

Shenzhen Shiding Electronics Co., Ltd.

Manufacturer Address: Unit A701, Phase II, Bolton Technology Park, No. 1044 Chaguang Road, Shuguang Community, Xili Street, Nanshan District, Shenzhen

Product specification

Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	0	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S .W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board




Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	-1.2	-0.5	0	-3.6	-1.1	-3.0	60.2 %


Return Loss

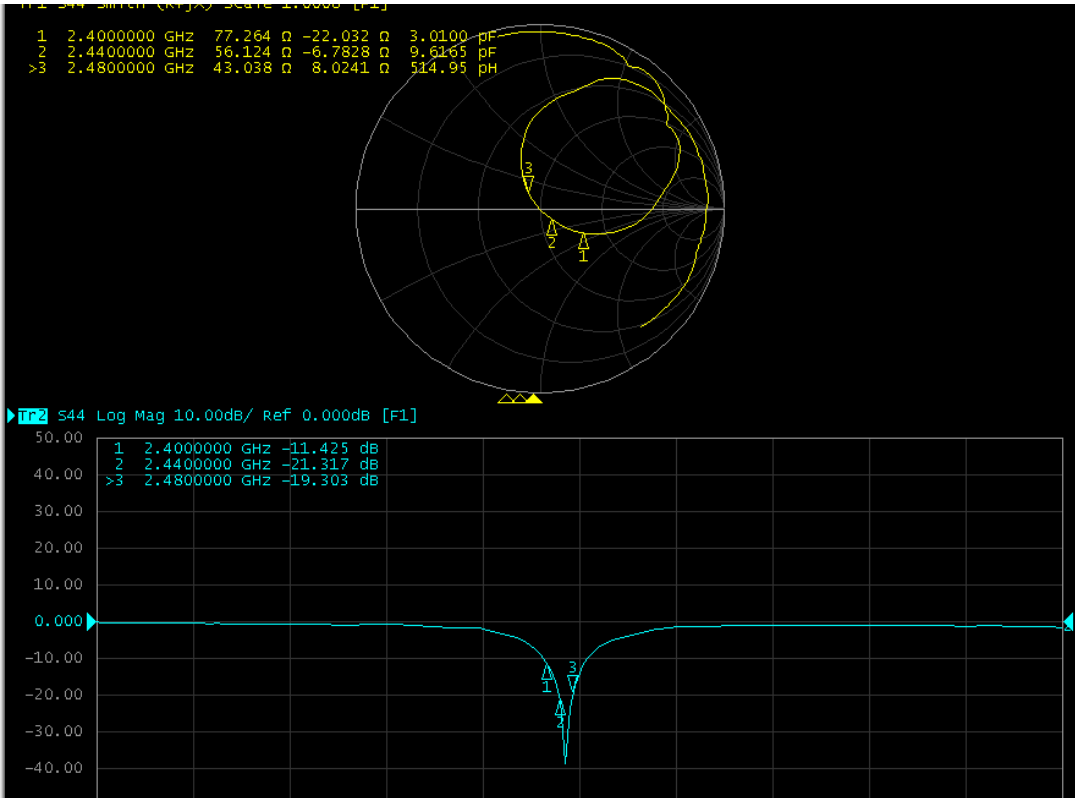

The Environment of Antenna Radiation Pattern

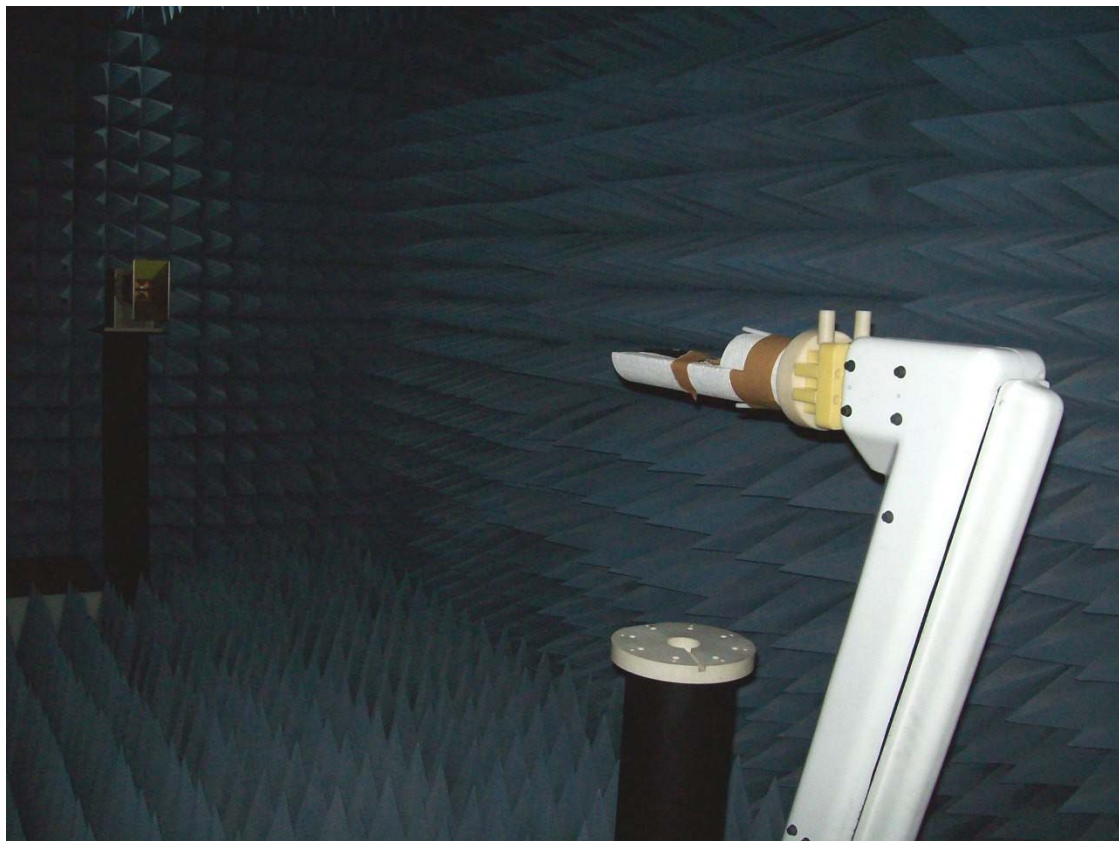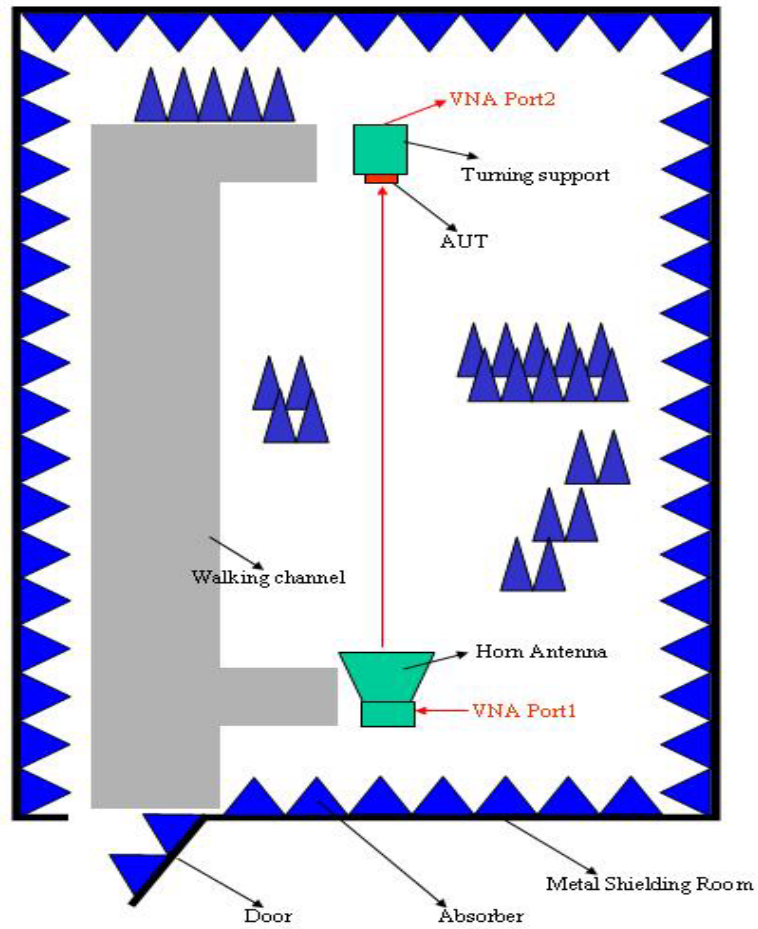

3D radiation pattern diagram

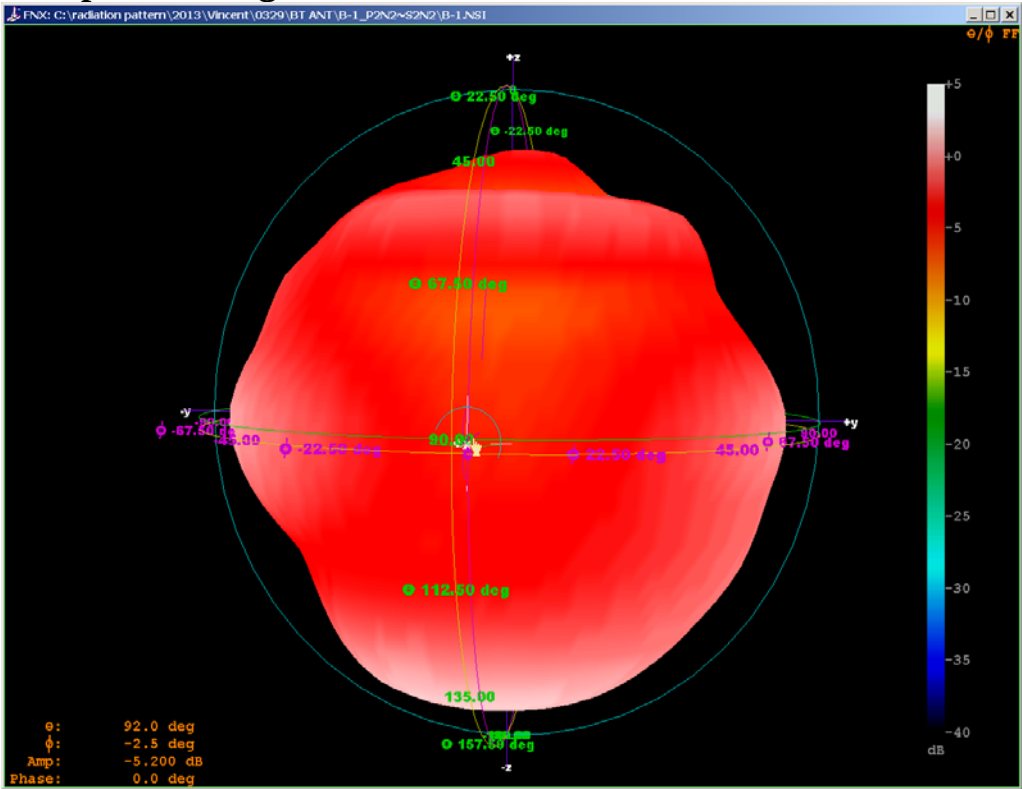

XZ-plane

Peak Gain (H+V) = 0dBi ,AvgGain (H+V) = -3.6dBi@24000GH

