



Shenzhen Helixun Technology Co., Ltd

SPECIFICATION FOR APPROVAL

Customer Name	By me		
Customer Project Name	BS563Z2Y	Helixun Project Name	BS563Z2Y
Customer P/N		Helixun P/N	HLX008-BS563Z2Y-V1
Band	2400-2500MHz		
Version	A1		
Designer Information			
RF Engineer	Huang Yafei	EE Engineer	Shi Zhenhao
ME Engineer	Huang Yafei		


Helixun Approval				Customer Approval	
	Prepared By	Checked By	Approval By	Checked By	Approval By
Signature	Yin Yongkang				
Date	2023-12-27				

Change Log				
Version	Change Description	Person in Charge	Approval By	Date

Catalogue

No.	Item	Page No.
1	Drawing or Product Image	3
2	Dimensions Test Report	4
3	RF Performance Test Report	5-15
4	Reliability Test Report1	16
5	Package Document	17
6	Environmental requirements	18
7	Install Wizard or Other	18

Drawing or Product Image

1	2	3	4	5	6	7	8																																																
Silk screen white, antenna black 																																																							
Concentrate: 1. The adhesive is made of 3M 9471 300LSE, the viscosity is more than 300MP, the shape of the adhesive is consistent with the substrate, covered on the back of the substrate, and the adhesive is cut in half; 2. The material is single-sided, half-to-half substrate, and the flexibility should be good; 3. There is no crack on the surface of the product after being bent at 180° after being oiled, and the flexibility should be good; 4. The surface of the gold finger is plated with gold 0.5μm, no oxidation, and there is no crack or conduction phenomenon after 180° bending at the junction of copper foil; 5. The precise tolerance range of wiring and holes: ± 0.03mm, and the tolerance of external dimensions is controlled within 0.1mm; 6. The ★ size is strictly controlled, marked with ★ as the key size, and the unmarked size is measured according to the CMM electronic drawing file 1:1; 7. Printing on the surface, see the figure for the specific content and location; 8. The non-appearance needs to be cut and sent to our company after the sample is sent.																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%;">No.</th> <th style="width: 40%;">Layer</th> <th style="width: 20%;">Description (thickness)</th> <th style="width: 10%;">Manufacturer & P/N</th> </tr> <tr> <td>1</td> <td>Adhesive backing</td> <td>300LSEMP (12μm)</td> <td>Jiujiang Flux</td> </tr> <tr> <td>2</td> <td>Substrate</td> <td>KIM-800F NMC3 (10μm)</td> <td>Bailey</td> </tr> <tr> <td>3</td> <td>Ink</td> <td>Cu (EP) <18μm>+PT <12.5μm></td> <td>Kaiyao</td> </tr> </table>								No.	Layer	Description (thickness)	Manufacturer & P/N	1	Adhesive backing	300LSEMP (12 μ m)	Jiujiang Flux	2	Substrate	KIM-800F NMC3 (10 μ m)	Bailey	3	Ink	Cu (EP) <18 μ m>+PT <12.5 μ m>	Kaiyao																																
No.	Layer	Description (thickness)	Manufacturer & P/N																																																				
1	Adhesive backing	300LSEMP (12 μ m)	Jiujiang Flux																																																				
2	Substrate	KIM-800F NMC3 (10 μ m)	Bailey																																																				
3	Ink	Cu (EP) <18 μ m>+PT <12.5 μ m>	Kaiyao																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%;">The third corner</th> <th style="width: 10%;">Models</th> <th style="width: 10%;">date</th> <th style="width: 10%;">2023-11-03</th> <th style="width: 10%;">drawing</th> <th style="width: 10%;">Huang Yafei</th> <th style="width: 10%;">page number</th> <th style="width: 10%;">[of 1]</th> </tr> <tr> <td>0~10</td> <td>± 0.10</td> <td>○</td> <td>0.02</td> <td>Product name</td> <td>BT天线</td> <td></td> <td></td> </tr> <tr> <td>10~20</td> <td>± 0.12</td> <td>◎</td> <td>0.03</td> <td>Part number</td> <td>HLX08-B55632Y-V1</td> <td></td> <td></td> </tr> <tr> <td>20~40</td> <td>± 0.15</td> <td>⊥</td> <td>0.02</td> <td>Material</td> <td>PPC-3M9471</td> <td></td> <td></td> </tr> <tr> <td>40~</td> <td>± 0.20</td> <td>∇</td> <td>0.04</td> <td>Die face treatment</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="4">Do not measure the drawing</td> <td>Location</td> <td>Appearance treatment</td> <td></td> <td></td> </tr> </table>								The third corner	Models	date	2023-11-03	drawing	Huang Yafei	page number	[of 1]	0~10	± 0.10	○	0.02	Product name	BT天线			10~20	± 0.12	◎	0.03	Part number	HLX08-B55632Y-V1			20~40	± 0.15	⊥	0.02	Material	PPC-3M9471			40~	± 0.20	∇	0.04	Die face treatment				Do not measure the drawing				Location	Appearance treatment		
The third corner	Models	date	2023-11-03	drawing	Huang Yafei	page number	[of 1]																																																
0~10	± 0.10	○	0.02	Product name	BT天线																																																		
10~20	± 0.12	◎	0.03	Part number	HLX08-B55632Y-V1																																																		
20~40	± 0.15	⊥	0.02	Material	PPC-3M9471																																																		
40~	± 0.20	∇	0.04	Die face treatment																																																			
Do not measure the drawing				Location	Appearance treatment																																																		
Shenzhen United Luxshare Technology Co., Ltd ----- tear-off position Appearance Gilding area Line area Release liner tear-off position V.1 V.2 V.3 V.4 V.5 V.6																																																							



Shenzhen Helixun Technology Co., Ltd

Sample Dimensions Test Report

Customer Name	By me	Customer P/N		Helixun P/N	HLX008-BS563Z2Y-V1
Test Date	2023-12-27	Sample Qty.	3	Inspector	Yin Yongkang
Dimension No.	Standard	Sample 1	Sample 2	Sample 3	Pass/NG
①Length	13.00mm±0.2mm	13.08mm	12.98mm	13.00mm	Pass
②Width	5.30mm±0.2mm	5.30mm	5.28mm	5.35mm	Pass
③Thickness	0.2±0.05mm	0.21mm	0.22mm	0.2mm	Pass
Conclusion					PASS
Inspector & Date	Yin Yongkang	2023-12-27	Approval & Date		


Company name: 1905, Building 2, Jiufang Square, Tiezai Road, Gongle Community, Xixiang Street, Bao'an District, Shenzhen TEL: 0755-23591525 FAX: 0755-23591525

RF Performance Test Report



Customer Name	By me	Project Name	BS563Z2Y	Helixun P/N	XLX008-BS563Z2Y-V1
Band	2400-2500MHZ	Test Date	2023-12-27	Inspector	Yin Yongkang

Antenna Test Equipment Introduction




Test of antenna input characteristics using **Agilent E5071** and **Agilent 5071C** vector network analyzer ; The radiation pattern of the antenna are tested using the ETS starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

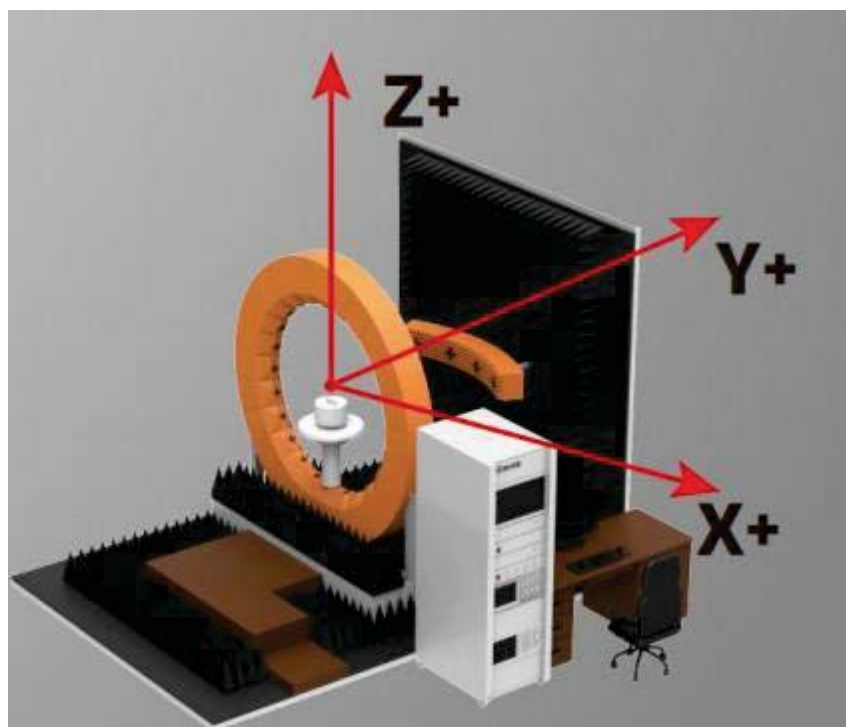

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5062A
OTA Test	TRP&TIS	Agilent 8960 E5515C& Agilent 4438C&CMW500 ETS&SATIMO
Gain & Efficiency	Gain & Efficiency	ETS&SATIMO Agilent 5071C

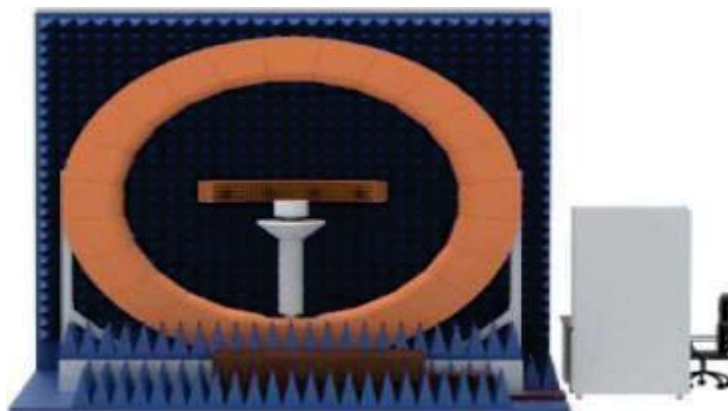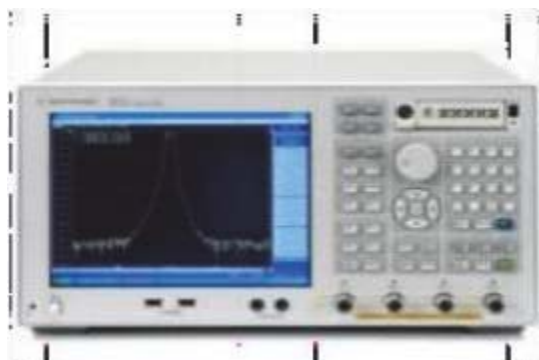


3.Product Overview & Dimension

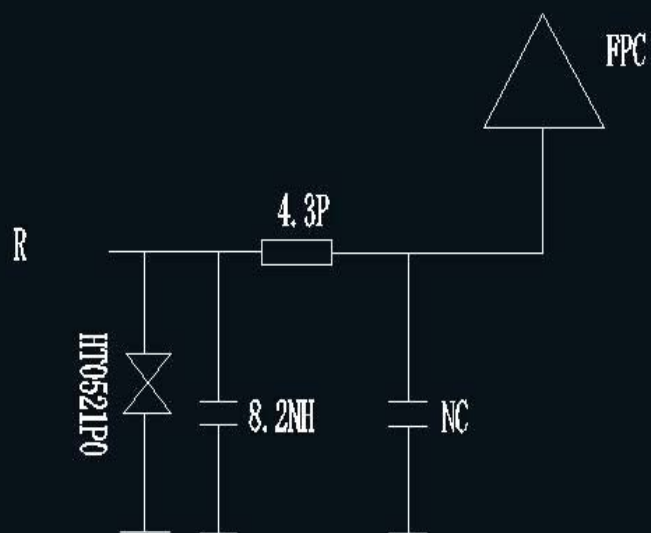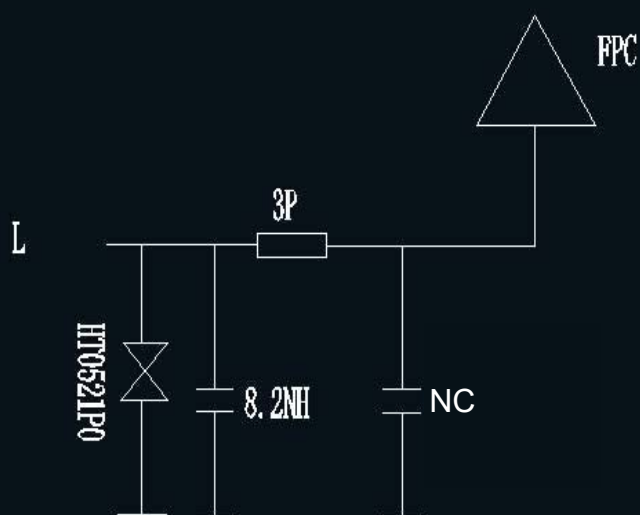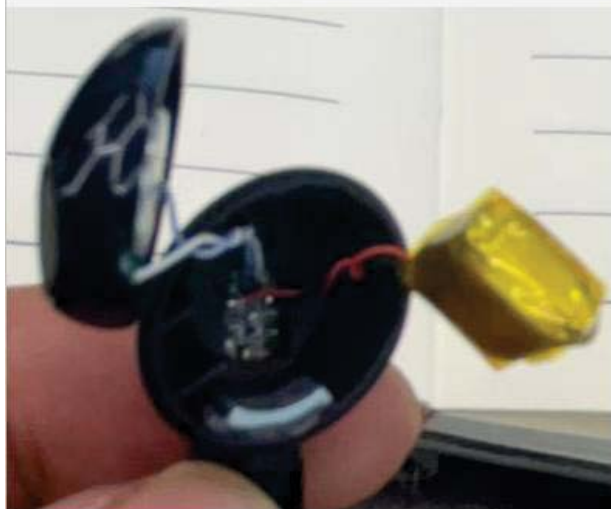

4. Test Result L

4.1 S11 Parameter-VSWR

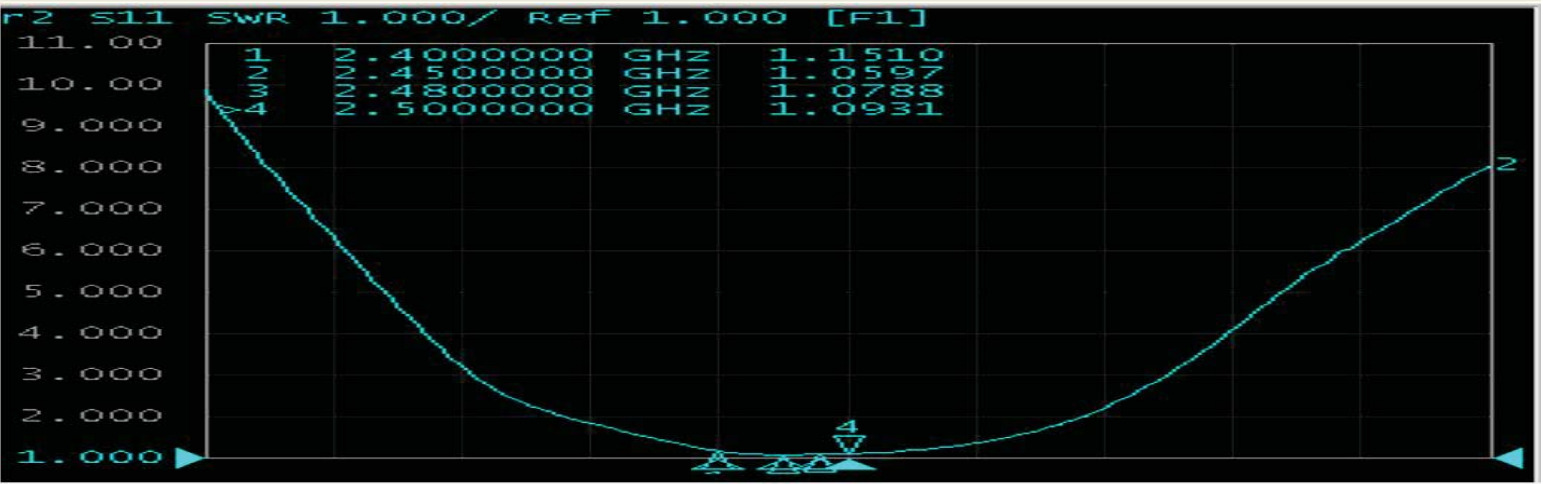

Frequency (MHz)	2400	2450	2480	2500
VSWR	1.15	1.05	1.07	1.09

4. Test Result L


4.1 S11 Parameter-Log Mag



Frequency (MHz)	2400	2450	2480	2500
Log Mag	-23.07	-30.75	-28.42	-27.03

4. Test Result L

4.1 S11 Parameter-VSWR

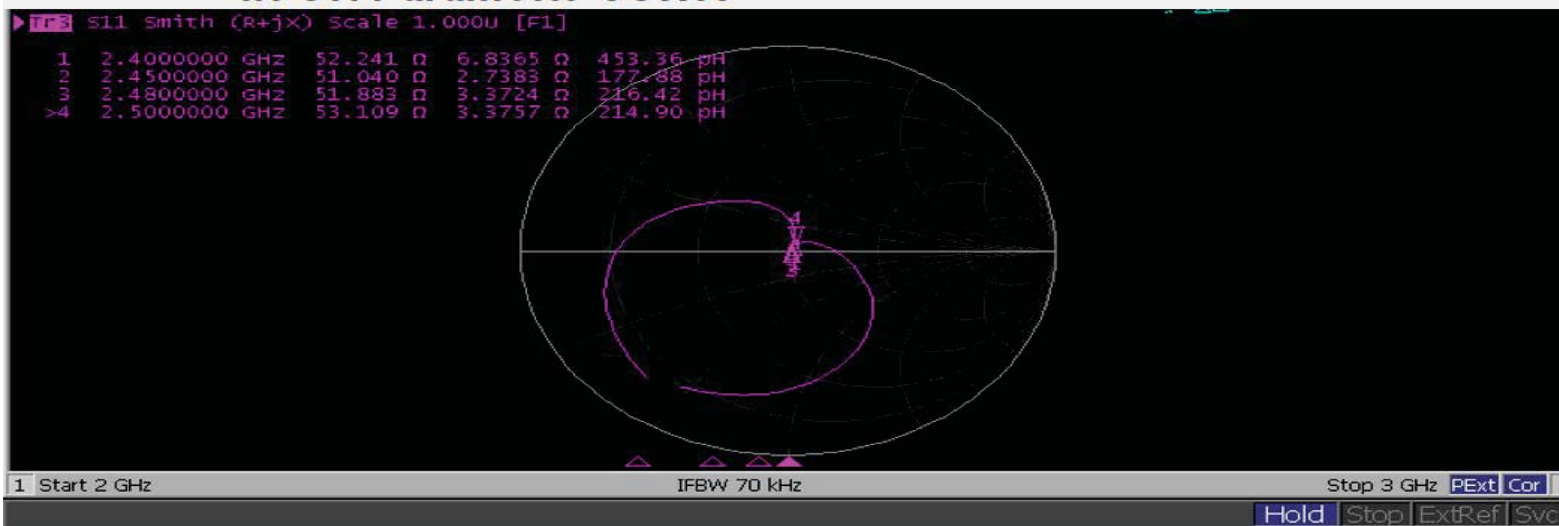

Frequency (MHz)	2400	2450	2480	2500
Smi th(Ω)	52.24	51.04	51.88	53.10

6



4. Test Result

4.2 Gain & Efficiency—ANT

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	30.51	0.02
2410	32.85	1.24
2420	32.89	1.07
2430	33.74	1.17
2440	33.46	1.02
2450	34.61	0.99
2460	33.61	0.78
2470	29.45	0.64
2480	29.51	0.24



4. Test Result

4.3 2D Pattern — BT ANT

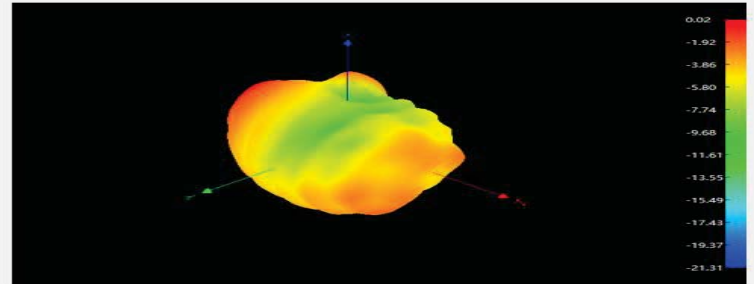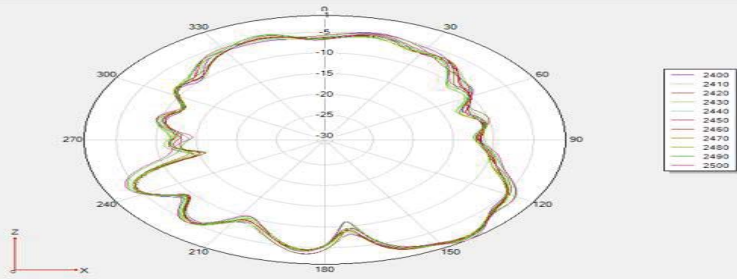



4. Test Result

4.3 2D Pattern — BT ANT

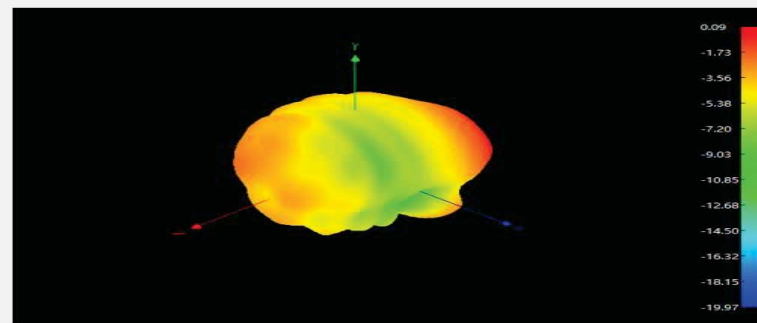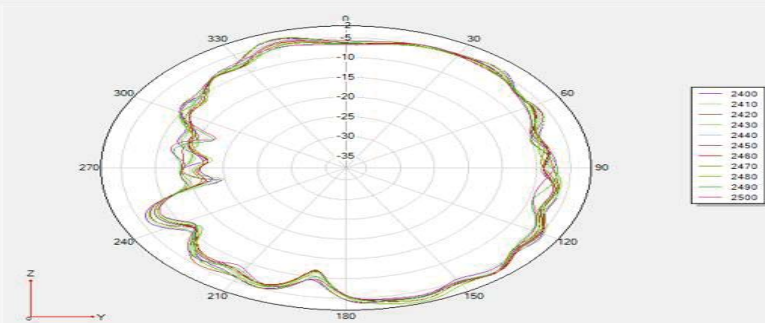

4. Test Result


4.3 2D Pattern — BT ANT

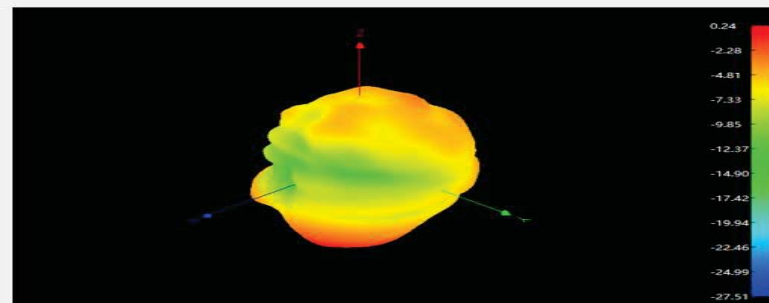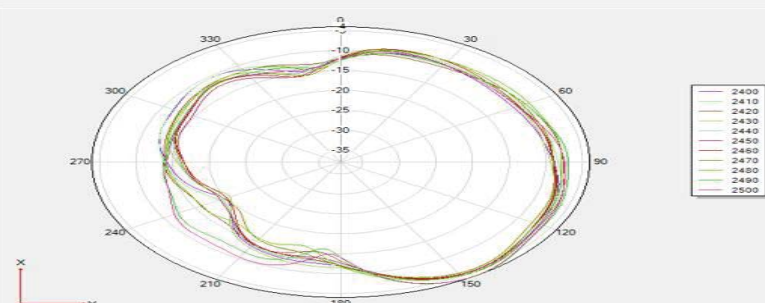

Test Equipment:	R&S CMW500			
Test Condition:	3D chamber			
Band		Channel	TRP(dBm)	TIS(dBm)
BT	L	0	5.58	-88.24
		39	5.51	-88.42
		78	4.18	-85.82


4. Test Result

4.4 2D Pattern——BT ANT

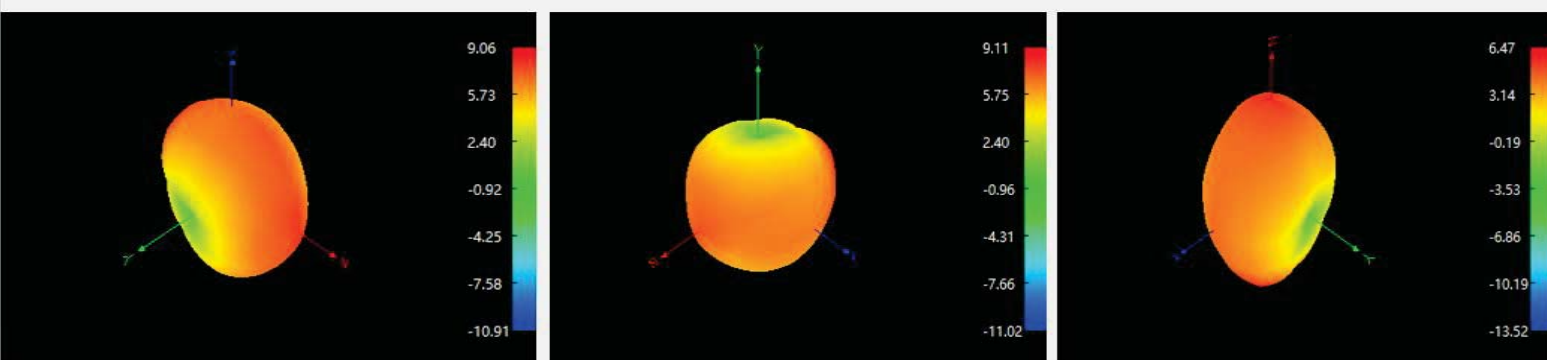


4. Test Result

4.4 2D Pattern——BT ANT

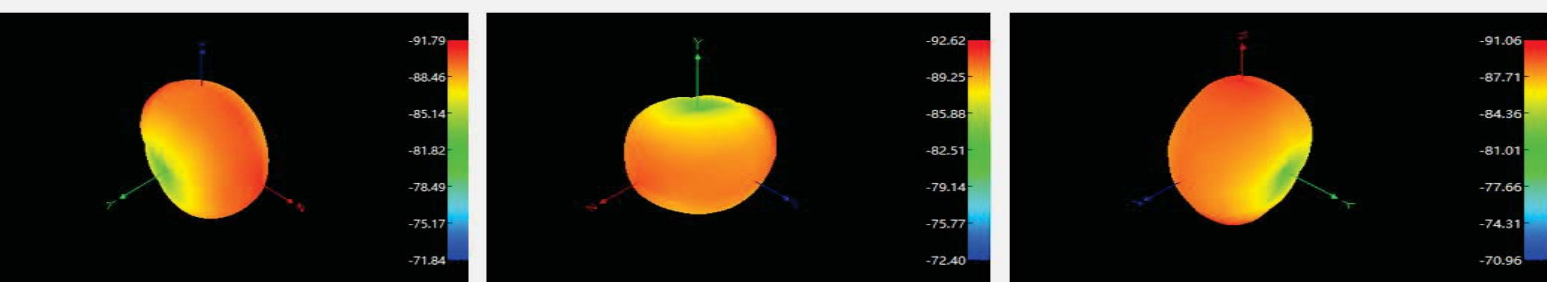

4. Test Result R

4.1 S11 Parameter-VSWR

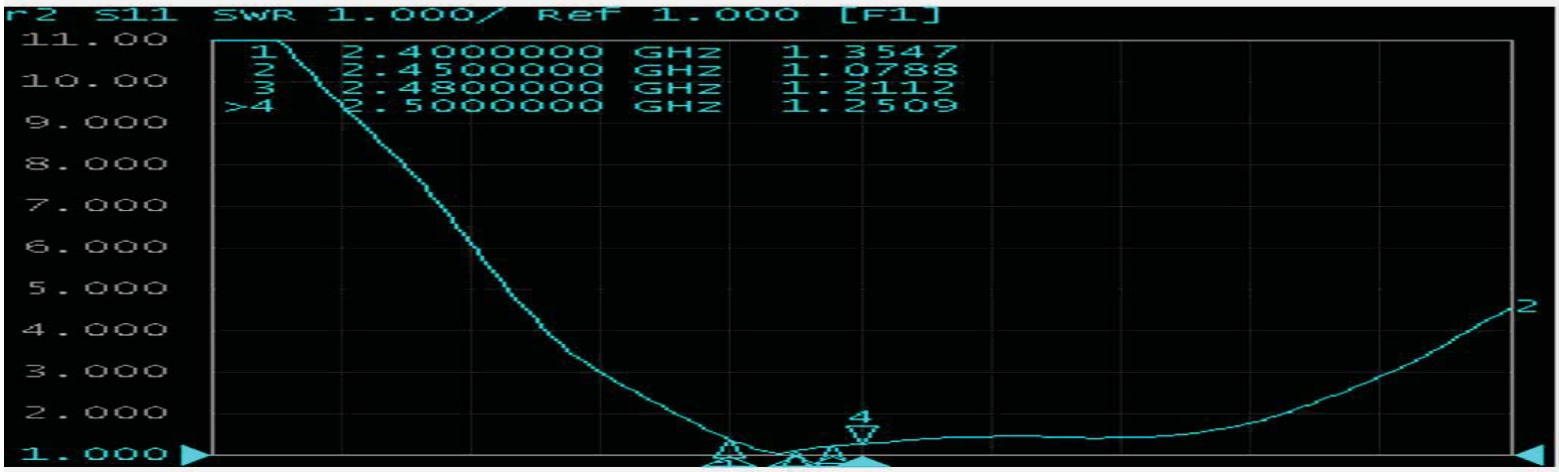

Frequency (MHz)	2400	2450	2480	2500
VSWR	1.35	1.07	1.21	1.25

11

4. Test Result R

4.1 S11 Parameter-Log Mag




Frequency (MHz)	2400	2450	2480	2500
Log Mag	-16.44	-28.42	-20.39	-19.05

12

4.Test Result

4.1 S11 Parameter-Smith

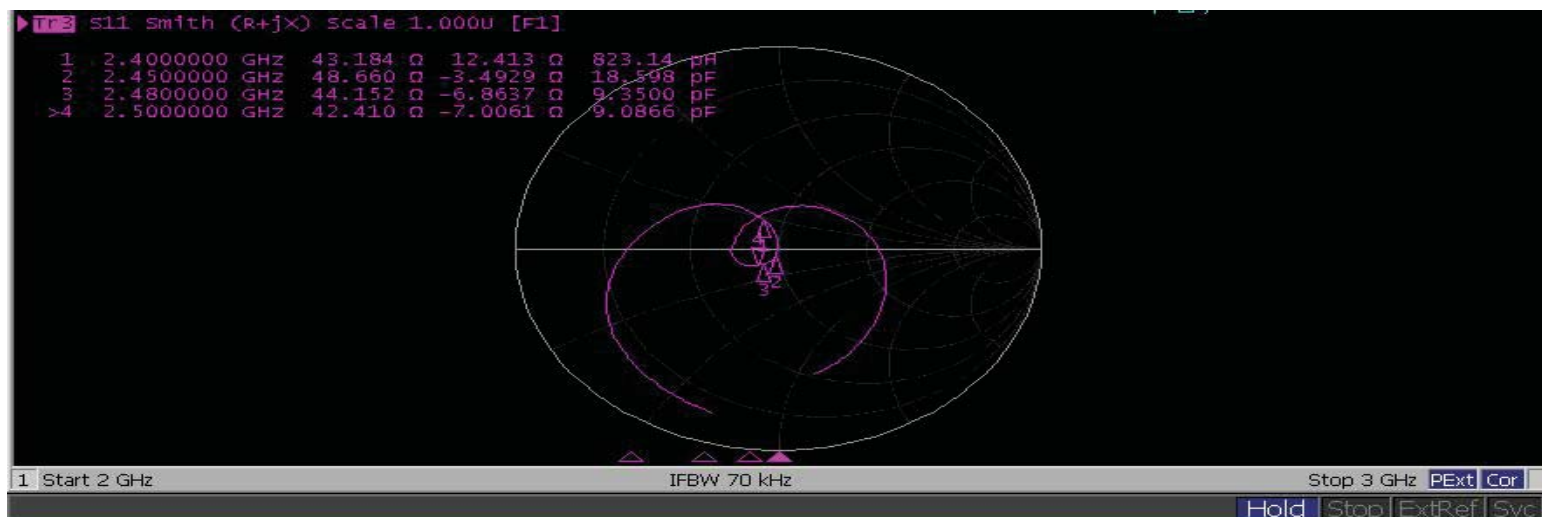



Frequency (MHz)	2400	2450	2480	2500
Smi th(Ω)	43.18	48.66	44.15	42.41

4.2 Gain & Efficiency——ANT

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	33.81	1.47
2410	34.99	1.49
2420	35.89	1.49
2430	34.04	1.42
2440	33.88	1.14
2450	33.81	1.08
2460	32.81	1.08
2470	30.69	0.93
2480	30.76	1.16



4. Test Result

4.3 2D Pattern — BT ANT

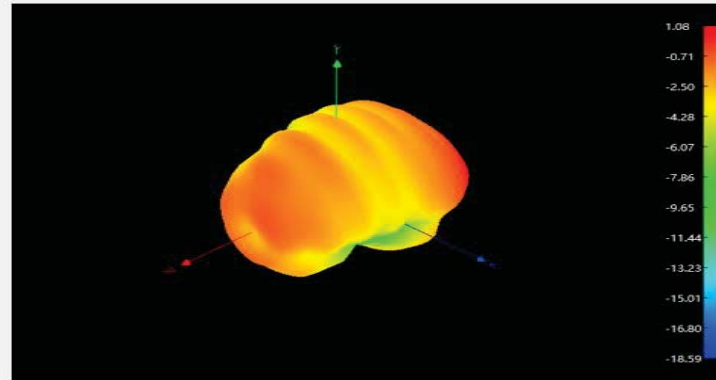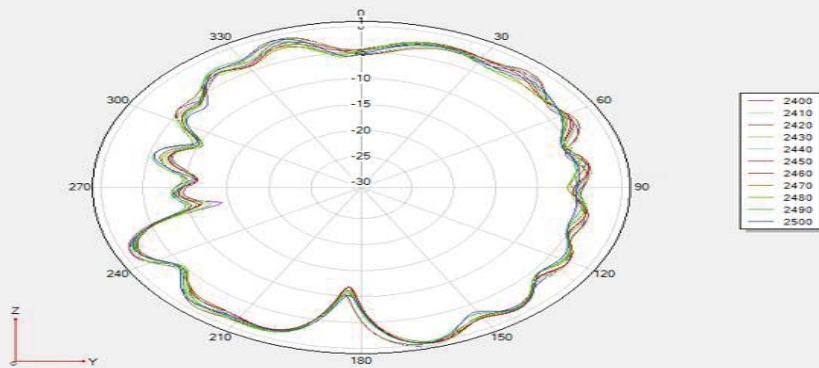



4. Test Result

4.3 2D Pattern — BT ANT

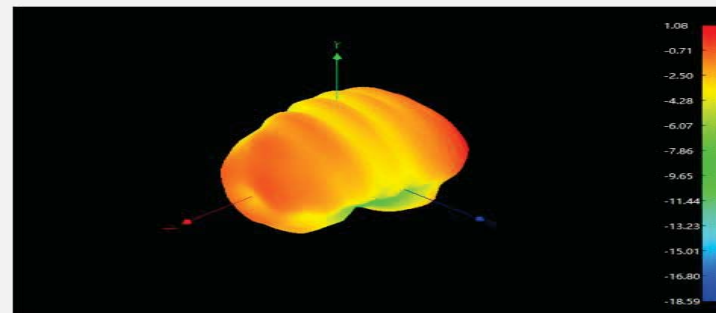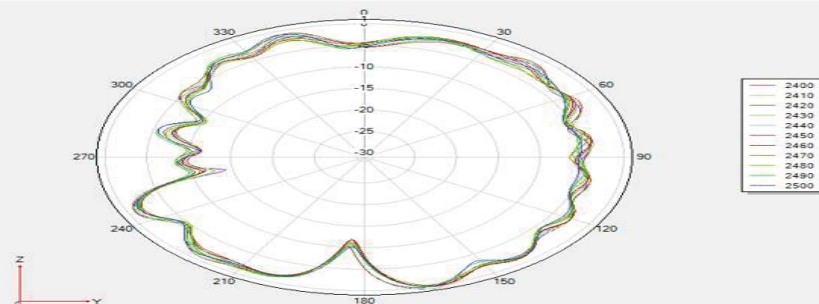

4. Test Result


4.3 2D Pattern — BT ANT

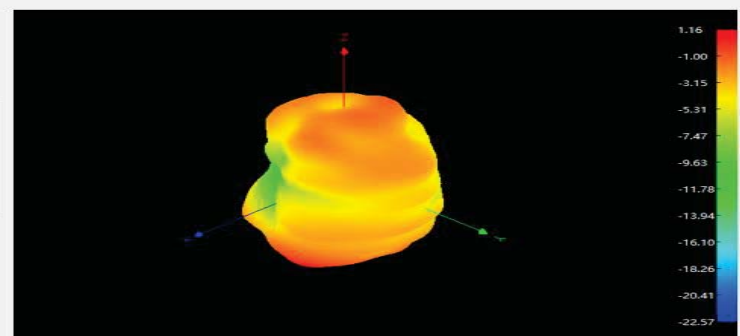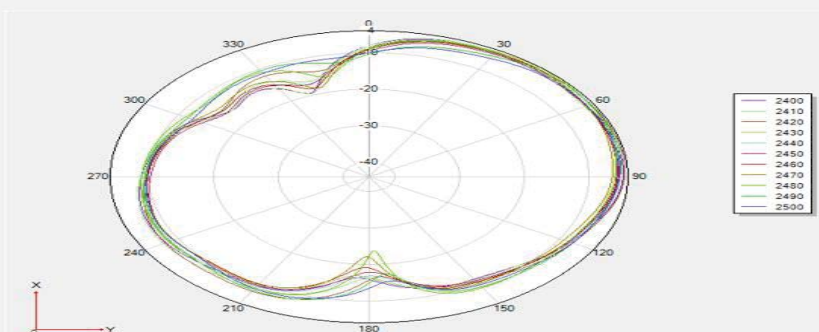

Test Equipment:	R&S CMW500			
Test Condition:	3D chamber			
Band		Channel	TRP(dBm)	TIS(dBm)
BT	R	0	5.39	-88.03
		39	5.19	-87.69
		78	3.95	-86.33


4. Test Result

4.4 2D Pattern——BT ANT

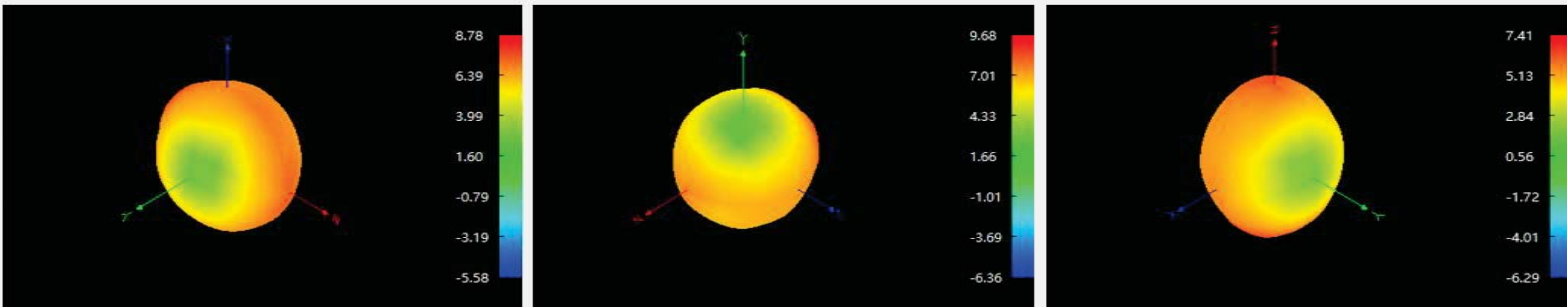

4. Test Result

4.4 2D Pattern——BT ANT



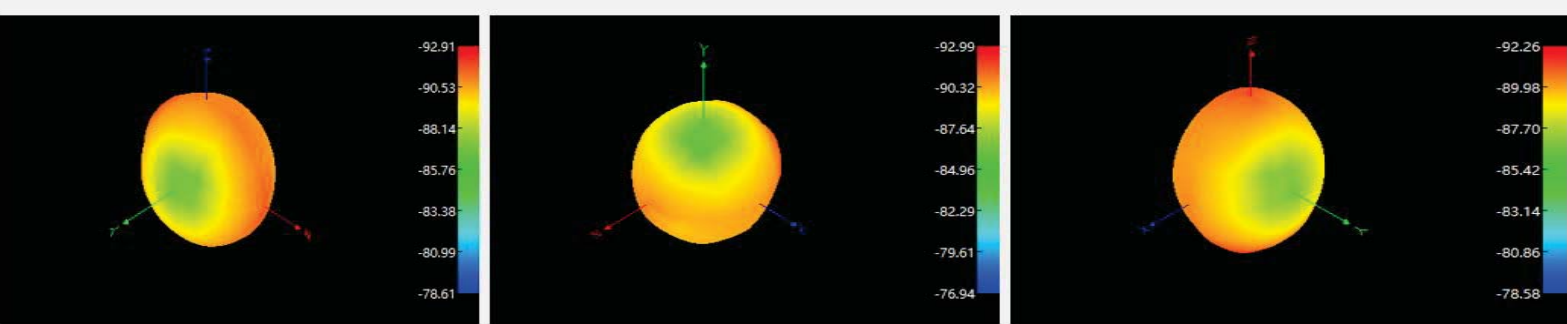


Shenzhen Helixun Technology Co., Ltd

Reliability Test Report

Customer Name	By me	Customer P/N		Helixun P/N	HLX008-BS563Z2Y-V1	
Test Date	2023-12-27	Sample Qty.	3	Inspector	Yin Yongkang	
Test Item	Requirement	testing equipment	Sample 1	Sample 2	Sample 3	PASS/NG
High temperature storage	The test was performed after 24H exposure at +85°C and 2H recovery	Constant temperature and humidity box	OK	OK	OK	Pass
Low temperature storage	The test was performed after 24H exposure at -40°C and 2H recovery	Constant temperature and humidity box	OK	OK	OK	Pass
High-temperature operation	24H power operation at +60°C	Constant temperature and humidity box	OK	OK	OK	Pass
Low temperature operation	Power operation for 24H under -20°C	Constant temperature and humidity box	OK	OK	OK	Pass
Salt spray test	(5 × 0.5)% sodium chloride, pH value of 6.5 ~ 7.2, laboratory temperature of (35±2)°C ☒ 24H ☐ 48H	Salt spray tester	OK	OK	OK	Pass
Connector rivet and pull force	1.13Wire diameter ≥10N 0.81 Wire diameter ≥8N RG174 ≥60N RG178 ≥50N	Push-pull gauge				
Conclusion						Pass
Inspector & Date	Yin Yongkang 2023-12-27		Approval & Date			

PACKING CRITERION

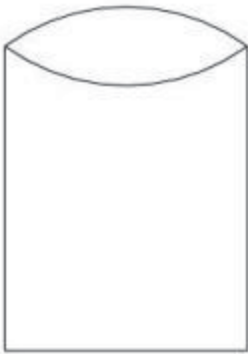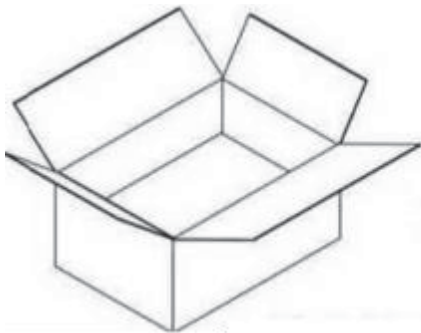1、Individual product (subject to actual packaging)**2、Large PE bag packaging (full plate/single 90pcs) (subject to actual packaging)****3、The box is sealed, and the outer box is affixed with our production label and ROHS label. (Subject to actual packaging)**

Environmental requirements

Material safety data sheet	☒ furnish	☐ Not provide for	☐ N/A
Environmental protection agreement	☒ furnish	☐ Not provide for	☐ N/A
Yunshi technical standard for environmental hazardous substances	☒ furnish	☐ Not provide for	☐ N/A
Specific environmental requirements	☒ Conform toROHS2.0 ☒ Conform toREACH ☒ Conforms to halogen-free ☒ California-compliant65		

Install Wizard or Other

Installation process:

Take 1PCS of products, tear off the release paper on the back of the FPC by hand, then align the positioning hole of the FPC with the positioning hole of the shell (positioning rib or positioning line), and smoothly attach to the shell, as shown in the figure below:

Precautions during installation:

- ☒After attaching the antenna, ensure that the FPC is fully attached to the housing;
- ☒The positioning hole is aligned with the positioning column of the housing;
- ☒The FPC edge is aligned with the shell edge
- ☐When connecting an antenna with terminals to the PCBA end of the mainboard, connect the terminals first and then vertically.
- ☐When removing antenna terminals, use a tool (such as a dedicated crowbar) to lift the terminals vertically. Do not pull the cables to remove them.