

TABLE OF CONTENTS

Conducted output power2

Frequency stability.....5

Peak-to-Average Ratio6

Occupied bandwidth16

Band edge.....26

Out-of-band emissions33

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dBm)	ERP (dBm)	ERP Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
EGPRS850 1 Slot	128	824.2	27.55	-2.76	-7.35	20.20	--	38.45	PASS
EGPRS850 1 Slot	190	836.6	29.55	-2.76	-7.35	22.20	--	38.45	PASS
EGPRS850 1 Slot	251	848.8	29.02	-2.76	-7.35	21.67	--	38.45	PASS
EGPRS850 2 Slot	128	824.2	27.09	-2.76	-7.35	19.74	--	38.45	PASS
EGPRS850 2 Slot	190	836.6	27.79	-2.76	-7.35	20.44	--	38.45	PASS
EGPRS850 2 Slot	251	848.8	27.30	-2.76	-7.35	19.95	--	38.45	PASS
EGPRS850 3 Slot	128	824.2	24.90	-2.76	-7.35	17.55	--	38.45	PASS
EGPRS850 3 Slot	190	836.6	25.48	-2.76	-7.35	18.13	--	38.45	PASS
EGPRS850 3 Slot	251	848.8	25.08	-2.76	-7.35	17.73	--	38.45	PASS
EGPRS850 4 Slot	128	824.2	22.26	-2.76	-7.35	14.91	--	38.45	PASS
EGPRS850 4 Slot	190	836.6	23.09	-2.76	-7.35	15.74	--	38.45	PASS
EGPRS850 4 Slot	251	848.8	22.51	-2.76	-7.35	15.16	--	38.45	PASS
GPRS850 1 Slot	128	824.2	34.49	-2.76	-7.35	27.14	--	38.45	PASS
GPRS850 1 Slot	190	836.6	34.26	-2.76	-7.35	26.91	--	38.45	PASS
GPRS850 1 Slot	251	848.8	34.59	-2.76	-7.35	27.24	--	38.45	PASS
GPRS850 2 Slot	128	824.2	32.24	-2.76	-7.35	24.89	--	38.45	PASS
GPRS850 2 Slot	190	836.6	32.31	-2.76	-7.35	24.96	--	38.45	PASS
GPRS850 2 Slot	251	848.8	32.40	-2.76	-7.35	25.05	--	38.45	PASS
GPRS850 3 Slot	128	824.2	30.41	-2.76	-7.35	23.06	--	38.45	PASS
GPRS850 3 Slot	190	836.6	30.53	-2.76	-7.35	23.18	--	38.45	PASS

Slot									
GPRS850 3 Slot	251	848.8	30.62	-2.76	-7.35	23.27	--	38.45	PASS
GPRS850 4 Slot	128	824.2	28.18	-2.76	-7.35	20.83	--	38.45	PASS
GPRS850 4 Slot	190	836.6	28.37	-2.76	-7.35	21.02	--	38.45	PASS
GPRS850 4 Slot	251	848.8	28.44	-2.76	-7.35	21.09	--	38.45	PASS
GSM850	128	824.2	34.53	-2.76	-7.35	27.18	--	38.45	PASS
GSM850	190	836.6	34.63	-2.76	-7.35	27.28	--	38.45	PASS
GSM850	251	848.8	34.68	-2.76	-7.35	27.33	--	38.45	PASS
EGPRS1900 1 Slot	512	1850.2	27.13	0.08	--	--	27.21	33.01	PASS
EGPRS1900 1 Slot	661	1880	27.20	0.08	--	--	27.28	33.01	PASS
EGPRS1900 1 Slot	810	1909.8	26.89	0.08	--	--	26.97	33.01	PASS
EGPRS1900 2 Slot	512	1850.2	25.63	0.08	--	--	25.71	33.01	PASS
EGPRS1900 2 Slot	661	1880	25.42	0.08	--	--	25.50	33.01	PASS
EGPRS1900 2 Slot	810	1909.8	25.31	0.08	--	--	25.39	33.01	PASS
EGPRS1900 3 Slot	512	1850.2	23.31	0.08	--	--	23.39	33.01	PASS
EGPRS1900 3 Slot	661	1880	23.15	0.08	--	--	23.23	33.01	PASS
EGPRS1900 3 Slot	810	1909.8	22.72	0.08	--	--	22.80	33.01	PASS
EGPRS1900 4 Slot	512	1850.2	21.26	0.08	--	--	21.34	33.01	PASS
EGPRS1900 4 Slot	661	1880	21.04	0.08	--	--	21.12	33.01	PASS
EGPRS1900 4 Slot	810	1909.8	20.77	0.08	--	--	20.85	33.01	PASS
GPRS1900 1 Slot	512	1850.2	31.51	0.08	--	--	31.59	33.01	PASS
GPRS1900 1 Slot	661	1880	31.44	0.08	--	--	31.52	33.01	PASS
GPRS1900 1 Slot	810	1909.8	31.25	0.08	--	--	31.33	33.01	PASS
GPRS1900 2 Slot	512	1850.2	28.93	0.08	--	--	29.01	33.01	PASS


GPRS1900 2 Slot	661	1880	28.87	0.08	--	--	28.95	33.01	PASS
GPRS1900 2 Slot	810	1909.8	28.71	0.08	--	--	28.79	33.01	PASS
GPRS1900 3 Slot	512	1850.2	27.37	0.08	--	--	27.45	33.01	PASS
GPRS1900 3 Slot	661	1880	27.33	0.08	--	--	27.41	33.01	PASS
GPRS1900 3 Slot	810	1909.8	27.2	0.08	--	--	27.28	33.01	PASS
GPRS1900 4 Slot	512	1850.2	25.31	0.08	--	--	25.39	33.01	PASS
GPRS1900 4 Slot	661	1880	25.29	0.08	--	--	25.37	33.01	PASS
GPRS1900 4 Slot	810	1909.8	25.19	0.08	--	--	25.27	33.01	PASS
GSM1900	512	1850.2	31.53	0.08	--	--	31.61	33.01	PASS
GSM1900	661	1880	31.48	0.08	--	--	31.56	33.01	PASS
GSM1900	810	1909.8	31.28	0.08	--	--	31.36	33.01	PASS

Frequency stability


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	-18.95179	-0.02	-2.500	2.5	PASS
EGPRS850	190	836.6	-6.489456	-0.01	-2.500	2.5	PASS
EGPRS850	251	848.8	-10.17004	-0.01	-2.500	2.5	PASS
GPRS850	128	824.2	-1.872579	0.00	-2.500	2.5	PASS
GPRS850	190	836.6	4.003445	0.00	-2.500	2.5	PASS
GPRS850	251	848.8	5.553166	0.01	-2.500	2.5	PASS
GSM850	128	824.2	-3.16	-0.004	-2.5	2.5	PASS
GSM850	190	836.6	-5.84	-0.007	-2.5	2.5	PASS
GSM850	251	848.8	-5.91	-0.007	-2.5	2.5	PASS
EGPRS1900	512	1850.2	-9.007752	0.00	-2.500	2.5	PASS
EGPRS1900	661	1880	-0.3551443	0.00	-2.500	2.5	PASS
EGPRS1900	810	1909.8	-12.33319	-0.01	-2.500	2.5	PASS
GPRS1900	512	1850.2	-7.490317	0.00	-2.500	2.5	PASS
GPRS1900	661	1880	3.745159	0.00	-2.500	2.5	PASS
GPRS1900	810	1909.8	10.39604	0.01	-2.500	2.5	PASS
GSM1900	512	1850.2	11.04	0.006	-2.5	2.5	PASS
GSM1900	661	1880	0.39	0.000	-2.5	2.5	PASS
GSM1900	810	1909.8	17.18	0.009	-2.5	2.5	PASS

Peak-to-Average Ratio


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
EGPRS850	128	824.2	7.70	13.00	PASS
EGPRS850	190	836.6	7.16	13.00	PASS
EGPRS850	251	848.8	8.12	13.00	PASS
GPRS850	128	824.2	2.61	13.00	PASS
GPRS850	190	836.6	2.62	13.00	PASS
GPRS850	251	848.8	2.62	13.00	PASS
GSM850	128	824.2	2.60	13	PASS
GSM850	190	836.6	2.61	13	PASS
GSM850	251	848.8	2.62	13	PASS
EGPRS1900	512	1850.2	5.73	13.00	PASS
EGPRS1900	661	1880	5.73	13.00	PASS
EGPRS1900	810	1909.8	5.54	13.00	PASS
GPRS1900	512	1850.2	2.64	13.00	PASS
GPRS1900	661	1880	2.64	13.00	PASS
GPRS1900	810	1909.8	2.64	13.00	PASS
GSM1900	512	1850.2	2.60	13	PASS
GSM1900	661	1880	2.60	13	PASS
GSM1900	810	1909.8	2.61	13	PASS

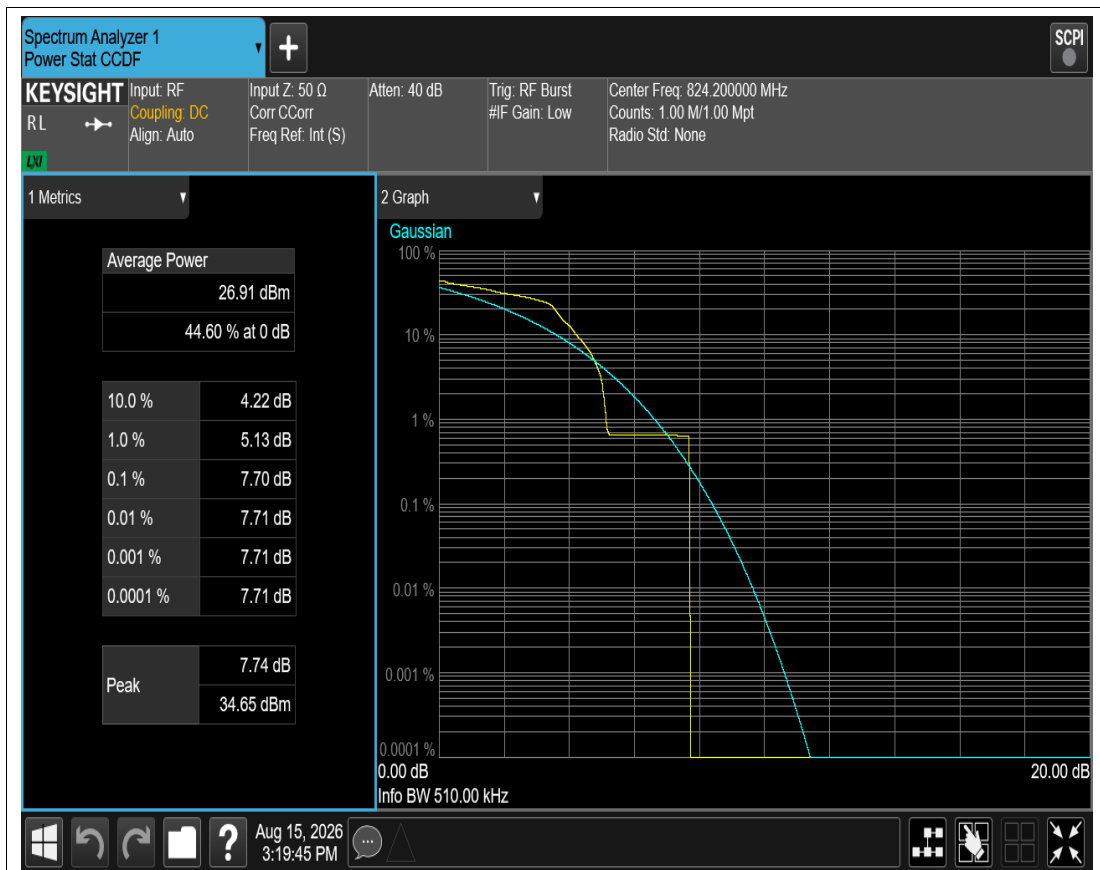


EGPRS850 Channel=128

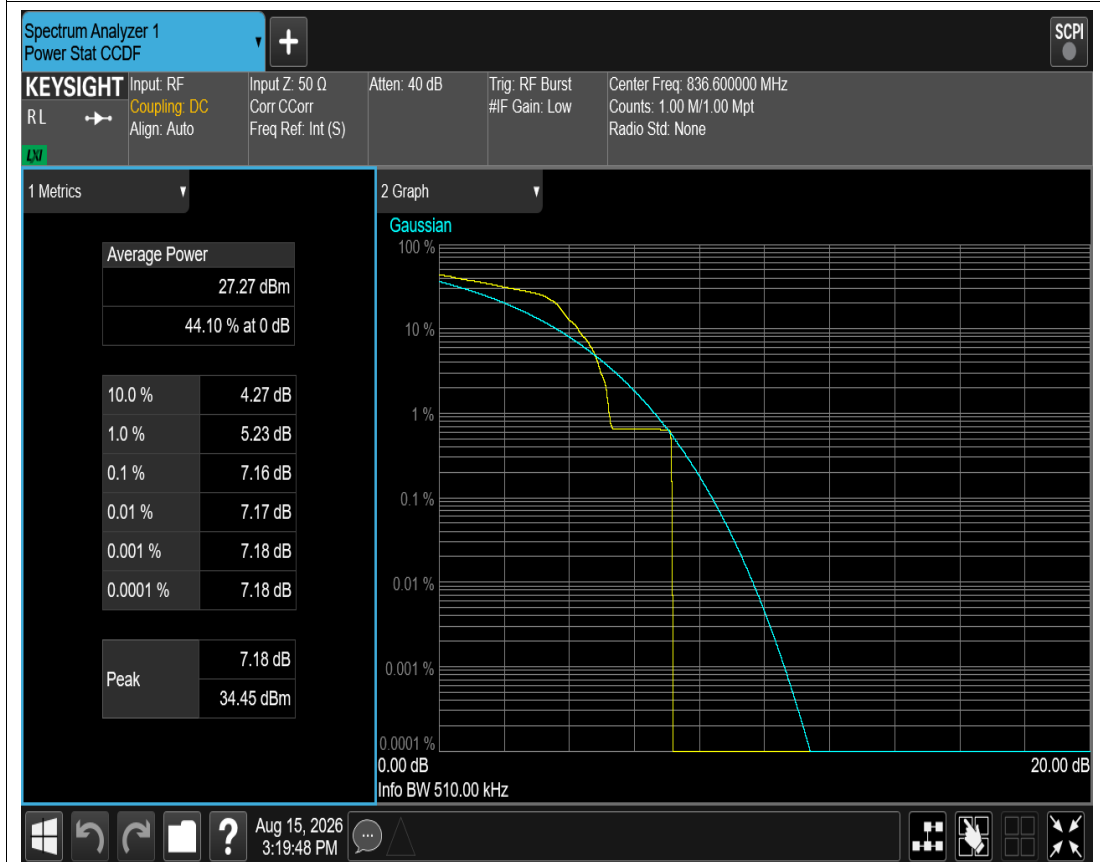


EGPRS850 Channel=190

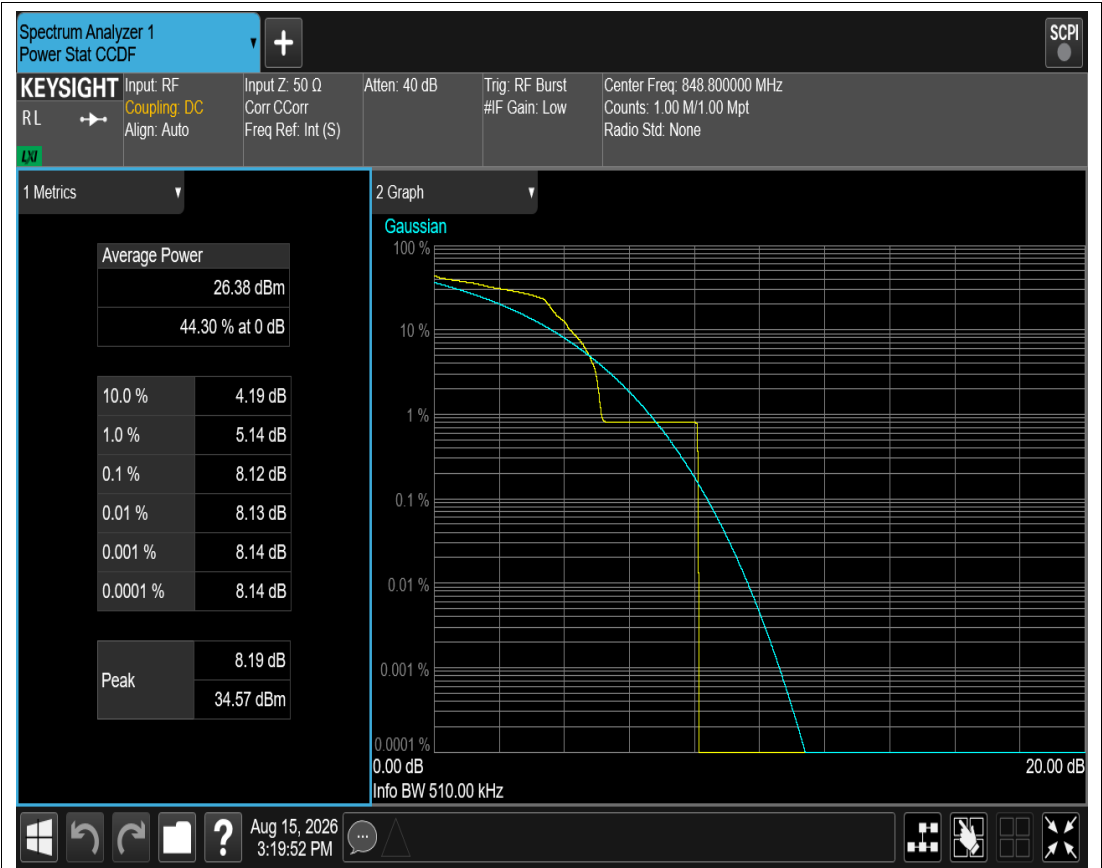


EGPRS850 Channel=251

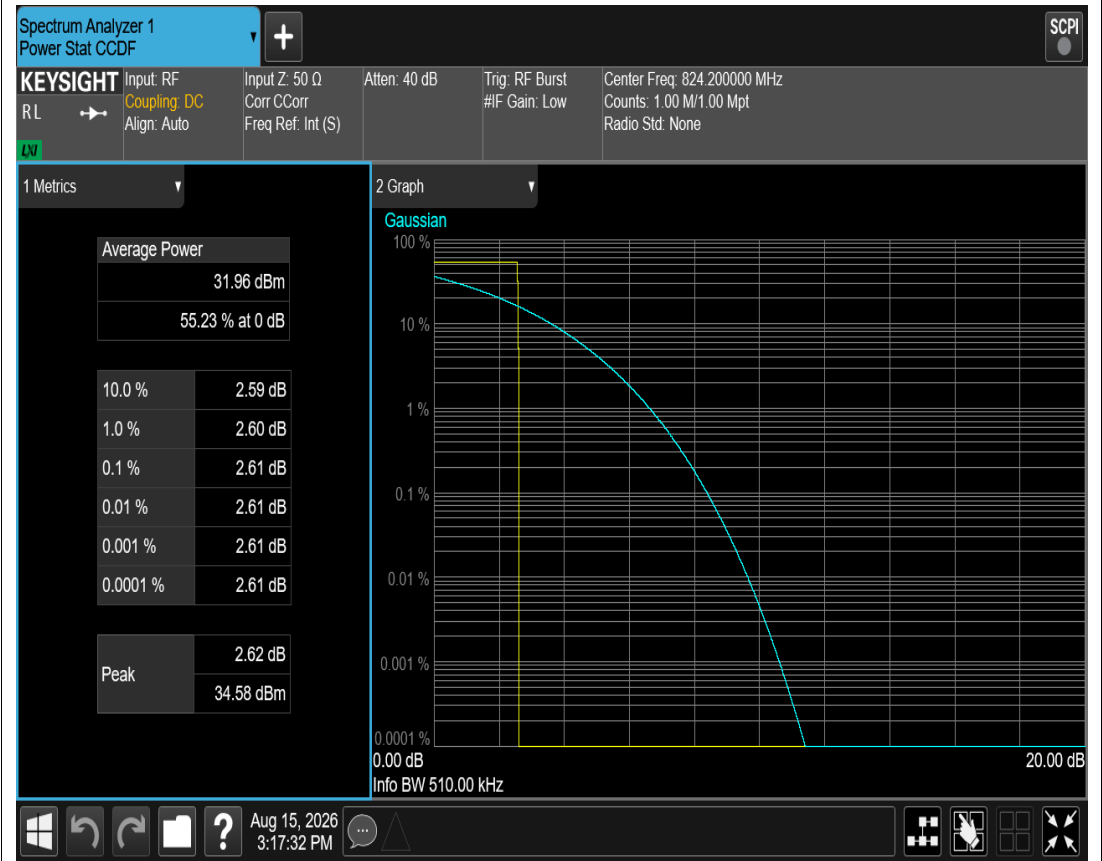


GPRS850 Channel=128

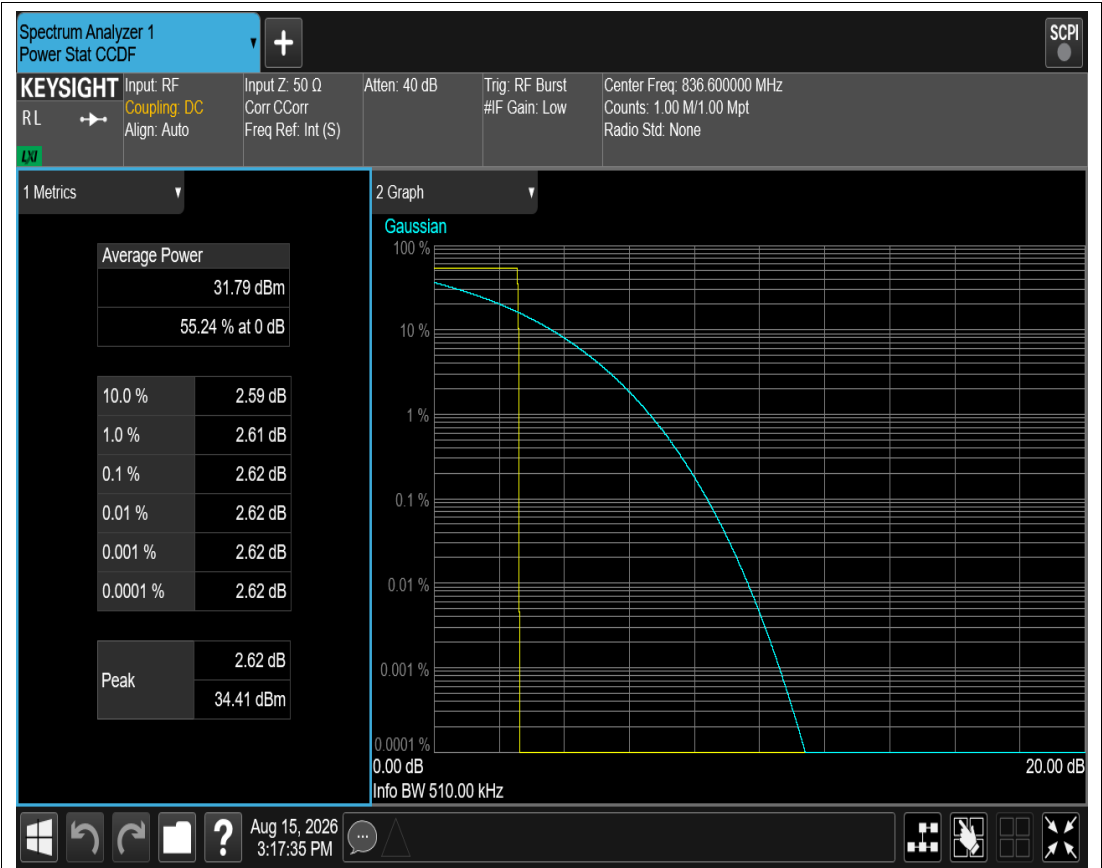


GPRS850 Channel=190

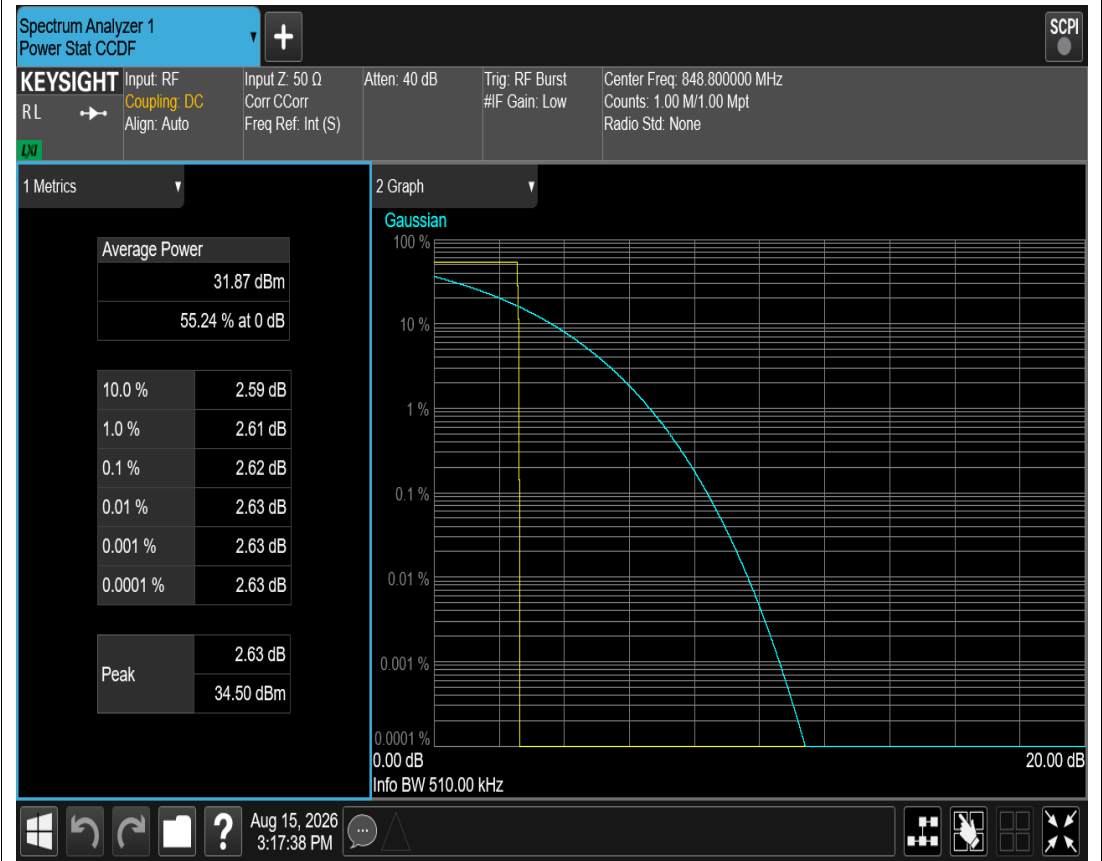


GPRS850 Channel=251

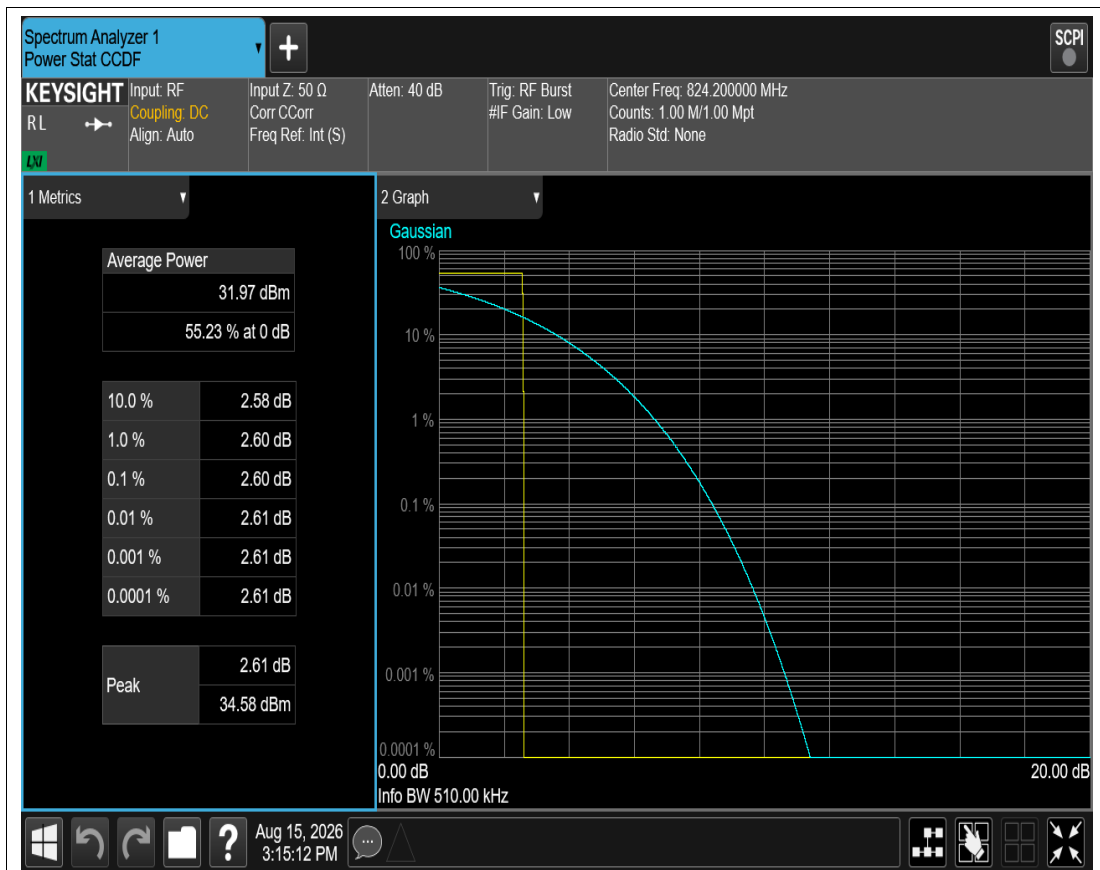


GSM850 Channel=128

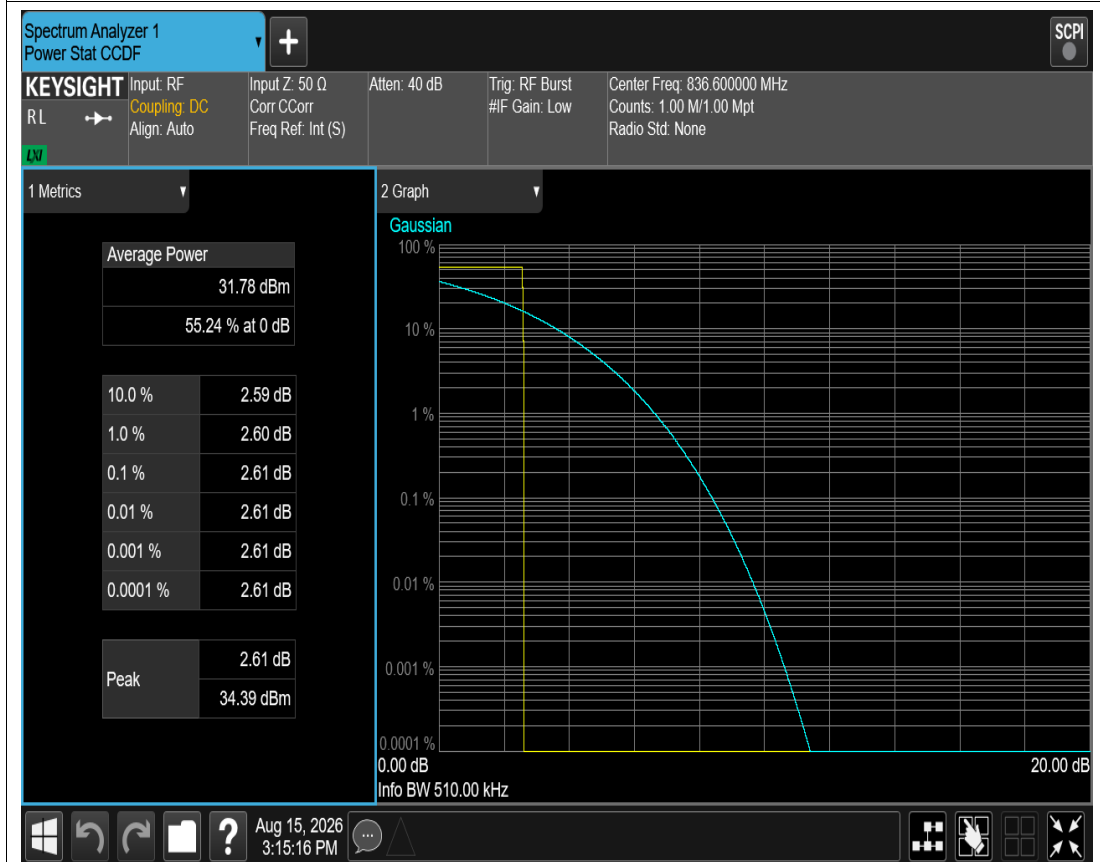


GSM850 Channel=190

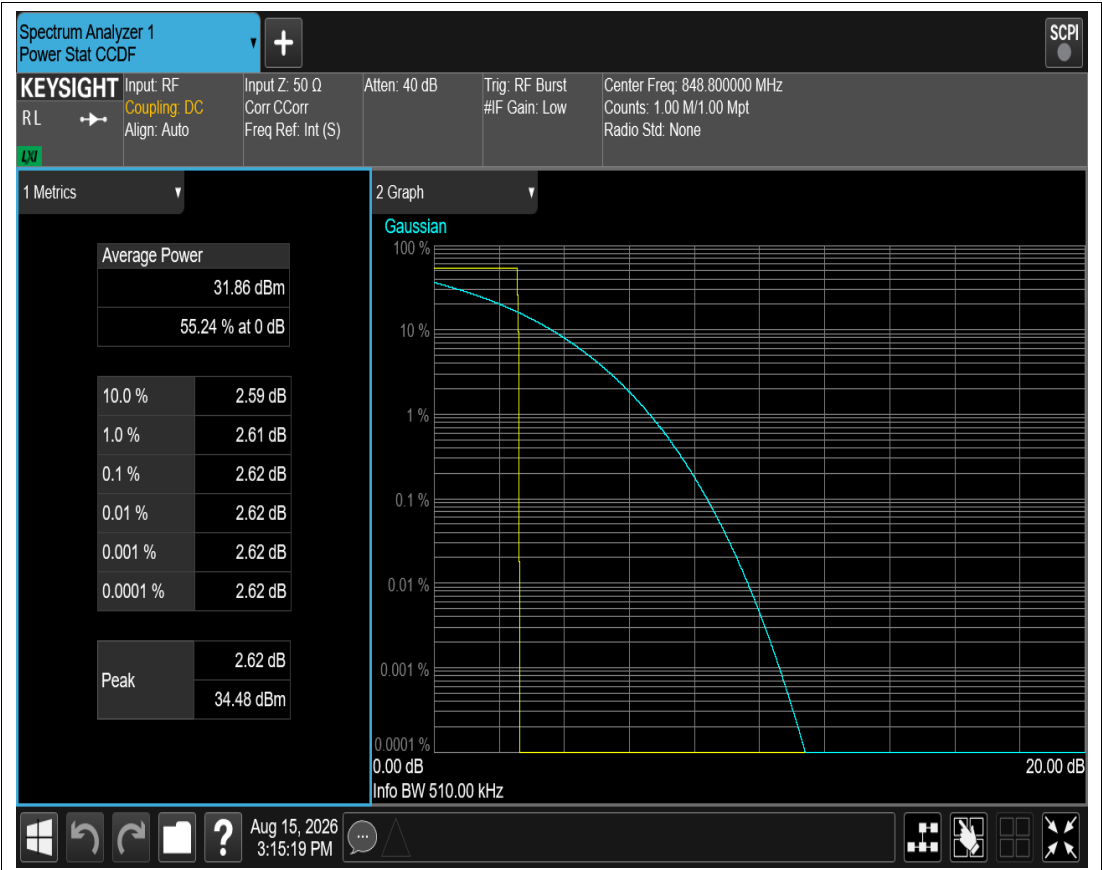


GSM850 Channel=251

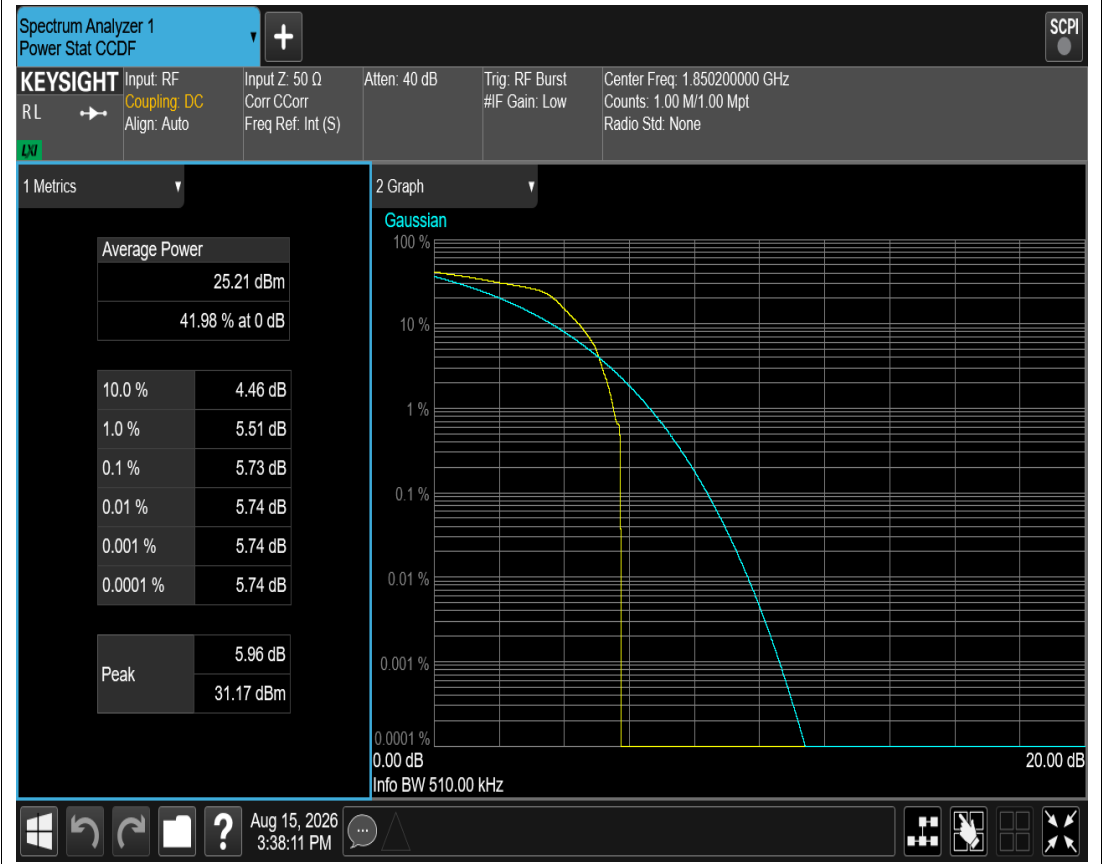


EGPRS1900 Channel=512

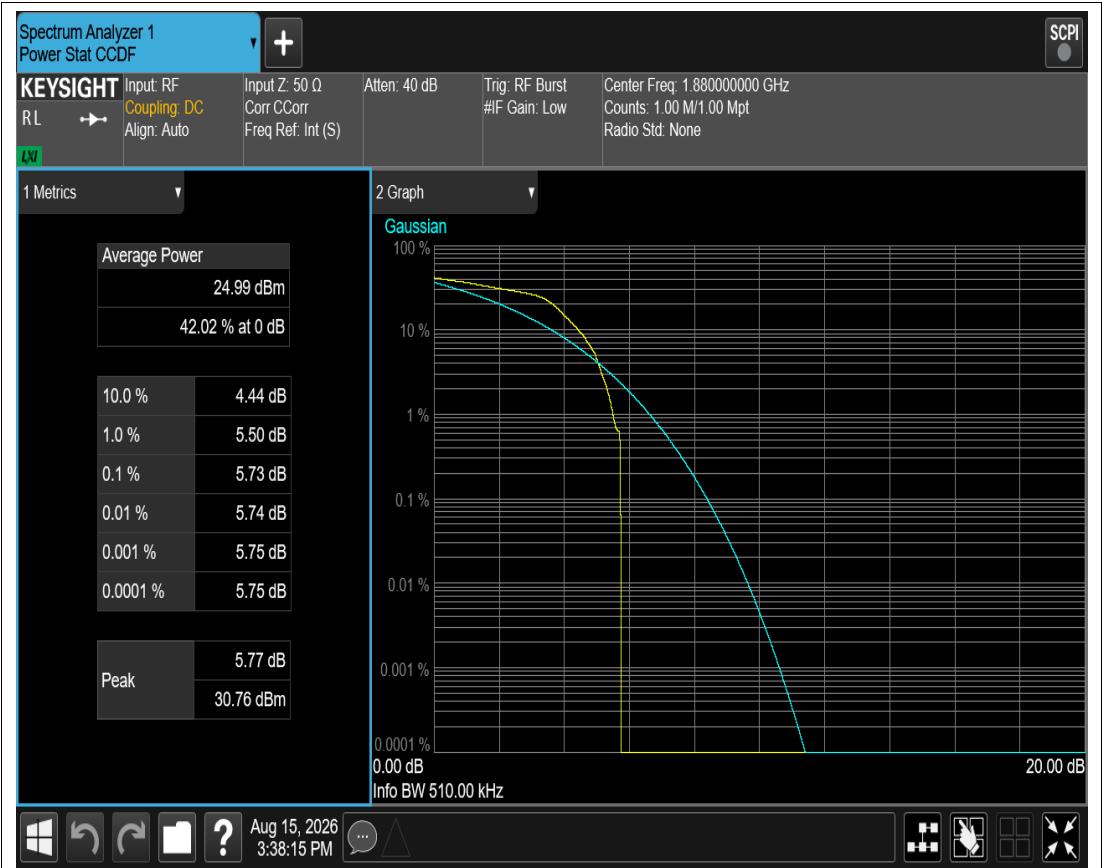


EGPRS1900 Channel=661

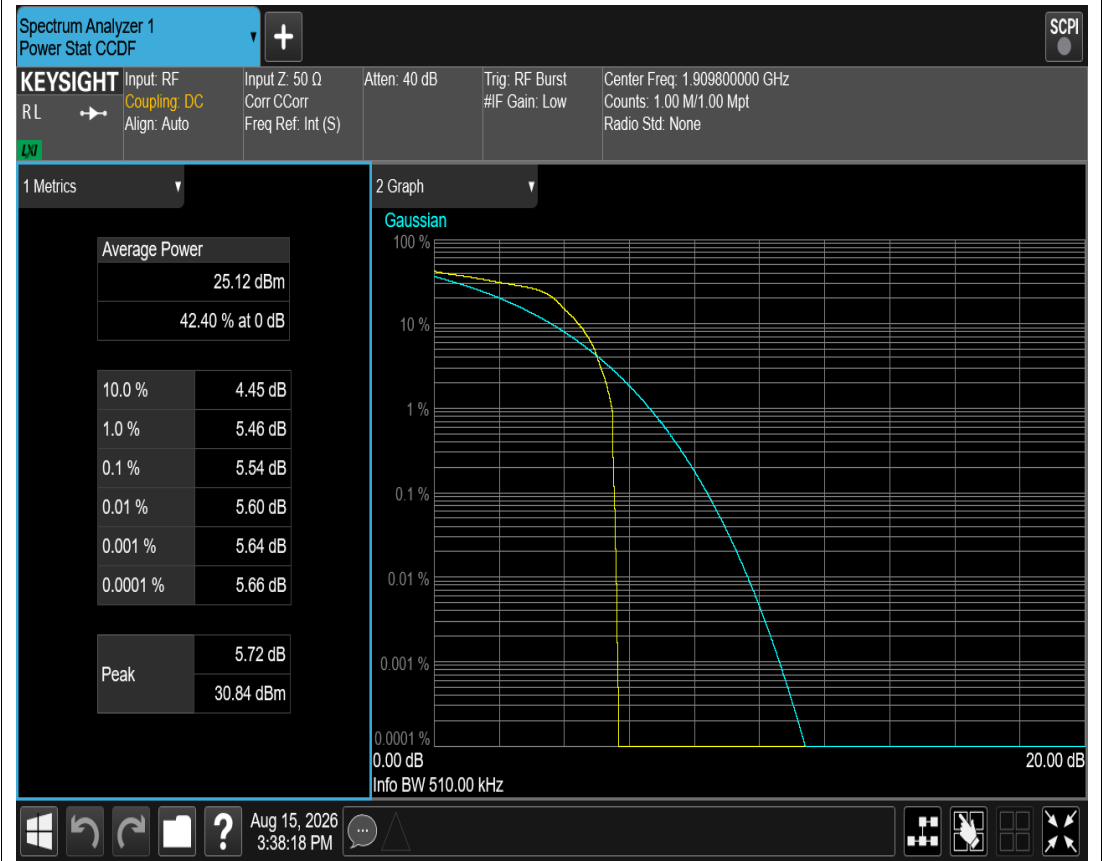


EGPRS1900 Channel=810

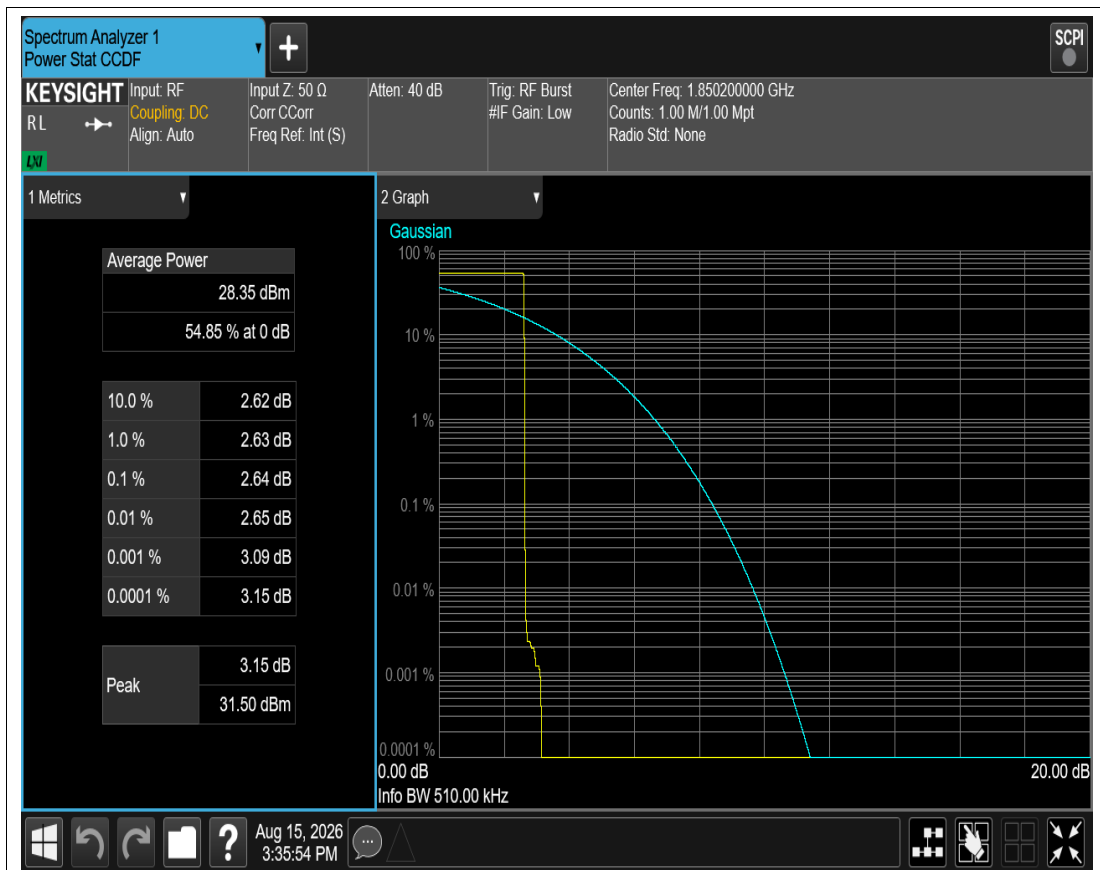


GPRS1900 Channel=512

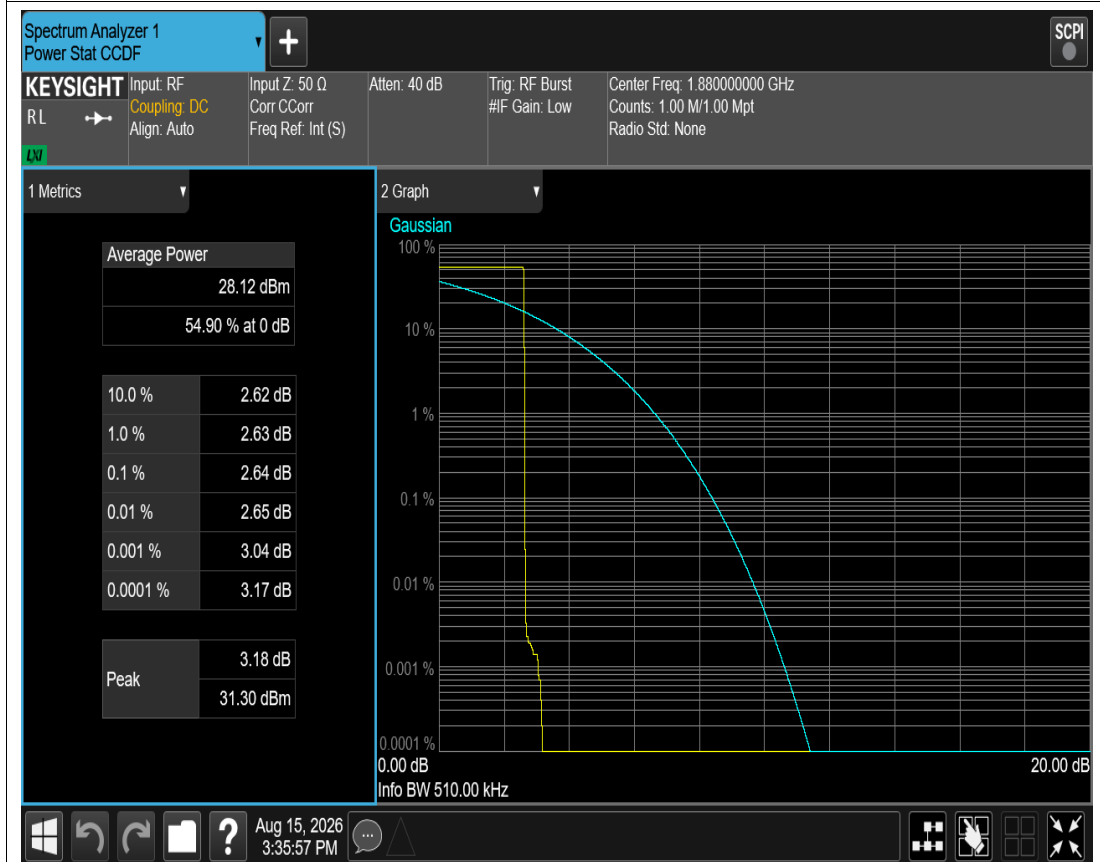


GPRS1900 Channel=661

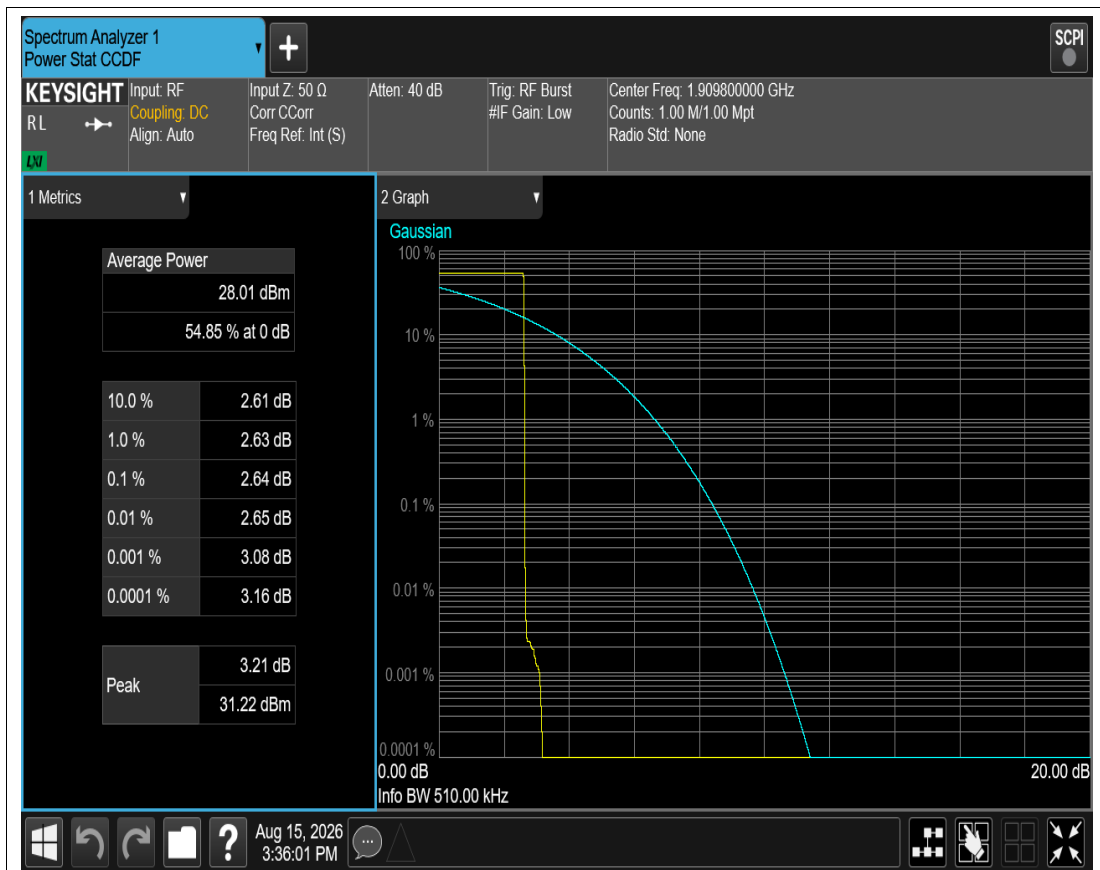


GPRS1900 Channel=810

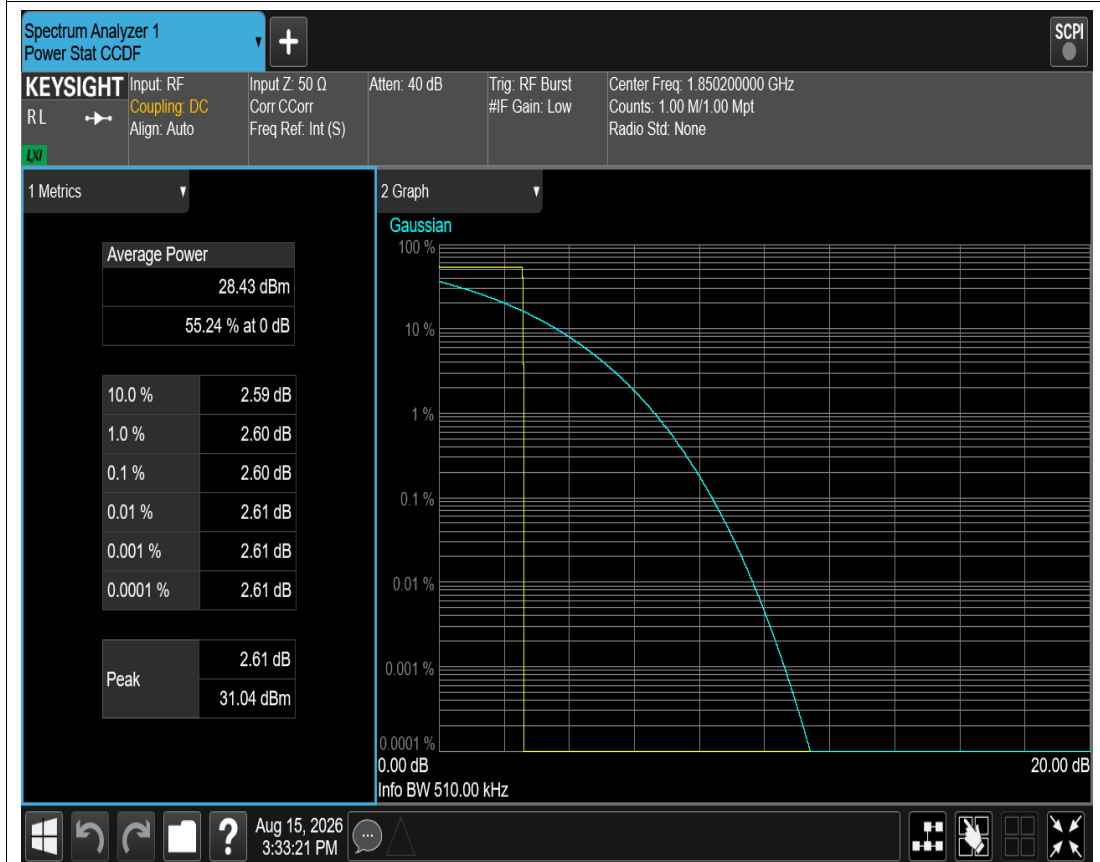

GSM1900 Channel=512

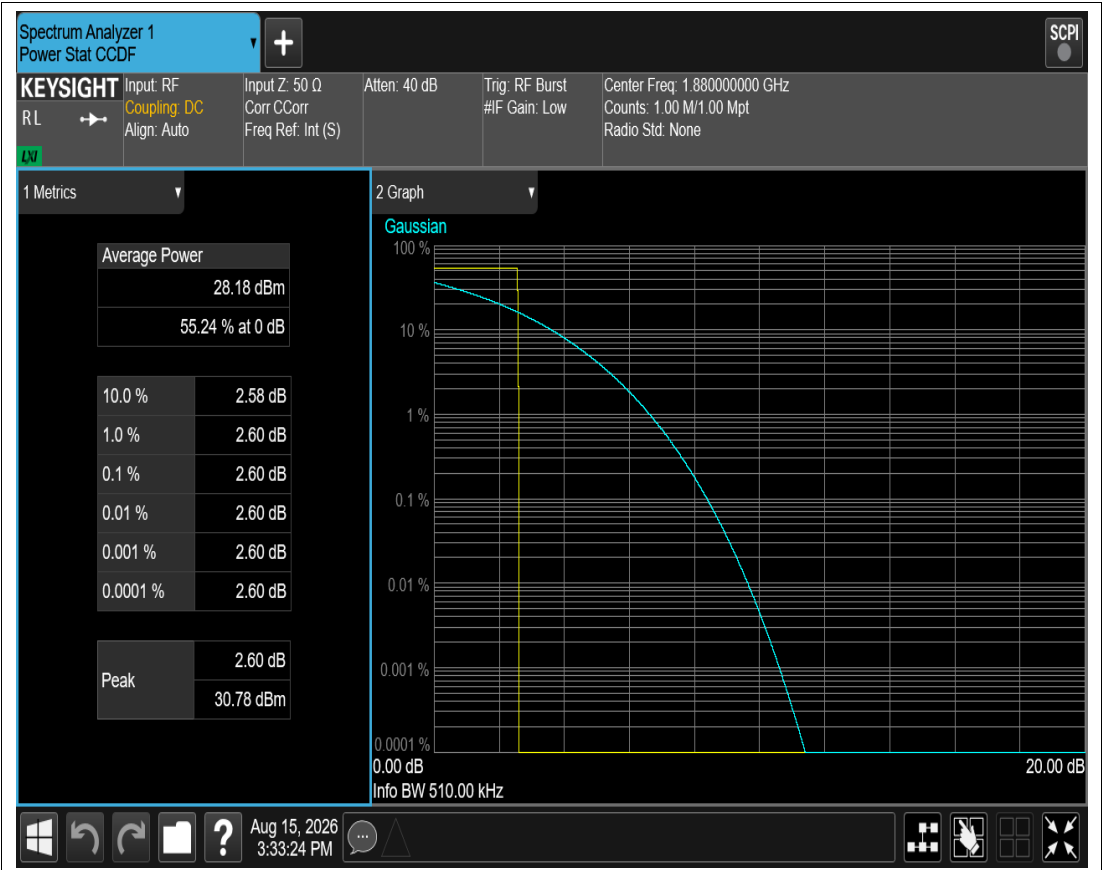


GSM1900 Channel=661

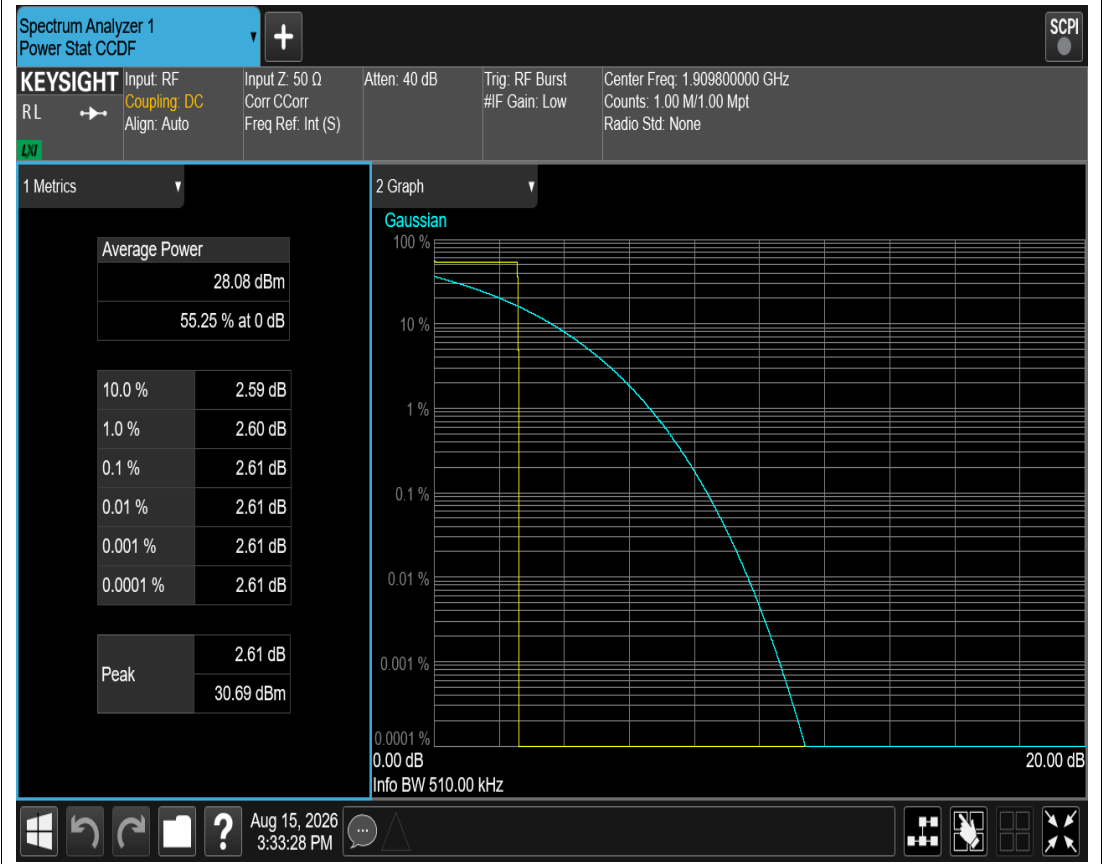


GSM1900 Channel=810

Occupied bandwidth


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>99% OBW (kHz)</i>	<i>-26dB EBW (kHz)</i>	<i>Verdict</i>
EGPRS850	128	824.2	253.472	321.674	PASS
EGPRS850	190	836.6	249.550	312.954	PASS
EGPRS850	251	848.8	244.115	318.941	PASS
GPRS850	128	824.2	246.513	320.483	PASS
GPRS850	190	836.6	240.087	314.278	PASS
GPRS850	251	848.8	247.424	303.816	PASS
GSM850	128	824.2	247.582	311.103	PASS
GSM850	190	836.6	244.136	319.086	PASS
GSM850	251	848.8	243.085	312.366	PASS
EGPRS1900	512	1850.2	242.431	318.945	PASS
EGPRS1900	661	1880	238.928	304.360	PASS
EGPRS1900	810	1909.8	244.579	305.647	PASS
GPRS1900	512	1850.2	245.246	314.903	PASS
GPRS1900	661	1880	244.720	310.790	PASS
GPRS1900	810	1909.8	243.455	312.704	PASS
GSM1900	512	1850.2	242.611	311.740	PASS
GSM1900	661	1880	242.439	312.823	PASS
GSM1900	810	1909.8	245.129	315.360	PASS

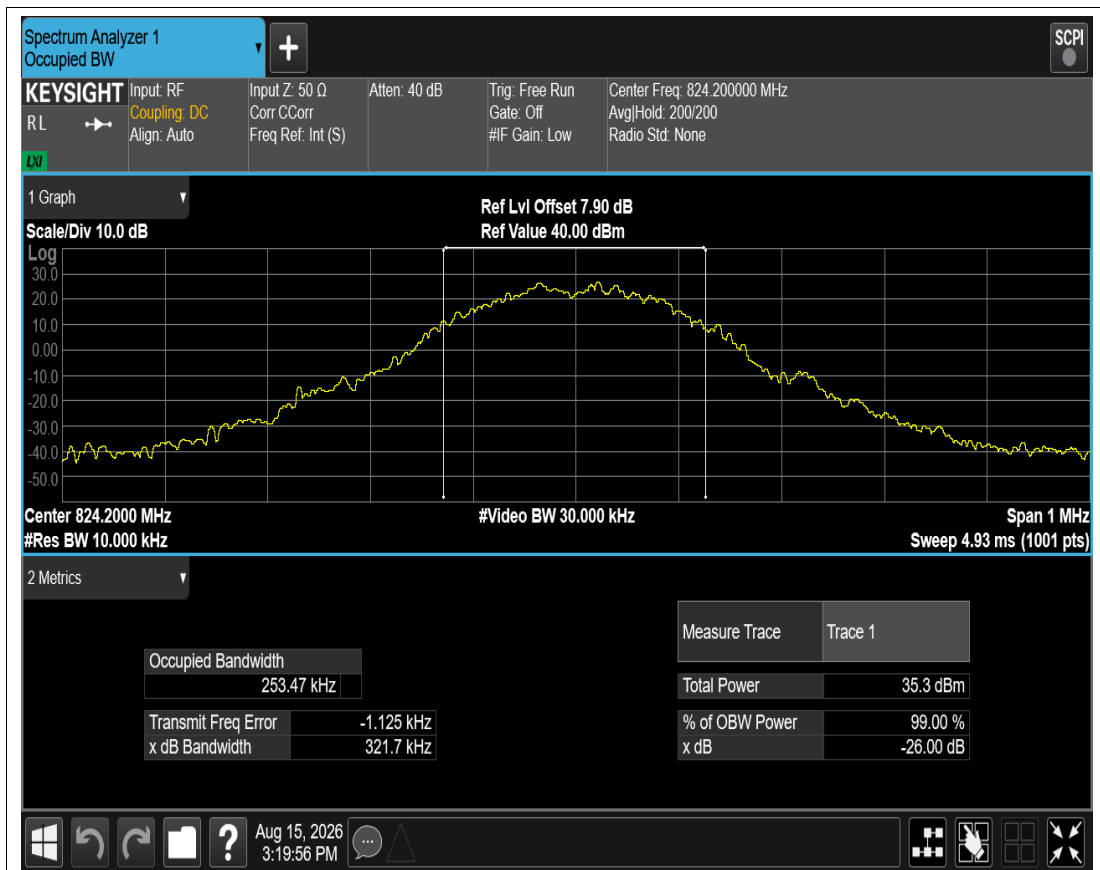


EGPRS850 Channel=128

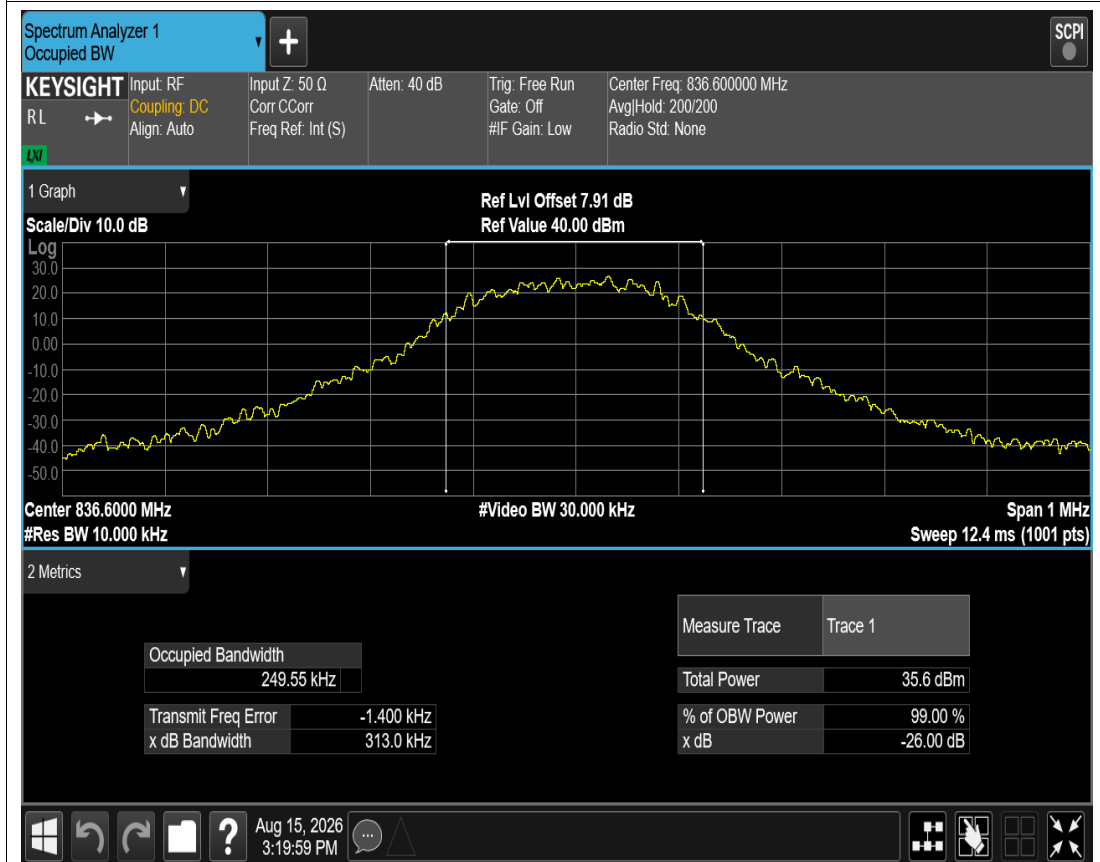


EGPRS850 Channel=190

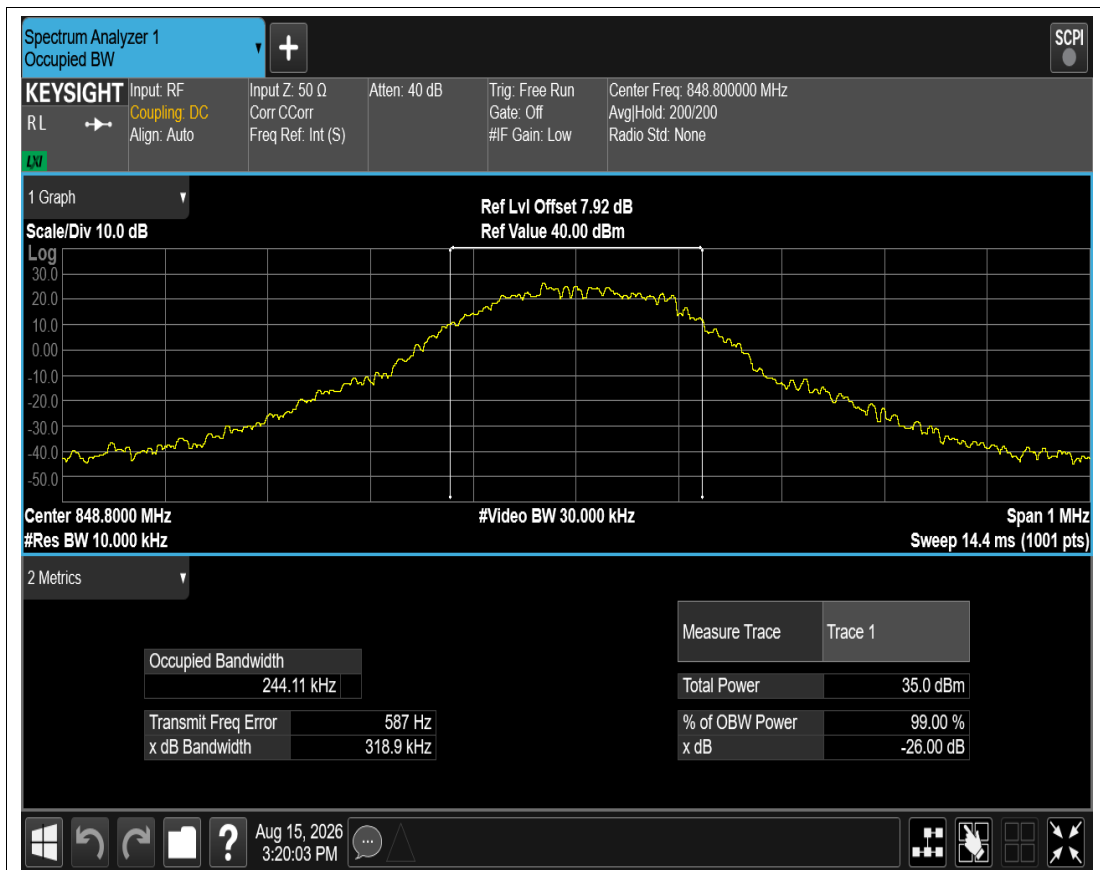


EGPRS850 Channel=251

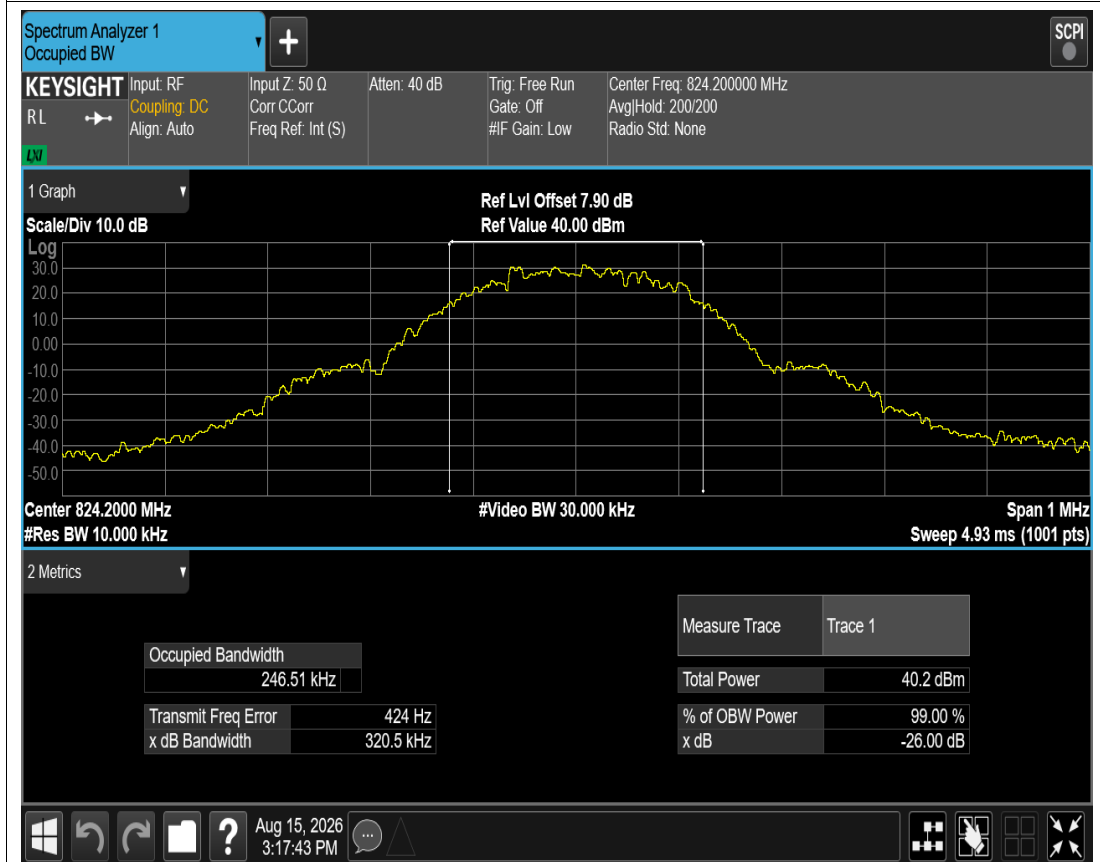


GPRS850 Channel=128

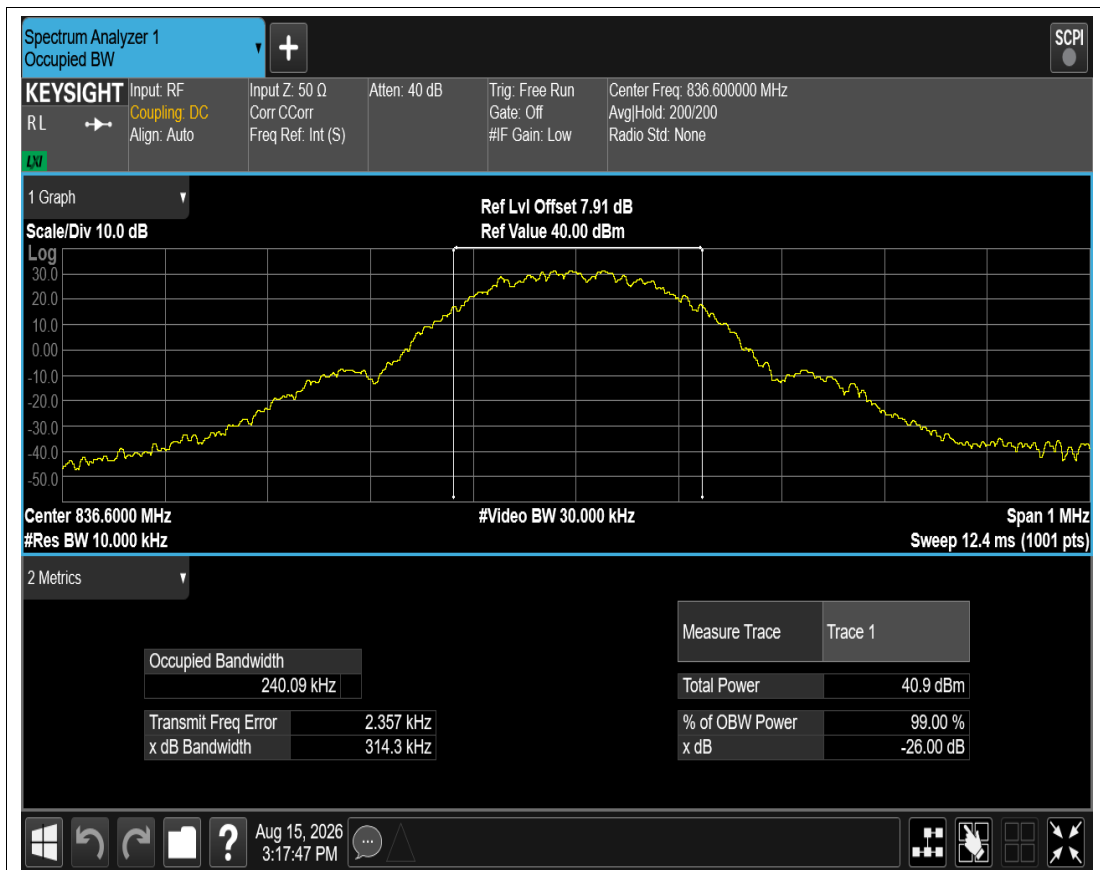


GPRS850 Channel=190

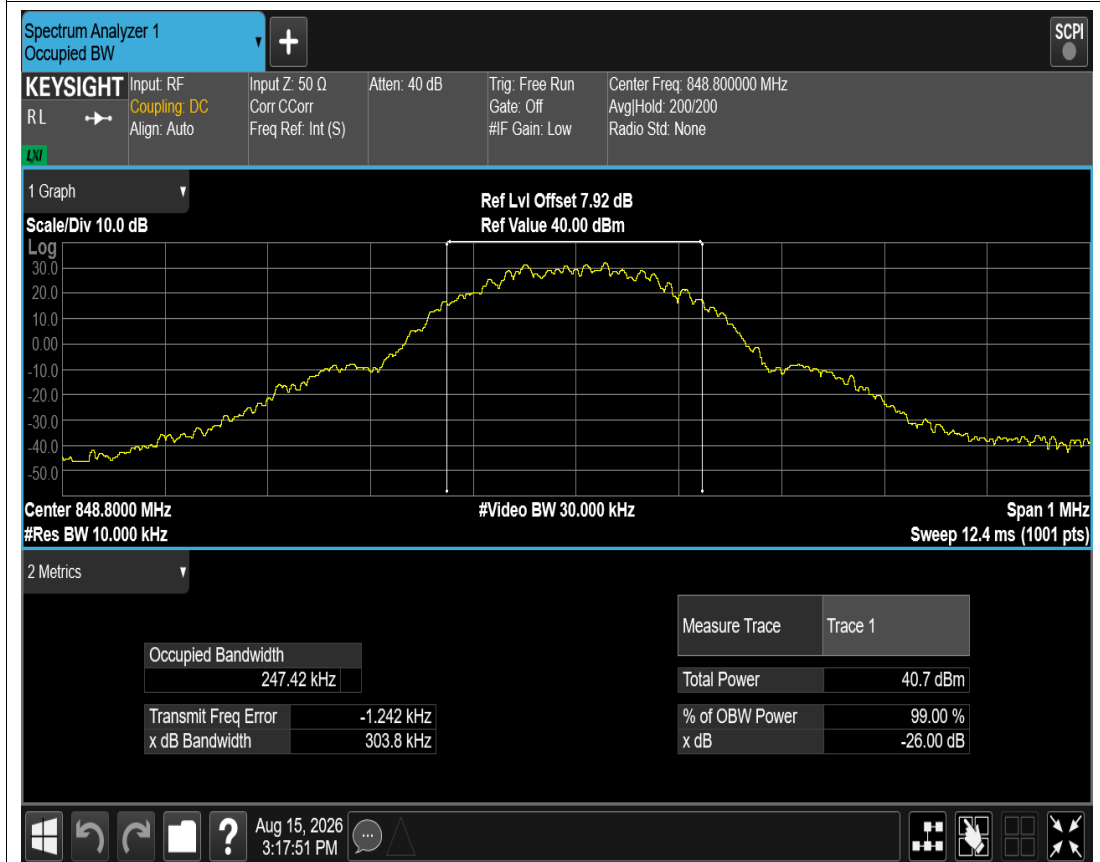


GPRS850 Channel=251

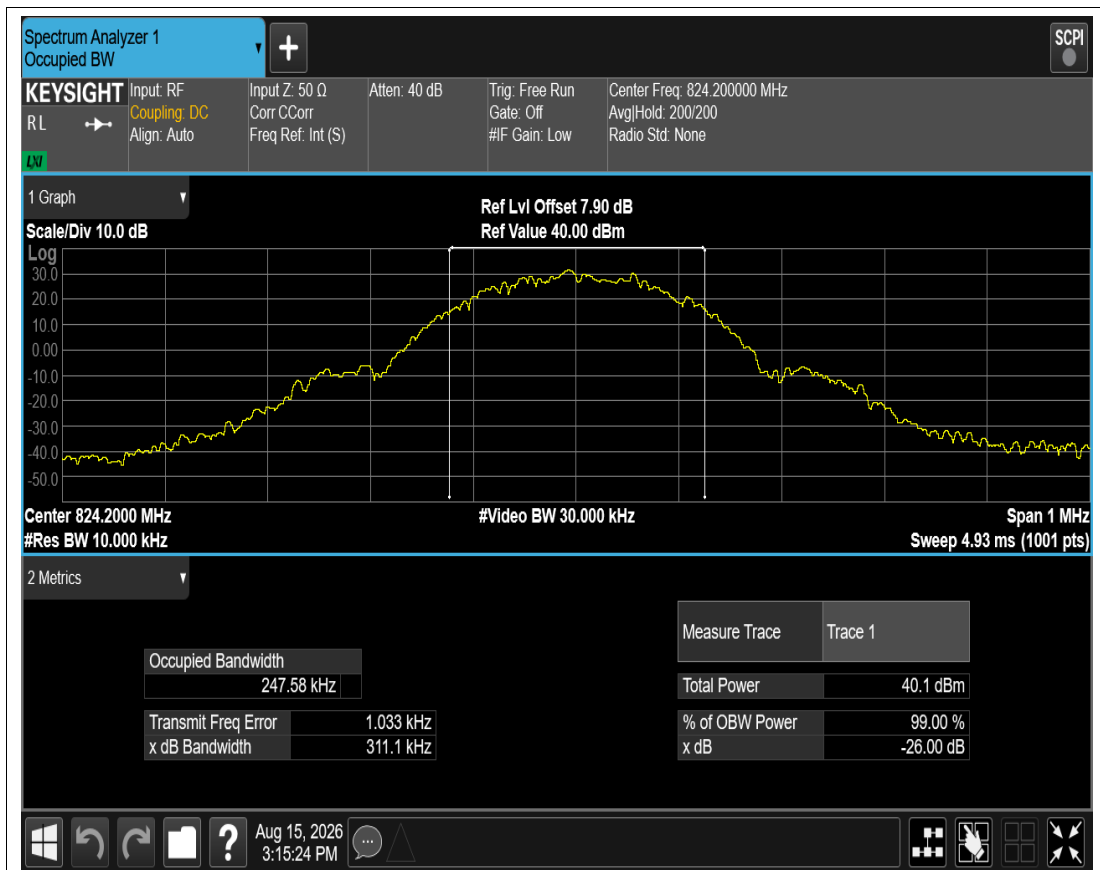


GSM850 Channel=128

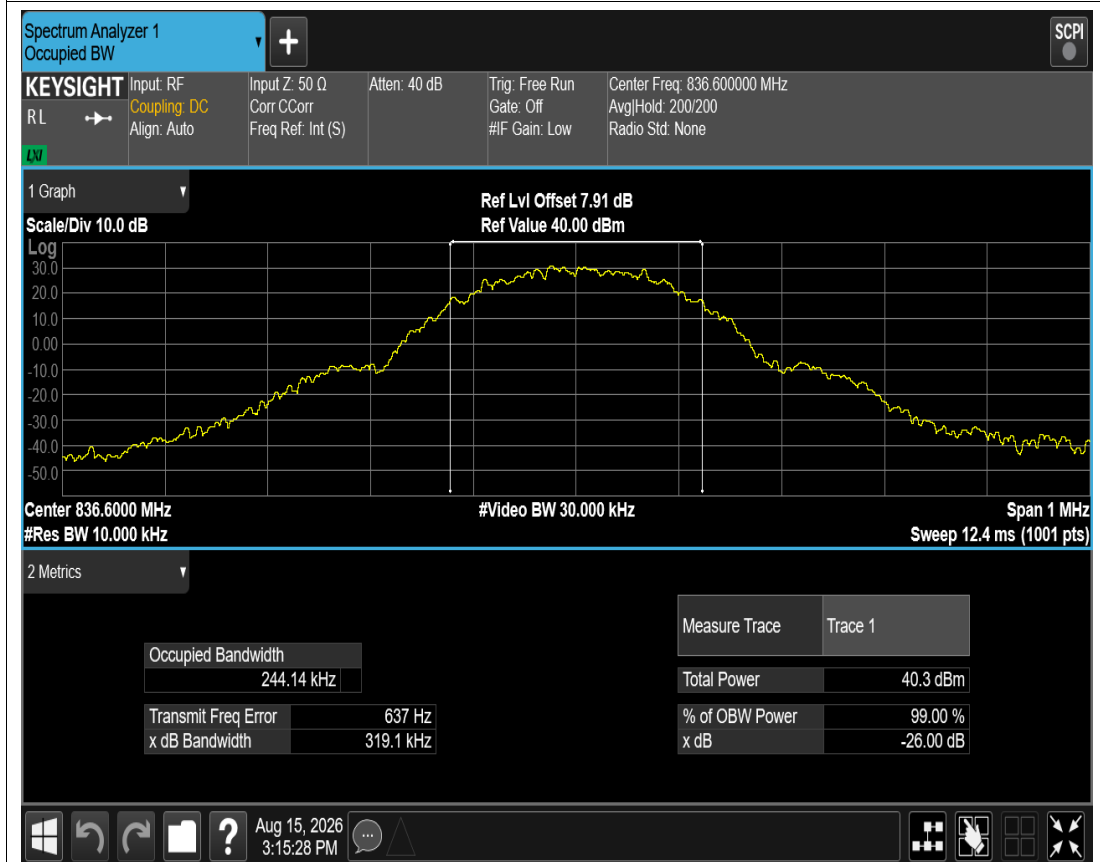


GSM850 Channel=190

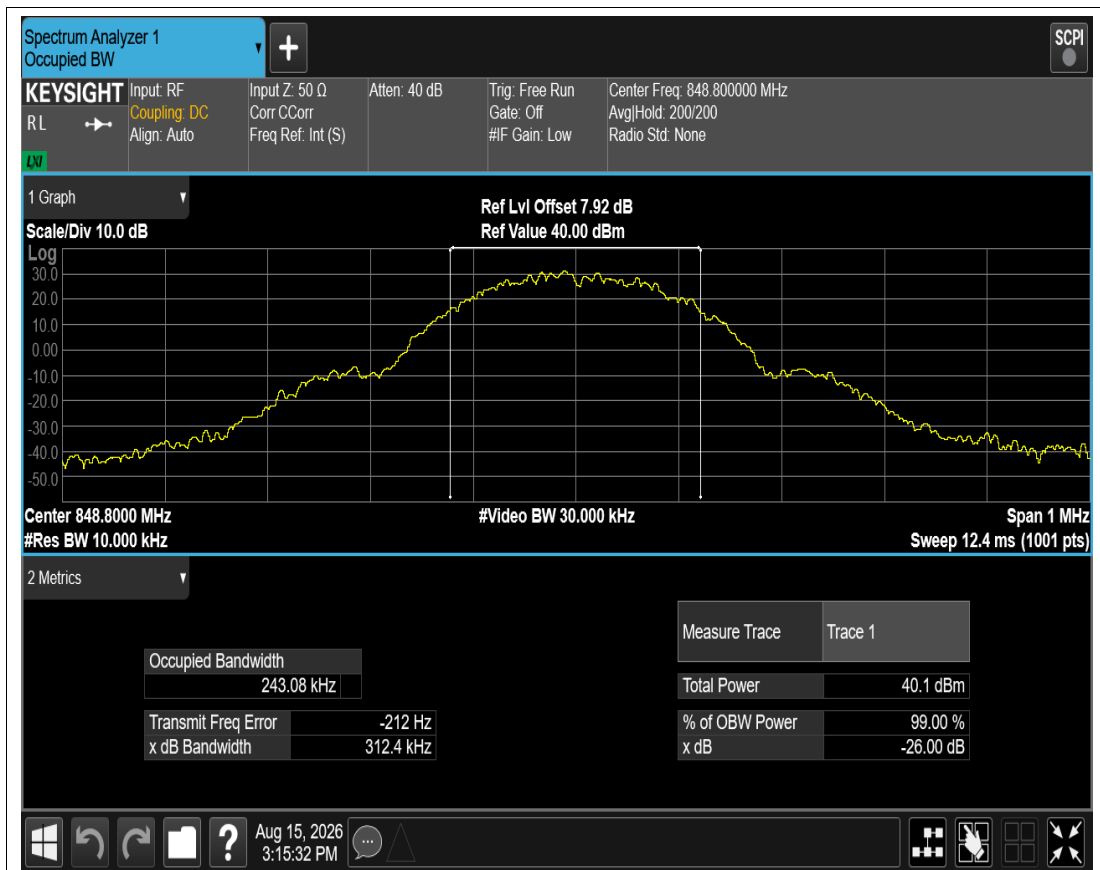


GSM850 Channel=251

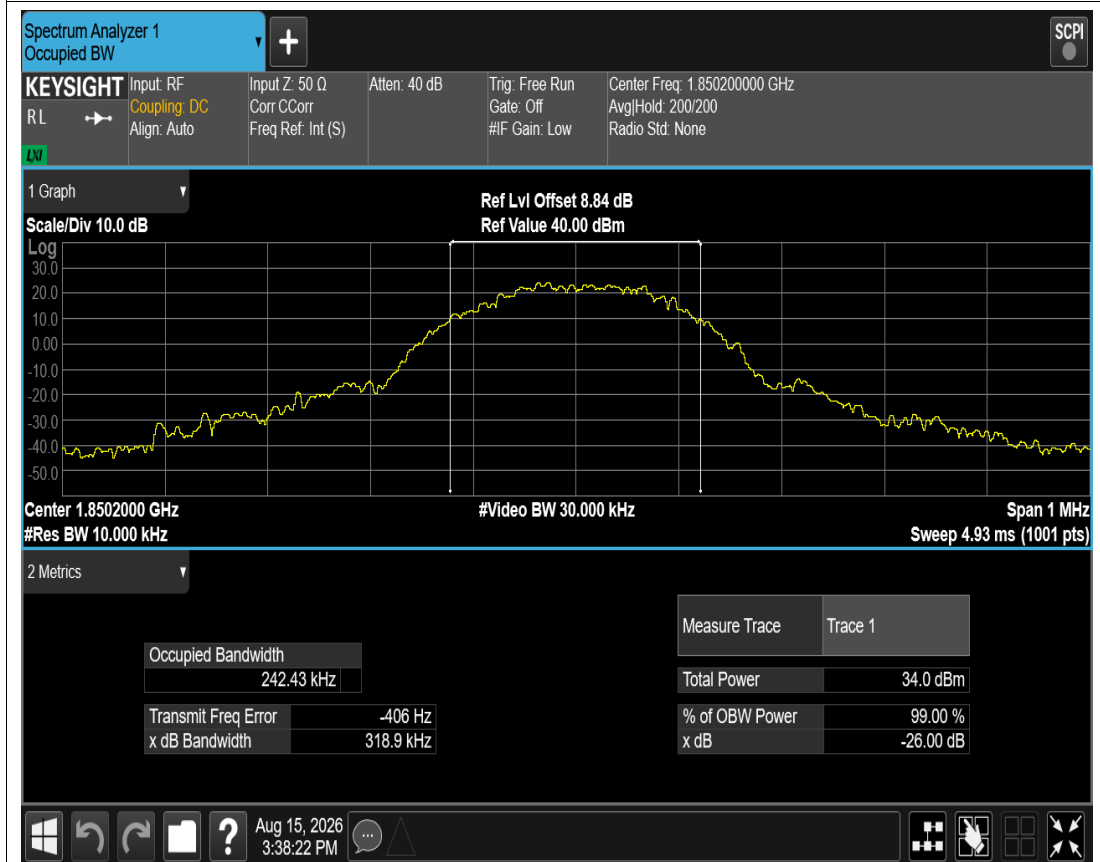


EGPRS1900 Channel=512

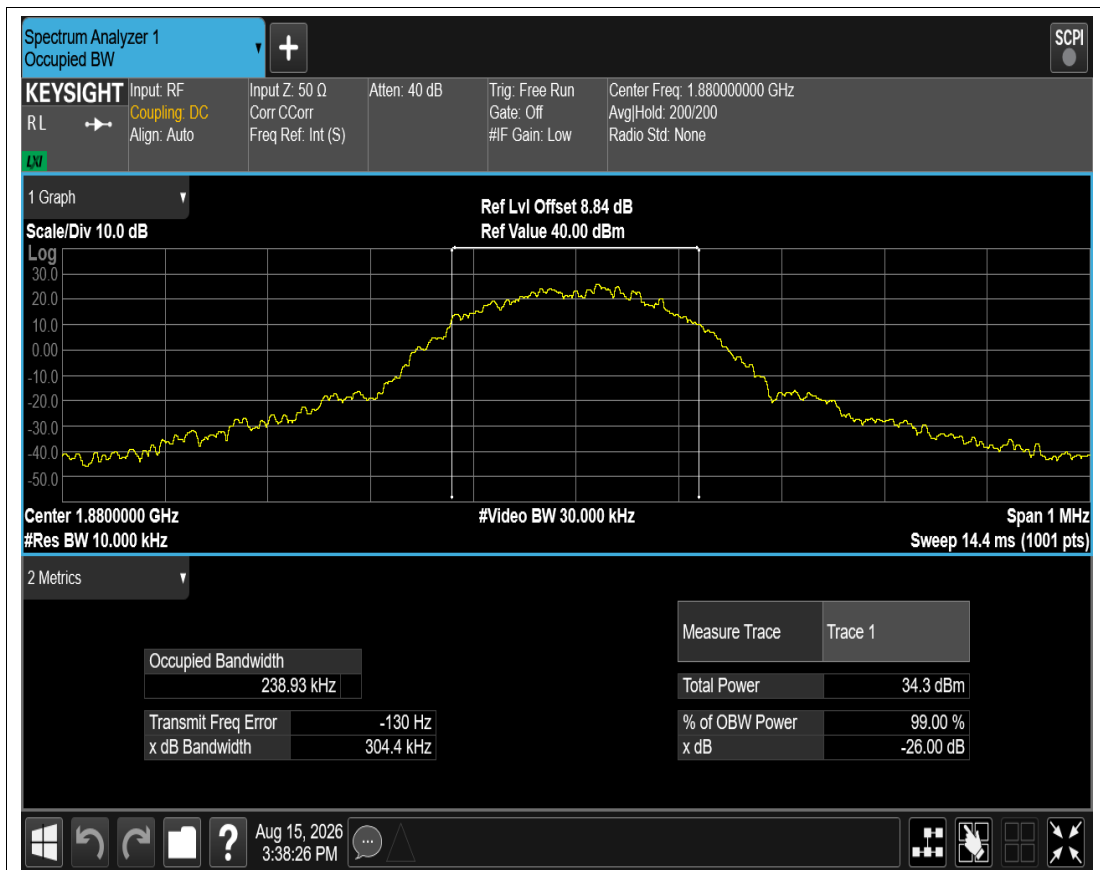


EGPRS1900 Channel=661

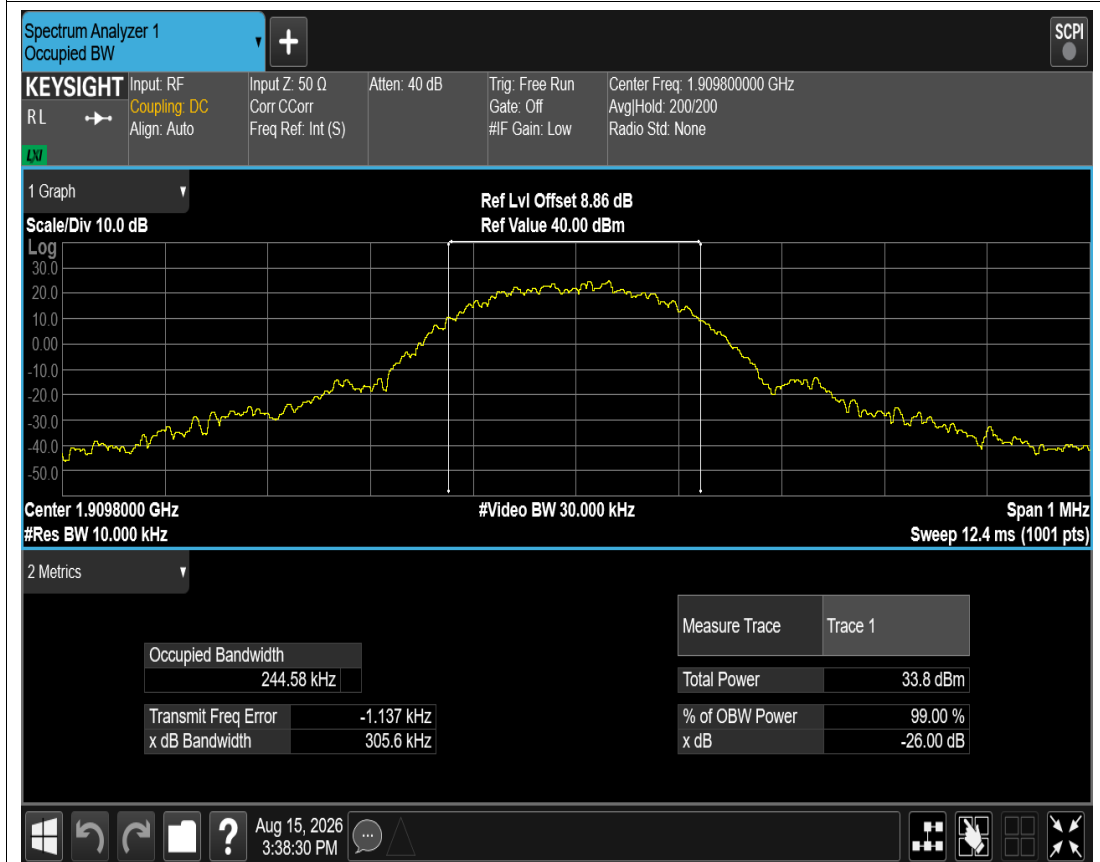


EGPRS1900 Channel=810

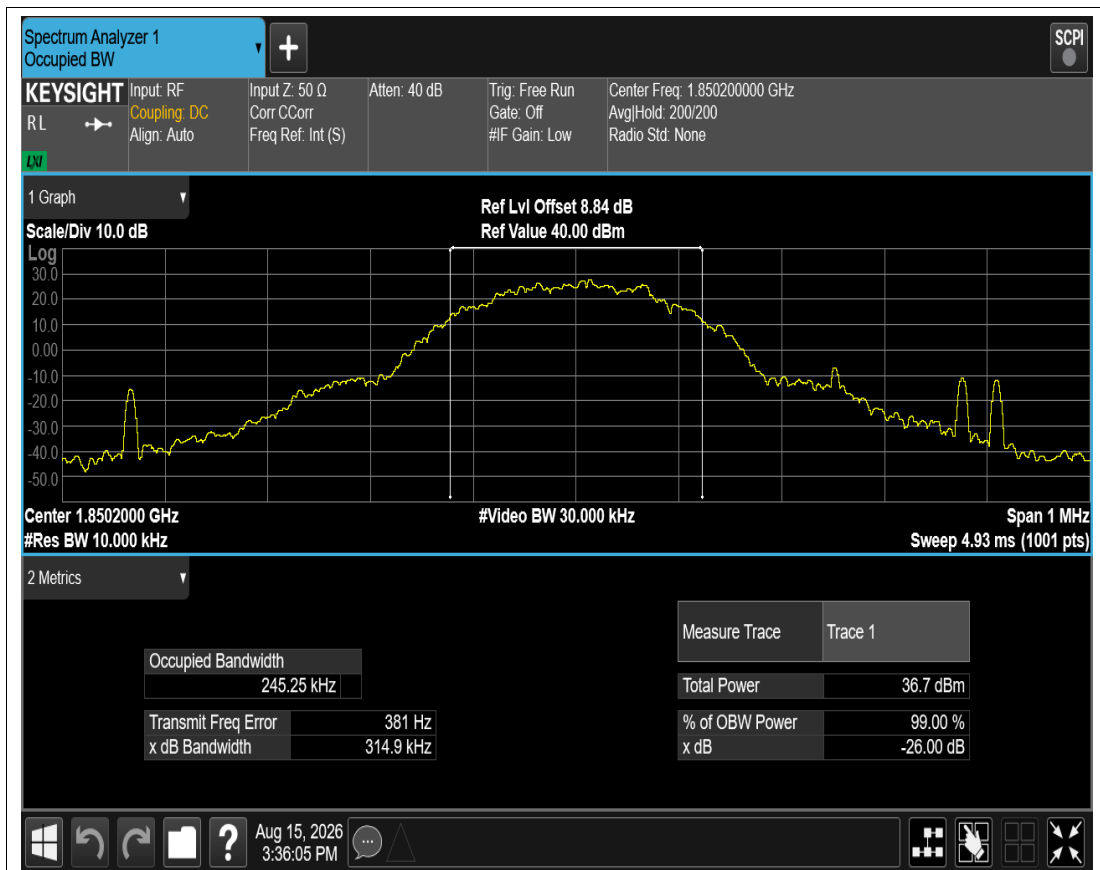


GPRS1900 Channel=512

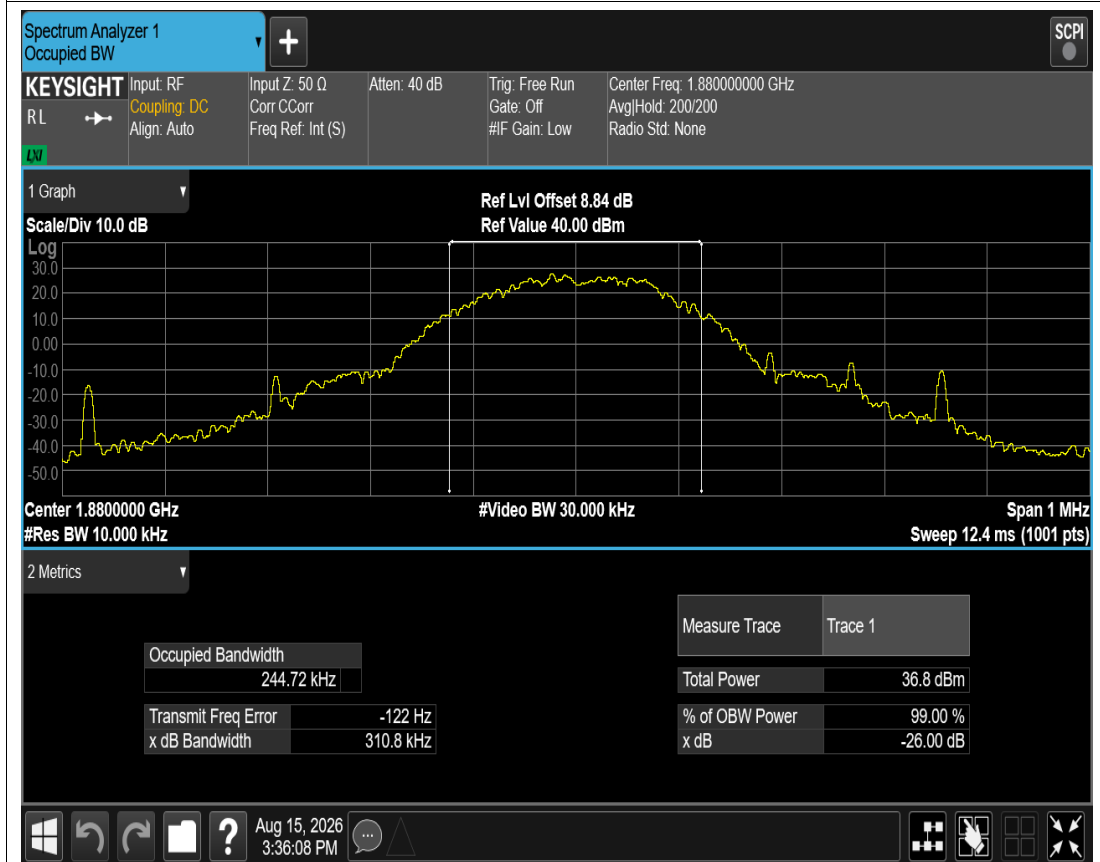


GPRS1900 Channel=661

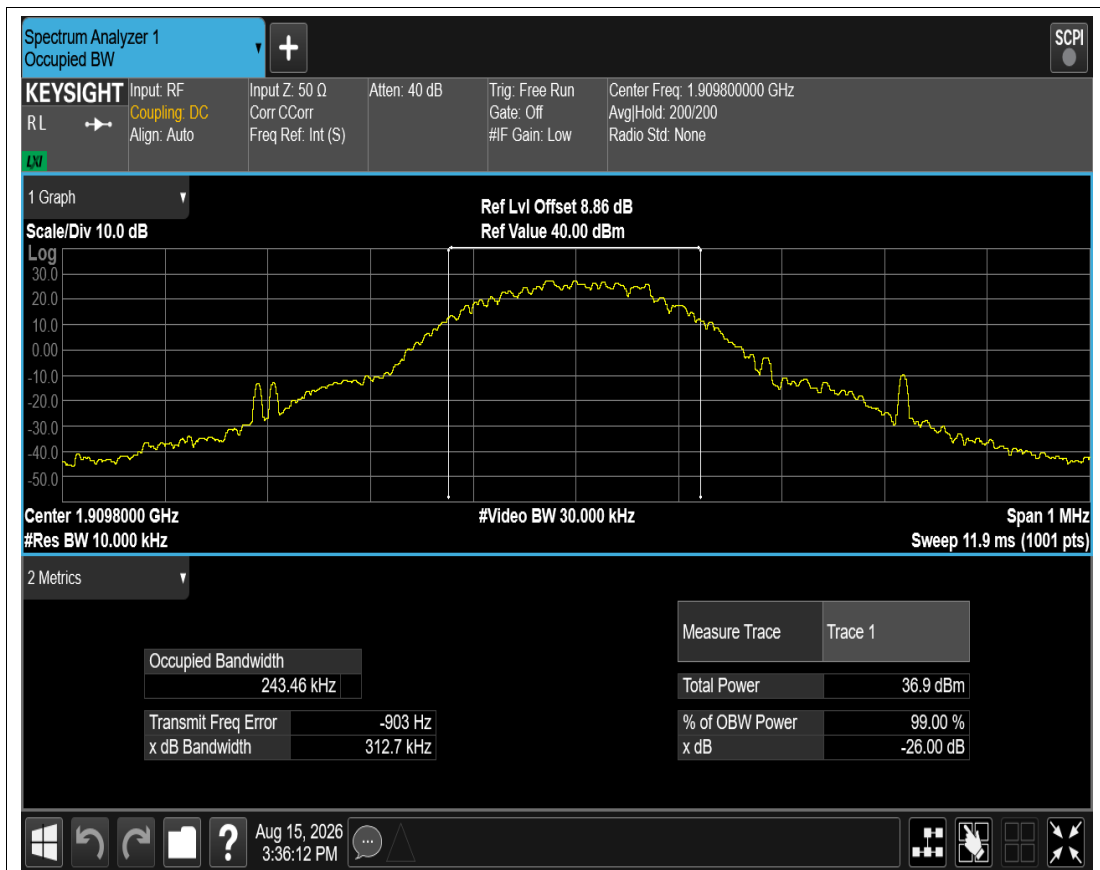


GPRS1900 Channel=810

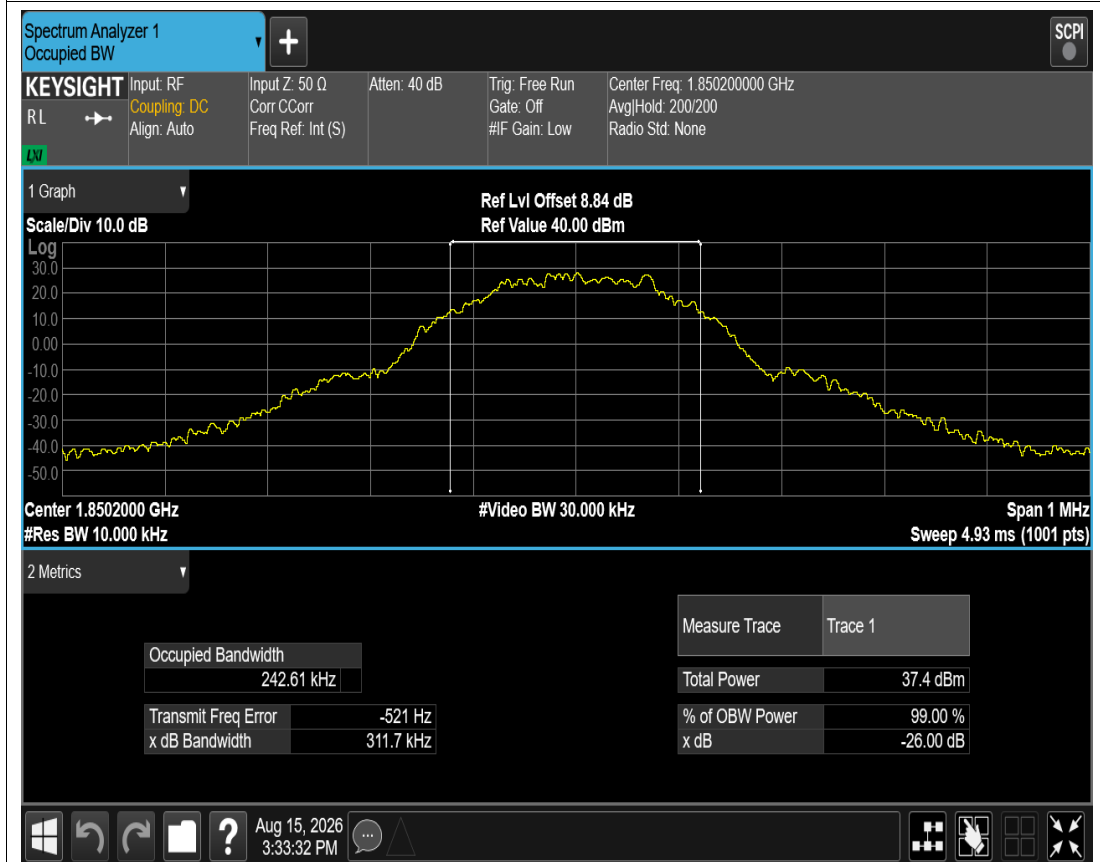

GSM1900 Channel=512

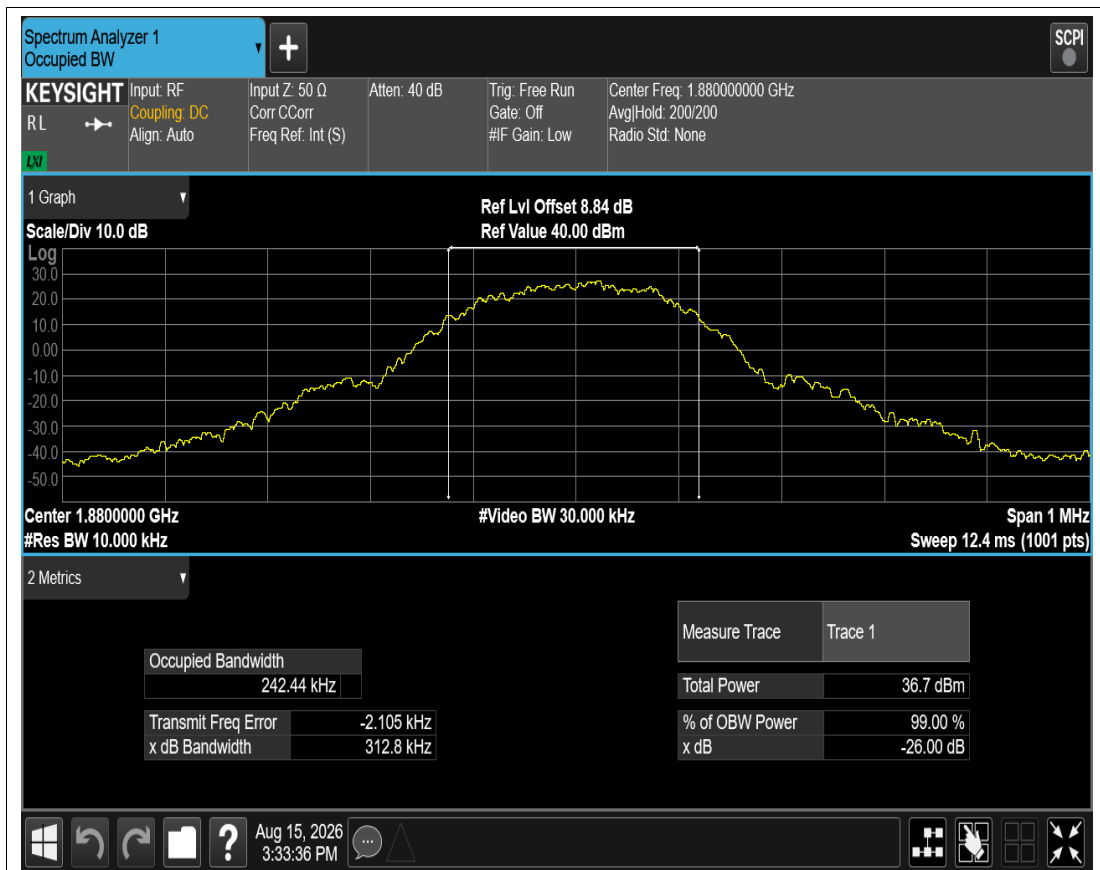


GSM1900 Channel=661

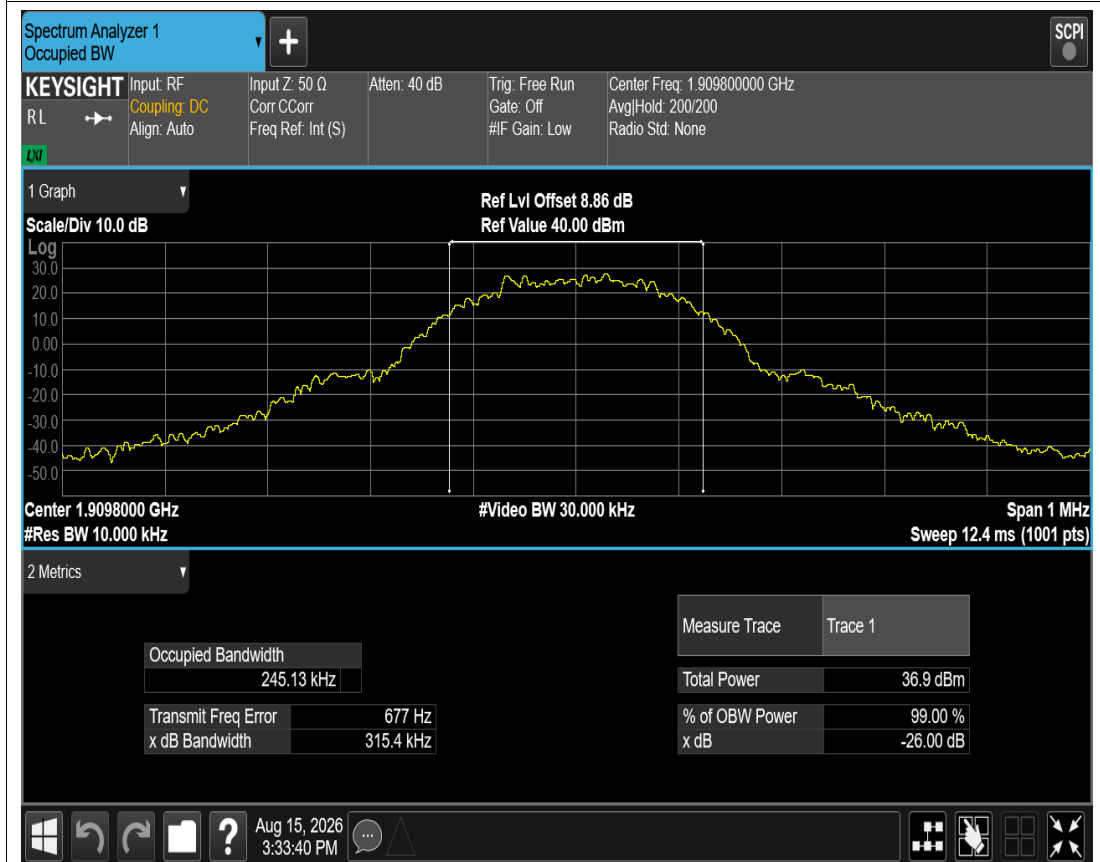


GSM1900 Channel=810

Band edge


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	824.00	-30.84	-13	PASS
EGPRS850	251	848.8	849.02	-33.10	-13	PASS
GPRS850	128	824.2	823.98	-26.17	-13	PASS
GPRS850	251	848.8	849.03	-26.75	-13	PASS
GSM850	128	824.2	823.98	-26.15	-13	PASS
GSM850	251	848.8	849.02	-26.64	-13	PASS
EGPRS1900	512	1850.2	1849.99	-33.97	-13	PASS
EGPRS1900	810	1909.8	1910.00	-34.60	-13	PASS
GPRS1900	512	1850.2	1849.99	-28.99	-13	PASS
GPRS1900	810	1909.8	1910.02	-29.89	-13	PASS
GSM1900	512	1850.2	1849.97	-28.96	-13	PASS
GSM1900	810	1909.8	1910.02	-29.82	-13	PASS

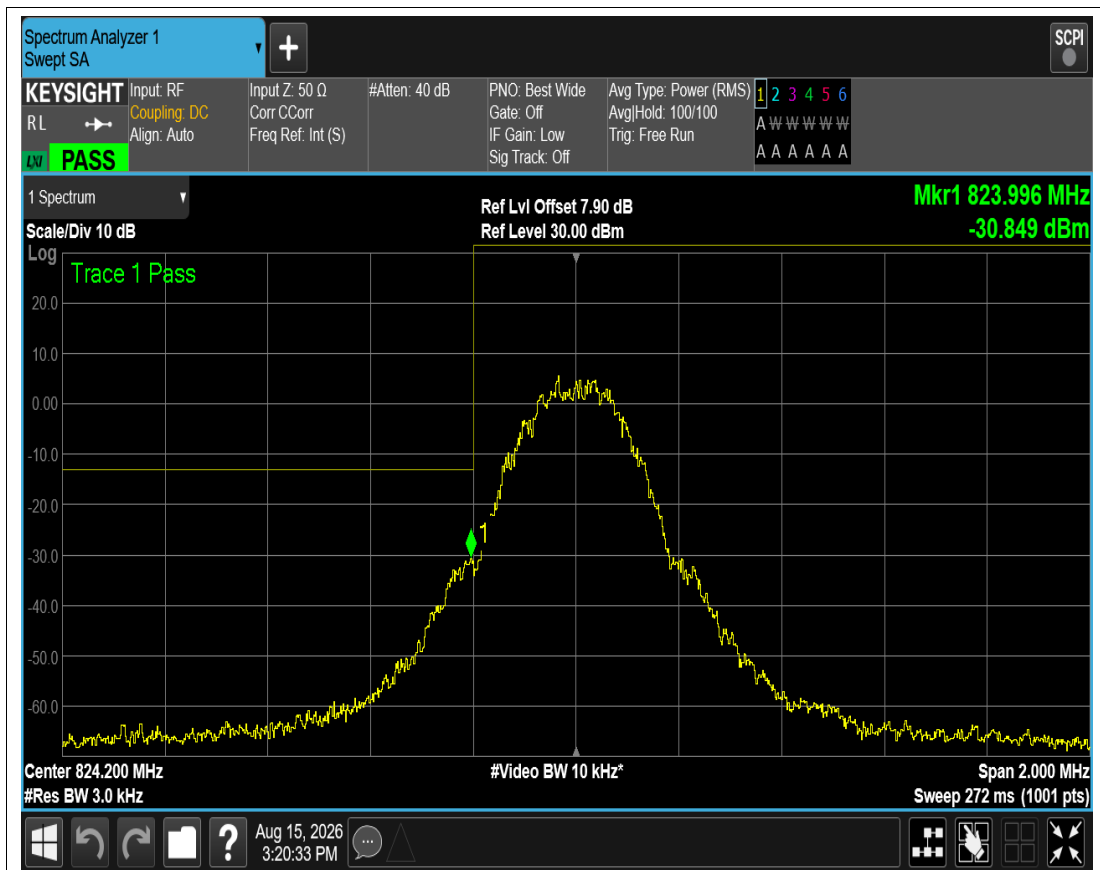


EGPRS850 Channel=128

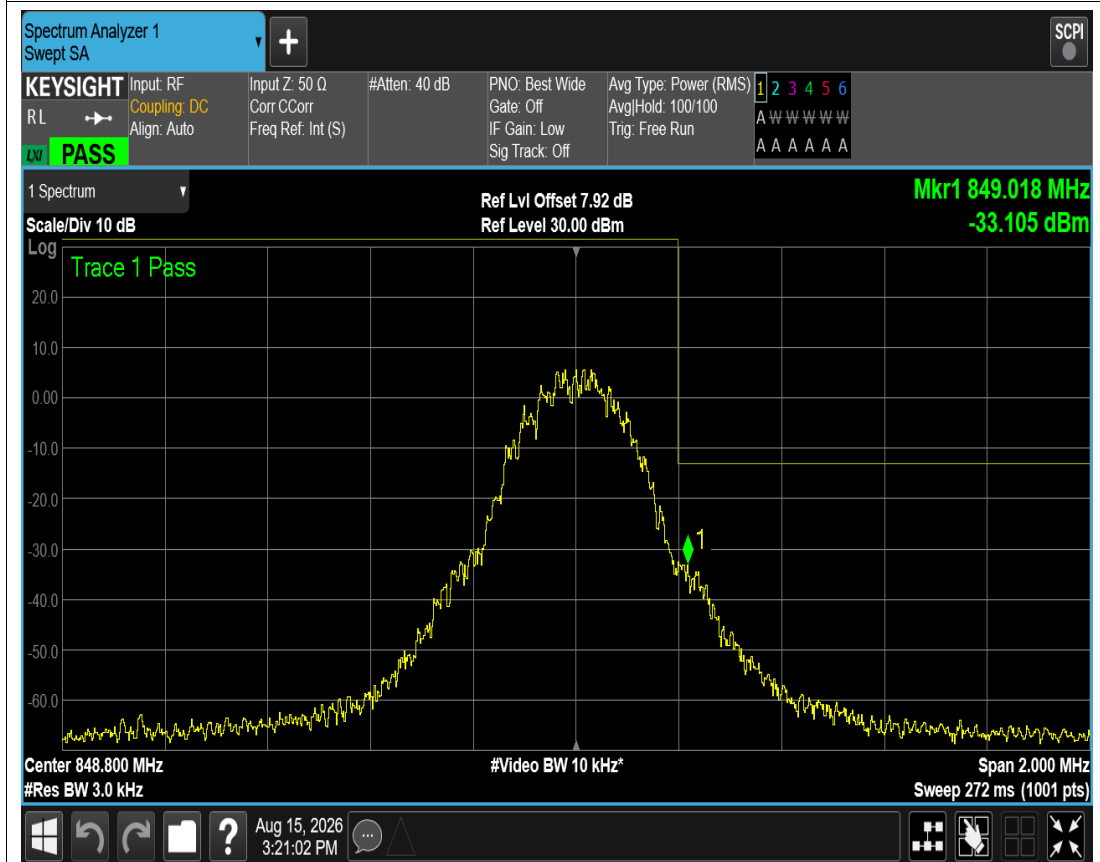


EGPRS850 Channel=251

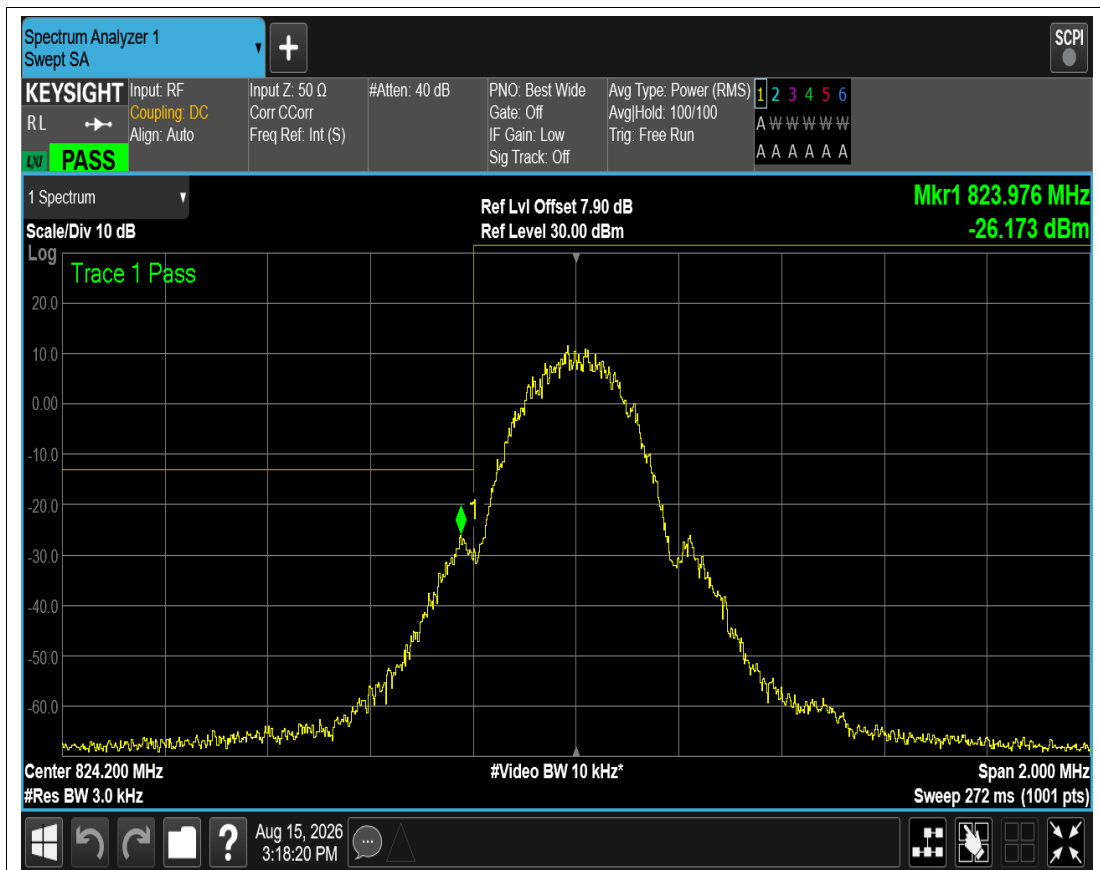


GPRS850 Channel=128

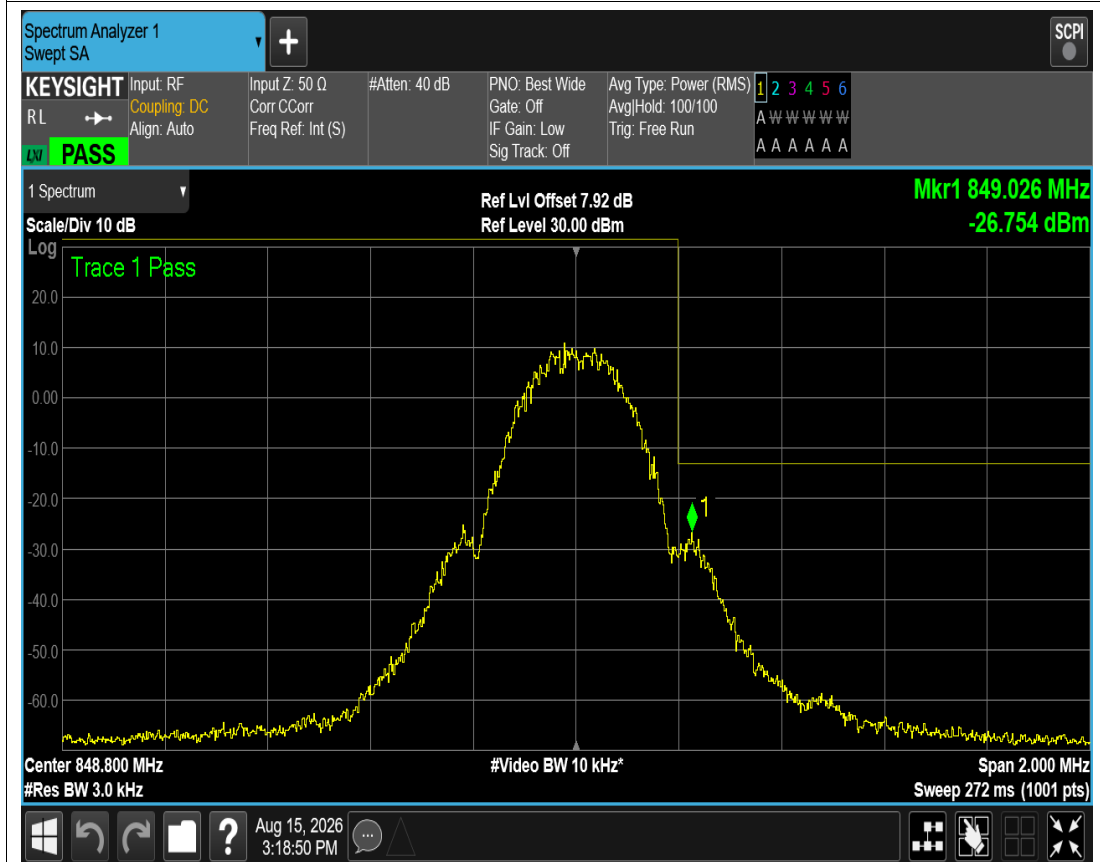


GPRS850 Channel=251

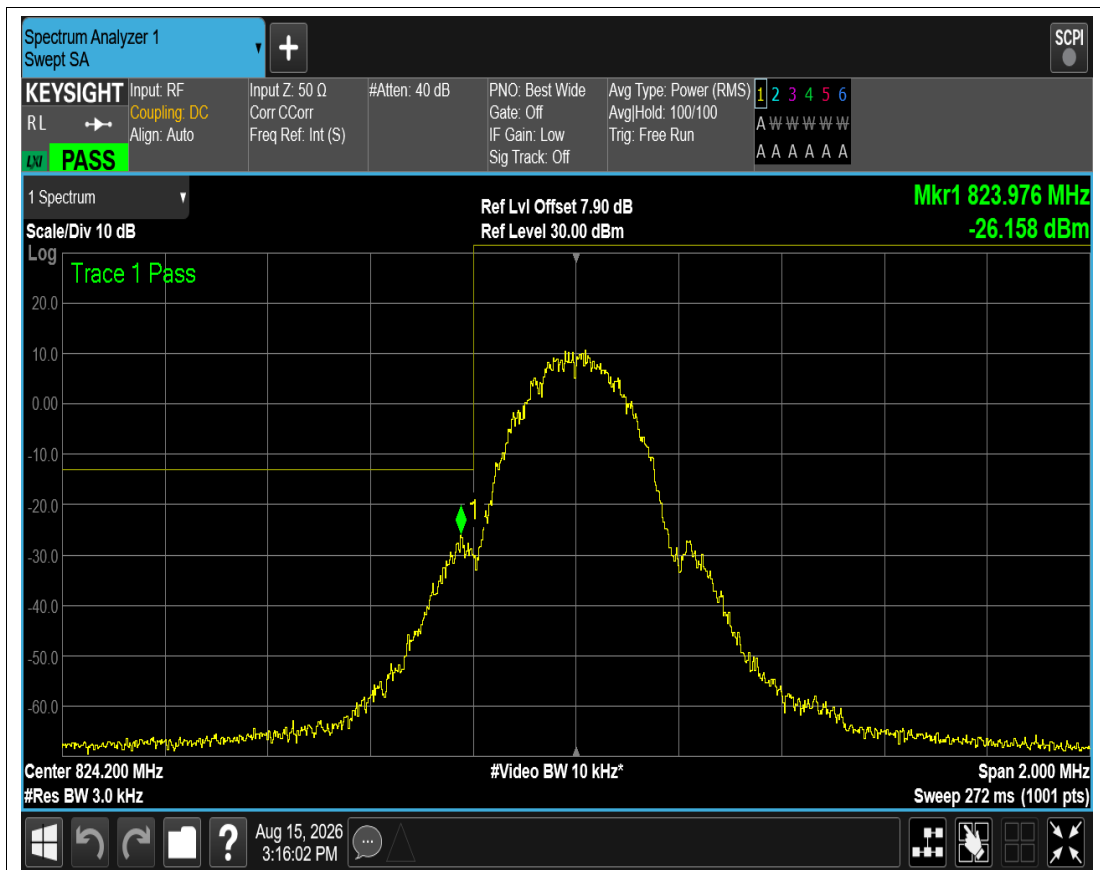


GSM850 Channel=128

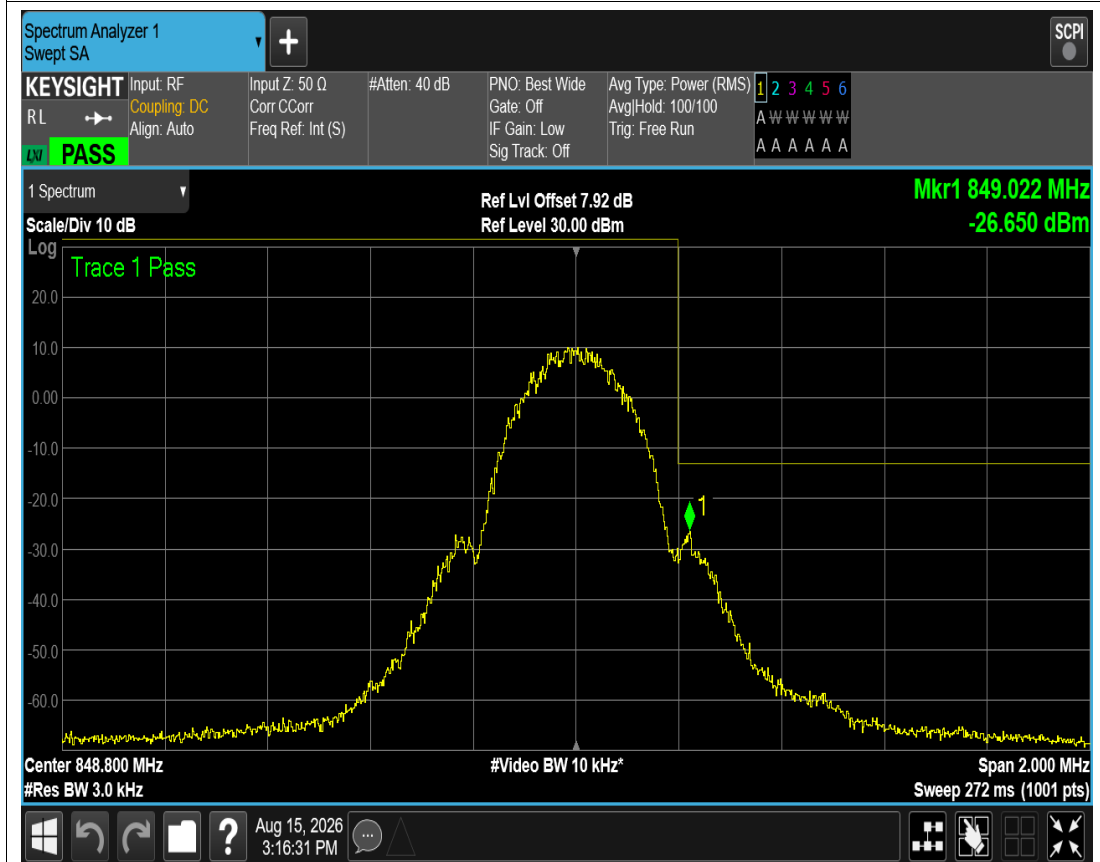


GSM850 Channel=251

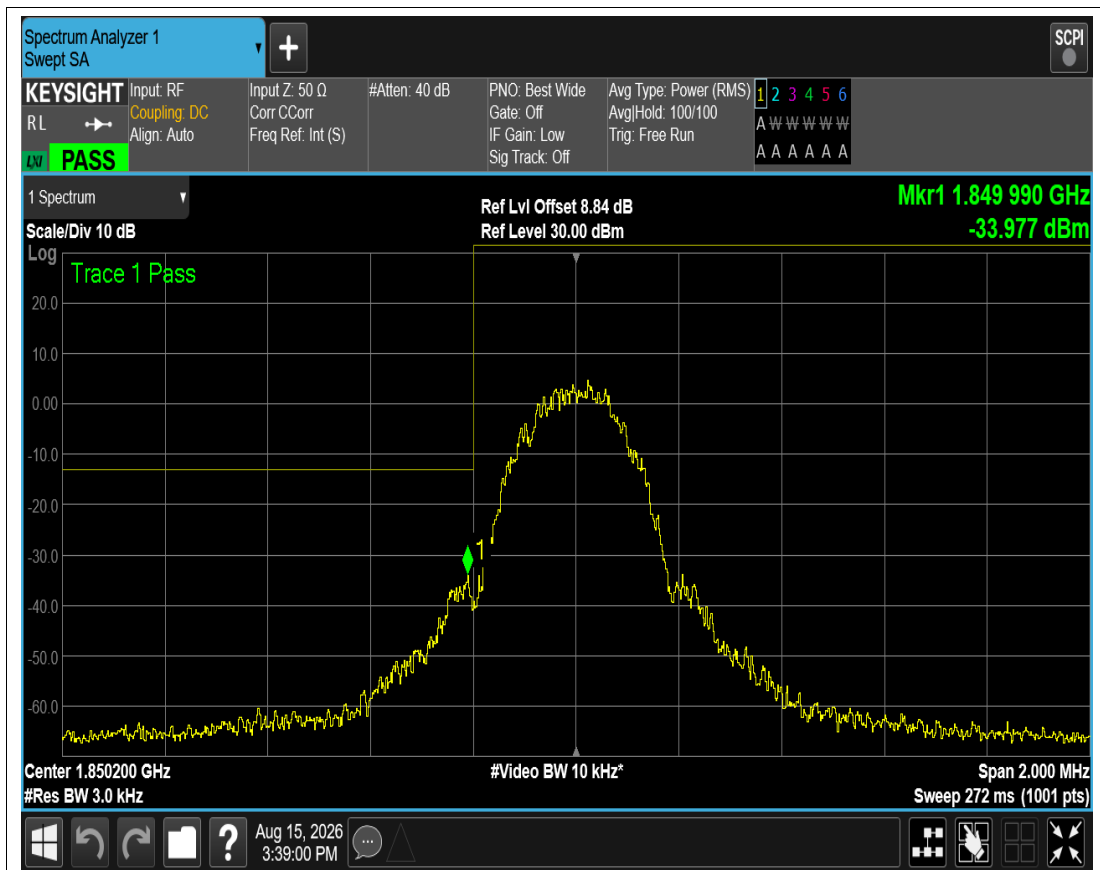


EGPRS1900 Channel=512

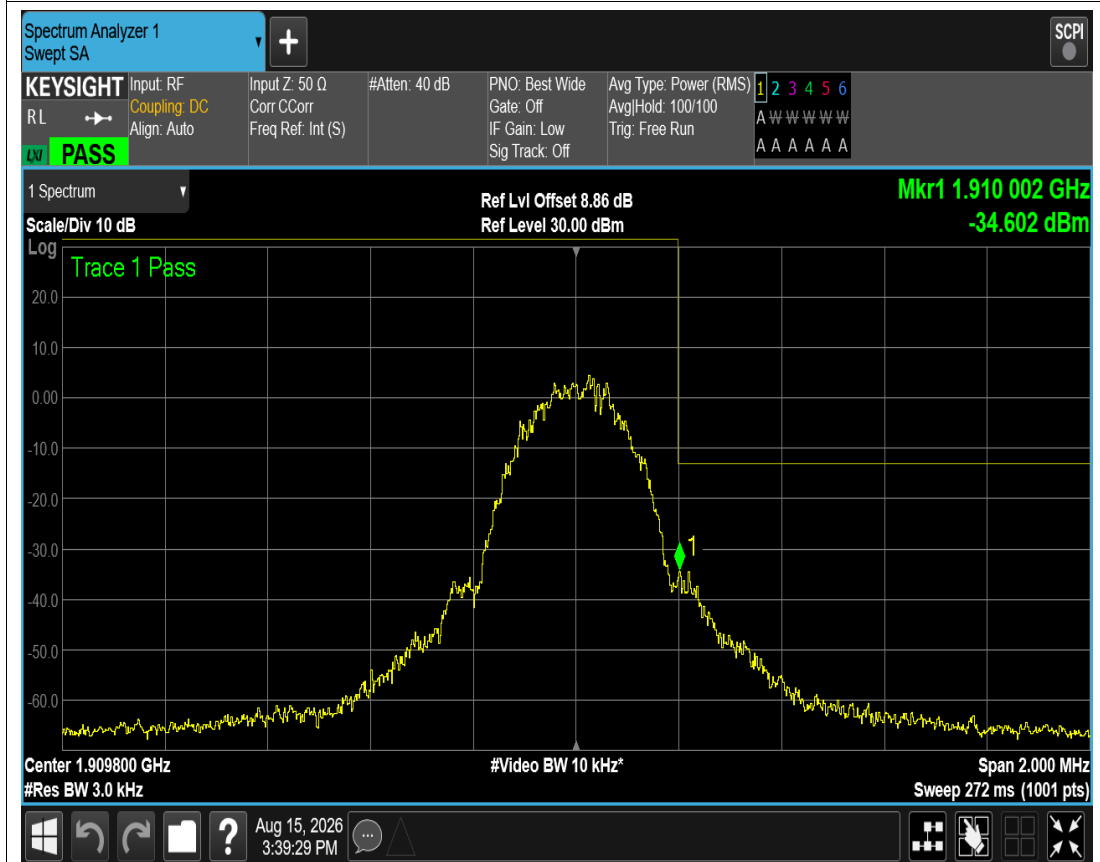


EGPRS1900 Channel=810

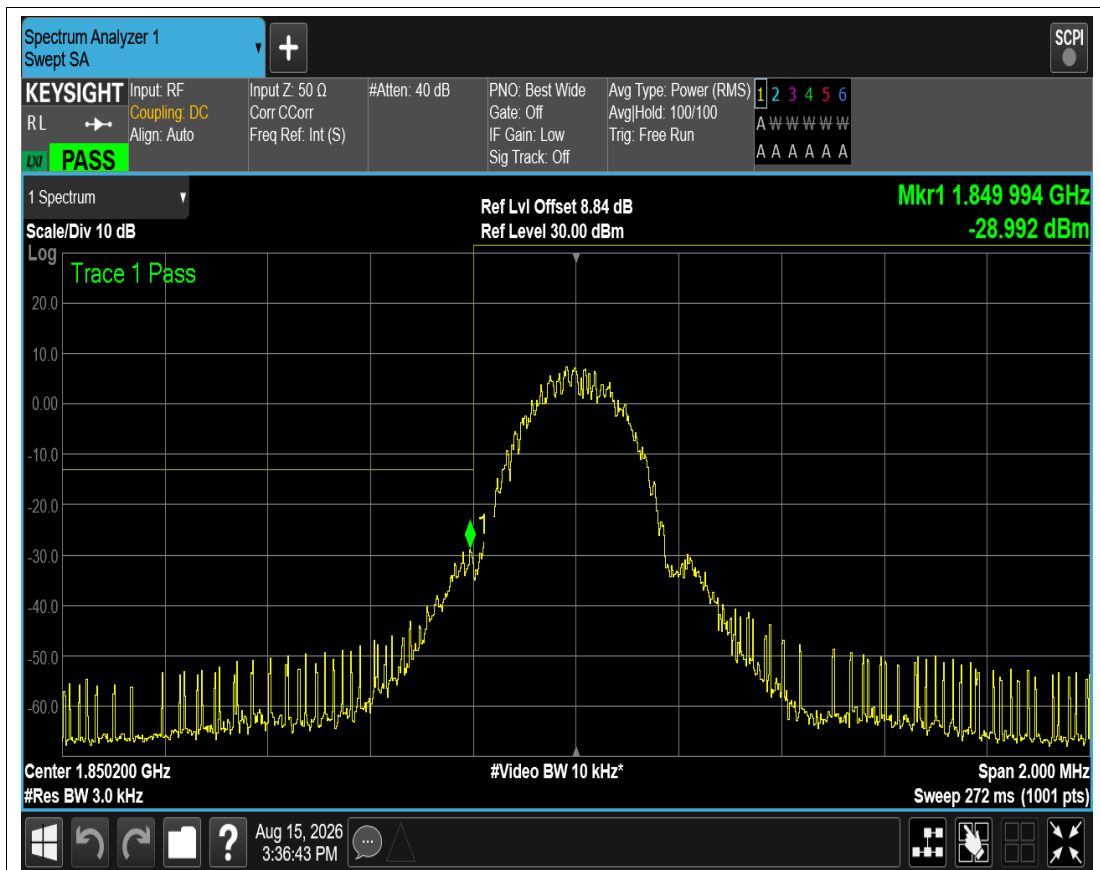


GPRS1900 Channel=512

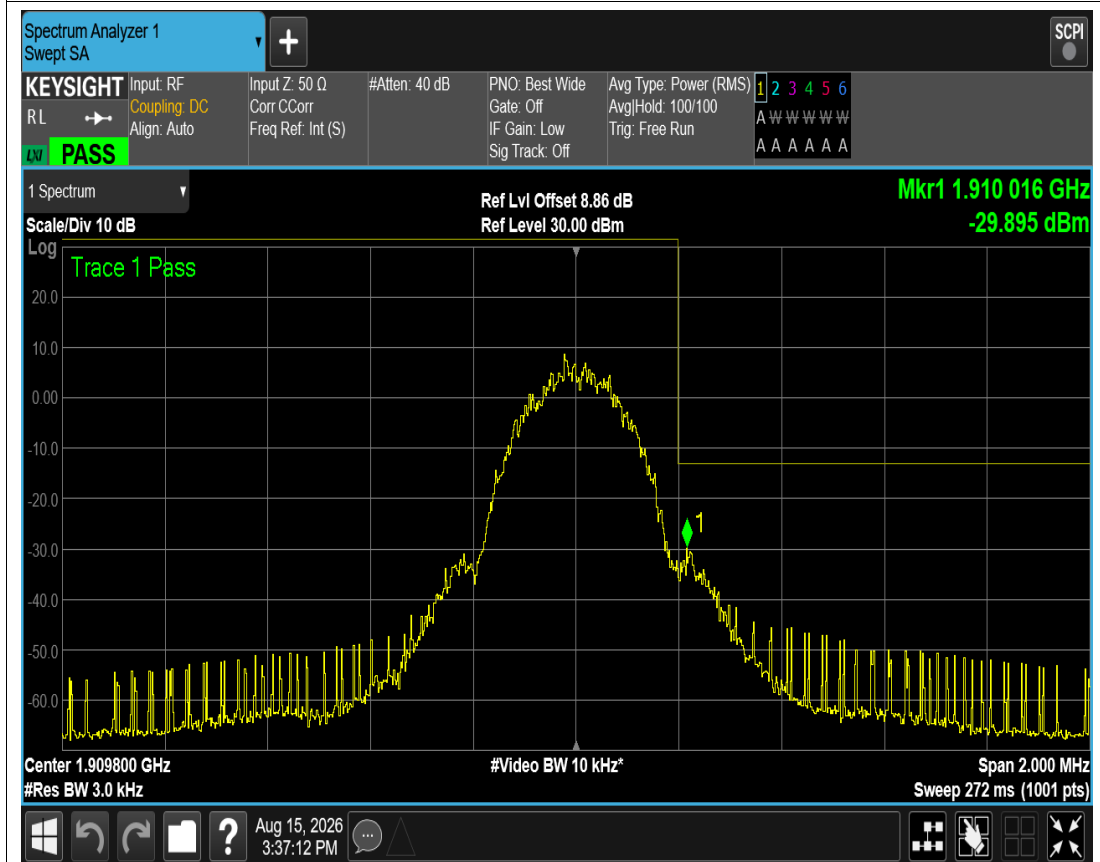

GPRS1900 Channel=810

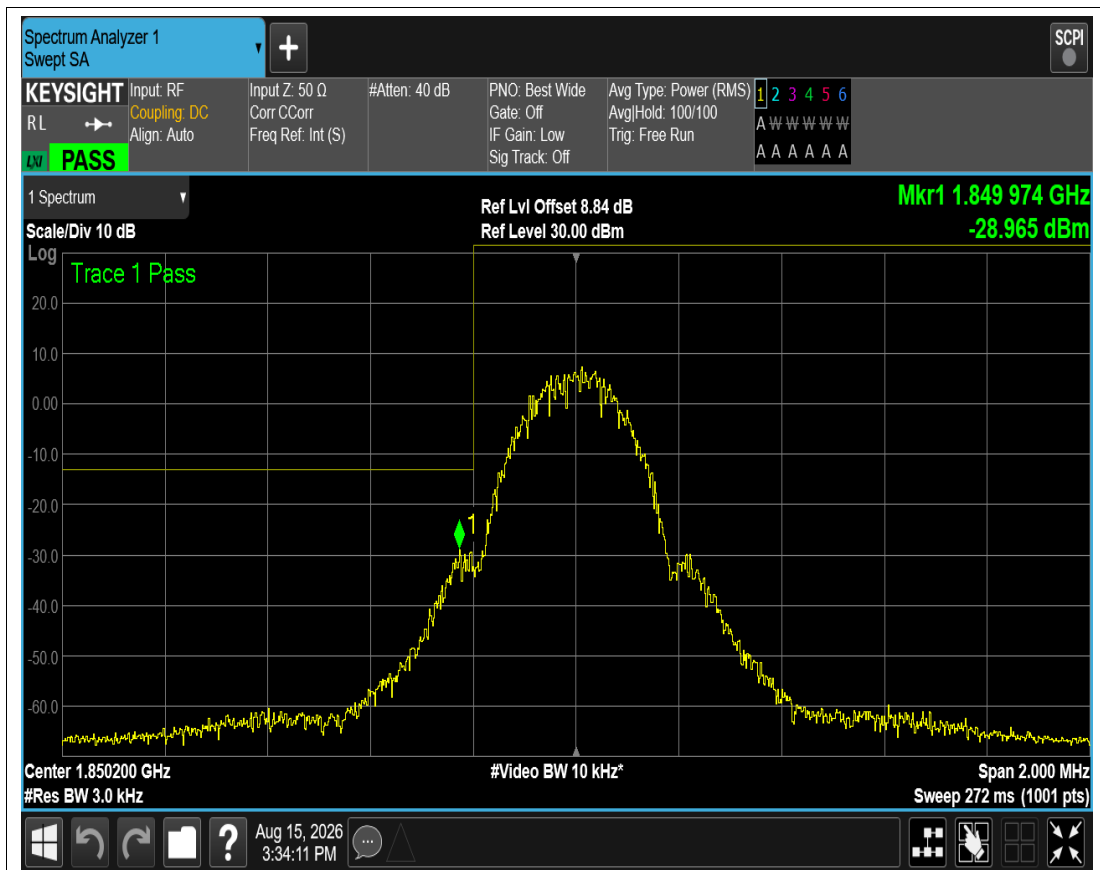


GSM1900 Channel=512

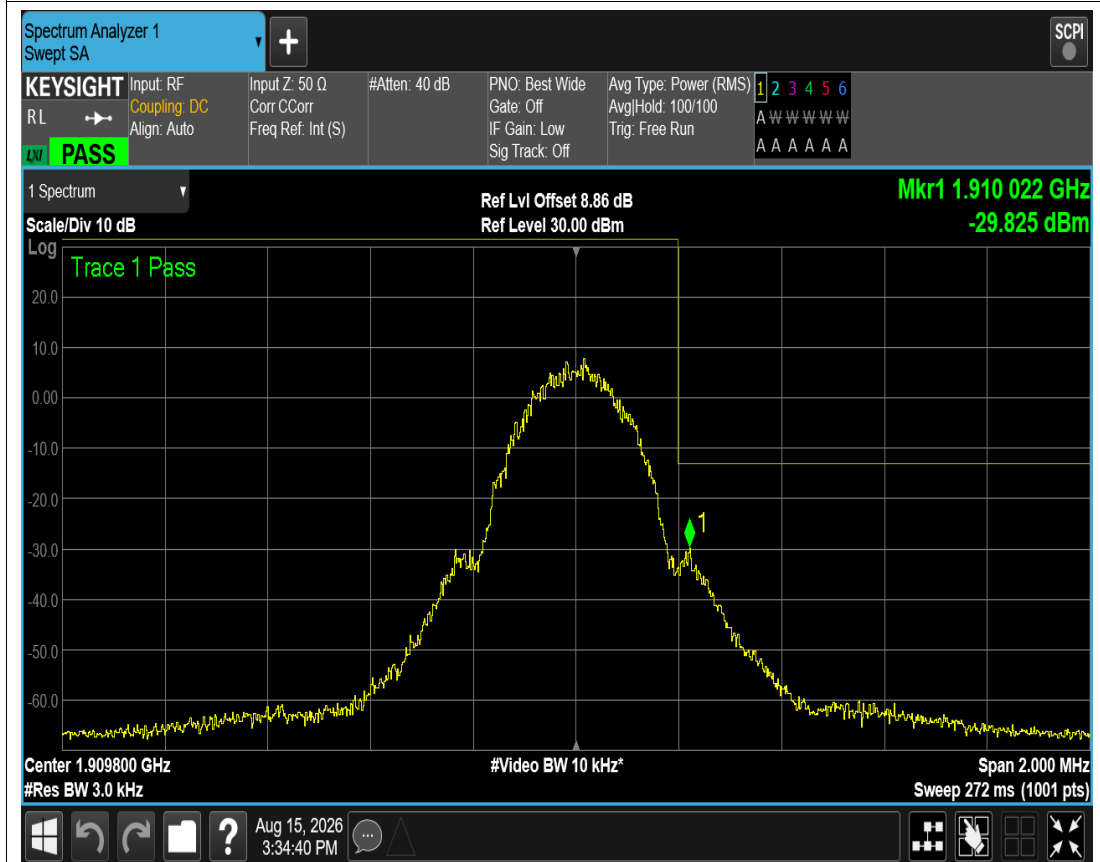


GSM1900 Channel=810

Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	3772.74	-26.06	-13	PASS
EGPRS850	190	836.6	3818.85	-25.79	-13	PASS
EGPRS850	251	848.8	3893.87	-26.88	-13	PASS
GPRS850	128	824.2	3926.28	-27.09	-13	PASS
GPRS850	190	836.6	3914.06	-27.32	-13	PASS
GPRS850	251	848.8	3842.78	-26.63	-13	PASS
GSM850	128	824.2	3849.01	-26.97	-13	PASS
GSM850	190	836.6	8087.01	-27.16	-13	PASS
GSM850	251	848.8	3794.67	-26.45	-13	PASS
EGPRS1900	512	1850.2	18752.87	-25.14	-13	PASS
EGPRS1900	661	1880	19053.42	-24.37	-13	PASS
EGPRS1900	810	1909.8	19012.48	-25.21	-13	PASS
GPRS1900	512	1850.2	19161.76	-24.49	-13	PASS
GPRS1900	661	1880	3861.24	-25.07	-13	PASS
GPRS1900	810	1909.8	19496.26	-24.92	-13	PASS
GSM1900	512	1850.2	18943.09	-24.95	-13	PASS
GSM1900	661	1880	19147.78	-24.97	-13	PASS
GSM1900	810	1909.8	19969.05	-24.86	-13	PASS

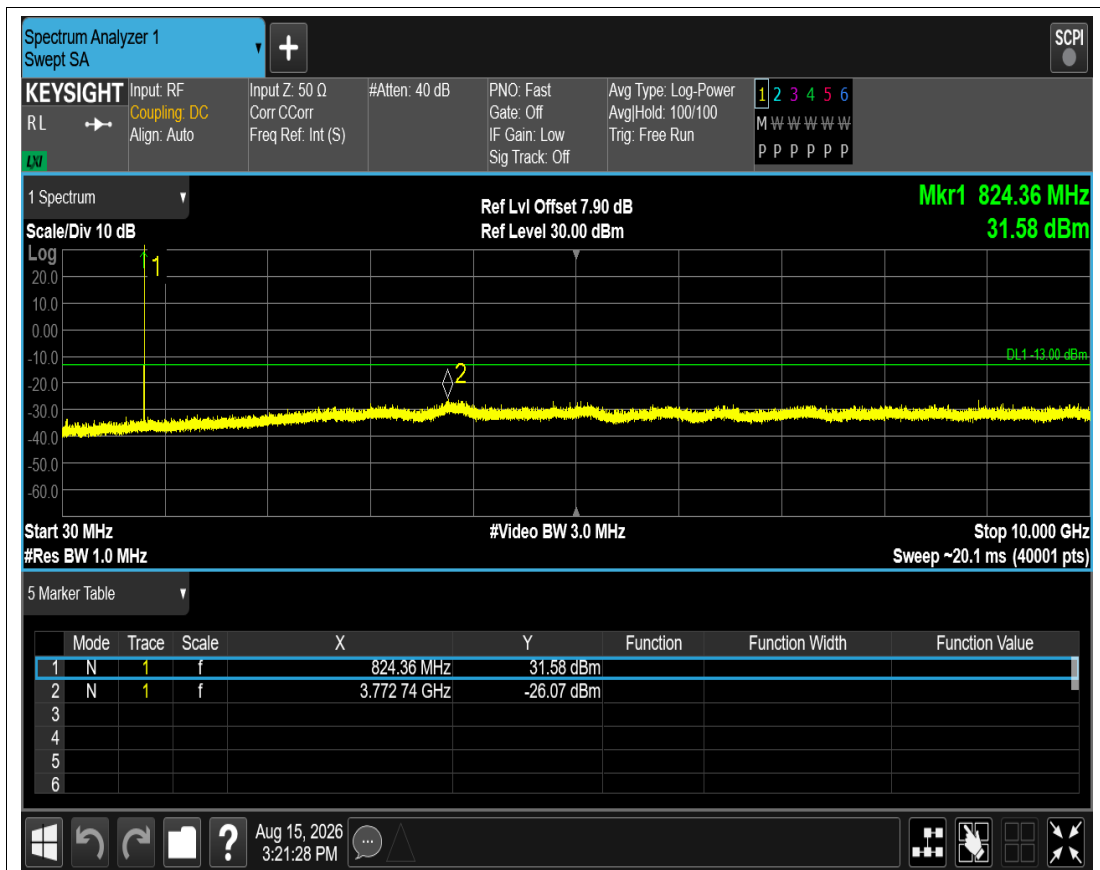


EGPRS850 Channel=128

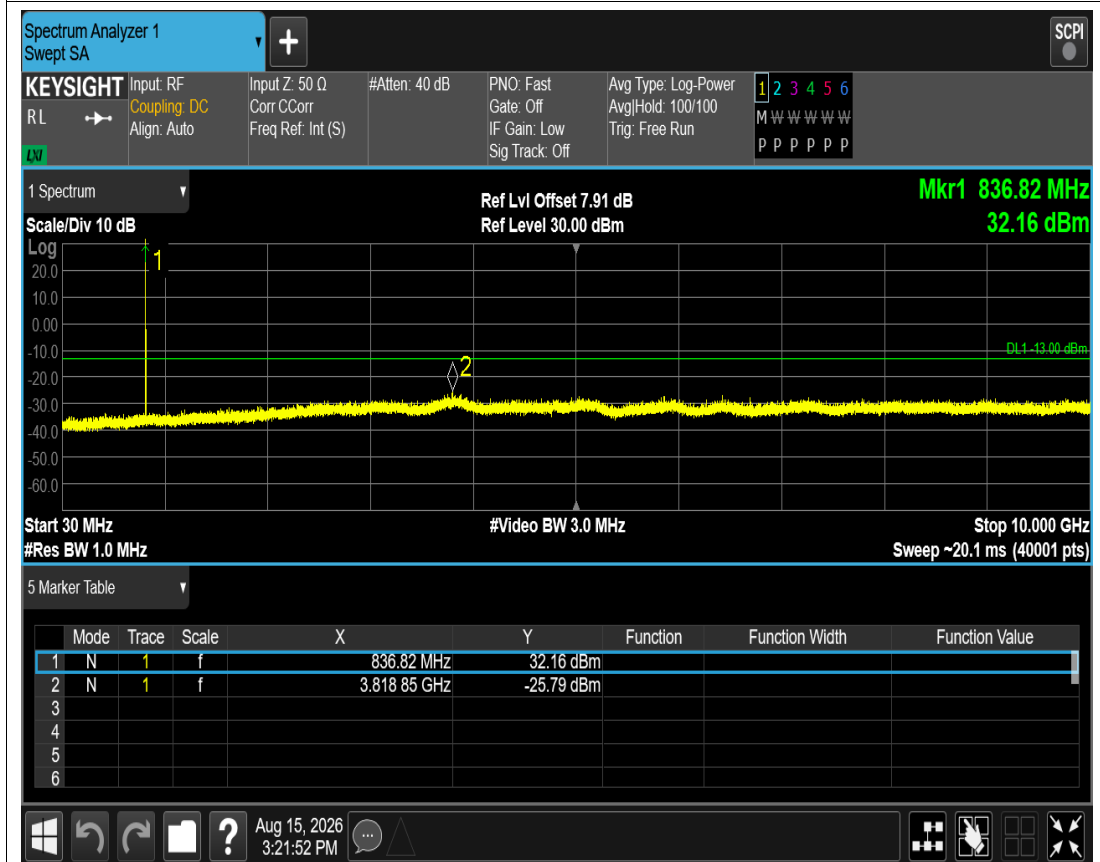


EGPRS850 Channel=190

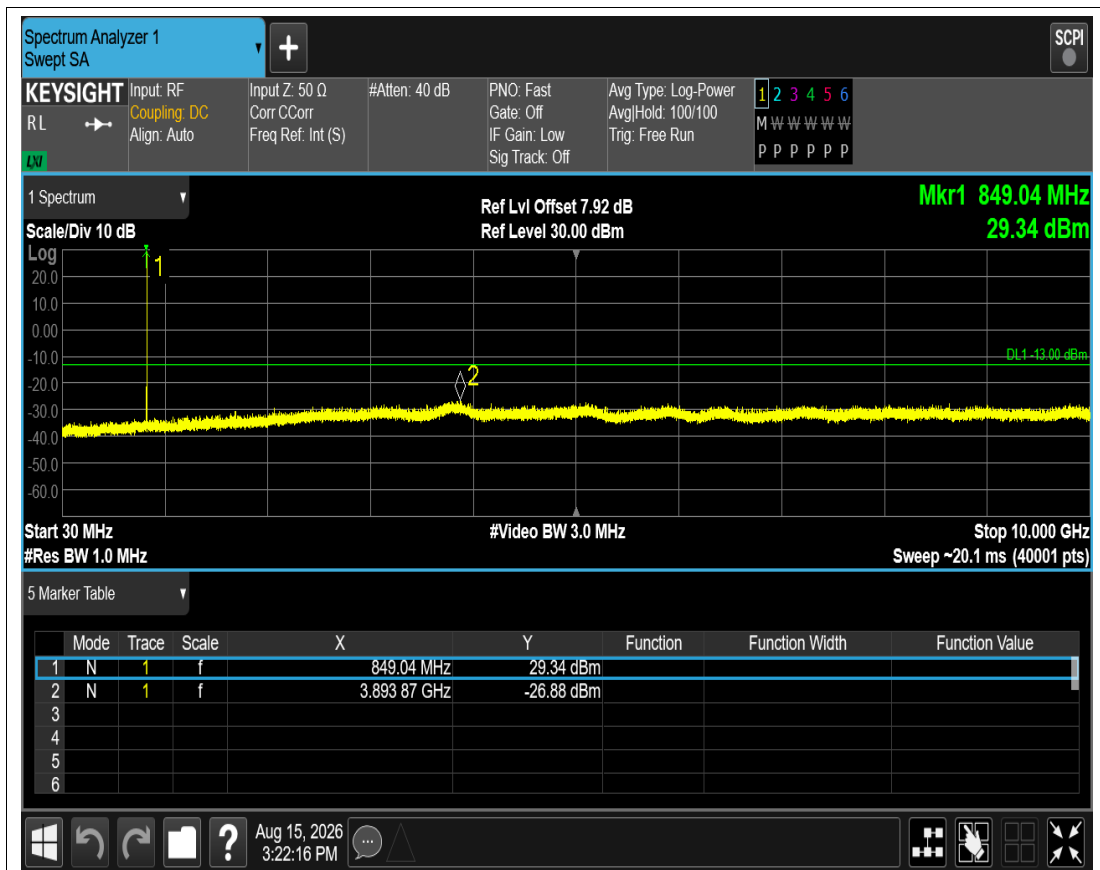


EGPRS850 Channel=251

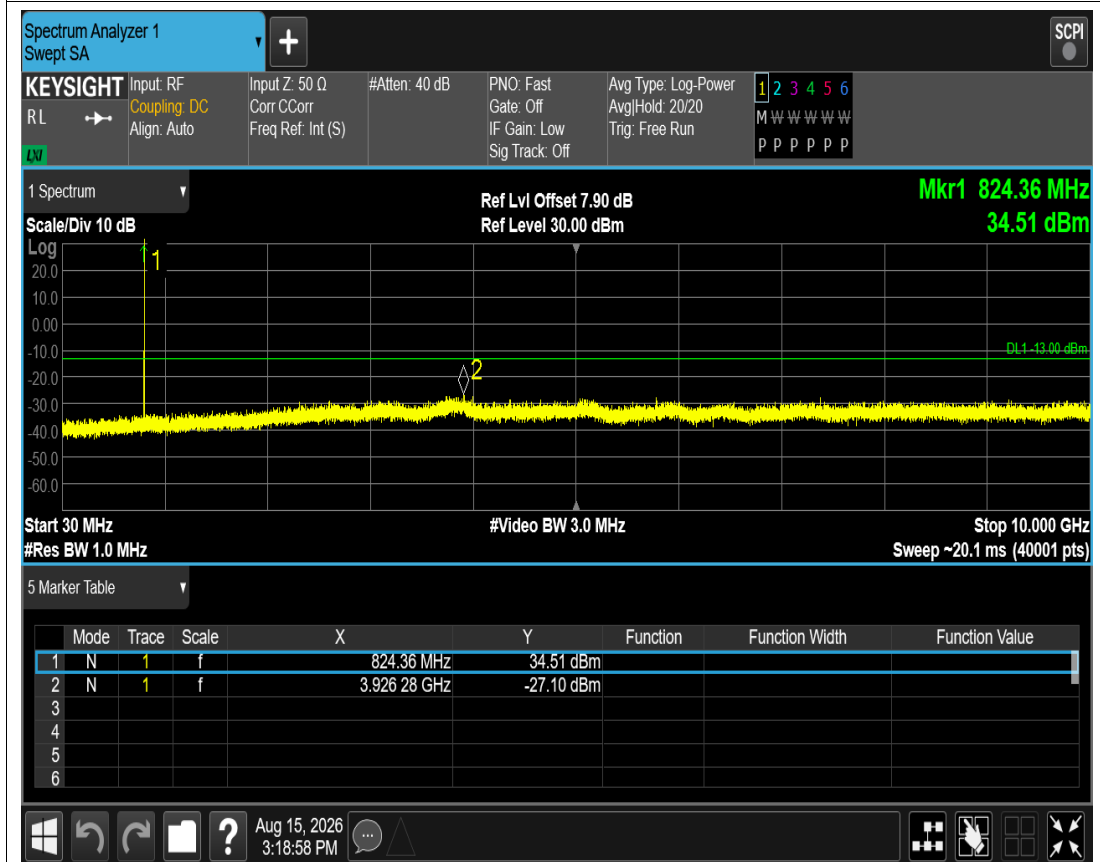


GPRS850 Channel=128

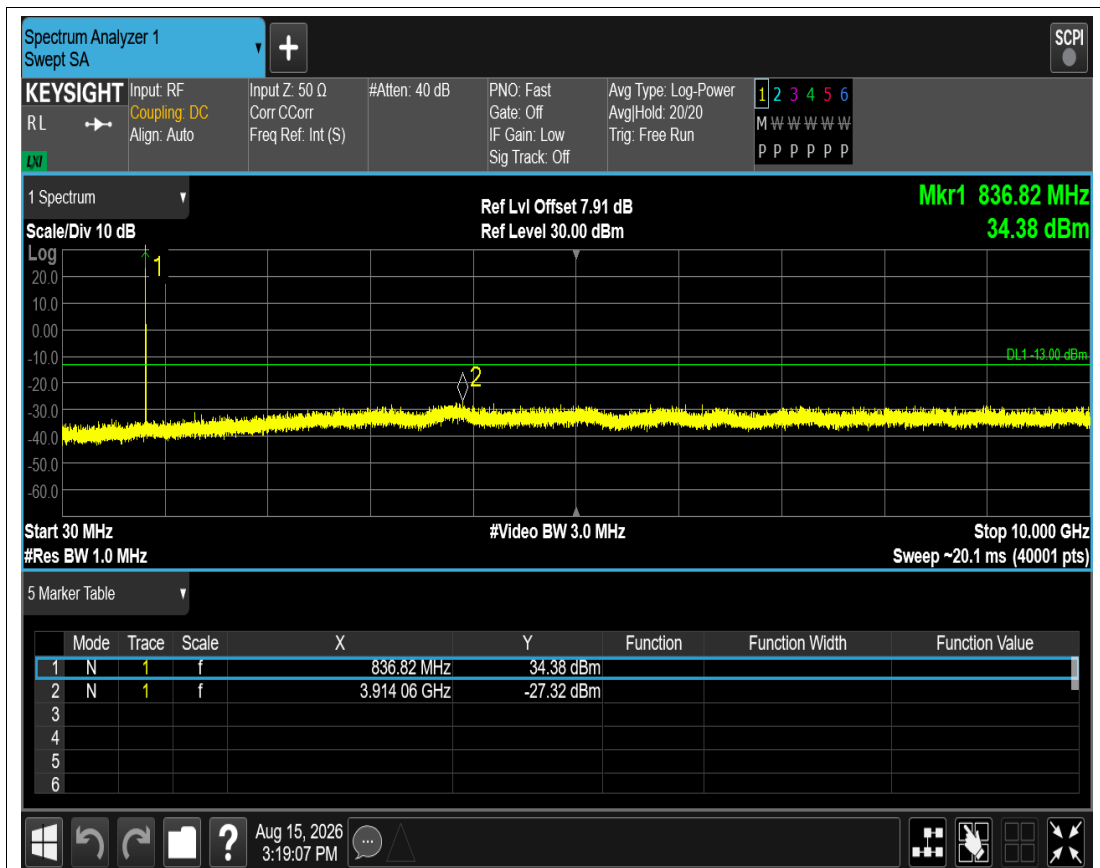


GPRS850 Channel=190

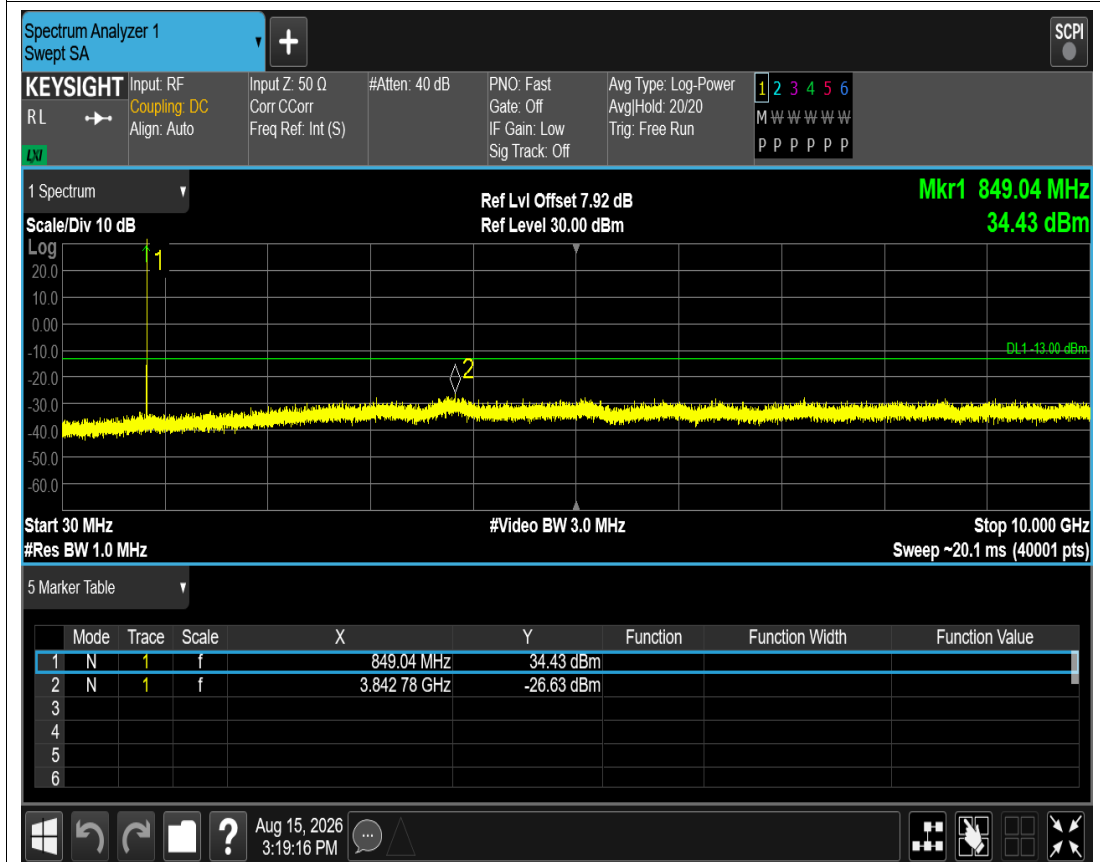


GPRS850 Channel=251

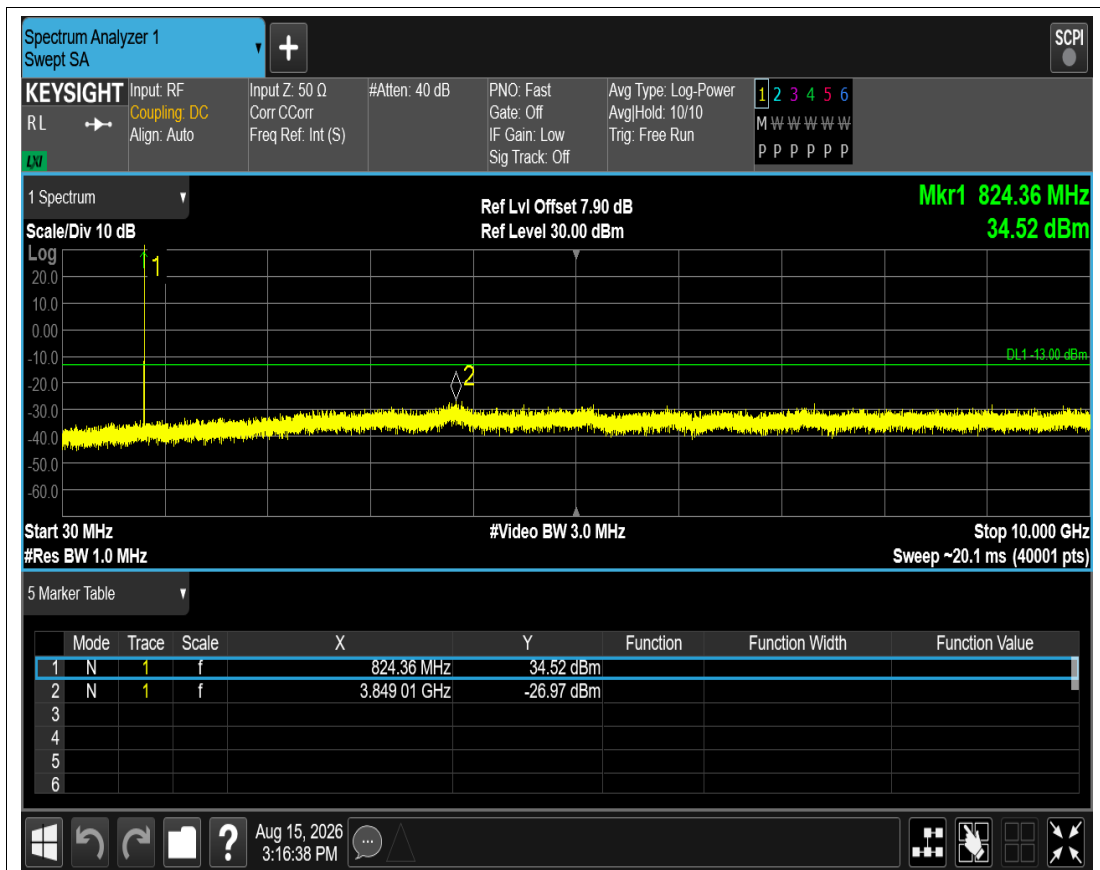


GSM850 Channel=128

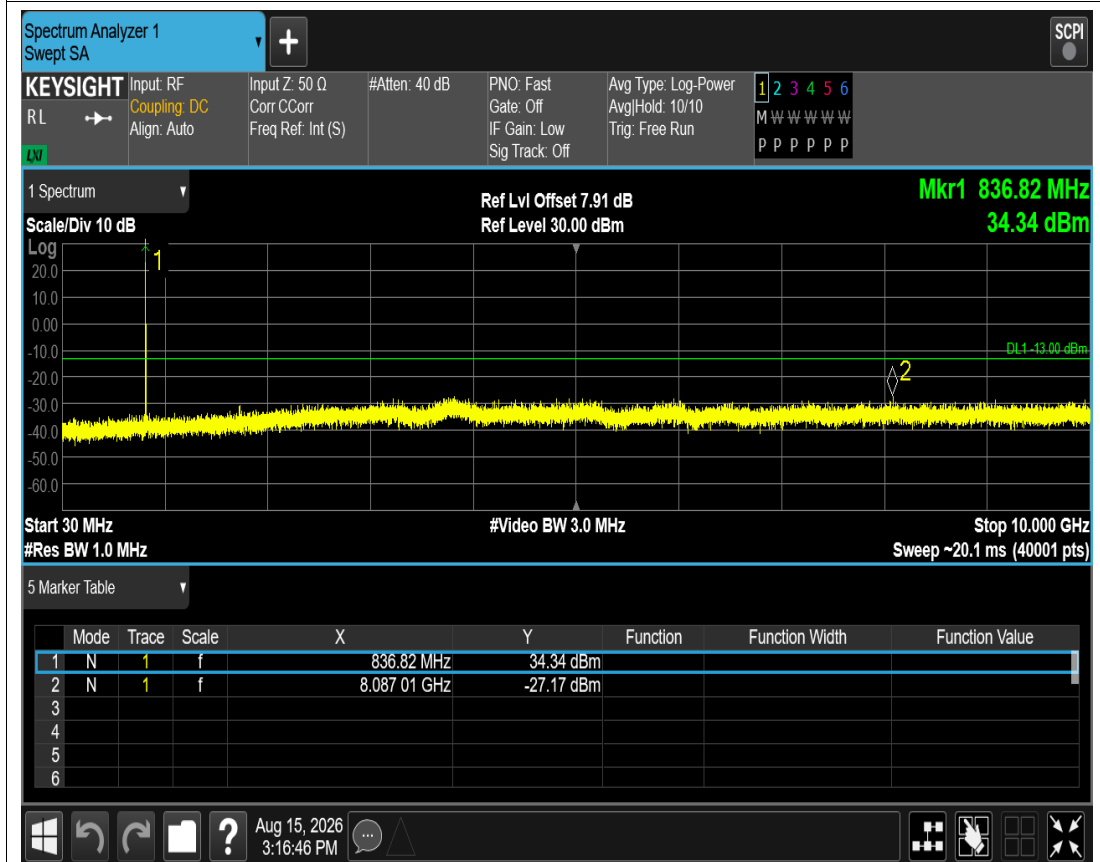


GSM850 Channel=190

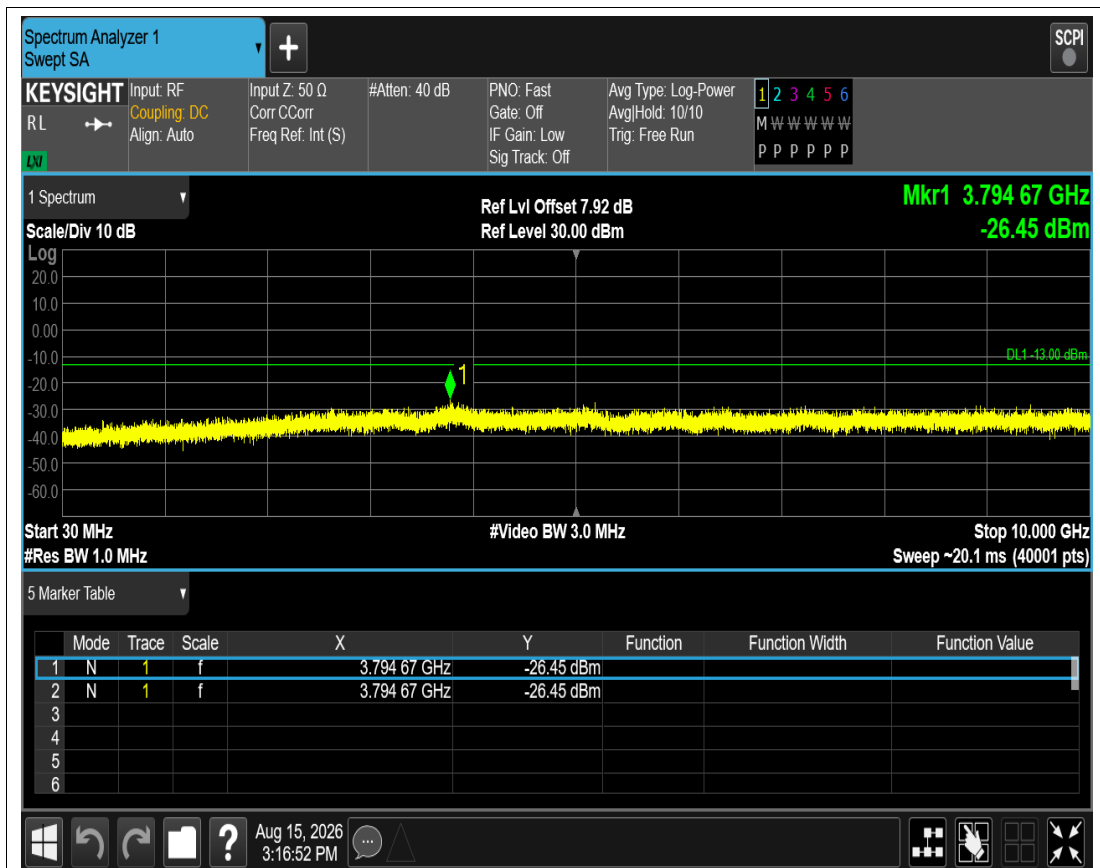


GSM850 Channel=251

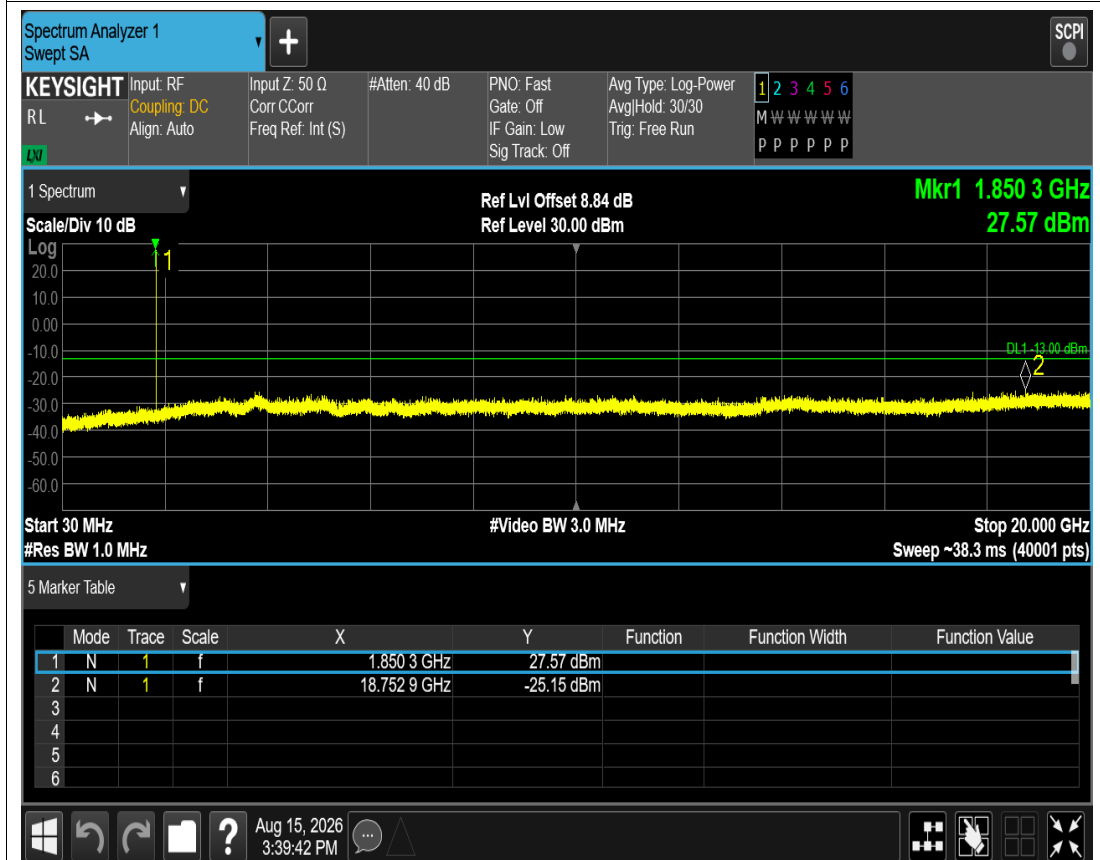


EGPRS1900 Channel=512

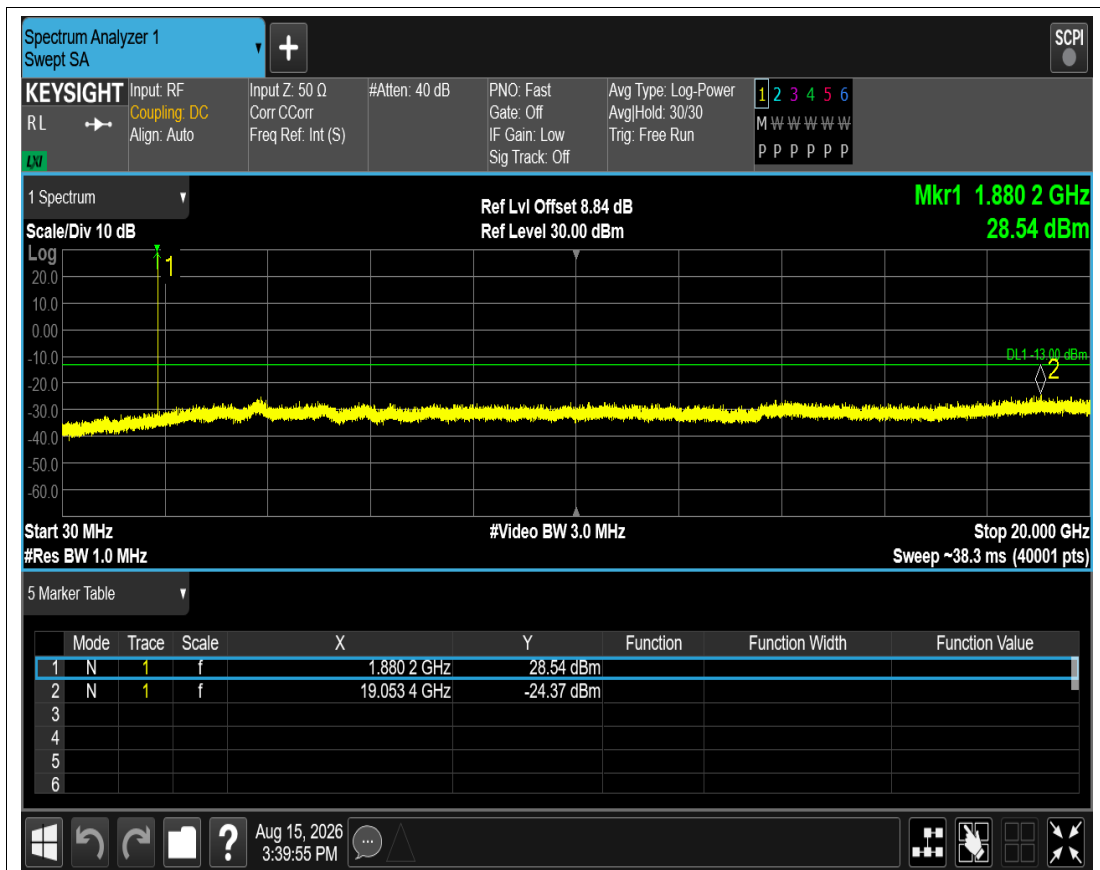


EGPRS1900 Channel=661

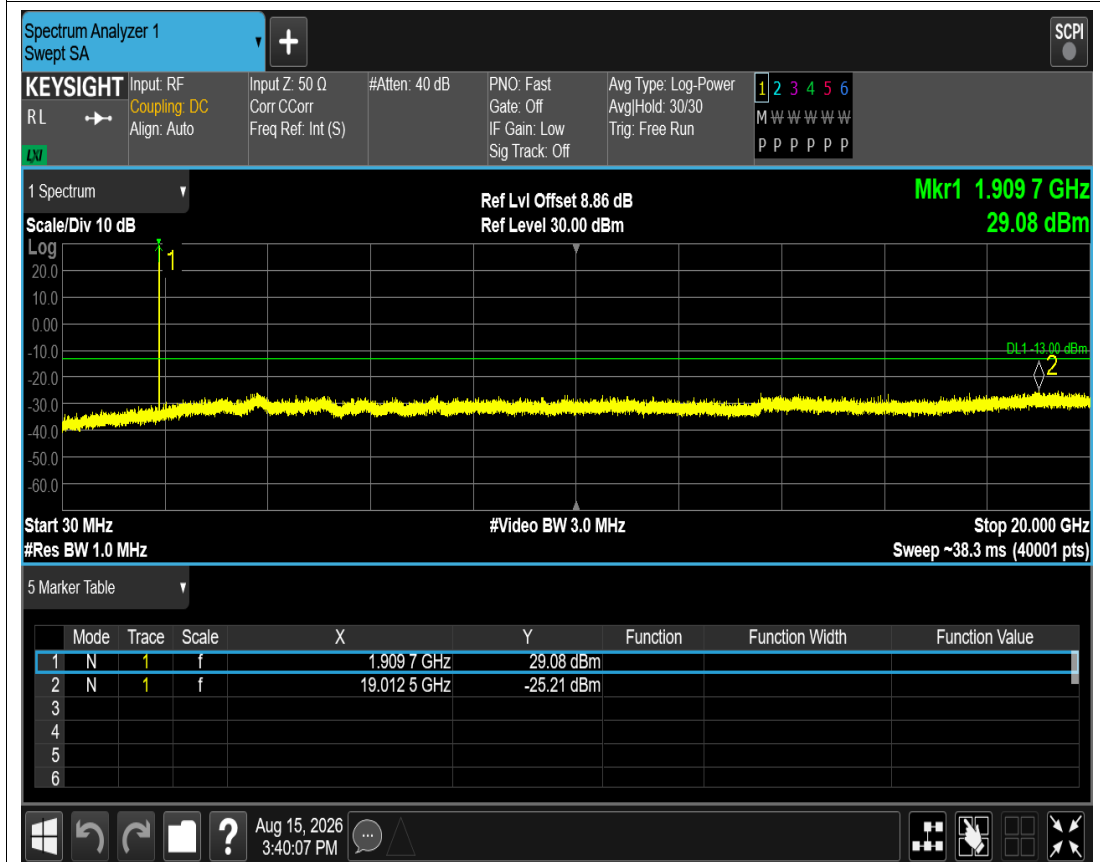


EGPRS1900 Channel=810

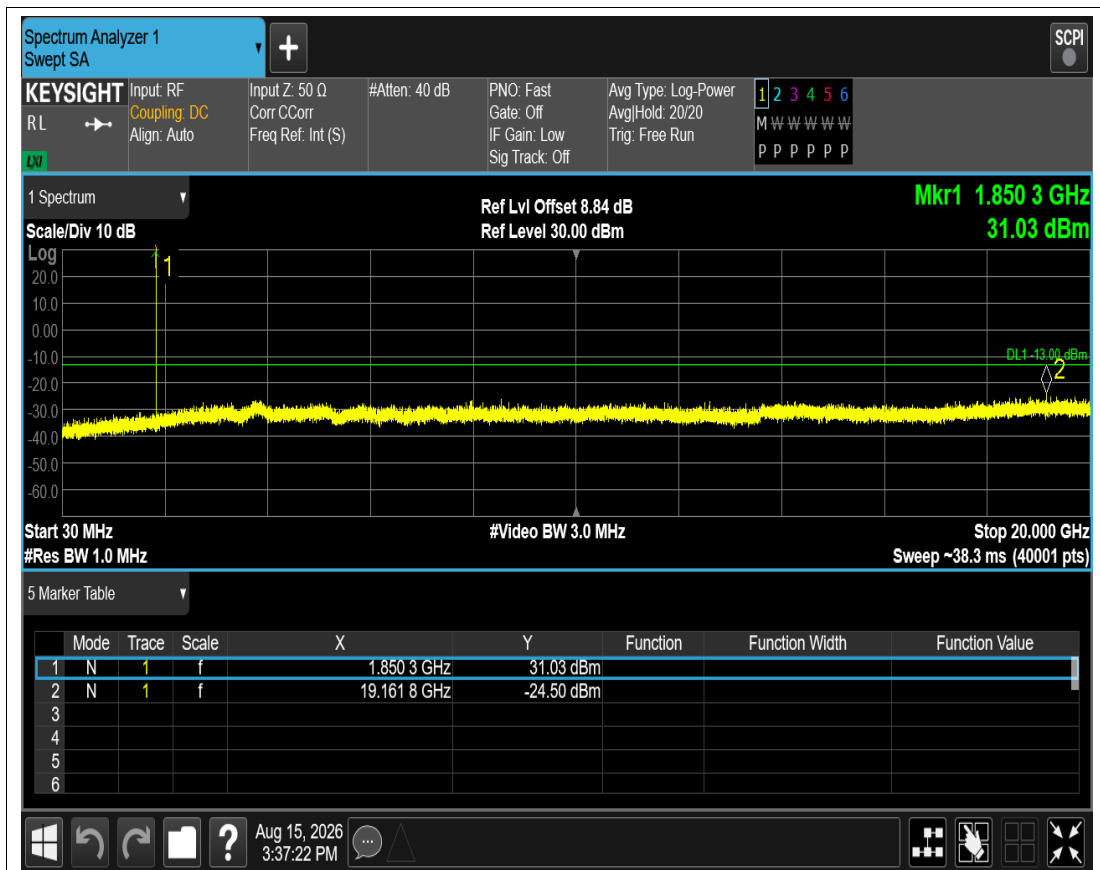


GPRS1900 Channel=512

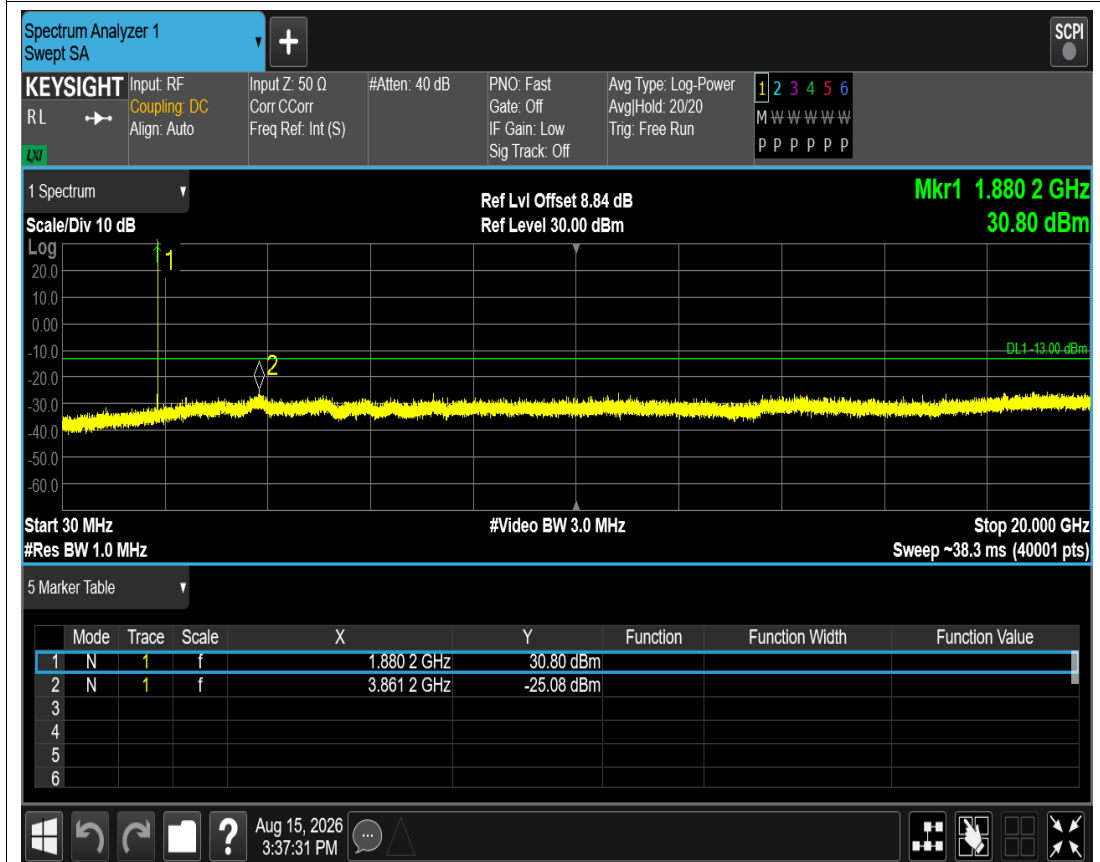


GPRS1900 Channel=661

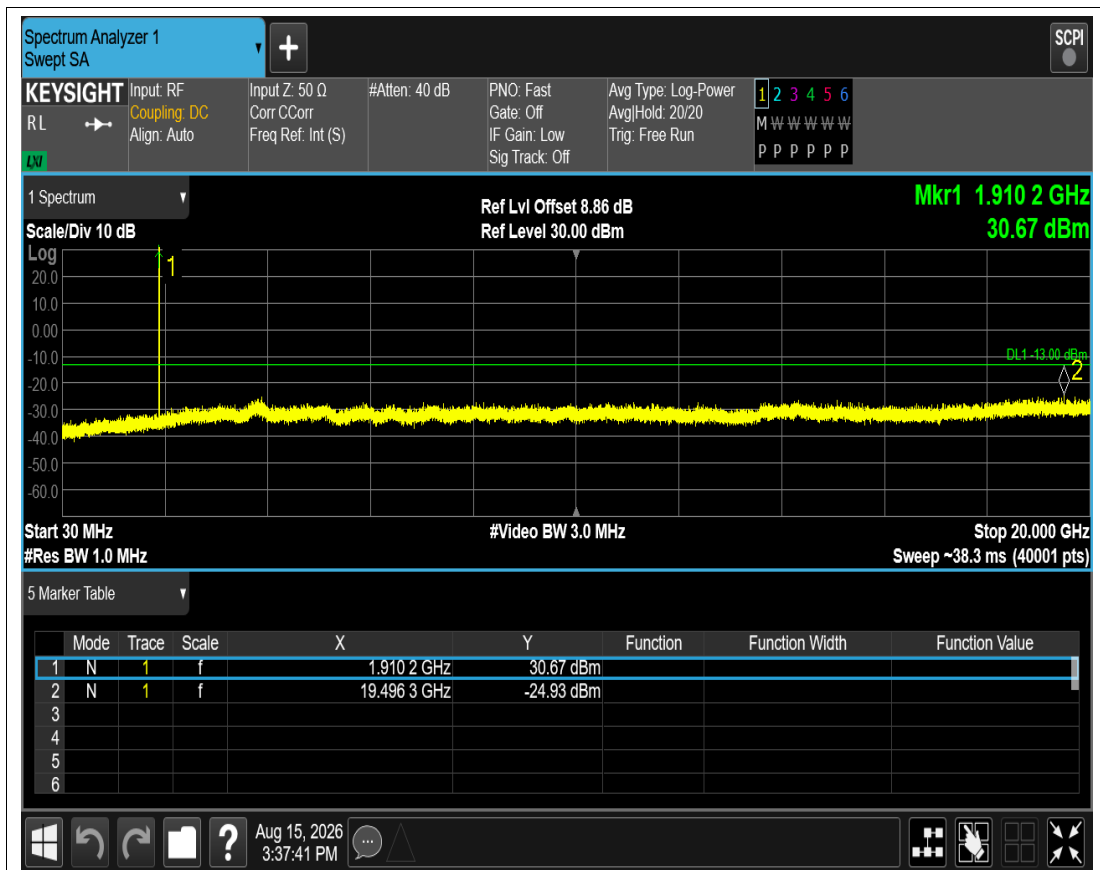


GPRS1900 Channel=810

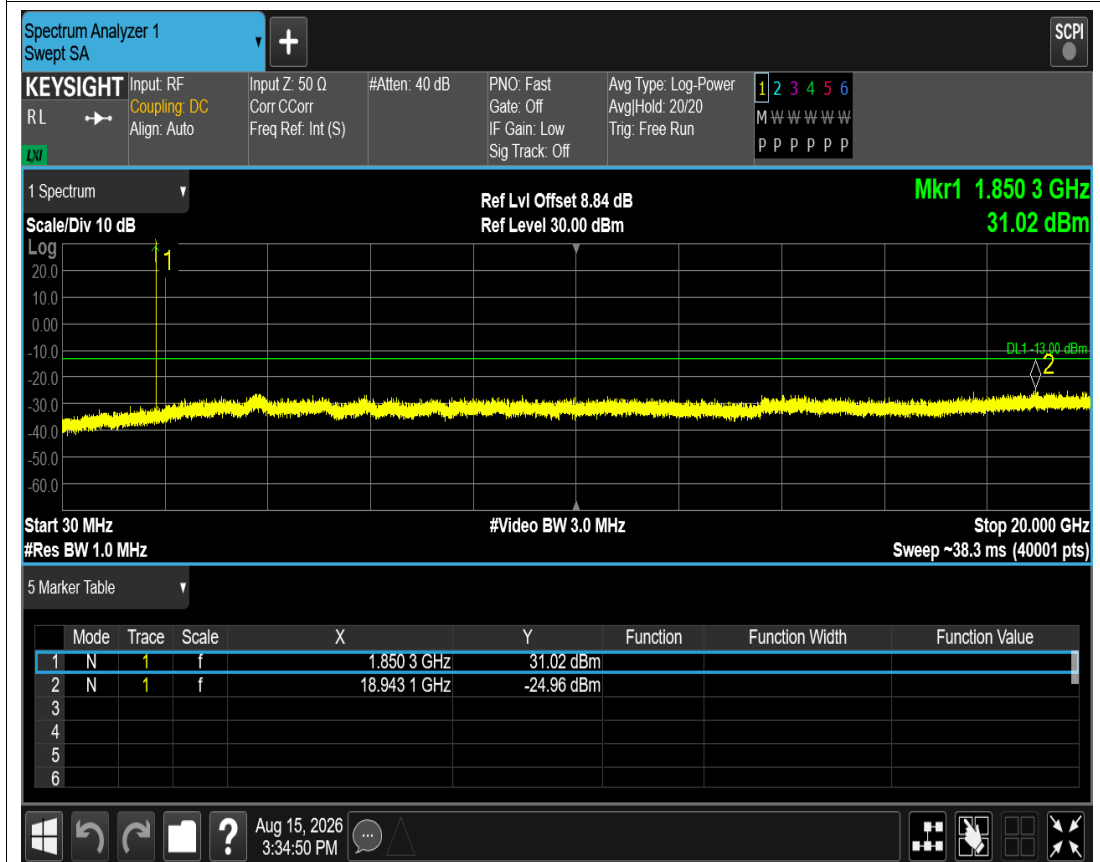

GSM1900 Channel=512

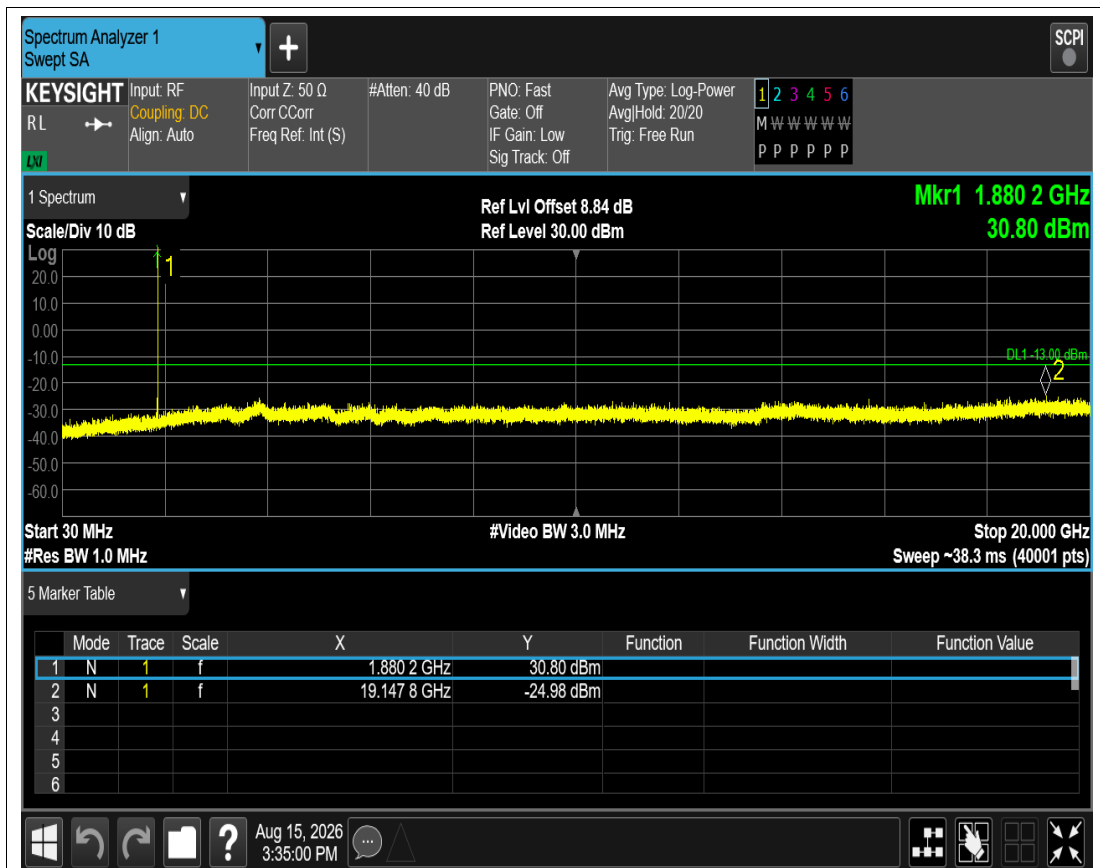

GSM1900 Channel=661

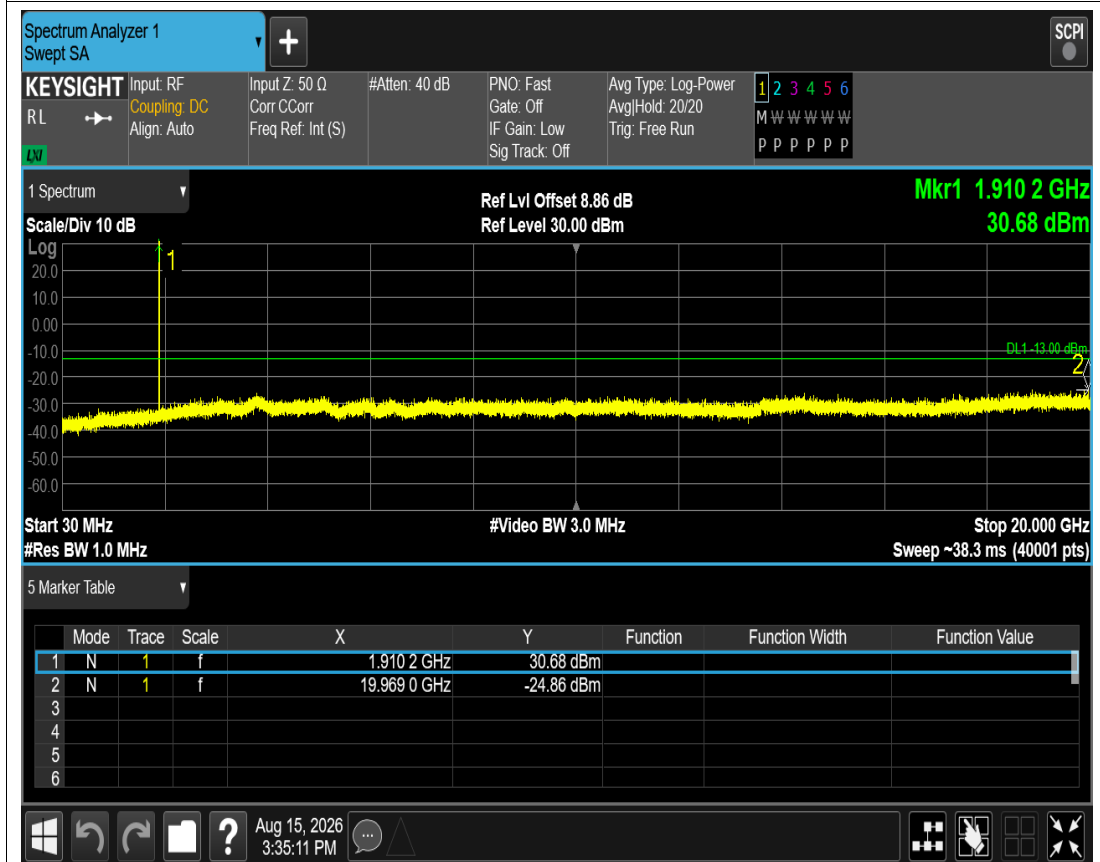

GSM1900 Channel=810