

# TABLE OF CONTENTS

|                                                  |            |
|--------------------------------------------------|------------|
| <b>1 Conducted output power for NR FR1 .....</b> | <b>2</b>   |
| <b>2 Frequency stability for NR FR1 .....</b>    | <b>4</b>   |
| <b>3 Peak-to-Average Ratio for NR FR1 .....</b>  | <b>6</b>   |
| <b>4 Occupied bandwidth for NR FR1 .....</b>     | <b>85</b>  |
| <b>5 Band edge for NR FR1 .....</b>              | <b>112</b> |
| <b>6 Out-of-band emissions for NR FR1 .....</b>  | <b>122</b> |

## 1 Conducted output power for NR FR1

| Band           | SCS<br>(kHz) | Bandwidth<br>(MHz) | UL<br>Channel | RB<br>Allocation | Modulation | Power<br>(dBm) | Antenna<br>Gain<br>(dBi) | EIRP<br>(dBm) | Limit<br>(dBm) | Verdict |
|----------------|--------------|--------------------|---------------|------------------|------------|----------------|--------------------------|---------------|----------------|---------|
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_BPSK   | 25.01          | -1.84                    | 23.17         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 24@0             | DFT_QPSK   | 24.06          | -1.84                    | 22.22         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 12@6             | DFT_QPSK   | 25.04          | -1.84                    | 23.2          | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_QPSK   | 25.01          | -1.84                    | 23.17         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@22             | DFT_QPSK   | 24.99          | -1.84                    | 23.15         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_QAM16  | 23.50          | -1.84                    | 21.66         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_QAM64  | 22.76          | -1.84                    | 20.92         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_QAM256 | 20.82          | -1.84                    | 18.98         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | CP_QPSK    | 24.08          | -1.84                    | 22.24         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_BPSK   | 25.00          | -1.84                    | 23.16         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 24@0             | DFT_QPSK   | 24.08          | -1.84                    | 22.24         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 12@6             | DFT_QPSK   | 25.09          | -1.84                    | 23.25         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_QPSK   | 25.16          | -1.84                    | 23.32         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@22             | DFT_QPSK   | 25.11          | -1.84                    | 23.27         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_QAM16  | 24.04          | -1.84                    | 22.2          | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_QAM64  | 22.81          | -1.84                    | 20.97         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_QAM256 | 20.60          | -1.84                    | 18.76         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | CP_QPSK    | 23.77          | -1.84                    | 21.93         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_BPSK   | 24.80          | -1.84                    | 22.96         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 24@0             | DFT_QPSK   | 23.93          | -1.84                    | 22.09         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 12@6             | DFT_QPSK   | 24.87          | -1.84                    | 23.03         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_QPSK   | 24.71          | -1.84                    | 22.87         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@22             | DFT_QPSK   | 24.82          | -1.84                    | 22.98         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_QAM16  | 23.72          | -1.84                    | 21.88         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_QAM64  | 22.37          | -1.84                    | 20.53         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_QAM256 | 20.30          | -1.84                    | 18.46         | 30             | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | CP_QPSK    | 23.70          | -1.84                    | 21.86         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_BPSK   | 24.98          | -1.84                    | 23.14         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 128@0            | DFT_QPSK   | 24.10          | -1.84                    | 22.26         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 64@32            | DFT_QPSK   | 25.06          | -1.84                    | 23.22         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_QPSK   | 24.98          | -1.84                    | 23.14         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@131            | DFT_QPSK   | 25.19          | -1.84                    | 23.35         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_QAM16  | 23.81          | -1.84                    | 21.97         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_QAM64  | 22.48          | -1.84                    | 20.64         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_QAM256 | 20.32          | -1.84                    | 18.48         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | CP_QPSK    | 23.65          | -1.84                    | 21.81         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 1@1              | DFT_BPSK   | 25.10          | -1.84                    | 23.26         | 30             | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 128@0            | DFT_QPSK   | 24.13          | -1.84                    | 22.29         | 30             | PASS    |

|                |    |     |        |        |            |       |       |       |    |      |
|----------------|----|-----|--------|--------|------------|-------|-------|-------|----|------|
| n78(3550-3700) | 30 | 50  | 641666 | 64@32  | DFT_QPSK   | 25.11 | -1.84 | 23.27 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 641666 | 1@1    | DFT_QPSK   | 25.04 | -1.84 | 23.2  | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 641666 | 1@131  | DFT_QPSK   | 24.91 | -1.84 | 23.07 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 641666 | 1@1    | DFT_QAM16  | 24.42 | -1.84 | 22.58 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 641666 | 1@1    | DFT_QAM64  | 22.81 | -1.84 | 20.97 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 641666 | 1@1    | DFT_QAM256 | 20.97 | -1.84 | 19.13 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 641666 | 1@1    | CP_QPSK    | 23.44 | -1.84 | 21.6  | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@1    | DFT_BPSK   | 24.78 | -1.84 | 22.94 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 128@0  | DFT_QPSK   | 23.90 | -1.84 | 22.06 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 64@32  | DFT_QPSK   | 24.90 | -1.84 | 23.06 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@1    | DFT_QPSK   | 24.85 | -1.84 | 23.01 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@131  | DFT_QPSK   | 25.01 | -1.84 | 23.17 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@1    | DFT_QAM16  | 23.82 | -1.84 | 21.98 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@1    | DFT_QAM64  | 22.50 | -1.84 | 20.66 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@1    | DFT_QAM256 | 20.45 | -1.84 | 18.61 | 30 | PASS |
| n78(3550-3700) | 30 | 50  | 645000 | 1@1    | CP_QPSK    | 23.35 | -1.84 | 21.51 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | DFT_BPSK   | 24.87 | -1.84 | 23.03 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 270@0  | DFT_QPSK   | 24.06 | -1.84 | 22.22 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 135@67 | DFT_QPSK   | 25.05 | -1.84 | 23.21 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | DFT_QPSK   | 24.82 | -1.84 | 22.98 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@271  | DFT_QPSK   | 24.82 | -1.84 | 22.98 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | DFT_QAM16  | 24.08 | -1.84 | 22.24 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | DFT_QAM64  | 22.50 | -1.84 | 20.66 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | DFT_QAM256 | 20.57 | -1.84 | 18.73 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | CP_QPSK    | 23.46 | -1.84 | 21.62 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_BPSK   | 24.95 | -1.84 | 23.11 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 270@0  | DFT_QPSK   | 23.98 | -1.84 | 22.14 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 135@67 | DFT_QPSK   | 25.07 | -1.84 | 23.23 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_QPSK   | 24.95 | -1.84 | 23.11 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@271  | DFT_QPSK   | 24.92 | -1.84 | 23.08 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_QAM16  | 24.28 | -1.84 | 22.44 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_QAM64  | 22.43 | -1.84 | 20.59 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_QAM256 | 20.40 | -1.84 | 18.56 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | CP_QPSK    | 23.36 | -1.84 | 21.52 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_BPSK   | 24.98 | -1.84 | 23.14 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 270@0  | DFT_QPSK   | 23.97 | -1.84 | 22.13 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 135@67 | DFT_QPSK   | 24.94 | -1.84 | 23.1  | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_QPSK   | 25.04 | -1.84 | 23.2  | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@271  | DFT_QPSK   | 24.96 | -1.84 | 23.12 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_QAM16  | 24.02 | -1.84 | 22.18 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_QAM64  | 22.72 | -1.84 | 20.88 | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_QAM256 | 20.74 | -1.84 | 18.9  | 30 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | CP_QPSK    | 23.57 | -1.84 | 21.73 | 30 | PASS |

## 2 Frequency stability for NR FR1

| Band           | SCS<br>(kHz) | Bandwidth<br>(MHz) | UL<br>Channel | RB<br>Allocation | Modulation | Result(Hz) | Result<br>(ppm) | Low<br>Limit<br>(ppm) | high<br>Limit<br>(ppm) | Verdict |
|----------------|--------------|--------------------|---------------|------------------|------------|------------|-----------------|-----------------------|------------------------|---------|
| n78(3550-3700) | 30           | 10                 | 637000        | 12@6             | DFT_BPSK   | -8.37      | -0.00235        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_BPSK   | -6.45      | -0.00181        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@22             | DFT_BPSK   | -5.50      | -0.00155        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 12@6             | DFT_QPSK   | -6.83      | -0.00192        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@1              | DFT_QPSK   | -6.41      | -0.00180        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 637000        | 1@22             | DFT_QPSK   | -6.54      | -0.00184        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 12@6             | DFT_BPSK   | -6.92      | -0.00191        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_BPSK   | -6.06      | -0.00167        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@22             | DFT_BPSK   | -6.14      | -0.00169        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 12@6             | DFT_QPSK   | -6.36      | -0.00175        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@1              | DFT_QPSK   | -5.70      | -0.00157        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 641666        | 1@22             | DFT_QPSK   | -6.37      | -0.00176        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 12@6             | DFT_BPSK   | -7.02      | -0.00190        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_BPSK   | -5.16      | -0.00140        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@22             | DFT_BPSK   | -2.67      | -0.00072        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 12@6             | DFT_QPSK   | -6.48      | -0.00175        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@1              | DFT_QPSK   | -5.91      | -0.00160        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 10                 | 646332        | 1@22             | DFT_QPSK   | -5.29      | -0.00143        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 64@32            | DFT_BPSK   | -4.64      | -0.00130        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_BPSK   | -5.74      | -0.00161        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@131            | DFT_BPSK   | -7.23      | -0.00202        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 64@32            | DFT_QPSK   | -6.96      | -0.00195        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@1              | DFT_QPSK   | -7.04      | -0.00197        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 638334        | 1@131            | DFT_QPSK   | -8.73      | -0.00244        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 64@32            | DFT_BPSK   | -6.32      | -0.00174        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 1@1              | DFT_BPSK   | -4.41      | -0.00122        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 1@131            | DFT_BPSK   | -5.08      | -0.00140        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 64@32            | DFT_QPSK   | -5.87      | -0.00162        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 1@1              | DFT_QPSK   | -7.60      | -0.00210        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 641666        | 1@131            | DFT_QPSK   | -4.86      | -0.00134        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 645000        | 64@32            | DFT_BPSK   | -6.27      | -0.00171        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 645000        | 1@1              | DFT_BPSK   | -6.20      | -0.00169        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 645000        | 1@131            | DFT_BPSK   | -7.11      | -0.00193        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 645000        | 64@32            | DFT_QPSK   | -6.43      | -0.00175        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 645000        | 1@1              | DFT_QPSK   | -2.67      | -0.00073        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 50                 | 645000        | 1@131            | DFT_QPSK   | -4.25      | -0.00116        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 100                | 640000        | 135@67           | DFT_BPSK   | -8.89      | -0.00247        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 100                | 640000        | 1@1              | DFT_BPSK   | -7.70      | -0.00214        | -2.5                  | 2.5                    | PASS    |
| n78(3550-3700) | 30           | 100                | 640000        | 1@271            | DFT_BPSK   | -4.94      | -0.00137        | -2.5                  | 2.5                    | PASS    |

|                |    |     |        |        |          |       |          |      |     |      |
|----------------|----|-----|--------|--------|----------|-------|----------|------|-----|------|
| n78(3550-3700) | 30 | 100 | 640000 | 135@67 | DFT_QPSK | -7.60 | -0.00211 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@1    | DFT_QPSK | -6.61 | -0.00184 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 1@271  | DFT_QPSK | -6.15 | -0.00171 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 135@67 | DFT_BPSK | -4.49 | -0.00124 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_BPSK | -6.99 | -0.00193 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@271  | DFT_BPSK | -6.71 | -0.00185 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 135@67 | DFT_QPSK | -6.72 | -0.00185 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@1    | DFT_QPSK | -5.91 | -0.00163 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 1@271  | DFT_QPSK | -6.23 | -0.00172 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 135@67 | DFT_BPSK | -7.29 | -0.00200 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_BPSK | -7.92 | -0.00217 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@271  | DFT_BPSK | -7.31 | -0.00200 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 135@67 | DFT_QPSK | -5.29 | -0.00145 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@1    | DFT_QPSK | -8.63 | -0.00236 | -2.5 | 2.5 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 1@271  | DFT_QPSK | -9.03 | -0.00247 | -2.5 | 2.5 | PASS |

### 3 Peak-to-Average Ratio for NR FR1


| <i>Band</i>    | <i>SCS<br/>(kHz)</i> | <i>Bandwidth<br/>(MHz)</i> | <i>UL<br/>Channel</i> | <i>RB<br/>Allocation</i> | <i>Modulation</i> | <i>Result<br/>(dB)</i> | <i>high Limit<br/>(dB)</i> | <i>Verdict</i> |
|----------------|----------------------|----------------------------|-----------------------|--------------------------|-------------------|------------------------|----------------------------|----------------|
| n78(3550-3700) | 30                   | 10                         | 637000                | 24@0                     | DFT_BPSK          | 4.16                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 637000                | 24@0                     | DFT_QPSK          | 5.56                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 637000                | 24@0                     | DFT_QAM16         | 6.26                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 637000                | 24@0                     | DFT_QAM64         | 6.40                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 637000                | 24@0                     | DFT_QAM256        | 6.67                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 641666                | 24@0                     | DFT_BPSK          | 4.09                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 641666                | 24@0                     | DFT_QPSK          | 5.40                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 641666                | 24@0                     | DFT_QAM16         | 6.08                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 641666                | 24@0                     | DFT_QAM64         | 6.57                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 641666                | 24@0                     | DFT_QAM256        | 6.58                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 646332                | 24@0                     | DFT_BPSK          | 4.18                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 646332                | 24@0                     | DFT_QPSK          | 5.44                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 646332                | 24@0                     | DFT_QAM16         | 6.30                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 646332                | 24@0                     | DFT_QAM64         | 6.41                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 10                         | 646332                | 24@0                     | DFT_QAM256        | 6.65                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 637168                | 36@0                     | DFT_BPSK          | 4.89                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 637168                | 36@0                     | DFT_QPSK          | 5.39                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 637168                | 36@0                     | DFT_QAM16         | 6.48                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 637168                | 36@0                     | DFT_QAM64         | 6.25                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 637168                | 36@0                     | DFT_QAM256        | 6.65                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 641666                | 36@0                     | DFT_BPSK          | 4.16                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 641666                | 36@0                     | DFT_QPSK          | 5.35                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 641666                | 36@0                     | DFT_QAM16         | 6.27                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 641666                | 36@0                     | DFT_QAM64         | 6.52                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 641666                | 36@0                     | DFT_QAM256        | 6.63                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 646166                | 36@0                     | DFT_BPSK          | 4.33                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 646166                | 36@0                     | DFT_QPSK          | 5.61                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 646166                | 36@0                     | DFT_QAM16         | 6.05                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 646166                | 36@0                     | DFT_QAM64         | 6.41                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 15                         | 646166                | 36@0                     | DFT_QAM256        | 6.56                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 637334                | 50@0                     | DFT_BPSK          | 5.28                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 637334                | 50@0                     | DFT_QPSK          | 5.67                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 637334                | 50@0                     | DFT_QAM16         | 6.34                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 637334                | 50@0                     | DFT_QAM64         | 6.60                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 637334                | 50@0                     | DFT_QAM256        | 6.80                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 641666                | 50@0                     | DFT_BPSK          | 4.20                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 641666                | 50@0                     | DFT_QPSK          | 5.71                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 641666                | 50@0                     | DFT_QAM16         | 6.29                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 641666                | 50@0                     | DFT_QAM64         | 6.35                   | 13                         | PASS           |
| n78(3550-3700) | 30                   | 20                         | 641666                | 50@0                     | DFT_QAM256        | 6.80                   | 13                         | PASS           |

|                |    |    |        |       |            |      |    |      |
|----------------|----|----|--------|-------|------------|------|----|------|
| n78(3550-3700) | 30 | 20 | 646000 | 50@0  | DFT_BPSK   | 4.33 | 13 | PASS |
| n78(3550-3700) | 30 | 20 | 646000 | 50@0  | DFT_QPSK   | 5.70 | 13 | PASS |
| n78(3550-3700) | 30 | 20 | 646000 | 50@0  | DFT_QAM16  | 6.26 | 13 | PASS |
| n78(3550-3700) | 30 | 20 | 646000 | 50@0  | DFT_QAM64  | 6.78 | 13 | PASS |
| n78(3550-3700) | 30 | 20 | 646000 | 50@0  | DFT_QAM256 | 6.52 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 638000 | 100@0 | DFT_BPSK   | 4.75 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 638000 | 100@0 | DFT_QPSK   | 5.52 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 638000 | 100@0 | DFT_QAM16  | 6.67 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 638000 | 100@0 | DFT_QAM64  | 6.60 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 638000 | 100@0 | DFT_QAM256 | 6.67 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 641666 | 100@0 | DFT_BPSK   | 4.34 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 641666 | 100@0 | DFT_QPSK   | 5.52 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 641666 | 100@0 | DFT_QAM16  | 6.09 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 641666 | 100@0 | DFT_QAM64  | 6.43 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 641666 | 100@0 | DFT_QAM256 | 6.91 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 645332 | 100@0 | DFT_BPSK   | 4.19 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 645332 | 100@0 | DFT_QPSK   | 5.49 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 645332 | 100@0 | DFT_QAM16  | 6.33 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 645332 | 100@0 | DFT_QAM64  | 6.54 | 13 | PASS |
| n78(3550-3700) | 30 | 40 | 645332 | 100@0 | DFT_QAM256 | 6.58 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 638334 | 128@0 | DFT_BPSK   | 4.26 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 638334 | 128@0 | DFT_QPSK   | 5.52 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 638334 | 128@0 | DFT_QAM16  | 6.48 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 638334 | 128@0 | DFT_QAM64  | 6.46 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 638334 | 128@0 | DFT_QAM256 | 6.87 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 641666 | 128@0 | DFT_BPSK   | 4.12 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 641666 | 128@0 | DFT_QPSK   | 5.55 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 641666 | 128@0 | DFT_QAM16  | 6.15 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 641666 | 128@0 | DFT_QAM64  | 6.50 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 641666 | 128@0 | DFT_QAM256 | 6.67 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 645000 | 128@0 | DFT_BPSK   | 4.31 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 645000 | 128@0 | DFT_QPSK   | 5.62 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 645000 | 128@0 | DFT_QAM16  | 6.35 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 645000 | 128@0 | DFT_QAM64  | 6.68 | 13 | PASS |
| n78(3550-3700) | 30 | 50 | 645000 | 128@0 | DFT_QAM256 | 6.50 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 638668 | 162@0 | DFT_BPSK   | 4.44 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 638668 | 162@0 | DFT_QPSK   | 5.51 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 638668 | 162@0 | DFT_QAM16  | 6.27 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 638668 | 162@0 | DFT_QAM64  | 6.51 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 638668 | 162@0 | DFT_QAM256 | 6.52 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 641666 | 162@0 | DFT_BPSK   | 4.35 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 641666 | 162@0 | DFT_QPSK   | 5.59 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 641666 | 162@0 | DFT_QAM16  | 5.99 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 641666 | 162@0 | DFT_QAM64  | 6.43 | 13 | PASS |


|                |    |    |        |       |            |      |    |      |
|----------------|----|----|--------|-------|------------|------|----|------|
| n78(3550-3700) | 30 | 60 | 641666 | 162@0 | DFT_QAM256 | 6.56 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 644666 | 162@0 | DFT_BPSK   | 4.77 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 644666 | 162@0 | DFT_QPSK   | 5.57 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 644666 | 162@0 | DFT_QAM16  | 6.14 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 644666 | 162@0 | DFT_QAM64  | 6.18 | 13 | PASS |
| n78(3550-3700) | 30 | 60 | 644666 | 162@0 | DFT_QAM256 | 6.45 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 639000 | 180@0 | DFT_BPSK   | 4.80 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 639000 | 180@0 | DFT_QPSK   | 5.30 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 639000 | 180@0 | DFT_QAM16  | 6.15 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 639000 | 180@0 | DFT_QAM64  | 6.37 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 639000 | 180@0 | DFT_QAM256 | 6.79 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 641666 | 180@0 | DFT_BPSK   | 4.41 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 641666 | 180@0 | DFT_QPSK   | 5.50 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 641666 | 180@0 | DFT_QAM16  | 6.07 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 641666 | 180@0 | DFT_QAM64  | 6.49 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 641666 | 180@0 | DFT_QAM256 | 6.63 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 644332 | 180@0 | DFT_BPSK   | 4.94 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 644332 | 180@0 | DFT_QPSK   | 5.48 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 644332 | 180@0 | DFT_QAM16  | 6.68 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 644332 | 180@0 | DFT_QAM64  | 6.39 | 13 | PASS |
| n78(3550-3700) | 30 | 70 | 644332 | 180@0 | DFT_QAM256 | 6.48 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 639334 | 216@0 | DFT_BPSK   | 4.41 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 639334 | 216@0 | DFT_QPSK   | 5.42 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 639334 | 216@0 | DFT_QAM16  | 6.06 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 639334 | 216@0 | DFT_QAM64  | 6.44 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 639334 | 216@0 | DFT_QAM256 | 6.55 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 641666 | 216@0 | DFT_BPSK   | 4.42 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 641666 | 216@0 | DFT_QPSK   | 5.36 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 641666 | 216@0 | DFT_QAM16  | 6.50 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 641666 | 216@0 | DFT_QAM64  | 6.78 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 641666 | 216@0 | DFT_QAM256 | 6.63 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 644000 | 216@0 | DFT_BPSK   | 4.40 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 644000 | 216@0 | DFT_QPSK   | 5.61 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 644000 | 216@0 | DFT_QAM16  | 6.22 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 644000 | 216@0 | DFT_QAM64  | 6.46 | 13 | PASS |
| n78(3550-3700) | 30 | 80 | 644000 | 216@0 | DFT_QAM256 | 7.02 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 639668 | 240@0 | DFT_BPSK   | 4.80 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 639668 | 240@0 | DFT_QPSK   | 5.39 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 639668 | 240@0 | DFT_QAM16  | 6.12 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 639668 | 240@0 | DFT_QAM64  | 6.71 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 639668 | 240@0 | DFT_QAM256 | 6.51 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 641666 | 240@0 | DFT_BPSK   | 4.44 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 641666 | 240@0 | DFT_QPSK   | 5.59 | 13 | PASS |
| n78(3550-3700) | 30 | 90 | 641666 | 240@0 | DFT_QAM16  | 6.25 | 13 | PASS |

|                |    |     |        |       |            |      |    |      |
|----------------|----|-----|--------|-------|------------|------|----|------|
| n78(3550-3700) | 30 | 90  | 641666 | 240@0 | DFT_QAM64  | 6.32 | 13 | PASS |
| n78(3550-3700) | 30 | 90  | 641666 | 240@0 | DFT_QAM256 | 6.75 | 13 | PASS |
| n78(3550-3700) | 30 | 90  | 643666 | 240@0 | DFT_BPSK   | 5.43 | 13 | PASS |
| n78(3550-3700) | 30 | 90  | 643666 | 240@0 | DFT_QPSK   | 5.53 | 13 | PASS |
| n78(3550-3700) | 30 | 90  | 643666 | 240@0 | DFT_QAM16  | 6.37 | 13 | PASS |
| n78(3550-3700) | 30 | 90  | 643666 | 240@0 | DFT_QAM64  | 6.61 | 13 | PASS |
| n78(3550-3700) | 30 | 90  | 643666 | 240@0 | DFT_QAM256 | 6.74 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 270@0 | DFT_BPSK   | 4.68 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 270@0 | DFT_QPSK   | 5.43 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 270@0 | DFT_QAM16  | 6.67 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 270@0 | DFT_QAM64  | 6.39 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 640000 | 270@0 | DFT_QAM256 | 6.74 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 270@0 | DFT_BPSK   | 4.66 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 270@0 | DFT_QPSK   | 5.71 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 270@0 | DFT_QAM16  | 6.21 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 270@0 | DFT_QAM64  | 6.59 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 641666 | 270@0 | DFT_QAM256 | 6.65 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 270@0 | DFT_BPSK   | 4.46 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 270@0 | DFT_QPSK   | 6.40 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 270@0 | DFT_QAM16  | 6.29 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 270@0 | DFT_QAM64  | 6.42 | 13 | PASS |
| n78(3550-3700) | 30 | 100 | 643332 | 270@0 | DFT_QAM256 | 6.63 | 13 | PASS |


**n78(3550-3700) SCS=30kHz DFT\_BPSK BW=100MHz Channel=640000 RB=270@0**

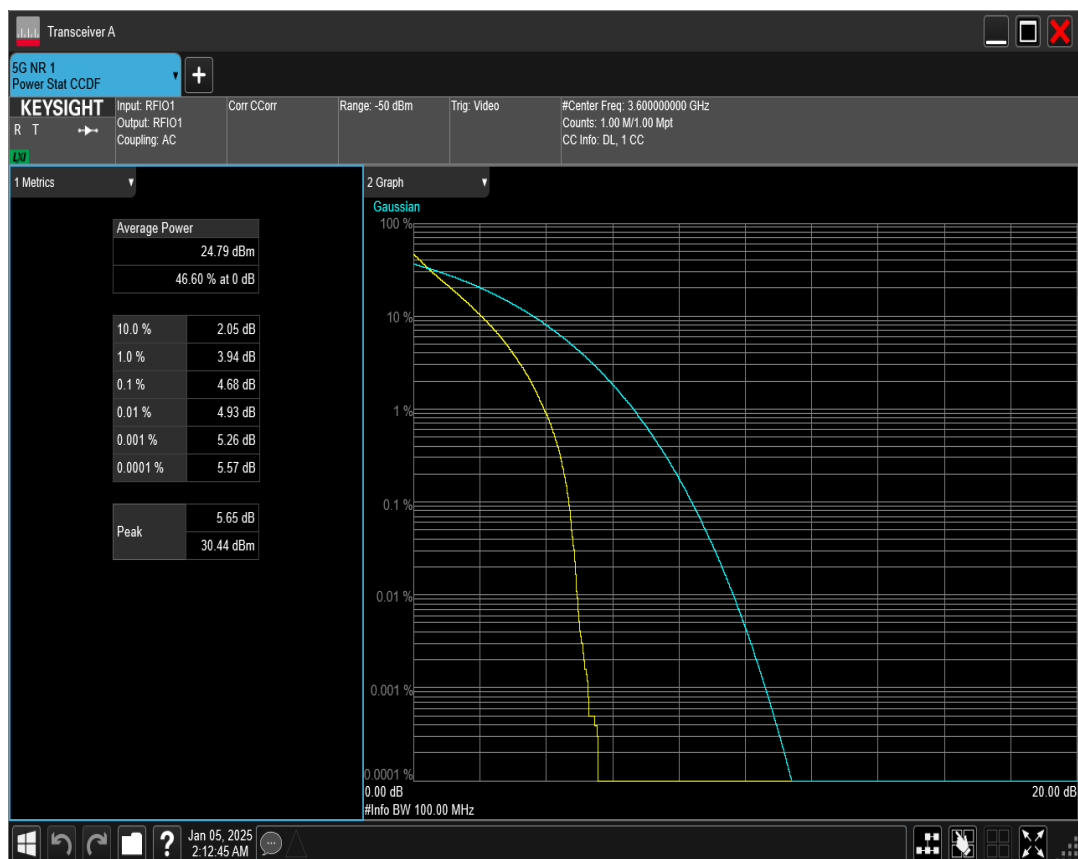


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=100MHz Channel=641666 RB=270@0*

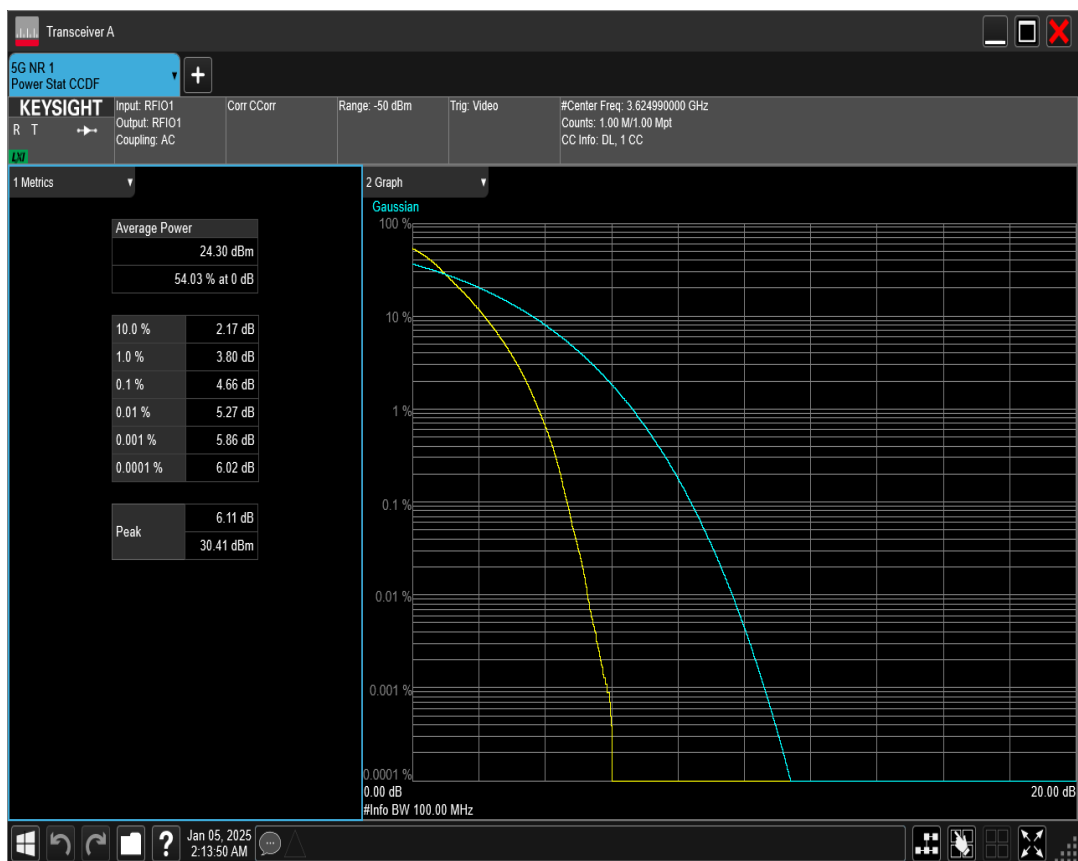


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=100MHz Channel=643332 RB=270@0*

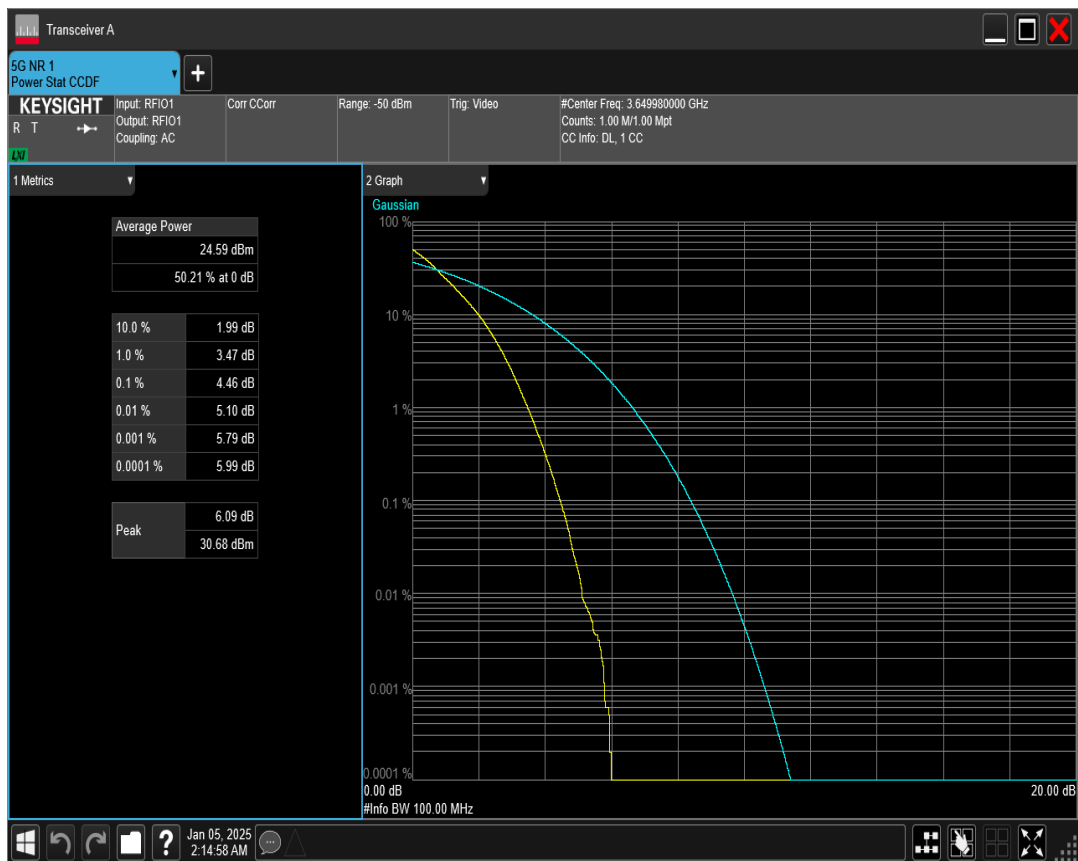


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=10MHz Channel=637000 RB=24@0*

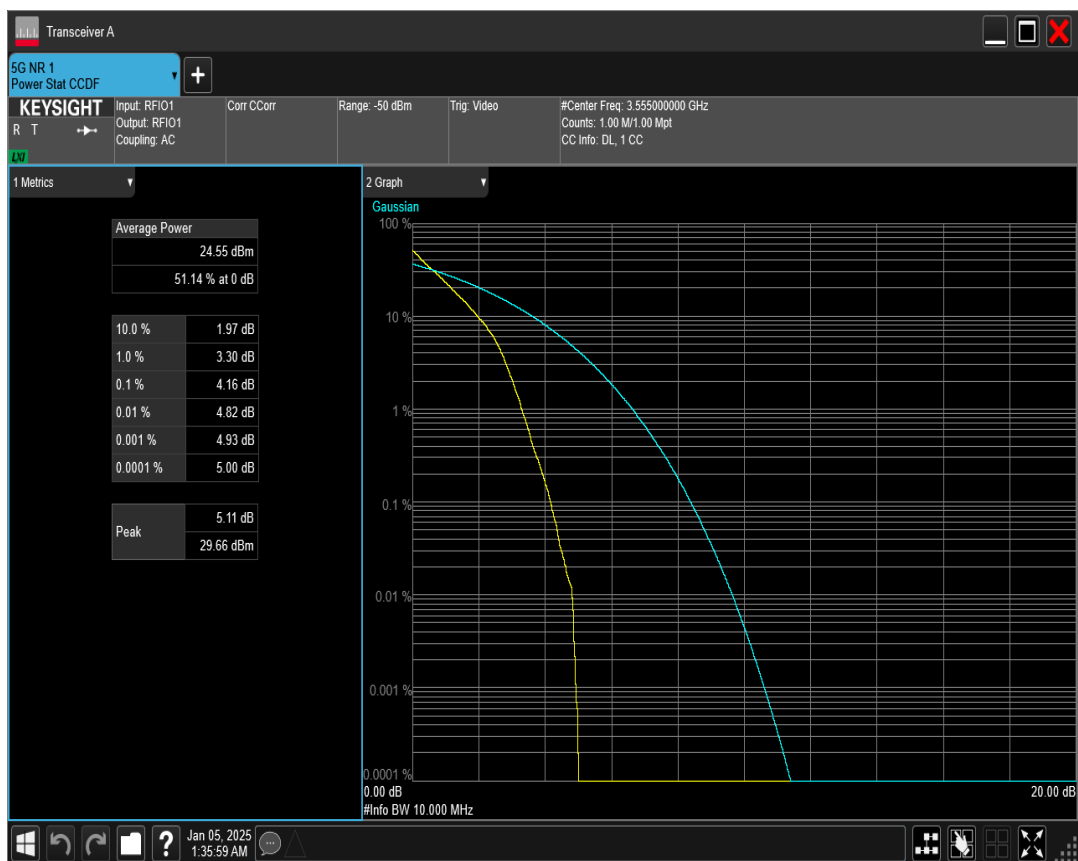


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=10MHz Channel=641666 RB=24@0*

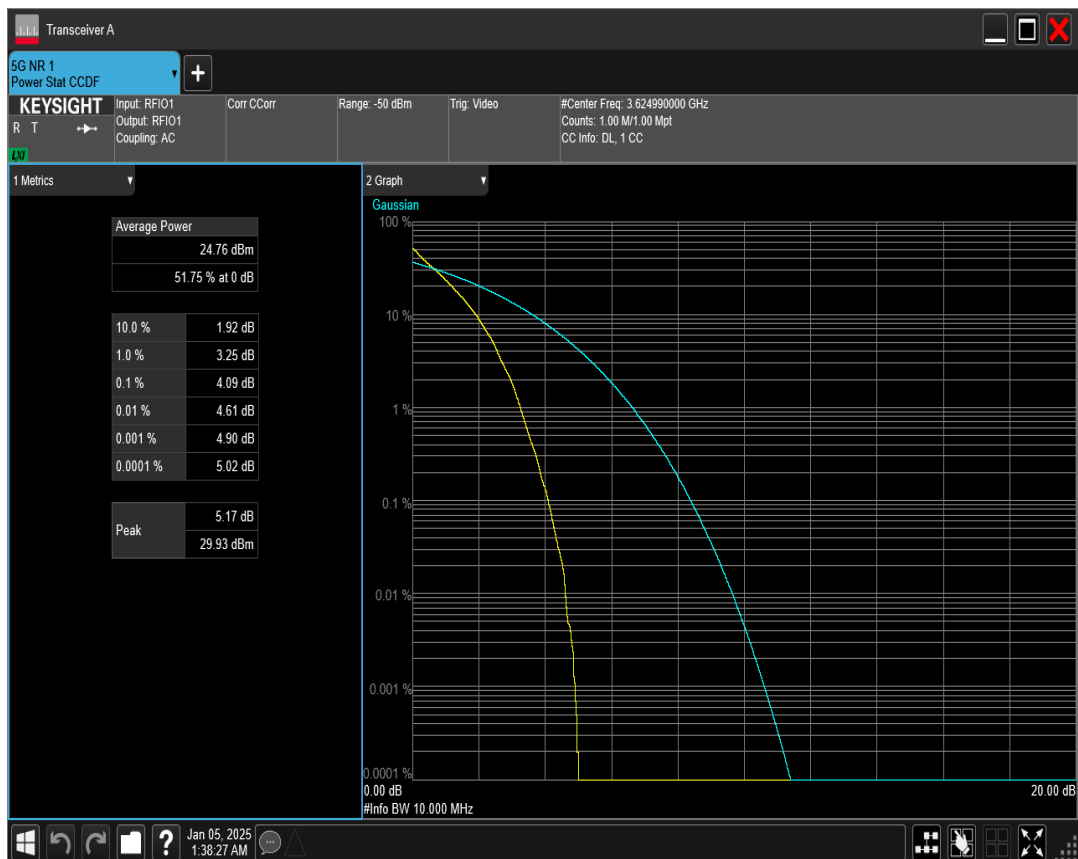


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=10MHz Channel=646332 RB=24@0*

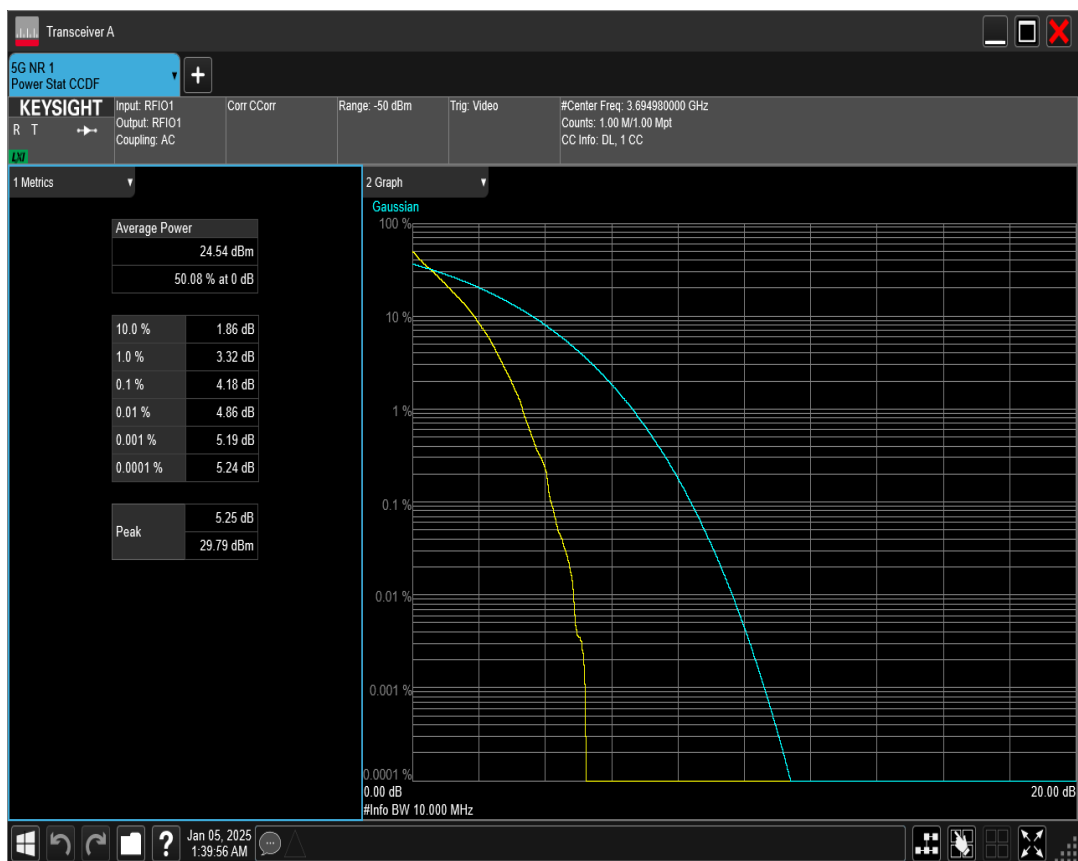


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=15MHz Channel=637168 RB=36@0*

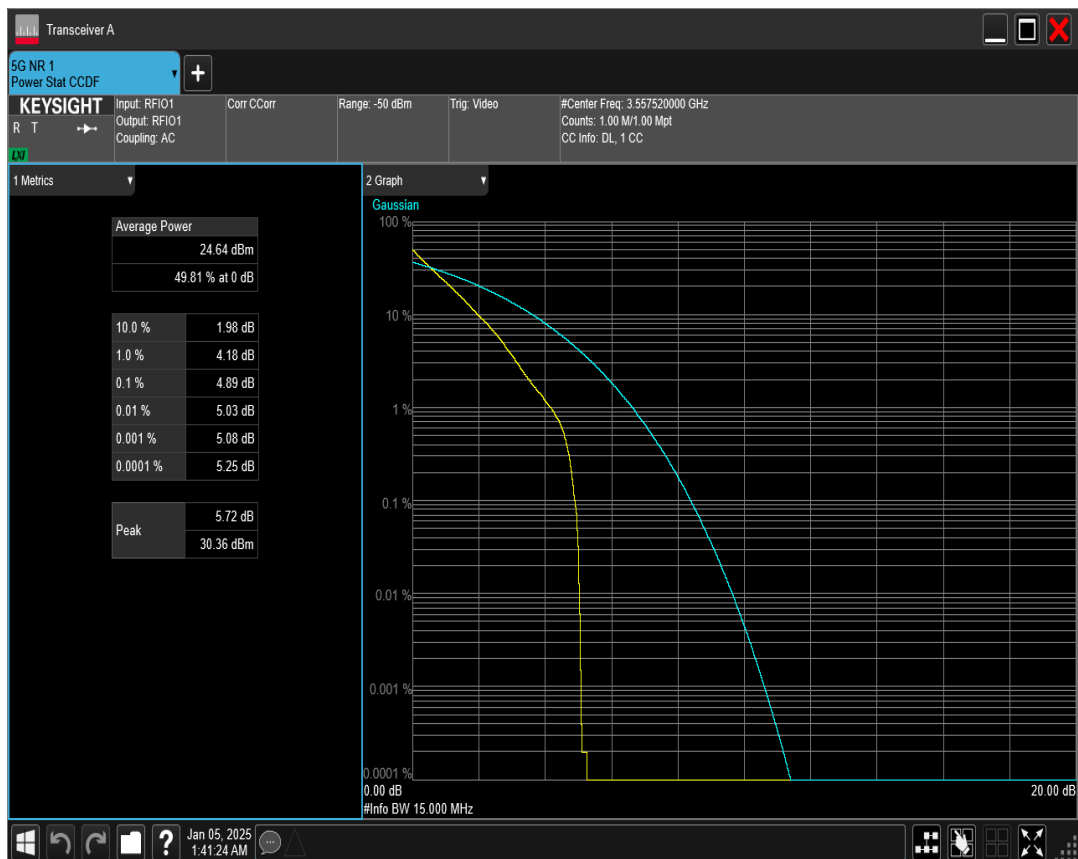


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=15MHz Channel=641666 RB=36@0*

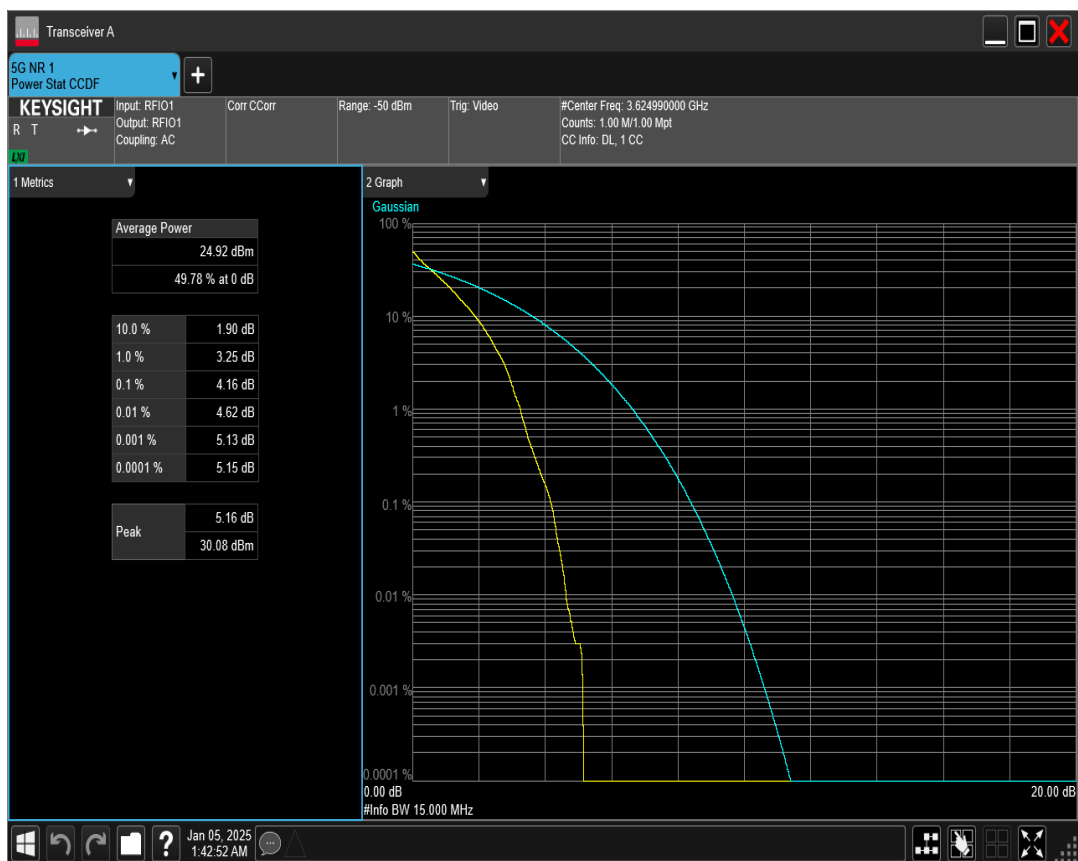


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=15MHz Channel=646166 RB=36@0*

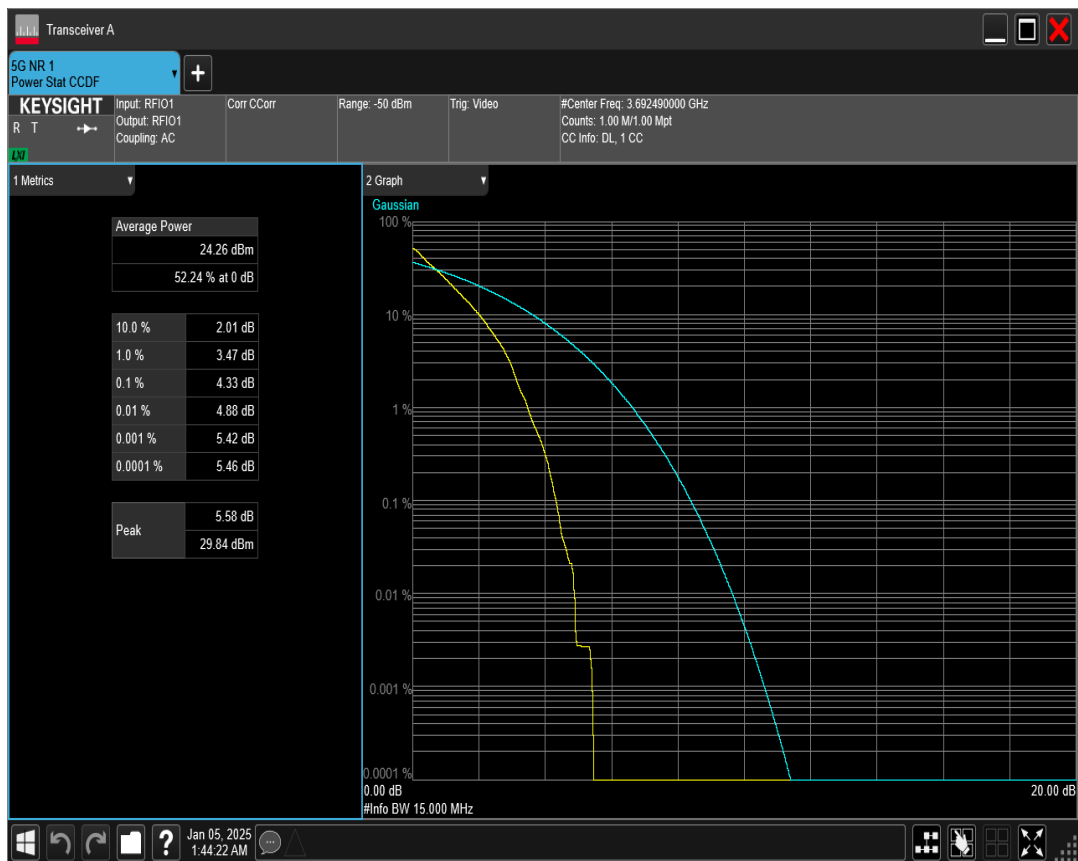


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=20MHz Channel=637334 RB=50@0*

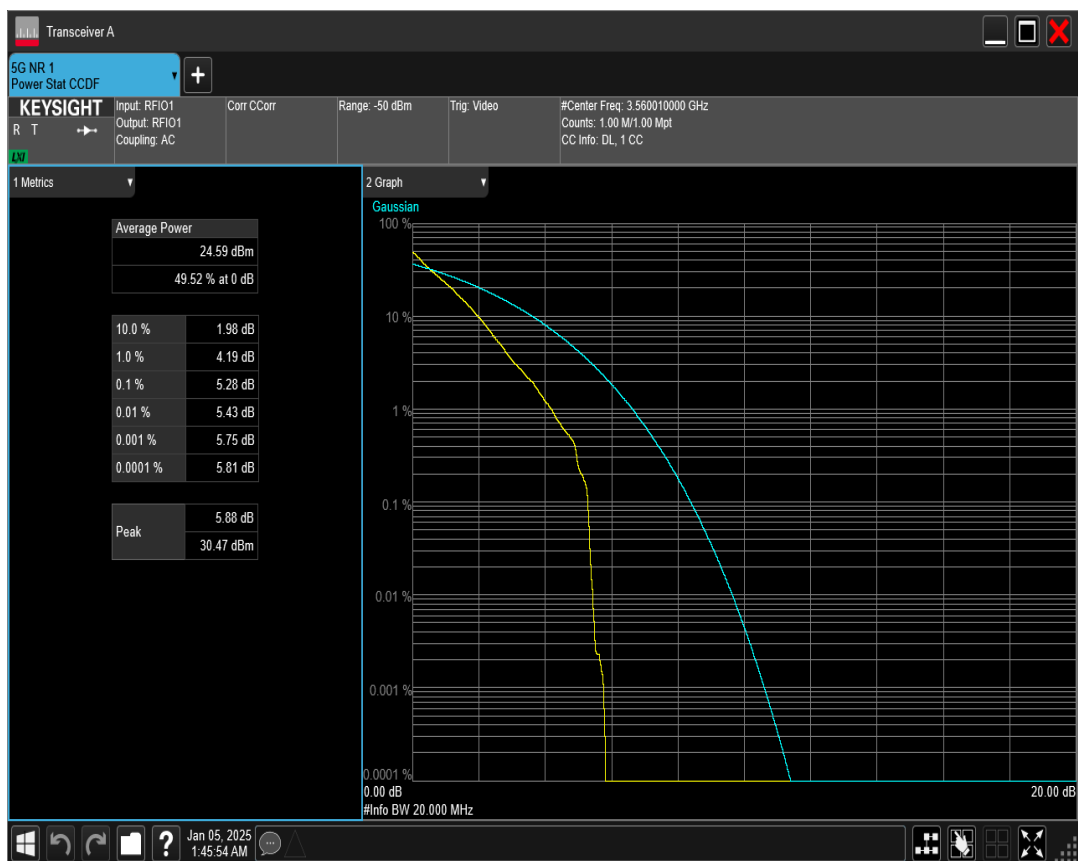


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=20MHz Channel=641666 RB=50@0*

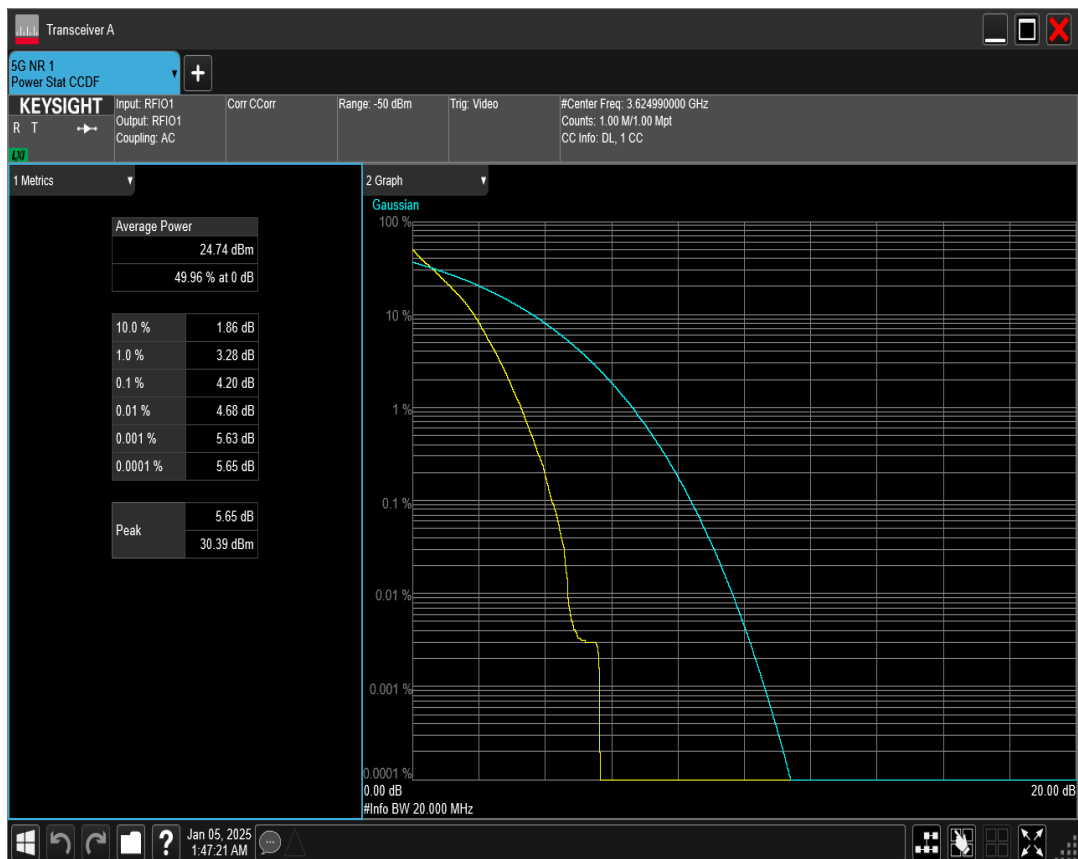


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=20MHz Channel=646000 RB=50@0*

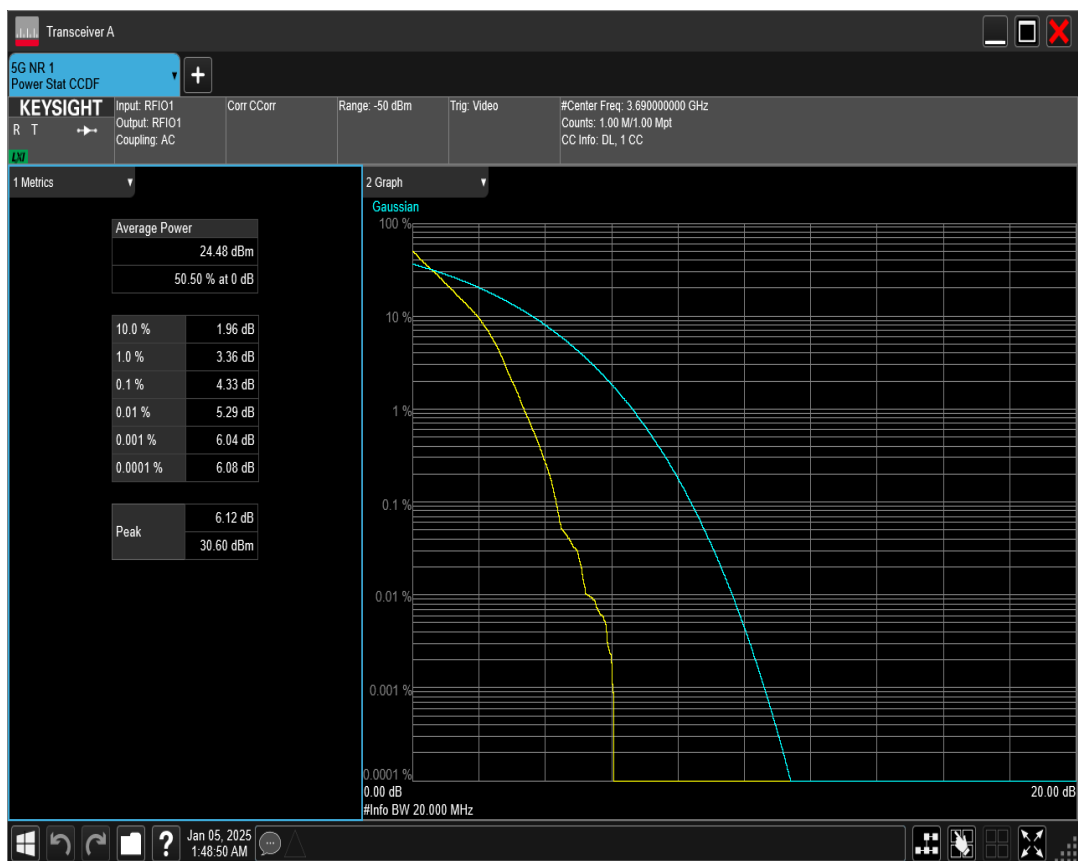


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=40MHz Channel=638000 RB=100@0*

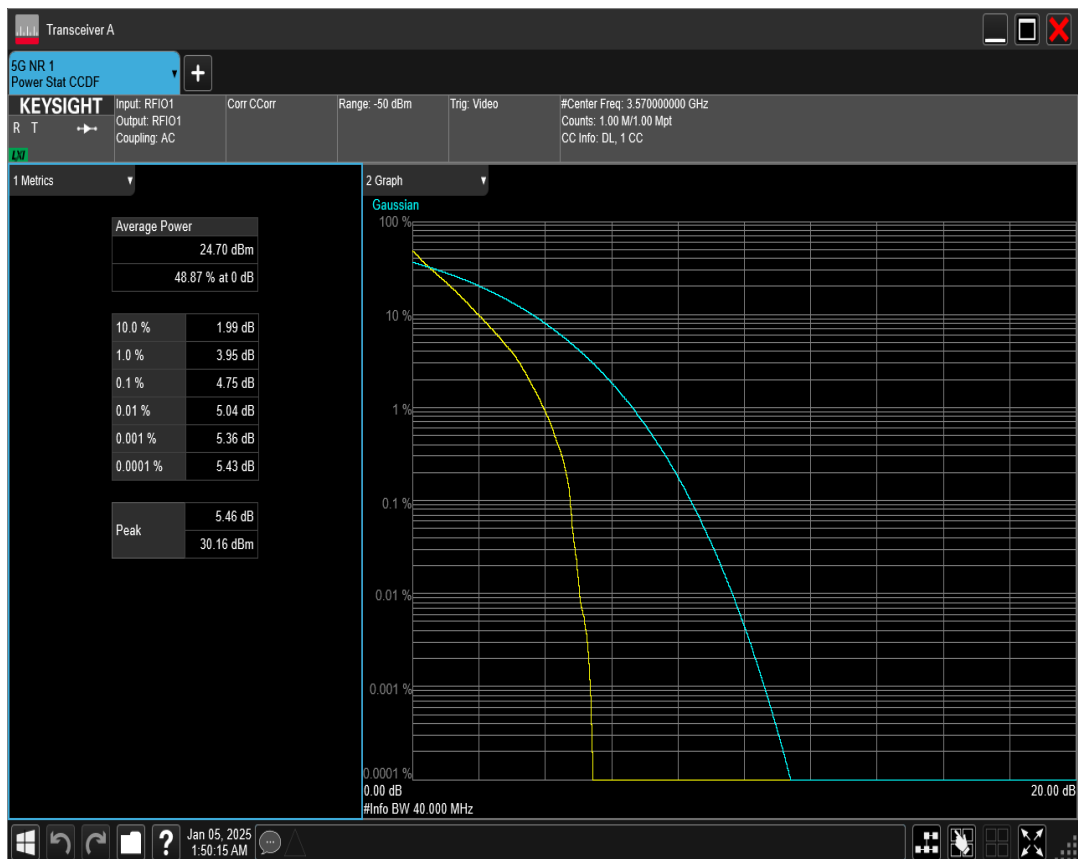


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=50MHz Channel=638334 RB=128@0*

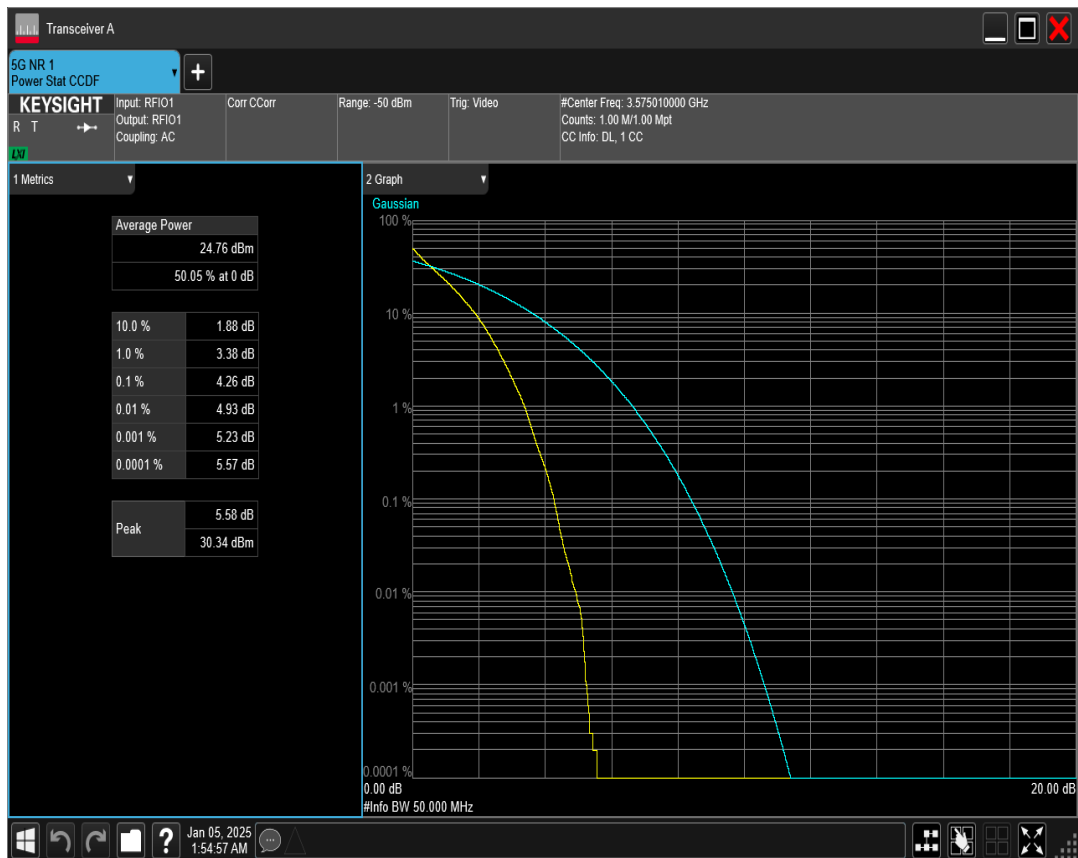


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=40MHz Channel=645332 RB=100@0*

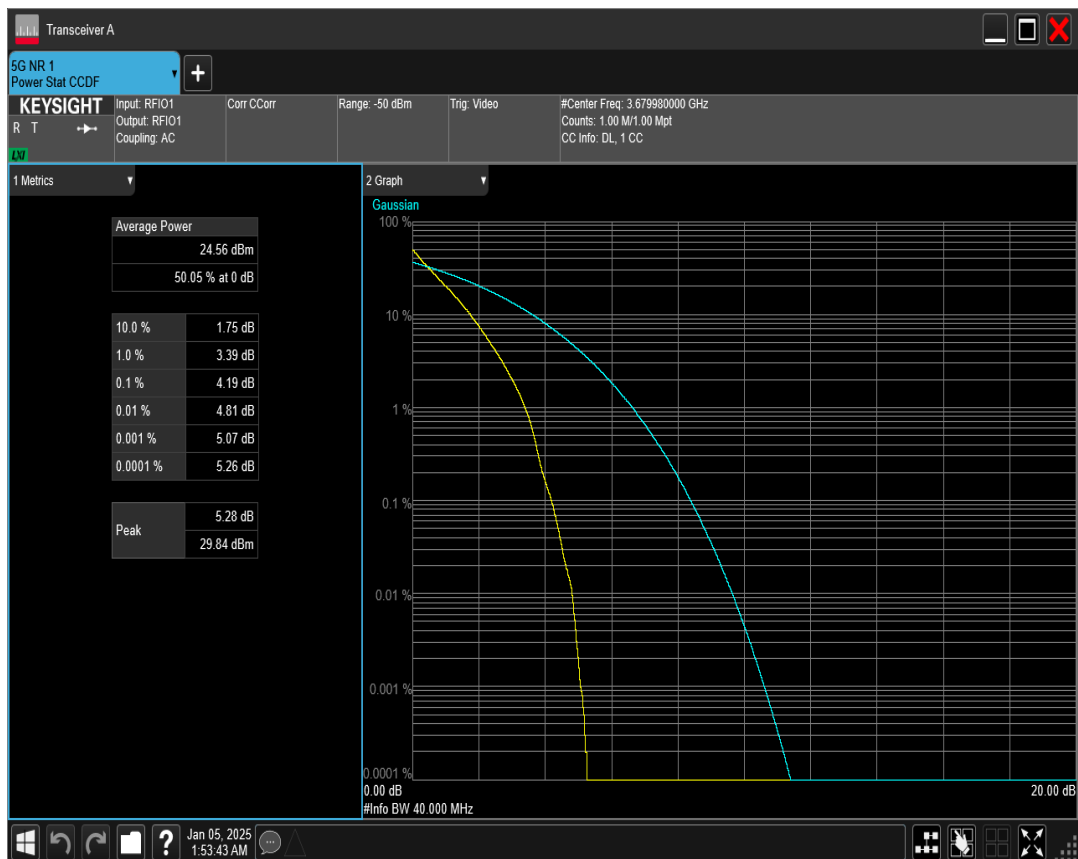


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=40MHz Channel=641666 RB=100@0*

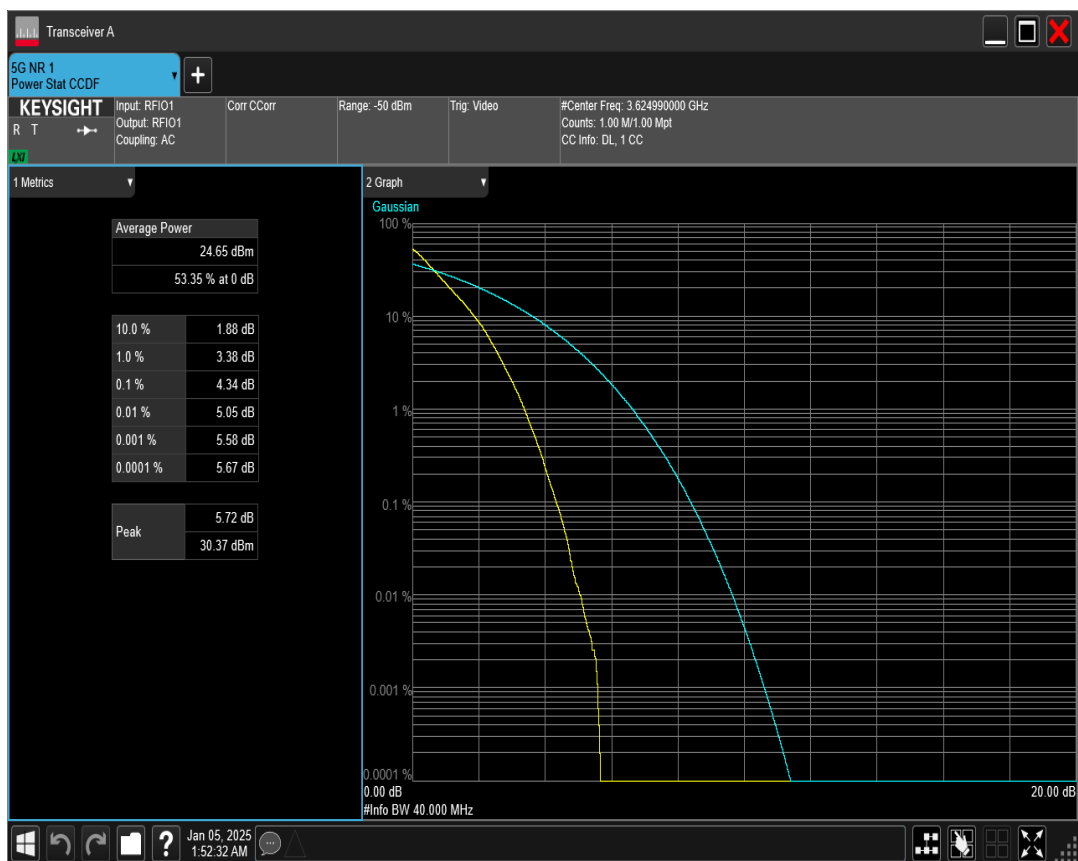


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=50MHz Channel=641666 RB=128@0*

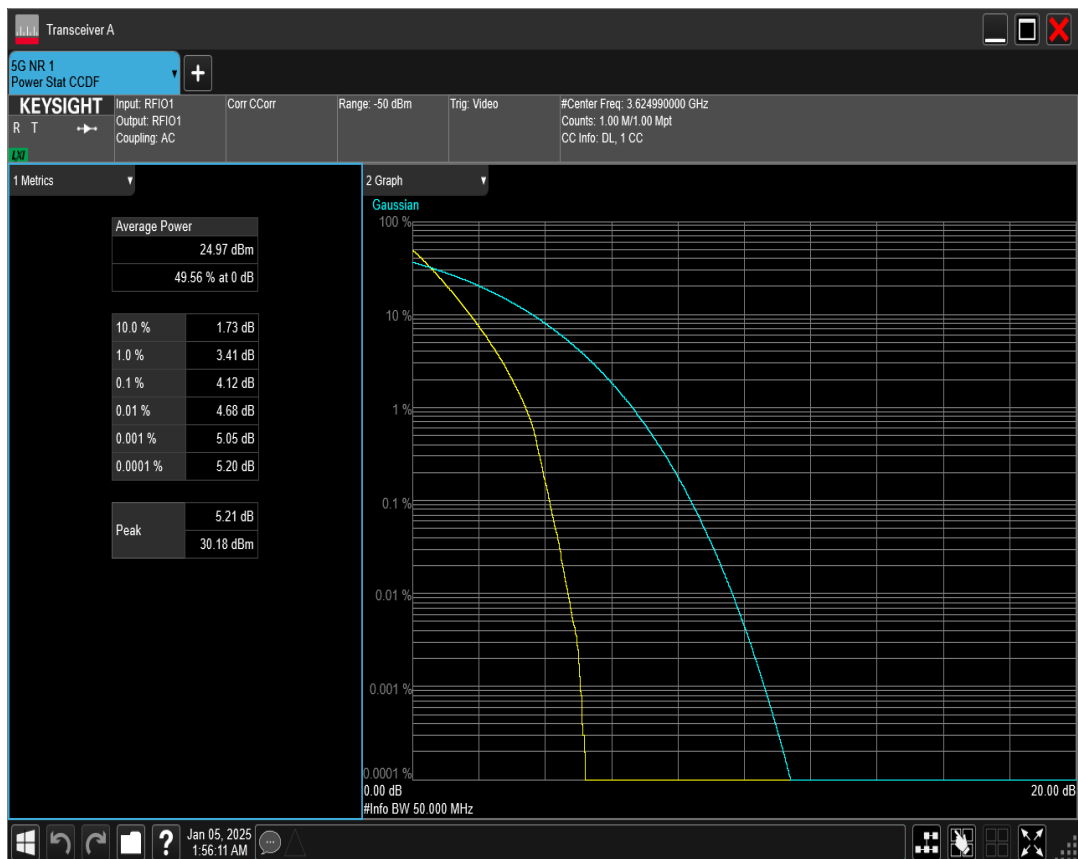


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=50MHz Channel=645000 RB=128@0*

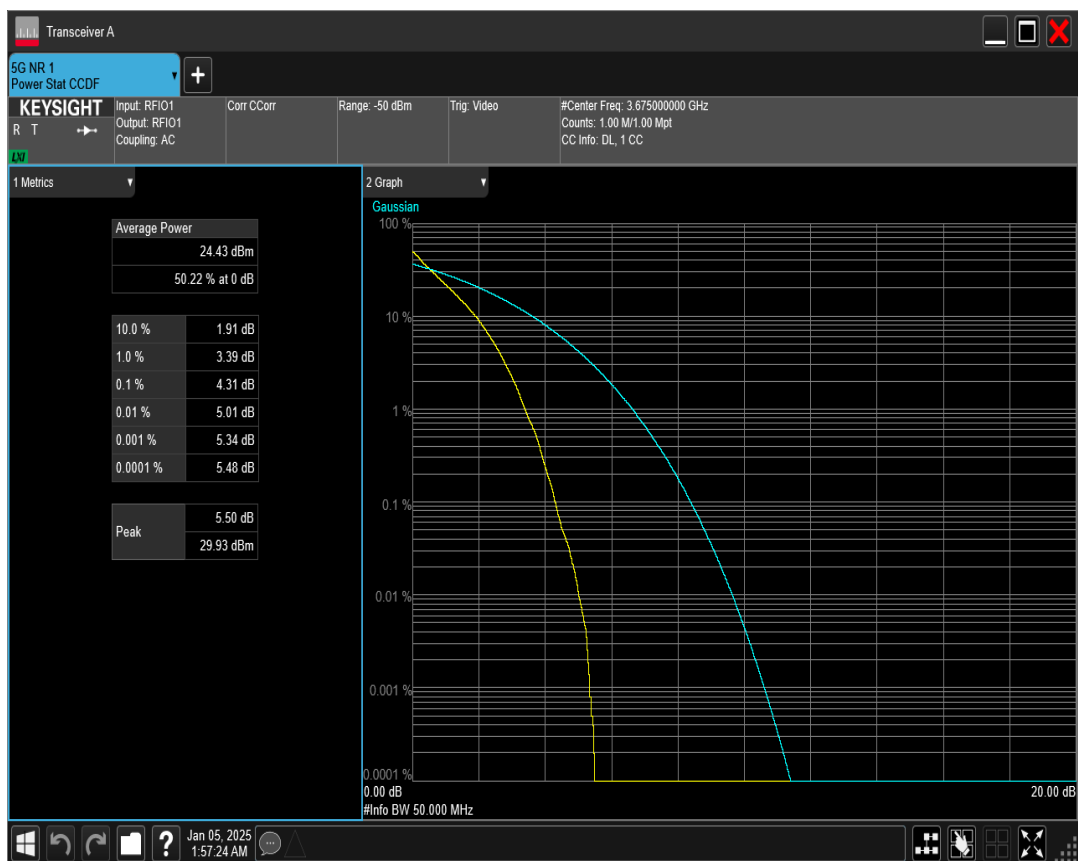


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=60MHz Channel=638668 RB=162@0*

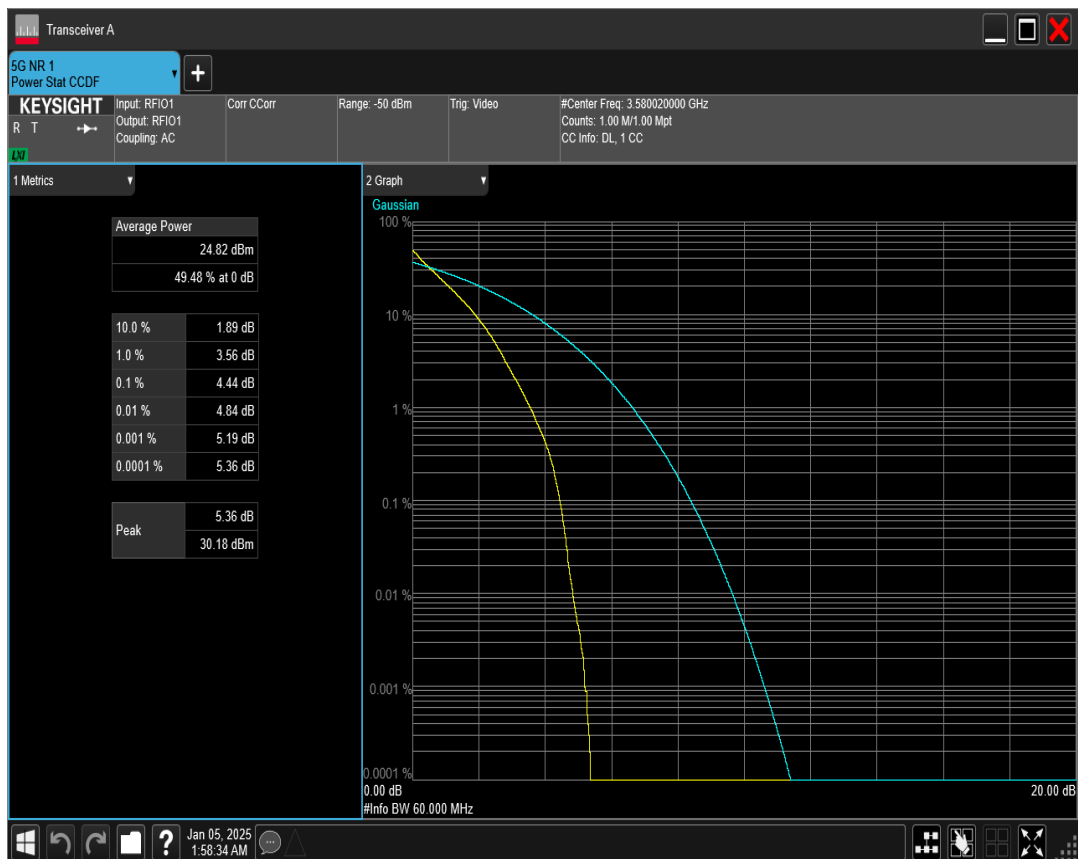


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=60MHz Channel=641666 RB=162@0*

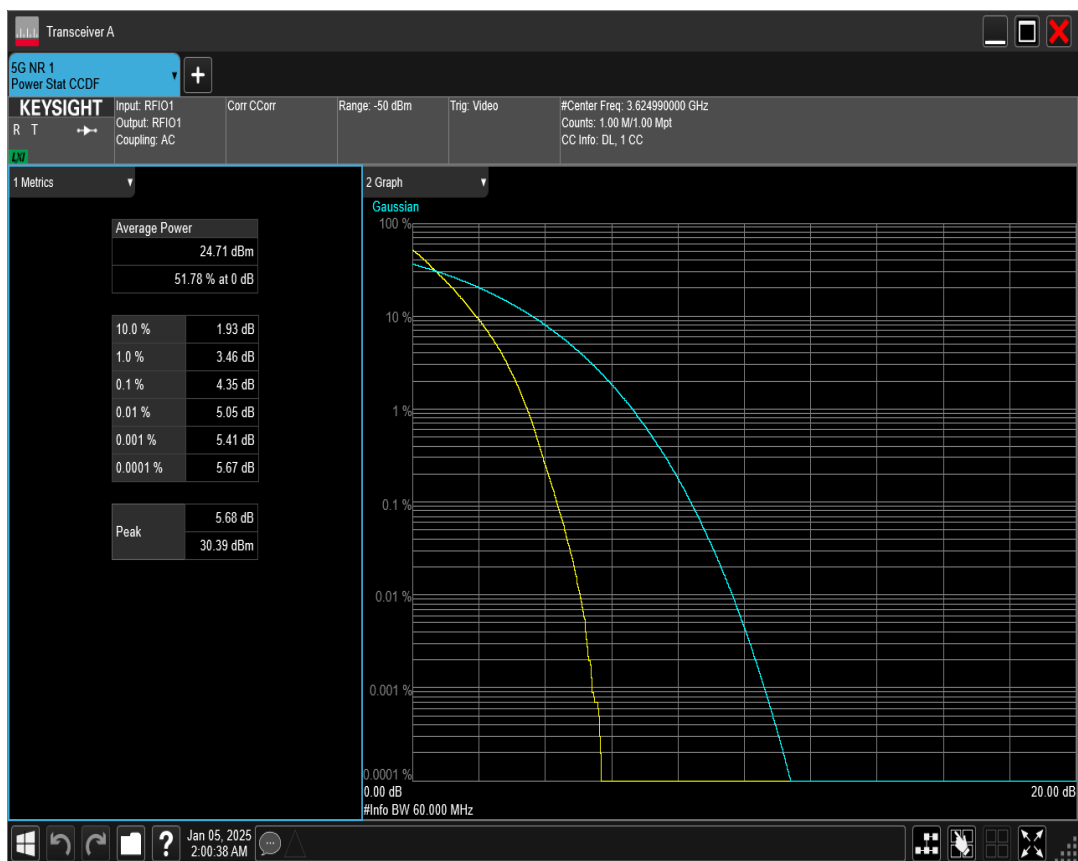


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=70MHz Channel=641666 RB=180@0*

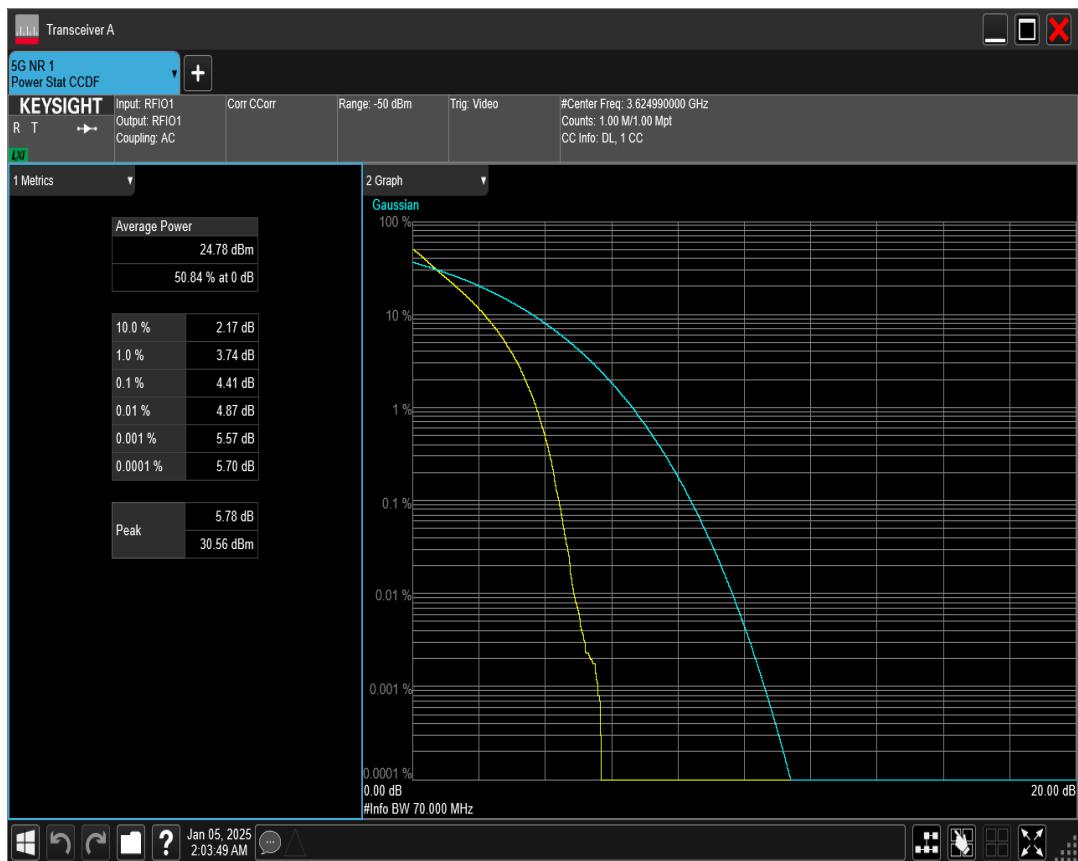


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=70MHz Channel=639000 RB=180@0*

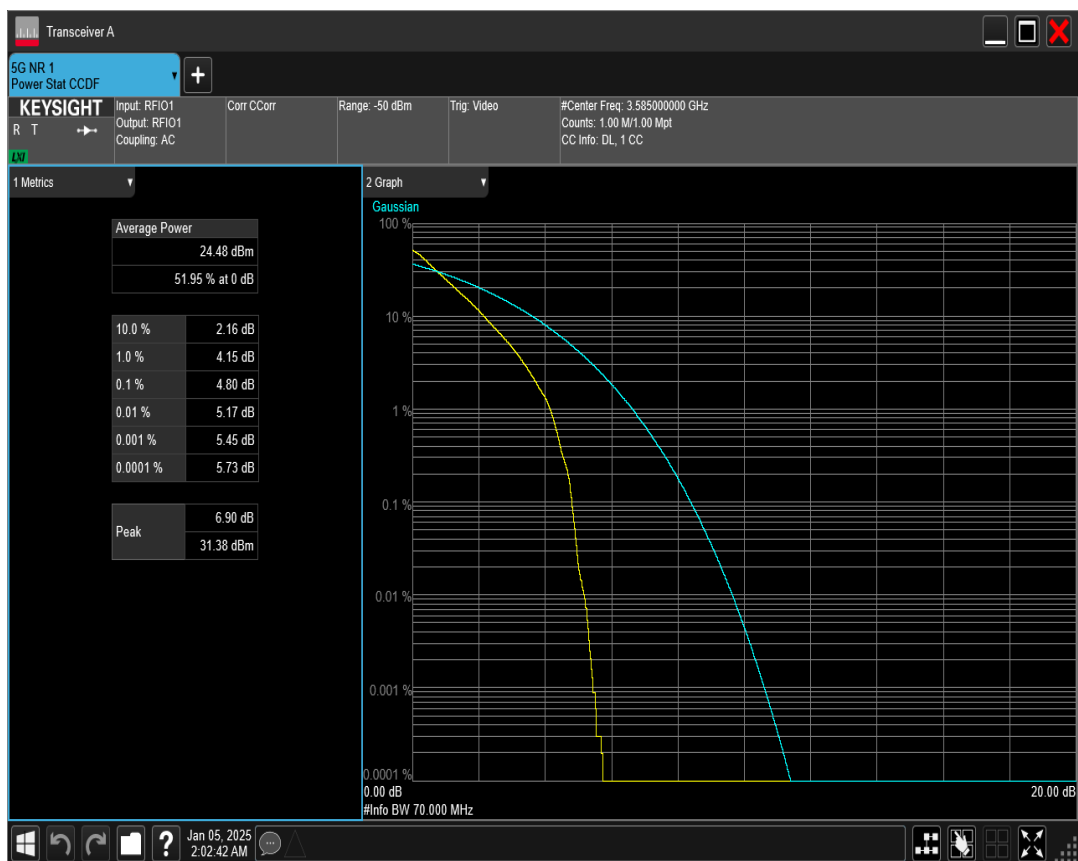


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=60MHz Channel=644666 RB=162@0*

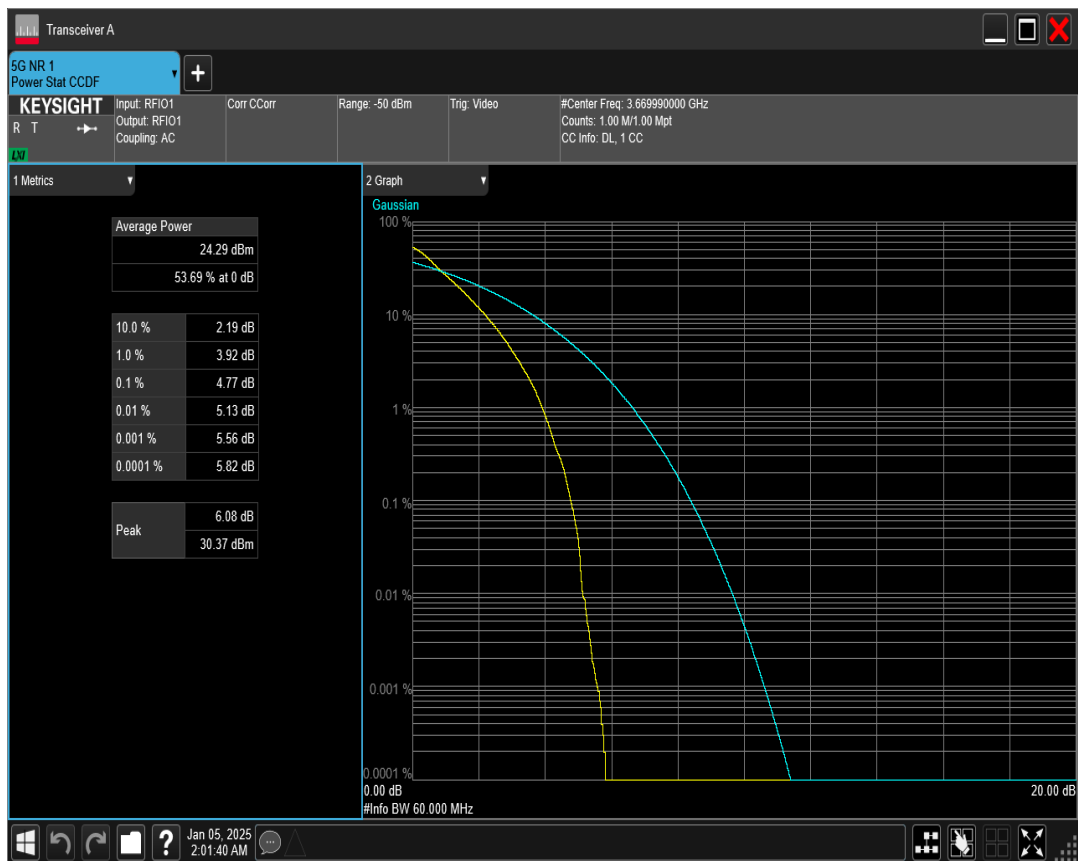


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=70MHz Channel=644332 RB=180@0*

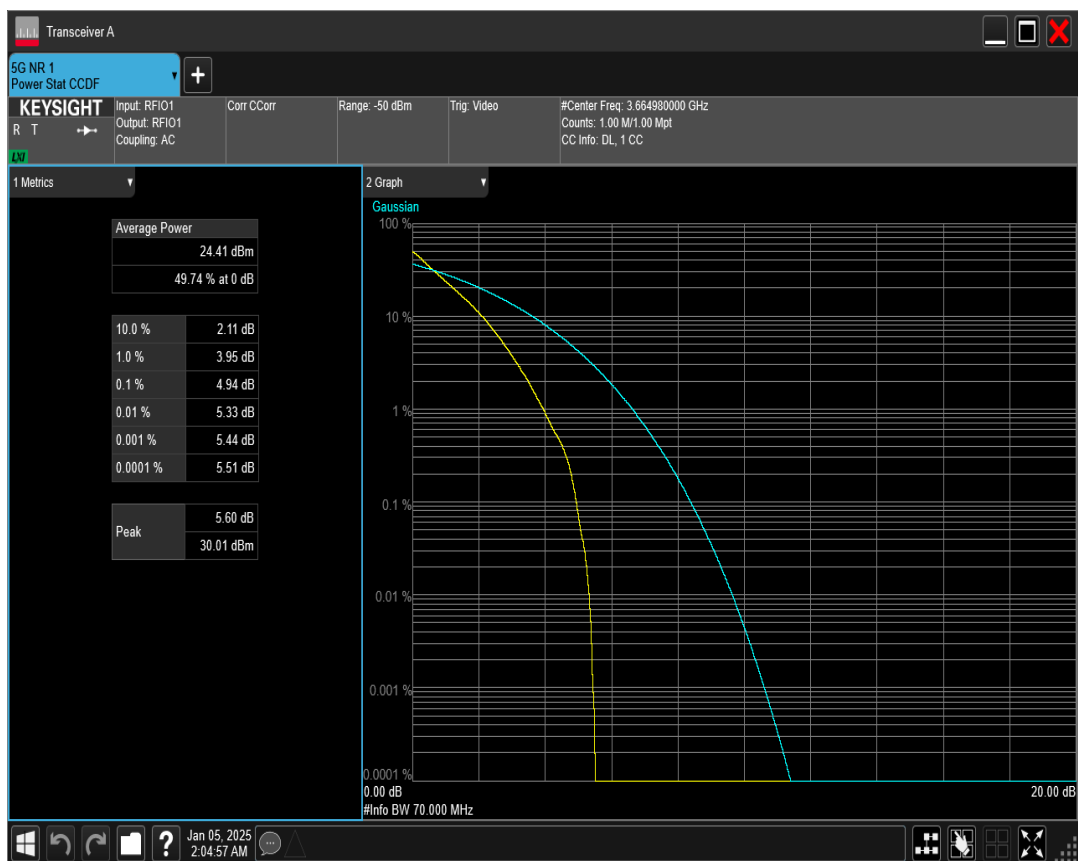


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=80MHz Channel=639334 RB=216@0*

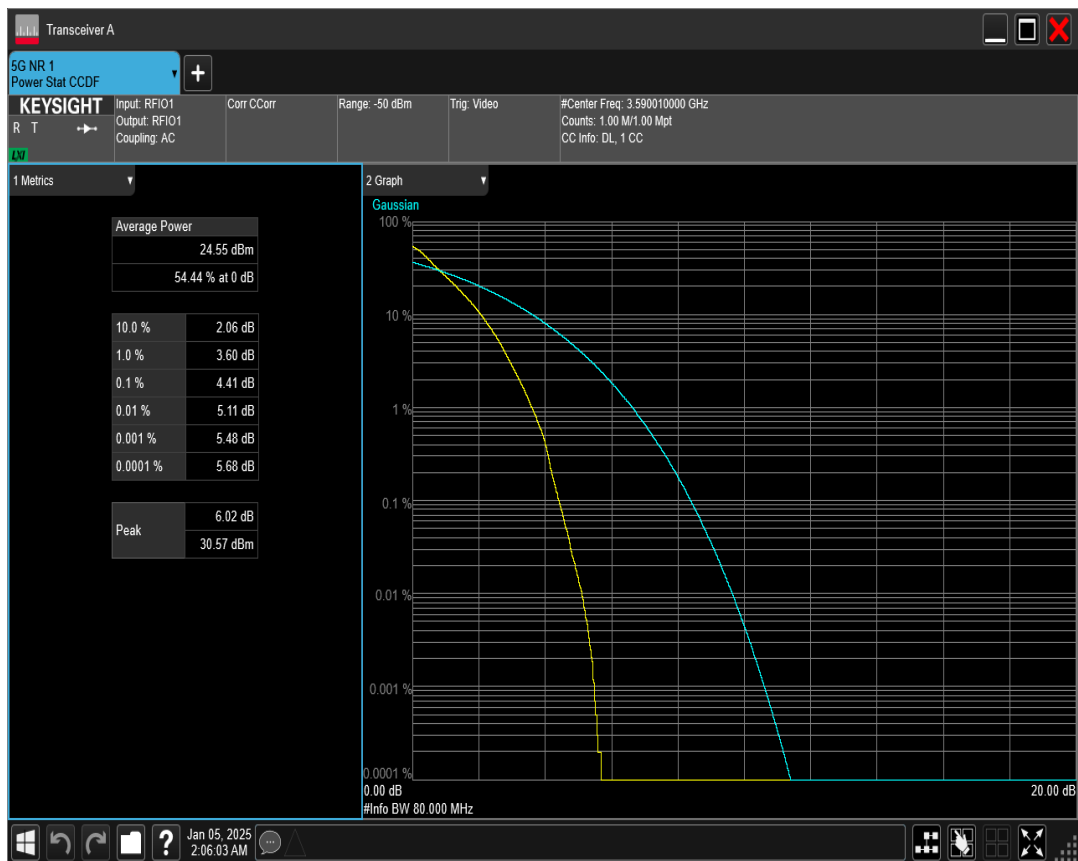


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=80MHz Channel=644000 RB=216@0*

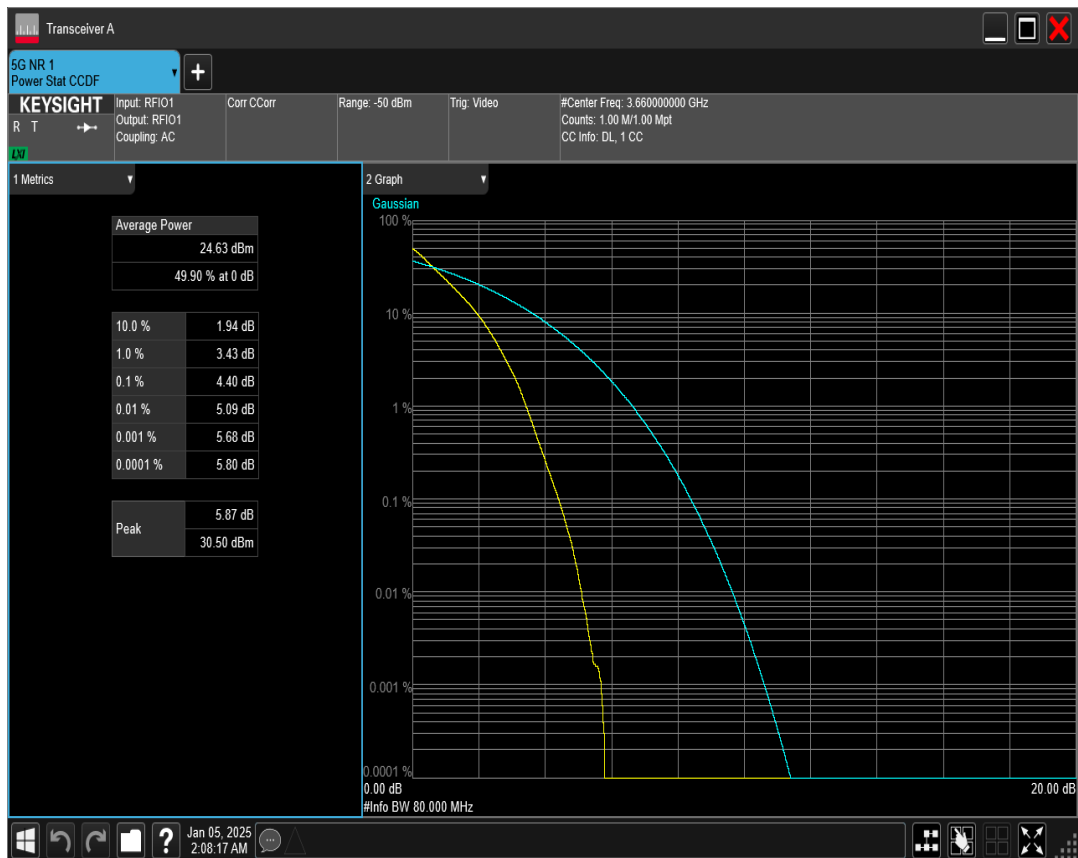


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=80MHz Channel=641666 RB=216@0*

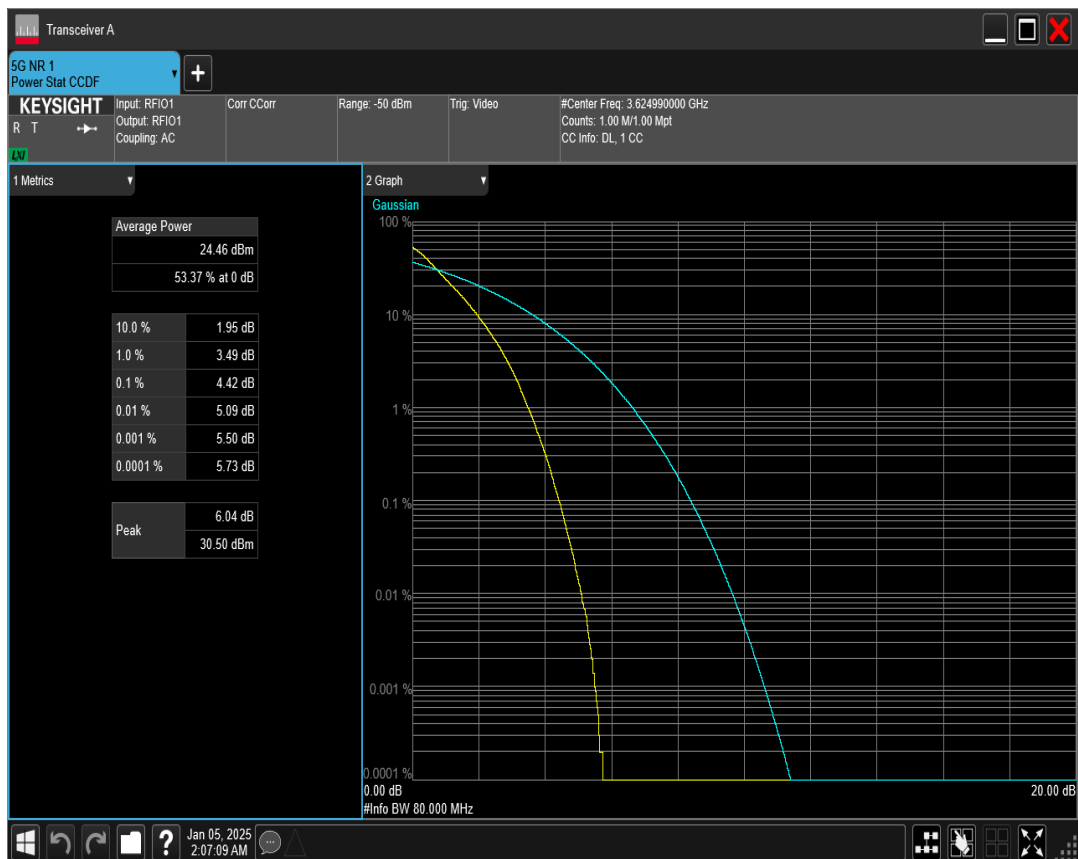


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=90MHz Channel=641666 RB=240@0*

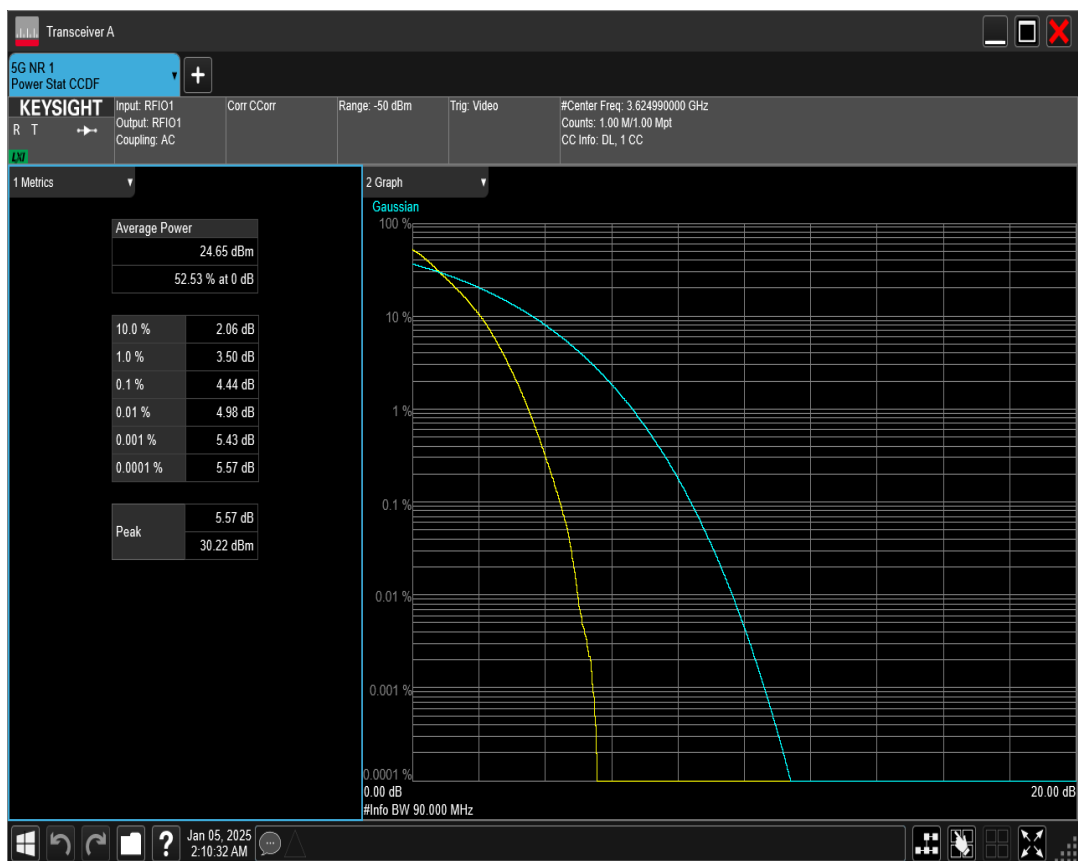


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=90MHz Channel=639668 RB=240@0*

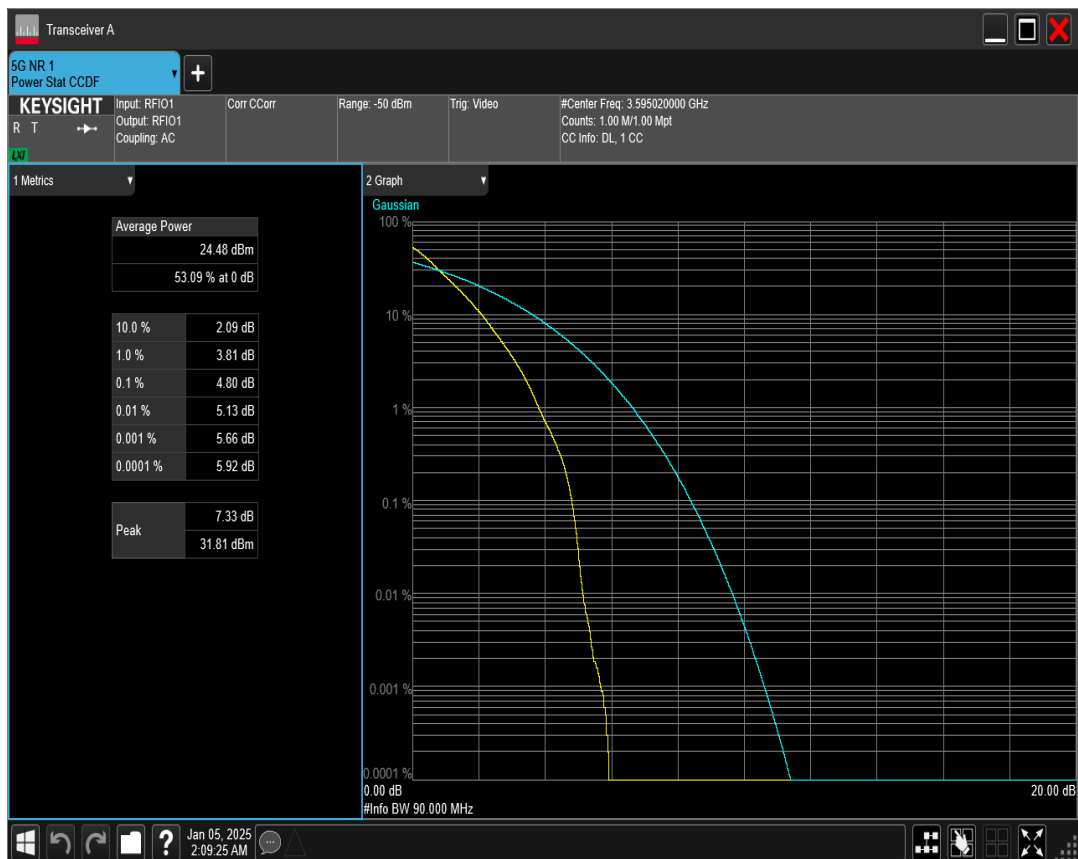


*n78(3550-3700) SCS=30kHz DFT\_BPSK BW=90MHz Channel=643666 RB=240@0*

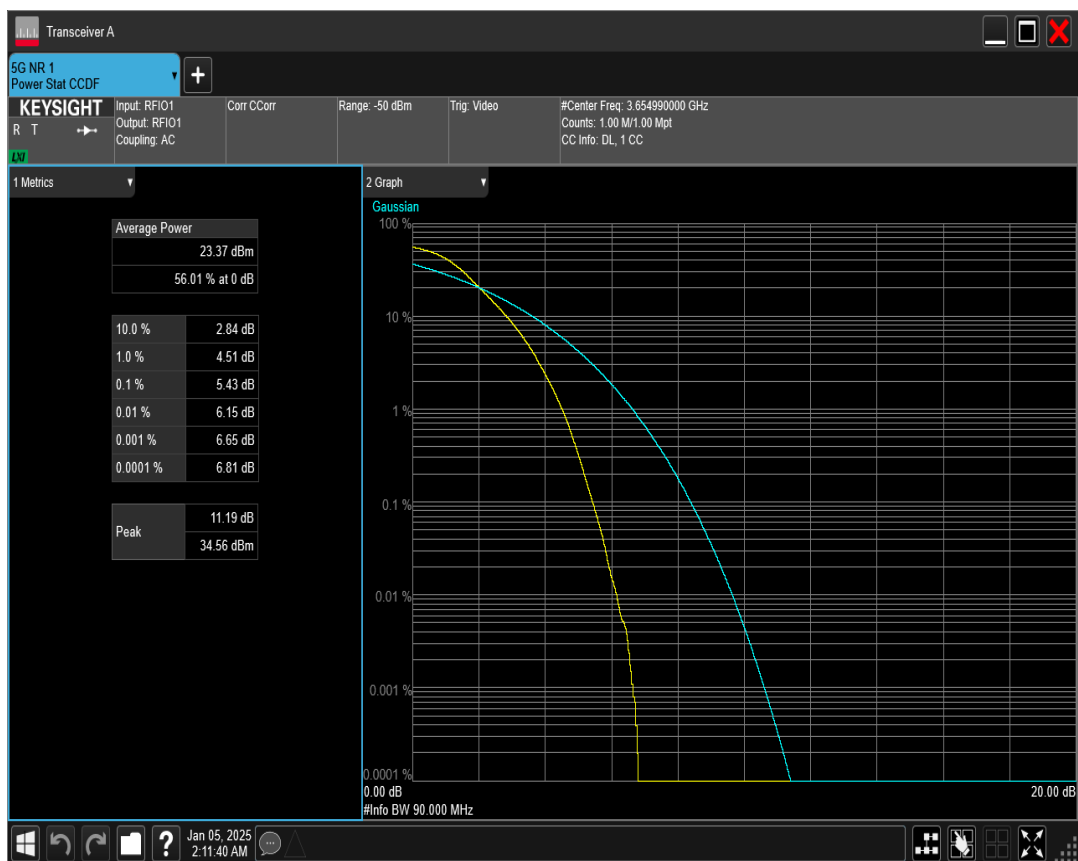


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=100MHz Channel=640000 RB=270@0*

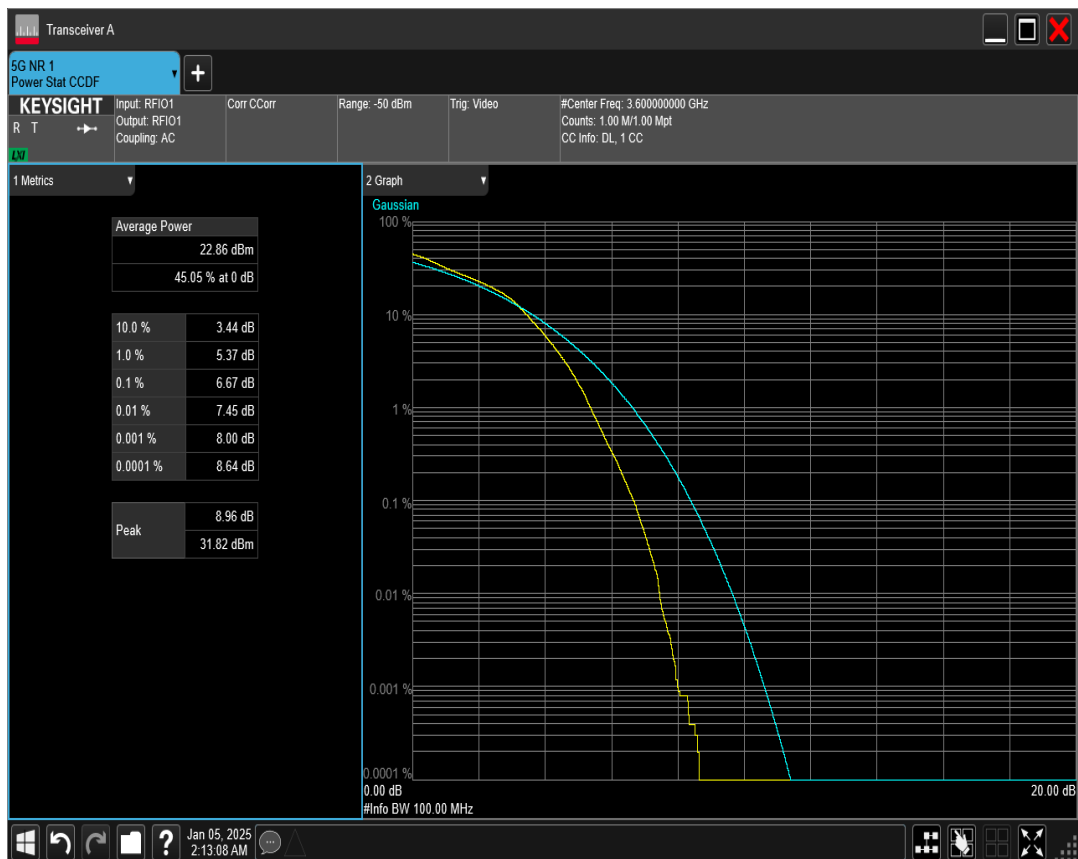


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=100MHz Channel=641666 RB=270@0*

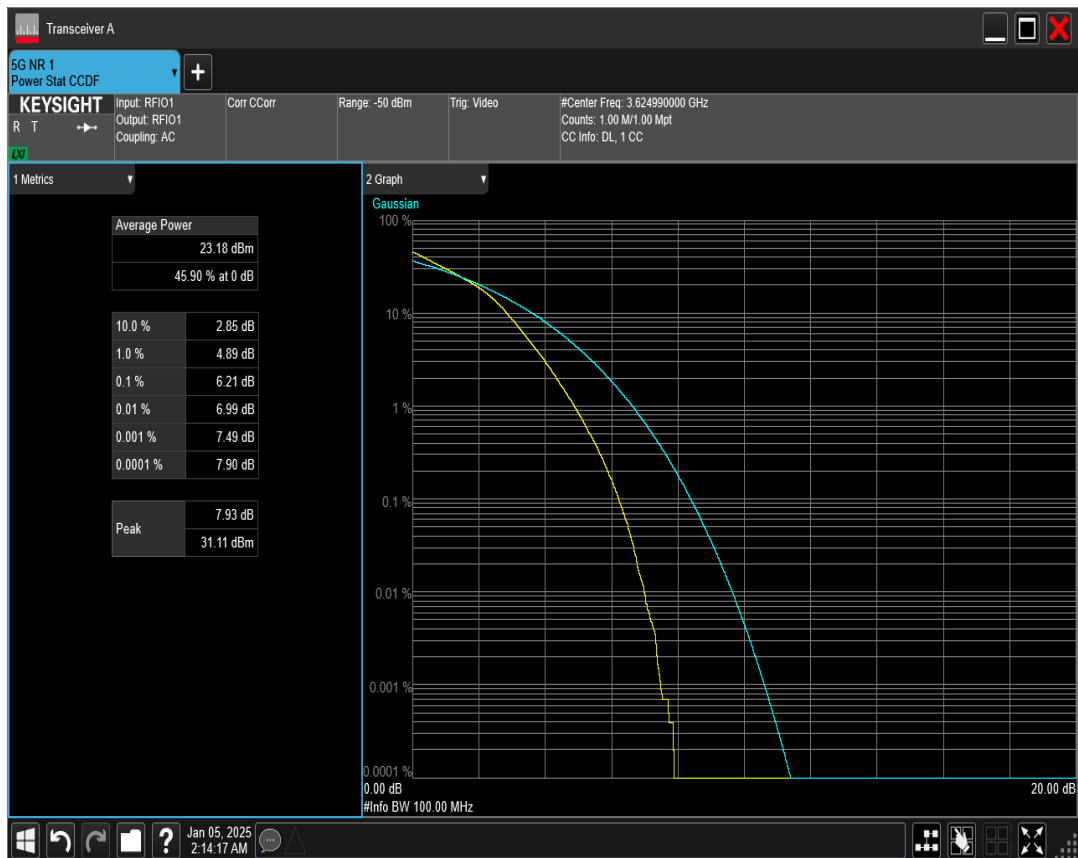


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=100MHz Channel=643332 RB=270@0*

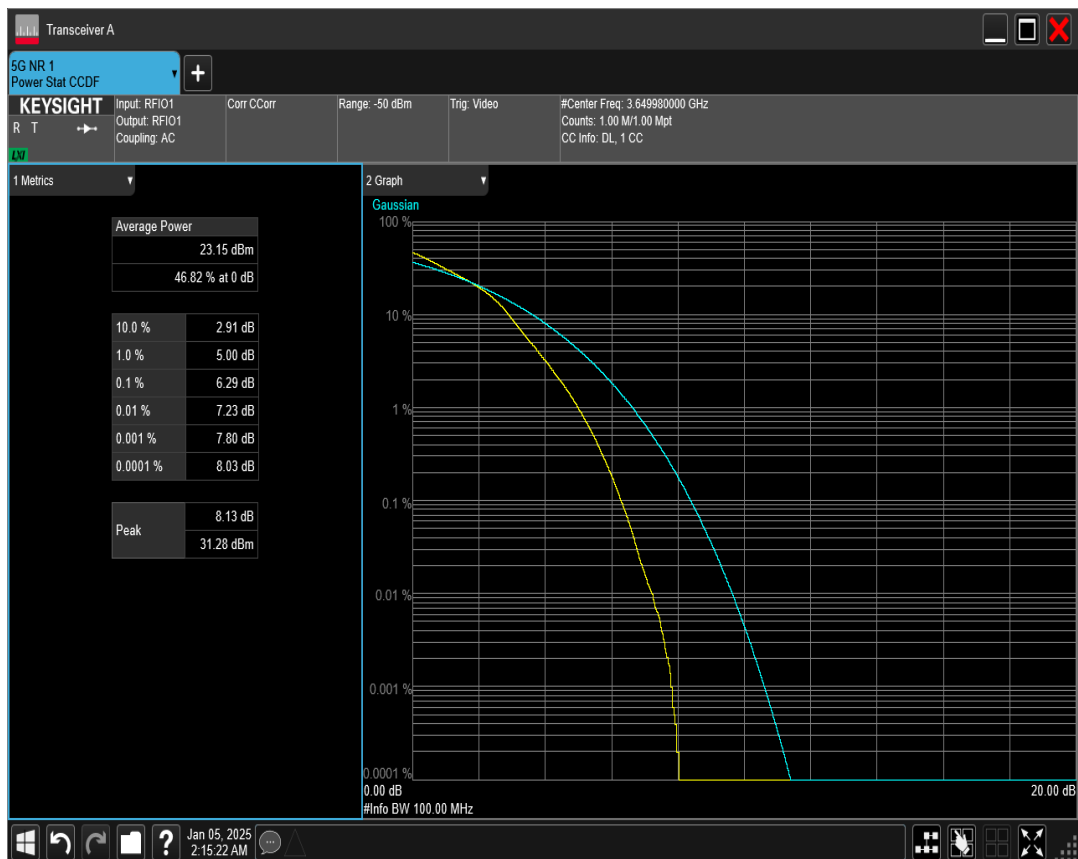


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=10MHz Channel=637000 RB=24@0*

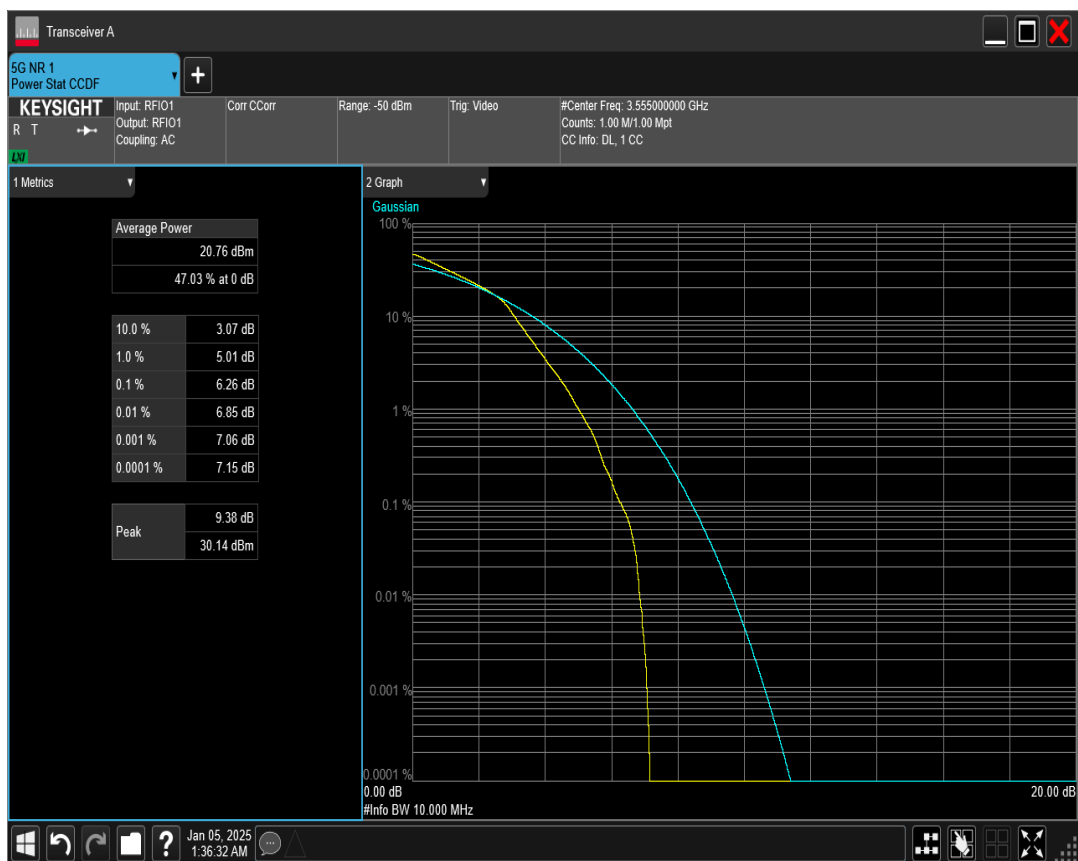


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=10MHz Channel=641666 RB=24@0*

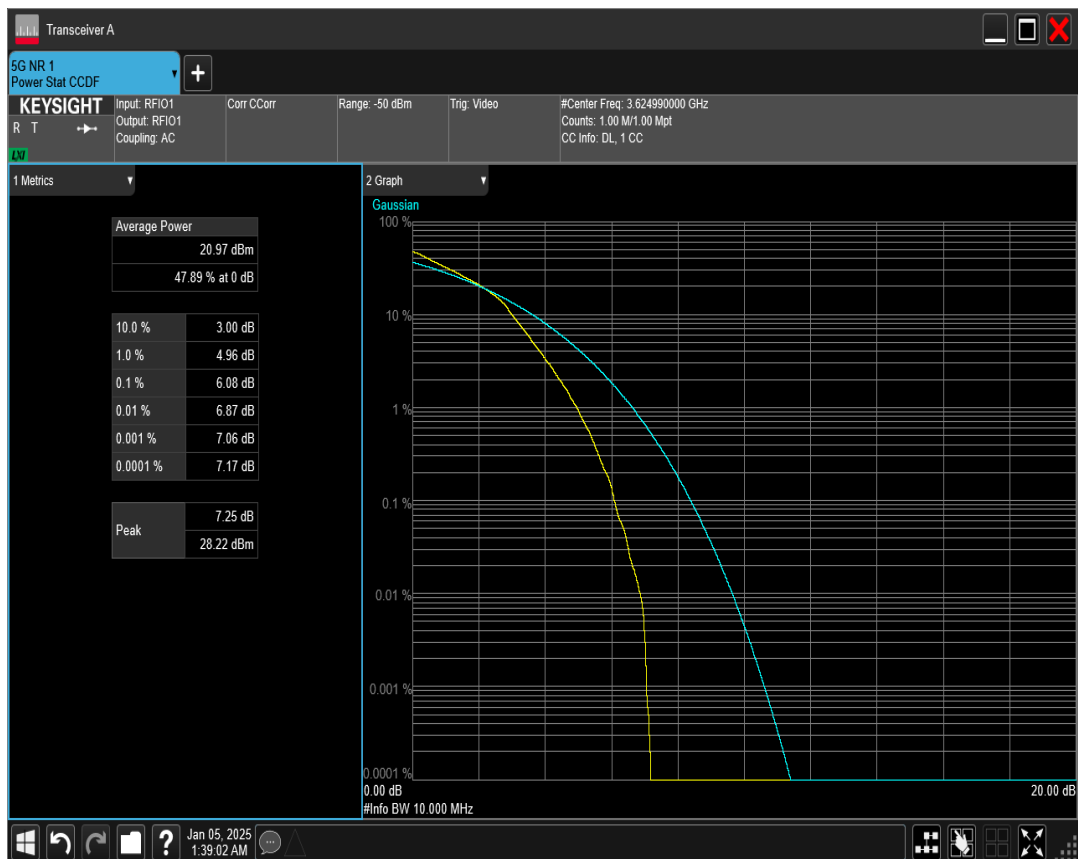


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=10MHz Channel=646332 RB=24@0*

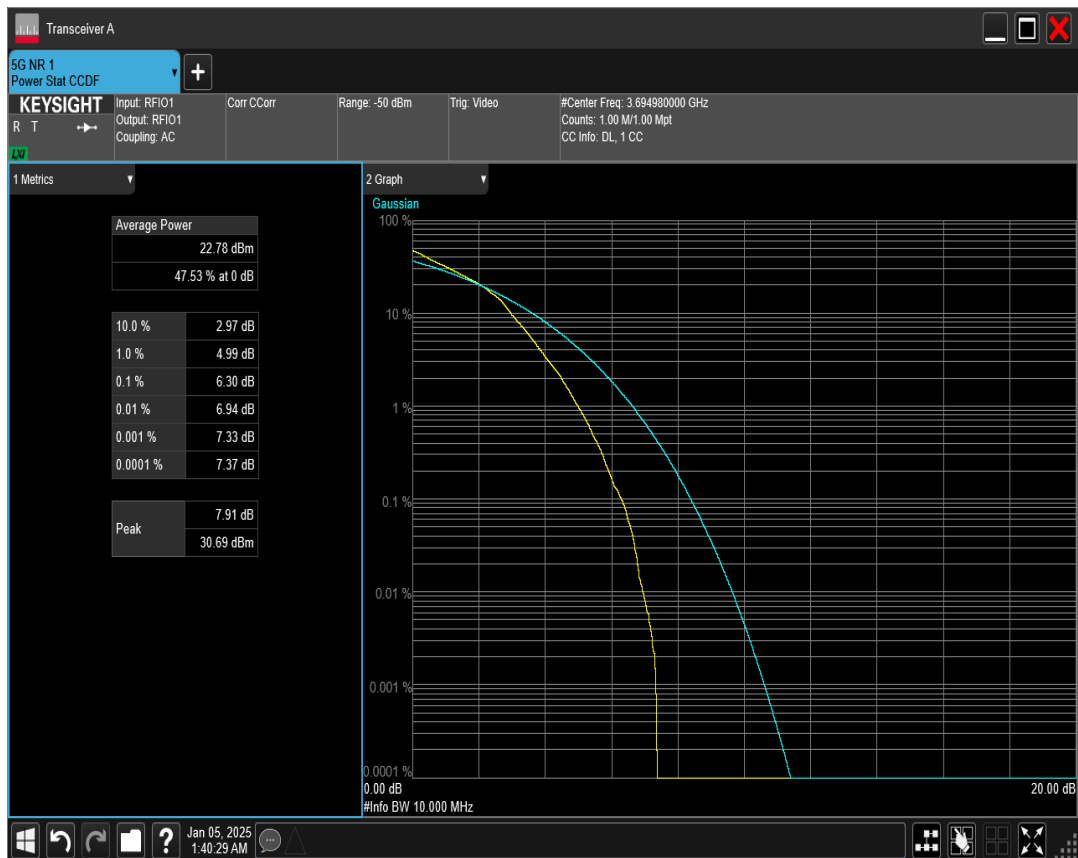


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=15MHz Channel=637168 RB=36@0*

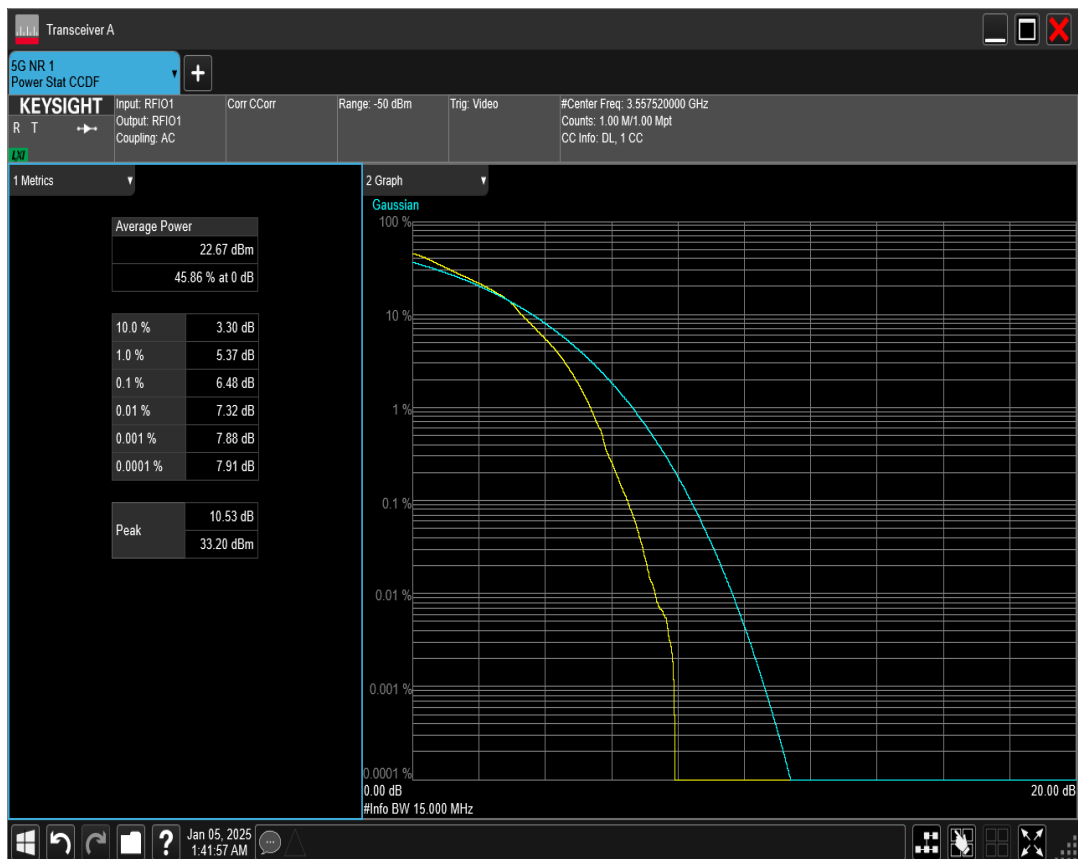


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=15MHz Channel=641666 RB=36@0*

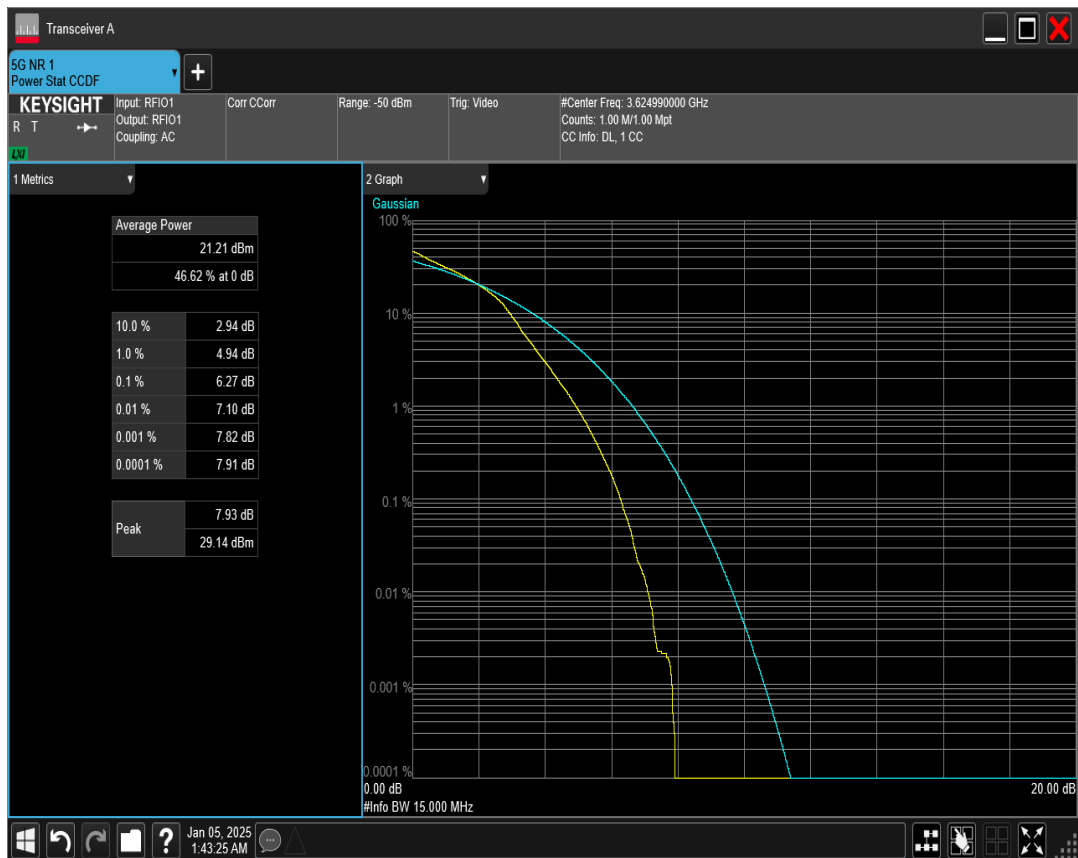


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=15MHz Channel=646166 RB=36@0*

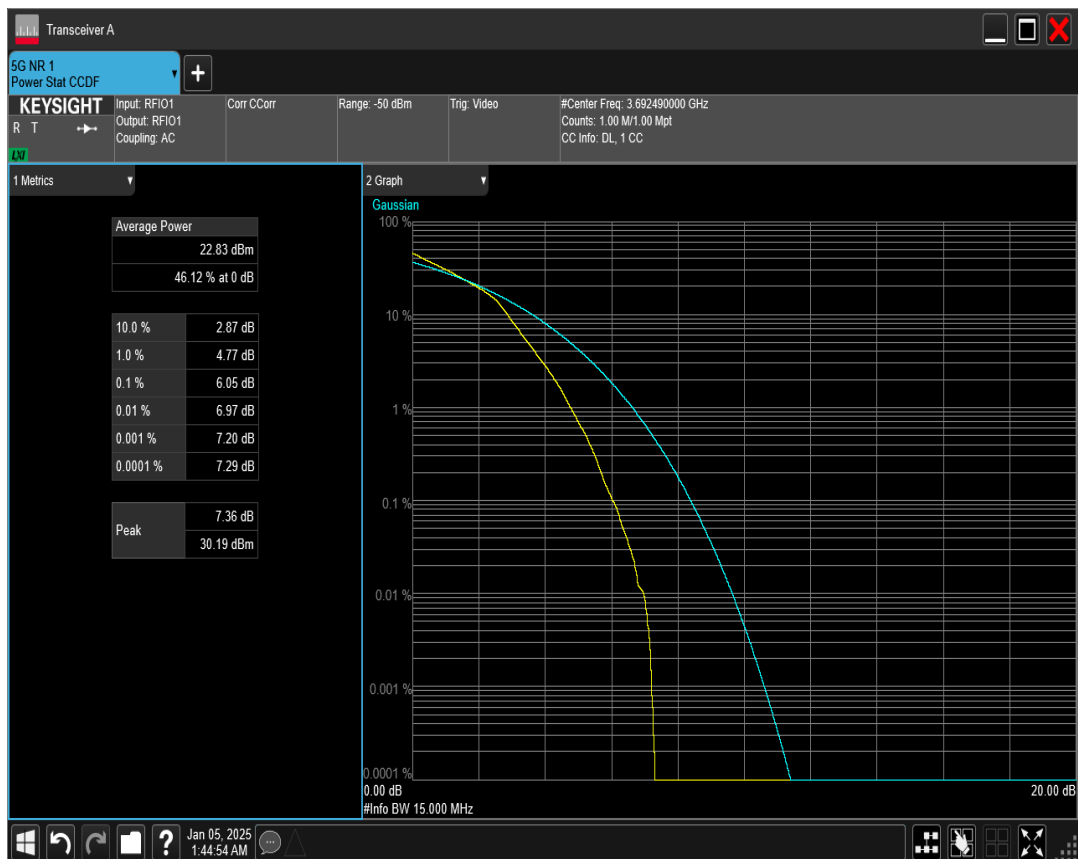


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=20MHz Channel=637334 RB=50@0*

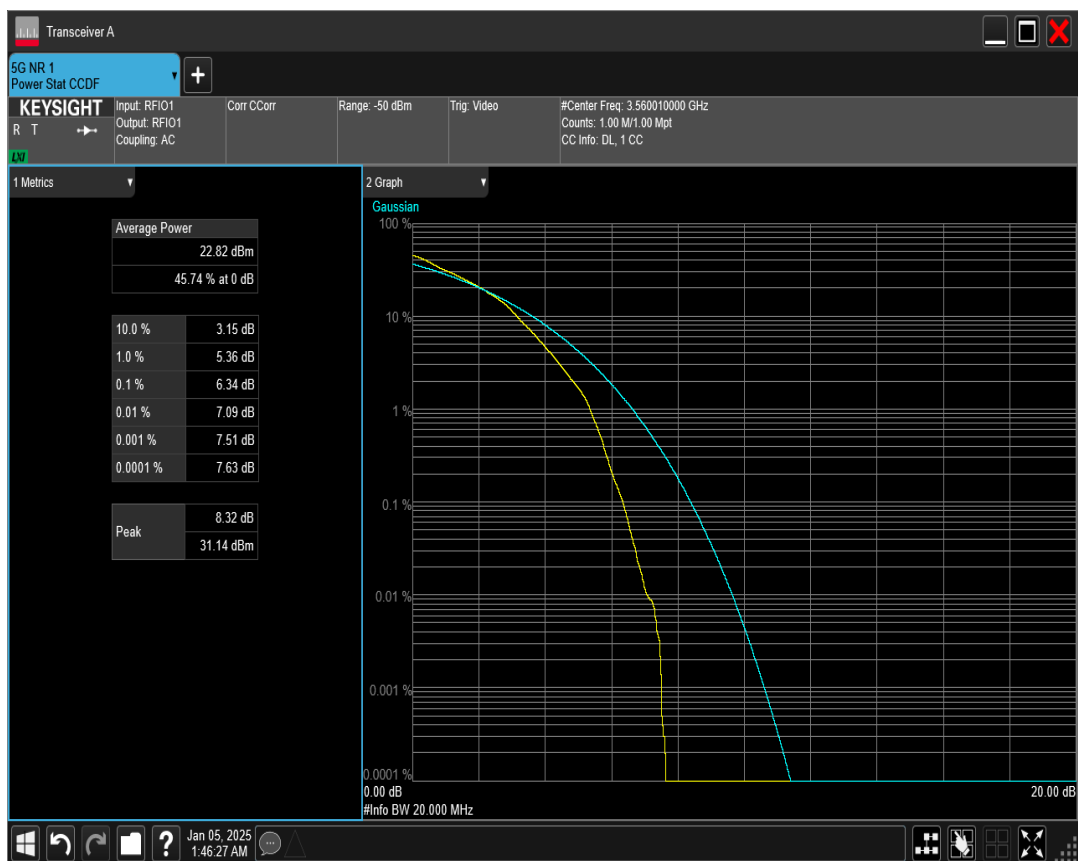


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=20MHz Channel=646000 RB=50@0*

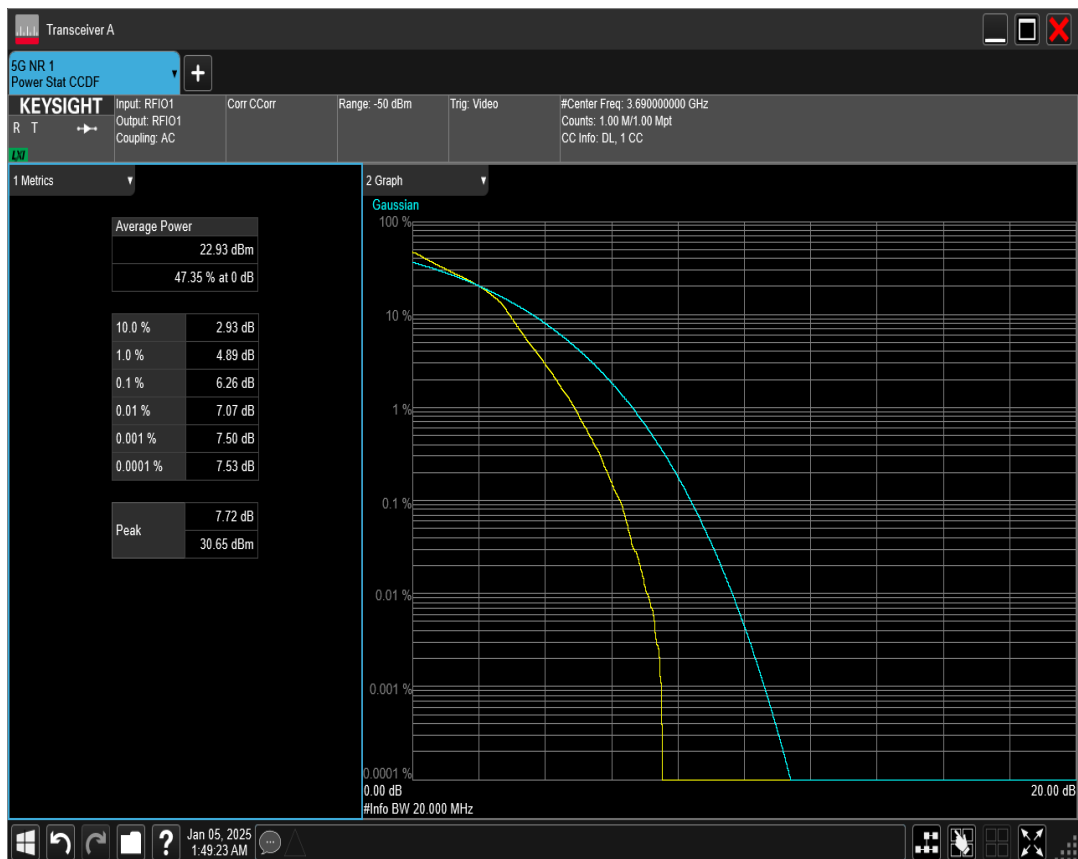


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=20MHz Channel=641666 RB=50@0*

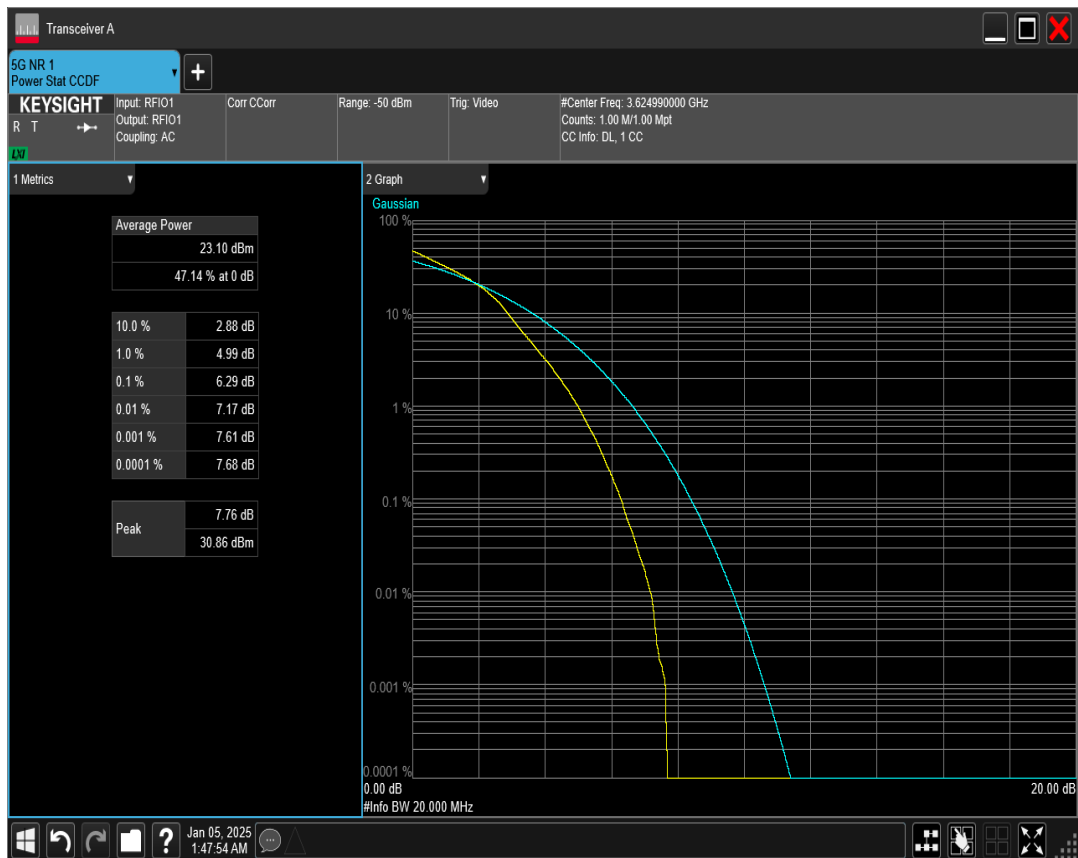


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=40MHz Channel=638000 RB=100@0*

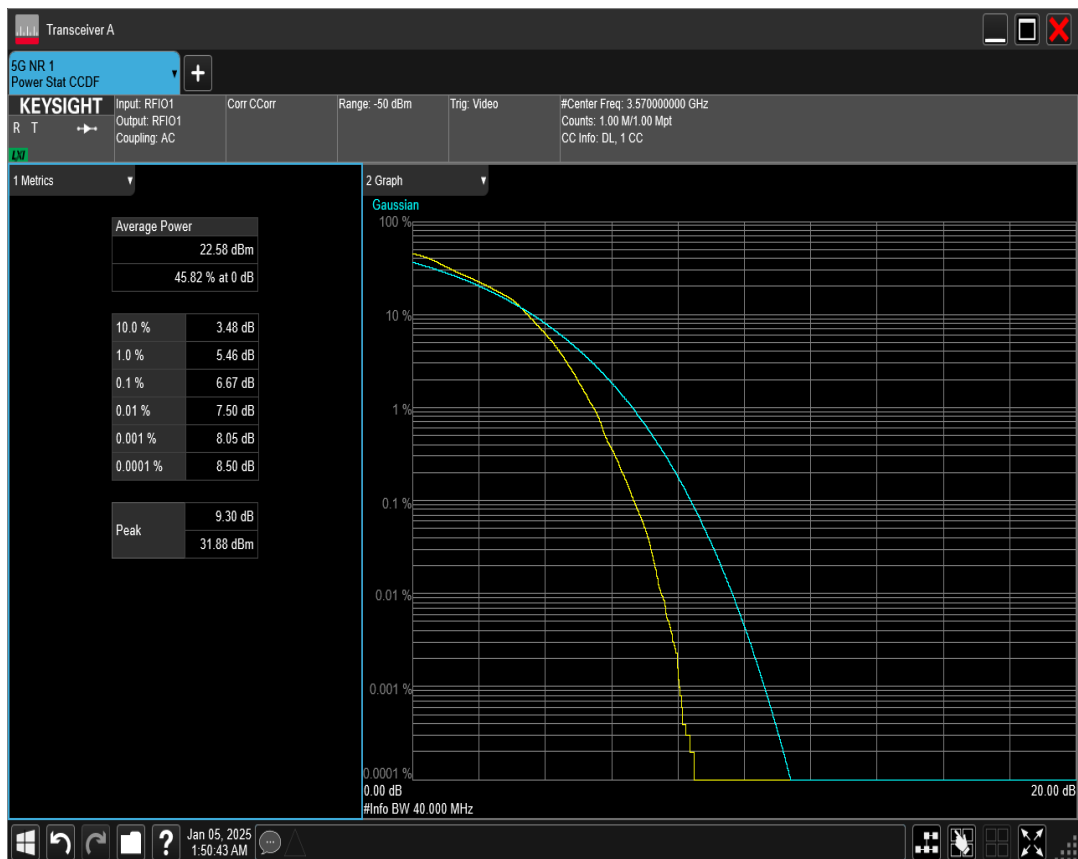


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=40MHz Channel=641666 RB=100@0*

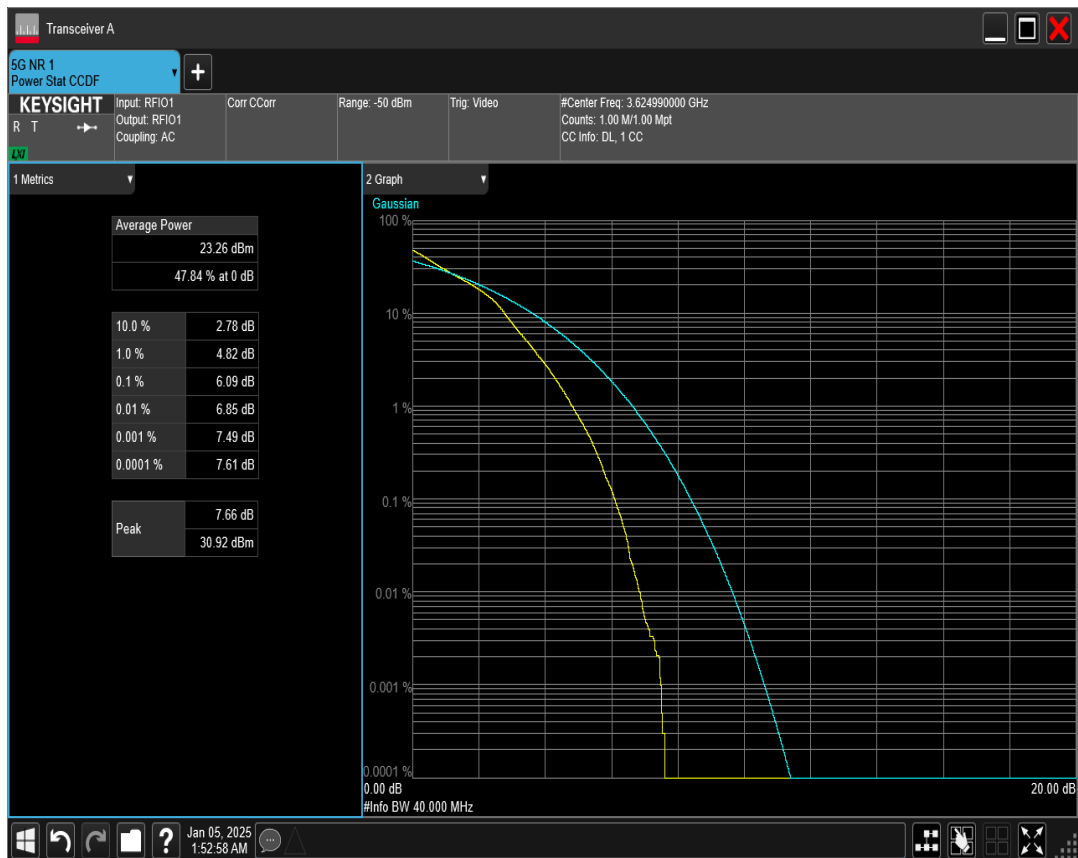


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=40MHz Channel=645332 RB=100@0*

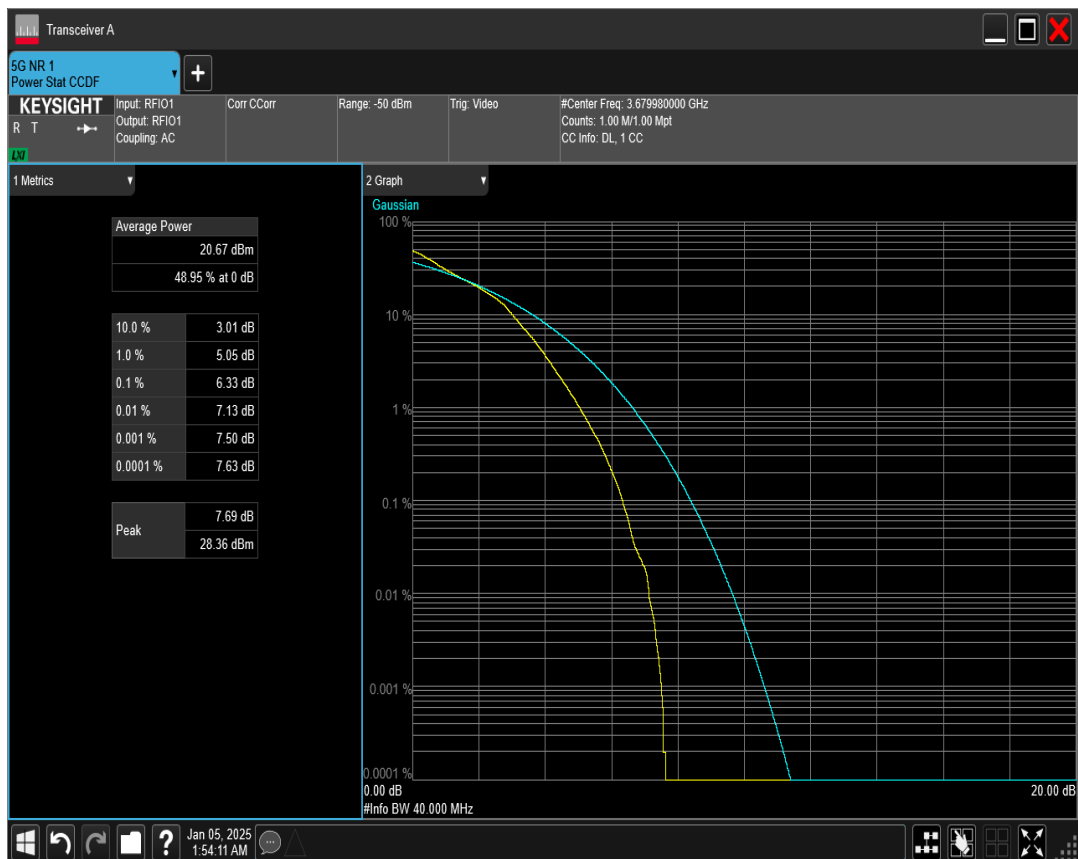


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=50MHz Channel=638334 RB=128@0*

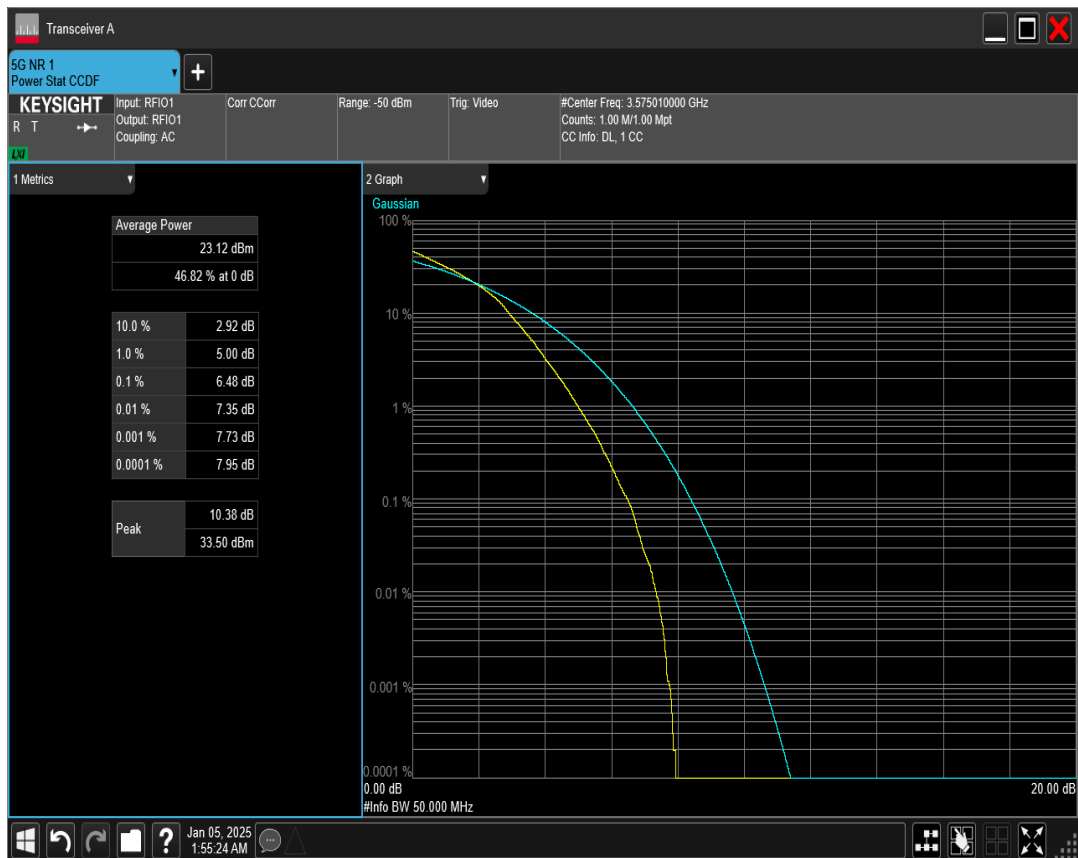


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=50MHz Channel=645000 RB=128@0*

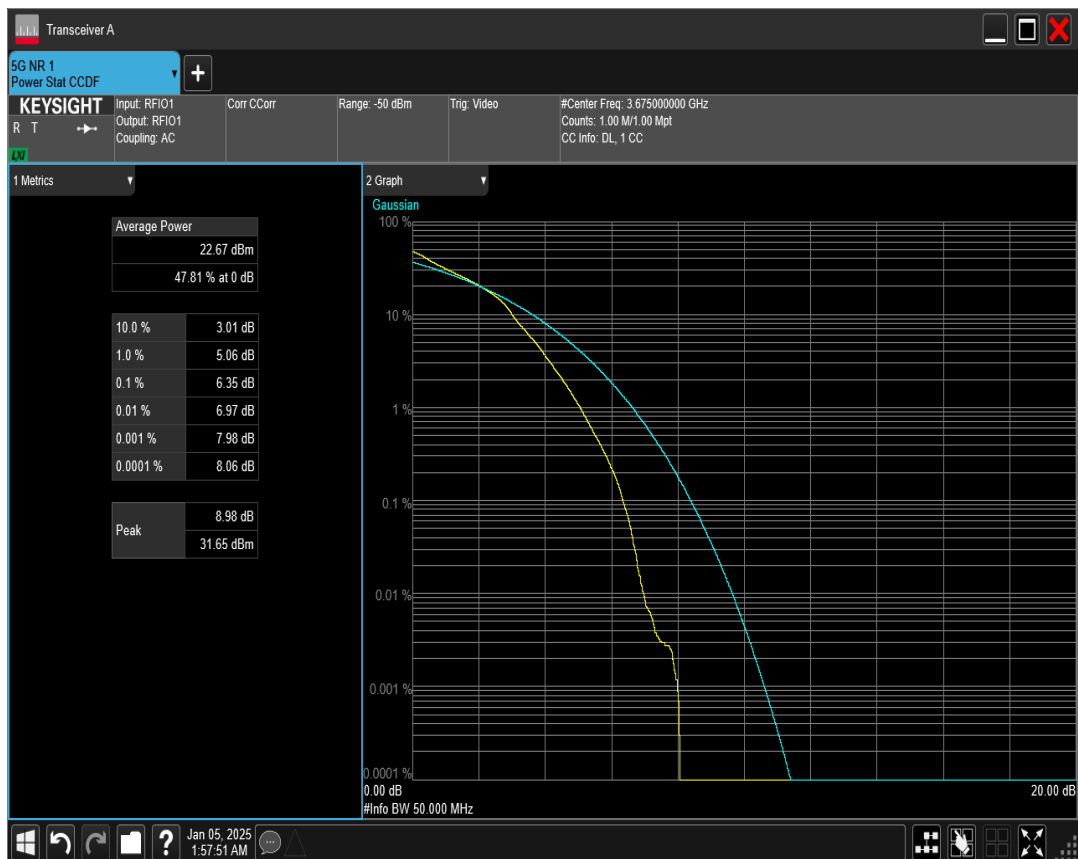


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=50MHz Channel=641666 RB=128@0*

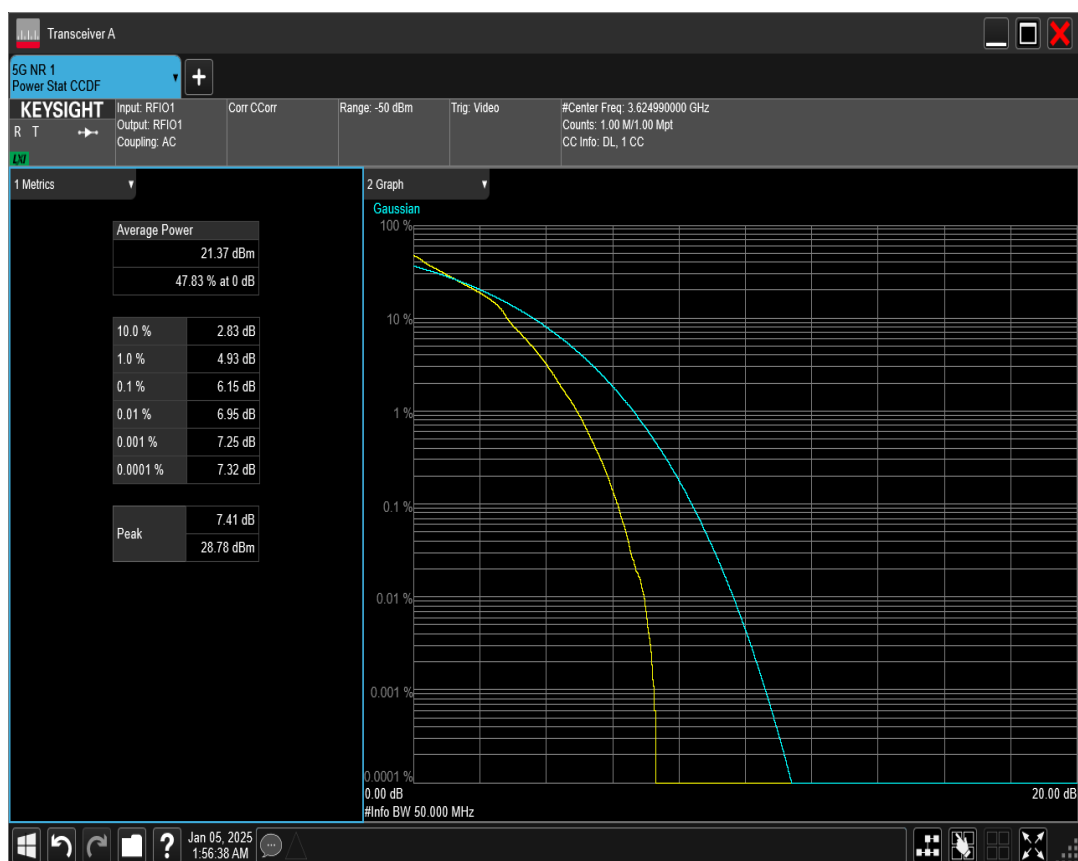


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=60MHz Channel=638668 RB=162@0*

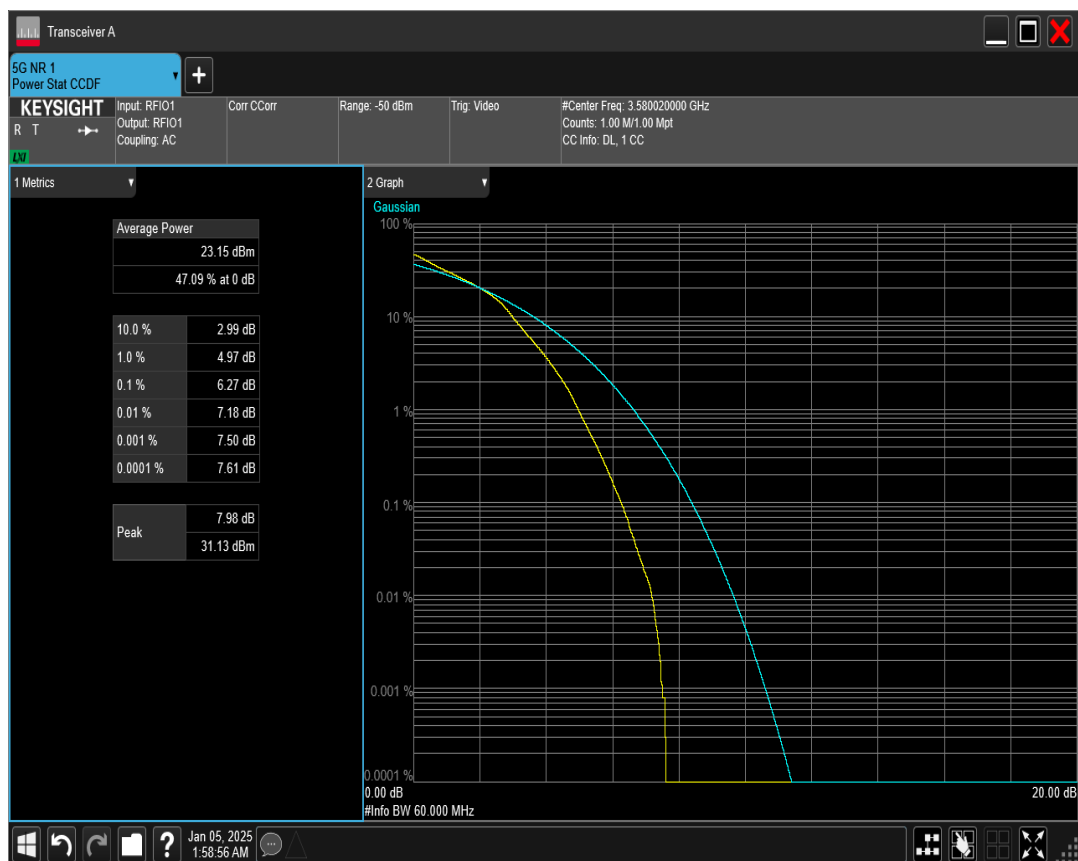


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=60MHz Channel=641666 RB=162@0*

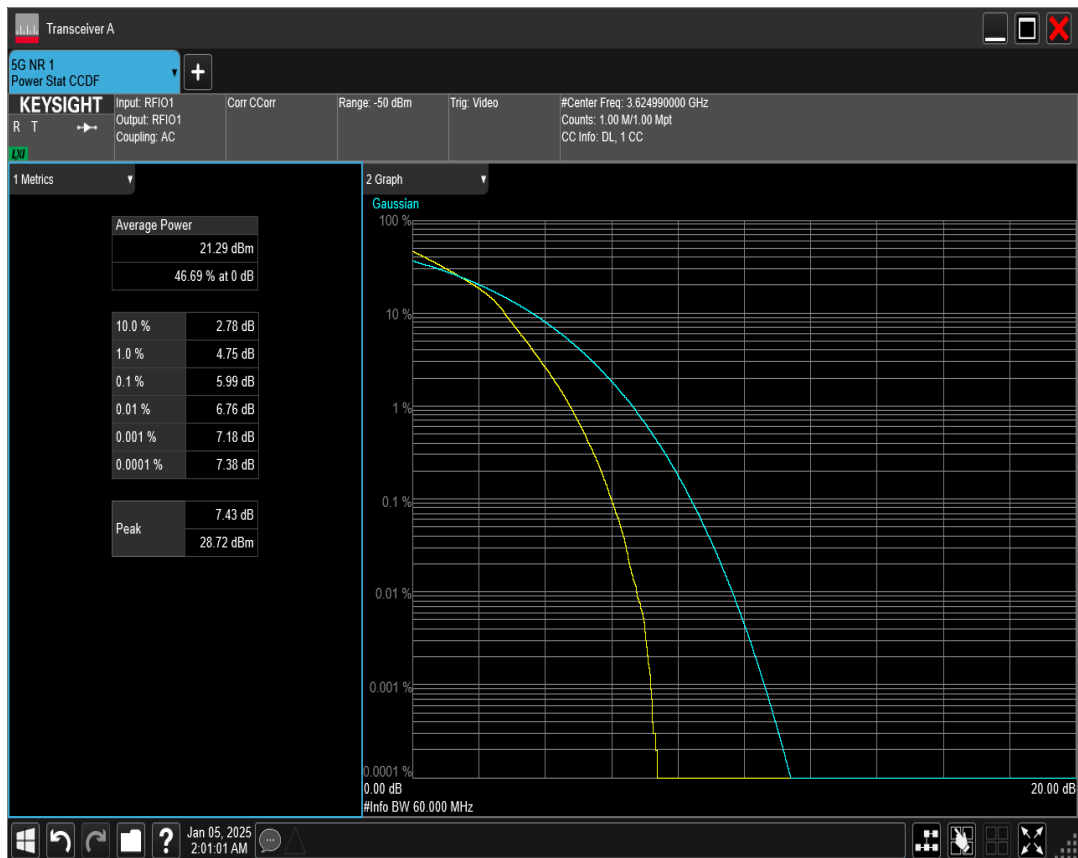


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=60MHz Channel=644666 RB=162@0*

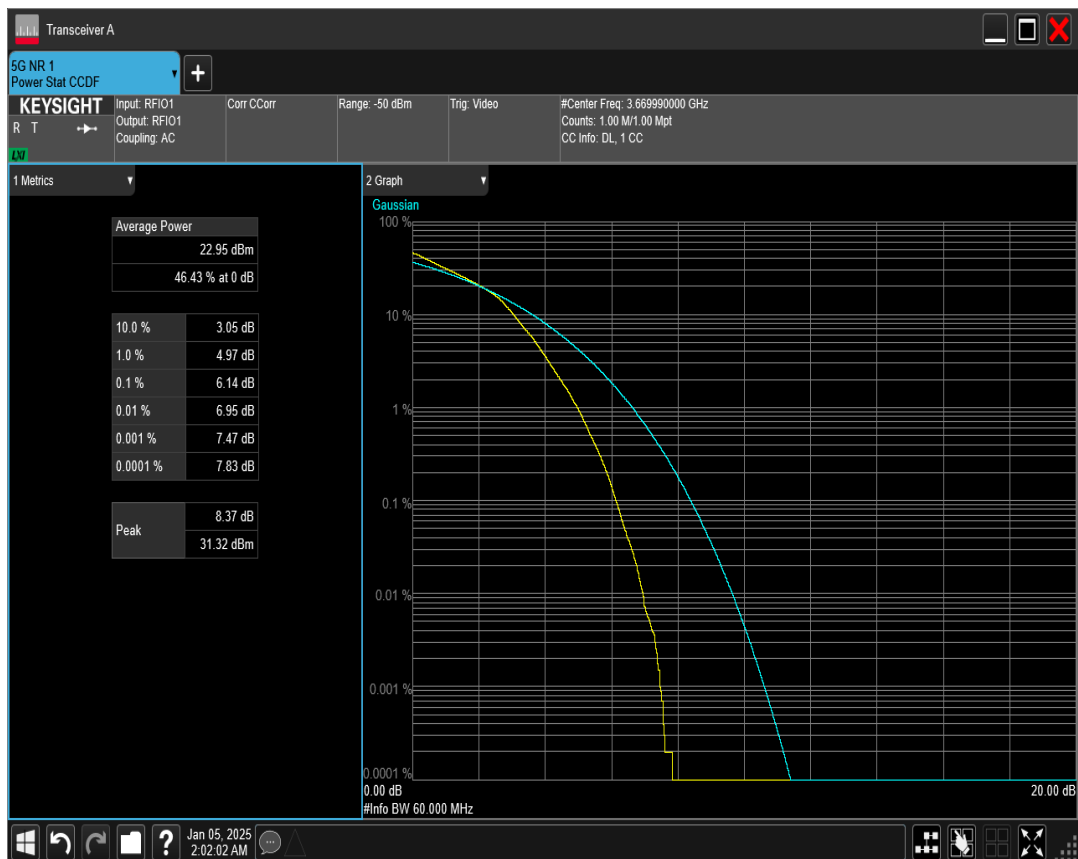


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=70MHz Channel=639000 RB=180@0*

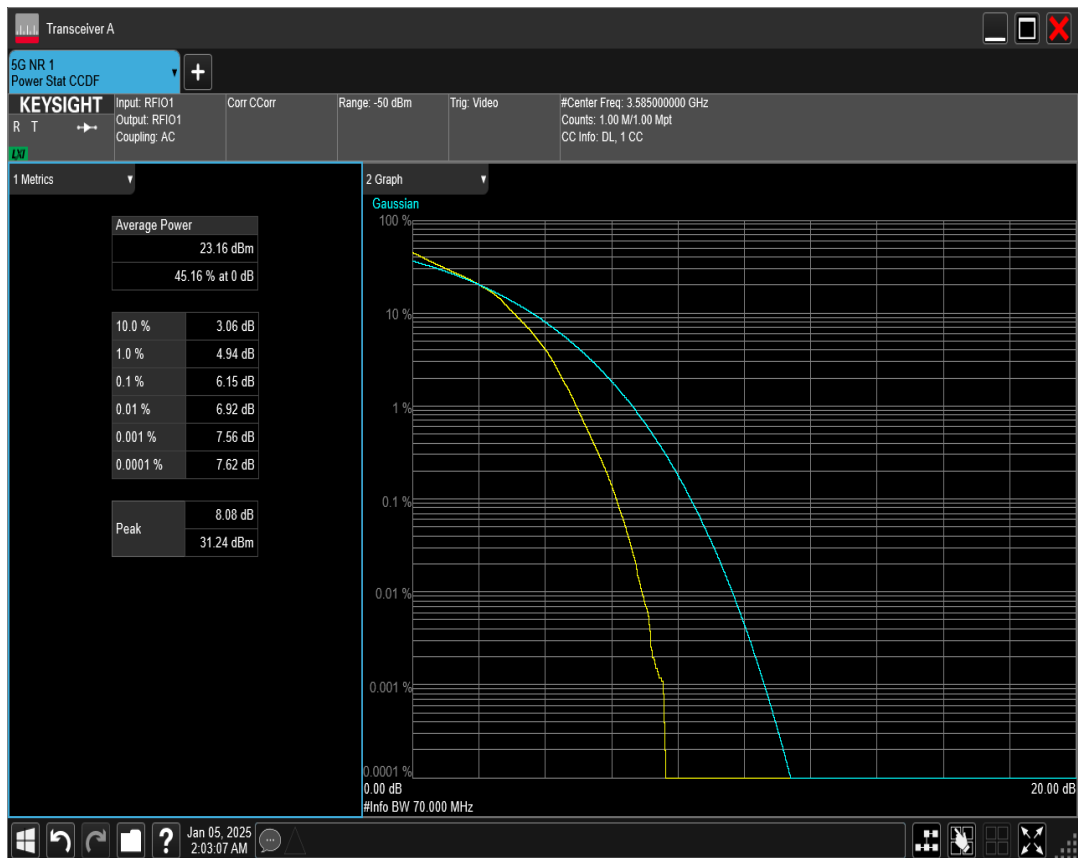


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=70MHz Channel=644332 RB=180@0*

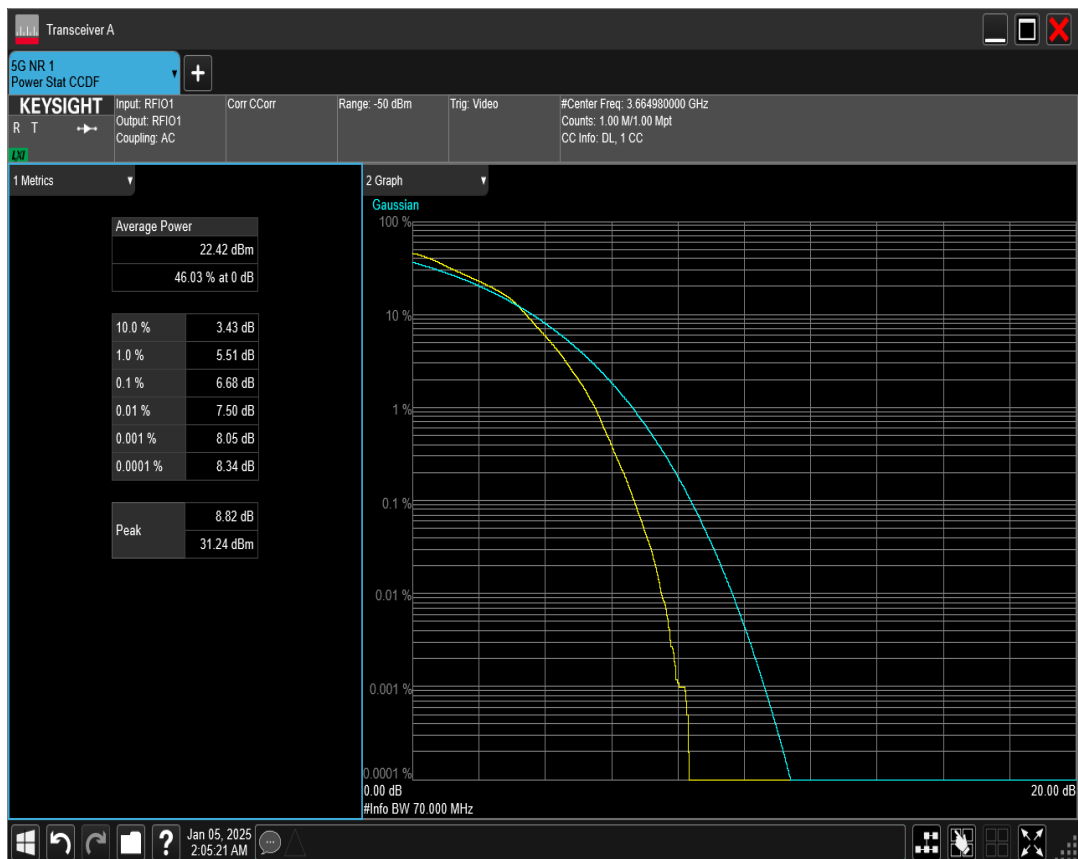


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=70MHz Channel=641666 RB=180@0*

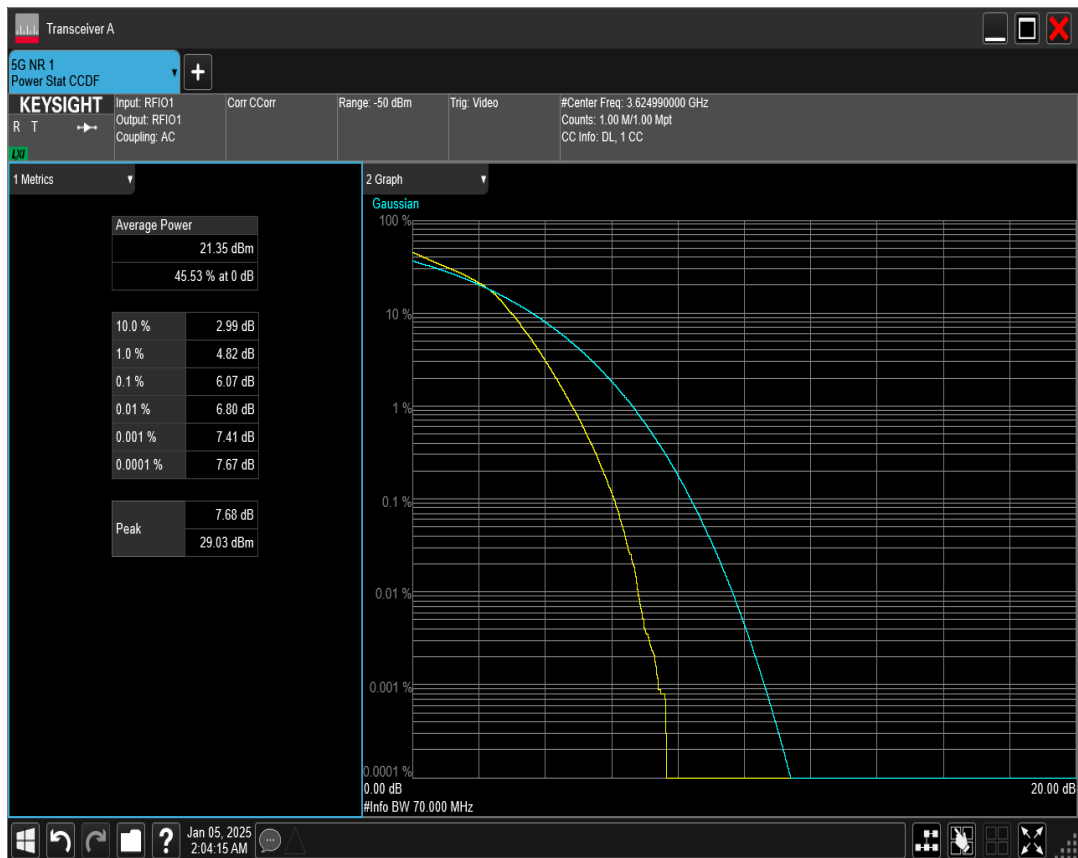


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=80MHz Channel=641666 RB=216@0*

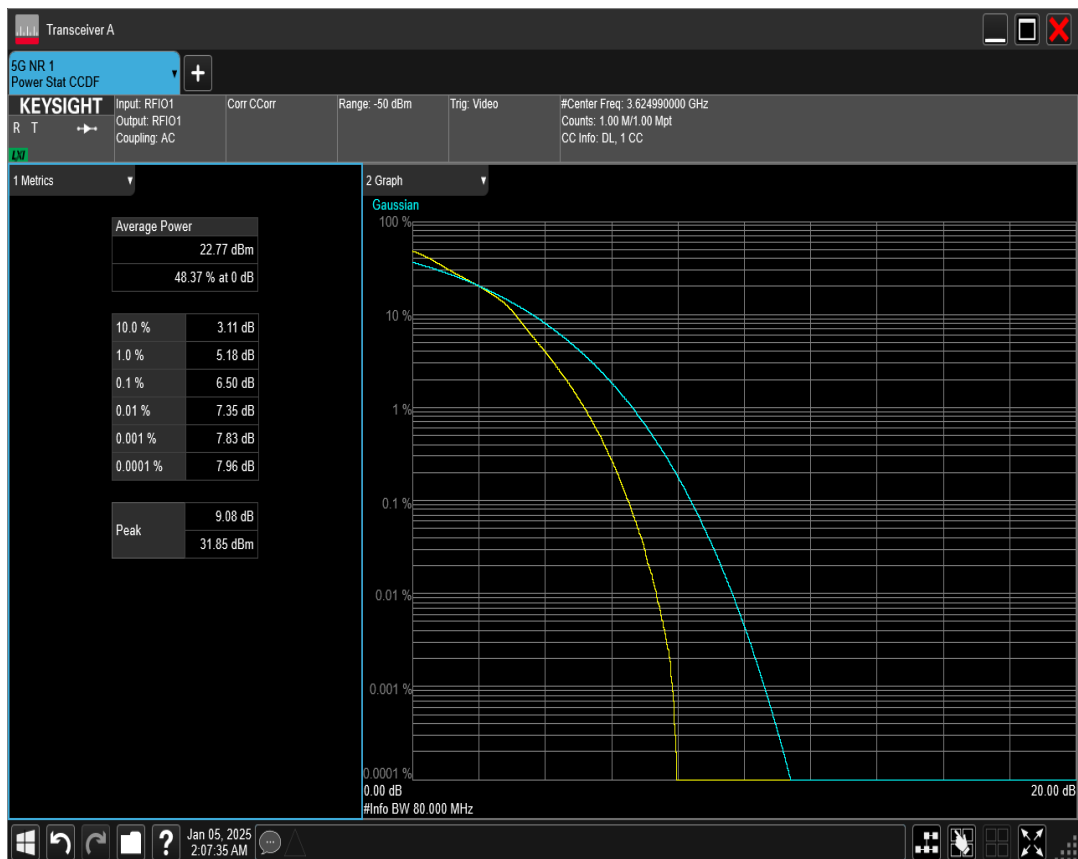


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=80MHz Channel=639334 RB=216@0*

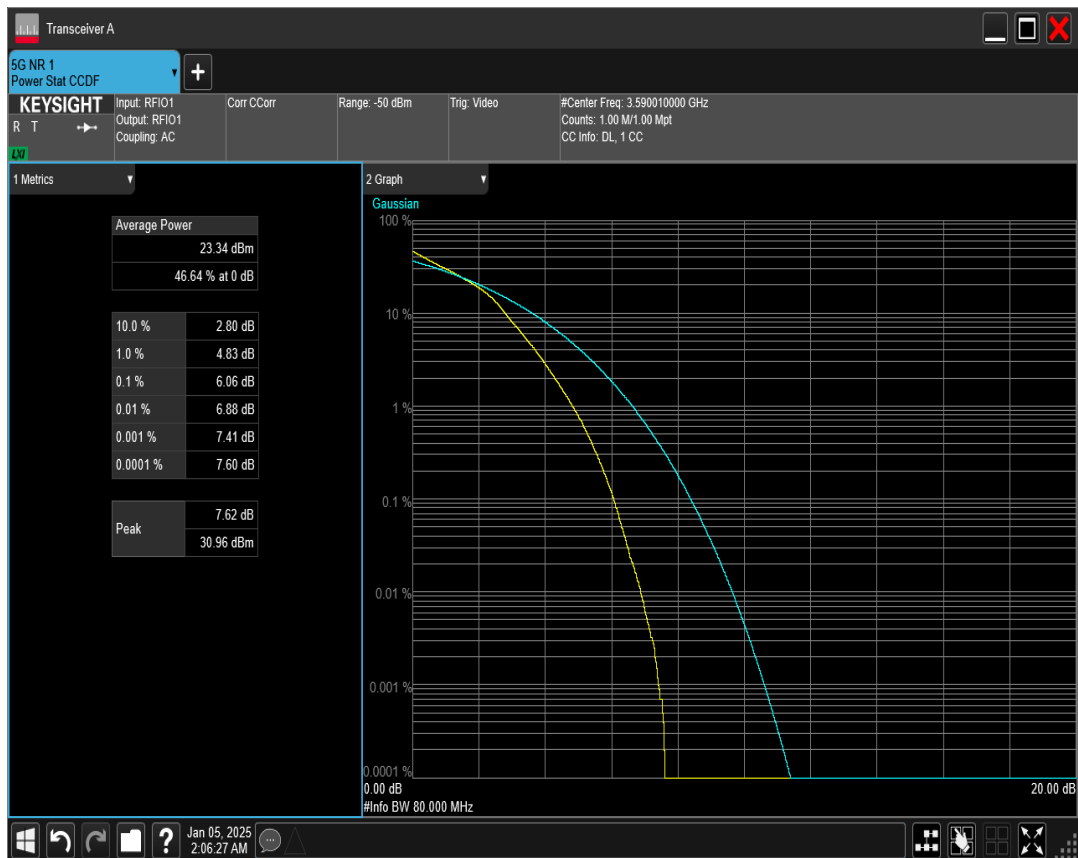


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=80MHz Channel=644000 RB=216@0*

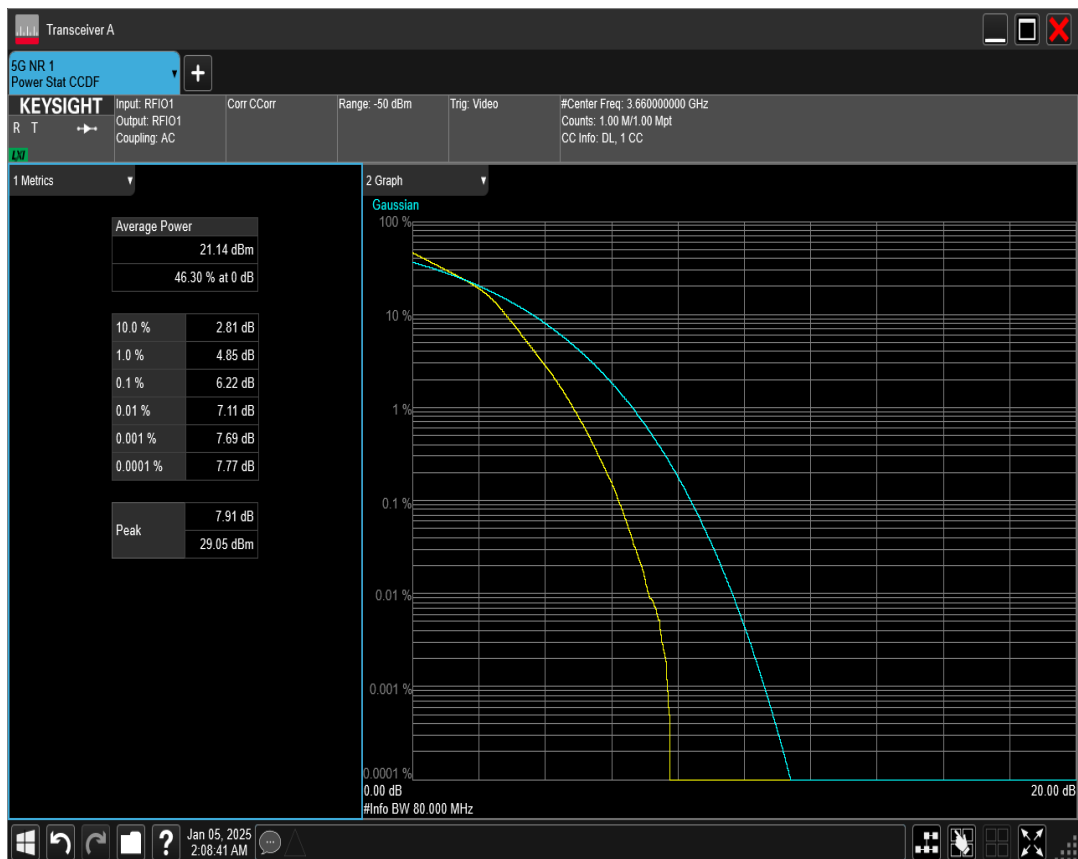


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=90MHz Channel=639668 RB=240@0*

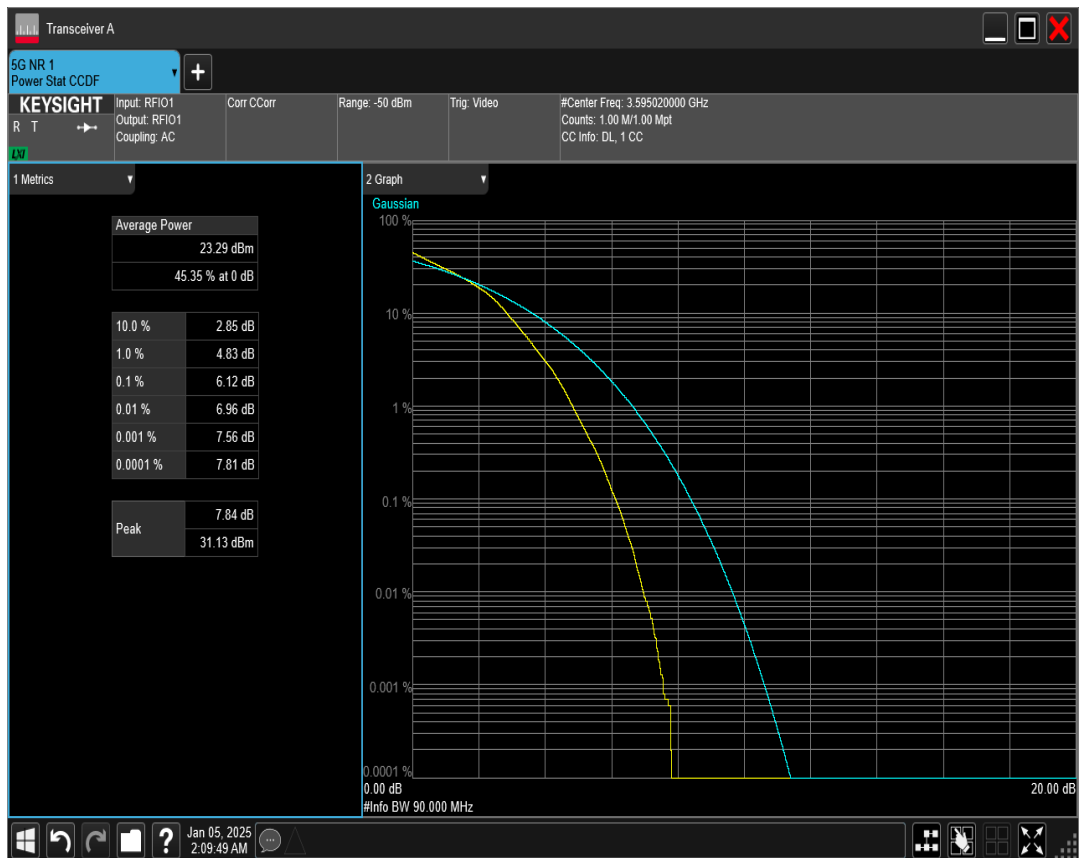


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=90MHz Channel=641666 RB=240@0*

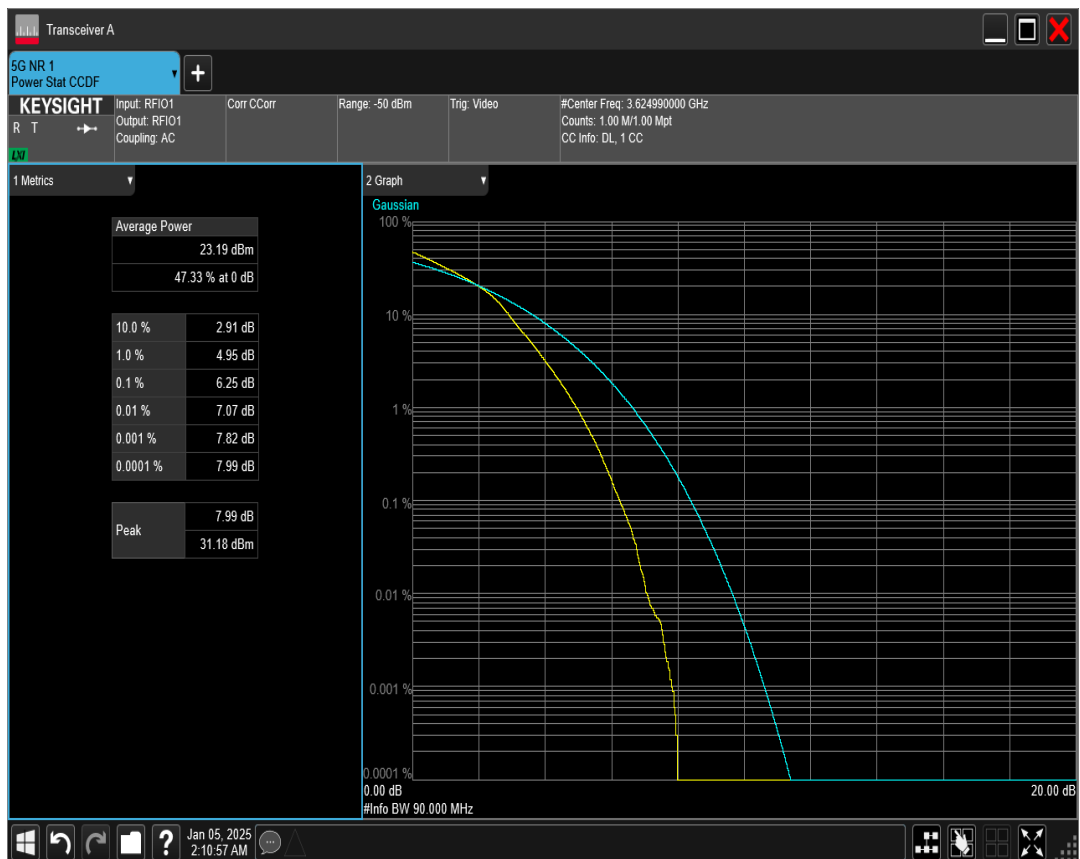


*n78(3550-3700) SCS=30kHz DFT\_QAM16 BW=90MHz Channel=643666 RB=240@0*

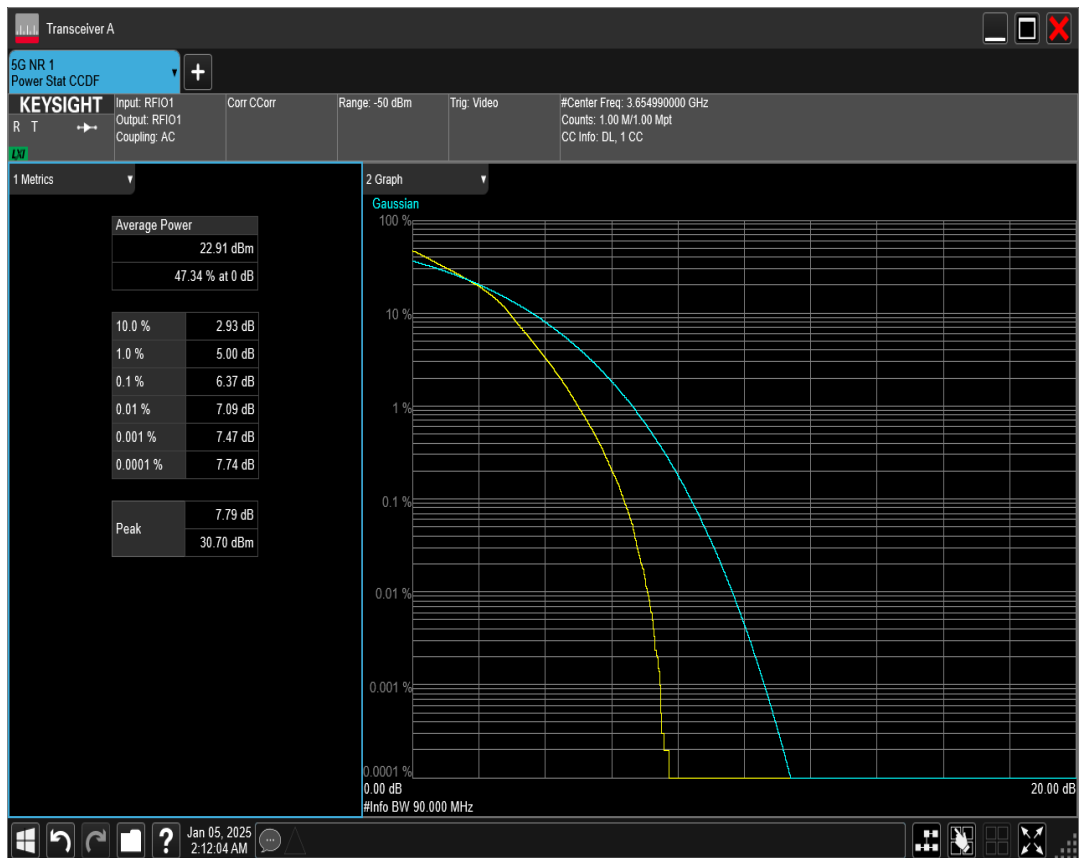


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=100MHz Channel=640000 RB=270@0*

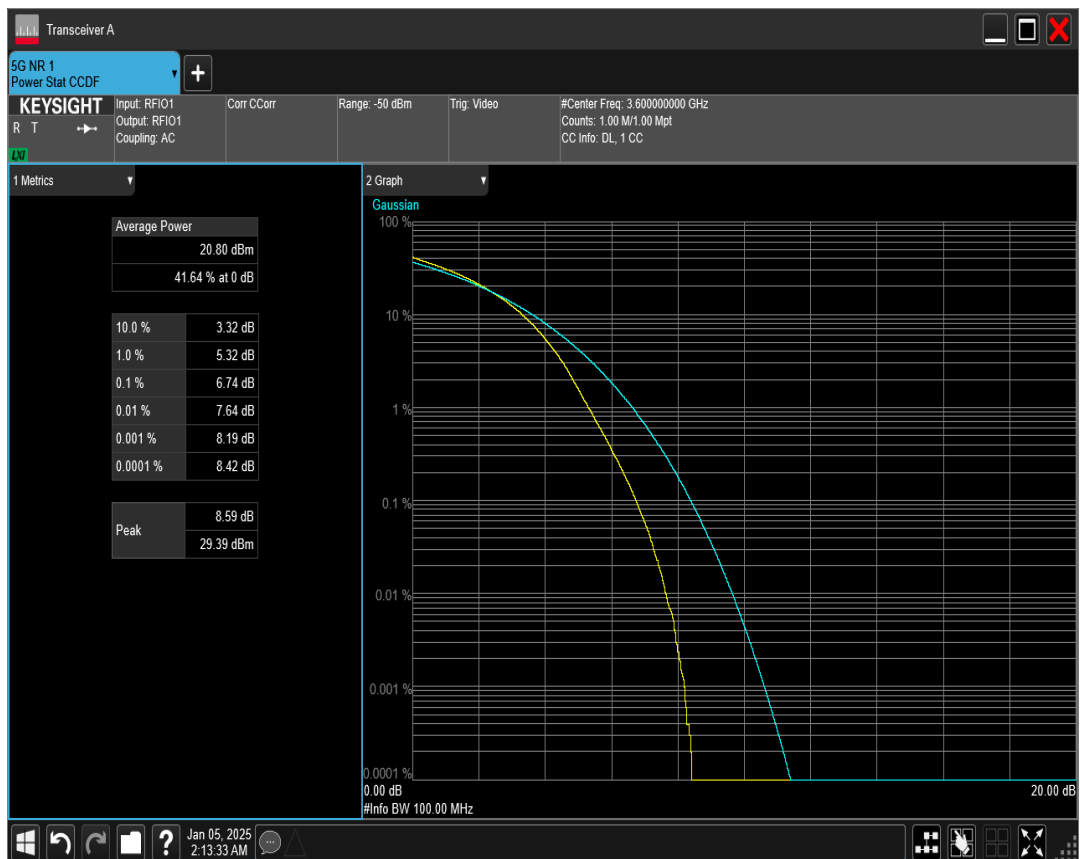


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=100MHz Channel=641666 RB=270@0*

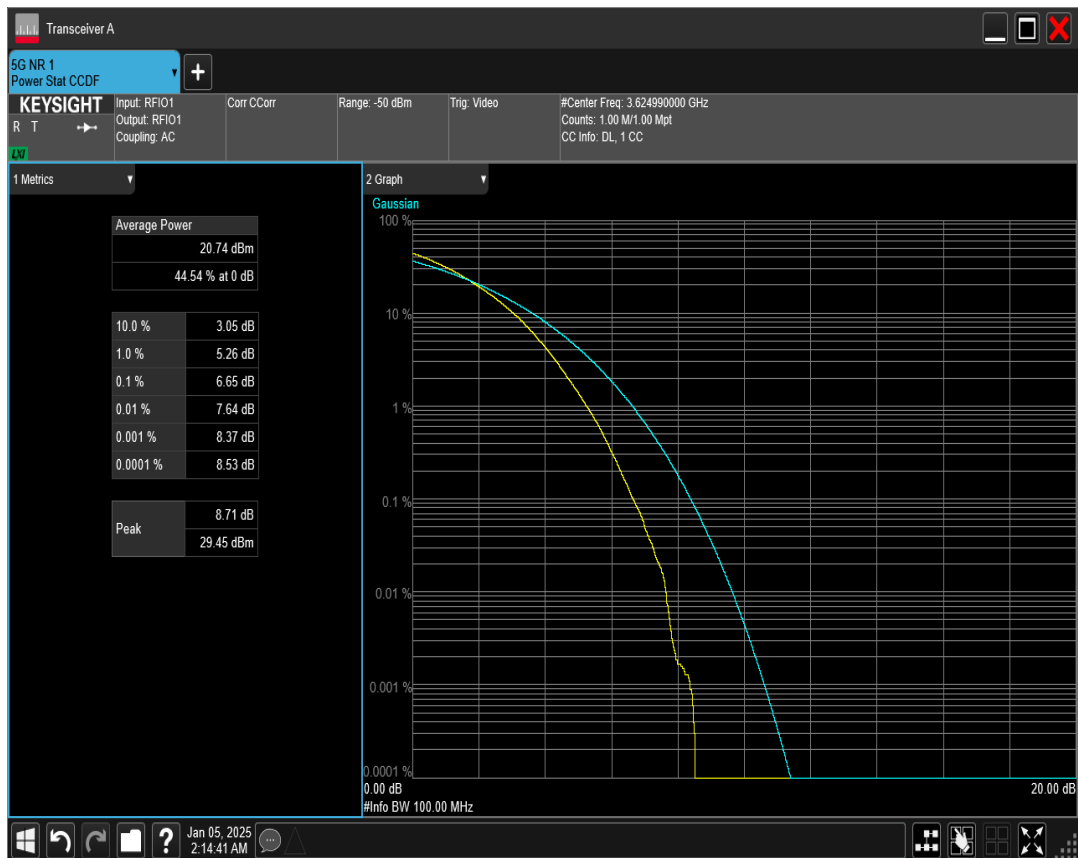


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=10MHz Channel=641666 RB=24@0*

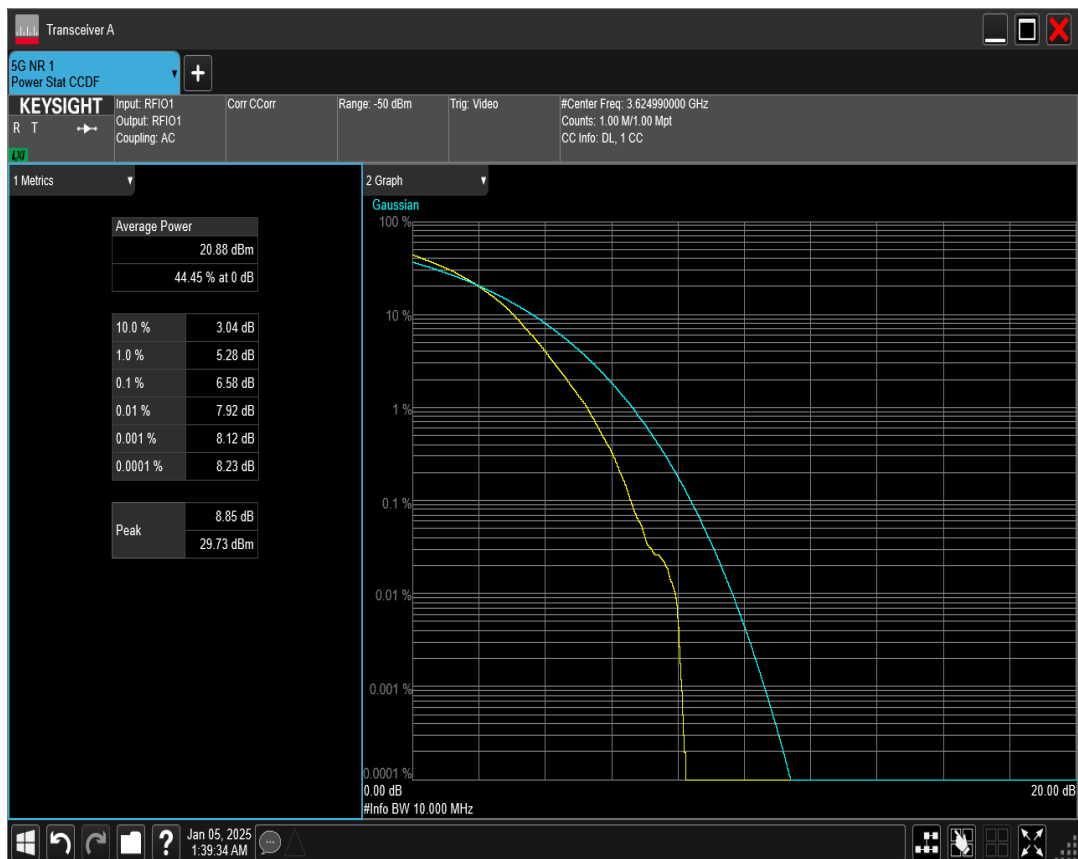


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=10MHz Channel=637000 RB=24@0*

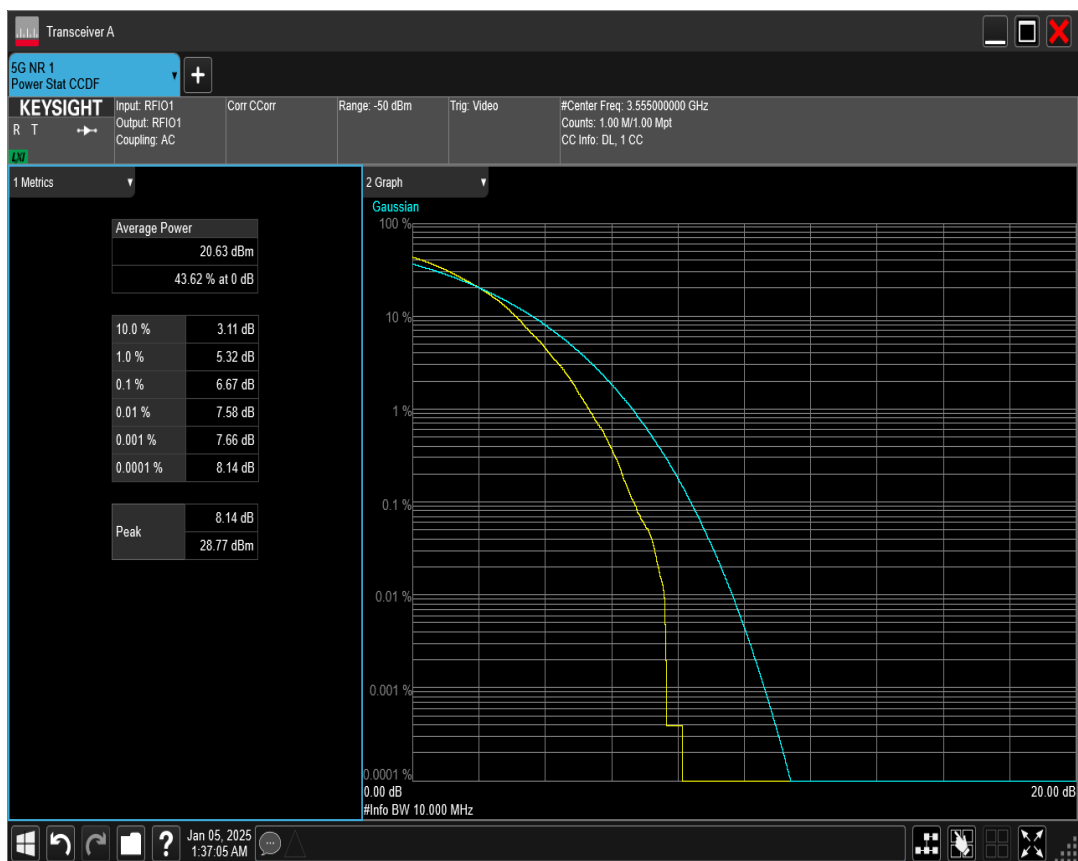


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=100MHz Channel=643332 RB=270@0*

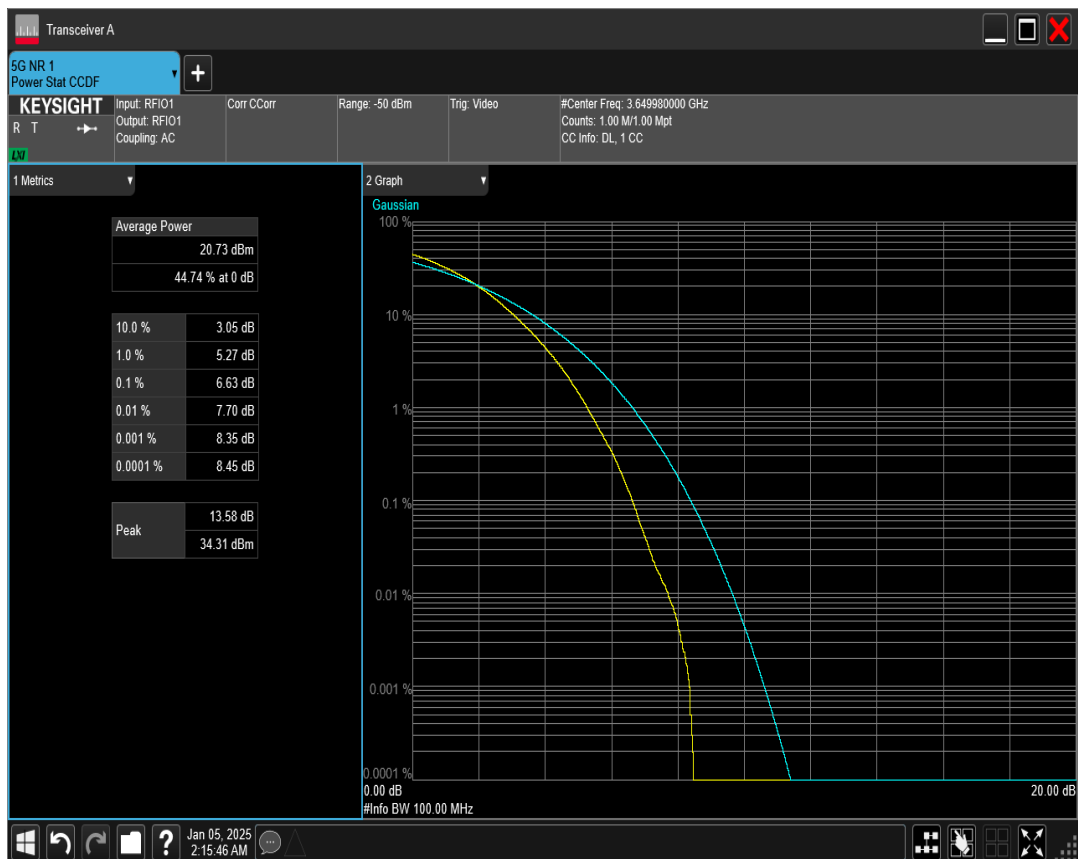


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=10MHz Channel=646332 RB=24@0*

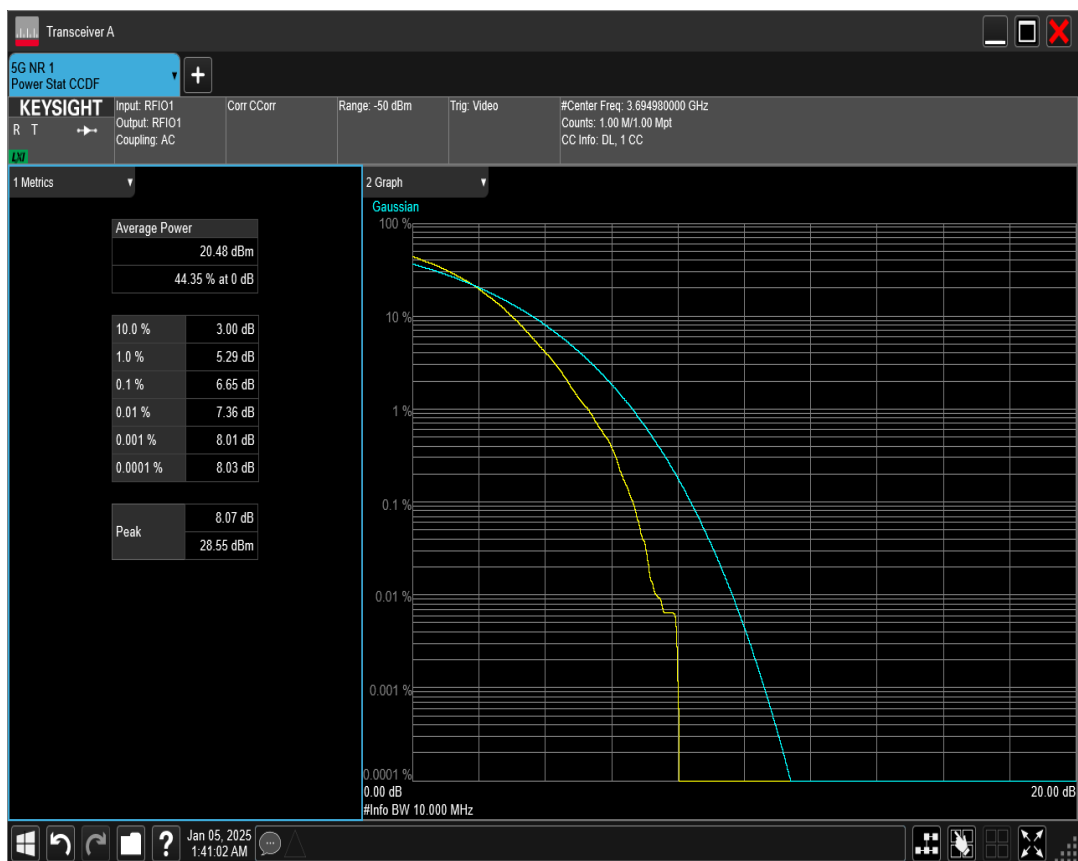


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=15MHz Channel=637168 RB=36@0*

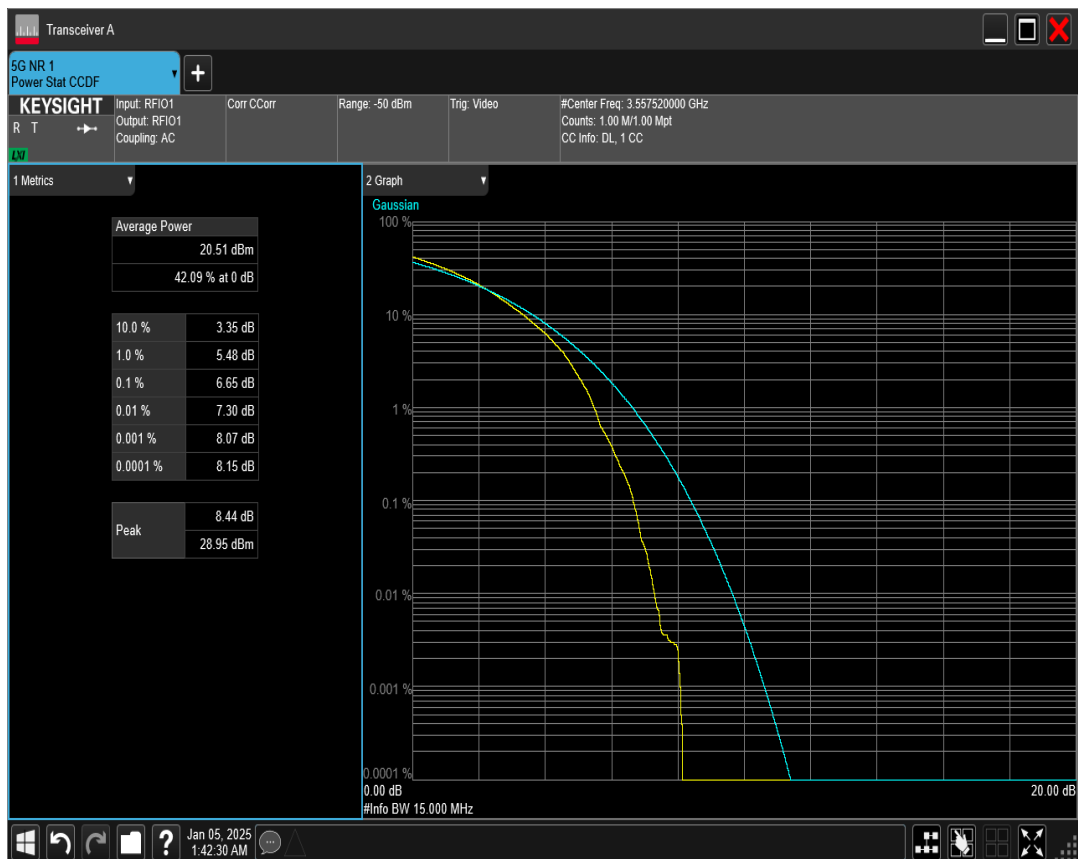


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=15MHz Channel=641666 RB=36@0*

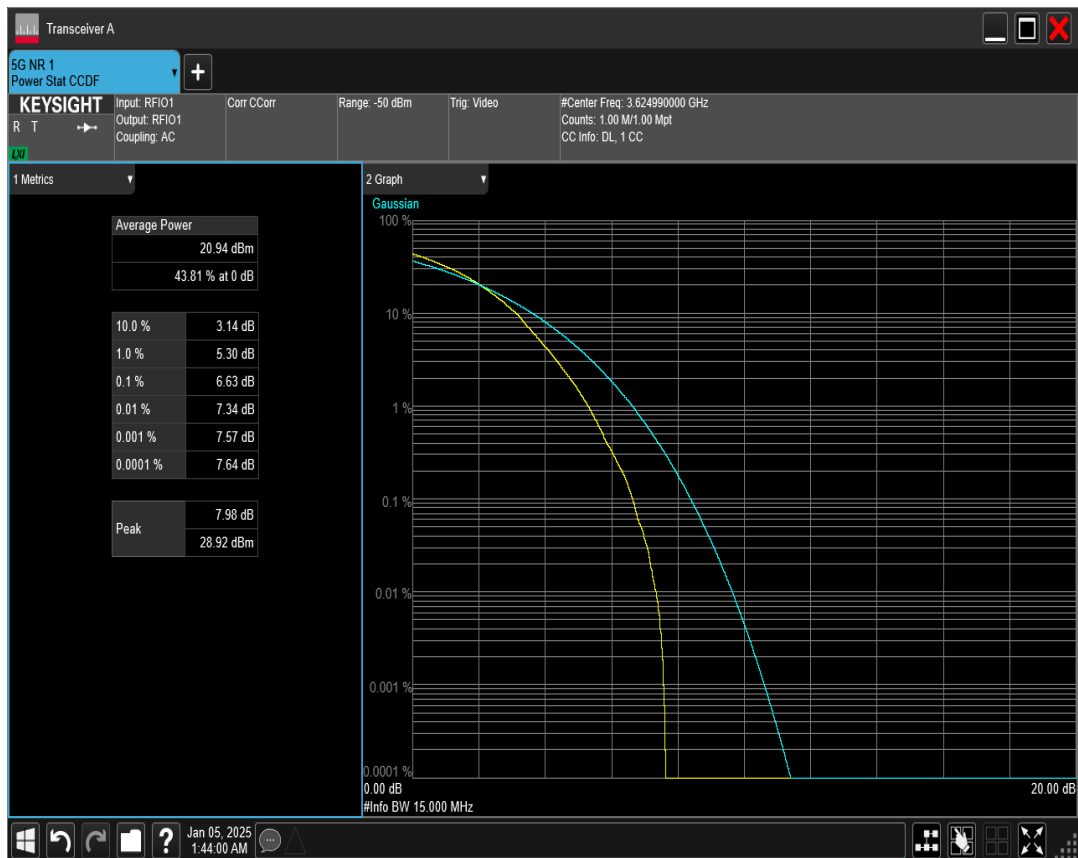


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=15MHz Channel=646166 RB=36@0*

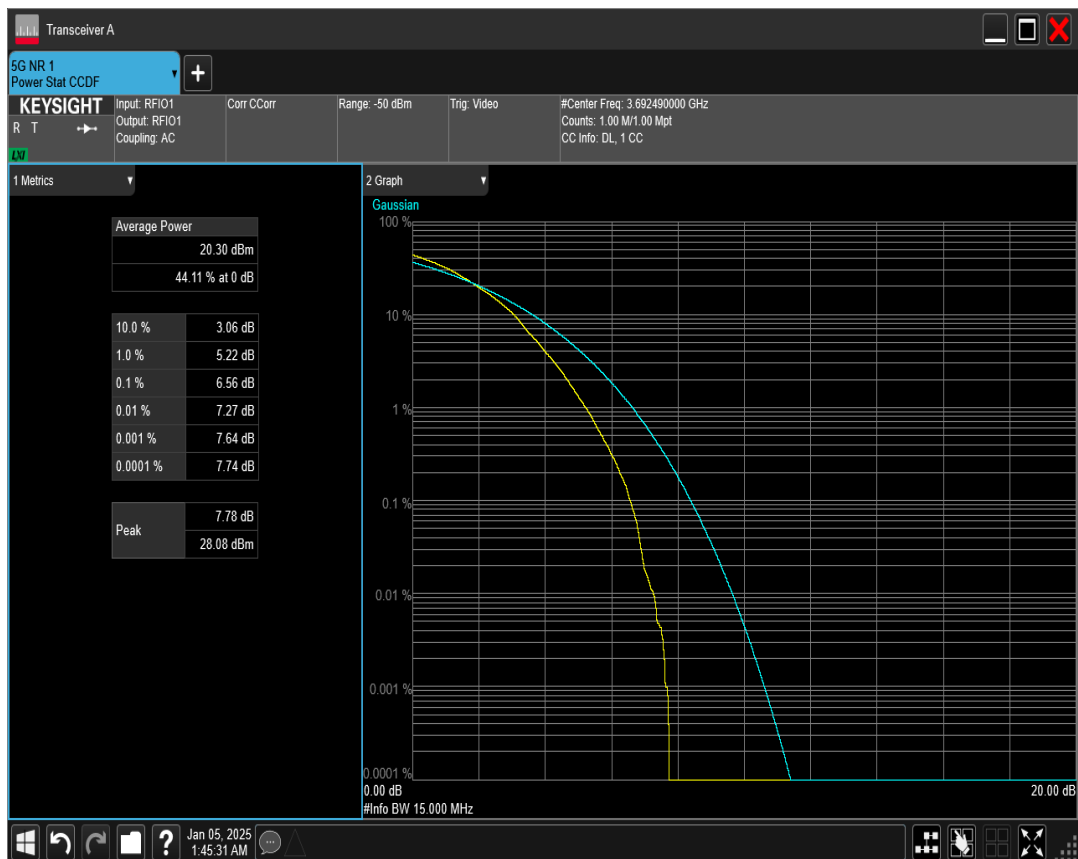


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=20MHz Channel=641666 RB=50@0*

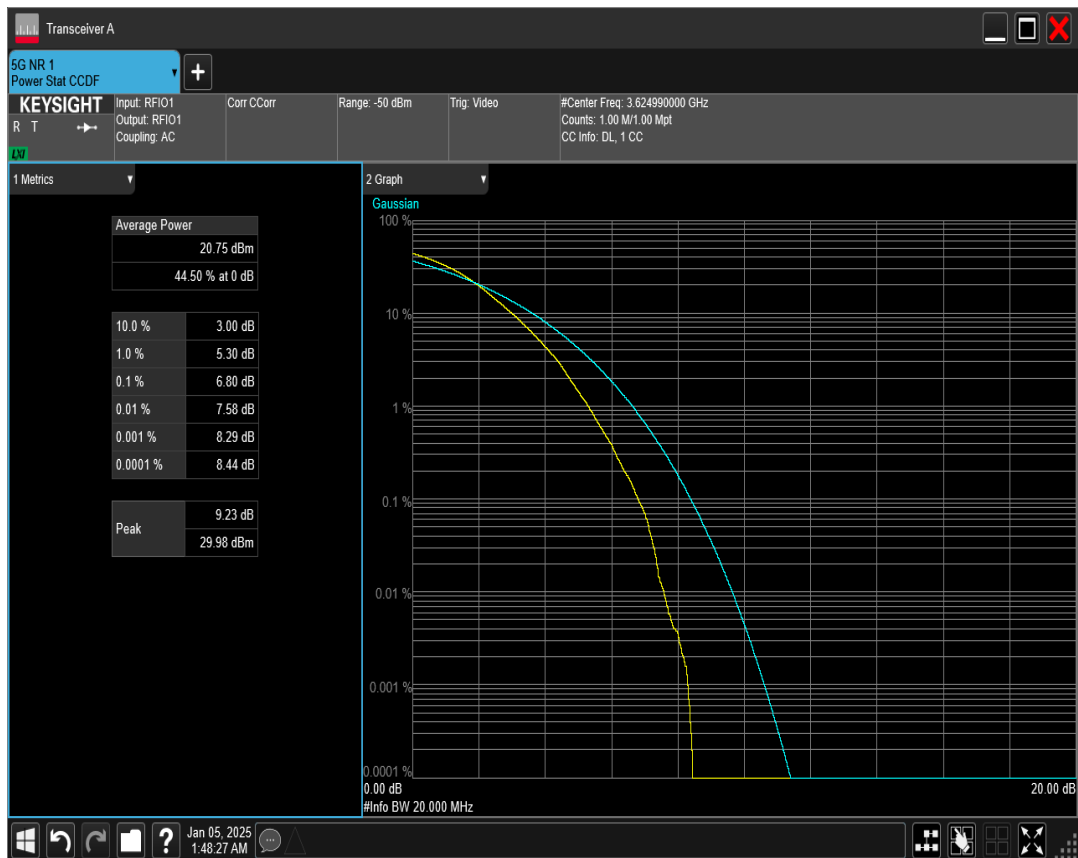


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=20MHz Channel=637334 RB=50@0*

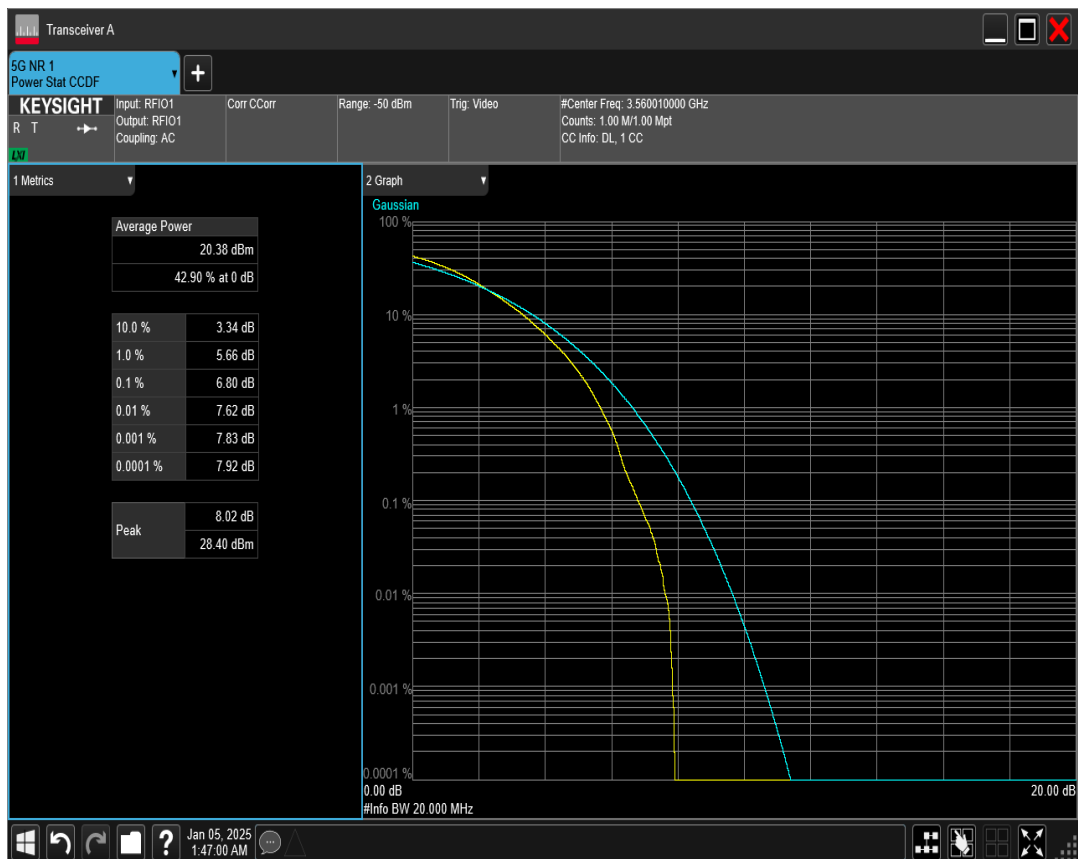


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=20MHz Channel=646000 RB=50@0*

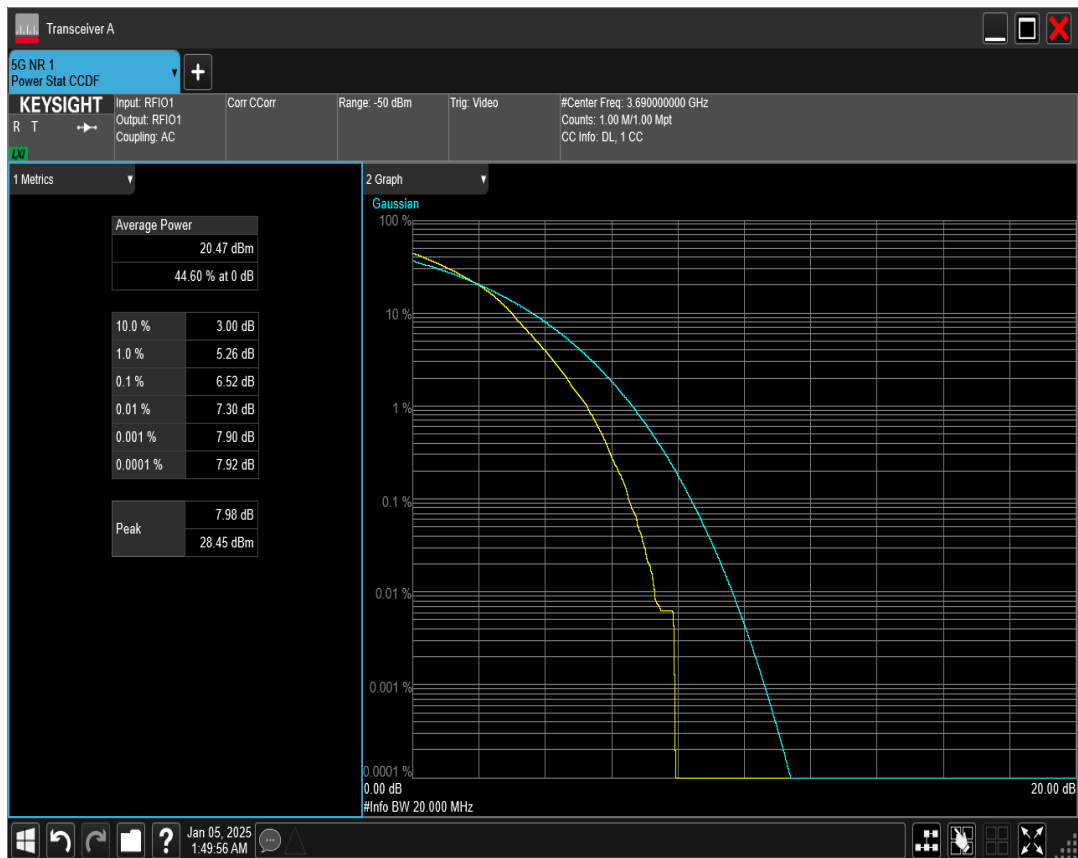


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=40MHz Channel=641666 RB=100@0*

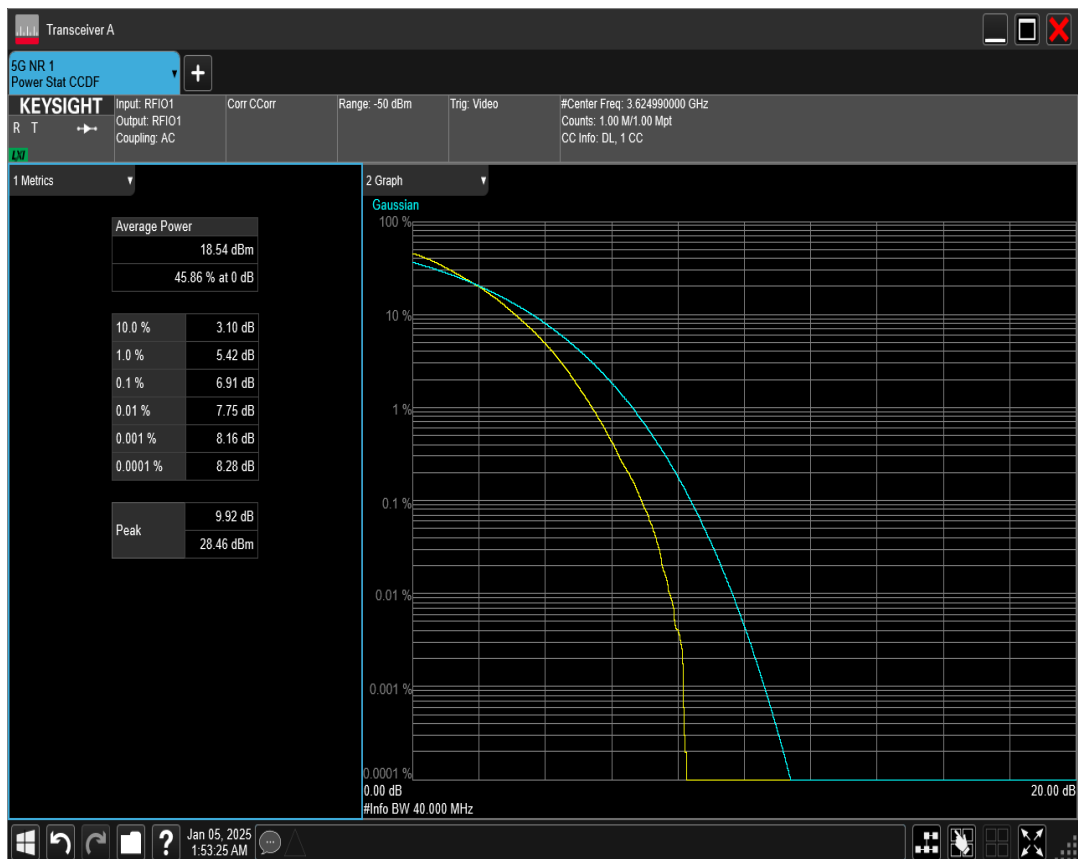


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=40MHz Channel=638000 RB=100@0*

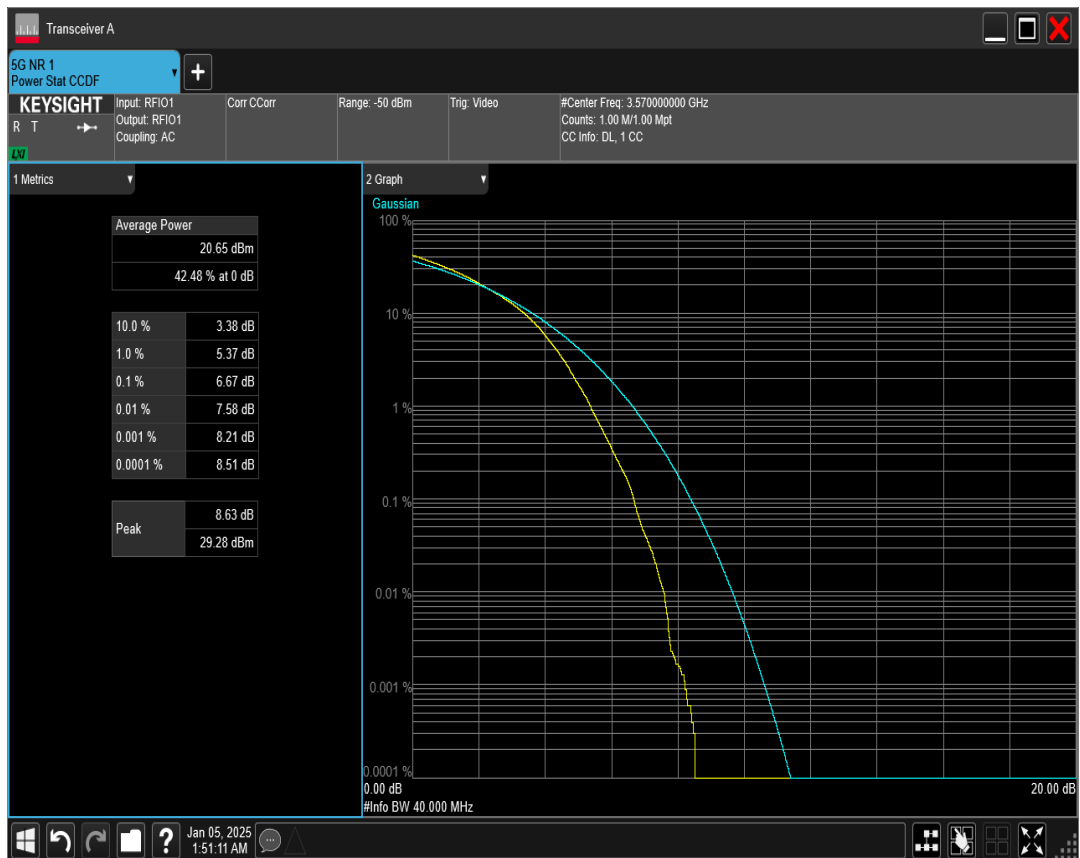


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=40MHz Channel=645332 RB=100@0*

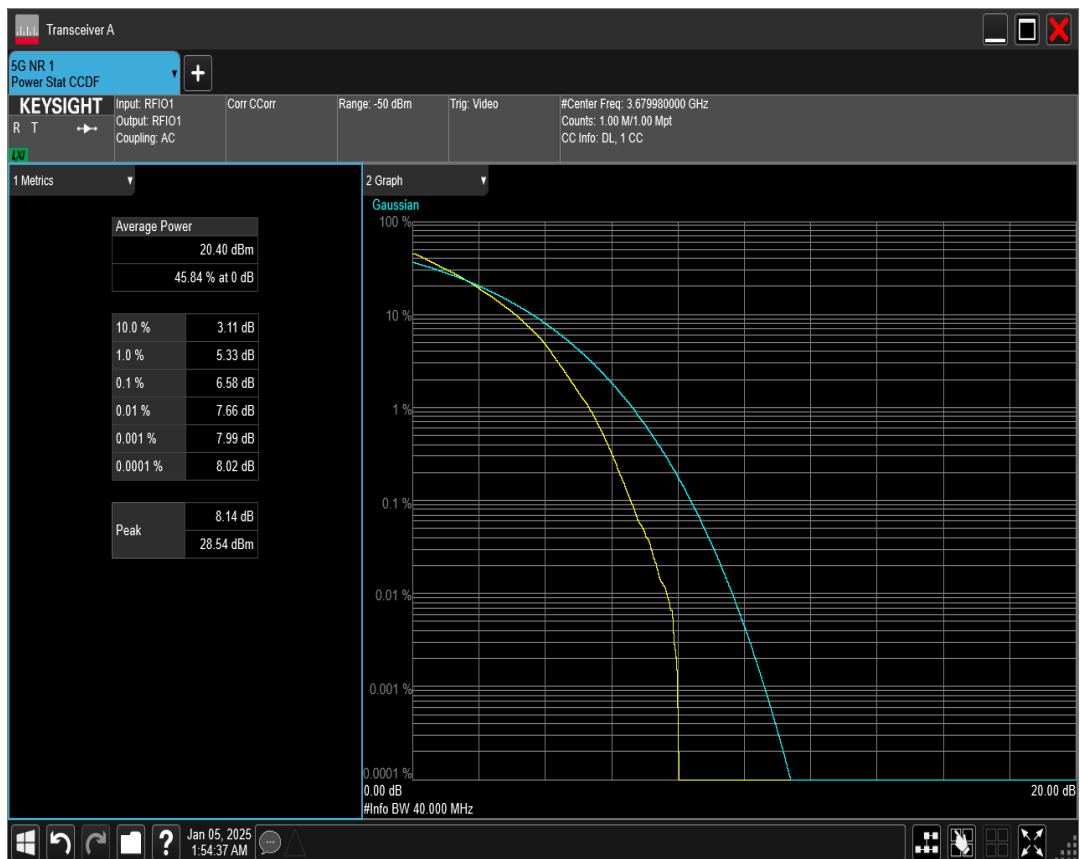


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=50MHz Channel=641666 RB=128@0*

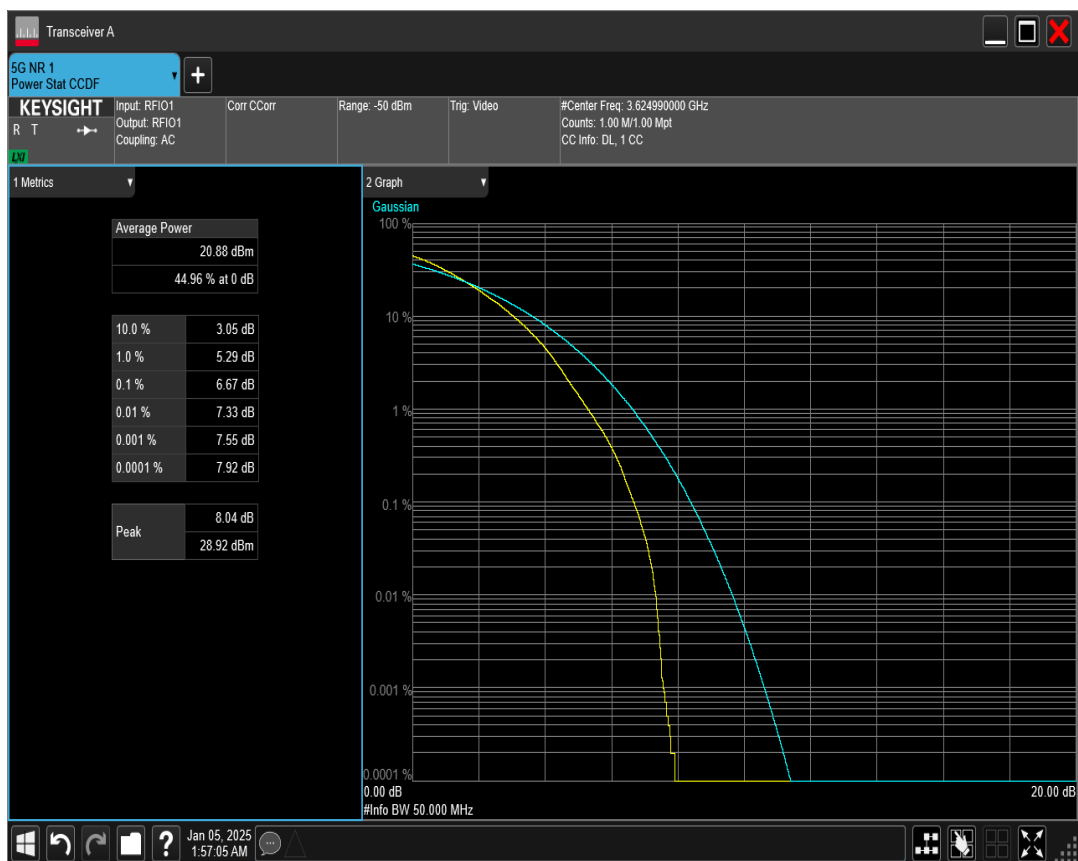


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=50MHz Channel=638334 RB=128@0*

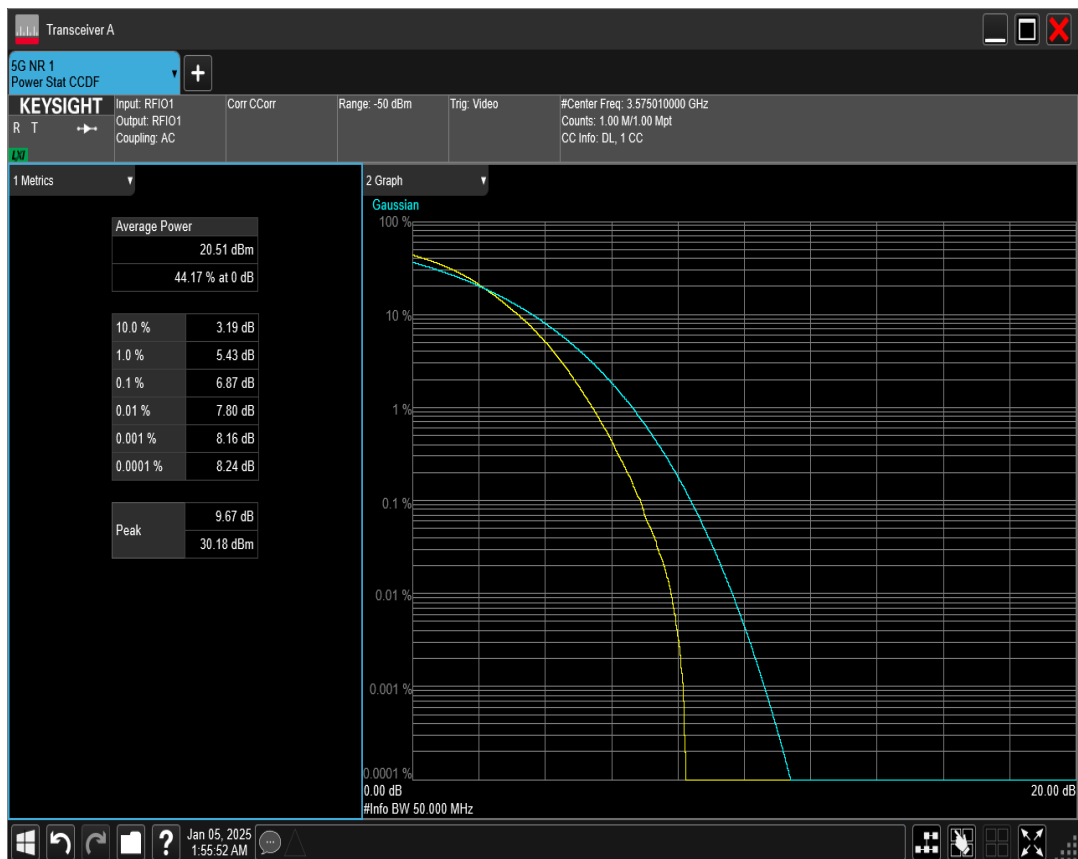


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=50MHz Channel=645000 RB=128@0*

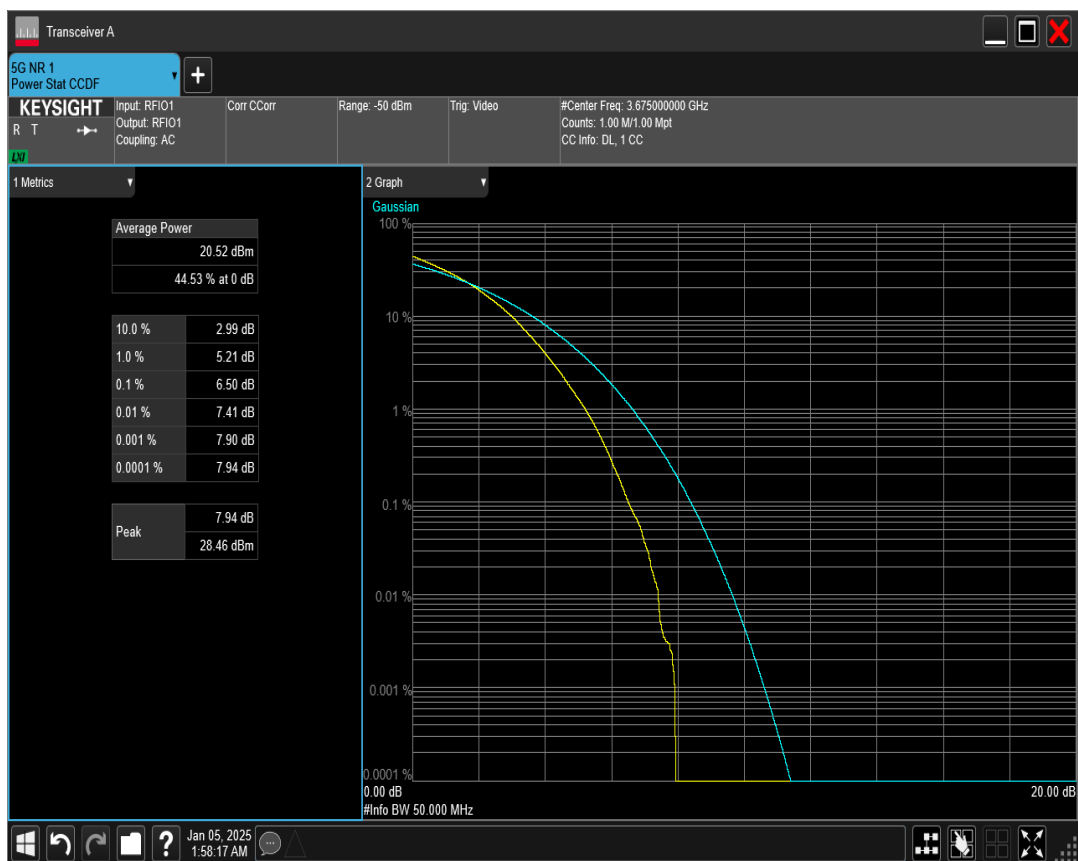


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=60MHz Channel=641666 RB=162@0*

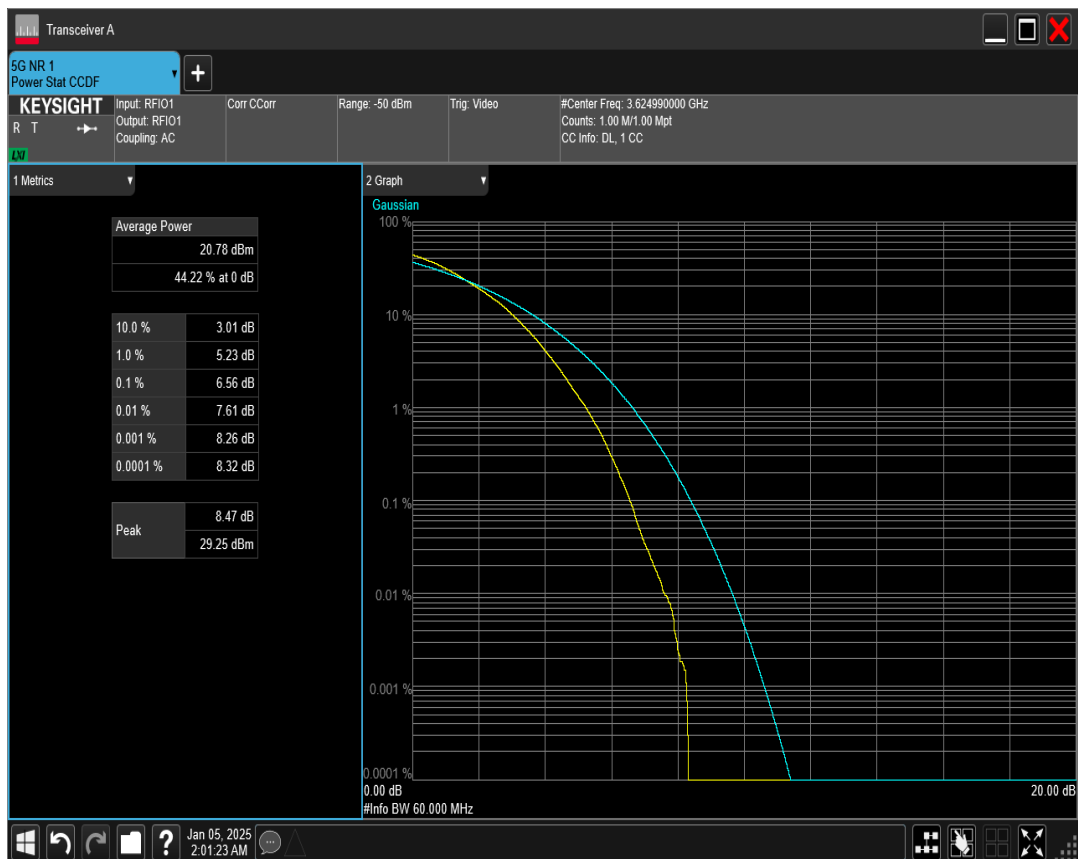


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=60MHz Channel=638668 RB=162@0*

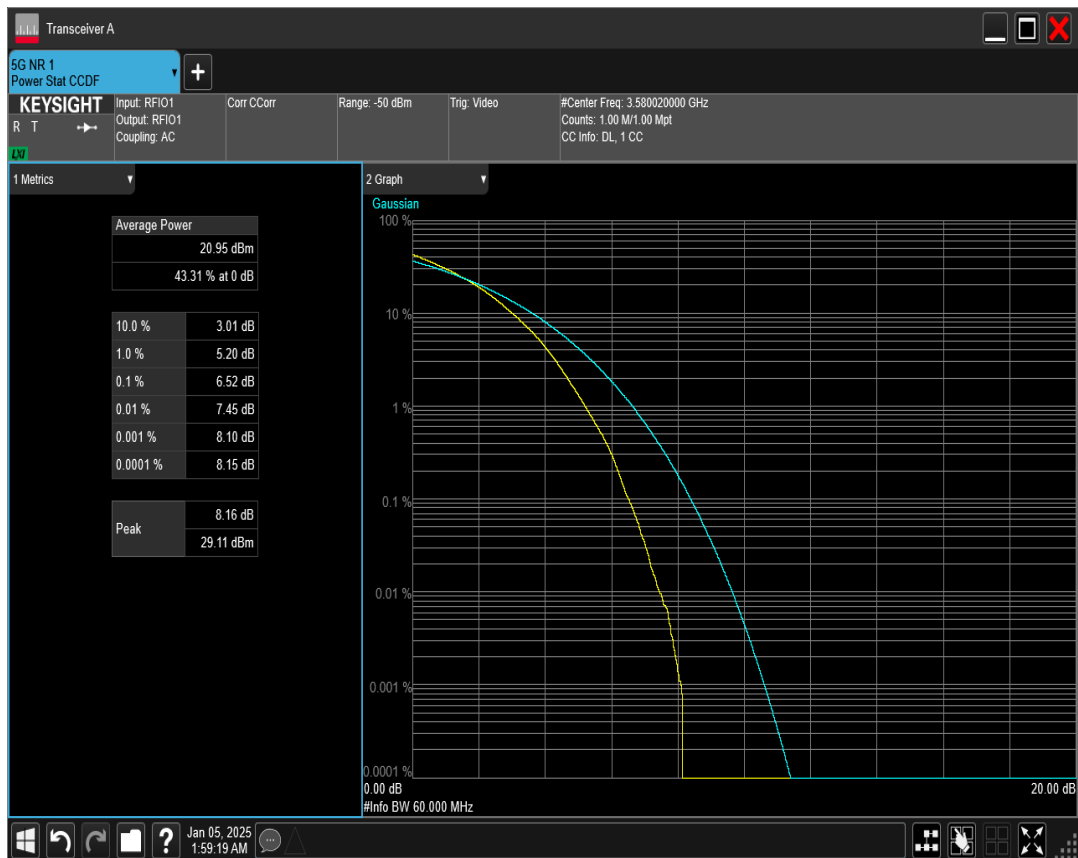


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=60MHz Channel=644666 RB=162@0*

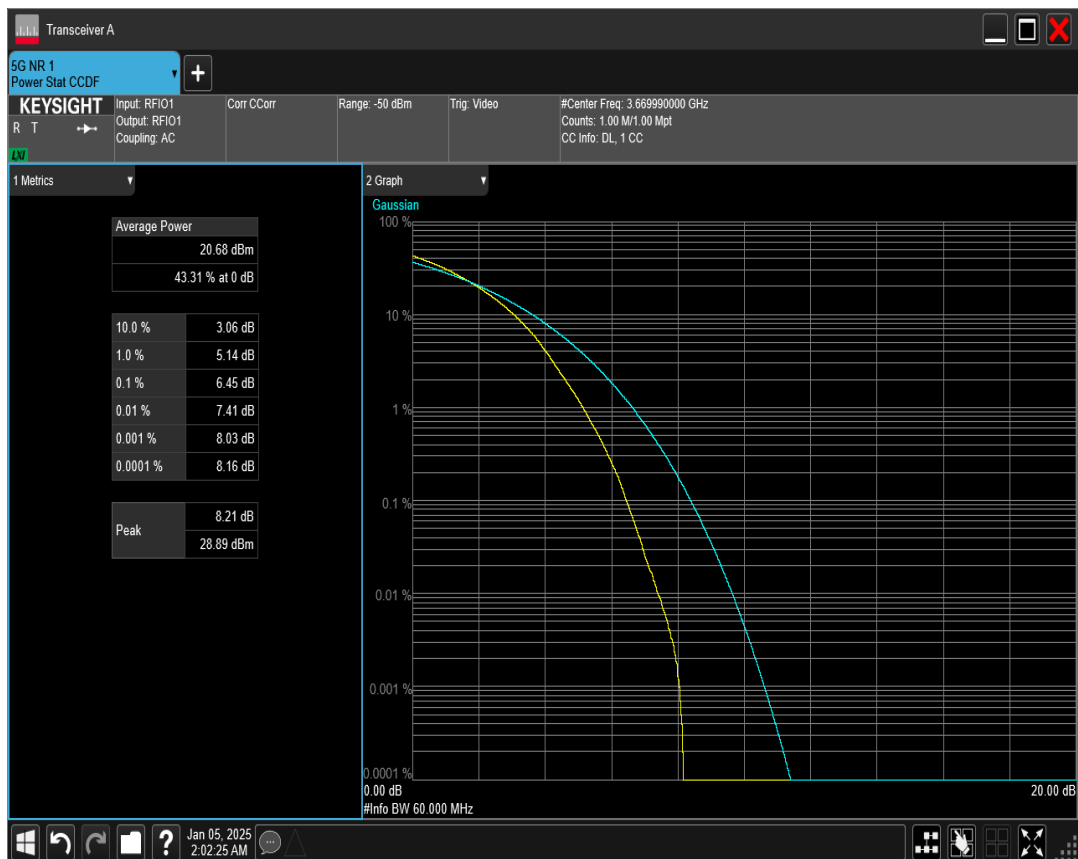


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=70MHz Channel=639000 RB=180@0*

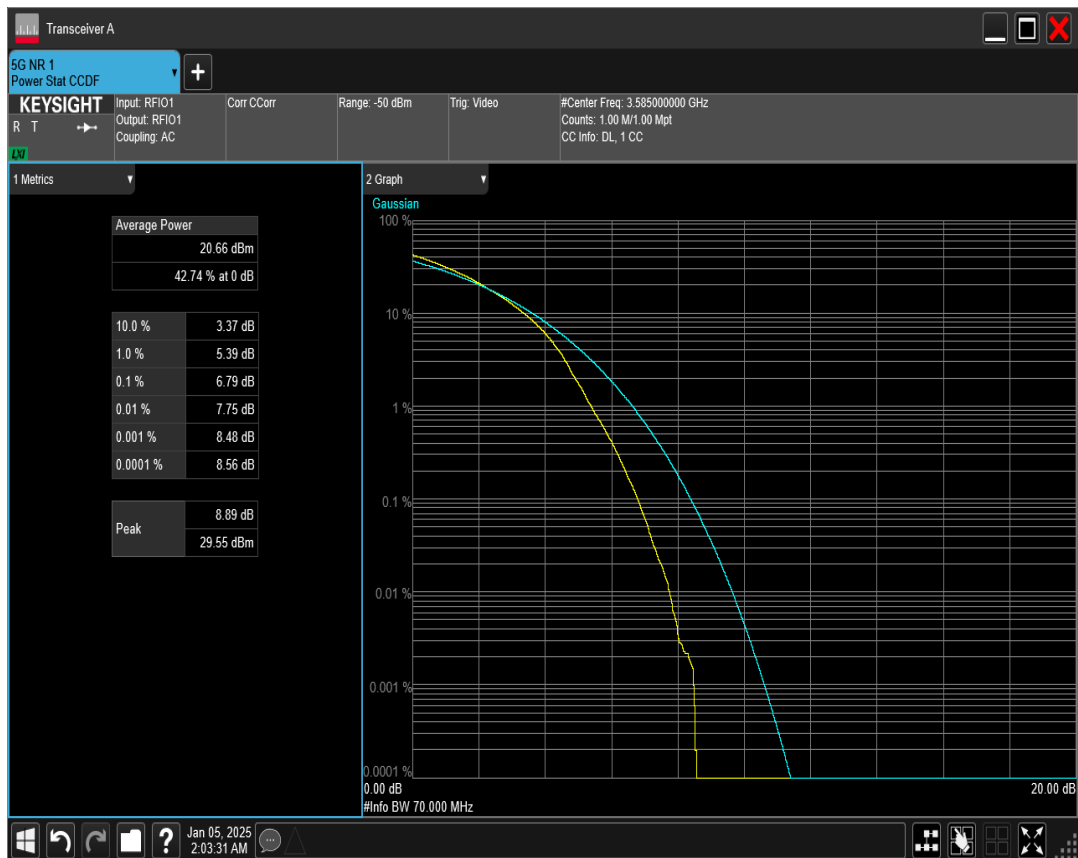


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=80MHz Channel=639334 RB=216@0*

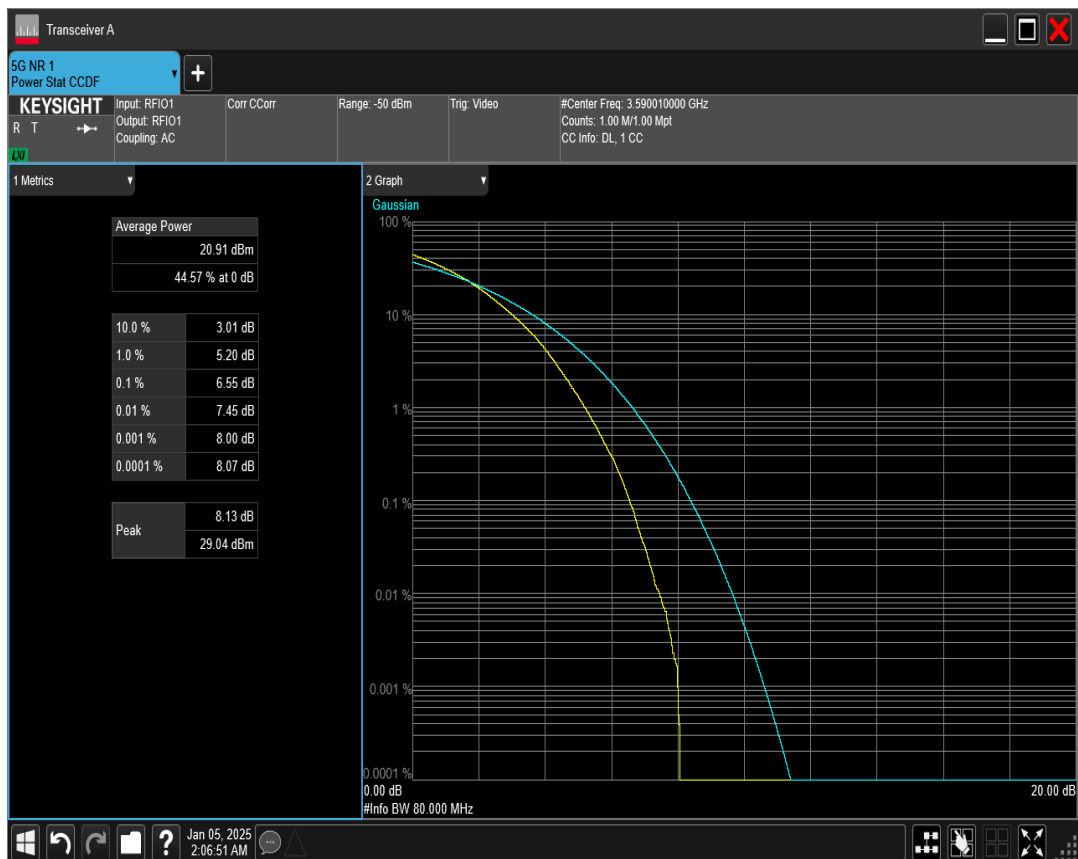


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=70MHz Channel=644332 RB=180@0*

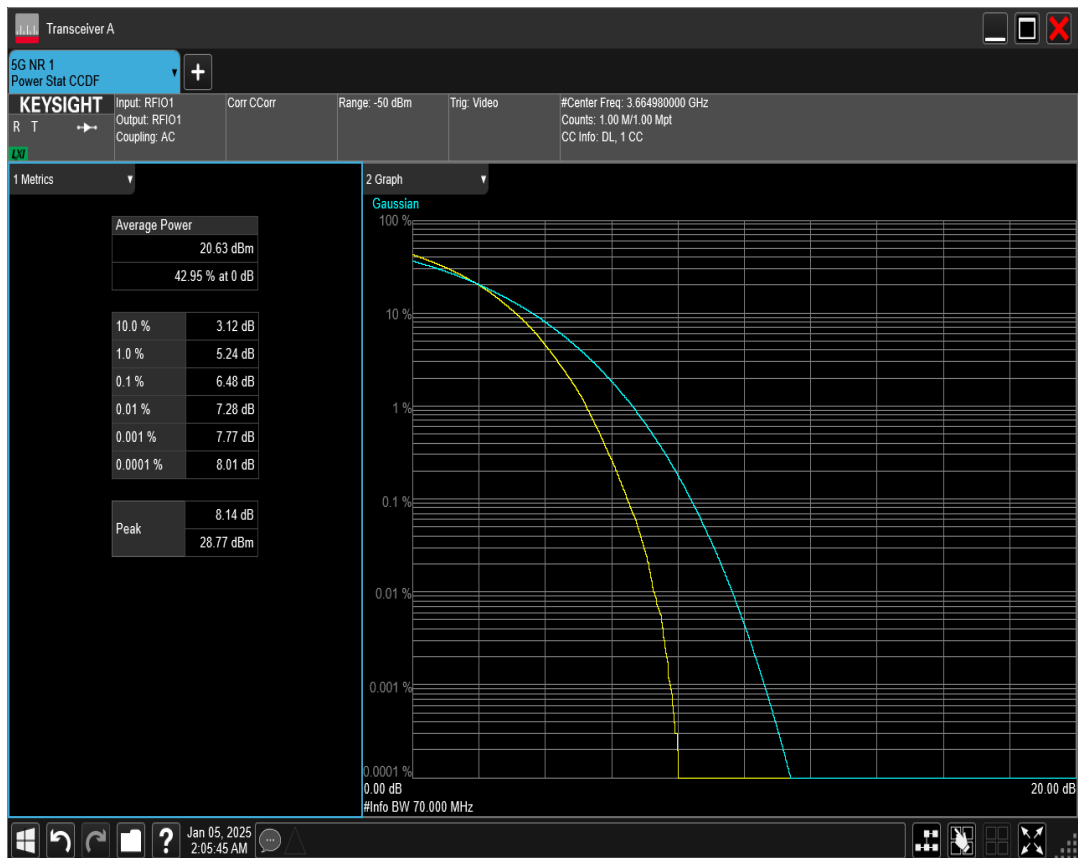


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=70MHz Channel=641666 RB=180@0*

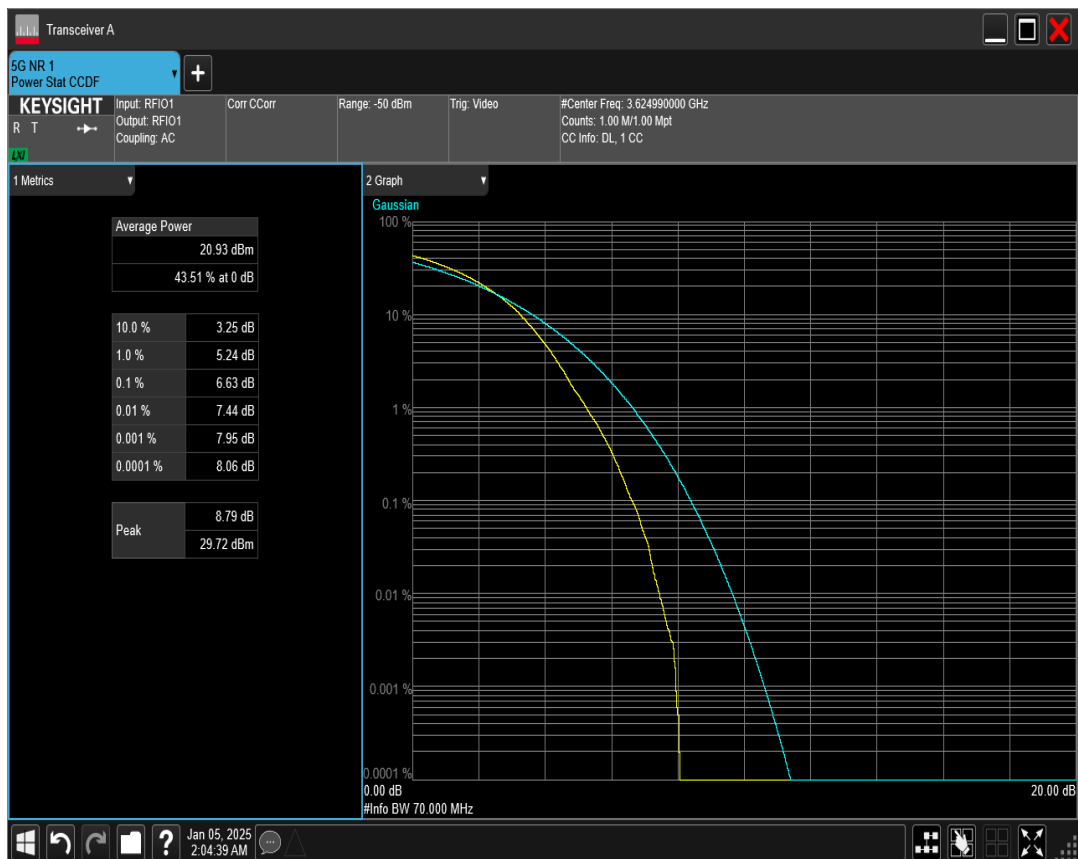


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=80MHz Channel=644000 RB=216@0*

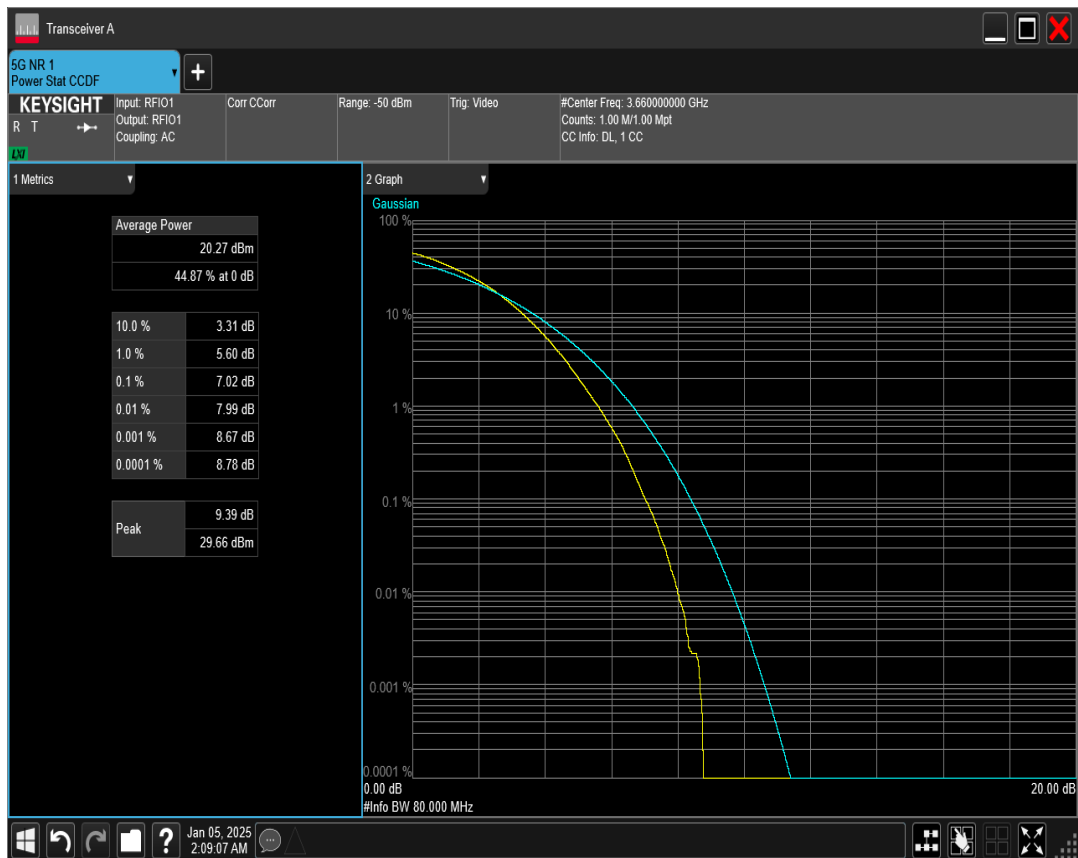


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=80MHz Channel=641666 RB=216@0*

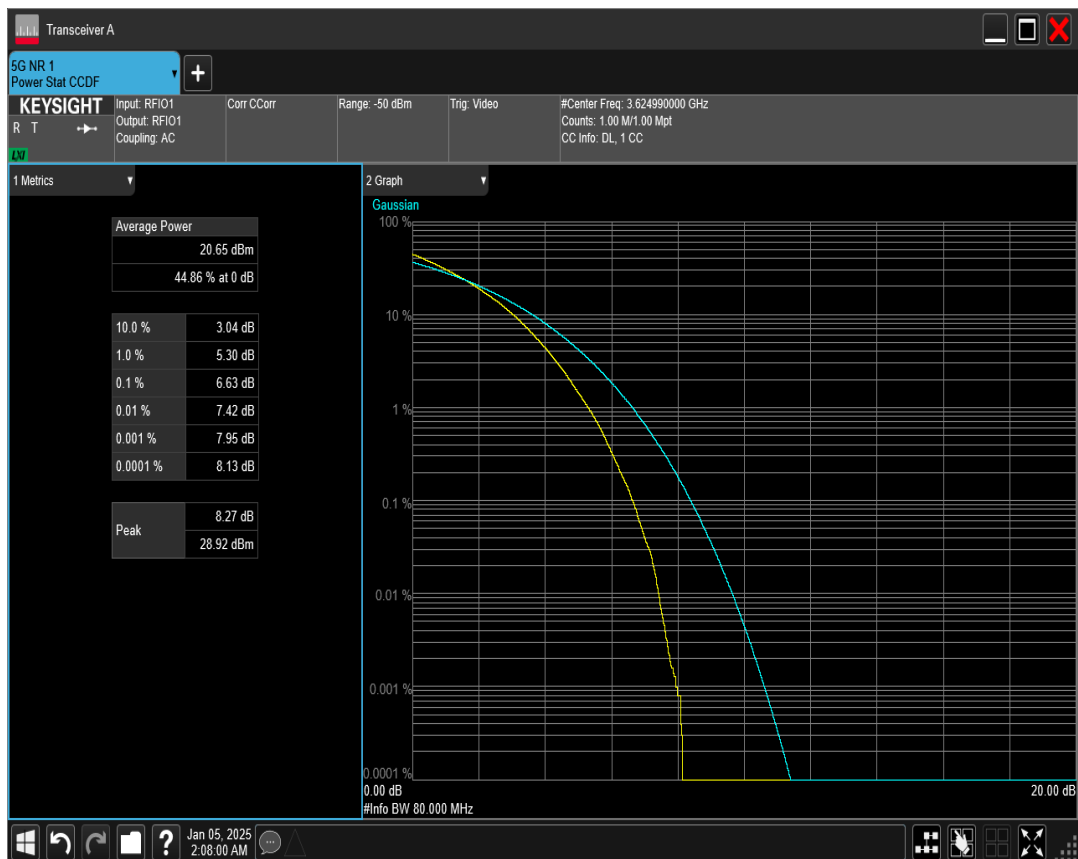


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=90MHz Channel=639668 RB=240@0*

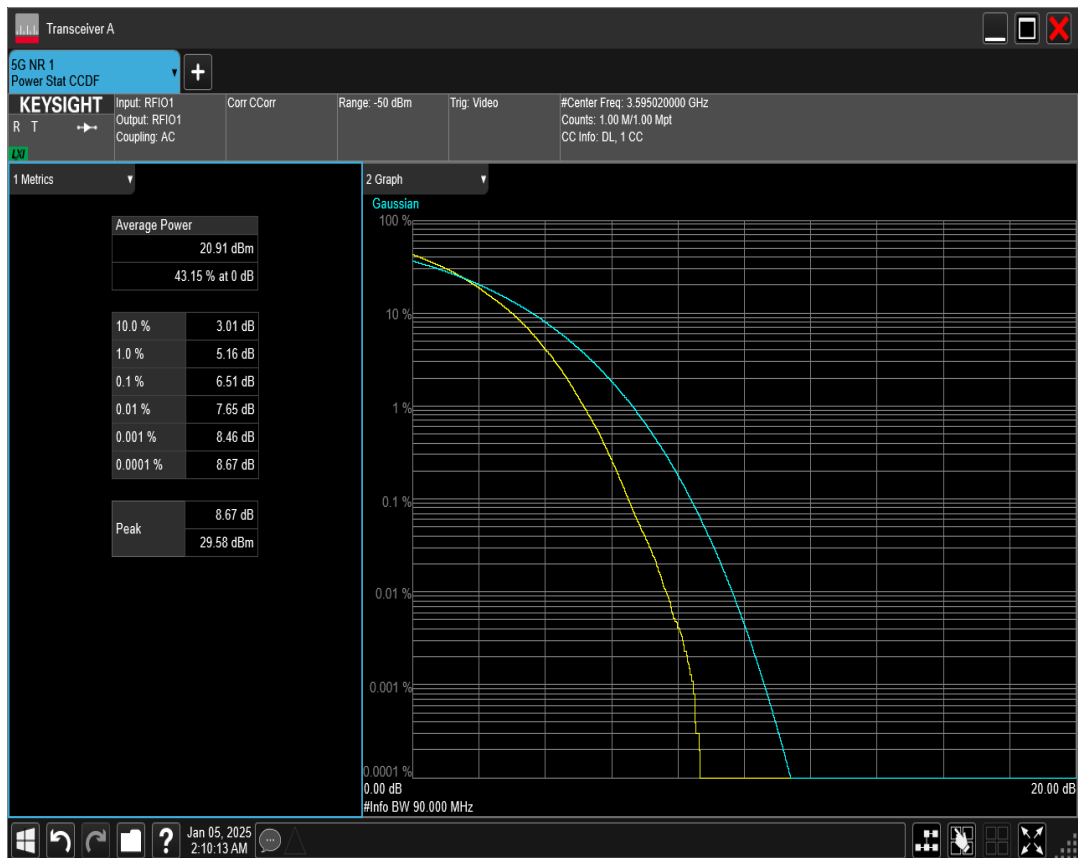


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=90MHz Channel=641666 RB=240@0*

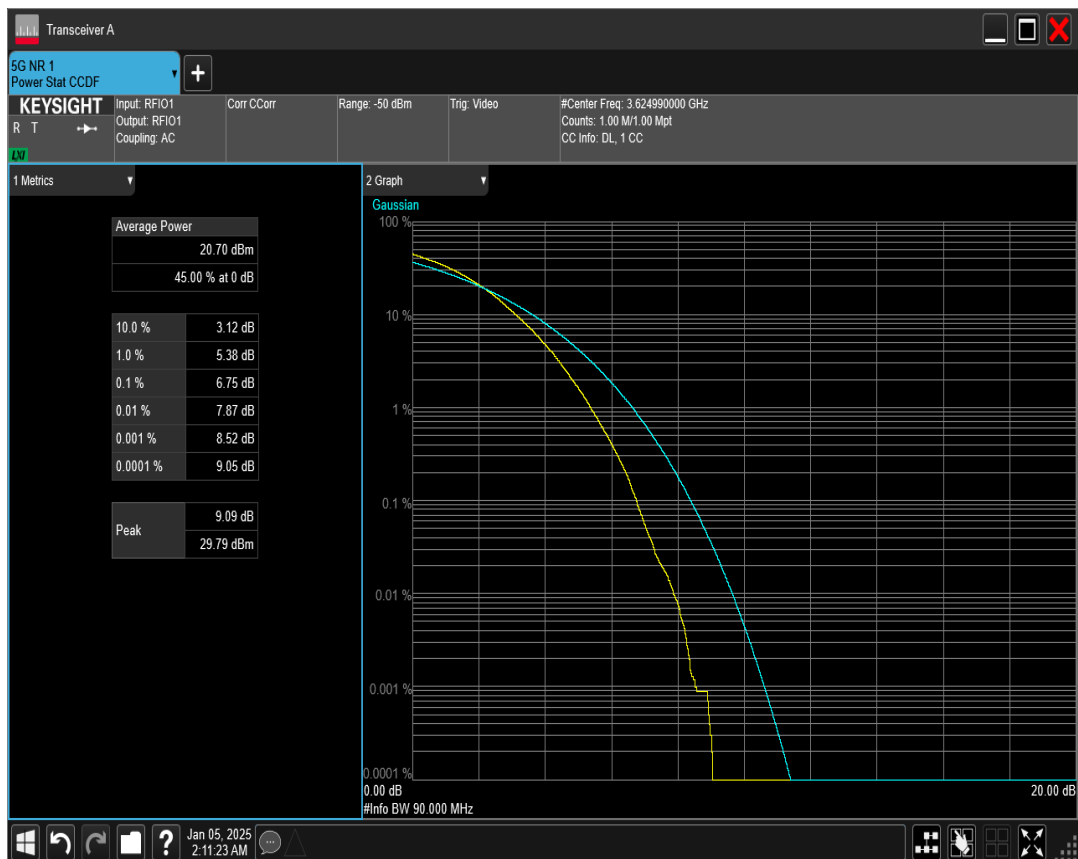


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=100MHz Channel=640000 RB=270@0*

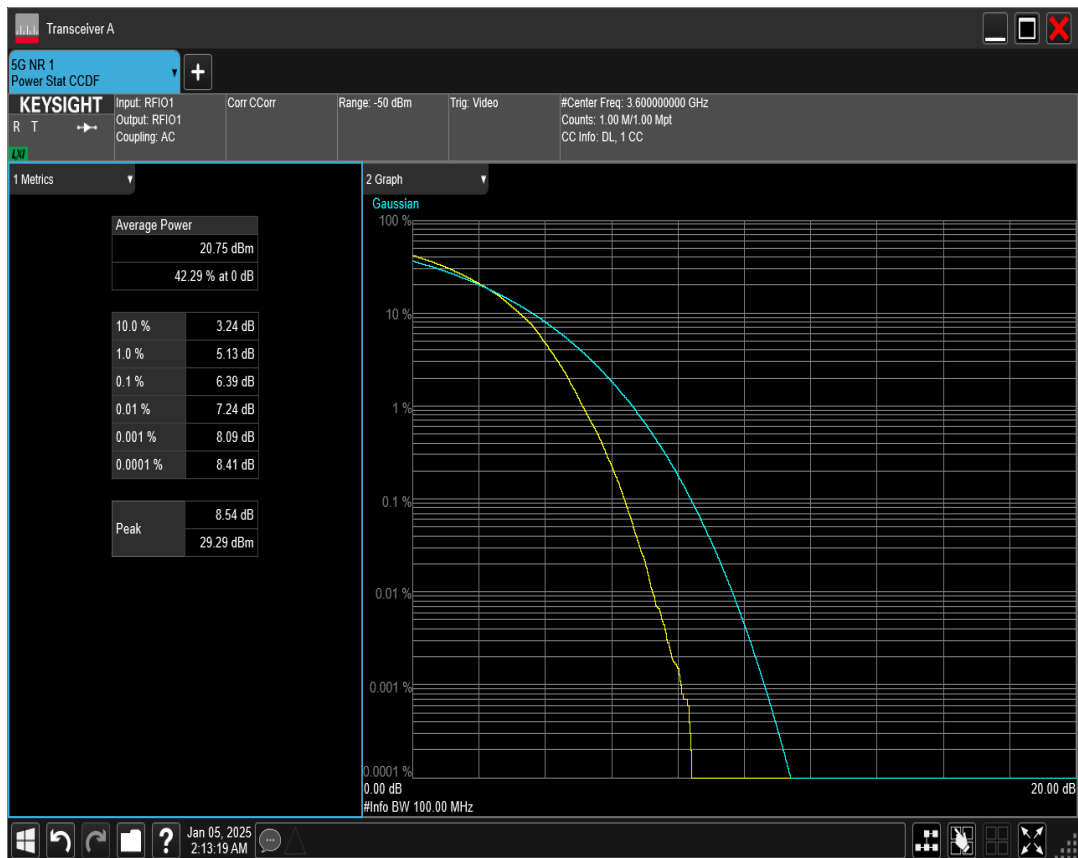


*n78(3550-3700) SCS=30kHz DFT\_QAM256 BW=90MHz Channel=643666 RB=240@0*

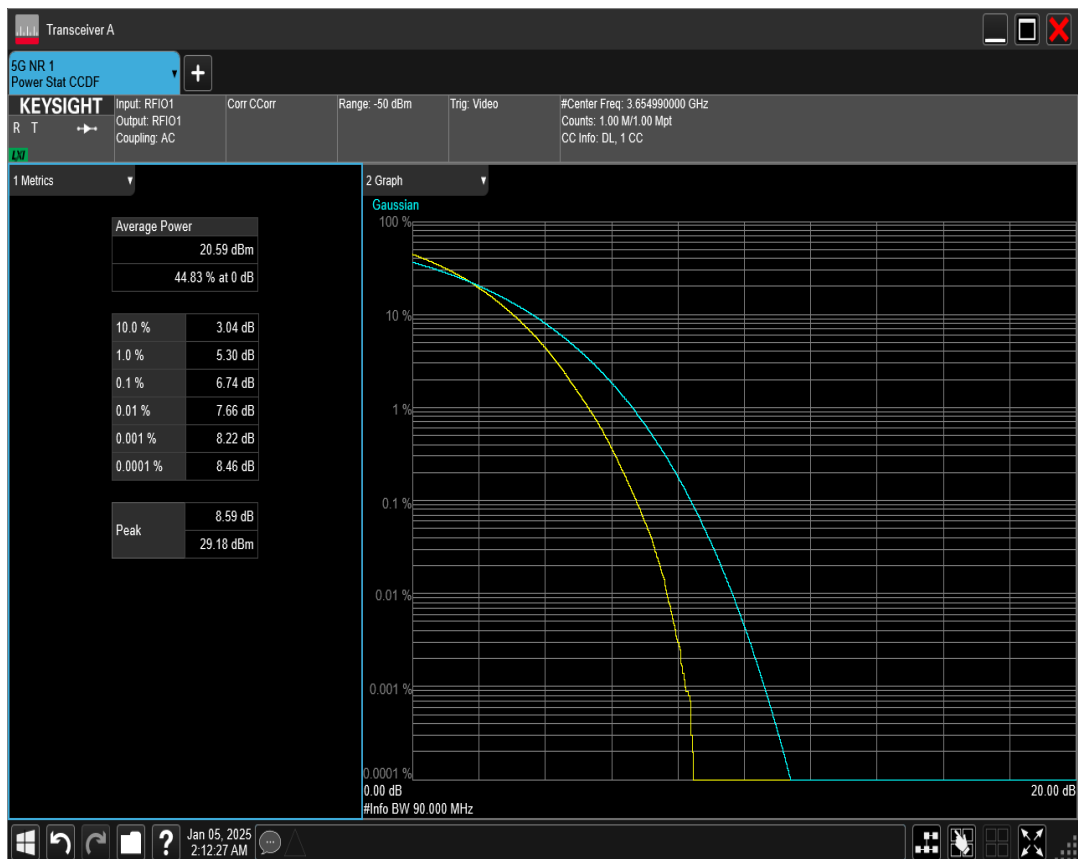


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=10MHz Channel=637000 RB=24@0*

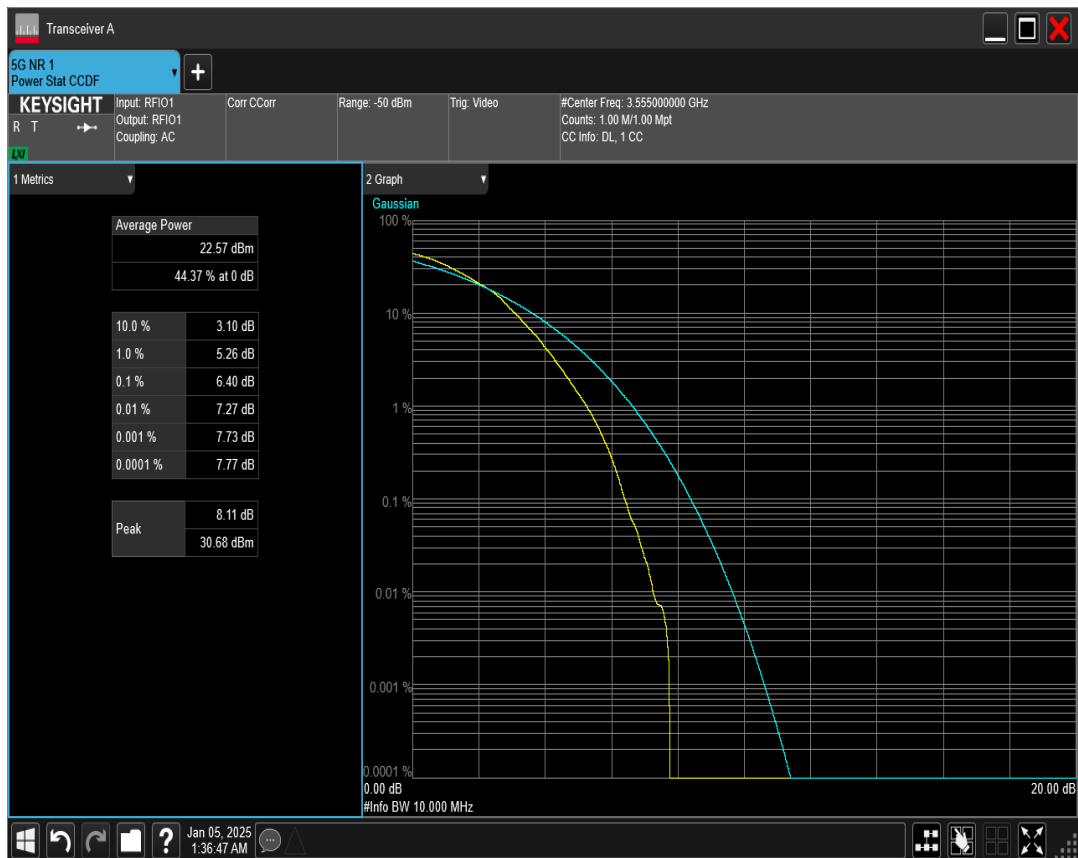


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=100MHz Channel=643332 RB=270@0*

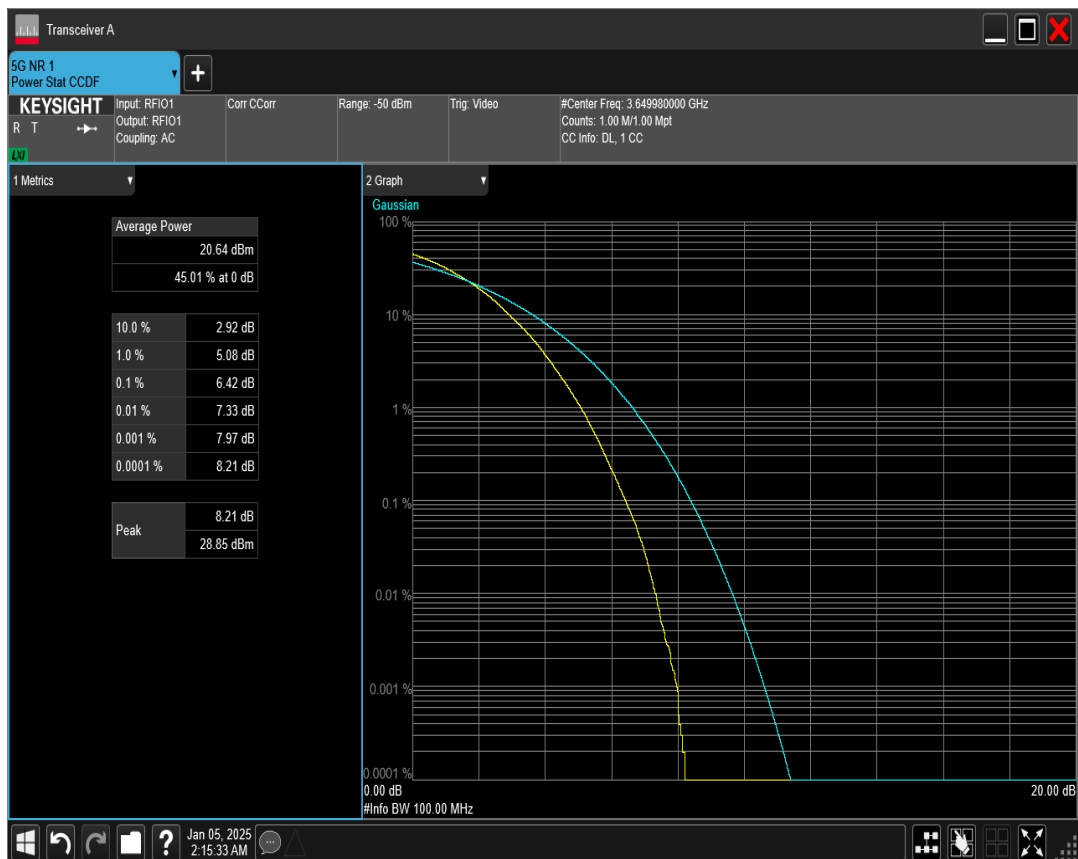


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=100MHz Channel=641666 RB=270@0*

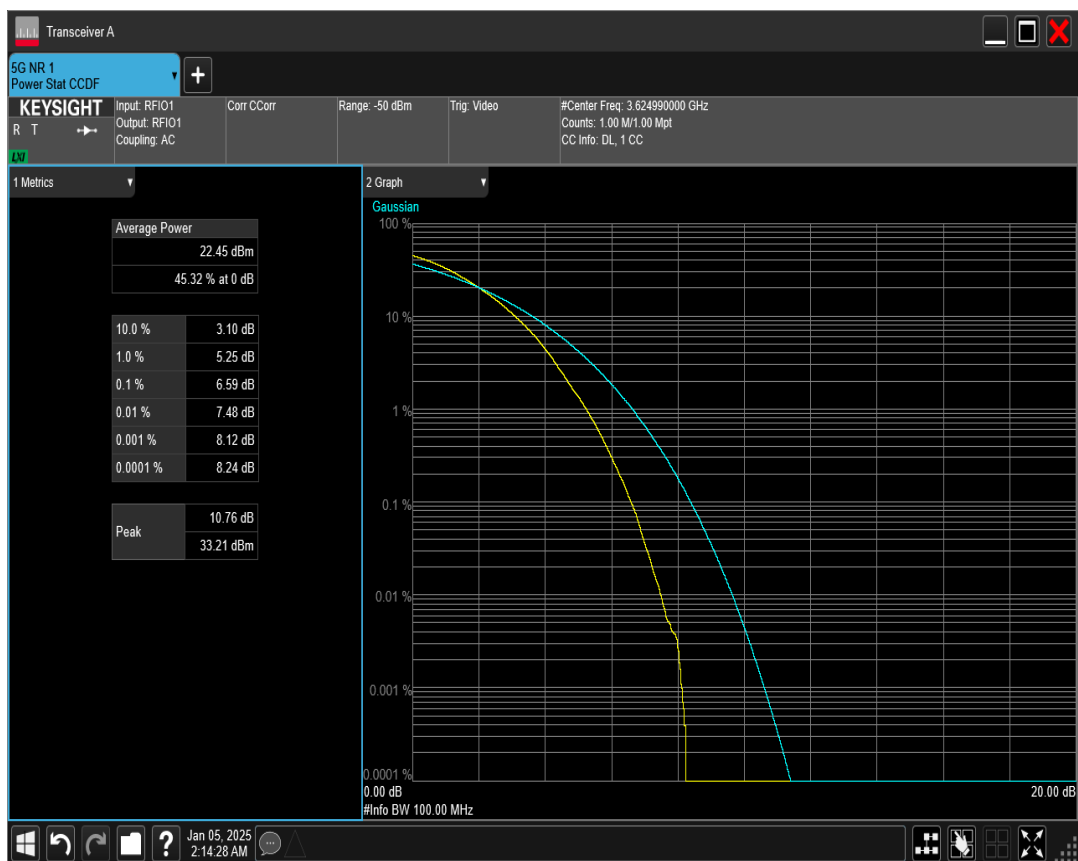


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=10MHz Channel=641666 RB=24@0*

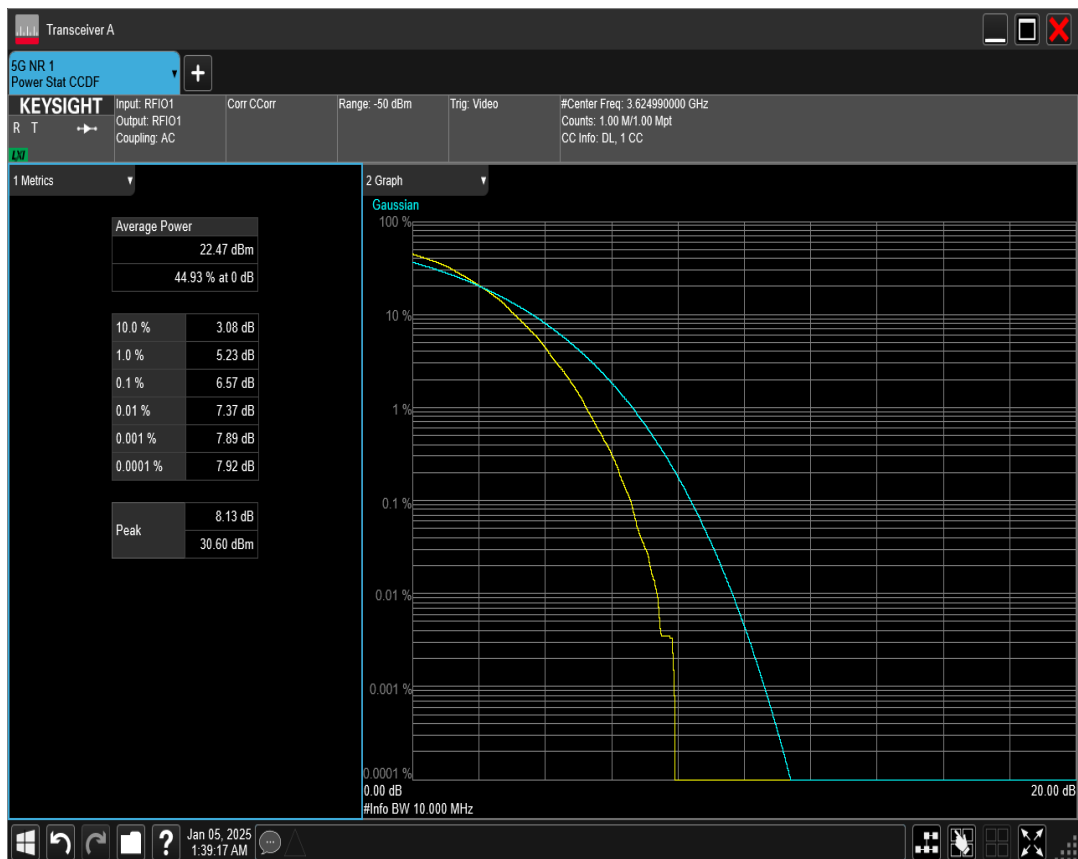


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=10MHz Channel=646332 RB=24@0*

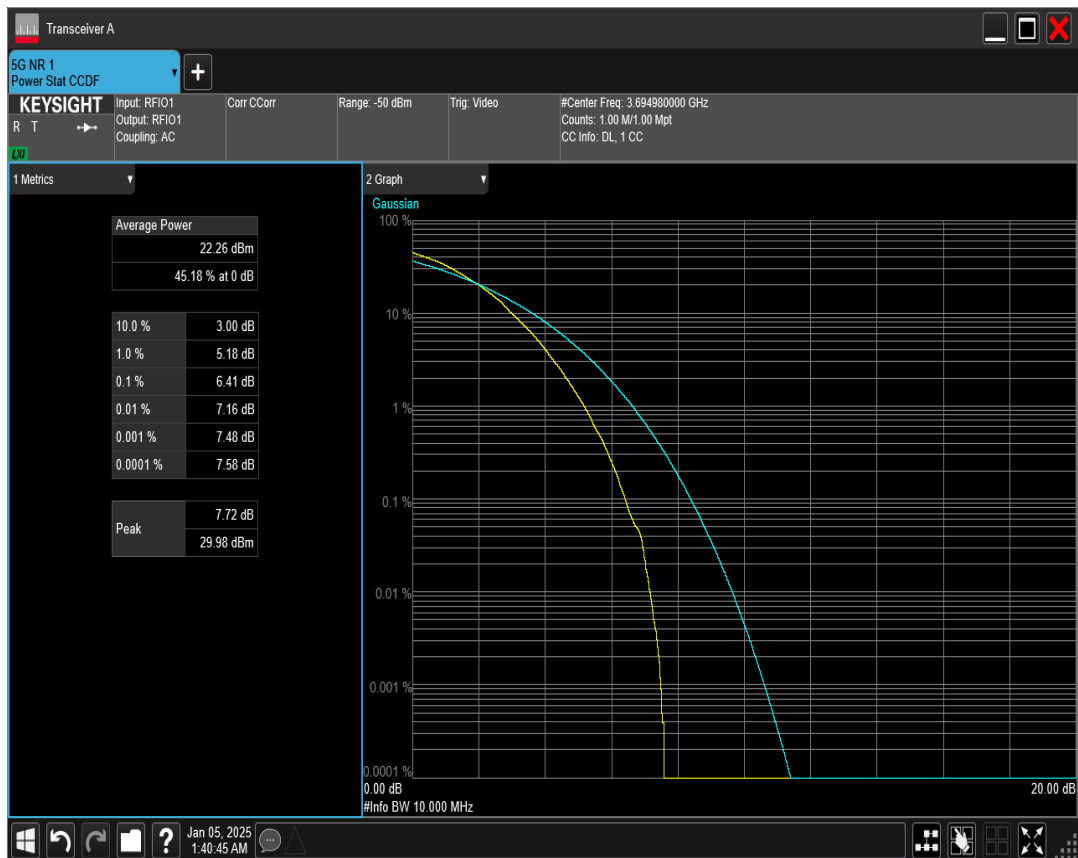


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=15MHz Channel=637168 RB=36@0*

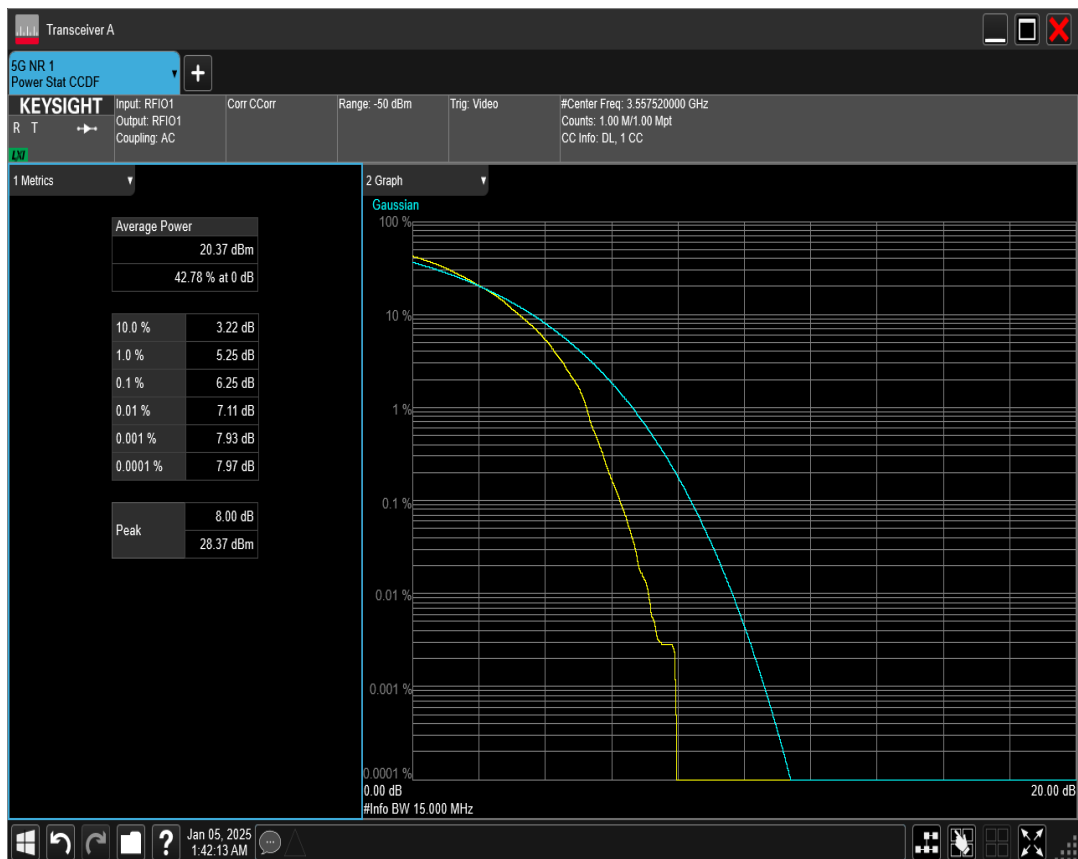


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=15MHz Channel=641666 RB=36@0*

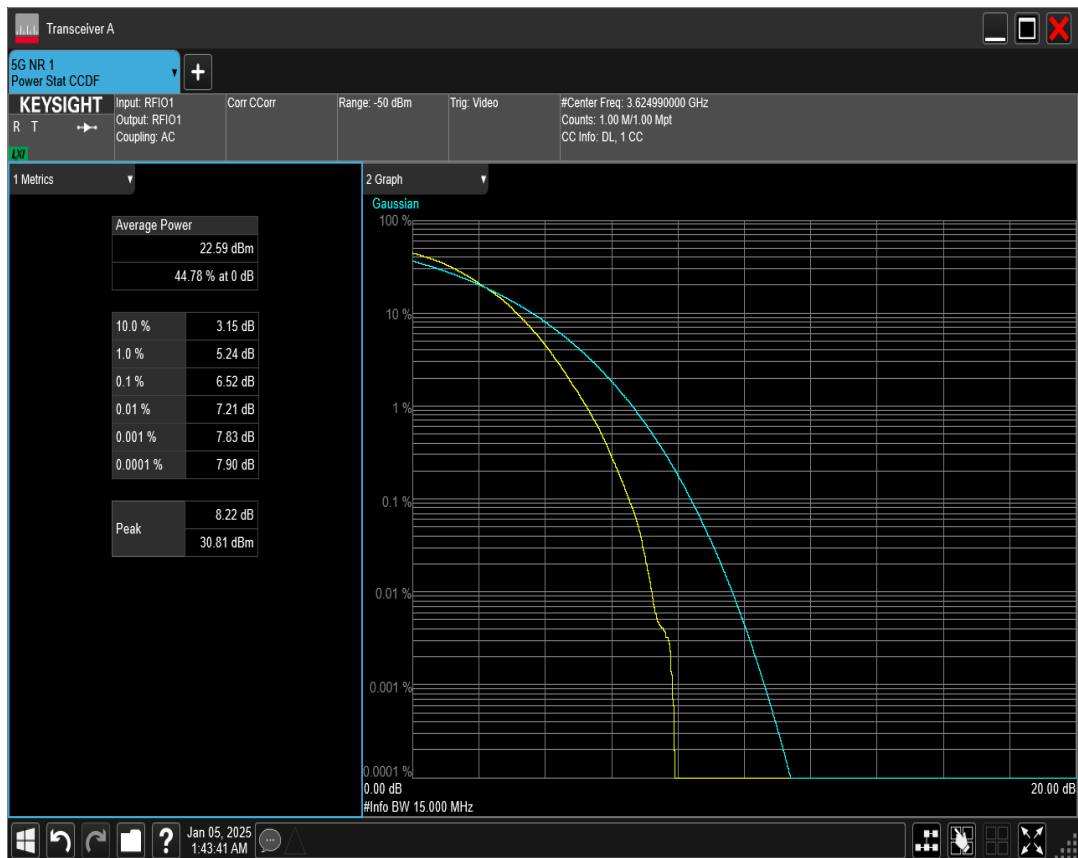


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=20MHz Channel=637334 RB=50@0*

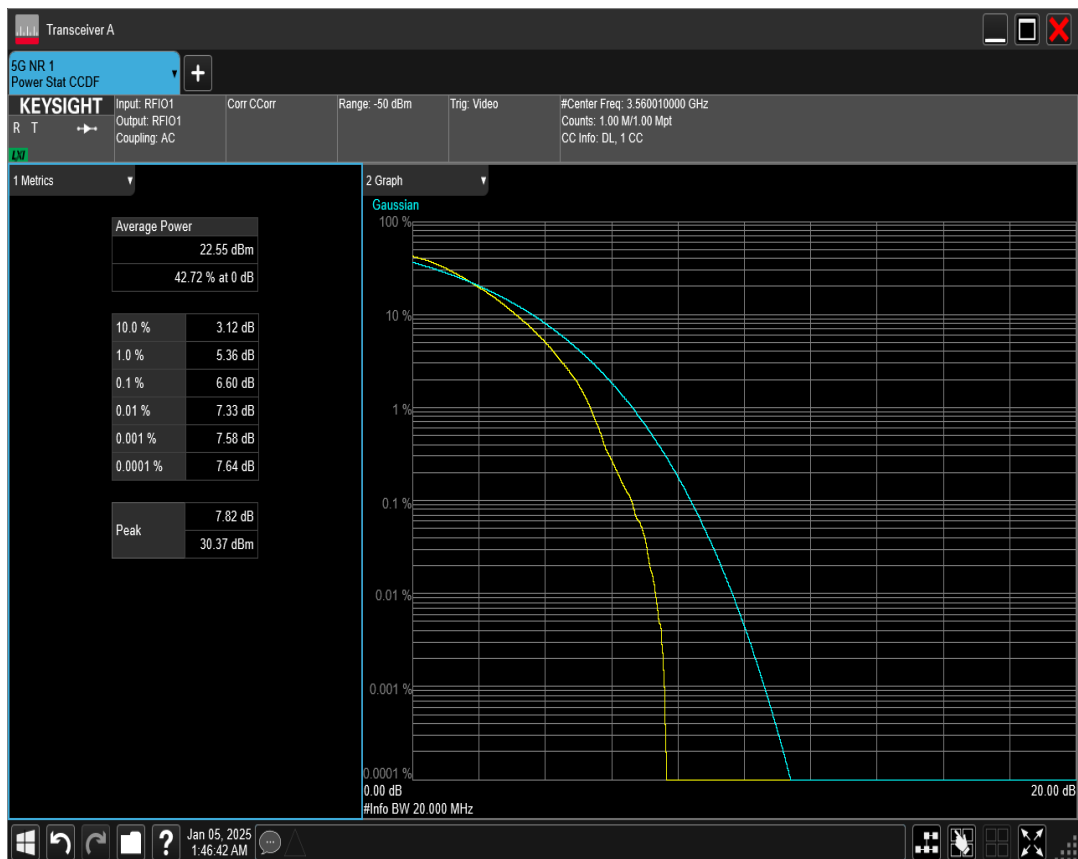


*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=15MHz Channel=646166 RB=36@0*

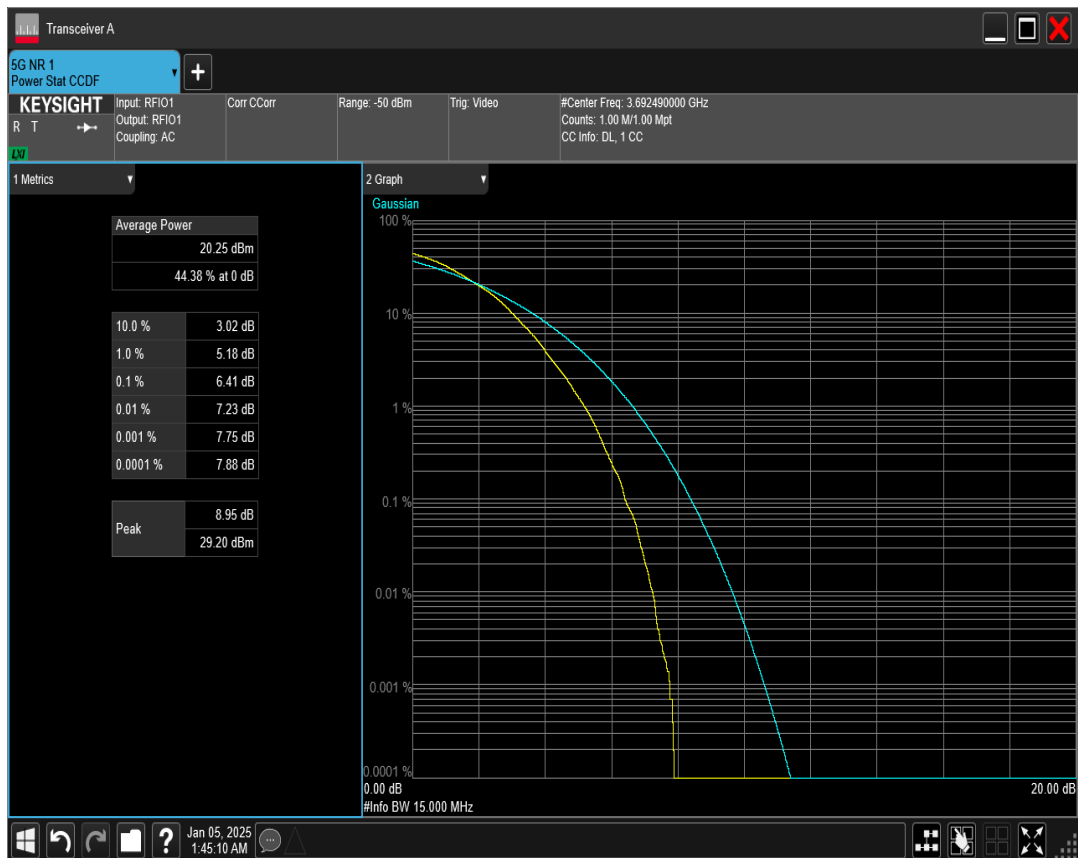

*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=20MHz Channel=641666 RB=50@0*

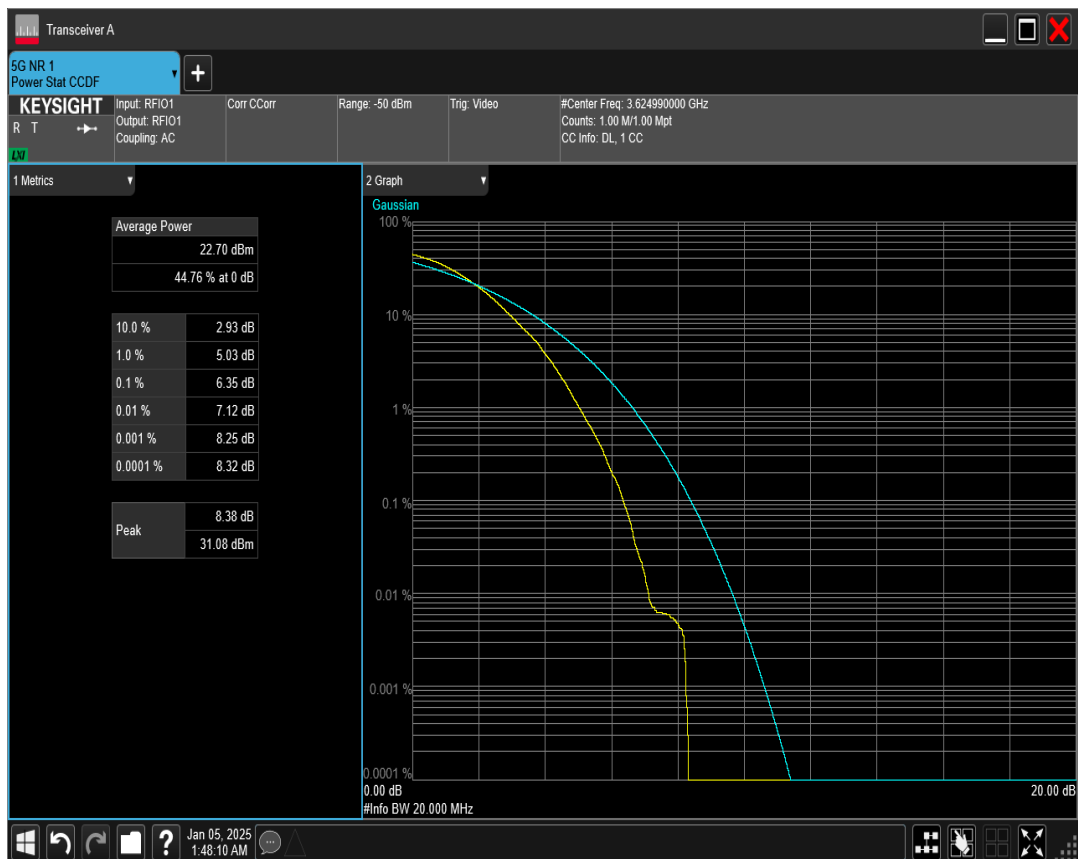

*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=20MHz Channel=646000 RB=50@0*

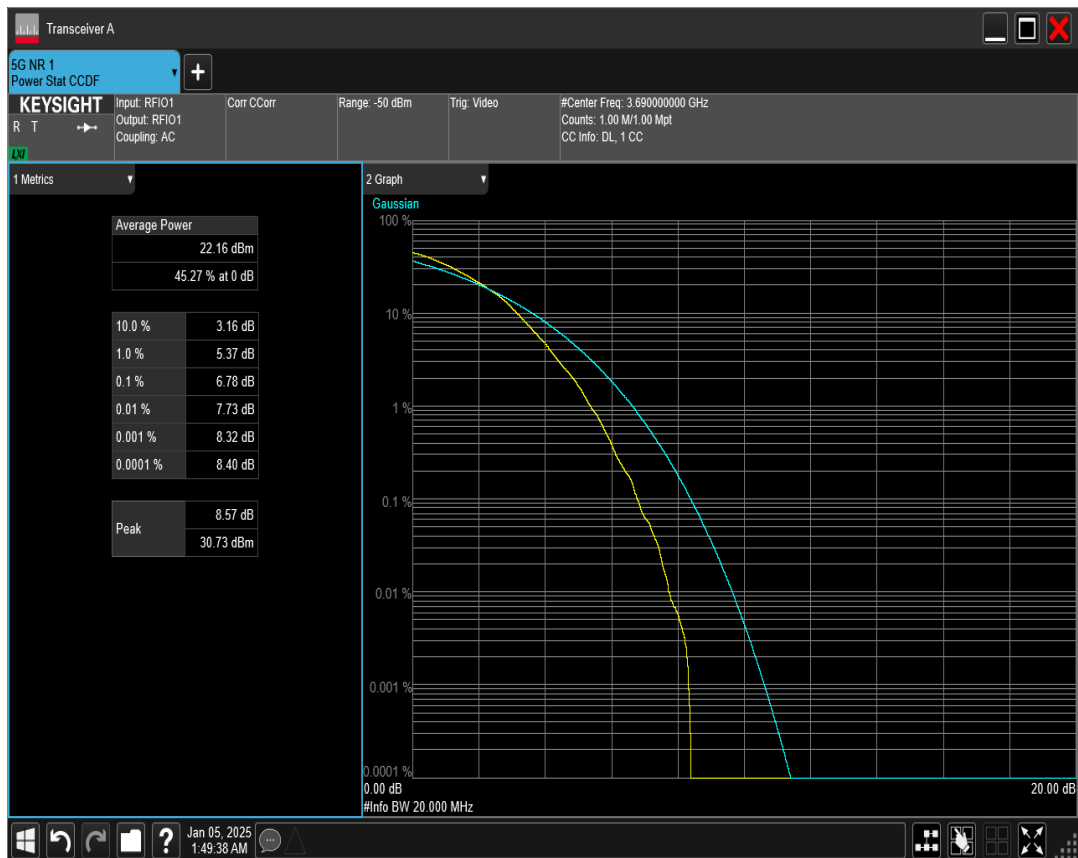

*n78(3550-3700) SCS=30kHz DFT\_QAM64 BW=40MHz Channel=638000 RB=100@0*

