

TABLE OF CONTENTS

1 Conducted output power for NR FR1	2
2 Frequency stability for NR FR1	4
3 Peak-to-Average Ratio for NR FR1	6
4 Occupied bandwidth for NR FR1	38
5 Band edge for NR FR1	49
6 Out-of-band emissions for NR FR1	59

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n7	15	5	500500	1@1	DFT_BPSK	23.39	-3.2	20.19	33.01	PASS
n7	15	5	500500	25@0	DFT_QPSK	22.80	-3.2	19.6	33.01	PASS
n7	15	5	500500	12@6	DFT_QPSK	23.24	-3.2	20.04	33.01	PASS
n7	15	5	500500	1@1	DFT_QPSK	23.02	-3.2	19.82	33.01	PASS
n7	15	5	500500	1@23	DFT_QPSK	23.13	-3.2	19.93	33.01	PASS
n7	15	5	500500	1@1	DFT_QAM16	22.88	-3.2	19.68	33.01	PASS
n7	15	5	500500	1@1	DFT_QAM64	21.52	-3.2	18.32	33.01	PASS
n7	15	5	500500	1@1	DFT_QAM256	19.51	-3.2	16.31	33.01	PASS
n7	15	5	500500	1@1	CP_QPSK	22.14	-3.2	18.94	33.01	PASS
n7	15	5	507000	1@1	DFT_BPSK	23.03	-3.2	19.83	33.01	PASS
n7	15	5	507000	25@0	DFT_QPSK	22.55	-3.2	19.35	33.01	PASS
n7	15	5	507000	12@6	DFT_QPSK	23.13	-3.2	19.93	33.01	PASS
n7	15	5	507000	1@1	DFT_QPSK	23.08	-3.2	19.88	33.01	PASS
n7	15	5	507000	1@23	DFT_QPSK	23.13	-3.2	19.93	33.01	PASS
n7	15	5	507000	1@1	DFT_QAM16	22.32	-3.2	19.12	33.01	PASS
n7	15	5	507000	1@1	DFT_QAM64	21.30	-3.2	18.1	33.01	PASS
n7	15	5	507000	1@1	DFT_QAM256	19.04	-3.2	15.84	33.01	PASS
n7	15	5	507000	1@1	CP_QPSK	22.49	-3.2	19.29	33.01	PASS
n7	15	5	513500	1@1	DFT_BPSK	23.40	-3.2	20.2	33.01	PASS
n7	15	5	513500	25@0	DFT_QPSK	22.85	-3.2	19.65	33.01	PASS
n7	15	5	513500	12@6	DFT_QPSK	23.39	-3.2	20.19	33.01	PASS
n7	15	5	513500	1@1	DFT_QPSK	23.37	-3.2	20.17	33.01	PASS
n7	15	5	513500	1@23	DFT_QPSK	23.38	-3.2	20.18	33.01	PASS
n7	15	5	513500	1@1	DFT_QAM16	22.85	-3.2	19.65	33.01	PASS
n7	15	5	513500	1@1	DFT_QAM64	21.32	-3.2	18.12	33.01	PASS
n7	15	5	513500	1@1	DFT_QAM256	19.70	-3.2	16.5	33.01	PASS
n7	15	5	513500	1@1	CP_QPSK	22.47	-3.2	19.27	33.01	PASS
n7	15	15	501500	1@1	DFT_BPSK	23.45	-3.2	20.25	33.01	PASS
n7	15	15	501500	75@0	DFT_QPSK	22.82	-3.2	19.62	33.01	PASS
n7	15	15	501500	36@18	DFT_QPSK	23.36	-3.2	20.16	33.01	PASS
n7	15	15	501500	1@1	DFT_QPSK	23.24	-3.2	20.04	33.01	PASS
n7	15	15	501500	1@77	DFT_QPSK	23.41	-3.2	20.21	33.01	PASS
n7	15	15	501500	1@1	DFT_QAM16	22.99	-3.2	19.79	33.01	PASS
n7	15	15	501500	1@1	DFT_QAM64	21.39	-3.2	18.19	33.01	PASS
n7	15	15	501500	1@1	DFT_QAM256	19.26	-3.2	16.06	33.01	PASS
n7	15	15	501500	1@1	CP_QPSK	22.15	-3.2	18.95	33.01	PASS
n7	15	15	507000	1@1	DFT_BPSK	23.42	-3.2	20.22	33.01	PASS

n7	15	15	507000	75@0	DFT_QPSK	22.52	-3.2	19.32	33.01	PASS
n7	15	15	507000	36@18	DFT_QPSK	23.05	-3.2	19.85	33.01	PASS
n7	15	15	507000	1@1	DFT_QPSK	23.12	-3.2	19.92	33.01	PASS
n7	15	15	507000	1@77	DFT_QPSK	23.28	-3.2	20.08	33.01	PASS
n7	15	15	507000	1@1	DFT_QAM16	23.01	-3.2	19.81	33.01	PASS
n7	15	15	507000	1@1	DFT_QAM64	21.78	-3.2	18.58	33.01	PASS
n7	15	15	507000	1@1	DFT_QAM256	19.21	-3.2	16.01	33.01	PASS
n7	15	15	507000	1@1	CP_QPSK	22.05	-3.2	18.85	33.01	PASS
n7	15	15	512500	1@1	DFT_BPSK	23.46	-3.2	20.26	33.01	PASS
n7	15	15	512500	75@0	DFT_QPSK	22.84	-3.2	19.64	33.01	PASS
n7	15	15	512500	36@18	DFT_QPSK	23.40	-3.2	20.2	33.01	PASS
n7	15	15	512500	1@1	DFT_QPSK	23.24	-3.2	20.04	33.01	PASS
n7	15	15	512500	1@77	DFT_QPSK	23.24	-3.2	20.04	33.01	PASS
n7	15	15	512500	1@1	DFT_QAM16	22.99	-3.2	19.79	33.01	PASS
n7	15	15	512500	1@1	DFT_QAM64	21.19	-3.2	17.99	33.01	PASS
n7	15	15	512500	1@1	DFT_QAM256	19.34	-3.2	16.14	33.01	PASS
n7	15	15	512500	1@1	CP_QPSK	22.32	-3.2	19.12	33.01	PASS
n7	15	20	502000	1@1	DFT_BPSK	23.34	-3.2	20.14	33.01	PASS
n7	15	20	502000	100@0	DFT_QPSK	22.81	-3.2	19.61	33.01	PASS
n7	15	20	502000	50@25	DFT_QPSK	23.36	-3.2	20.16	33.01	PASS
n7	15	20	502000	1@1	DFT_QPSK	23.46	-3.2	20.26	33.01	PASS
n7	15	20	502000	1@104	DFT_QPSK	23.39	-3.2	20.19	33.01	PASS
n7	15	20	502000	1@1	DFT_QAM16	22.89	-3.2	19.69	33.01	PASS
n7	15	20	502000	1@1	DFT_QAM64	21.19	-3.2	17.99	33.01	PASS
n7	15	20	502000	1@1	DFT_QAM256	19.21	-3.2	16.01	33.01	PASS
n7	15	20	502000	1@1	CP_QPSK	22.47	-3.2	19.27	33.01	PASS
n7	15	20	507000	1@1	DFT_BPSK	23.08	-3.2	19.88	33.01	PASS
n7	15	20	507000	100@0	DFT_QPSK	22.60	-3.2	19.4	33.01	PASS
n7	15	20	507000	50@25	DFT_QPSK	23.15	-3.2	19.95	33.01	PASS
n7	15	20	507000	1@1	DFT_QPSK	23.24	-3.2	20.04	33.01	PASS
n7	15	20	507000	1@104	DFT_QPSK	23.32	-3.2	20.12	33.01	PASS
n7	15	20	507000	1@1	DFT_QAM16	22.70	-3.2	19.5	33.01	PASS
n7	15	20	507000	1@1	DFT_QAM64	20.64	-3.2	17.44	33.01	PASS
n7	15	20	507000	1@1	DFT_QAM256	19.02	-3.2	15.82	33.01	PASS
n7	15	20	507000	1@1	CP_QPSK	22.08	-3.2	18.88	33.01	PASS
n7	15	20	512000	1@1	DFT_BPSK	23.13	-3.2	19.93	33.01	PASS
n7	15	20	512000	100@0	DFT_QPSK	22.81	-3.2	19.61	33.01	PASS
n7	15	20	512000	50@25	DFT_QPSK	23.44	-3.2	20.24	33.01	PASS
n7	15	20	512000	1@1	DFT_QPSK	23.36	-3.2	20.16	33.01	PASS
n7	15	20	512000	1@104	DFT_QPSK	23.40	-3.2	20.2	33.01	PASS
n7	15	20	512000	1@1	DFT_QAM16	22.66	-3.2	19.46	33.01	PASS
n7	15	20	512000	1@1	DFT_QAM64	21.48	-3.2	18.28	33.01	PASS
n7	15	20	512000	1@1	DFT_QAM256	19.33	-3.2	16.13	33.01	PASS
n7	15	20	512000	1@1	CP_QPSK	22.17	-3.2	18.97	33.01	PASS

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n7	15	5	500500	12@6	DFT_BPSK	0.96	0.00038	-2.5	2.5	PASS
n7	15	5	500500	1@1	DFT_BPSK	-1.59	-0.00064	-2.5	2.5	PASS
n7	15	5	500500	1@23	DFT_BPSK	-4.60	-0.00184	-2.5	2.5	PASS
n7	15	5	500500	12@6	DFT_QPSK	1.28	0.00051	-2.5	2.5	PASS
n7	15	5	500500	1@1	DFT_QPSK	-2.72	-0.00109	-2.5	2.5	PASS
n7	15	5	500500	1@23	DFT_QPSK	-5.02	-0.00201	-2.5	2.5	PASS
n7	15	5	507000	12@6	DFT_BPSK	-0.56	-0.00022	-2.5	2.5	PASS
n7	15	5	507000	1@1	DFT_BPSK	-3.44	-0.00136	-2.5	2.5	PASS
n7	15	5	507000	1@23	DFT_BPSK	-4.79	-0.00189	-2.5	2.5	PASS
n7	15	5	507000	12@6	DFT_QPSK	0.60	0.00024	-2.5	2.5	PASS
n7	15	5	507000	1@1	DFT_QPSK	-3.25	-0.00128	-2.5	2.5	PASS
n7	15	5	507000	1@23	DFT_QPSK	-6.22	-0.00245	-2.5	2.5	PASS
n7	15	5	513500	12@6	DFT_BPSK	-0.09	-0.00004	-2.5	2.5	PASS
n7	15	5	513500	1@1	DFT_BPSK	-2.92	-0.00114	-2.5	2.5	PASS
n7	15	5	513500	1@23	DFT_BPSK	-5.43	-0.00211	-2.5	2.5	PASS
n7	15	5	513500	12@6	DFT_QPSK	0.26	0.00010	-2.5	2.5	PASS
n7	15	5	513500	1@1	DFT_QPSK	-1.46	-0.00057	-2.5	2.5	PASS
n7	15	5	513500	1@23	DFT_QPSK	-5.32	-0.00207	-2.5	2.5	PASS
n7	15	15	501500	36@18	DFT_BPSK	-3.62	-0.00144	-2.5	2.5	PASS
n7	15	15	501500	1@1	DFT_BPSK	1.31	0.00052	-2.5	2.5	PASS
n7	15	15	501500	1@77	DFT_BPSK	-12.08	-0.00482	-2.5	2.5	PASS
n7	15	15	501500	36@18	DFT_QPSK	-2.87	-0.00114	-2.5	2.5	PASS
n7	15	15	501500	1@1	DFT_QPSK	1.41	0.00056	-2.5	2.5	PASS
n7	15	15	501500	1@77	DFT_QPSK	-12.89	-0.00514	-2.5	2.5	PASS
n7	15	15	507000	36@18	DFT_BPSK	-2.59	-0.00102	-2.5	2.5	PASS
n7	15	15	507000	1@1	DFT_BPSK	1.66	0.00065	-2.5	2.5	PASS
n7	15	15	507000	1@77	DFT_BPSK	-10.55	-0.00416	-2.5	2.5	PASS
n7	15	15	507000	36@18	DFT_QPSK	-2.33	-0.00092	-2.5	2.5	PASS
n7	15	15	507000	1@1	DFT_QPSK	1.26	0.00050	-2.5	2.5	PASS
n7	15	15	507000	1@77	DFT_QPSK	-10.44	-0.00412	-2.5	2.5	PASS
n7	15	15	512500	36@18	DFT_BPSK	-1.03	-0.00040	-2.5	2.5	PASS
n7	15	15	512500	1@1	DFT_BPSK	2.62	0.00102	-2.5	2.5	PASS
n7	15	15	512500	1@77	DFT_BPSK	-10.79	-0.00421	-2.5	2.5	PASS
n7	15	15	512500	36@18	DFT_QPSK	-1.49	-0.00058	-2.5	2.5	PASS
n7	15	15	512500	1@1	DFT_QPSK	2.92	0.00114	-2.5	2.5	PASS
n7	15	15	512500	1@77	DFT_QPSK	-9.14	-0.00357	-2.5	2.5	PASS
n7	15	20	502000	50@25	DFT_BPSK	-6.40	-0.00255	-2.5	2.5	PASS
n7	15	20	502000	1@1	DFT_BPSK	1.00	0.00040	-2.5	2.5	PASS


n7	15	20	502000	1@104	DFT_BPSK	-9.54	-0.00380	-2.5	2.5	PASS
n7	15	20	502000	50@25	DFT_QPSK	-4.33	-0.00173	-2.5	2.5	PASS
n7	15	20	502000	1@1	DFT_QPSK	0.70	0.00028	-2.5	2.5	PASS
n7	15	20	502000	1@104	DFT_QPSK	-7.66	-0.00305	-2.5	2.5	PASS
n7	15	20	507000	50@25	DFT_BPSK	-6.01	-0.00237	-2.5	2.5	PASS
n7	15	20	507000	1@1	DFT_BPSK	0.59	0.00023	-2.5	2.5	PASS
n7	15	20	507000	1@104	DFT_BPSK	-9.05	-0.00357	-2.5	2.5	PASS
n7	15	20	507000	50@25	DFT_QPSK	-5.37	-0.00212	-2.5	2.5	PASS
n7	15	20	507000	1@1	DFT_QPSK	0.39	0.00015	-2.5	2.5	PASS
n7	15	20	507000	1@104	DFT_QPSK	-8.71	-0.00344	-2.5	2.5	PASS
n7	15	20	512000	50@25	DFT_BPSK	-7.00	-0.00273	-2.5	2.5	PASS
n7	15	20	512000	1@1	DFT_BPSK	-0.02	-0.00001	-2.5	2.5	PASS
n7	15	20	512000	1@104	DFT_BPSK	-9.43	-0.00368	-2.5	2.5	PASS
n7	15	20	512000	50@25	DFT_QPSK	-6.36	-0.00248	-2.5	2.5	PASS
n7	15	20	512000	1@1	DFT_QPSK	-1.11	-0.00043	-2.5	2.5	PASS
n7	15	20	512000	1@104	DFT_QPSK	-9.06	-0.00354	-2.5	2.5	PASS

3 Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n7	15	5	500500	25@0	DFT_BPSK	3.92	13	PASS
n7	15	5	500500	25@0	DFT_QPSK	5.02	13	PASS
n7	15	5	500500	25@0	DFT_QAM16	5.93	13	PASS
n7	15	5	500500	25@0	DFT_QAM64	6.08	13	PASS
n7	15	5	500500	25@0	DFT_QAM256	6.29	13	PASS
n7	15	5	507000	25@0	DFT_BPSK	3.80	13	PASS
n7	15	5	507000	25@0	DFT_QPSK	4.85	13	PASS
n7	15	5	507000	25@0	DFT_QAM16	5.79	13	PASS
n7	15	5	507000	25@0	DFT_QAM64	6.22	13	PASS
n7	15	5	507000	25@0	DFT_QAM256	6.66	13	PASS
n7	15	5	513500	25@0	DFT_BPSK	3.80	13	PASS
n7	15	5	513500	25@0	DFT_QPSK	5.59	13	PASS
n7	15	5	513500	25@0	DFT_QAM16	5.91	13	PASS
n7	15	5	513500	25@0	DFT_QAM64	6.21	13	PASS
n7	15	5	513500	25@0	DFT_QAM256	6.46	13	PASS
n7	15	10	501000	50@0	DFT_BPSK	4.00	13	PASS
n7	15	10	501000	50@0	DFT_QPSK	5.07	13	PASS
n7	15	10	501000	50@0	DFT_QAM16	5.90	13	PASS
n7	15	10	501000	50@0	DFT_QAM64	6.21	13	PASS
n7	15	10	501000	50@0	DFT_QAM256	6.41	13	PASS
n7	15	10	507000	50@0	DFT_BPSK	4.04	13	PASS
n7	15	10	507000	50@0	DFT_QPSK	4.95	13	PASS
n7	15	10	507000	50@0	DFT_QAM16	5.63	13	PASS
n7	15	10	507000	50@0	DFT_QAM64	6.08	13	PASS
n7	15	10	507000	50@0	DFT_QAM256	6.66	13	PASS
n7	15	10	513000	50@0	DFT_BPSK	5.59	13	PASS
n7	15	10	513000	50@0	DFT_QPSK	5.21	13	PASS
n7	15	10	513000	50@0	DFT_QAM16	5.96	13	PASS
n7	15	10	513000	50@0	DFT_QAM64	6.32	13	PASS
n7	15	10	513000	50@0	DFT_QAM256	6.80	13	PASS
n7	15	15	501500	75@0	DFT_BPSK	4.00	13	PASS
n7	15	15	501500	75@0	DFT_QPSK	5.02	13	PASS
n7	15	15	501500	75@0	DFT_QAM16	5.92	13	PASS
n7	15	15	501500	75@0	DFT_QAM64	6.22	13	PASS
n7	15	15	501500	75@0	DFT_QAM256	6.72	13	PASS
n7	15	15	507000	75@0	DFT_BPSK	3.98	13	PASS
n7	15	15	507000	75@0	DFT_QPSK	4.97	13	PASS
n7	15	15	507000	75@0	DFT_QAM16	5.85	13	PASS
n7	15	15	507000	75@0	DFT_QAM64	6.04	13	PASS

n7	15	15	507000	75@0	DFT_QAM256	6.60	13	PASS
n7	15	15	512500	75@0	DFT_BPSK	5.16	13	PASS
n7	15	15	512500	75@0	DFT_QPSK	5.10	13	PASS
n7	15	15	512500	75@0	DFT_QAM16	5.99	13	PASS
n7	15	15	512500	75@0	DFT_QAM64	6.36	13	PASS
n7	15	15	512500	75@0	DFT_QAM256	6.65	13	PASS
n7	15	20	502000	100@0	DFT_BPSK	6.01	13	PASS
n7	15	20	502000	100@0	DFT_QPSK	5.23	13	PASS
n7	15	20	502000	100@0	DFT_QAM16	5.95	13	PASS
n7	15	20	502000	100@0	DFT_QAM64	6.32	13	PASS
n7	15	20	502000	100@0	DFT_QAM256	6.57	13	PASS
n7	15	20	507000	100@0	DFT_BPSK	4.42	13	PASS
n7	15	20	507000	100@0	DFT_QPSK	5.28	13	PASS
n7	15	20	507000	100@0	DFT_QAM16	6.20	13	PASS
n7	15	20	507000	100@0	DFT_QAM64	6.41	13	PASS
n7	15	20	507000	100@0	DFT_QAM256	6.76	13	PASS
n7	15	20	512000	100@0	DFT_BPSK	5.98	13	PASS
n7	15	20	512000	100@0	DFT_QPSK	5.17	13	PASS
n7	15	20	512000	100@0	DFT_QAM16	5.96	13	PASS
n7	15	20	512000	100@0	DFT_QAM64	6.31	13	PASS
n7	15	20	512000	100@0	DFT_QAM256	6.55	13	PASS


n7 SCS=15kHz DFT_BPSK BW=10MHz Channel=501000 RB=50@0

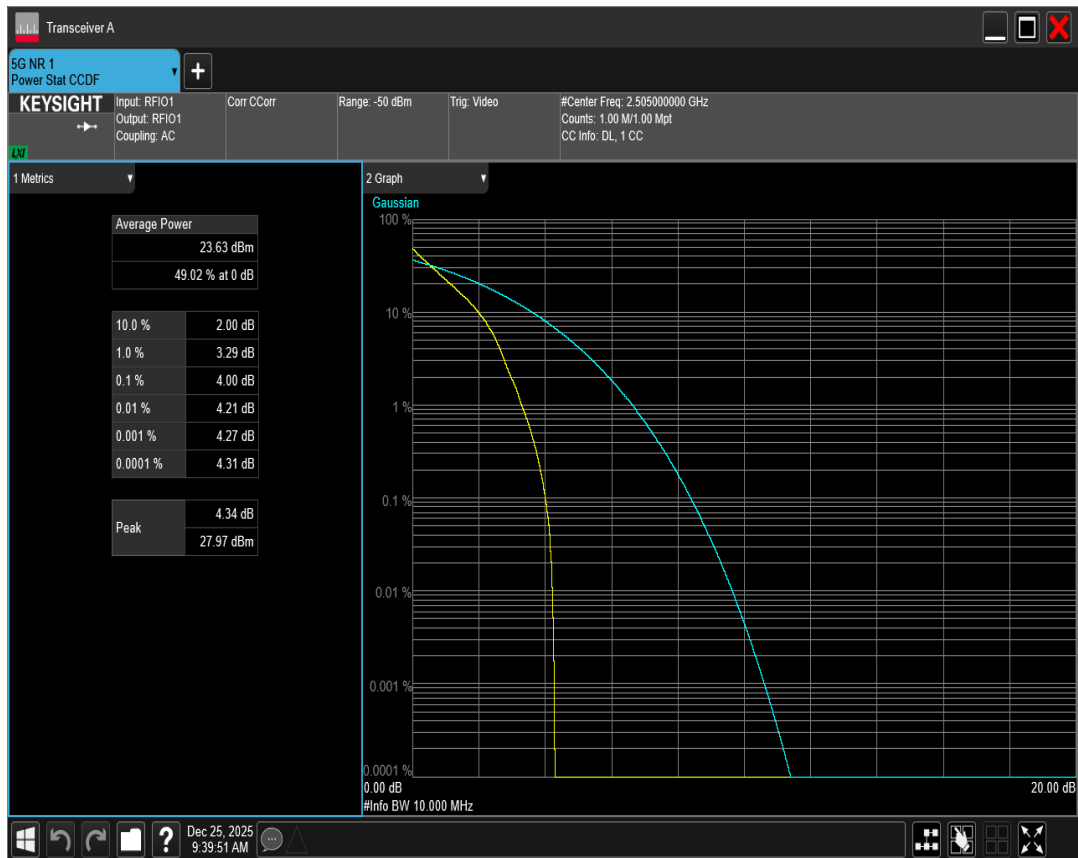


n7 SCS=15kHz DFT_BPSK BW=10MHz Channel=507000 RB=50@0

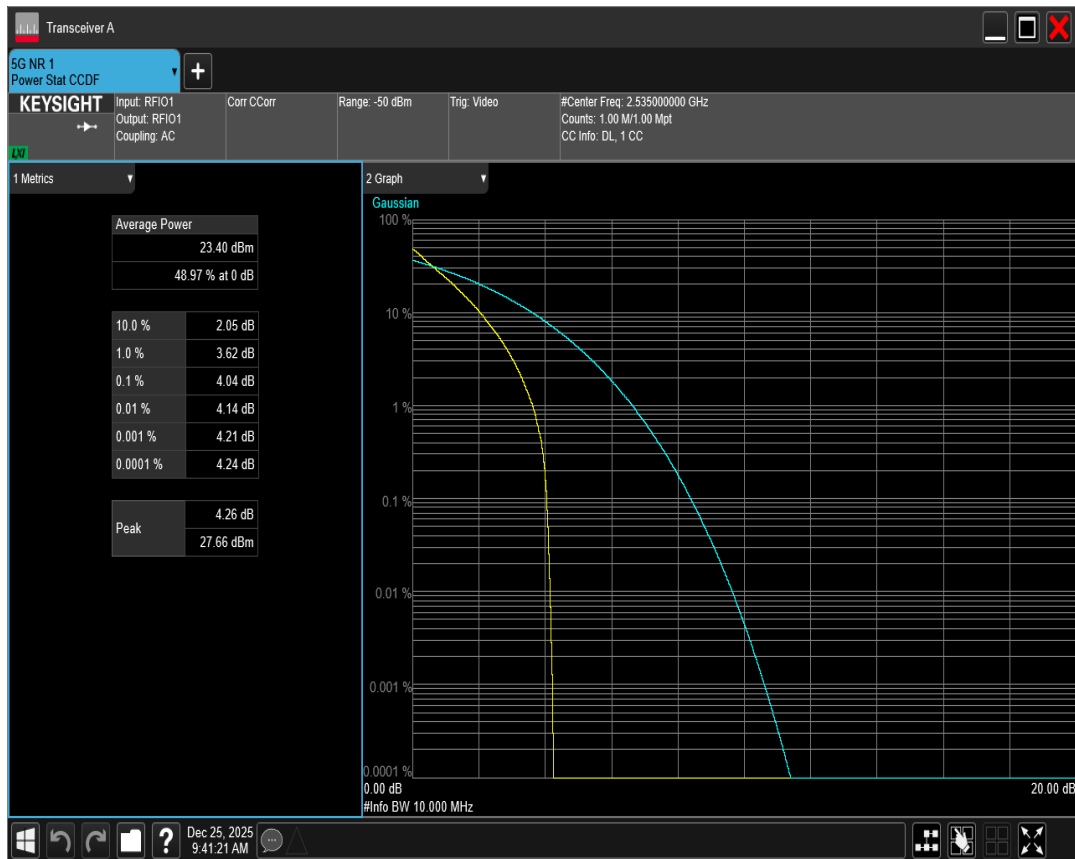


n7 SCS=15kHz DFT_BPSK BW=10MHz Channel=513000 RB=50@0

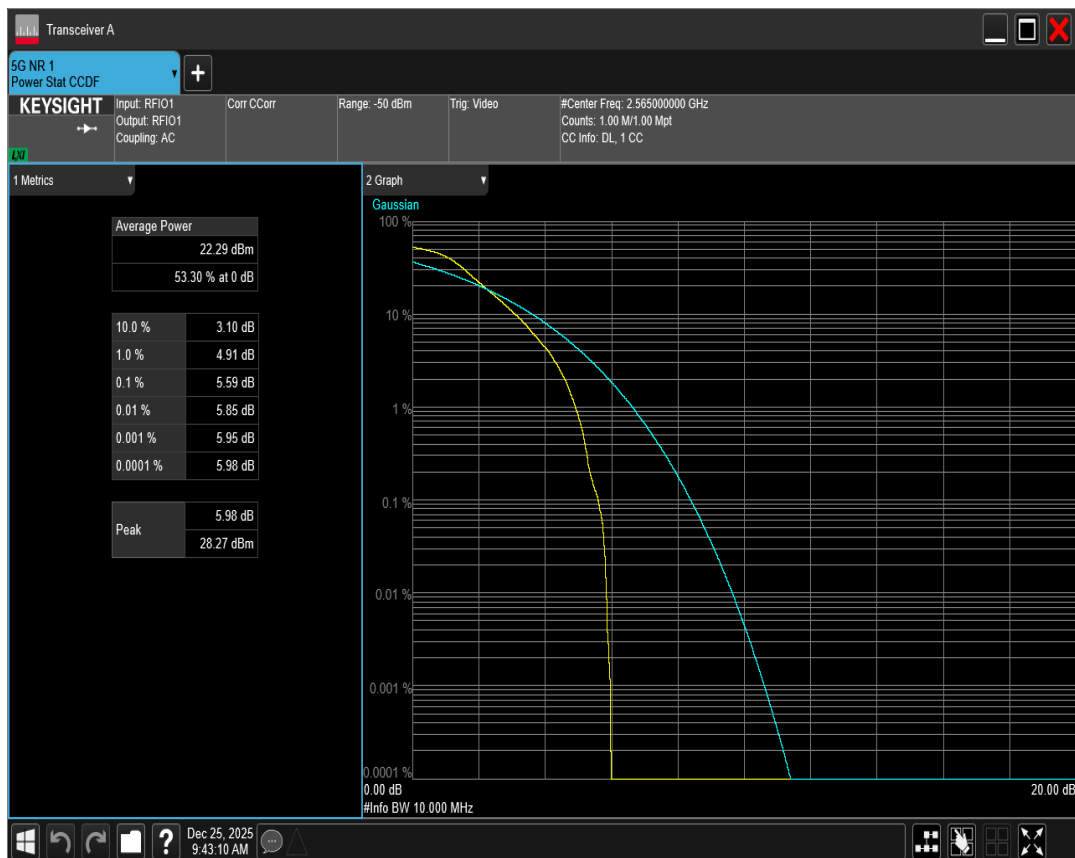


n7 SCS=15kHz DFT_BPSK BW=15MHz Channel=501500 RB=75@0

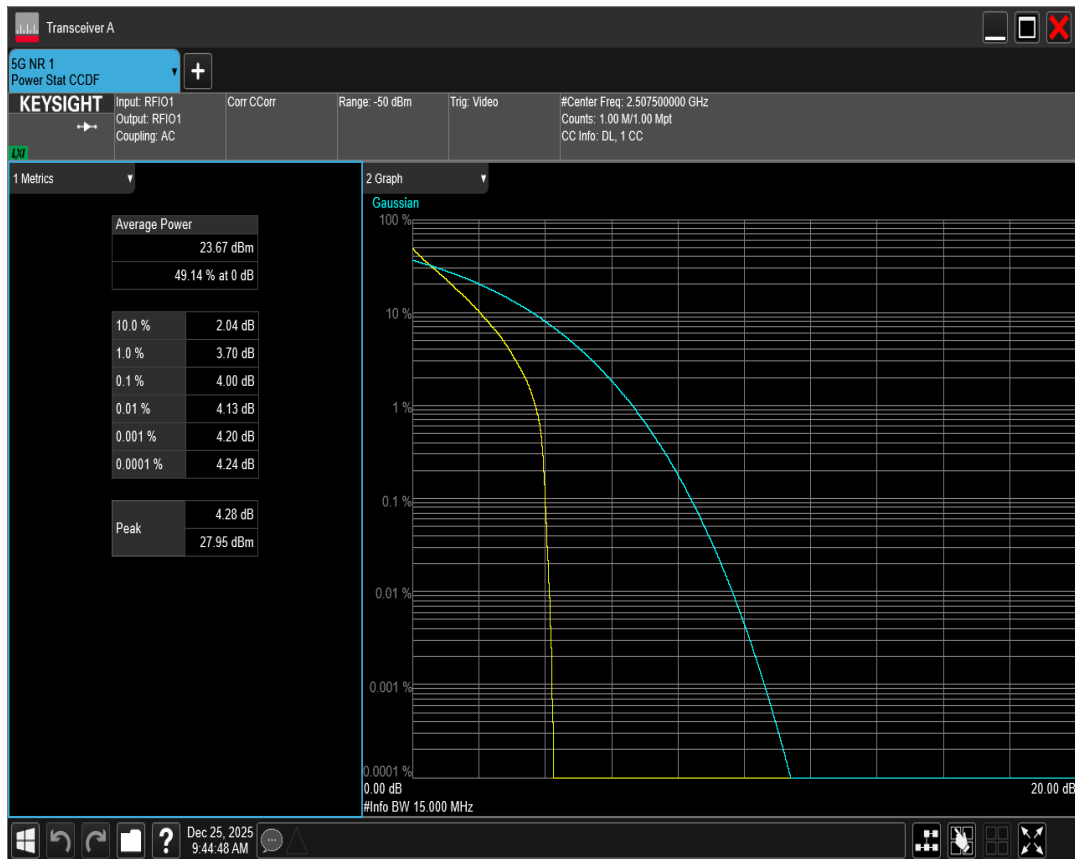


n7 SCS=15kHz DFT_BPSK BW=15MHz Channel=507000 RB=75@0

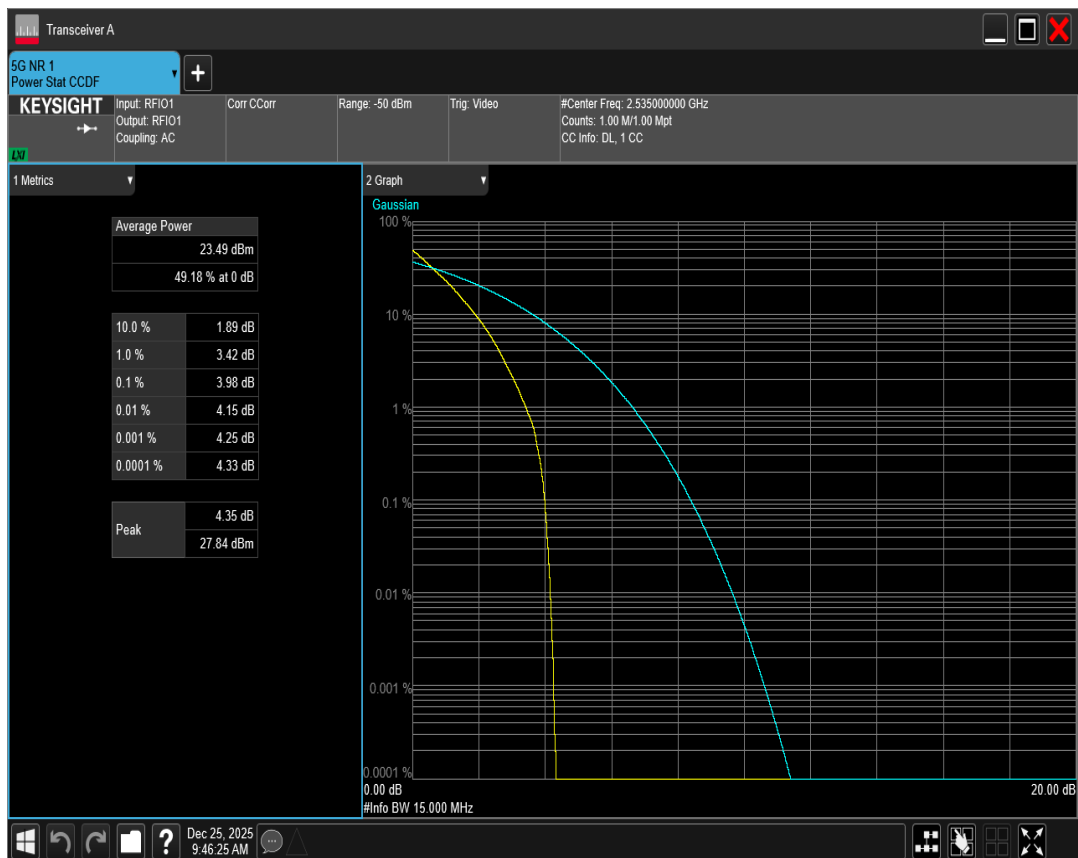


n7 SCS=15kHz DFT_BPSK BW=15MHz Channel=512500 RB=75@0

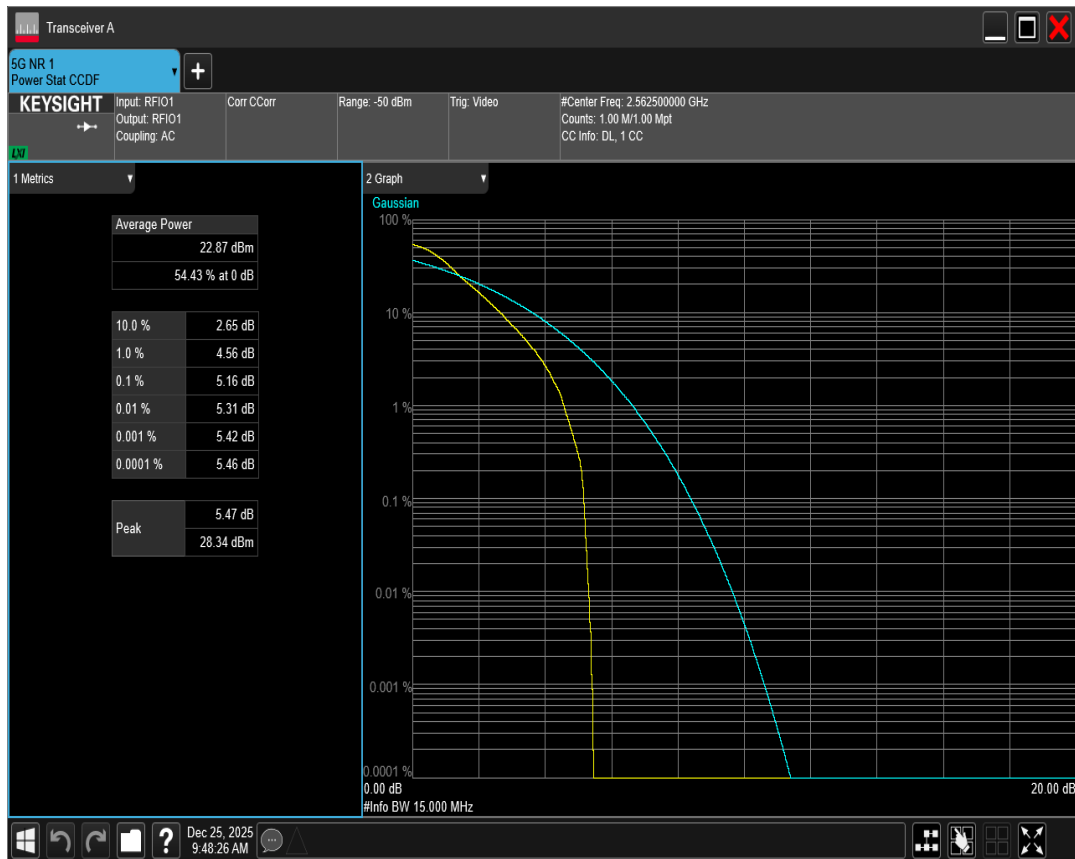


n7 SCS=15kHz DFT_BPSK BW=20MHz Channel=502000 RB=100@0

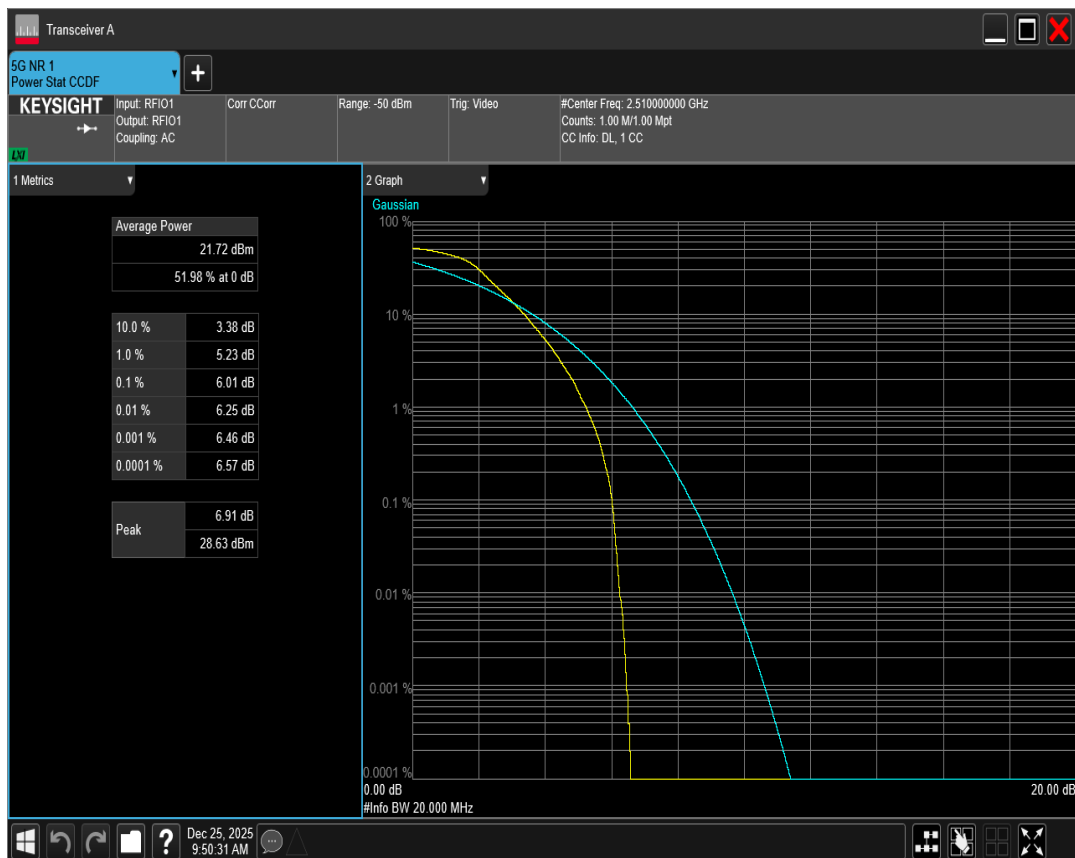


n7 SCS=15kHz DFT_BPSK BW=20MHz Channel=507000 RB=100@0

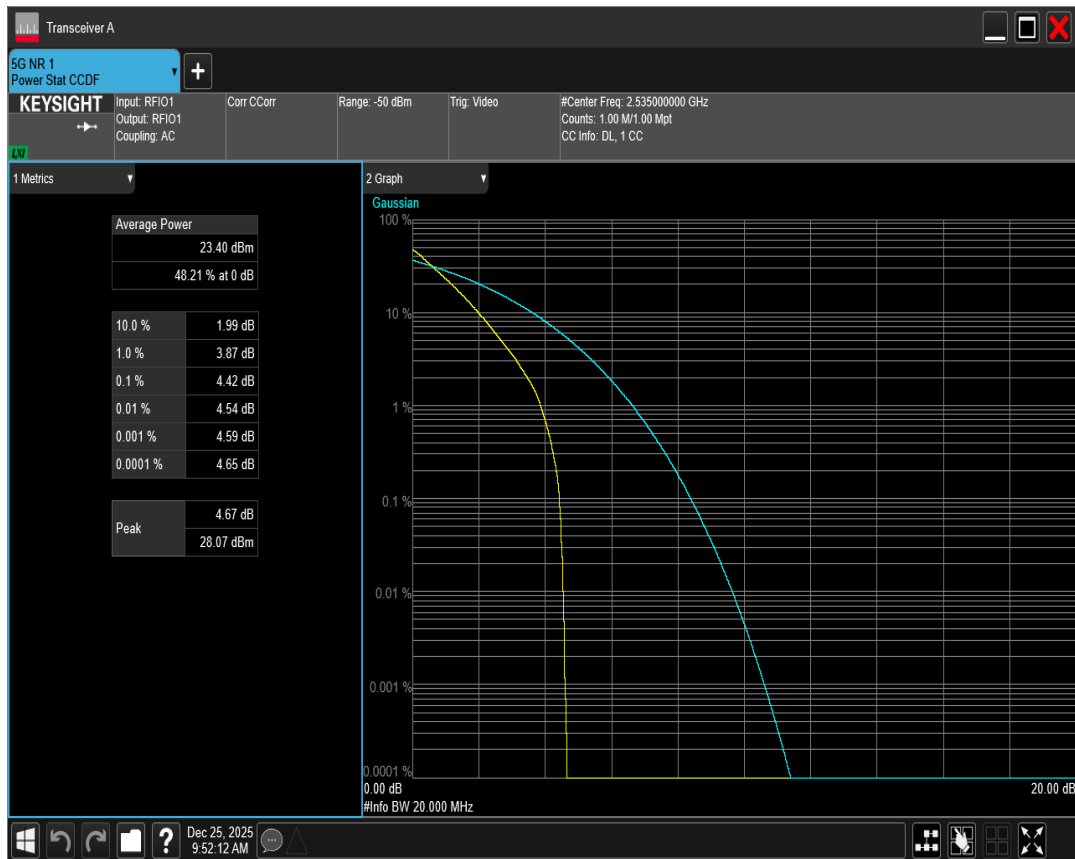


n7 SCS=15kHz DFT_BPSK BW=20MHz Channel=512000 RB=100@0

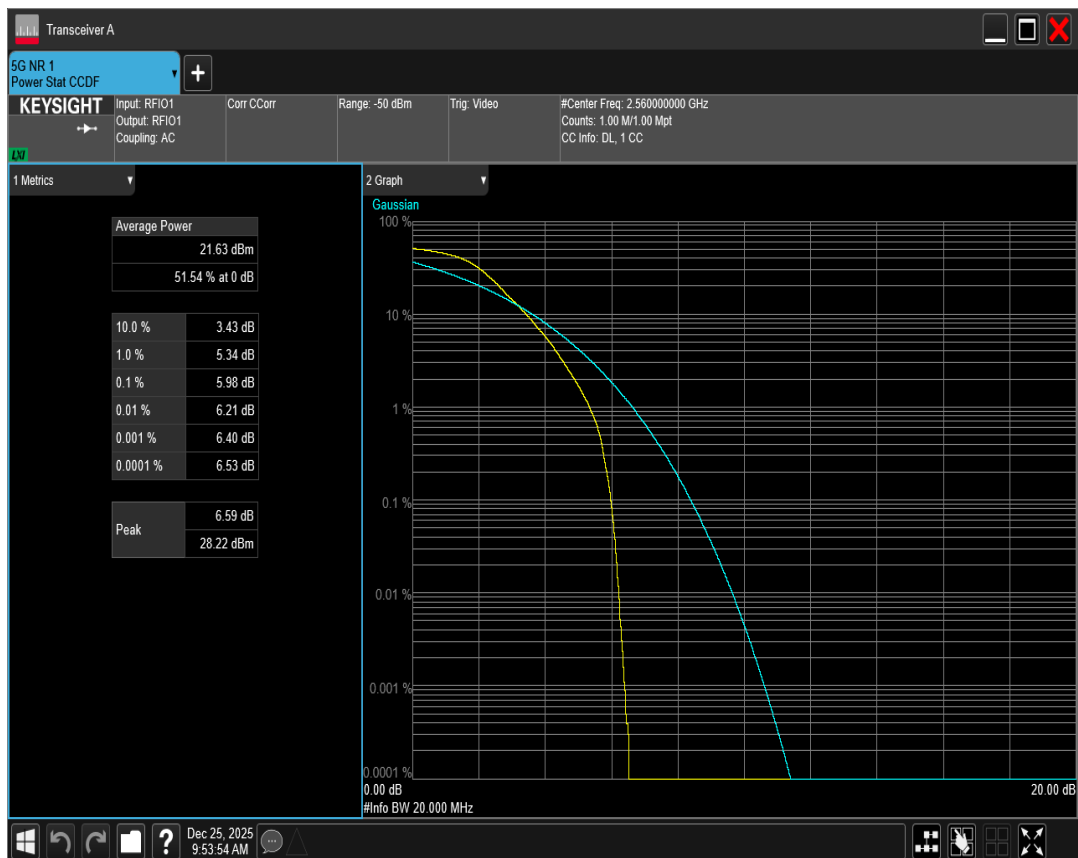


n7 SCS=15kHz DFT_BPSK BW=5MHz Channel=500500 RB=25@0

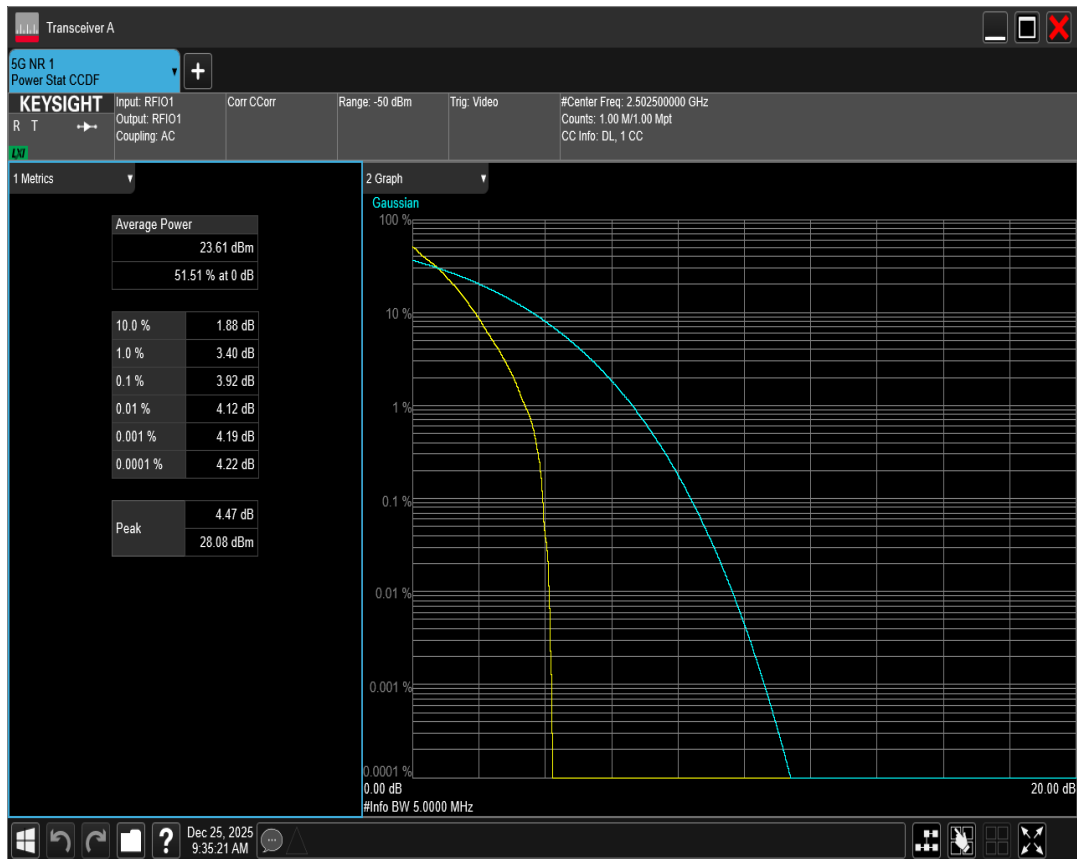


n7 SCS=15kHz DFT_BPSK BW=5MHz Channel=507000 RB=25@0

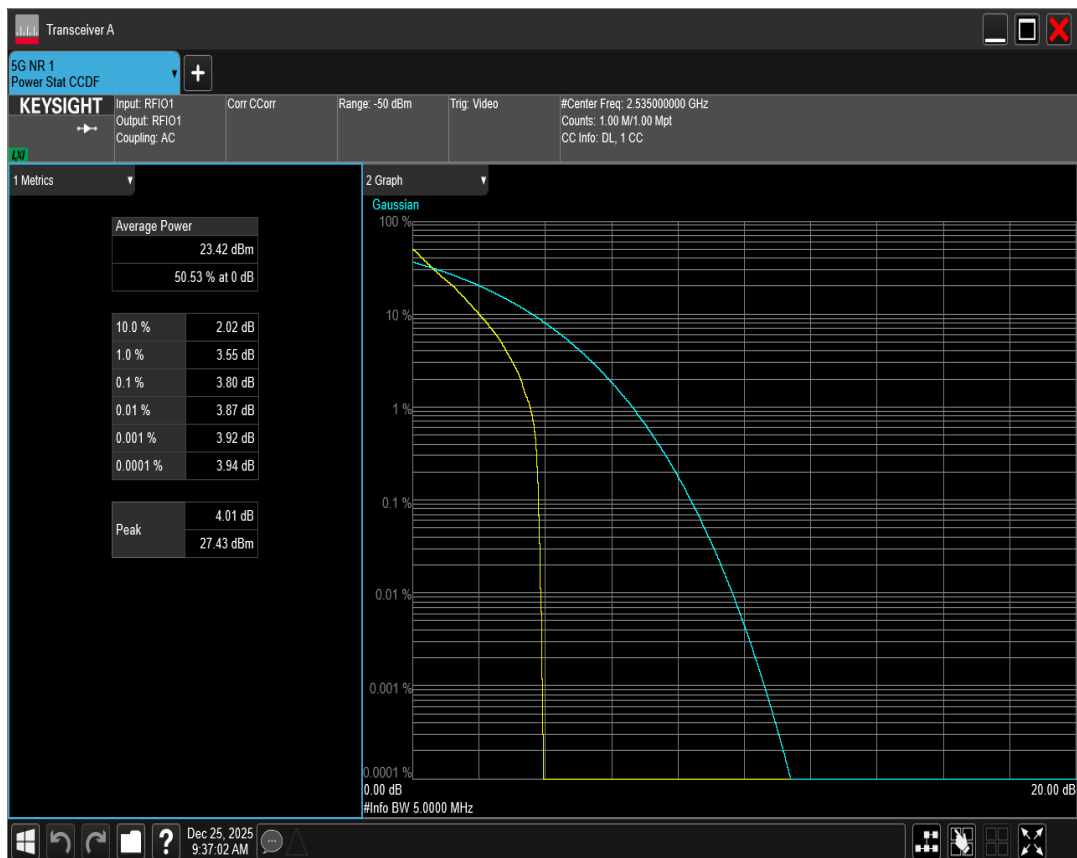


n7 SCS=15kHz DFT_BPSK BW=5MHz Channel=513500 RB=25@0

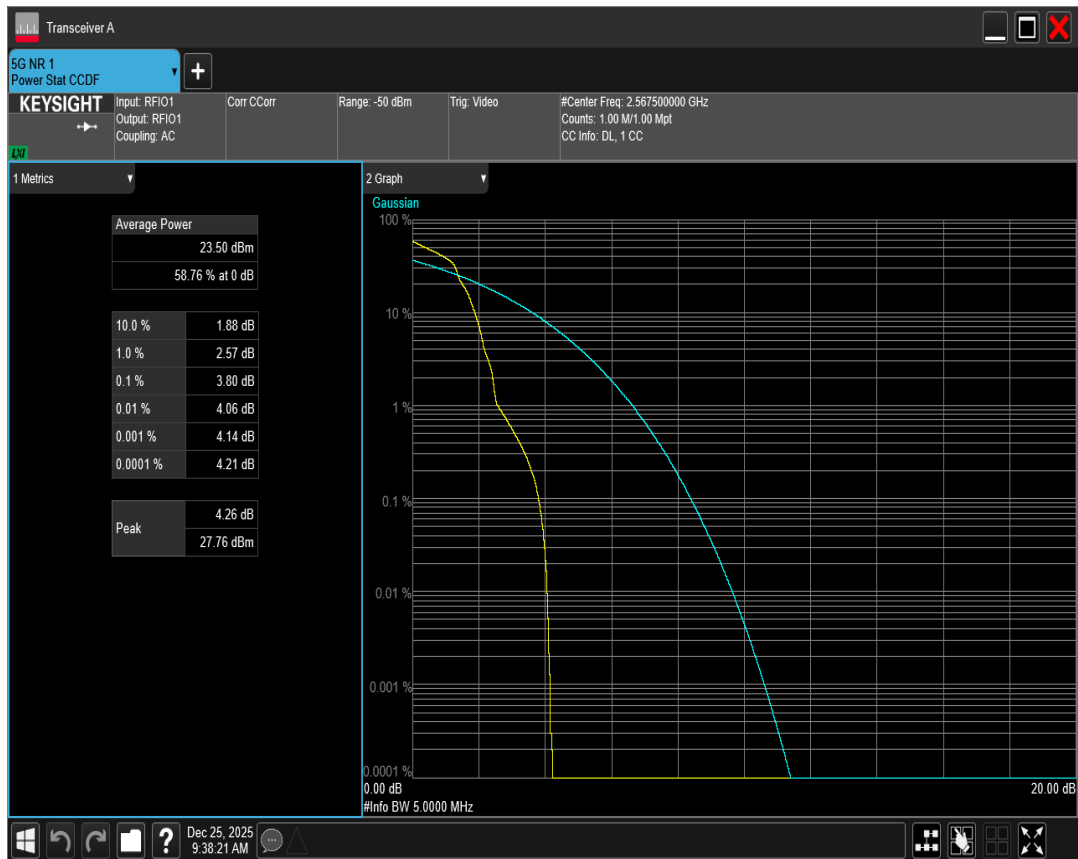


n7 SCS=15kHz DFT_QAM16 BW=10MHz Channel=501000 RB=50@0

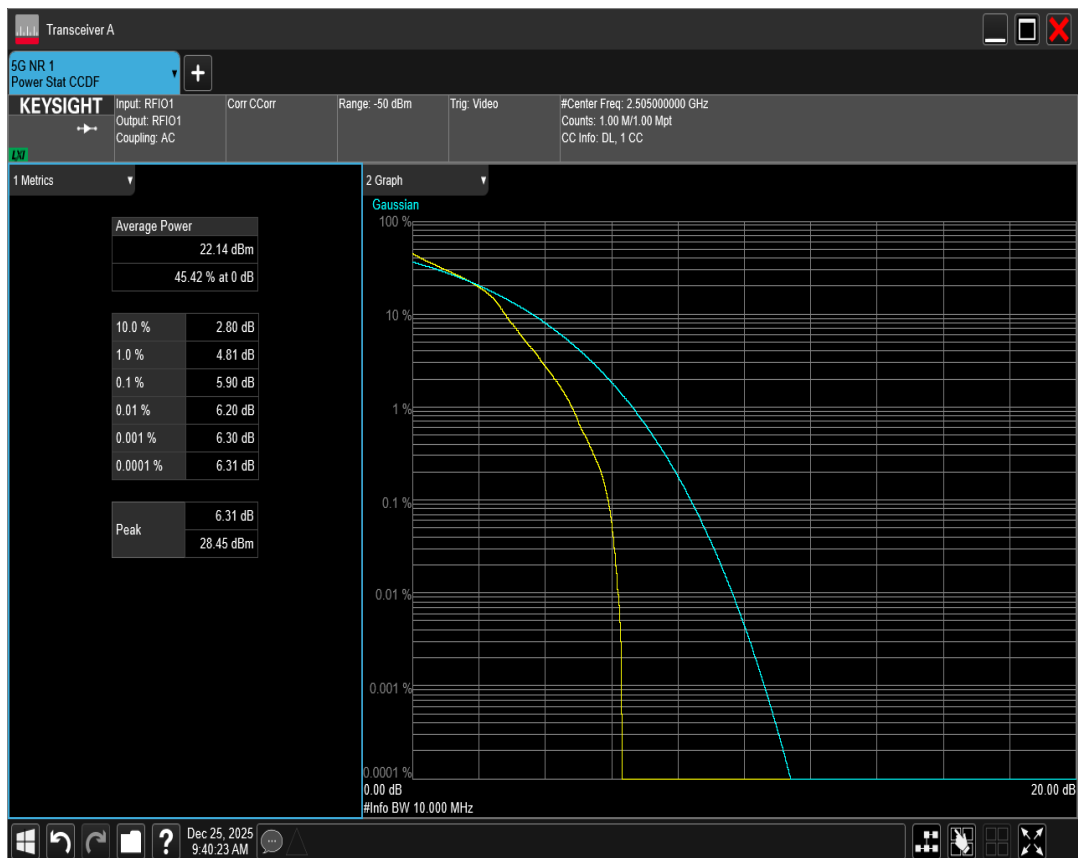


n7 SCS=15kHz DFT_QAM16 BW=10MHz Channel=507000 RB=50@0

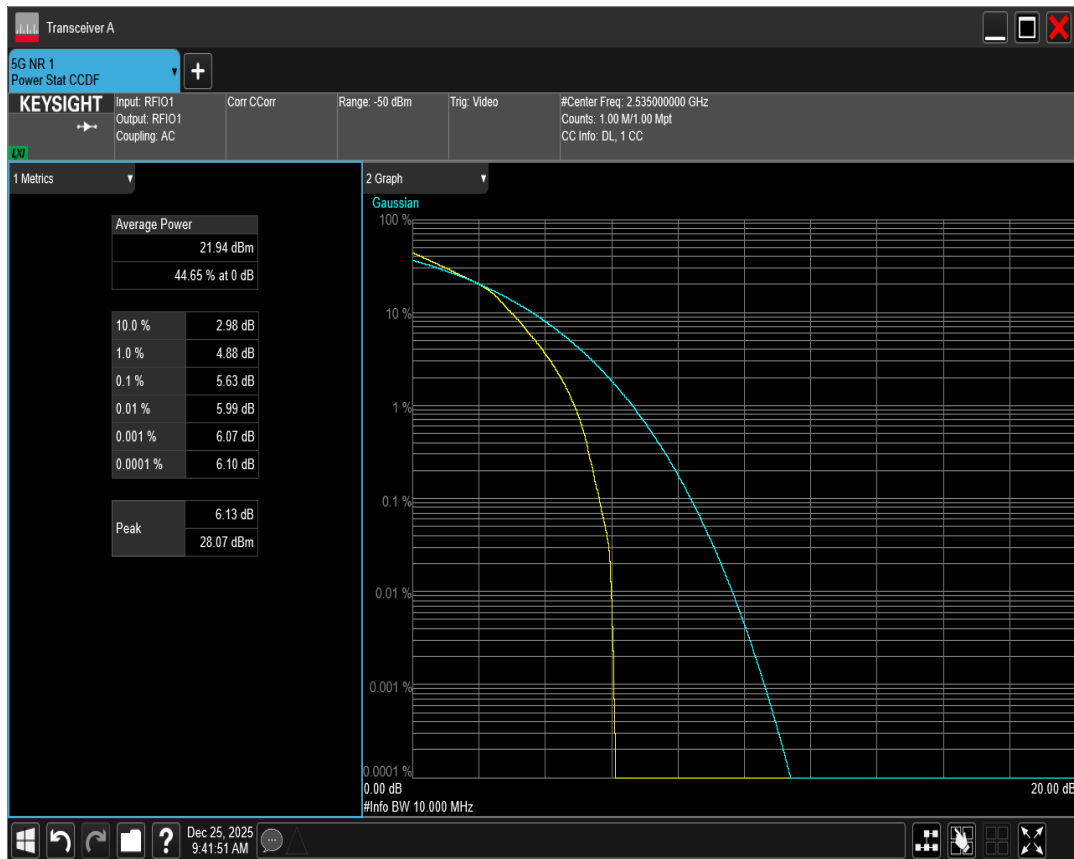


n7 SCS=15kHz DFT_QAM16 BW=10MHz Channel=513000 RB=50@0

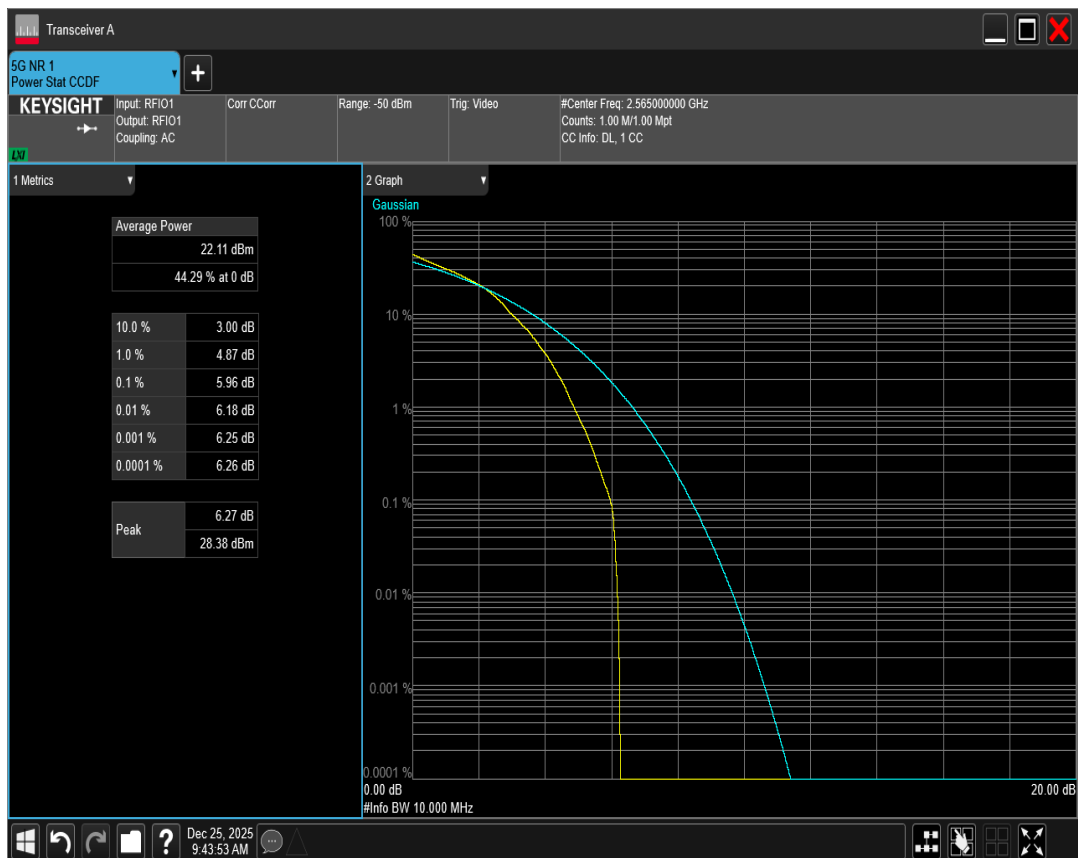


n7 SCS=15kHz DFT_QAM16 BW=15MHz Channel=501500 RB=75@0

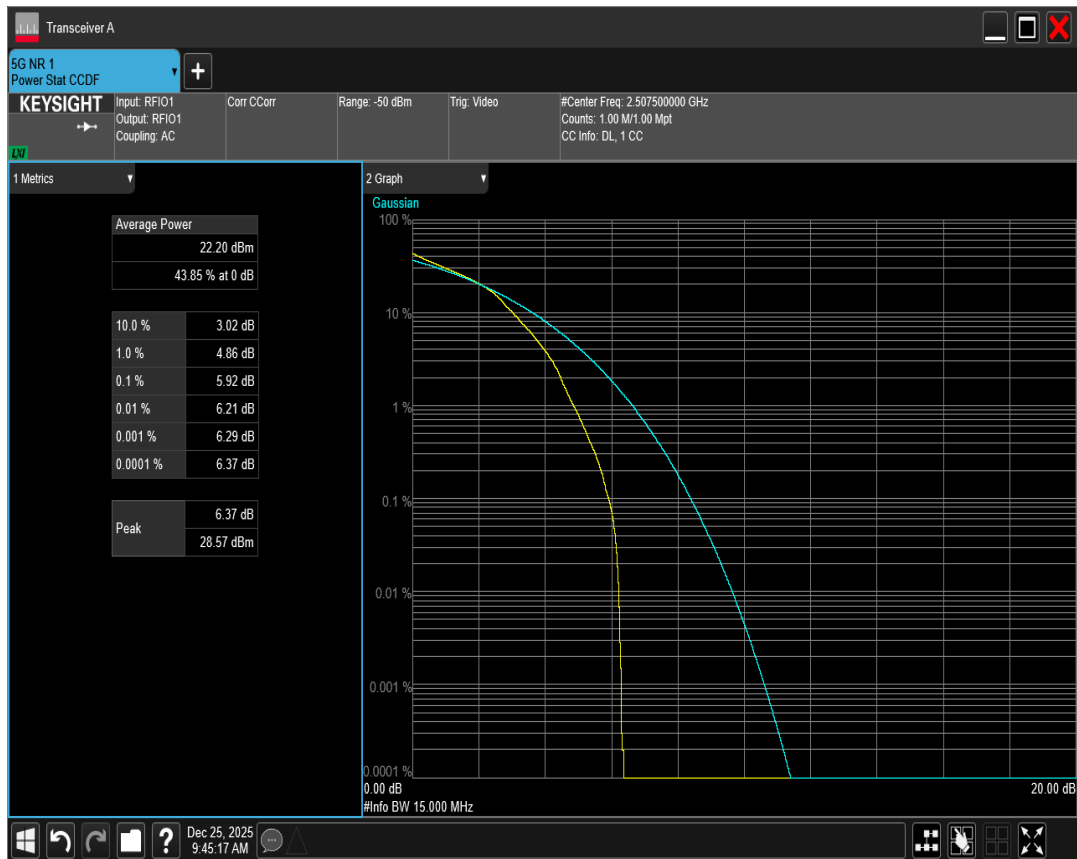


n7 SCS=15kHz DFT_QAM16 BW=15MHz Channel=507000 RB=75@0

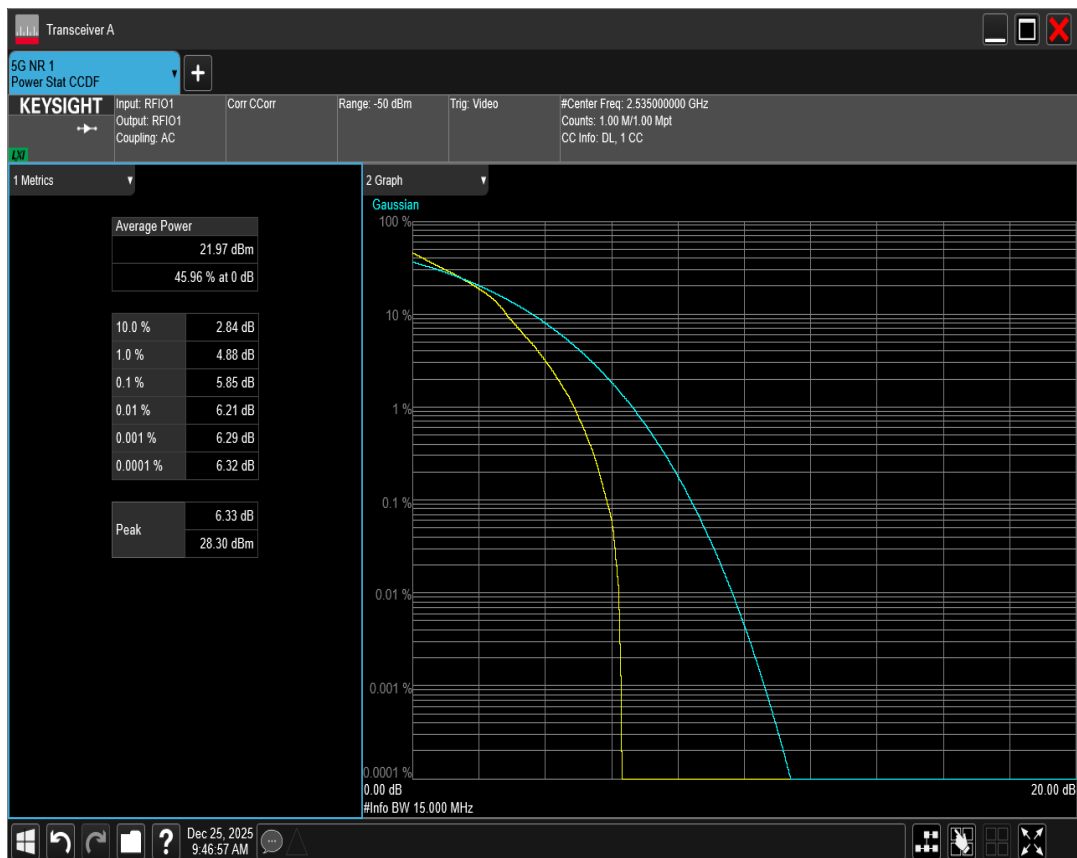


n7 SCS=15kHz DFT_QAM16 BW=15MHz Channel=512500 RB=75@0

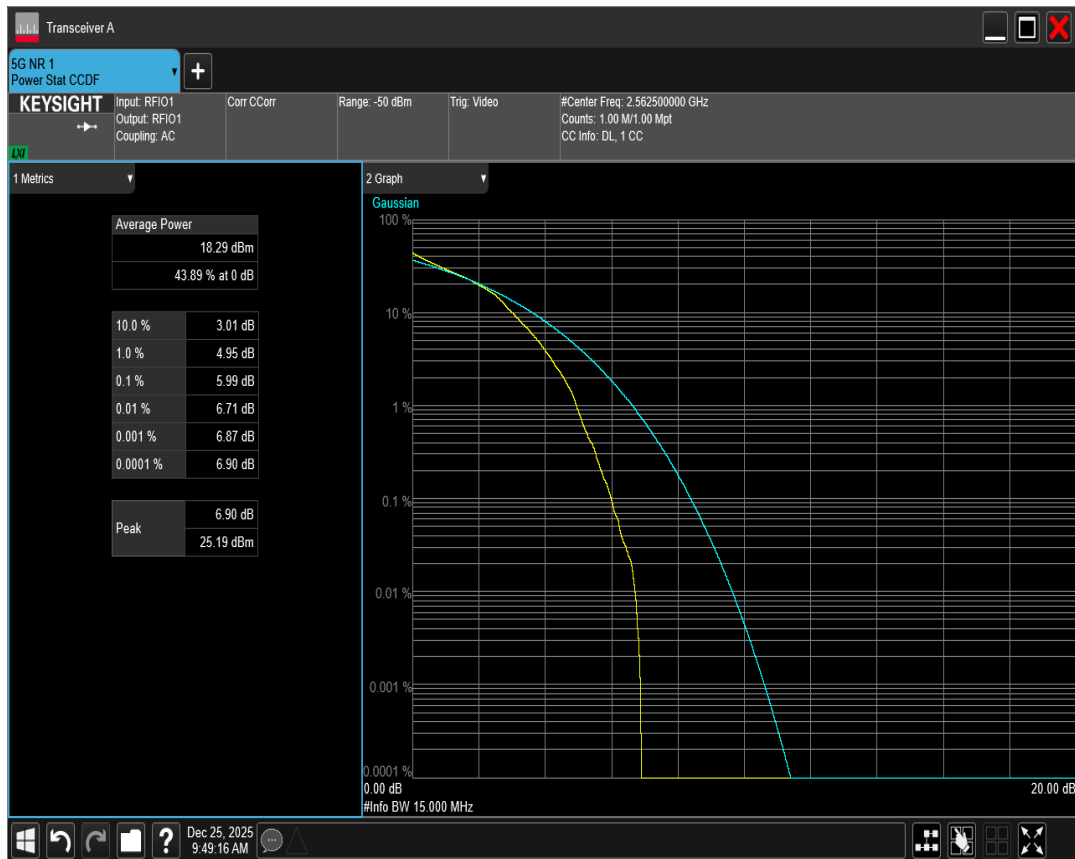


n7 SCS=15kHz DFT_QAM16 BW=20MHz Channel=502000 RB=100@0

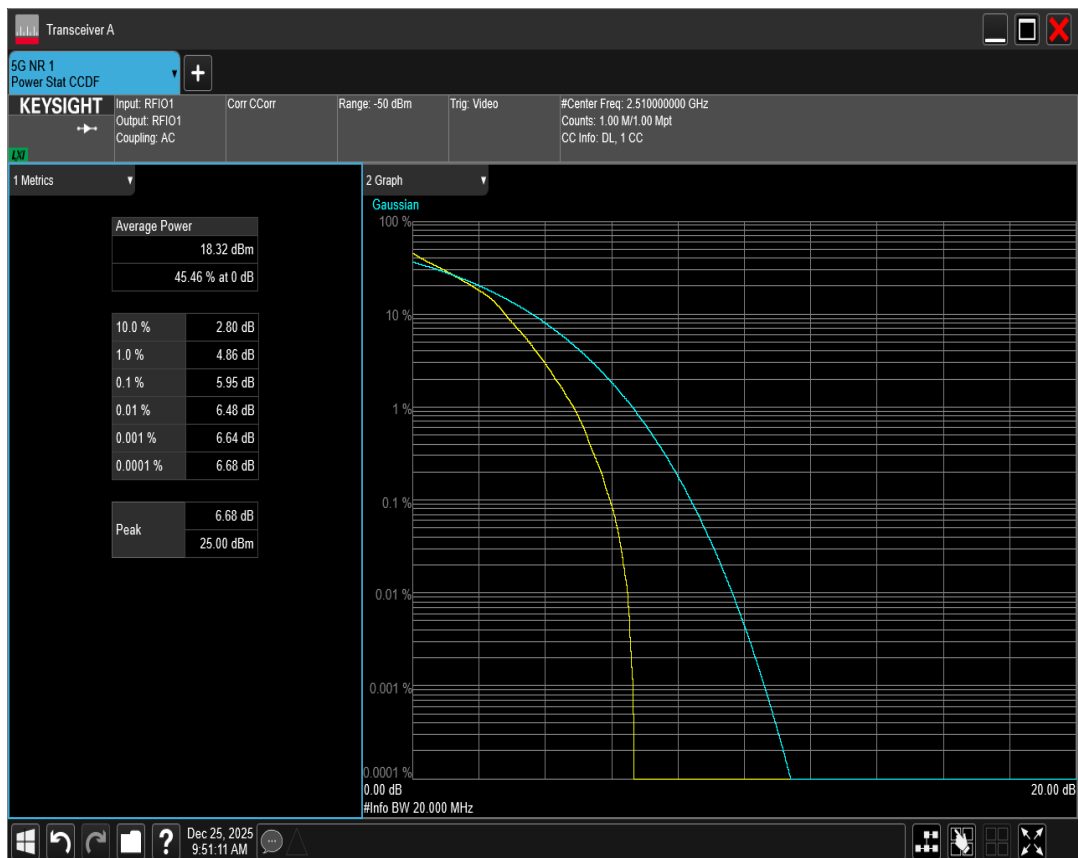


n7 SCS=15kHz DFT_QAM16 BW=20MHz Channel=507000 RB=100@0

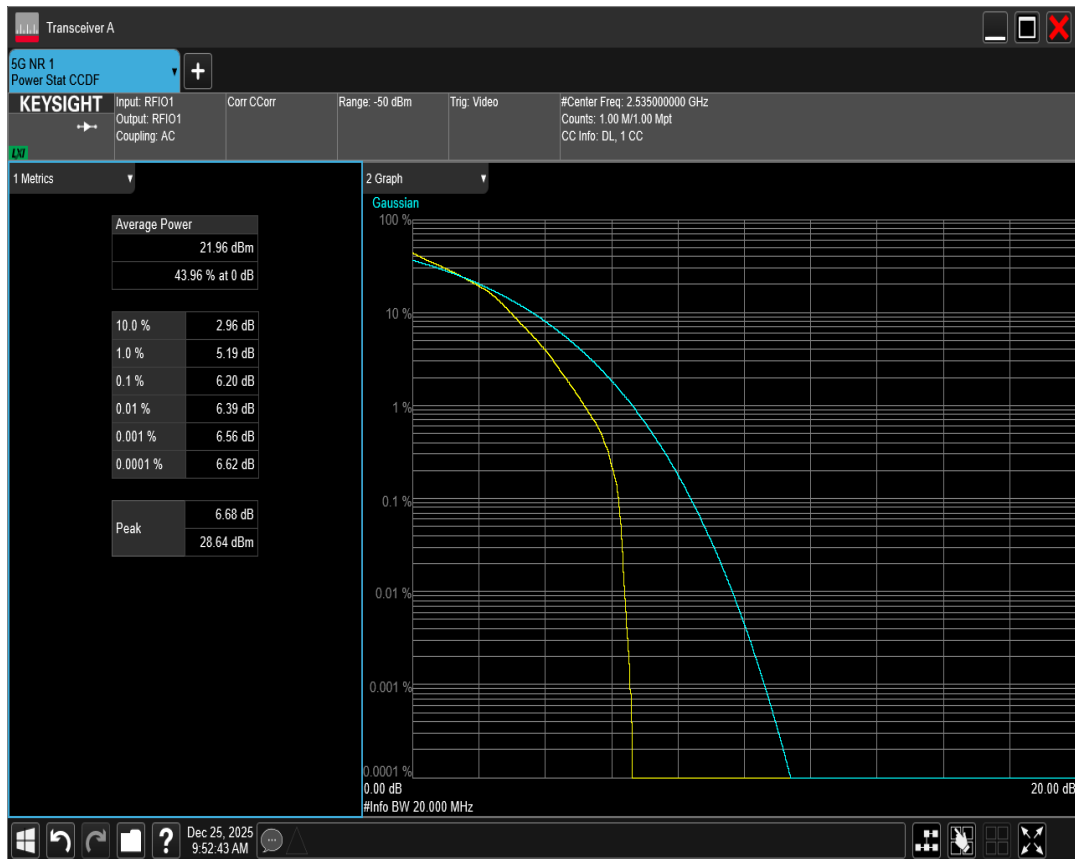


n7 SCS=15kHz DFT_QAM16 BW=20MHz Channel=512000 RB=100@0

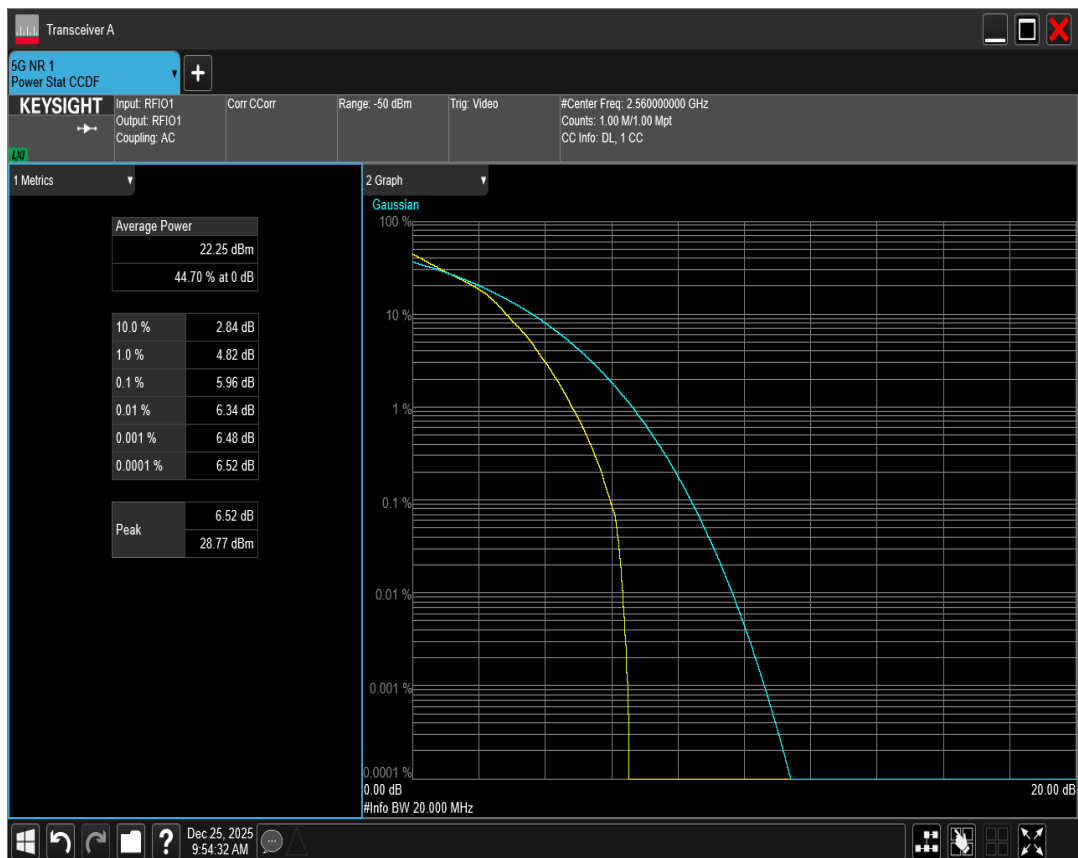


n7 SCS=15kHz DFT_QAM16 BW=5MHz Channel=500500 RB=25@0

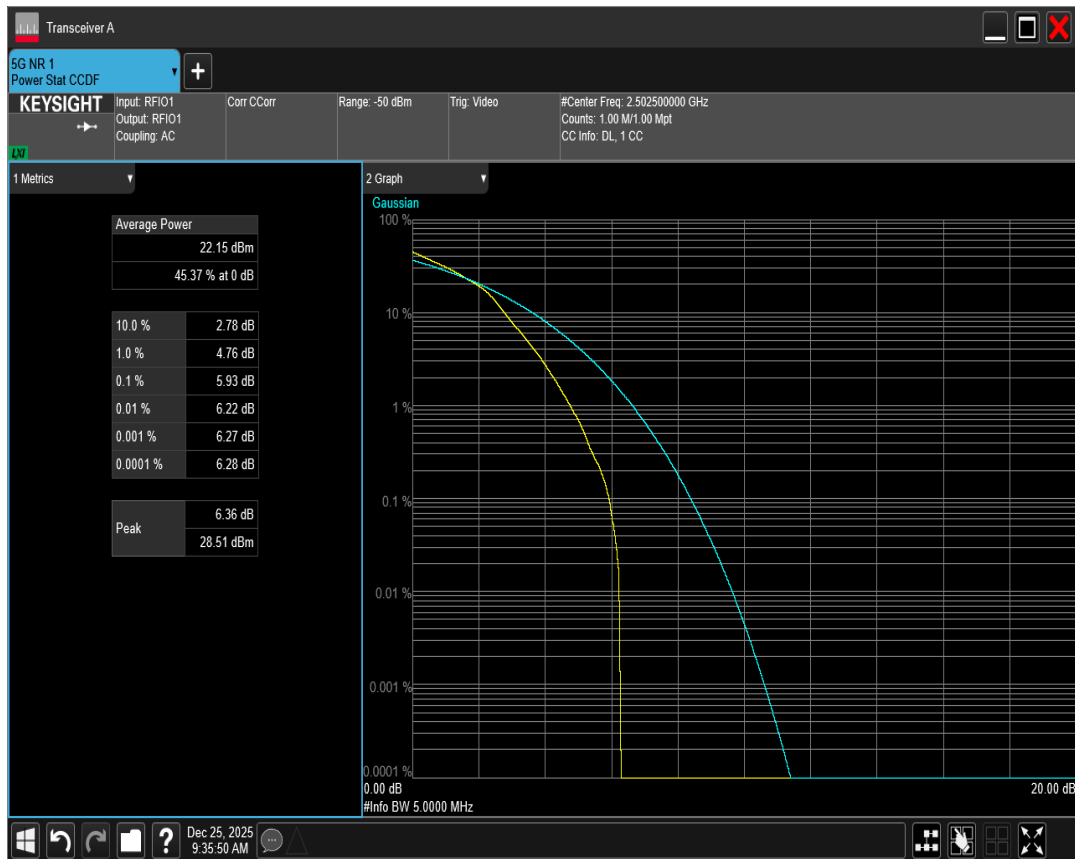


n7 SCS=15kHz DFT_QAM16 BW=5MHz Channel=507000 RB=25@0

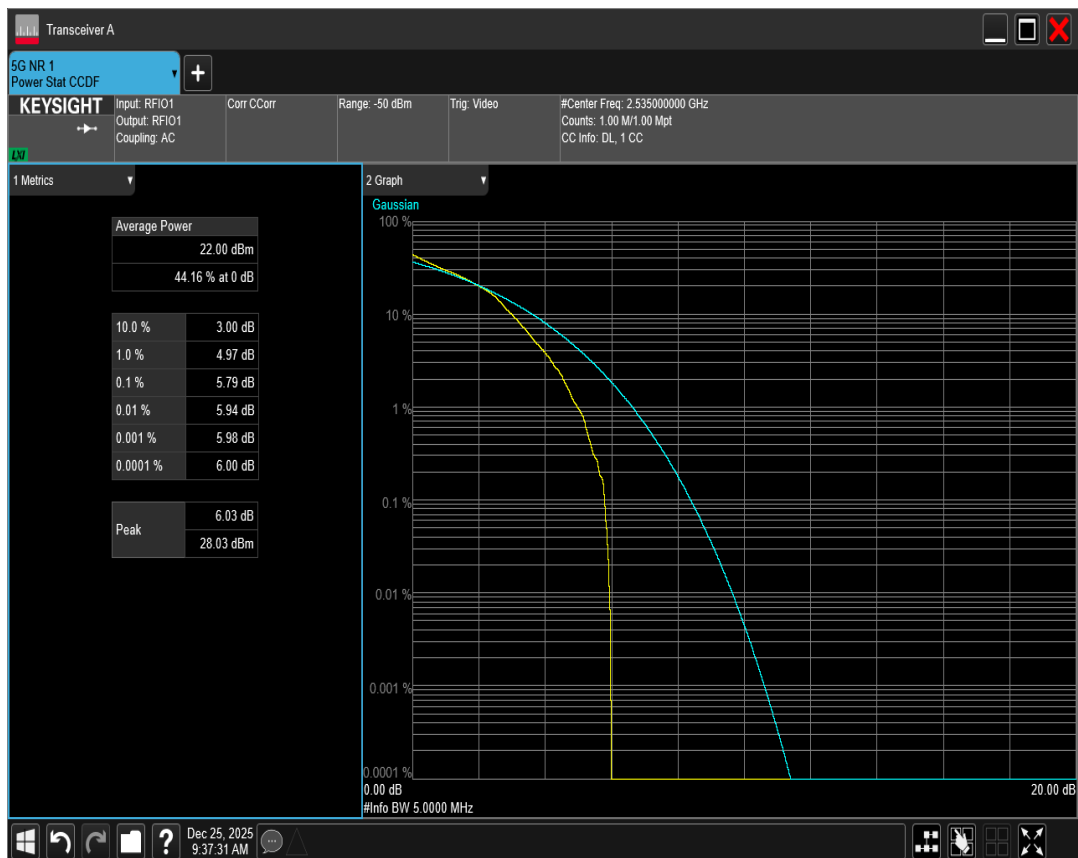


n7 SCS=15kHz DFT_QAM16 BW=5MHz Channel=513500 RB=25@0

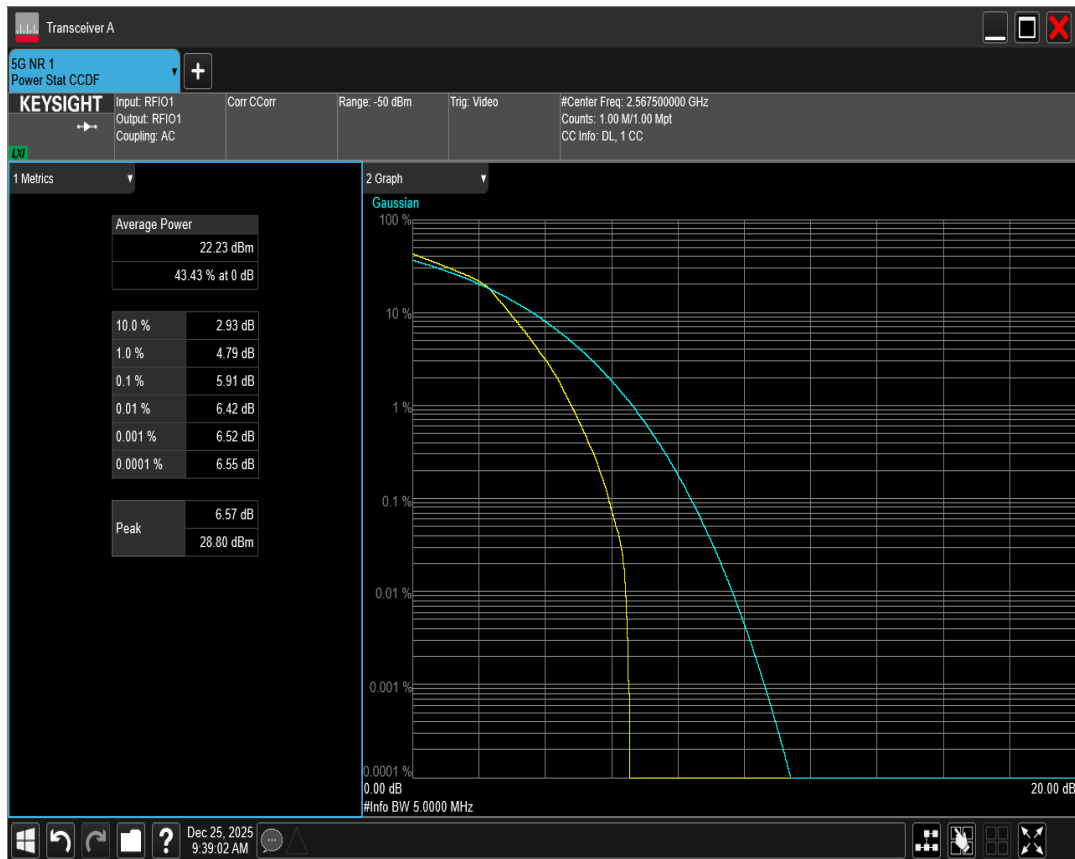


n7 SCS=15kHz DFT_QAM256 BW=10MHz Channel=501000 RB=50@0

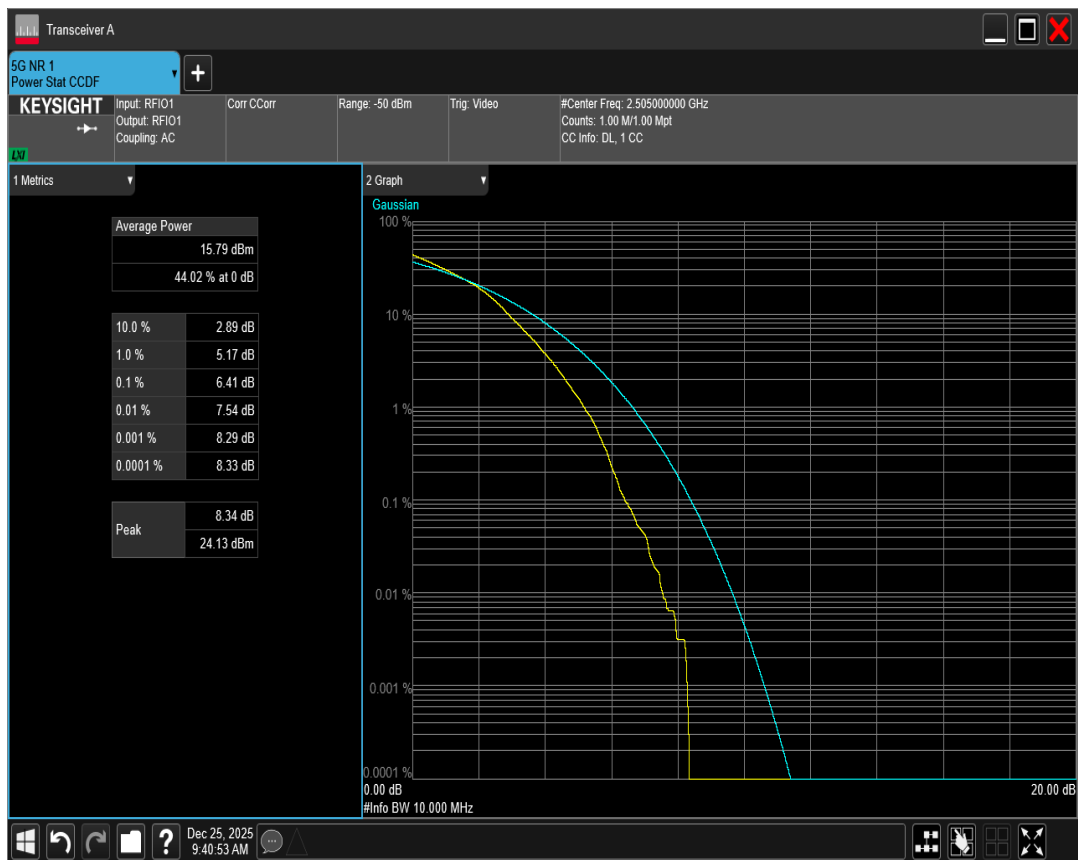


n7 SCS=15kHz DFT_QAM256 BW=10MHz Channel=507000 RB=50@0

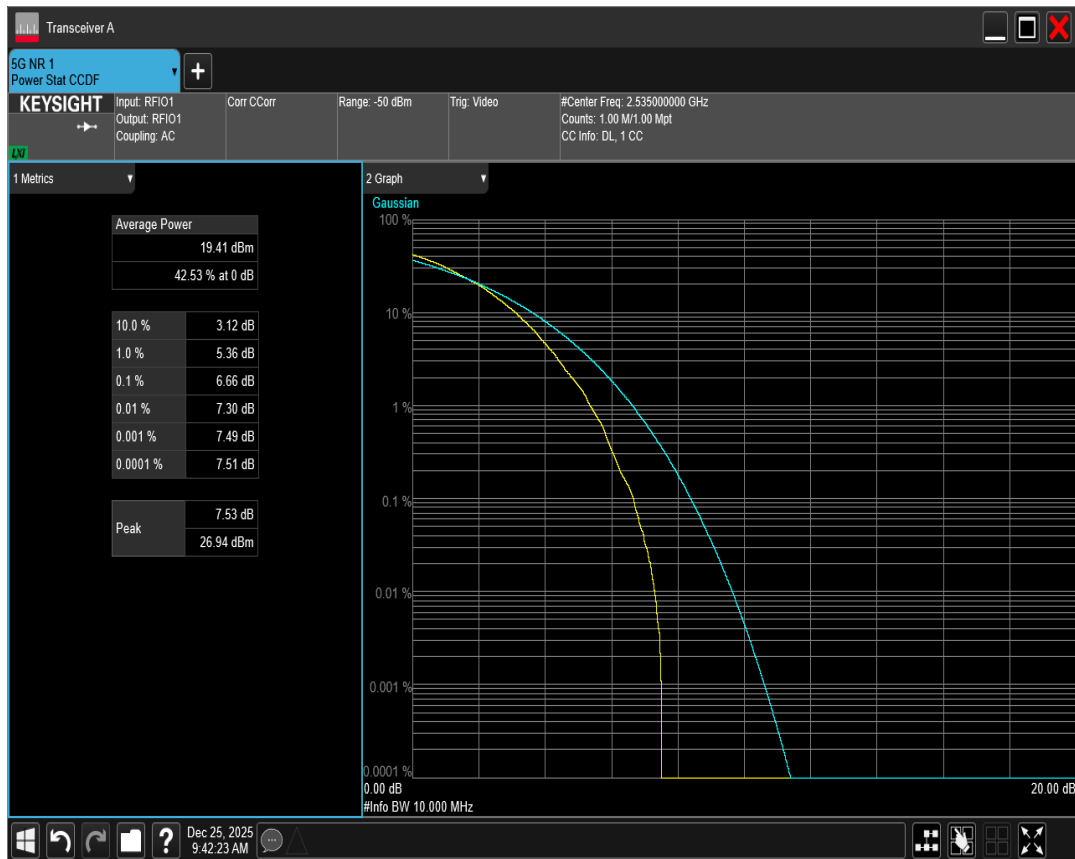


n7 SCS=15kHz DFT_QAM256 BW=10MHz Channel=513000 RB=50@0

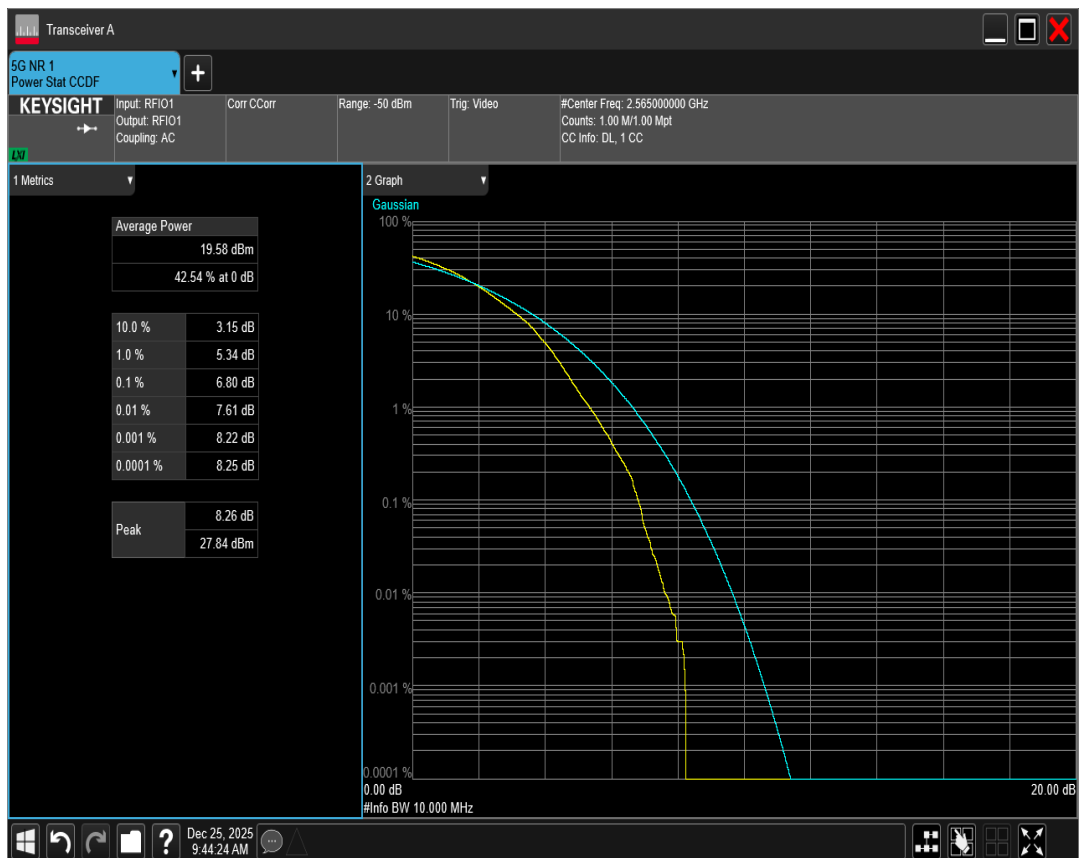


n7 SCS=15kHz DFT_QAM256 BW=15MHz Channel=501500 RB=75@0

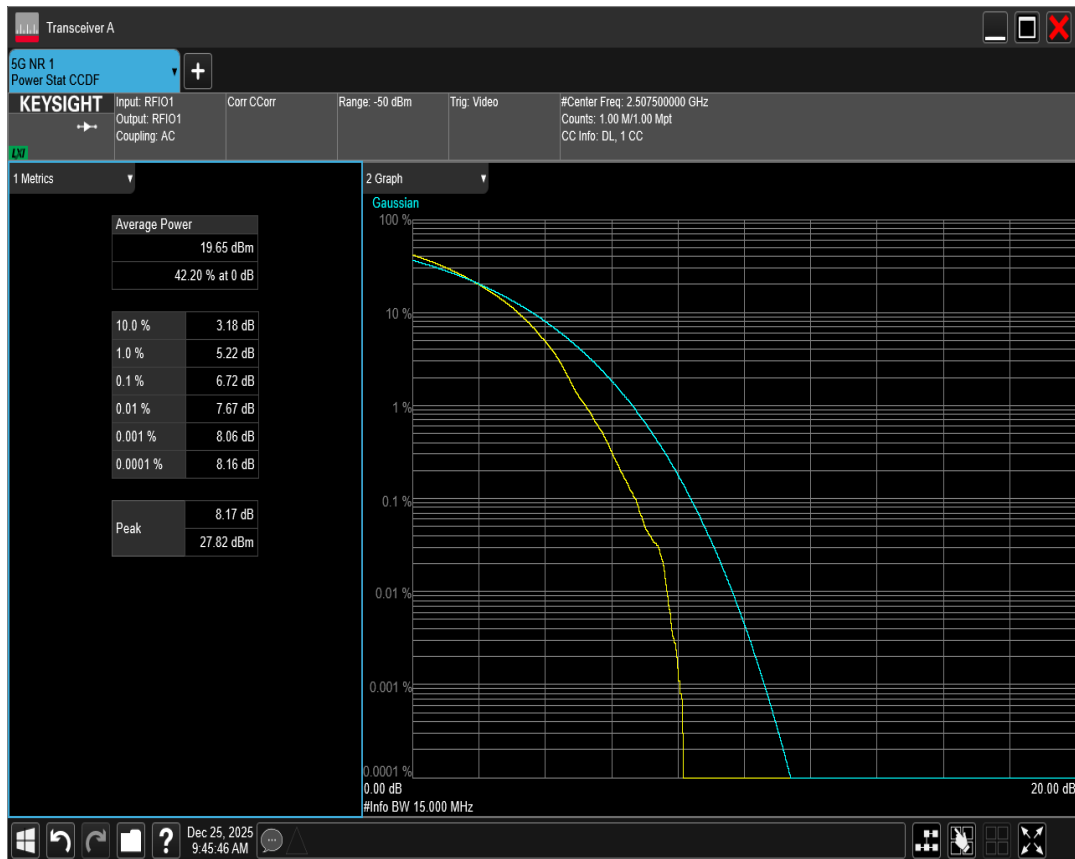


n7 SCS=15kHz DFT_QAM256 BW=15MHz Channel=507000 RB=75@0

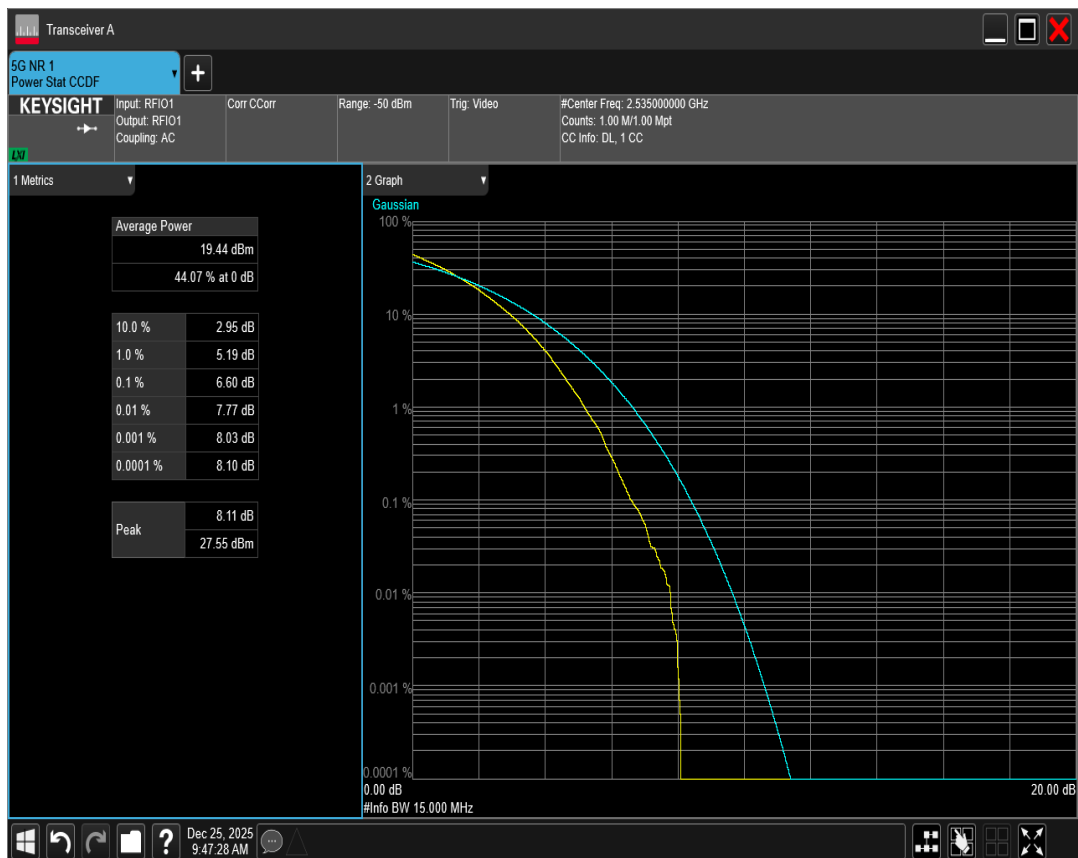


n7 SCS=15kHz DFT_QAM256 BW=15MHz Channel=512500 RB=75@0

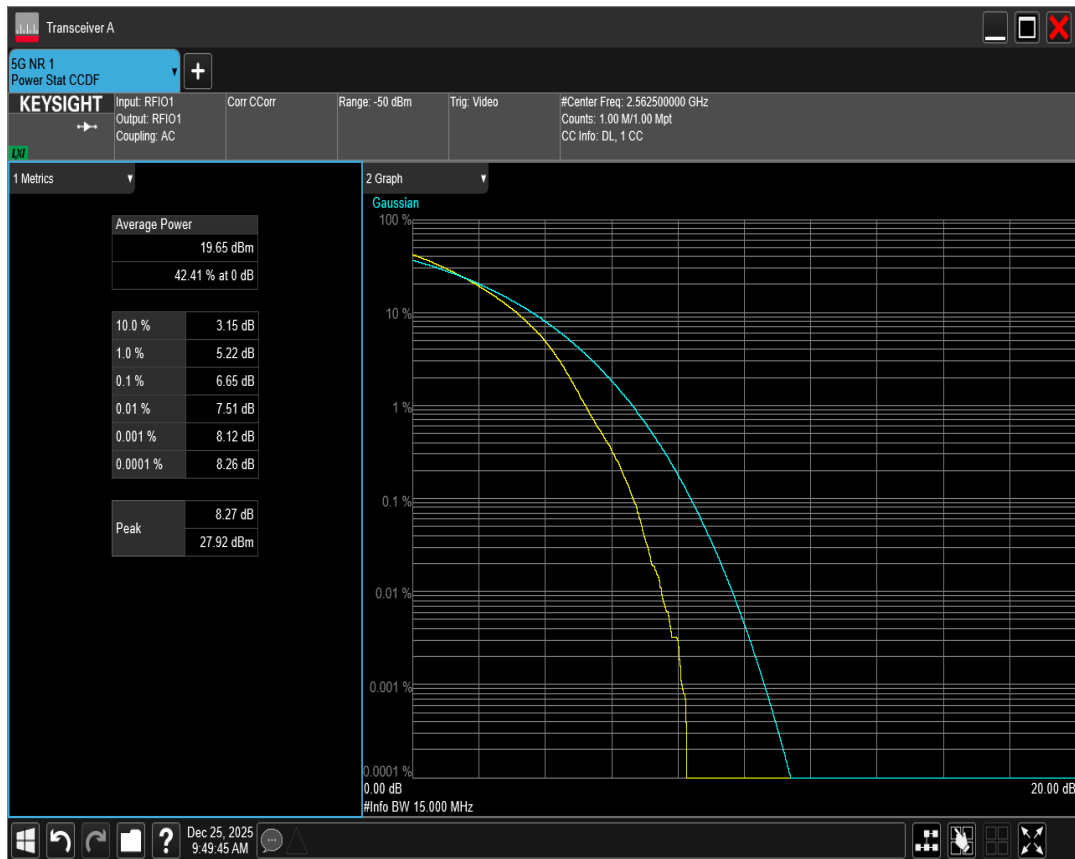


n7 SCS=15kHz DFT_QAM256 BW=20MHz Channel=502000 RB=100@0

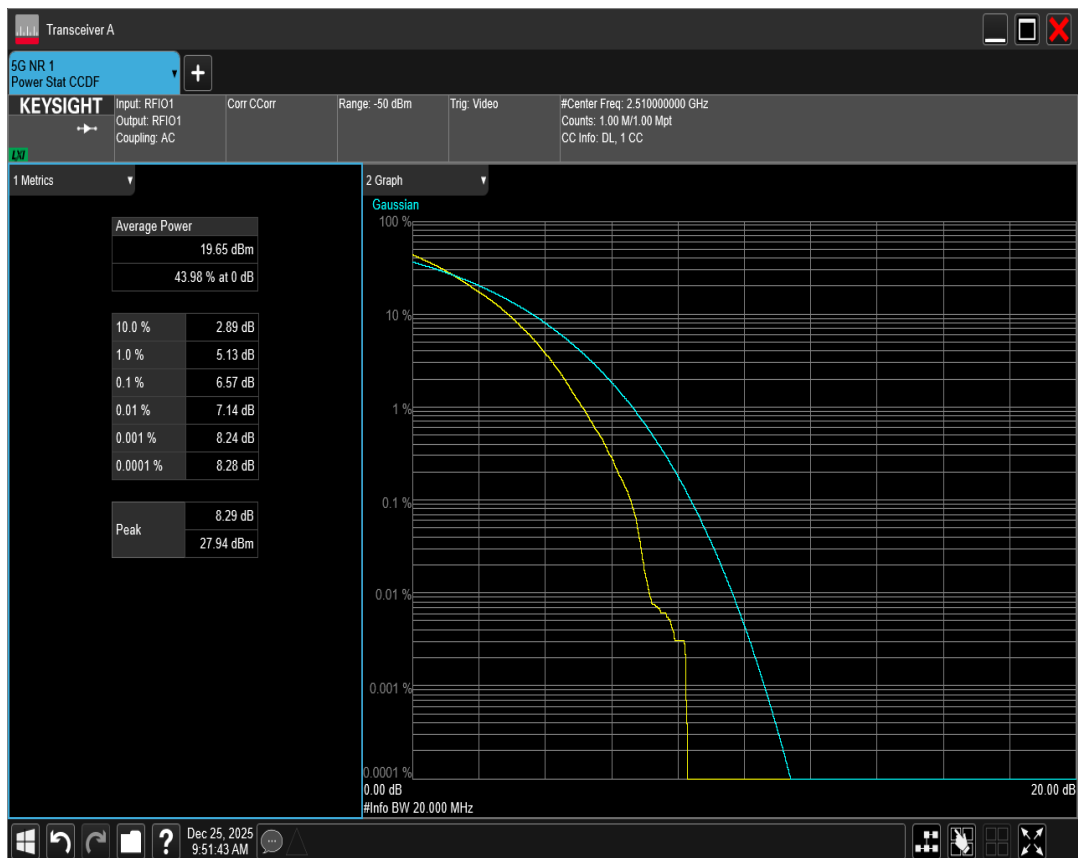


n7 SCS=15kHz DFT_QAM256 BW=20MHz Channel=507000 RB=100@0

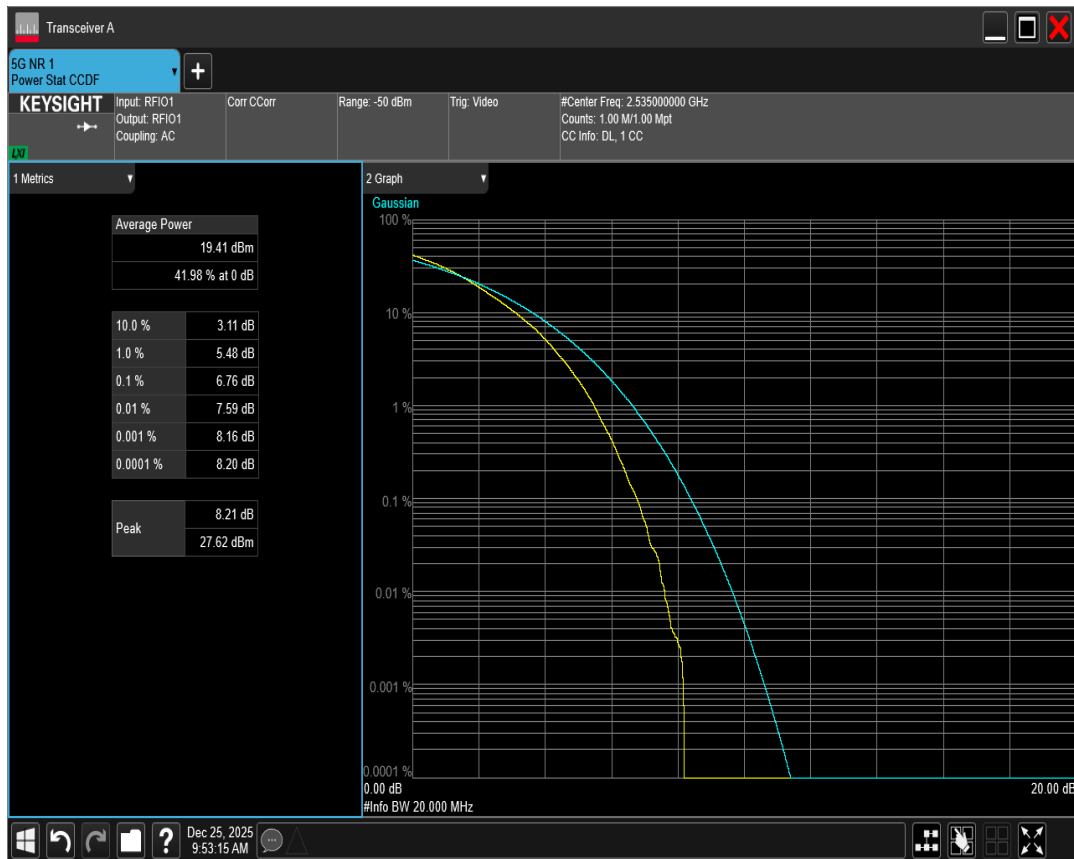


n7 SCS=15kHz DFT_QAM256 BW=20MHz Channel=512000 RB=100@0

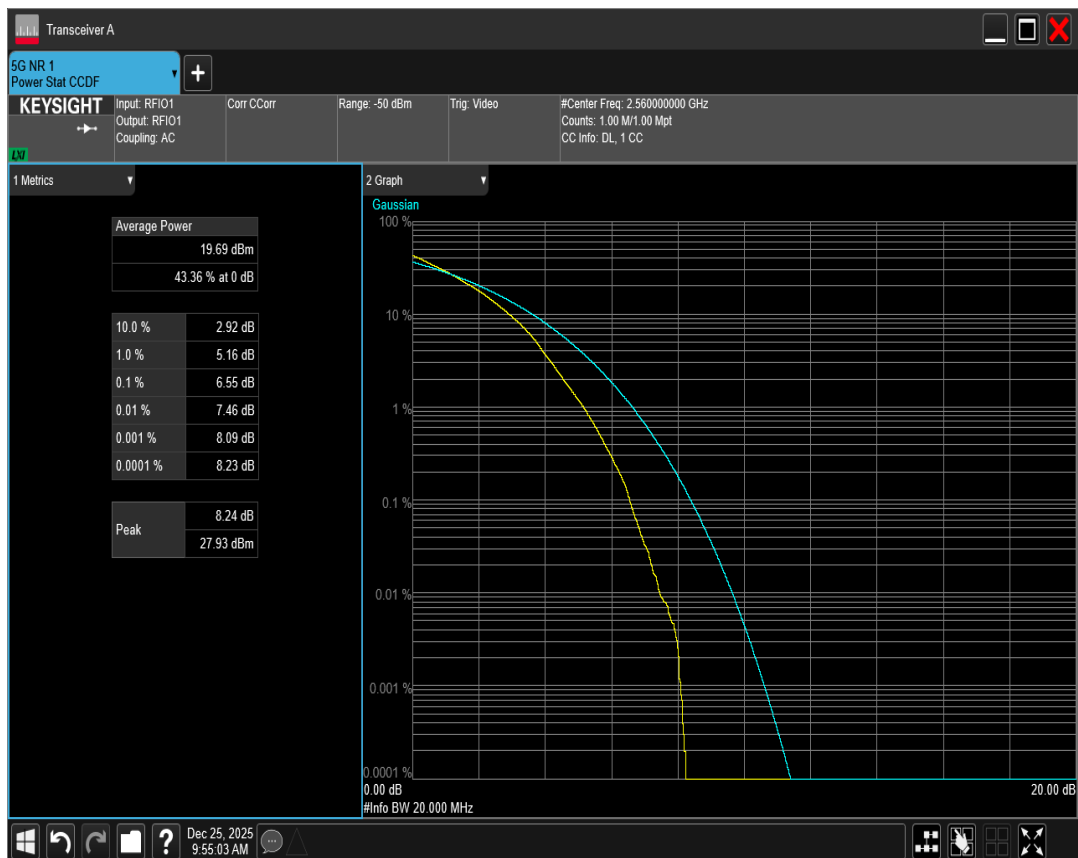


n7 SCS=15kHz DFT_QAM256 BW=5MHz Channel=500500 RB=25@0

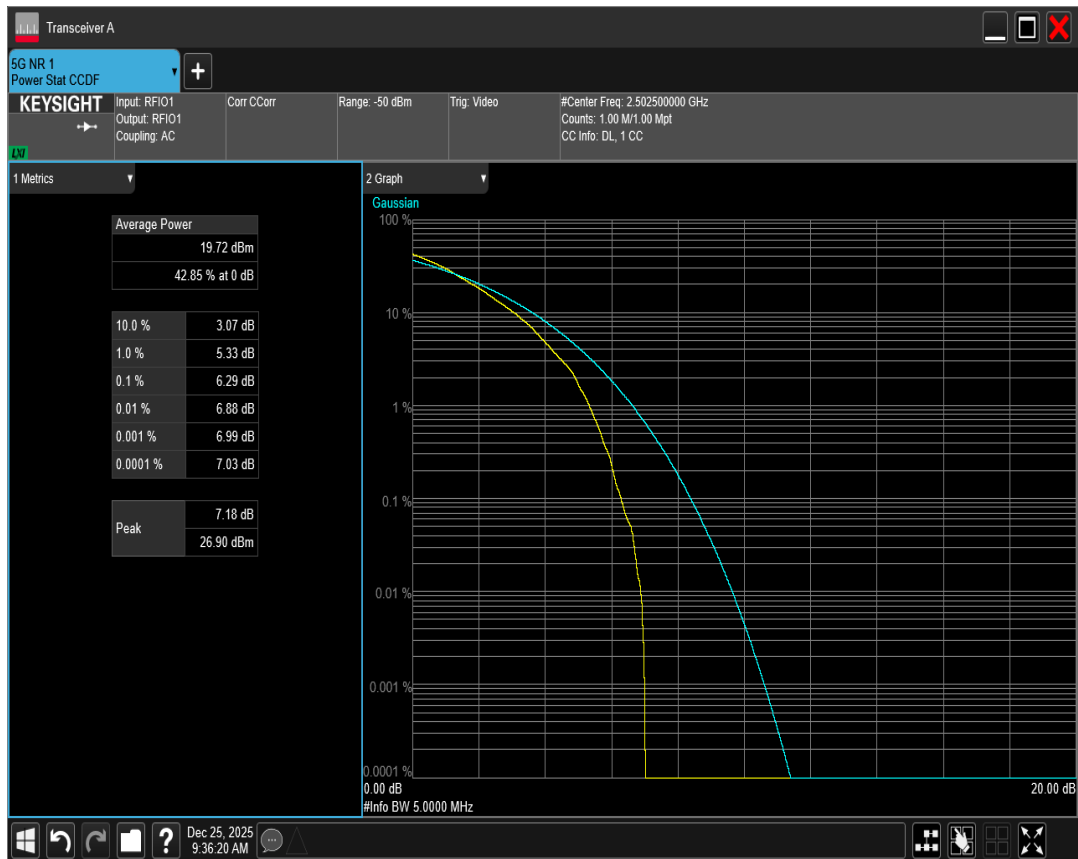


n7 SCS=15kHz DFT_QAM256 BW=5MHz Channel=507000 RB=25@0

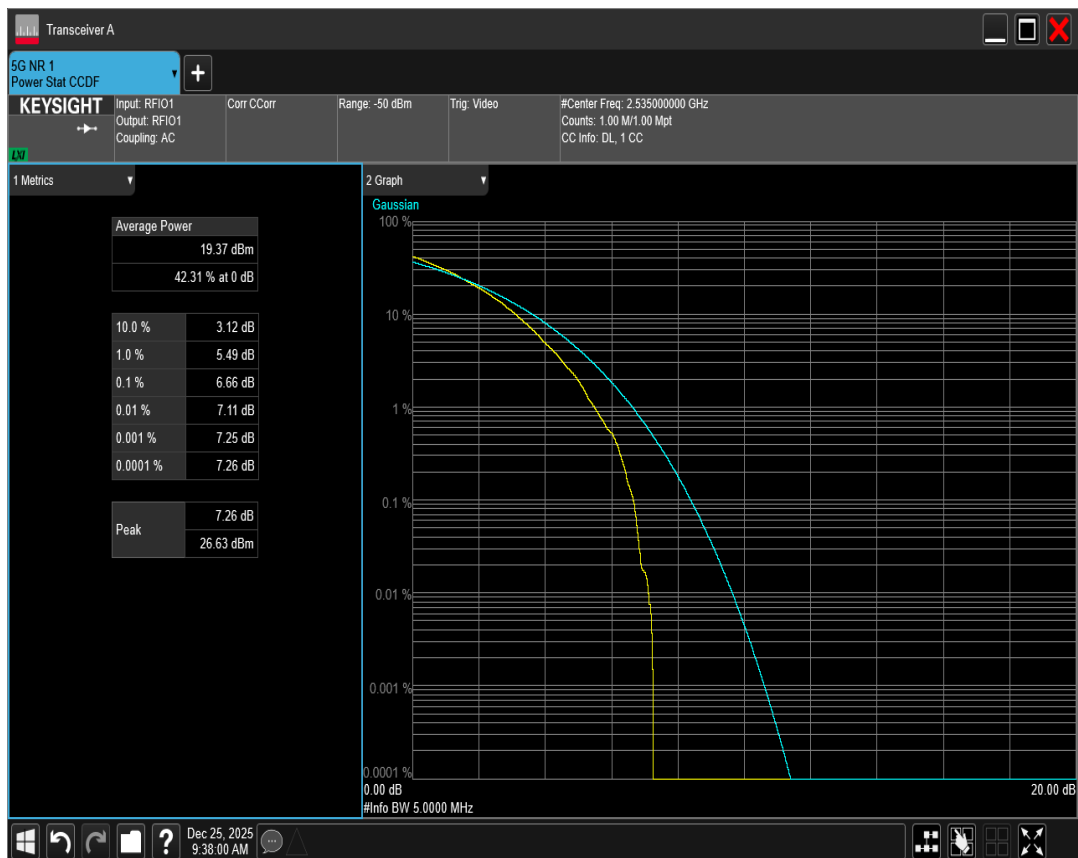


n7 SCS=15kHz DFT_QAM256 BW=5MHz Channel=513500 RB=25@0

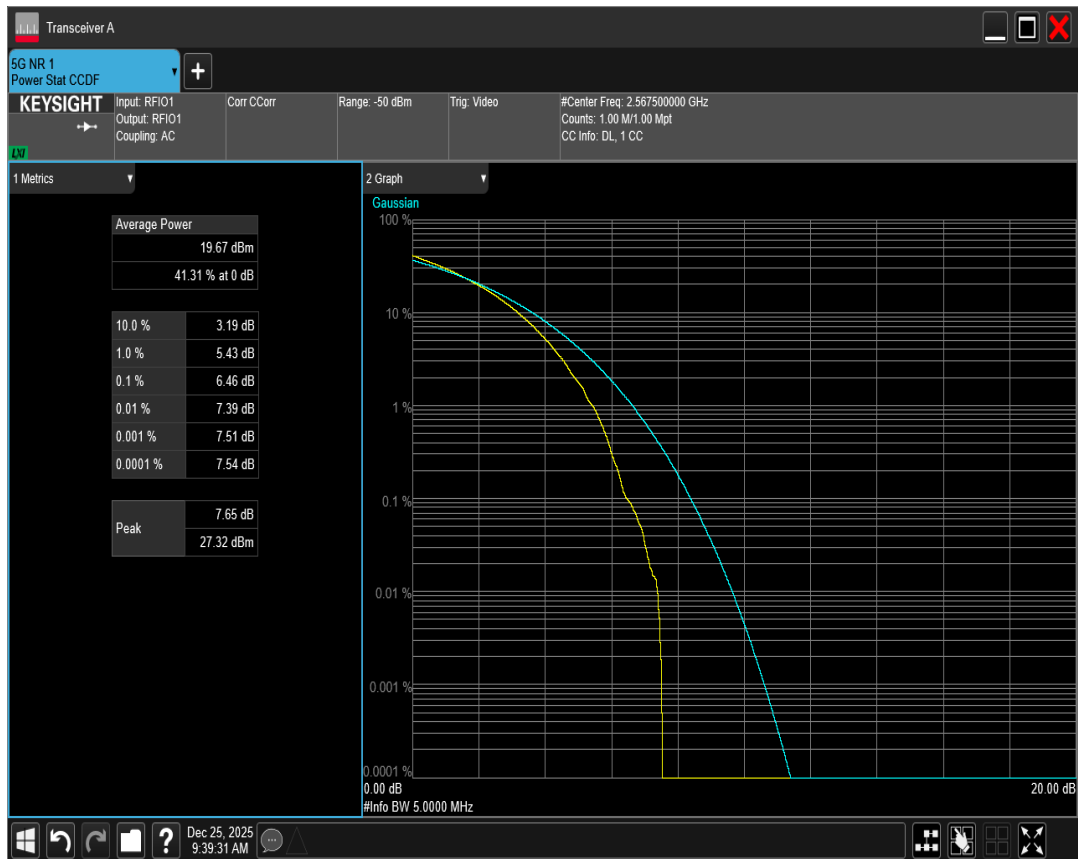


n7 SCS=15kHz DFT_QAM64 BW=10MHz Channel=501000 RB=50@0

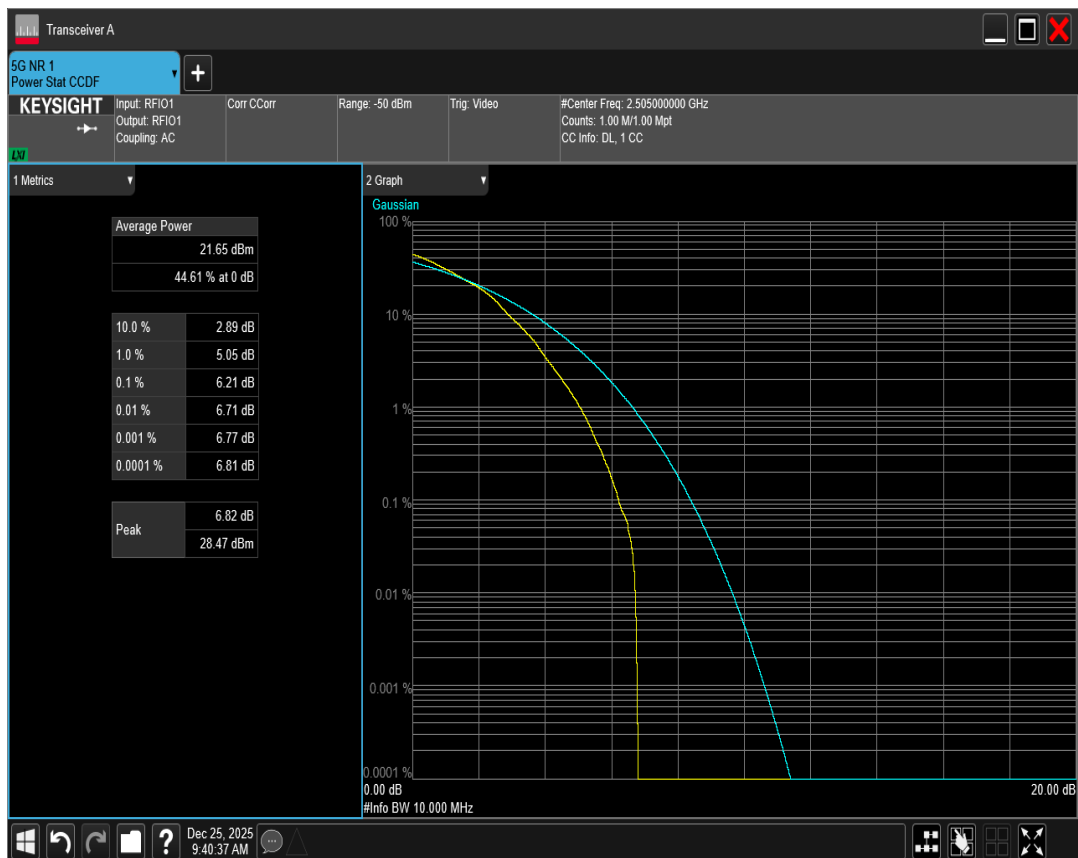


n7 SCS=15kHz DFT_QAM64 BW=10MHz Channel=507000 RB=50@0

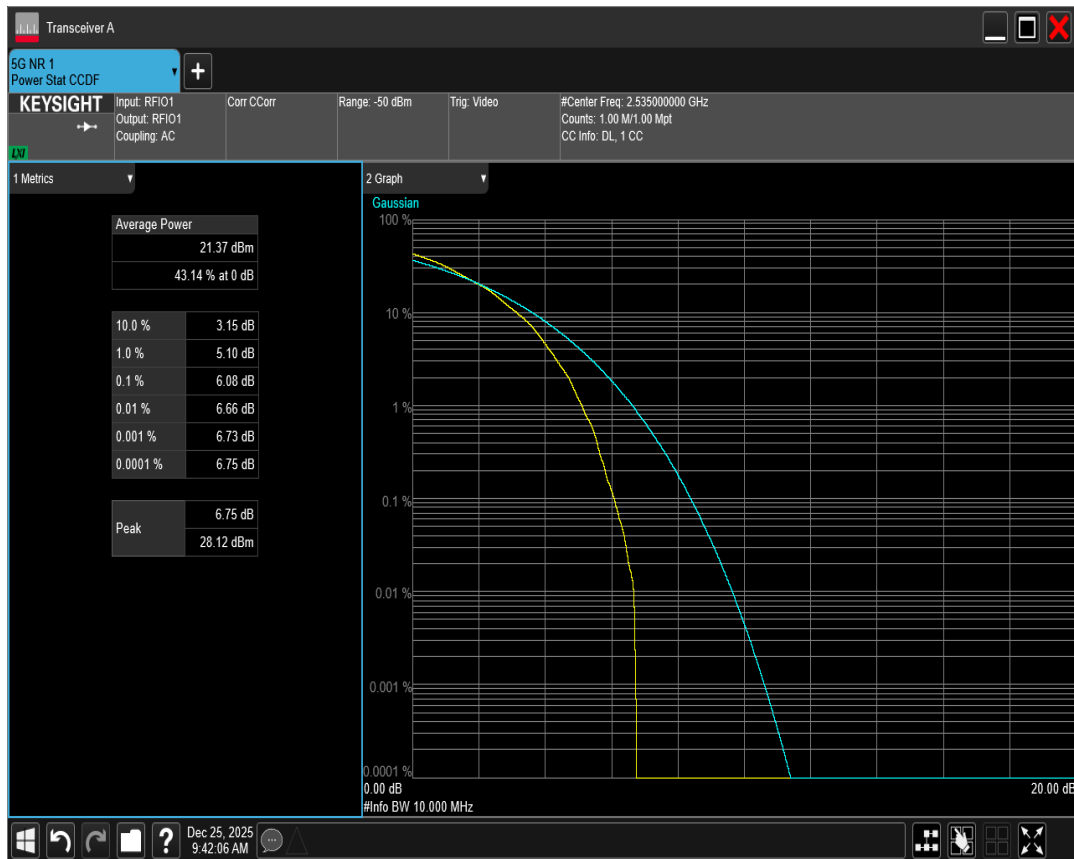


n7 SCS=15kHz DFT_QAM64 BW=10MHz Channel=513000 RB=50@0

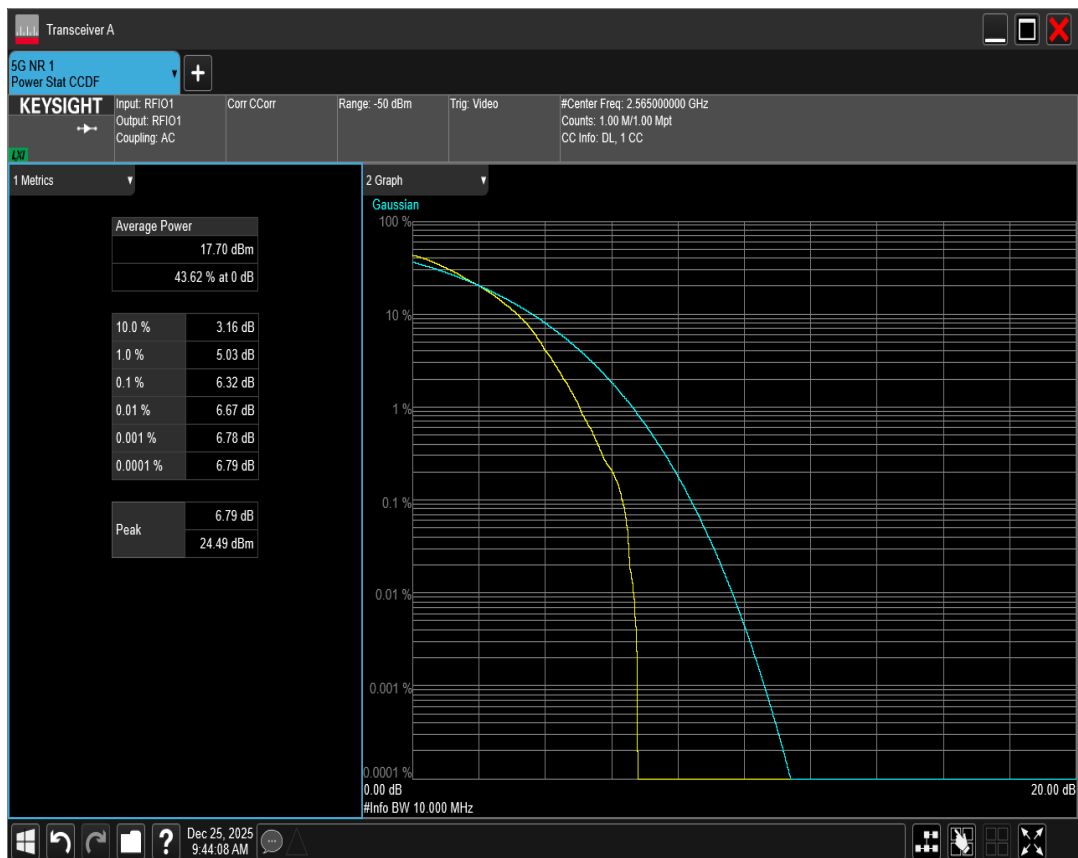


n7 SCS=15kHz DFT_QAM64 BW=15MHz Channel=501500 RB=75@0

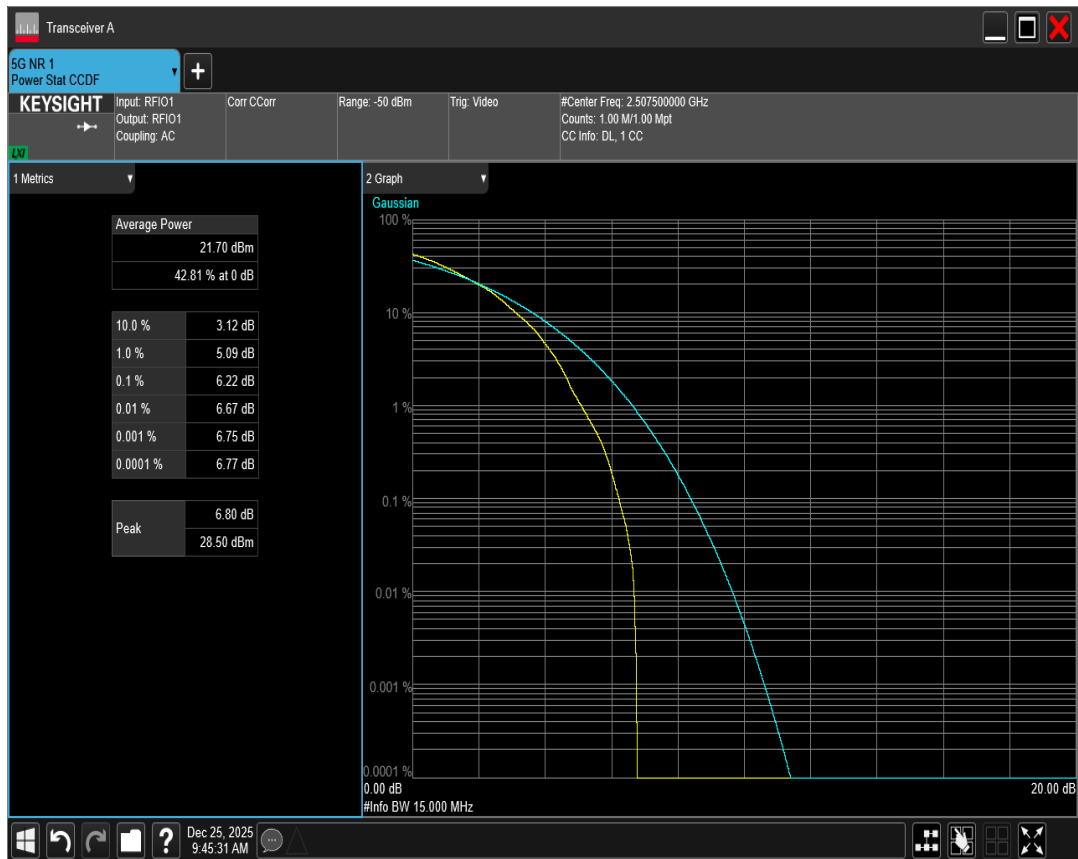


n7 SCS=15kHz DFT_QAM64 BW=15MHz Channel=507000 RB=75@0

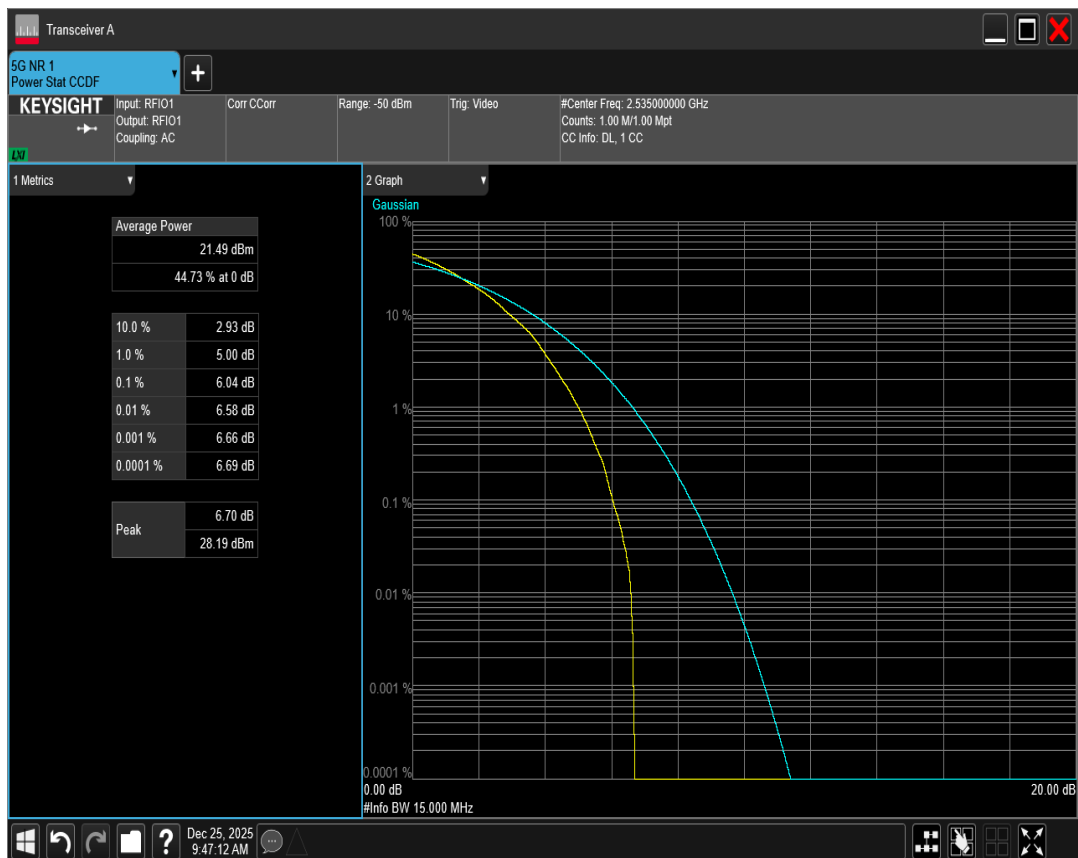


n7 SCS=15kHz DFT_QAM64 BW=15MHz Channel=512500 RB=75@0

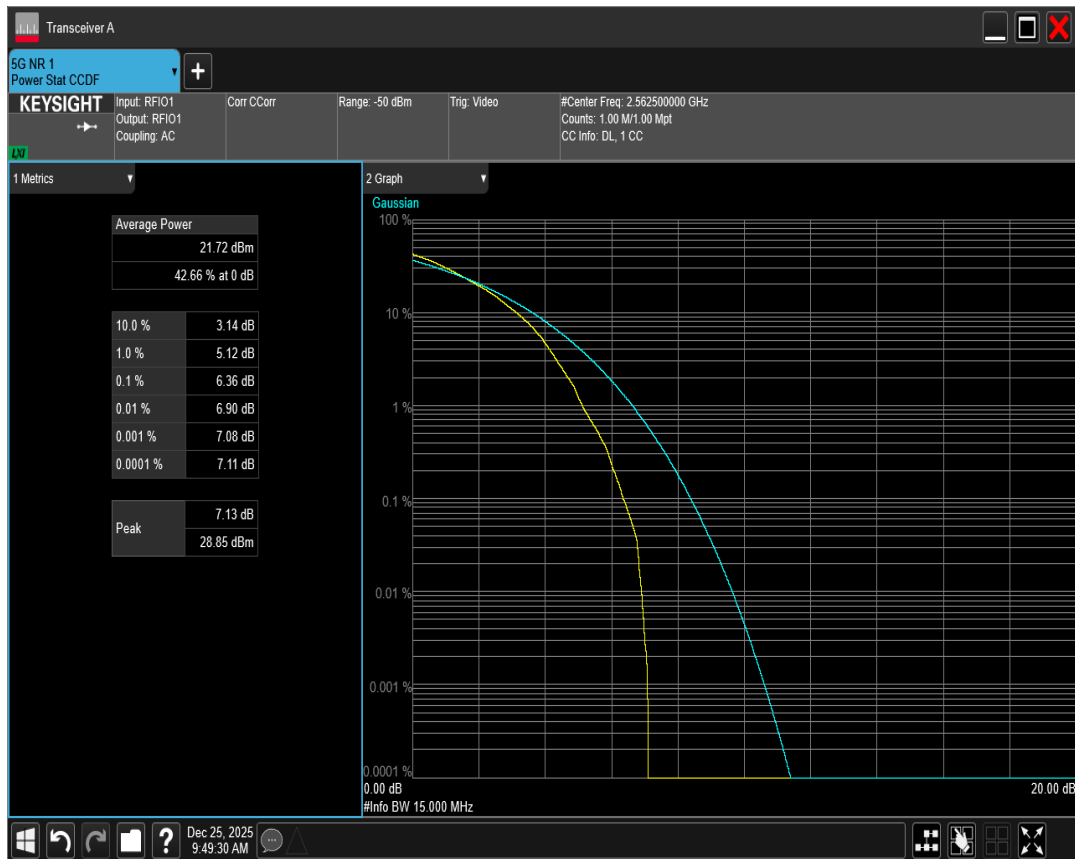


n7 SCS=15kHz DFT_QAM64 BW=20MHz Channel=502000 RB=100@0

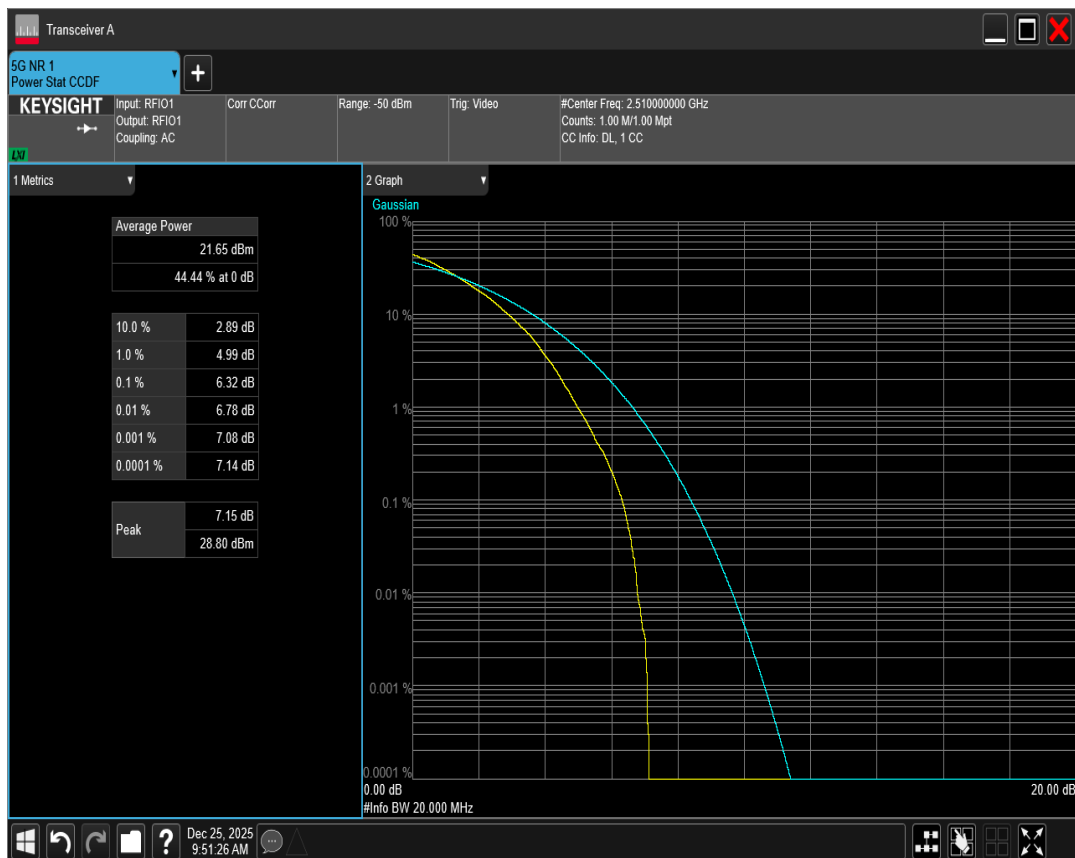


n7 SCS=15kHz DFT_QAM64 BW=20MHz Channel=507000 RB=100@0

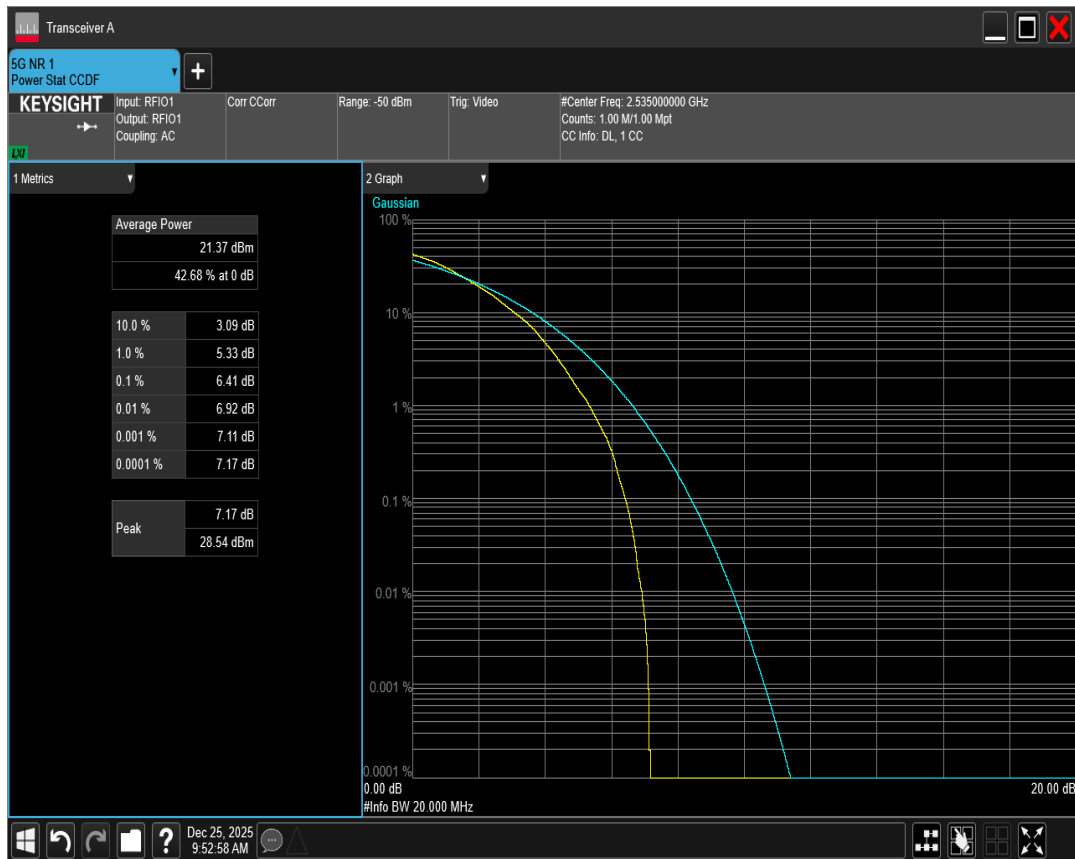


n7 SCS=15kHz DFT_QAM64 BW=20MHz Channel=512000 RB=100@0

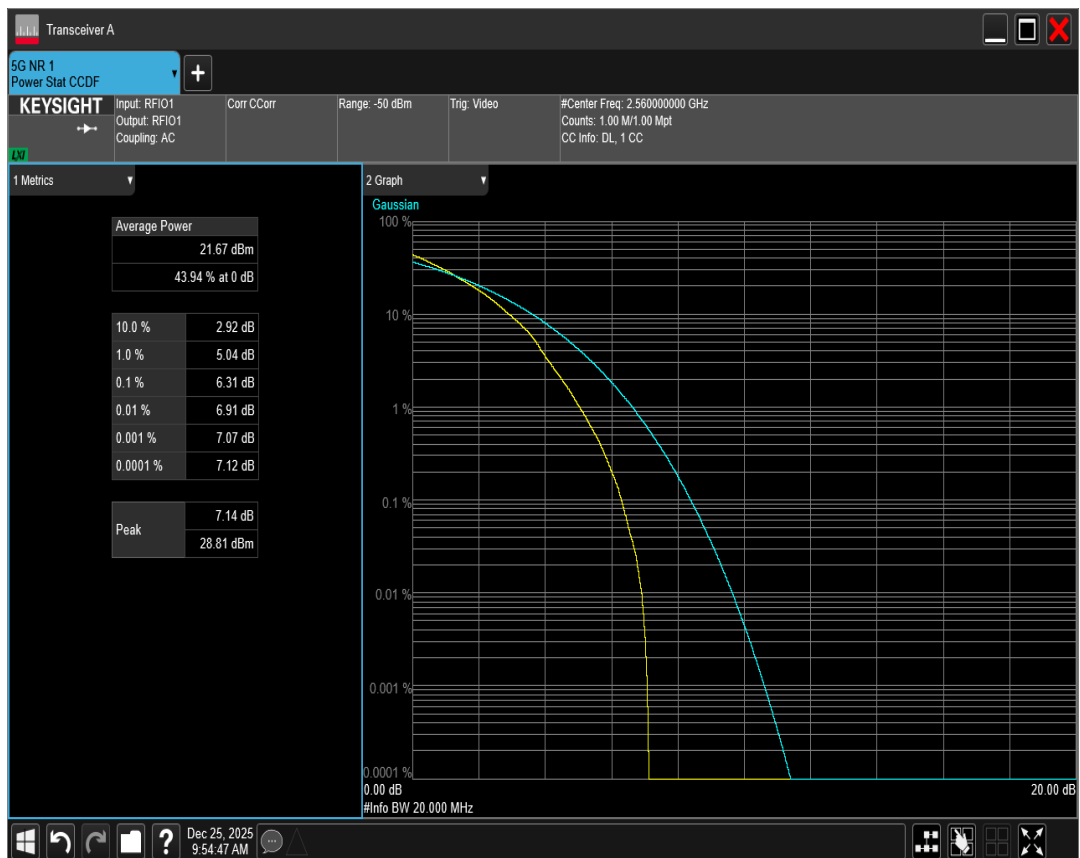


n7 SCS=15kHz DFT_QAM64 BW=5MHz Channel=500500 RB=25@0

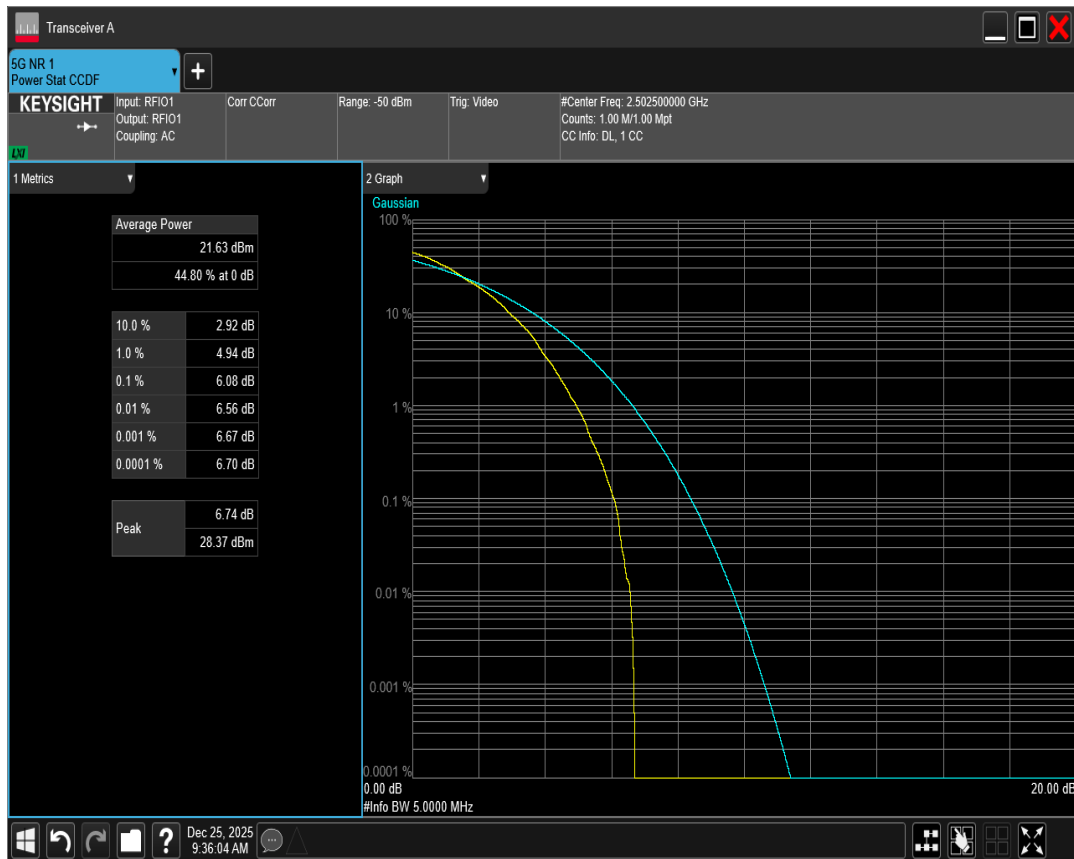


n7 SCS=15kHz DFT_QAM64 BW=5MHz Channel=507000 RB=25@0

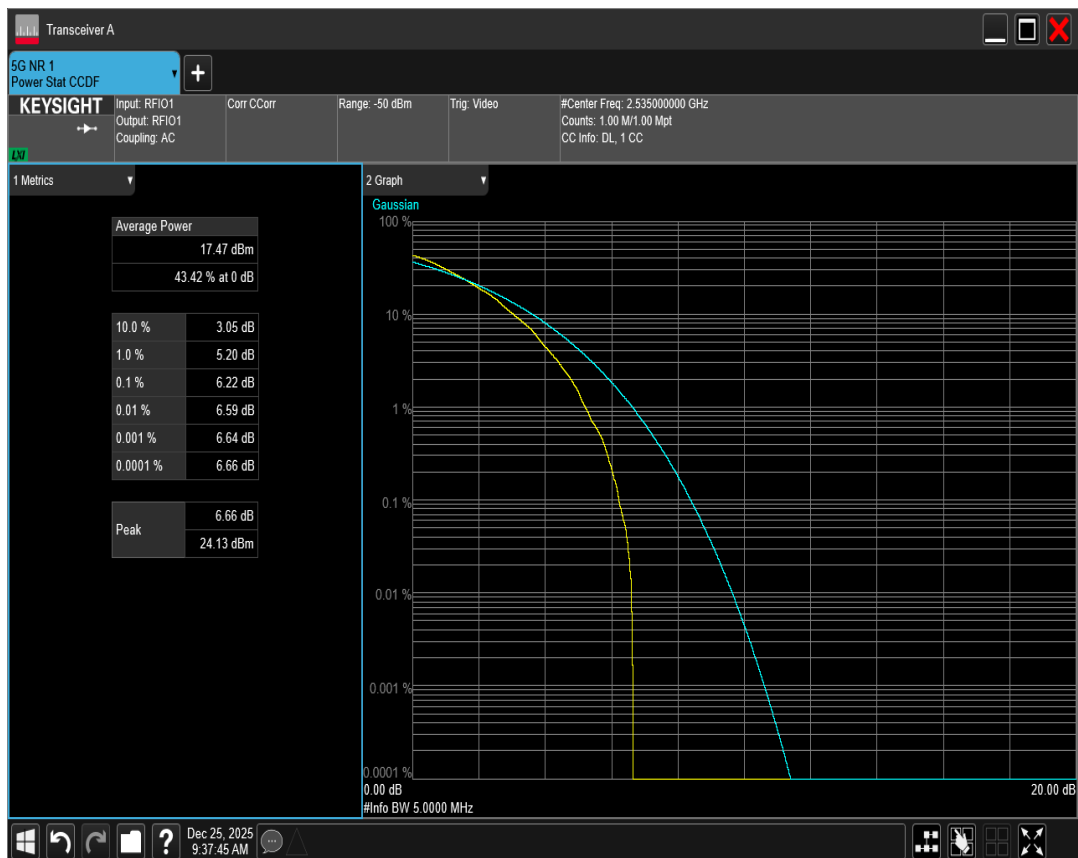


n7 SCS=15kHz DFT_QAM64 BW=5MHz Channel=513500 RB=25@0

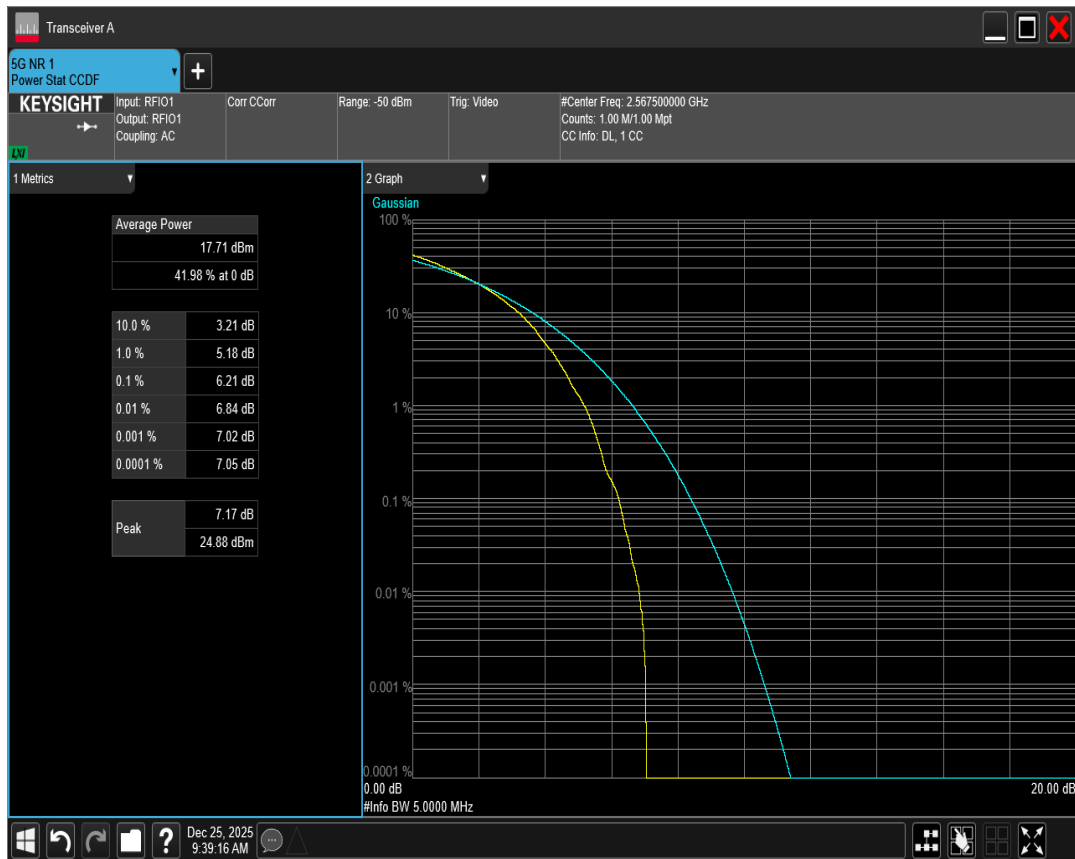


n7 SCS=15kHz DFT_QPSK BW=10MHz Channel=501000 RB=50@0

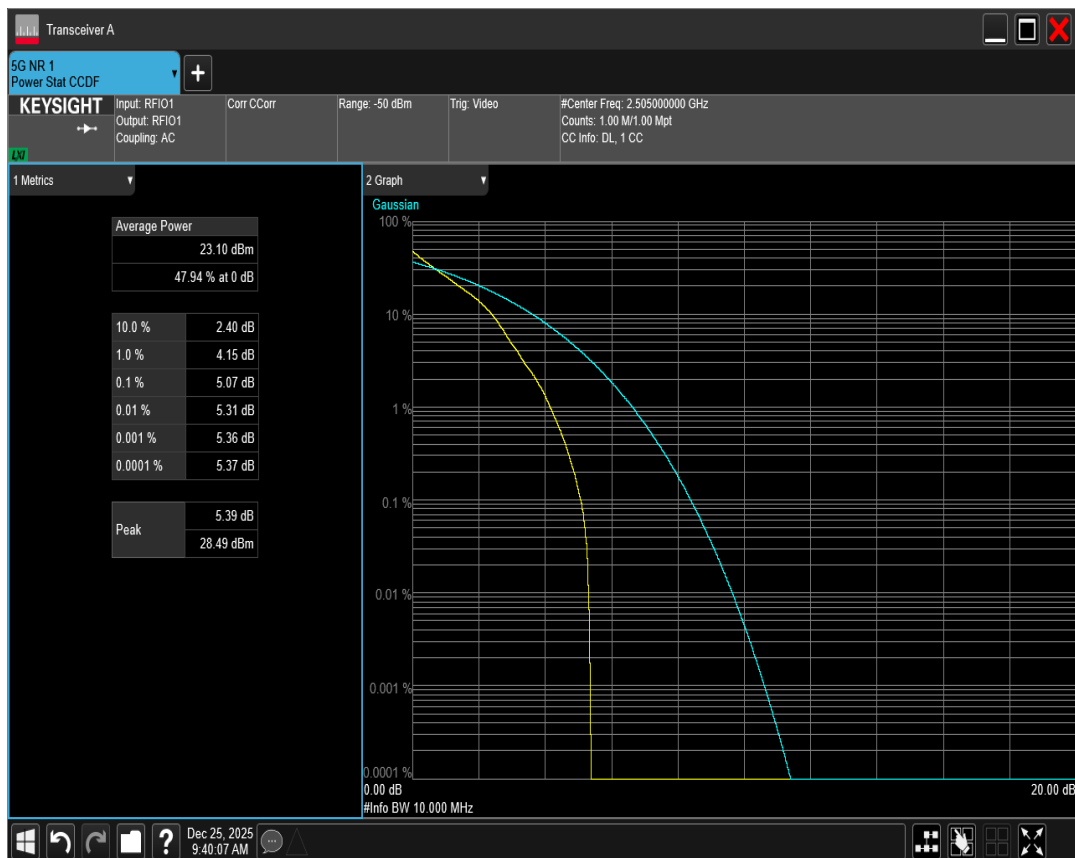


n7 SCS=15kHz DFT_QPSK BW=10MHz Channel=507000 RB=50@0

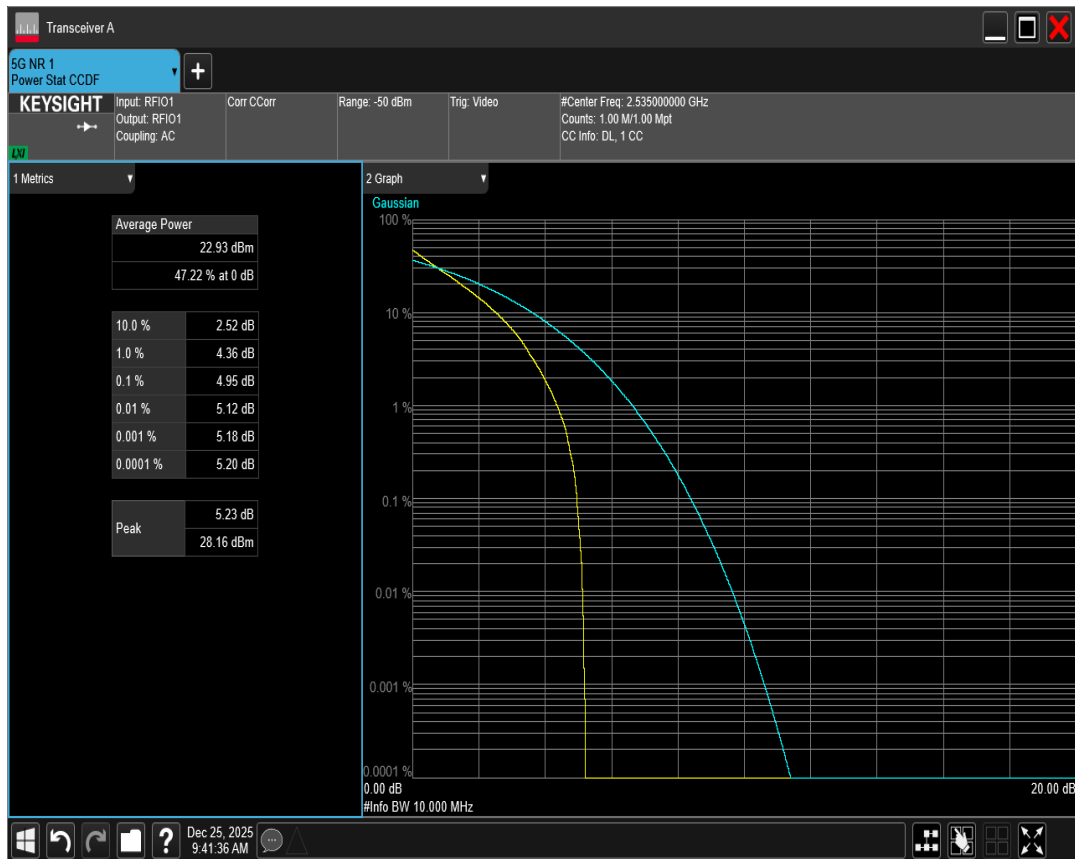


n7 SCS=15kHz DFT_QPSK BW=10MHz Channel=513000 RB=50@0

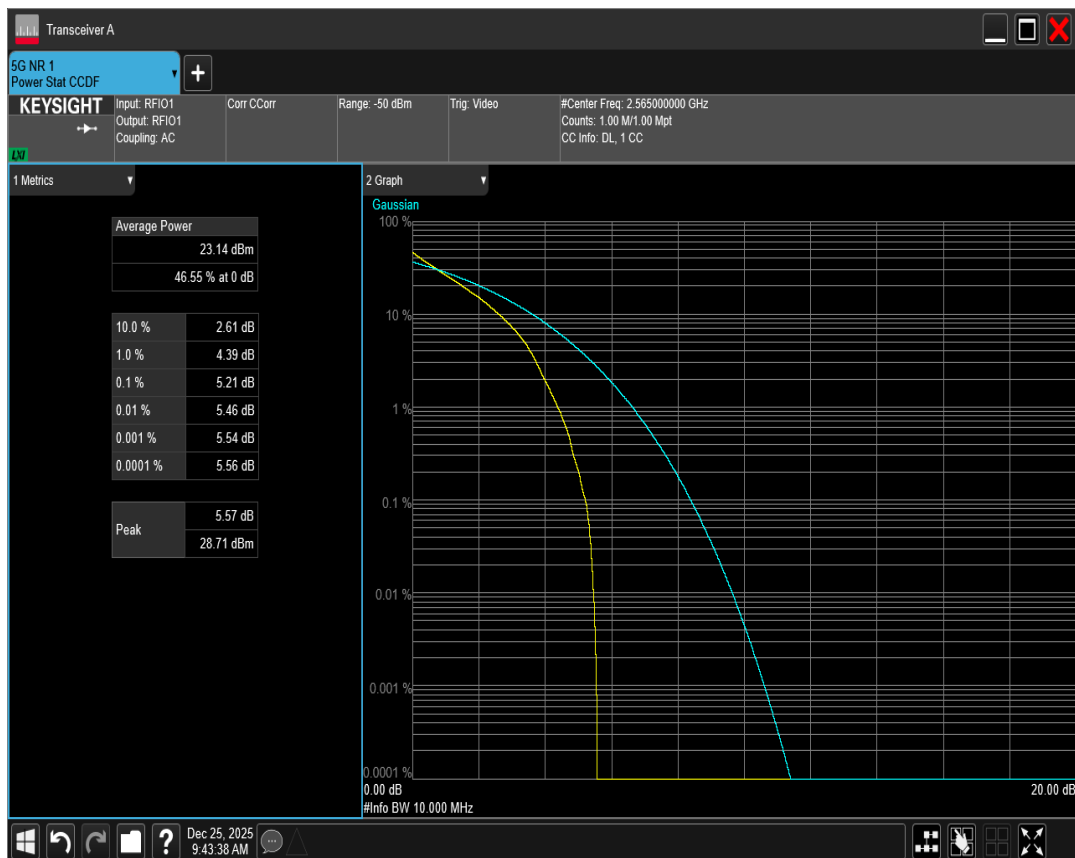


n7 SCS=15kHz DFT_QPSK BW=15MHz Channel=501500 RB=75@0

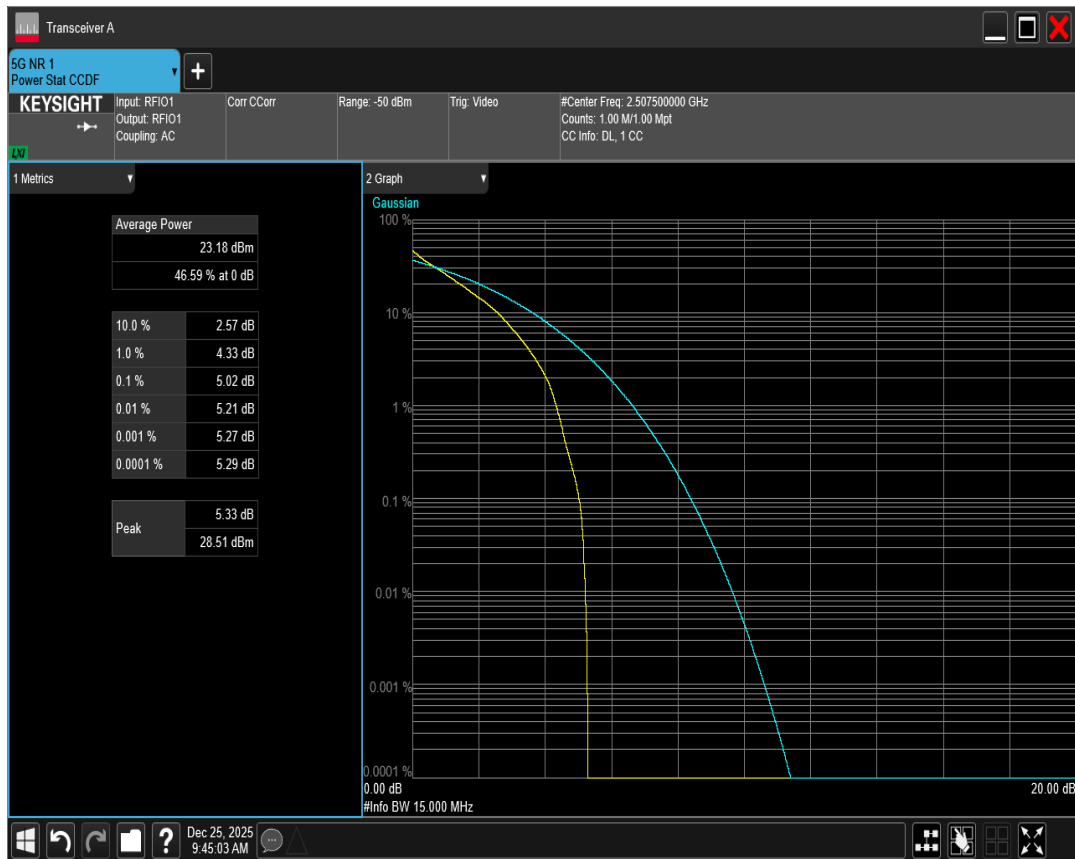


n7 SCS=15kHz DFT_QPSK BW=15MHz Channel=507000 RB=75@0

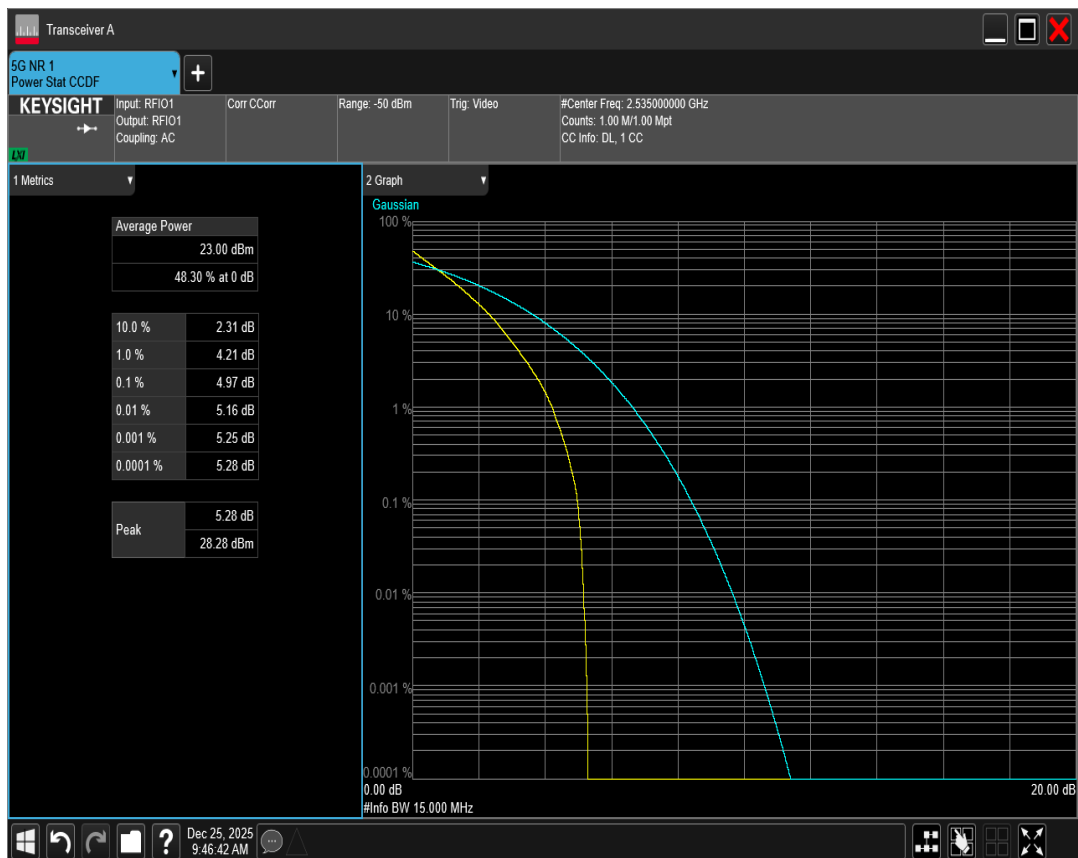


n7 SCS=15kHz DFT_QPSK BW=15MHz Channel=512500 RB=75@0

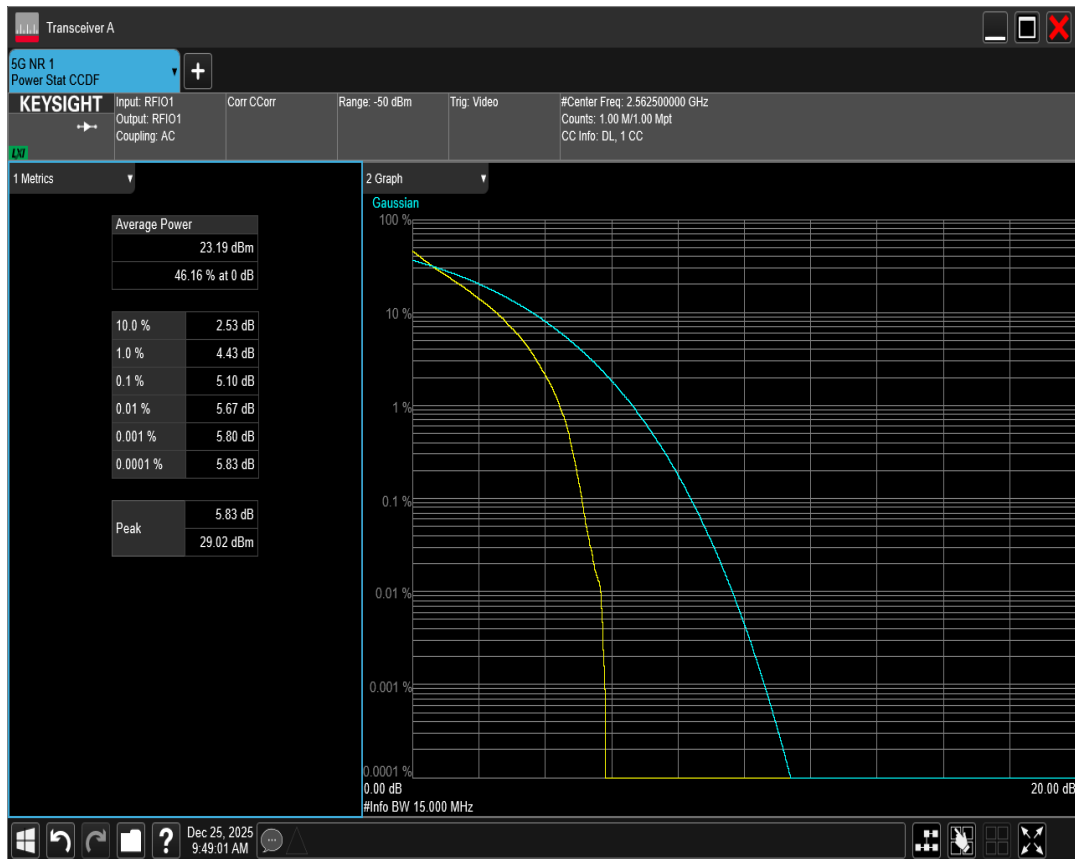


n7 SCS=15kHz DFT_QPSK BW=20MHz Channel=502000 RB=100@0

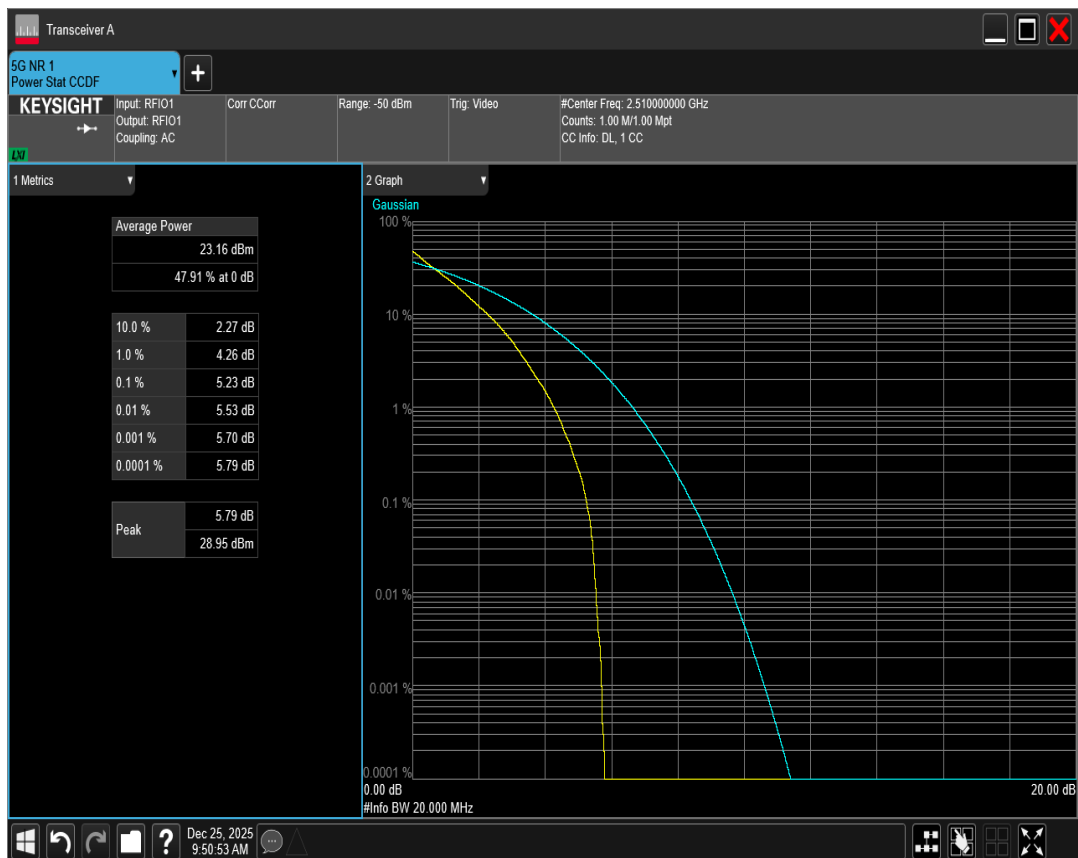


n7 SCS=15kHz DFT_QPSK BW=20MHz Channel=507000 RB=100@0

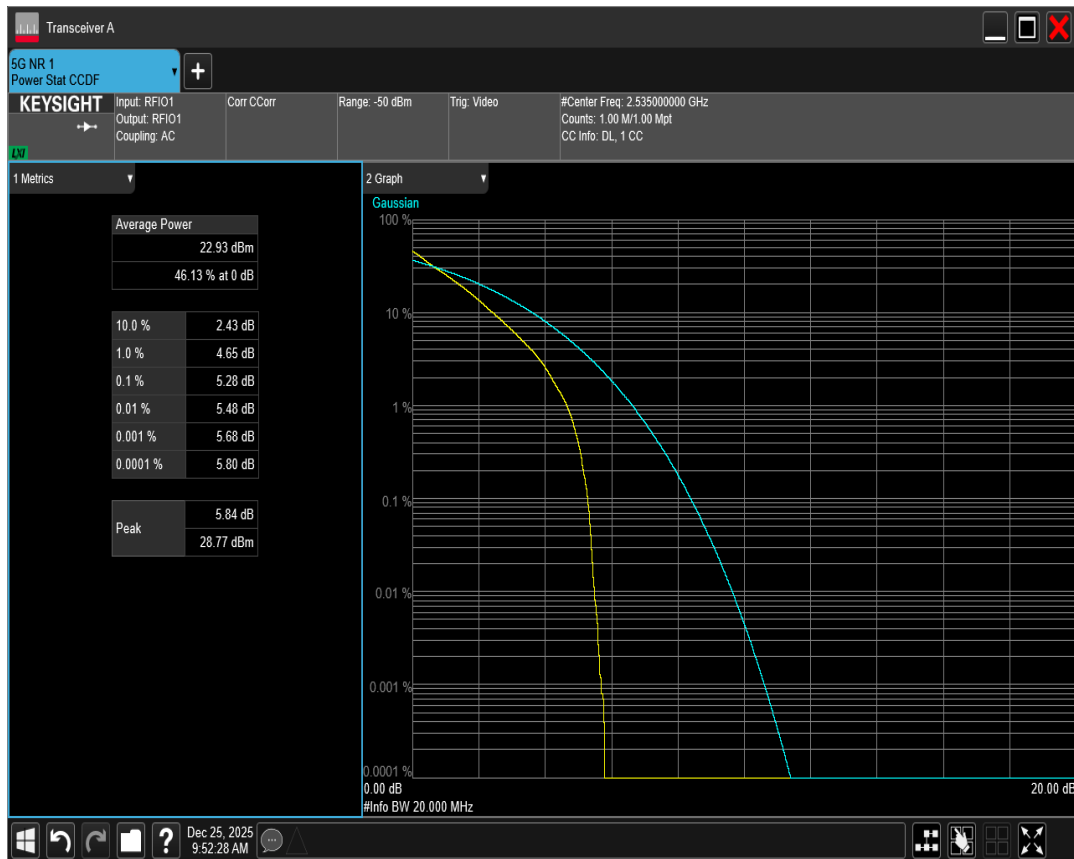


n7 SCS=15kHz DFT_QPSK BW=20MHz Channel=512000 RB=100@0

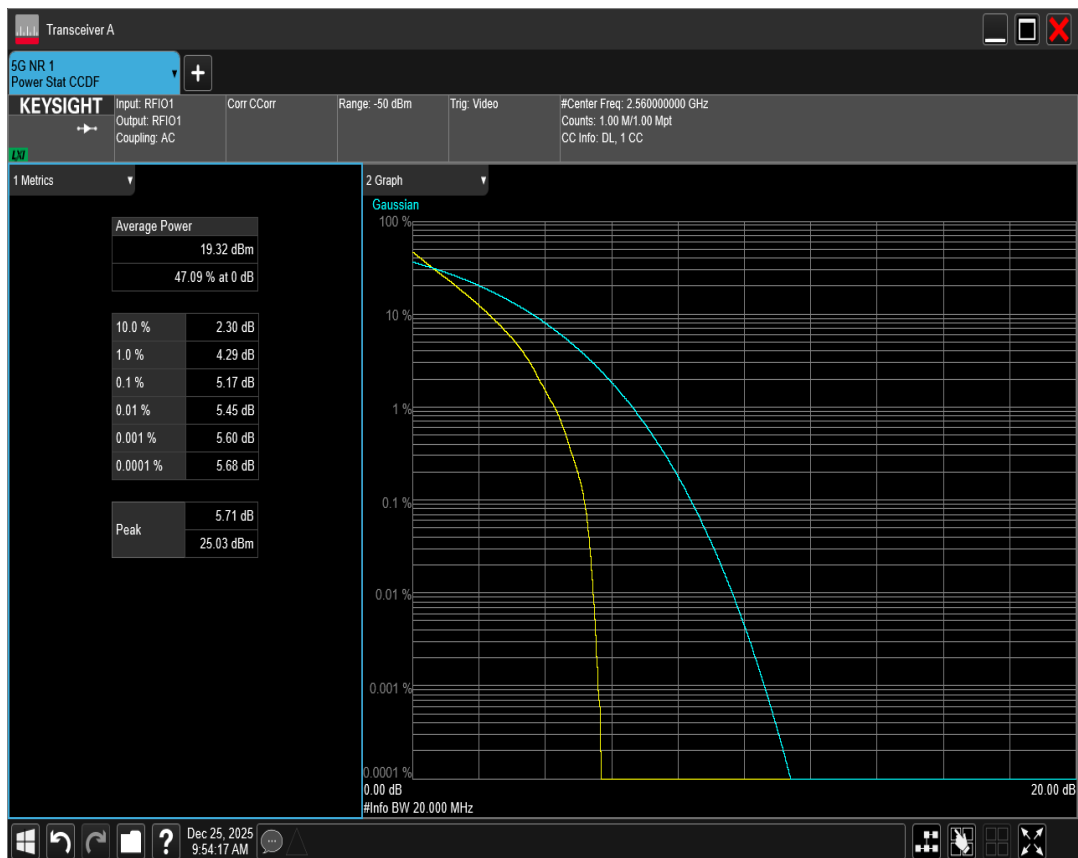


n7 SCS=15kHz DFT_QPSK BW=5MHz Channel=500500 RB=25@0

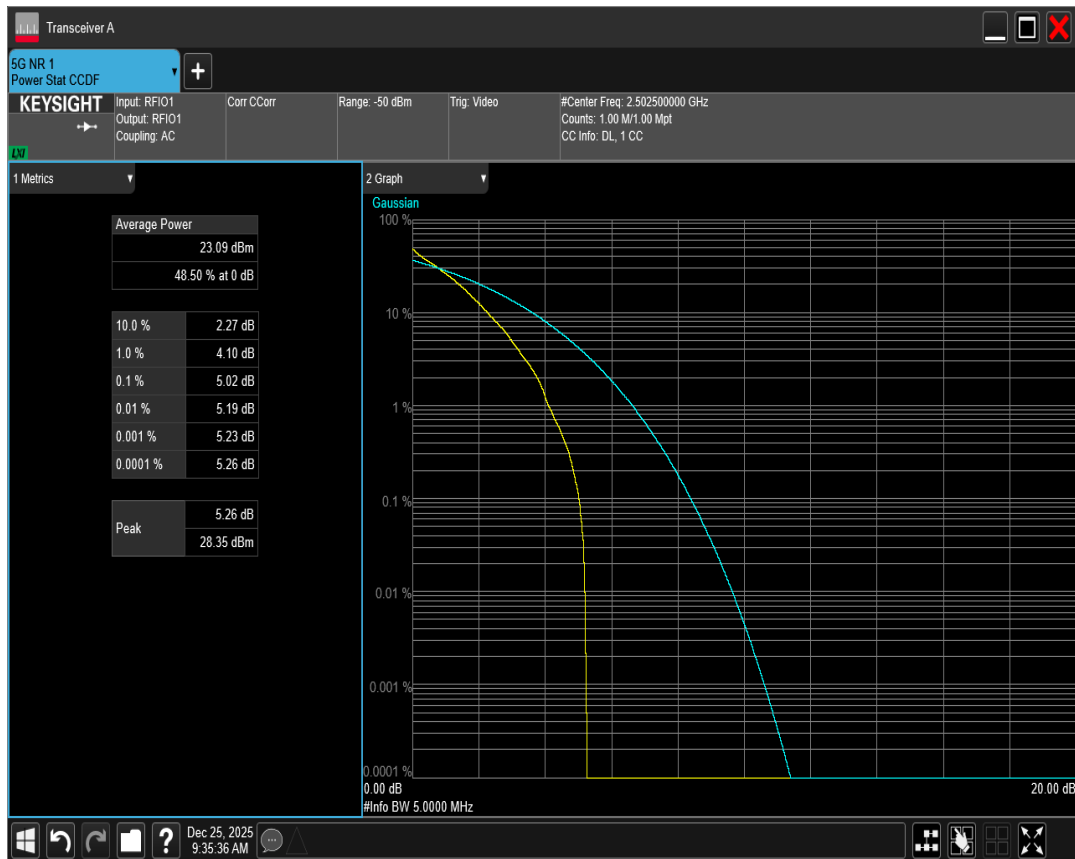

n7 SCS=15kHz DFT_QPSK BW=5MHz Channel=507000 RB=25@0

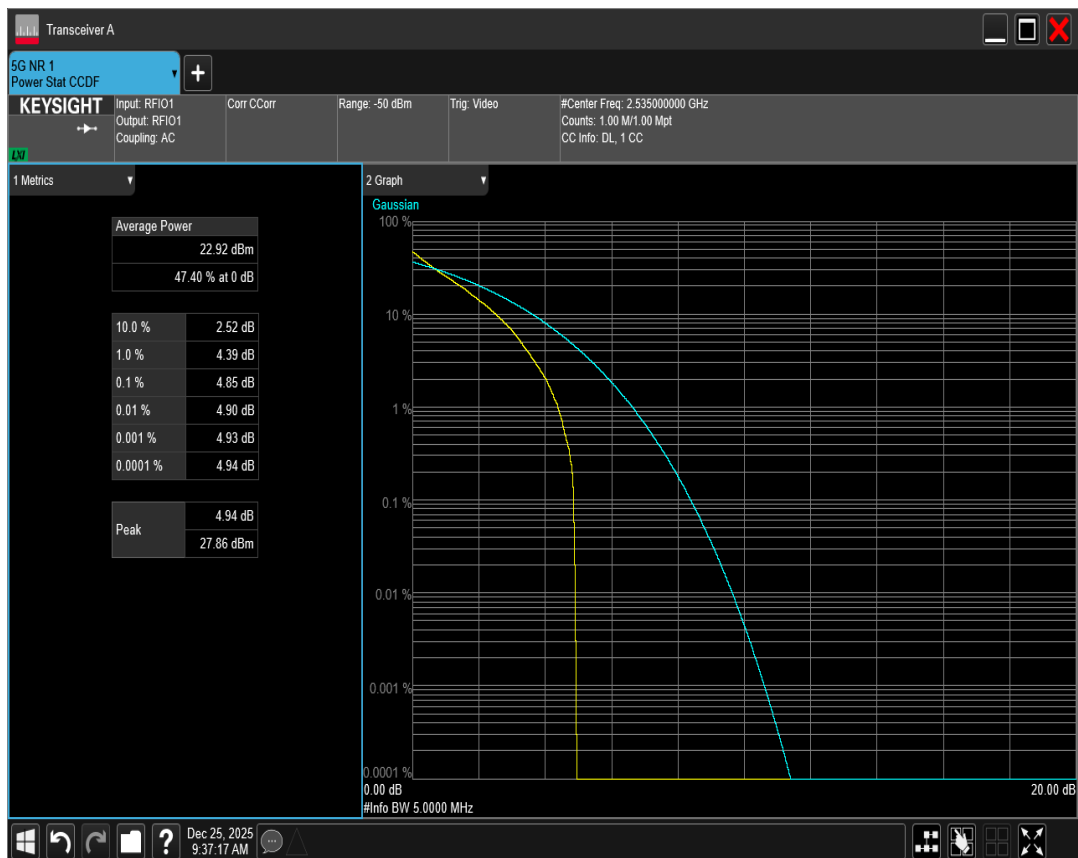

n7 SCS=15kHz DFT_QPSK BW=5MHz Channel=513500 RB=25@0

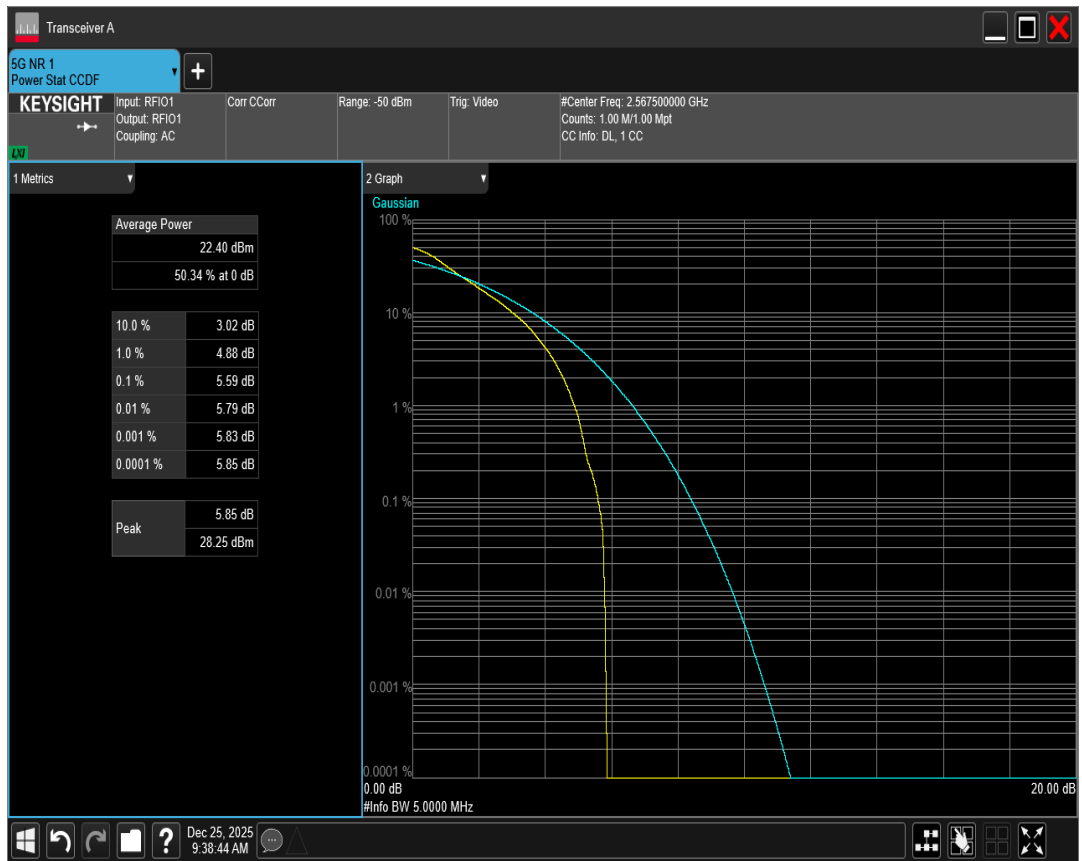

4 Occupied bandwidth for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n7	15	5	507000	25@0	DFT_BPSK	4.470	4.700	PASS
n7	15	5	507000	25@0	DFT_QPSK	4.450	4.670	PASS
n7	15	5	507000	25@0	DFT_QAM16	4.460	4.680	PASS
n7	15	5	507000	25@0	DFT_QAM64	4.460	4.750	PASS
n7	15	5	507000	25@0	DFT_QAM256	4.460	4.600	PASS
n7	15	10	507000	50@0	DFT_BPSK	9.140	9.180	PASS
n7	15	10	507000	50@0	DFT_QPSK	9.190	9.080	PASS
n7	15	10	507000	50@0	DFT_QAM16	9.200	9.160	PASS
n7	15	10	507000	50@0	DFT_QAM64	9.180	9.190	PASS
n7	15	10	507000	50@0	DFT_QAM256	9.190	9.090	PASS
n7	15	15	507000	75@0	DFT_BPSK	13.880	13.620	PASS
n7	15	15	507000	75@0	DFT_QPSK	13.890	13.700	PASS
n7	15	15	507000	75@0	DFT_QAM16	13.900	13.700	PASS
n7	15	15	507000	75@0	DFT_QAM64	13.970	13.680	PASS
n7	15	15	507000	75@0	DFT_QAM256	13.980	13.680	PASS
n7	15	20	507000	100@0	DFT_BPSK	18.760	18.170	PASS
n7	15	20	507000	100@0	DFT_QPSK	39.630	40.000	PASS
n7	15	20	507000	100@0	DFT_QAM16	18.730	18.150	PASS
n7	15	20	507000	100@0	DFT_QAM64	18.680	18.160	PASS
n7	15	20	507000	100@0	DFT_QAM256	18.670	18.140	PASS

n7 SCS=15kHz DFT_BPSK BW=10MHz Channel=507000 RB=50@0



n7 SCS=15kHz DFT_BPSK BW=15MHz Channel=507000 RB=75@0



n7 SCS=15kHz DFT_BPSK BW=20MHz Channel=507000 RB=100@0



n7 SCS=15kHz DFT_BPSK BW=5MHz Channel=507000 RB=25@0



n7 SCS=15kHz DFT_QAM16 BW=10MHz Channel=507000 RB=50@0



n7 SCS=15kHz DFT_QAM16 BW=15MHz Channel=507000 RB=75@0



n7 SCS=15kHz DFT_QAM16 BW=20MHz Channel=507000 RB=100@0



n7 SCS=15kHz DFT_QAM16 BW=5MHz Channel=507000 RB=25@0



n7 SCS=15kHz DFT_QAM256 BW=10MHz Channel=507000 RB=50@0



n7 SCS=15kHz DFT_QAM256 BW=15MHz Channel=507000 RB=75@0



n7 SCS=15kHz DFT_QAM256 BW=20MHz Channel=507000 RB=100@0



n7 SCS=15kHz DFT_QAM256 BW=5MHz Channel=507000 RB=25@0



n7 SCS=15kHz DFT_QAM64 BW=10MHz Channel=507000 RB=50@0




n7 SCS=15kHz DFT_QAM64 BW=15MHz Channel=507000 RB=75@0



n7 SCS=15kHz DFT_QAM64 BW=20MHz Channel=507000 RB=100@0



n7 SCS=15kHz DFT_QAM64 BW=5MHz Channel=507000 RB=25@0

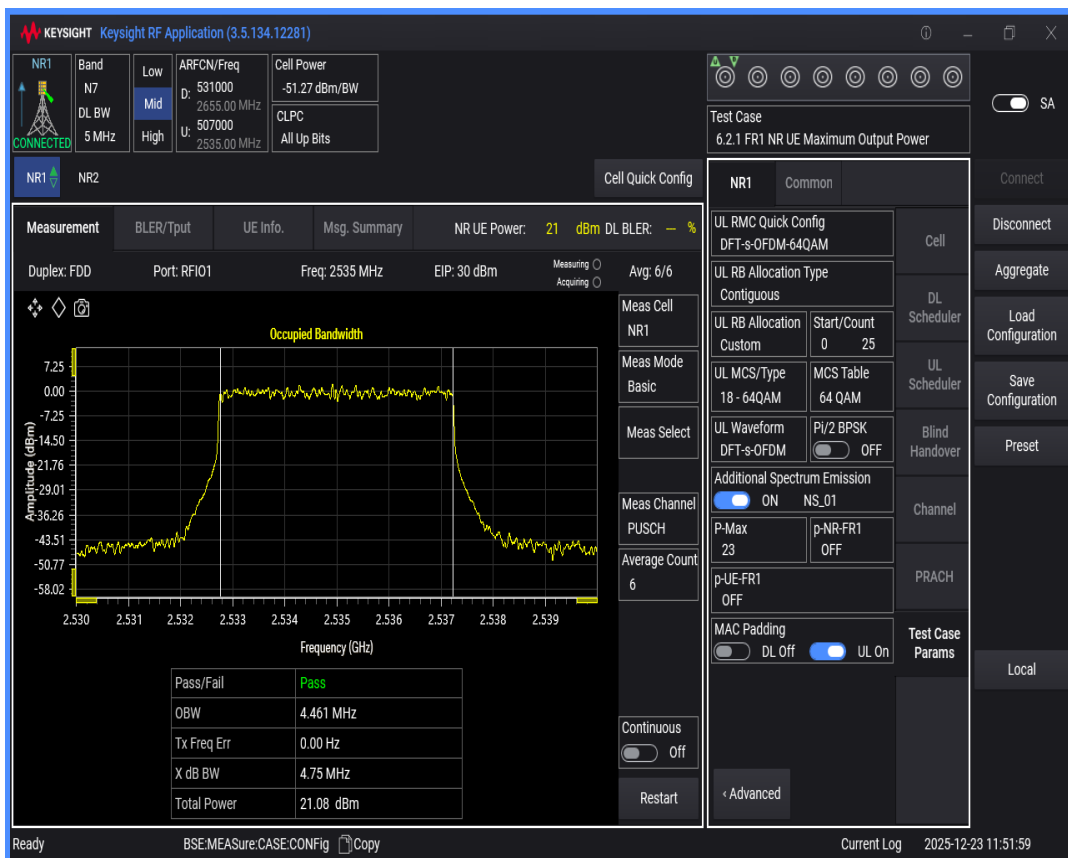

n7 SCS=15kHz DFT_QPSK BW=10MHz Channel=507000 RB=50@0



n7 SCS=15kHz DFT_QPSK BW=15MHz Channel=507000 RB=75@0



n7 SCS=15kHz DFT_QPSK BW=5MHz Channel=507000 RB=25@0