

TABLE OF CONTENTS

1 Conducted output power for NR FR12

2 Frequency stability for NR FR14

3 Peak-to-Average Ratio for NR FR16

4 Occupied bandwidth for NR FR185

5 Band edge for NR FR1 112

6 Out-of-band emissions for NR FR1122

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n78(3550-3700)	30	10	637000	1@1	DFT_BPSK	25.84	-1.6	24.24	30	PASS
n78(3550-3700)	30	10	637000	24@0	DFT_QPSK	24.87	-1.6	23.27	30	PASS
n78(3550-3700)	30	10	637000	12@6	DFT_QPSK	26.03	-1.6	24.43	30	PASS
n78(3550-3700)	30	10	637000	1@1	DFT_QPSK	25.87	-1.6	24.27	30	PASS
n78(3550-3700)	30	10	637000	1@22	DFT_QPSK	25.56	-1.6	23.96	30	PASS
n78(3550-3700)	30	10	637000	1@1	DFT_QAM16	24.97	-1.6	23.37	30	PASS
n78(3550-3700)	30	10	637000	1@1	DFT_QAM64	23.26	-1.6	21.66	30	PASS
n78(3550-3700)	30	10	637000	1@1	DFT_QAM256	21.36	-1.6	19.76	30	PASS
n78(3550-3700)	30	10	637000	1@1	CP_QPSK	24.47	-1.6	22.87	30	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_BPSK	25.85	-1.6	24.25	30	PASS
n78(3550-3700)	30	10	641666	24@0	DFT_QPSK	24.91	-1.6	23.31	30	PASS
n78(3550-3700)	30	10	641666	12@6	DFT_QPSK	25.86	-1.6	24.26	30	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_QPSK	25.83	-1.6	24.23	30	PASS
n78(3550-3700)	30	10	641666	1@22	DFT_QPSK	25.76	-1.6	24.16	30	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_QAM16	24.72	-1.6	23.12	30	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_QAM64	23.36	-1.6	21.76	30	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_QAM256	21.41	-1.6	19.81	30	PASS
n78(3550-3700)	30	10	641666	1@1	CP_QPSK	24.41	-1.6	22.81	30	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_BPSK	25.55	-1.6	23.95	30	PASS
n78(3550-3700)	30	10	646332	24@0	DFT_QPSK	24.48	-1.6	22.88	30	PASS
n78(3550-3700)	30	10	646332	12@6	DFT_QPSK	25.51	-1.6	23.91	30	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_QPSK	25.68	-1.6	24.08	30	PASS
n78(3550-3700)	30	10	646332	1@22	DFT_QPSK	25.61	-1.6	24.01	30	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_QAM16	24.23	-1.6	22.63	30	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_QAM64	22.87	-1.6	21.27	30	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_QAM256	20.65	-1.6	19.05	30	PASS
n78(3550-3700)	30	10	646332	1@1	CP_QPSK	23.86	-1.6	22.26	30	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_BPSK	26.00	-1.6	24.4	30	PASS
n78(3550-3700)	30	50	638334	128@0	DFT_QPSK	25.01	-1.6	23.41	30	PASS
n78(3550-3700)	30	50	638334	64@32	DFT_QPSK	25.99	-1.6	24.39	30	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_QPSK	25.95	-1.6	24.35	30	PASS
n78(3550-3700)	30	50	638334	1@131	DFT_QPSK	26.09	-1.6	24.49	30	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_QAM16	24.88	-1.6	23.28	30	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_QAM64	23.47	-1.6	21.87	30	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_QAM256	21.73	-1.6	20.13	30	PASS
n78(3550-3700)	30	50	638334	1@1	CP_QPSK	24.33	-1.6	22.73	30	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_BPSK	25.82	-1.6	24.22	30	PASS

n78(3550-3700)	30	50	641666	128@0	DFT_QPSK	24.91	-1.6	23.31	30	PASS
n78(3550-3700)	30	50	641666	64@32	DFT_QPSK	25.98	-1.6	24.38	30	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_QPSK	25.86	-1.6	24.26	30	PASS
n78(3550-3700)	30	50	641666	1@131	DFT_QPSK	25.73	-1.6	24.13	30	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_QAM16	24.83	-1.6	23.23	30	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_QAM64	23.56	-1.6	21.96	30	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_QAM256	21.61	-1.6	20.01	30	PASS
n78(3550-3700)	30	50	641666	1@1	CP_QPSK	24.44	-1.6	22.84	30	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_BPSK	25.69	-1.6	24.09	30	PASS
n78(3550-3700)	30	50	645000	128@0	DFT_QPSK	24.73	-1.6	23.13	30	PASS
n78(3550-3700)	30	50	645000	64@32	DFT_QPSK	25.72	-1.6	24.12	30	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_QPSK	25.67	-1.6	24.07	30	PASS
n78(3550-3700)	30	50	645000	1@131	DFT_QPSK	25.56	-1.6	23.96	30	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_QAM16	25.06	-1.6	23.46	30	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_QAM64	23.01	-1.6	21.41	30	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_QAM256	21.32	-1.6	19.72	30	PASS
n78(3550-3700)	30	50	645000	1@1	CP_QPSK	24.12	-1.6	22.52	30	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_BPSK	25.89	-1.6	24.29	30	PASS
n78(3550-3700)	30	100	640000	270@0	DFT_QPSK	24.97	-1.6	23.37	30	PASS
n78(3550-3700)	30	100	640000	135@67	DFT_QPSK	26.09	-1.6	24.49	30	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_QPSK	25.91	-1.6	24.31	30	PASS
n78(3550-3700)	30	100	640000	1@271	DFT_QPSK	25.84	-1.6	24.24	30	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_QAM16	24.91	-1.6	23.31	30	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_QAM64	23.30	-1.6	21.7	30	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_QAM256	21.26	-1.6	19.66	30	PASS
n78(3550-3700)	30	100	640000	1@1	CP_QPSK	24.33	-1.6	22.73	30	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_BPSK	25.72	-1.6	24.12	30	PASS
n78(3550-3700)	30	100	641666	270@0	DFT_QPSK	24.91	-1.6	23.31	30	PASS
n78(3550-3700)	30	100	641666	135@67	DFT_QPSK	25.95	-1.6	24.35	30	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_QPSK	25.74	-1.6	24.14	30	PASS
n78(3550-3700)	30	100	641666	1@271	DFT_QPSK	25.55	-1.6	23.95	30	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_QAM16	24.76	-1.6	23.16	30	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_QAM64	23.37	-1.6	21.77	30	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_QAM256	21.45	-1.6	19.85	30	PASS
n78(3550-3700)	30	100	641666	1@1	CP_QPSK	24.38	-1.6	22.78	30	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_BPSK	25.88	-1.6	24.28	30	PASS
n78(3550-3700)	30	100	643332	270@0	DFT_QPSK	24.87	-1.6	23.27	30	PASS
n78(3550-3700)	30	100	643332	135@67	DFT_QPSK	25.88	-1.6	24.28	30	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_QPSK	25.84	-1.6	24.24	30	PASS
n78(3550-3700)	30	100	643332	1@271	DFT_QPSK	25.49	-1.6	23.89	30	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_QAM16	24.75	-1.6	23.15	30	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_QAM64	23.42	-1.6	21.82	30	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_QAM256	21.35	-1.6	19.75	30	PASS
n78(3550-3700)	30	100	643332	1@1	CP_QPSK	24.50	-1.6	22.9	30	PASS

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n78(3550-3700)	30	10	637000	12@6	DFT_BPSK	2.19	0.00062	-2.5	2.5	PASS
n78(3550-3700)	30	10	637000	1@1	DFT_BPSK	-3.20	-0.00090	-2.5	2.5	PASS
n78(3550-3700)	30	10	637000	1@22	DFT_BPSK	2.97	0.00084	-2.5	2.5	PASS
n78(3550-3700)	30	10	637000	12@6	DFT_QPSK	-13.45	-0.00378	-2.5	2.5	PASS
n78(3550-3700)	30	10	637000	1@1	DFT_QPSK	-3.07	-0.00086	-2.5	2.5	PASS
n78(3550-3700)	30	10	637000	1@22	DFT_QPSK	-1.60	-0.00045	-2.5	2.5	PASS
n78(3550-3700)	30	10	641666	12@6	DFT_BPSK	-6.05	-0.00167	-2.5	2.5	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_BPSK	-2.81	-0.00078	-2.5	2.5	PASS
n78(3550-3700)	30	10	641666	1@22	DFT_BPSK	-6.81	-0.00188	-2.5	2.5	PASS
n78(3550-3700)	30	10	641666	12@6	DFT_QPSK	-21.22	-0.00585	-2.5	2.5	PASS
n78(3550-3700)	30	10	641666	1@1	DFT_QPSK	-10.43	-0.00288	-2.5	2.5	PASS
n78(3550-3700)	30	10	641666	1@22	DFT_QPSK	-7.97	-0.00220	-2.5	2.5	PASS
n78(3550-3700)	30	10	646332	12@6	DFT_BPSK	-8.39	-0.00227	-2.5	2.5	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_BPSK	-3.11	-0.00084	-2.5	2.5	PASS
n78(3550-3700)	30	10	646332	1@22	DFT_BPSK	-14.23	-0.00385	-2.5	2.5	PASS
n78(3550-3700)	30	10	646332	12@6	DFT_QPSK	-7.88	-0.00213	-2.5	2.5	PASS
n78(3550-3700)	30	10	646332	1@1	DFT_QPSK	-9.86	-0.00267	-2.5	2.5	PASS
n78(3550-3700)	30	10	646332	1@22	DFT_QPSK	-0.80	-0.00022	-2.5	2.5	PASS
n78(3550-3700)	30	50	638334	64@32	DFT_BPSK	-8.40	-0.00235	-2.5	2.5	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_BPSK	-6.12	-0.00171	-2.5	2.5	PASS
n78(3550-3700)	30	50	638334	1@131	DFT_BPSK	-3.84	-0.00107	-2.5	2.5	PASS
n78(3550-3700)	30	50	638334	64@32	DFT_QPSK	-8.65	-0.00242	-2.5	2.5	PASS
n78(3550-3700)	30	50	638334	1@1	DFT_QPSK	-4.38	-0.00123	-2.5	2.5	PASS
n78(3550-3700)	30	50	638334	1@131	DFT_QPSK	-3.22	-0.00090	-2.5	2.5	PASS
n78(3550-3700)	30	50	641666	64@32	DFT_BPSK	-2.27	-0.00063	-2.5	2.5	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_BPSK	-0.09	-0.00002	-2.5	2.5	PASS
n78(3550-3700)	30	50	641666	1@131	DFT_BPSK	-6.54	-0.00180	-2.5	2.5	PASS
n78(3550-3700)	30	50	641666	64@32	DFT_QPSK	-1.35	-0.00037	-2.5	2.5	PASS
n78(3550-3700)	30	50	641666	1@1	DFT_QPSK	-4.05	-0.00112	-2.5	2.5	PASS
n78(3550-3700)	30	50	641666	1@131	DFT_QPSK	-15.25	-0.00421	-2.5	2.5	PASS
n78(3550-3700)	30	50	645000	64@32	DFT_BPSK	-15.31	-0.00417	-2.5	2.5	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_BPSK	3.45	0.00094	-2.5	2.5	PASS
n78(3550-3700)	30	50	645000	1@131	DFT_BPSK	-9.02	-0.00245	-2.5	2.5	PASS
n78(3550-3700)	30	50	645000	64@32	DFT_QPSK	-7.89	-0.00215	-2.5	2.5	PASS
n78(3550-3700)	30	50	645000	1@1	DFT_QPSK	-12.86	-0.00350	-2.5	2.5	PASS
n78(3550-3700)	30	50	645000	1@131	DFT_QPSK	-18.76	-0.00510	-2.5	2.5	PASS
n78(3550-3700)	30	100	640000	135@67	DFT_BPSK	-11.12	-0.00309	-2.5	2.5	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_BPSK	-12.59	-0.00350	-2.5	2.5	PASS
n78(3550-3700)	30	100	640000	1@271	DFT_BPSK	-20.71	-0.00575	-2.5	2.5	PASS

n78(3550-3700)	30	100	640000	135@67	DFT_QPSK	-14.00	-0.00389	-2.5	2.5	PASS
n78(3550-3700)	30	100	640000	1@1	DFT_QPSK	-14.35	-0.00399	-2.5	2.5	PASS
n78(3550-3700)	30	100	640000	1@271	DFT_QPSK	-1.87	-0.00052	-2.5	2.5	PASS
n78(3550-3700)	30	100	641666	135@67	DFT_BPSK	-19.38	-0.00535	-2.5	2.5	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_BPSK	-9.33	-0.00257	-2.5	2.5	PASS
n78(3550-3700)	30	100	641666	1@271	DFT_BPSK	3.94	0.00109	-2.5	2.5	PASS
n78(3550-3700)	30	100	641666	135@67	DFT_QPSK	9.30	0.00257	-2.5	2.5	PASS
n78(3550-3700)	30	100	641666	1@1	DFT_QPSK	-10.94	-0.00302	-2.5	2.5	PASS
n78(3550-3700)	30	100	641666	1@271	DFT_QPSK	-13.92	-0.00384	-2.5	2.5	PASS
n78(3550-3700)	30	100	643332	135@67	DFT_BPSK	-9.77	-0.00268	-2.5	2.5	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_BPSK	2.61	0.00072	-2.5	2.5	PASS
n78(3550-3700)	30	100	643332	1@271	DFT_BPSK	-7.45	-0.00204	-2.5	2.5	PASS
n78(3550-3700)	30	100	643332	135@67	DFT_QPSK	-9.22	-0.00253	-2.5	2.5	PASS
n78(3550-3700)	30	100	643332	1@1	DFT_QPSK	-11.07	-0.00303	-2.5	2.5	PASS
n78(3550-3700)	30	100	643332	1@271	DFT_QPSK	-2.21	-0.00061	-2.5	2.5	PASS

3 Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n78(3550-3700)	30	10	637000	24@0	DFT_BPSK	4.21	13	PASS
n78(3550-3700)	30	10	637000	24@0	DFT_QPSK	5.57	13	PASS
n78(3550-3700)	30	10	637000	24@0	DFT_QAM16	5.99	13	PASS
n78(3550-3700)	30	10	637000	24@0	DFT_QAM64	6.44	13	PASS
n78(3550-3700)	30	10	637000	24@0	DFT_QAM256	7.14	13	PASS
n78(3550-3700)	30	10	641666	24@0	DFT_BPSK	4.11	13	PASS
n78(3550-3700)	30	10	641666	24@0	DFT_QPSK	5.36	13	PASS
n78(3550-3700)	30	10	641666	24@0	DFT_QAM16	6.34	13	PASS
n78(3550-3700)	30	10	641666	24@0	DFT_QAM64	6.34	13	PASS
n78(3550-3700)	30	10	641666	24@0	DFT_QAM256	6.88	13	PASS
n78(3550-3700)	30	10	646332	24@0	DFT_BPSK	4.16	13	PASS
n78(3550-3700)	30	10	646332	24@0	DFT_QPSK	5.31	13	PASS
n78(3550-3700)	30	10	646332	24@0	DFT_QAM16	5.95	13	PASS
n78(3550-3700)	30	10	646332	24@0	DFT_QAM64	6.25	13	PASS
n78(3550-3700)	30	10	646332	24@0	DFT_QAM256	6.89	13	PASS
n78(3550-3700)	30	15	637168	36@0	DFT_BPSK	4.38	13	PASS
n78(3550-3700)	30	15	637168	36@0	DFT_QPSK	5.23	13	PASS
n78(3550-3700)	30	15	637168	36@0	DFT_QAM16	6.15	13	PASS
n78(3550-3700)	30	15	637168	36@0	DFT_QAM64	6.04	13	PASS
n78(3550-3700)	30	15	637168	36@0	DFT_QAM256	6.54	13	PASS
n78(3550-3700)	30	15	641666	36@0	DFT_BPSK	4.08	13	PASS
n78(3550-3700)	30	15	641666	36@0	DFT_QPSK	5.31	13	PASS
n78(3550-3700)	30	15	641666	36@0	DFT_QAM16	6.06	13	PASS
n78(3550-3700)	30	15	641666	36@0	DFT_QAM64	6.21	13	PASS
n78(3550-3700)	30	15	641666	36@0	DFT_QAM256	6.89	13	PASS
n78(3550-3700)	30	15	646166	36@0	DFT_BPSK	4.04	13	PASS
n78(3550-3700)	30	15	646166	36@0	DFT_QPSK	5.39	13	PASS
n78(3550-3700)	30	15	646166	36@0	DFT_QAM16	5.95	13	PASS
n78(3550-3700)	30	15	646166	36@0	DFT_QAM64	6.07	13	PASS
n78(3550-3700)	30	15	646166	36@0	DFT_QAM256	6.93	13	PASS
n78(3550-3700)	30	20	637334	50@0	DFT_BPSK	4.52	13	PASS
n78(3550-3700)	30	20	637334	50@0	DFT_QPSK	5.45	13	PASS
n78(3550-3700)	30	20	637334	50@0	DFT_QAM16	5.82	13	PASS
n78(3550-3700)	30	20	637334	50@0	DFT_QAM64	6.56	13	PASS
n78(3550-3700)	30	20	637334	50@0	DFT_QAM256	6.86	13	PASS
n78(3550-3700)	30	20	641666	50@0	DFT_BPSK	4.06	13	PASS
n78(3550-3700)	30	20	641666	50@0	DFT_QPSK	5.25	13	PASS
n78(3550-3700)	30	20	641666	50@0	DFT_QAM16	6.11	13	PASS
n78(3550-3700)	30	20	641666	50@0	DFT_QAM64	6.27	13	PASS

n78(3550-3700)	30	20	641666	50@0	DFT_QAM256	6.79	13	PASS
n78(3550-3700)	30	20	646000	50@0	DFT_BPSK	4.15	13	PASS
n78(3550-3700)	30	20	646000	50@0	DFT_QPSK	5.39	13	PASS
n78(3550-3700)	30	20	646000	50@0	DFT_QAM16	5.88	13	PASS
n78(3550-3700)	30	20	646000	50@0	DFT_QAM64	6.25	13	PASS
n78(3550-3700)	30	20	646000	50@0	DFT_QAM256	6.54	13	PASS
n78(3550-3700)	30	40	638000	100@0	DFT_BPSK	4.64	13	PASS
n78(3550-3700)	30	40	638000	100@0	DFT_QPSK	5.39	13	PASS
n78(3550-3700)	30	40	638000	100@0	DFT_QAM16	6.03	13	PASS
n78(3550-3700)	30	40	638000	100@0	DFT_QAM64	6.38	13	PASS
n78(3550-3700)	30	40	638000	100@0	DFT_QAM256	6.58	13	PASS
n78(3550-3700)	30	40	641666	100@0	DFT_BPSK	4.10	13	PASS
n78(3550-3700)	30	40	641666	100@0	DFT_QPSK	5.31	13	PASS
n78(3550-3700)	30	40	641666	100@0	DFT_QAM16	6.21	13	PASS
n78(3550-3700)	30	40	641666	100@0	DFT_QAM64	6.10	13	PASS
n78(3550-3700)	30	40	641666	100@0	DFT_QAM256	6.89	13	PASS
n78(3550-3700)	30	40	645332	100@0	DFT_BPSK	4.41	13	PASS
n78(3550-3700)	30	40	645332	100@0	DFT_QPSK	5.19	13	PASS
n78(3550-3700)	30	40	645332	100@0	DFT_QAM16	6.30	13	PASS
n78(3550-3700)	30	40	645332	100@0	DFT_QAM64	6.42	13	PASS
n78(3550-3700)	30	40	645332	100@0	DFT_QAM256	6.58	13	PASS
n78(3550-3700)	30	50	638334	128@0	DFT_BPSK	4.17	13	PASS
n78(3550-3700)	30	50	638334	128@0	DFT_QPSK	5.41	13	PASS
n78(3550-3700)	30	50	638334	128@0	DFT_QAM16	6.27	13	PASS
n78(3550-3700)	30	50	638334	128@0	DFT_QAM64	6.21	13	PASS
n78(3550-3700)	30	50	638334	128@0	DFT_QAM256	6.70	13	PASS
n78(3550-3700)	30	50	641666	128@0	DFT_BPSK	4.01	13	PASS
n78(3550-3700)	30	50	641666	128@0	DFT_QPSK	5.48	13	PASS
n78(3550-3700)	30	50	641666	128@0	DFT_QAM16	5.87	13	PASS
n78(3550-3700)	30	50	641666	128@0	DFT_QAM64	6.47	13	PASS
n78(3550-3700)	30	50	641666	128@0	DFT_QAM256	6.70	13	PASS
n78(3550-3700)	30	50	645000	128@0	DFT_BPSK	4.04	13	PASS
n78(3550-3700)	30	50	645000	128@0	DFT_QPSK	5.63	13	PASS
n78(3550-3700)	30	50	645000	128@0	DFT_QAM16	6.33	13	PASS
n78(3550-3700)	30	50	645000	128@0	DFT_QAM64	6.37	13	PASS
n78(3550-3700)	30	50	645000	128@0	DFT_QAM256	6.58	13	PASS
n78(3550-3700)	30	60	638668	162@0	DFT_BPSK	4.05	13	PASS
n78(3550-3700)	30	60	638668	162@0	DFT_QPSK	5.39	13	PASS
n78(3550-3700)	30	60	638668	162@0	DFT_QAM16	6.30	13	PASS
n78(3550-3700)	30	60	638668	162@0	DFT_QAM64	6.51	13	PASS
n78(3550-3700)	30	60	638668	162@0	DFT_QAM256	6.78	13	PASS
n78(3550-3700)	30	60	641666	162@0	DFT_BPSK	4.10	13	PASS
n78(3550-3700)	30	60	641666	162@0	DFT_QPSK	5.46	13	PASS
n78(3550-3700)	30	60	641666	162@0	DFT_QAM16	5.89	13	PASS


n78(3550-3700)	30	60	641666	162@0	DFT_QAM64	6.10	13	PASS
n78(3550-3700)	30	60	641666	162@0	DFT_QAM256	6.89	13	PASS
n78(3550-3700)	30	60	644666	162@0	DFT_BPSK	4.12	13	PASS
n78(3550-3700)	30	60	644666	162@0	DFT_QPSK	5.23	13	PASS
n78(3550-3700)	30	60	644666	162@0	DFT_QAM16	6.19	13	PASS
n78(3550-3700)	30	60	644666	162@0	DFT_QAM64	6.58	13	PASS
n78(3550-3700)	30	60	644666	162@0	DFT_QAM256	6.63	13	PASS
n78(3550-3700)	30	70	639000	180@0	DFT_BPSK	5.25	13	PASS
n78(3550-3700)	30	70	639000	180@0	DFT_QPSK	5.78	13	PASS
n78(3550-3700)	30	70	639000	180@0	DFT_QAM16	6.33	13	PASS
n78(3550-3700)	30	70	639000	180@0	DFT_QAM64	6.61	13	PASS
n78(3550-3700)	30	70	639000	180@0	DFT_QAM256	7.17	13	PASS
n78(3550-3700)	30	70	641666	180@0	DFT_BPSK	4.30	13	PASS
n78(3550-3700)	30	70	641666	180@0	DFT_QPSK	5.78	13	PASS
n78(3550-3700)	30	70	641666	180@0	DFT_QAM16	6.18	13	PASS
n78(3550-3700)	30	70	641666	180@0	DFT_QAM64	6.28	13	PASS
n78(3550-3700)	30	70	641666	180@0	DFT_QAM256	6.44	13	PASS
n78(3550-3700)	30	70	644332	180@0	DFT_BPSK	4.56	13	PASS
n78(3550-3700)	30	70	644332	180@0	DFT_QPSK	5.48	13	PASS
n78(3550-3700)	30	70	644332	180@0	DFT_QAM16	6.46	13	PASS
n78(3550-3700)	30	70	644332	180@0	DFT_QAM64	6.53	13	PASS
n78(3550-3700)	30	70	644332	180@0	DFT_QAM256	6.43	13	PASS
n78(3550-3700)	30	80	639334	216@0	DFT_BPSK	4.11	13	PASS
n78(3550-3700)	30	80	639334	216@0	DFT_QPSK	5.59	13	PASS
n78(3550-3700)	30	80	639334	216@0	DFT_QAM16	5.96	13	PASS
n78(3550-3700)	30	80	639334	216@0	DFT_QAM64	6.29	13	PASS
n78(3550-3700)	30	80	639334	216@0	DFT_QAM256	6.57	13	PASS
n78(3550-3700)	30	80	641666	216@0	DFT_BPSK	4.07	13	PASS
n78(3550-3700)	30	80	641666	216@0	DFT_QPSK	5.31	13	PASS
n78(3550-3700)	30	80	641666	216@0	DFT_QAM16	6.07	13	PASS
n78(3550-3700)	30	80	641666	216@0	DFT_QAM64	6.66	13	PASS
n78(3550-3700)	30	80	641666	216@0	DFT_QAM256	6.73	13	PASS
n78(3550-3700)	30	80	644000	216@0	DFT_BPSK	3.91	13	PASS
n78(3550-3700)	30	80	644000	216@0	DFT_QPSK	5.58	13	PASS
n78(3550-3700)	30	80	644000	216@0	DFT_QAM16	6.70	13	PASS
n78(3550-3700)	30	80	644000	216@0	DFT_QAM64	6.65	13	PASS
n78(3550-3700)	30	80	644000	216@0	DFT_QAM256	6.61	13	PASS
n78(3550-3700)	30	90	639668	240@0	DFT_BPSK	4.02	13	PASS
n78(3550-3700)	30	90	639668	240@0	DFT_QPSK	5.59	13	PASS
n78(3550-3700)	30	90	639668	240@0	DFT_QAM16	5.97	13	PASS
n78(3550-3700)	30	90	639668	240@0	DFT_QAM64	6.39	13	PASS
n78(3550-3700)	30	90	639668	240@0	DFT_QAM256	6.49	13	PASS
n78(3550-3700)	30	90	641666	240@0	DFT_BPSK	3.94	13	PASS
n78(3550-3700)	30	90	641666	240@0	DFT_QPSK	5.84	13	PASS

n78(3550-3700)	30	90	641666	240@0	DFT_QAM16	6.72	13	PASS
n78(3550-3700)	30	90	641666	240@0	DFT_QAM64	6.35	13	PASS
n78(3550-3700)	30	90	641666	240@0	DFT_QAM256	6.74	13	PASS
n78(3550-3700)	30	90	643666	240@0	DFT_BPSK	4.70	13	PASS
n78(3550-3700)	30	90	643666	240@0	DFT_QPSK	5.93	13	PASS
n78(3550-3700)	30	90	643666	240@0	DFT_QAM16	5.97	13	PASS
n78(3550-3700)	30	90	643666	240@0	DFT_QAM64	6.38	13	PASS
n78(3550-3700)	30	90	643666	240@0	DFT_QAM256	6.91	13	PASS
n78(3550-3700)	30	100	640000	270@0	DFT_BPSK	4.57	13	PASS
n78(3550-3700)	30	100	640000	270@0	DFT_QPSK	5.33	13	PASS
n78(3550-3700)	30	100	640000	270@0	DFT_QAM16	6.32	13	PASS
n78(3550-3700)	30	100	640000	270@0	DFT_QAM64	6.34	13	PASS
n78(3550-3700)	30	100	640000	270@0	DFT_QAM256	6.49	13	PASS
n78(3550-3700)	30	100	641666	270@0	DFT_BPSK	4.28	13	PASS
n78(3550-3700)	30	100	641666	270@0	DFT_QPSK	5.41	13	PASS
n78(3550-3700)	30	100	641666	270@0	DFT_QAM16	6.36	13	PASS
n78(3550-3700)	30	100	641666	270@0	DFT_QAM64	6.79	13	PASS
n78(3550-3700)	30	100	641666	270@0	DFT_QAM256	6.54	13	PASS
n78(3550-3700)	30	100	643332	270@0	DFT_BPSK	4.43	13	PASS
n78(3550-3700)	30	100	643332	270@0	DFT_QPSK	5.91	13	PASS
n78(3550-3700)	30	100	643332	270@0	DFT_QAM16	6.17	13	PASS
n78(3550-3700)	30	100	643332	270@0	DFT_QAM64	6.55	13	PASS
n78(3550-3700)	30	100	643332	270@0	DFT_QAM256	6.66	13	PASS


n78(3550-3700) SCS=30kHz DFT_BPSK BW=100MHz Channel=640000 RB=270@0

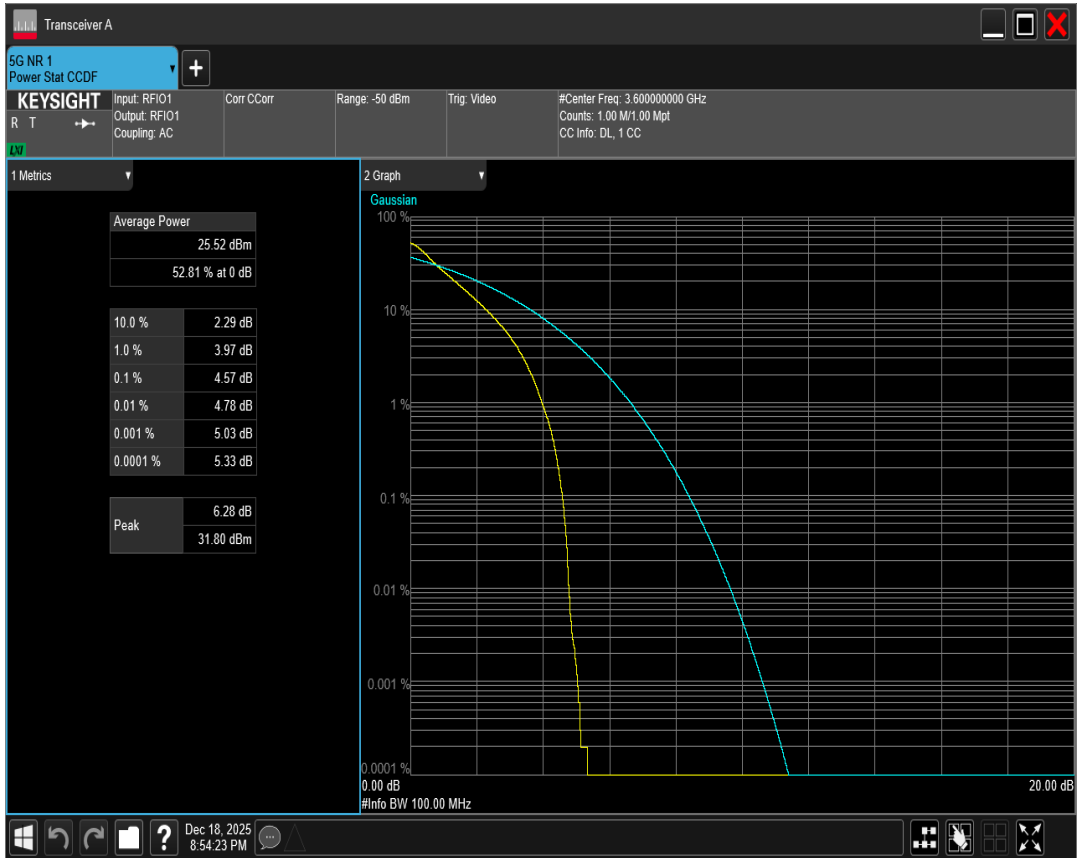


n78(3550-3700) SCS=30kHz DFT_BPSK BW=100MHz Channel=641666 RB=270@0

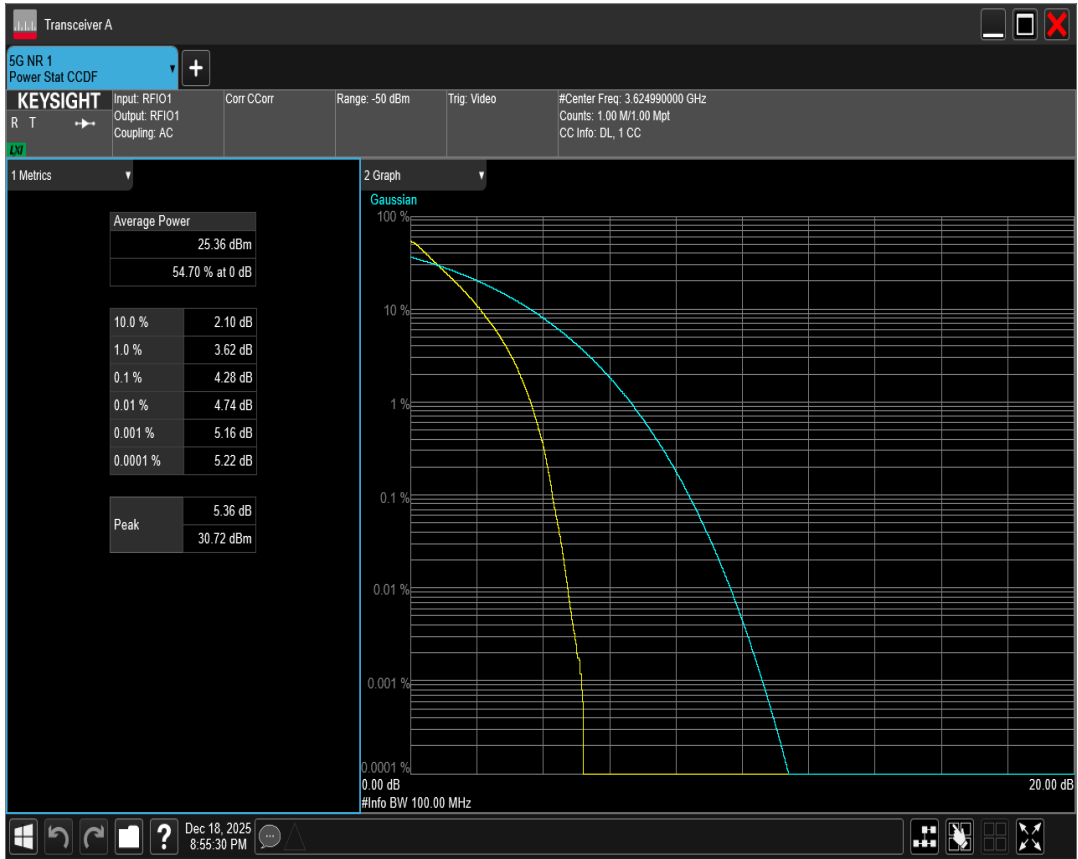


n78(3550-3700) SCS=30kHz DFT_BPSK BW=100MHz Channel=643332 RB=270@0

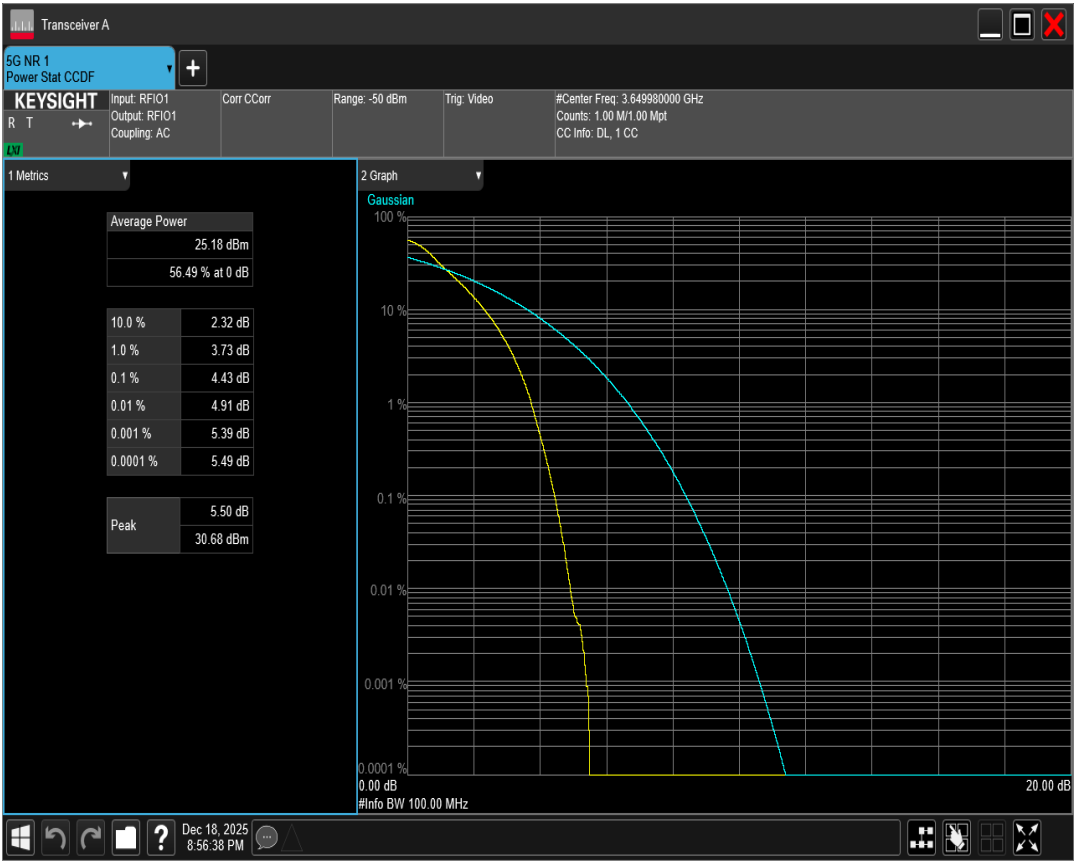


n78(3550-3700) SCS=30kHz DFT_BPSK BW=10MHz Channel=637000 RB=24@0

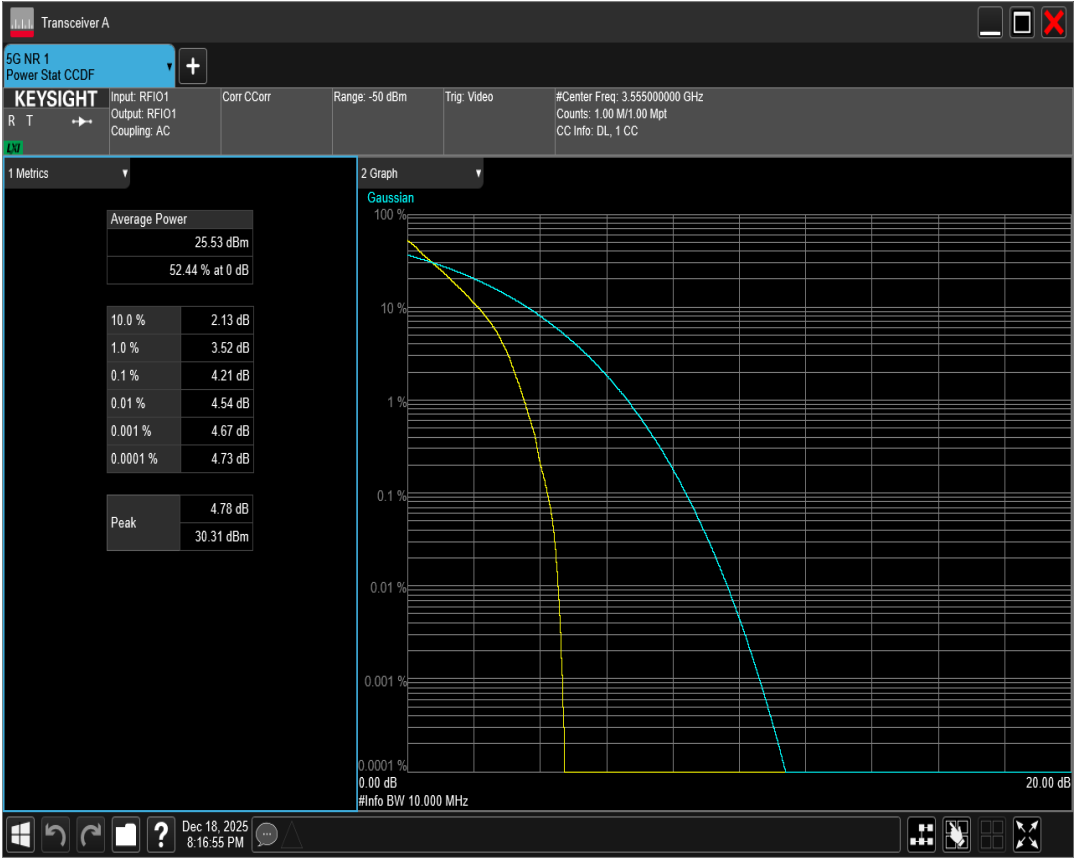


n78(3550-3700) SCS=30kHz DFT_BPSK BW=10MHz Channel=641666 RB=24@0

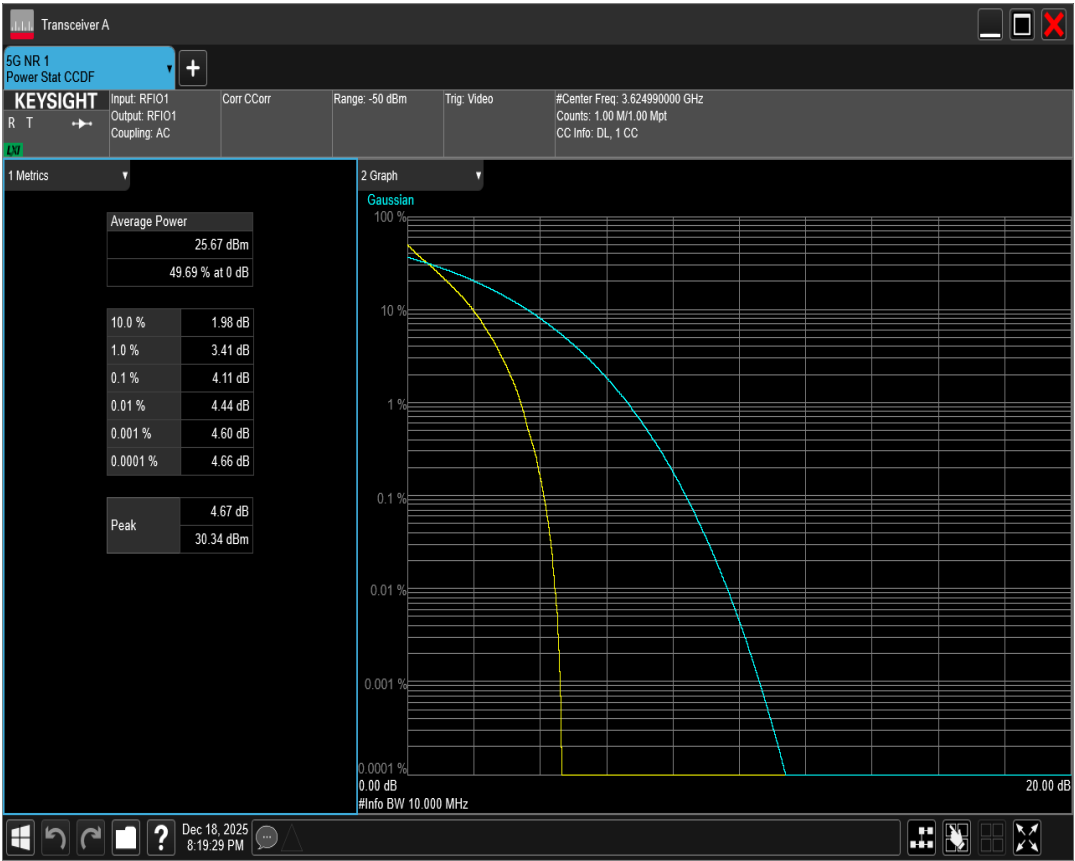


n78(3550-3700) SCS=30kHz DFT_BPSK BW=10MHz Channel=646332 RB=24@0

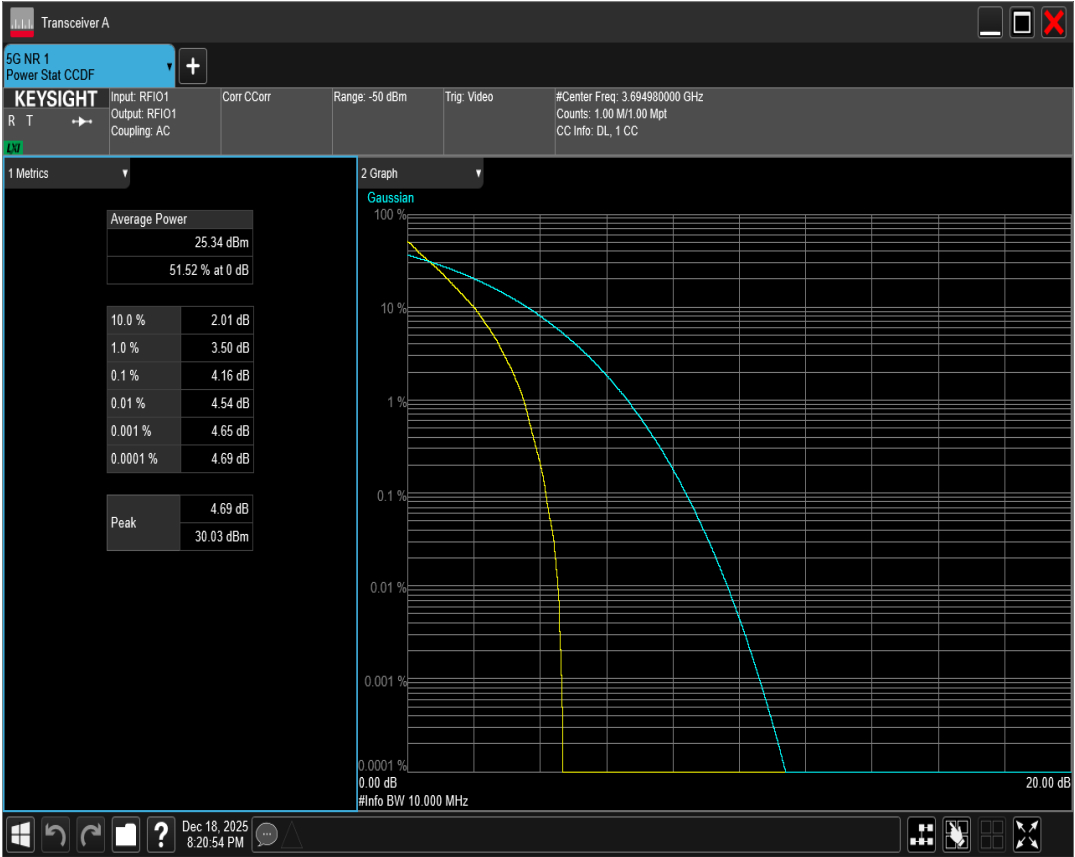


n78(3550-3700) SCS=30kHz DFT_BPSK BW=15MHz Channel=637168 RB=36@0

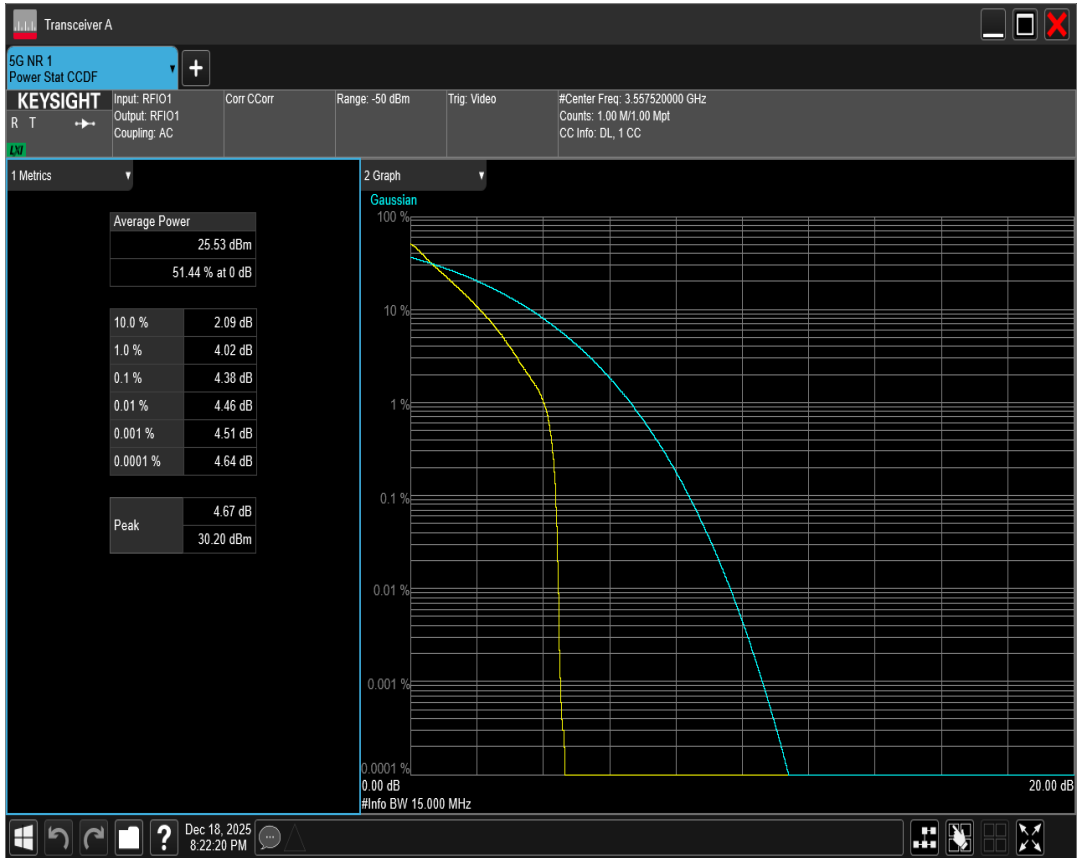


n78(3550-3700) SCS=30kHz DFT_BPSK BW=15MHz Channel=641666 RB=36@0

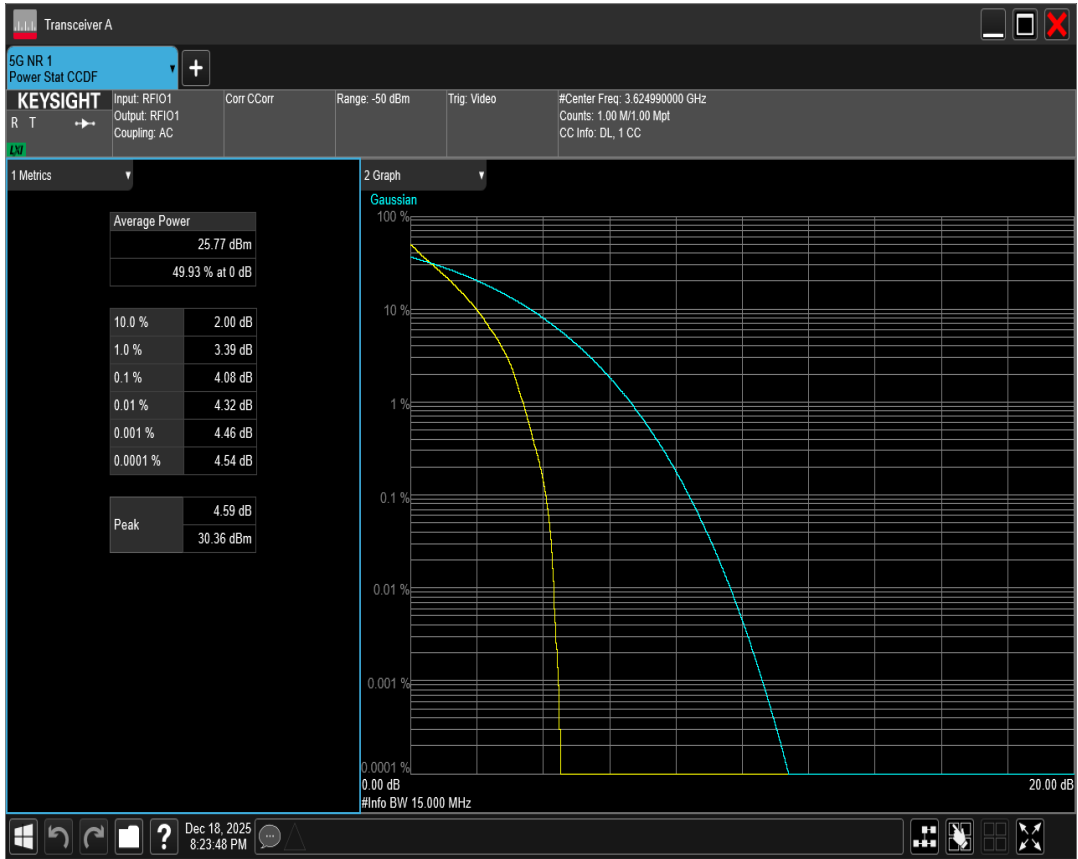


n78(3550-3700) SCS=30kHz DFT_BPSK BW=15MHz Channel=646166 RB=36@0

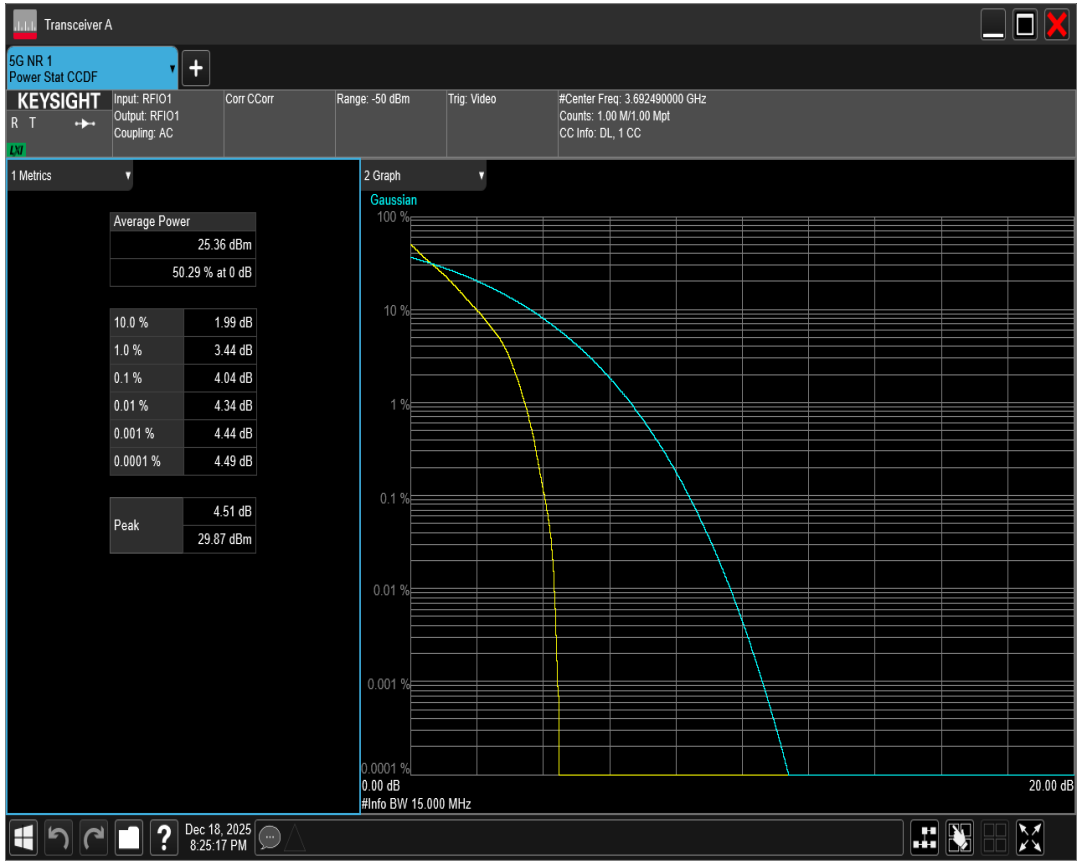


n78(3550-3700) SCS=30kHz DFT_BPSK BW=20MHz Channel=637334 RB=50@0

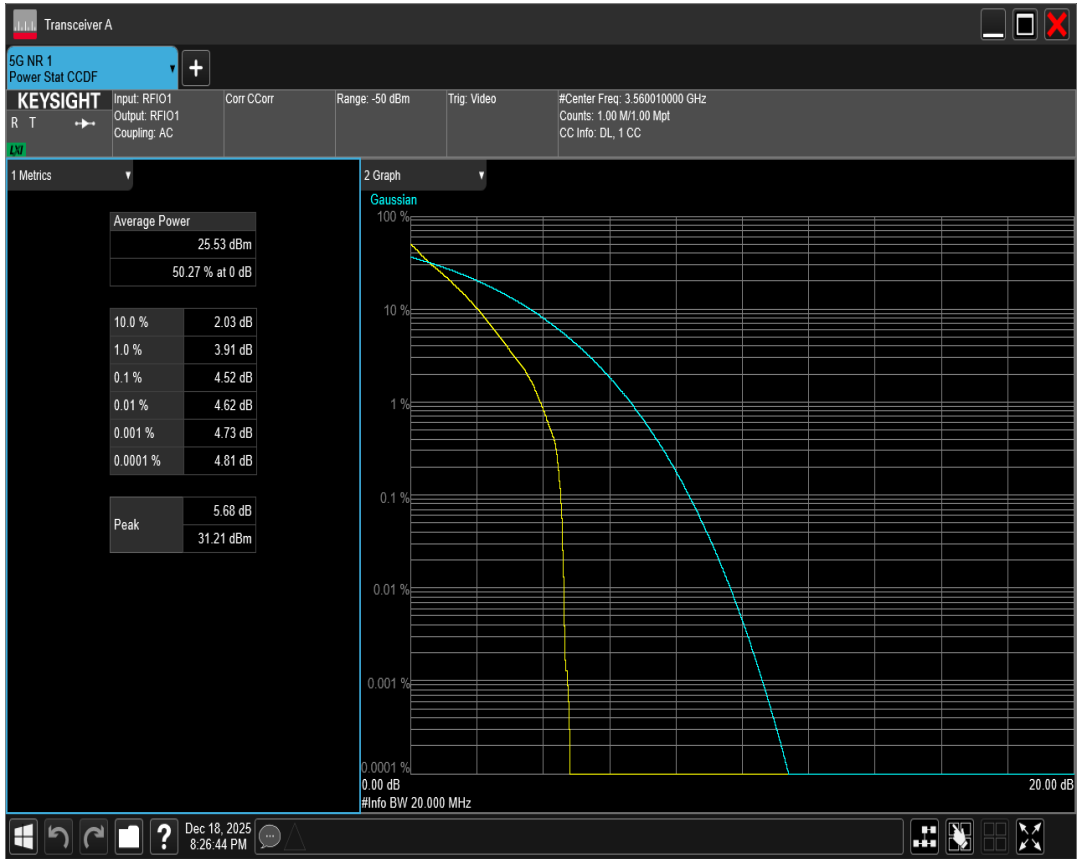


n78(3550-3700) SCS=30kHz DFT_BPSK BW=20MHz Channel=641666 RB=50@0

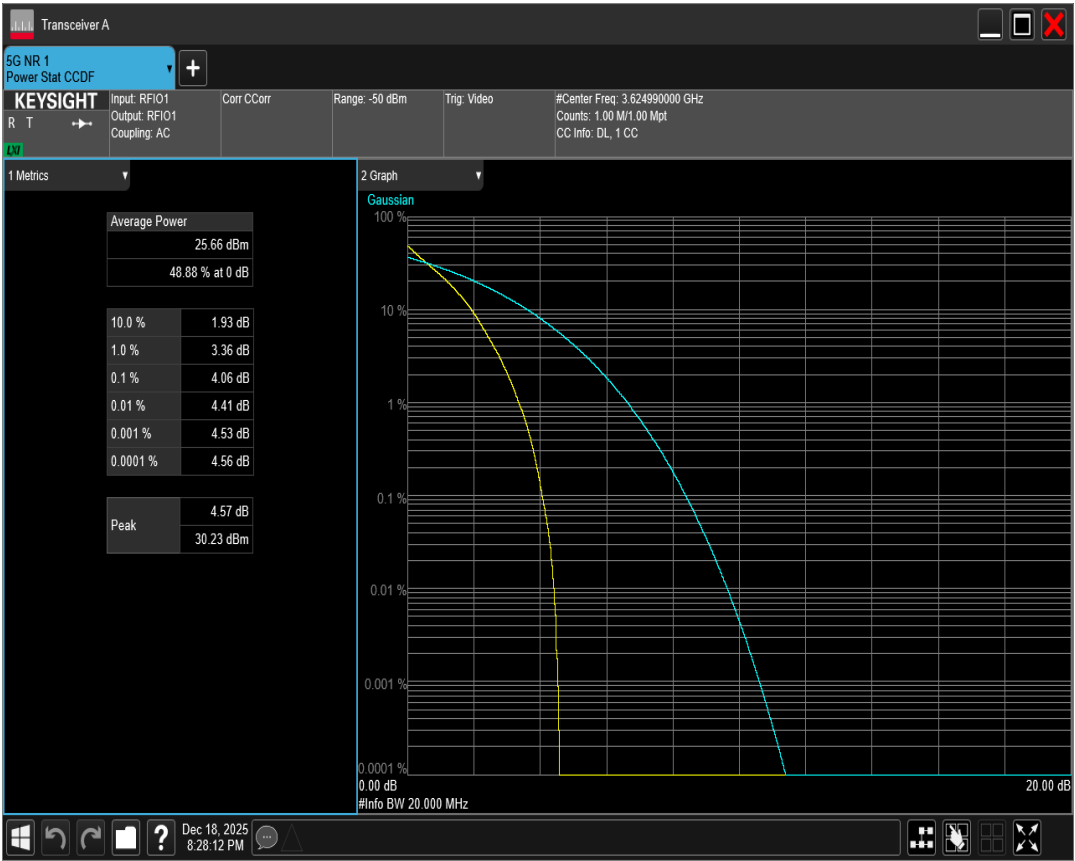

n78(3550-3700) SCS=30kHz DFT_BPSK BW=20MHz Channel=646000 RB=50@0

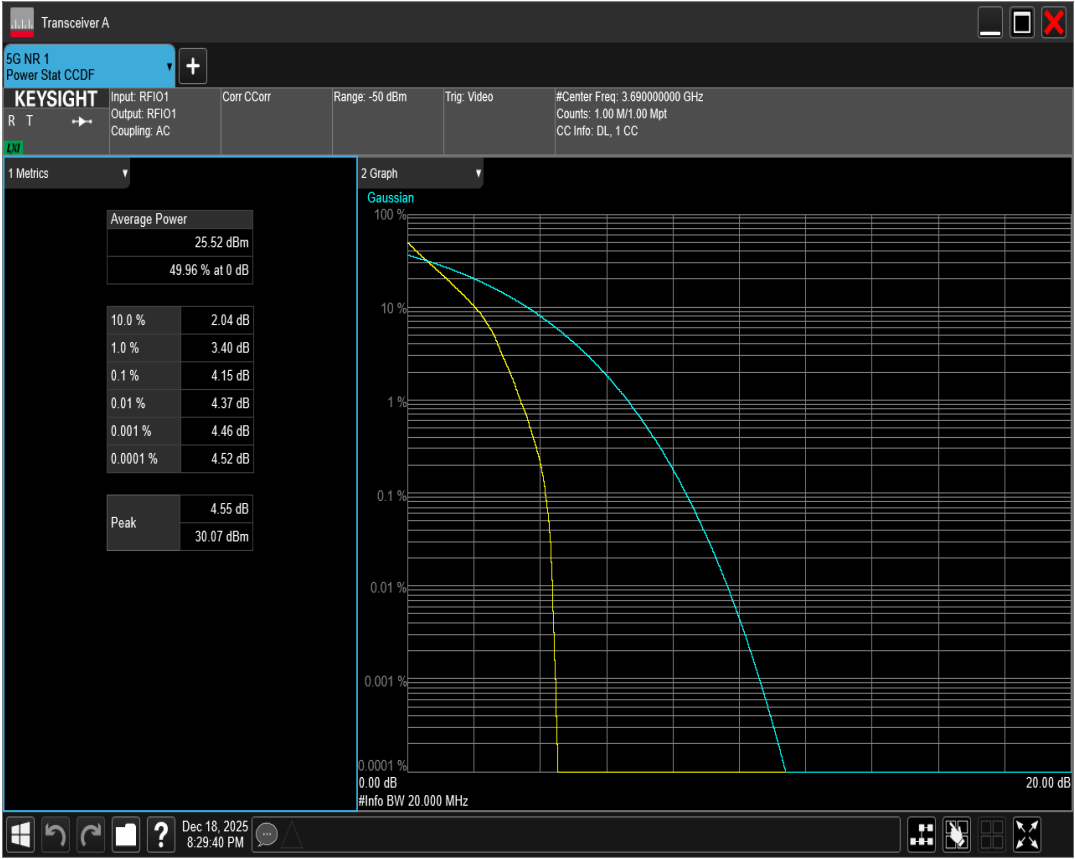


n78(3550-3700) SCS=30kHz DFT_BPSK BW=40MHz Channel=638000 RB=100@0

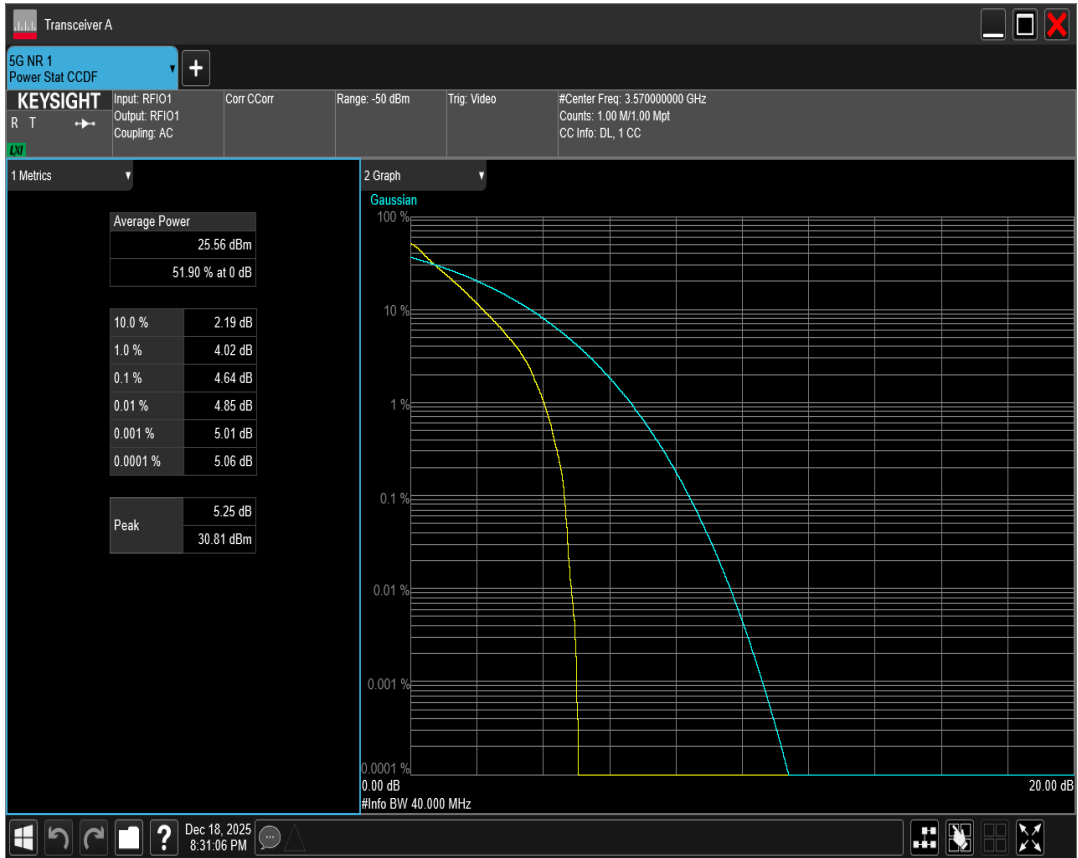


n78(3550-3700) SCS=30kHz DFT_BPSK BW=40MHz Channel=641666 RB=100@0




n78(3550-3700) SCS=30kHz DFT_BPSK BW=40MHz Channel=645332 RB=100@0

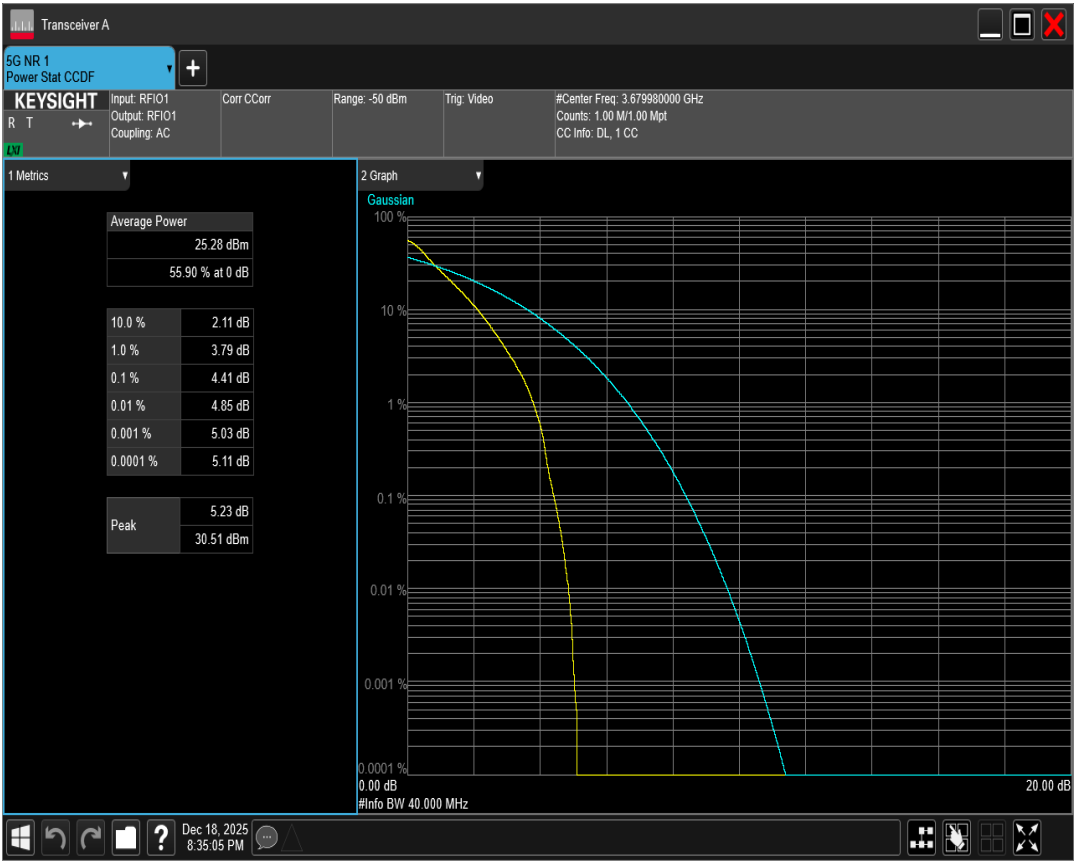


n78(3550-3700) SCS=30kHz DFT_BPSK BW=50MHz Channel=638334 RB=128@0

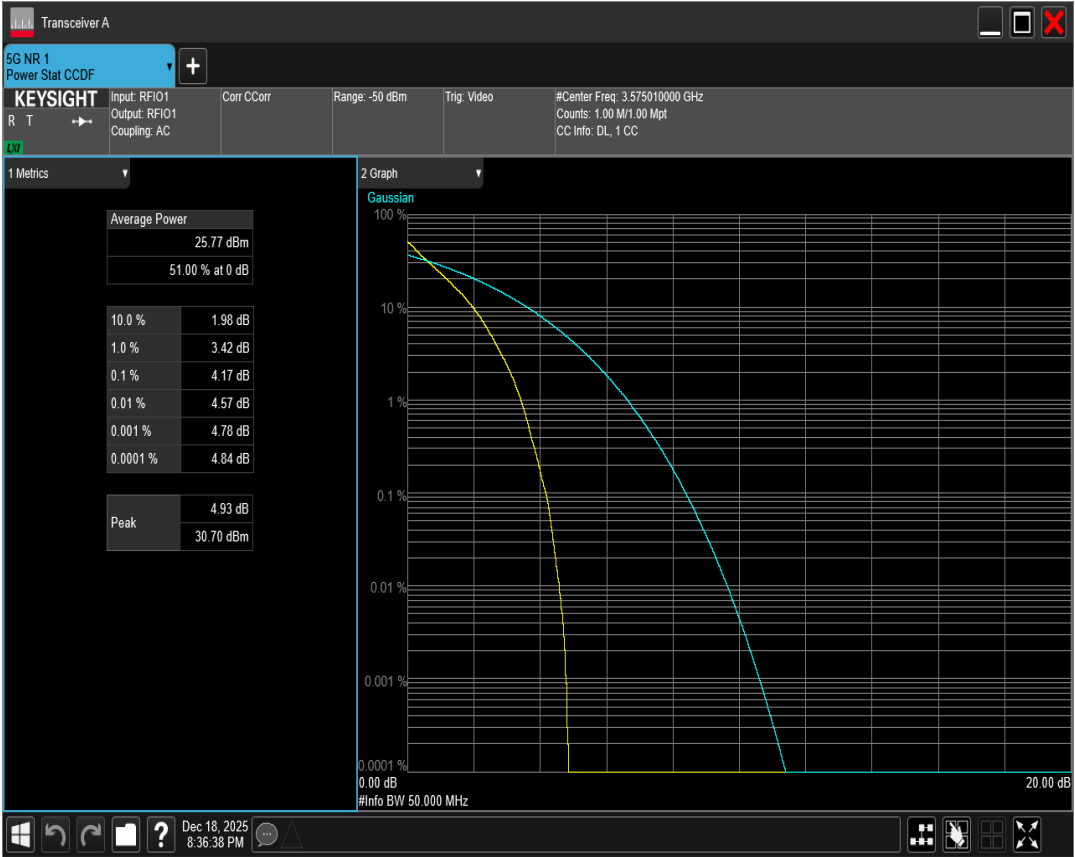

n78(3550-3700) SCS=30kHz DFT_BPSK BW=50MHz Channel=641666 RB=128@0

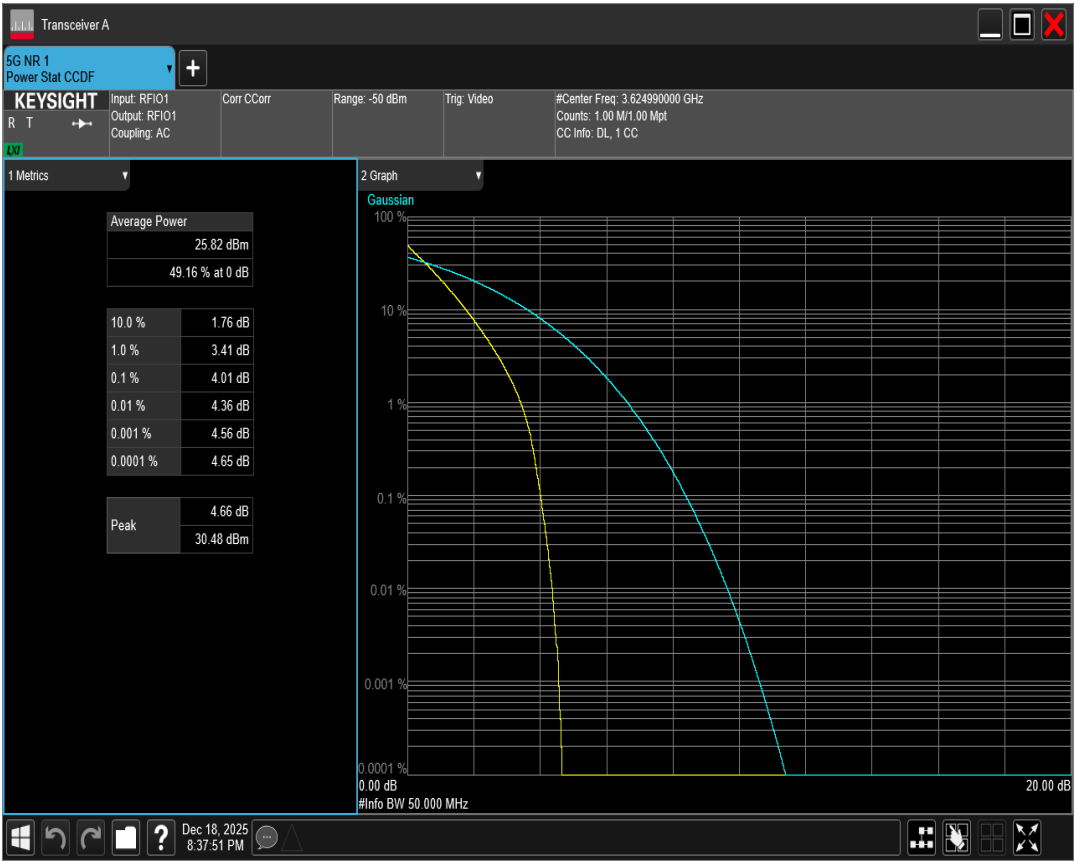


n78(3550-3700) SCS=30kHz DFT_BPSK BW=50MHz Channel=645000 RB=128@0

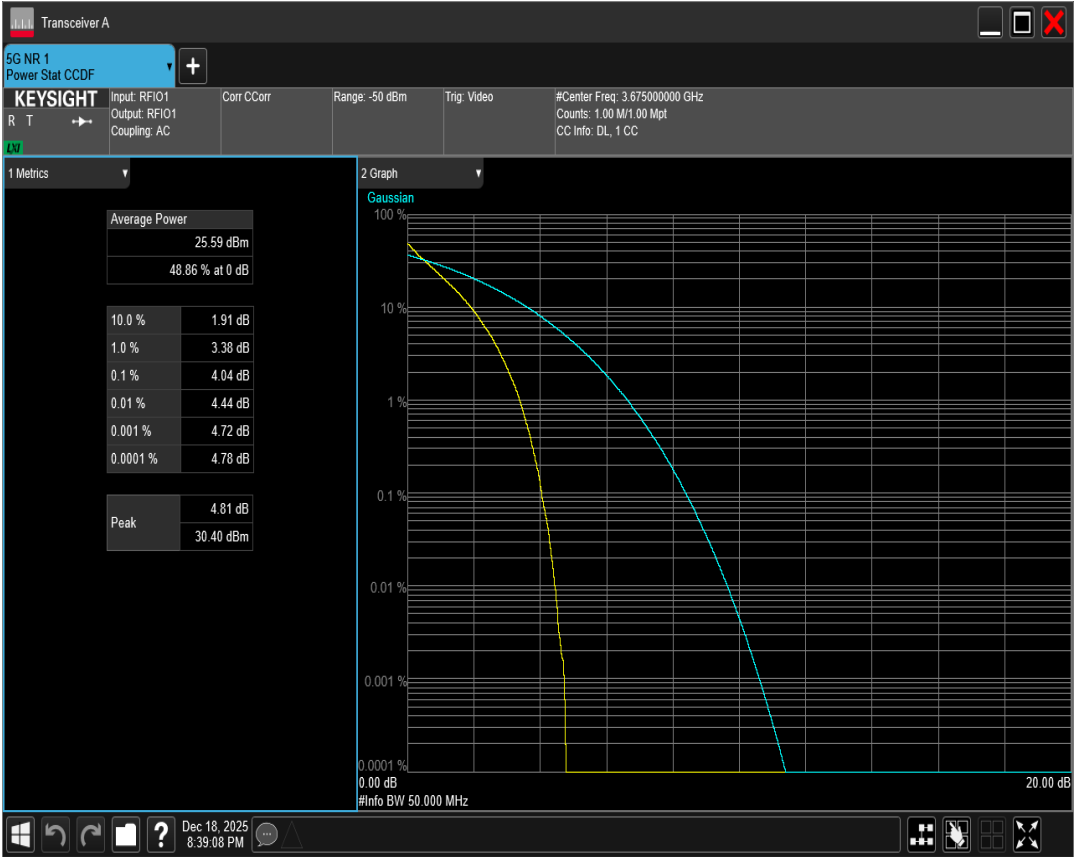


n78(3550-3700) SCS=30kHz DFT_BPSK BW=60MHz Channel=638668 RB=162@0




n78(3550-3700) SCS=30kHz DFT_BPSK BW=60MHz Channel=641666 RB=162@0

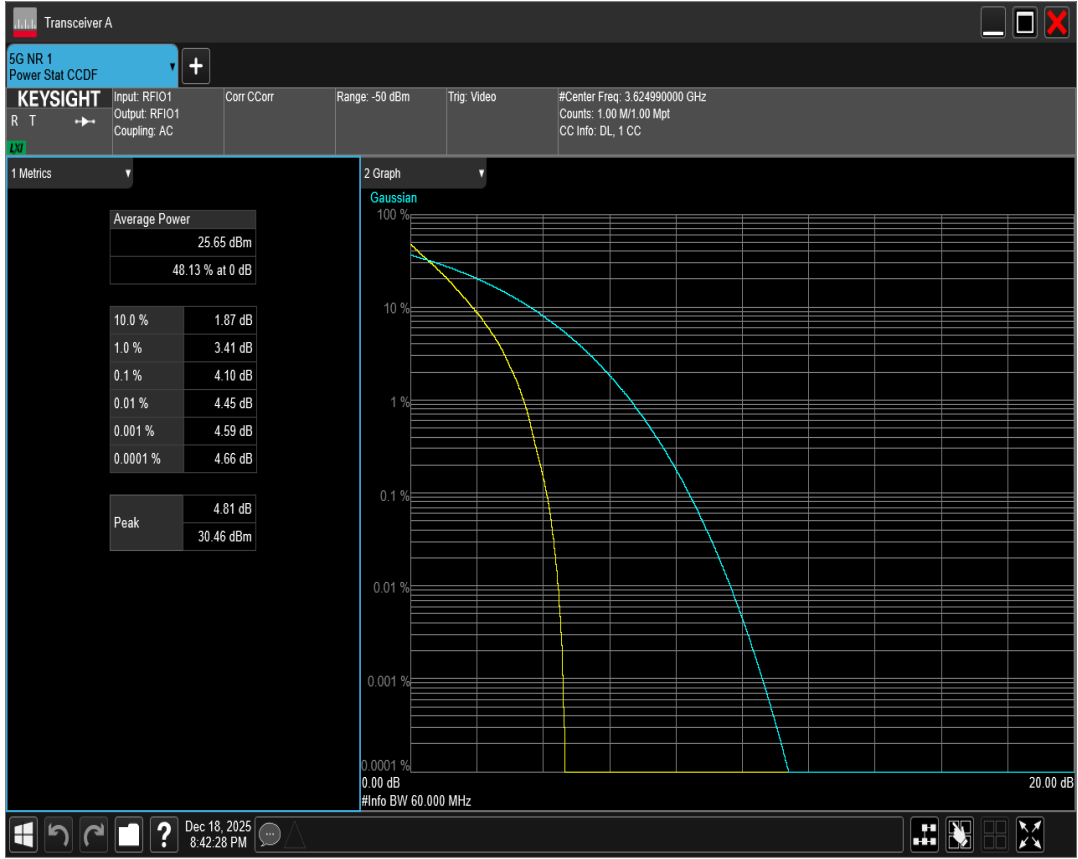


n78(3550-3700) SCS=30kHz DFT_BPSK BW=60MHz Channel=644666 RB=162@0

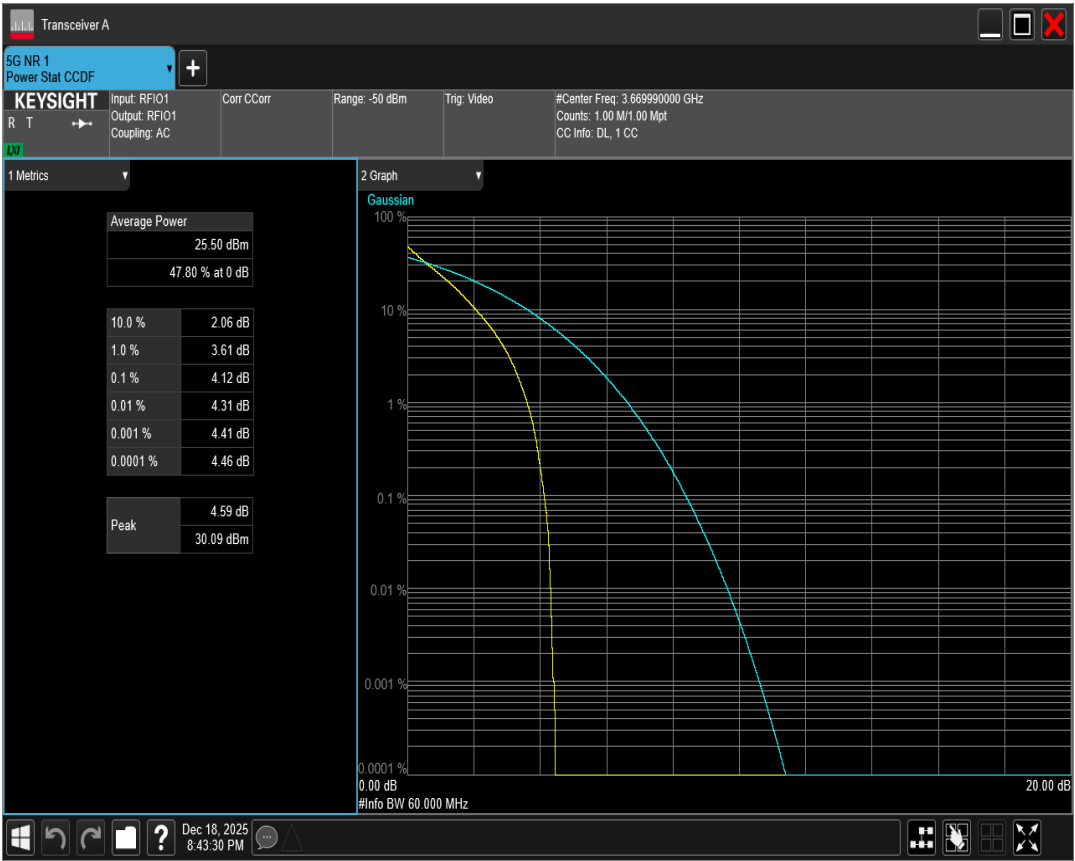


n78(3550-3700) SCS=30kHz DFT_BPSK BW=70MHz Channel=639000 RB=180@0

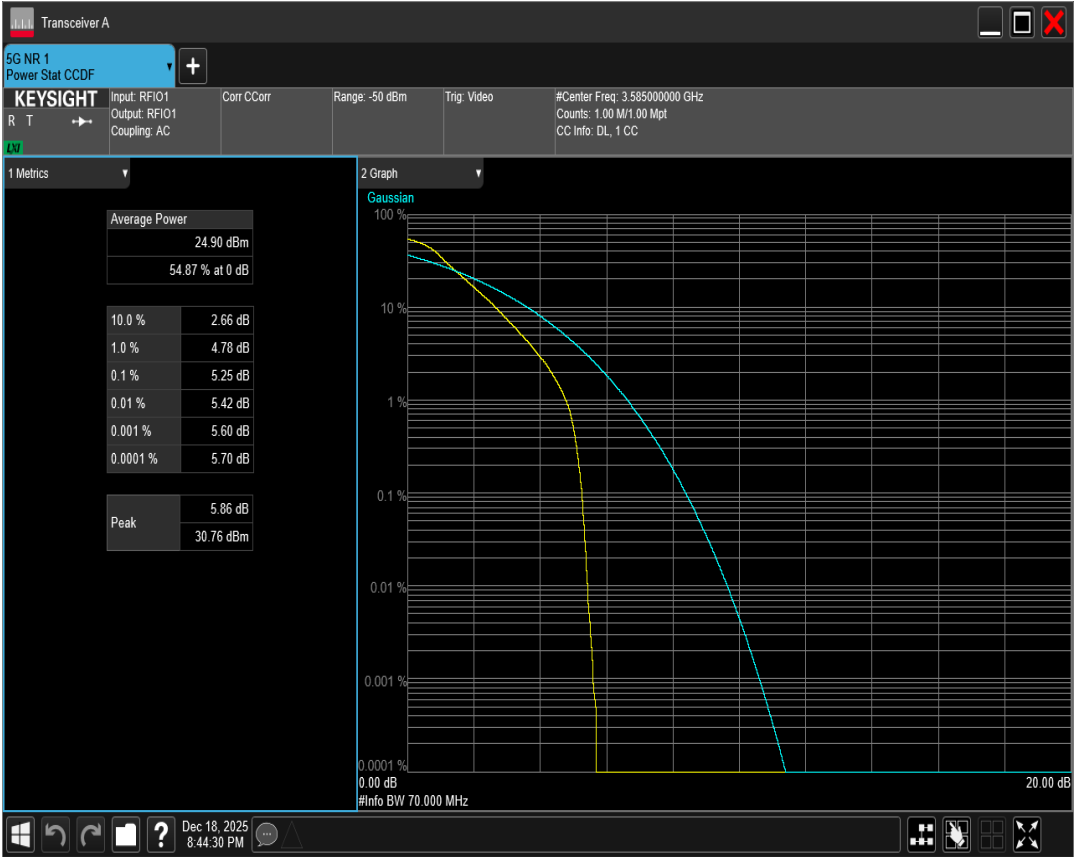


n78(3550-3700) SCS=30kHz DFT_BPSK BW=70MHz Channel=641666 RB=180@0

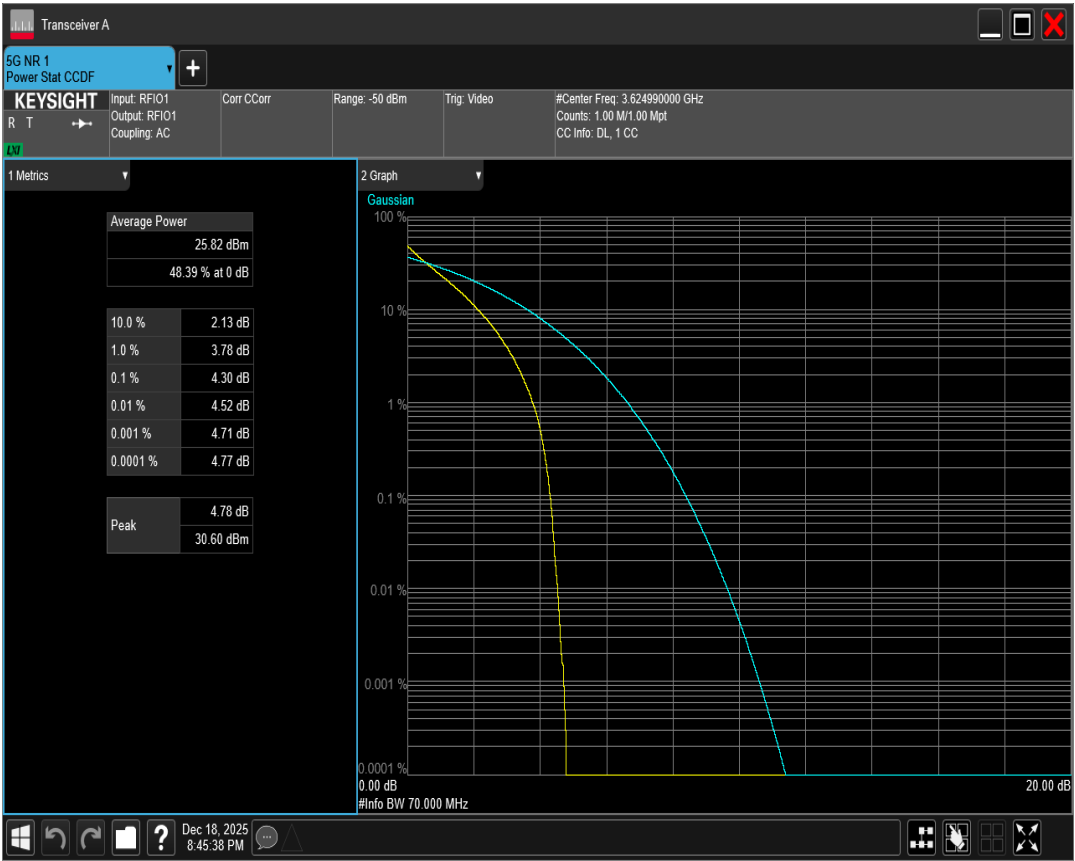


n78(3550-3700) SCS=30kHz DFT_BPSK BW=70MHz Channel=644332 RB=180@0

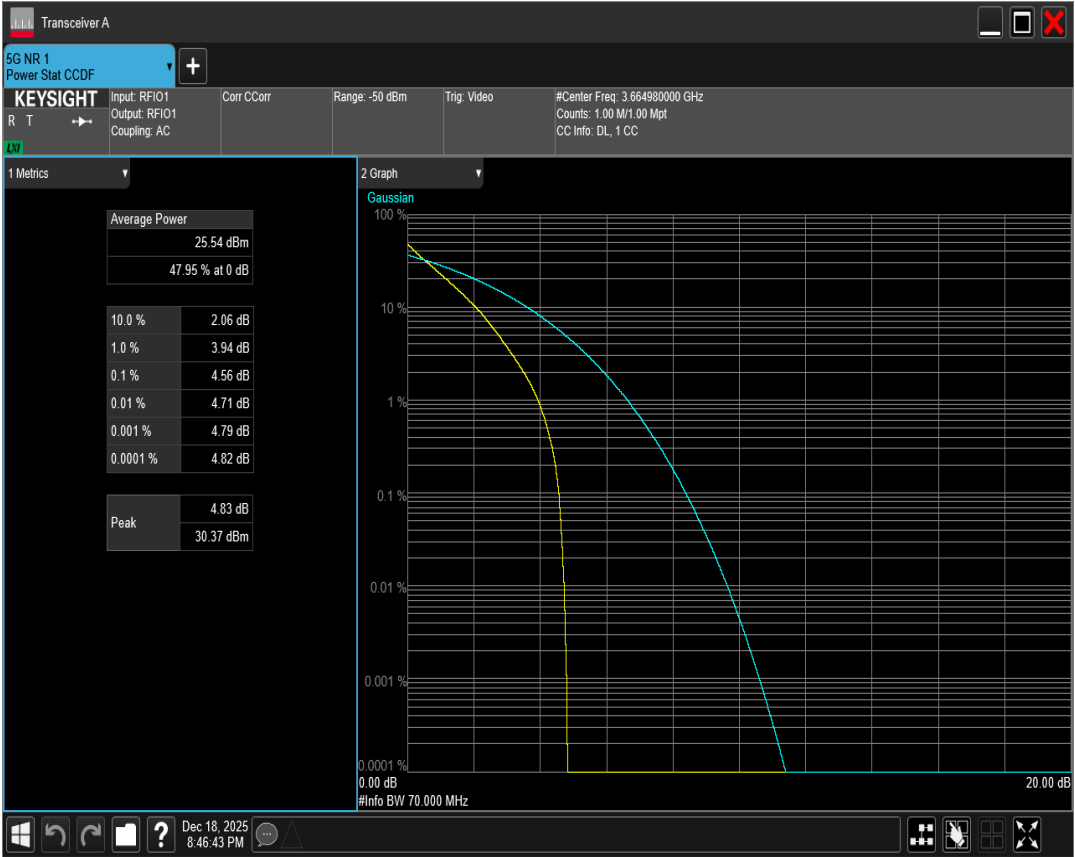


n78(3550-3700) SCS=30kHz DFT_BPSK BW=80MHz Channel=639334 RB=216@0

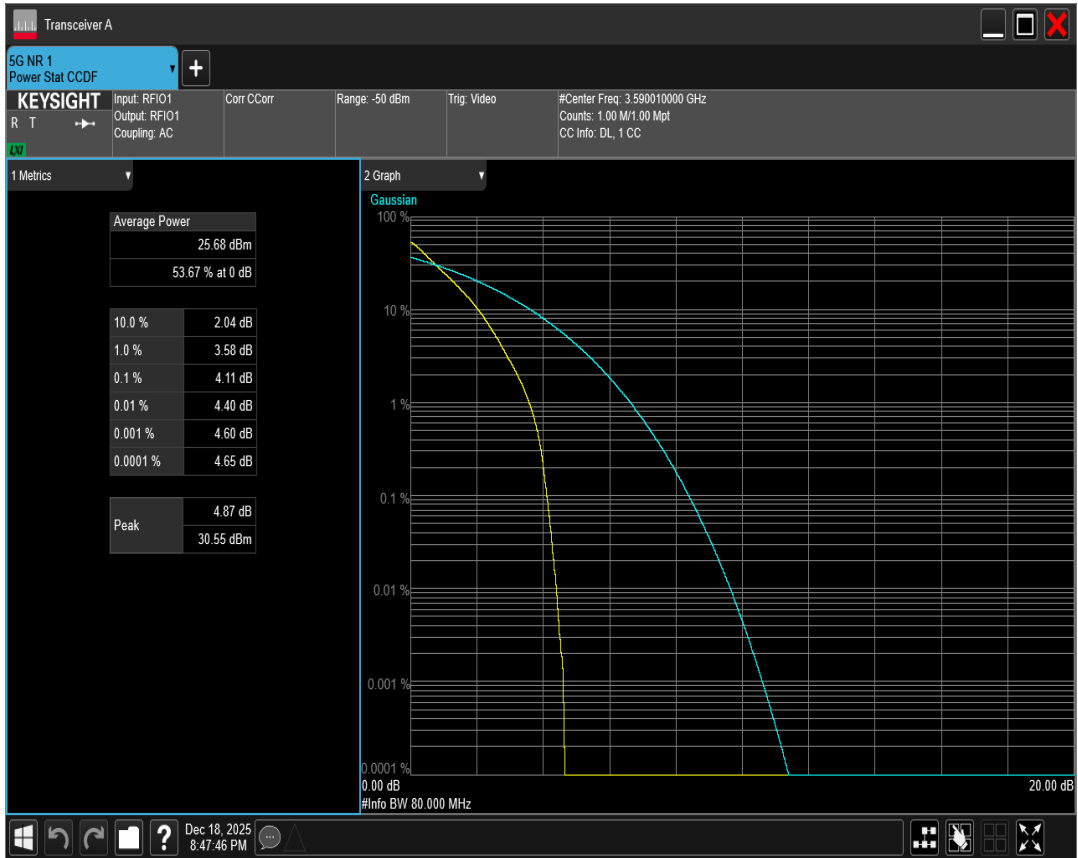


n78(3550-3700) SCS=30kHz DFT_BPSK BW=80MHz Channel=641666 RB=216@0

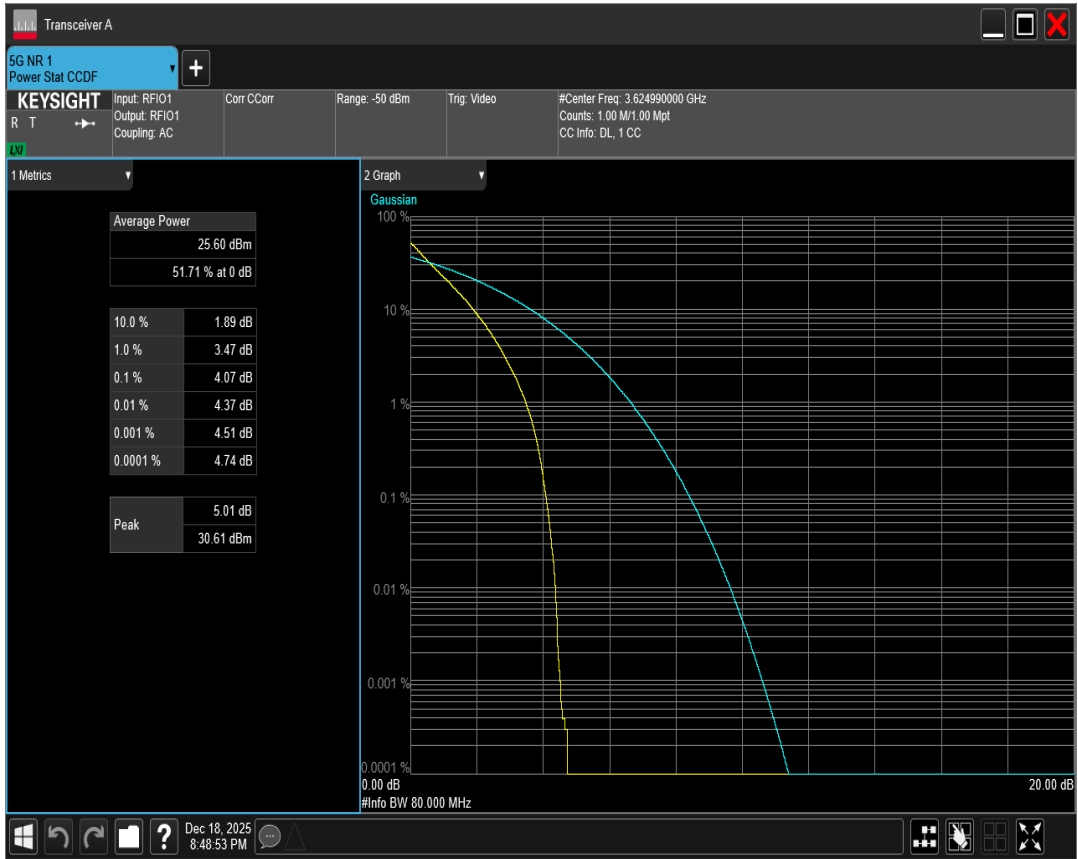


n78(3550-3700) SCS=30kHz DFT_BPSK BW=80MHz Channel=644000 RB=216@0

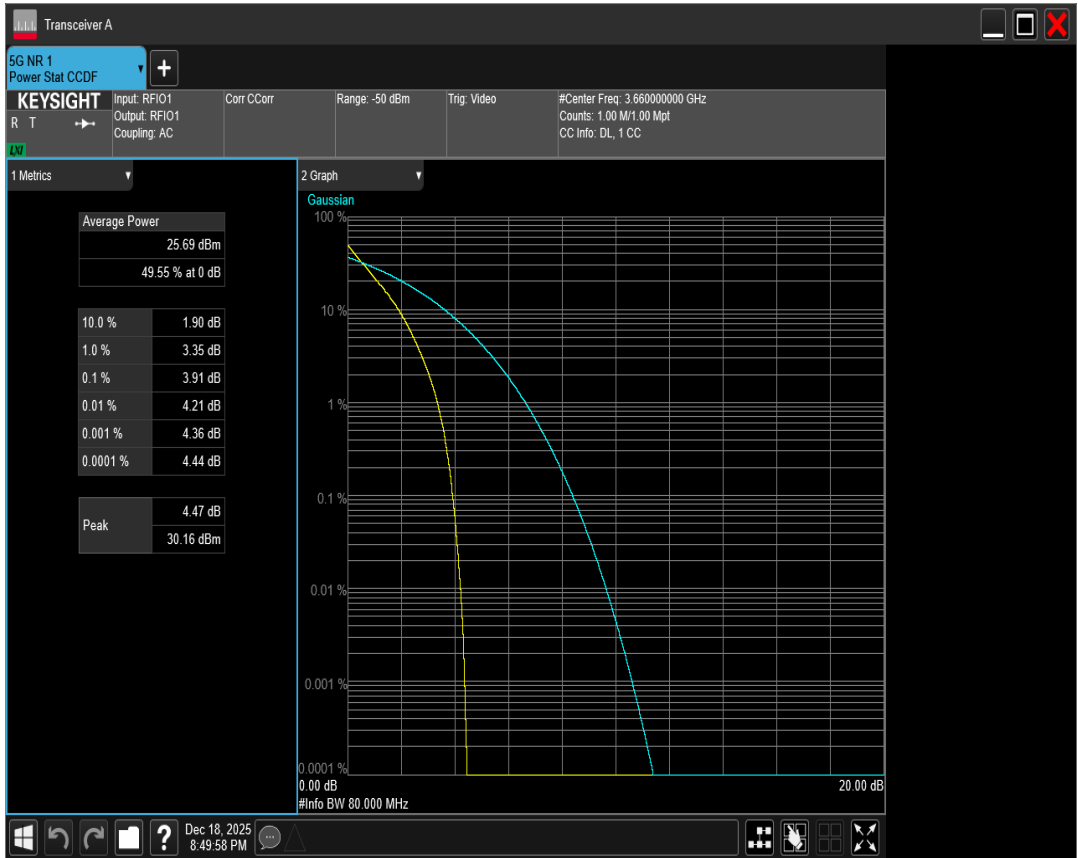


n78(3550-3700) SCS=30kHz DFT_BPSK BW=90MHz Channel=639668 RB=240@0

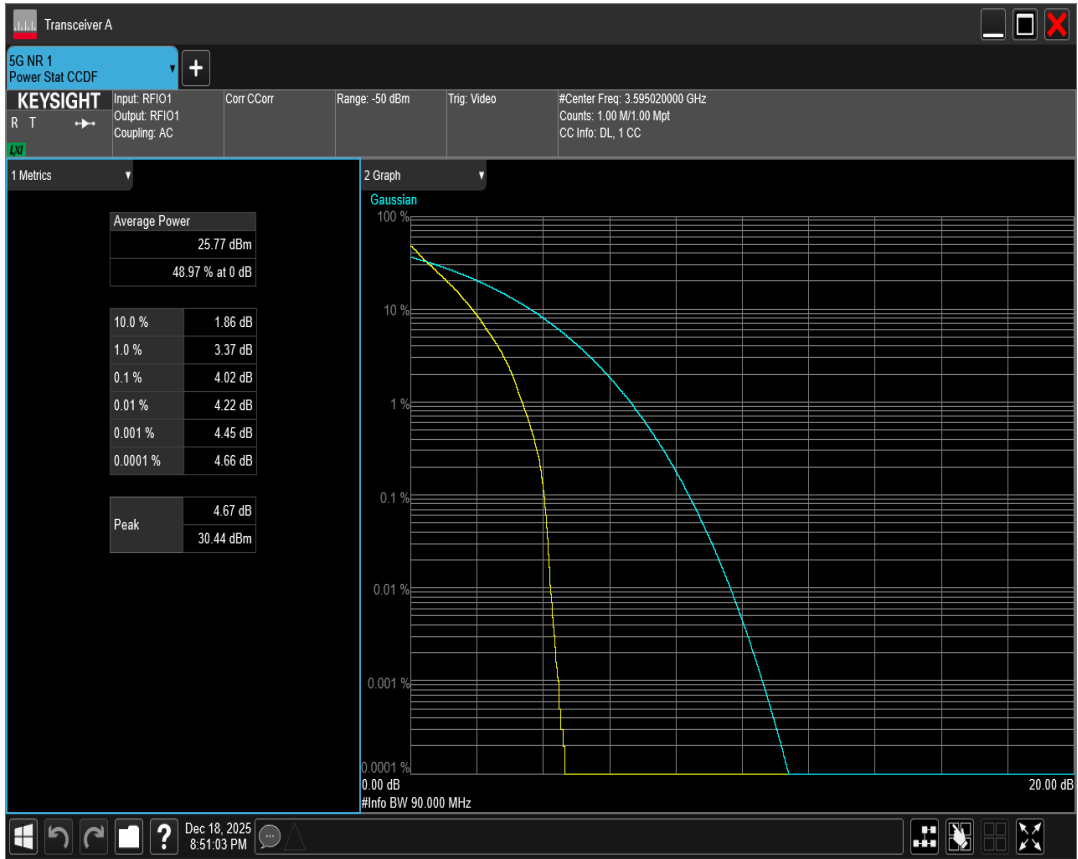


n78(3550-3700) SCS=30kHz DFT_BPSK BW=90MHz Channel=641666 RB=240@0

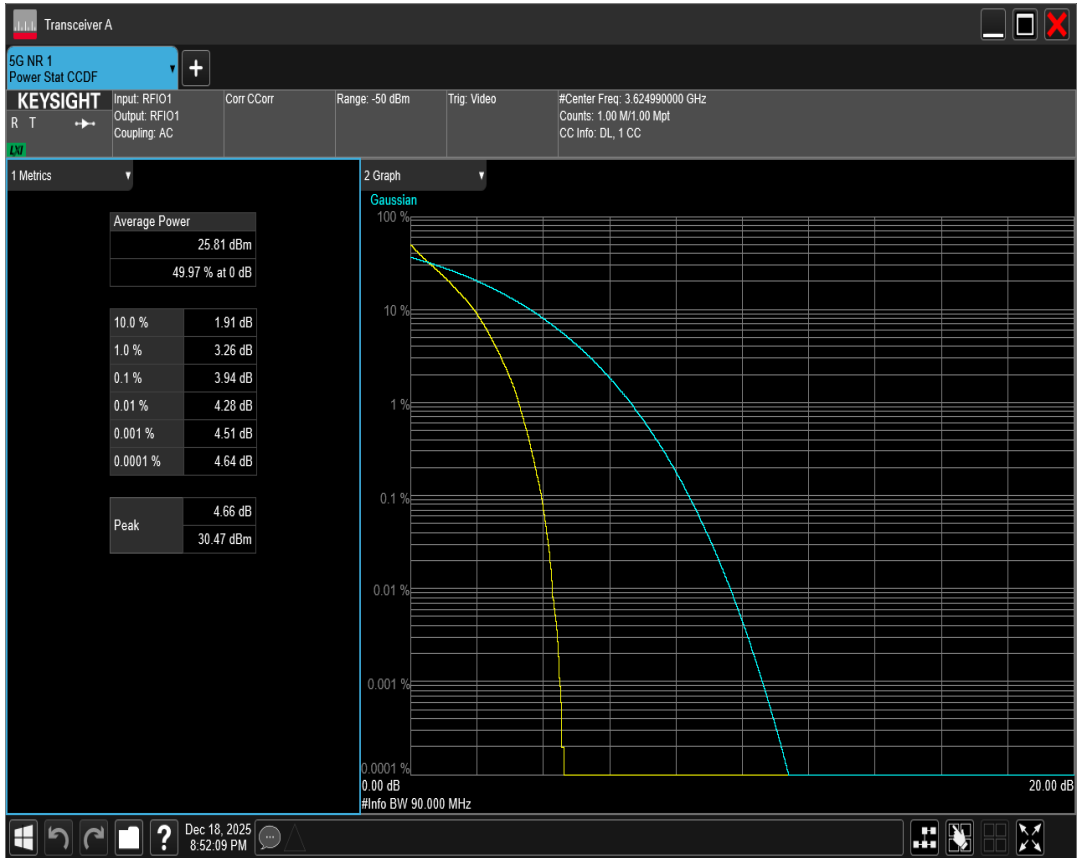


n78(3550-3700) SCS=30kHz DFT_BPSK BW=90MHz Channel=643666 RB=240@0

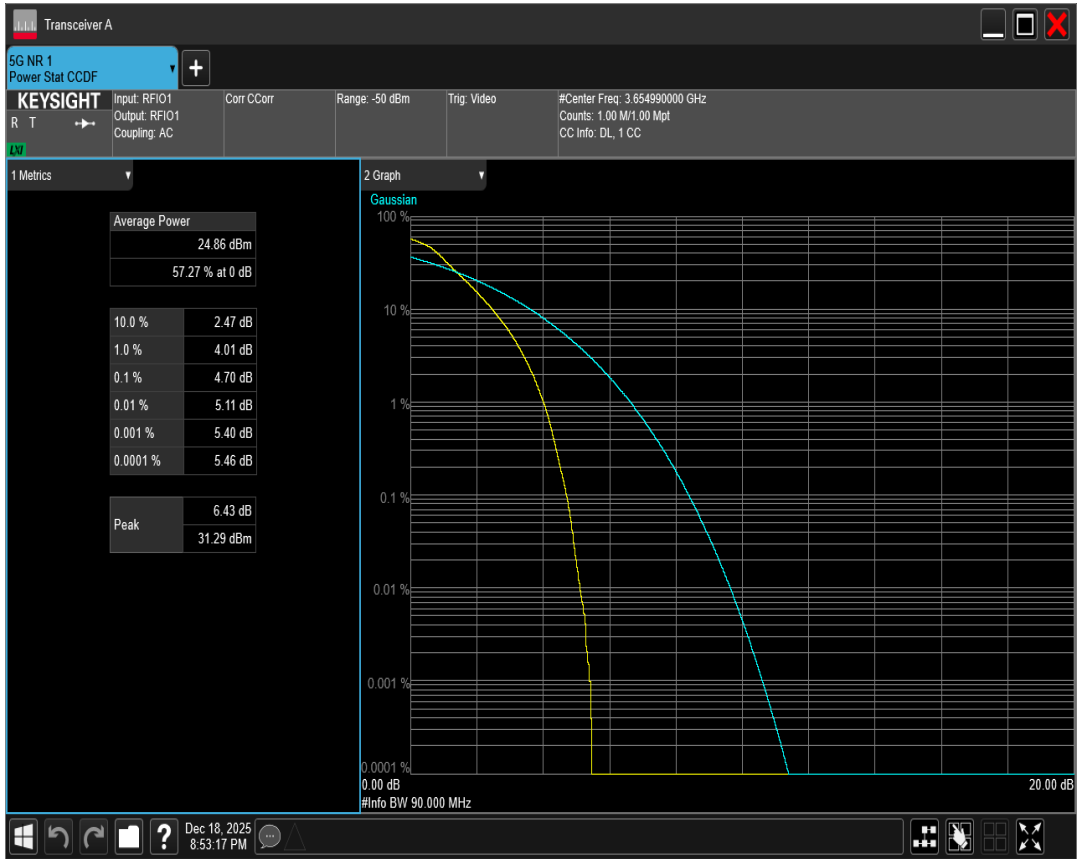


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=100MHz Channel=640000 RB=270@0

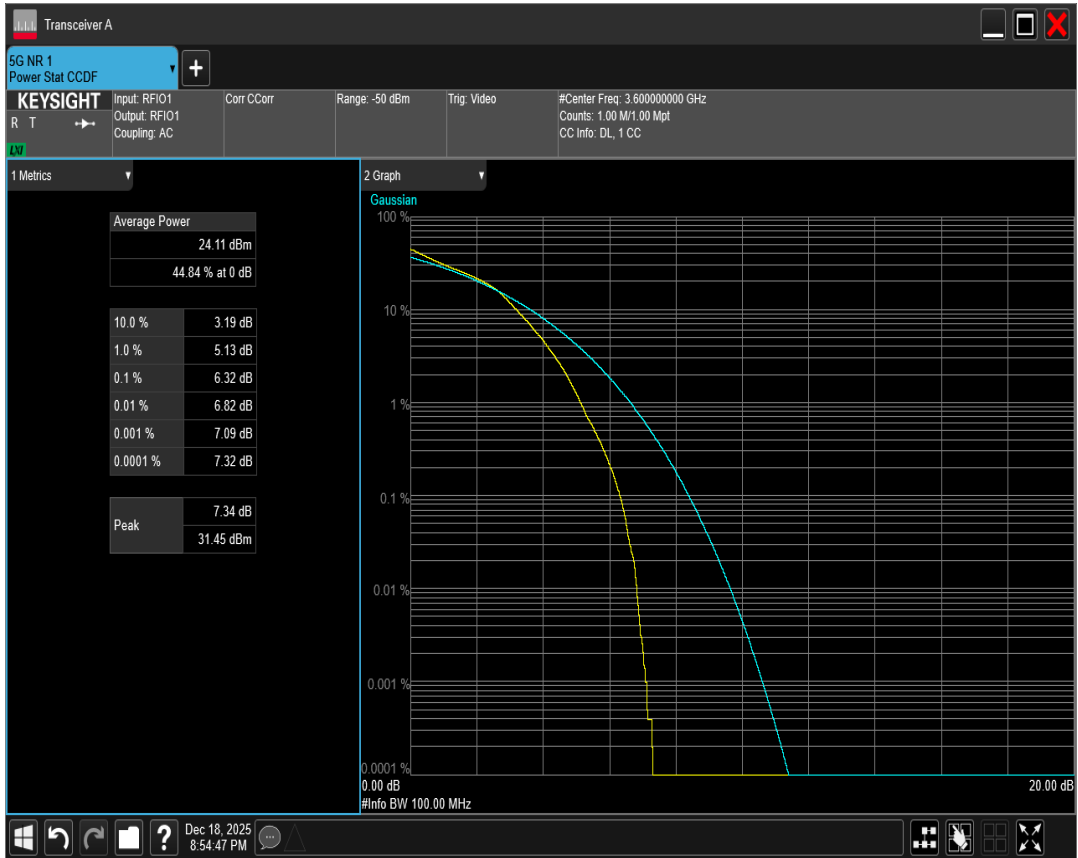


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=100MHz Channel=641666 RB=270@0

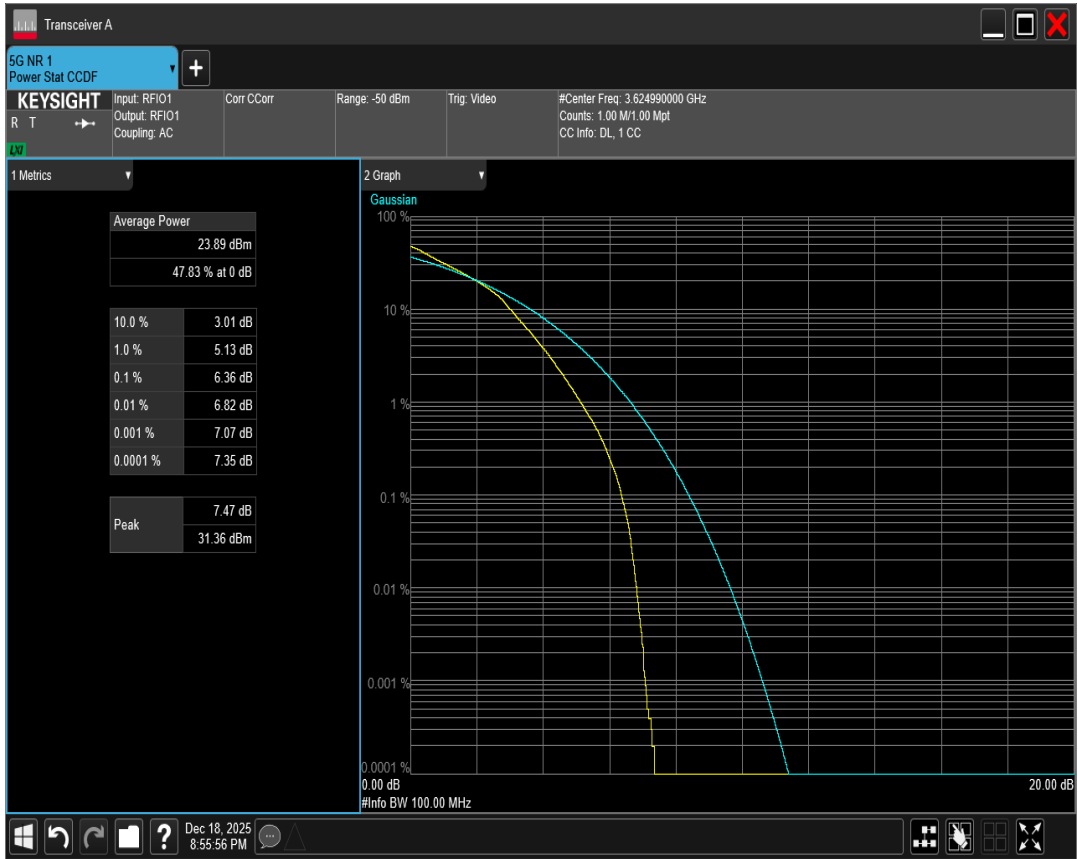


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=100MHz Channel=643332 RB=270@0

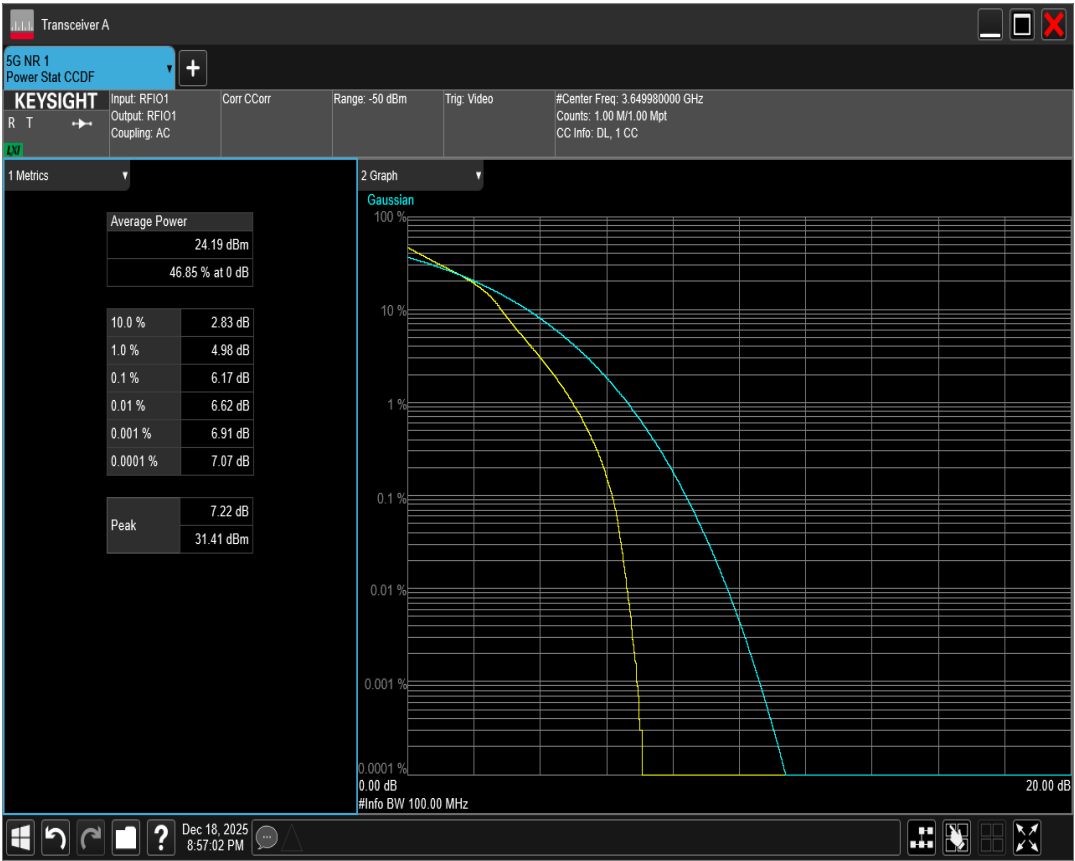


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=10MHz Channel=637000 RB=24@0

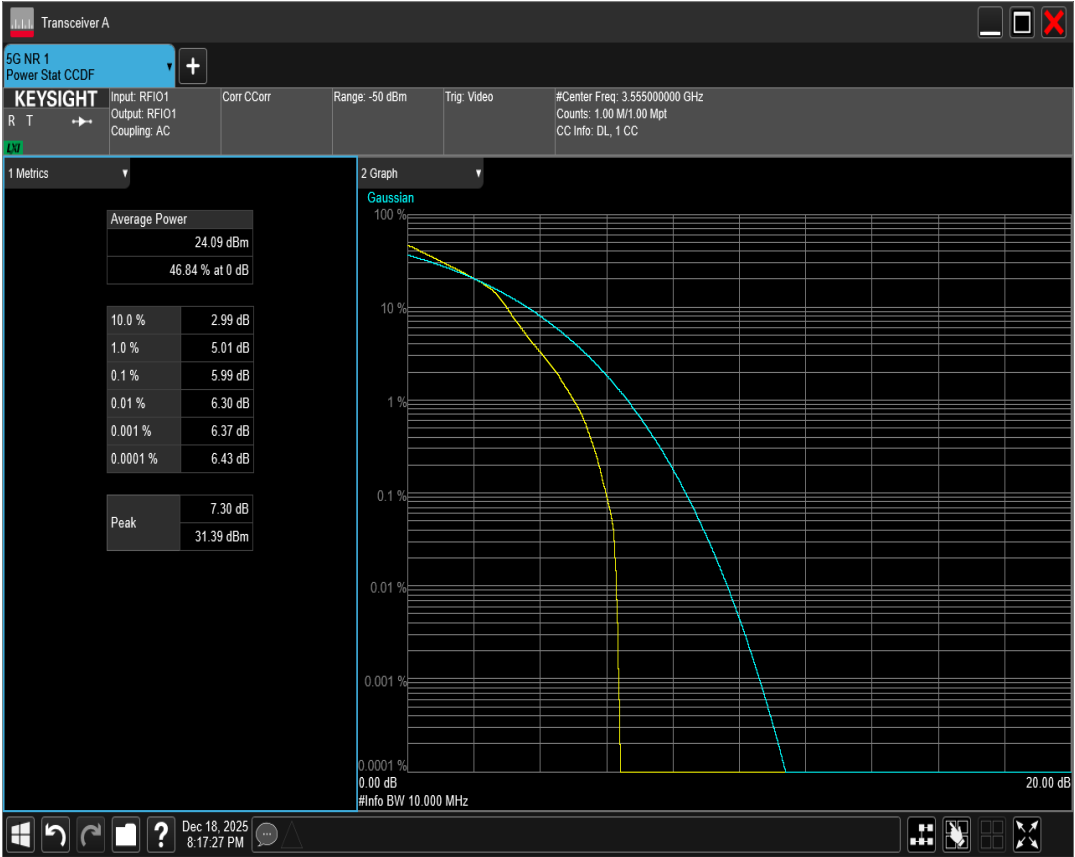


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=10MHz Channel=641666 RB=24@0

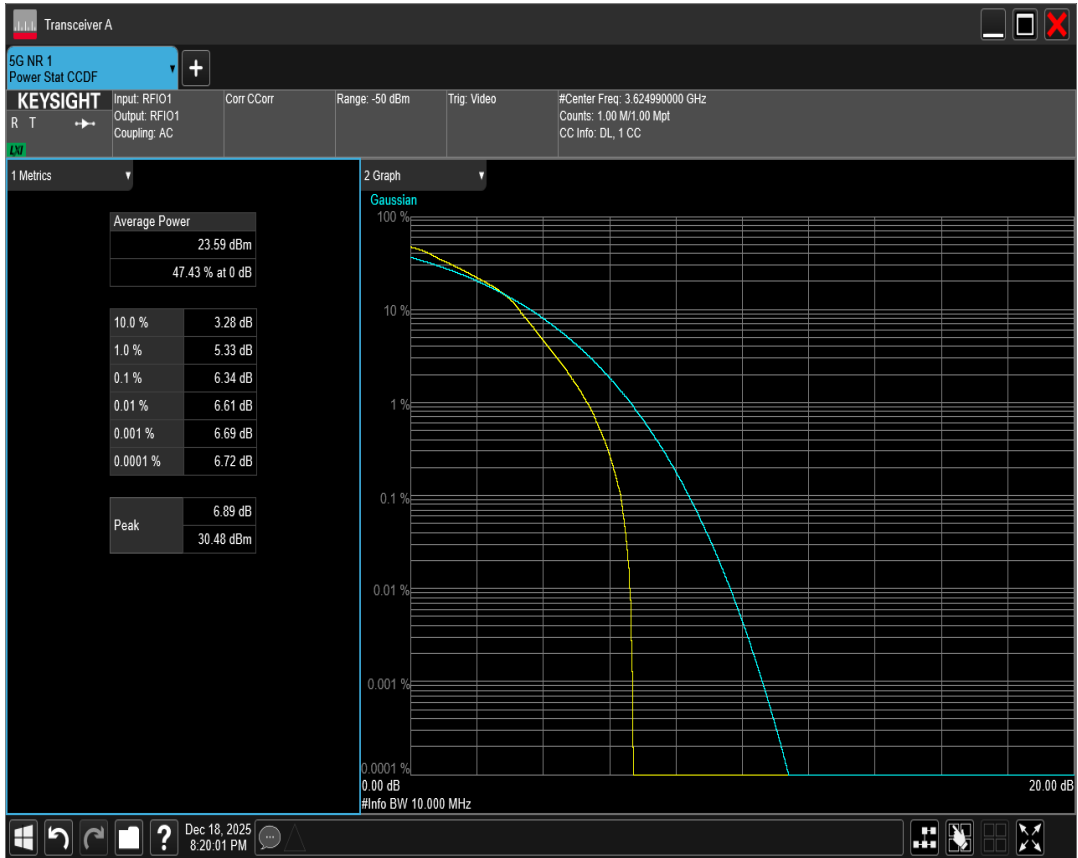


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=10MHz Channel=646332 RB=24@0

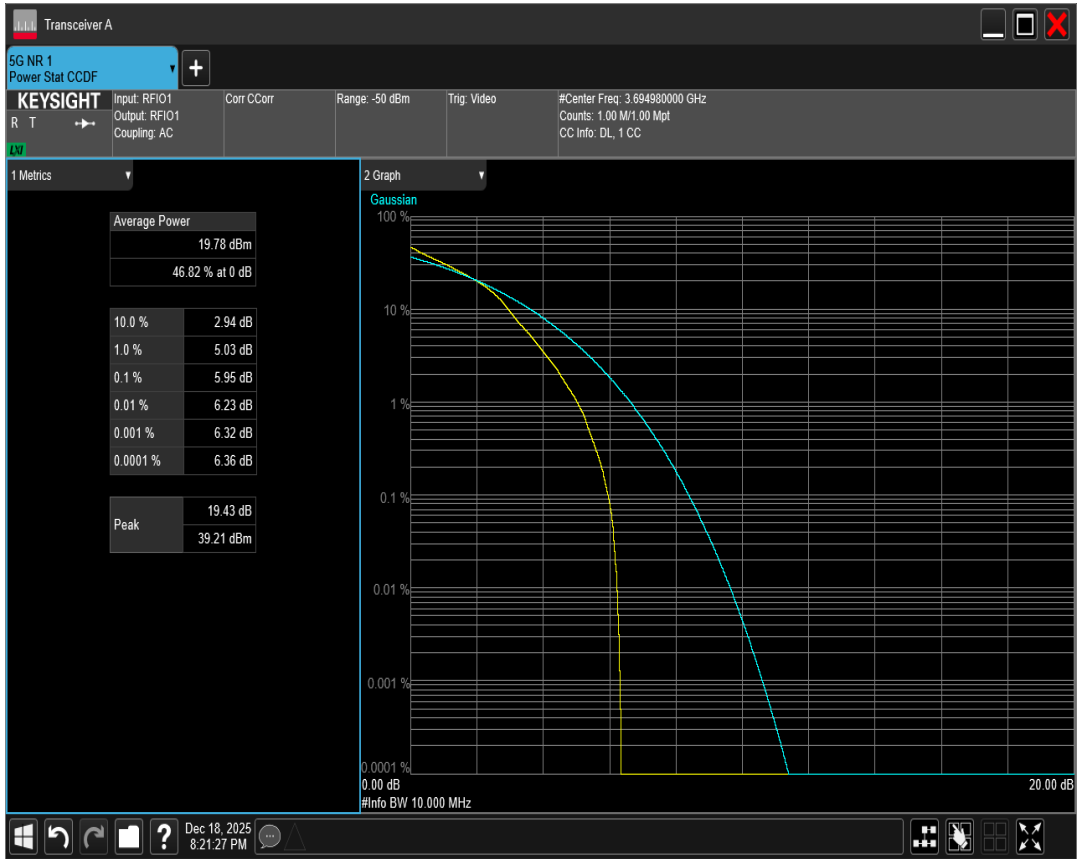


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=15MHz Channel=637168 RB=36@0

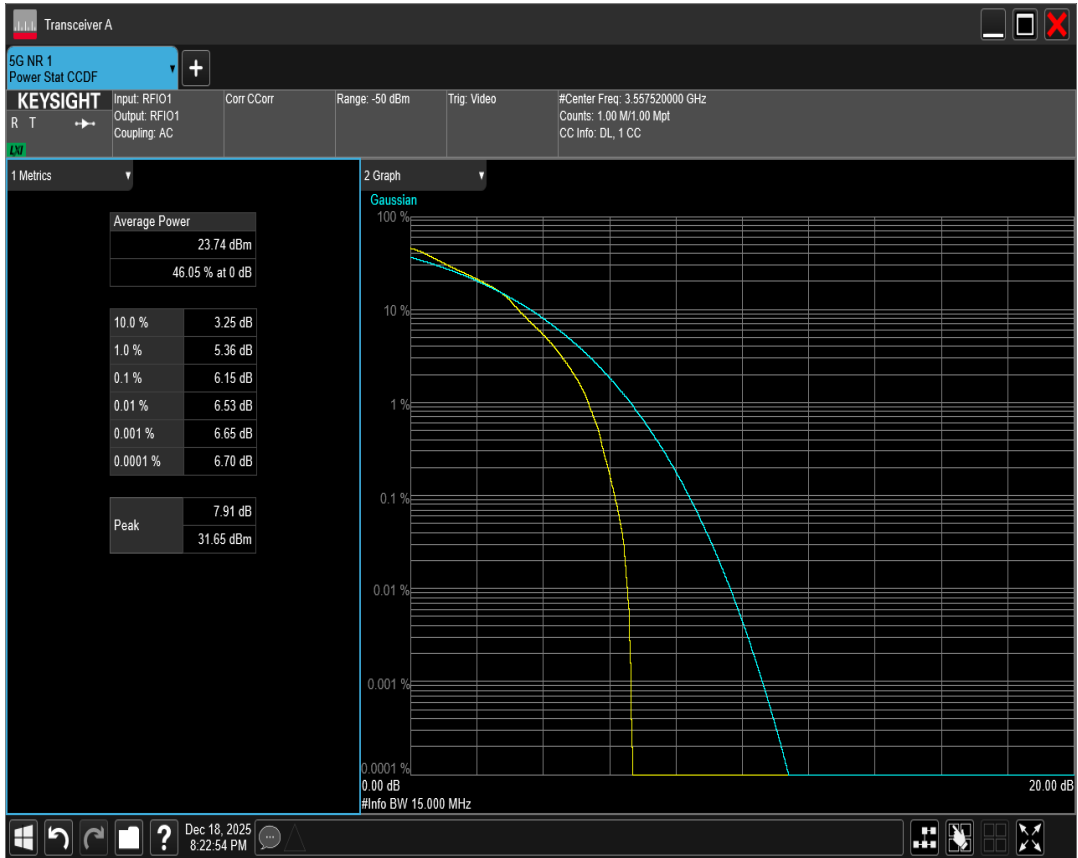


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=15MHz Channel=641666 RB=36@0

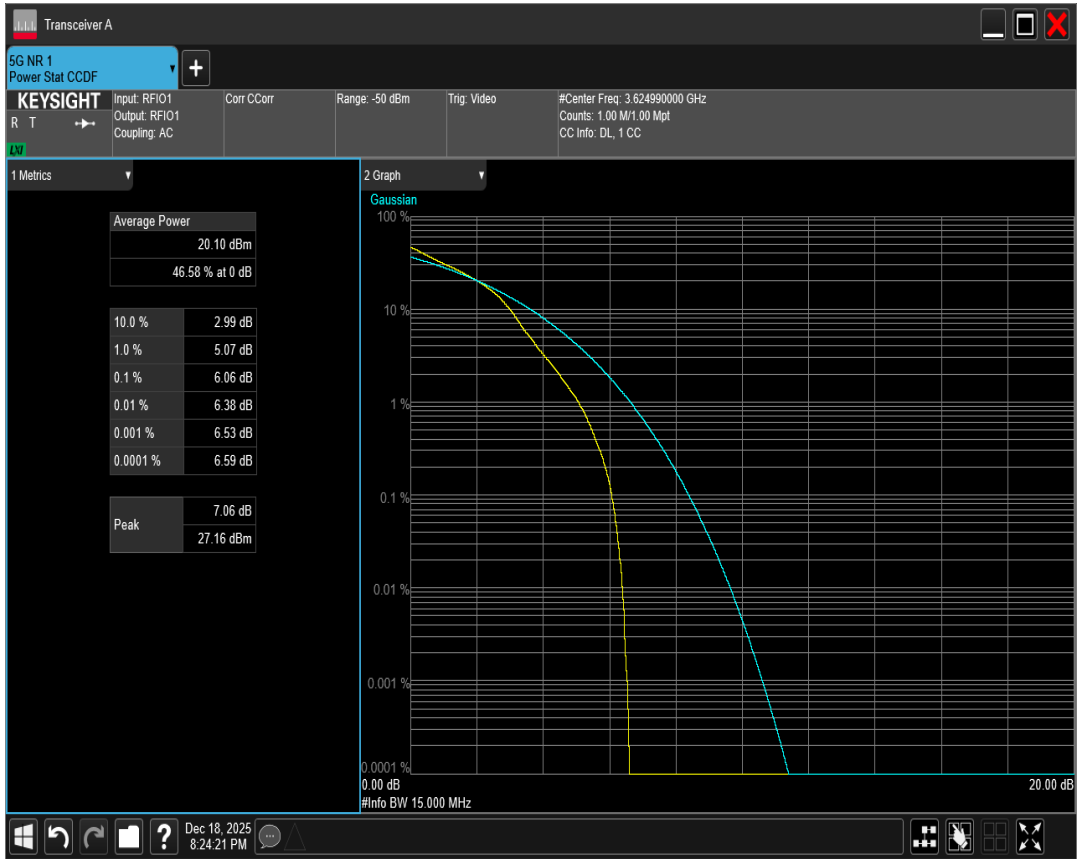


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=15MHz Channel=646166 RB=36@0

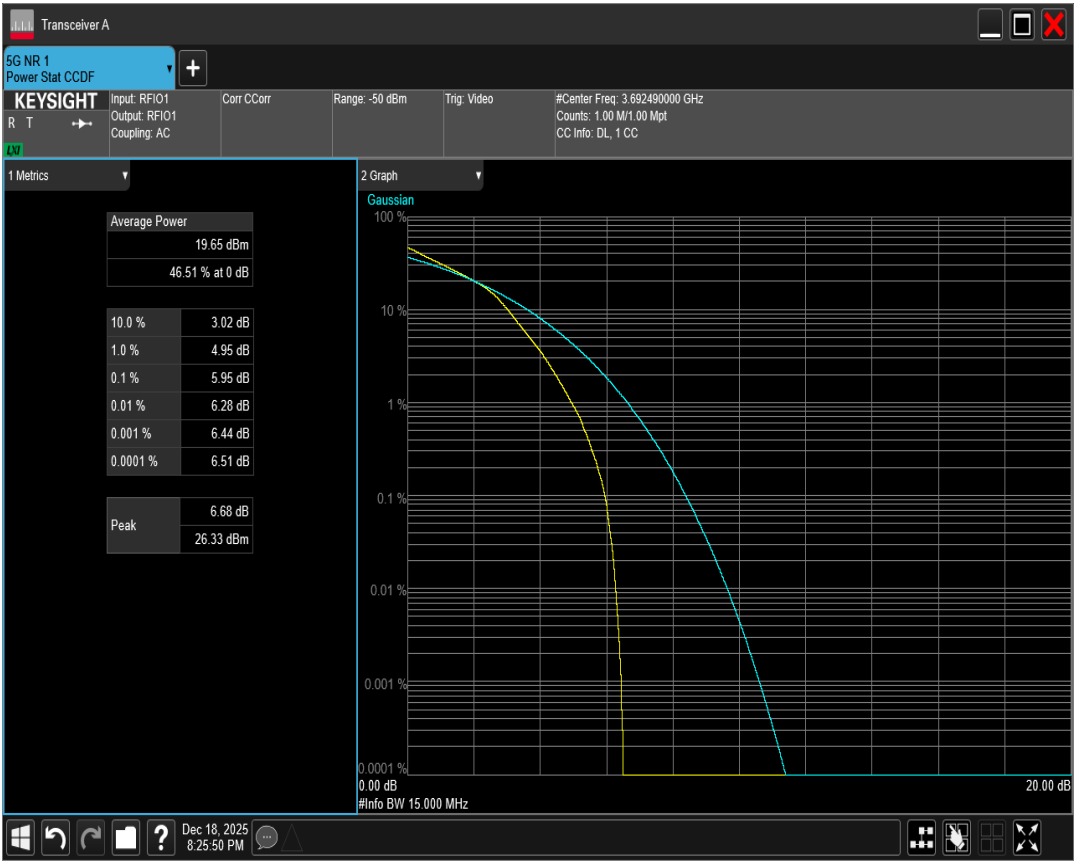


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=20MHz Channel=637334 RB=50@0

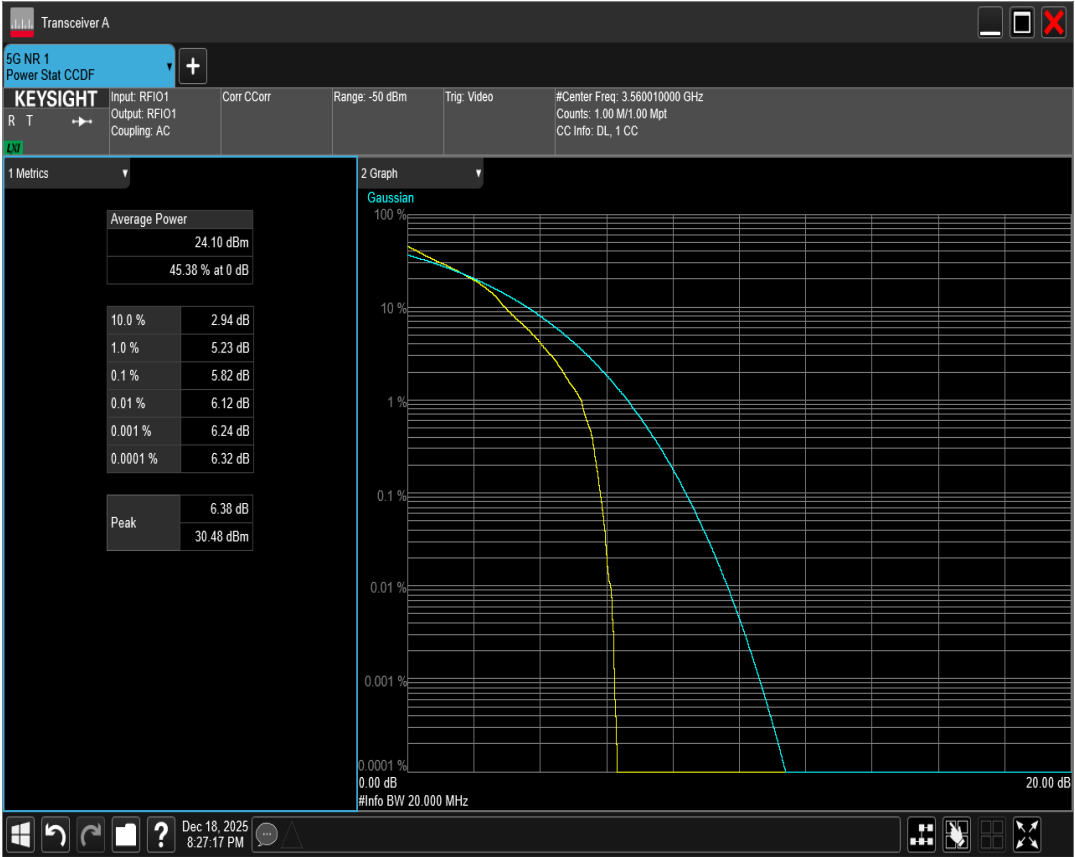


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=20MHz Channel=641666 RB=50@0

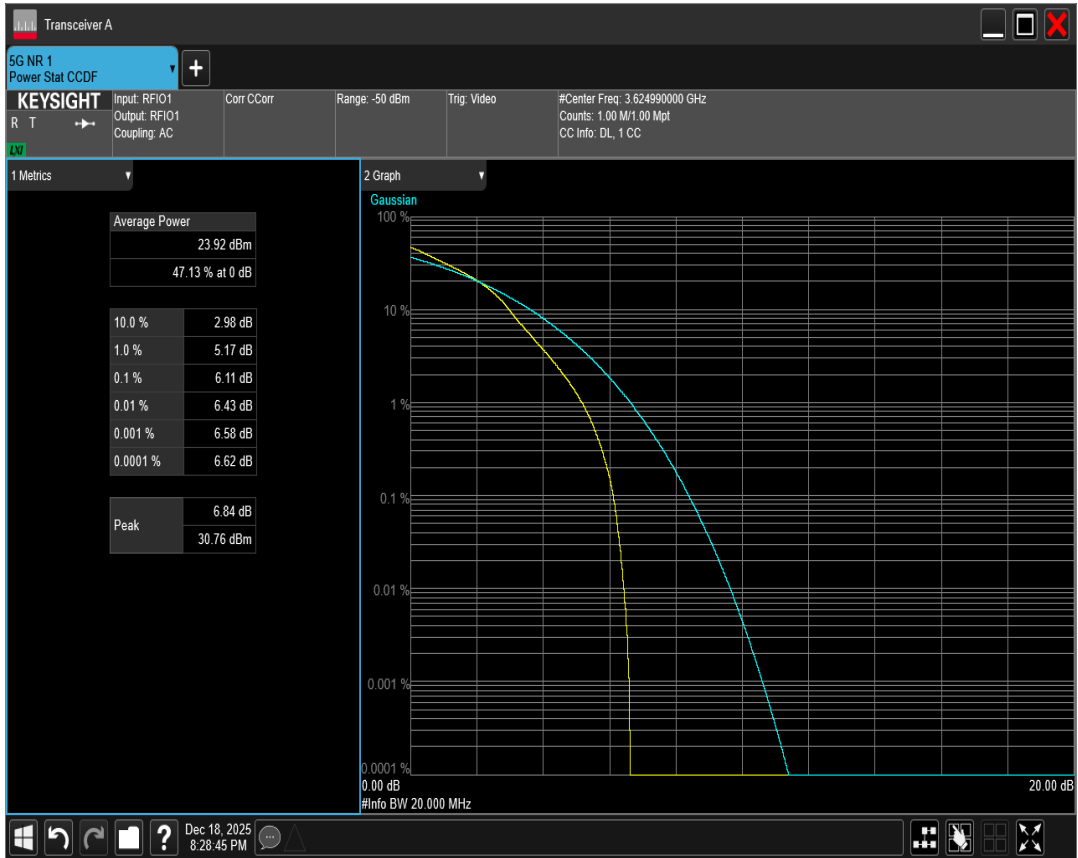


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=20MHz Channel=646000 RB=50@0

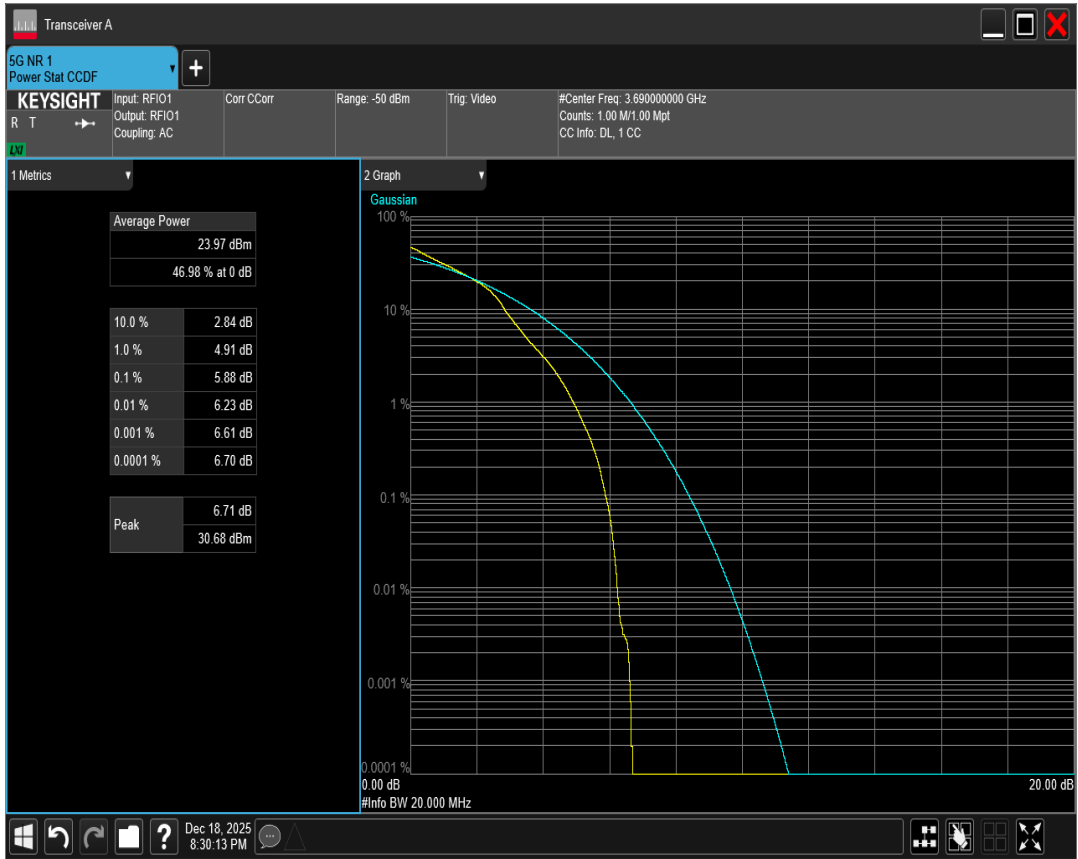


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=40MHz Channel=638000 RB=100@0

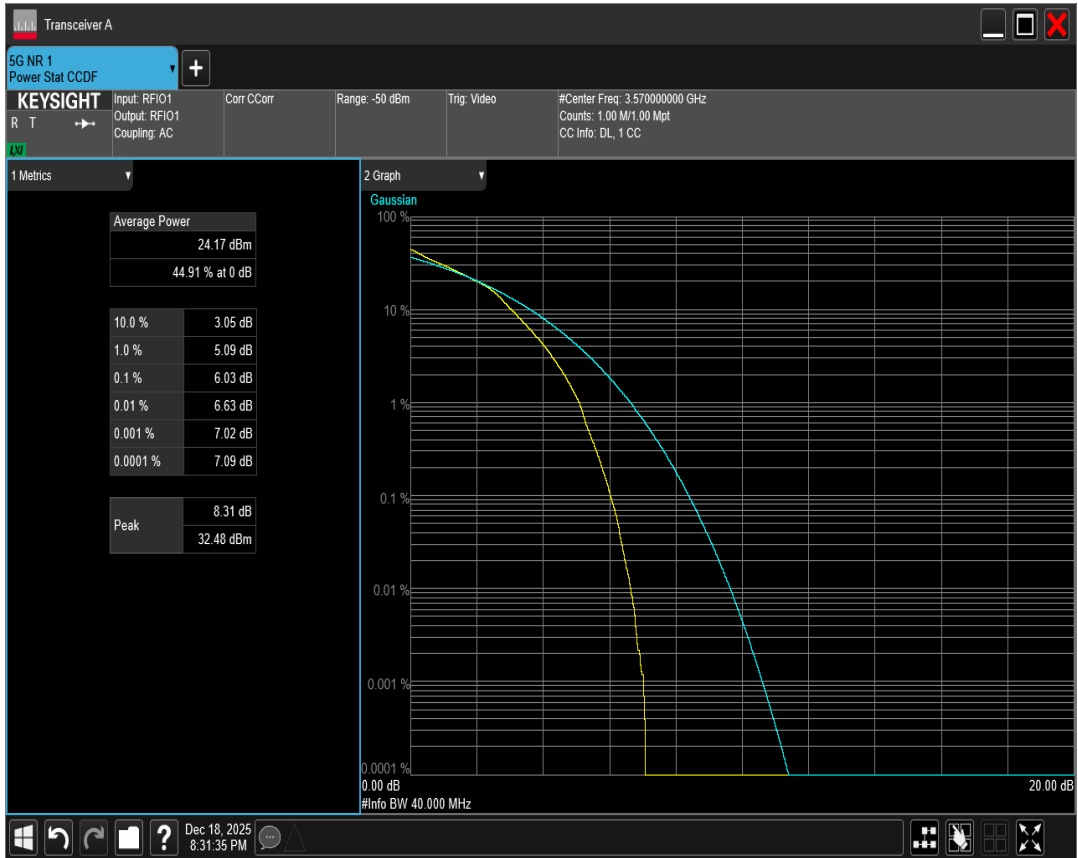


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=40MHz Channel=641666 RB=100@0

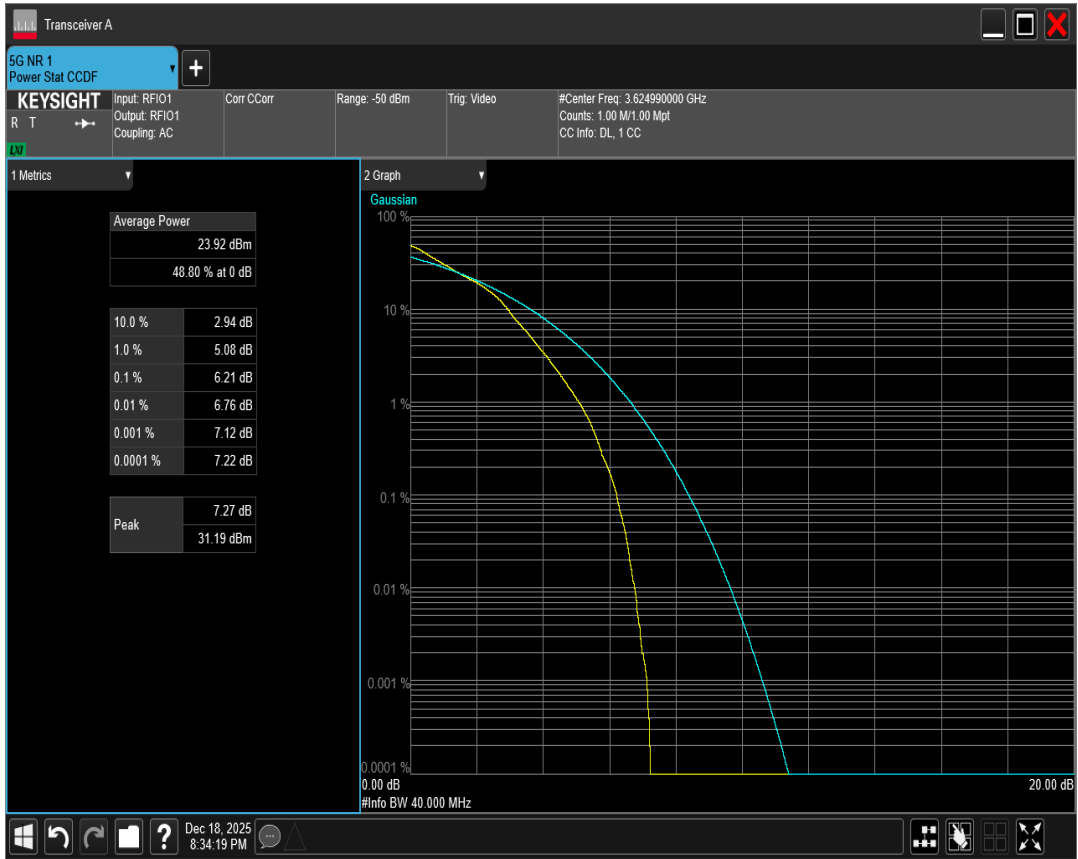


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=40MHz Channel=645332 RB=100@0

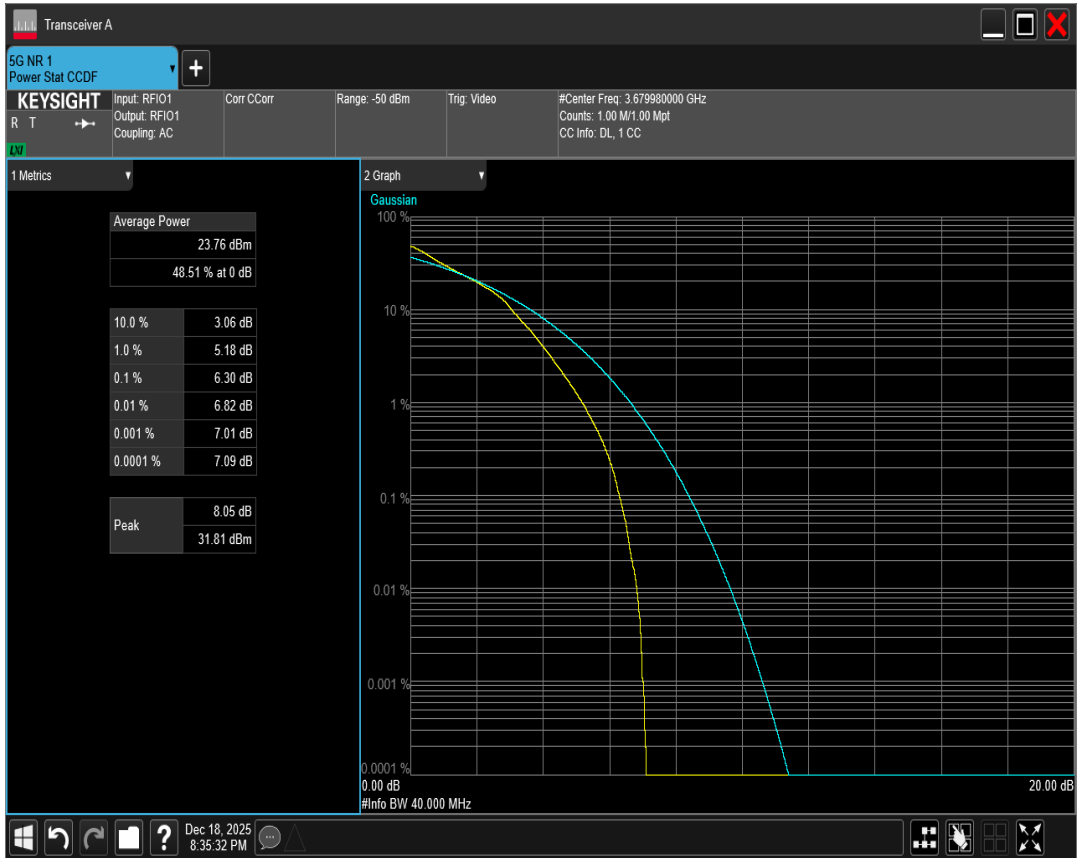


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=50MHz Channel=638334 RB=128@0

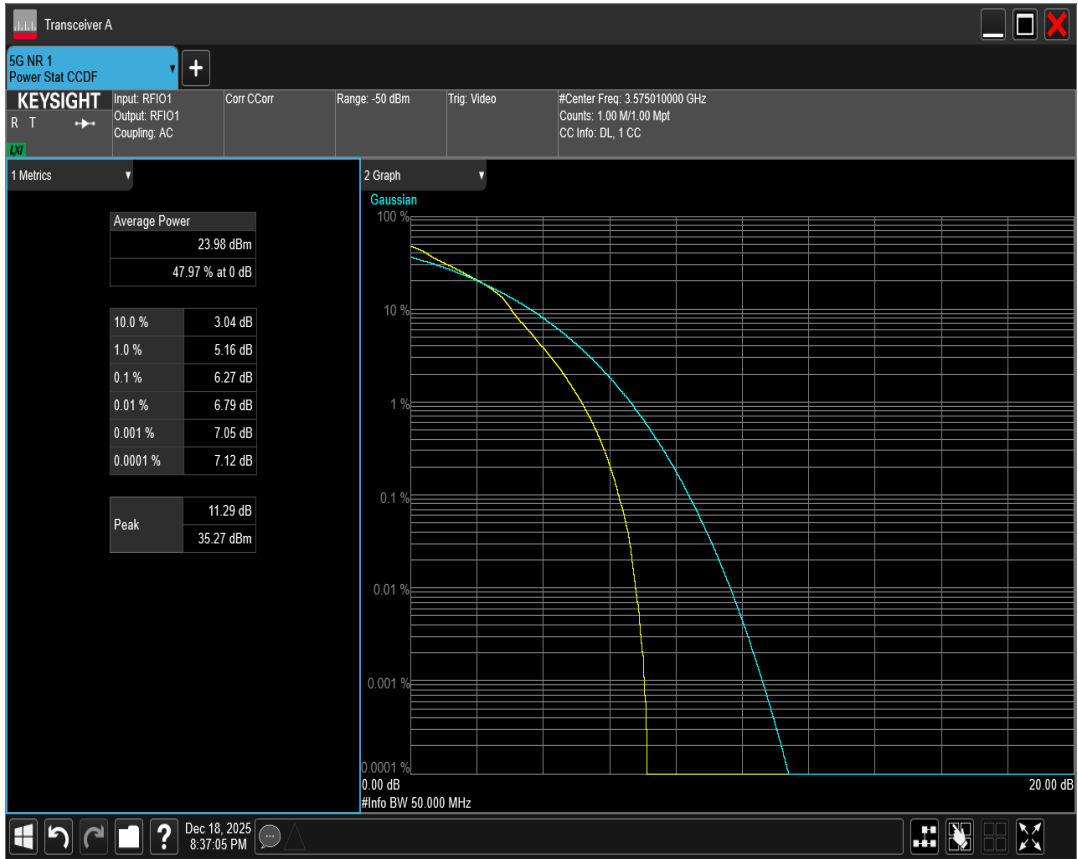


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=50MHz Channel=641666 RB=128@0

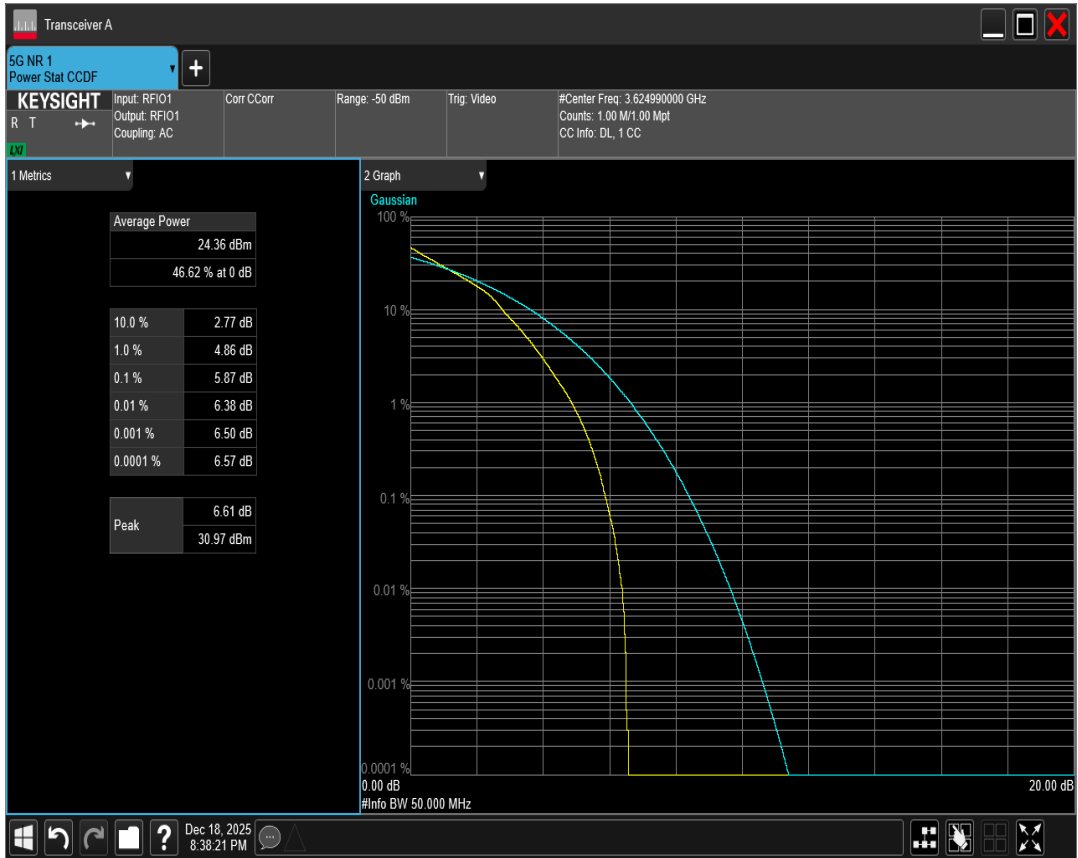


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=50MHz Channel=645000 RB=128@0

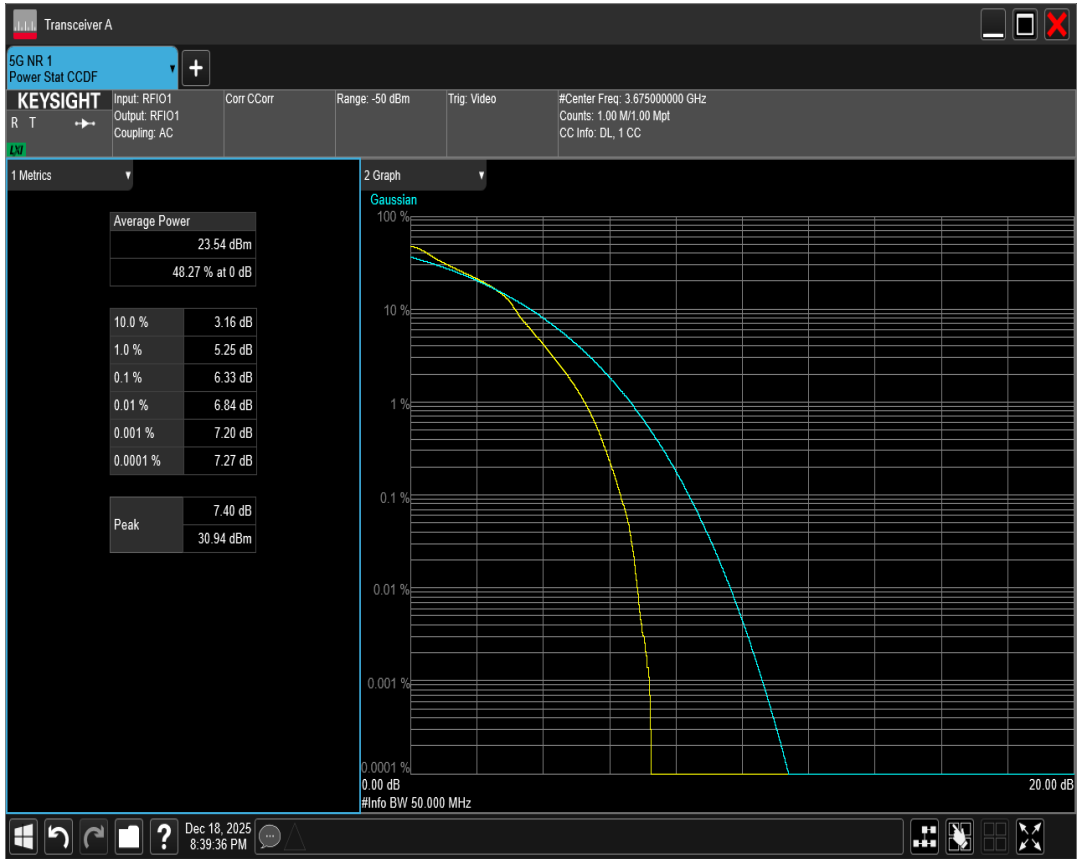


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=60MHz Channel=638668 RB=162@0

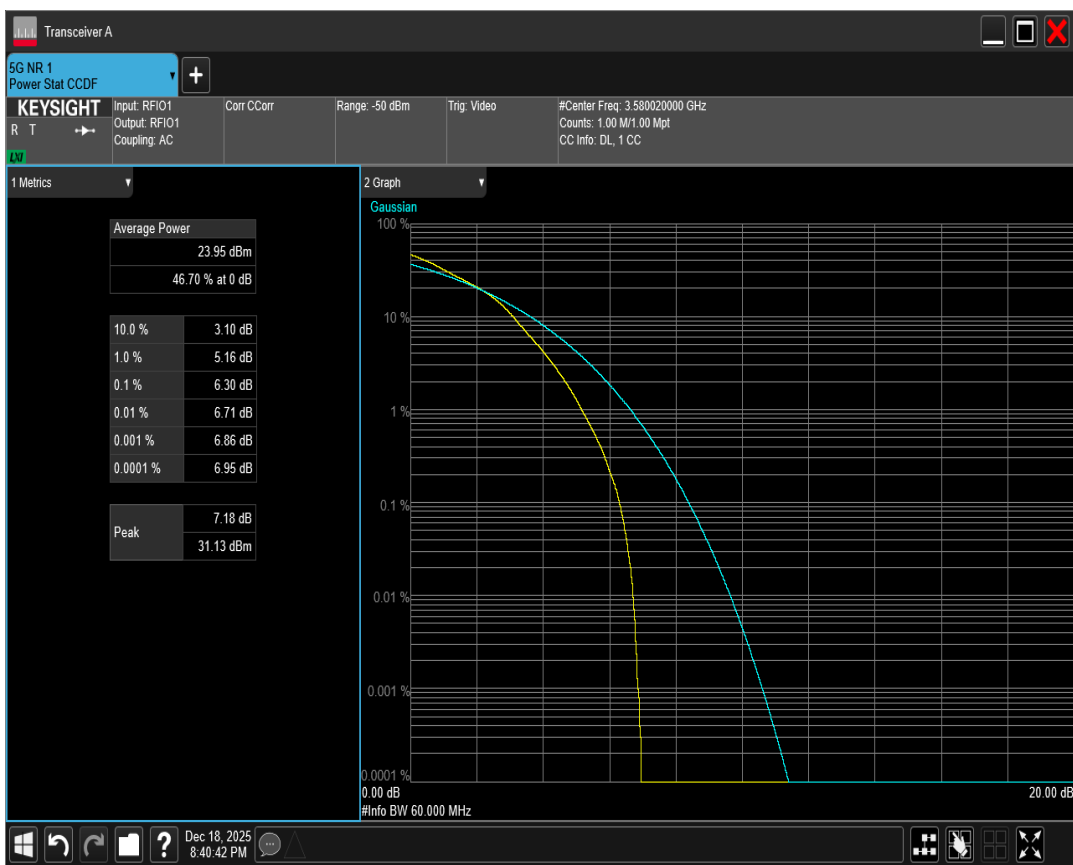


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=60MHz Channel=641666 RB=162@0

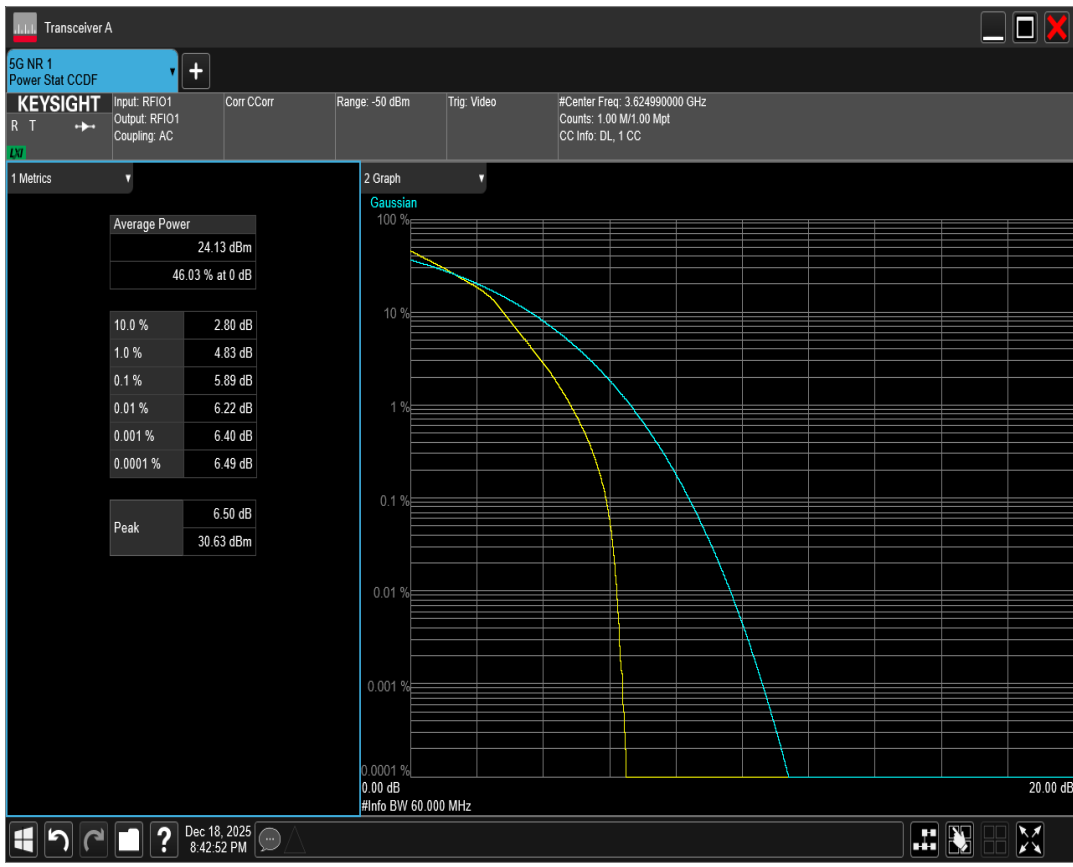


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=60MHz Channel=644666 RB=162@0

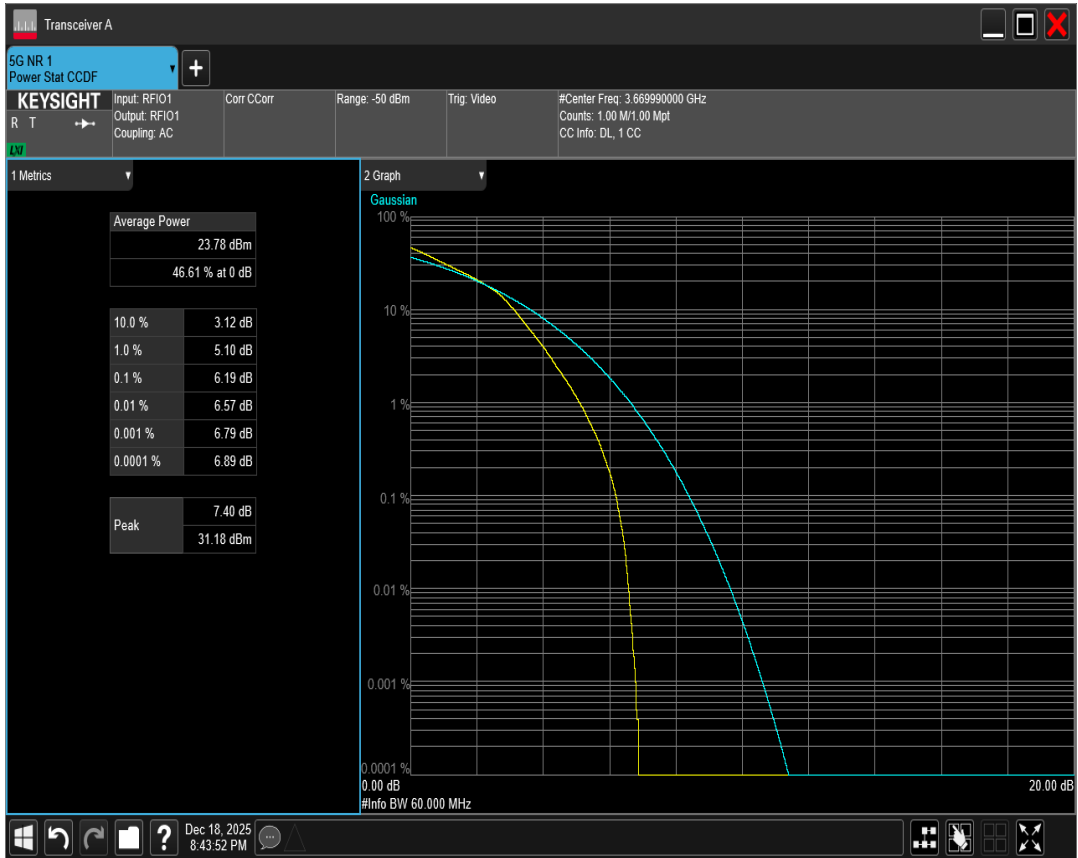


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=70MHz Channel=639000 RB=180@0

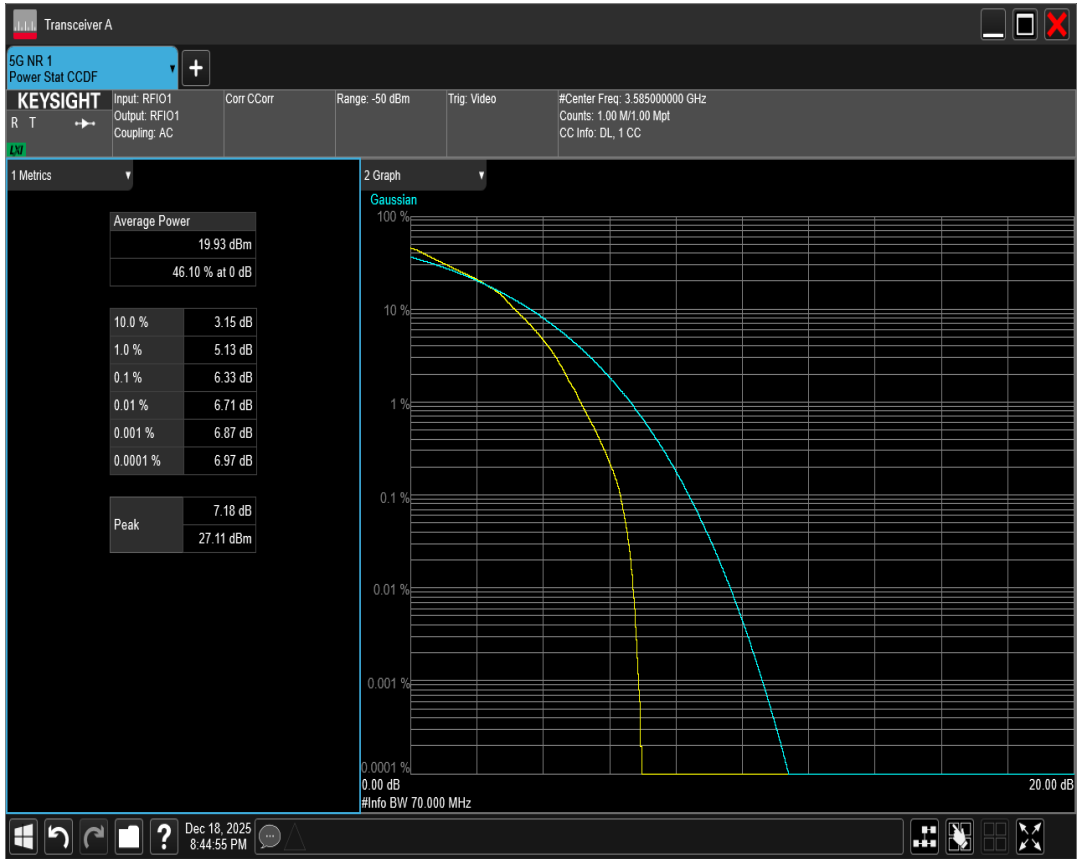


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=70MHz Channel=641666 RB=180@0

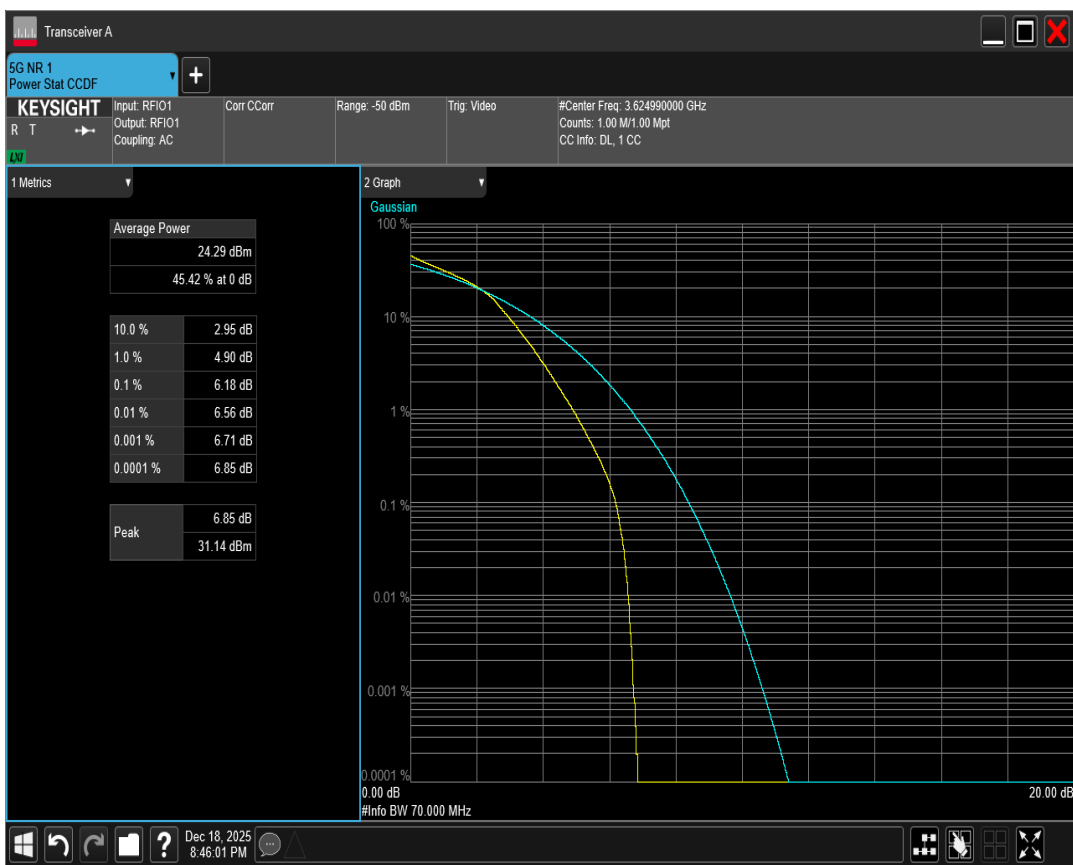


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=70MHz Channel=644332 RB=180@0

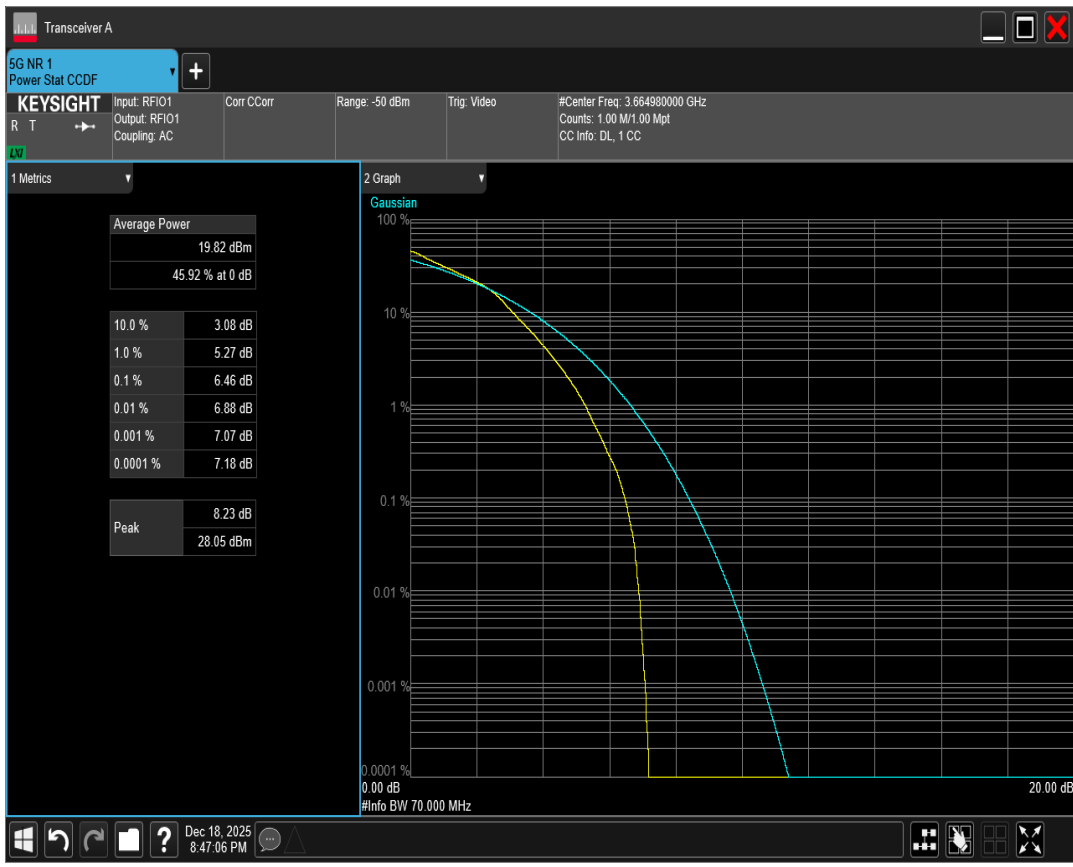


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=80MHz Channel=639334 RB=216@0

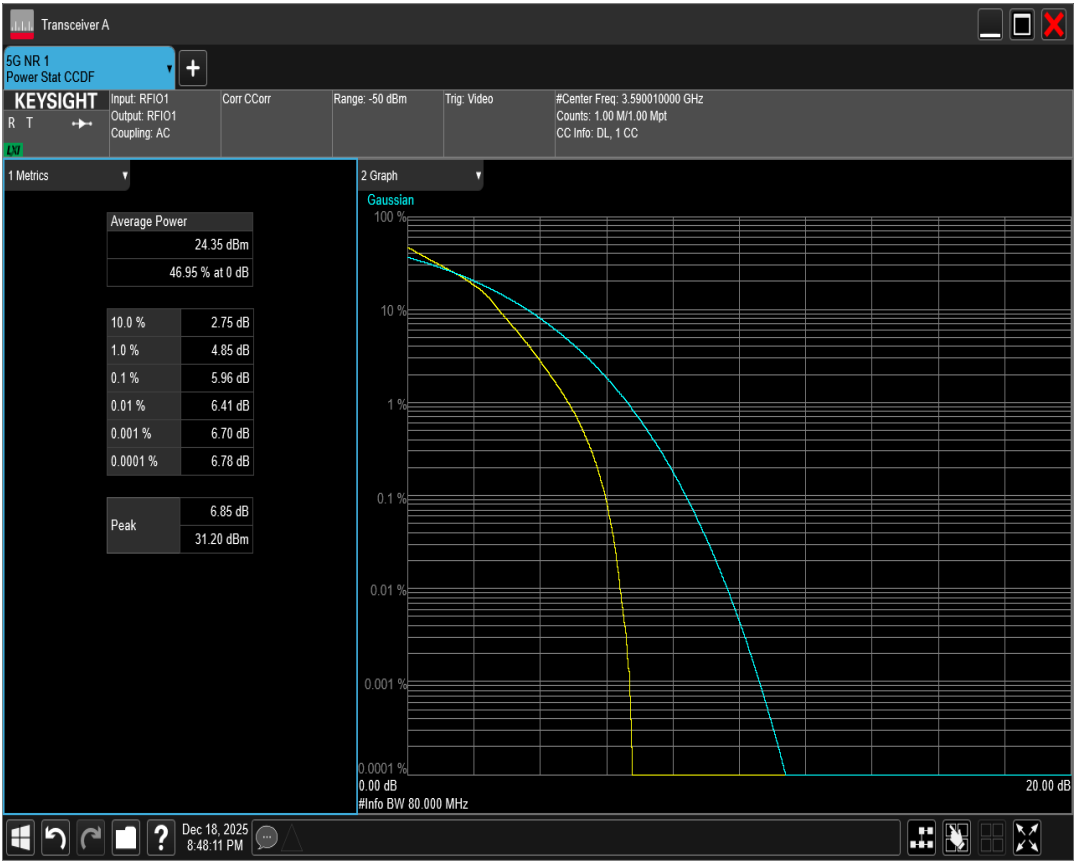


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=80MHz Channel=641666 RB=216@0

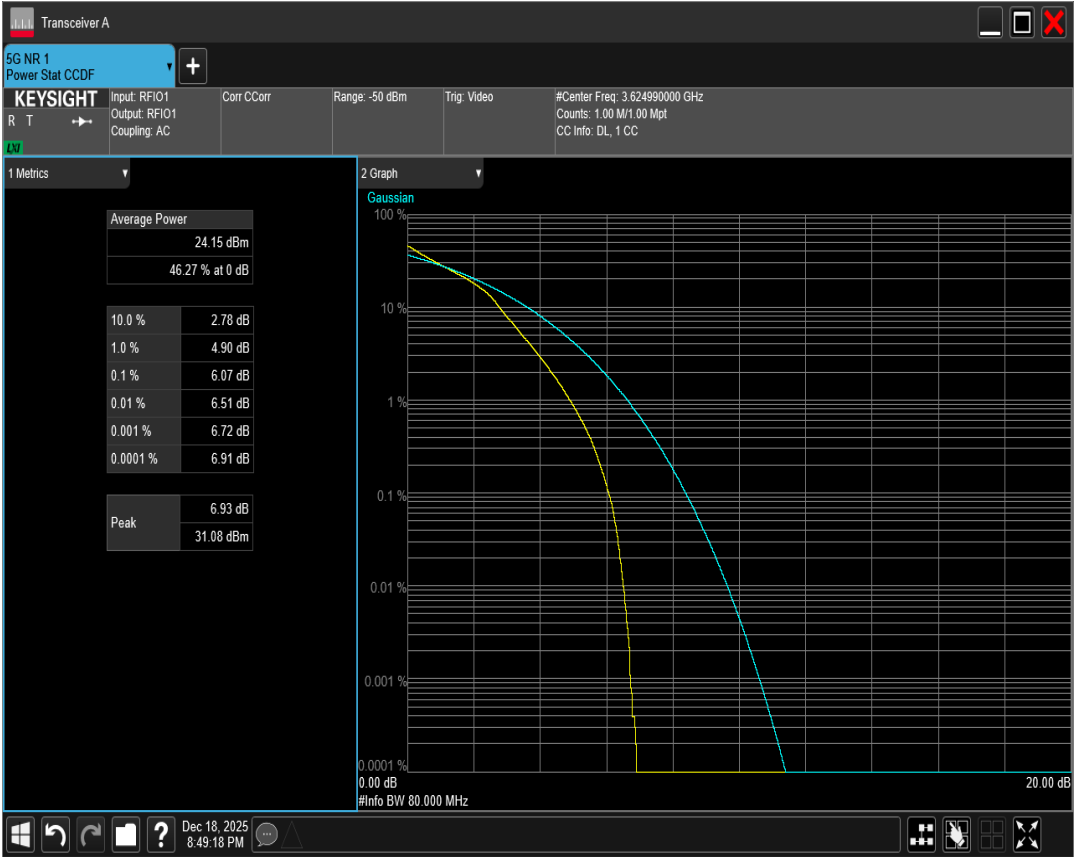


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=80MHz Channel=644000 RB=216@0

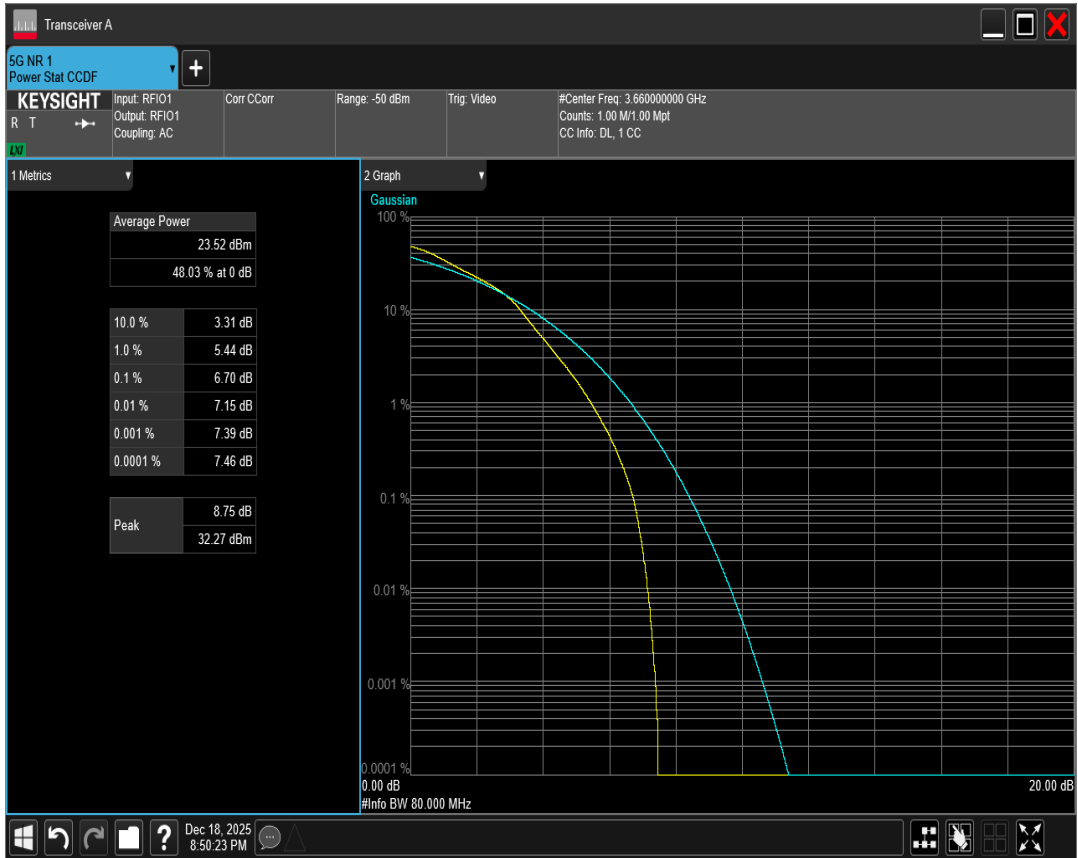


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=90MHz Channel=639668 RB=240@0

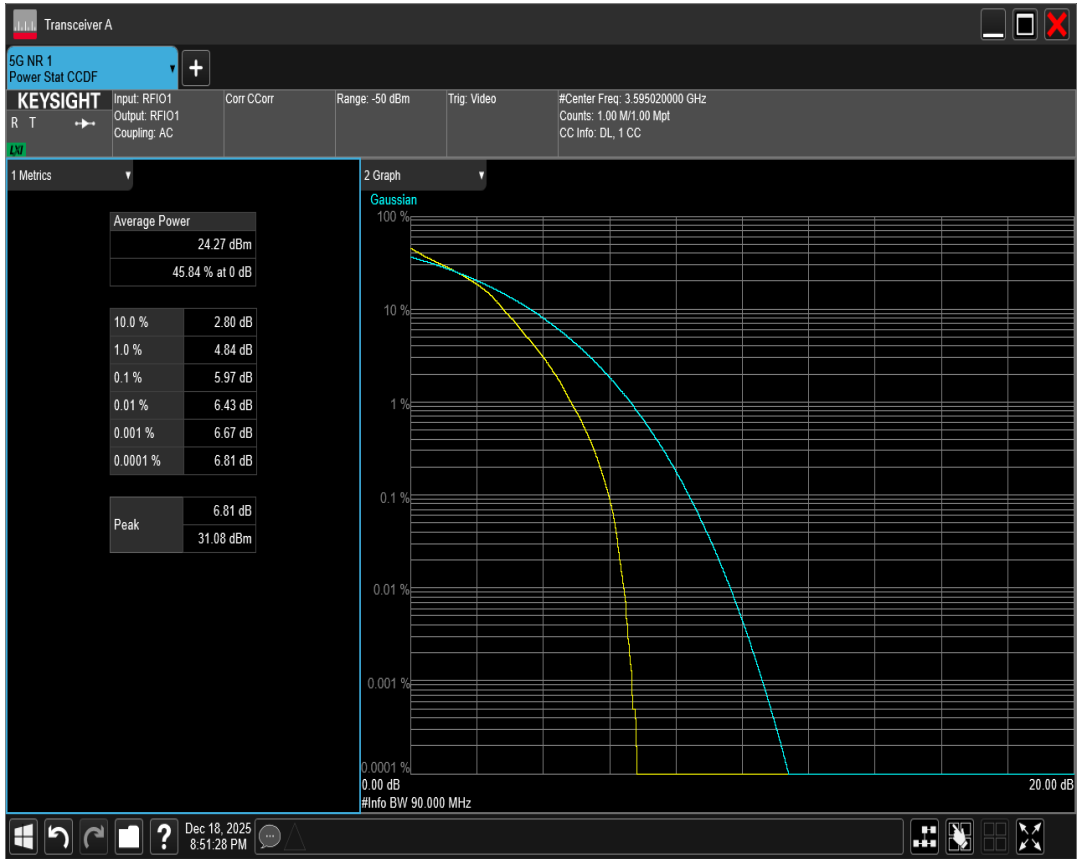


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=90MHz Channel=641666 RB=240@0

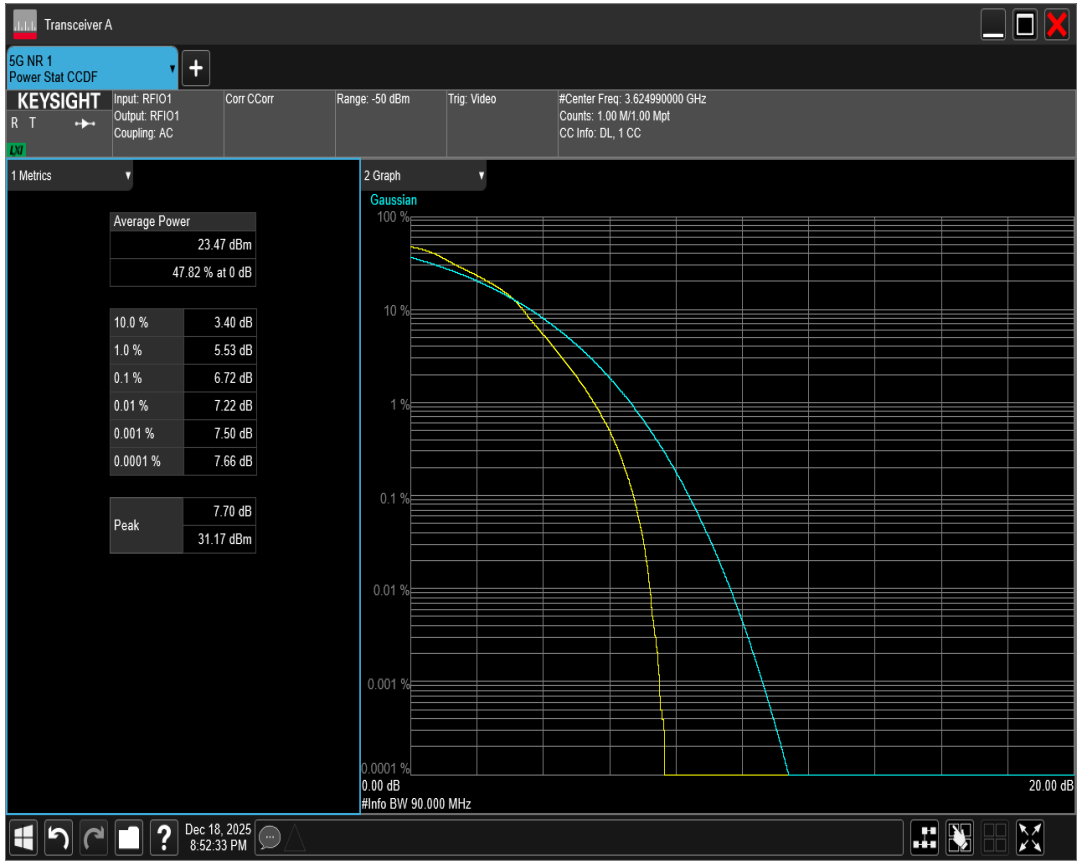


n78(3550-3700) SCS=30kHz DFT_QAM16 BW=90MHz Channel=643666 RB=240@0

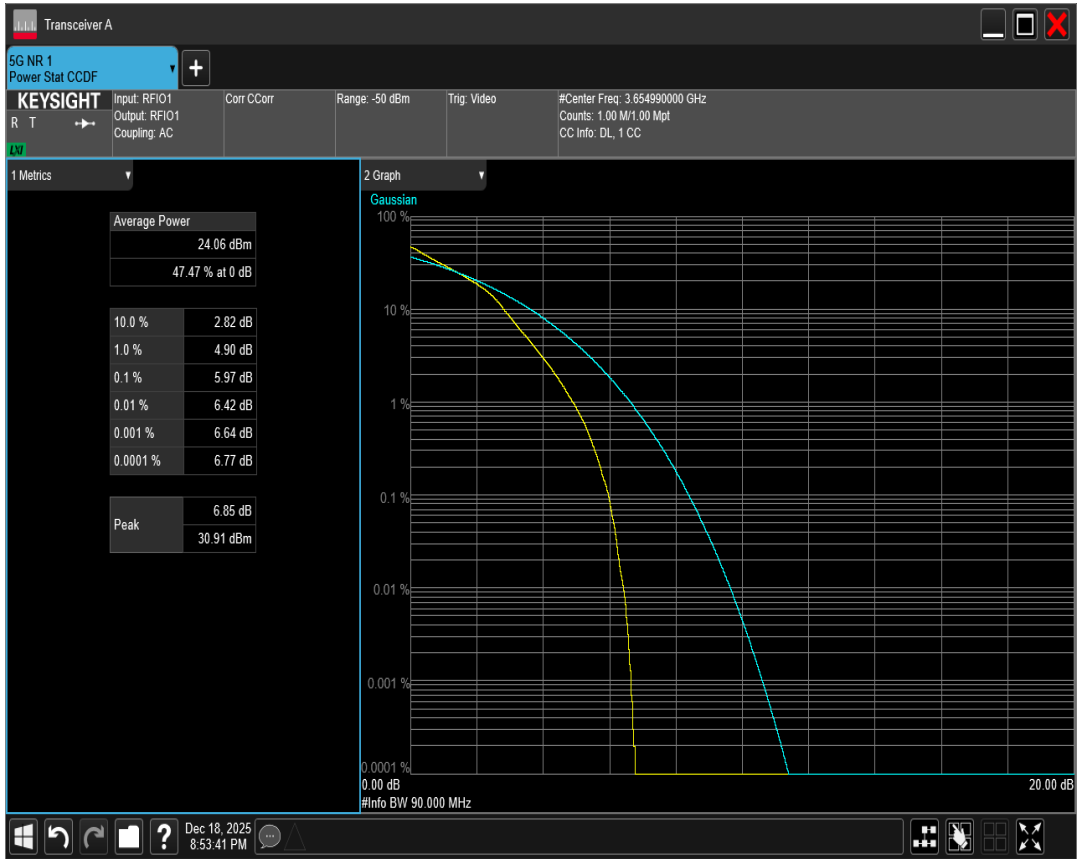


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=100MHz Channel=640000 RB=270@0

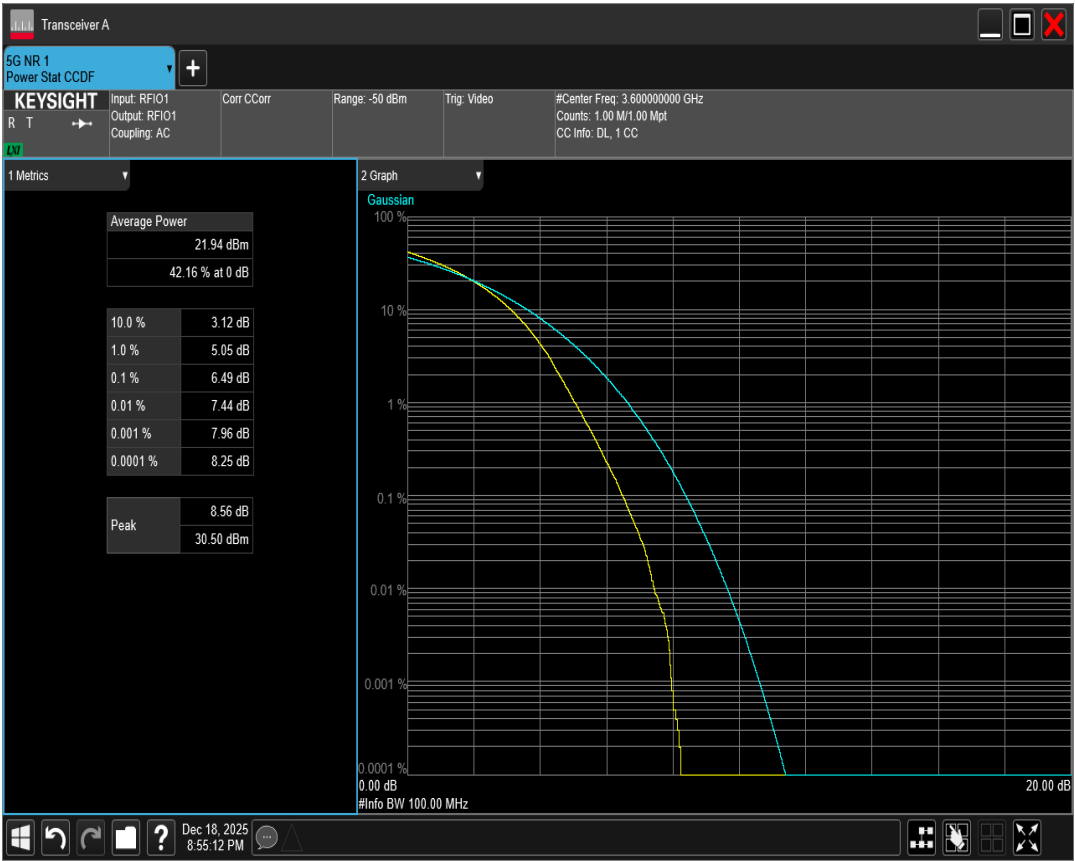


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=100MHz Channel=641666 RB=270@0

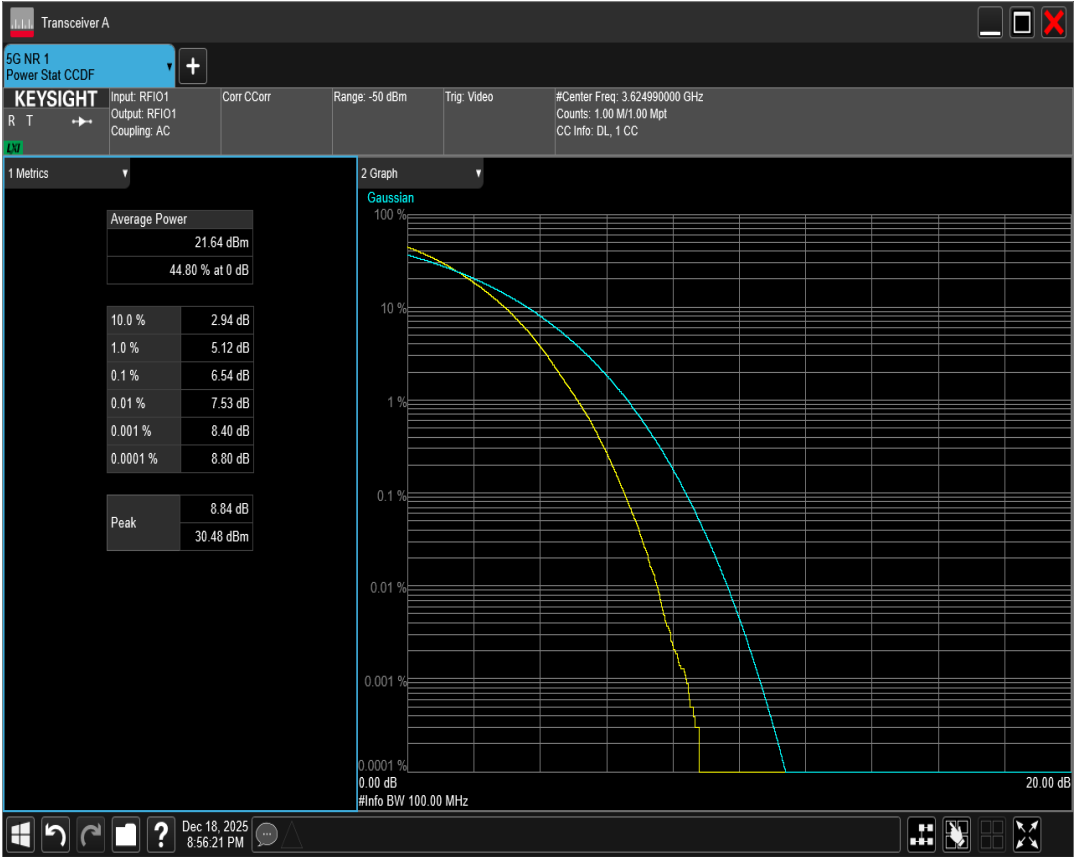


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=100MHz Channel=643332 RB=270@0

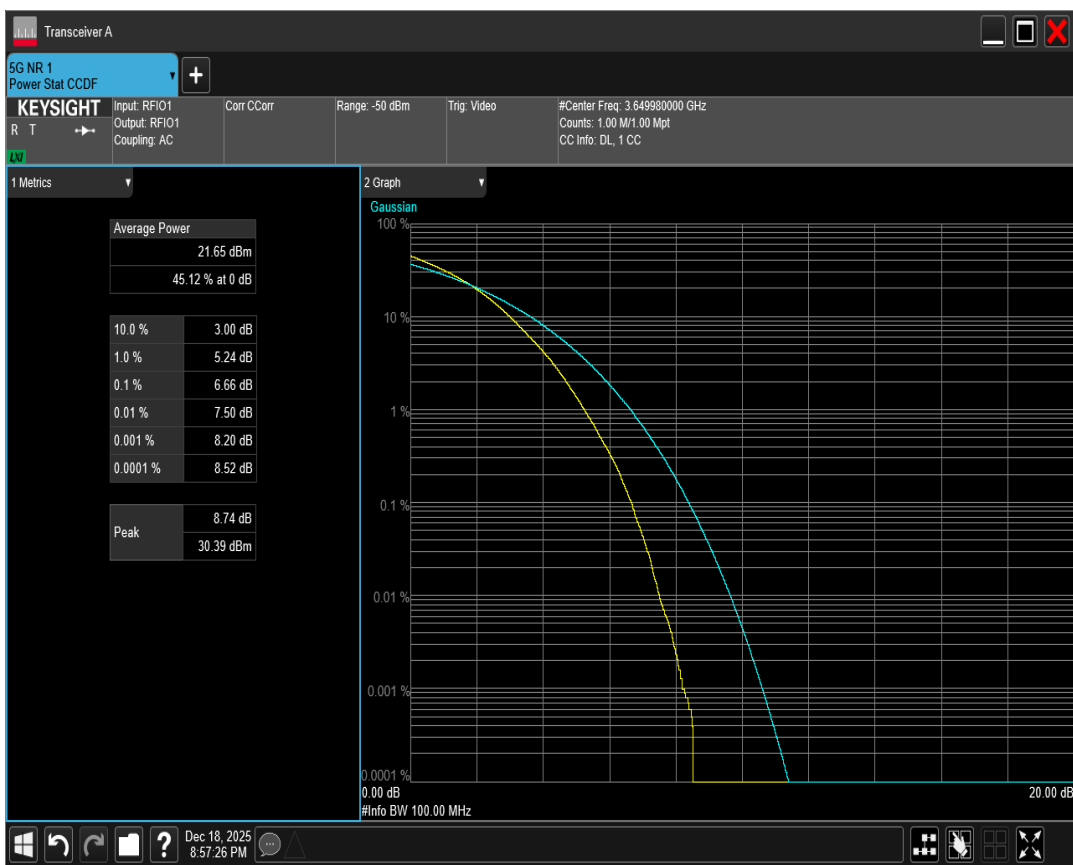


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=10MHz Channel=637000 RB=24@0

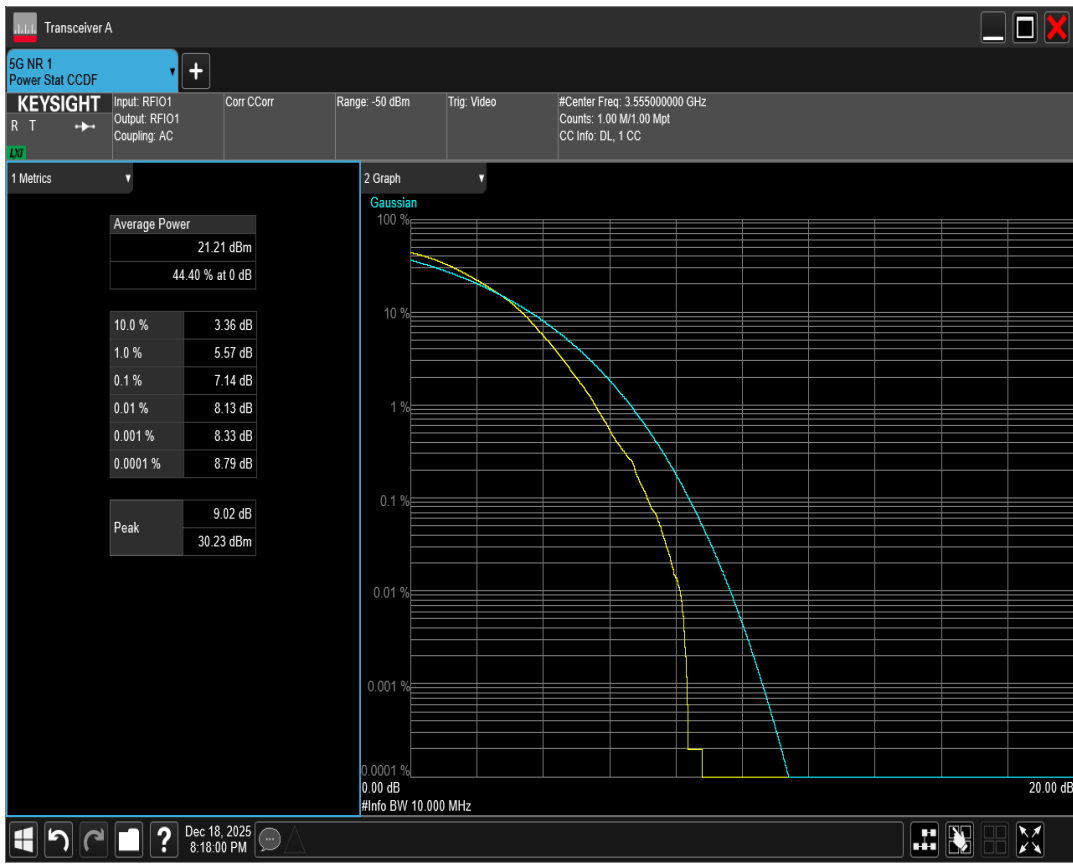


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=10MHz Channel=641666 RB=24@0

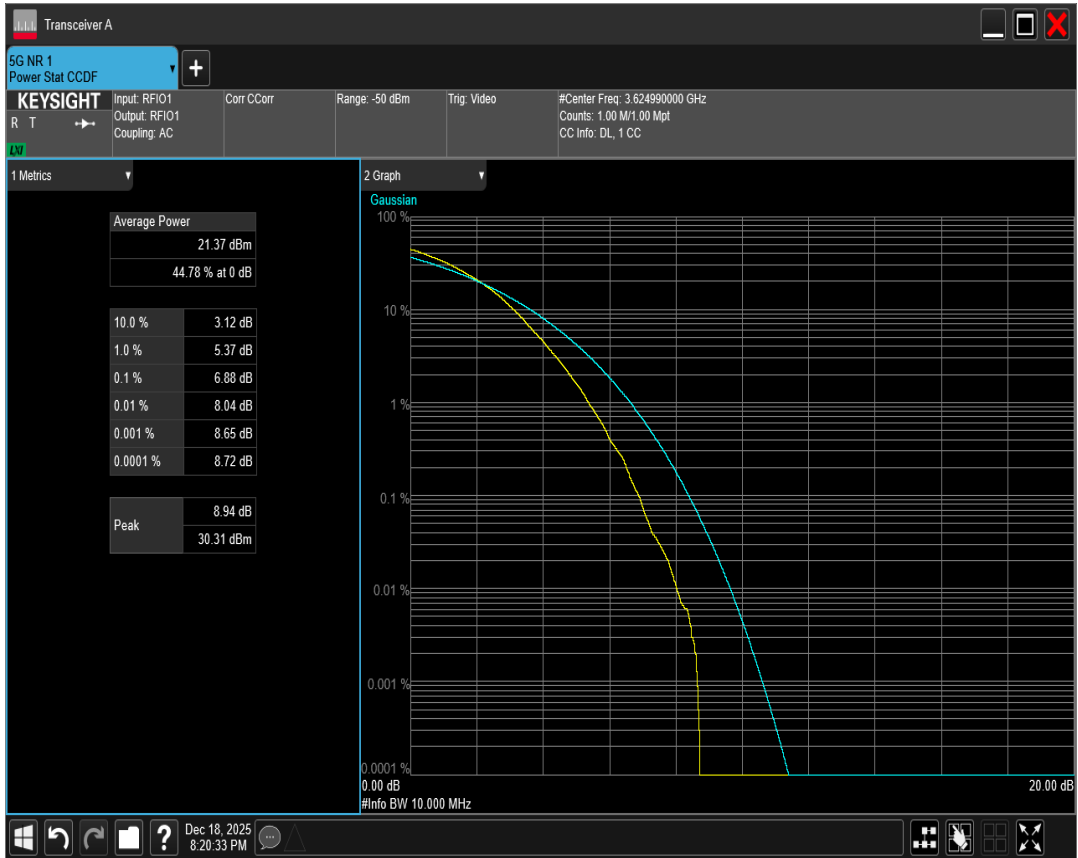


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=10MHz Channel=646332 RB=24@0

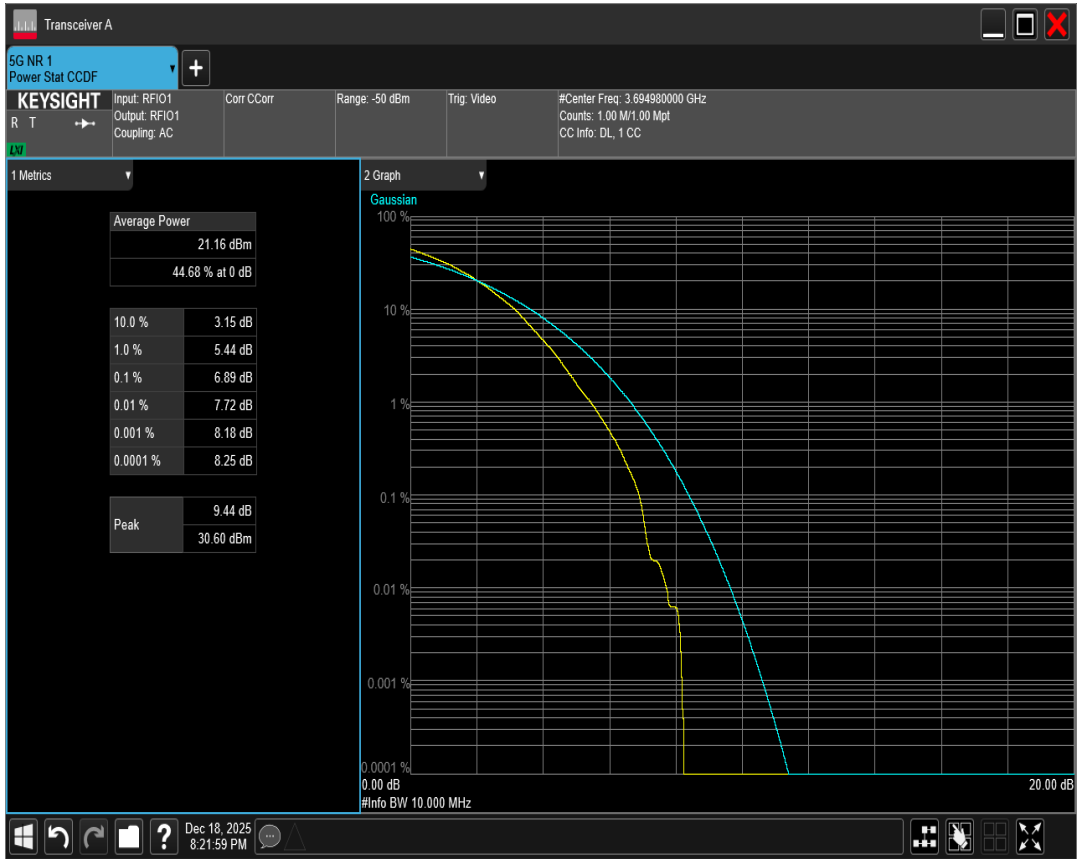


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=15MHz Channel=637168 RB=36@0

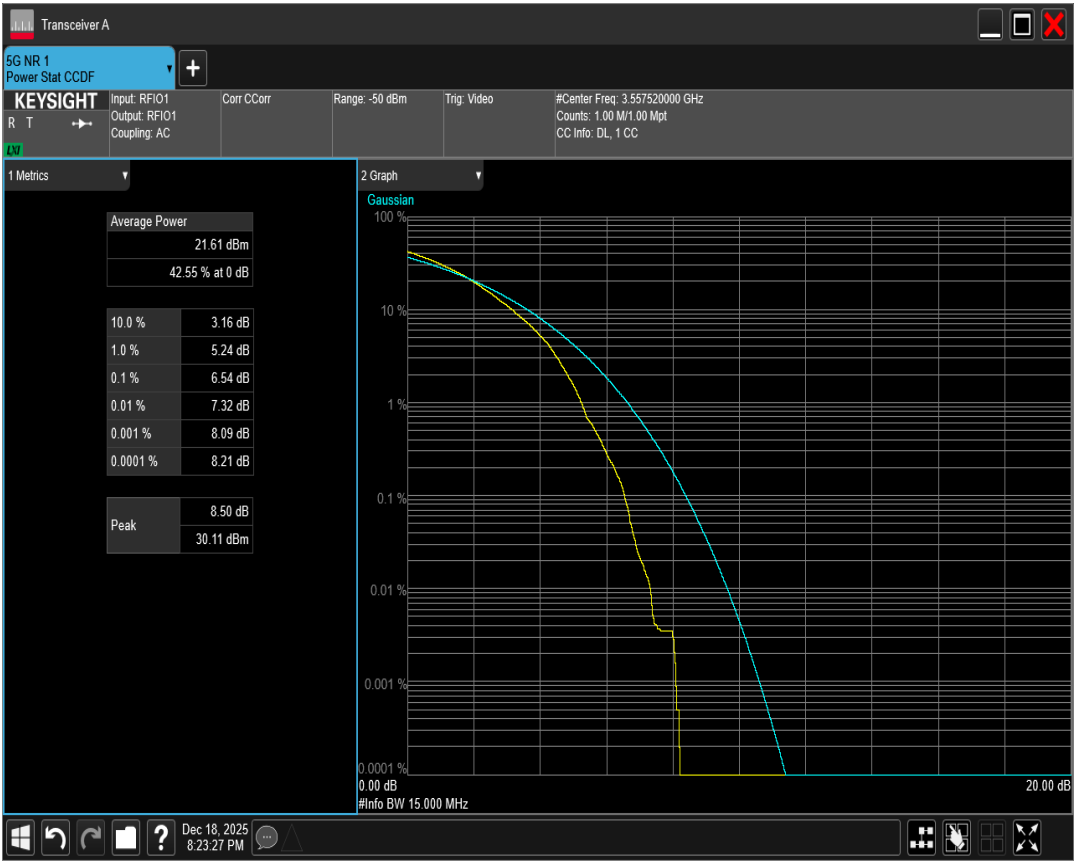


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=15MHz Channel=641666 RB=36@0

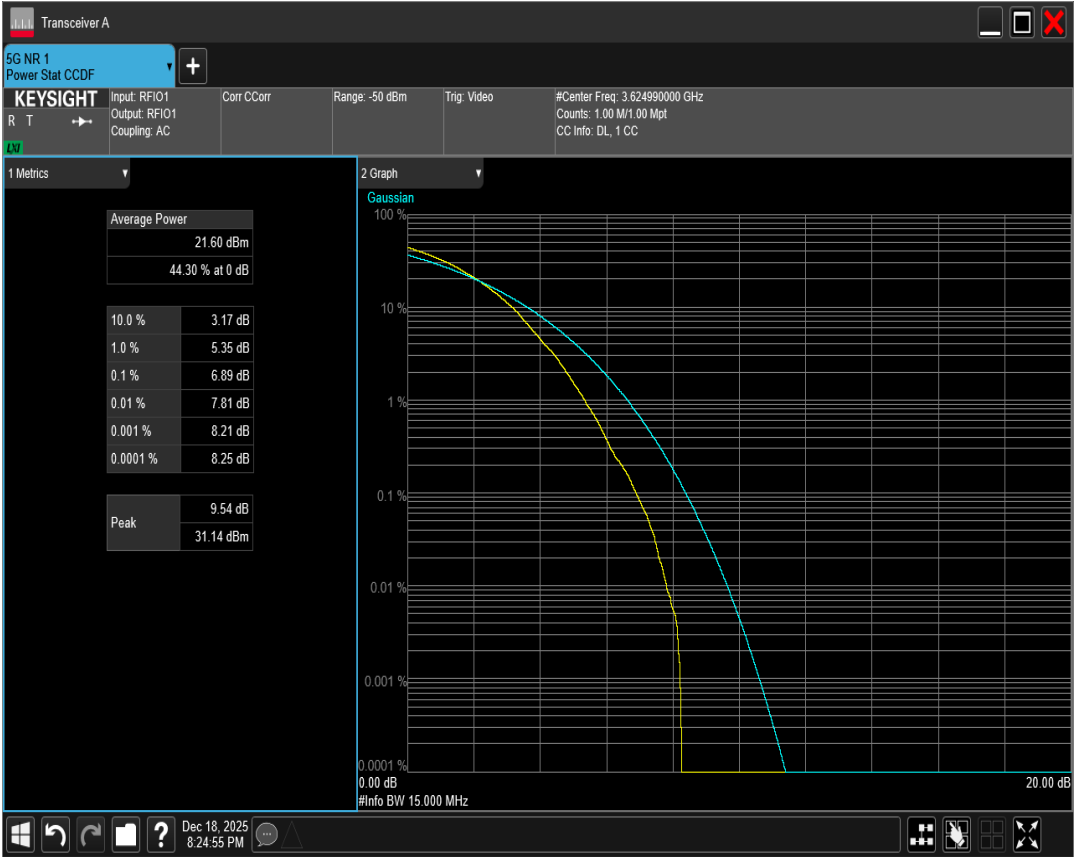


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=15MHz Channel=646166 RB=36@0

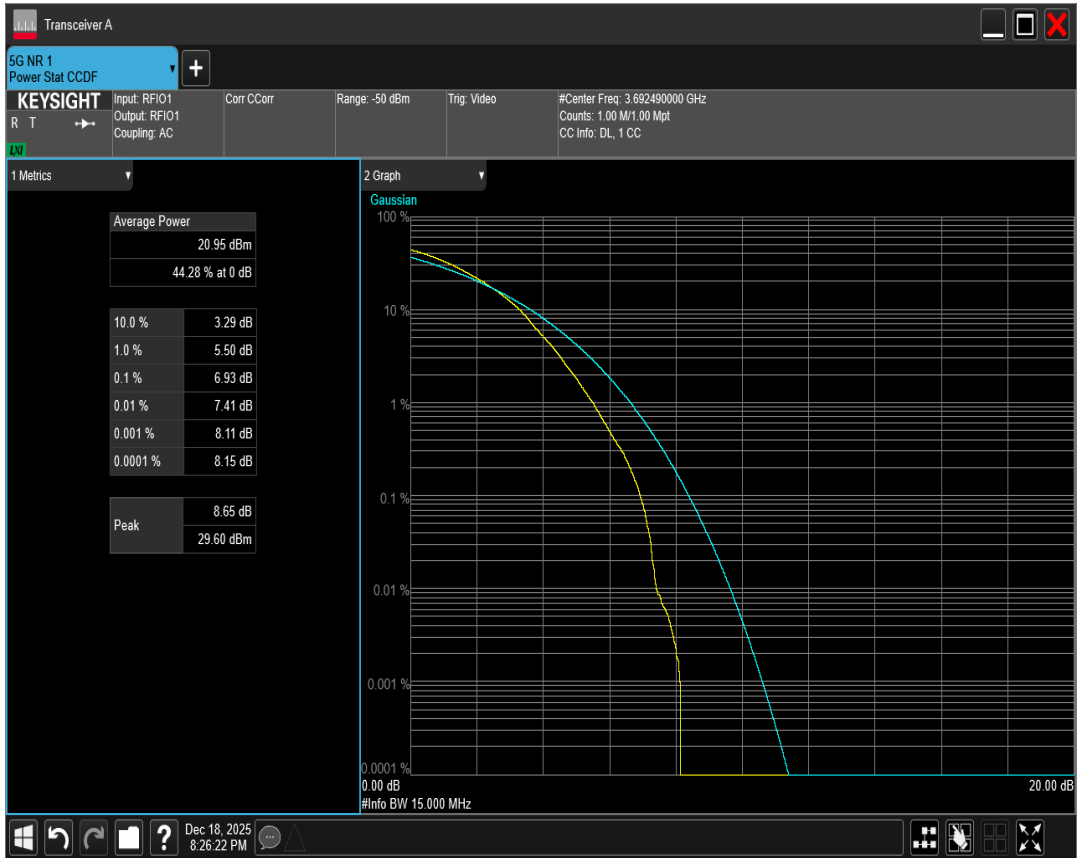


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=20MHz Channel=637334 RB=50@0

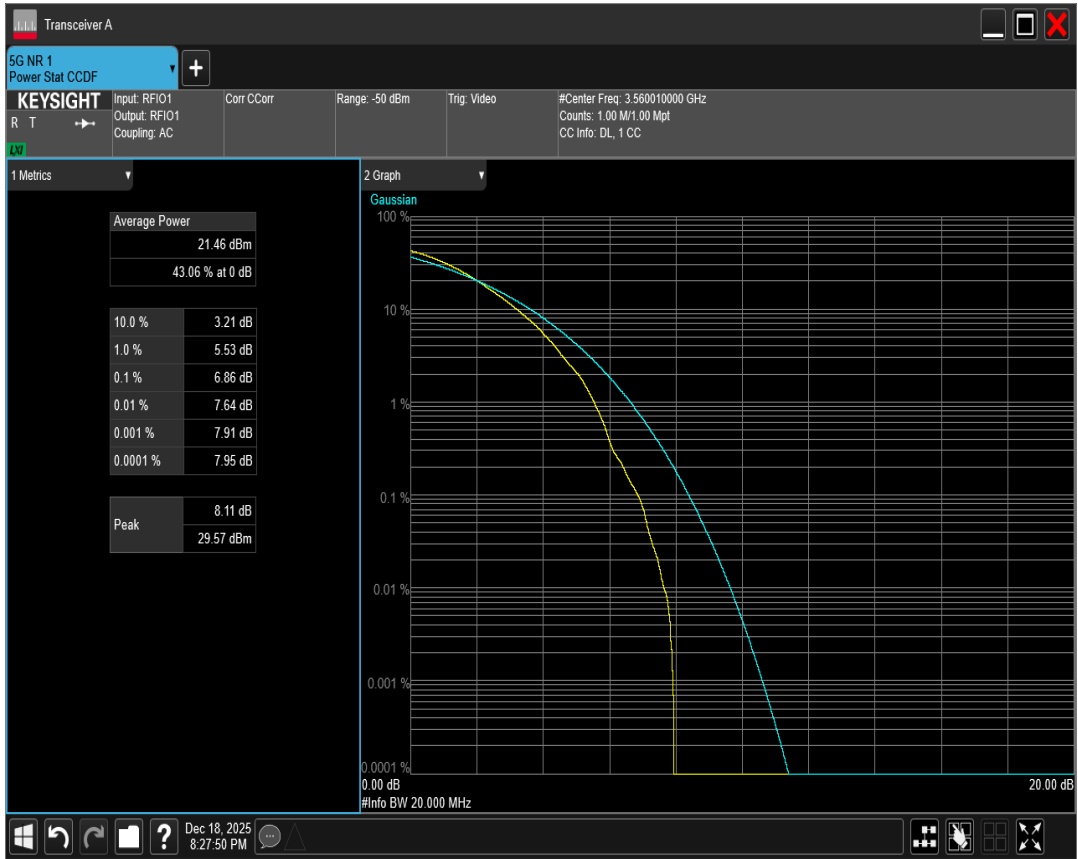


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=20MHz Channel=641666 RB=50@0

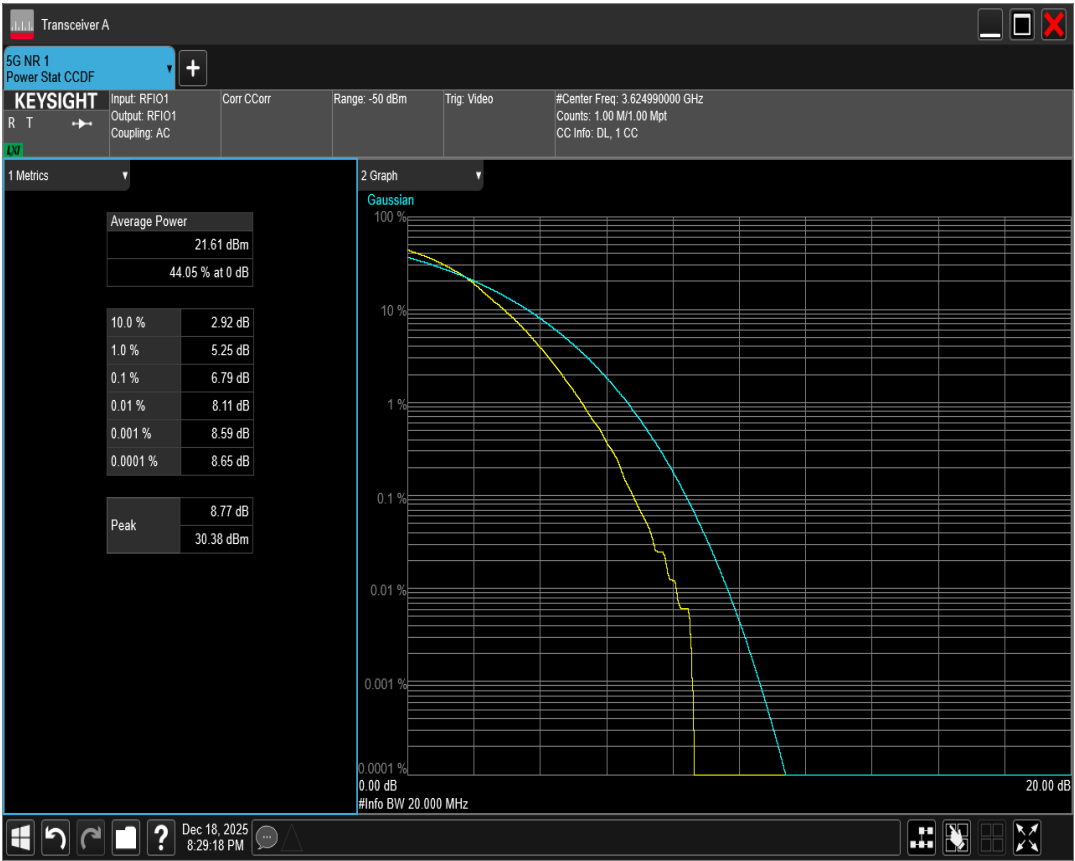


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=20MHz Channel=646000 RB=50@0

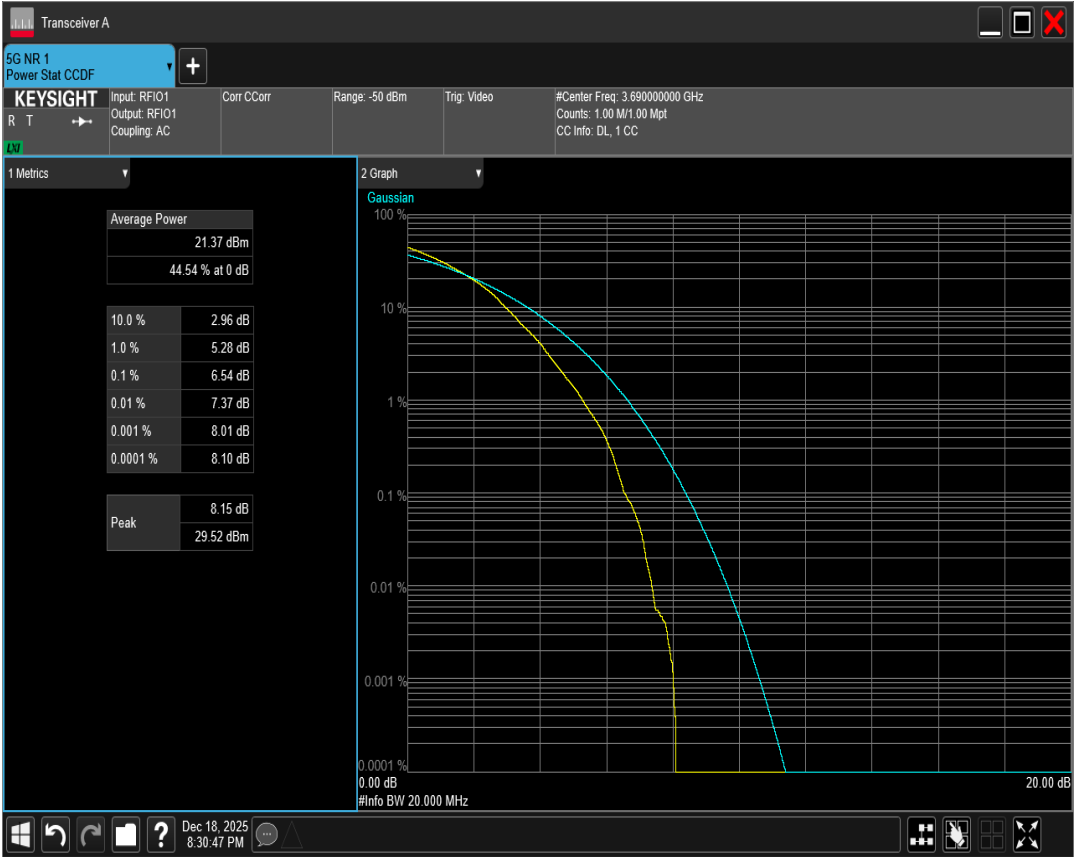


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=40MHz Channel=638000 RB=100@0

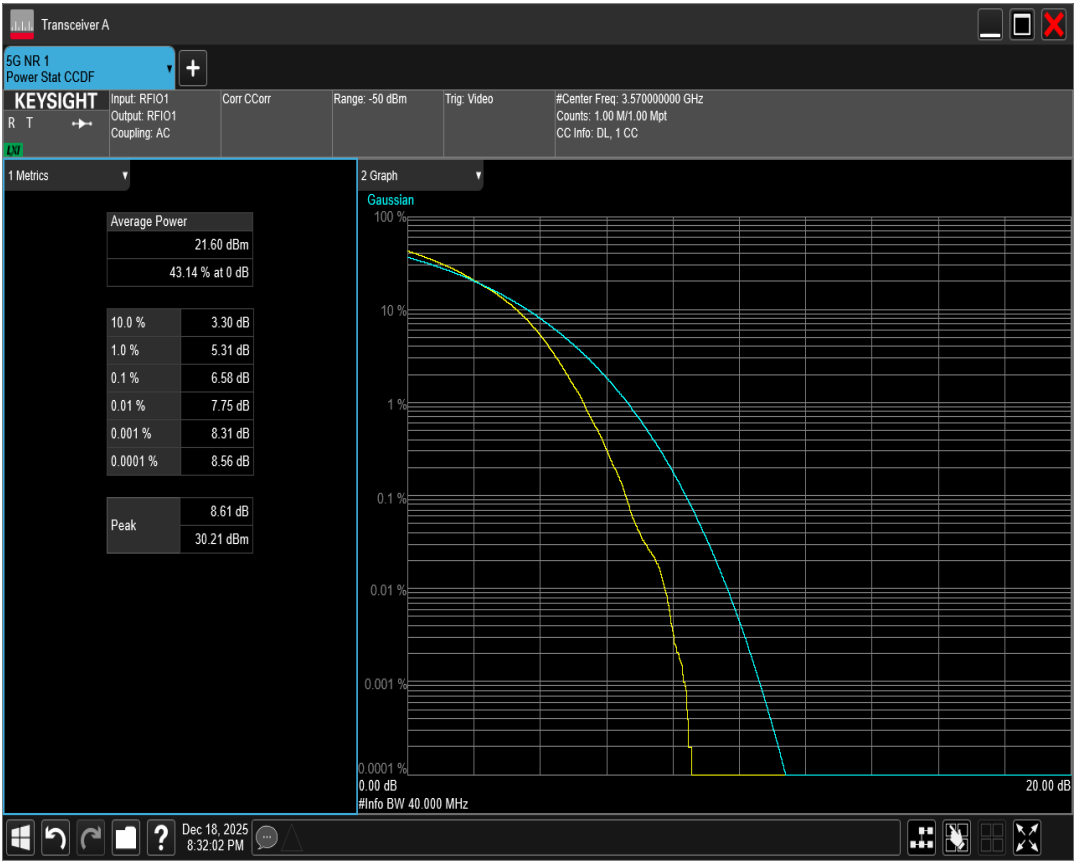


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=40MHz Channel=641666 RB=100@0

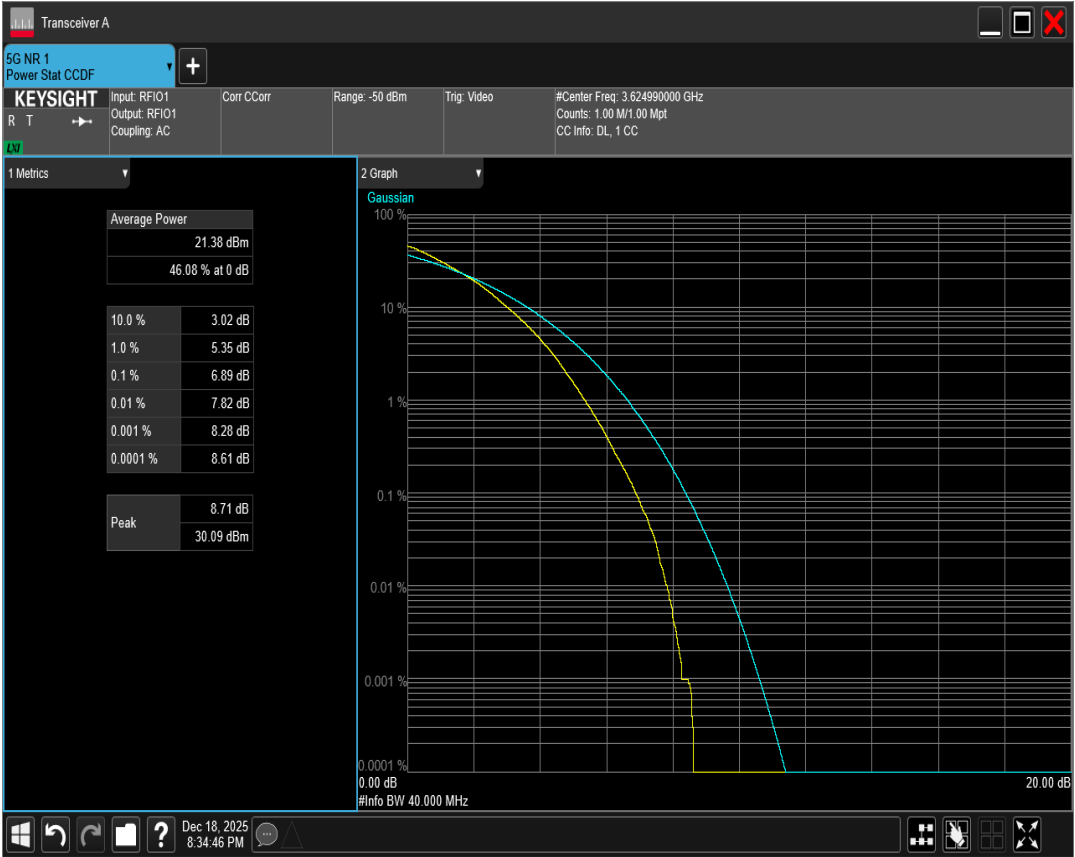


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=40MHz Channel=645332 RB=100@0

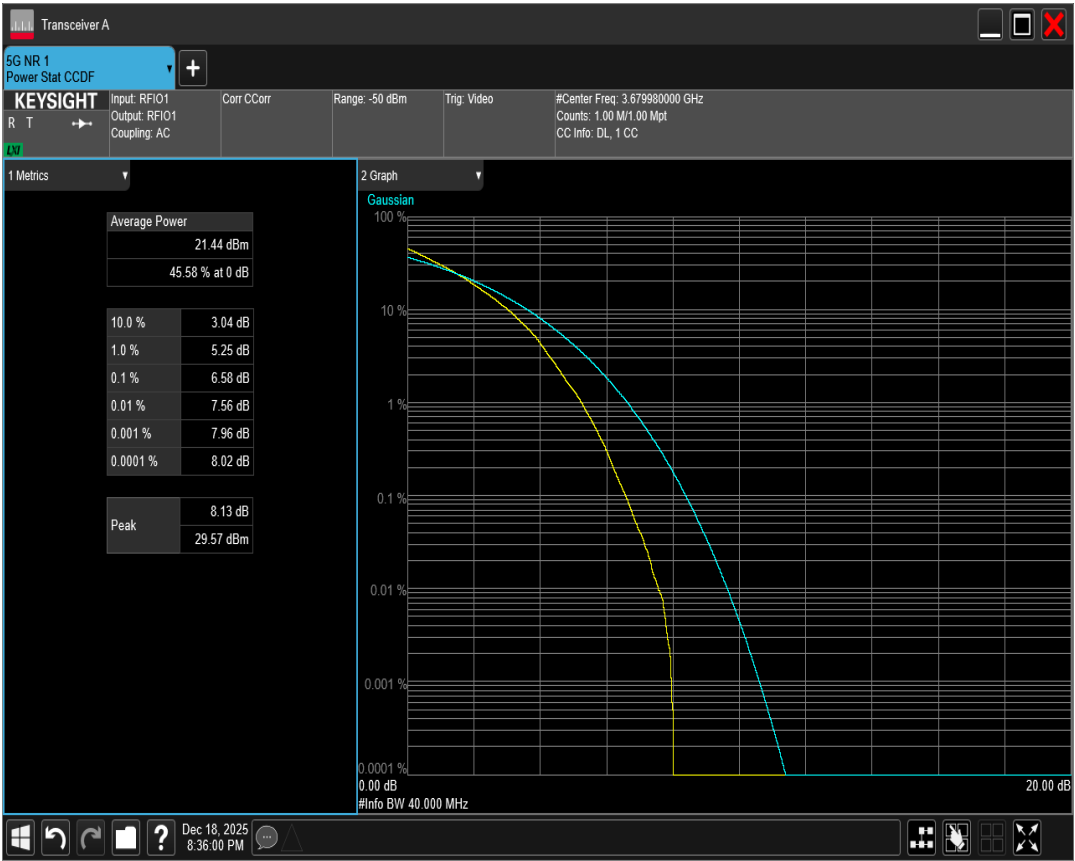


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=50MHz Channel=638334 RB=128@0

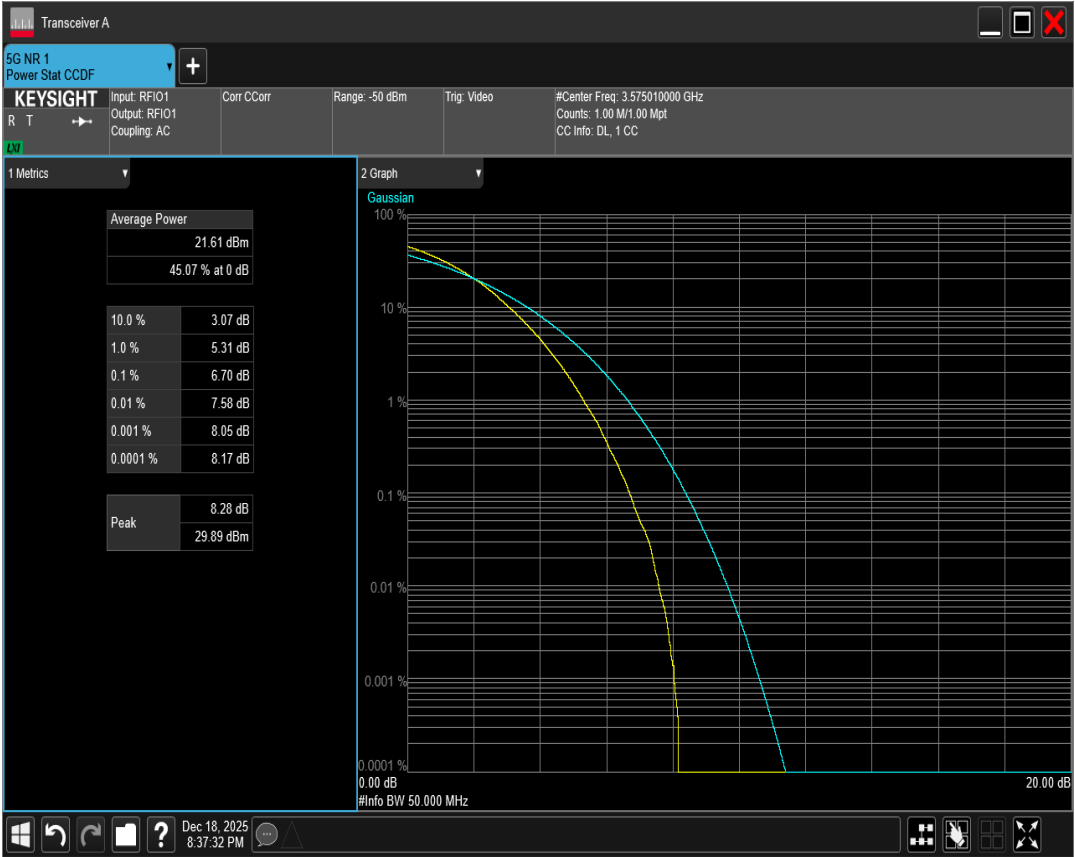


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=50MHz Channel=641666 RB=128@0

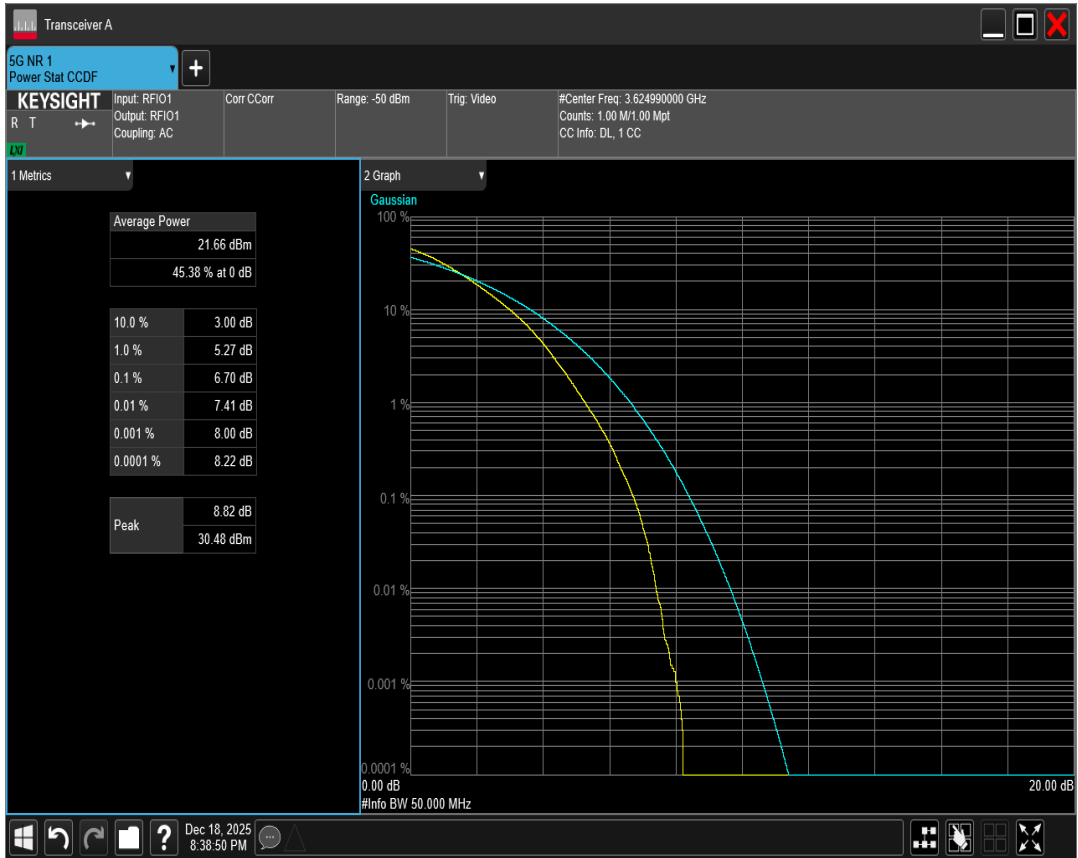


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=50MHz Channel=645000 RB=128@0

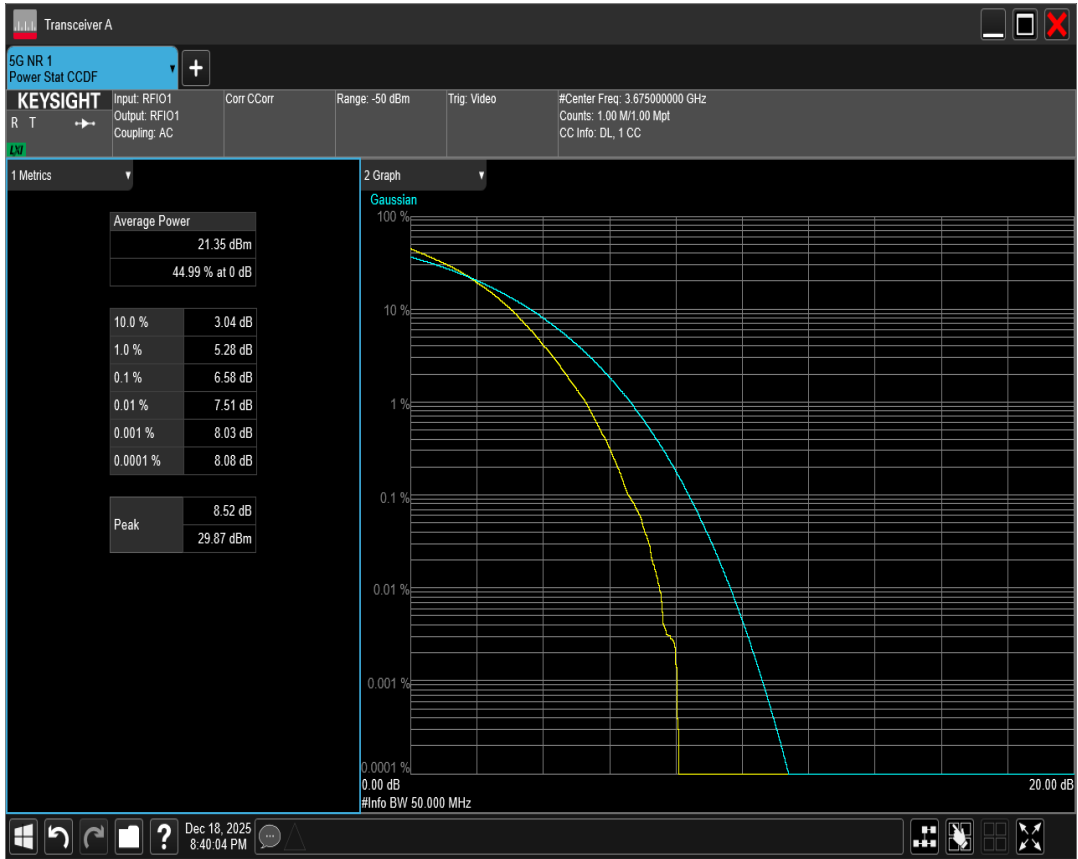


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=60MHz Channel=638668 RB=162@0

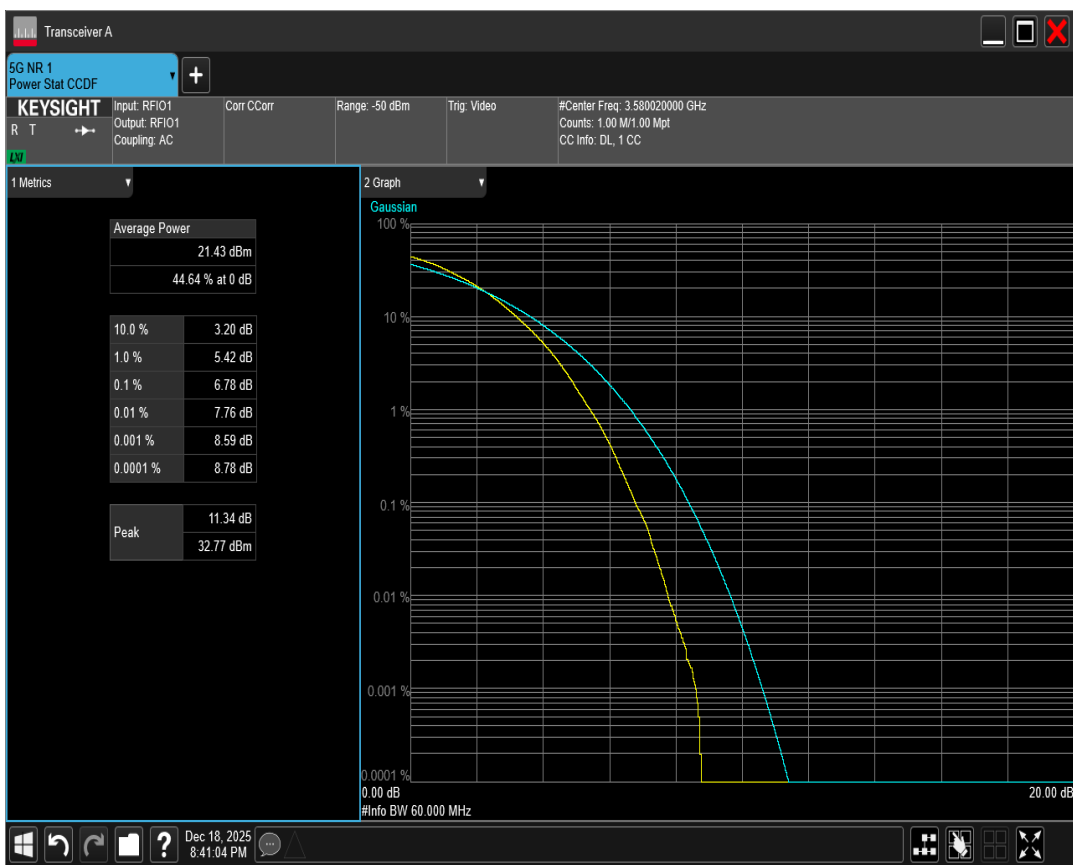


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=60MHz Channel=641666 RB=162@0

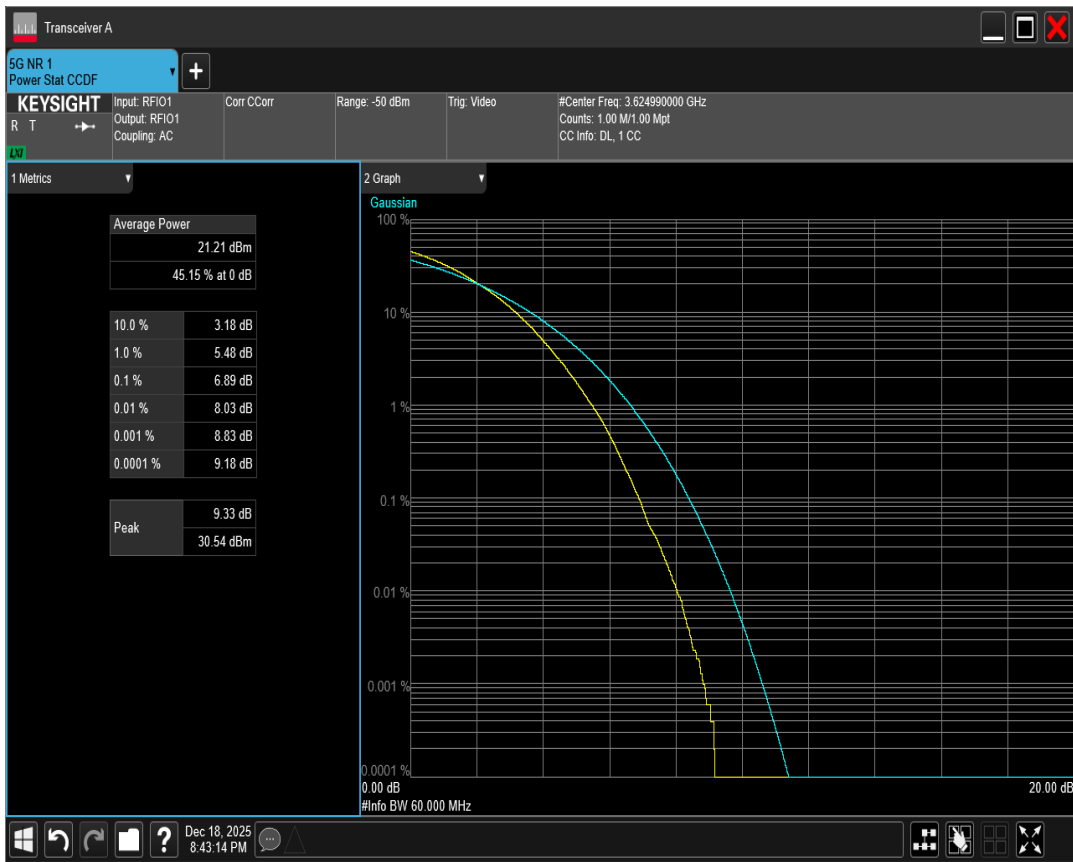


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=60MHz Channel=644666 RB=162@0

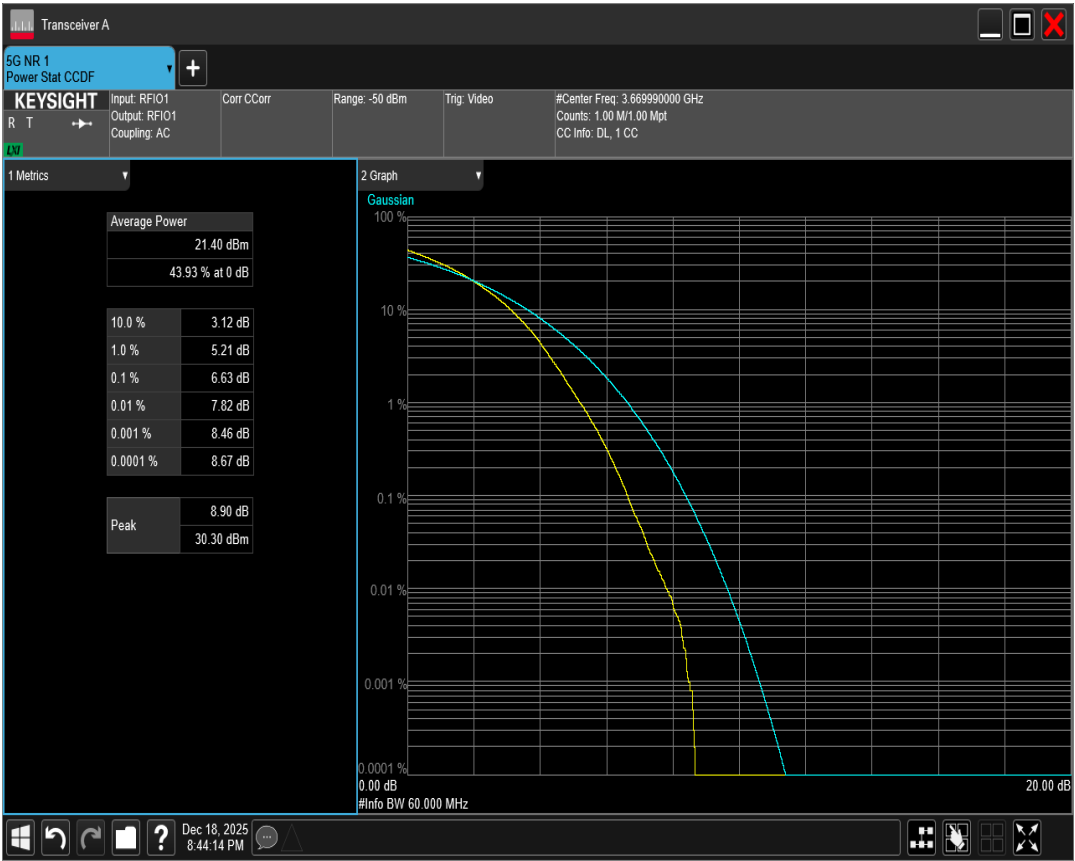


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=70MHz Channel=639000 RB=180@0

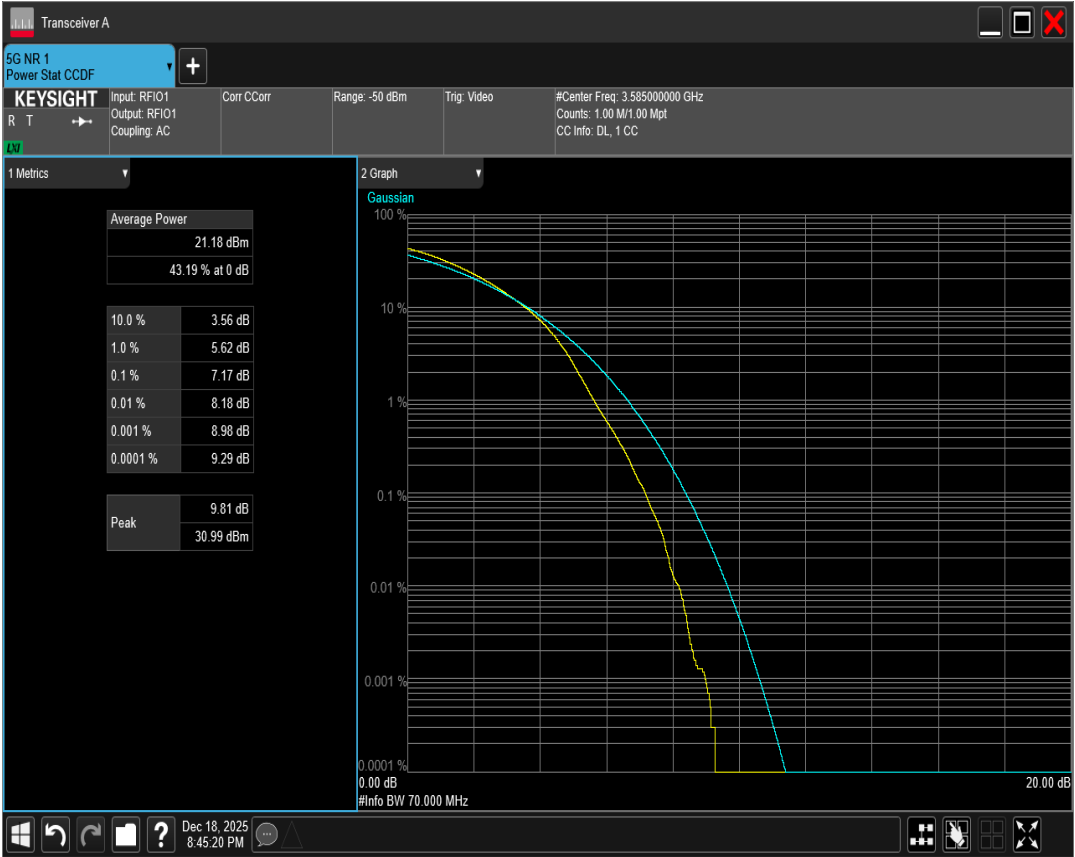


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=70MHz Channel=641666 RB=180@0

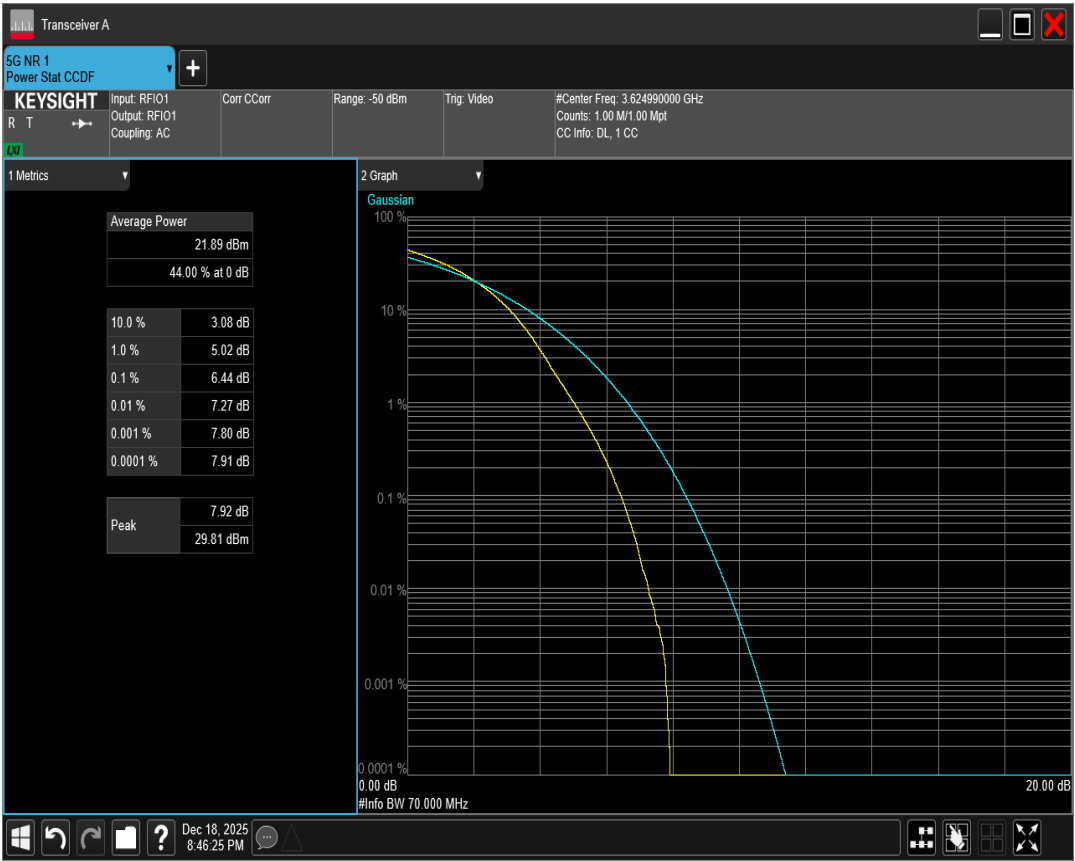


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=70MHz Channel=644332 RB=180@0

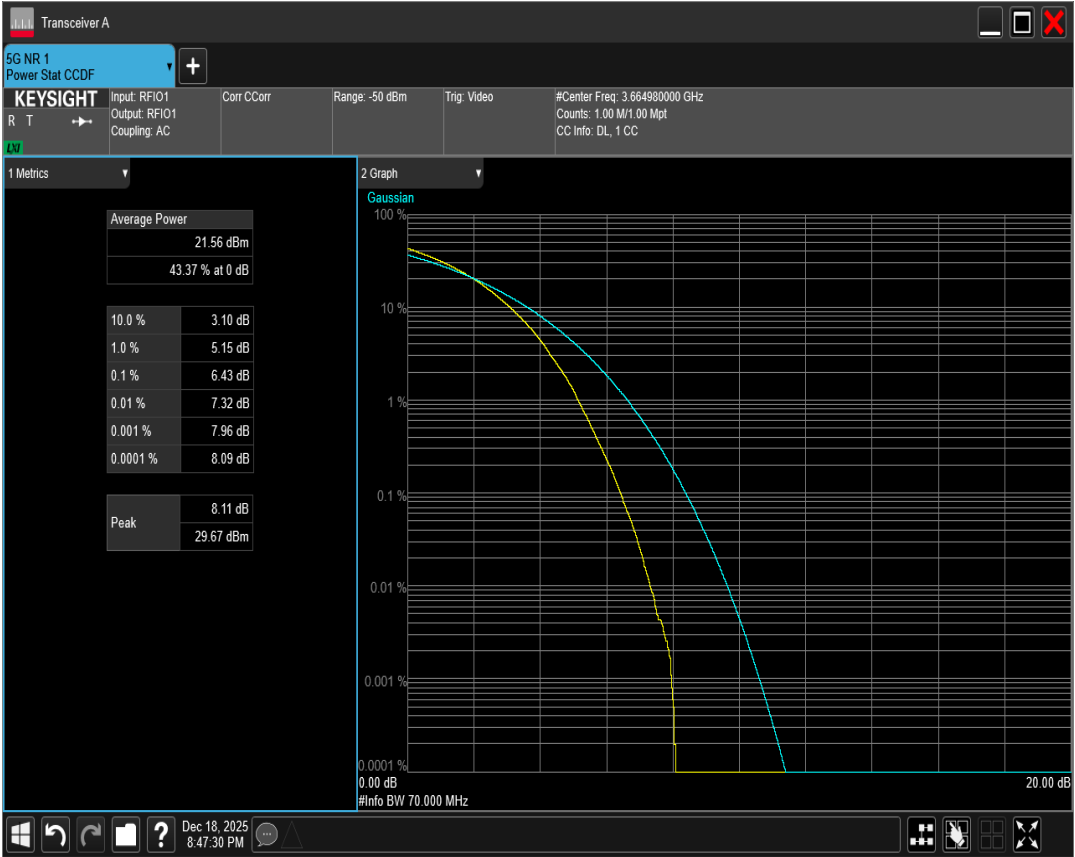


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=80MHz Channel=639334 RB=216@0

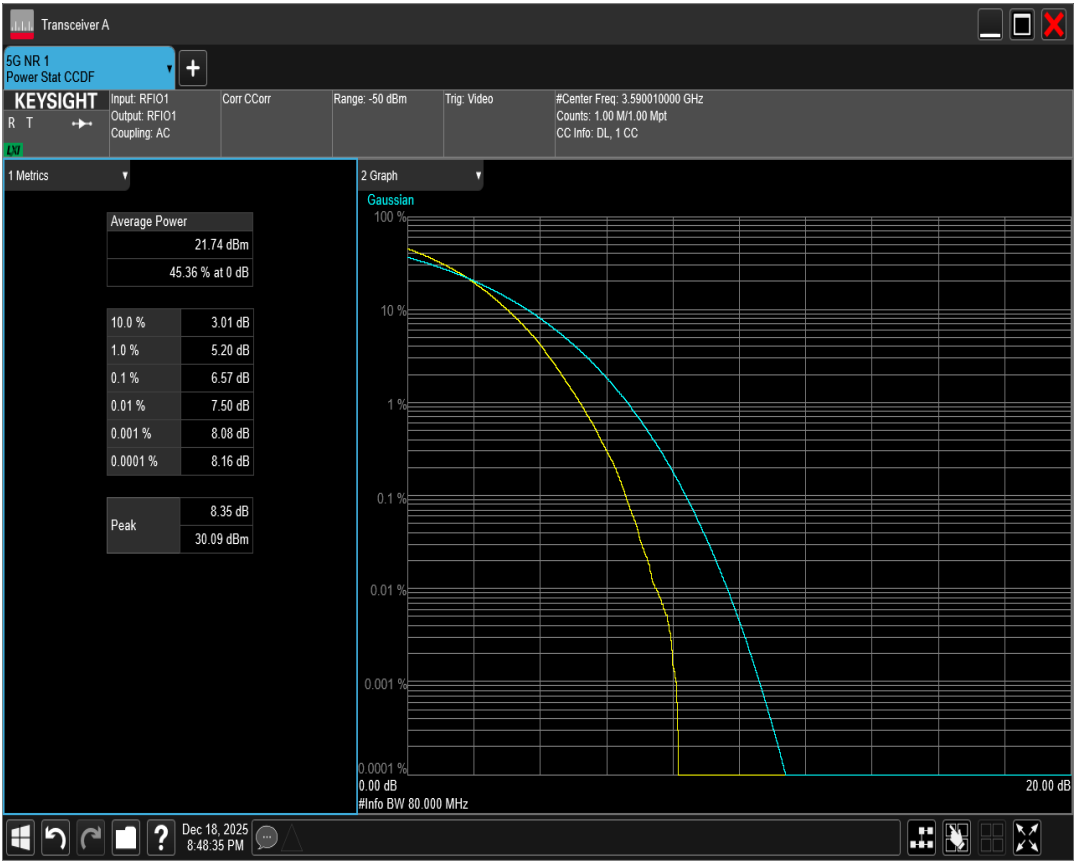


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=80MHz Channel=641666 RB=216@0

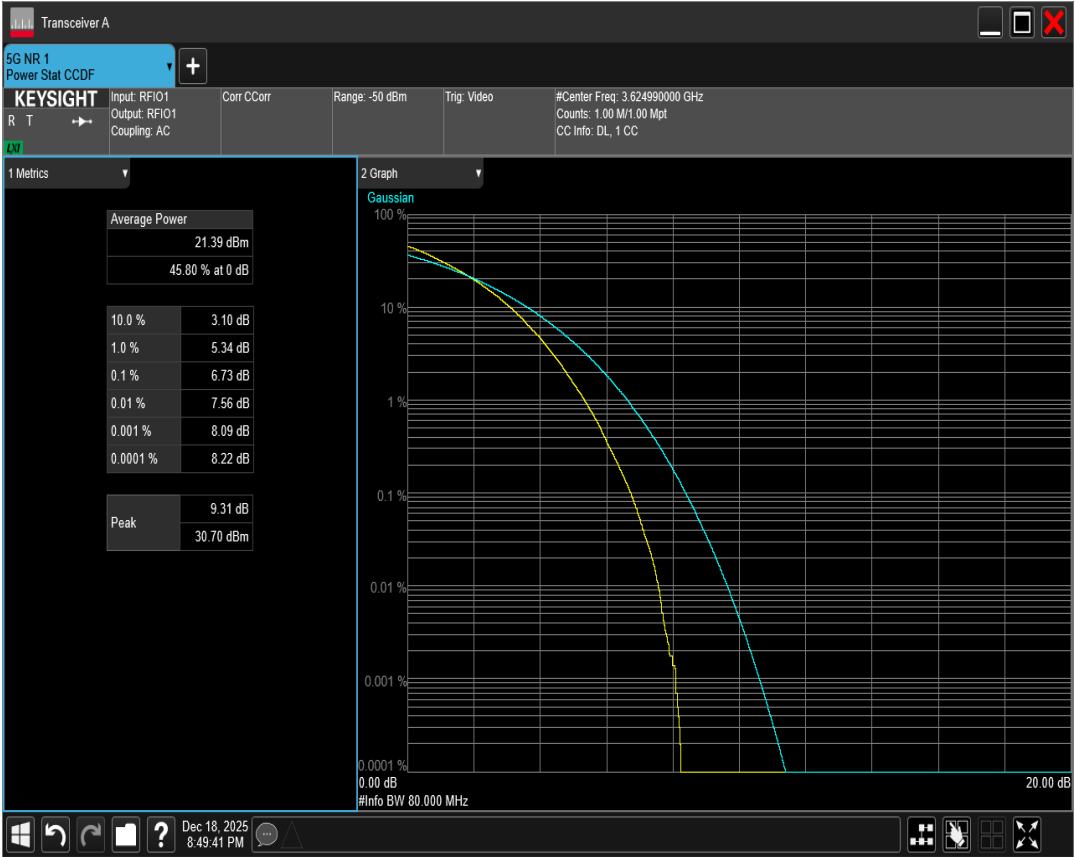


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=80MHz Channel=644000 RB=216@0

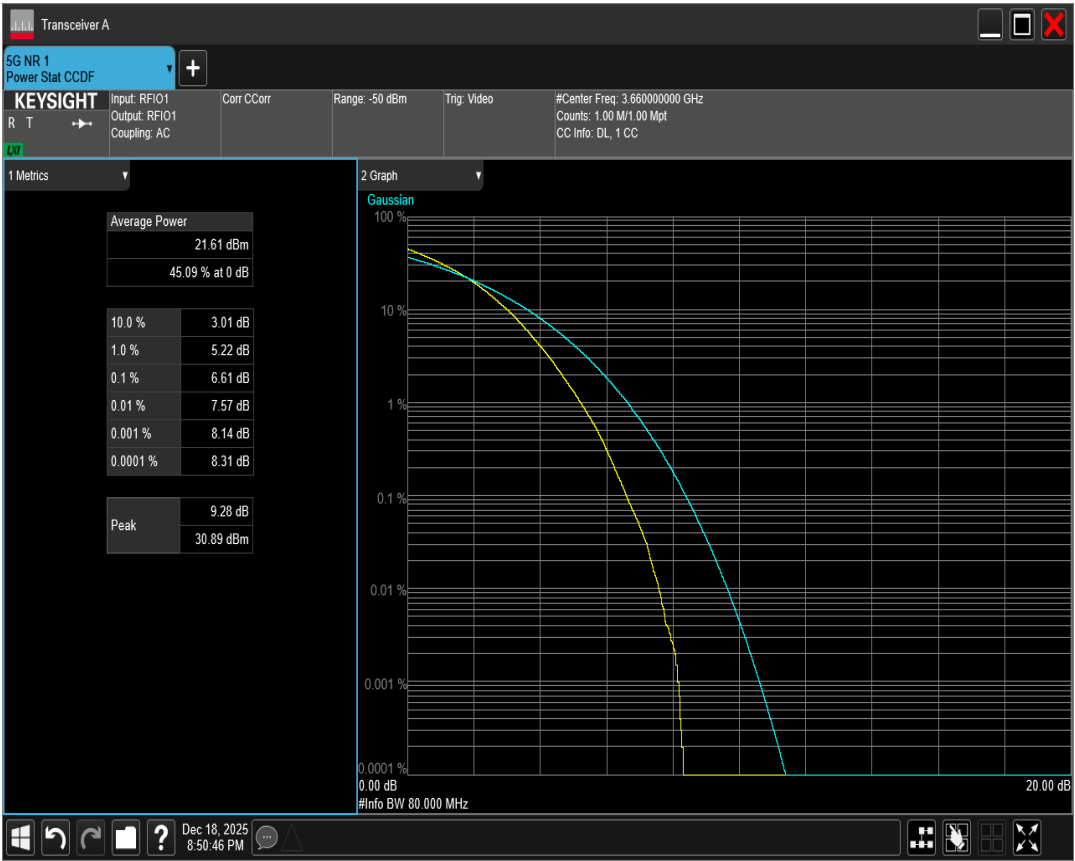


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=90MHz Channel=639668 RB=240@0

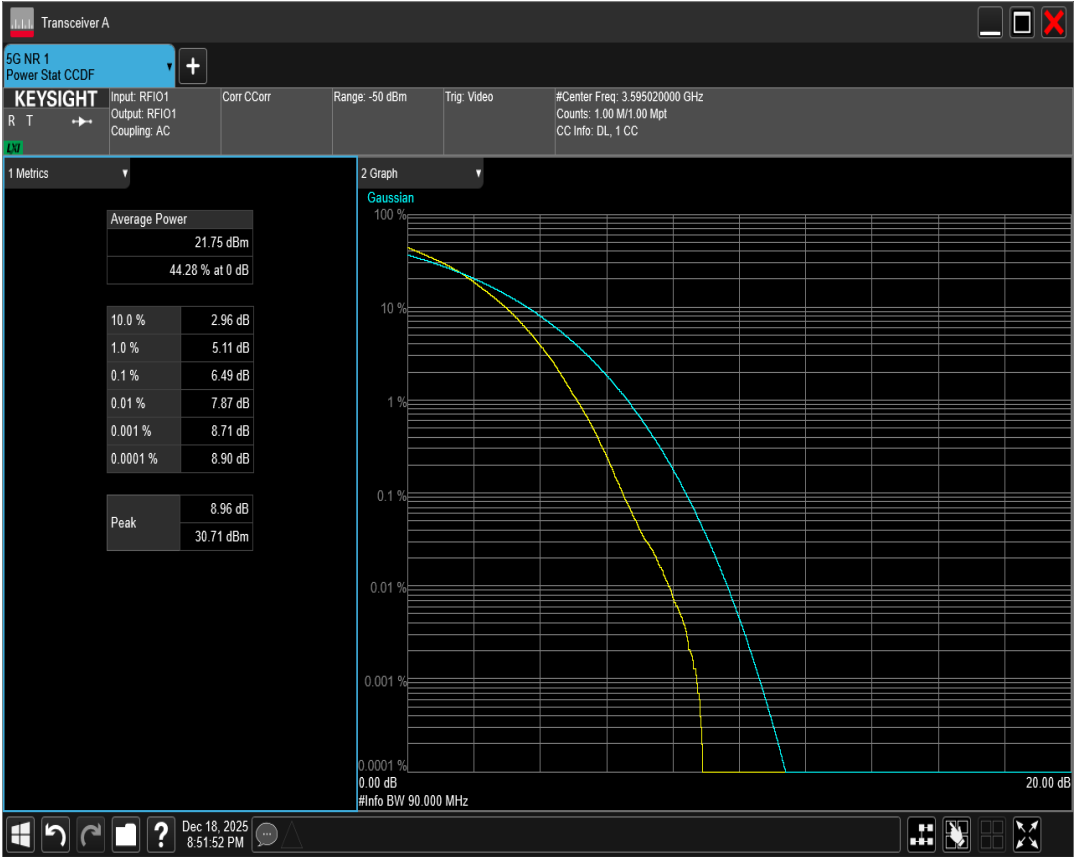


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=90MHz Channel=641666 RB=240@0

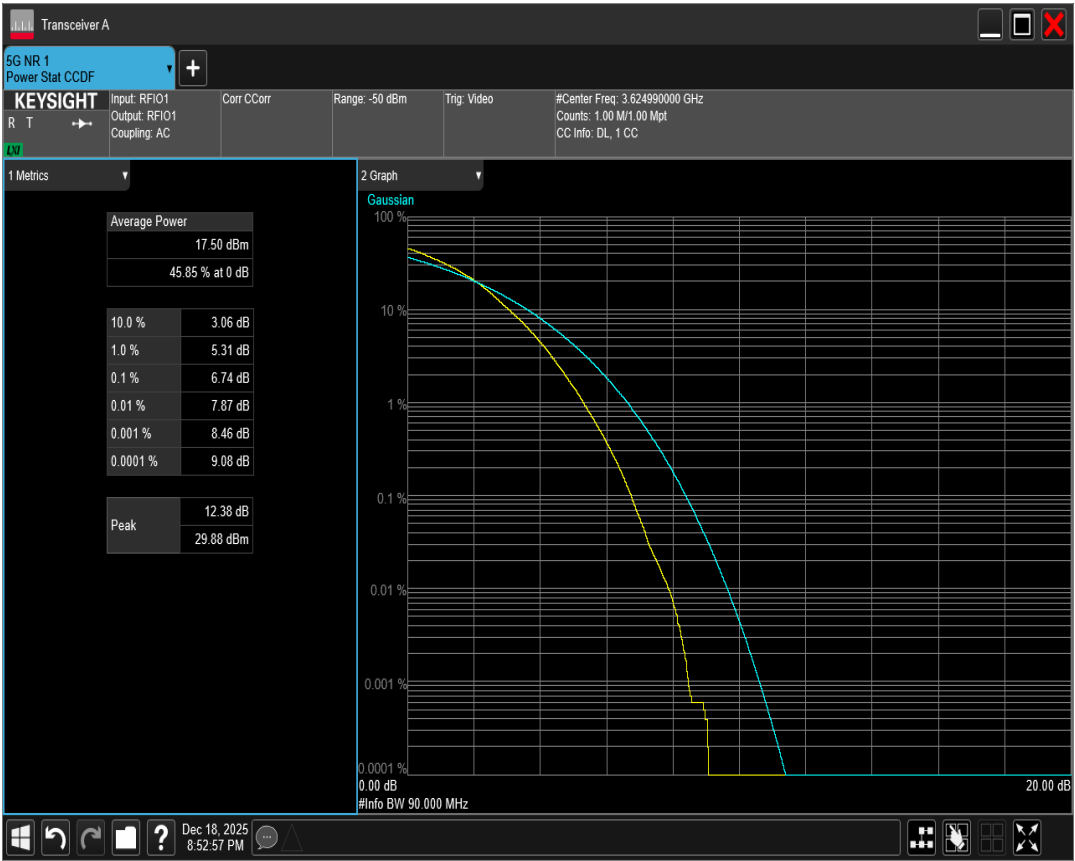


n78(3550-3700) SCS=30kHz DFT_QAM256 BW=90MHz Channel=643666 RB=240@0

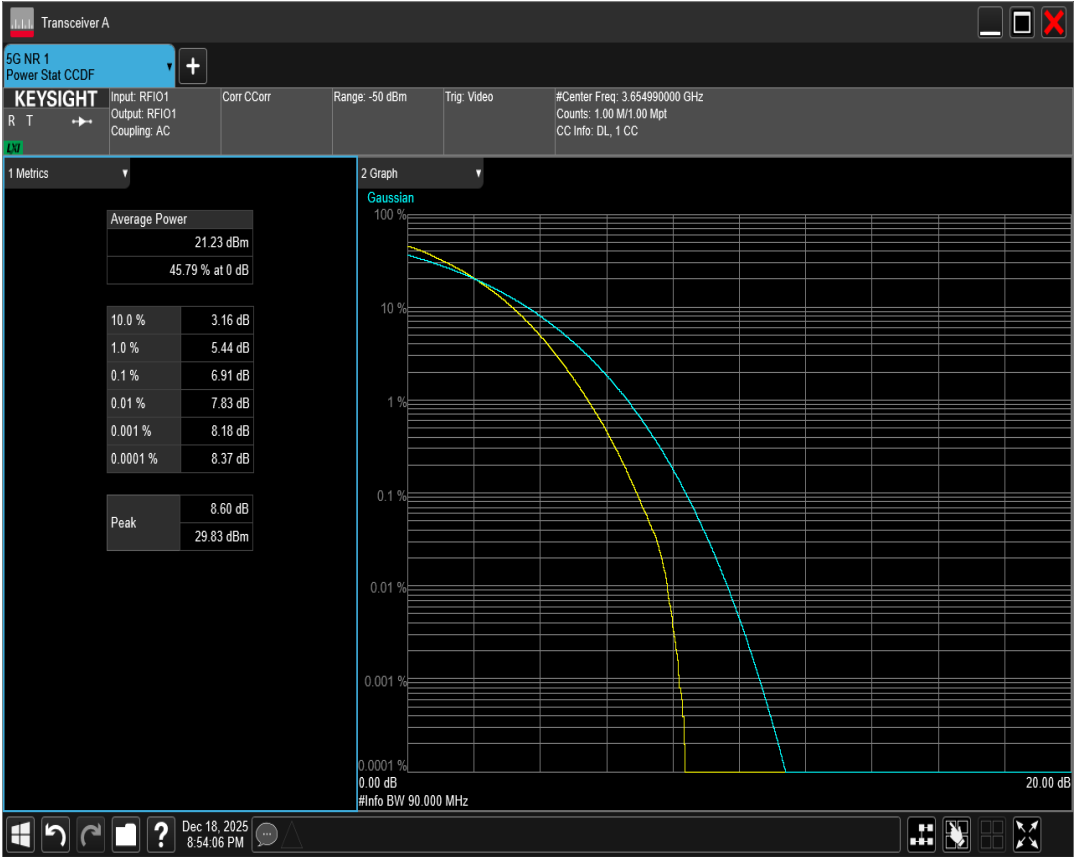

n78(3550-3700) SCS=30kHz DFT_QAM64 BW=100MHz Channel=640000 RB=270@0

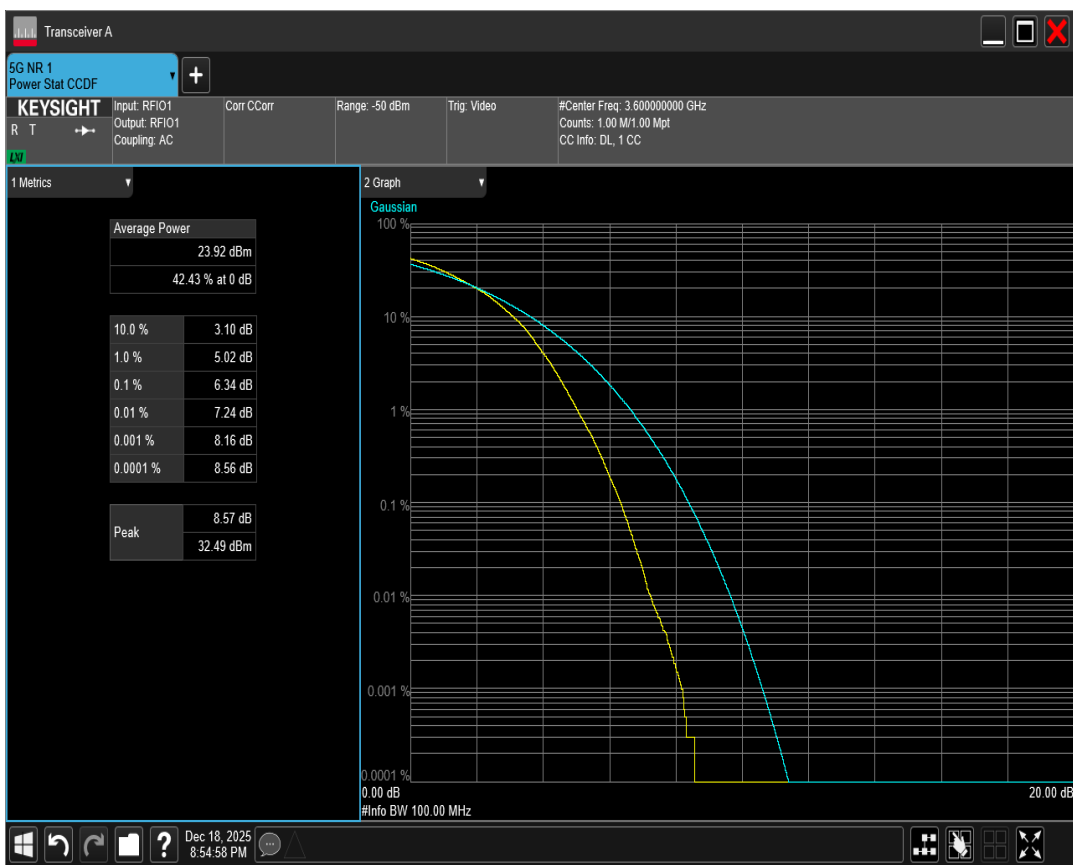

n78(3550-3700) SCS=30kHz DFT_QAM64 BW=100MHz Channel=641666 RB=270@0

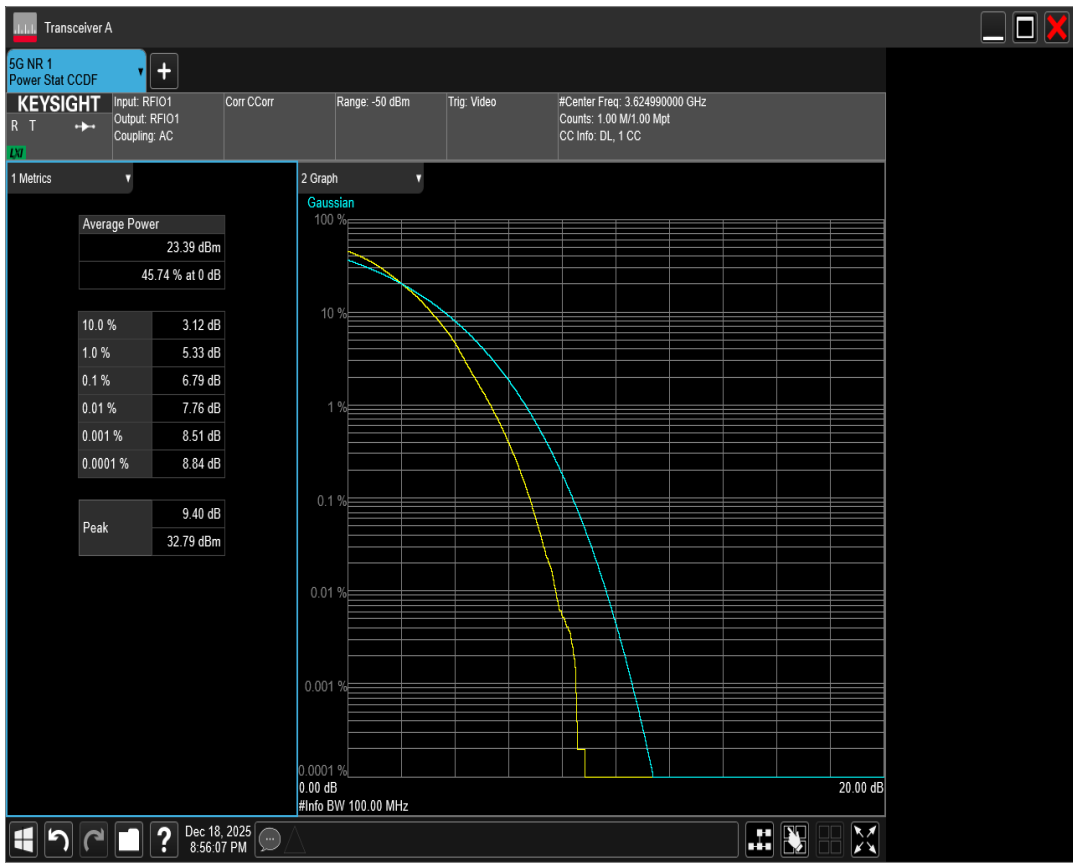

n78(3550-3700) SCS=30kHz DFT_QAM64 BW=100MHz Channel=643332 RB=270@0