

TABLE OF CONTENTS

1 Conducted output power for NR FR12

2 Frequency stability for NR FR14

3 Peak-to-Average Ratio for NR FR16

4 Occupied bandwidth for NR FR188

5 Band edge for NR FR1 117

6 Out-of-band emissions for NR FR1125

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limt (dBm)	Verdict
n78(3700-3800)	30	10	647000	1@1	DFT_BPSK	25.1	-0.43	24.67	30.00	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QPSK	24.09	-0.43	23.66	30.00	PASS
n78(3700-3800)	30	10	647000	12@6	DFT_QPSK	25.14	-0.43	24.71	30.00	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_QPSK	25	-0.43	24.57	30.00	PASS
n78(3700-3800)	30	10	647000	1@22	DFT_QPSK	25.03	-0.43	24.60	30.00	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_QAM16	24.02	-0.43	23.59	30.00	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_QAM64	22.56	-0.43	22.13	30.00	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_QAM256	20.61	-0.43	20.18	30.00	PASS
n78(3700-3800)	30	10	647000	1@1	CP_QPSK	23.87	-0.43	23.44	30.00	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_BPSK	25.6	-0.43	25.17	30.00	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QPSK	24.44	-0.43	24.01	30.00	PASS
n78(3700-3800)	30	10	650000	12@6	DFT_QPSK	25.46	-0.43	25.03	30.00	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_QPSK	25.62	-0.43	25.19	30.00	PASS
n78(3700-3800)	30	10	650000	1@22	DFT_QPSK	25.67	-0.43	25.24	30.00	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_QAM16	24.35	-0.43	23.92	30.00	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_QAM64	22.72	-0.43	22.29	30.00	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_QAM256	20.71	-0.43	20.28	30.00	PASS
n78(3700-3800)	30	10	650000	1@1	CP_QPSK	23.69	-0.43	23.26	30.00	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_BPSK	25.62	-0.43	25.19	30.00	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QPSK	24.44	-0.43	24.01	30.00	PASS
n78(3700-3800)	30	10	653000	12@6	DFT_QPSK	25.45	-0.43	25.02	30.00	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_QPSK	25.62	-0.43	25.19	30.00	PASS
n78(3700-3800)	30	10	653000	1@22	DFT_QPSK	25.76	-0.43	25.33	30.00	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_QAM16	24.67	-0.43	24.24	30.00	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_QAM64	23.15	-0.43	22.72	30.00	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_QAM256	21.27	-0.43	20.84	30.00	PASS
n78(3700-3800)	30	10	653000	1@1	CP_QPSK	24.15	-0.43	23.72	30.00	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_BPSK	25.12	-0.43	24.69	30.00	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QPSK	24.42	-0.43	23.99	30.00	PASS
n78(3700-3800)	30	50	648334	64@32	DFT_QPSK	25.47	-0.43	25.04	30.00	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_QPSK	25.09	-0.43	24.66	30.00	PASS
n78(3700-3800)	30	50	648334	1@131	DFT_QPSK	25.4	-0.43	24.97	30.00	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_QAM16	24.09	-0.43	23.66	30.00	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_QAM64	22.72	-0.43	22.29	30.00	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_QAM256	20.74	-0.43	20.31	30.00	PASS
n78(3700-3800)	30	50	648334	1@1	CP_QPSK	23.6	-0.43	23.17	30.00	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_BPSK	25.47	-0.43	25.04	30.00	PASS

n78(3700-3800)	30	50	650000	128@0	DFT_QPSK	24.6	-0.43	24.17	30.00	PASS
n78(3700-3800)	30	50	650000	64@32	DFT_QPSK	25.55	-0.43	25.12	30.00	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_QPSK	25.34	-0.43	24.91	30.00	PASS
n78(3700-3800)	30	50	650000	1@131	DFT_QPSK	25.57	-0.43	25.14	30.00	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_QAM16	24.63	-0.43	24.20	30.00	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_QAM64	22.97	-0.43	22.54	30.00	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_QAM256	20.96	-0.43	20.53	30.00	PASS
n78(3700-3800)	30	50	650000	1@1	CP_QPSK	23.69	-0.43	23.26	30.00	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_BPSK	25.38	-0.43	24.95	30.00	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QPSK	24.55	-0.43	24.12	30.00	PASS
n78(3700-3800)	30	50	651666	64@32	DFT_QPSK	25.61	-0.43	25.18	30.00	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_QPSK	25.44	-0.43	25.01	30.00	PASS
n78(3700-3800)	30	50	651666	1@131	DFT_QPSK	25.64	-0.43	25.21	30.00	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_QAM16	24.56	-0.43	24.13	30.00	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_QAM64	22.84	-0.43	22.41	30.00	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_QAM256	20.79	-0.43	20.36	30.00	PASS
n78(3700-3800)	30	50	651666	1@1	CP_QPSK	23.86	-0.43	23.43	30.00	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_BPSK	25.17	-0.43	24.74	30.00	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QPSK	24.56	-0.43	24.13	30.00	PASS
n78(3700-3800)	30	100	650000	135@67	DFT_QPSK	25.63	-0.43	25.20	30.00	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_QPSK	25.22	-0.43	24.79	30.00	PASS
n78(3700-3800)	30	100	650000	1@271	DFT_QPSK	25.64	-0.43	25.21	30.00	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_QAM16	24.18	-0.43	23.75	30.00	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_QAM64	22.69	-0.43	22.26	30.00	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_QAM256	20.82	-0.43	20.39	30.00	PASS
n78(3700-3800)	30	100	650000	1@1	CP_QPSK	23.87	-0.43	23.44	30.00	PASS

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n78(3700-3800)	30	10	647000	12@6	DFT_BPSK	-5.58	-0.00151	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_BPSK	-6.52	-0.00176	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@22	DFT_BPSK	-8.29	-0.00224	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	12@6	DFT_QPSK	-6.97	-0.00188	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_QPSK	-7.52	-0.00203	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@22	DFT_QPSK	-6.54	-0.00177	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	12@6	DFT_BPSK	-7.58	-0.00202	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_BPSK	-8.73	-0.00233	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@22	DFT_BPSK	-8.25	-0.00220	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	12@6	DFT_QPSK	-6.84	-0.00182	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_QPSK	-6.94	-0.00185	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@22	DFT_QPSK	-8.04	-0.00214	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	12@6	DFT_BPSK	-6.57	-0.00173	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_BPSK	-7.91	-0.00208	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@22	DFT_BPSK	-8.18	-0.00216	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	12@6	DFT_QPSK	-9.02	-0.00238	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_QPSK	-10.19	-0.00269	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@22	DFT_QPSK	-10.46	-0.00276	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	64@32	DFT_BPSK	-9.02	-0.00242	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_BPSK	-6.60	-0.00177	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@131	DFT_BPSK	-8.83	-0.00237	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	64@32	DFT_QPSK	-6.96	-0.00187	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_QPSK	-7.48	-0.00201	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@131	DFT_QPSK	-8.96	-0.00241	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	64@32	DFT_BPSK	-8.69	-0.00232	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_BPSK	-8.22	-0.00219	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@131	DFT_BPSK	-9.29	-0.00248	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	64@32	DFT_QPSK	-8.75	-0.00233	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_QPSK	-8.23	-0.00219	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@131	DFT_QPSK	-8.34	-0.00222	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	64@32	DFT_BPSK	-8.49	-0.00225	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_BPSK	-8.37	-0.00222	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@131	DFT_BPSK	-9.05	-0.00240	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	64@32	DFT_QPSK	-8.84	-0.00234	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_QPSK	-9.81	-0.00260	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@131	DFT_QPSK	-7.37	-0.00195	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	135@67	DFT_BPSK	-7.54	-0.00201	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_BPSK	-7.69	-0.00205	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@271	DFT_BPSK	-8.74	-0.00233	-2.5	2.5	PASS

n78(3700-3800)	30	100	650000	135@67	DFT_QPSK	-6.43	-0.00171	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_QPSK	-9.64	-0.00257	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@271	DFT_QPSK	-10.19	-0.00272	-2.5	2.5	PASS

Note: (Voltage: 3.92V, Temperature: 25°C) only reflect the worst mode.

3 Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n78(3700-3800)	30	10	647000	24@0	DFT_BPSK	4.38	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QPSK	6.08	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QAM16	6.56	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QAM64	6.78	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QAM256	6.79	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_BPSK	4.88	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QPSK	5.96	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QAM16	7.04	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QAM64	7.20	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QAM256	6.90	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_BPSK	4.97	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QPSK	6.16	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QAM16	7.03	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QAM64	7.30	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QAM256	6.99	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_BPSK	4.48	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QPSK	5.98	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QAM16	6.86	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QAM64	6.86	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QAM256	6.80	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_BPSK	4.75	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QPSK	6.05	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QAM16	6.94	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QAM64	6.96	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QAM256	6.82	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_BPSK	5.09	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QPSK	6.13	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QAM16	6.90	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QAM64	7.24	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QAM256	7.08	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_BPSK	4.44	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QPSK	5.83	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QAM16	6.96	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QAM64	6.85	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QAM256	6.57	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_BPSK	4.98	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_QPSK	5.99	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_QAM16	7.00	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_QAM64	6.96	13	PASS

n78(3700-3800)	30	20	650000	50@0	DFT_QAM256	7.04	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_BPSK	4.85	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QPSK	6.25	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QAM16	6.88	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QAM64	6.95	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QAM256	6.94	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_BPSK	4.59	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QPSK	6.01	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QAM16	6.98	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QAM64	7.02	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QAM256	6.85	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_BPSK	4.77	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QPSK	6.16	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QAM16	6.60	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QAM64	7.16	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QAM256	6.97	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_BPSK	4.78	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QPSK	6.33	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QAM16	6.93	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QAM64	7.20	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QAM256	6.93	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_BPSK	5.17	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QPSK	6.03	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QAM16	6.64	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QAM64	6.96	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QAM256	6.55	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_BPSK	4.82	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QPSK	6.11	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QAM16	6.66	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QAM64	6.96	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QAM256	6.90	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_BPSK	4.90	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QPSK	6.19	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QAM16	6.74	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QAM64	7.11	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QAM256	6.78	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_BPSK	4.54	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QPSK	6.04	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QAM16	6.76	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QAM64	6.83	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QAM256	6.70	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_BPSK	4.61	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_QPSK	6.06	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_QAM16	6.61	13	PASS


n78(3700-3800)	30	50	650000	128@0	DFT_QAM64	7.12	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_QAM256	6.60	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_BPSK	4.74	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QPSK	6.01	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QAM16	6.75	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QAM64	6.95	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QAM256	7.01	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_BPSK	4.98	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QPSK	5.88	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QAM16	6.87	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QAM64	6.77	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QAM256	6.85	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_BPSK	4.77	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QPSK	6.08	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QAM16	6.69	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QAM64	7.01	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QAM256	6.87	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_BPSK	4.93	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QPSK	6.11	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QAM16	6.76	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QAM64	6.85	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QAM256	6.79	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_BPSK	5.02	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QPSK	6.02	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QAM16	6.51	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QAM64	6.94	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QAM256	6.81	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_BPSK	4.78	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QPSK	5.84	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QAM16	6.74	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QAM64	7.21	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QAM256	6.65	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_BPSK	5.38	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QPSK	5.96	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QAM16	6.69	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QAM64	6.78	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QAM256	6.78	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_BPSK	4.60	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QPSK	5.80	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QAM16	7.84	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QAM64	6.70	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QAM256	6.57	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_BPSK	4.85	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_QPSK	5.86	13	PASS

n78(3700-3800)	30	80	650000	216@0	DFT_QAM16	6.97	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_QAM64	6.86	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_QAM256	6.69	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_BPSK	4.73	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QPSK	5.86	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QAM16	7.04	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QAM64	7.14	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QAM256	7.04	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_BPSK	4.92	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QPSK	5.80	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QAM16	6.87	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QAM64	6.74	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QAM256	6.85	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_BPSK	4.63	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QPSK	6.30	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QAM16	6.68	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QAM64	6.98	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QAM256	6.63	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_BPSK	5.57	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QPSK	6.12	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QAM16	7.05	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QAM64	6.80	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QAM256	7.20	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_BPSK	5.07	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QPSK	5.94	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QAM16	6.86	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QAM64	6.66	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QAM256	7.07	13	PASS


n78(3700-3800) SCS=30kHz DFT_BPSK BW=100MHz Channel=650000 RB=270@0

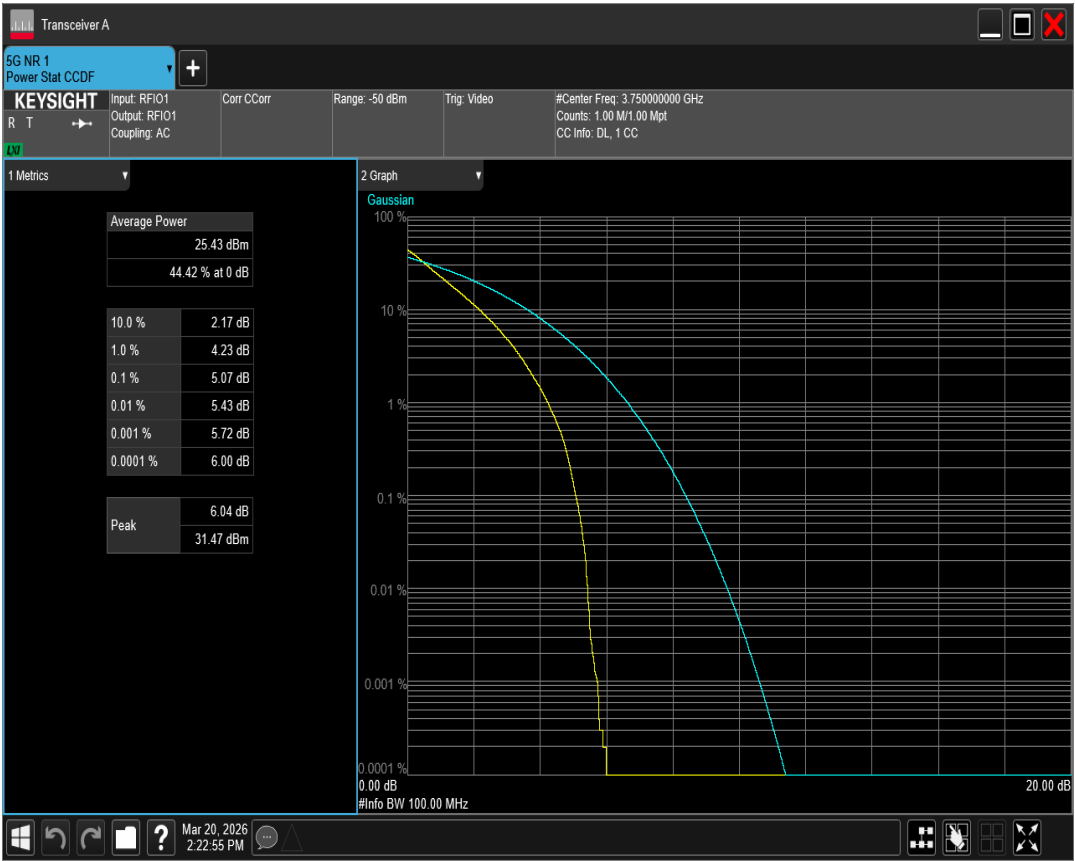


n78(3700-3800) SCS=30kHz DFT_BPSK BW=10MHz Channel=647000 RB=24@0

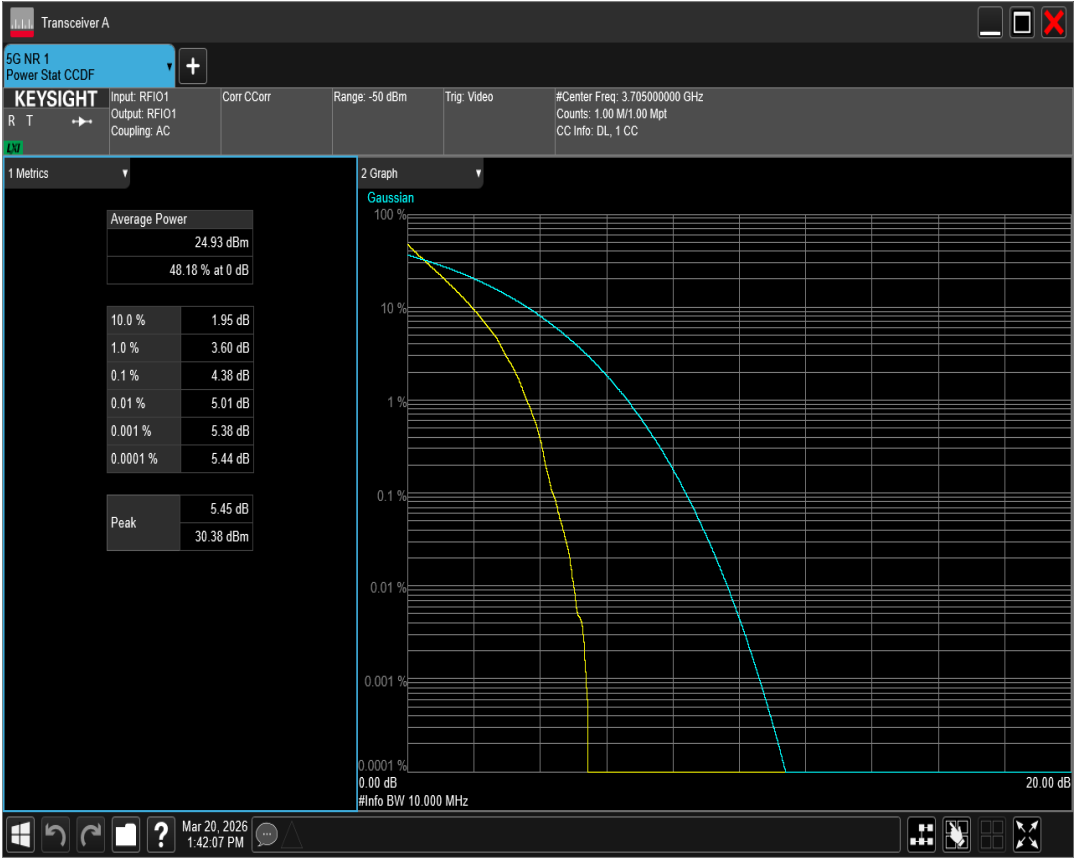


n78(3700-3800) SCS=30kHz DFT_BPSK BW=10MHz Channel=650000 RB=24@0

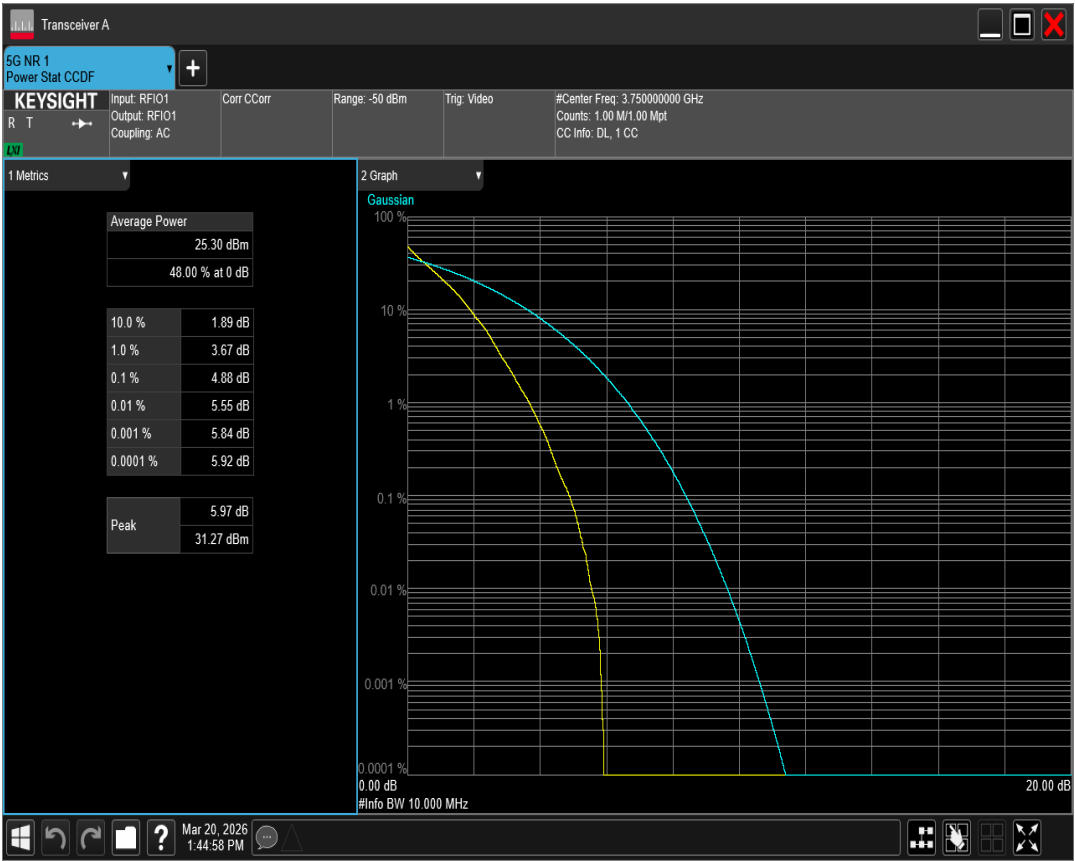


n78(3700-3800) SCS=30kHz DFT_BPSK BW=15MHz Channel=647168 RB=36@0

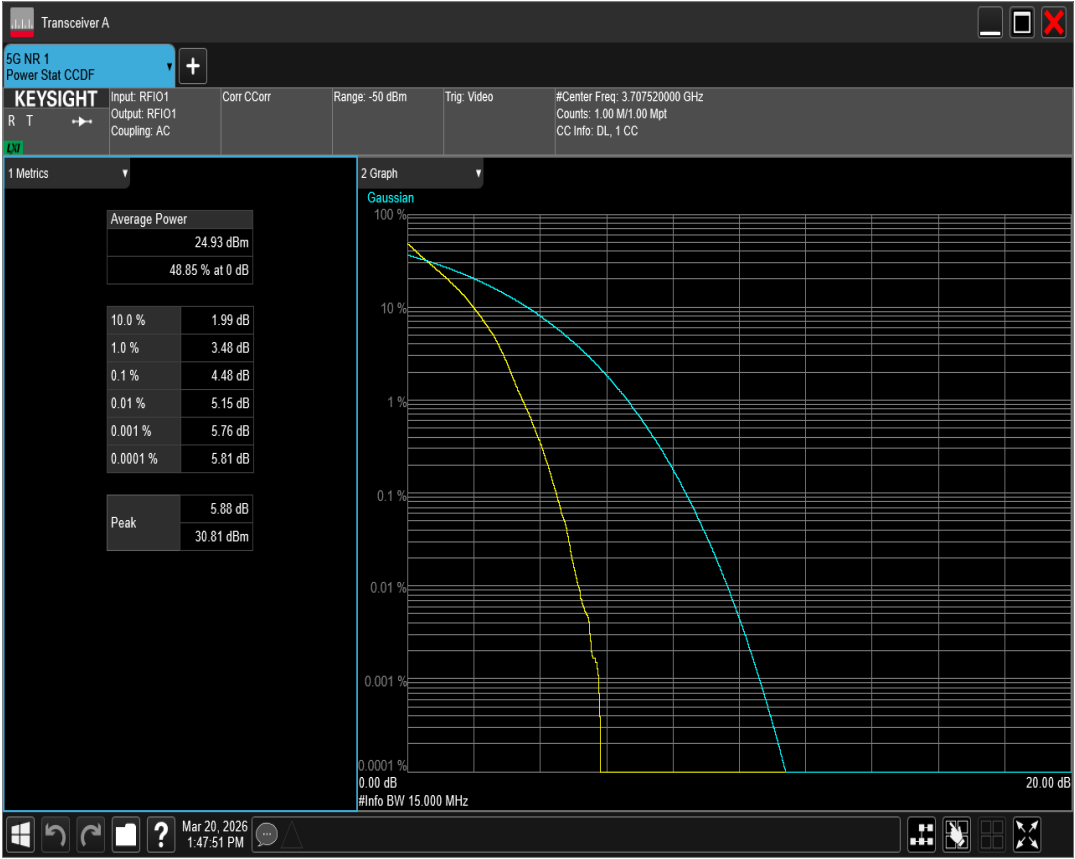


n78(3700-3800) SCS=30kHz DFT_BPSK BW=10MHz Channel=653000 RB=24@0

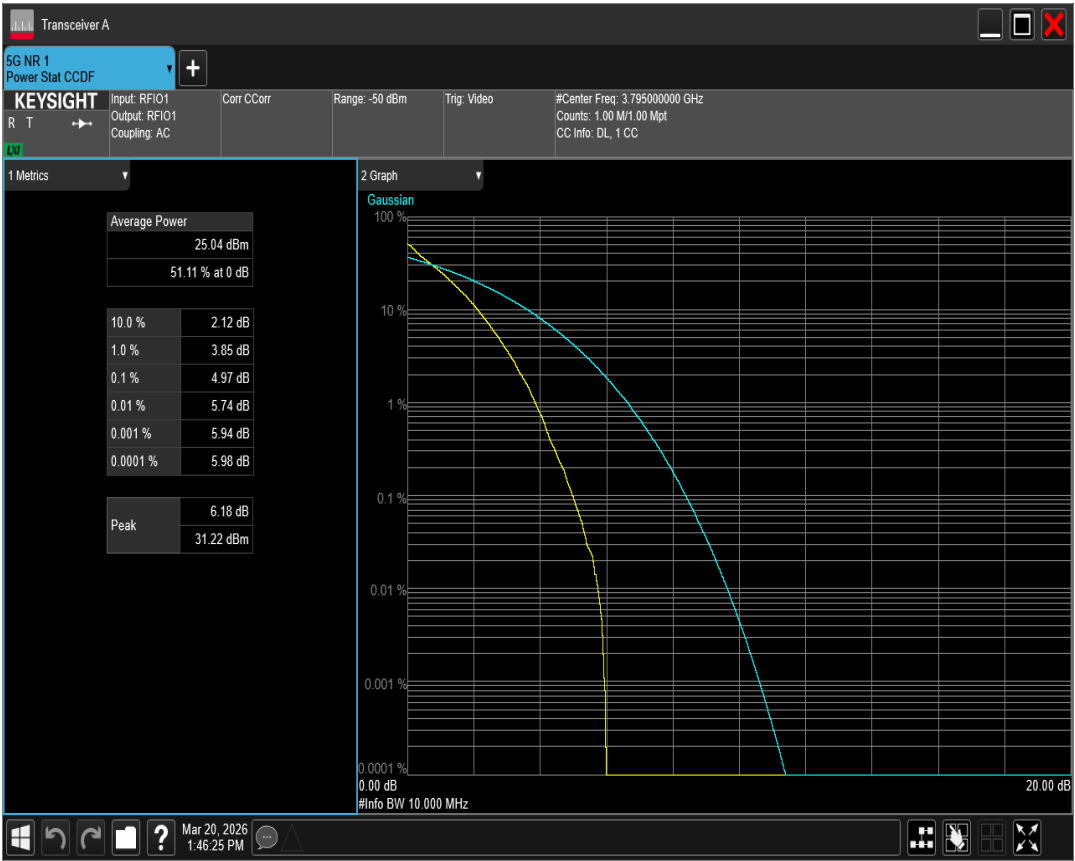


n78(3700-3800) SCS=30kHz DFT_BPSK BW=15MHz Channel=650000 RB=36@0

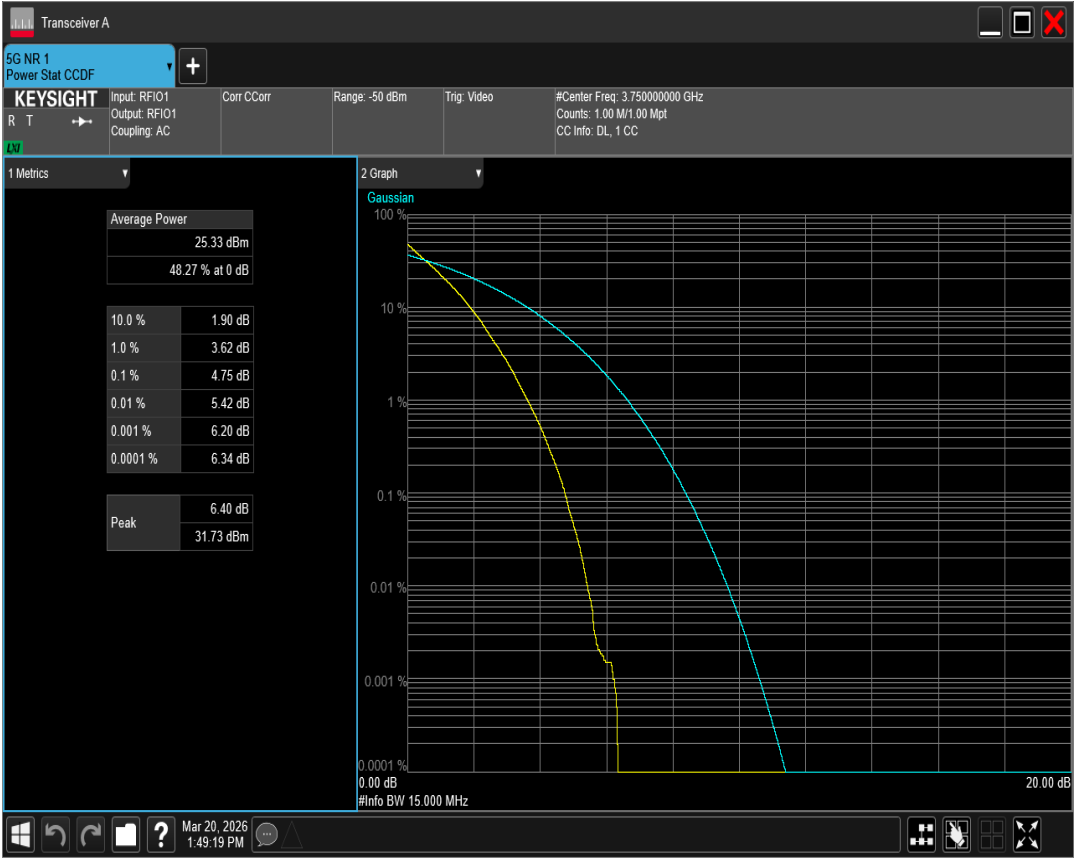


n78(3700-3800) SCS=30kHz DFT_BPSK BW=15MHz Channel=652832 RB=36@0

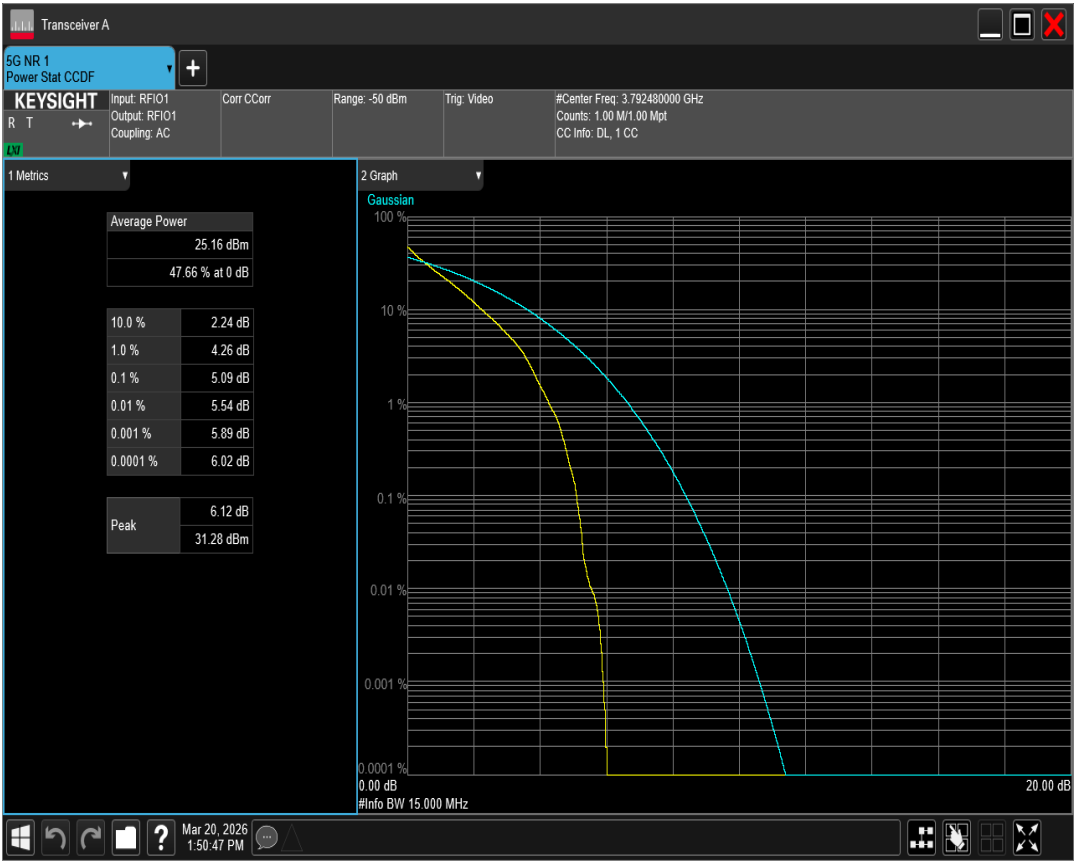


n78(3700-3800) SCS=30kHz DFT_BPSK BW=20MHz Channel=647334 RB=50@0

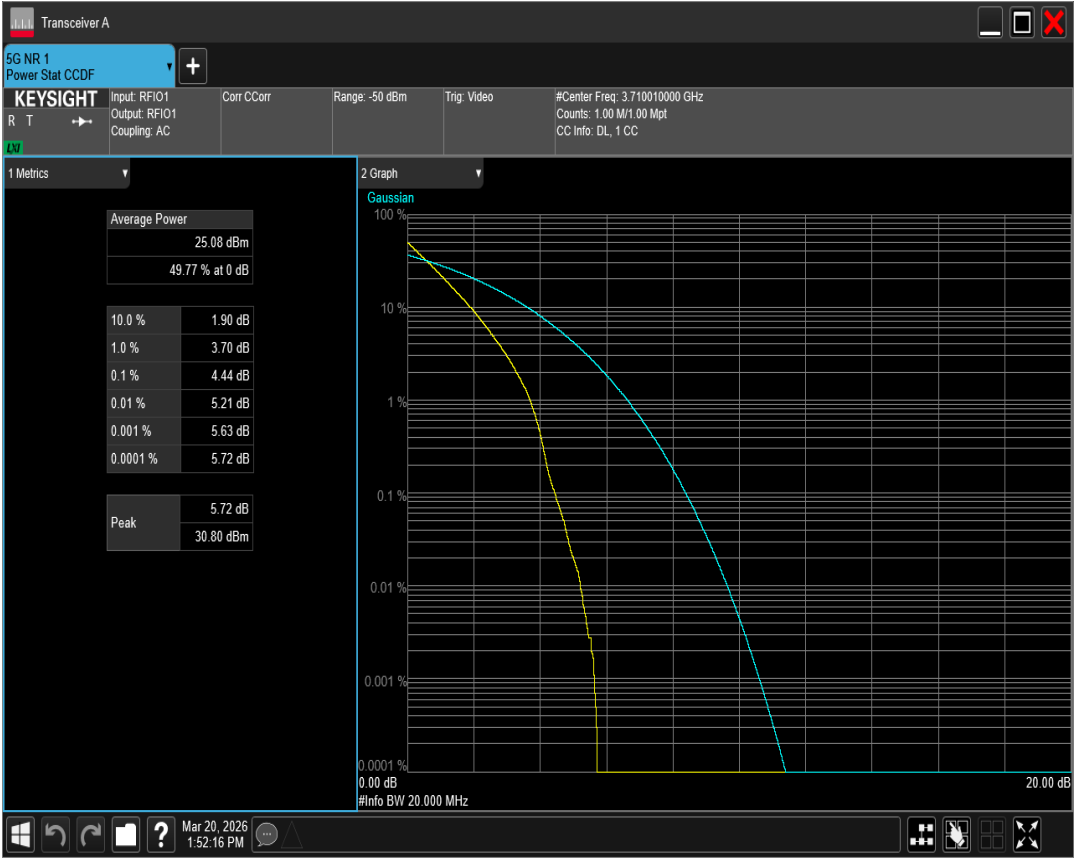


n78(3700-3800) SCS=30kHz DFT_BPSK BW=20MHz Channel=650000 RB=50@0

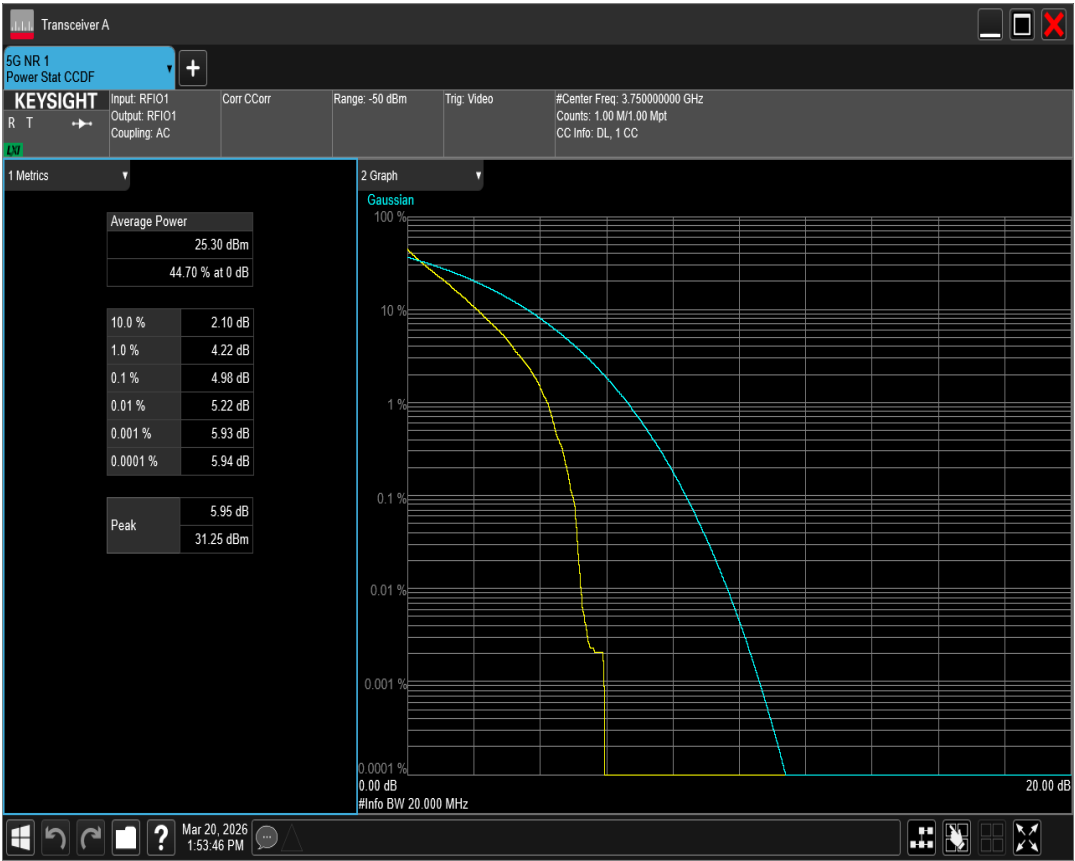


n78(3700-3800) SCS=30kHz DFT_BPSK BW=20MHz Channel=652666 RB=50@0

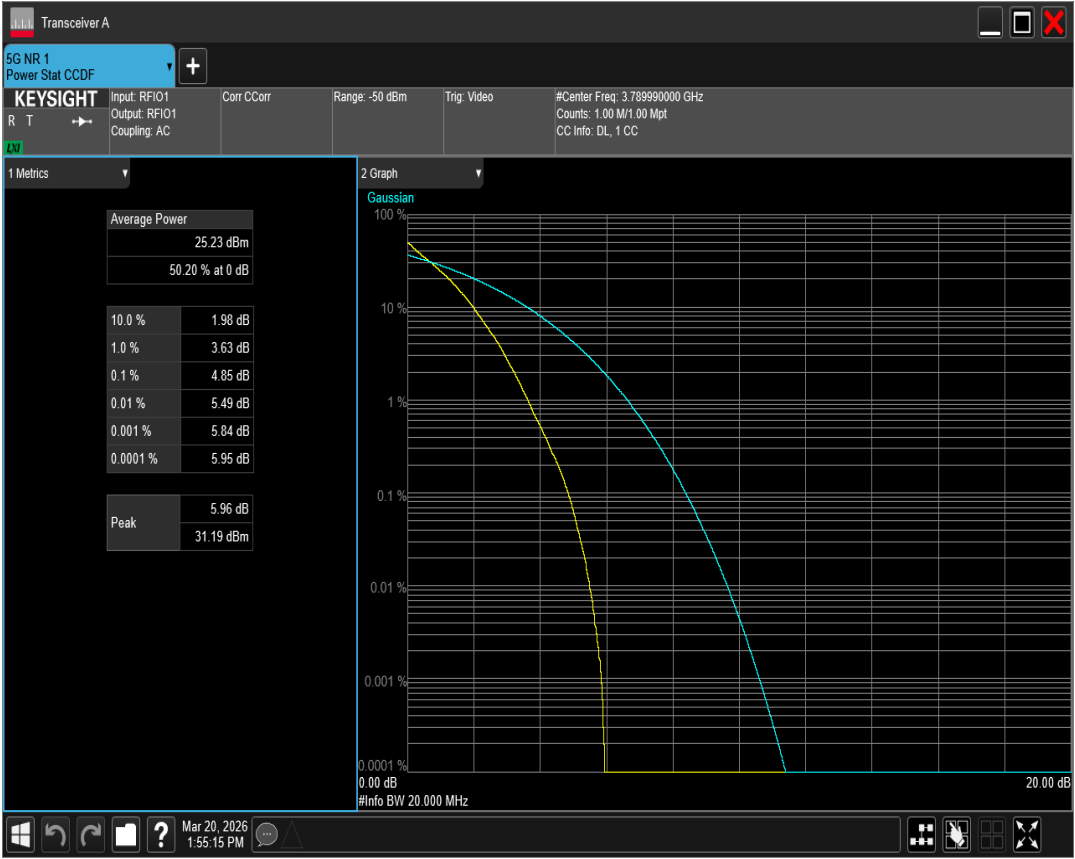


n78(3700-3800) SCS=30kHz DFT_BPSK BW=30MHz Channel=647668 RB=75@0

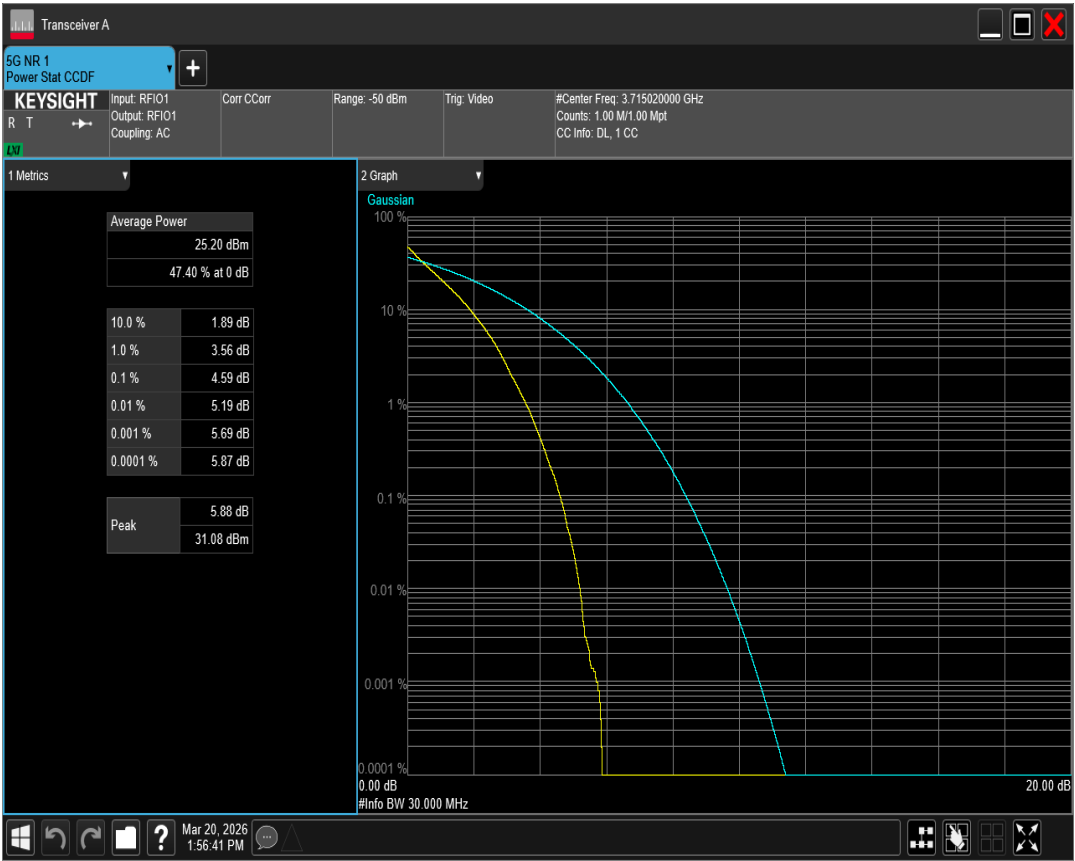


n78(3700-3800) SCS=30kHz DFT_BPSK BW=30MHz Channel=650000 RB=75@0

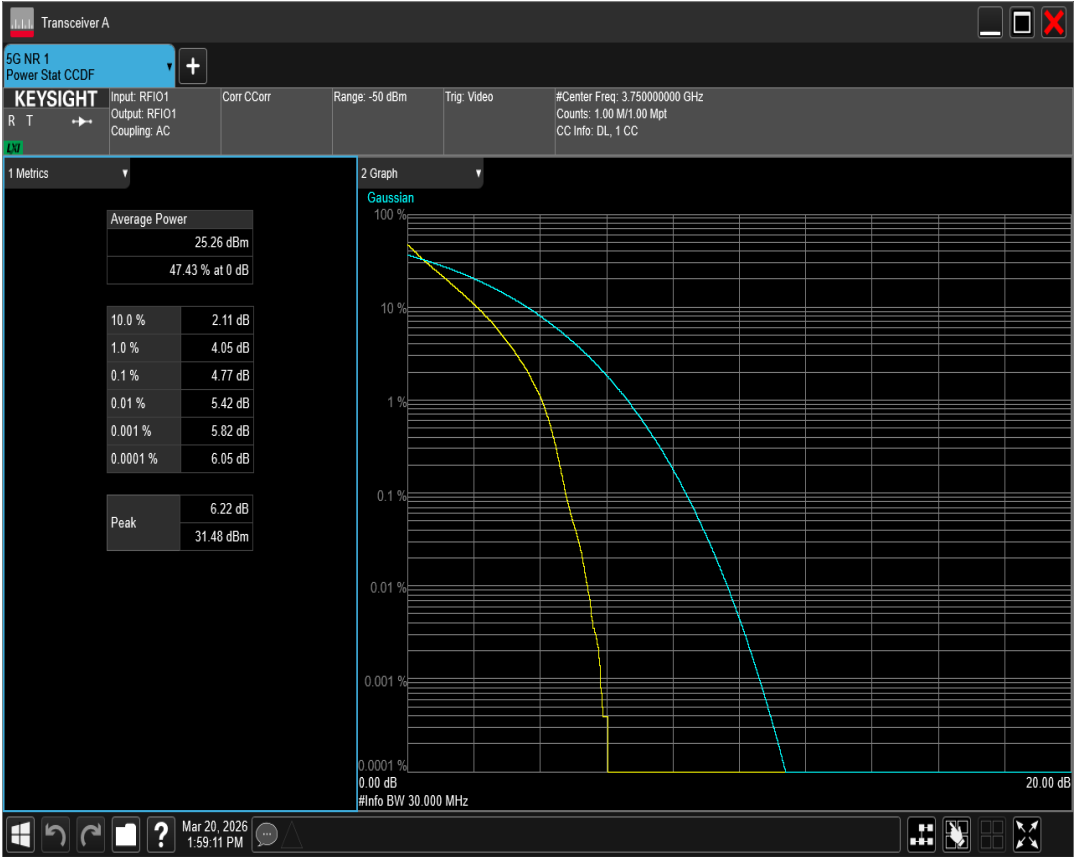


n78(3700-3800) SCS=30kHz DFT_BPSK BW=30MHz Channel=652332 RB=75@0

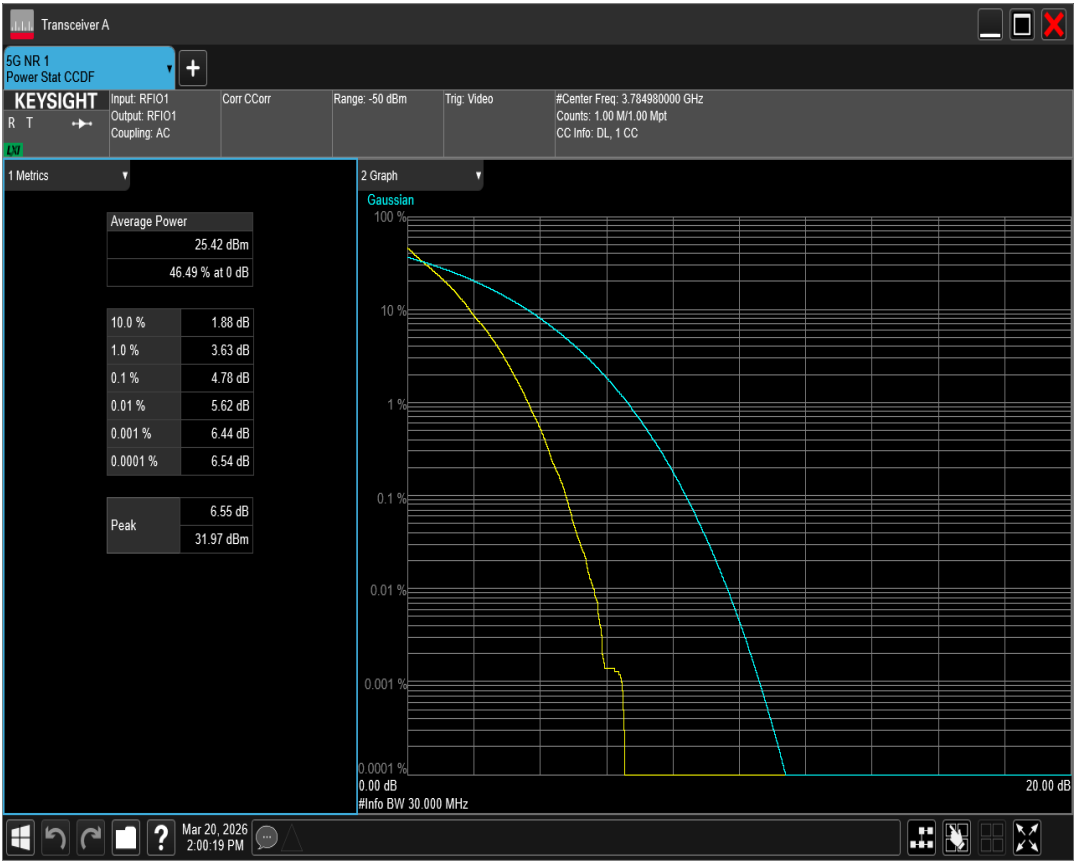


n78(3700-3800) SCS=30kHz DFT_BPSK BW=40MHz Channel=648000 RB=100@0

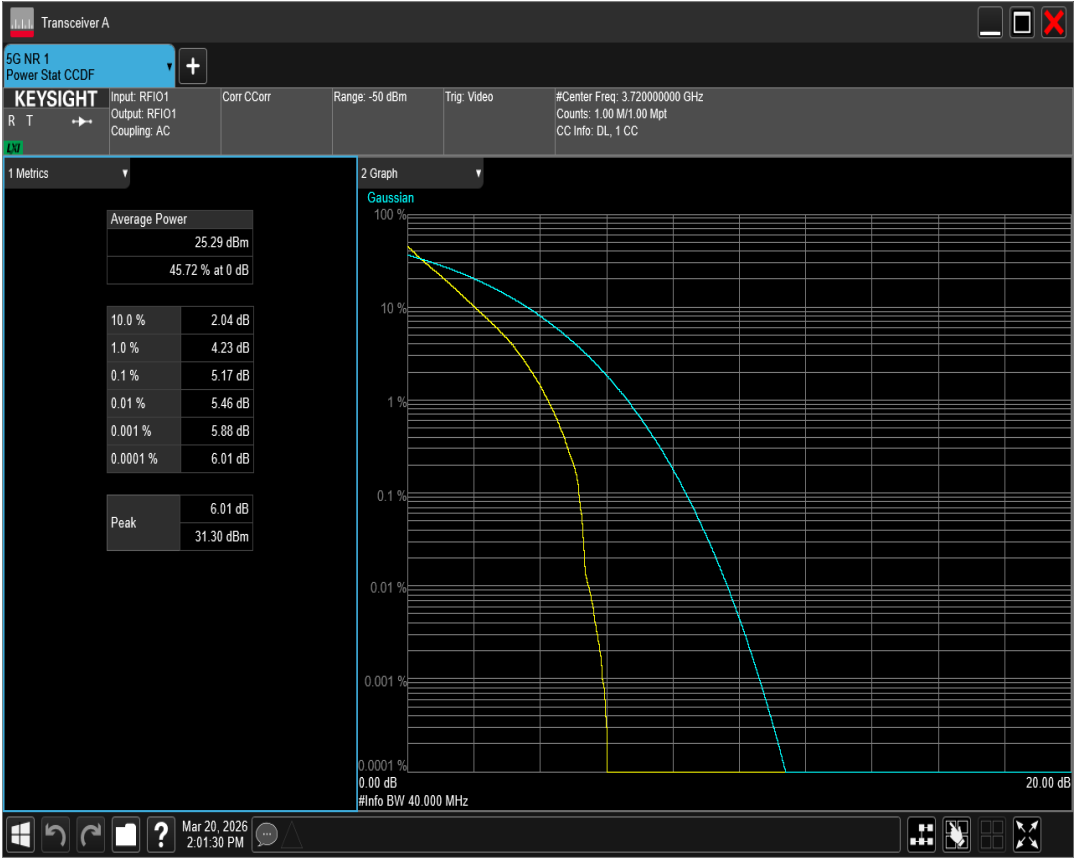


n78(3700-3800) SCS=30kHz DFT_BPSK BW=40MHz Channel=650000 RB=100@0

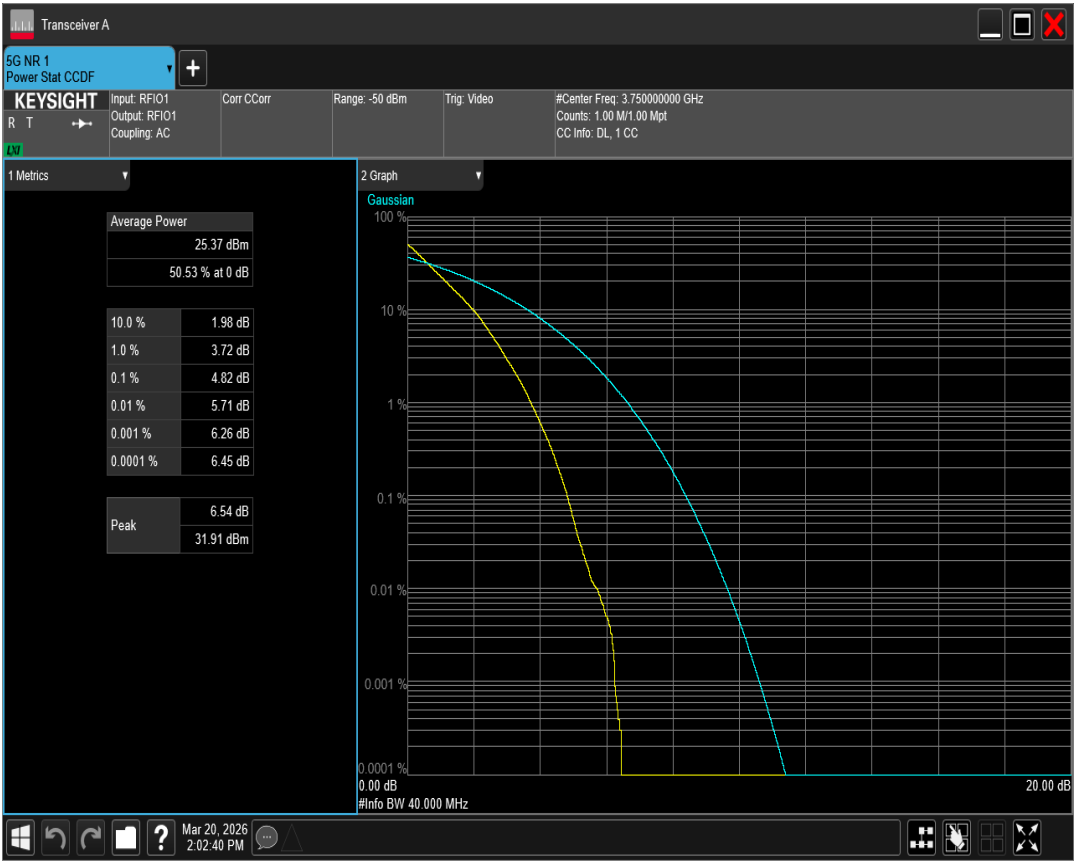


n78(3700-3800) SCS=30kHz DFT_BPSK BW=40MHz Channel=652000 RB=100@0

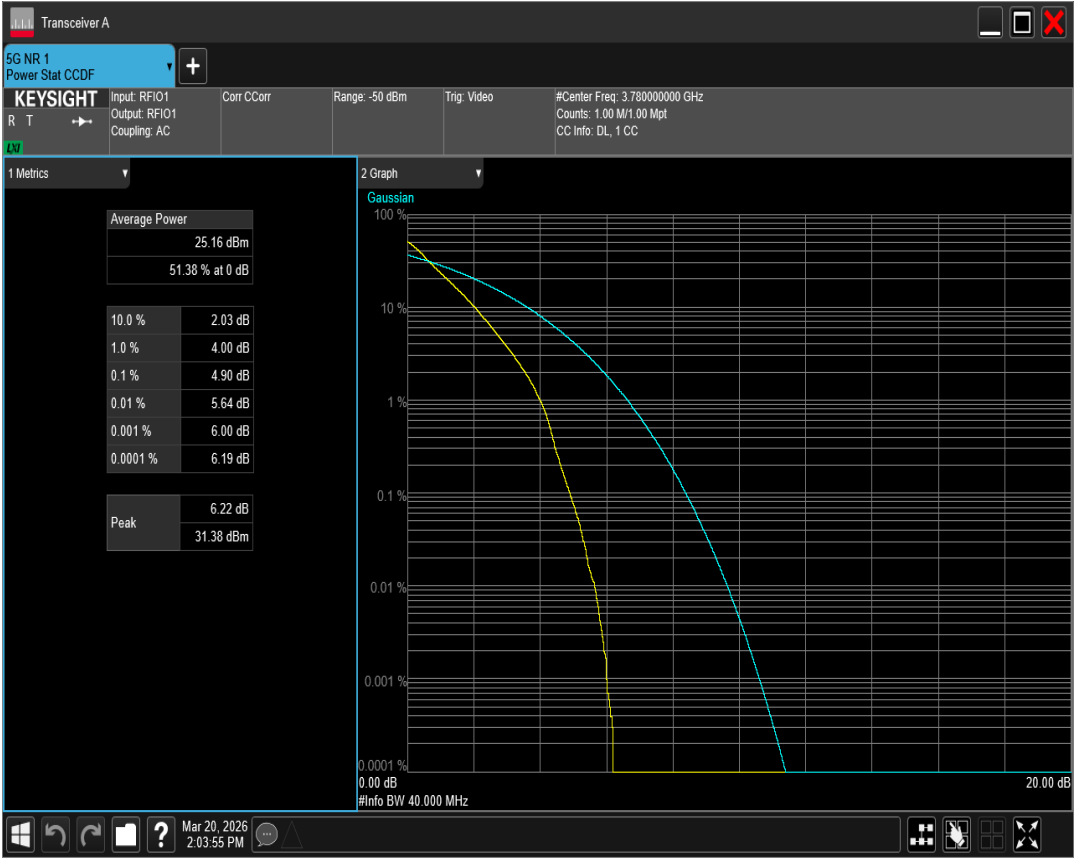


n78(3700-3800) SCS=30kHz DFT_BPSK BW=50MHz Channel=648334 RB=128@0

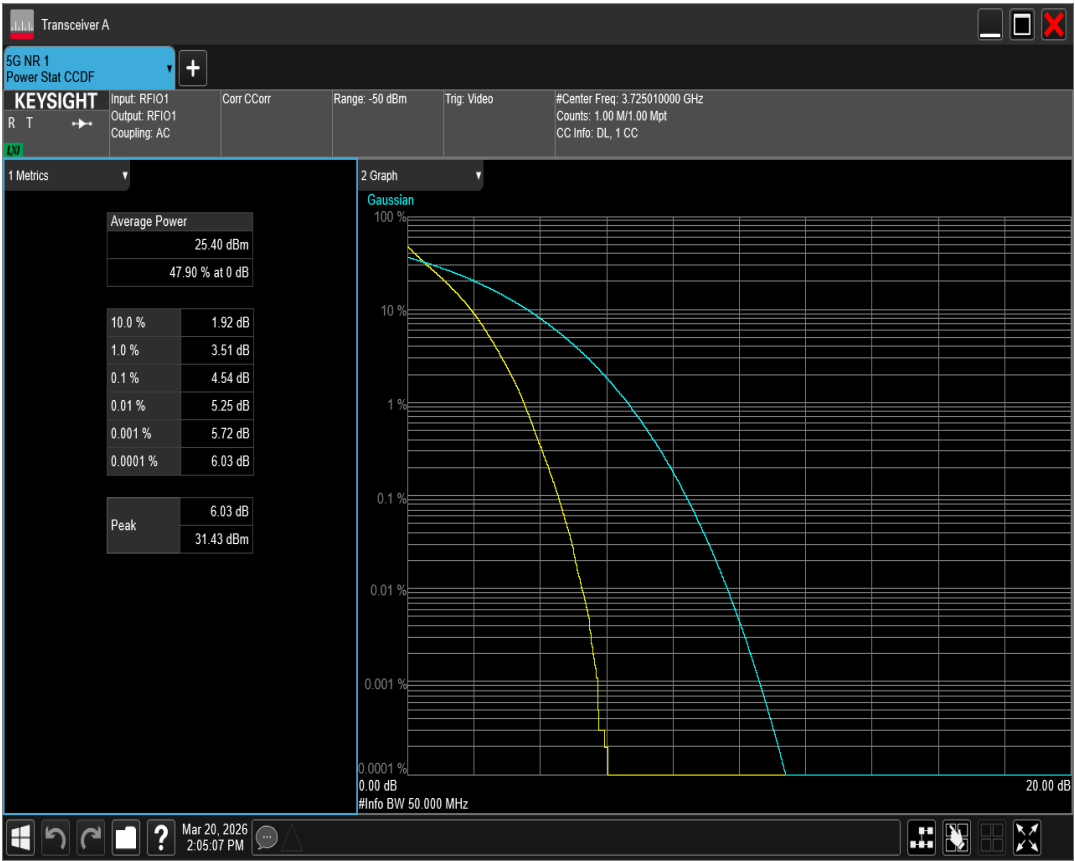


n78(3700-3800) SCS=30kHz DFT_BPSK BW=50MHz Channel=650000 RB=128@0

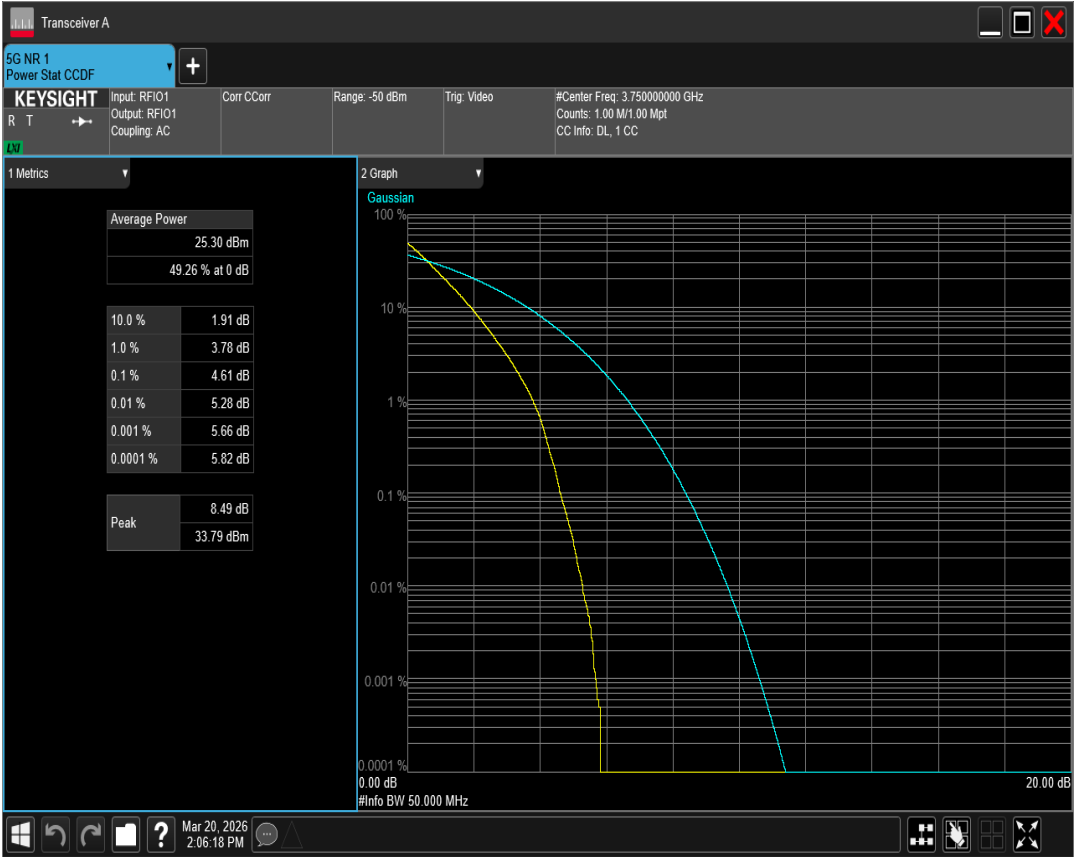


n78(3700-3800) SCS=30kHz DFT_BPSK BW=50MHz Channel=651666 RB=128@0

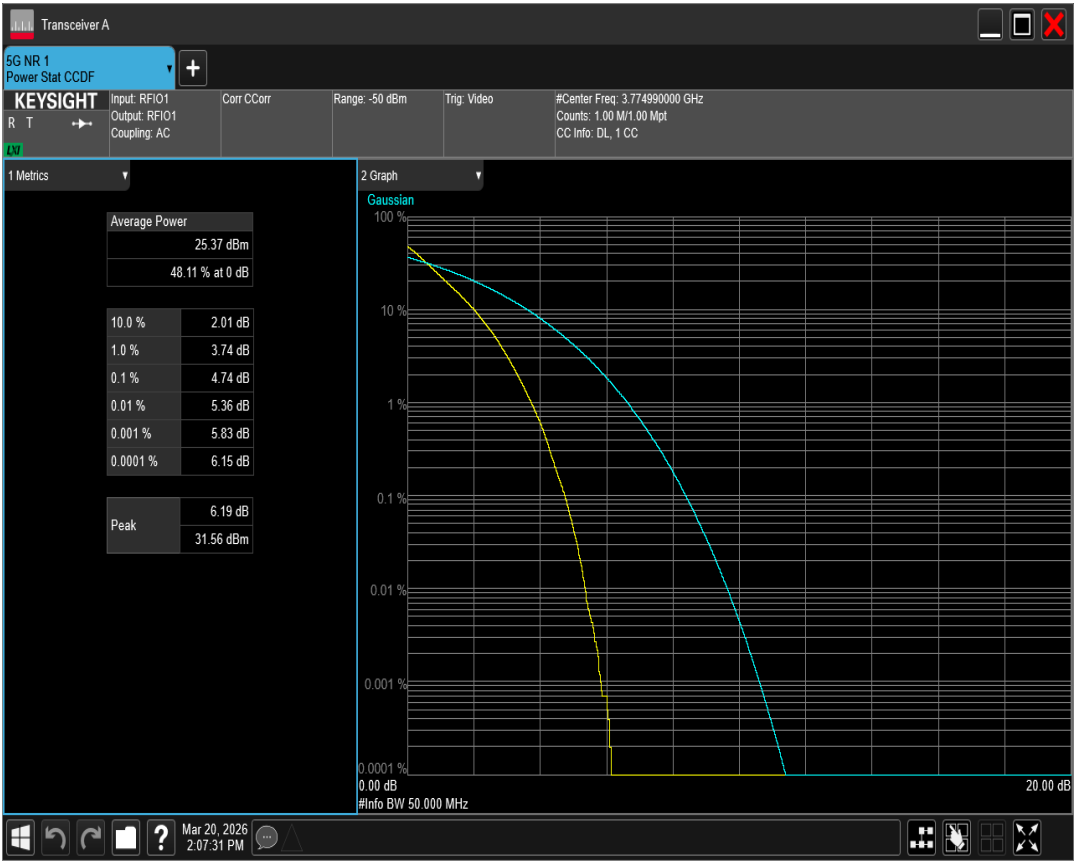


n78(3700-3800) SCS=30kHz DFT_BPSK BW=60MHz Channel=648668 RB=162@0

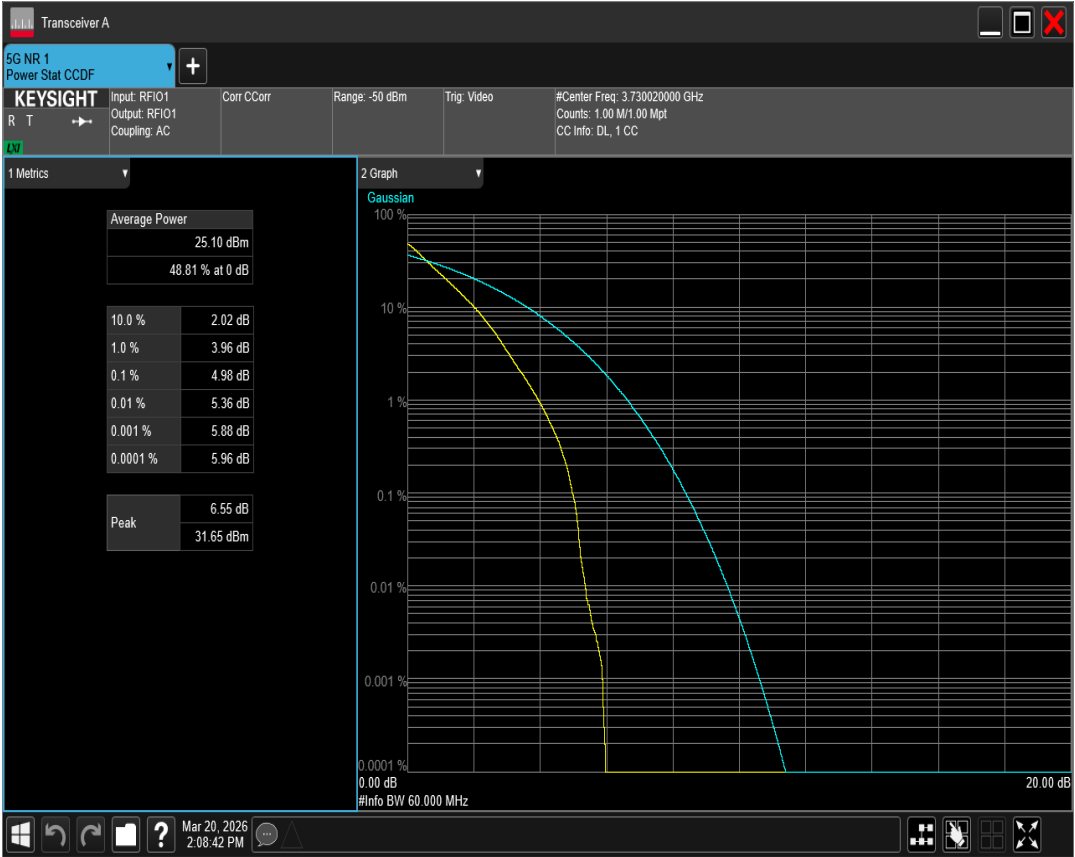


n78(3700-3800) SCS=30kHz DFT_BPSK BW=60MHz Channel=650000 RB=162@0

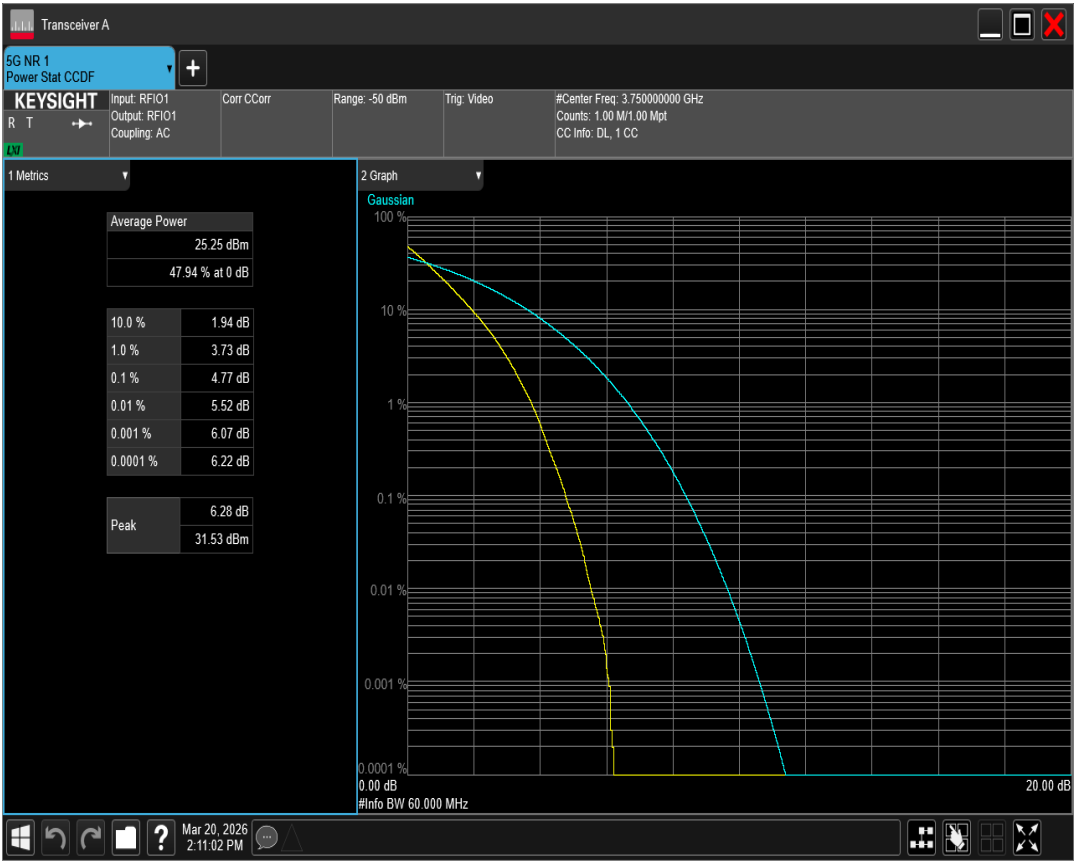


n78(3700-3800) SCS=30kHz DFT_BPSK BW=70MHz Channel=649000 RB=180@0

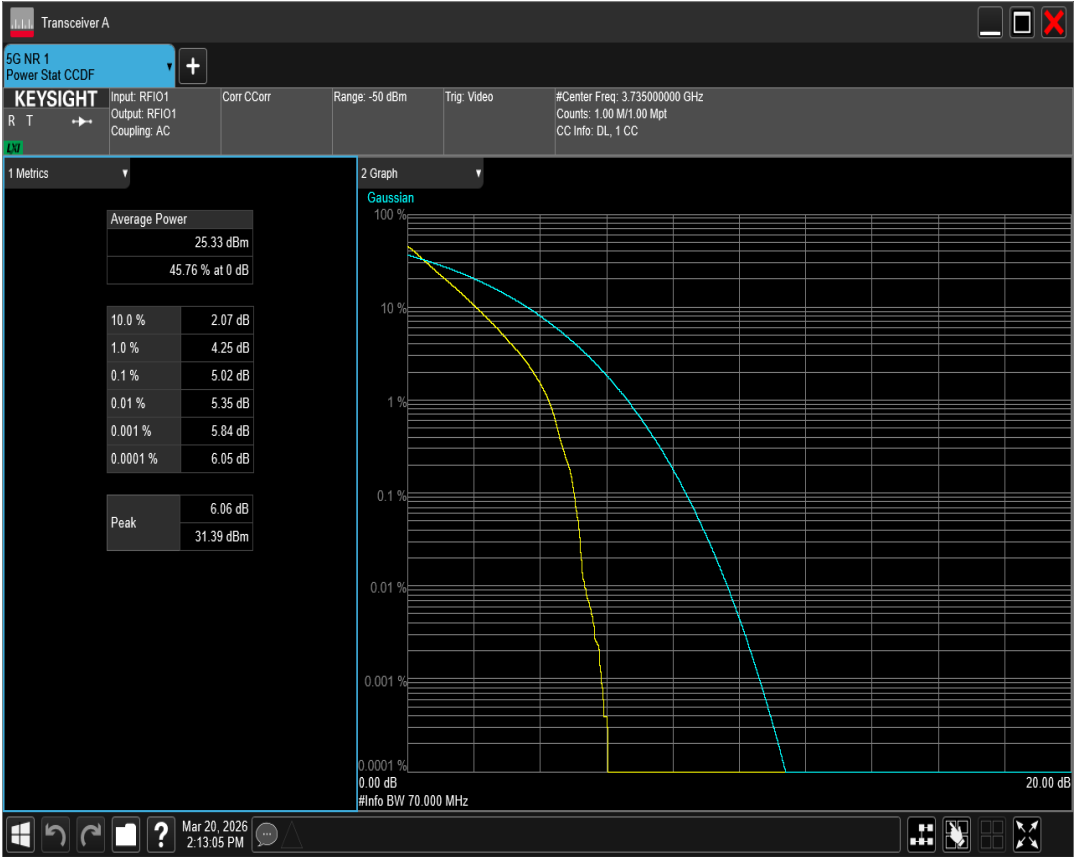


n78(3700-3800) SCS=30kHz DFT_BPSK BW=60MHz Channel=651332 RB=162@0

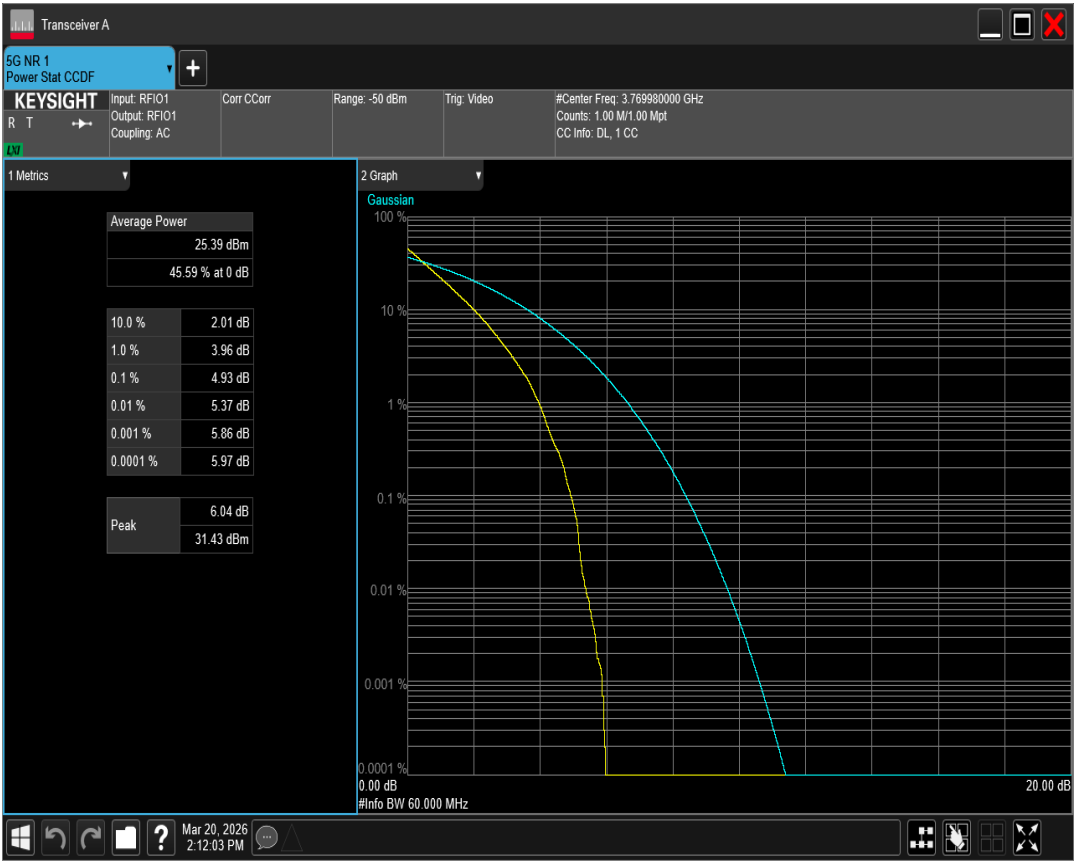


n78(3700-3800) SCS=30kHz DFT_BPSK BW=70MHz Channel=650000 RB=180@0

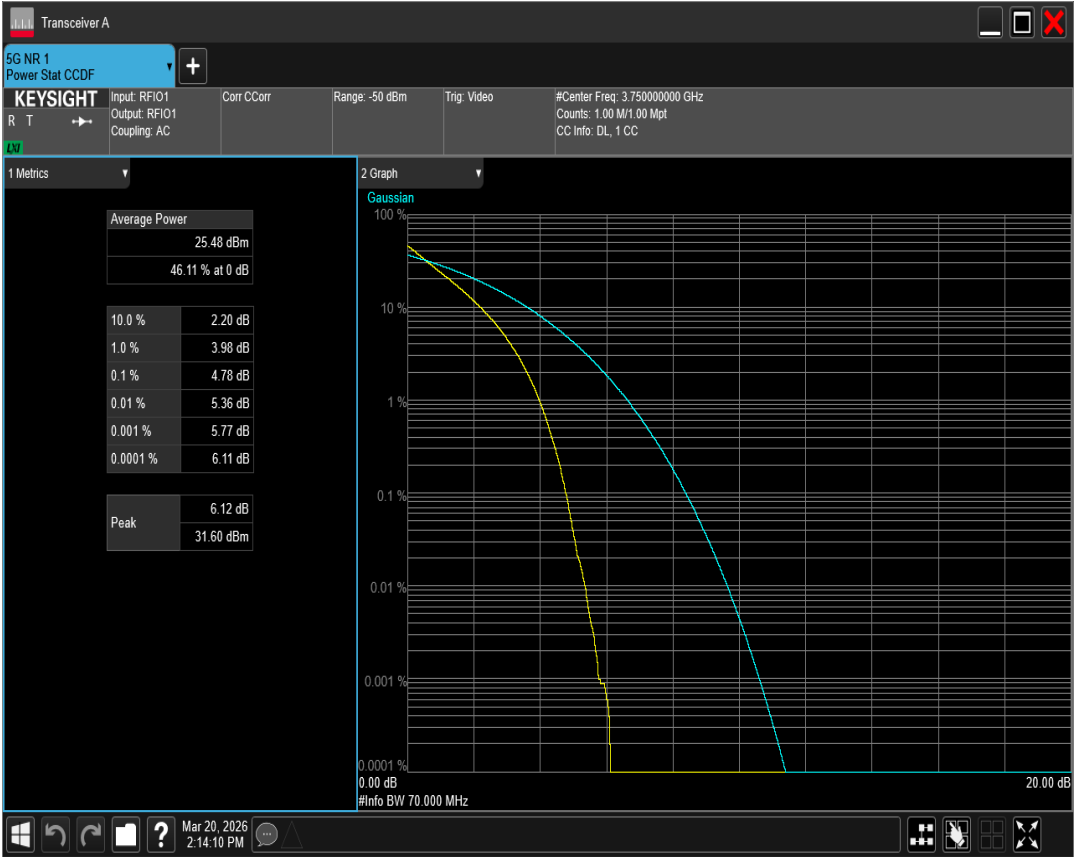


n78(3700-3800) SCS=30kHz DFT_BPSK BW=70MHz Channel=651000 RB=180@0

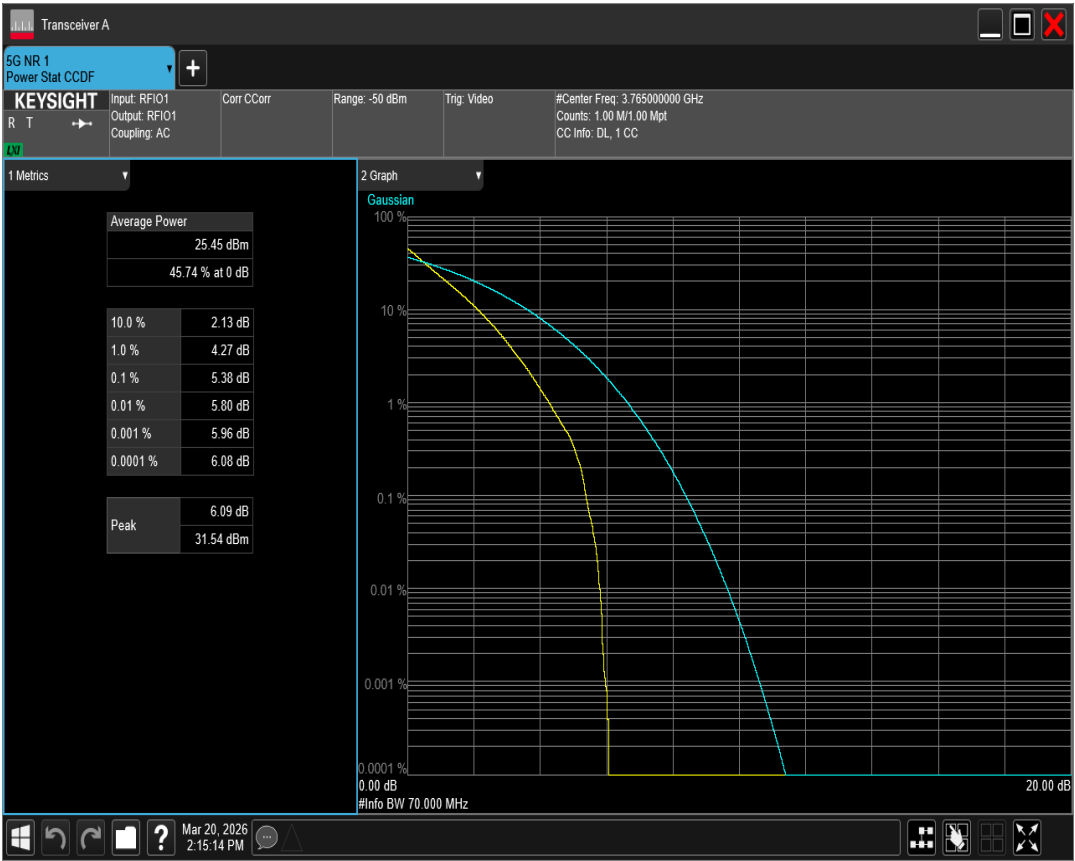


n78(3700-3800) SCS=30kHz DFT_BPSK BW=80MHz Channel=649334 RB=216@0

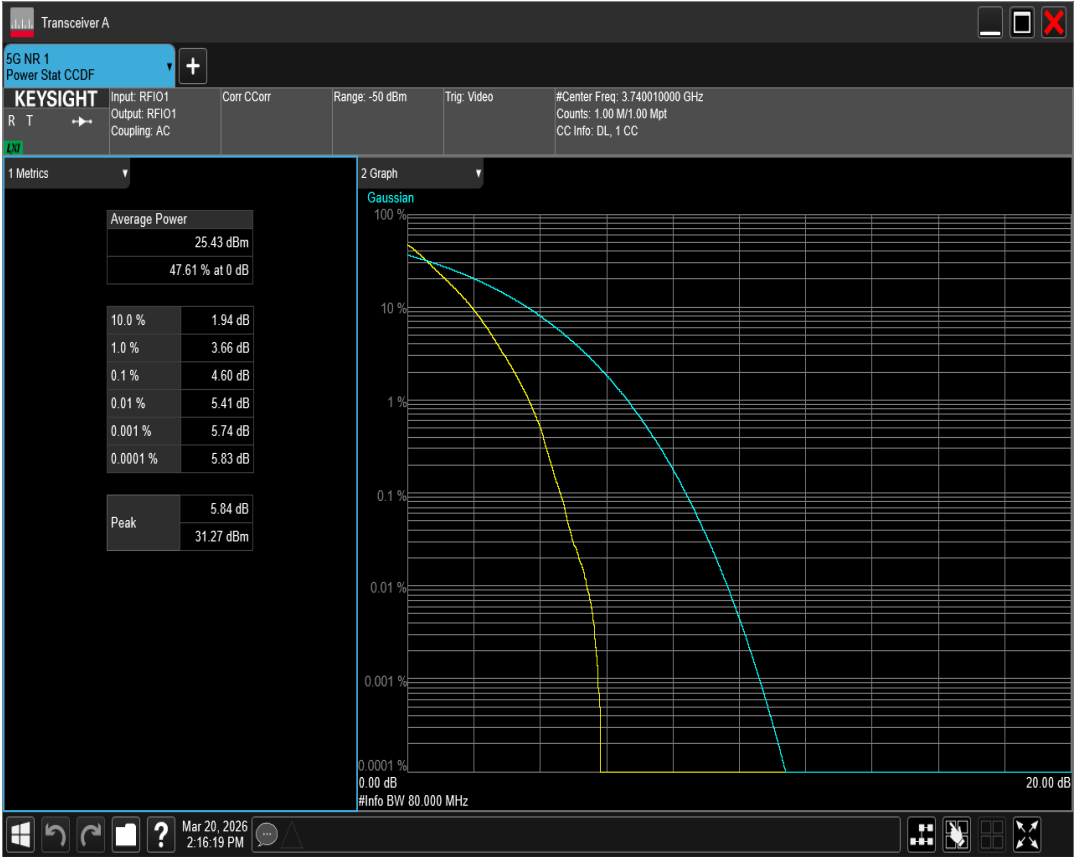


n78(3700-3800) SCS=30kHz DFT_BPSK BW=80MHz Channel=650000 RB=216@0

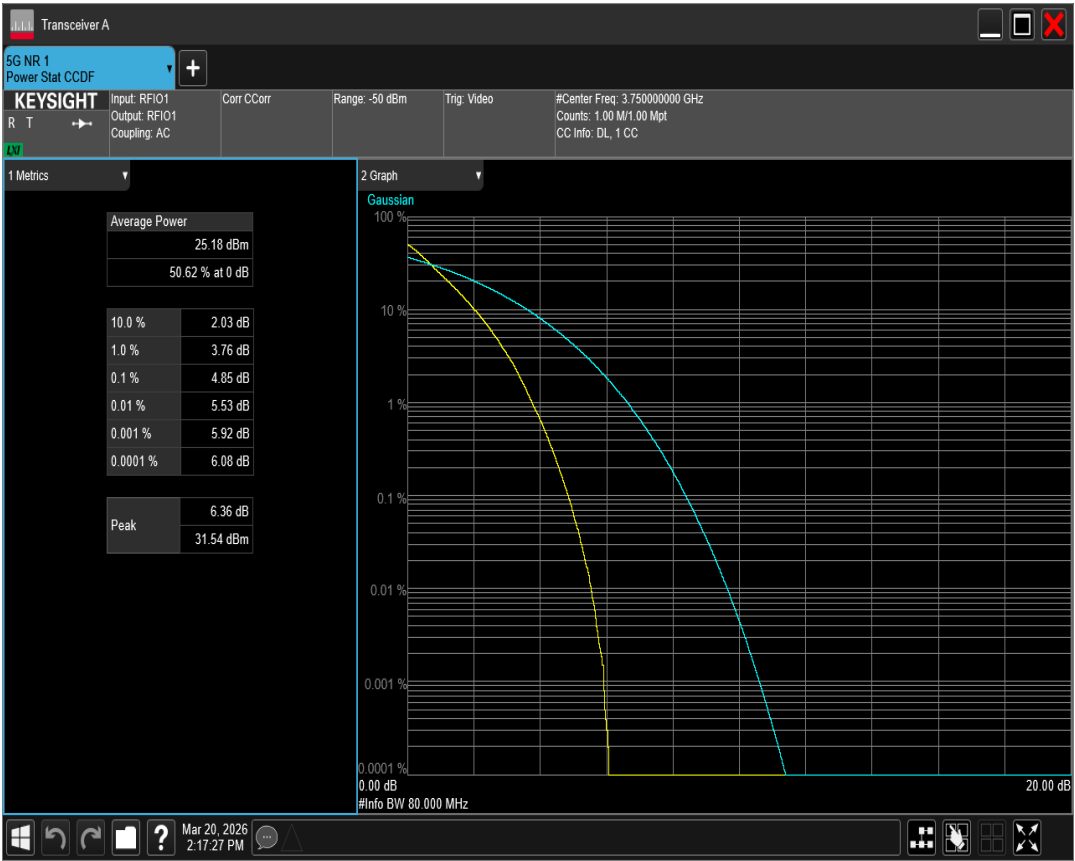


n78(3700-3800) SCS=30kHz DFT_BPSK BW=80MHz Channel=650666 RB=216@0

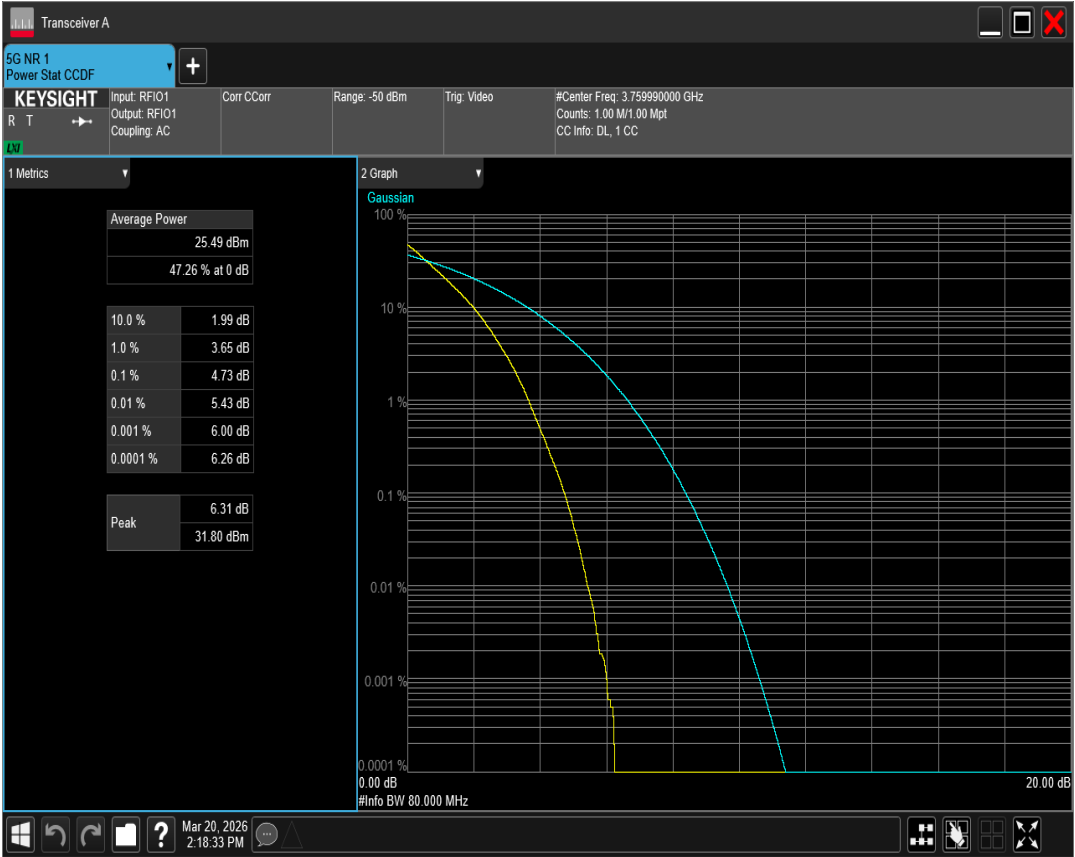


n78(3700-3800) SCS=30kHz DFT_BPSK BW=90MHz Channel=649668 RB=240@0

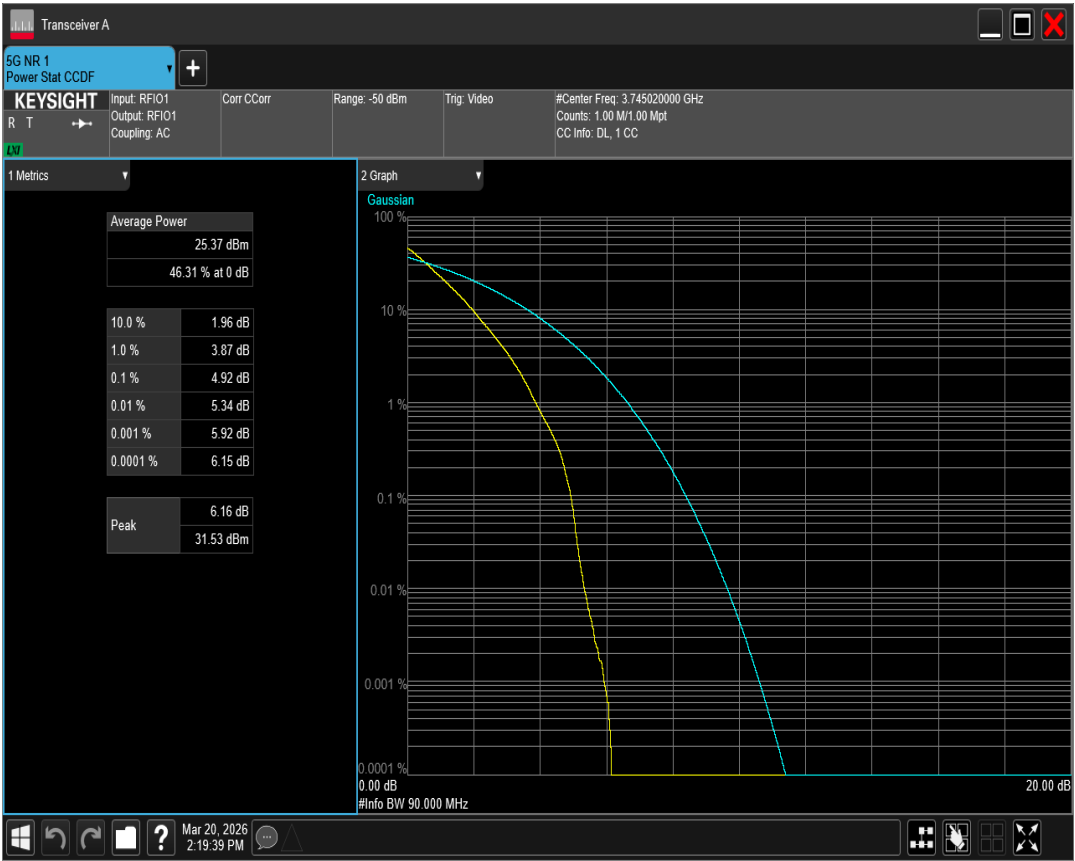


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=100MHz Channel=650000 RB=270@0

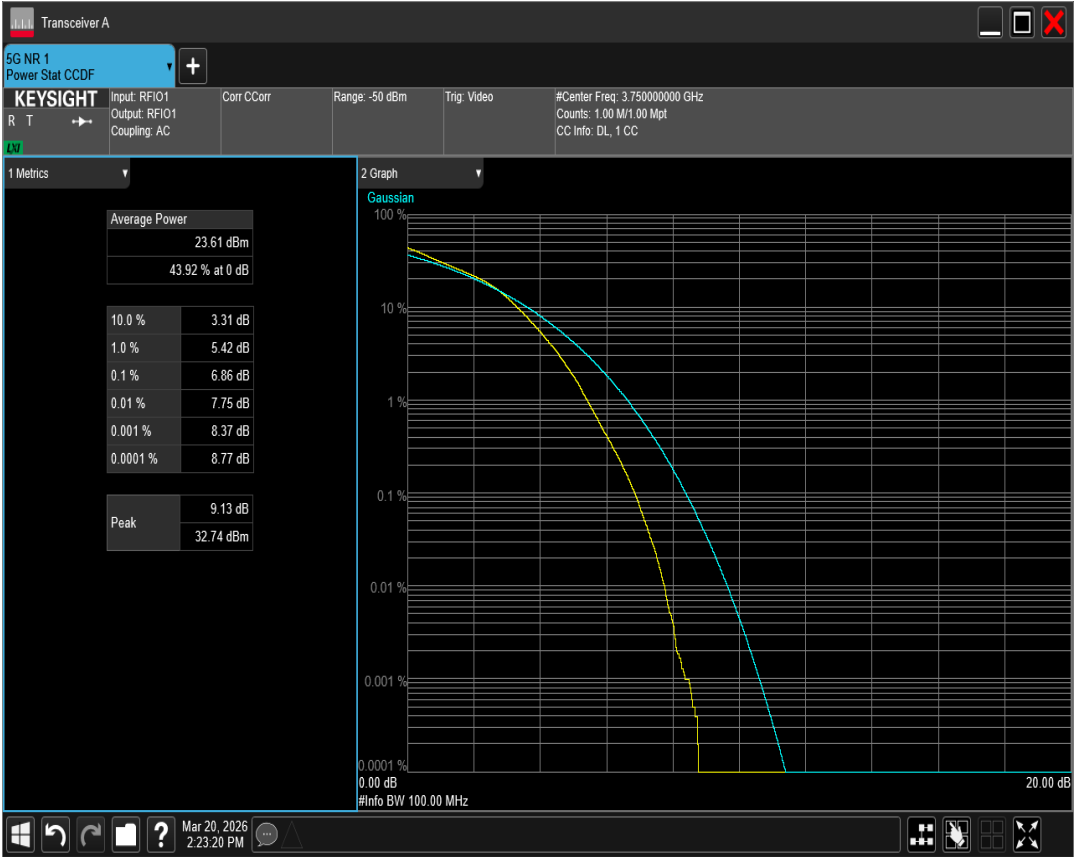


n78(3700-3800) SCS=30kHz DFT_BPSK BW=90MHz Channel=650332 RB=240@0

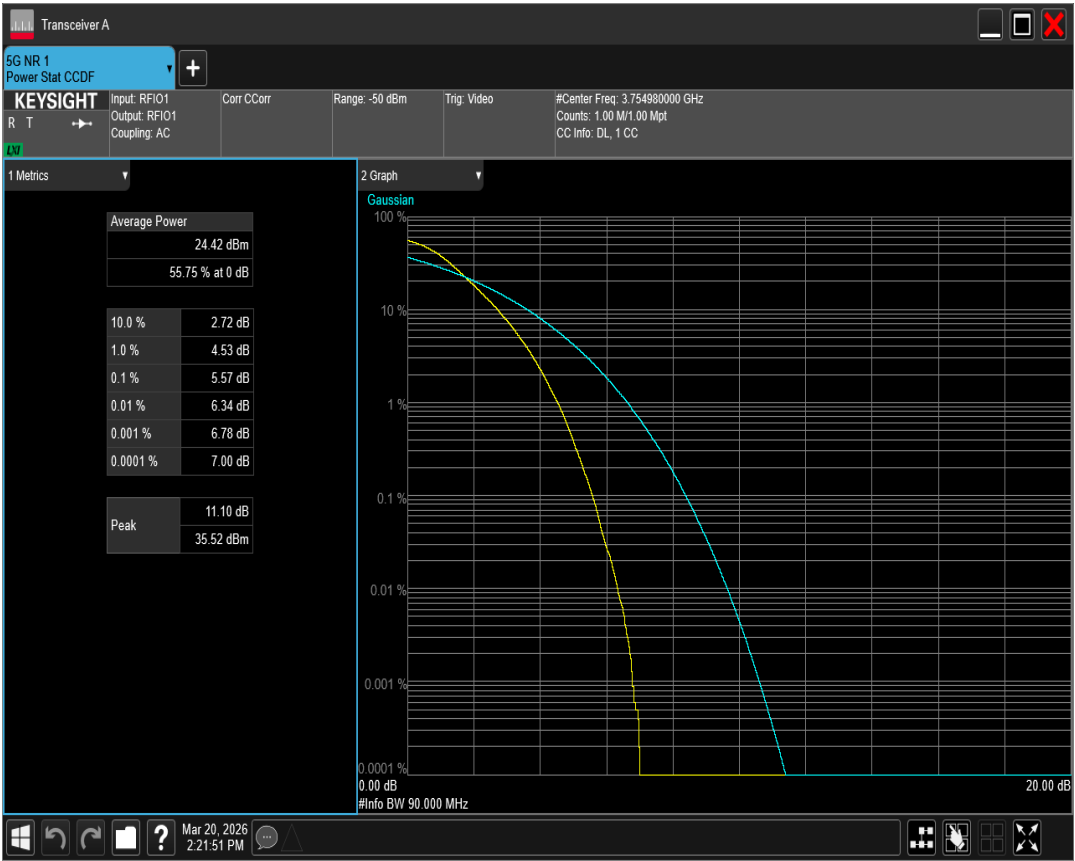


n78(3700-3800) SCS=30kHz DFT_BPSK BW=90MHz Channel=650000 RB=240@0

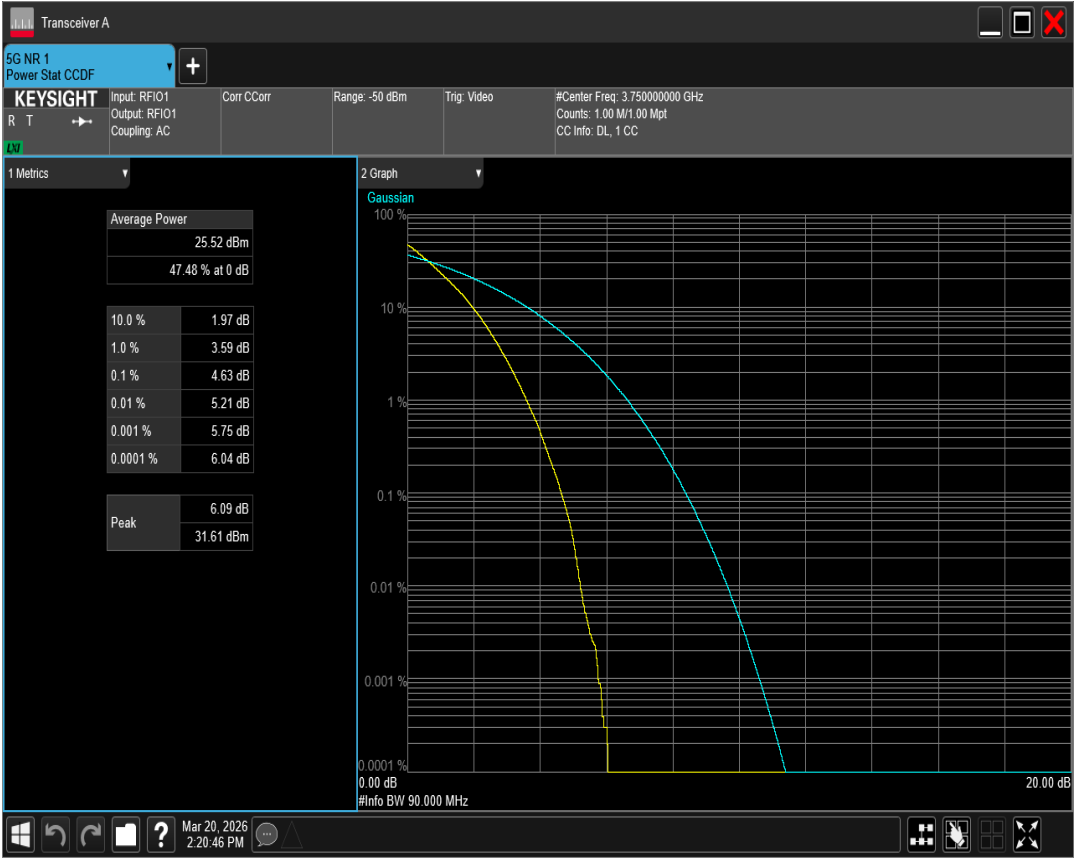


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=10MHz Channel=647000 RB=24@0

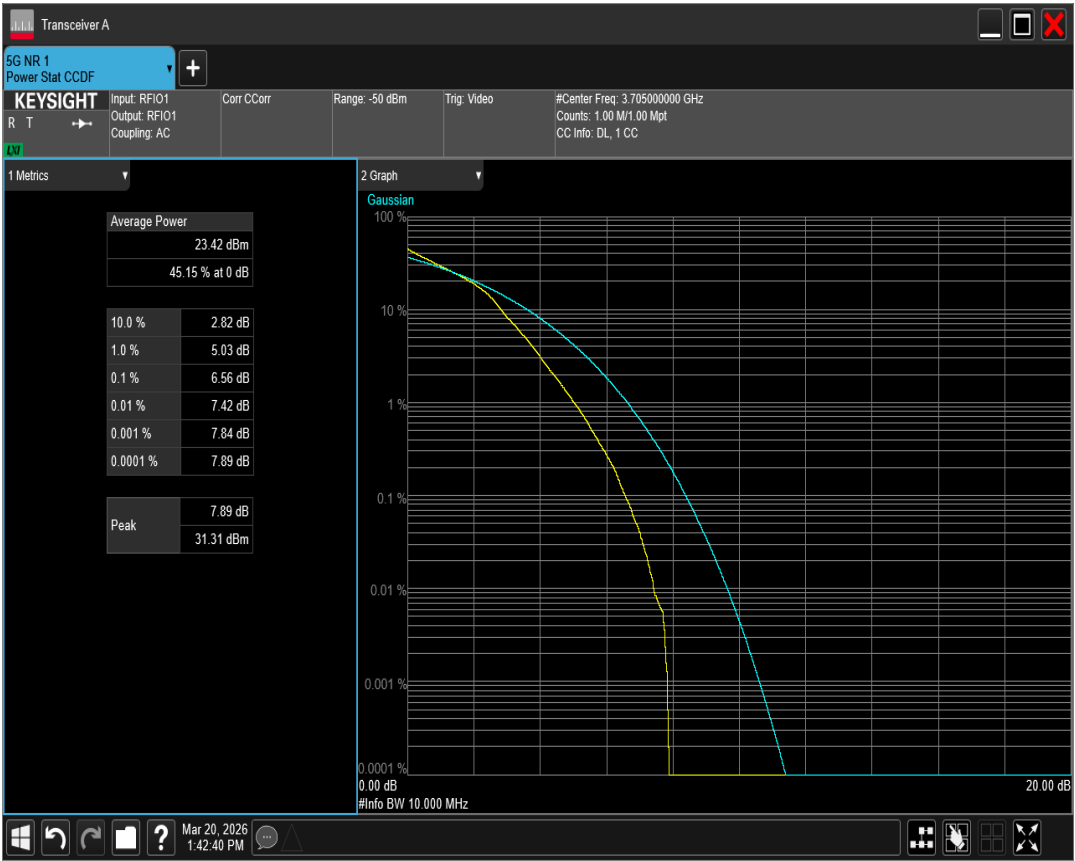


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=10MHz Channel=650000 RB=24@0

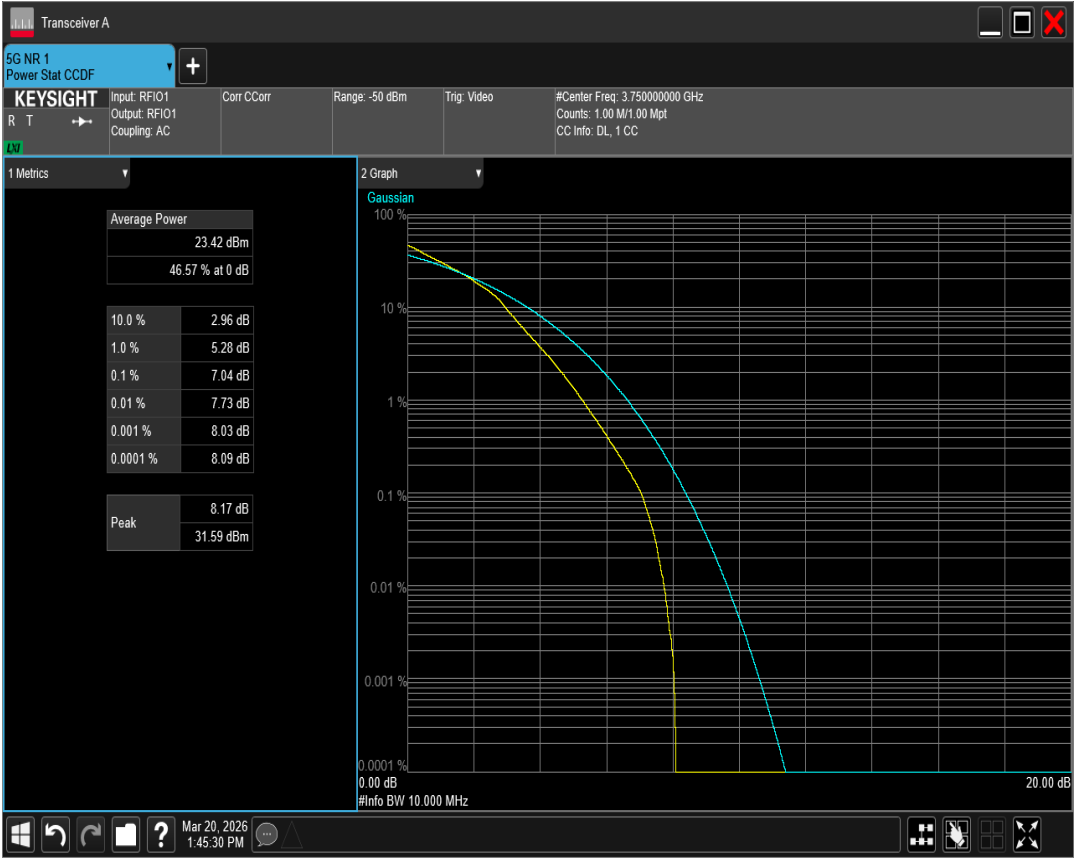


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=15MHz Channel=650000 RB=36@0

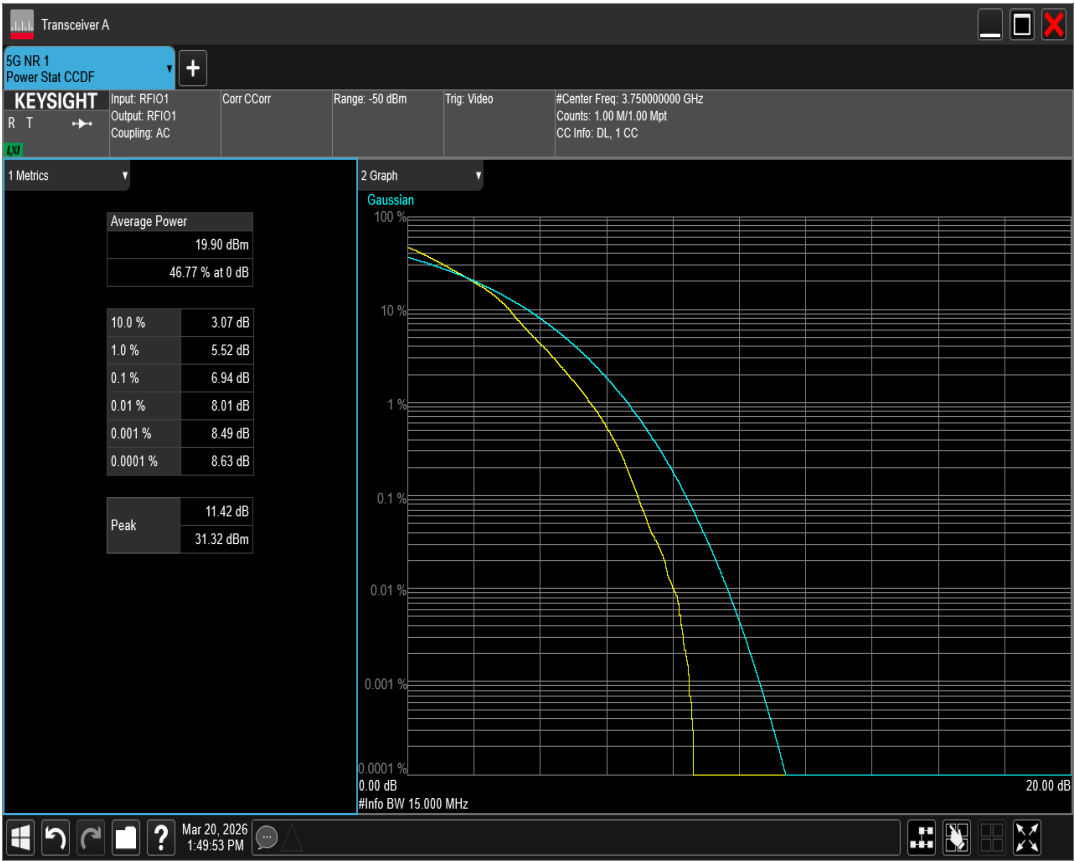


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=15MHz Channel=647168 RB=36@0

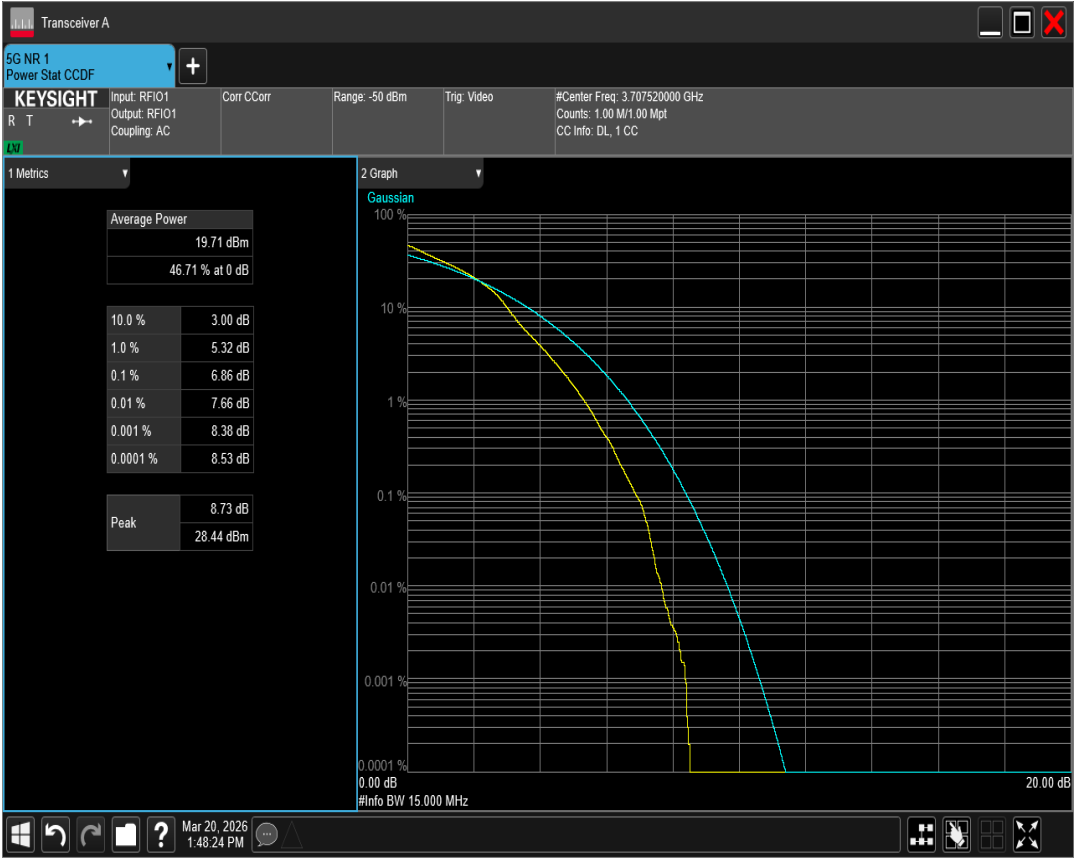


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=10MHz Channel=653000 RB=24@0

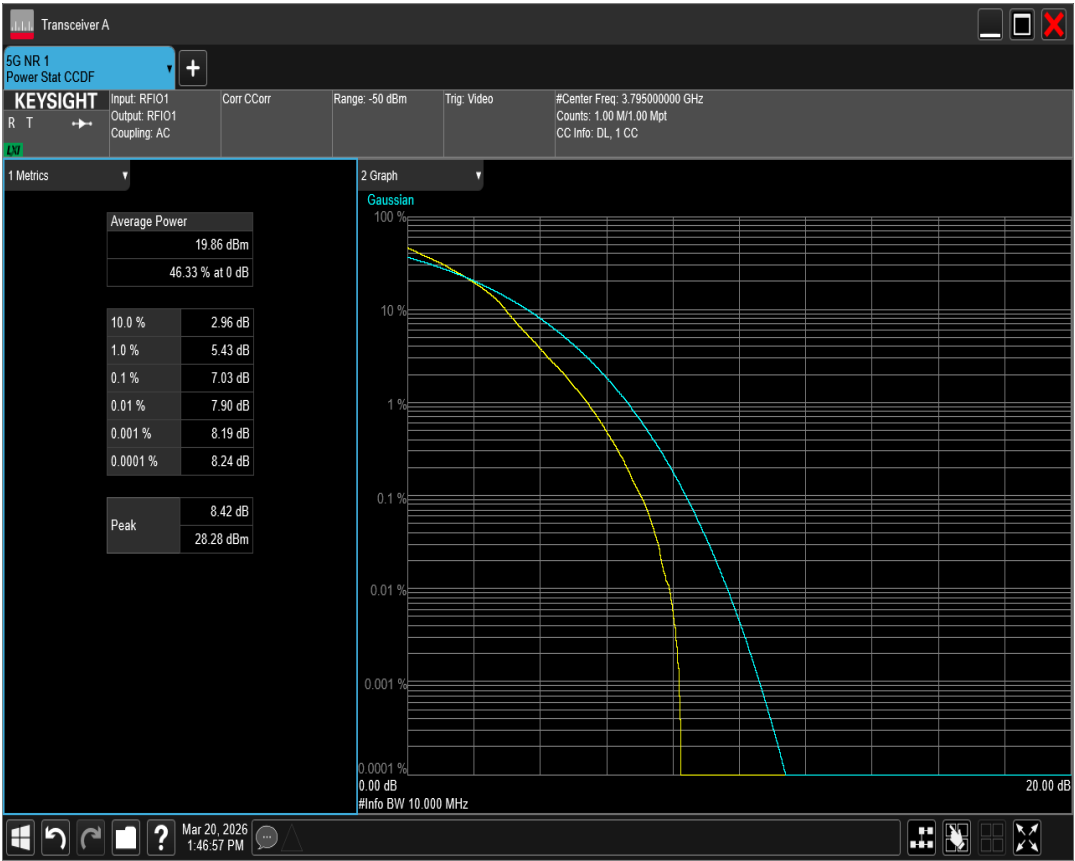


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=20MHz Channel=652666 RB=50@0

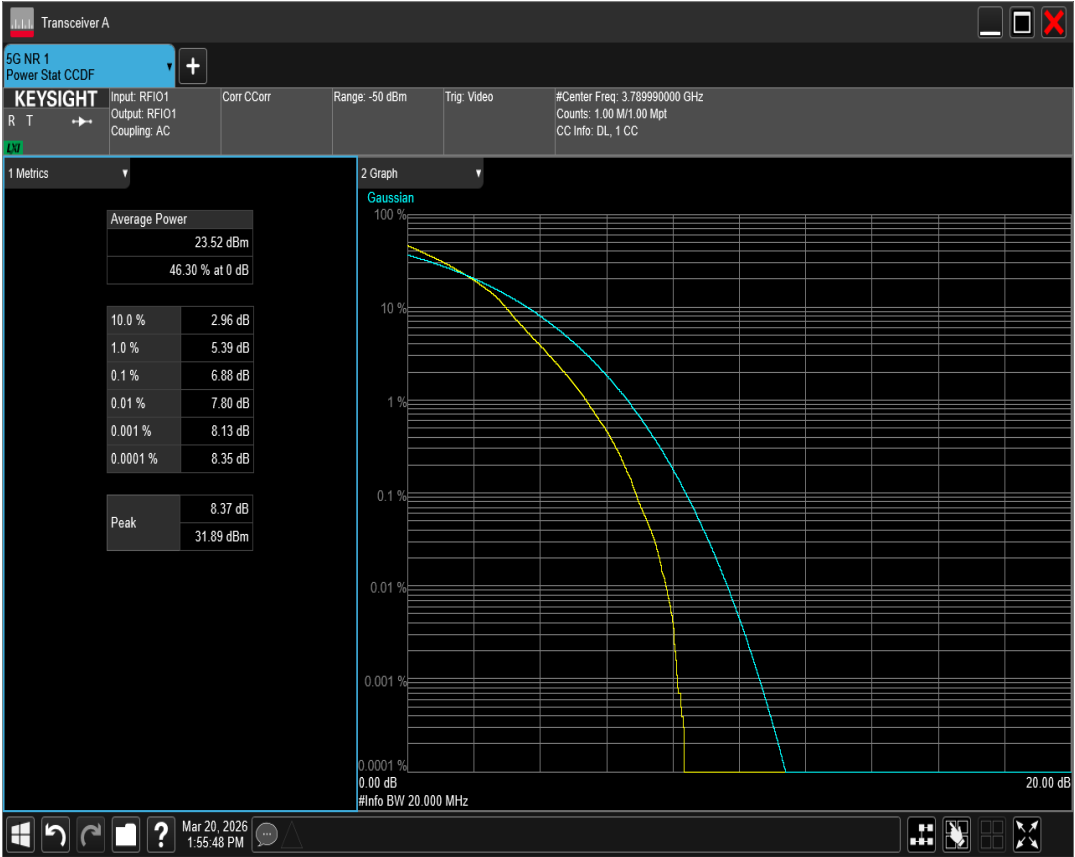


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=30MHz Channel=647668 RB=75@0

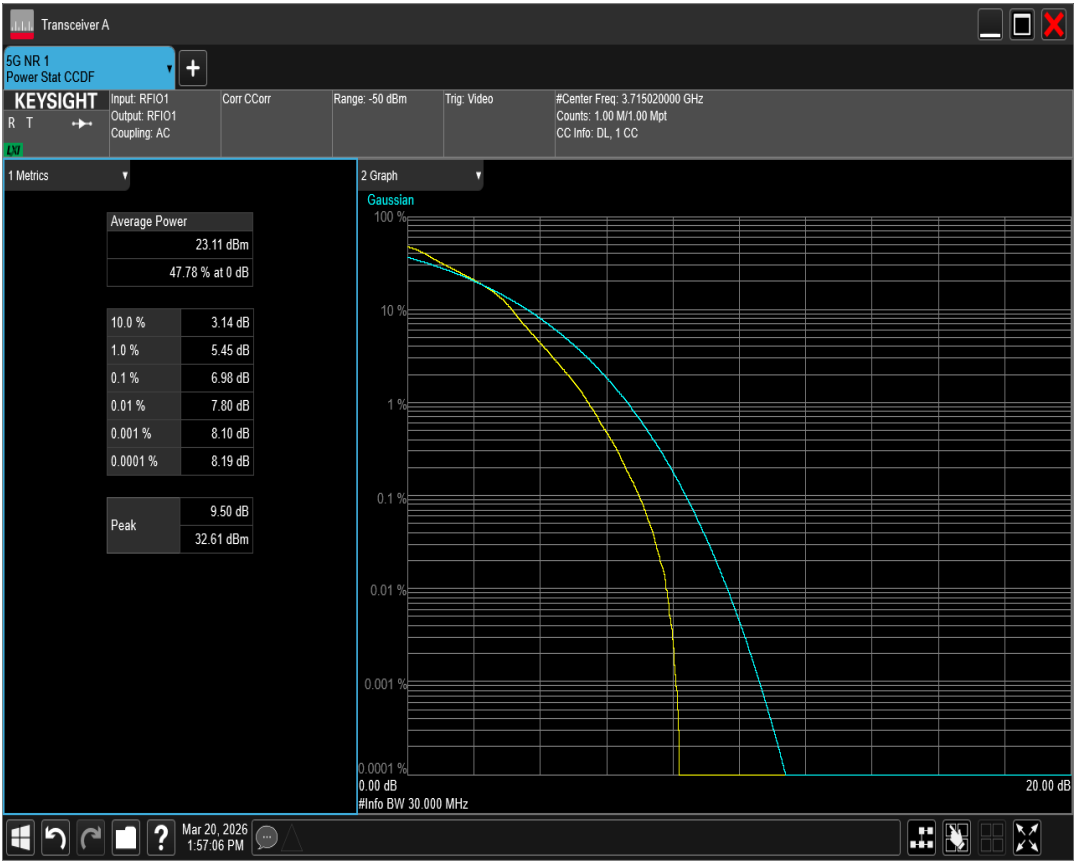


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=20MHz Channel=650000 RB=50@0

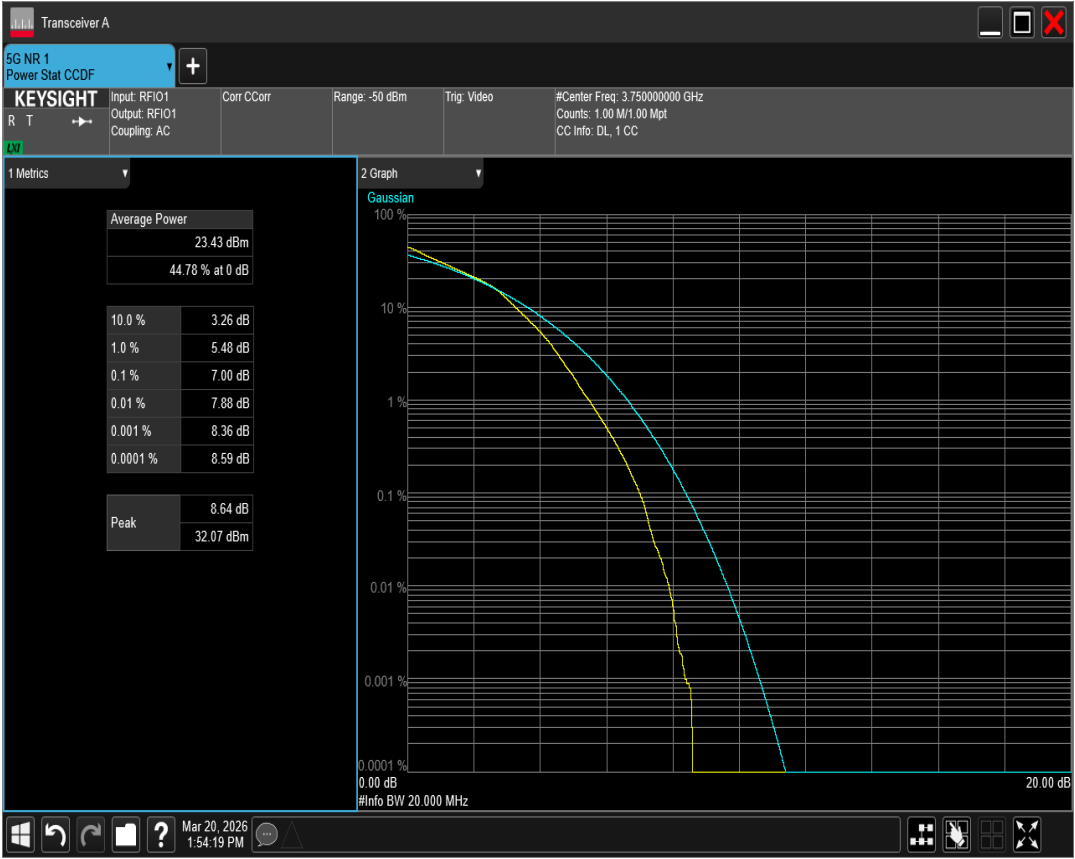


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=15MHz Channel=652832 RB=36@0

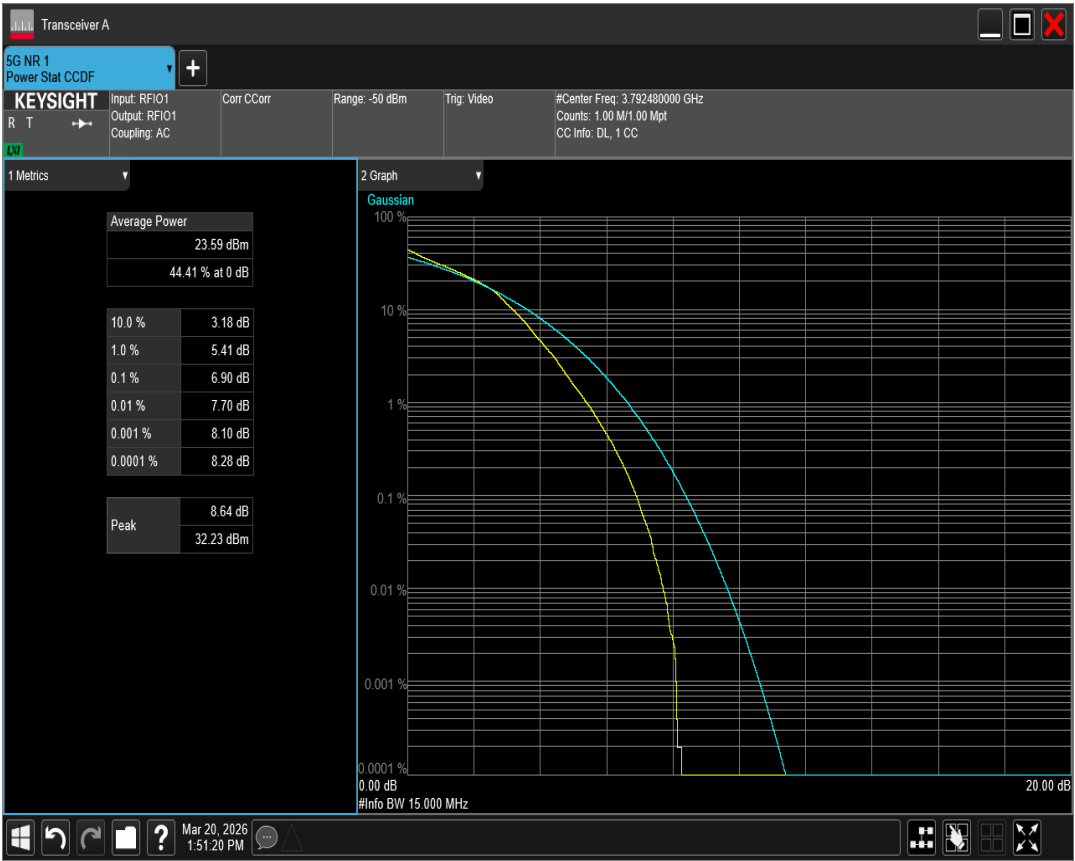


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=20MHz Channel=647334 RB=50@0

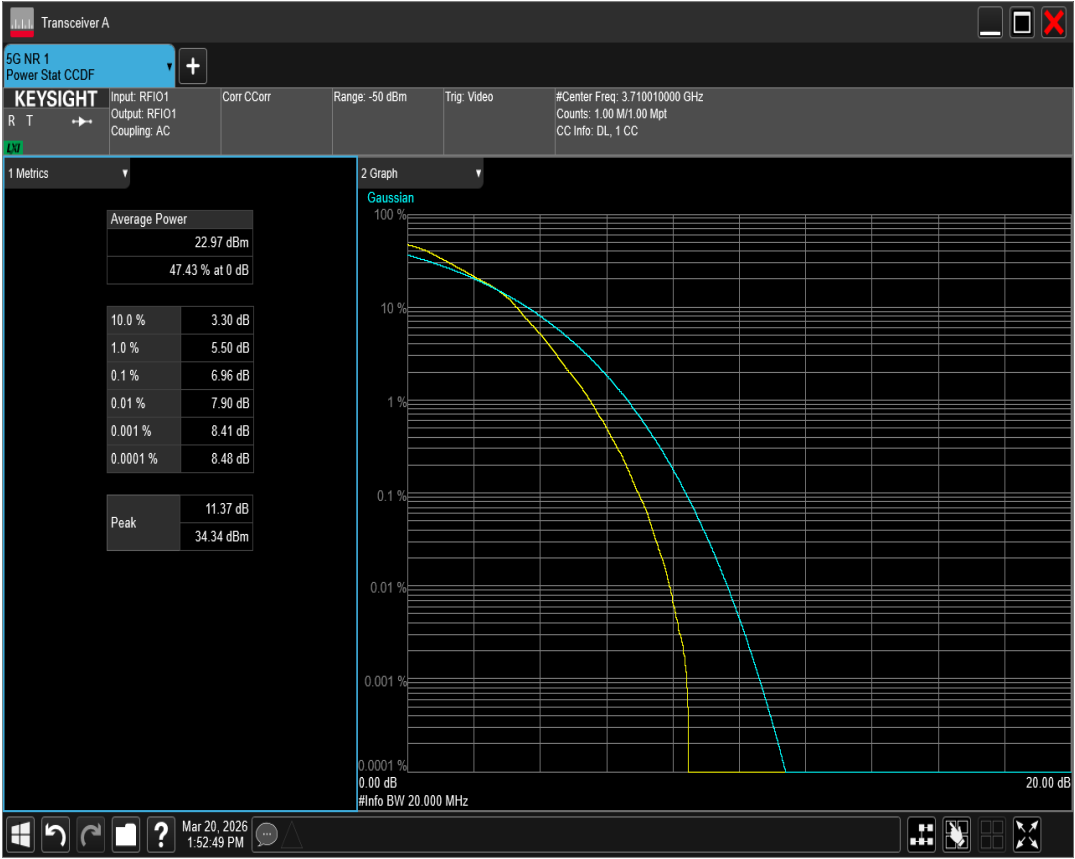


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=40MHz Channel=650000 RB=100@0

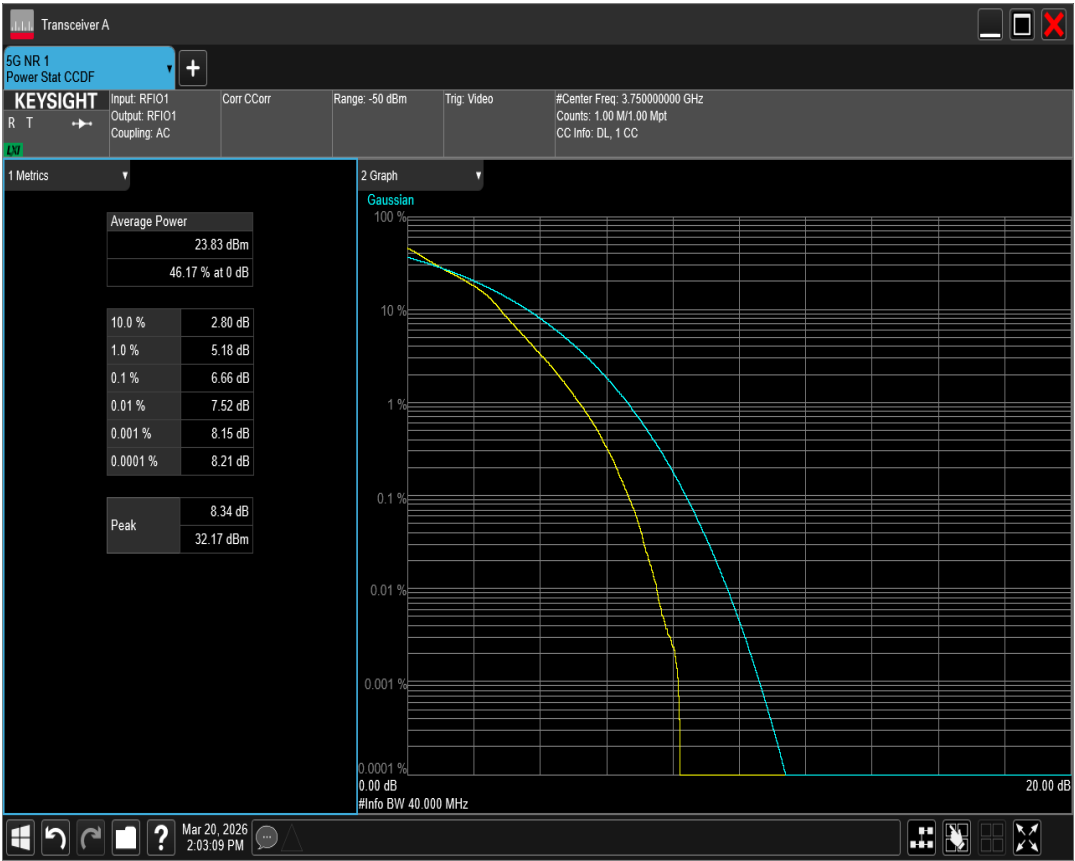


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=40MHz Channel=652000 RB=100@0

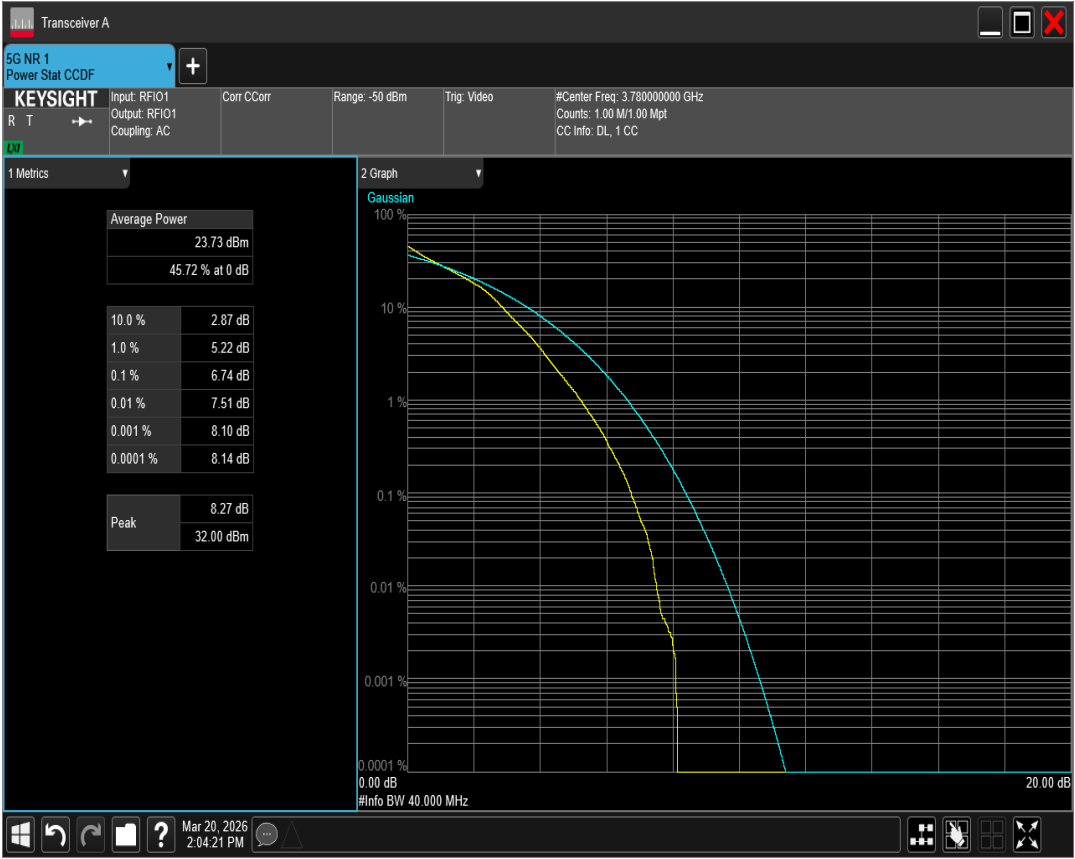


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=40MHz Channel=648000 RB=100@0

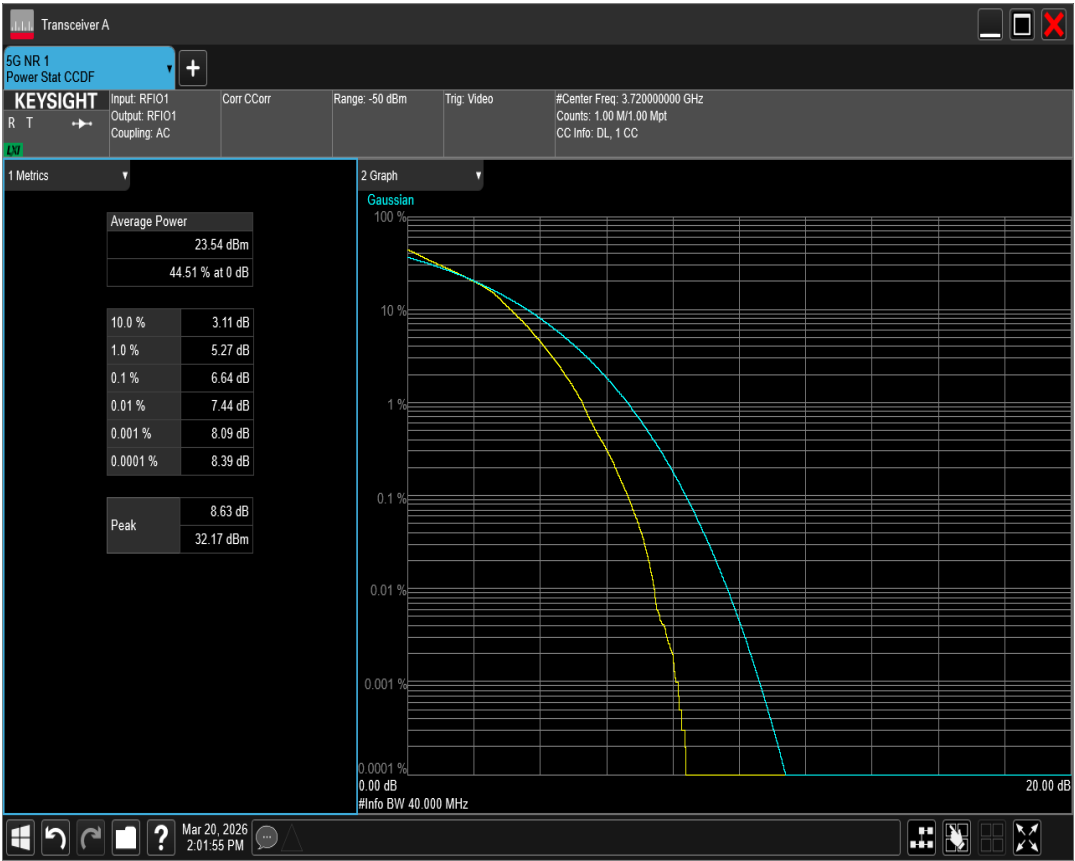


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=30MHz Channel=650000 RB=75@0

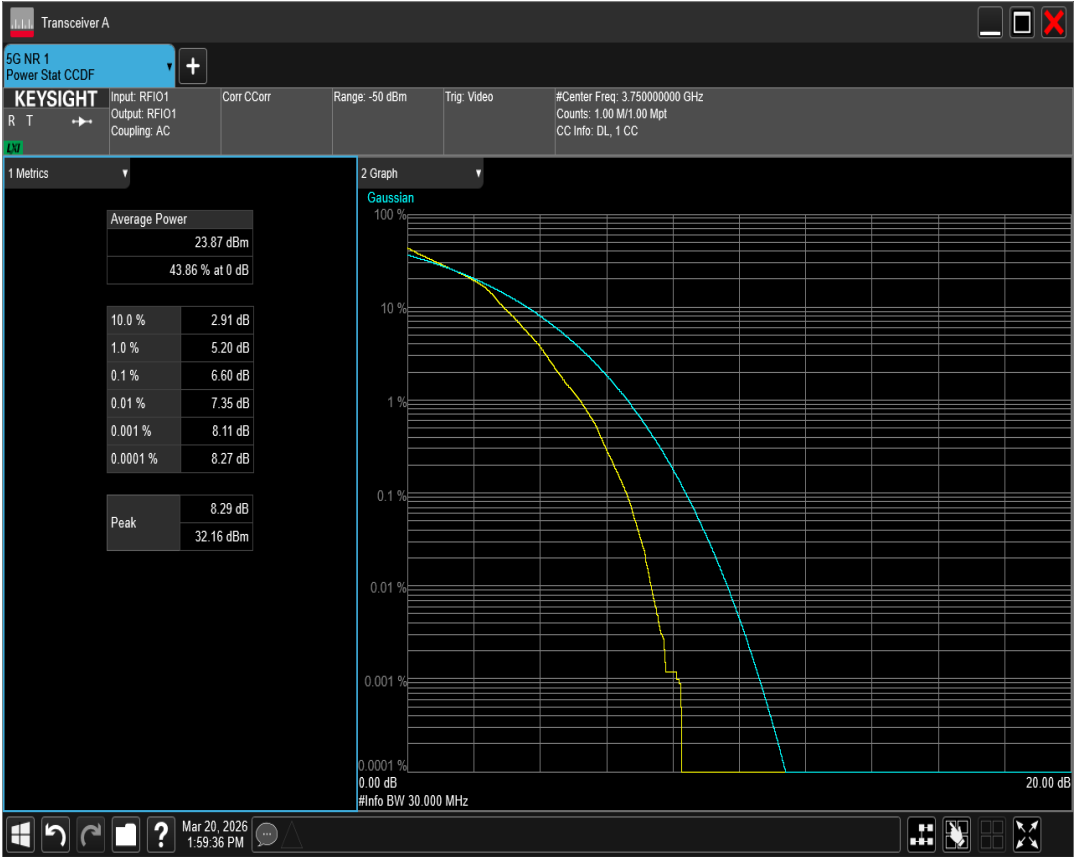


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=30MHz Channel=652332 RB=75@0

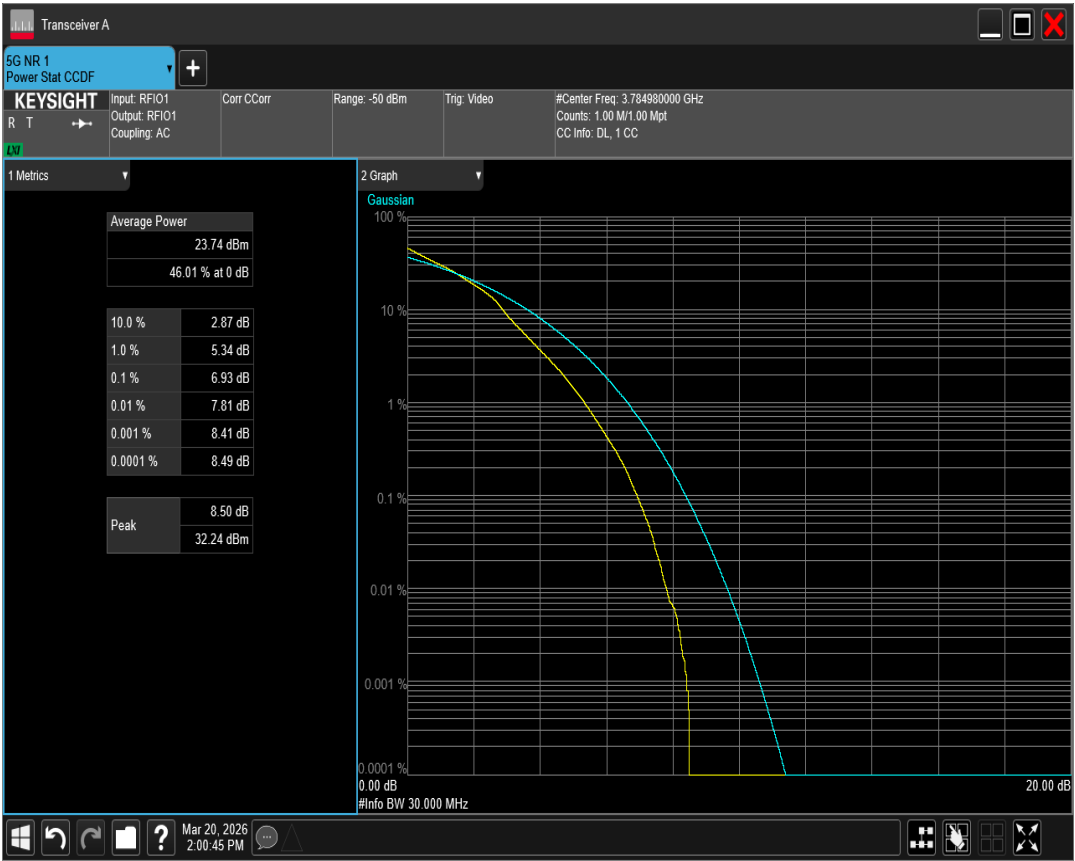


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=60MHz Channel=648668 RB=162@0

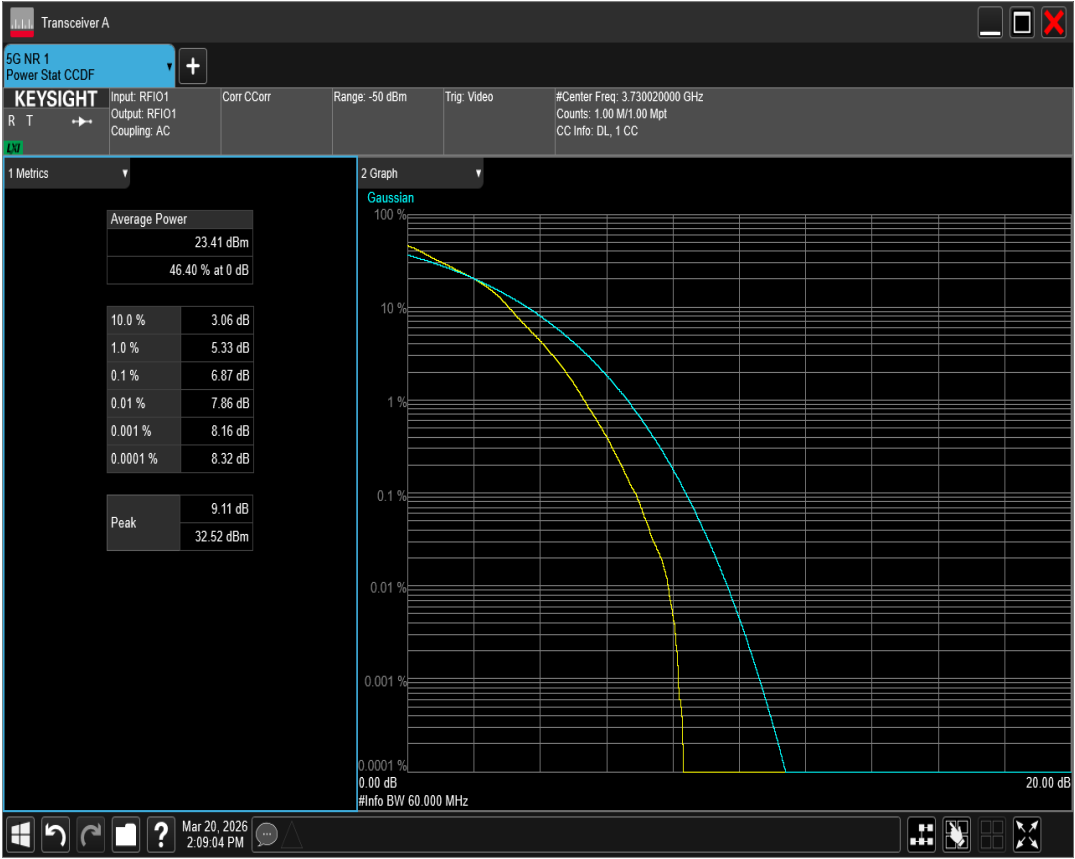


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=60MHz Channel=650000 RB=162@0

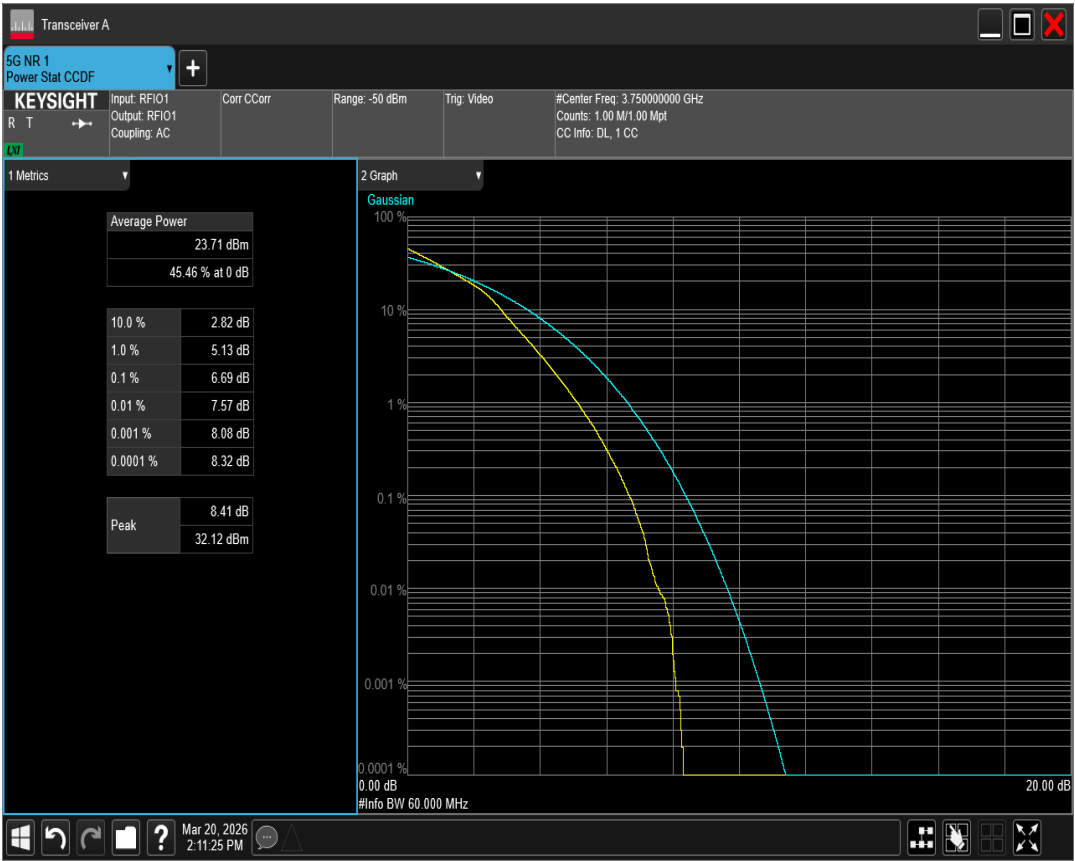


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=50MHz Channel=651666 RB=128@0

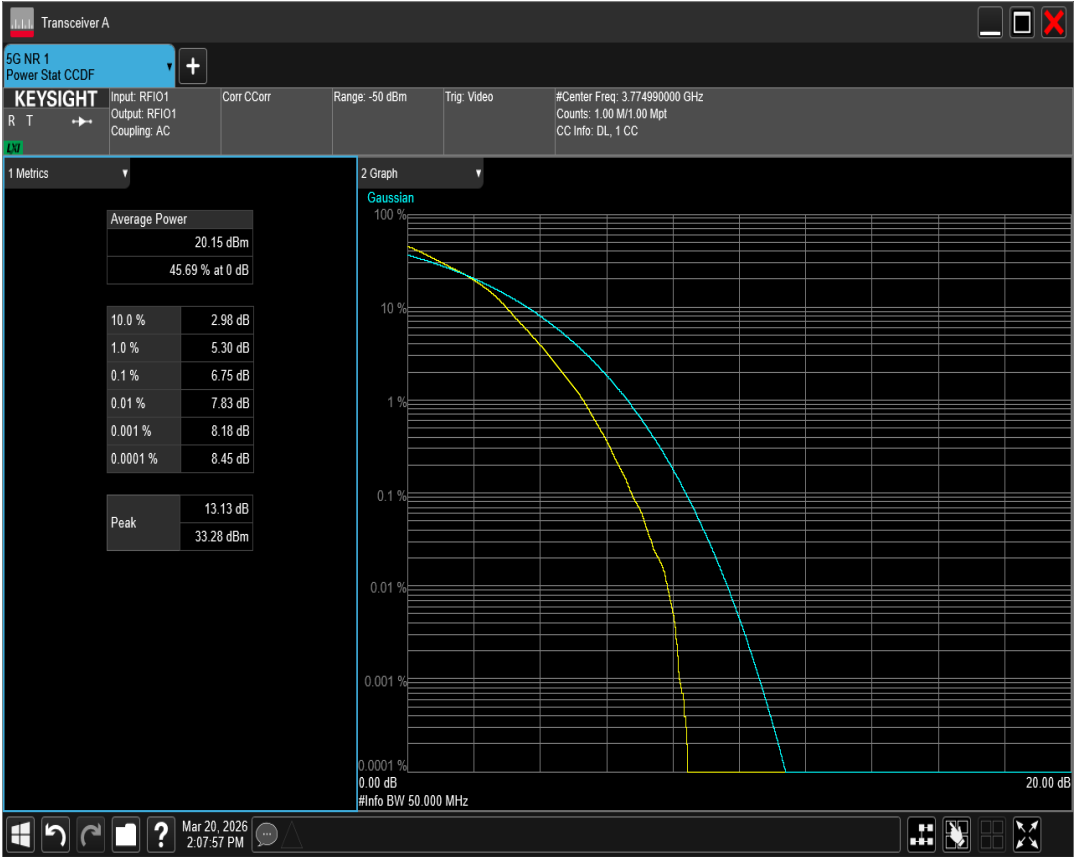


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=50MHz Channel=648334 RB=128@0

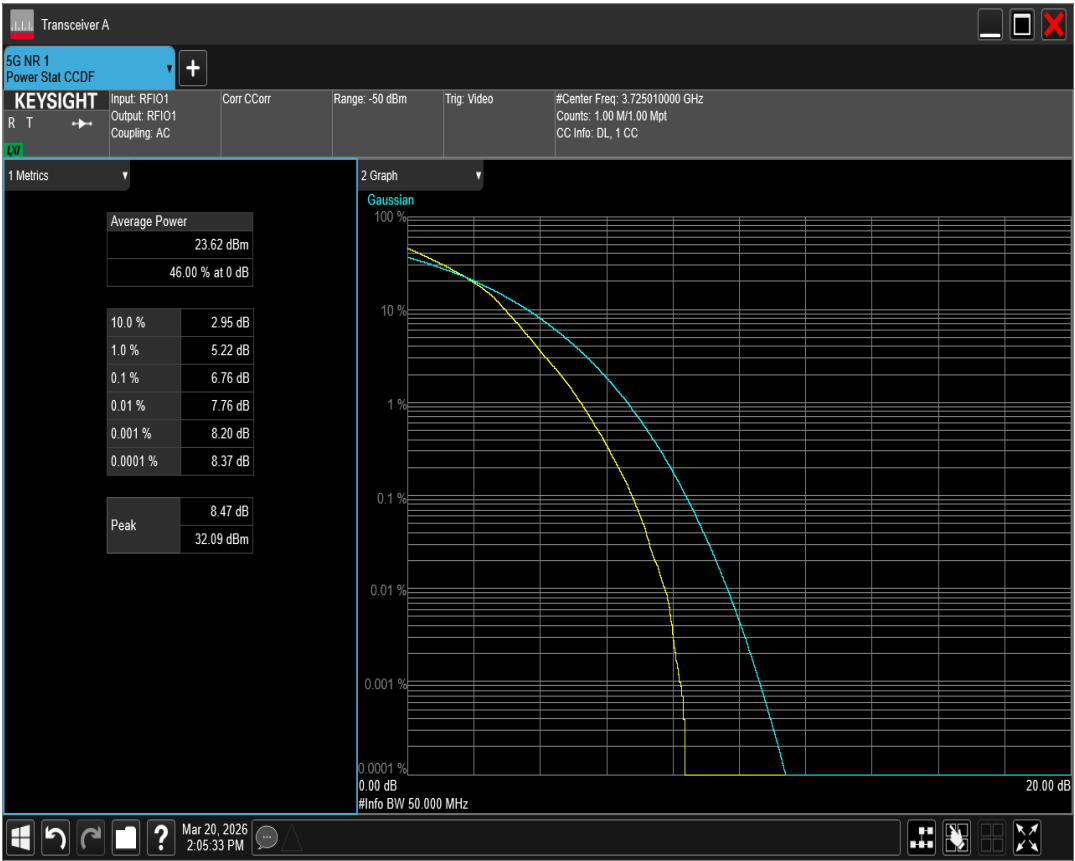


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=50MHz Channel=650000 RB=128@0

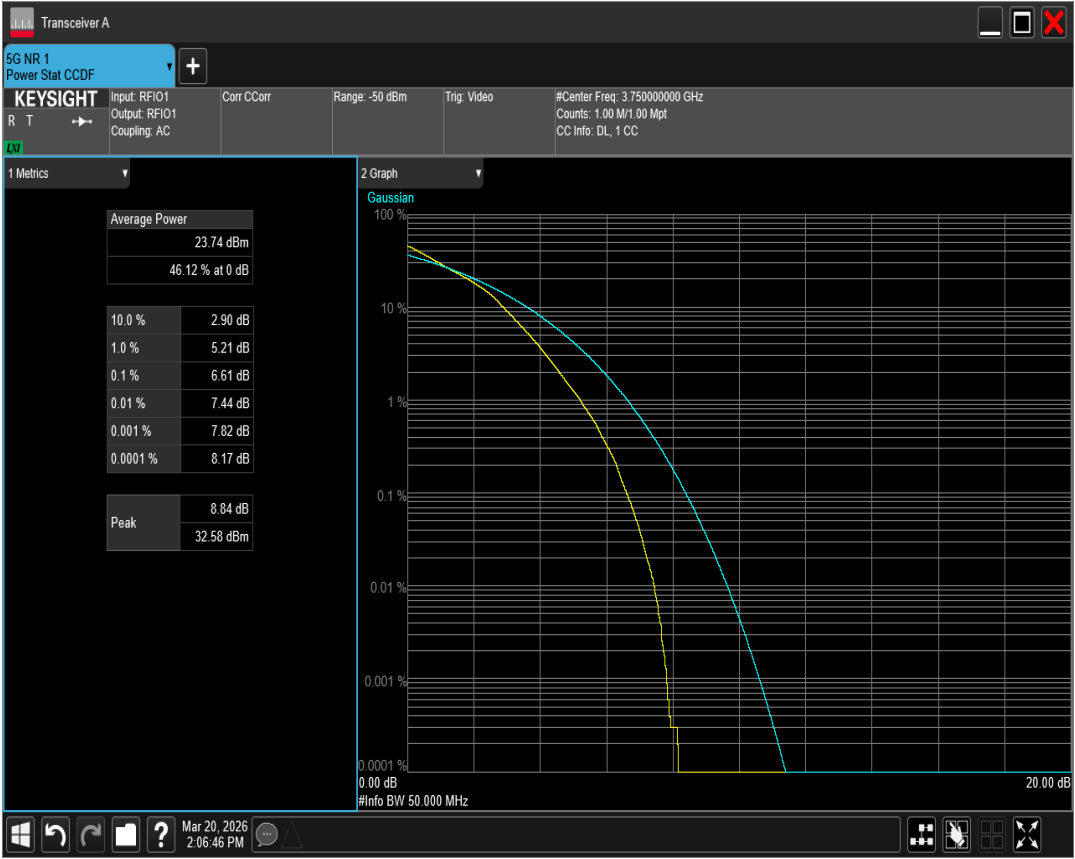


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=70MHz Channel=650000 RB=180@0

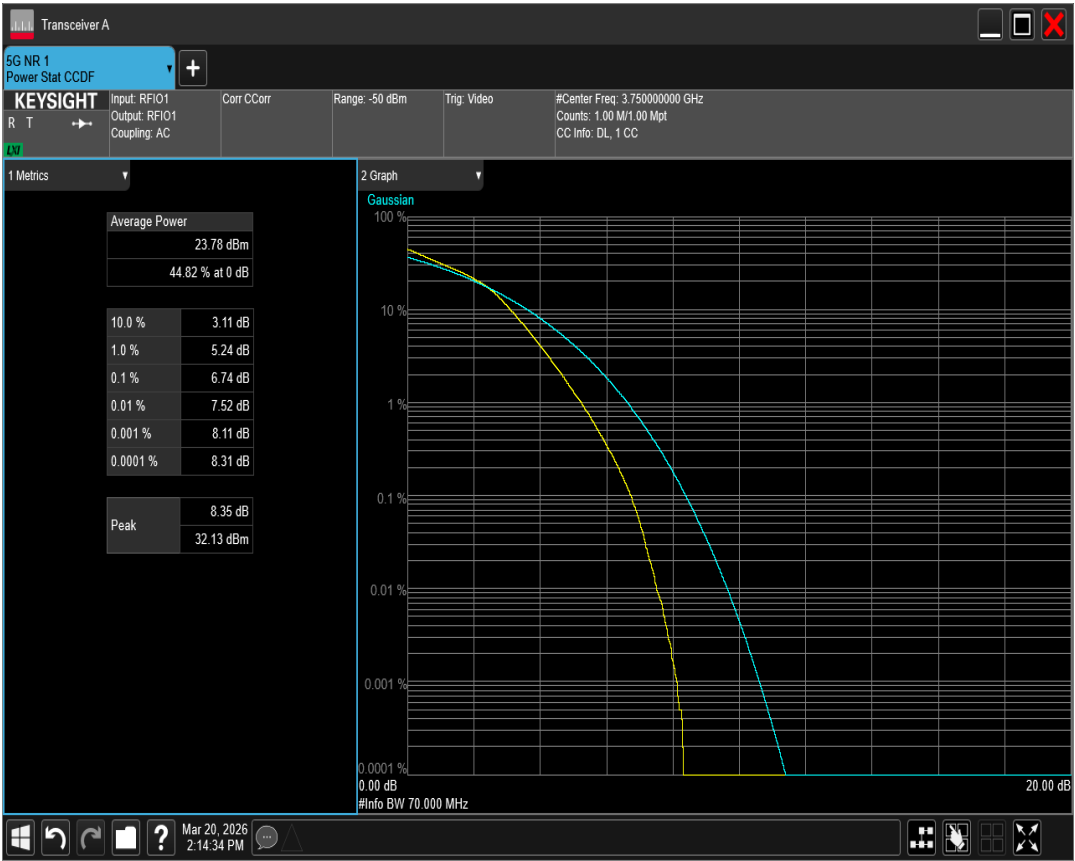


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=70MHz Channel=649000 RB=180@0

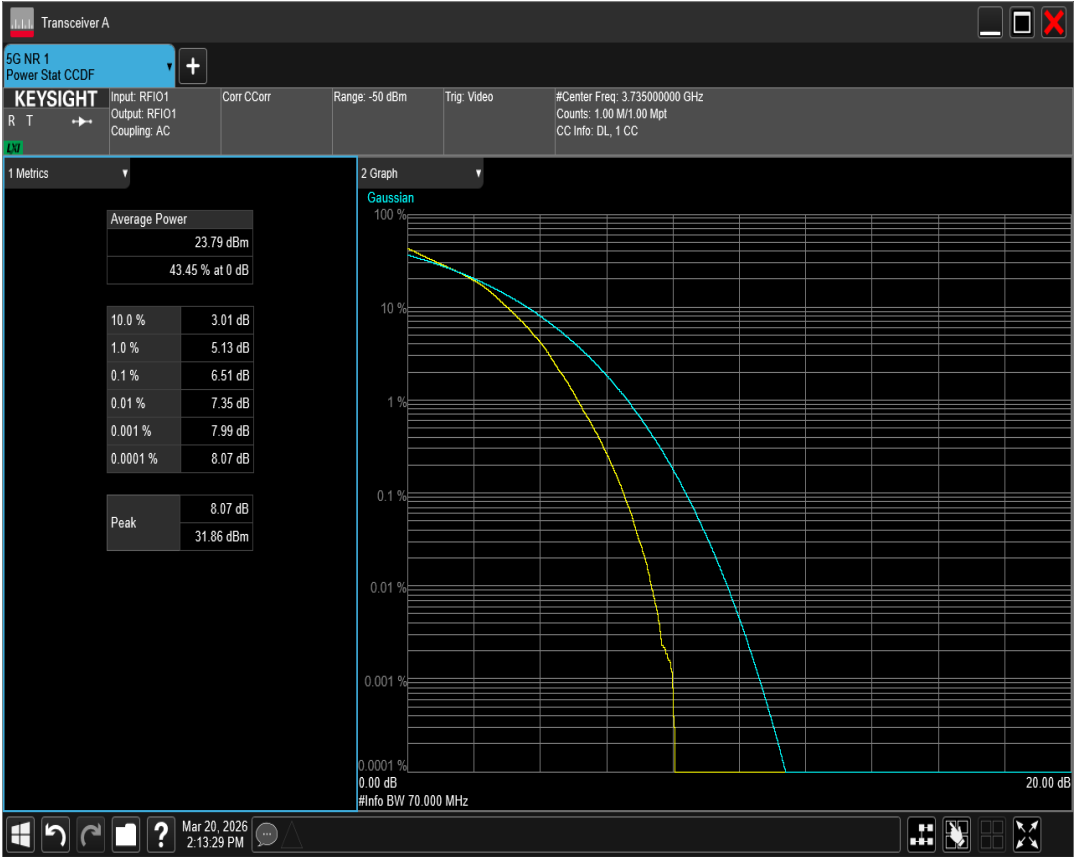


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=60MHz Channel=651332 RB=162@0

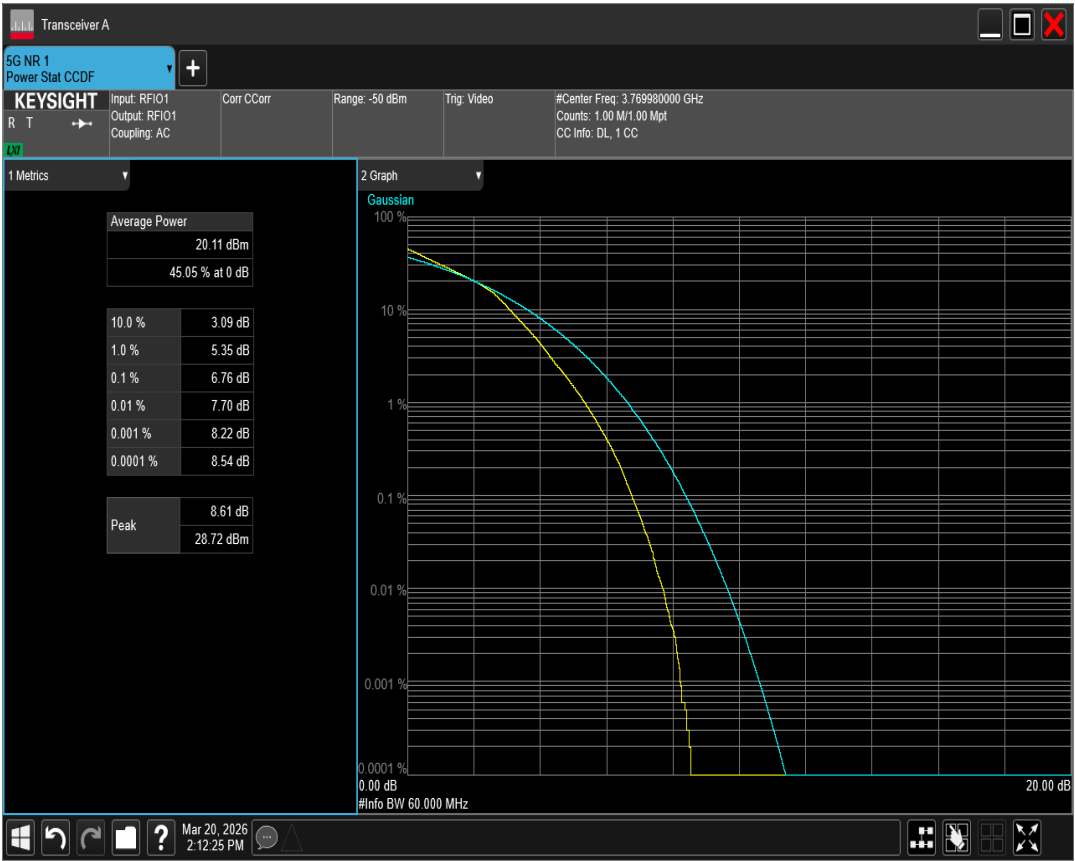


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=80MHz Channel=650666 RB=216@0

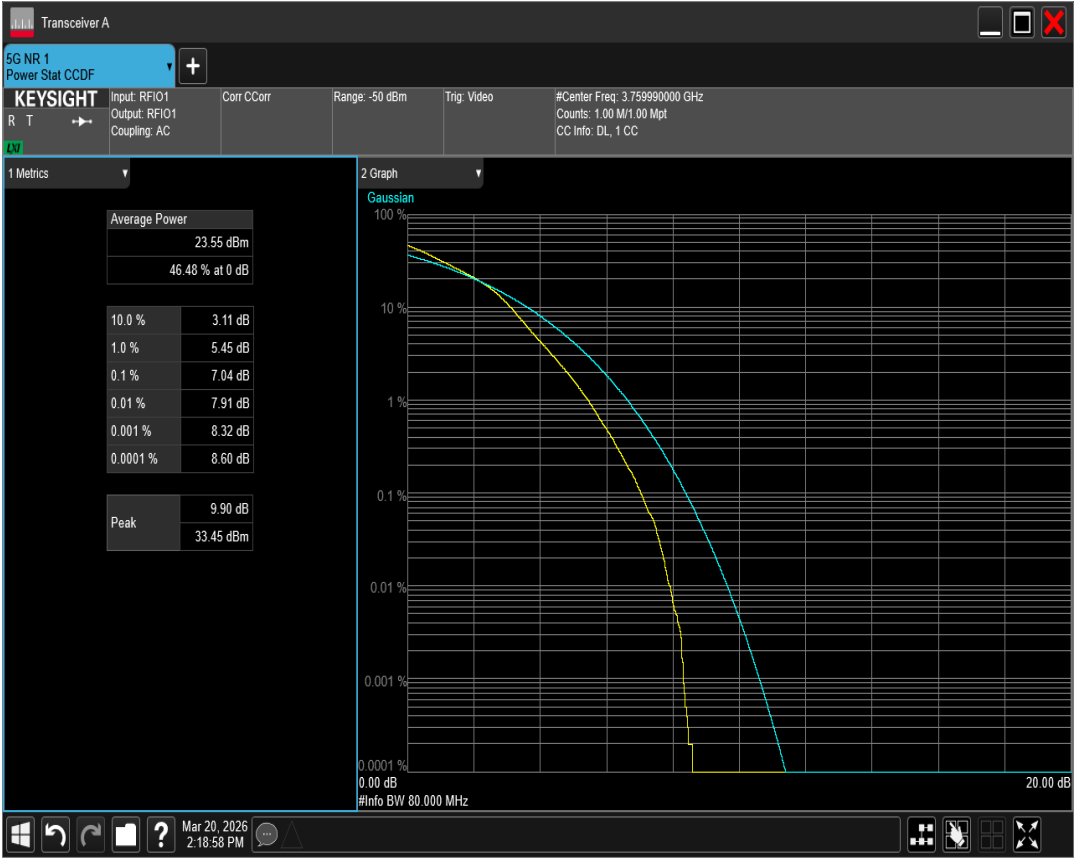


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=90MHz Channel=649668 RB=240@0

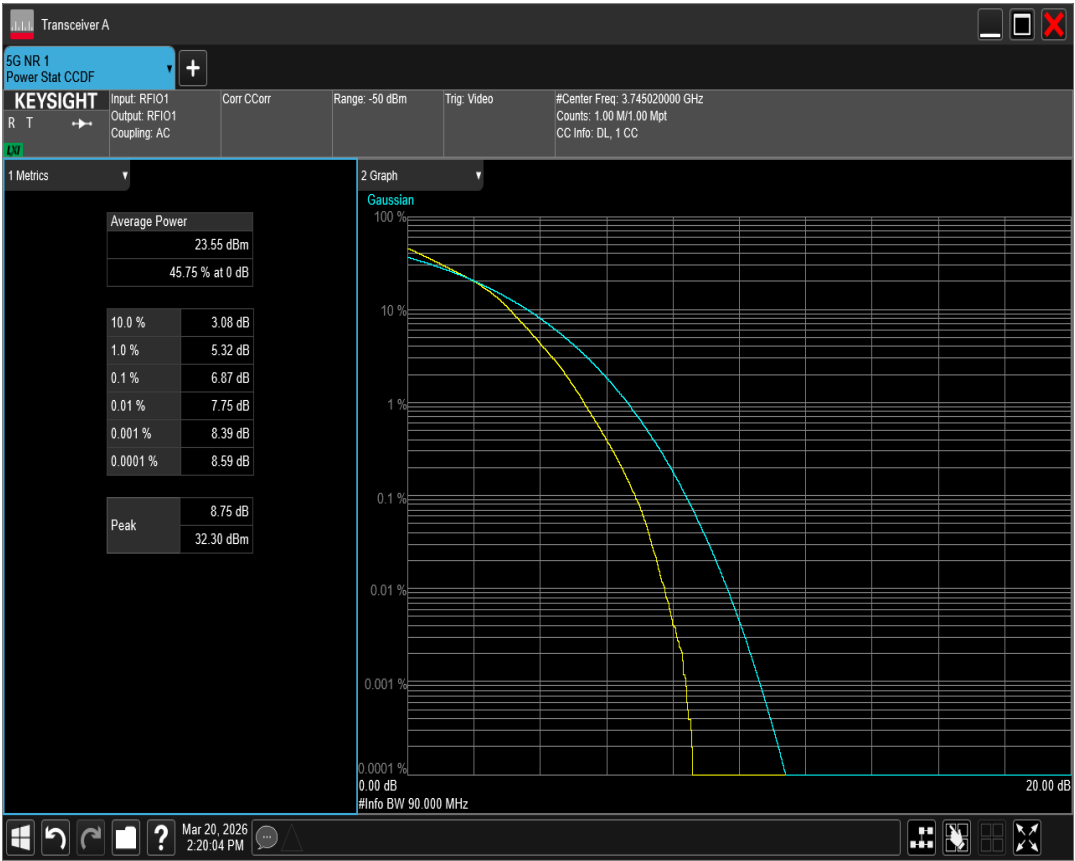


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=90MHz Channel=650000 RB=240@0

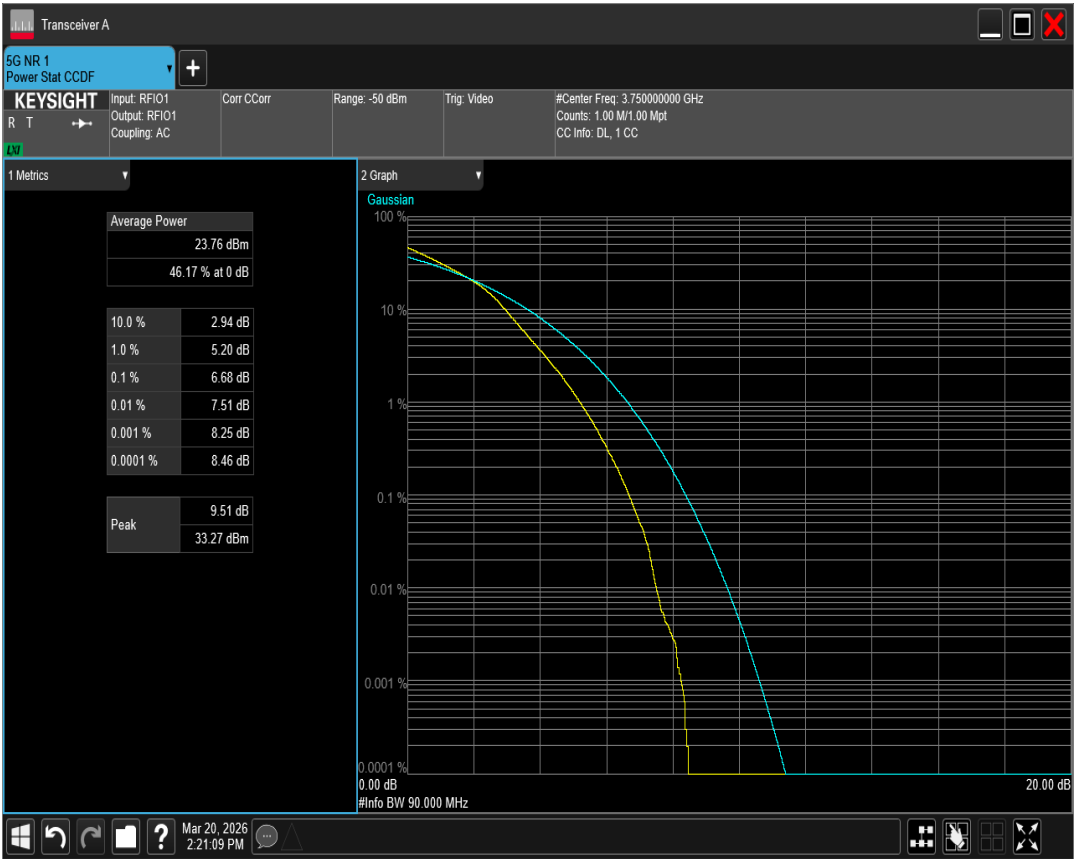


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=70MHz Channel=651000 RB=180@0

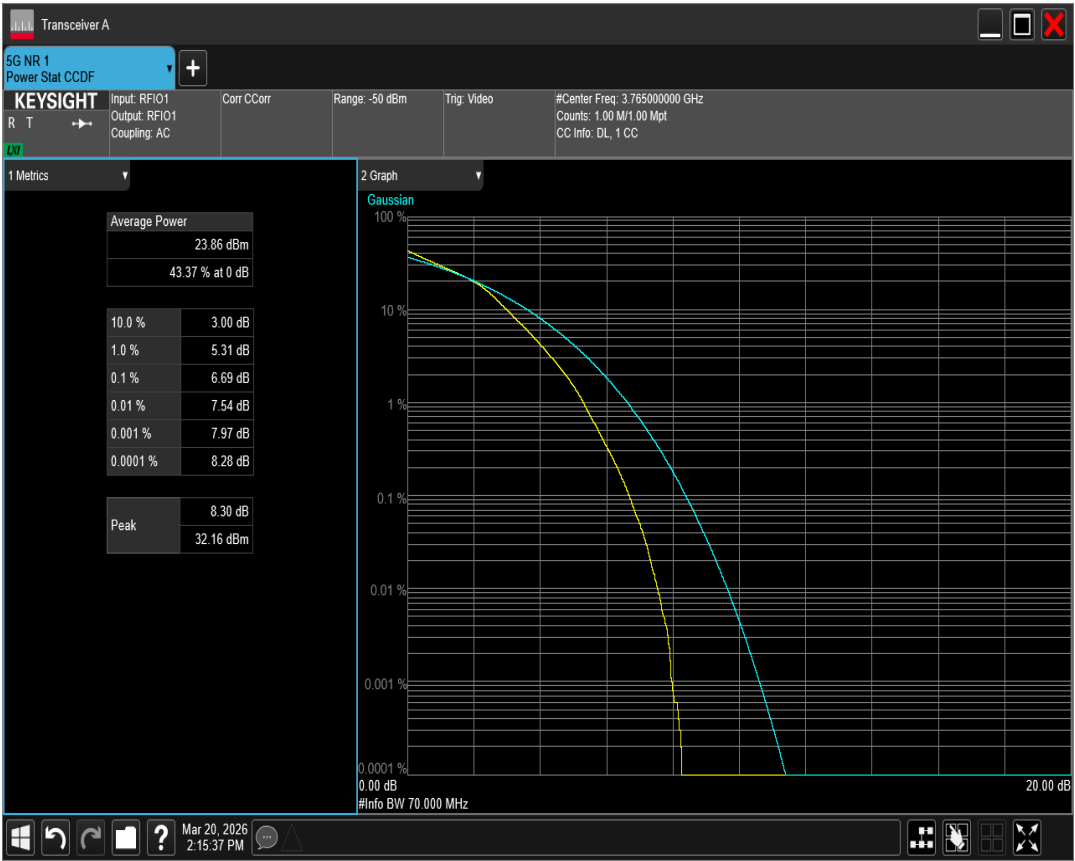


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=80MHz Channel=649334 RB=216@0

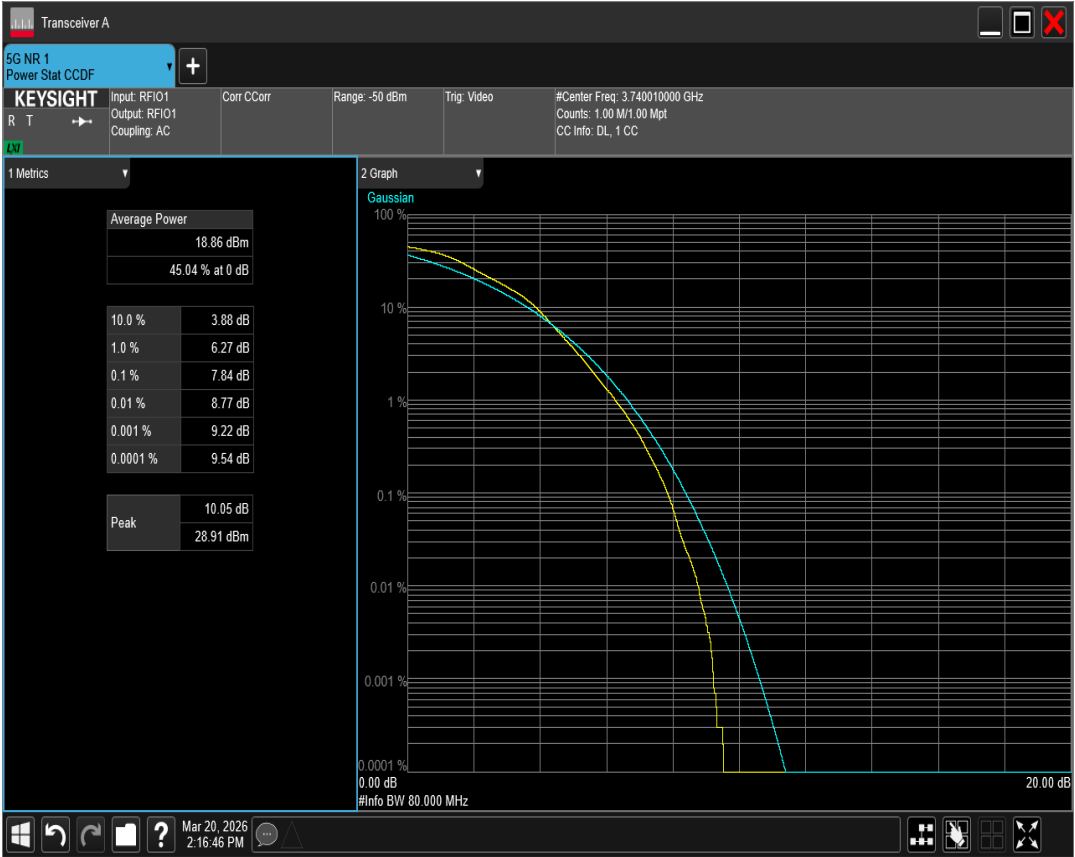


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=80MHz Channel=650000 RB=216@0

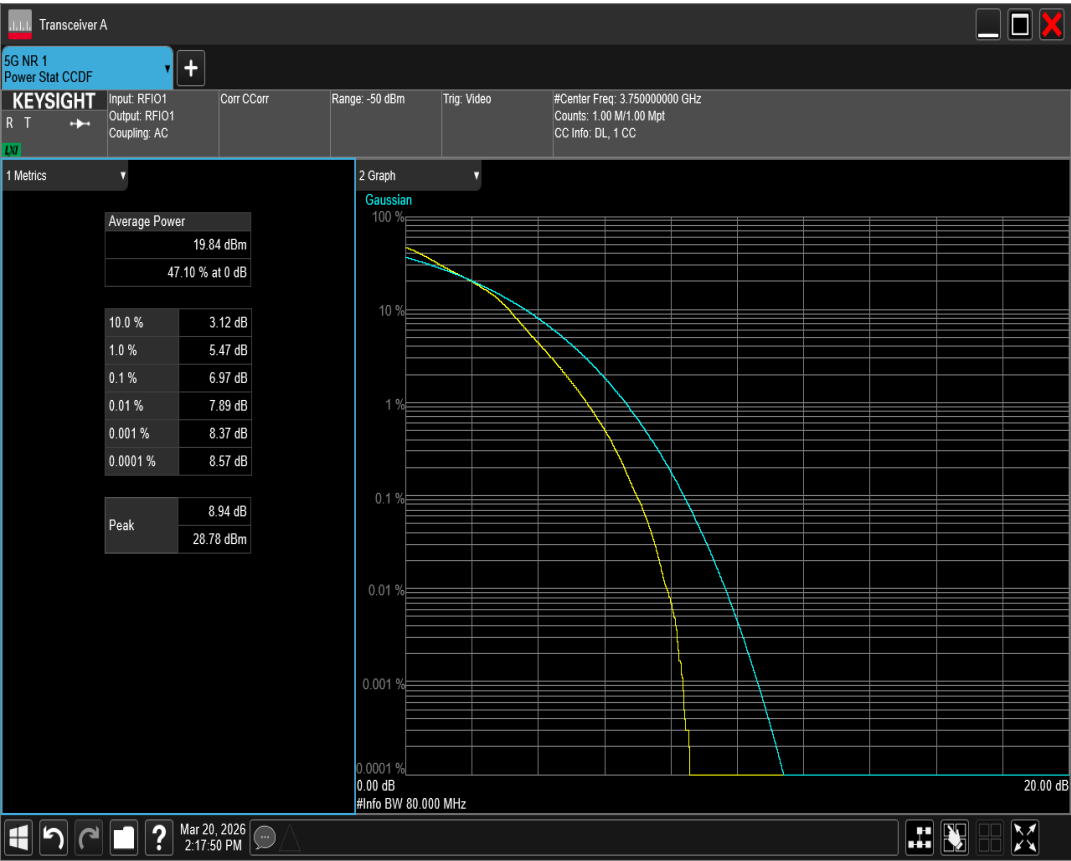


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=100MHz Channel=650000 RB=270@0

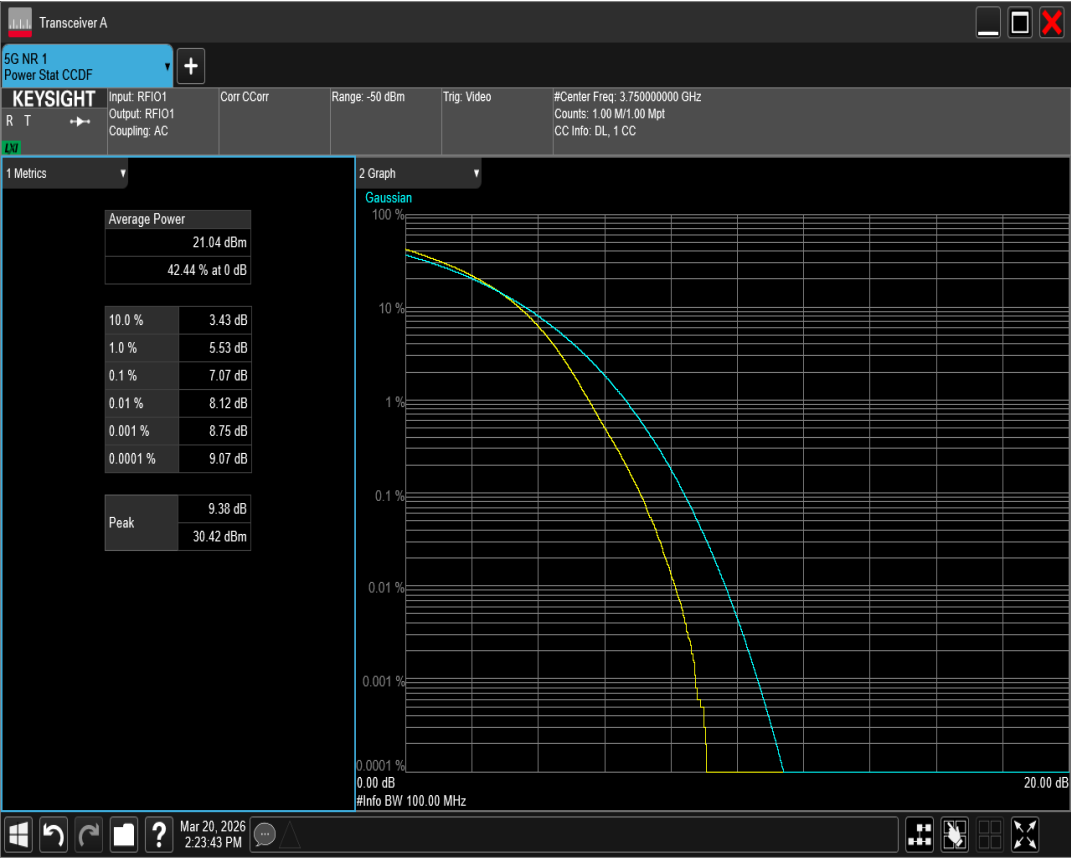


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=90MHz Channel=650332 RB=240@0

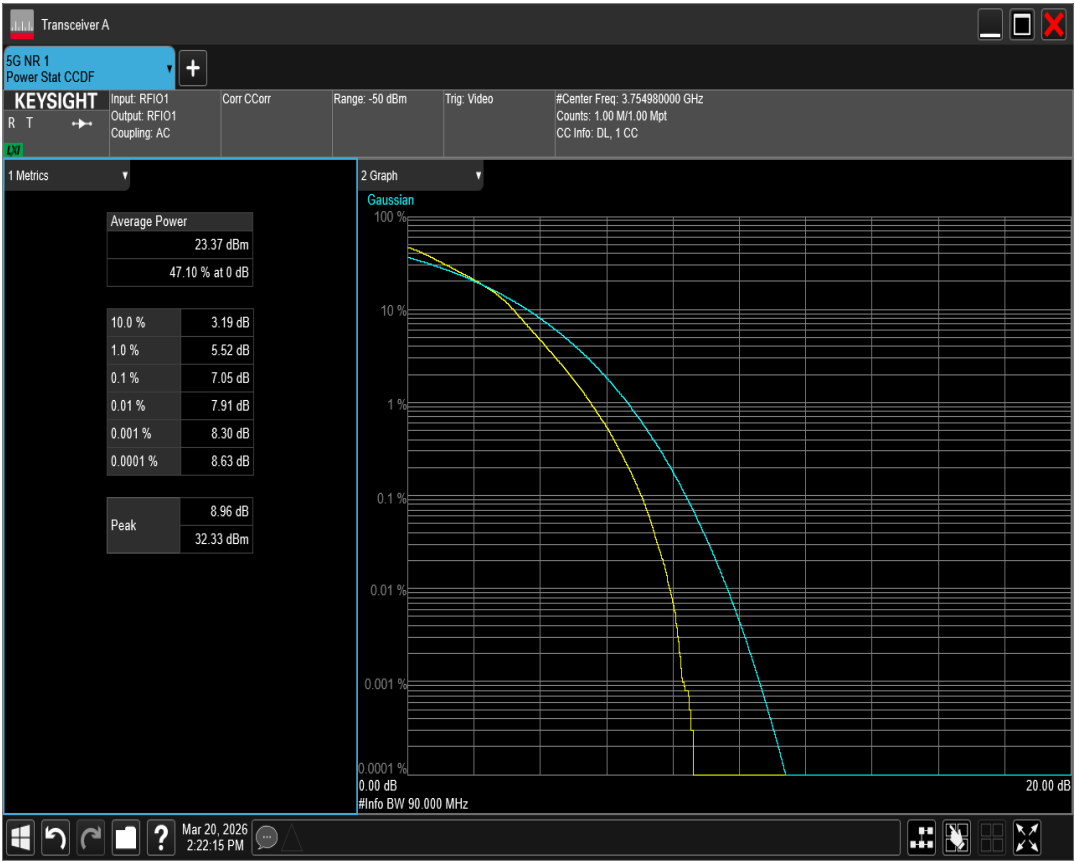


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=10MHz Channel=647000 RB=24@0

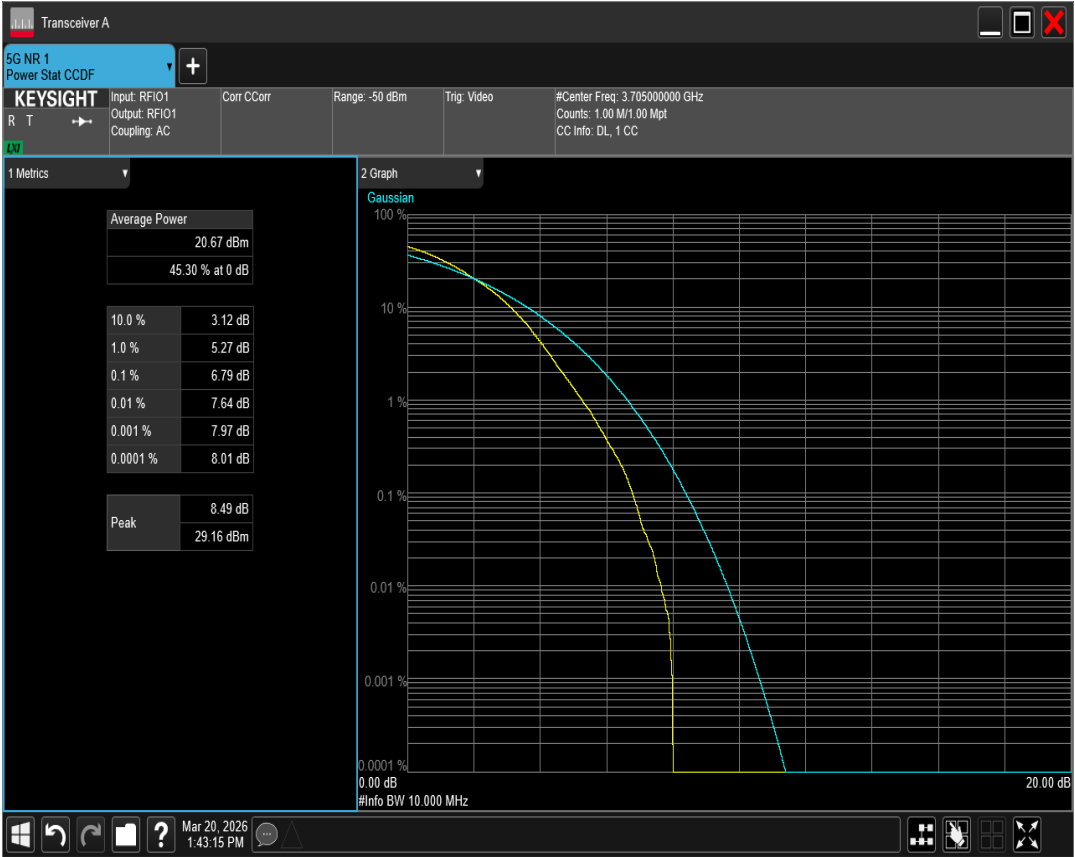


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=10MHz Channel=653000 RB=24@0

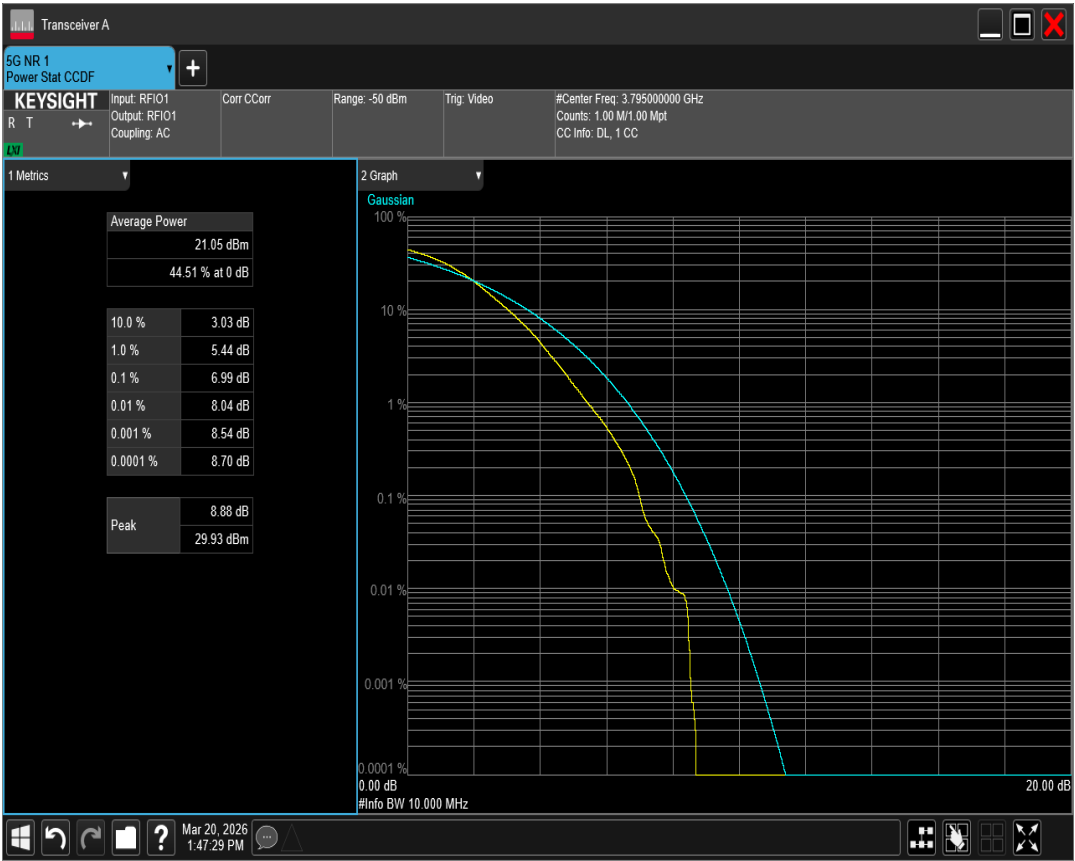


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=10MHz Channel=650000 RB=24@0

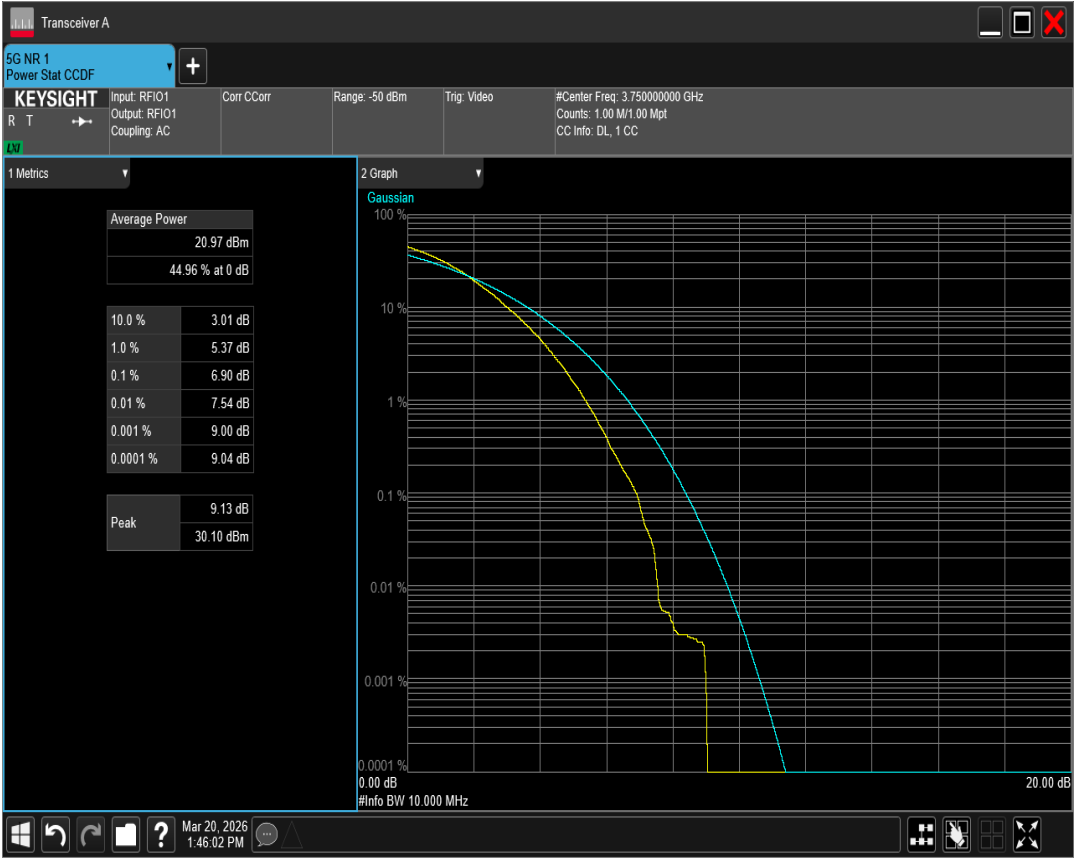


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=15MHz Channel=652832 RB=36@0

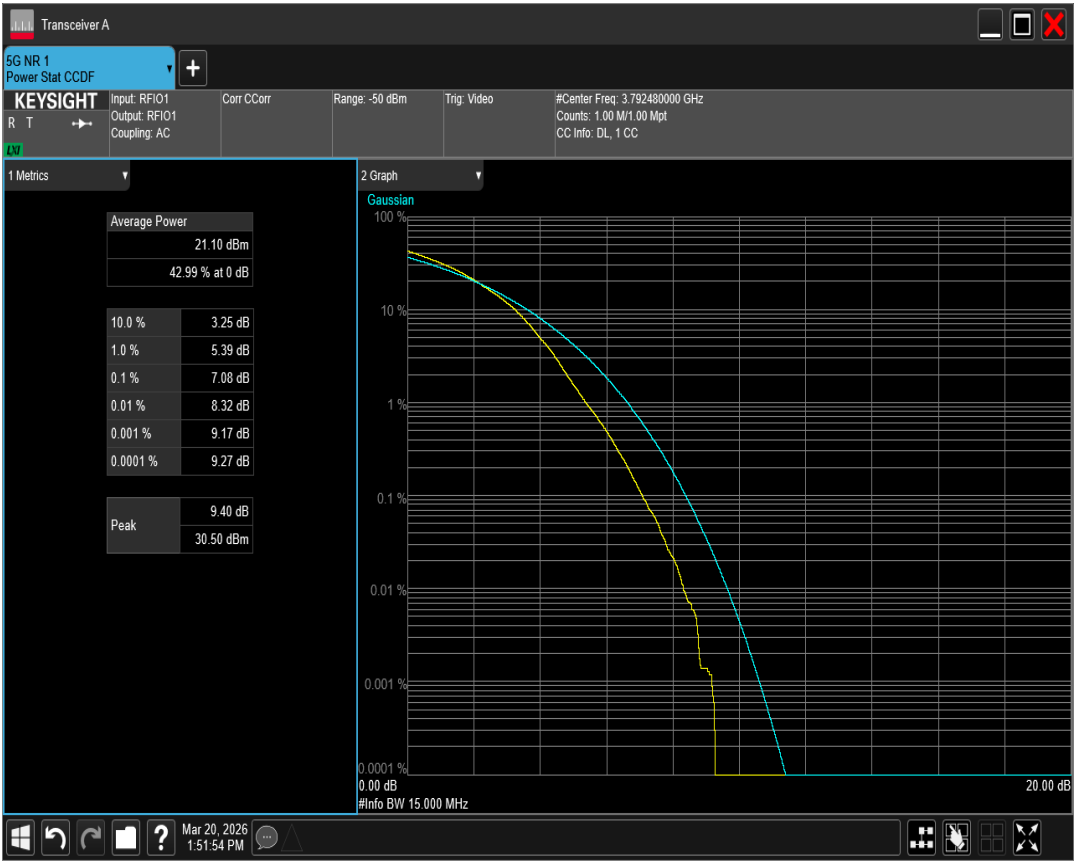


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=15MHz Channel=650000 RB=36@0

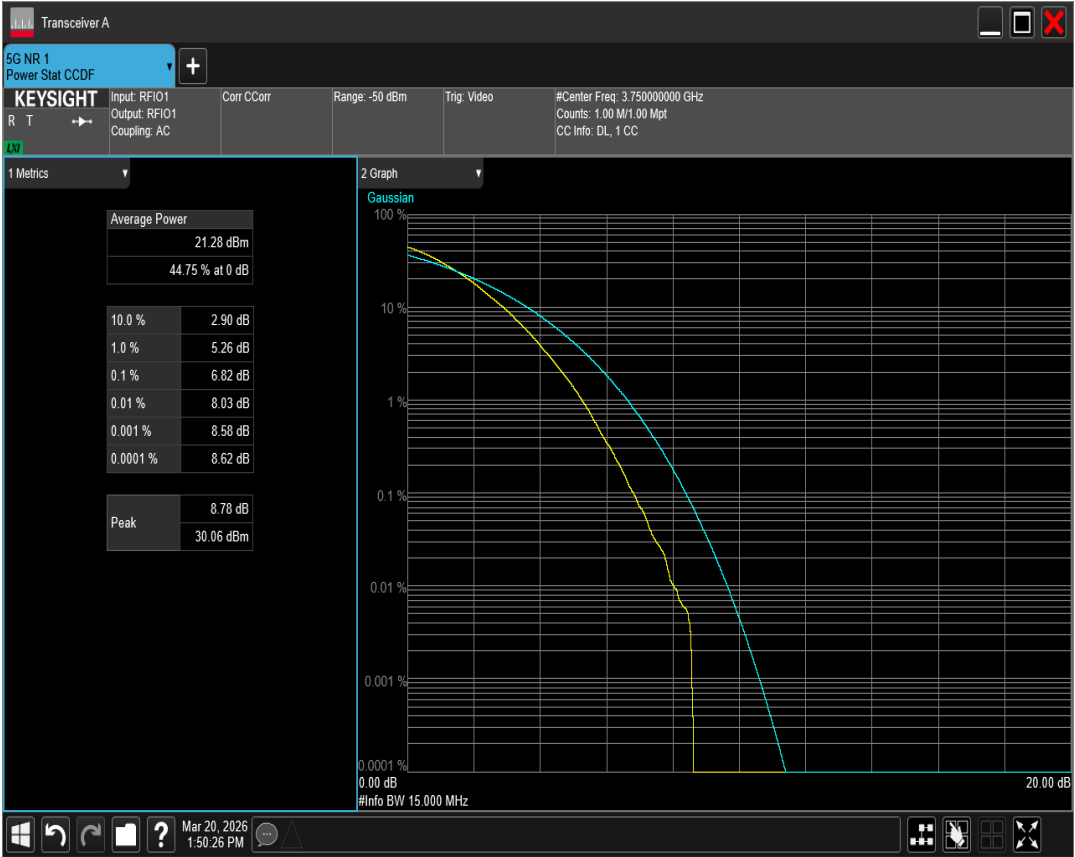


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=15MHz Channel=647168 RB=36@0

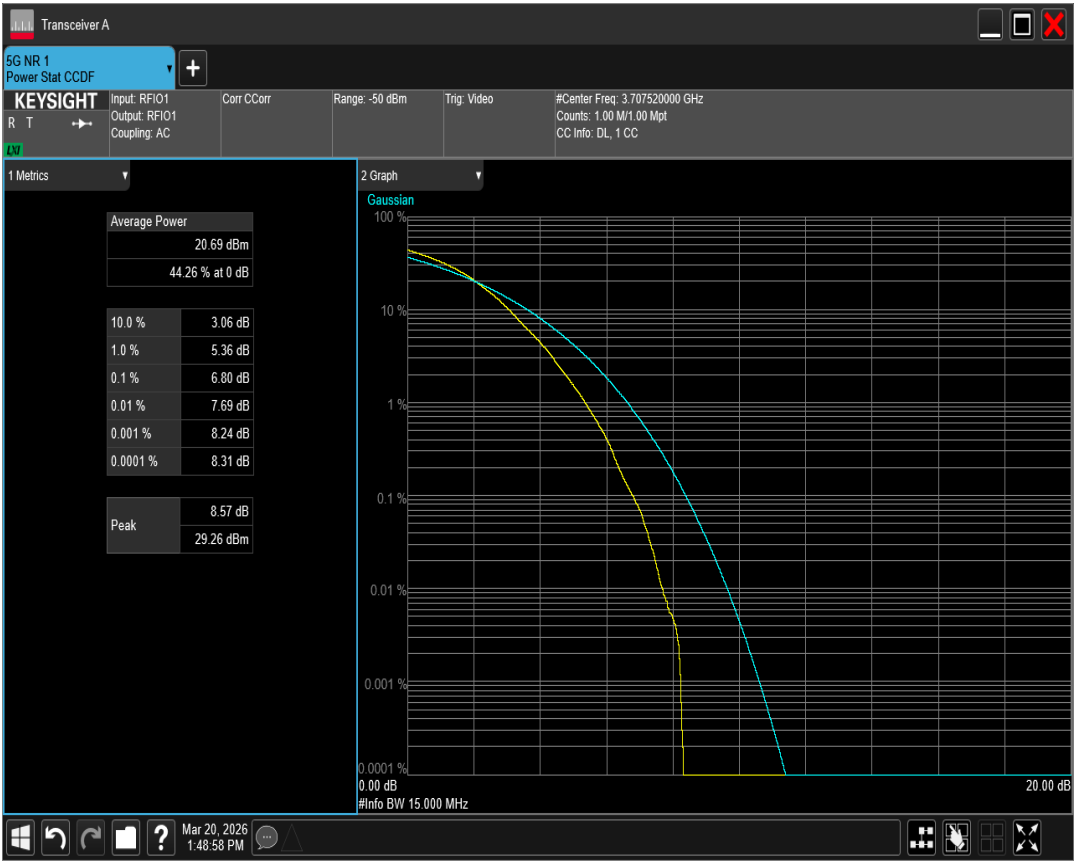


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=30MHz Channel=647668 RB=75@0

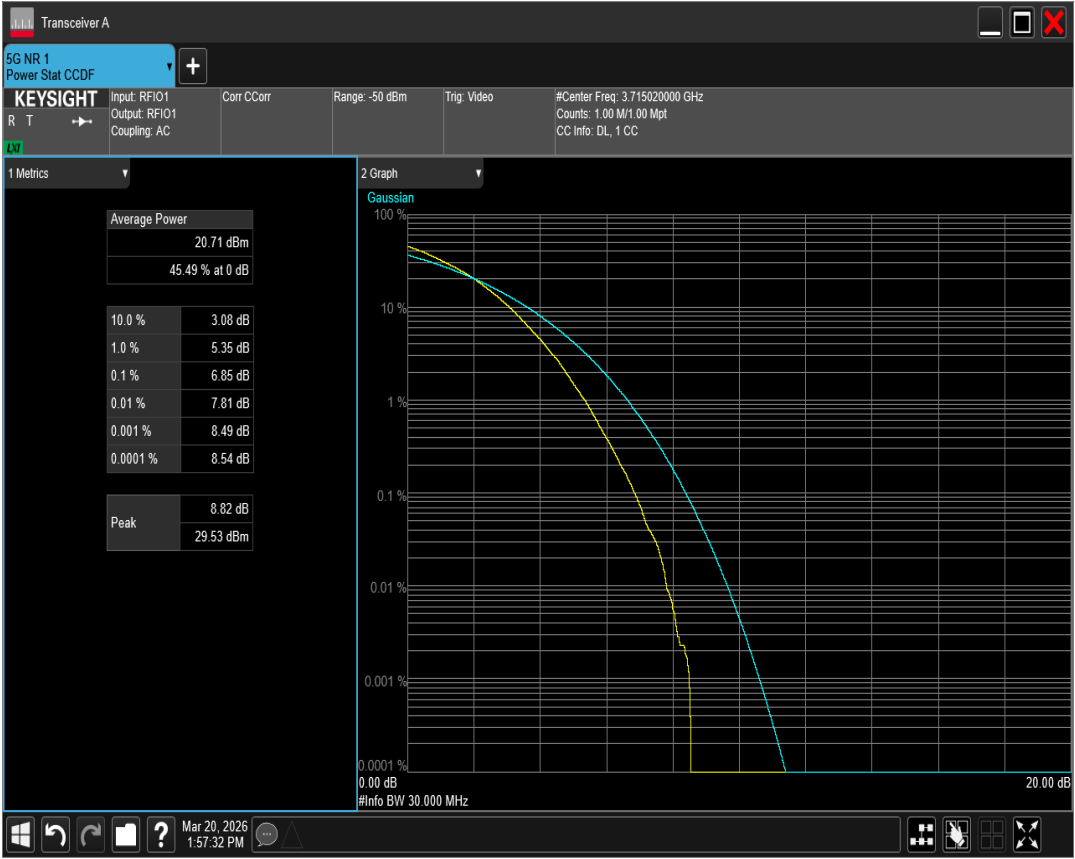


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=30MHz Channel=650000 RB=75@0

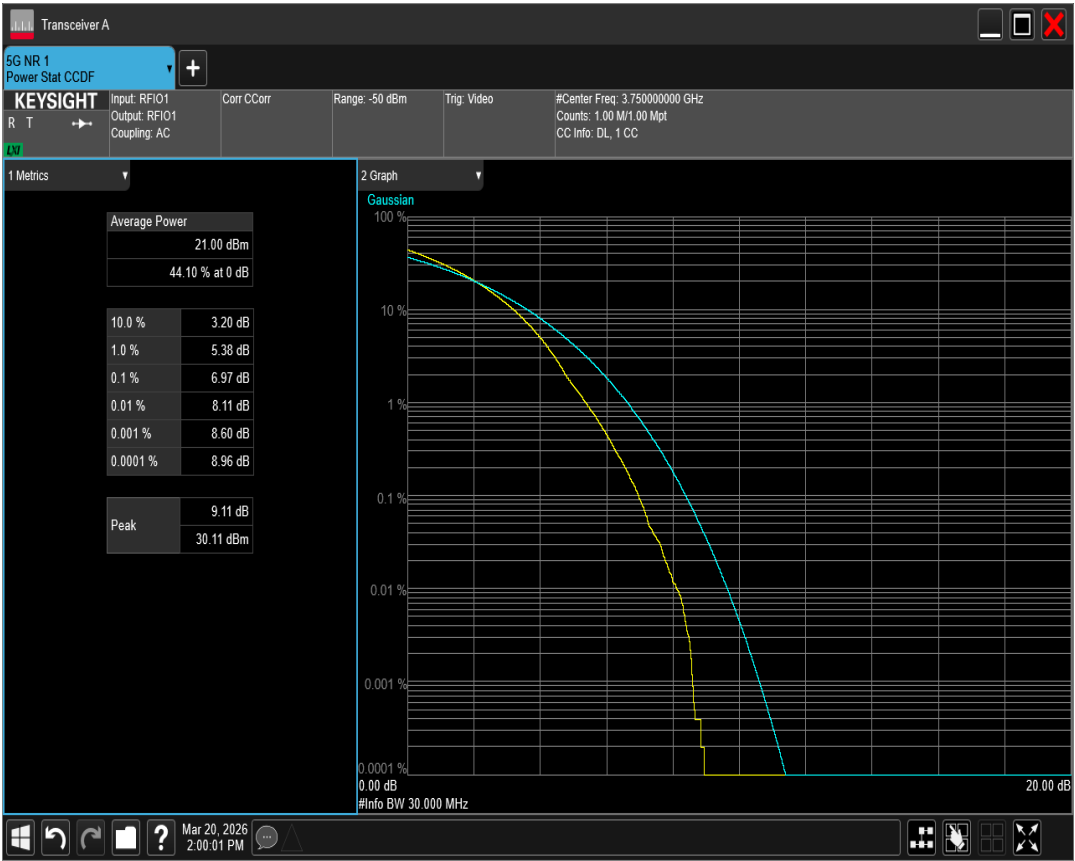


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=20MHz Channel=652666 RB=50@0

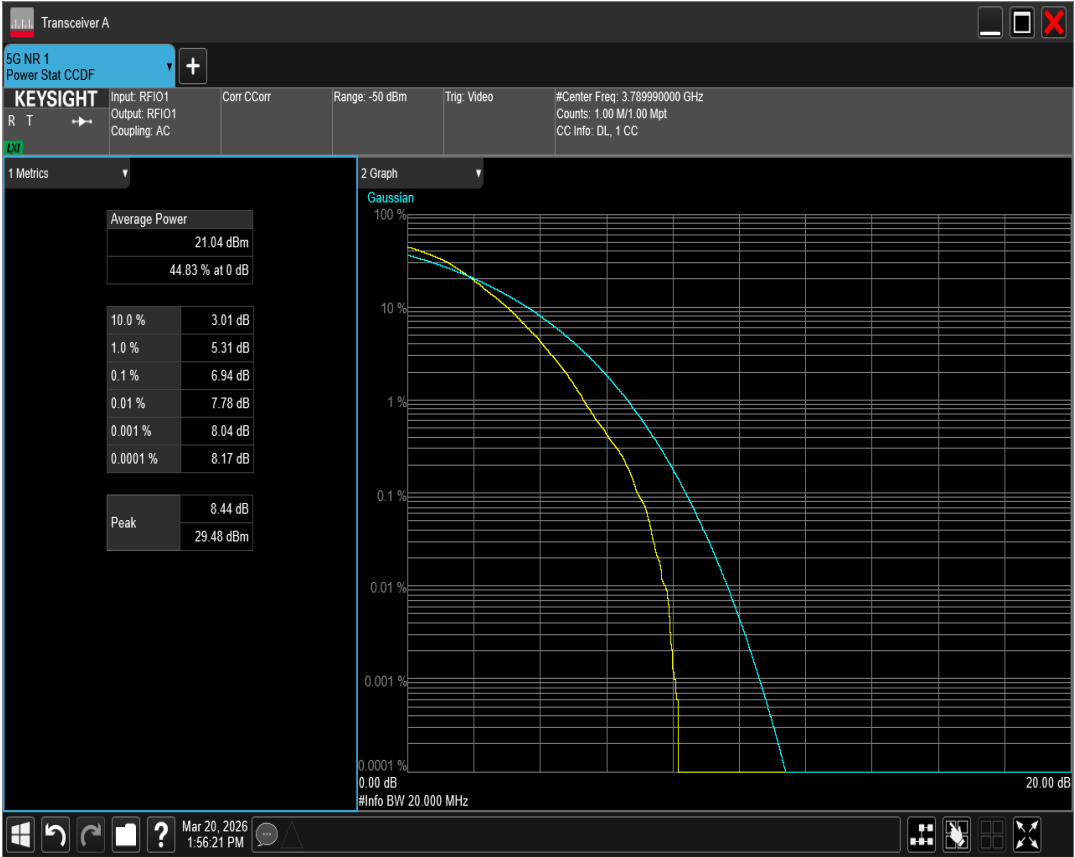


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=20MHz Channel=647334 RB=50@0

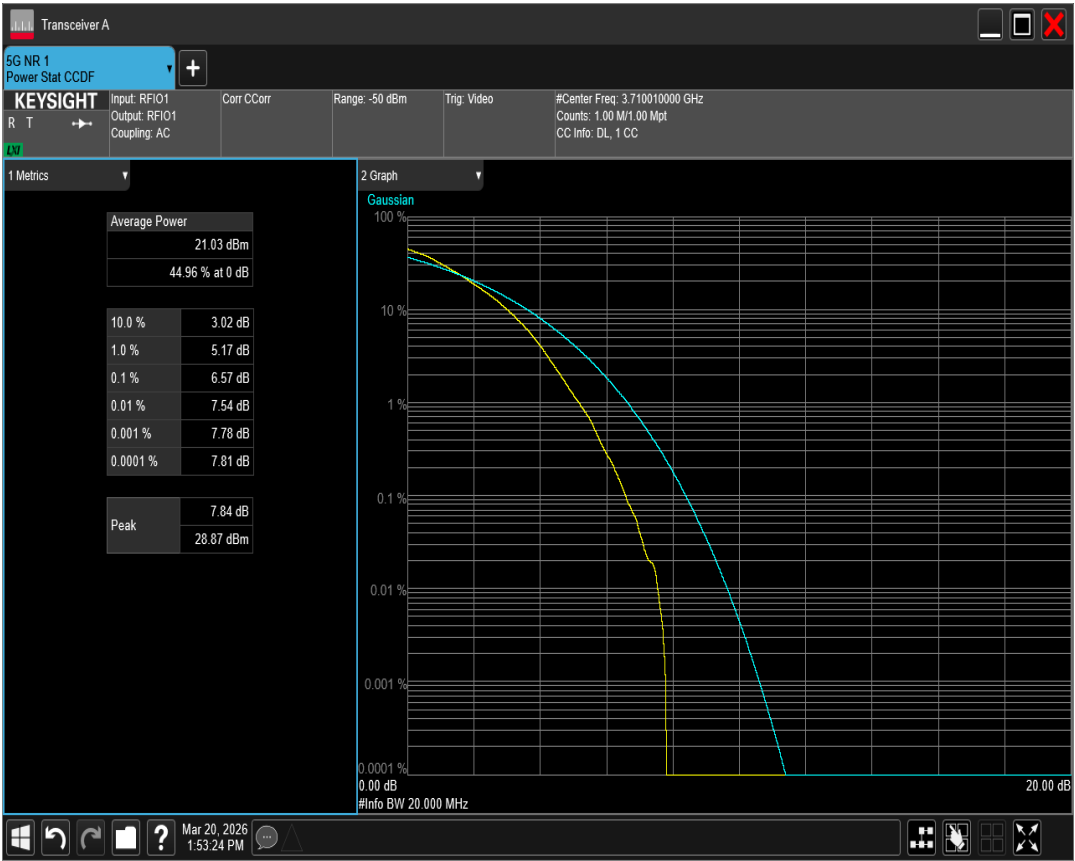


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=20MHz Channel=650000 RB=50@0

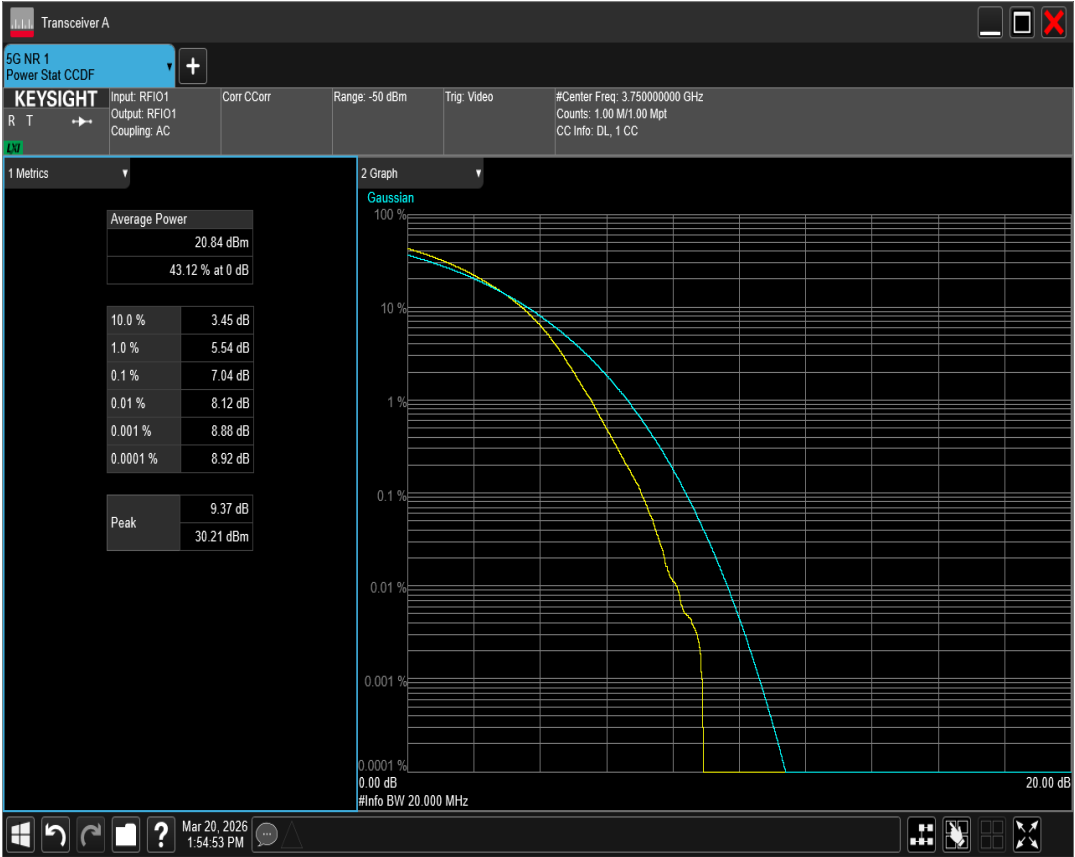


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=30MHz Channel=652332 RB=75@0

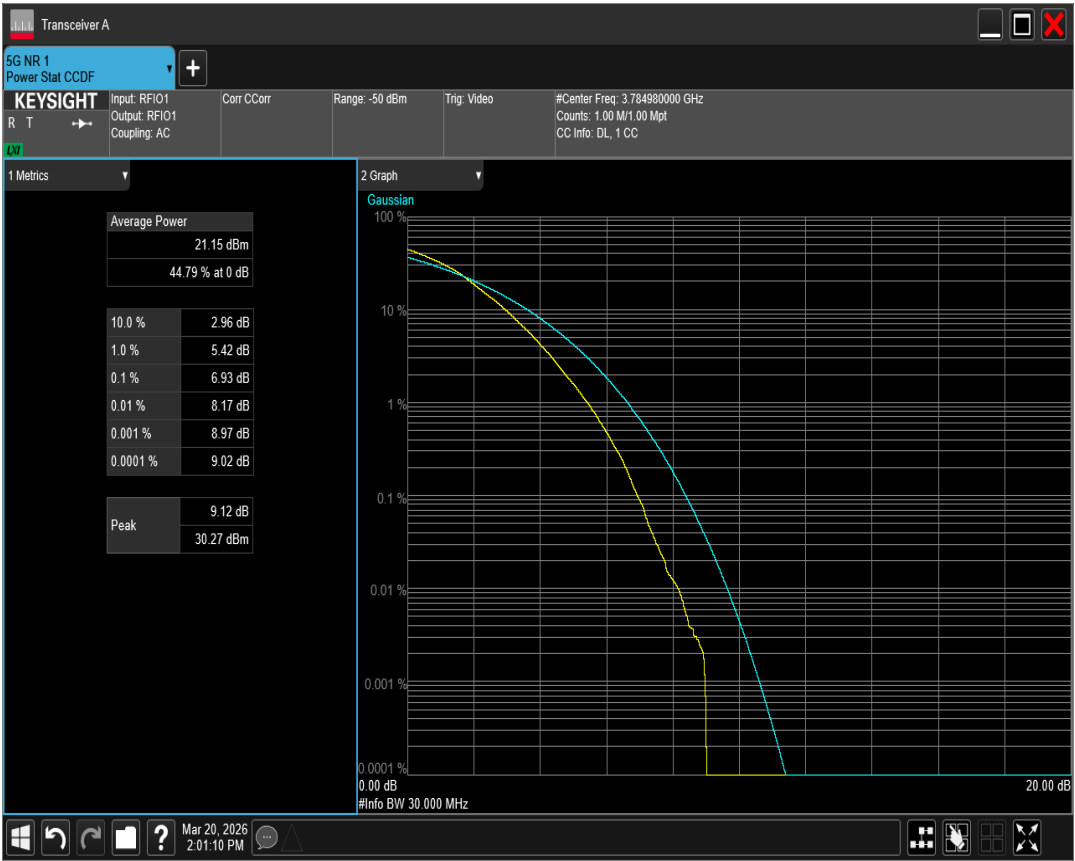


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=50MHz Channel=648334 RB=128@0

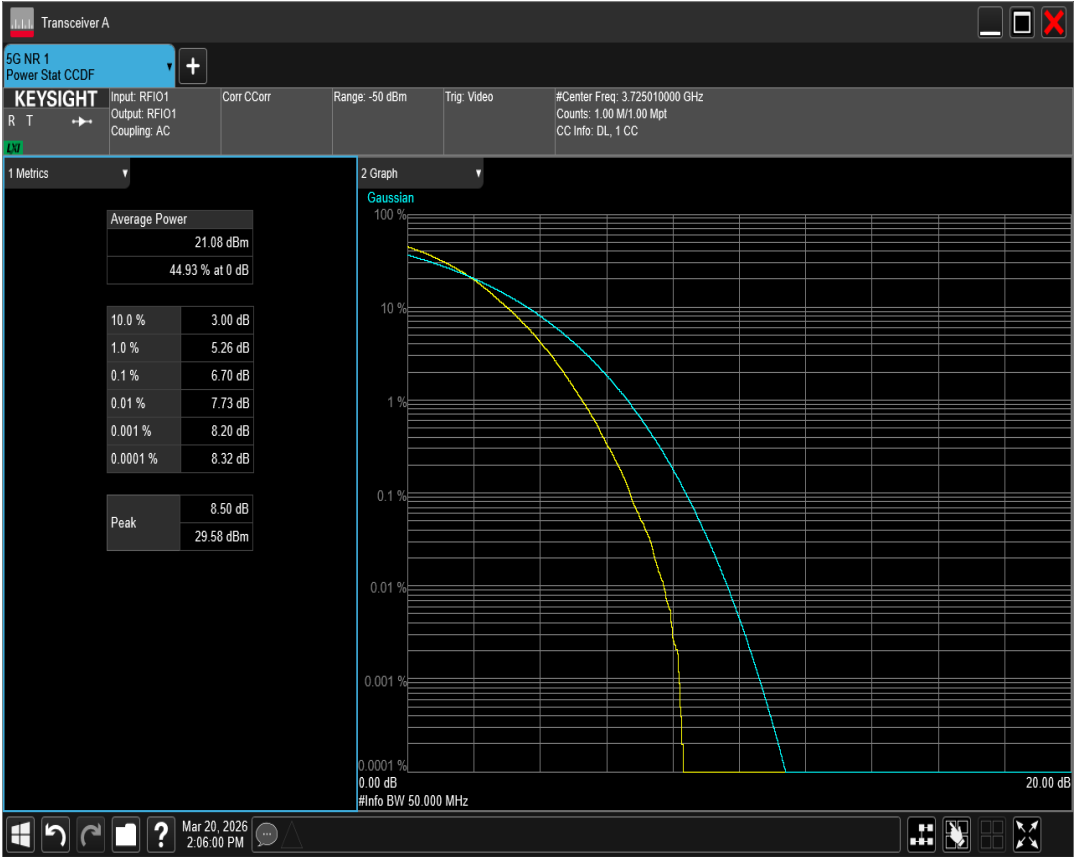


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=50MHz Channel=650000 RB=128@0

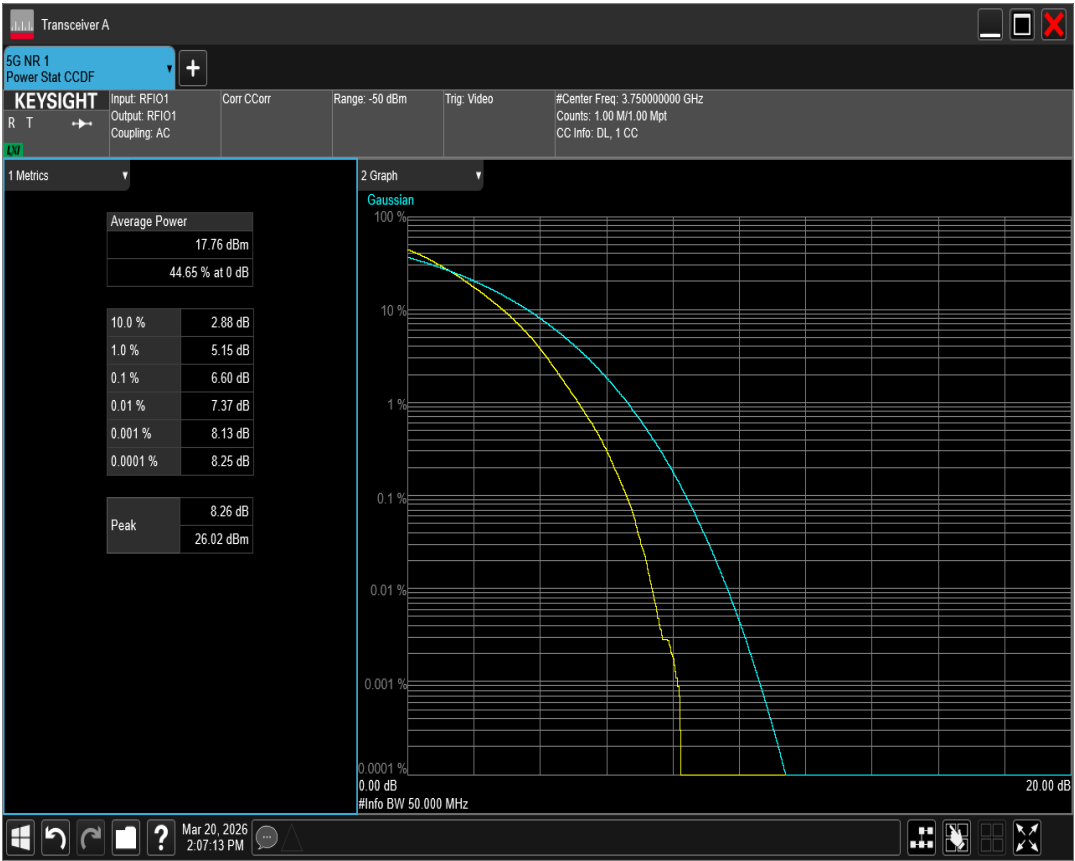


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=40MHz Channel=652000 RB=100@0

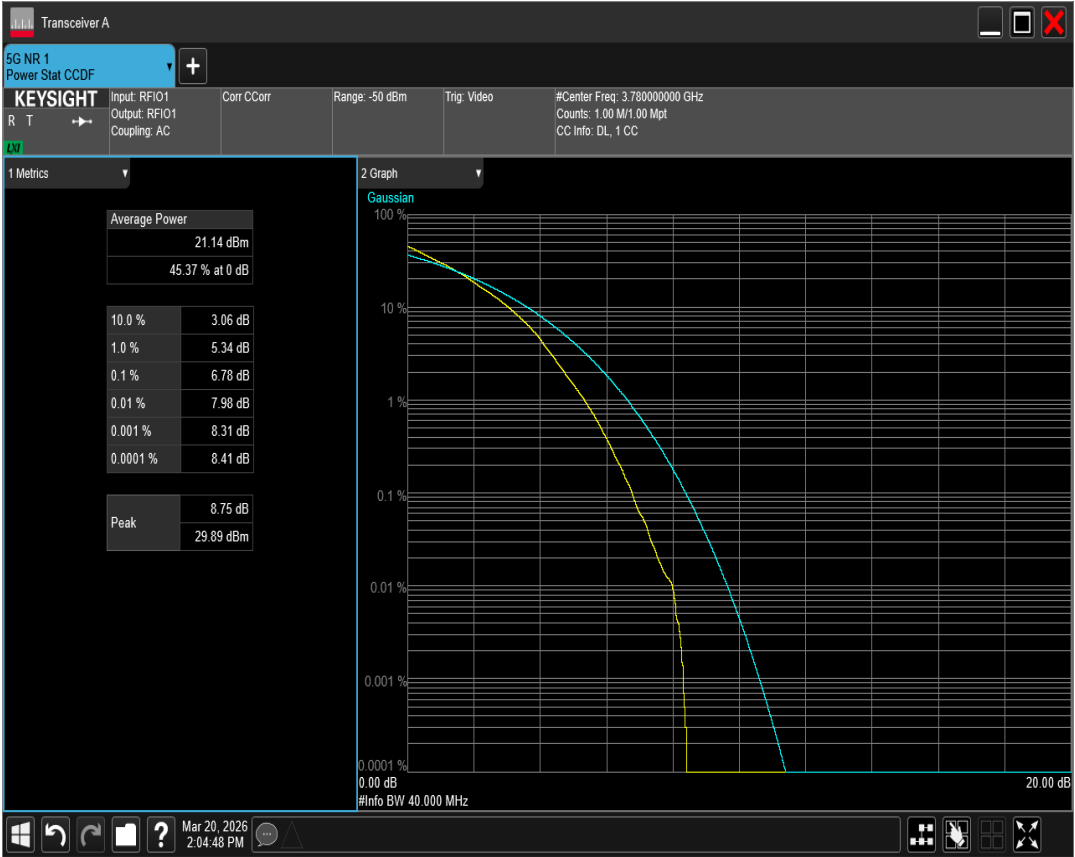


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=40MHz Channel=648000 RB=100@0

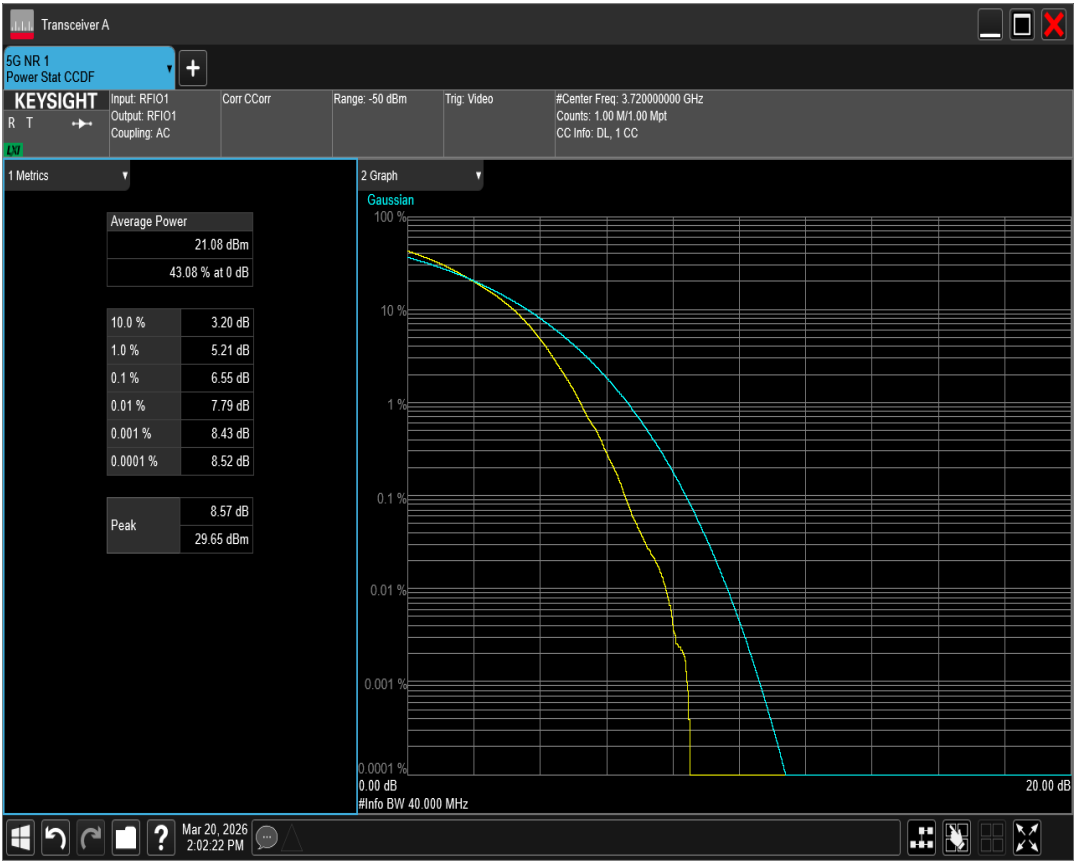


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=40MHz Channel=650000 RB=100@0

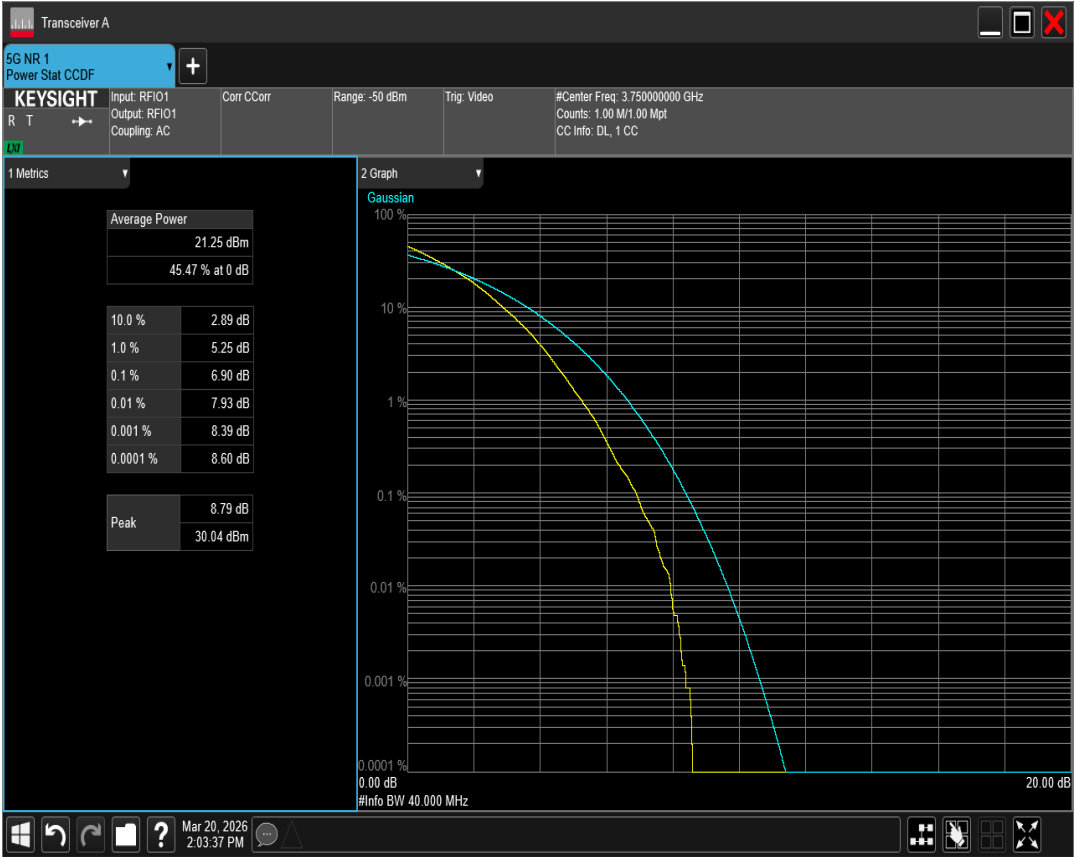


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=60MHz Channel=651332 RB=162@0

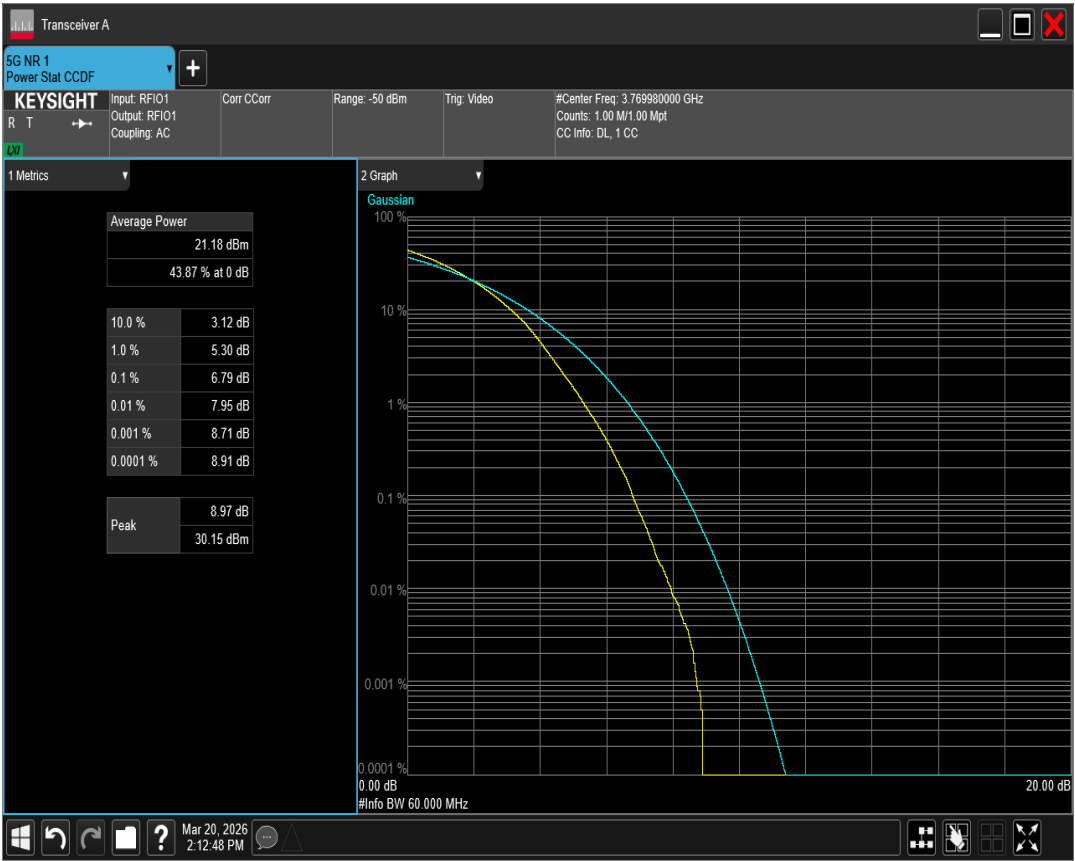


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=70MHz Channel=649000 RB=180@0

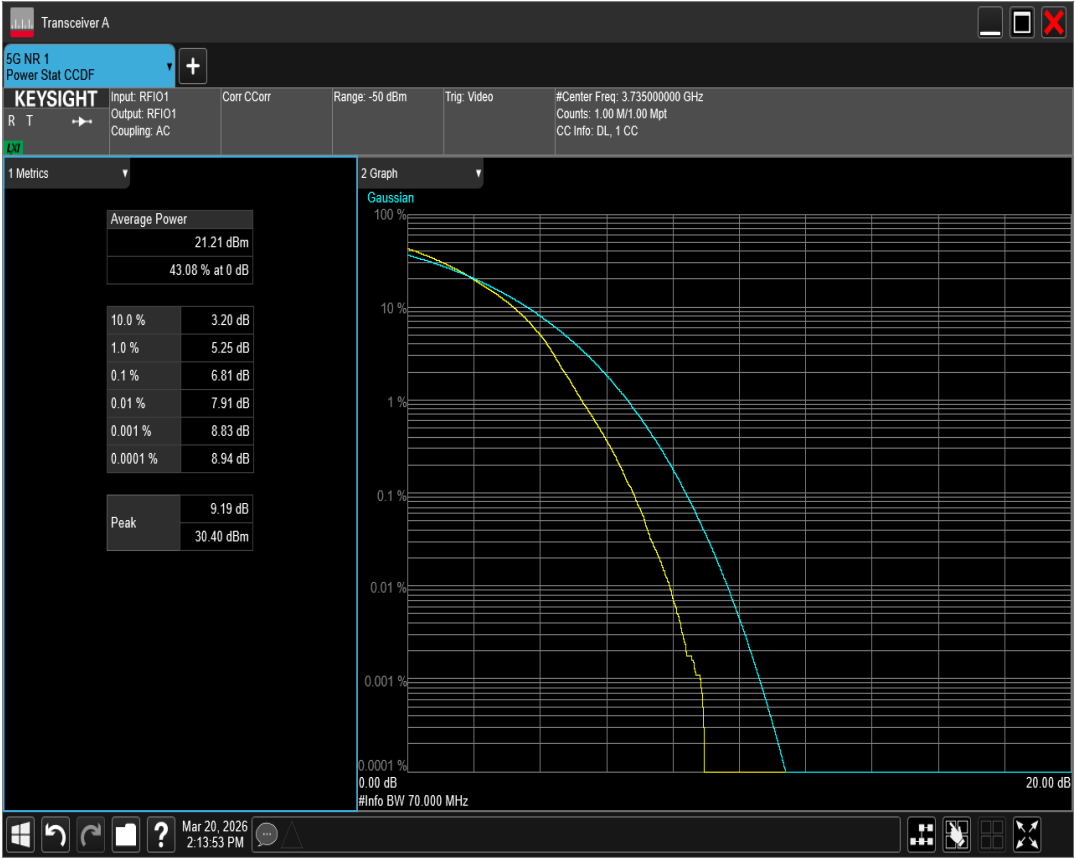


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=60MHz Channel=650000 RB=162@0

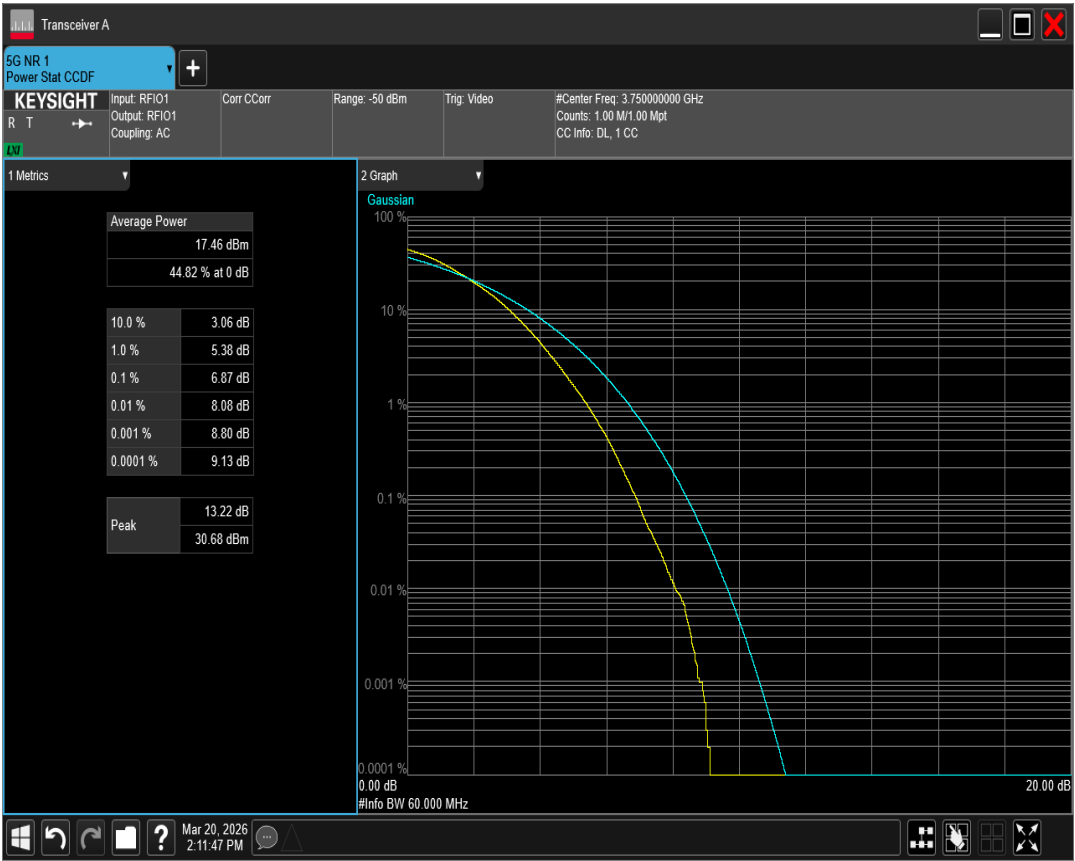


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=50MHz Channel=651666 RB=128@0

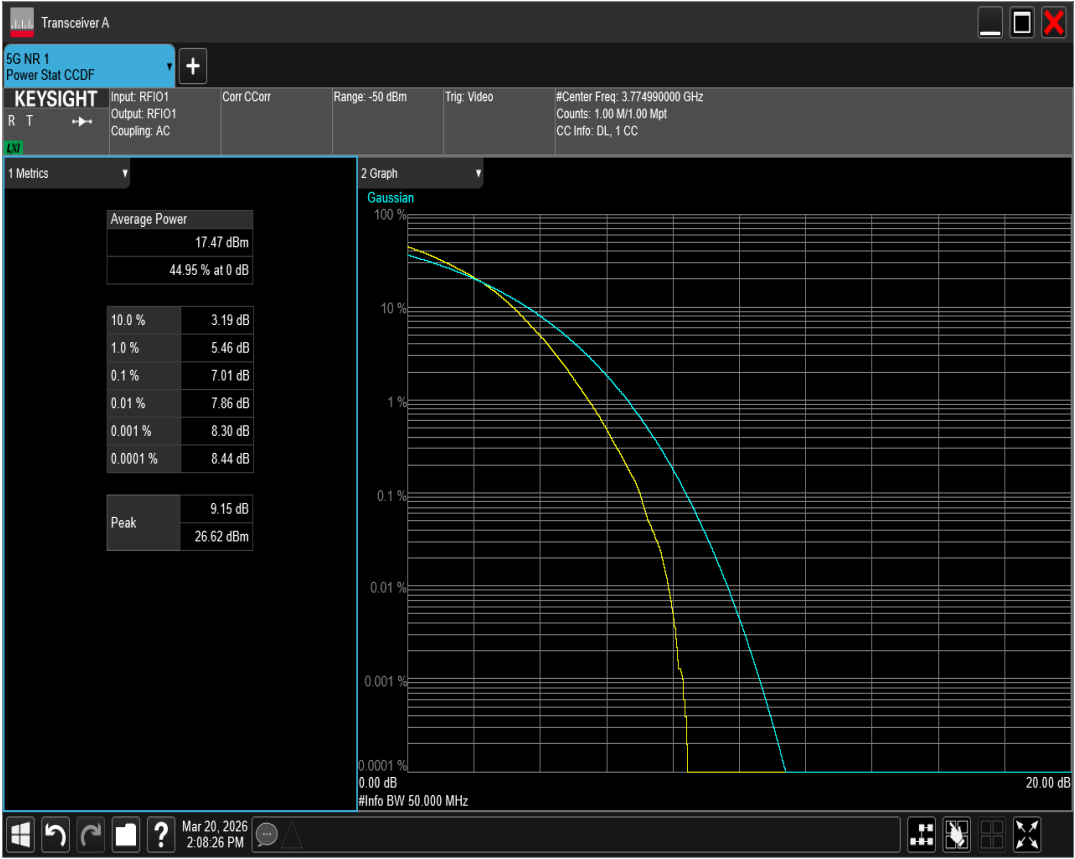


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=60MHz Channel=648668 RB=162@0

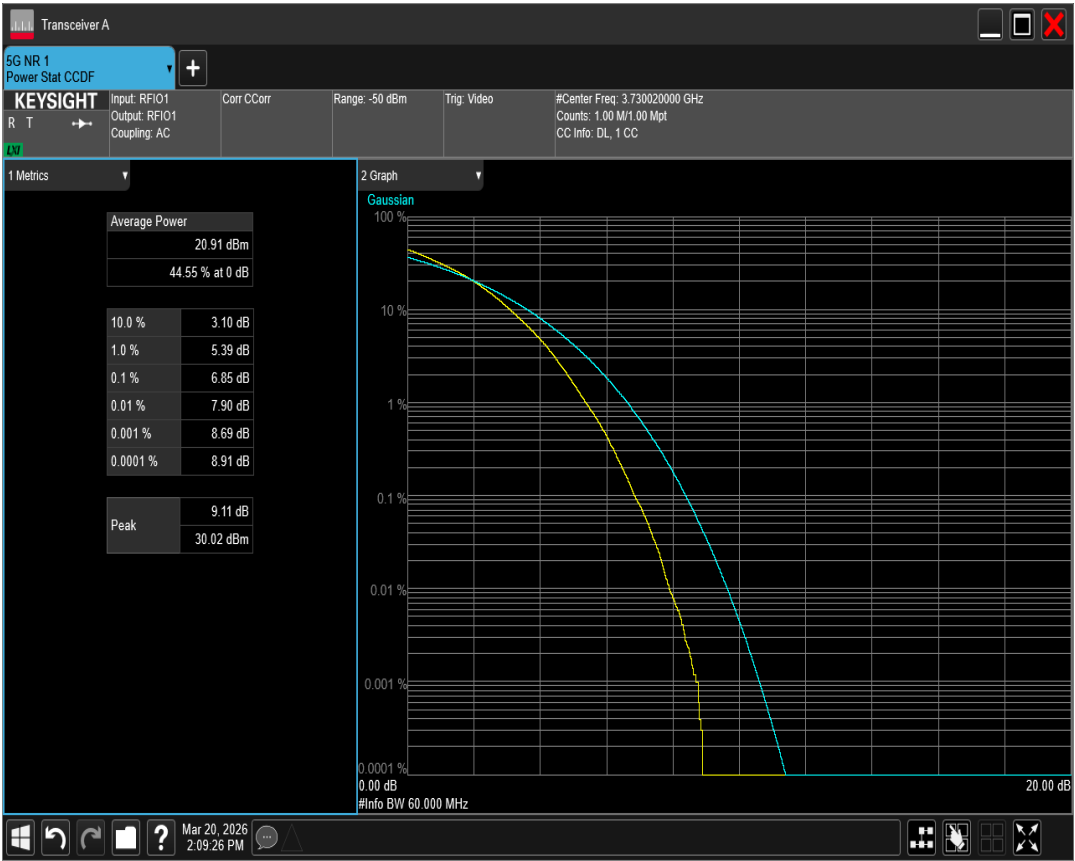


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=80MHz Channel=650000 RB=216@0

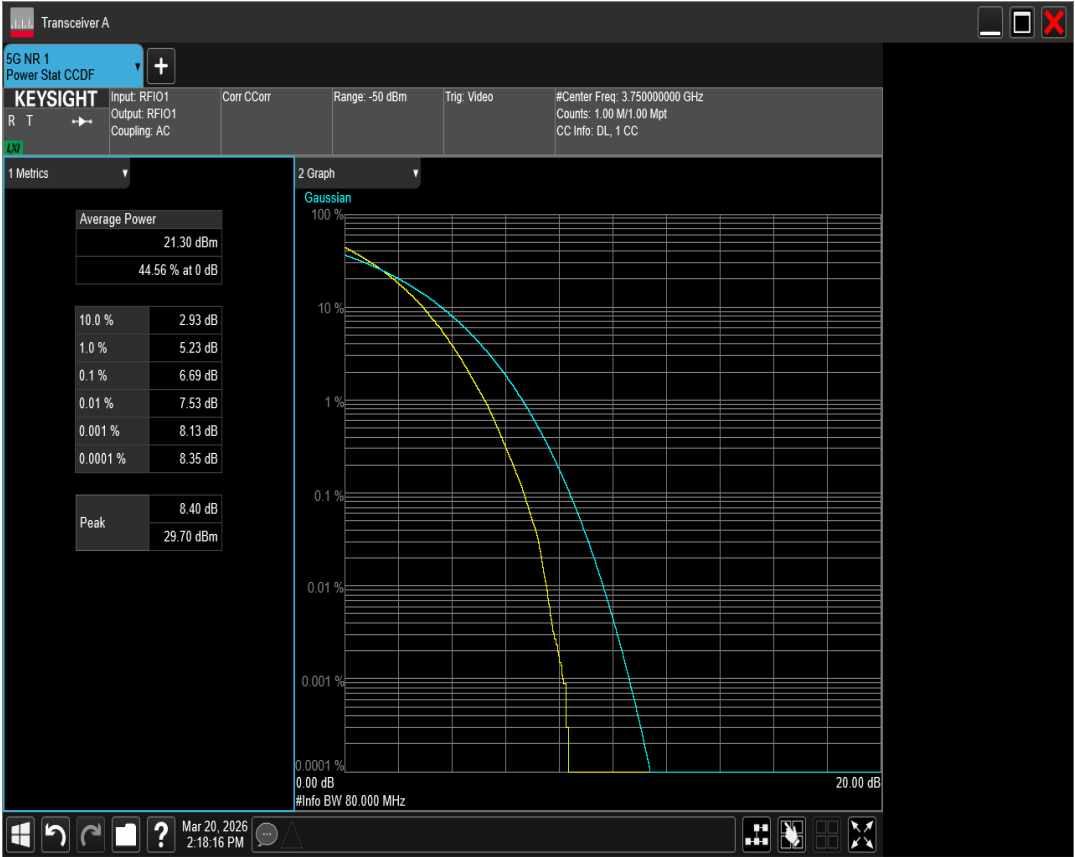


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=80MHz Channel=650666 RB=216@0

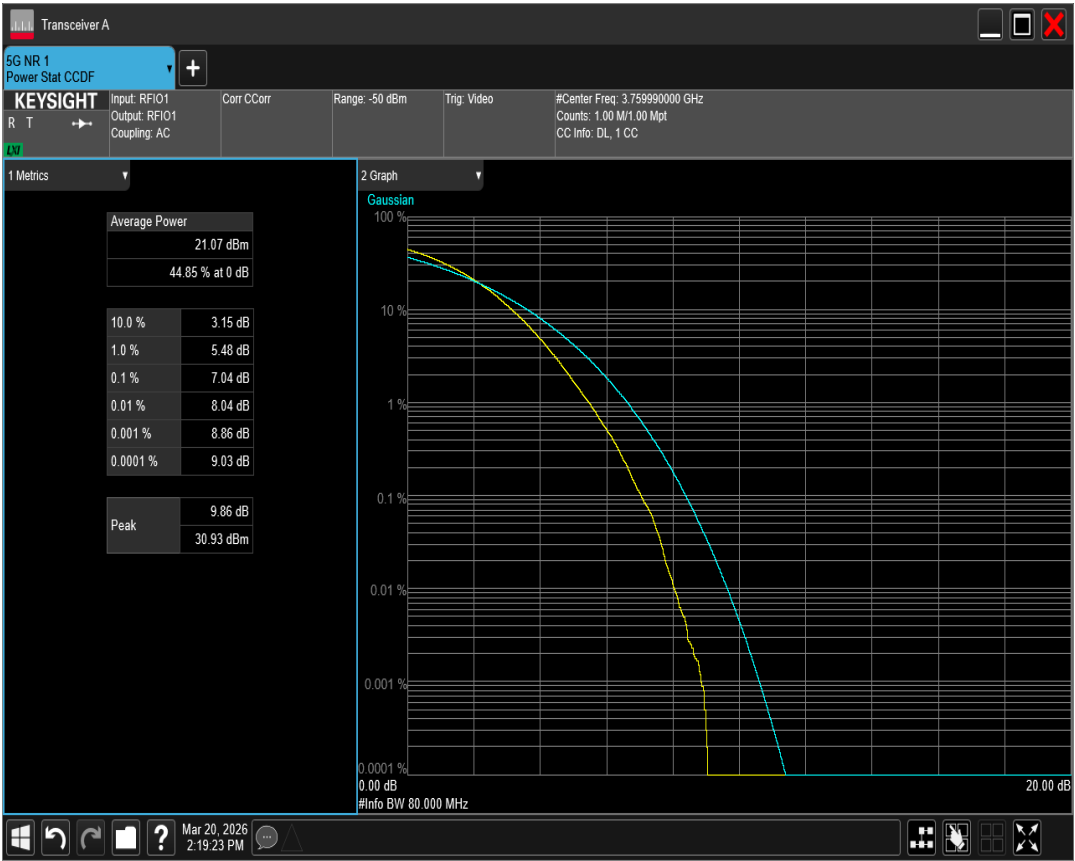


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=90MHz Channel=649668 RB=240@0

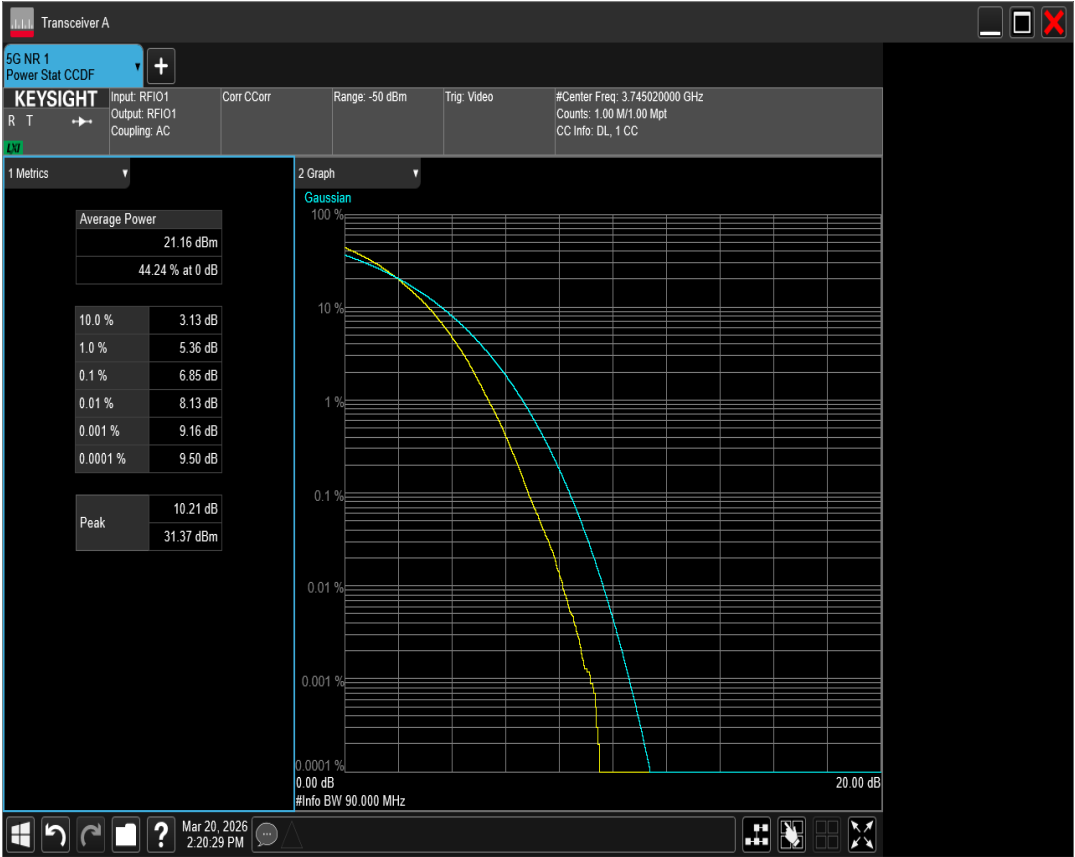


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=70MHz Channel=650000 RB=180@0

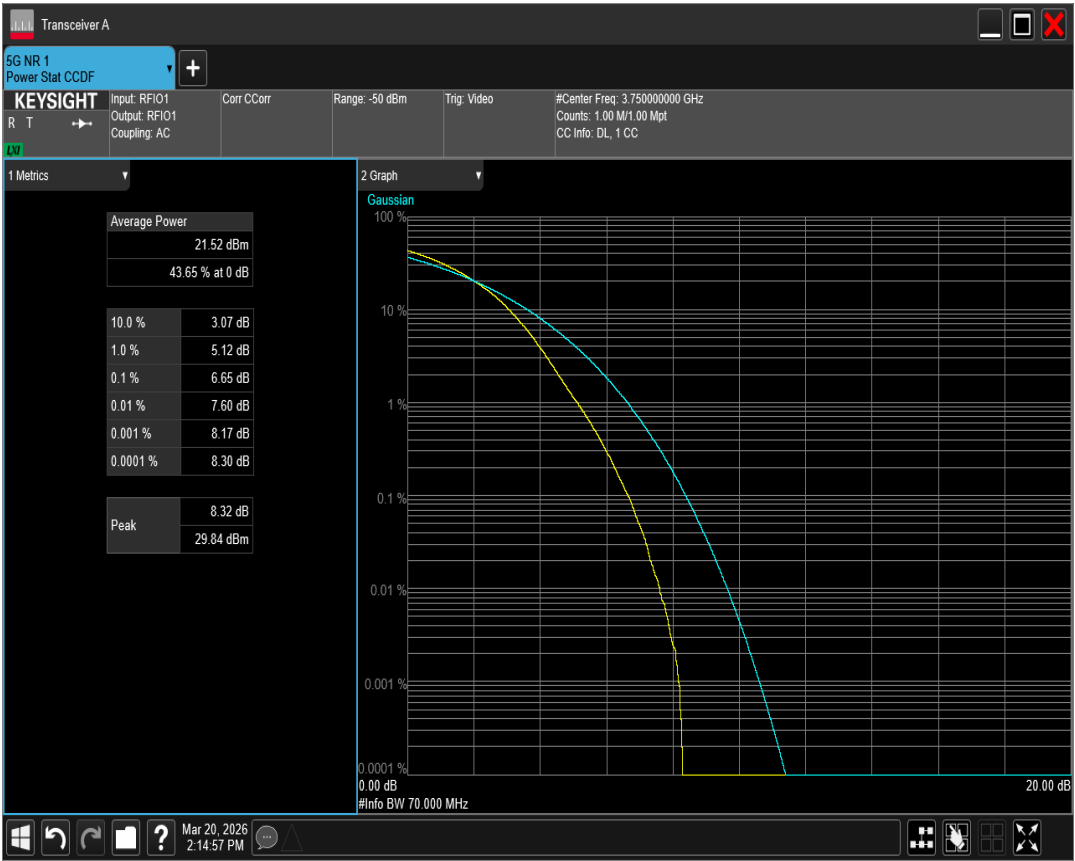


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=70MHz Channel=651000 RB=180@0

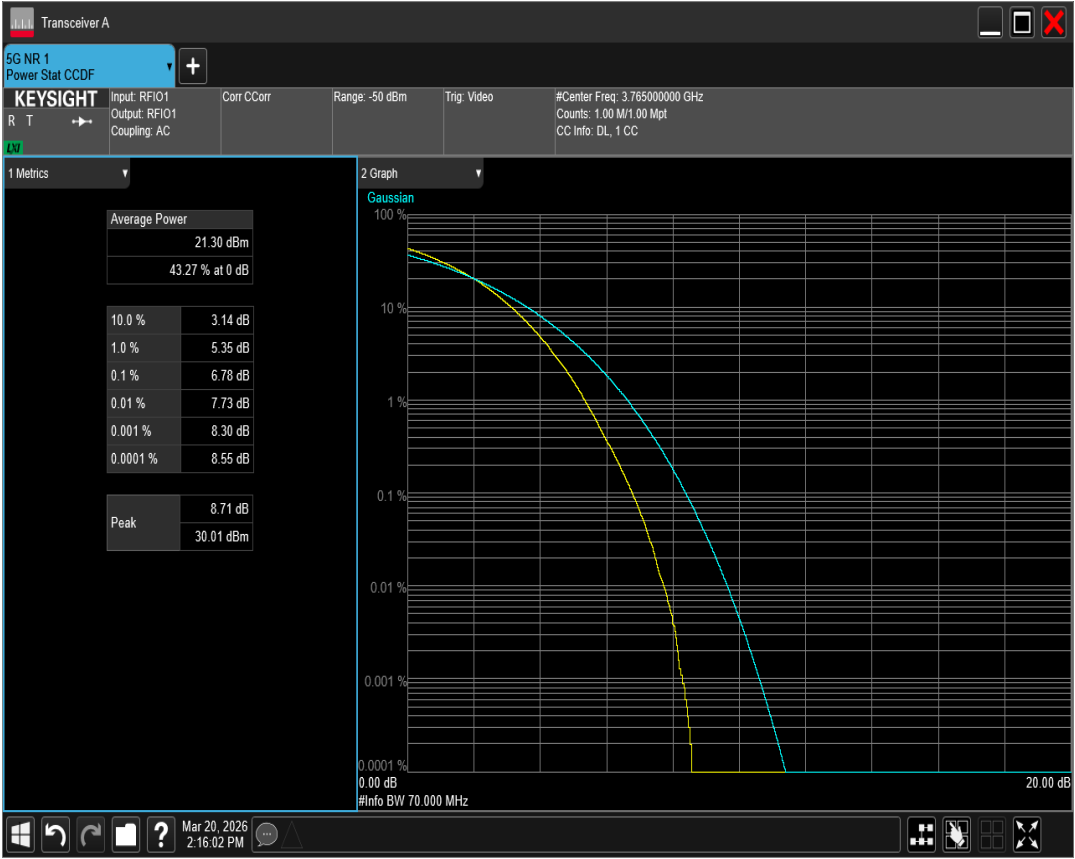


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=80MHz Channel=649334 RB=216@0

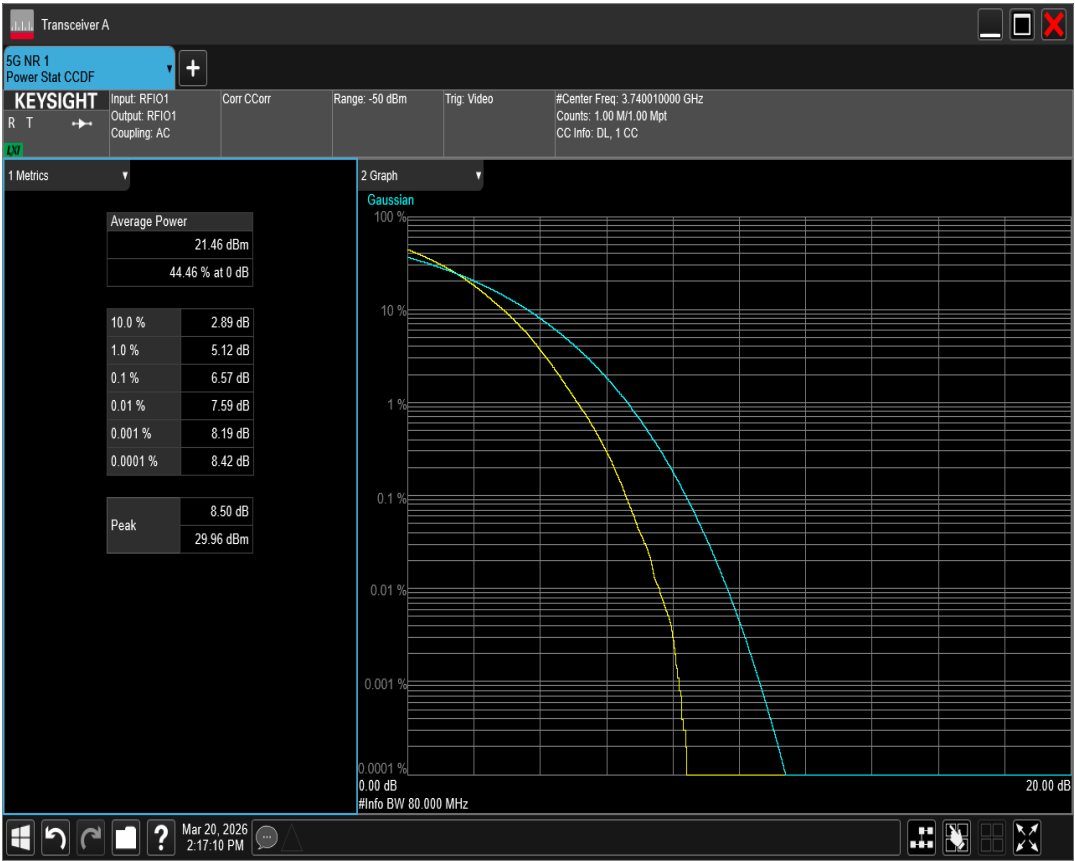


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=90MHz Channel=650332 RB=240@0

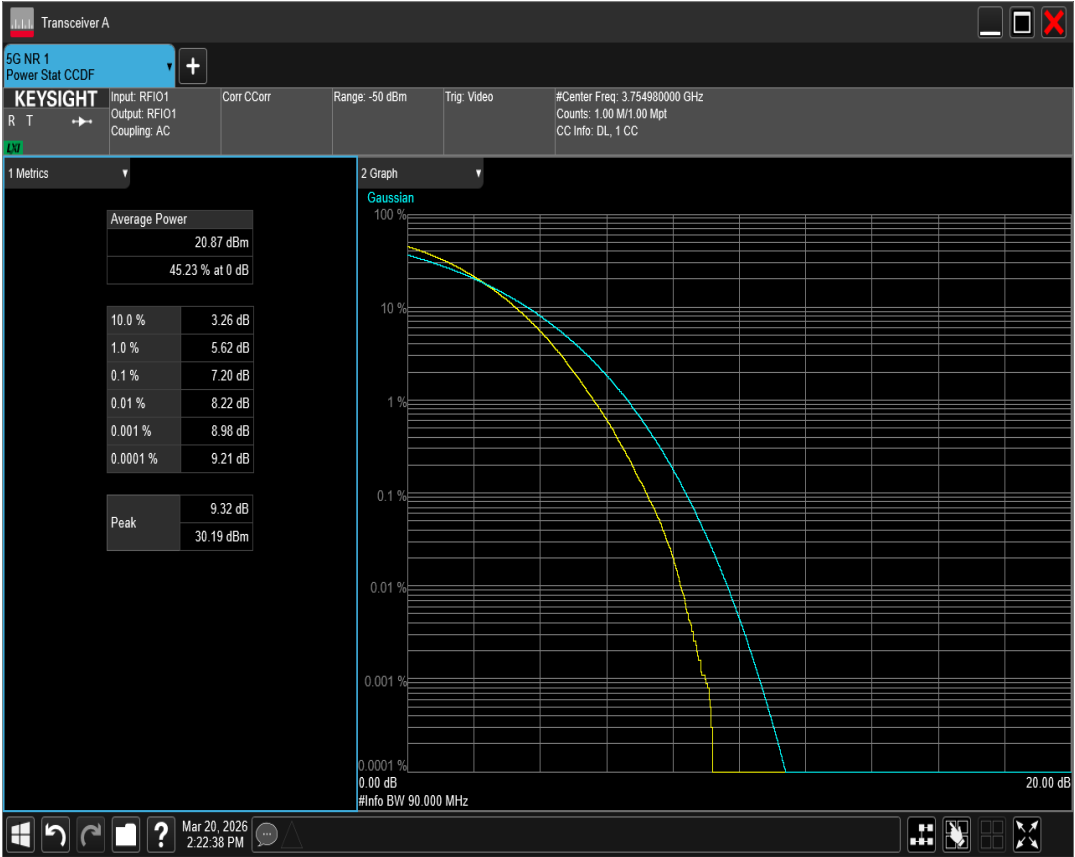


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=90MHz Channel=650000 RB=240@0

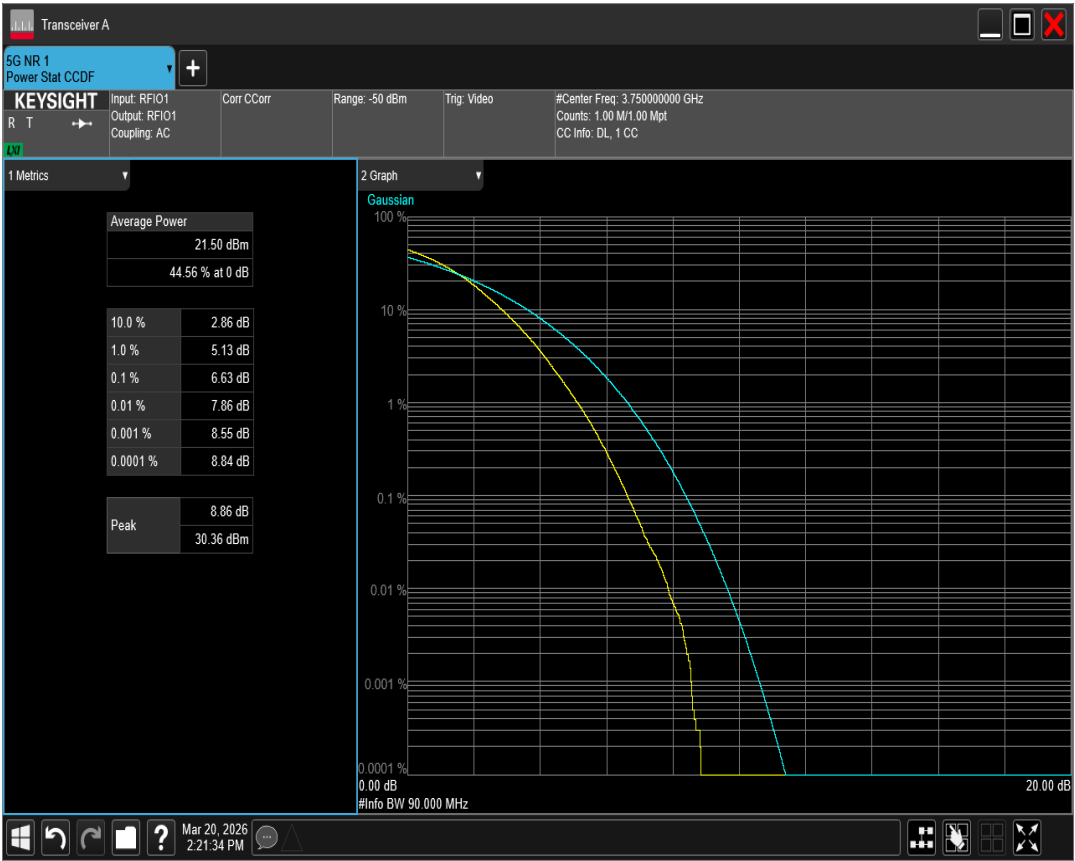


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=100MHz Channel=650000 RB=270@0

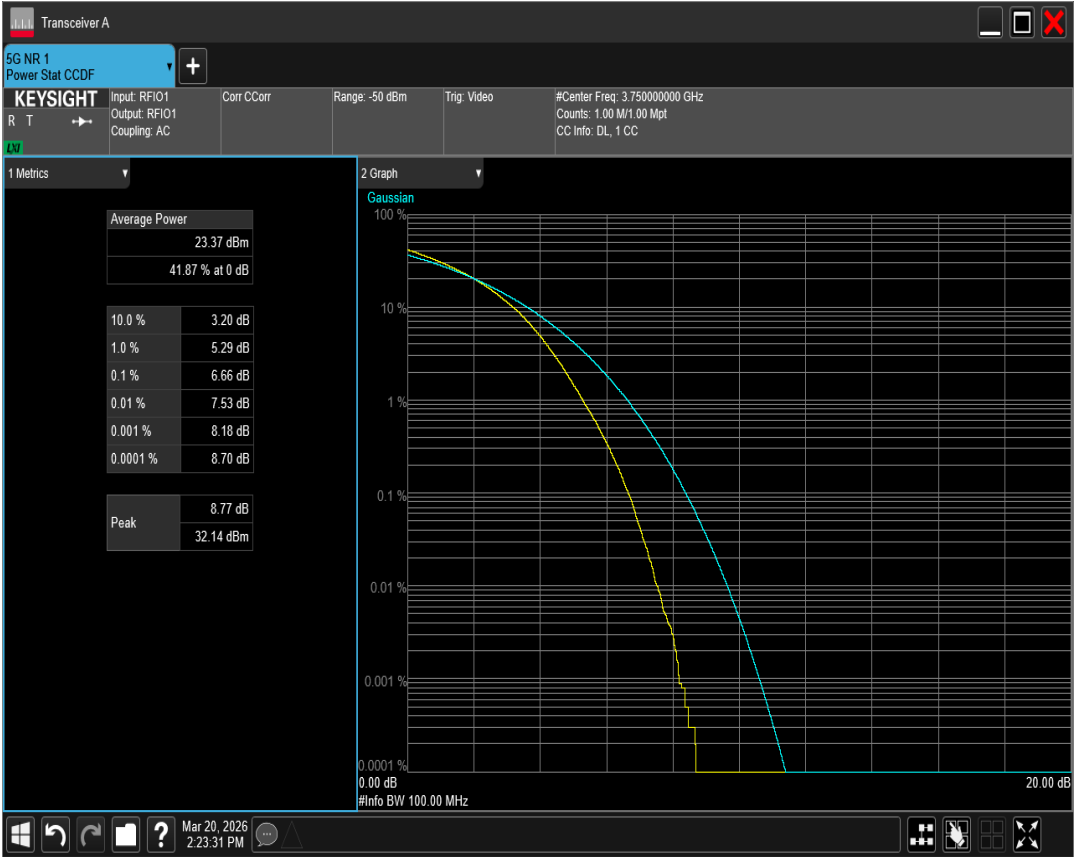


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=10MHz Channel=647000 RB=24@0

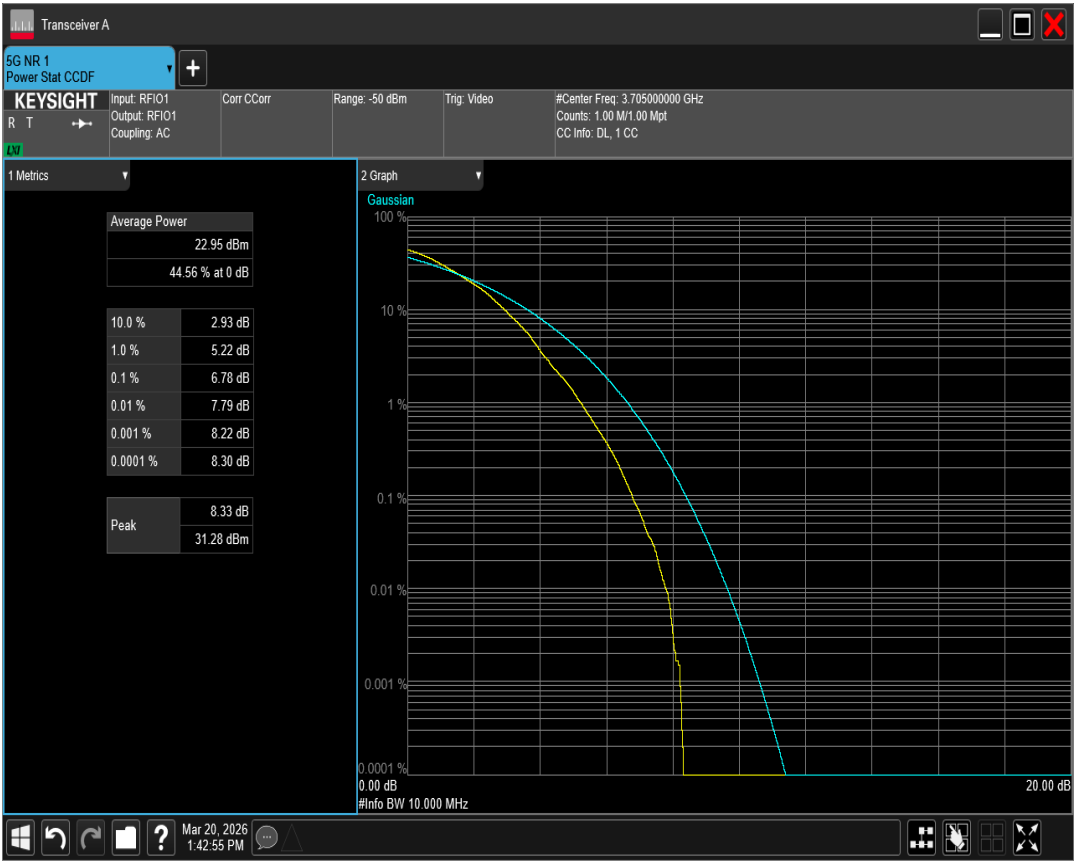


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=15MHz Channel=647168 RB=36@0

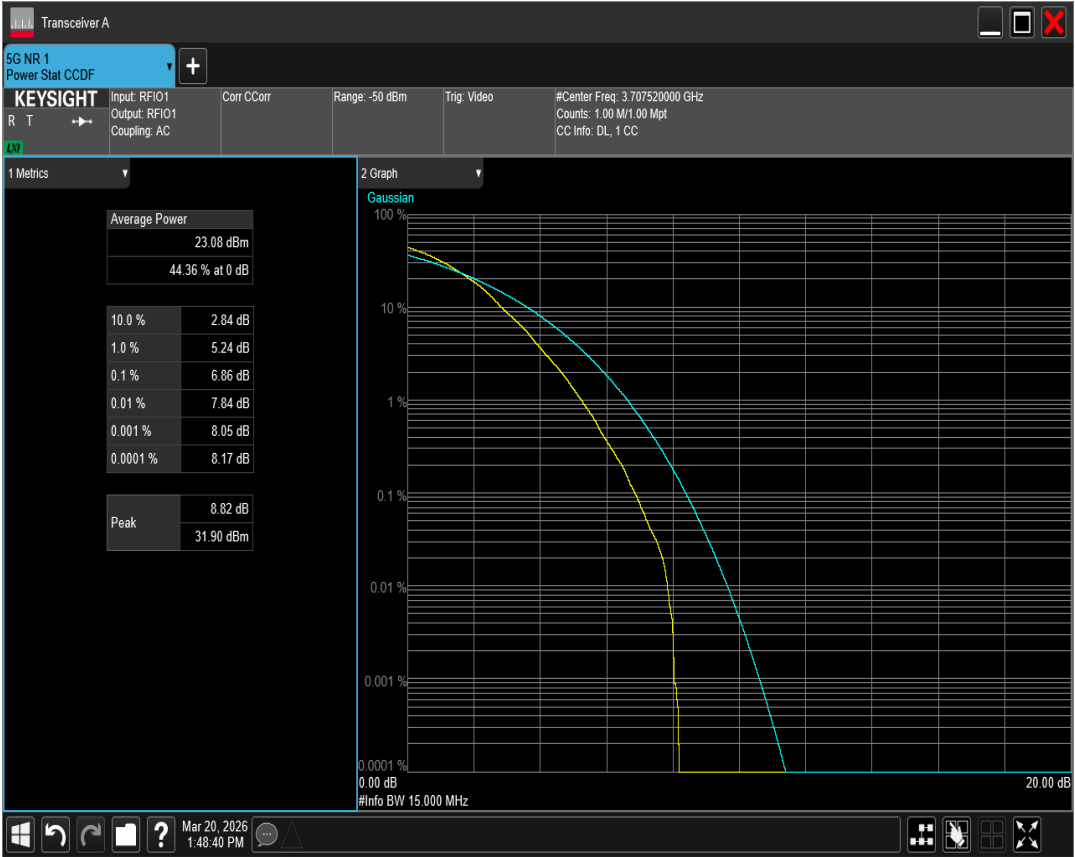


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=10MHz Channel=653000 RB=24@0

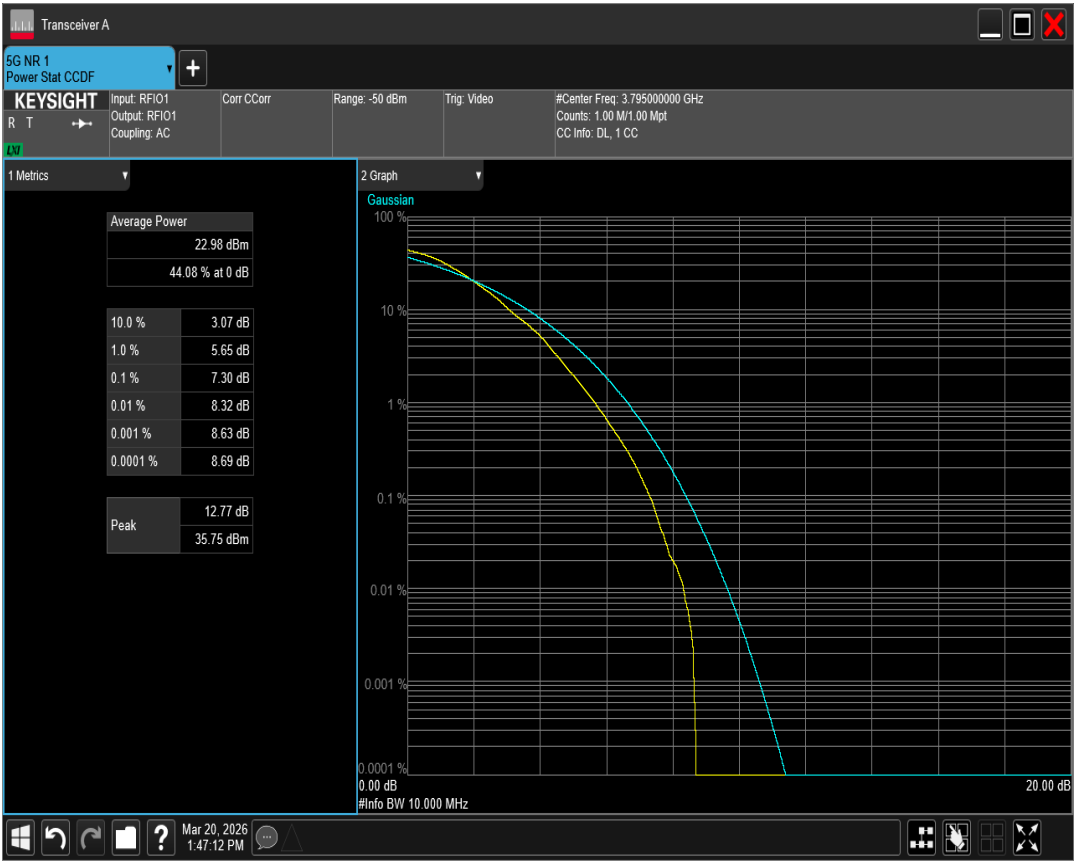


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=10MHz Channel=650000 RB=24@0

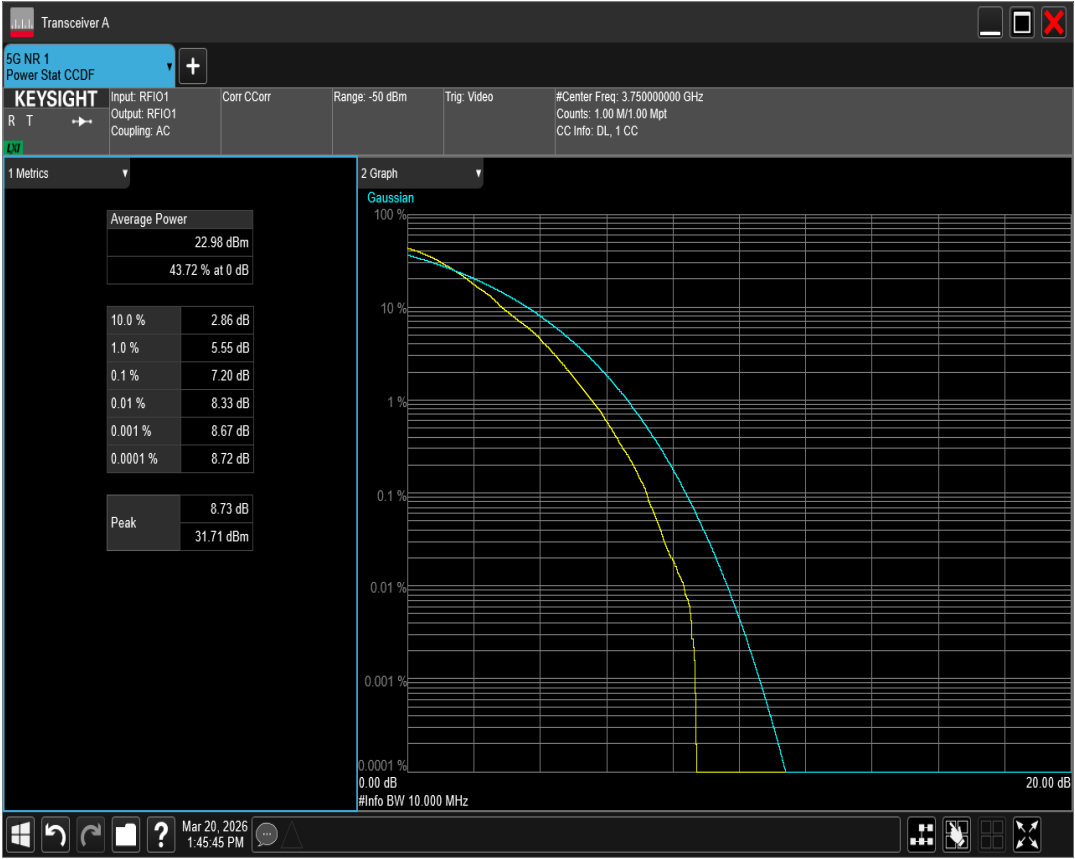


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=20MHz Channel=647334 RB=50@0

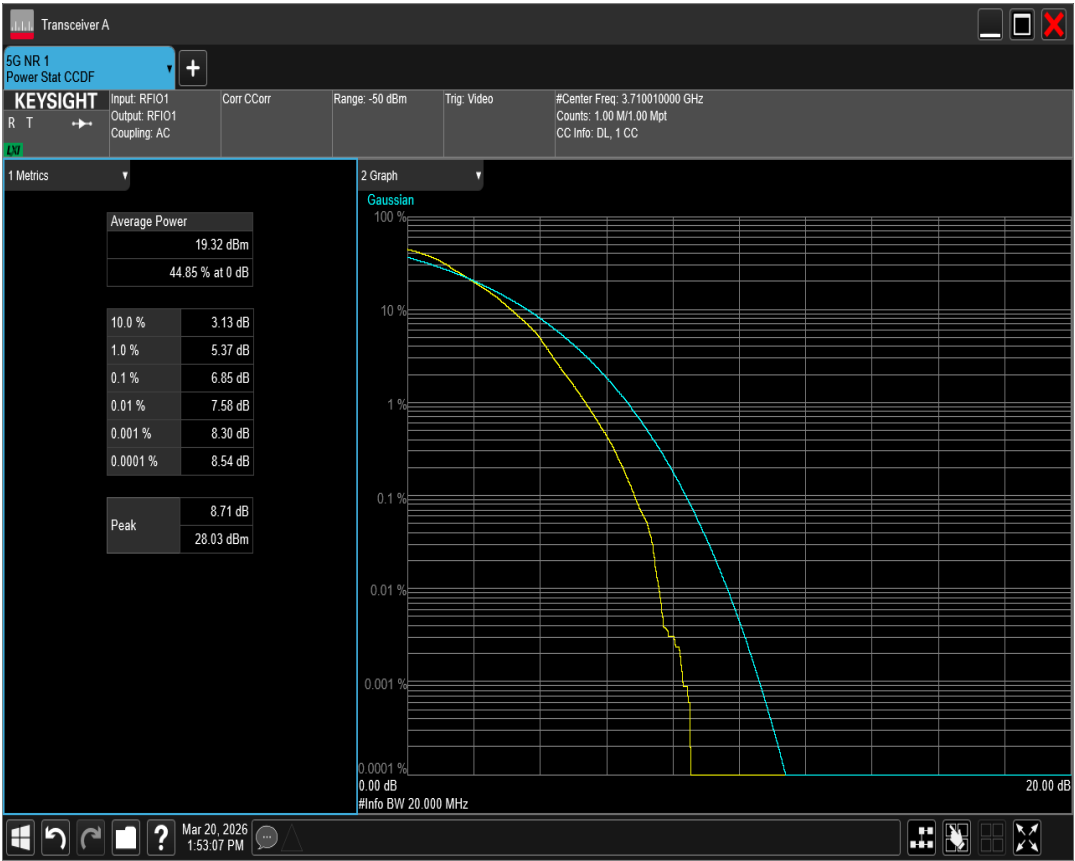


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=15MHz Channel=652832 RB=36@0

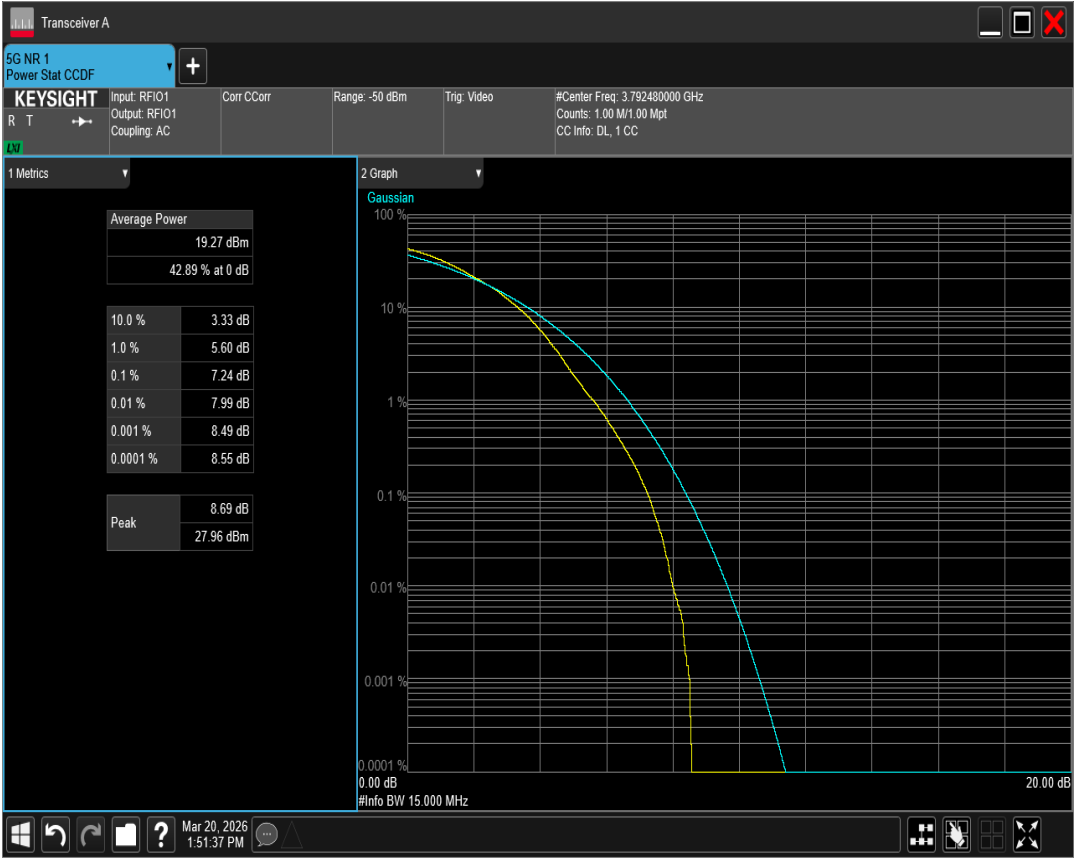

n78(3700-3800) SCS=30kHz DFT_QAM64 BW=15MHz Channel=650000 RB=36@0

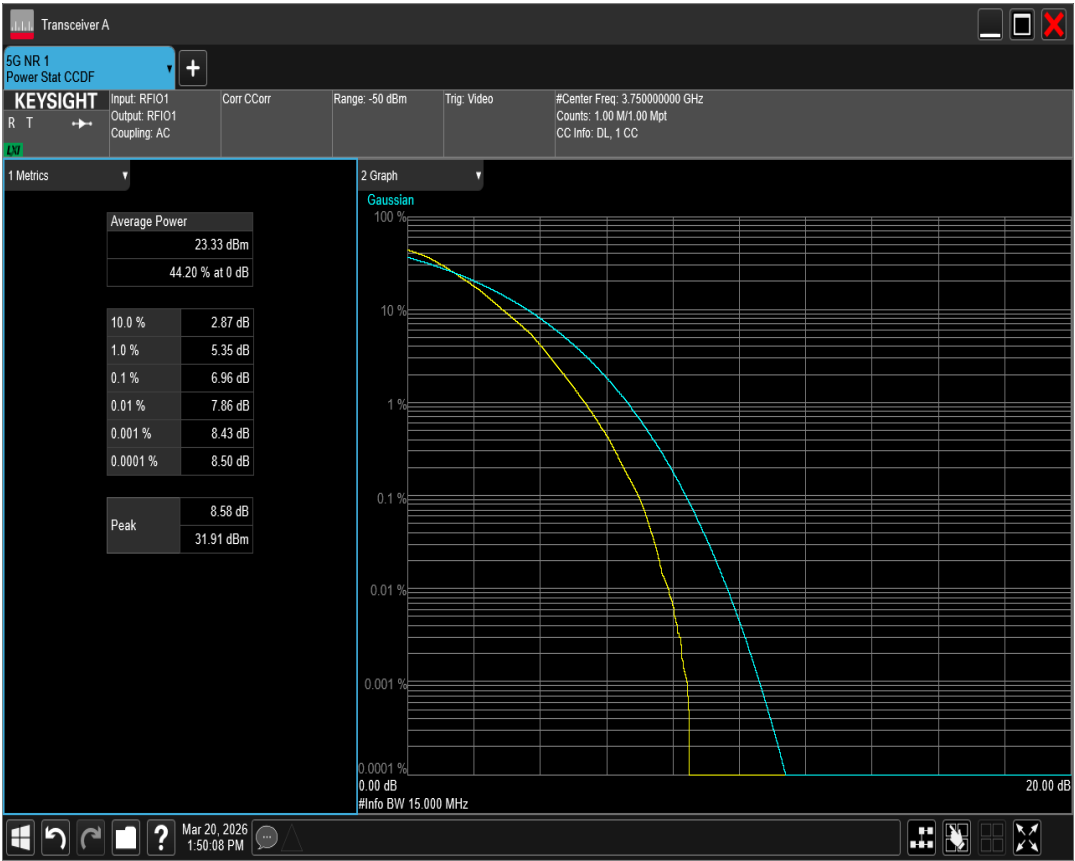

n78(3700-3800) SCS=30kHz DFT_QAM64 BW=30MHz Channel=650000 RB=75@0

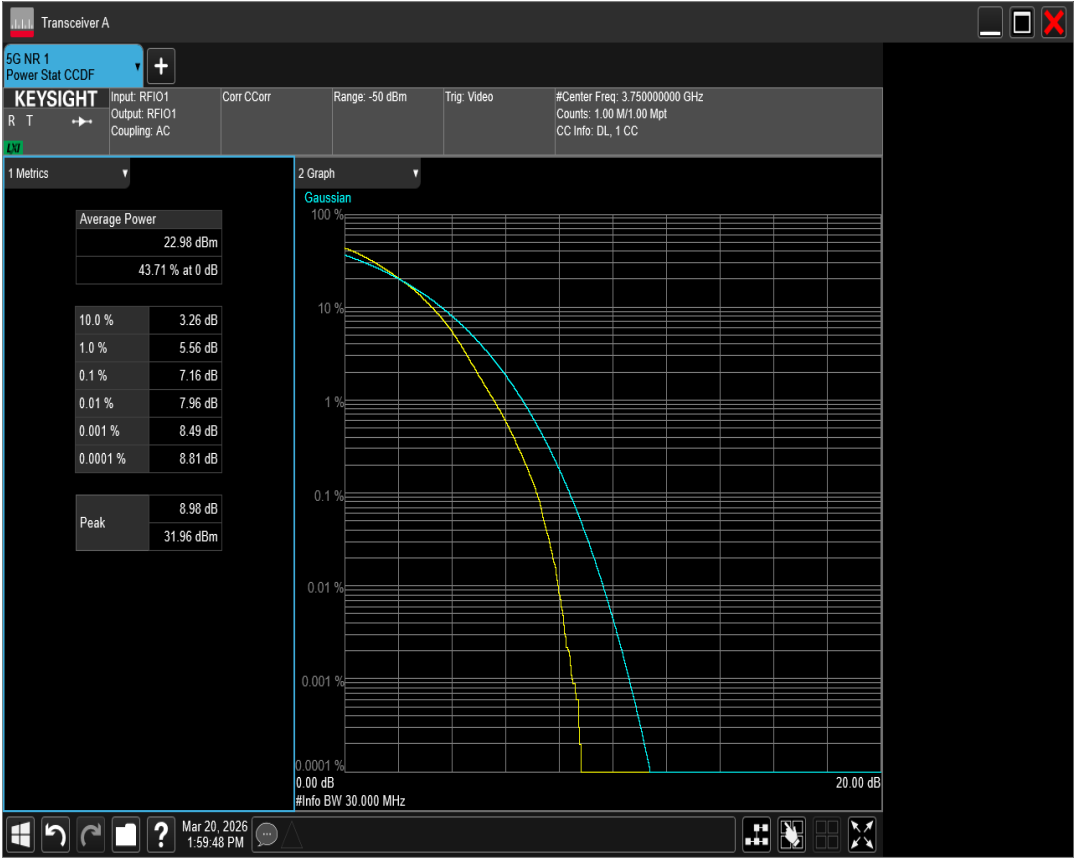

n78(3700-3800) SCS=30kHz DFT_QAM64 BW=30MHz Channel=652332 RB=75@0