



P3S

STEREO BLUETOOTH AUDIO RECEIVER

English Manual


www.xvive.com

OVERVIEW

The Xvive P3 Stereo is a compact professional Bluetooth audio receiver designed to add high-quality wireless audio capability to mixers, active PA speakers, and other balanced audio systems.

Designed as a stereo output solution, P3 Stereo provides left and right balanced audio outputs from a single Bluetooth connection, allowing stereo playback without additional devices or complex setup.

Featuring a rugged mini-XLR/XLR-based design, intuitive operation, and stable wireless performance, P3 Stereo is well suited for background music, fitness instruction, live events, and portable audio applications where reliable, cable-free stereo audio is required.

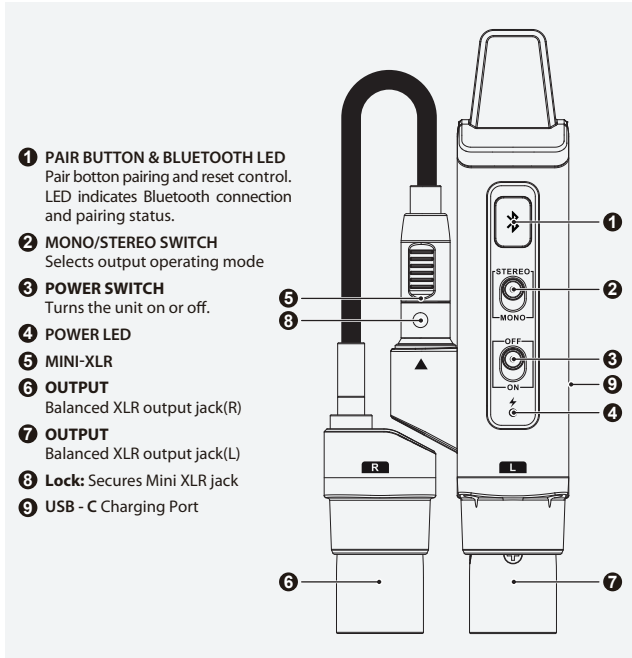

- 01 -

SPECIFICATIONS

Supported codecs: SBC, AAC

Bluetooth range:

Up to 100 ft (30.5 m), line-of-sight

Output connectors:

XLR male (Left / Mono)

Mini-XLR (Right / Mono)

Output level: +4 dBu

Frequency response:

20 Hz ~ 20 kHz (±3 dB)

Battery life: Up to 8 hours

Charging time: Approx. 2 hours

Charging port: USB Type-C, 5V

Battery type:

Internal rechargeable lithium-ion

Dimensions: Same as P3

Weight: 98 g

MONO AND STEREO OPERATION

MONO MODE


When the MONO / STEREO switch is set to MONO:

- Bluetooth Left and Right audio signals are summed before the analog output stage
- Both outputs carry the same mono (L+R mix) signal
- Either output can be used independently
- Two speakers may be connected to receive identical audio

This mode is ideal for:

- Single-speaker systems
- Dual speakers requiring identical program material
- Simple, fast setup situations

MONO MODE




STEREO MODE

When the MONO / STEREO switch is set to STEREO:

- Bluetooth Left and Right signals are transmitted independently
- XLR output = Left channel
- Mini-XLR output = Right channel
- If only the Left (XLR) output is connected: The unit will continue to output the Left channel normally
- No error or muting will occur
- This mode provides true stereo playback from a single Bluetooth device, without requiring multiple receivers.

STEREO MODE




- 02 -

BLUETOOTH PAIRING

1. Power on the P3 Stereo.
2. The unit will automatically enter Bluetooth pairing mode if no device is connected.
 - To manually enter pairing mode, press and hold the PAIR button for 3 seconds.
3. Enable Bluetooth on your smartphone, tablet, or computer.
4. Select "Xvive P3 Stereo" from the available Bluetooth devices list.
5. When pairing is successful:
 - A confirmation tone will sound
 - The Bluetooth LED will illuminate solid

Note: If your device requests a pairing code, enter 0000.

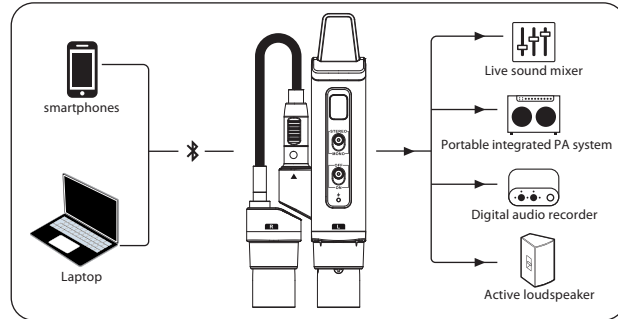

Clearing Previous Pairing

To erase all stored Bluetooth pairing information:

- Press and hold the PAIR button for 10 seconds
- A confirmation tone will sound
- The unit is now ready to pair with a new device

LED INDICATIONS

Bluetooth LED

- **Flashing:** Pairing mode / searching for Bluetooth device
- **Solid on:** Bluetooth connecte

Power / Battery Status LED

- **Green:** Battery level above 30%
- **Yellow:** Battery below 30%
- **Red:** Battery critically low (recharge required)

- 03 -

TROUBLESHOOTING

No sound output

- Check MONO / STEREO switch position
- Increase volume on Bluetooth source device
- Check mixer or speaker input gain

Bluetooth cannot connect

- Ensure the unit is in pairing mode
- Move Bluetooth device closer
- Clear previous pairing and reconnect

Only one speaker outputs sound in Stereo mode

- Confirm both outputs are connected
- Verify MONO / STEREO switch is set to STEREO

CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT REMOVE SCREWS. NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THE APPLIANCE TO RAIN OR MOISTURE.



Declaration of Conformity:

This product complies with the requirements of EMC Directive 2004/108/EG and Low Voltage Directive 2006/95/EC

- 04 -



Radio Approvals: FCC Part 15.249, RSS-247(Canada), EN 300 440 (Europe), EN 301.489 (Europe) The Korea version has been KC certified

This device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. All essential radio test suites have been carried out. Detailed DOC file please visit our website: www.xvive.com

IC CAUTION:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference,
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

FCC REGULATION WARNING

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- **Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.**
- **This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**
- **The device has been evaluated to meet general RF exposure requirement.**



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

- 05 -

SAFETY INSTRUCTIONS

- Only charge the PT-10 units with chargers recommended by Xvive.
- Keep out of reach of children.
- Do not expose the product to moisture or extremely high-temperatures.
- Switch rechargeable battery-powered products off after use.
- Only charge the units at ambient temperatures between 10°C (50°F) and 40°C (104°F).
- Do not mutilate or dismantle the product.
- Do not heat above 60°C (140°F). Do not expose to direct sunlight or throw into a fire.
- If your product appears defective, stop using it immediately and contact your authorized dealer or Xvive support.
- Store the product in a cool and dry place at room temperature (approx. 20°C / 68°F).
- Xvive does not accept any liability for damage arising from abuse or misuse.

ONE-YEAR LIMITED WARRANTY

Xvive Corporation Ltd. [Xvive] warrants our products to be free of defects in materials and workmanship in normal use for a period of one (1) year from the date of original purchase. Please visit <https://www.xvive.com> to register your new purchase.

Xvive will, at its sole discretion, or in cooperation with our authorized retailers, repair or replace at no charge, any unit that is inspected by Xvive or an affiliated Xvive service center and deemed to be defective within the warranty period. This warranty is non-transferrable.

This warranty is only valid to the original purchaser, only when purchased "new-in-box" from an Authorized Xvive Dealer and with a valid proof of purchase bearing the purchase date.

Within the USA:

- All Xvive warranty claims should be made with the retailer from which the unit was purchased. This applies to both retail stores and online retailers.

Outside of the USA:

- For all warranty and non-warranty claims, the purchaser should contact the Authorized Xvive Retailer from which the unit was purchased within the country or province in which it was purchased for information on how to obtain warranty or non-warranty service.

This limited warranty does not cover the following:

- Products that have been modified in any way;
- Any products whose serial numbers have been altered or removed;
- Exterior cosmetic damage or damage to the finish due to misuse or normal wear and tear;
- Products that were purchased as "used", items listed as demo stock or refurbished items;
- Damage to the product or parts caused by improper storage by the user;
- Any freight charges (from or to the retailer);
- Shipping Damage:
 - Shipping damage claims must be filed with the freight carrier (such as UPS, FedEx).
 - Notify the freight carrier immediately of any shipping damage upon receipt of damaged items to begin the claim process.

- 06 -

- We also recommend reporting any shipping damage claim within 48 hours of receipt to the Authorized Retailer from which the item was purchased.
- Keep all original documents and packing materials until the freight damage claim has a final resolution.

For units returned to Xvive USA:

- The item must be returned in the same format in which it was purchased. If a system containing a transmitter and receiver was purchased, then both units will need to be returned together.
- The purchaser will pay all freight charges to return the original item to Xvive USA or its affiliated service centers.
- If the unit is deemed to be covered by this warranty, Xvive will ship the repaired or replacement unit to the purchaser free-of-charge and without any additional freight charges.
- If the unit is deemed to NOT be covered by this warranty, other charges plus return freight charges will apply.

EXCEPT AS EXPRESSLY SET FORTH ABOVE IN THIS LIMITED WARRANTY, XVIVE MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES TO THE EXTENT PERMITTED BY LAW. XVIVE ASSUMES NO LIABILITY FOR PROPERTY DAMAGE RESULTING FROM FAILURE OF THIS PRODUCT NOR ANY LOSS OF INCOME, SATISFACTION, OR DAMAGES ARISING FROM THE LOSS OF USE OF SAME DUE TO DEFECTS OR AVAILABILITY OF SAME DURING SERVICE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR BY COUNTRY OR PROVINCE.

For warranty inquiries not covered in this policy, please contact support@xviveaudio.com



- 07 -