



Chain0 : 26dB Bandwidth @ 802.11ac(VHT80) Mode Ch155




Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch36

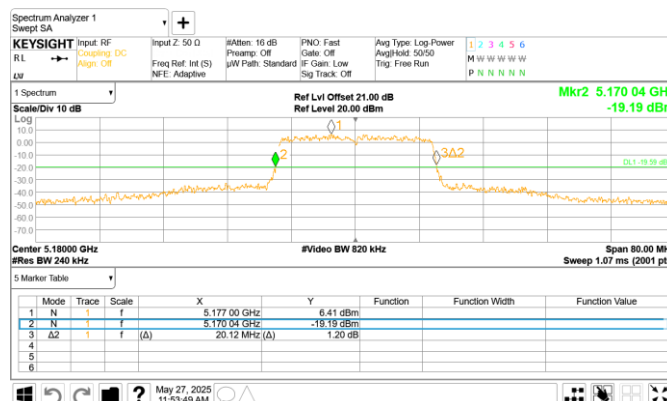


Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch44

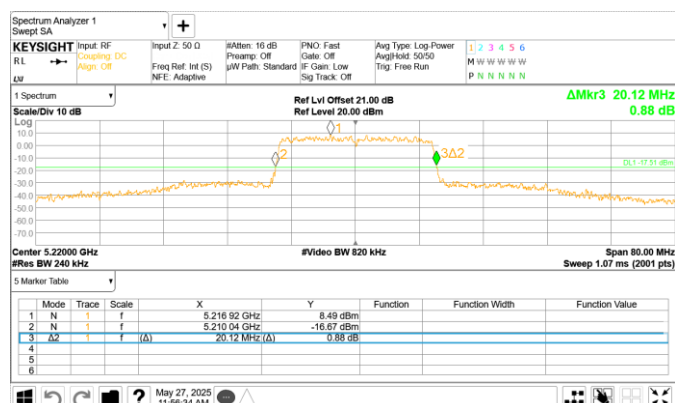


Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch48

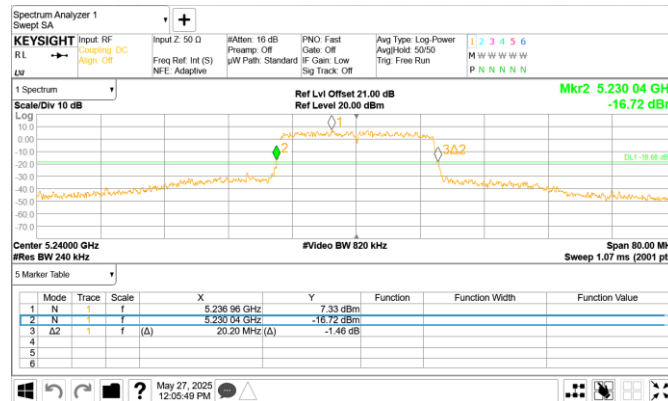

Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch52

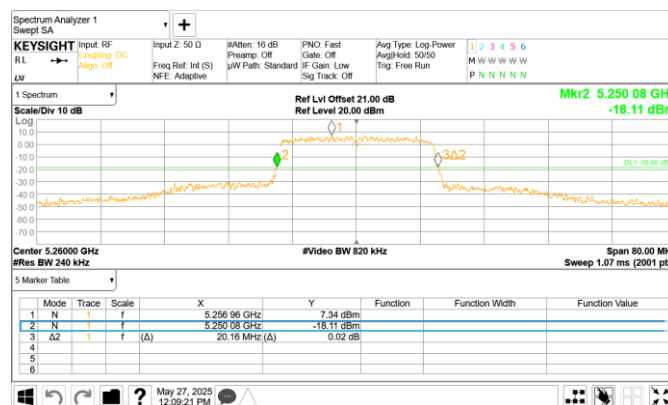

Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch60

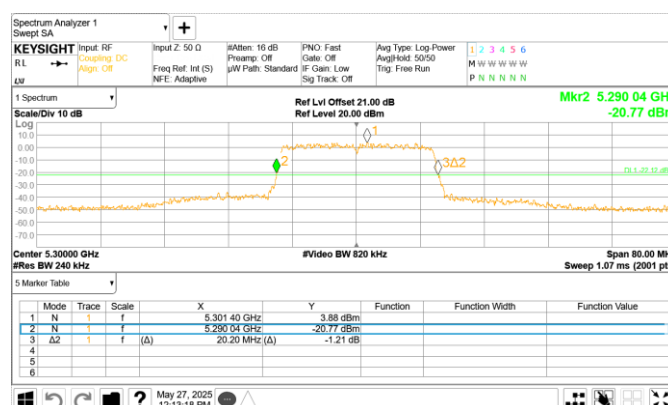


Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch64



Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch100




Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch116

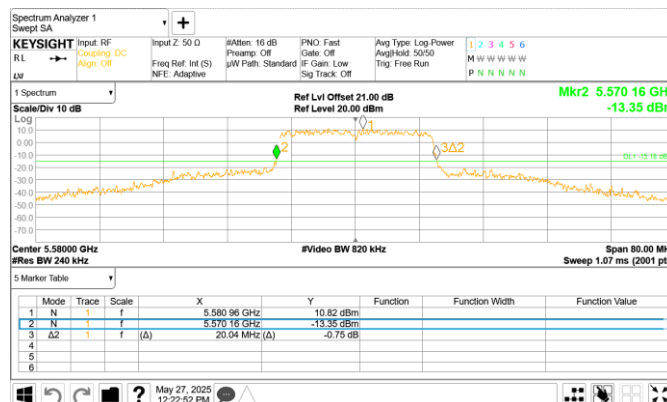


Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch140



Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch149

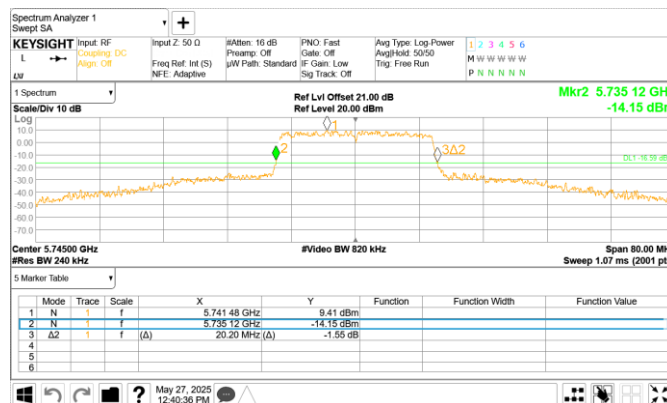


Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch157

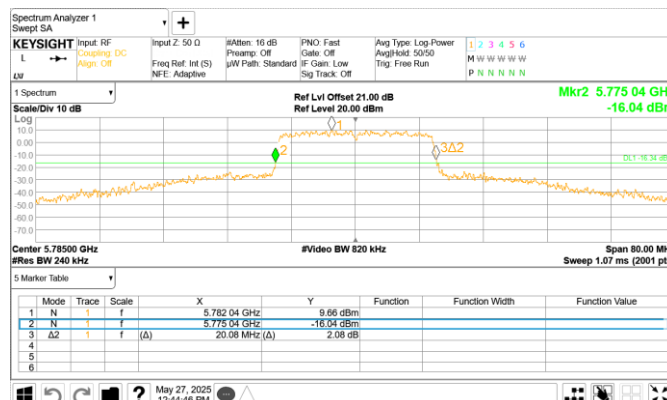


Chain0 : 26dB Bandwidth @ 802.11ax(HE20) Mode Ch165




Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch38

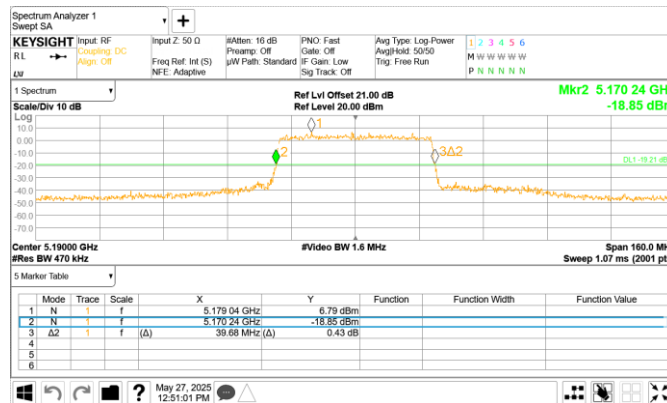


Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch46

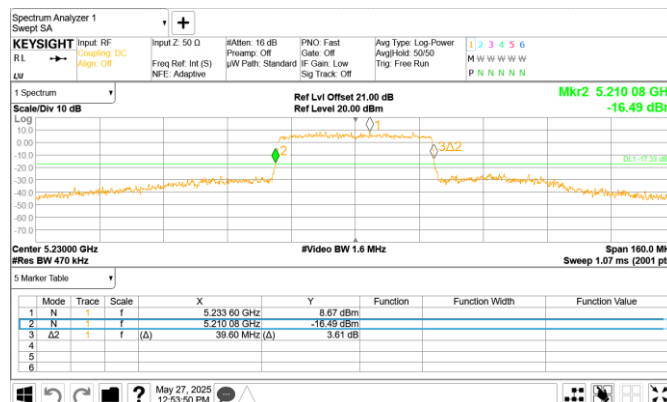


Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch54

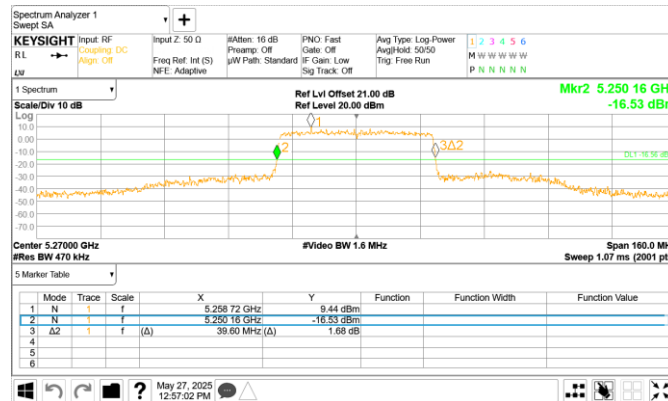


Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch62

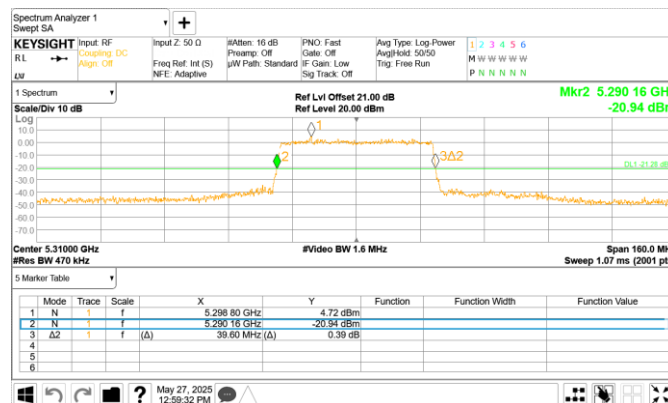

Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch102

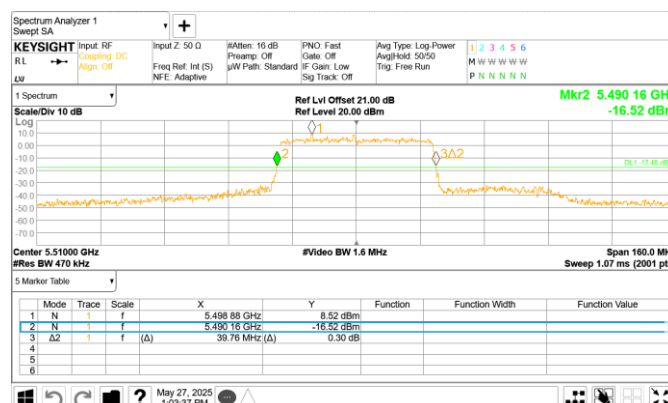


Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch110

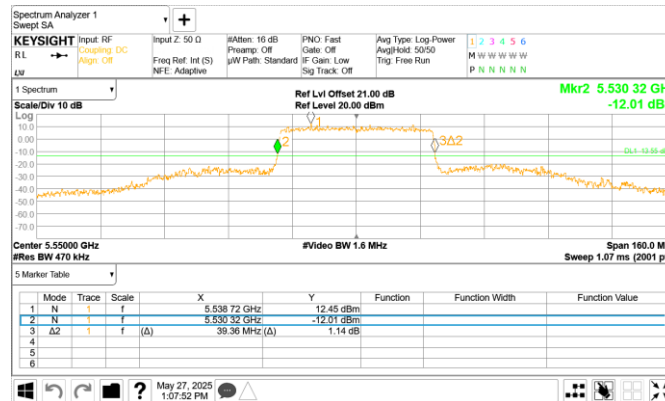


Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch134




Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch151

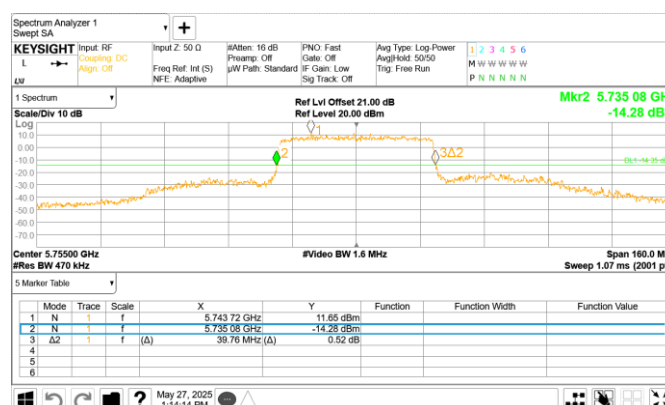


Chain0 : 26dB Bandwidth @ 802.11ax(HE40) Mode Ch159

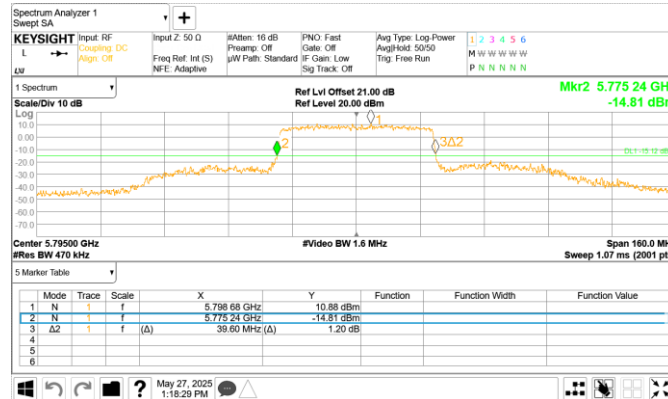


Chain0 : 26dB Bandwidth @ 802.11ax(HE80) Mode Ch42

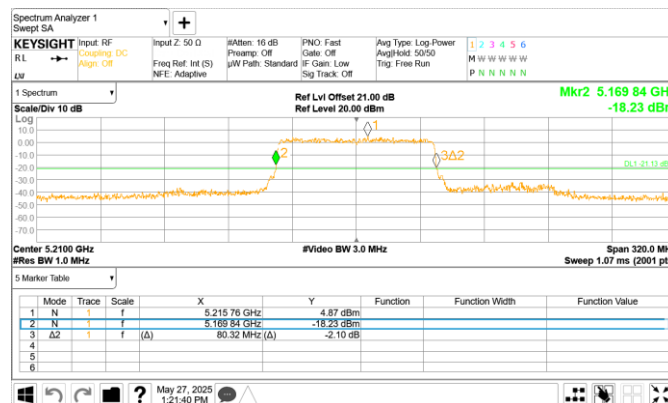


Chain0 : 26dB Bandwidth @ 802.11ax(HE80) Mode Ch58

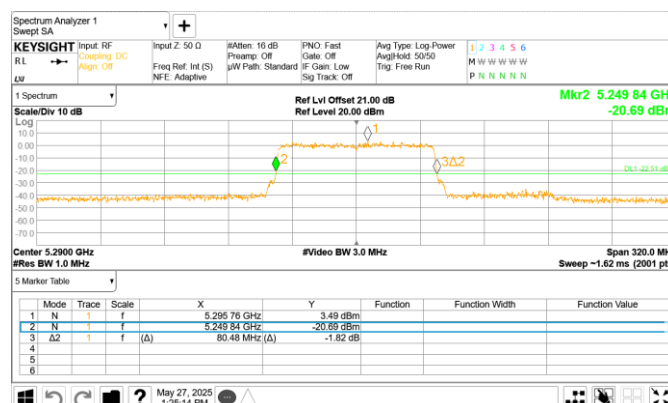


Chain0 : 26dB Bandwidth @ 802.11ax(HE80) Mode Ch106

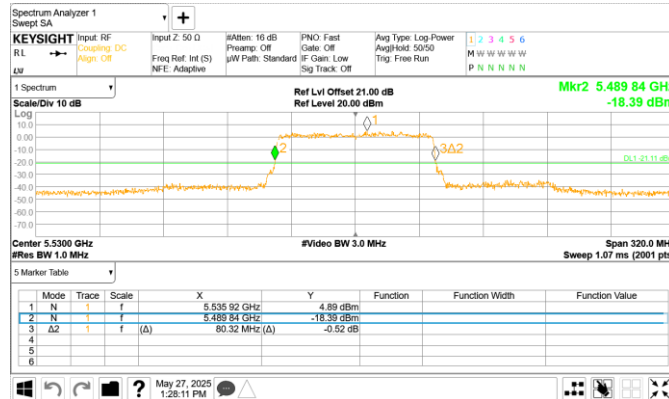


Chain0 : 26dB Bandwidth @ 802.11ax(HE80) Mode Ch155

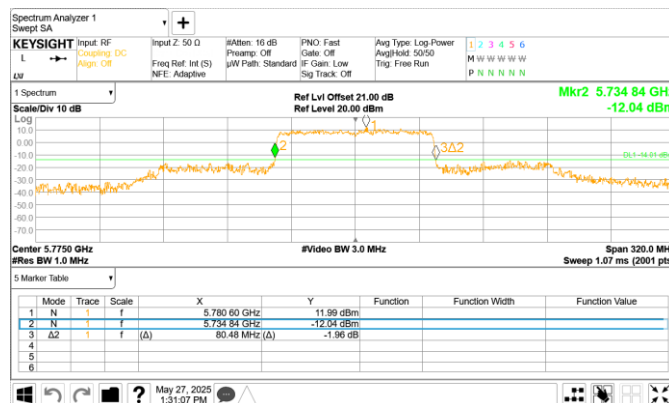


Chain0 : 6dB Bandwidth @ 802.11a Mode Ch149

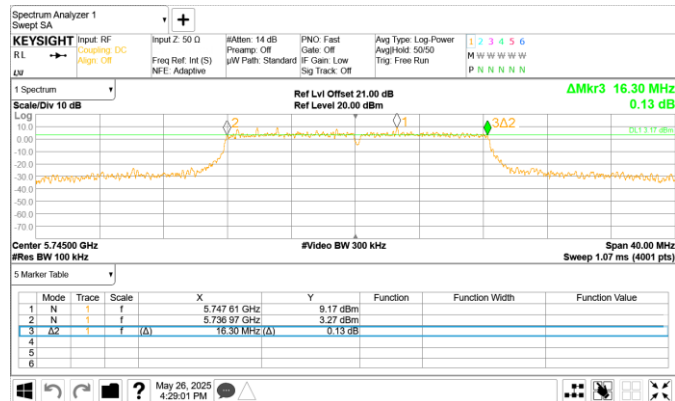

Chain0 : 6dB Bandwidth @ 802.11a Mode Ch157

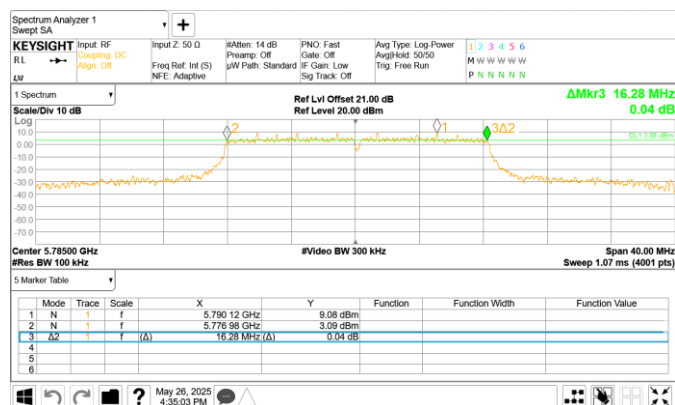

Chain0 : 6dB Bandwidth @ 802.11a Mode Ch165

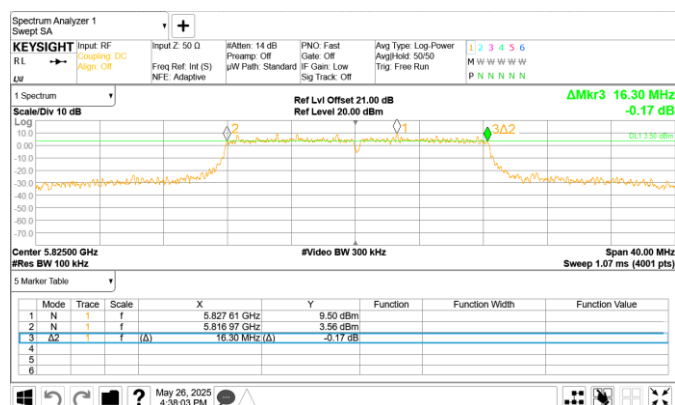


Chain0 : 6dB Bandwidth @ 802.11ac(VHT20) Mode Ch149




Chain0 : 6dB Bandwidth @ 802.11ac(VHT20) Mode Ch157



Chain0 : 6dB Bandwidth @ 802.11ac(VHT20) Mode Ch165

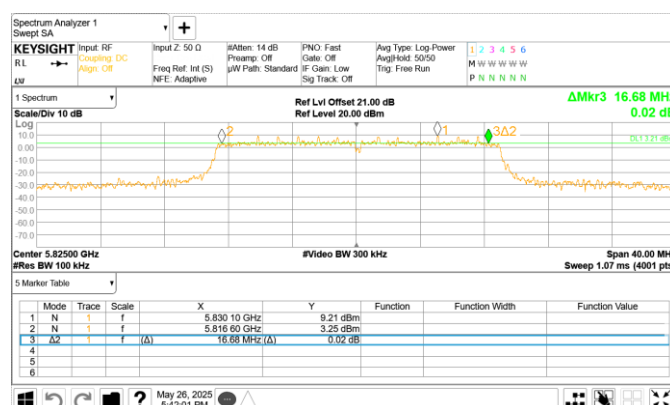


Chain0 : 6dB Bandwidth @ 802.11ac(VHT40) Mode Ch151

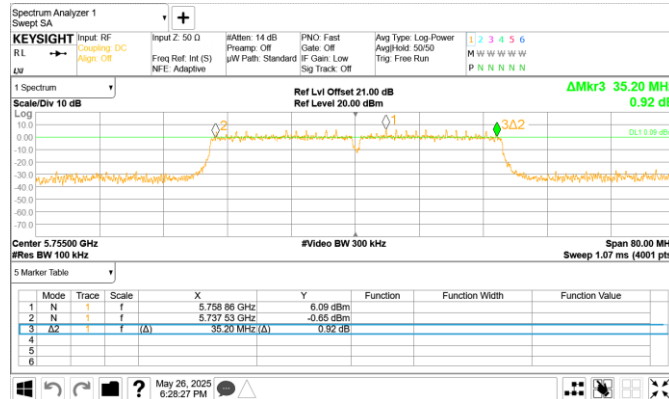


Chain0 : 6dB Bandwidth @ 802.11ac(VHT40) Mode Ch159




Chain0 : 6dB Bandwidth @ 802.11ac(VHT80) Mode Ch155

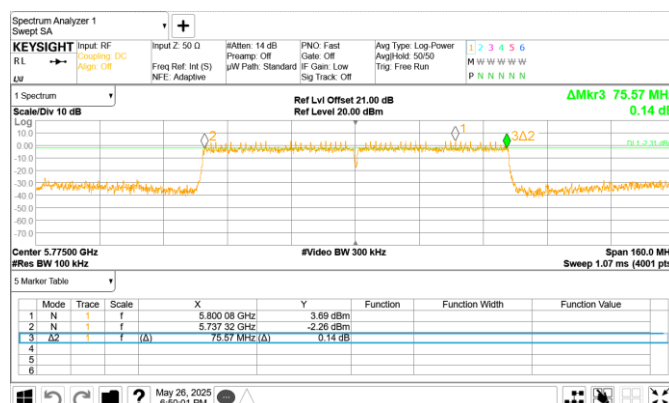


Chain0 : 6dB Bandwidth @ 802.11ax(HE20) Mode Ch149

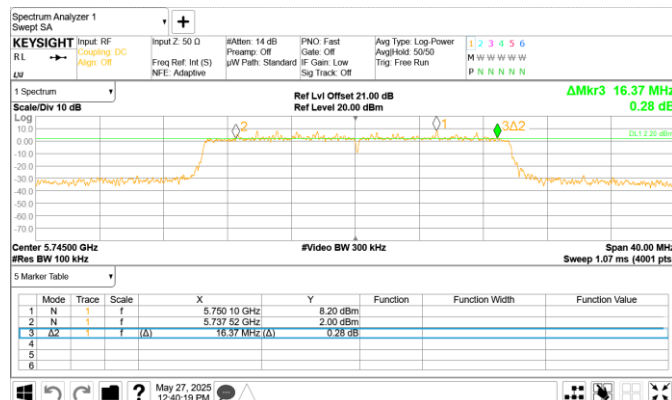


Chain0 : 6dB Bandwidth @ 802.11ax(HE20) Mode Ch157

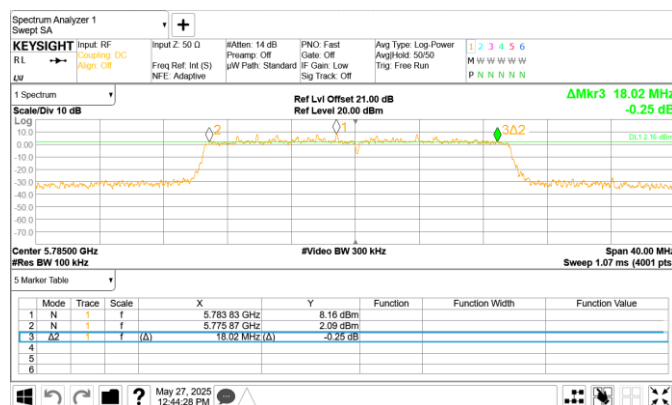


Chain0 : 6dB Bandwidth @ 802.11ax(HE20) Mode Ch165

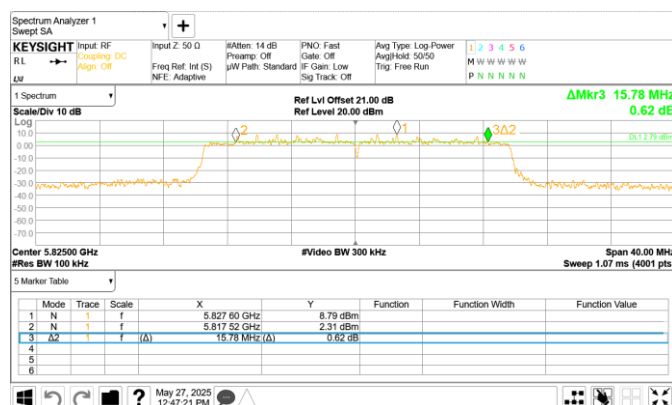


Chain0 : 6dB Bandwidth @ 802.11ax(HE40) Mode Ch151

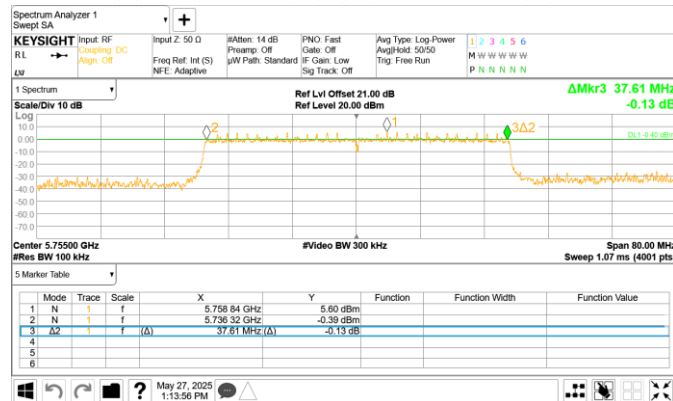

Chain0 : 6dB Bandwidth @ 802.11ax(HE40) Mode Ch159

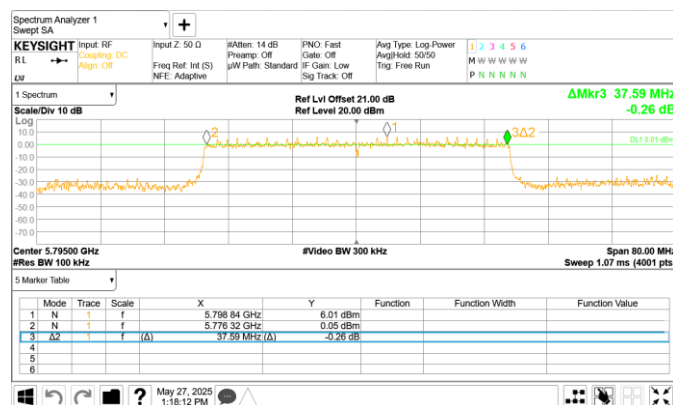

Chain0 : 6dB Bandwidth @ 802.11ax(HE80) Mode Ch155

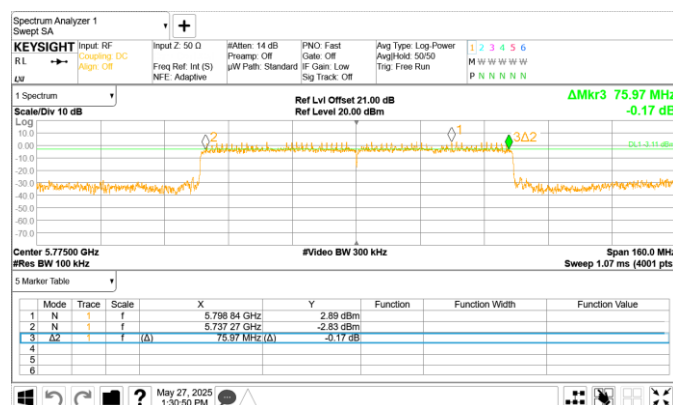

5. Emissions in Restricted Frequency Bands (Radiated emission measurements)

5.1 Limit for emission in restricted frequency bands (Radiated emission measurement)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	2400/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

As specified in 15.407(b), For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

5.2 Measuring instrument setting

Below 1GHz measurement

Receiver settings	
Receiver function	Setting
Detector	QP
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Attenuation	Auto

Above 1GHz measurement

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak ; Average
RBW	1MHz
VBW	3MHz for Peak; 1/T Minimum kHz for Average
Sweep	Auto couple
Start Frequency	1GHz
Stop Frequency	Tenth harmonic
Attenuation	Auto


5.3 Test procedure

1. Configure the EUT according to ANSI C63.10: 2013 The EUT was placed on the top of the turntable 1.5 meter above ground for above 1GHz and placed on the top of the turntable 0.8 meter above ground for below 1GHz. The center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the companion devices. The turntable was rotated by 360 degree to find the position of the maximum emission level.
3. The height of the receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of the both horizontal and vertical polarization
4. If find the frequencies above the limit or below within 3dB, the antenna tower was scan (from 1m to 4m) and then the turntable was rotated to find the maximum reading.
5. Set the test-receiver system to peak or CISPR quasi-peak detector with specified bandwidth under maximum hold mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
7. If the emissions level of the EUT in peak mode was 3dB lower than the average limit specified then testing will be stopped and peak values of the EUT will be reported. Otherwise, the emissions which do not have 3dB margin will be measured using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, The emissions level of the EUT in peak mode was lower than average limit, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be quasi-peak measured by receiver.


5.4 Test configuration

5.4.1 Radiated emission from 9 kHz to 30MHz using Loop Antenna


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

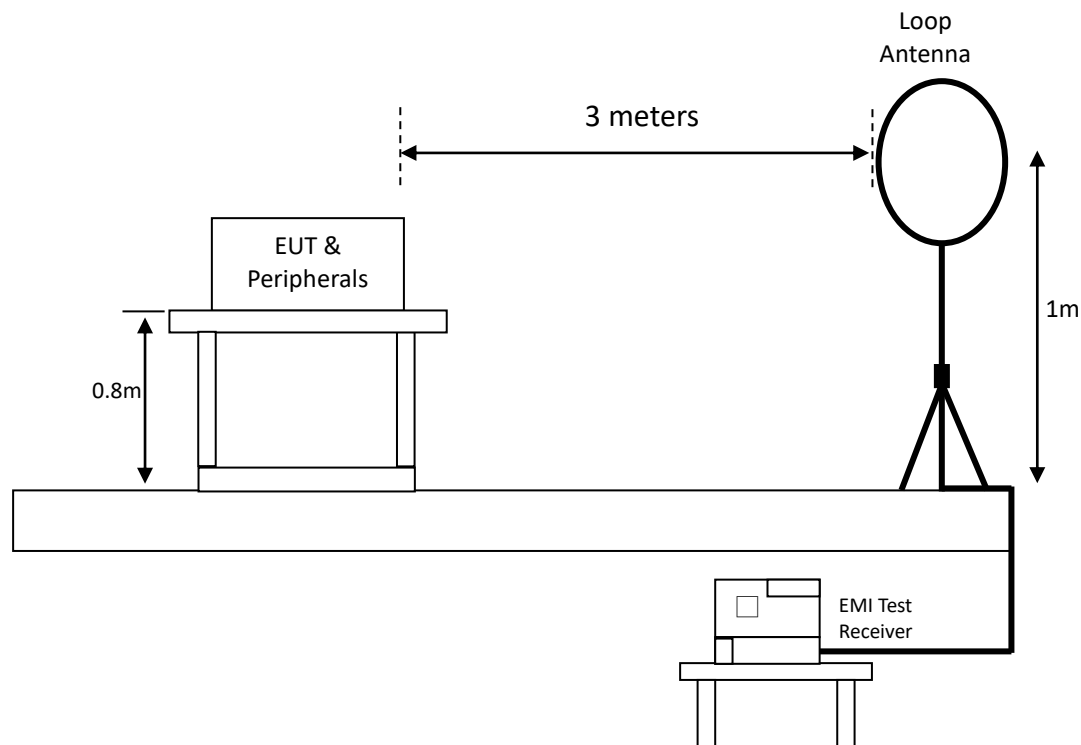

Radiated emission below 1GHz using Bilog Antenna

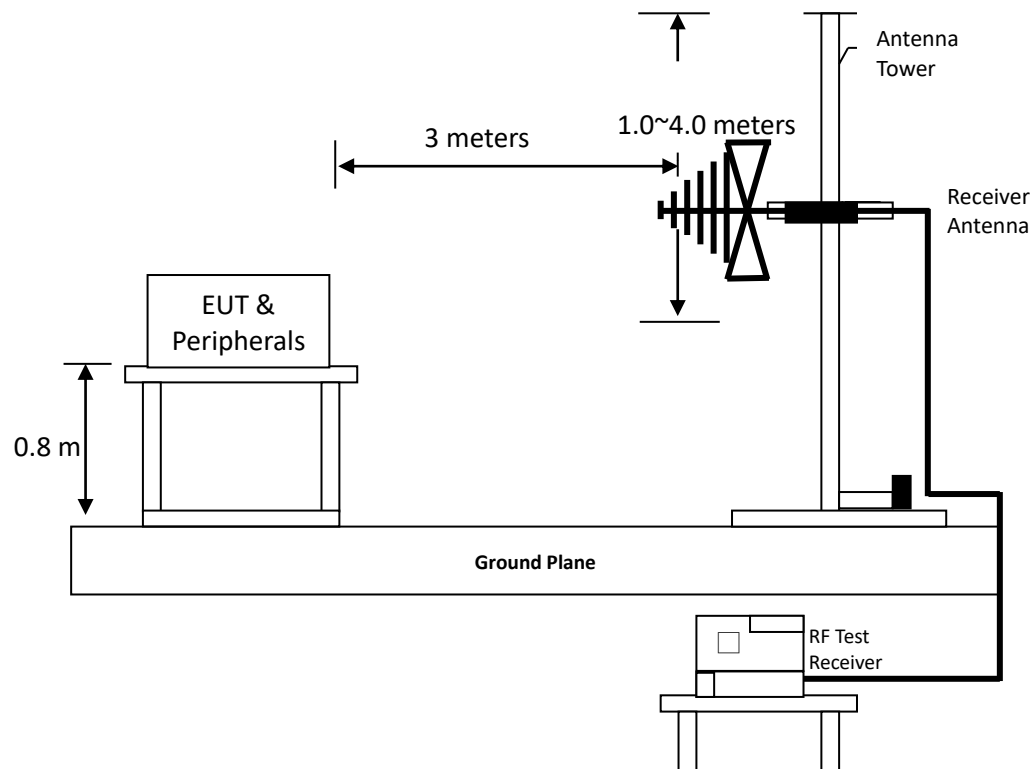

Radiated emission above 1GHz using Horn Antenna

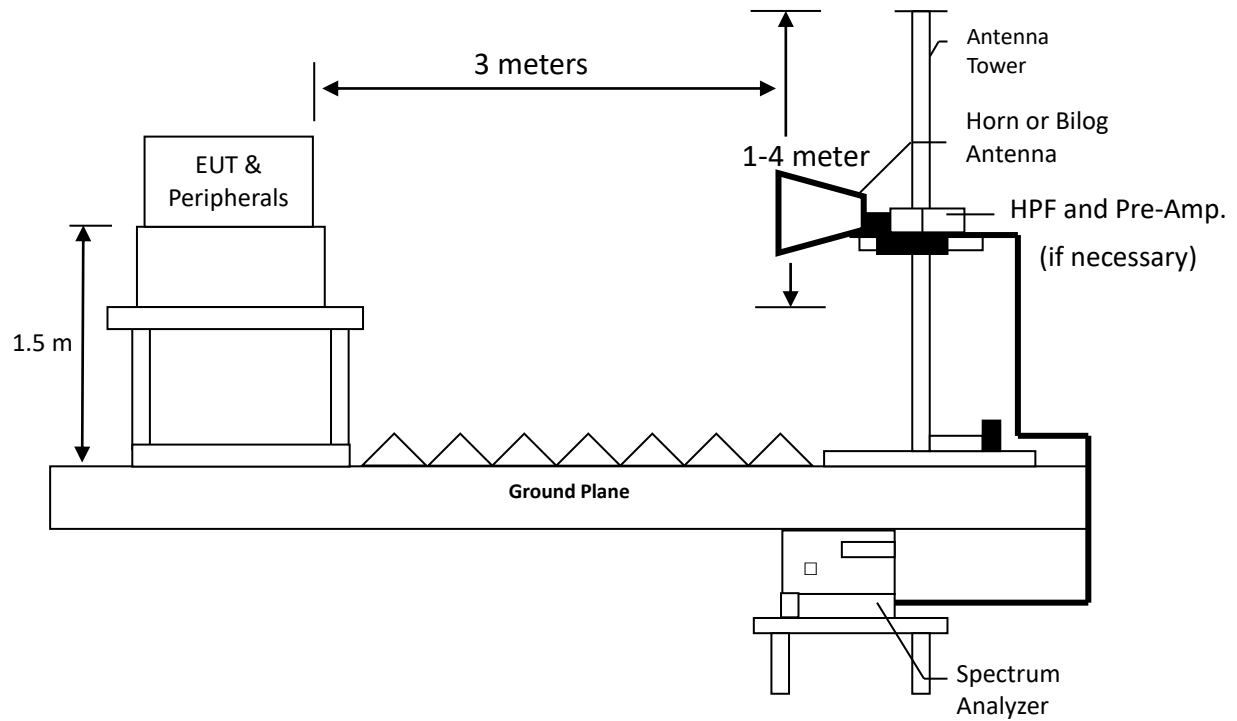

5.5 Test results

5.5.1 Measurement results: frequencies from 9 kHz to 30MHz

Temperature (°C) :	25
Relative Humidity (%) :	74
Test date :	2025/5/23

The test was performed on continuously transmitting mode. The worst case occurred at 802.11a Channel 116.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.55	PK	17.35	19.99	37.34	72.82	-35.48
Perpendicular	0.82	PK	17.50	13.91	31.41	69.34	-37.93
Perpendicular	0.94	PK	17.46	13.77	31.23	68.15	-36.92
Perpendicular	1.18	PK	17.38	15.39	32.77	66.17	-33.40
Perpendicular	1.93	PK	17.31	14.94	32.25	69.54	-37.29
Perpendicular	5.80	PK	19.10	10.74	29.84	69.54	-39.70

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.55	PK	17.35	19.69	37.04	72.82	-35.78
Parallel	1.18	PK	17.38	14.94	32.32	66.17	-33.85
Parallel	1.75	PK	17.33	12.17	29.50	69.54	-40.04
Parallel	1.90	PK	17.31	13.04	30.35	69.54	-39.19
Parallel	9.19	PK	19.35	11.22	30.57	69.54	-38.97
Parallel	13.45	PK	19.80	9.30	29.10	69.54	-40.44

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.31	PK	17.01	19.21	36.22	97.81	-61.59
Ground-parallel	0.55	PK	17.35	18.81	36.16	72.82	-36.66
Ground-parallel	1.15	PK	17.39	14.79	32.18	66.40	-34.22
Ground-parallel	1.93	PK	17.31	13.09	30.40	69.54	-39.14
Ground-parallel	2.77	PK	17.45	9.76	27.21	69.54	-42.33
Ground-parallel	3.70	PK	17.78	10.67	28.45	69.54	-41.09

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

5.5.2 Measurement results: frequencies from 30 MHz to 1GHz

Temperature (°C) :	25
Relative Humidity (%) :	74
Test date :	2025/05/23

The test was performed on continuously transmitting mode. The worst case occurred at 802.11a Channel 116.

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	125.06	PK	17.90	11.11	29.01	43.50	-14.49
Horizontal	162.89	PK	20.22	8.91	29.13	43.50	-14.37
Horizontal	250.19	PK	19.91	16.76	36.67	46.00	-9.33
Horizontal	375.32	PK	23.02	9.81	32.83	46.00	-13.17
Horizontal	942.77	PK	32.87	10.35	43.22	46.00	-2.78
Horizontal	955.38	QP	33.03	11.65	44.68	46.00	-1.32

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	50.37	QP	20.54	17.69	38.23	40.00	-1.77
Vertical	68.80	PK	18.48	20.34	38.82	40.00	-1.18
Vertical	77.53	PK	16.31	22.21	38.52	40.00	-1.48
Vertical	125.06	PK	17.90	22.41	40.31	43.50	-3.19
Vertical	250.19	PK	19.91	20.75	40.66	46.00	-5.34
Vertical	954.41	QP	33.02	11.88	44.90	46.00	-1.10

Remark: Corr. Factor = Antenna Factor + Cable Loss

TEST REPORT

5.5.3 Measurement results: frequency above 1GHz to 40GHz

Temperature (°C) :	25
Relative Humidity (%) :	74
Test date :	2025/05/19 ~ 2025/05/22

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11a Ch36	10360	PK	H	8.64	56.14	64.78	68.2	-3.42
	15540	PK	H	14.30	38.49	52.79	74.0	-21.21
	10360	PK	V	8.64	55.09	63.73	68.2	-4.47
	15540	PK	V	14.30	38.70	53.00	74.0	-21.00
802.11a Ch44	10440	PK	H	8.90	56.71	65.61	68.2	-2.59
	15660	PK	H	13.88	39.51	53.39	74.0	-20.61
	10440	PK	V	8.90	57.58	66.48	68.2	-1.72
	15660	PK	V	13.88	39.09	52.97	74.0	-21.03
802.11a Ch48	10480	PK	H	8.98	57.37	66.35	68.2	-1.85
	15720	PK	H	13.75	39.80	53.55	74.0	-20.45
	15720	AV	H	13.75	32.60	46.35	54.0	-7.65
	10480	PK	V	8.98	57.53	66.51	68.2	-1.69
	15720	PK	V	13.75	39.18	52.93	74.0	-21.07
802.11a Ch52	10520	PK	H	9.07	57.23	66.30	68.2	-1.90
	15780	PK	H	13.66	38.47	52.13	74.0	-21.87
	10520	PK	V	9.07	57.31	66.38	68.2	-1.82
	15780	PK	V	13.66	37.48	51.14	74.0	-22.86
802.11a Ch60	10600	PK	H	9.24	57.15	66.39	68.2	-1.81
	10600	PK	V	9.24	57.23	66.47	68.2	-1.73
802.11a Ch64	10640	PK	H	9.34	55.10	64.44	74.0	-9.56
	10640	AV	H	9.34	31.55	40.89	54.0	-13.11
	10640	PK	V	9.34	54.59	63.93	74.0	-10.07
	10640	AV	V	9.34	30.25	39.59	54.0	-14.41
802.11a Ch100	11000	PK	H	10.55	56.04	66.59	74.0	-7.41
	11000	AV	H	10.55	30.41	40.96	54.0	-13.04
	16500	PK	H	16.91	37.10	54.01	68.2	-14.19
	11000	PK	V	10.55	55.30	65.85	74.0	-8.15
	11000	AV	V	10.55	29.64	40.19	54.0	-13.81
	16500	PK	V	16.91	36.53	53.44	68.2	-14.76

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11a Ch116	11160	PK	H	10.58	55.64	66.22	74.0	-7.78
	11160	AV	H	10.58	30.64	41.22	54.0	-12.78
	11160	PK	V	10.58	50.34	60.92	74.0	-13.08
	11160	AV	V	10.58	29.56	40.14	54.0	-13.86
802.11a Ch140	11400	PK	H	11.24	51.41	62.65	74.0	-11.35
	11400	AV	H	11.24	30.16	41.40	54.0	-12.60
	17100	PK	H	19.88	37.70	57.58	68.2	-10.62
	11400	PK	V	11.24	46.34	57.58	74.0	-16.42
	11400	AV	V	11.24	29.84	41.08	54.0	-12.92
	17100	PK	V	19.88	37.23	57.11	68.2	-11.09
802.11a Ch149	11490	PK	H	11.50	49.63	61.13	74.0	-12.87
	11490	AV	H	11.50	31.28	42.78	54.0	-11.22
	17235	PK	H	20.51	37.43	57.94	68.2	-10.26
	11490	PK	V	11.50	44.72	56.22	74.0	-17.78
	11490	AV	V	11.50	30.23	41.73	54.0	-12.27
	17235	PK	V	20.51	34.92	55.43	68.2	-12.77
802.11a Ch157	11570	PK	H	11.67	49.38	61.05	74.0	-12.95
	11570	AV	H	11.67	30.78	42.45	54.0	-11.55
	17355	PK	H	21.23	38.05	59.28	68.2	-8.92
	11570	PK	V	11.67	44.15	55.82	74.0	-18.18
	11570	AV	V	11.67	29.32	40.99	54.0	-13.01
802.11a Ch165	11650	PK	H	11.78	48.85	60.63	74.0	-13.37
	11650	AV	H	11.78	31.84	43.62	54.0	-10.38
	17475	PK	H	22.32	37.97	60.29	68.2	-7.91
	11650	PK	V	11.78	44.91	56.69	74.0	-17.31
	11650	AV	V	11.78	30.54	42.32	54.0	-11.68
802.11ac (VHT20) Ch36	10360	PK	H	8.64	58.16	66.80	68.2	-1.40
	15540	PK	H	14.30	39.30	53.60	74.0	-20.40
	15540	PK	H	14.30	33.80	48.10	54.0	-5.90
	10360	PK	V	8.64	54.65	63.29	68.2	-4.91
	15540	PK	V	14.30	37.98	52.28	74.0	-21.72
802.11ac (VHT20) Ch44	10440	PK	H	8.90	55.70	64.60	68.2	-3.60
	15660	PK	H	13.88	37.77	51.65	74.0	-22.35
	10440	PK	V	8.90	55.84	64.74	68.2	-3.46
	15660	PK	V	13.88	38.91	52.79	74.0	-21.21

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11ac (VHT20) Ch48	10480	PK	H	8.98	57.25	66.23	68.2	-1.97
	15720	PK	H	13.76	38.10	51.86	74.0	-22.14
	10480	PK	V	8.98	57.60	66.58	68.2	-1.62
	15720	PK	V	13.75	41.63	55.38	74.0	-18.62
	15720	AV	V	13.75	36.87	50.62	54.0	-3.38
802.11ac (VHT20) Ch52	10520	PK	H	9.07	57.66	66.73	68.2	-1.47
	15780	PK	H	13.66	38.03	51.69	74.0	-22.31
	10520	PK	V	9.07	57.84	66.91	68.2	-1.29
	15780	PK	V	13.66	41.54	55.20	74.0	-18.80
802.11ac (VHT20) Ch60	10600	PK	H	9.24	56.32	65.56	68.2	-2.64
	10600	PK	V	9.24	56.75	65.99	68.2	-2.21
802.11ac (VHT20) Ch64	10640	PK	H	9.34	54.26	63.60	74.0	-10.40
	10640	AV	H	9.34	31.41	40.75	54.0	-13.25
	10640	PK	V	9.34	54.90	64.24	74.0	-9.76
	10640	AV	V	9.34	30.71	40.05	54.0	-13.95
802.11ac (VHT20) Ch100	11000	PK	H	10.55	51.88	62.43	74.0	-11.57
	11000	AV	H	10.55	33.00	43.55	54.0	-10.45
	11000	PK	V	10.55	48.09	58.64	74.0	-15.36
	11000	AV	V	10.55	32.07	42.62	54.0	-11.38
802.11ac (VHT20) Ch116	11160	PK	H	10.58	56.27	66.85	74.0	-7.15
	11160	AV	H	10.58	33.16	43.74	54.0	-10.26
	16740	PK	H	18.43	36.38	54.81	68.2	-13.39
	11160	PK	V	10.58	52.36	62.94	74.0	-11.06
	11160	AV	V	10.58	32.41	42.99	54.0	-11.01
	16740	PK	V	18.43	34.79	53.22	68.2	-14.98
802.11ac (VHT20) Ch140	11400	PK	H	11.24	49.97	61.21	74.0	-12.79
	11400	AV	H	11.24	32.32	43.56	54.0	-10.44
	17100	PK	H	19.88	38.46	58.34	68.2	-9.86
	11400	PK	V	11.24	47.03	58.27	74.0	-15.73
	11400	AV	V	11.24	33.64	44.88	54.0	-9.12
	17100	PK	V	19.88	35.77	55.65	68.2	-12.55

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11ac (VHT20) Ch149	11490	PK	H	11.50	50.36	61.86	74.0	-12.14
	11490	AV	H	11.50	31.11	42.61	54.0	-11.39
	17235	PK	H	20.51	38.26	58.77	68.2	-9.43
	11490	PK	V	11.50	47.23	58.73	74.0	-15.27
	11490	AV	V	11.50	30.45	41.95	54.0	-12.05
	17235	PK	V	20.51	35.64	56.15	68.2	-12.05
802.11ac (VHT20) Ch157	11570	PK	H	11.67	50.51	62.18	74.0	-11.82
	11570	AV	H	11.67	31.28	42.95	54.0	-11.05
	17355	PK	H	21.23	36.54	57.77	68.2	-10.43
	11570	PK	V	11.67	45.75	57.42	74.0	-16.58
	11570	AV	V	11.67	30.65	42.32	54.0	-11.68
802.11ac (VHT20) Ch165	11650	PK	H	11.78	50.61	62.39	74.0	-11.61
	11650	AV	H	11.78	31.73	43.51	54.0	-10.49
	17475	PK	H	22.32	37.08	59.40	68.2	-8.80
	11650	PK	V	11.78	44.92	56.70	74.0	-17.30
	11650	AV	V	11.78	30.84	42.62	54.0	-11.38
802.11ac (VHT40) Ch38	10380	PK	H	8.72	52.11	60.83	68.2	-7.37
	10380	PK	V	8.72	52.62	61.34	68.2	-6.86
802.11ac (VHT40) Ch46	10460	PK	H	8.93	55.78	64.71	68.2	-3.49
	15690	PK	H	13.82	37.50	51.32	74.0	-22.68
	10460	PK	V	8.93	57.00	65.93	68.2	-2.27
	15690	PK	V	13.82	37.17	50.99	74.0	-23.01
802.11ac (VHT40) Ch54	10540	PK	H	9.11	58.05	67.16	68.2	-1.04
	15810	PK	H	13.57	37.39	50.96	74.0	-23.04
	10540	PK	V	9.11	58.05	67.16	68.2	-1.04
	15810	PK	V	13.57	40.71	54.28	74.0	-19.72
	15810	AV	V	13.57	36.15	49.72	54.0	-4.28
802.11ac (VHT40) Ch62	10620	PK	H	9.29	51.10	60.39	74.0	-13.61
	10620	AV	H	9.29	31.41	40.70	54.0	-13.30
	10620	PK	V	9.29	50.12	59.41	74.0	-14.59
	10620	AV	V	9.29	30.24	39.53	54.0	-14.47

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11ac (VHT40) Ch102	11020	PK	H	10.57	50.16	60.73	74.0	-13.27
	11020	AV	H	10.57	33.41	43.98	54.0	-10.02
	11020	PK	V	10.57	47.68	58.25	74.0	-15.75
	11020	AV	V	10.57	31.85	42.42	54.0	-11.58
802.11ac (VHT40) Ch110	11100	PK	H	10.64	52.85	63.49	74.0	-10.51
	11100	AV	H	10.64	32.42	43.06	54.0	-10.94
	11100	PK	V	10.64	49.37	60.01	74.0	-13.99
	11100	AV	V	10.64	31.96	42.60	54.0	-11.40
802.11ac (VHT40) Ch134	11340	PK	H	11.06	49.15	60.21	74.0	-13.79
	11340	AV	H	11.06	32.85	43.91	54.0	-10.09
	11340	PK	V	11.06	45.57	56.63	74.0	-17.37
	11340	AV	V	11.06	32.25	43.31	54.0	-10.69
802.11ac (VHT40) Ch151	11510	PK	H	11.55	45.91	57.46	74.0	-16.54
	11510	AV	H	11.55	31.79	43.34	54.0	-10.66
	17265	PK	H	20.58	37.17	57.75	68.2	-10.45
	11510	PK	V	11.55	44.91	56.46	74.0	-17.54
	11510	AV	V	11.55	29.80	41.35	54.0	-12.65
802.11ac (VHT40) Ch159	11590	PK	H	11.70	48.59	60.29	74.0	-13.71
	11590	AV	H	11.70	31.30	43.00	54.0	-11.00
	17385	PK	H	21.54	36.00	57.54	68.2	-10.66
	11590	PK	V	11.70	42.88	54.58	74.0	-19.42
	11590	AV	V	11.70	29.35	41.05	54.0	-12.95
802.11ac (VHT80) Ch42	10420	PK	H	8.86	48.60	57.46	68.2	-10.74
	10420	PK	V	8.86	49.43	58.29	68.2	-9.91
802.11ac (VHT80) Ch58	10580	PK	H	9.21	45.86	55.07	68.2	-13.13
	10580	PK	V	9.21	50.67	59.88	68.2	-8.32
802.11ac (VHT80) Ch106	11060	PK	H	10.60	45.21	55.81	74.0	-18.19
	11060	AV	H	10.60	30.07	40.67	54.0	-13.33
	11060	PK	V	10.60	42.43	53.03	74.0	-20.97

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11ac (VHT80) Ch155	11550	PK	H	11.63	45.08	56.71	74.0	-17.29
	11550	AV	H	11.63	30.44	42.07	54.0	-11.93
	11550	PK	V	11.63	42.83	54.46	74.0	-19.54
	11550	AV	V	11.63	29.30	40.93	54.0	-13.07
802.11ax (HE20) Ch36	10360	PK	H	8.64	52.90	61.54	68.2	-6.66
	10360	PK	V	8.64	51.52	60.16	68.2	-8.04
802.11ax (HE20) Ch44	10440	PK	H	8.90	55.77	64.67	68.2	-3.53
	15660	PK	H	13.88	38.24	52.12	74.0	-21.88
	10440	PK	V	8.90	57.82	66.72	68.2	-1.48
	15660	PK	V	13.88	38.80	52.68	74.0	-21.32
802.11ax (HE20) Ch48	10480	PK	H	8.98	56.74	65.72	68.2	-2.48
	15720	PK	H	13.75	37.13	50.88	74.0	-23.12
	10480	PK	V	8.98	56.93	65.91	68.2	-2.29
	15720	PK	V	13.75	37.10	50.85	74.0	-23.15
802.11ax (HE20) Ch52	10520	PK	H	9.07	57.41	66.48	68.2	-1.72
	15780	PK	H	13.66	37.63	51.29	74.0	-22.71
	10520	PK	V	9.07	57.73	66.80	68.2	-1.40
	15780	PK	V	13.66	38.01	51.67	74.0	-22.33
802.11ax (HE20) Ch60	10600	PK	H	9.24	54.19	63.43	68.2	-4.77
	10600	PK	V	9.24	53.76	63.00	68.2	-5.20
802.11ax (HE20) Ch64	10640	PK	H	9.34	55.53	64.87	74.0	-9.13
	10640	AV	H	9.34	31.62	40.96	54.0	-13.04
	10640	PK	V	9.34	57.54	66.88	74.0	-7.12
	10640	AV	V	9.34	30.82	40.16	54.0	-13.84
802.11ax (HE20) Ch100	11000	PK	H	10.55	53.00	63.55	74.0	-10.45
	11000	AV	H	10.55	32.89	43.44	54.0	-10.56
	11000	PK	V	10.55	50.93	61.48	74.0	-12.52
	11000	AV	V	10.55	32.41	42.96	54.0	-11.04
802.11ax (HE20) Ch116	11160	PK	H	10.58	51.74	62.32	74.0	-11.68
	11160	AV	H	10.58	32.35	42.93	54.0	-11.07
	11160	PK	V	10.58	49.18	59.76	74.0	-14.24
	11160	AV	V	10.58	31.82	42.40	54.0	-11.60

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11ax (HE20) Ch140	11400	PK	H	11.24	50.71	61.95	74.0	-12.05
	11400	AV	H	11.24	32.40	43.64	54.0	-10.36
	17100	PK	H	19.88	37.19	57.07	68.2	-11.13
	11400	PK	V	11.24	46.65	57.89	74.0	-16.11
	11400	AV	V	11.24	30.31	41.55	54.0	-12.45
802.11ax (HE20) Ch149	11490	PK	H	11.50	49.46	60.96	74.0	-13.04
	11490	AV	H	11.50	31.39	42.89	54.0	-11.11
	17235	PK	H	20.51	37.59	58.10	68.2	-10.10
	11490	PK	V	11.50	44.73	56.23	74.0	-17.77
	11490	AV	V	11.50	29.60	41.10	54.0	-12.90
802.11ax (HE20) Ch157	11570	PK	H	11.67	48.92	60.59	74.0	-13.41
	11570	AV	H	11.67	31.21	42.88	54.0	-11.12
	17355	PK	H	21.23	37.23	58.46	68.2	-9.74
	11570	PK	V	11.67	43.90	55.57	74.0	-18.43
	11570	AV	V	11.67	29.19	40.86	54.0	-13.14
802.11ax (HE20) Ch165	11650	PK	H	11.78	49.87	61.65	74.0	-12.35
	11650	AV	H	11.78	31.69	43.47	54.0	-10.53
	17475	PK	H	22.32	35.82	58.14	68.2	-10.06
	11650	PK	V	11.78	43.68	55.46	74.0	-18.54
	11650	AV	V	11.78	29.65	41.43	54.0	-12.57
802.11ax (HE40) Ch38	10380	PK	H	8.72	51.80	60.52	68.2	-7.68
	10380	PK	V	8.72	51.11	59.83	68.2	-8.37
802.11ax (HE40) Ch46	10460	PK	H	8.93	54.97	63.90	68.2	-4.30
	15690	PK	H	13.82	38.03	51.85	74.0	-22.15
	10460	PK	V	8.93	57.40	66.33	68.2	-1.87
	15690	PK	V	13.82	38.40	52.22	74.0	-21.78
802.11ax (HE40) Ch54	10540	PK	H	9.11	57.63	66.74	68.2	-1.46
	10540	PK	V	9.11	57.54	66.65	68.2	-1.55
802.11ax (HE40) Ch62	10620	PK	H	9.29	50.28	59.57	74.0	-14.43
	10620	AV	H	9.29	31.83	41.12	54.0	-12.88
	10620	PK	V	9.29	51.30	60.59	74.0	-13.41
	10620	AV	V	9.29	30.73	40.02	54.0	-13.98

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

TEST REPORT

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11ax (HE40) Ch102	11020	PK	H	10.57	48.94	59.51	74.0	-14.49
	11020	AV	H	10.57	31.25	41.82	54.0	-12.18
	11020	PK	V	10.57	45.40	55.97	74.0	-18.03
	11020	AV	V	10.57	29.85	40.42	54.0	-13.58
802.11ax (HE40) Ch110	11100	PK	H	10.64	53.58	64.22	74.0	-9.78
	11100	AV	H	10.64	31.63	42.27	54.0	-11.73
	11100	PK	V	10.64	49.49	60.13	74.0	-13.87
	11100	AV	V	10.64	30.13	40.77	54.0	-13.23
802.11ax (HE40) Ch134	11340	PK	H	11.06	49.02	60.08	74.0	-13.92
	11340	AV	H	11.06	31.69	42.75	54.0	-11.25
	11340	PK	V	11.06	46.02	57.08	74.0	-16.92
	11340	AV	V	11.06	30.32	41.38	54.0	-12.62
802.11ax (HE40) Ch151	11510	PK	H	11.55	47.63	59.18	74.0	-14.82
	11510	AV	H	11.55	30.30	41.85	54.0	-12.15
	17265	PK	H	20.58	37.03	57.61	68.2	-10.59
	11510	PK	V	11.55	42.83	54.38	74.0	-19.62
	11510	AV	V	11.55	29.39	40.94	54.0	-13.06
802.11ax (HE40) Ch159	11590	PK	H	11.70	47.95	59.65	74.0	-14.35
	11590	AV	H	11.70	31.42	43.12	54.0	-10.88
	11590	PK	V	11.70	42.16	53.86	74.0	-20.14
	11590	AV	V	11.70	29.41	41.11	54.0	-12.89
802.11ax (HE80) Ch42	10420	PK	H	8.86	51.06	59.92	68.2	-8.28
	10420	PK	V	8.86	51.90	60.76	68.2	-7.44
802.11ax (HE80) Ch58	10580	PK	H	9.21	46.17	55.38	68.2	-12.82
	10580	PK	V	9.21	47.81	57.02	68.2	-11.18
802.11ax (HE80) Ch106	11060	PK	H	10.60	40.24	50.84	74.0	-23.16
	11060	PK	V	10.60	38.42	49.02	74.0	-24.98
802.11ax (HE80) Ch155	11550	PK	H	11.63	46.01	57.64	74.0	-16.36
	11550	AV	H	11.63	30.70	42.33	54.0	-11.67
	17325	PK	H	20.93	36.05	56.98	68.2	-11.22
	11550	PK	V	11.63	41.07	52.70	74.0	-21.30

Remark: 1. Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre_Amplifier Gain

2. The emissions were very low against the limit above 18 GHz.

6. Emission on The Band Edge

6.1 Measuring instrument setting

For 5.15 GHz -5.25 GHz

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak ; Average
RBW	1MHz
VBW	3MHz for Peak; 1/T Minimum kHz for Average
Sweep	Auto couple
Restrict bands	4500~5150MHz
	5350 ~5460MHz
Attenuation	Auto

For 5.725 GHz -5.850 GHz

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	1MHz
VBW	3MHz
Sweep	Auto couple
Attenuation	Auto

6.2 Test procedure

The test procedure is the same as clause 5.3.

6.3 Limit for Band Edge (Radiated emission measurement)

Refer to clause 5.1.

6.4 Test Result

Temperature (°C) :	22
Relative Humidity (%) :	74
Test date :	2025/05/08 ~ 2025/05/14

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11a_Ch36	5150.00	PK	H	40.40	20.02	60.42	74	-13.58	4500~5150
	5150.00	AV	H	40.40	11.63	52.03	54	-1.97	
802.11a_Ch48	5416.80	PK	H	40.57	11.15	51.72	74	-22.28	5350~5460
	5350.00	AV	H	40.45	-3.01	37.44	54	-16.56	
802.11a_Ch52	5124.96	PK	H	40.45	12.17	52.62	74	-21.38	4500~5150
	5150.00	AV	H	40.40	-5.32	35.08	54	-18.92	
802.11a_Ch64	5350.00	PK	H	40.45	21.47	61.92	74	-12.08	5350~5460
	5350.00	AV	H	40.45	9.85	50.30	54	-3.70	
802.11a_Ch100	5460.00	PK	H	40.91	26.10	67.01	74	-6.99	5350~5460
	5460.00	AV	H	40.91	11.64	52.55	54	-1.45	
802.11ac_Ch36 (VHT20)	5150.00	PK	H	40.40	19.20	59.60	74	-14.40	4500~5150
	5150.00	AV	H	40.40	12.60	53.00	54	-1.00	
802.11ac_Ch48 (VHT20)	5383.20	PK	H	40.44	10.24	50.68	74	-23.32	5350~5460
	5358.24	AV	H	40.45	-2.03	38.42	54	-15.58	
802.11ac_Ch52 (VHT20)	5083.68	PK	H	40.48	10.10	50.58	74	-23.42	4500~5150
	5150.00	AV	H	40.40	-3.62	36.78	54	-17.22	
802.11ac_Ch64 (VHT20)	5350.00	PK	H	40.45	19.35	59.80	74	-14.20	5350~5460
	5350.00	AV	H	40.45	9.56	50.01	54	-3.99	
802.11ac_Ch100 (VHT20)	5460.00	PK	H	40.91	14.19	55.10	74	-18.90	5350~5460
	5460.00	AV	H	40.91	4.45	45.36	54	-8.64	
802.11ac_Ch38 (VHT40)	5150.00	PK	H	40.40	18.42	58.82	74	-15.18	4500~5150
	5150.00	AV	H	40.40	11.46	51.86	54	-2.14	
802.11ac_Ch46 (VHT40)	5350.00	PK	H	40.45	9.57	50.02	74	-23.98	5350~5460
	5350.00	AV	H	40.45	2.02	42.47	54	-11.53	
802.11ac_Ch54 (VHT40)	5150.00	PK	H	40.40	9.72	50.12	74	-23.88	4500~5150
	5150.00	AV	H	40.40	0.77	41.17	54	-12.83	
802.11ac_Ch62 (VHT40)	5350.00	PK	H	40.45	21.35	61.80	74	-12.20	5350~5460
	5350.00	AV	H	40.45	11.33	51.78	54	-2.22	

Remark: Correction Factor = Antenna Factor + Cable Loss - Pre_Amplifier Gain

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11ac_Ch102 (VHT40)	5460.00	PK	H	40.91	23.05	63.96	74	-10.04	5350~5460
	5460.00	AV	H	40.91	9.83	50.74	54	-3.26	
802.11ac_Ch42 (VHT80)	5140.32	PK	H	40.42	20.16	60.58	74	-13.42	4500~5150
	5142.24	AV	H	40.41	10.46	50.87	54	-3.13	
	5361.12	PK	H	40.45	13.38	53.83	74	-20.17	5350~5460
	5350.00	AV	H	40.45	1.07	41.52	54	-12.48	
802.11ac_Ch58 (VHT80)	5042.40	PK	H	40.38	9.11	49.49	74	-24.51	4500~5150
	5065.44	AV	H	40.45	-6.15	34.30	54	-19.70	
	5364.96	PK	H	40.45	22.79	63.24	74	-10.76	5350~5460
	5373.60	AV	H	40.45	11.49	51.94	54	-2.06	
802.11ac_Ch106 (VHT80)	5453.35	PK	H	40.86	21.76	62.62	74	-11.38	5350~5460
	5452.65	AV	H	40.86	11.94	52.80	54	-1.20	
802.11ax_Ch36 (HE20)	5019.36	PK	H	40.24	25.77	66.01	74	-7.99	4500~5150
	5150.00	AV	H	40.40	10.34	50.74	54	-3.26	
802.11ax_Ch48 (HE20)	5437.92	PK	H	40.74	25.60	66.34	74	-7.66	5350~5460
	5350.00	AV	H	40.45	6.66	47.11	54	-6.89	
802.11ax_Ch52 (HE20)	5037.60	PK	H	40.35	25.06	65.41	74	-8.59	4500~5150
	4560.48	AV	H	38.39	11.66	50.05	54	-3.95	
802.11ax_Ch64 (HE20)	5426.40	PK	H	40.65	23.81	64.46	74	-9.54	5350~5460
	5350.00	AV	H	40.45	12.41	52.86	54	-1.14	
802.11ax_Ch100 (HE20)	5460.00	PK	H	40.91	21.37	62.28	74	-11.72	5350~5460
	5460.00	AV	H	40.91	9.83	50.74	54	-3.26	
802.11ax_Ch38 (HE40)	4981.92	PK	H	39.93	26.53	66.46	74	-7.54	4500~5150
	5146.08	AV	H	40.41	10.75	51.16	54	-2.84	
802.11ax_Ch46 (HE40)	5455.20	PK	H	40.87	23.97	64.84	74	-9.16	5350~5460
	5350.00	AV	H	40.45	9.87	50.32	54	-3.68	
802.11ax_Ch54 (HE40)	4969.44	PK	H	39.79	26.04	65.83	74	-8.17	4500~5150
	4997.28	AV	H	40.10	10.68	50.78	54	-3.22	
802.11ax_Ch62 (HE40)	5350.00	PK	H	40.45	26.26	66.71	74	-7.29	5350~5460
	5350.00	AV	H	40.45	12.02	52.47	54	-1.53	
802.11ax_Ch102 (HE40)	5460.00	PK	H	40.91	22.36	63.27	74	-10.73	5350~5460
	5460.00	AV	H	40.91	9.37	50.28	54	-3.72	


Remark: Correction Factor = Antenna Factor + Cable Loss - Pre_Amplifier Gain

TEST REPORT


Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11ax_Ch42 (HE80)	4995.36	PK	H	40.07	26.17	66.24	74	-7.76	4500~5150
	5005.92	AV	H	40.16	9.88	50.04	54	-3.96	
	5435.04	PK	H	40.71	25.90	66.61	74	-7.39	5350~5460
	5355.36	AV	H	40.45	8.73	49.18	54	-4.82	
802.11ax_Ch58 (HE80)	4634.40	PK	H	38.97	26.49	65.46	74	-8.54	4500~5150
	5008.80	AV	H	40.19	9.96	50.15	54	-3.85	
	5350.00	PK	H	40.45	24.21	64.66	74	-9.34	5350~5460
	5350.00	AV	H	40.45	10.14	50.59	54	-3.41	
802.11ax_Ch106 (HE80)	5460.00	PK	H	40.91	22.03	62.94	74	-11.06	5350~5460
	5460.00	AV	H	40.91	10.86	51.77	54	-2.23	

Remark: Correction Factor = Antenna Factor + Cable Loss - Pre_Amplifier Gain


Restricted Band Bandedge @ 802.11a Mode Ch36 PK

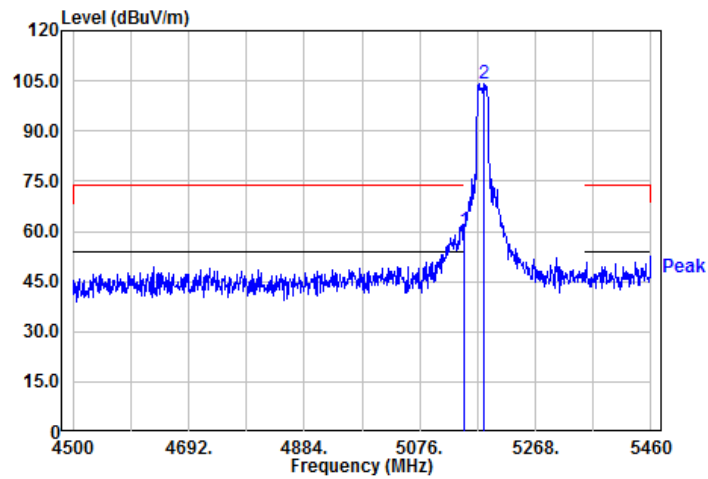


Restricted Band Bandedge @ 802.11a Mode Ch36 AV

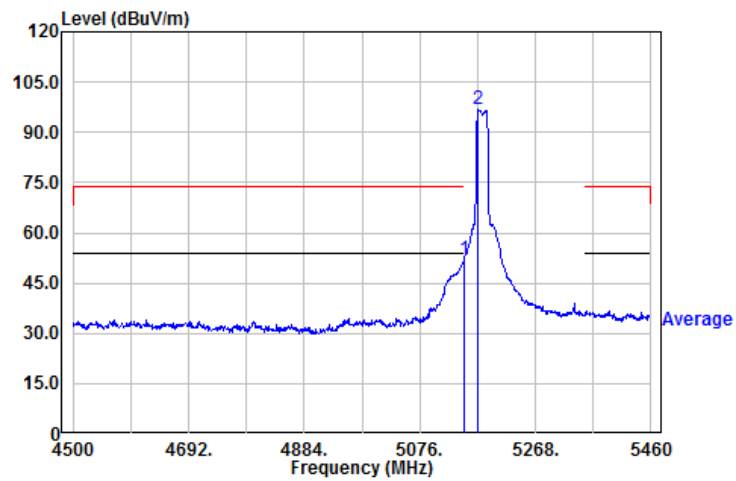


Restricted Band Bandedge @ 802.11a Mode Ch48 PK

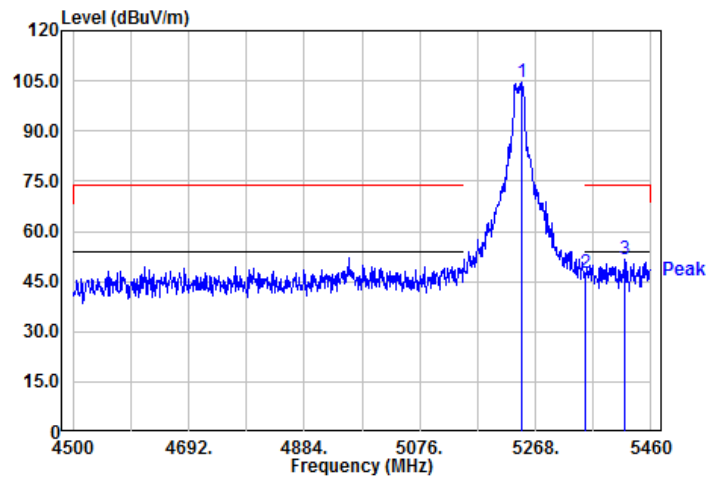


Restricted Band Bandedge @ 802.11a Mode Ch48 AV

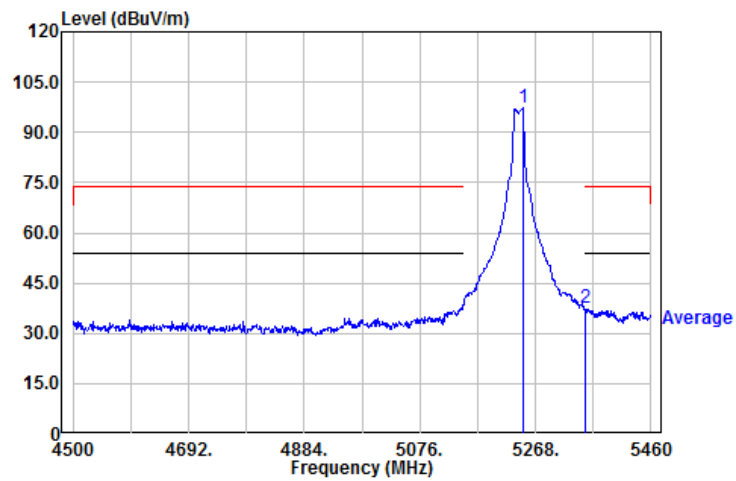


Restricted Band Bandedge @ 802.11a Mode Ch52 PK

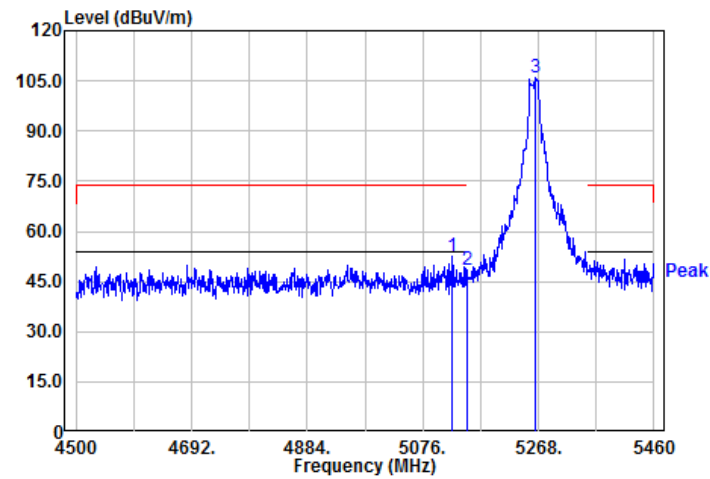


Restricted Band Bandedge @ 802.11a Mode Ch52 AV

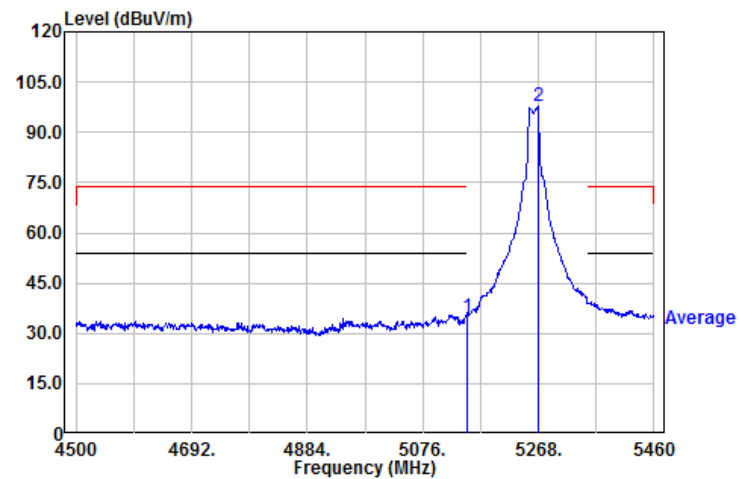


Restricted Band Bandedge @ 802.11a Mode Ch64 PK

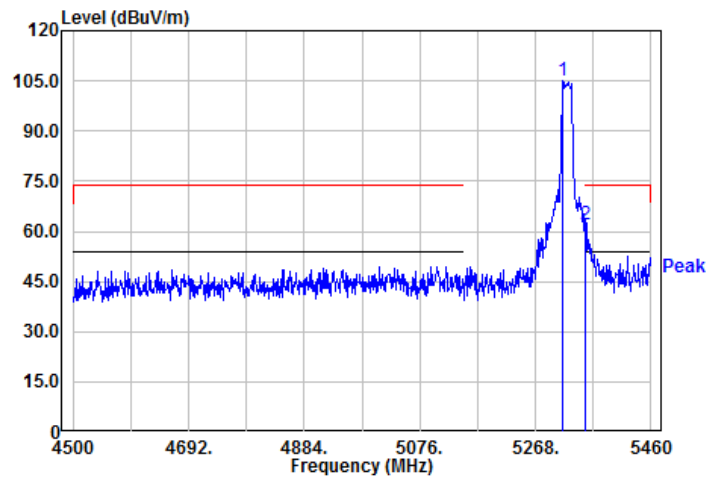


Restricted Band Bandedge @ 802.11a Mode Ch64 AV

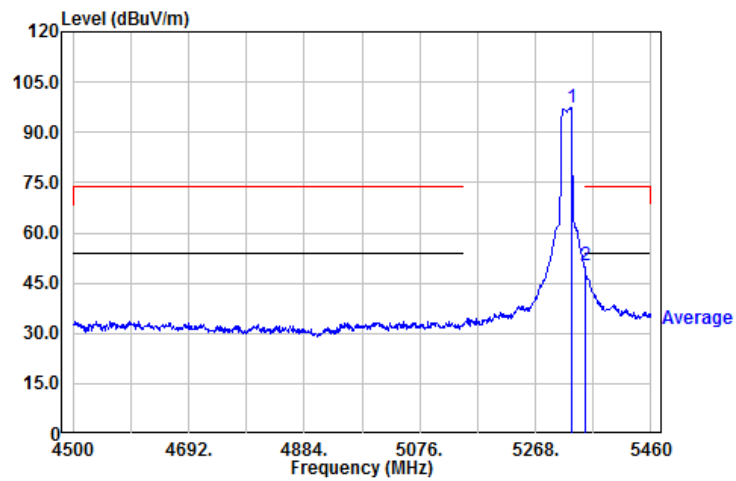


Restricted Band Bandedge @ 802.11a Mode Ch100 PK

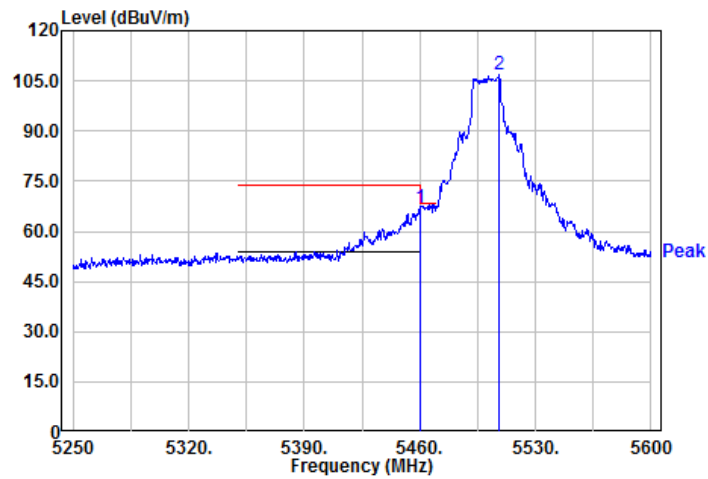


Restricted Band Bandedge @ 802.11a Mode Ch100 AV

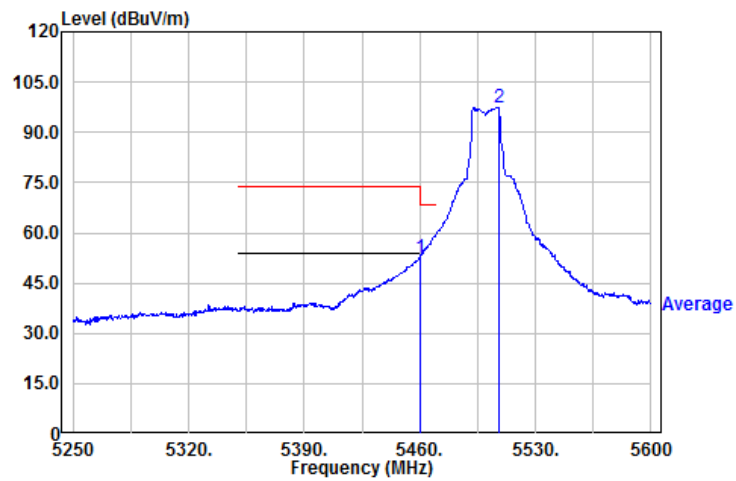


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch36 PK

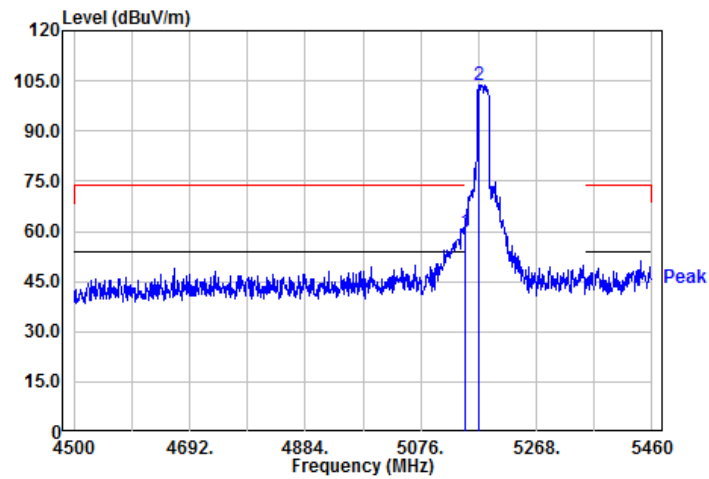


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch36 AV

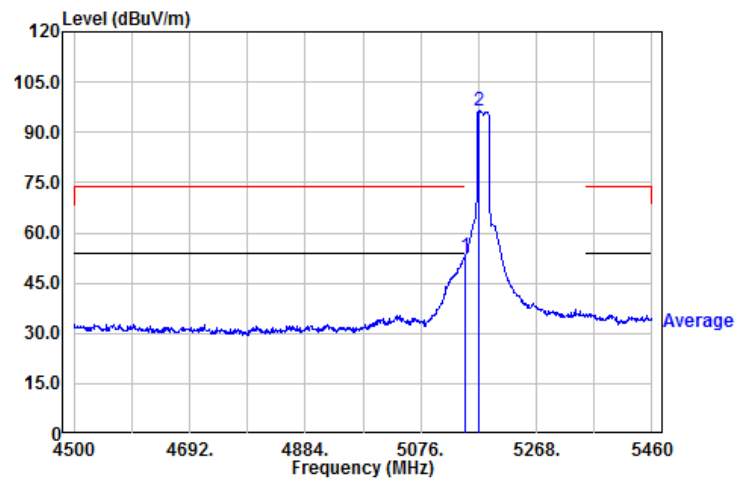


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch48 PK

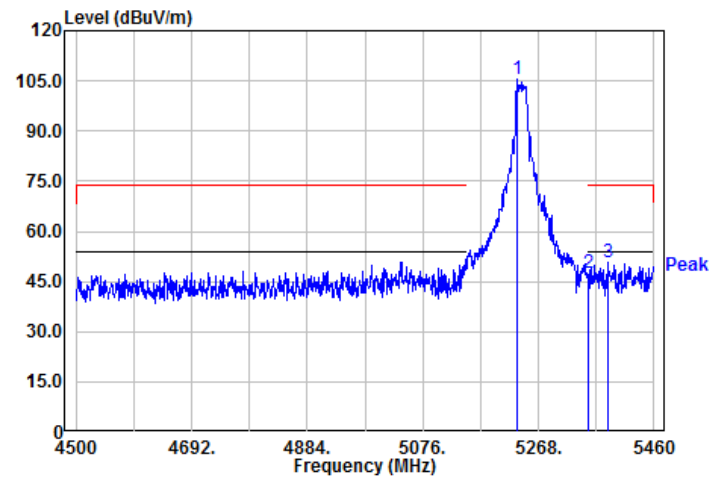


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch48 AV

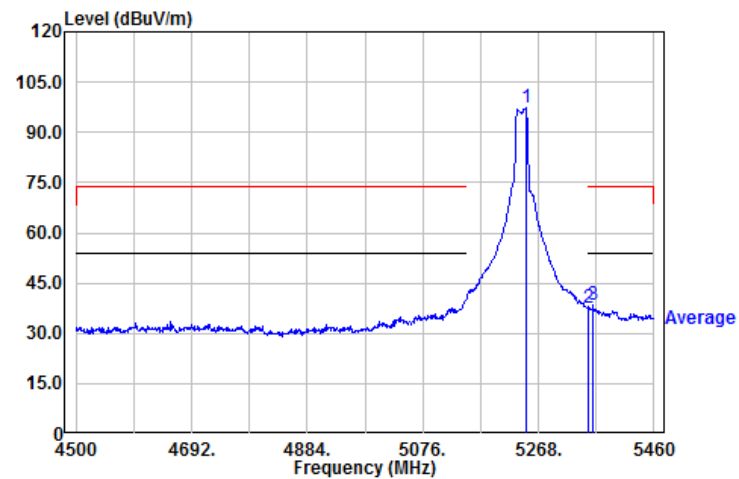


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch52 PK

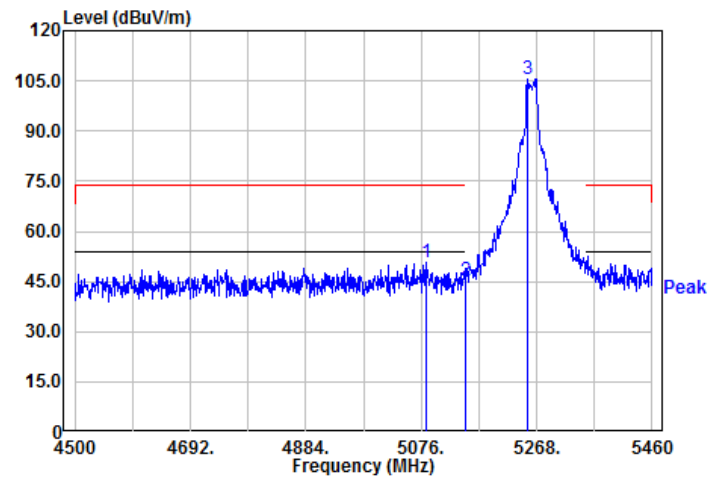


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch52 AV

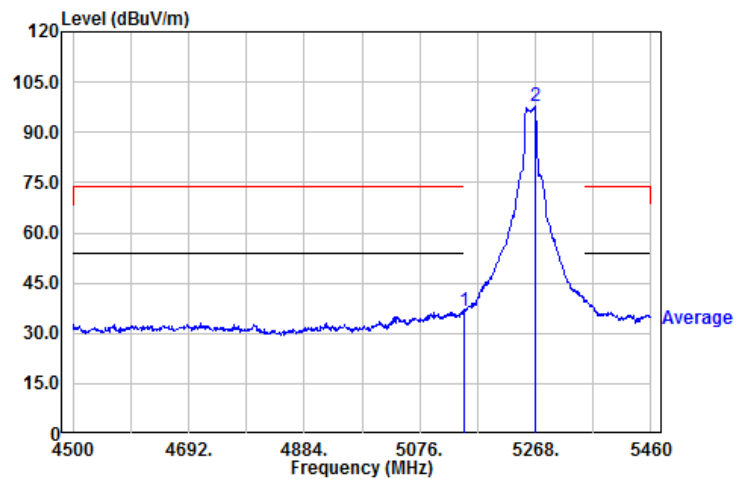


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch64 PK

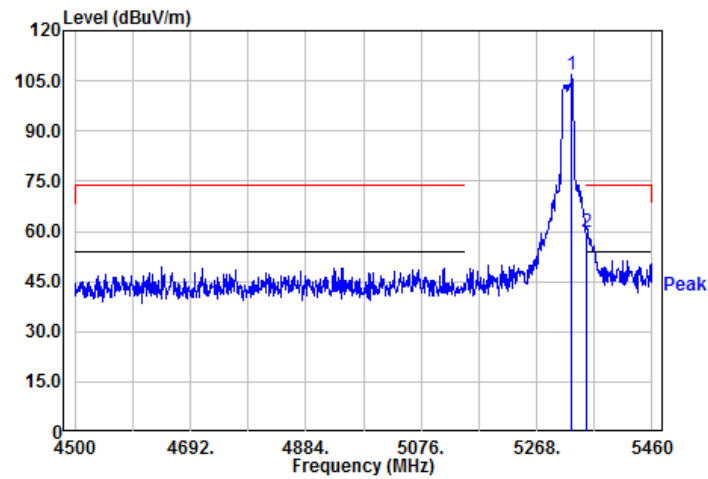


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch64 AV

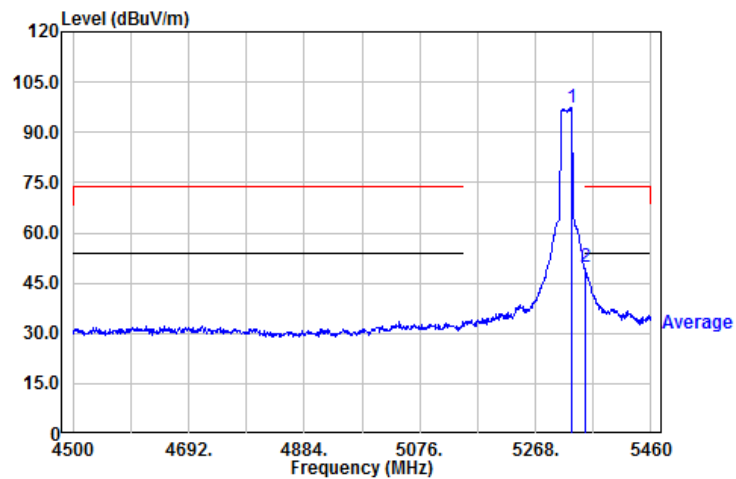


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch100 PK

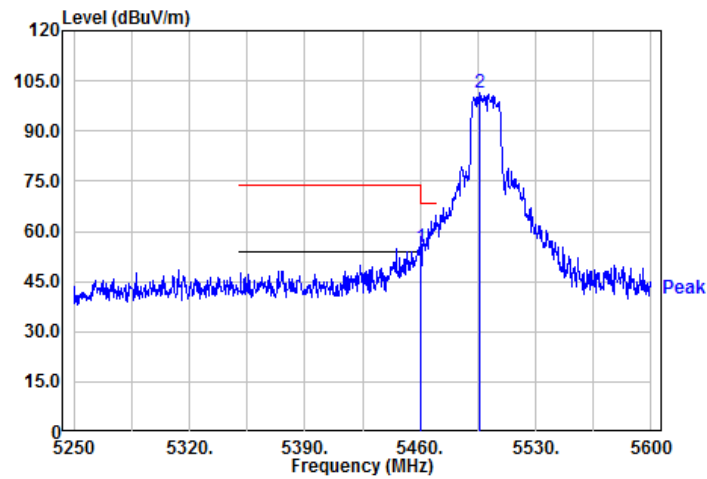


Restricted Band Bandedge @ 802.11ac(VHT20) Mode Ch100 AV

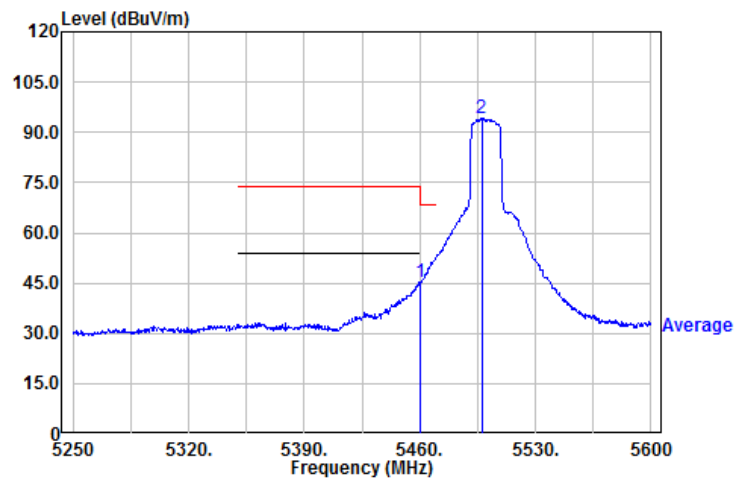


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch38 PK

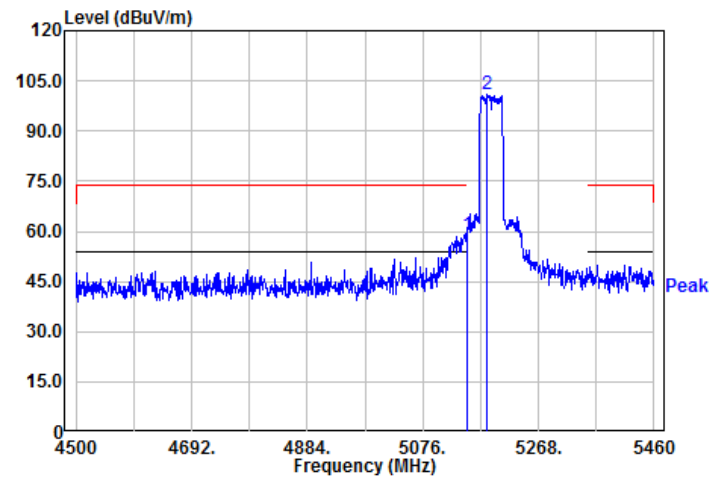


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch38 AV

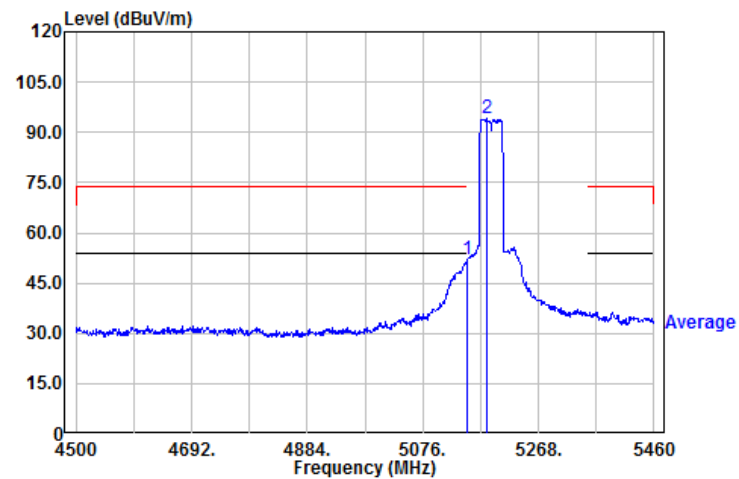


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch46 PK

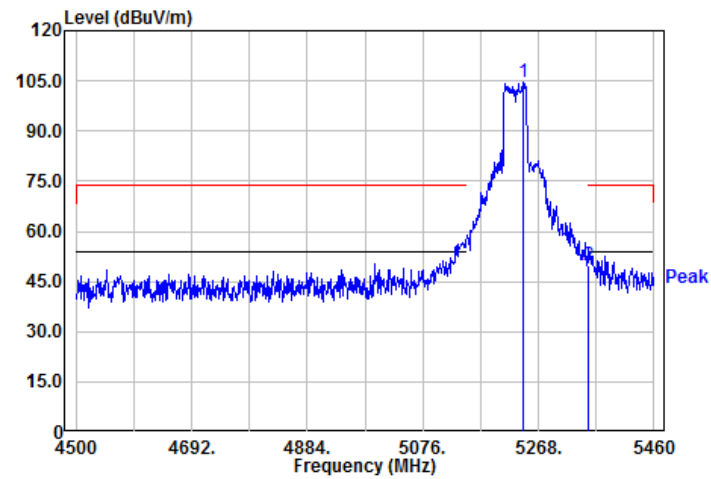


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch46 AV

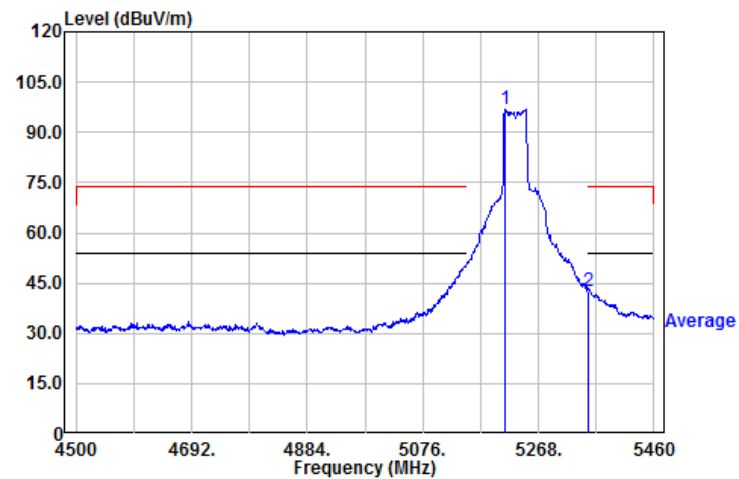


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch54 PK

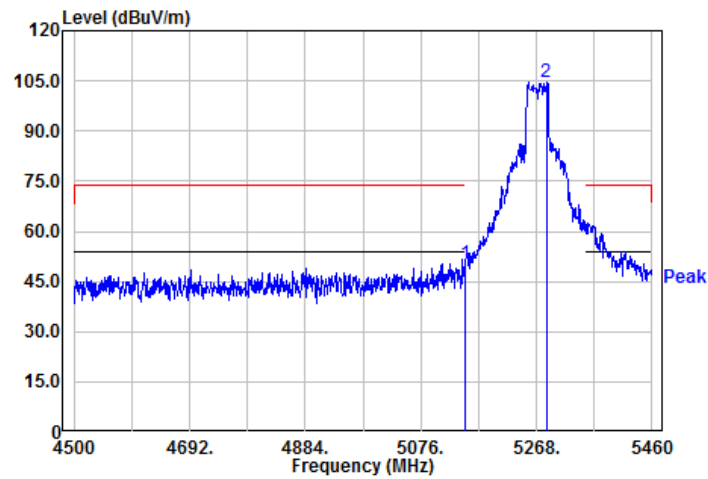


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch54 AV

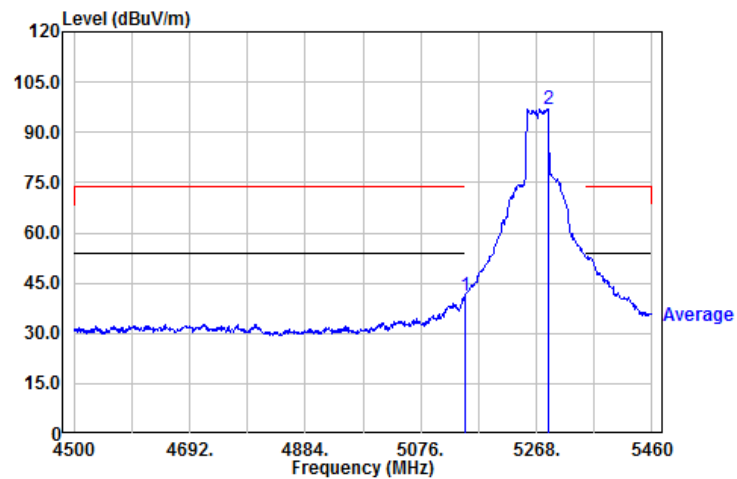


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch62 PK

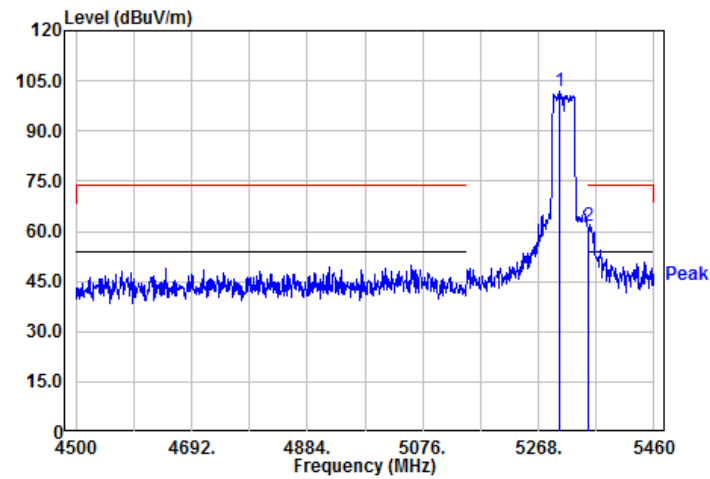


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch62 AV

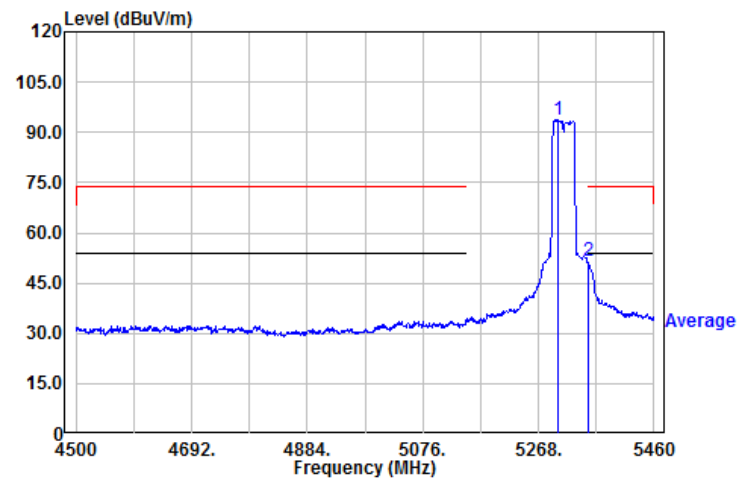


Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch102 PK

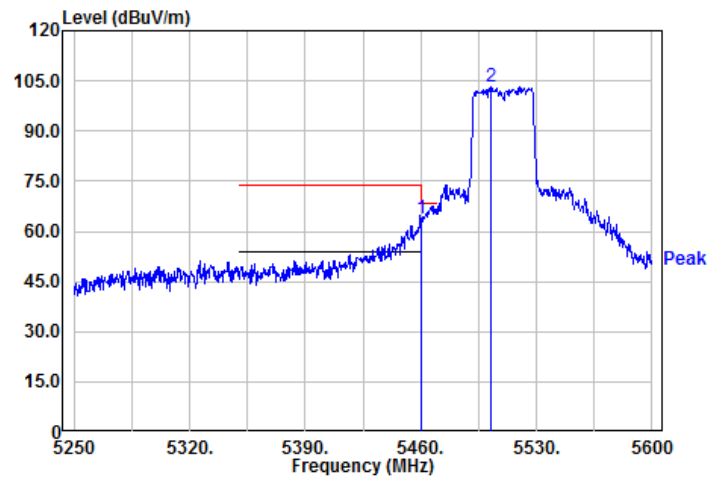

Restricted Band Bandedge @ 802.11ac(VHT40) Mode Ch102 AV

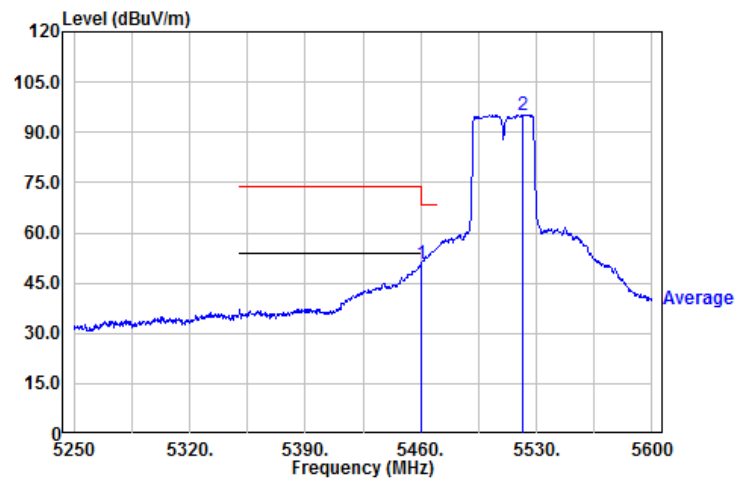

Restricted Band Bandedge @ 802.11ac(VHT80) Mode Ch42 PK

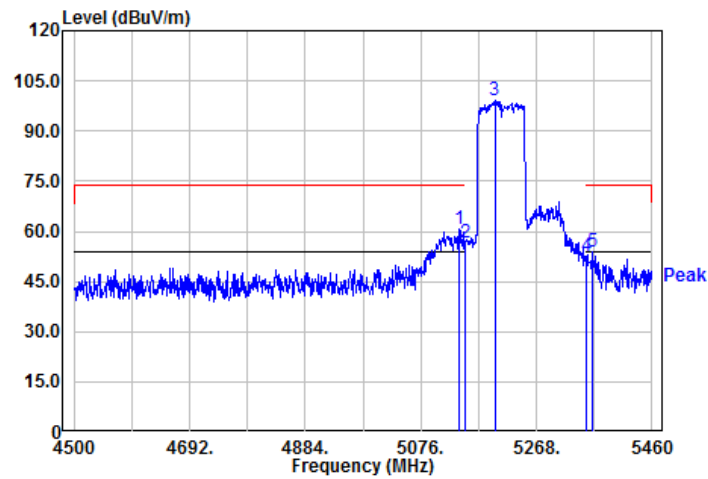

Restricted Band Bandedge @ 802.11ac(VHT80) Mode Ch42 AV

