

TABLE OF CONTENTS

1 Conducted output power	2
2 Frequency stability	6
3 Peak-to-Average Ratio	7
4 Occupied bandwidth	12
5 Band edge	23
6 Out-of-band emissions	31

1 Conducted output power

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	1	#0	QPSK	23.60	-2.27	-4.42	19.18	50	PASS
Band26(814-824)	1.4	26697	1	#Mid	QPSK	23.67	-2.27	-4.42	19.25	50	PASS
Band26(814-824)	1.4	26697	1	#Max	QPSK	23.54	-2.27	-4.42	19.12	50	PASS
Band26(814-824)	1.4	26697	3	#0	QPSK	23.51	-2.27	-4.42	19.09	50	PASS
Band26(814-824)	1.4	26697	3	#Mid	QPSK	23.52	-2.27	-4.42	19.1	50	PASS
Band26(814-824)	1.4	26697	3	#Max	QPSK	23.55	-2.27	-4.42	19.13	50	PASS
Band26(814-824)	1.4	26697	6	#0	QPSK	22.63	-2.27	-4.42	18.21	50	PASS
Band26(814-824)	1.4	26697	1	#0	QAM16	23.67	-2.27	-4.42	19.25	50	PASS
Band26(814-824)	1.4	26697	1	#Mid	QAM16	23.73	-2.27	-4.42	19.31	50	PASS
Band26(814-824)	1.4	26697	1	#Max	QAM16	23.70	-2.27	-4.42	19.28	50	PASS
Band26(814-824)	1.4	26697	3	#0	QAM16	22.88	-2.27	-4.42	18.46	50	PASS
Band26(814-824)	1.4	26697	3	#Mid	QAM16	22.90	-2.27	-4.42	18.48	50	PASS
Band26(814-824)	1.4	26697	3	#Max	QAM16	22.95	-2.27	-4.42	18.53	50	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	21.82	-2.27	-4.42	17.4	50	PASS
Band26(814-824)	1.4	26740	1	#0	QPSK	23.80	-2.27	-4.42	19.38	50	PASS
Band26(814-824)	1.4	26740	1	#Mid	QPSK	23.68	-2.27	-4.42	19.26	50	PASS
Band26(814-824)	1.4	26740	1	#Max	QPSK	23.70	-2.27	-4.42	19.28	50	PASS
Band26(814-824)	1.4	26740	3	#0	QPSK	23.72	-2.27	-4.42	19.3	50	PASS
Band26(814-824)	1.4	26740	3	#Mid	QPSK	23.71	-2.27	-4.42	19.29	50	PASS
Band26(814-824)	1.4	26740	3	#Max	QPSK	23.65	-2.27	-4.42	19.23	50	PASS
Band26(814-824)	1.4	26740	6	#0	QPSK	22.54	-2.27	-4.42	18.12	50	PASS
Band26(814-824)	1.4	26740	1	#0	QAM16	22.74	-2.27	-4.42	18.32	50	PASS
Band26(814-824)	1.4	26740	1	#Mid	QAM16	22.76	-2.27	-4.42	18.34	50	PASS
Band26(814-824)	1.4	26740	1	#Max	QAM16	22.77	-2.27	-4.42	18.35	50	PASS
Band26(814-824)	1.4	26740	3	#0	QAM16	22.61	-2.27	-4.42	18.19	50	PASS
Band26(814-824)	1.4	26740	3	#Mid	QAM16	22.63	-2.27	-4.42	18.21	50	PASS
Band26(814-824)	1.4	26740	3	#Max	QAM16	22.61	-2.27	-4.42	18.19	50	PASS
Band26(814-824)	1.4	26740	6	#0	QAM16	21.68	-2.27	-4.42	17.26	50	PASS
Band26(814-824)	1.4	26783	1	#0	QPSK	23.57	-2.27	-4.42	19.15	50	PASS
Band26(814-824)	1.4	26783	1	#Mid	QPSK	23.52	-2.27	-4.42	19.1	50	PASS
Band26(814-824)	1.4	26783	1	#Max	QPSK	23.50	-2.27	-4.42	19.08	50	PASS
Band26(814-824)	1.4	26783	3	#0	QPSK	23.55	-2.27	-4.42	19.13	50	PASS
Band26(814-824)	1.4	26783	3	#Mid	QPSK	23.59	-2.27	-4.42	19.17	50	PASS
Band26(814-824)	1.4	26783	3	#Max	QPSK	23.63	-2.27	-4.42	19.21	50	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	22.59	-2.27	-4.42	18.17	50	PASS
Band26(814-824)	1.4	26783	1	#0	QAM16	23.20	-2.27	-4.42	18.78	50	PASS
Band26(814-824)	1.4	26783	1	#Mid	QAM16	23.23	-2.27	-4.42	18.81	50	PASS

Band26(814-824)	1.4	26783	1	#Max	QAM16	23.15	-2.27	-4.42	18.73	50	PASS
Band26(814-824)	1.4	26783	3	#0	QAM16	23.15	-2.27	-4.42	18.73	50	PASS
Band26(814-824)	1.4	26783	3	#Mid	QAM16	23.05	-2.27	-4.42	18.63	50	PASS
Band26(814-824)	1.4	26783	3	#Max	QAM16	22.98	-2.27	-4.42	18.56	50	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	21.80	-2.27	-4.42	17.38	50	PASS
Band26(814-824)	3	26705	1	#0	QPSK	23.62	-2.27	-4.42	19.2	50	PASS
Band26(814-824)	3	26705	1	#Mid	QPSK	23.50	-2.27	-4.42	19.08	50	PASS
Band26(814-824)	3	26705	1	#Max	QPSK	23.52	-2.27	-4.42	19.1	50	PASS
Band26(814-824)	3	26705	8	#0	QPSK	22.50	-2.27	-4.42	18.08	50	PASS
Band26(814-824)	3	26705	8	#Mid	QPSK	22.45	-2.27	-4.42	18.03	50	PASS
Band26(814-824)	3	26705	8	#Max	QPSK	22.60	-2.27	-4.42	18.18	50	PASS
Band26(814-824)	3	26705	15	#0	QPSK	22.53	-2.27	-4.42	18.11	50	PASS
Band26(814-824)	3	26705	1	#0	QAM16	23.14	-2.27	-4.42	18.72	50	PASS
Band26(814-824)	3	26705	1	#Mid	QAM16	23.04	-2.27	-4.42	18.62	50	PASS
Band26(814-824)	3	26705	1	#Max	QAM16	23.09	-2.27	-4.42	18.67	50	PASS
Band26(814-824)	3	26705	8	#0	QAM16	21.81	-2.27	-4.42	17.39	50	PASS
Band26(814-824)	3	26705	8	#Mid	QAM16	21.76	-2.27	-4.42	17.34	50	PASS
Band26(814-824)	3	26705	8	#Max	QAM16	21.84	-2.27	-4.42	17.42	50	PASS
Band26(814-824)	3	26705	15	#0	QAM16	21.66	-2.27	-4.42	17.24	50	PASS
Band26(814-824)	3	26740	1	#0	QPSK	23.69	-2.27	-4.42	19.27	50	PASS
Band26(814-824)	3	26740	1	#Mid	QPSK	23.72	-2.27	-4.42	19.3	50	PASS
Band26(814-824)	3	26740	1	#Max	QPSK	23.72	-2.27	-4.42	19.3	50	PASS
Band26(814-824)	3	26740	8	#0	QPSK	22.58	-2.27	-4.42	18.16	50	PASS
Band26(814-824)	3	26740	8	#Mid	QPSK	22.49	-2.27	-4.42	18.07	50	PASS
Band26(814-824)	3	26740	8	#Max	QPSK	22.56	-2.27	-4.42	18.14	50	PASS
Band26(814-824)	3	26740	15	#0	QPSK	22.65	-2.27	-4.42	18.23	50	PASS
Band26(814-824)	3	26740	1	#0	QAM16	22.68	-2.27	-4.42	18.26	50	PASS
Band26(814-824)	3	26740	1	#Mid	QAM16	22.74	-2.27	-4.42	18.32	50	PASS
Band26(814-824)	3	26740	1	#Max	QAM16	22.71	-2.27	-4.42	18.29	50	PASS
Band26(814-824)	3	26740	8	#0	QAM16	21.74	-2.27	-4.42	17.32	50	PASS
Band26(814-824)	3	26740	8	#Mid	QAM16	21.73	-2.27	-4.42	17.31	50	PASS
Band26(814-824)	3	26740	8	#Max	QAM16	21.71	-2.27	-4.42	17.29	50	PASS
Band26(814-824)	3	26740	15	#0	QAM16	21.71	-2.27	-4.42	17.29	50	PASS
Band26(814-824)	3	26775	1	#0	QPSK	23.52	-2.27	-4.42	19.1	50	PASS
Band26(814-824)	3	26775	1	#Mid	QPSK	23.53	-2.27	-4.42	19.11	50	PASS
Band26(814-824)	3	26775	1	#Max	QPSK	23.57	-2.27	-4.42	19.15	50	PASS
Band26(814-824)	3	26775	8	#0	QPSK	22.52	-2.27	-4.42	18.1	50	PASS
Band26(814-824)	3	26775	8	#Mid	QPSK	22.62	-2.27	-4.42	18.2	50	PASS
Band26(814-824)	3	26775	8	#Max	QPSK	22.60	-2.27	-4.42	18.18	50	PASS
Band26(814-824)	3	26775	15	#0	QPSK	22.56	-2.27	-4.42	18.14	50	PASS
Band26(814-824)	3	26775	1	#0	QAM16	23.55	-2.27	-4.42	19.13	50	PASS
Band26(814-824)	3	26775	1	#Mid	QAM16	23.55	-2.27	-4.42	19.13	50	PASS
Band26(814-824)	3	26775	1	#Max	QAM16	23.63	-2.27	-4.42	19.21	50	PASS
Band26(814-824)	3	26775	8	#0	QAM16	21.47	-2.27	-4.42	17.05	50	PASS

Band26(814-824)	3	26775	8	#Mid	QAM16	21.57	-2.27	-4.42	17.15	50	PASS
Band26(814-824)	3	26775	8	#Max	QAM16	21.54	-2.27	-4.42	17.12	50	PASS
Band26(814-824)	3	26775	15	#0	QAM16	21.69	-2.27	-4.42	17.27	50	PASS
Band26(814-824)	5	26715	1	#0	QPSK	23.56	-2.27	-4.42	19.14	50	PASS
Band26(814-824)	5	26715	1	#Mid	QPSK	23.59	-2.27	-4.42	19.17	50	PASS
Band26(814-824)	5	26715	1	#Max	QPSK	23.56	-2.27	-4.42	19.14	50	PASS
Band26(814-824)	5	26715	12	#0	QPSK	22.58	-2.27	-4.42	18.16	50	PASS
Band26(814-824)	5	26715	12	#Mid	QPSK	22.72	-2.27	-4.42	18.3	50	PASS
Band26(814-824)	5	26715	12	#Max	QPSK	22.61	-2.27	-4.42	18.19	50	PASS
Band26(814-824)	5	26715	25	#0	QPSK	22.68	-2.27	-4.42	18.26	50	PASS
Band26(814-824)	5	26715	1	#0	QAM16	22.63	-2.27	-4.42	18.21	50	PASS
Band26(814-824)	5	26715	1	#Mid	QAM16	22.61	-2.27	-4.42	18.19	50	PASS
Band26(814-824)	5	26715	1	#Max	QAM16	22.68	-2.27	-4.42	18.26	50	PASS
Band26(814-824)	5	26715	12	#0	QAM16	21.44	-2.27	-4.42	17.02	50	PASS
Band26(814-824)	5	26715	12	#Mid	QAM16	21.56	-2.27	-4.42	17.14	50	PASS
Band26(814-824)	5	26715	12	#Max	QAM16	21.50	-2.27	-4.42	17.08	50	PASS
Band26(814-824)	5	26715	25	#0	QAM16	21.79	-2.27	-4.42	17.37	50	PASS
Band26(814-824)	5	26740	1	#0	QPSK	23.77	-2.27	-4.42	19.35	50	PASS
Band26(814-824)	5	26740	1	#Mid	QPSK	23.75	-2.27	-4.42	19.33	50	PASS
Band26(814-824)	5	26740	1	#Max	QPSK	23.68	-2.27	-4.42	19.26	50	PASS
Band26(814-824)	5	26740	12	#0	QPSK	22.52	-2.27	-4.42	18.1	50	PASS
Band26(814-824)	5	26740	12	#Mid	QPSK	22.60	-2.27	-4.42	18.18	50	PASS
Band26(814-824)	5	26740	12	#Max	QPSK	22.71	-2.27	-4.42	18.29	50	PASS
Band26(814-824)	5	26740	25	#0	QPSK	22.68	-2.27	-4.42	18.26	50	PASS
Band26(814-824)	5	26740	1	#0	QAM16	22.65	-2.27	-4.42	18.23	50	PASS
Band26(814-824)	5	26740	1	#Mid	QAM16	22.65	-2.27	-4.42	18.23	50	PASS
Band26(814-824)	5	26740	1	#Max	QAM16	22.64	-2.27	-4.42	18.22	50	PASS
Band26(814-824)	5	26740	12	#0	QAM16	21.43	-2.27	-4.42	17.01	50	PASS
Band26(814-824)	5	26740	12	#Mid	QAM16	21.58	-2.27	-4.42	17.16	50	PASS
Band26(814-824)	5	26740	12	#Max	QAM16	21.46	-2.27	-4.42	17.04	50	PASS
Band26(814-824)	5	26740	25	#0	QAM16	21.69	-2.27	-4.42	17.27	50	PASS
Band26(814-824)	5	26765	1	#0	QPSK	23.47	-2.27	-4.42	19.05	50	PASS
Band26(814-824)	5	26765	1	#Mid	QPSK	23.35	-2.27	-4.42	18.93	50	PASS
Band26(814-824)	5	26765	1	#Max	QPSK	23.34	-2.27	-4.42	18.92	50	PASS
Band26(814-824)	5	26765	12	#0	QPSK	22.56	-2.27	-4.42	18.14	50	PASS
Band26(814-824)	5	26765	12	#Mid	QPSK	22.69	-2.27	-4.42	18.27	50	PASS
Band26(814-824)	5	26765	12	#Max	QPSK	22.60	-2.27	-4.42	18.18	50	PASS
Band26(814-824)	5	26765	25	#0	QPSK	22.71	-2.27	-4.42	18.29	50	PASS
Band26(814-824)	5	26765	1	#0	QAM16	23.15	-2.27	-4.42	18.73	50	PASS
Band26(814-824)	5	26765	1	#Mid	QAM16	23.14	-2.27	-4.42	18.72	50	PASS
Band26(814-824)	5	26765	1	#Max	QAM16	23.21	-2.27	-4.42	18.79	50	PASS
Band26(814-824)	5	26765	12	#0	QAM16	21.62	-2.27	-4.42	17.2	50	PASS
Band26(814-824)	5	26765	12	#Mid	QAM16	21.60	-2.27	-4.42	17.18	50	PASS
Band26(814-824)	5	26765	12	#Max	QAM16	21.56	-2.27	-4.42	17.14	50	PASS

Band26(814-824)	5	26765	25	#0	QAM16	21.78	-2.27	-4.42	17.36	50	PASS
Band26(814-824)	10	26740	1	#0	QPSK	23.59	-2.27	-4.42	19.17	50	PASS
Band26(814-824)	10	26740	1	#Mid	QPSK	23.50	-2.27	-4.42	19.08	50	PASS
Band26(814-824)	10	26740	1	#Max	QPSK	23.58	-2.27	-4.42	19.16	50	PASS
Band26(814-824)	10	26740	25	#0	QPSK	22.64	-2.27	-4.42	18.22	50	PASS
Band26(814-824)	10	26740	25	#Mid	QPSK	22.55	-2.27	-4.42	18.13	50	PASS
Band26(814-824)	10	26740	25	#Max	QPSK	22.52	-2.27	-4.42	18.1	50	PASS
Band26(814-824)	10	26740	50	#0	QPSK	22.60	-2.27	-4.42	18.18	50	PASS
Band26(814-824)	10	26740	1	#0	QAM16	23.61	-2.27	-4.42	19.19	50	PASS
Band26(814-824)	10	26740	1	#Mid	QAM16	23.62	-2.27	-4.42	19.2	50	PASS
Band26(814-824)	10	26740	1	#Max	QAM16	23.63	-2.27	-4.42	19.21	50	PASS
Band26(814-824)	10	26740	25	#0	QAM16	21.70	-2.27	-4.42	17.28	50	PASS
Band26(814-824)	10	26740	25	#Mid	QAM16	21.68	-2.27	-4.42	17.26	50	PASS
Band26(814-824)	10	26740	25	#Max	QAM16	21.63	-2.27	-4.42	17.21	50	PASS
Band26(814-824)	10	26740	50	#0	QAM16	21.78	-2.27	-4.42	17.36	50	PASS

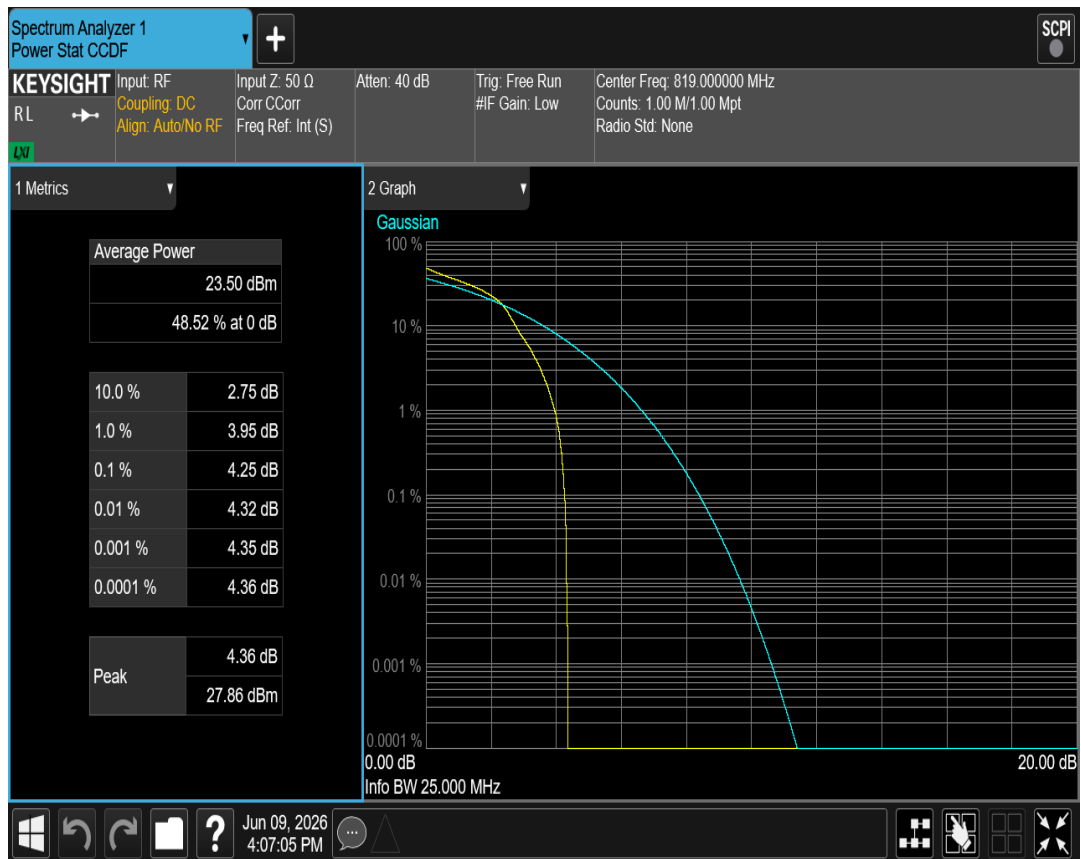
2 Frequency stability

<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
Band26(814-824)	10	26740	50	#0	QPSK	33.00	0.040	-2.5	2.5	PASS
Band26(814-824)	10	26740	50	#0	QAM16	32.47	0.040	-2.5	2.5	PASS



3 Peak-to-Average Ratio



Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Result (dB)	high Limit (dB)	Verdict
Band26(814-824)	1.4	26740	1	#0	QPSK	3.69	13	PASS
Band26(814-824)	1.4	26740	1	#0	QAM16	4.25	13	PASS
Band26(814-824)	3	26740	1	#0	QPSK	3.40	13	PASS
Band26(814-824)	3	26740	1	#0	QAM16	4.57	13	PASS
Band26(814-824)	5	26740	1	#0	QPSK	3.34	13	PASS
Band26(814-824)	5	26740	1	#0	QAM16	4.74	13	PASS
Band26(814-824)	10	26740	1	#0	QPSK	3.82	13	PASS
Band26(814-824)	10	26740	1	#0	QAM16	4.81	13	PASS



Band26(814-824) QAM16 BW=1.4MHz Channel=26740 RB Size=1 Position=#0




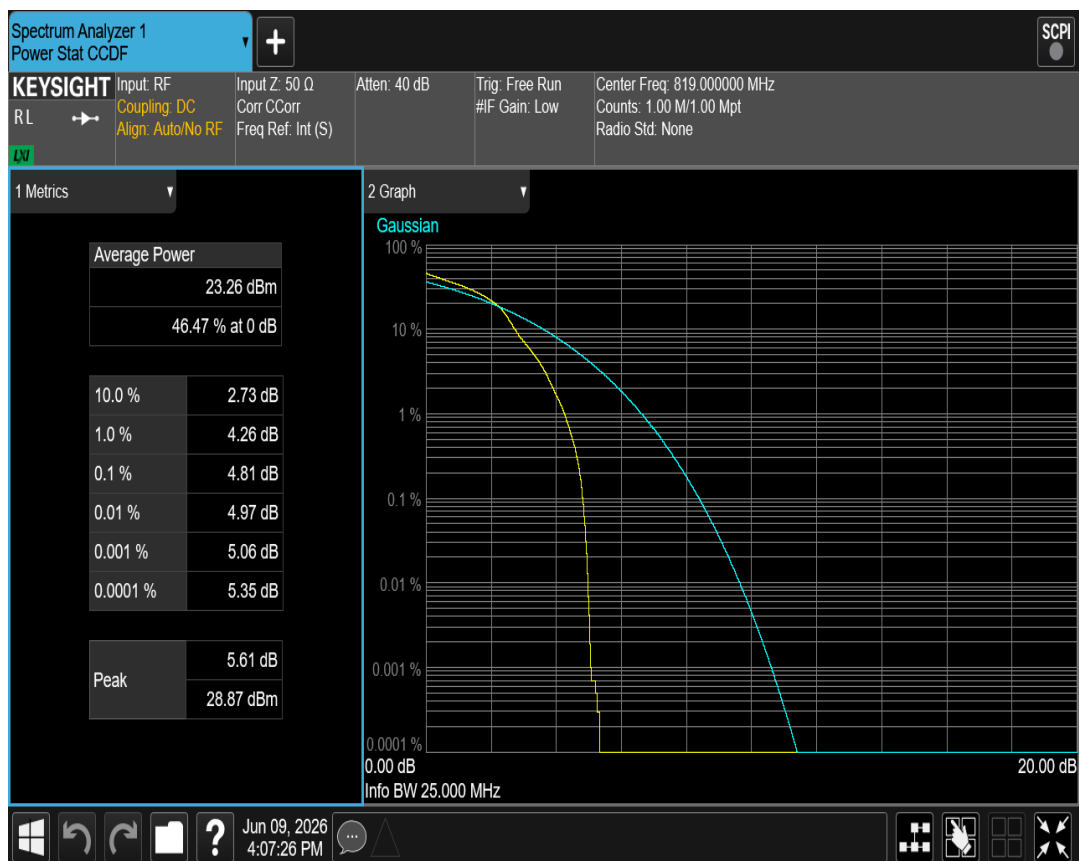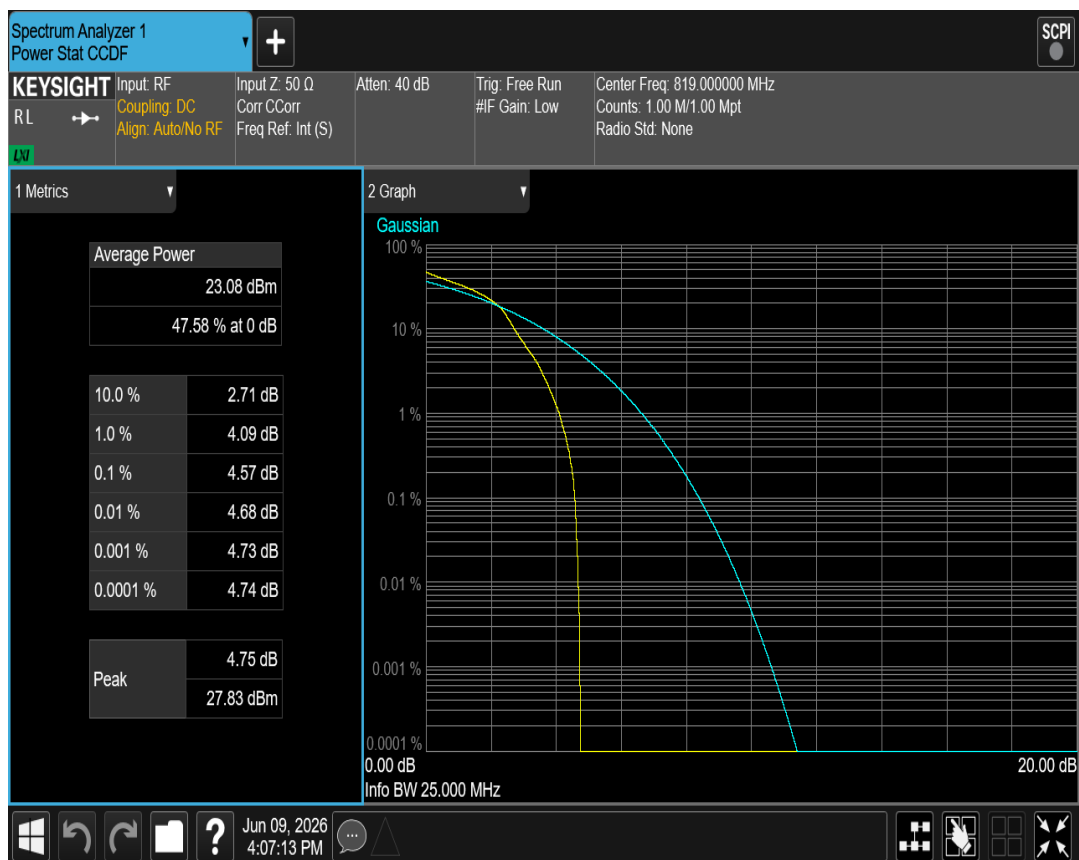Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=1 Position=#0

**Band26(814-824) QAM16 BW=3MHz Channel=26740 RB Size=1 Position=#0****Band26(814-824) QAM16 BW=5MHz Channel=26740 RB Size=1 Position=#0**

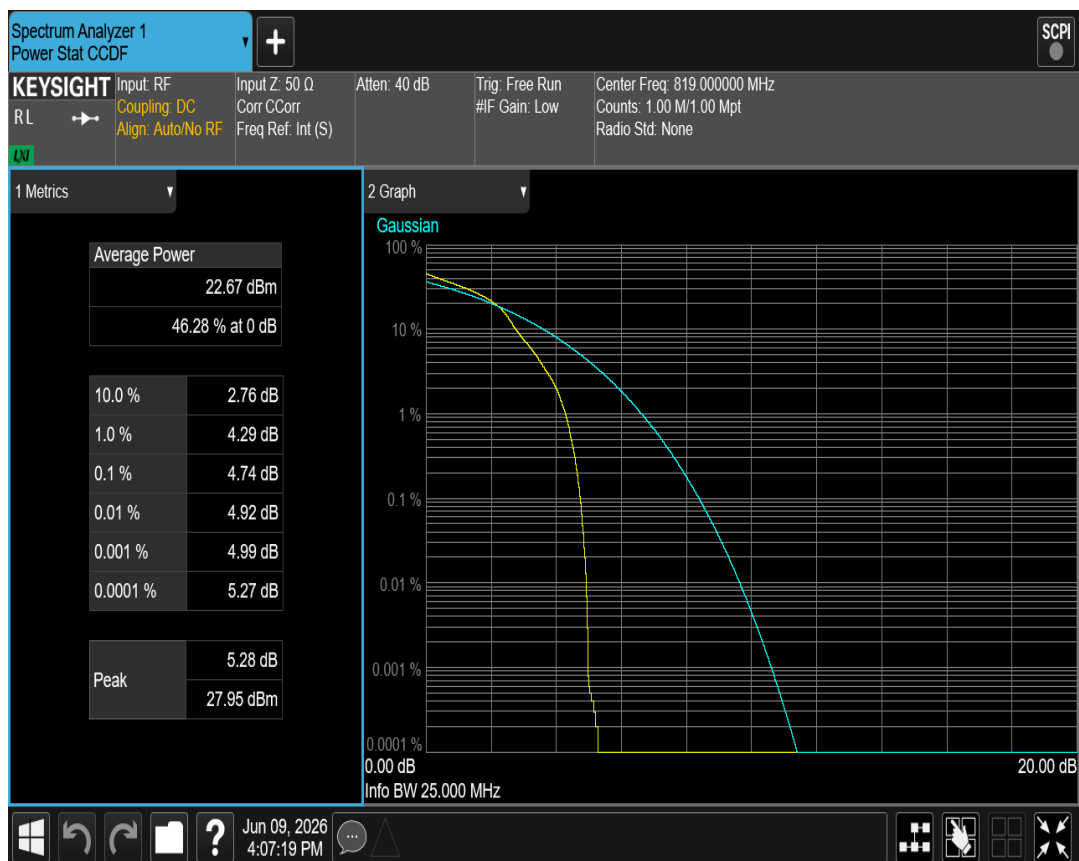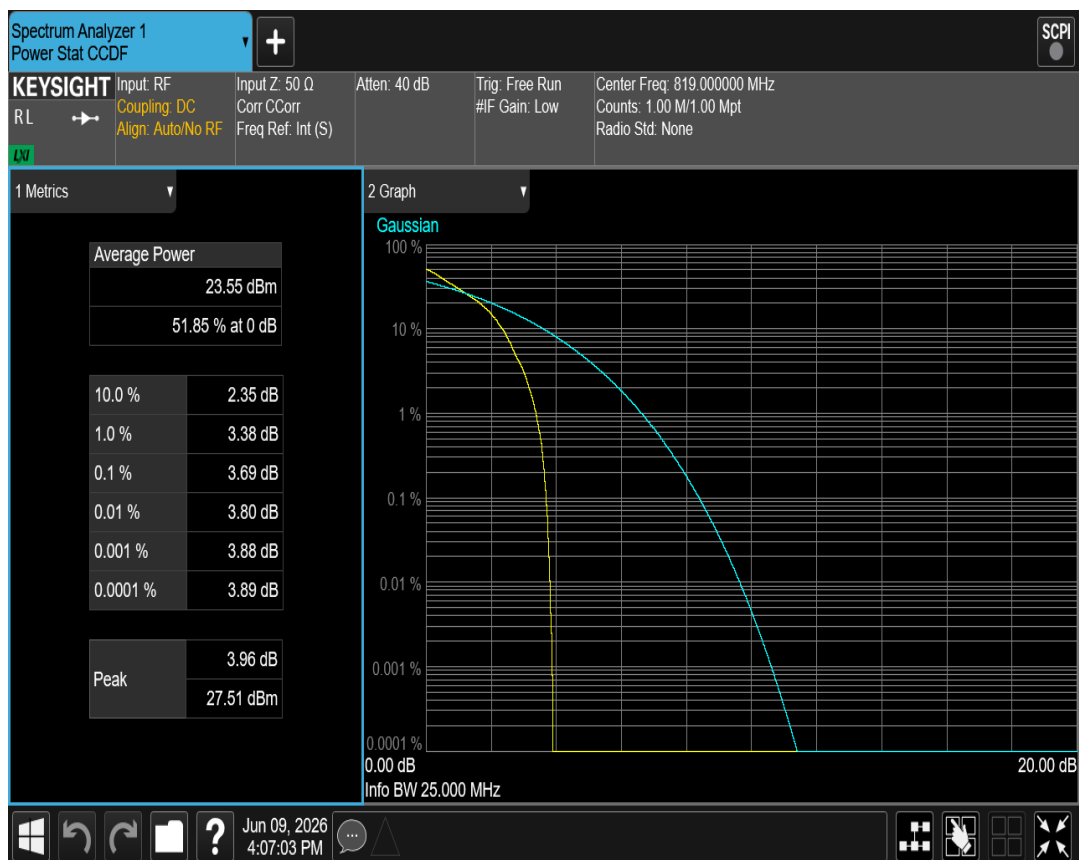**Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=1 Position=#0****Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=1 Position=#0**

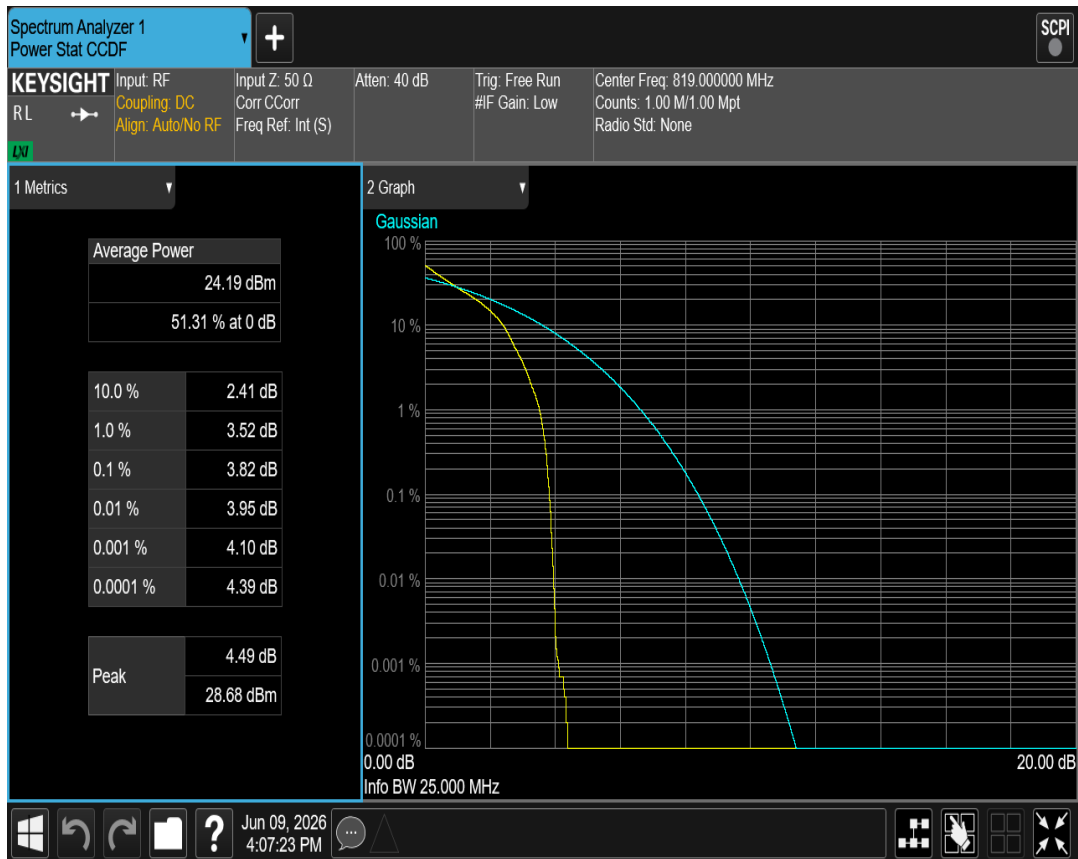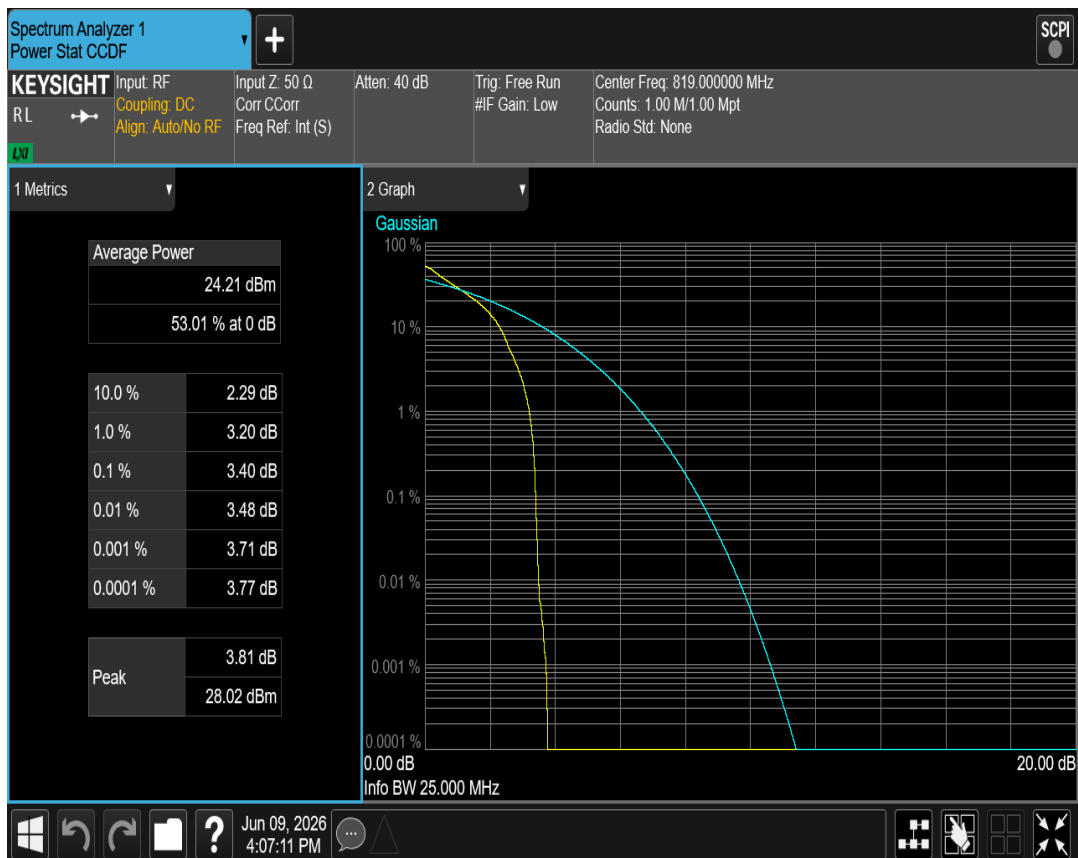
**Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=1 Position=#0****Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=1 Position=#0**

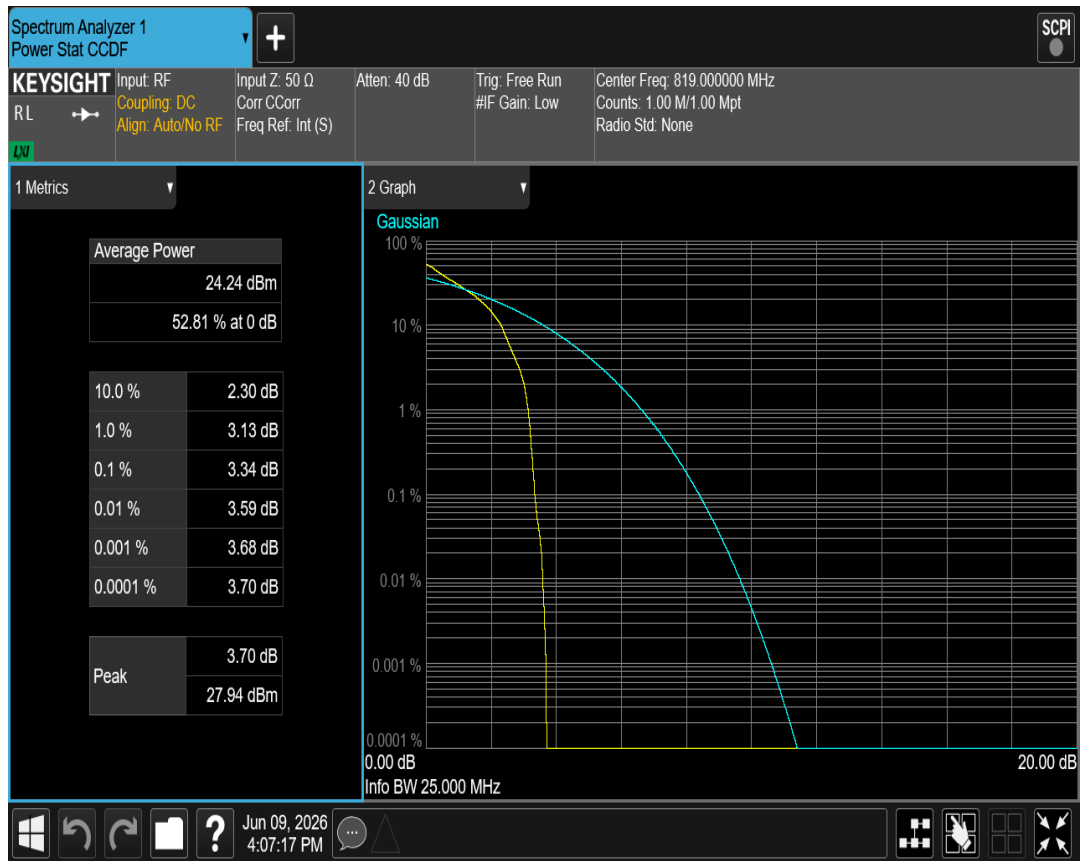


4 Occupied bandwidth

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	1.092	1.244	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	1.103	1.254	PASS
Band26(814-824)	1.4	26740	6	#0	QPSK	1.096	1.249	PASS
Band26(814-824)	1.4	26740	6	#0	QAM16	1.100	1.249	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	1.101	1.243	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	1.097	1.241	PASS
Band26(814-824)	3	26705	15	#0	QPSK	2.712	3.046	PASS
Band26(814-824)	3	26705	15	#0	QAM16	2.720	3.042	PASS
Band26(814-824)	3	26740	15	#0	QPSK	2.707	3.027	PASS
Band26(814-824)	3	26740	15	#0	QAM16	2.702	3.027	PASS
Band26(814-824)	3	26775	15	#0	QPSK	2.719	3.013	PASS
Band26(814-824)	3	26775	15	#0	QAM16	2.709	3.077	PASS
Band26(814-824)	5	26715	25	#0	QPSK	4.545	4.966	PASS
Band26(814-824)	5	26715	25	#0	QAM16	4.508	4.989	PASS
Band26(814-824)	5	26740	25	#0	QPSK	4.508	4.994	PASS
Band26(814-824)	5	26740	25	#0	QAM16	4.514	4.960	PASS
Band26(814-824)	5	26765	25	#0	QPSK	4.505	4.917	PASS
Band26(814-824)	5	26765	25	#0	QAM16	4.505	4.982	PASS
Band26(814-824)	10	26740	50	#0	QPSK	8.992	9.713	PASS
Band26(814-824)	10	26740	50	#0	QAM16	8.971	9.912	PASS


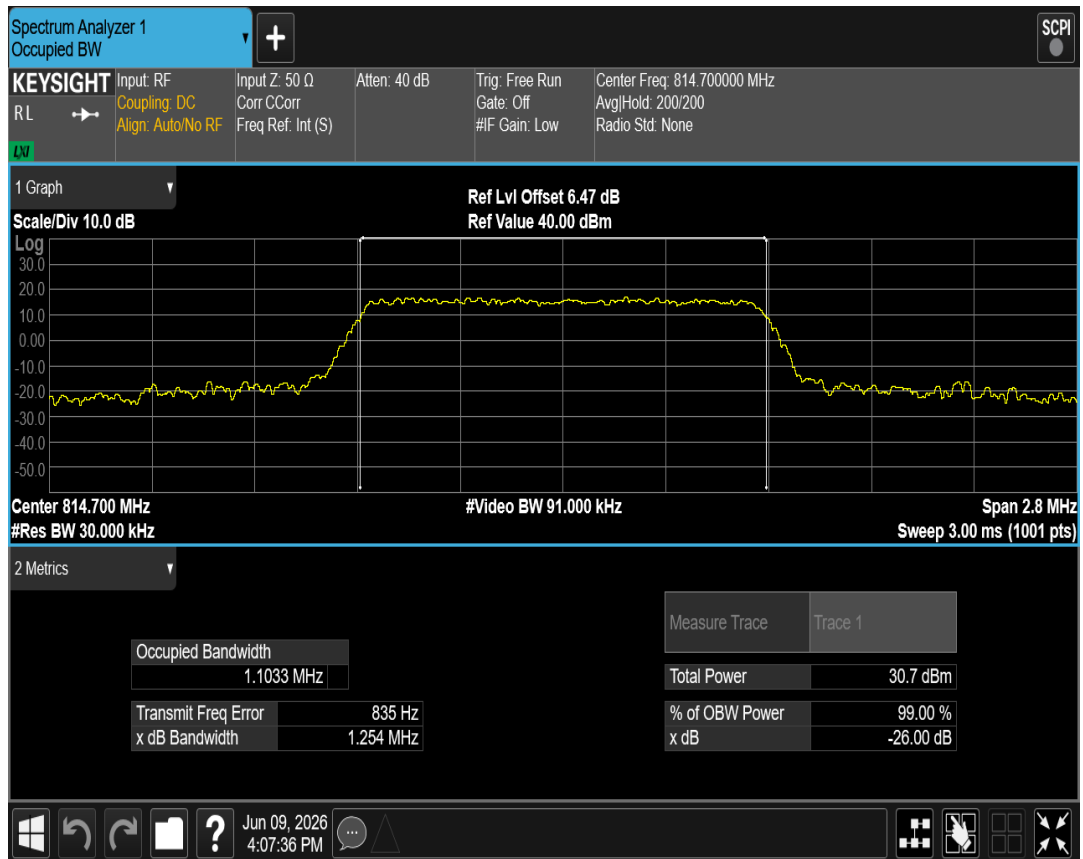
Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0






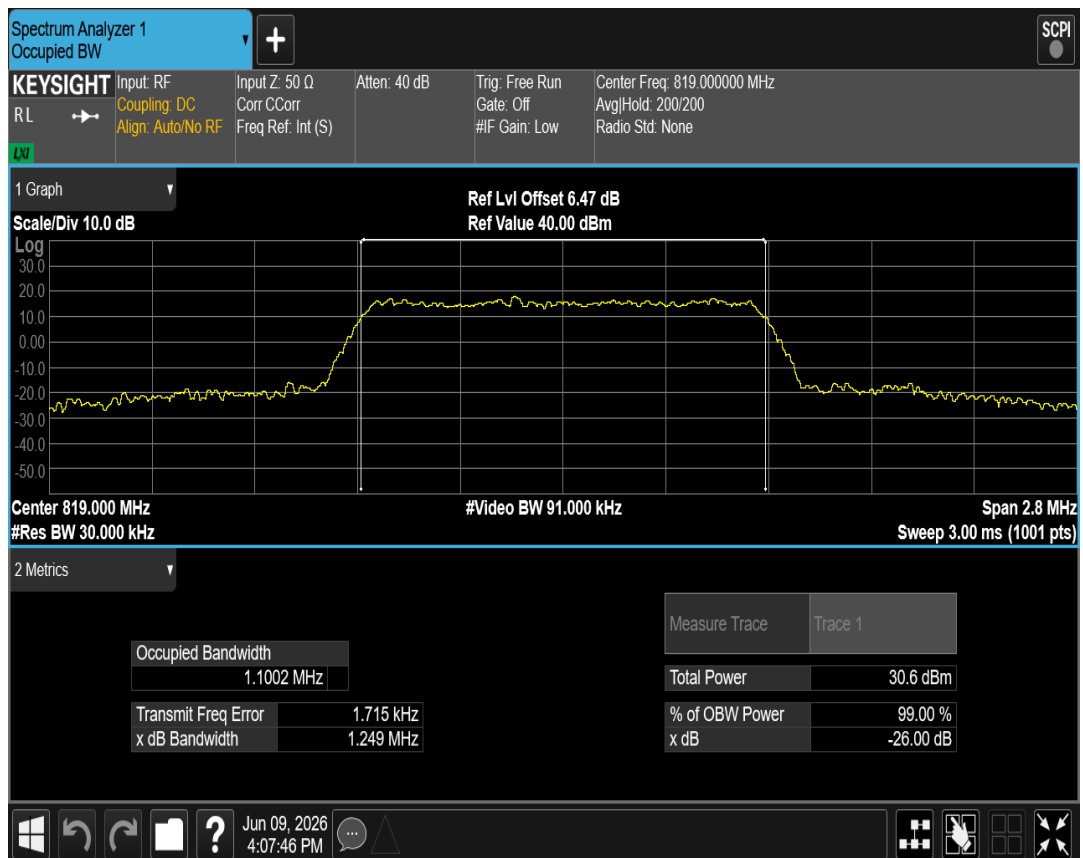
Band26(814-824) QAM16 BW=1.4MHz Channel=26740 RB Size=6 Position=#0





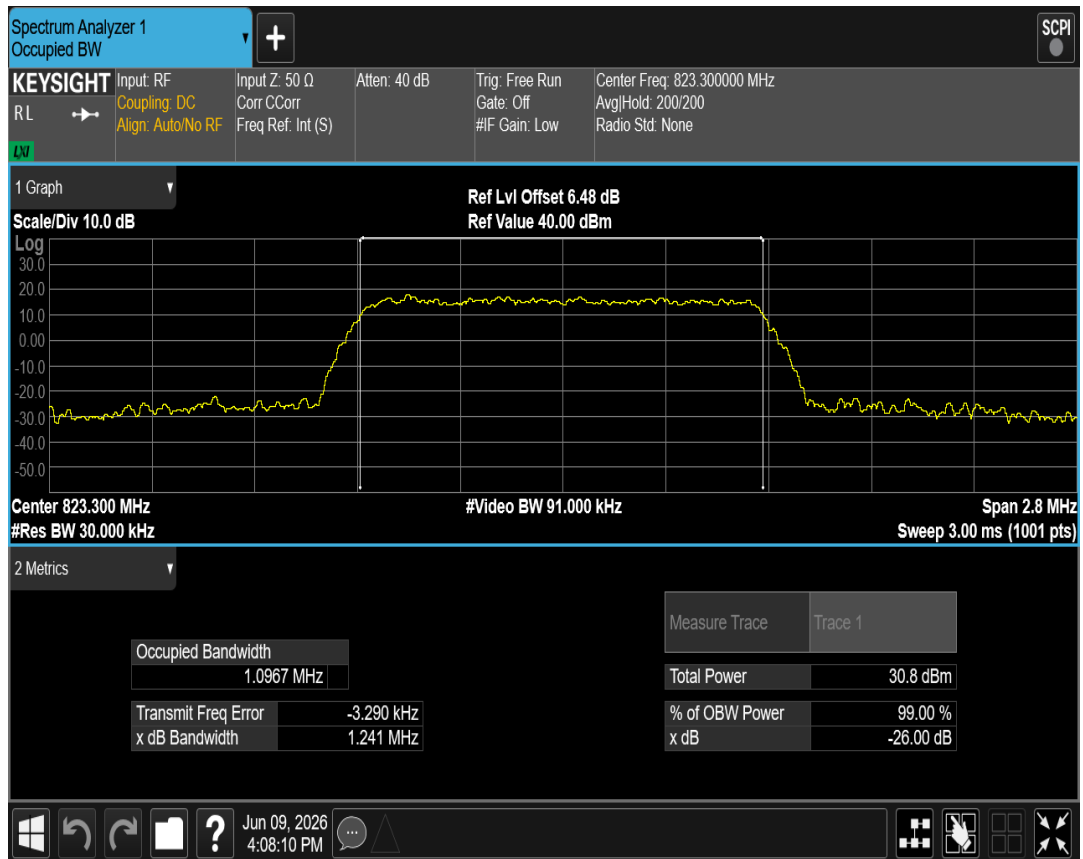
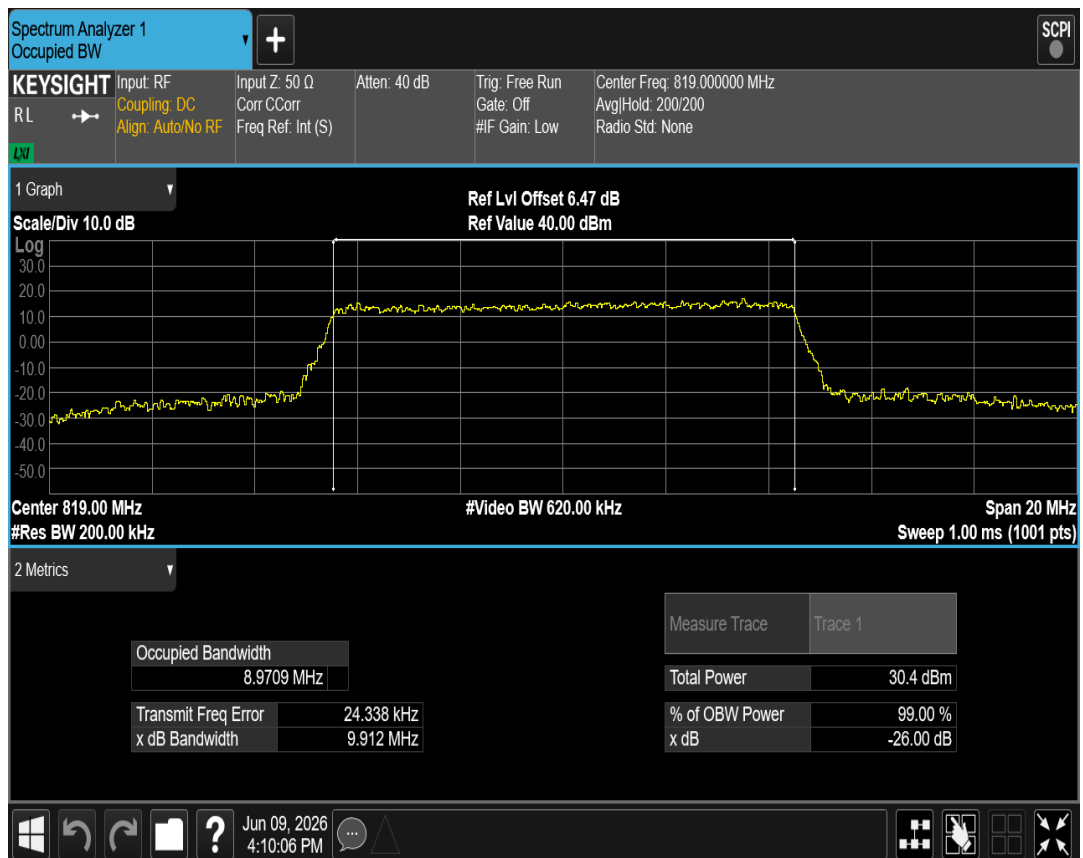
Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0


**Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0****Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0**

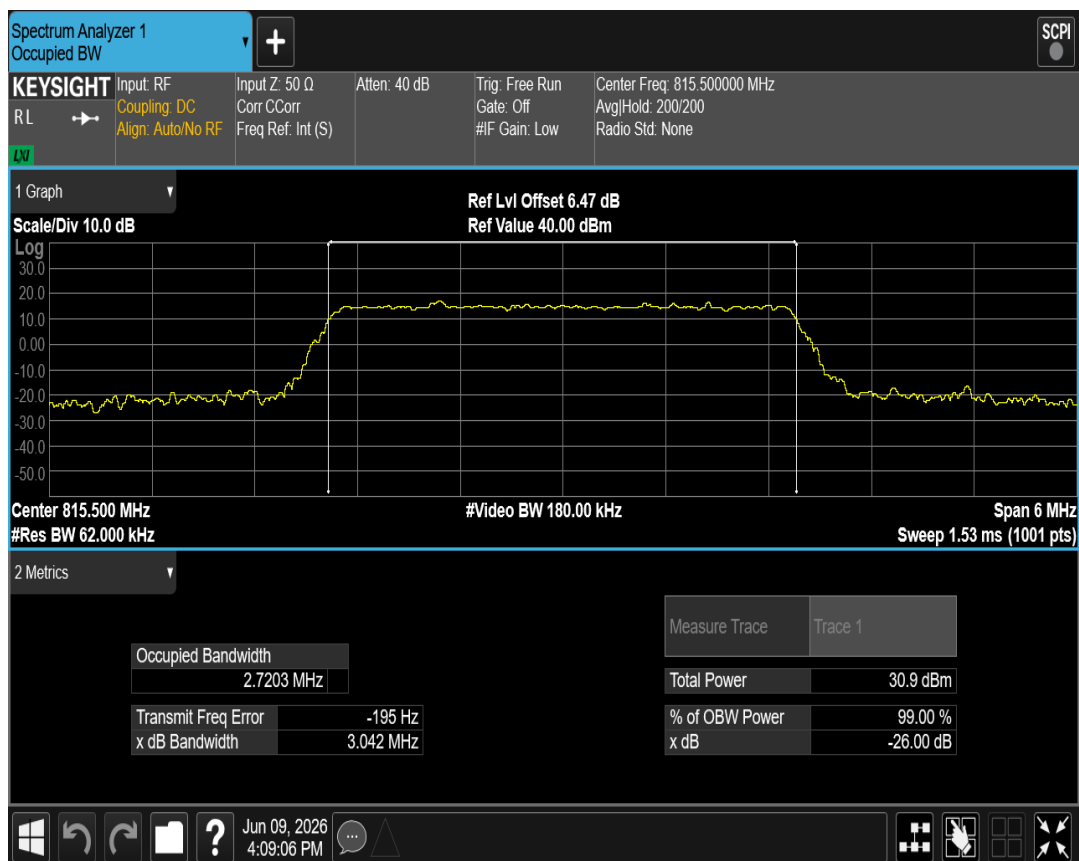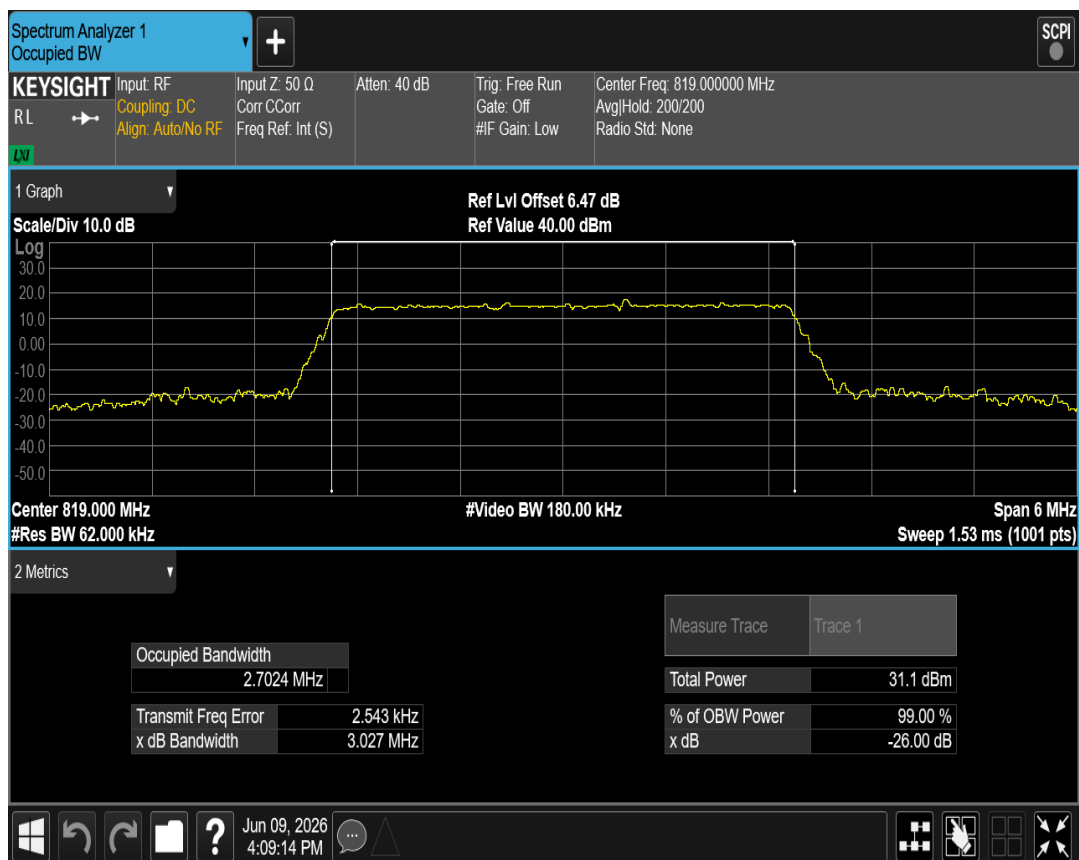**Band26(814-824) QAM16 BW=3MHz Channel=26740 RB Size=15 Position=#0****Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0**

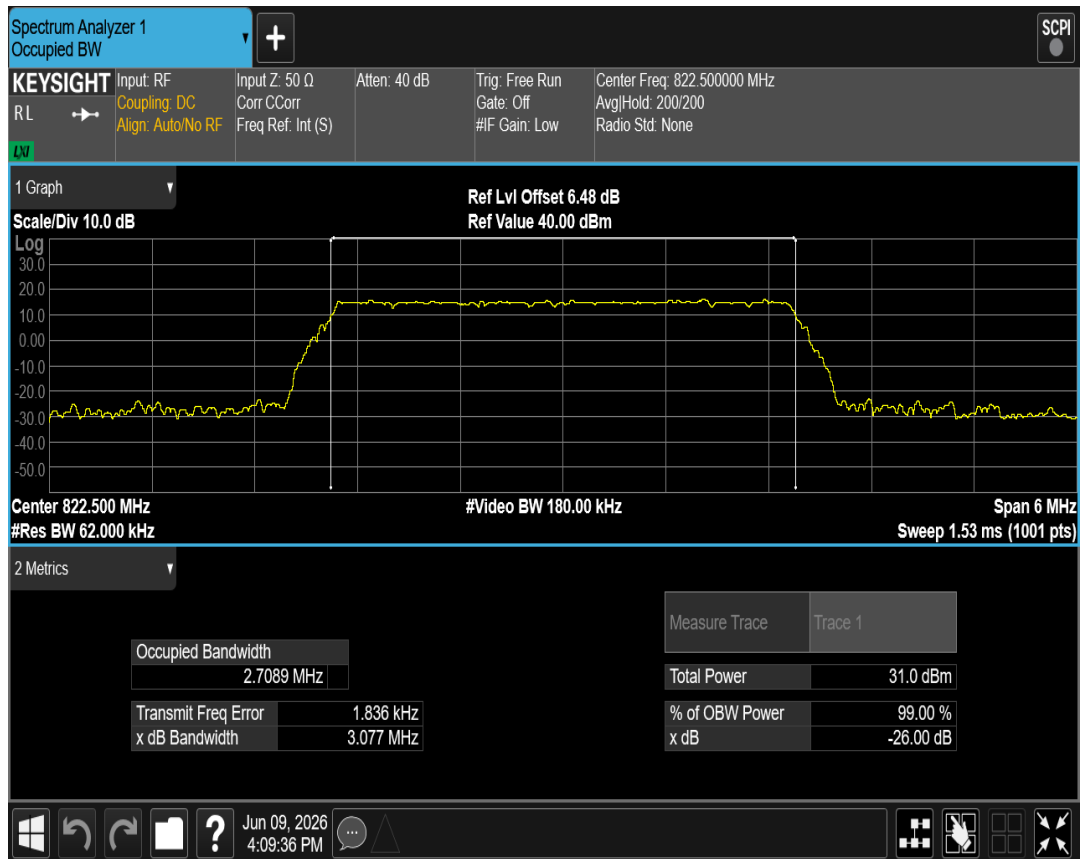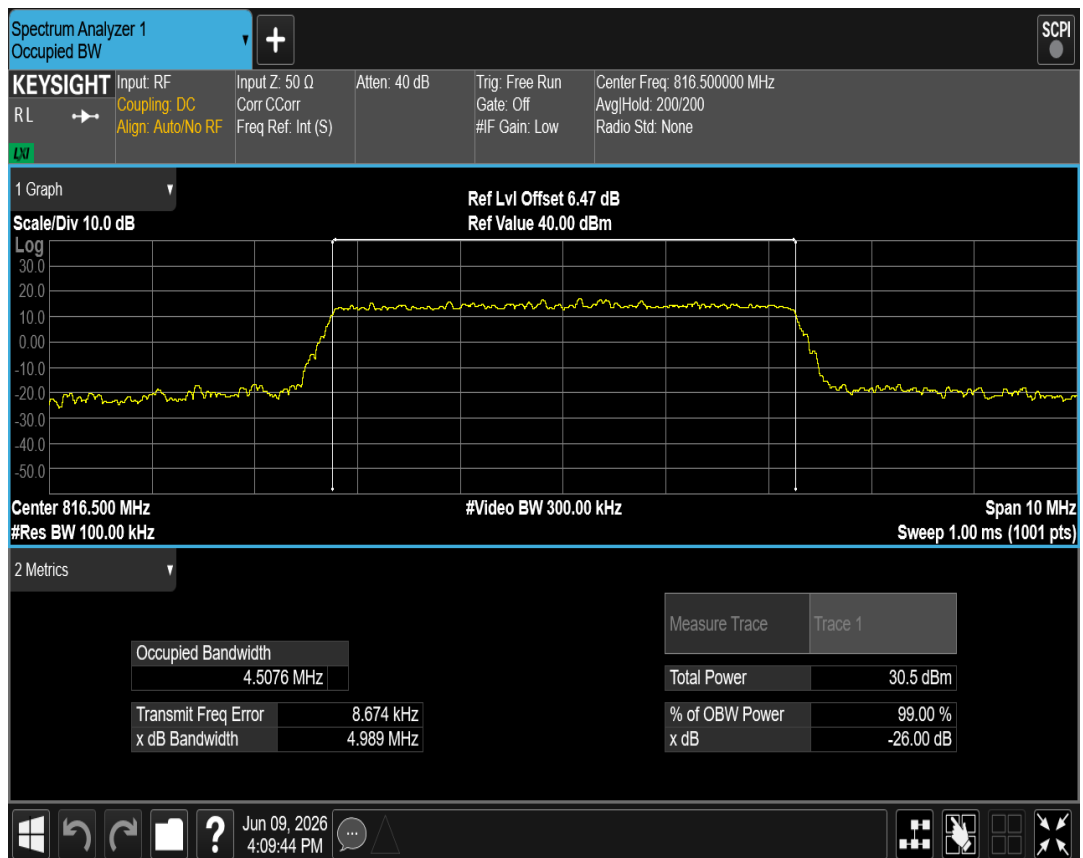
**Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0****Band26(814-824) QAM16 BW=5MHz Channel=26740 RB Size=25 Position=#0**

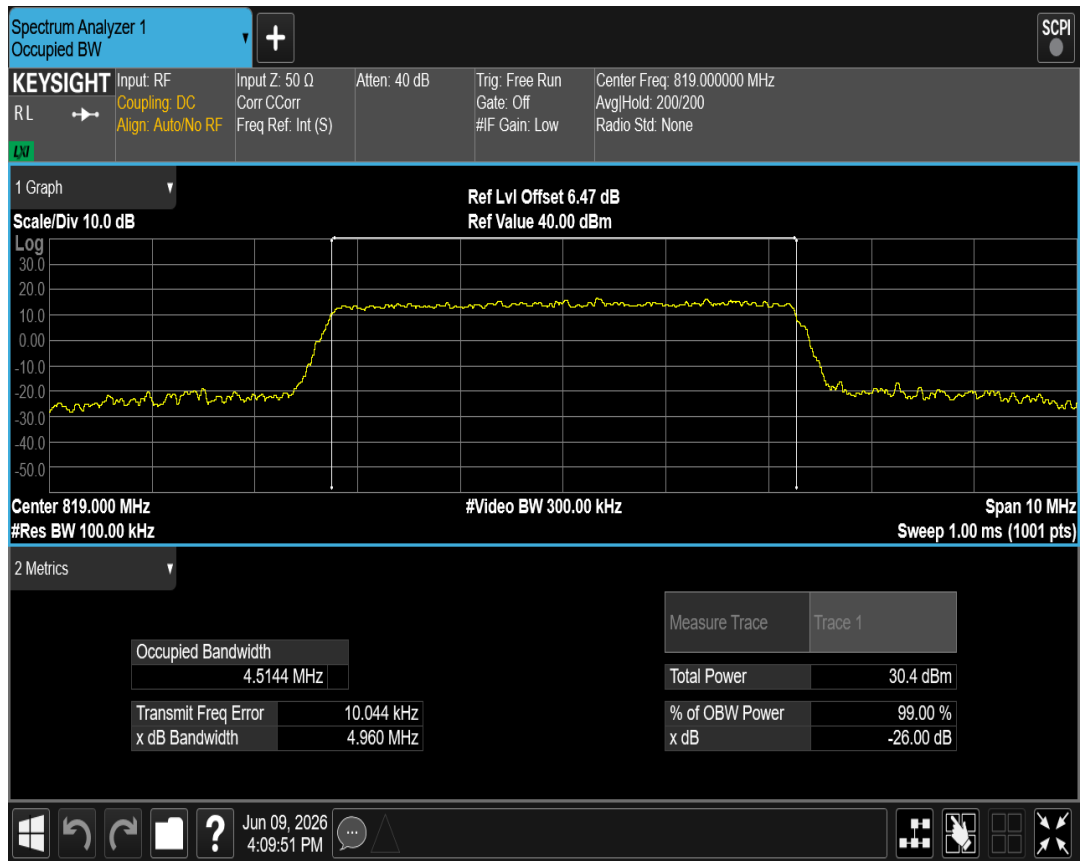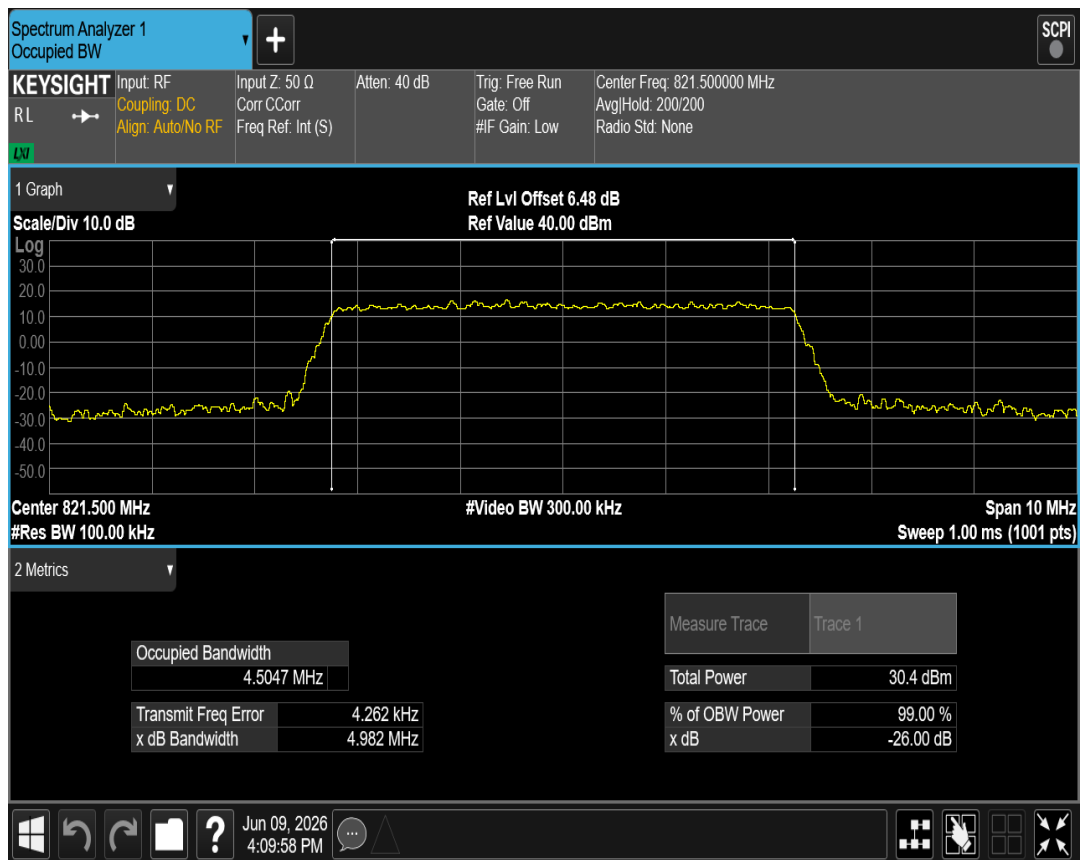**Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0****Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0**

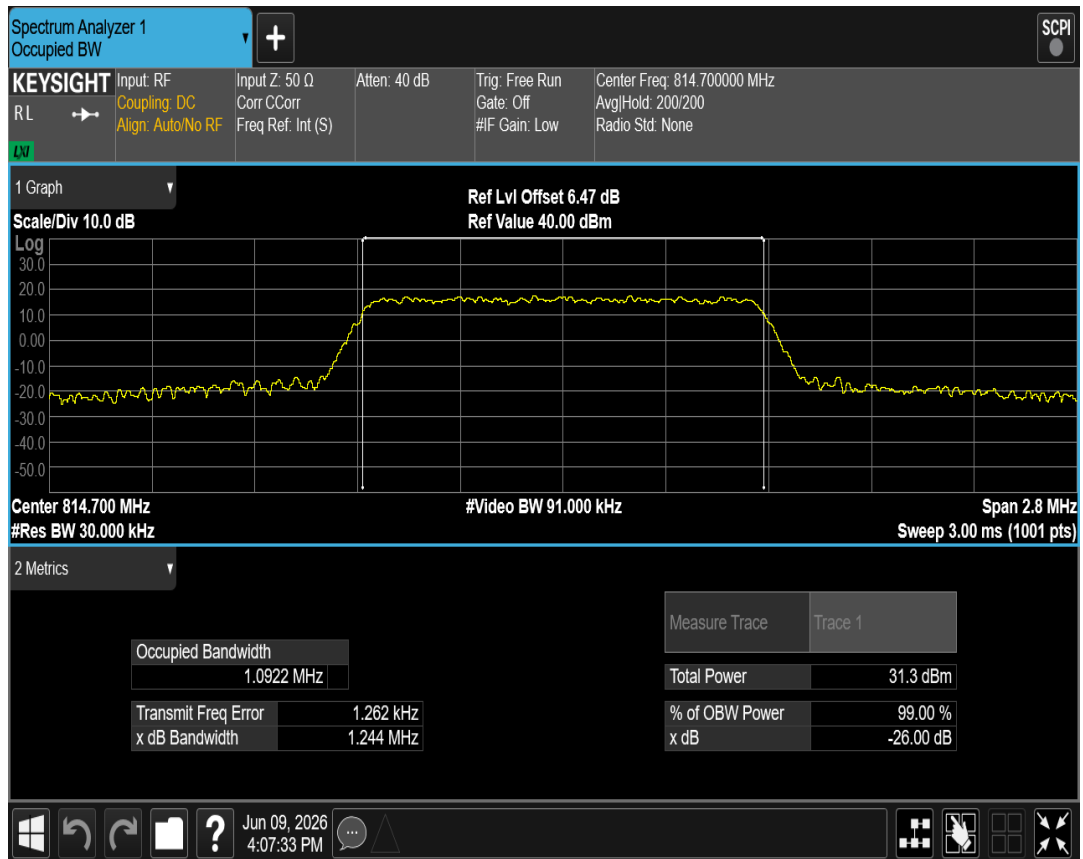
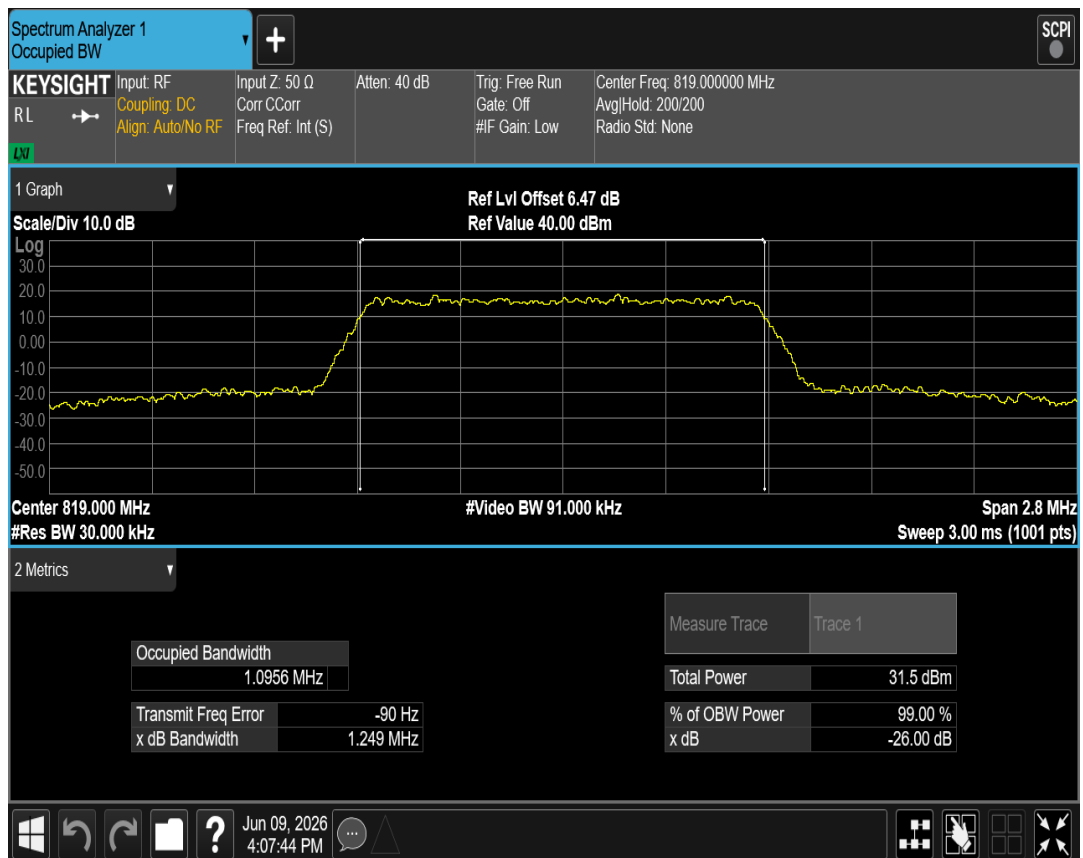
**Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=6 Position=#0****Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0**


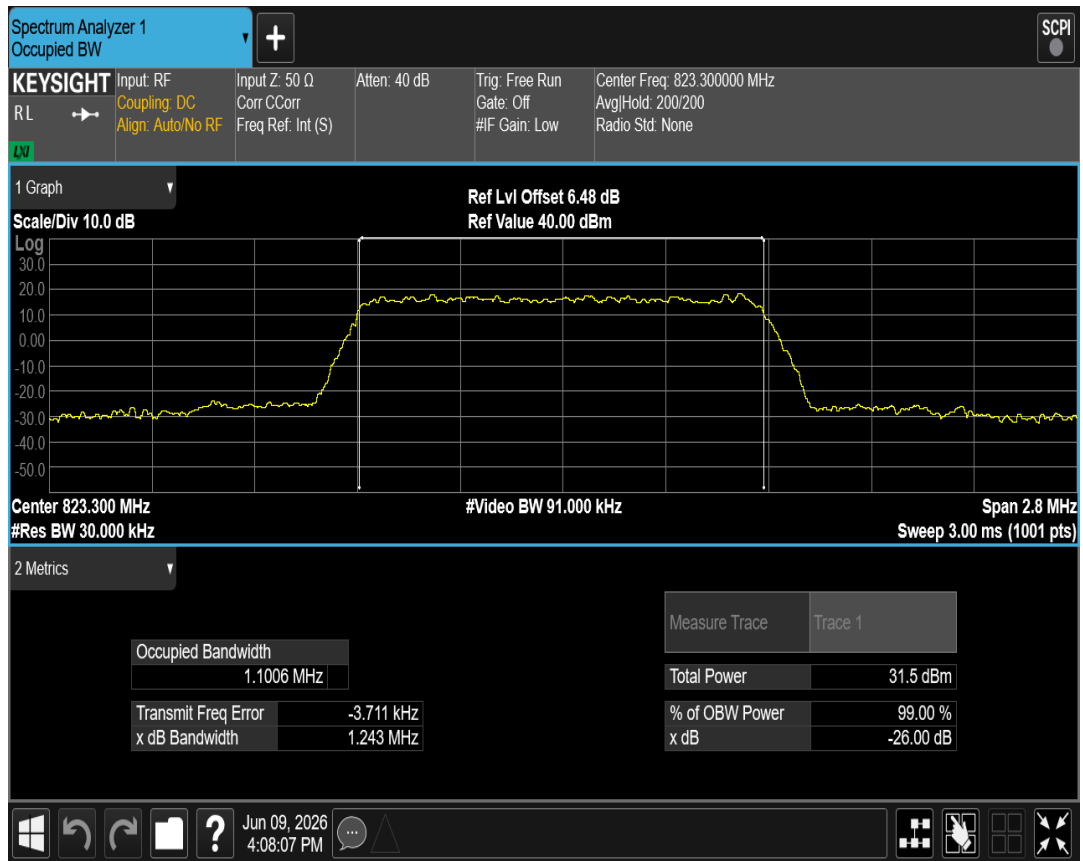


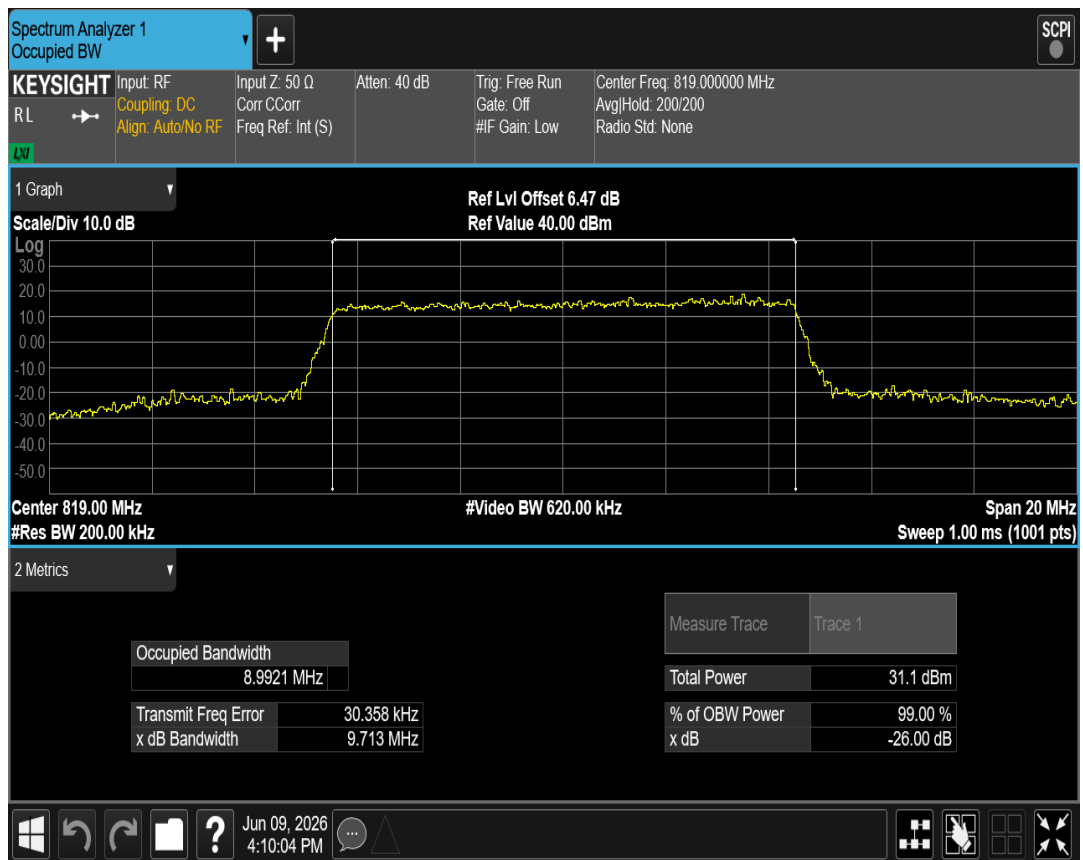
Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0



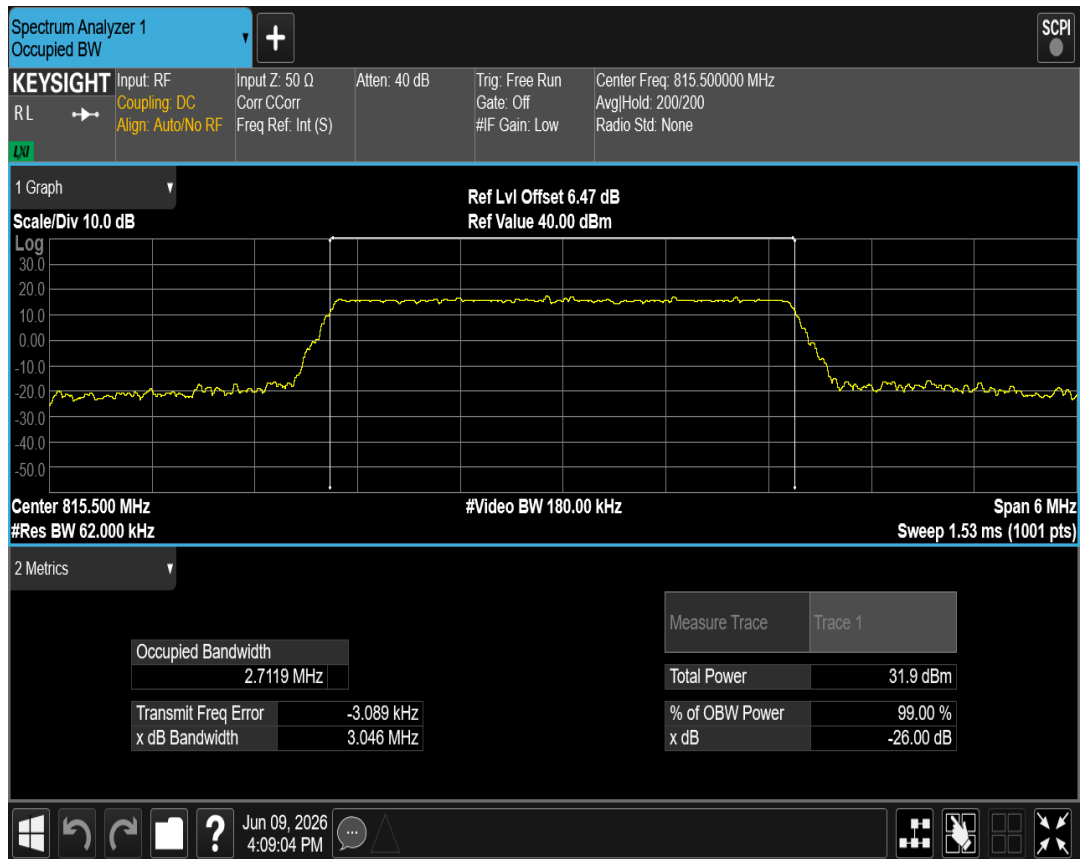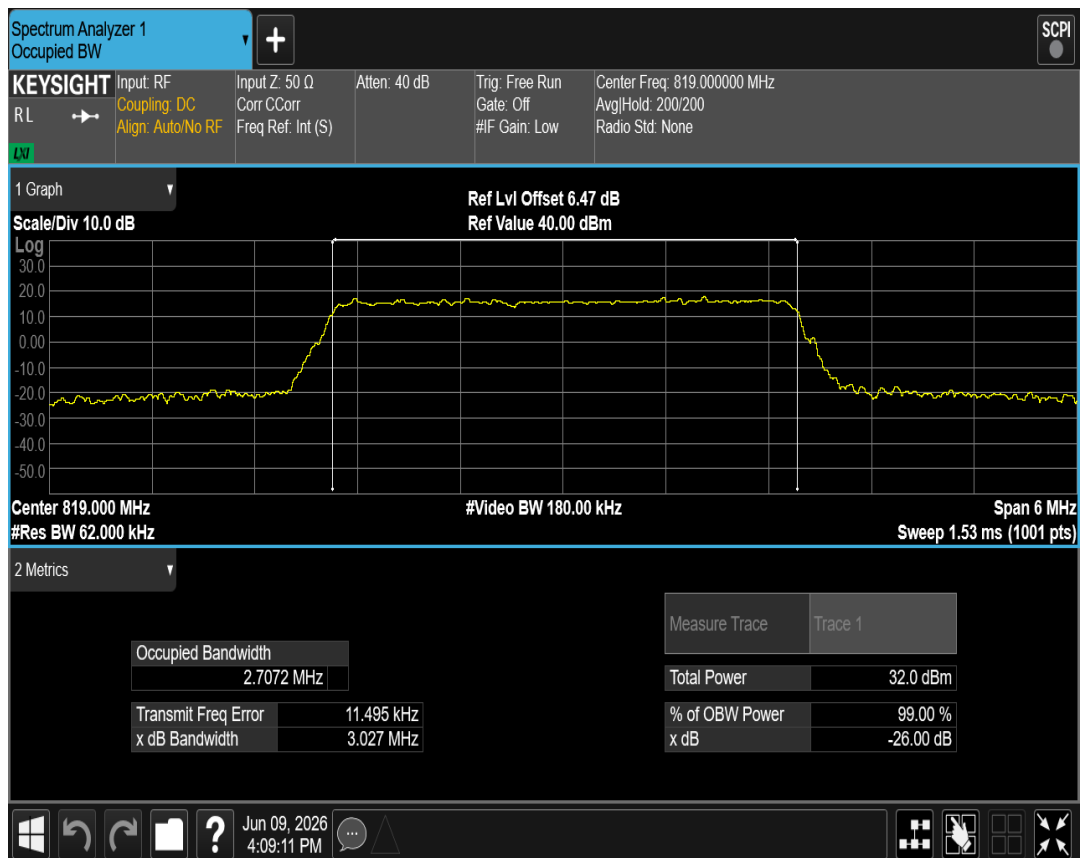
Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0

**Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=15 Position=#0****Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0**

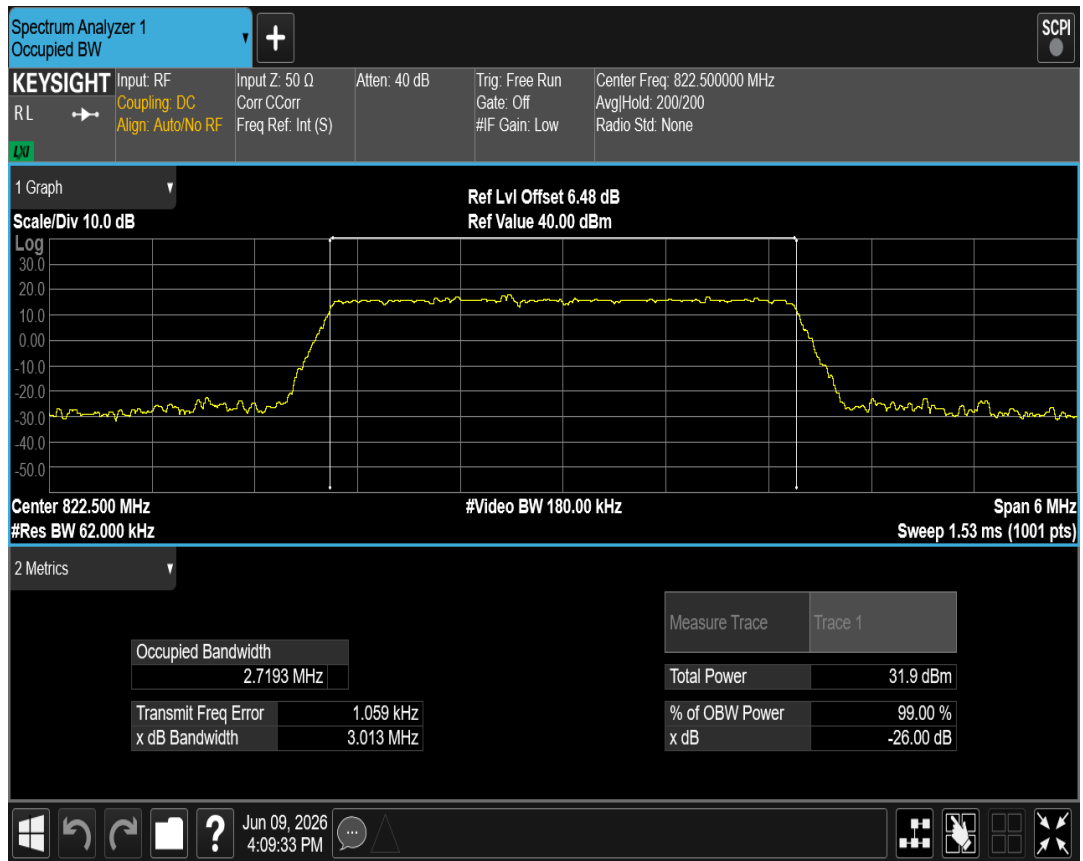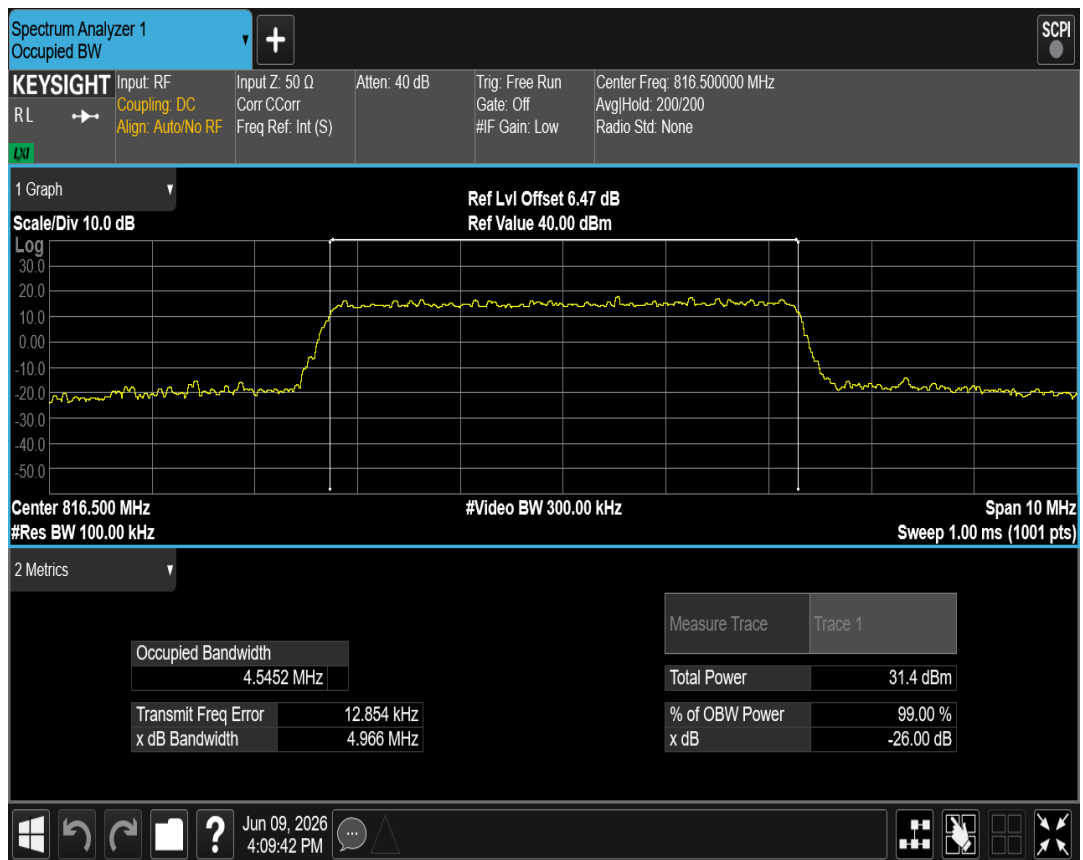**Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0****Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=25 Position=#0**

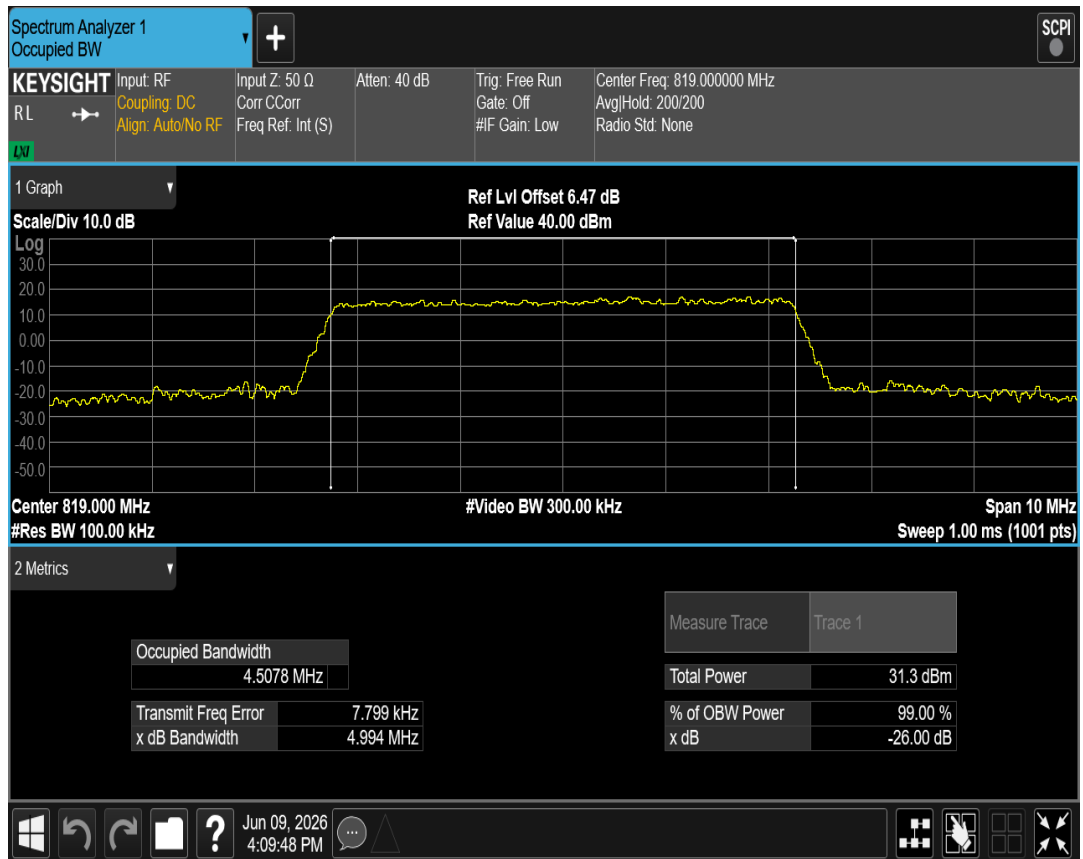

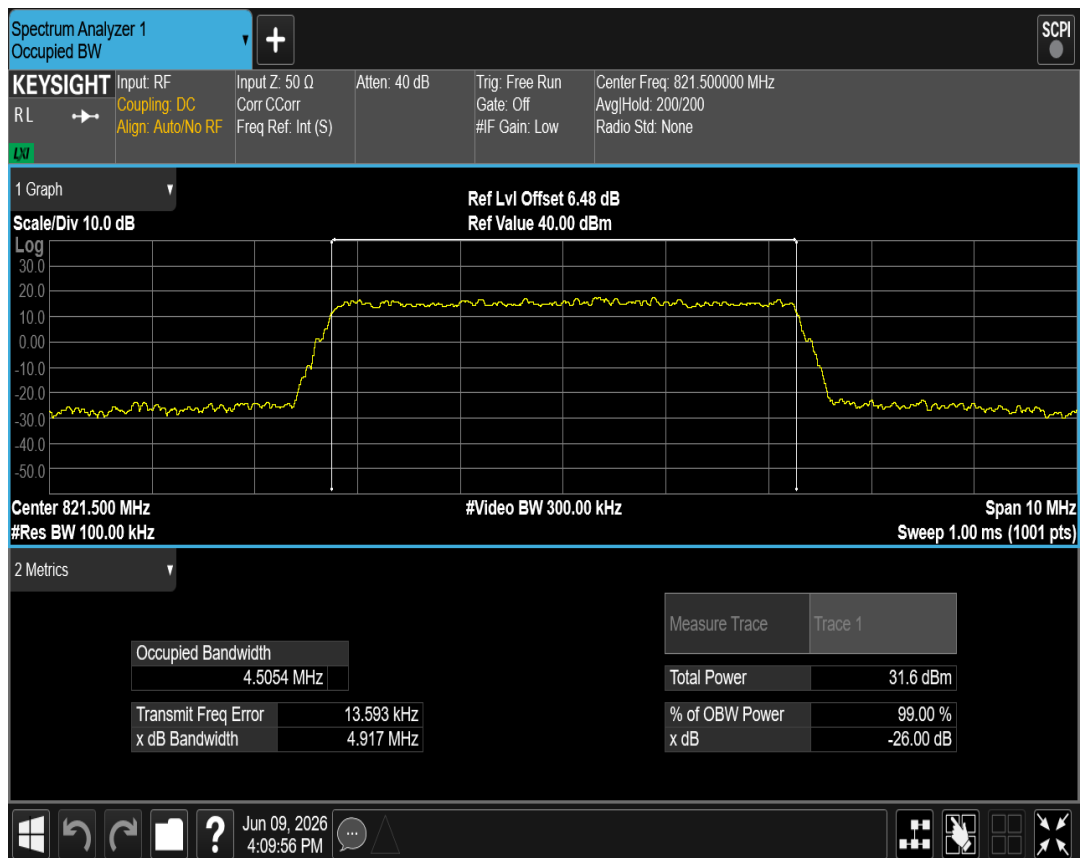
Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0




5 Band edge

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	813.86	-19.49	-13	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	815.51	-20.20	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	822.56	-26.92	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	822.53	-26.94	-13	PASS
Band26(814-824)	3	26705	15	#0	QPSK	817.06	-18.96	-13	PASS
Band26(814-824)	3	26705	15	#0	QAM16	813.96	-19.56	-13	PASS
Band26(814-824)	3	26775	15	#0	QPSK	820.95	-19.40	-13	PASS
Band26(814-824)	3	26775	15	#0	QAM16	824.04	-21.71	-13	PASS
Band26(814-824)	5	26715	25	#0	QPSK	819.05	-22.87	-13	PASS
Band26(814-824)	5	26715	25	#0	QAM16	819.05	-25.02	-13	PASS
Band26(814-824)	5	26765	25	#0	QPSK	824.04	-29.16	-13	PASS
Band26(814-824)	5	26765	25	#0	QAM16	824.04	-27.49	-13	PASS
Band26(814-824)	10	26740	50	#0	QPSK	824.12	-30.57	-13	PASS
Band26(814-824)	10	26740	50	#0	QAM16	824.09	-31.42	-13	PASS

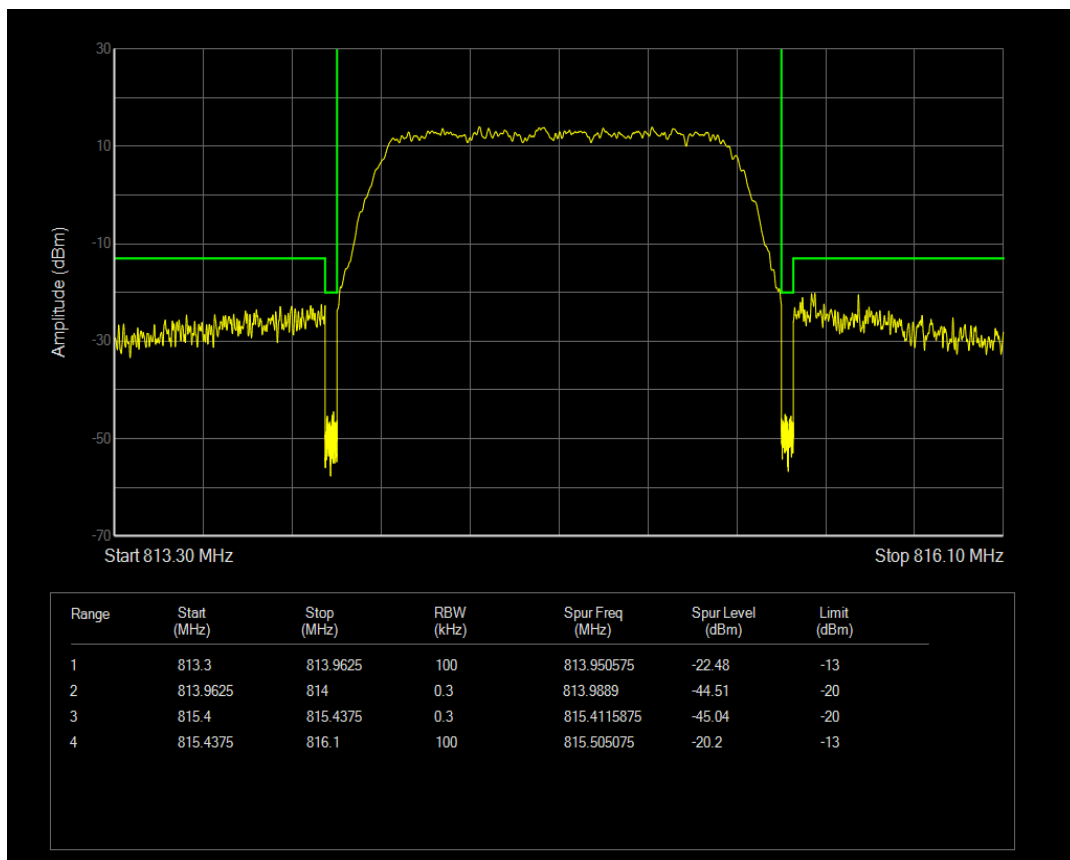
Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0



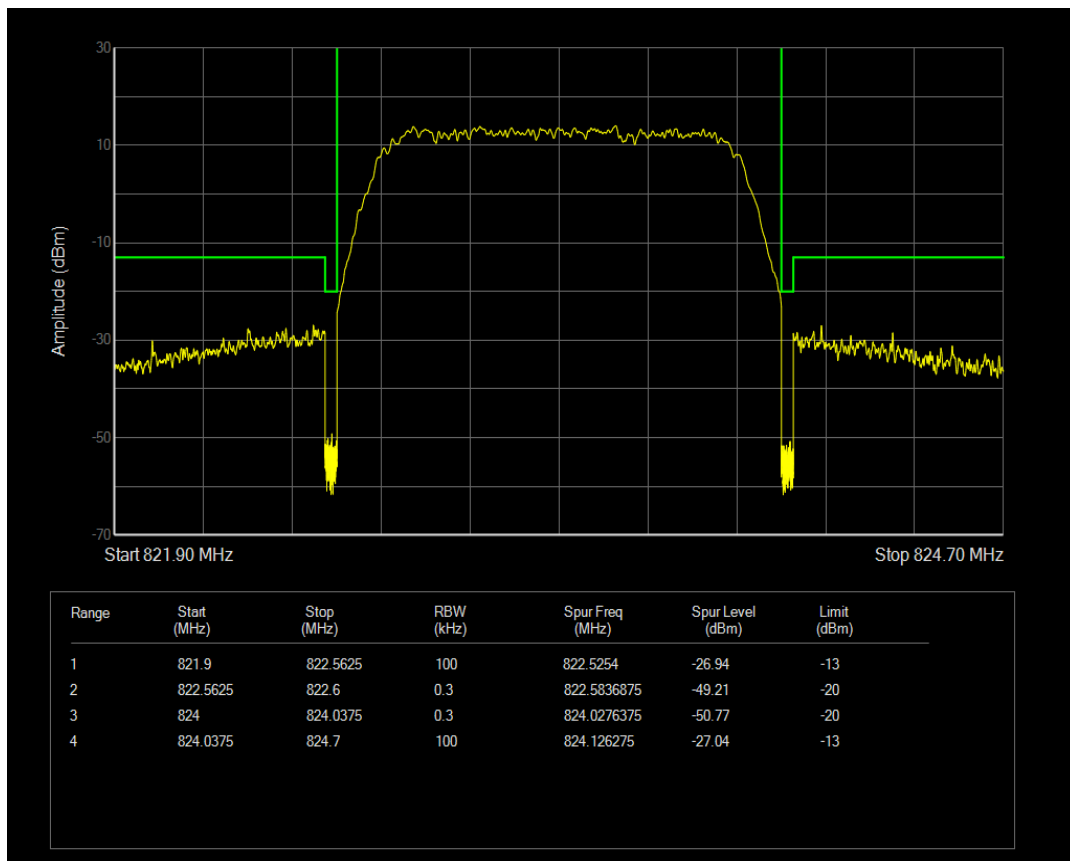
Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0



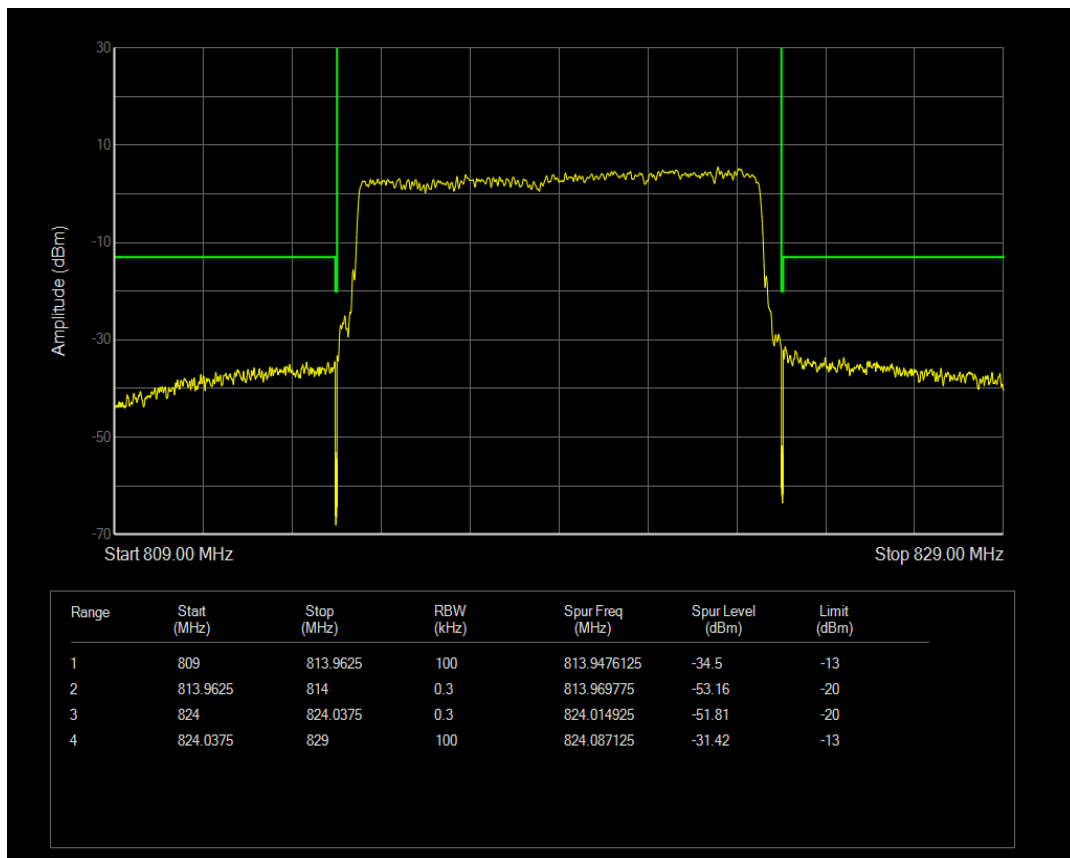
Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0



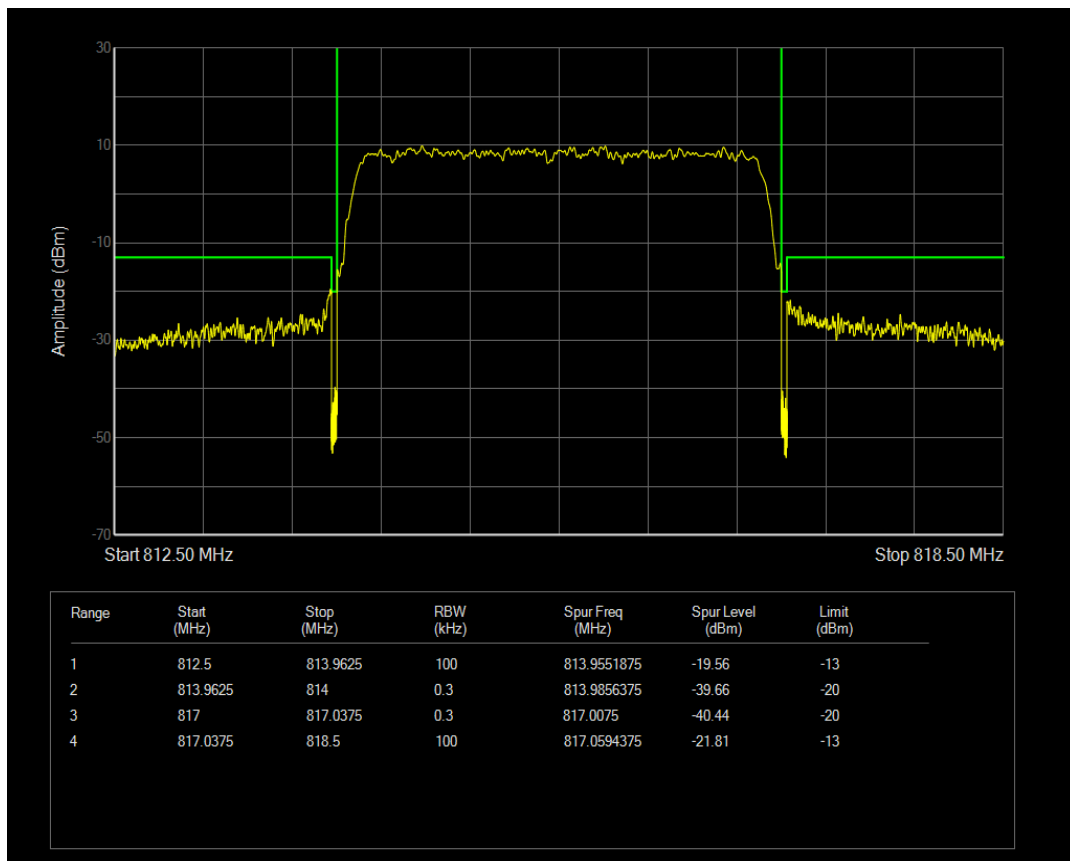
Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0



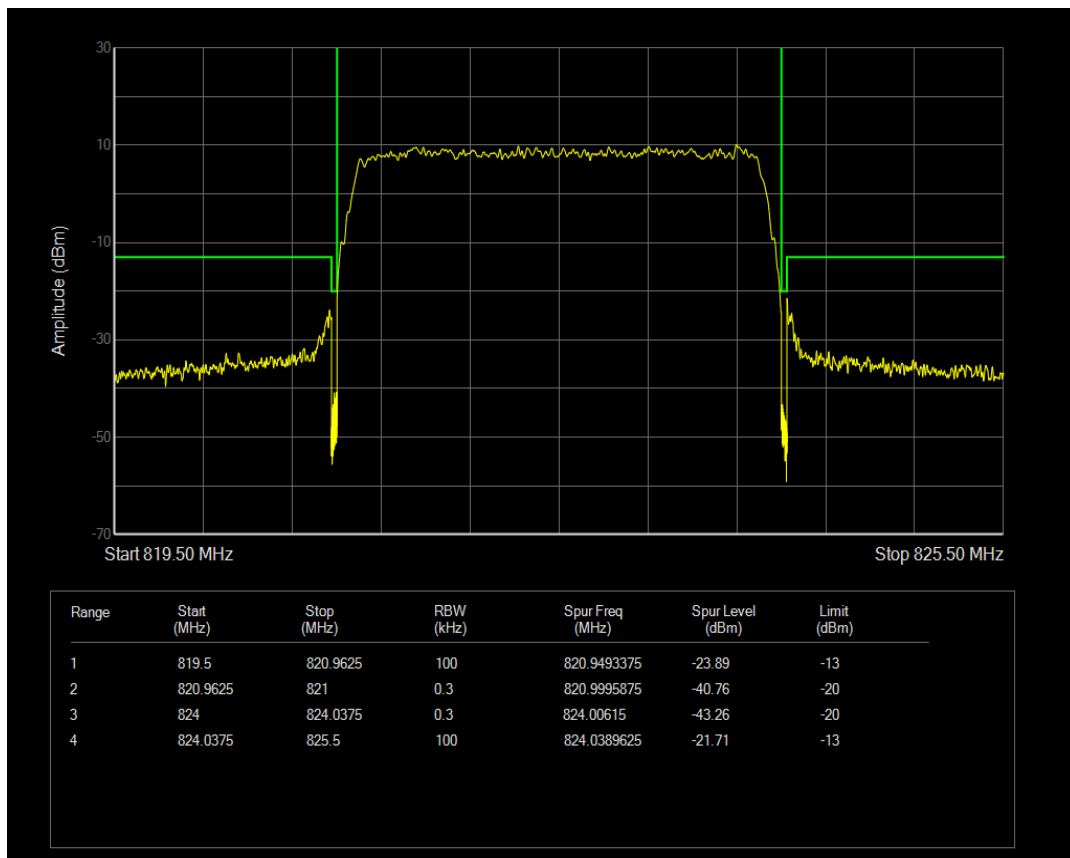
Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0



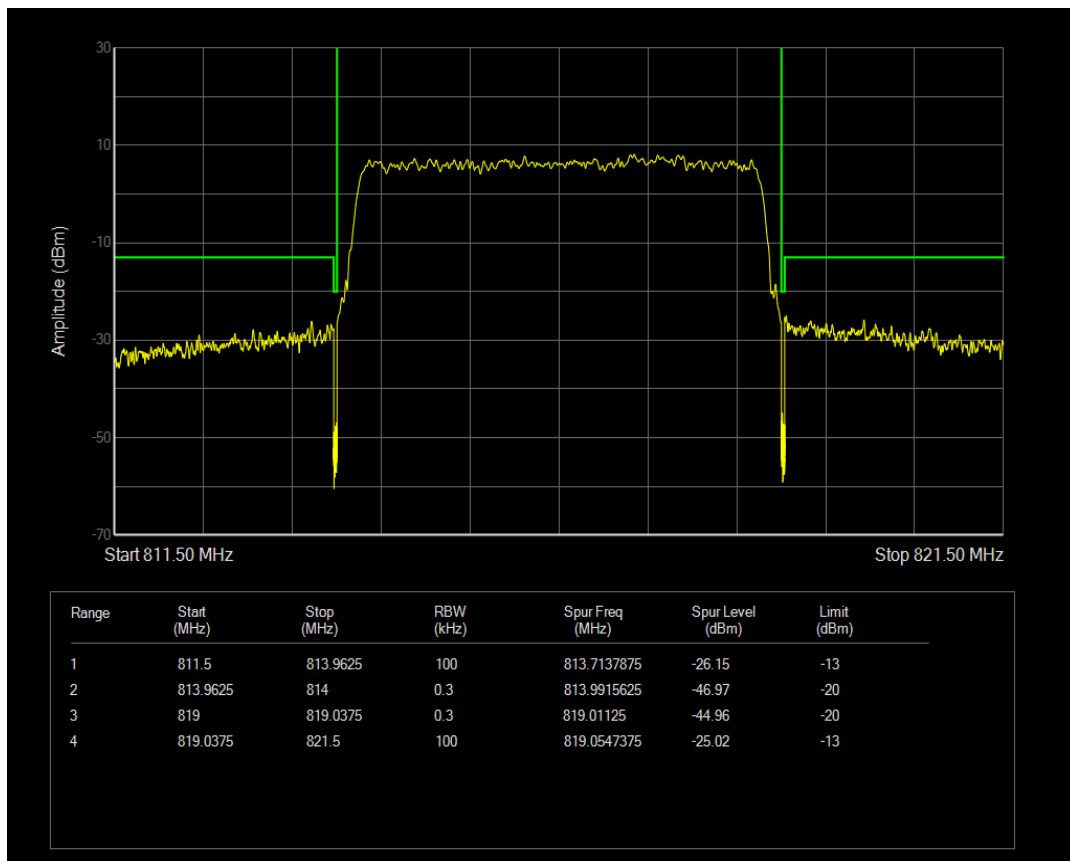
Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0



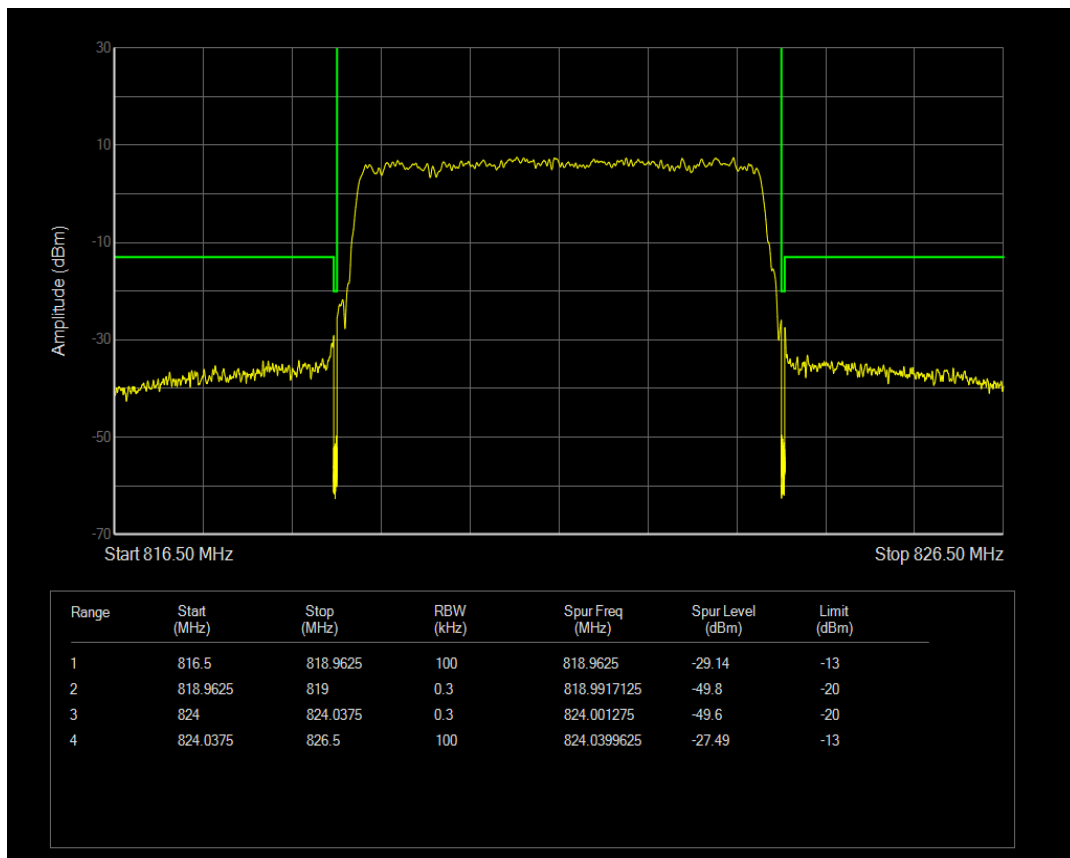
Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0



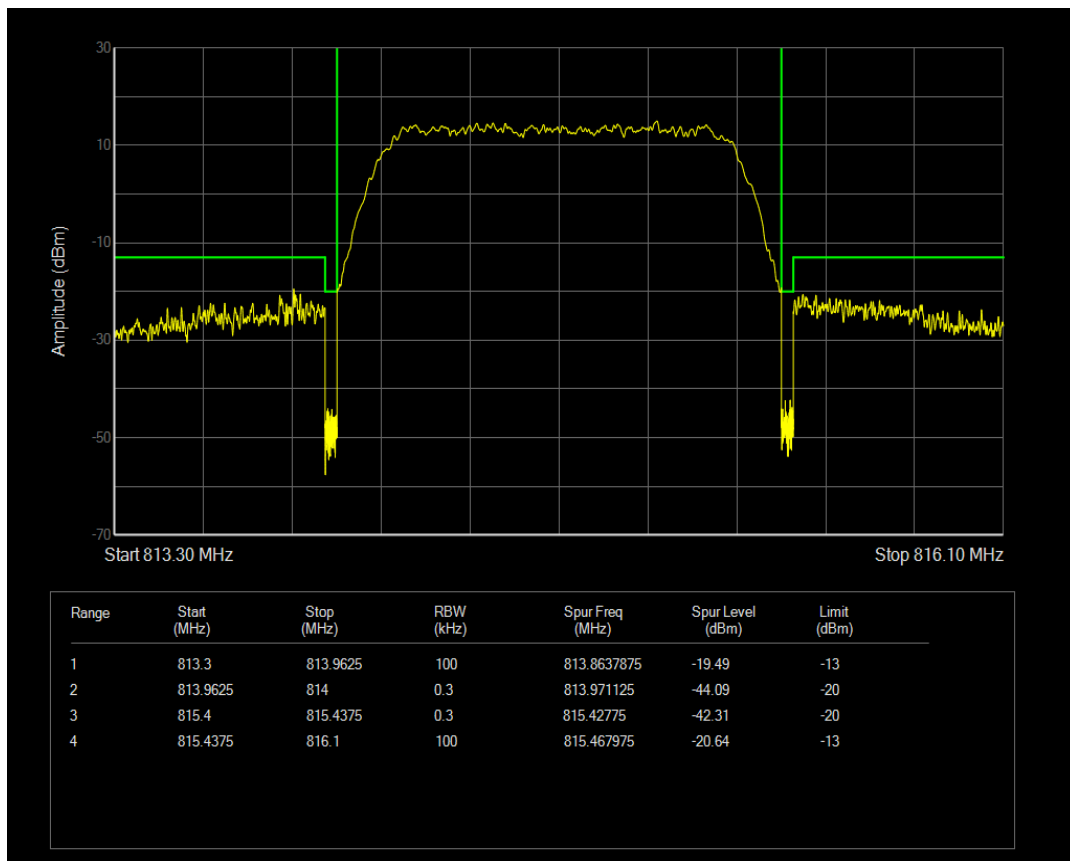
Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0



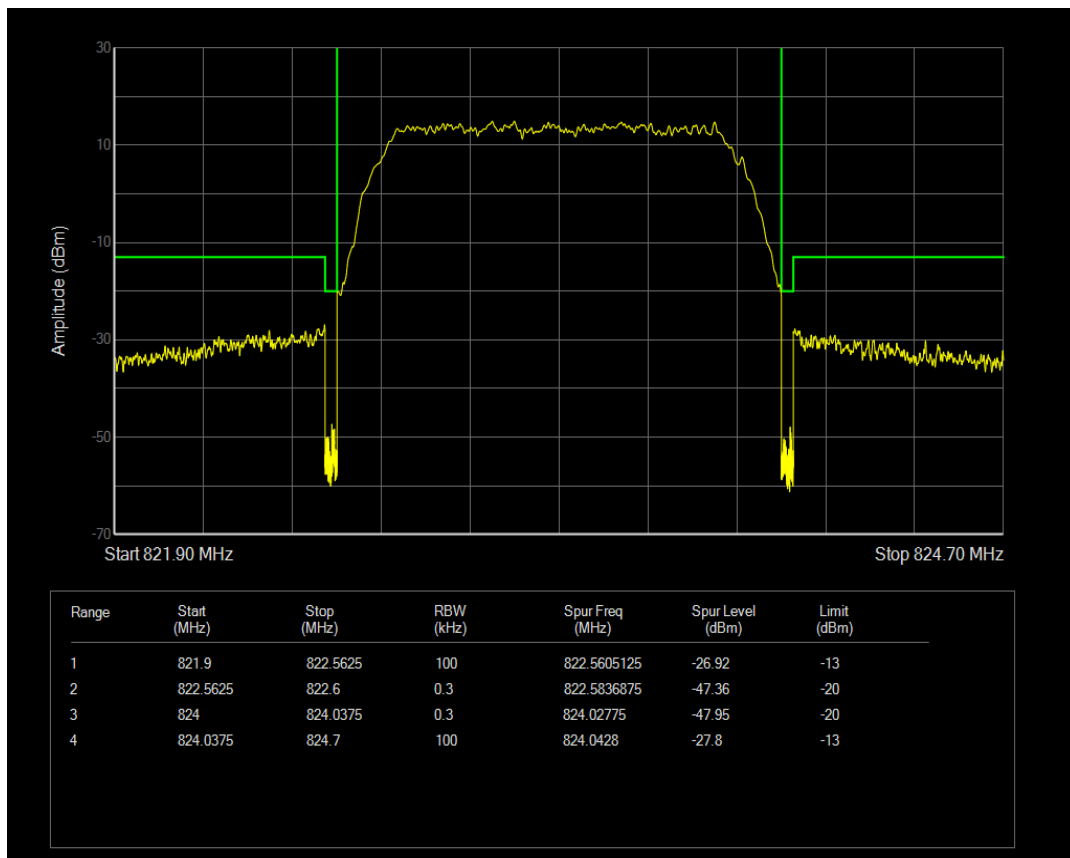
Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0



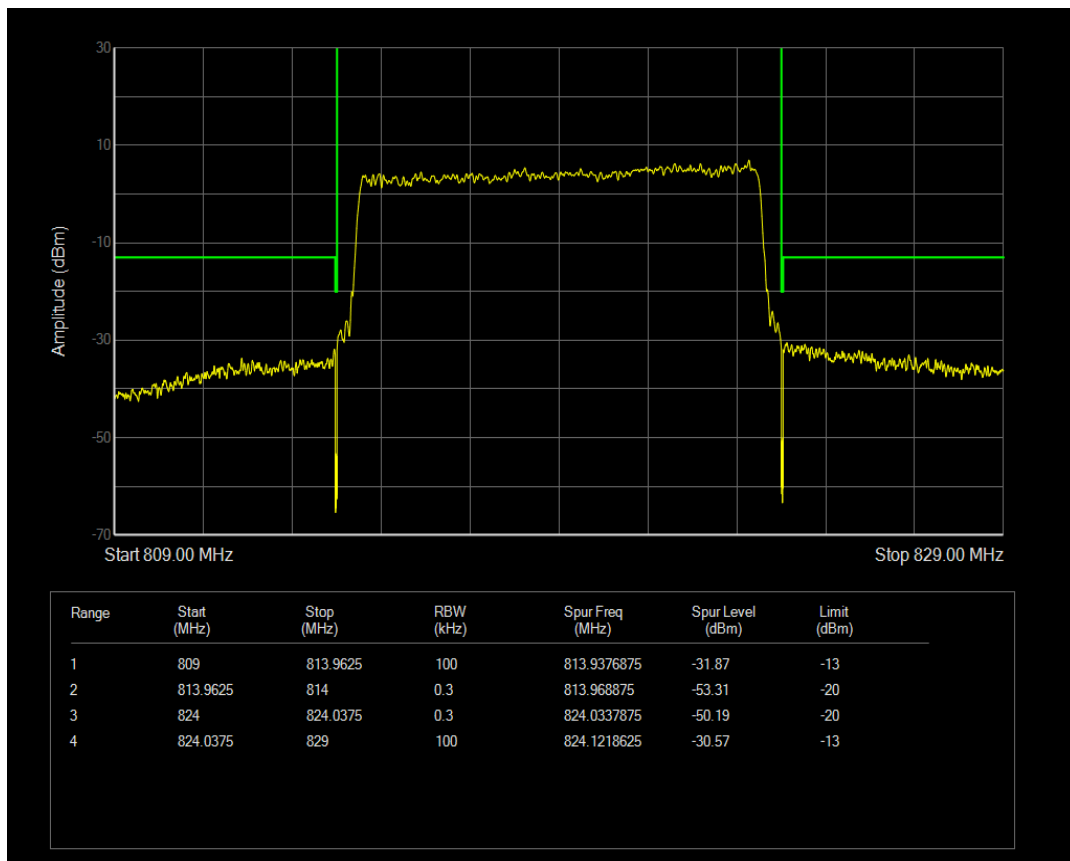
Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0



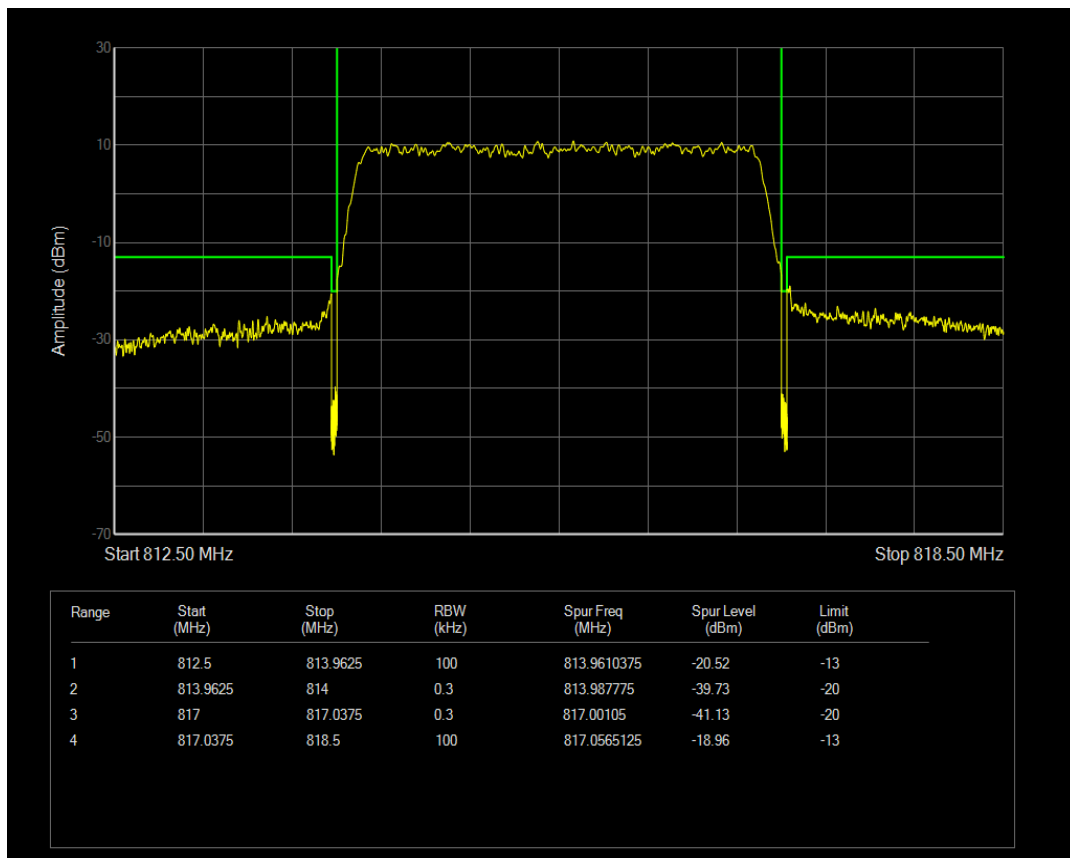
Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0



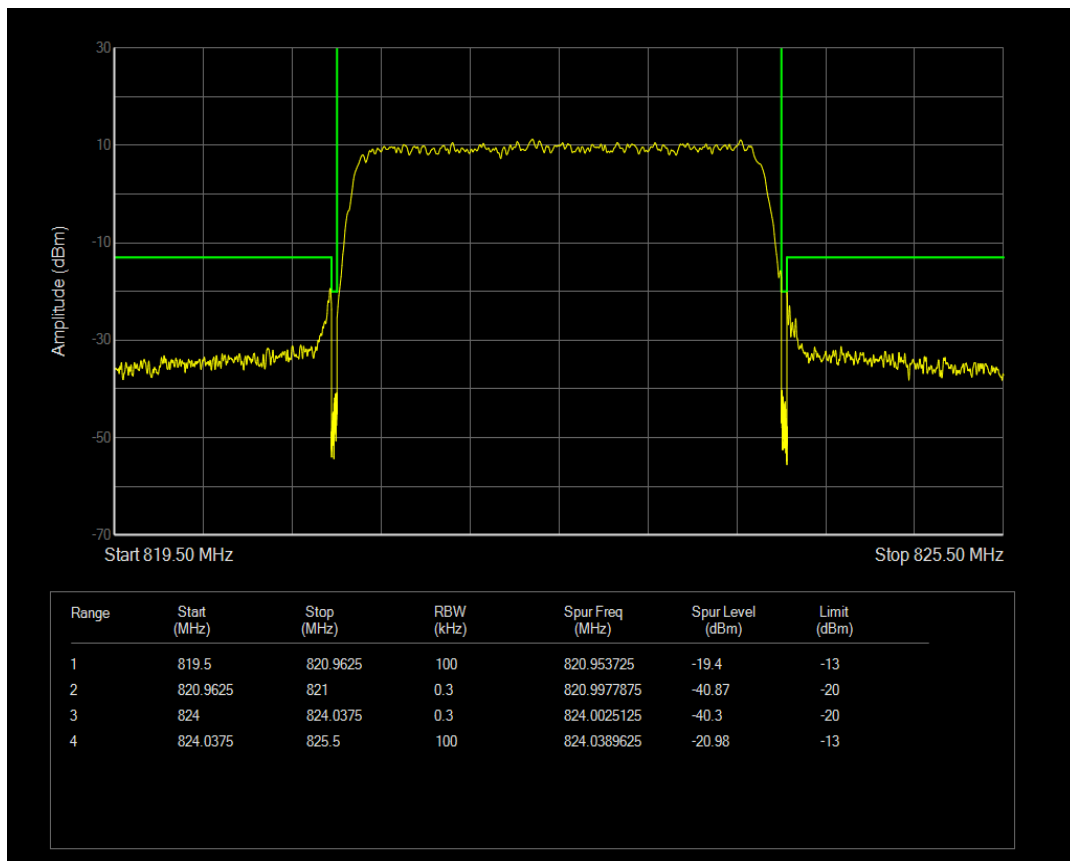
Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0



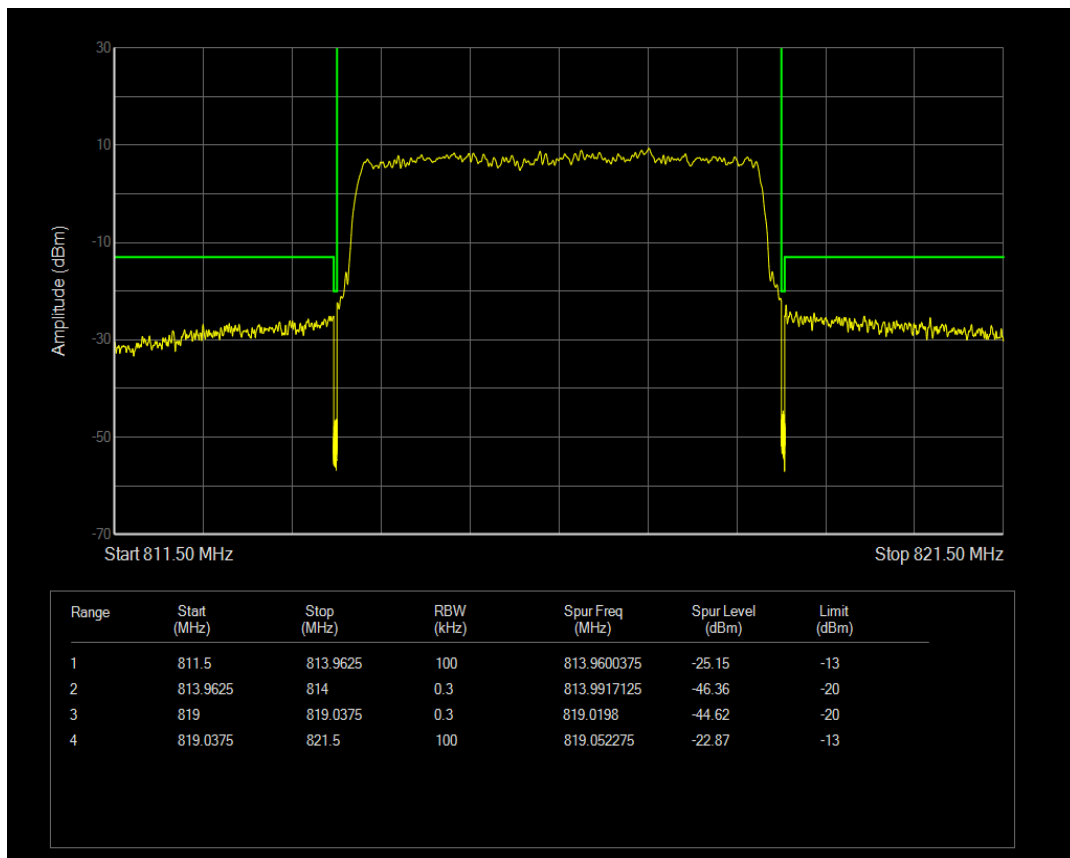Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0



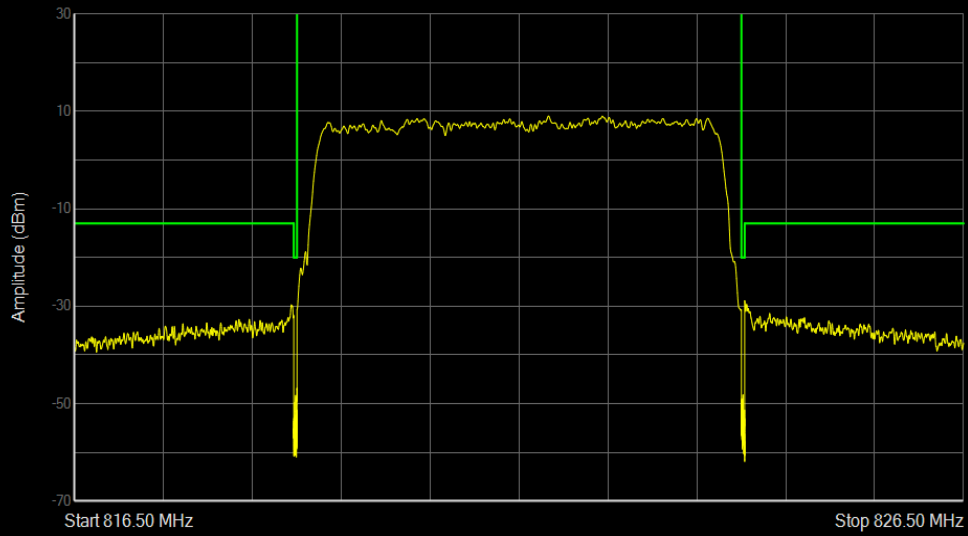Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0




Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	816.5	818.9625	100	818.9354125	-29.73	-13
2	818.9625	819	0.3	818.9996625	-46.84	-20
3	824	824.0375	0.3	824.0177375	-48.19	-20
4	824.0375	826.5	100	824.0399625	-29.16	-13



6 Out-of-band emissions



Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	2445.40	-33.89	-13	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	2444.05	-32.00	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	3040.08	-35.81	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	2469.70	-31.98	-13	PASS
Band26(814-824)	3	26705	15	#0	QPSK	2447.65	-35.53	-13	PASS
Band26(814-824)	3	26705	15	#0	QAM16	2488.38	-35.97	-13	PASS
Band26(814-824)	3	26775	15	#0	QPSK	2465.65	-35.94	-13	PASS
Band26(814-824)	3	26775	15	#0	QAM16	2468.35	-33.67	-13	PASS
Band26(814-824)	5	26715	25	#0	QPSK	2601.78	-36.22	-13	PASS
Band26(814-824)	5	26715	25	#0	QAM16	3076.53	-36.49	-13	PASS
Band26(814-824)	5	26765	25	#0	QPSK	2464.53	-36.80	-13	PASS
Band26(814-824)	5	26765	25	#0	QAM16	3441.48	-35.74	-13	PASS
Band26(814-824)	10	26740	50	#0	QPSK	3079.90	-35.61	-13	PASS
Band26(814-824)	10	26740	50	#0	QAM16	3142.90	-36.43	-13	PASS


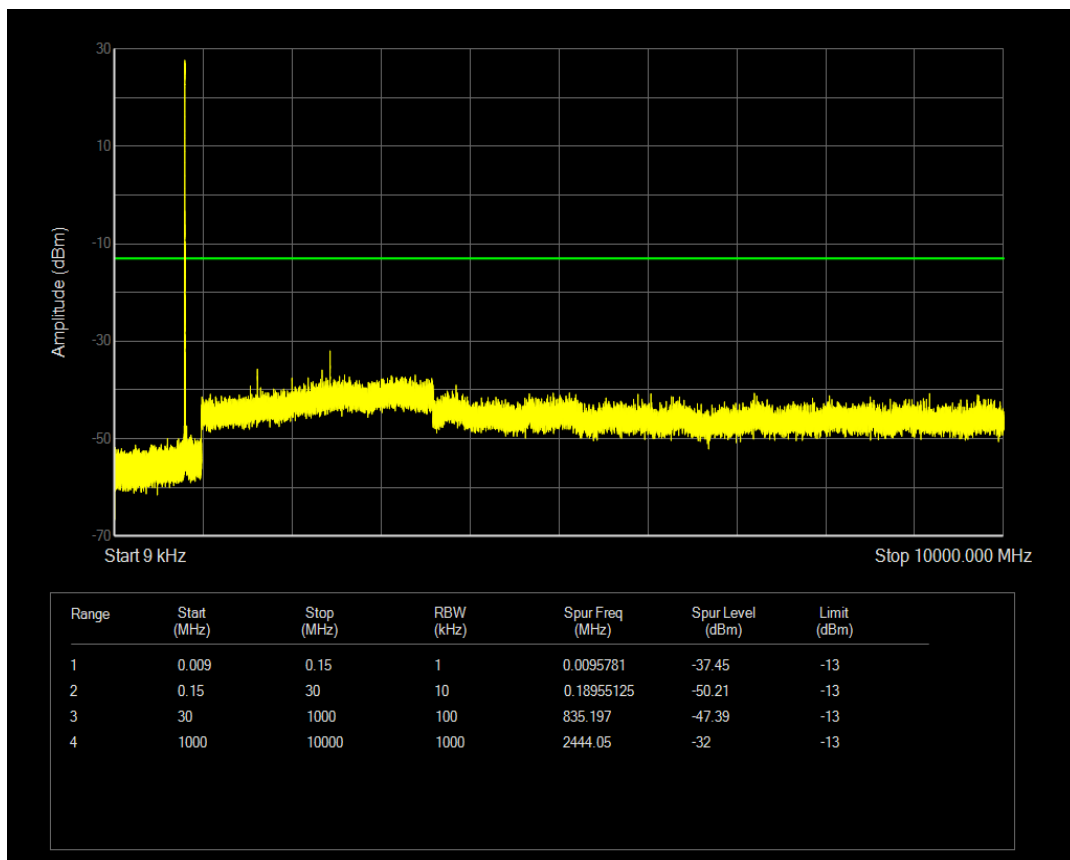
Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0





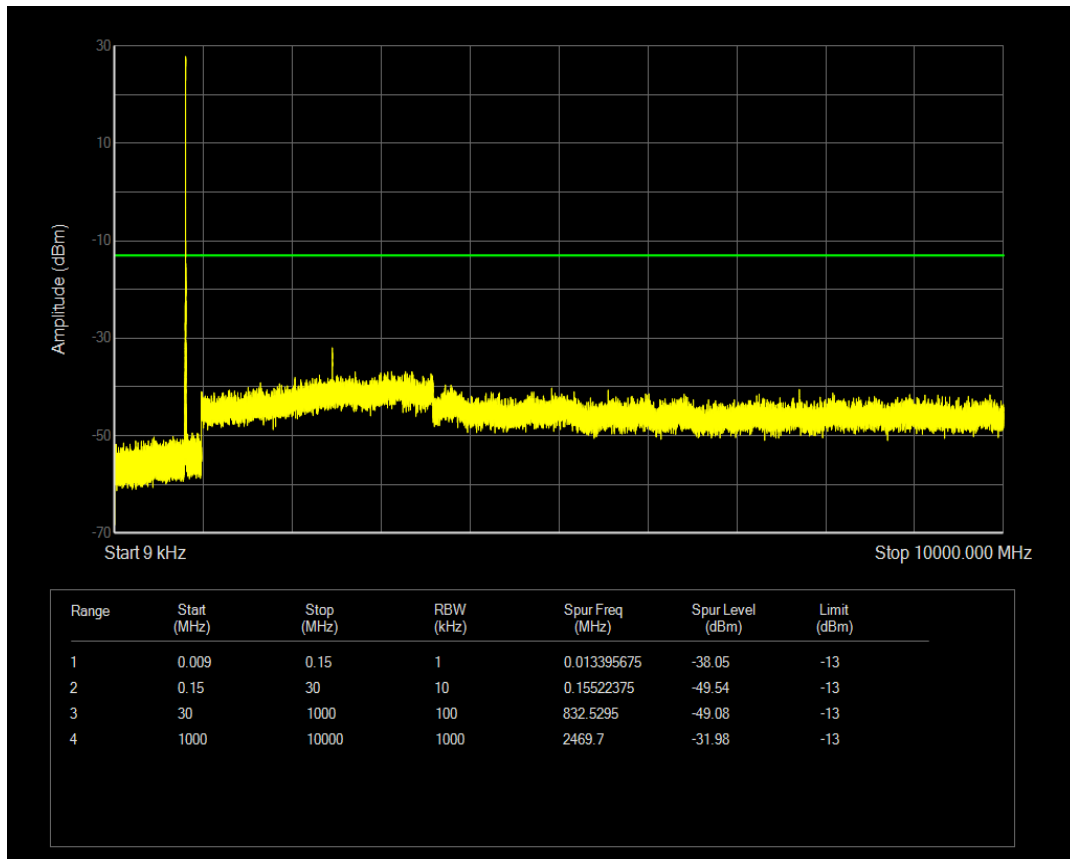
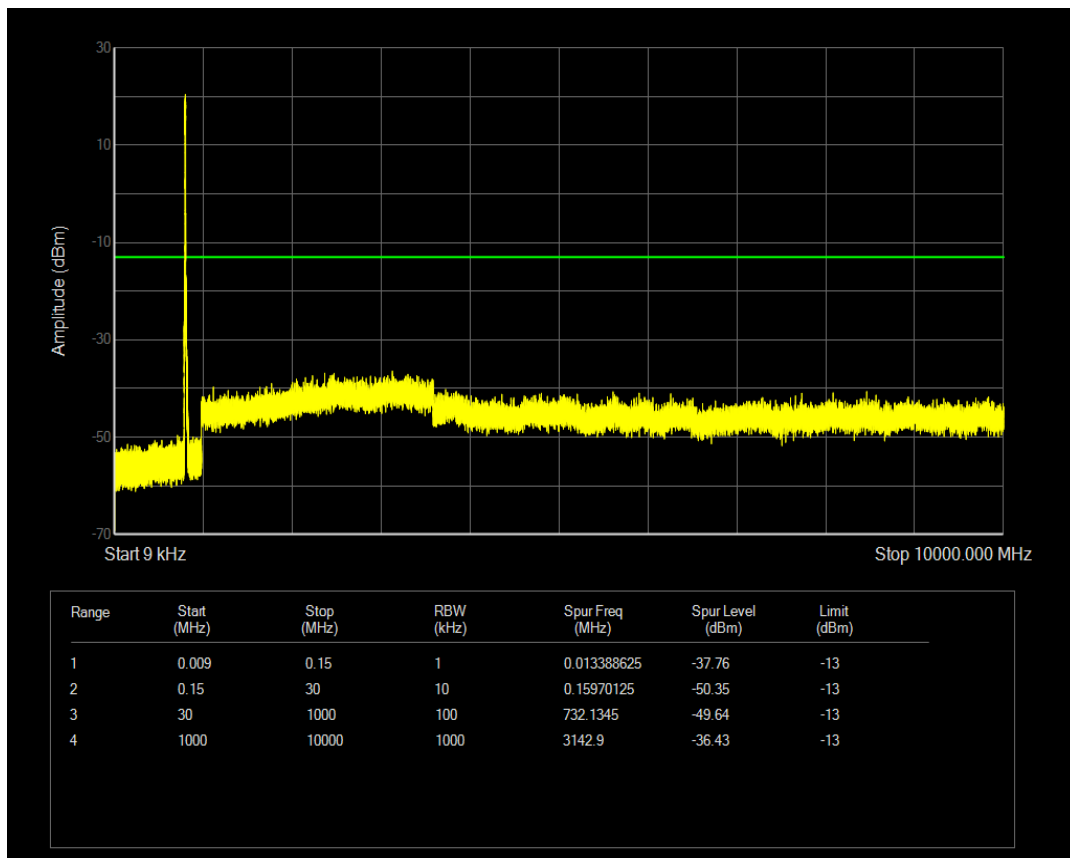
Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0



**Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0****Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0**

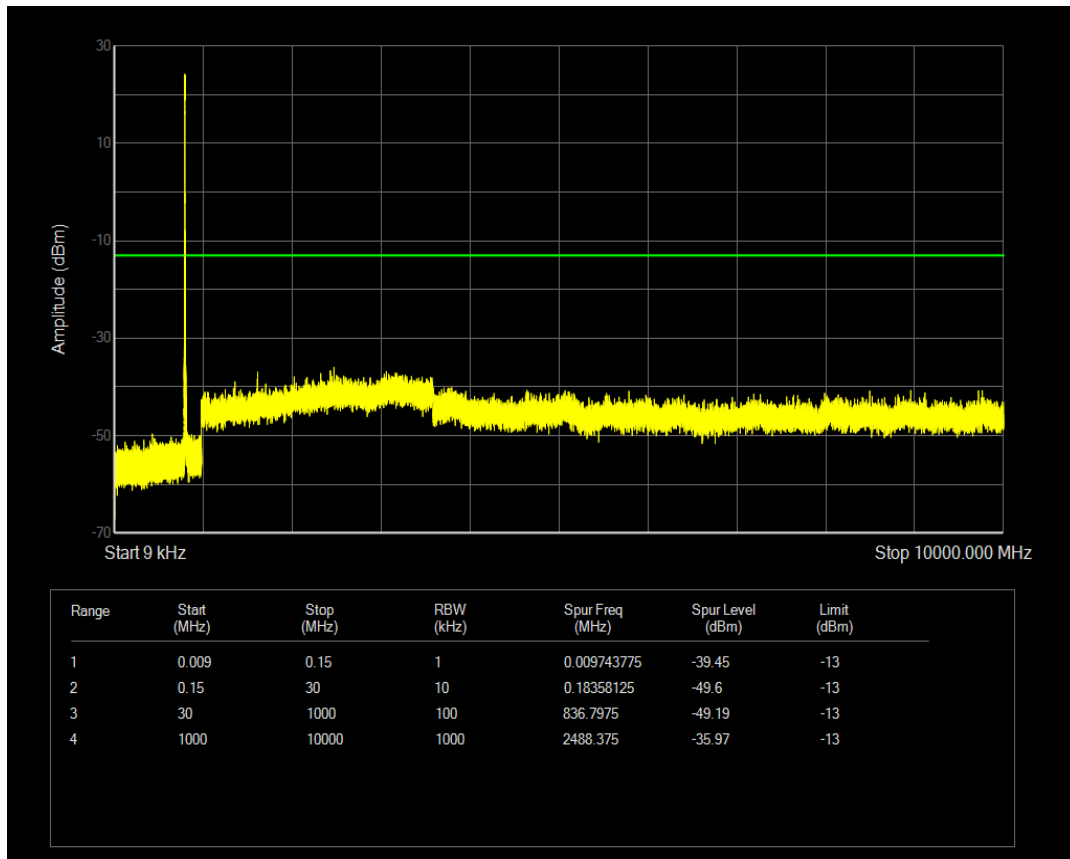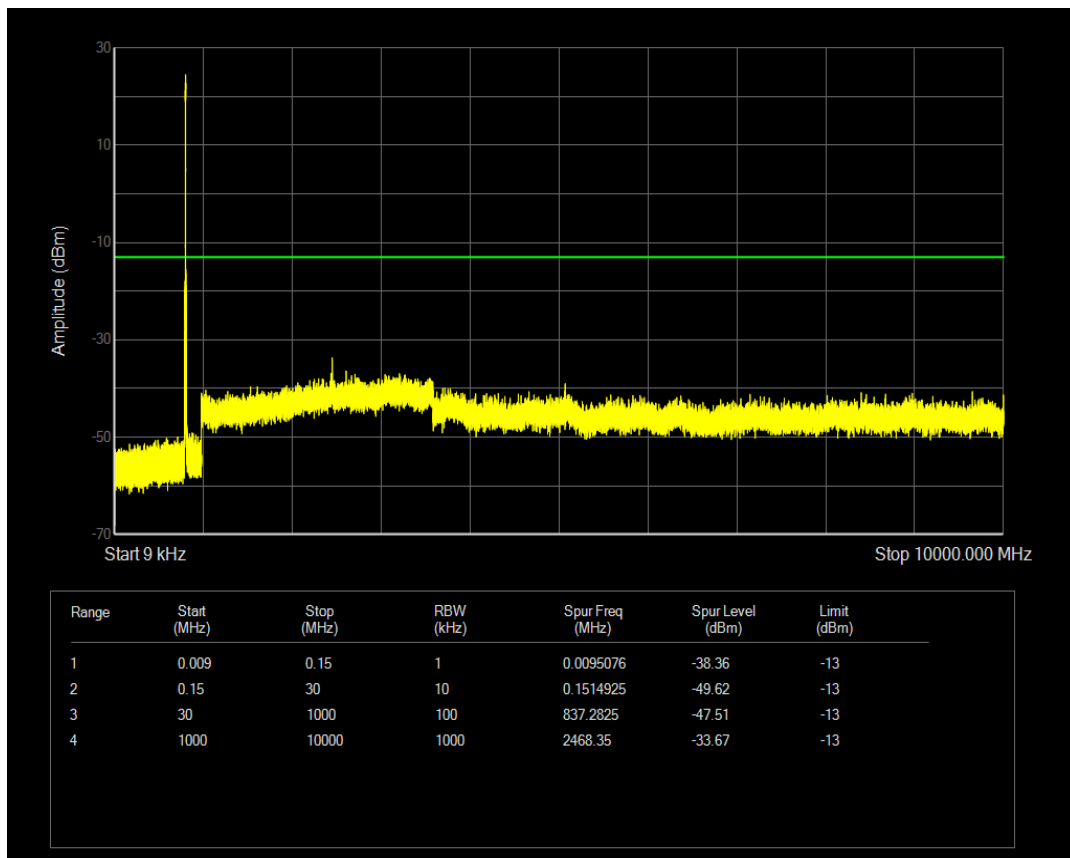
**Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0****Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0**

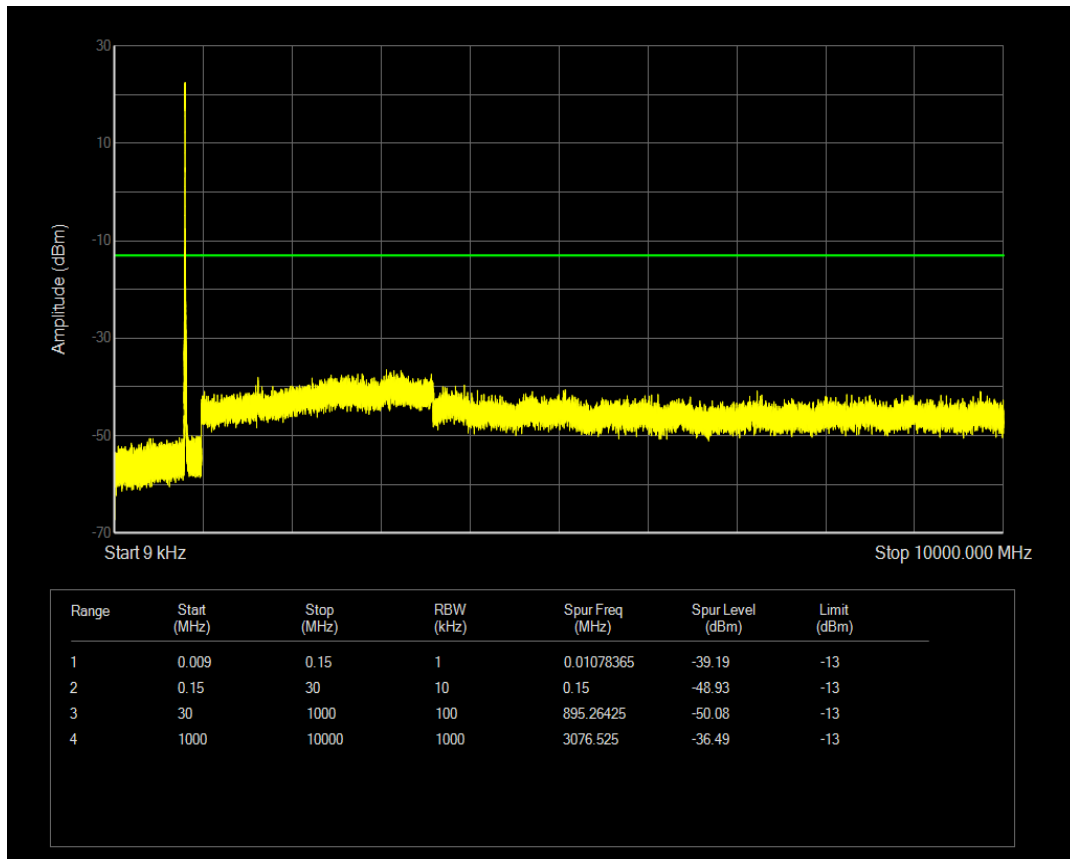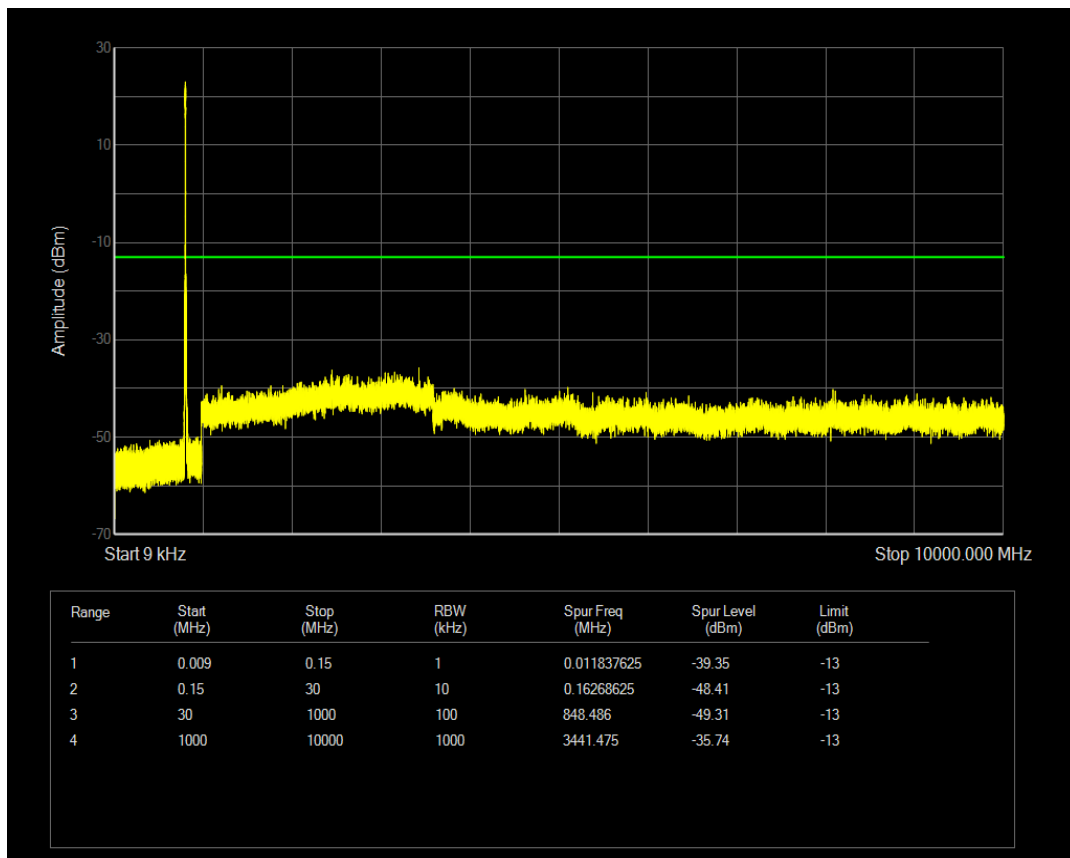**Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0****Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0**

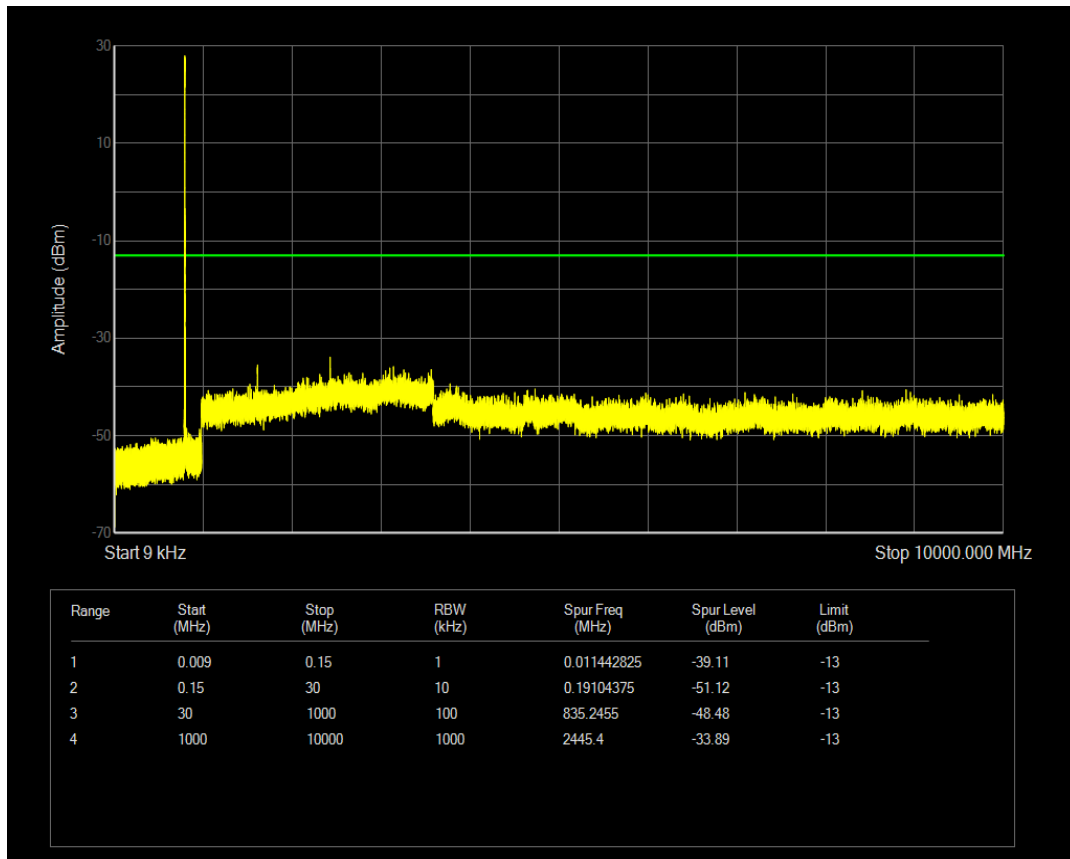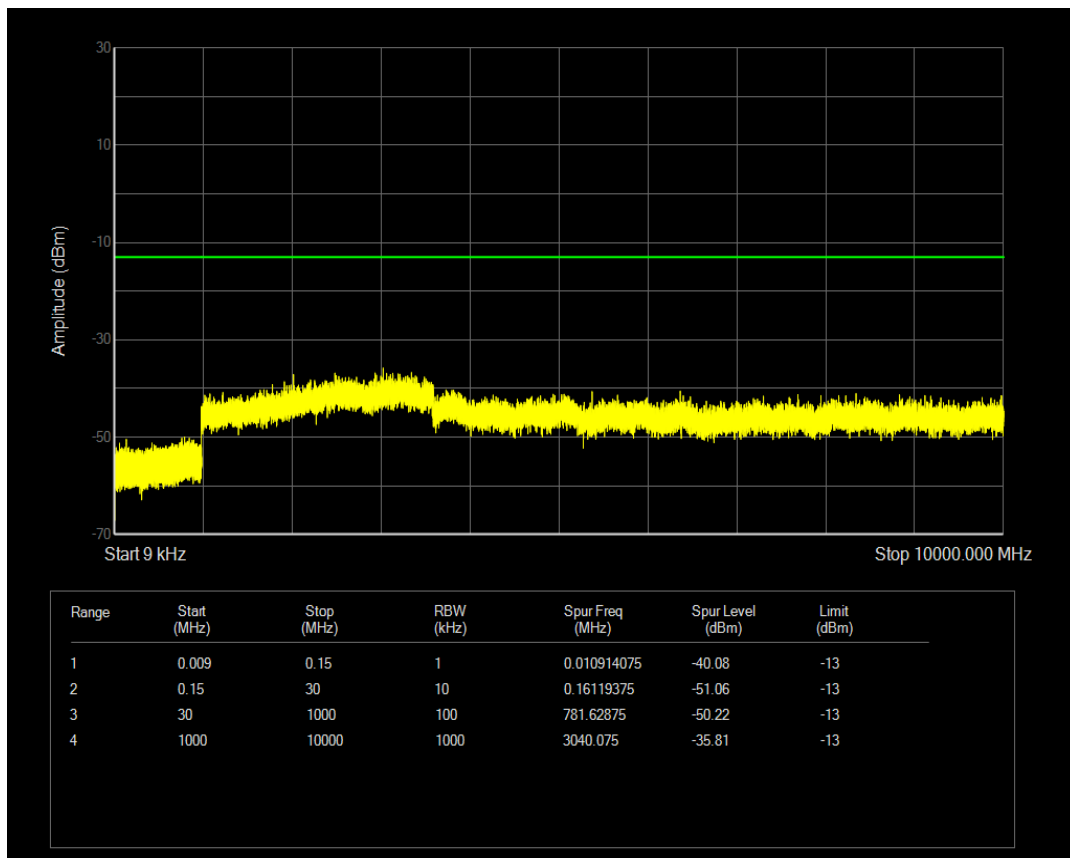**Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0****Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0**

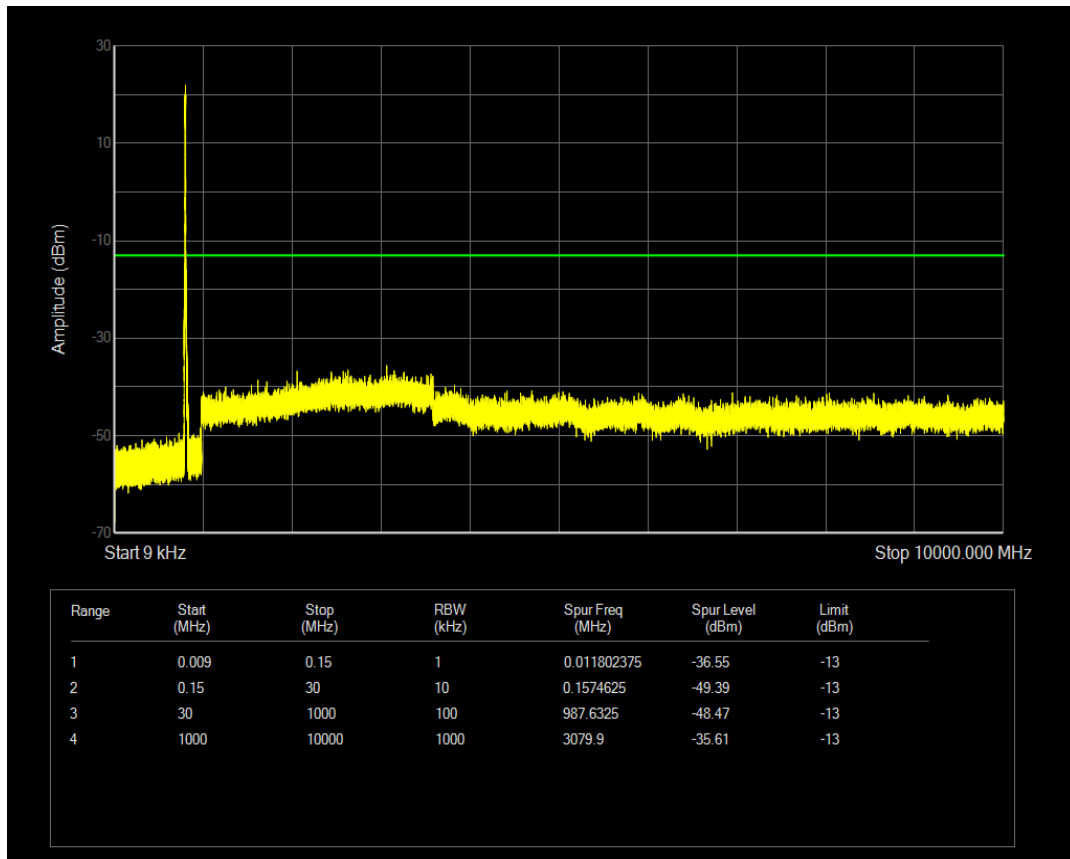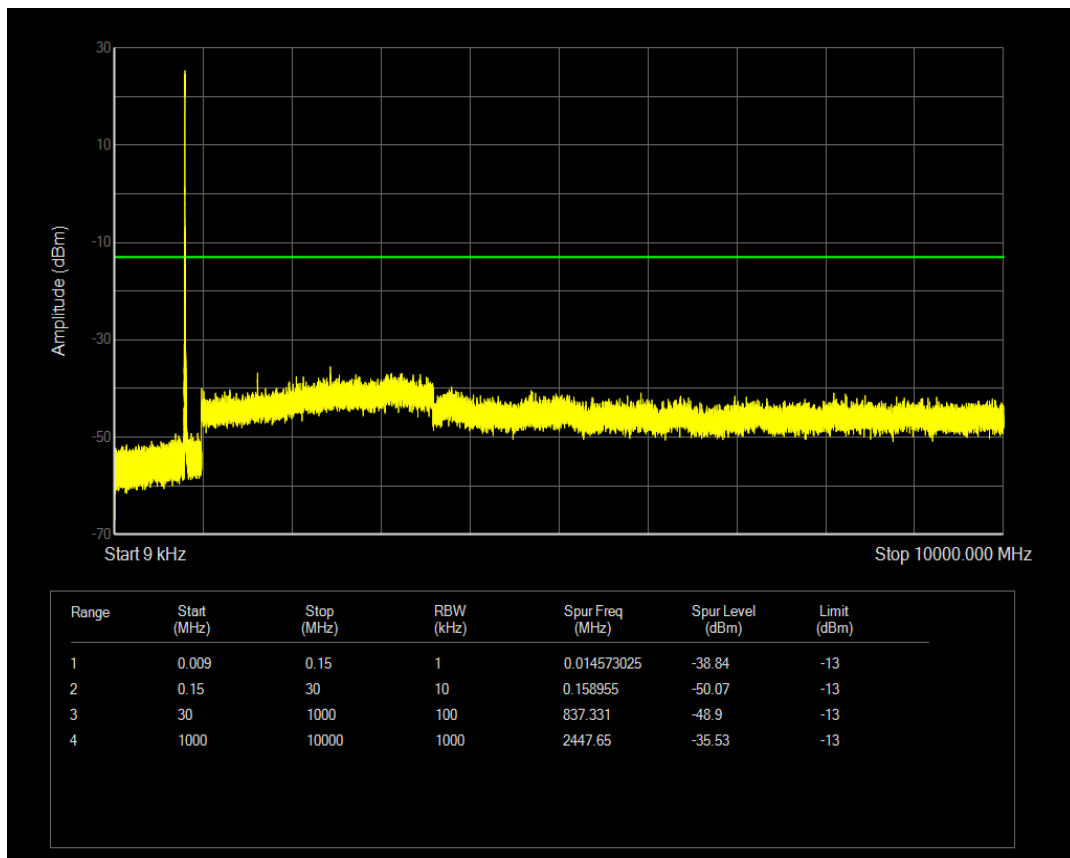**Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0****Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0**

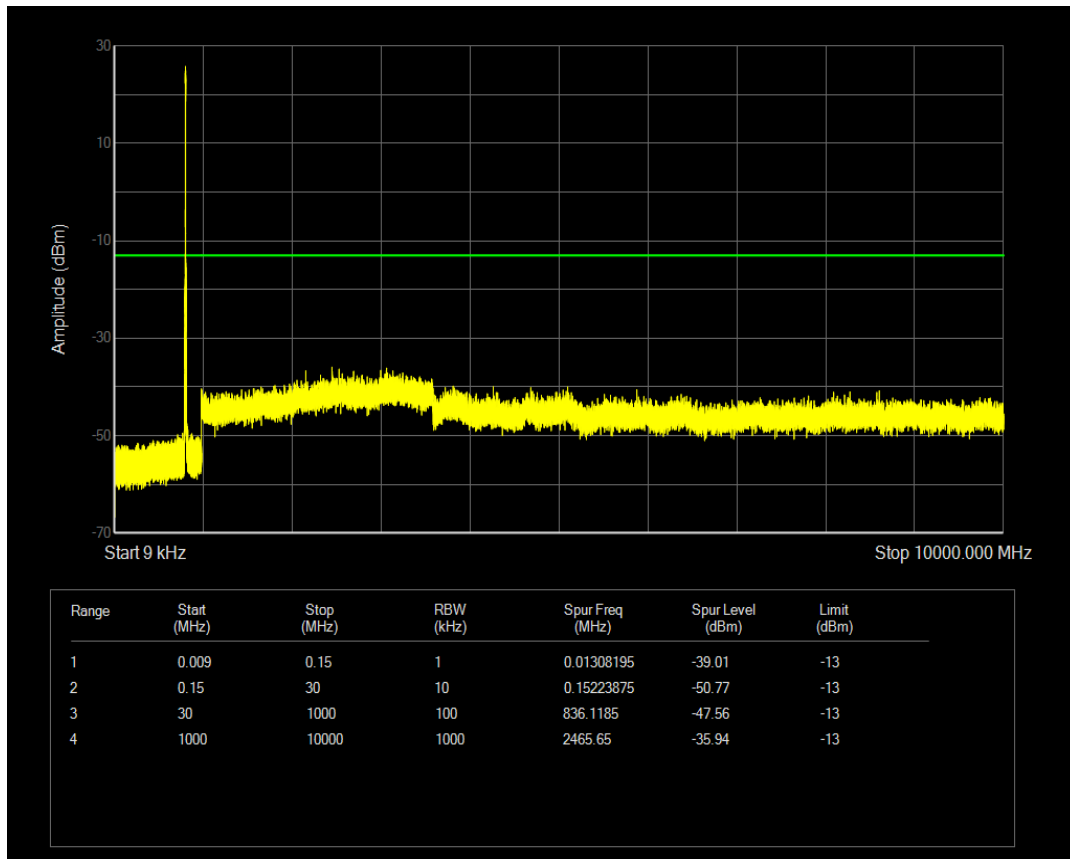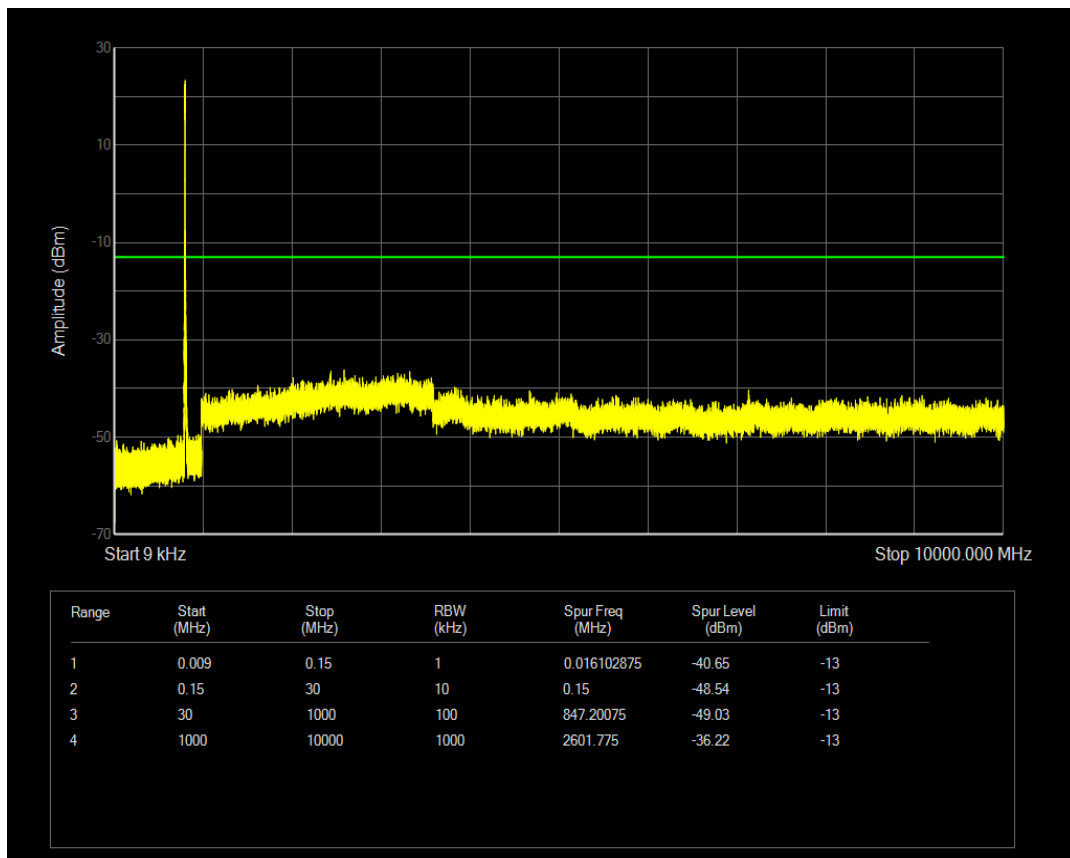**Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0****Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0**

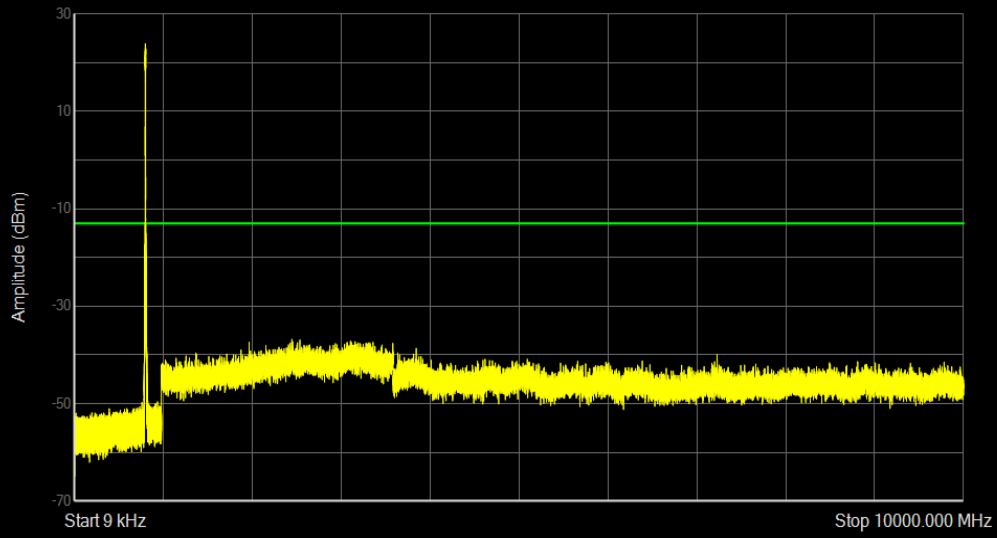

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01460475	-39.52	-13
2	0.15	30	10	0.1544775	-50.73	-13
3	30	1000	100	844.8485	-49.22	-13
4	1000	10000	1000	2464.525	-36.8	-13