

# CABLE


## 1. Explanation of Product number

S L K - A K - C A B L E - 2 8 - R

1

2

3



Product Code:

(1) Connector:

Cable:双剥线同轴线

(2) Cable Length:

28: 28\*0.6MM电子线

(3)Cable Color

R: Red

## 2. Features

\*Stable and reliable in performances


\*Compact size

\*RoHS compliance

Manufacturer: Shenzhen Yishengbang Technology Co., Ltd.


Address: Room 101, Building C, Qianwan Hard Technology Industrial Park,  
Nanchang Community, Xixiang Street, Bao 'an District, Shenzhen

3.Dimensions (unit: mm)

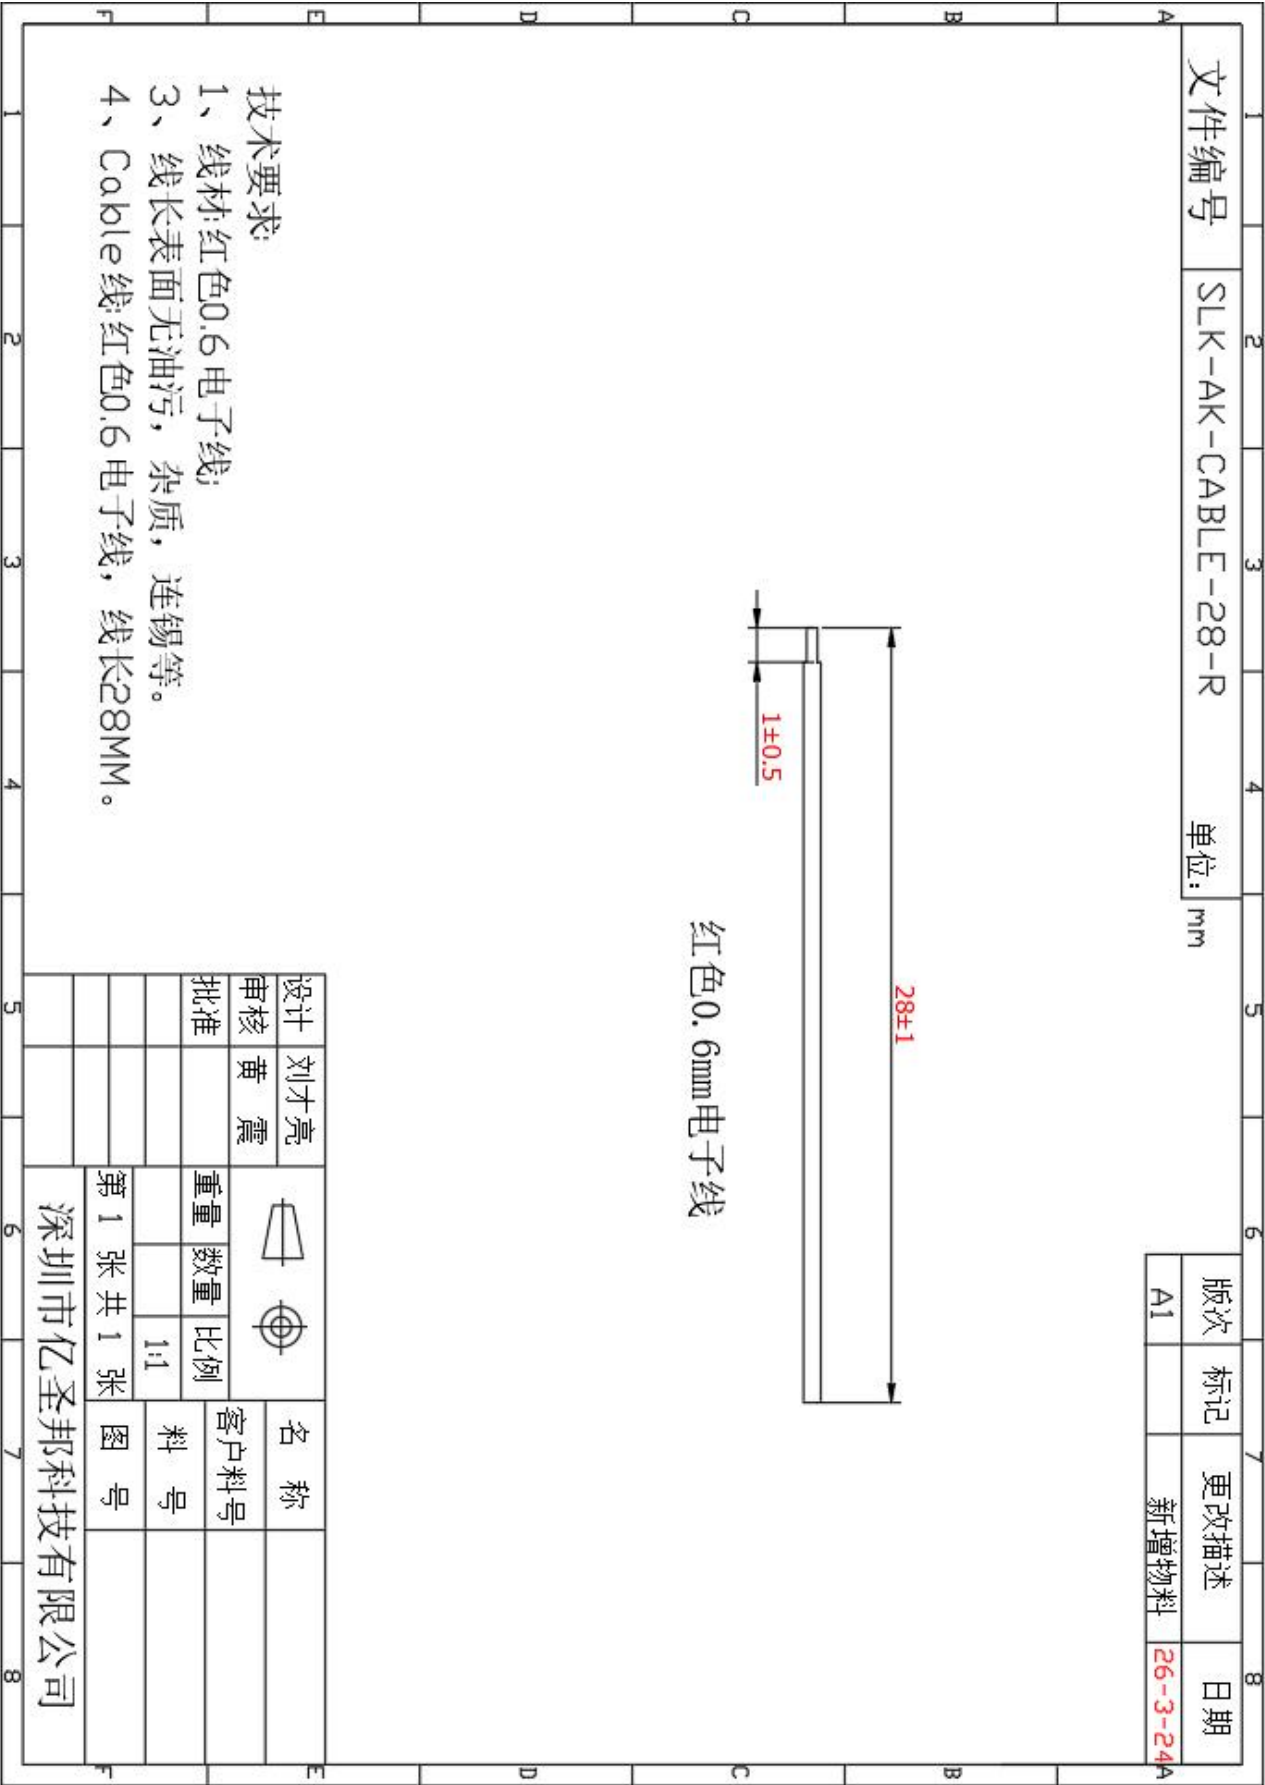

驻波比和回波损耗 (VSWR/S11)

驻波比和回波损耗 (VSWR/S11)

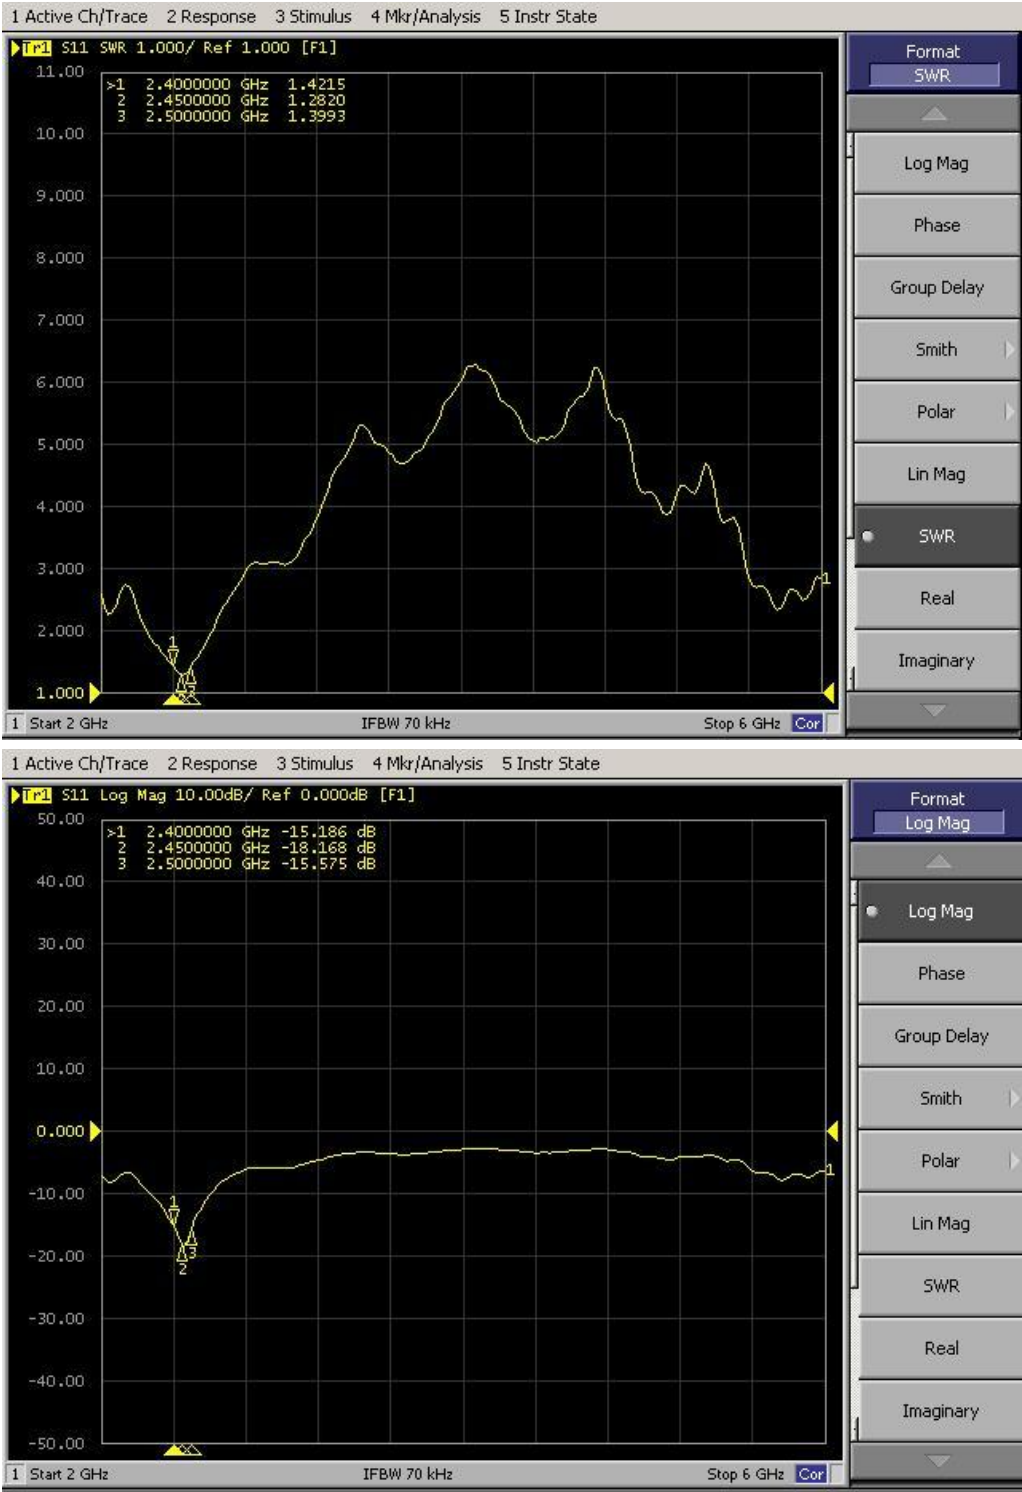

| Frequency (MHz)  | 2400.0 | 2410.0 | 2420.0 | 2430.0 | 2440.0 | 2450.0 | 2460.0 | 2470.0 | 2480.0 | 2490.0 | 2500.0 |
|------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Efficiency (dBi) | -3.58  | -3.51  | -3.60  | -3.58  | -3.61  | -3.55  | -3.63  | -3.57  | -3.70  | -3.78  | -3.76  |
| Gain (dBi)       | 2.84   | 2.88   | 2.86   | 2.95   | 2.70   | 2.40   | 2.52   | 2.60   | 2.29   | 2.94   | 2.79   |
| Efficiency (%)   | 43.83  | 44.50  | 43.60  | 43.77  | 43.49  | 44.11  | 43.35  | 43.94  | 42.61  | 41.81  | 41.99  |

2450.0MHz H+V, Eff. 44.1%

Back View

