

TABLE OF CONTENTS

1 Conducted output power 2

2 Frequency stability 9

3 Peak-to-Average Ratio 10

4 Occupied bandwidth 15

5 Band edge 26

6 Out-of-band emissions 34

1 Conducted output power

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Verdict
Band26 (814-824)	1.4	26697	1	#0	QPSK	21.66	-4.42	-6.57	15.09	38.45	Pass
Band26 (814-824)	1.4	26697	1	#Mid	QPSK	21.72	-4.42	-6.57	15.15	38.45	Pass
Band26 (814-824)	1.4	26697	1	#Max	QPSK	21.68	-4.42	-6.57	15.11	38.45	Pass
Band26 (814-824)	1.4	26697	3	#0	QPSK	21.59	-4.42	-6.57	15.02	38.45	Pass
Band26 (814-824)	1.4	26697	3	#Mid	QPSK	21.65	-4.42	-6.57	15.08	38.45	Pass
Band26 (814-824)	1.4	26697	3	#Max	QPSK	21.62	-4.42	-6.57	15.05	38.45	Pass
Band26 (814-824)	1.4	26697	6	#0	QPSK	21.15	-4.42	-6.57	14.58	38.45	Pass
Band26 (814-824)	1.4	26697	1	#0	QAM16	22.01	-4.42	-6.57	15.44	38.45	Pass
Band26 (814-824)	1.4	26697	1	#Mid	QAM16	21.99	-4.42	-6.57	15.42	38.45	Pass
Band26 (814-824)	1.4	26697	1	#Max	QAM16	21.97	-4.42	-6.57	15.40	38.45	Pass
Band26 (814-824)	1.4	26697	3	#0	QAM16	20.74	-4.42	-6.57	14.17	38.45	Pass
Band26 (814-824)	1.4	26697	3	#Mid	QAM16	20.7	-4.42	-6.57	14.13	38.45	Pass
Band26 (814-824)	1.4	26697	3	#Max	QAM16	20.67	-4.42	-6.57	14.10	38.45	Pass
Band26 (814-824)	1.4	26697	6	#0	QAM16	19.71	-4.42	-6.57	13.14	38.45	Pass
Band26 (814-824)	1.4	26740	1	#0	QPSK	21.76	-4.42	-6.57	15.19	38.45	Pass
Band26 (814-824)	1.4	26740	1	#Mid	QPSK	21.66	-4.42	-6.57	15.09	38.45	Pass
Band26 (814-824)	1.4	26740	1	#Max	QPSK	21.63	-4.42	-6.57	15.06	38.45	Pass
Band26 (814-824)	1.4	26740	3	#0	QPSK	21.62	-4.42	-6.57	15.05	38.45	Pass
Band26 (814-824)	1.4	26740	3	#Mid	QPSK	21.67	-4.42	-6.57	15.10	38.45	Pass

Band26 (814-824)	1.4	26740	3	#Max	QPSK	21.64	-4.42	-6.57	15.07	38.45	Pass
Band26 (814-824)	1.4	26740	6	#0	QPSK	21.07	-4.42	-6.57	14.50	38.45	Pass
Band26 (814-824)	1.4	26740	1	#0	QAM16	22.1	-4.42	-6.57	15.53	38.45	Pass
Band26 (814-824)	1.4	26740	1	#Mid	QAM16	22.18	-4.42	-6.57	15.61	38.45	Pass
Band26 (814-824)	1.4	26740	1	#Max	QAM16	22.15	-4.42	-6.57	15.58	38.45	Pass
Band26 (814-824)	1.4	26740	3	#0	QAM16	20.79	-4.42	-6.57	14.22	38.45	Pass
Band26 (814-824)	1.4	26740	3	#Mid	QAM16	20.82	-4.42	-6.57	14.25	38.45	Pass
Band26 (814-824)	1.4	26740	3	#Max	QAM16	20.81	-4.42	-6.57	14.24	38.45	Pass
Band26 (814-824)	1.4	26740	6	#0	QAM16	19.66	-4.42	-6.57	13.09	38.45	Pass
Band26 (814-824)	1.4	26783	1	#0	QPSK	21.39	-4.42	-6.57	14.82	38.45	Pass
Band26 (814-824)	1.4	26783	1	#Mid	QPSK	21.52	-4.42	-6.57	14.95	38.45	Pass
Band26 (814-824)	1.4	26783	1	#Max	QPSK	21.53	-4.42	-6.57	14.96	38.45	Pass
Band26 (814-824)	1.4	26783	3	#0	QPSK	21.56	-4.42	-6.57	14.99	38.45	Pass
Band26 (814-824)	1.4	26783	3	#Mid	QPSK	21.47	-4.42	-6.57	14.90	38.45	Pass
Band26 (814-824)	1.4	26783	3	#Max	QPSK	21.5	-4.42	-6.57	14.93	38.45	Pass
Band26 (814-824)	1.4	26783	6	#0	QPSK	21.04	-4.42	-6.57	14.47	38.45	Pass
Band26 (814-824)	1.4	26783	1	#0	QAM16	21.55	-4.42	-6.57	14.98	38.45	Pass
Band26 (814-824)	1.4	26783	1	#Mid	QAM16	21.56	-4.42	-6.57	14.99	38.45	Pass
Band26 (814-824)	1.4	26783	1	#Max	QAM16	21.53	-4.42	-6.57	14.96	38.45	Pass
Band26 (814-824)	1.4	26783	3	#0	QAM16	20.96	-4.42	-6.57	14.39	38.45	Pass
Band26 (814-824)	1.4	26783	3	#Mid	QAM16	20.88	-4.42	-6.57	14.31	38.45	Pass
Band26 (814-824)	1.4	26783	3	#Max	QAM16	20.95	-4.42	-6.57	14.38	38.45	Pass

Band26 (814-824)	1.4	26783	6	#0	QAM16	19.75	-4.42	-6.57	13.18	38.45	Pass
Band26 (814-824)	3	26705	1	#0	QPSK	21.58	-4.42	-6.57	15.01	38.45	Pass
Band26 (814-824)	3	26705	1	#Mid	QPSK	21.54	-4.42	-6.57	14.97	38.45	Pass
Band26 (814-824)	3	26705	1	#Max	QPSK	21.6	-4.42	-6.57	15.03	38.45	Pass
Band26 (814-824)	3	26705	8	#0	QPSK	21.09	-4.42	-6.57	14.52	38.45	Pass
Band26 (814-824)	3	26705	8	#Mid	QPSK	21.07	-4.42	-6.57	14.50	38.45	Pass
Band26 (814-824)	3	26705	8	#Max	QPSK	21.08	-4.42	-6.57	14.51	38.45	Pass
Band26 (814-824)	3	26705	15	#0	QPSK	21.11	-4.42	-6.57	14.54	38.45	Pass
Band26 (814-824)	3	26705	1	#0	QAM16	22.06	-4.42	-6.57	15.49	38.45	Pass
Band26 (814-824)	3	26705	1	#Mid	QAM16	22.05	-4.42	-6.57	15.48	38.45	Pass
Band26 (814-824)	3	26705	1	#Max	QAM16	22.03	-4.42	-6.57	15.46	38.45	Pass
Band26 (814-824)	3	26705	8	#0	QAM16	19.56	-4.42	-6.57	12.99	38.45	Pass
Band26 (814-824)	3	26705	8	#Mid	QAM16	19.6	-4.42	-6.57	13.03	38.45	Pass
Band26 (814-824)	3	26705	8	#Max	QAM16	19.42	-4.42	-6.57	12.85	38.45	Pass
Band26 (814-824)	3	26705	15	#0	QAM16	19.87	-4.42	-6.57	13.30	38.45	Pass
Band26 (814-824)	3	26740	1	#0	QPSK	21.61	-4.42	-6.57	15.04	38.45	Pass
Band26 (814-824)	3	26740	1	#Mid	QPSK	21.61	-4.42	-6.57	15.04	38.45	Pass
Band26 (814-824)	3	26740	1	#Max	QPSK	21.65	-4.42	-6.57	15.08	38.45	Pass
Band26 (814-824)	3	26740	8	#0	QPSK	21	-4.42	-6.57	14.43	38.45	Pass
Band26 (814-824)	3	26740	8	#Mid	QPSK	21.09	-4.42	-6.57	14.52	38.45	Pass
Band26 (814-824)	3	26740	8	#Max	QPSK	21.07	-4.42	-6.57	14.50	38.45	Pass
Band26 (814-824)	3	26740	15	#0	QPSK	21.05	-4.42	-6.57	14.48	38.45	Pass

Band26 (814-824)	3	26740	1	#0	QAM16	21.56	-4.42	-6.57	14.99	38.45	Pass
Band26 (814-824)	3	26740	1	#Mid	QAM16	21.57	-4.42	-6.57	15.00	38.45	Pass
Band26 (814-824)	3	26740	1	#Max	QAM16	21.6	-4.42	-6.57	15.03	38.45	Pass
Band26 (814-824)	3	26740	8	#0	QAM16	19.73	-4.42	-6.57	13.16	38.45	Pass
Band26 (814-824)	3	26740	8	#Mid	QAM16	19.77	-4.42	-6.57	13.20	38.45	Pass
Band26 (814-824)	3	26740	8	#Max	QAM16	19.74	-4.42	-6.57	13.17	38.45	Pass
Band26 (814-824)	3	26740	15	#0	QAM16	19.52	-4.42	-6.57	12.95	38.45	Pass
Band26 (814-824)	3	26775	1	#0	QPSK	21.61	-4.42	-6.57	15.04	38.45	Pass
Band26 (814-824)	3	26775	1	#Mid	QPSK	21.51	-4.42	-6.57	14.94	38.45	Pass
Band26 (814-824)	3	26775	1	#Max	QPSK	21.57	-4.42	-6.57	15.00	38.45	Pass
Band26 (814-824)	3	26775	8	#0	QPSK	21	-4.42	-6.57	14.43	38.45	Pass
Band26 (814-824)	3	26775	8	#Mid	QPSK	20.97	-4.42	-6.57	14.40	38.45	Pass
Band26 (814-824)	3	26775	8	#Max	QPSK	20.95	-4.42	-6.57	14.38	38.45	Pass
Band26 (814-824)	3	26775	15	#0	QPSK	21.07	-4.42	-6.57	14.50	38.45	Pass
Band26 (814-824)	3	26775	1	#0	QAM16	21.49	-4.42	-6.57	14.92	38.45	Pass
Band26 (814-824)	3	26775	1	#Mid	QAM16	21.44	-4.42	-6.57	14.87	38.45	Pass
Band26 (814-824)	3	26775	1	#Max	QAM16	21.46	-4.42	-6.57	14.89	38.45	Pass
Band26 (814-824)	3	26775	8	#0	QAM16	19.76	-4.42	-6.57	13.19	38.45	Pass
Band26 (814-824)	3	26775	8	#Mid	QAM16	19.56	-4.42	-6.57	12.99	38.45	Pass
Band26 (814-824)	3	26775	8	#Max	QAM16	19.59	-4.42	-6.57	13.02	38.45	Pass
Band26 (814-824)	3	26775	15	#0	QAM16	19.7	-4.42	-6.57	13.13	38.45	Pass
Band26 (814-824)	5	26715	1	#0	QPSK	21.64	-4.42	-6.57	15.07	38.45	Pass

Band26 (814-824)	5	26715	1	#Mid	QPSK	21.59	-4.42	-6.57	15.02	38.45	Pass
Band26 (814-824)	5	26715	1	#Max	QPSK	21.6	-4.42	-6.57	15.03	38.45	Pass
Band26 (814-824)	5	26715	12	#0	QPSK	21.08	-4.42	-6.57	14.51	38.45	Pass
Band26 (814-824)	5	26715	12	#Mid	QPSK	21.09	-4.42	-6.57	14.52	38.45	Pass
Band26 (814-824)	5	26715	12	#Max	QPSK	21.09	-4.42	-6.57	14.52	38.45	Pass
Band26 (814-824)	5	26715	25	#0	QPSK	21.09	-4.42	-6.57	14.52	38.45	Pass
Band26 (814-824)	5	26715	1	#0	QAM16	21.15	-4.42	-6.57	14.58	38.45	Pass
Band26 (814-824)	5	26715	1	#Mid	QAM16	21.1	-4.42	-6.57	14.53	38.45	Pass
Band26 (814-824)	5	26715	1	#Max	QAM16	21.1	-4.42	-6.57	14.53	38.45	Pass
Band26 (814-824)	5	26715	12	#0	QAM16	19.6	-4.42	-6.57	13.03	38.45	Pass
Band26 (814-824)	5	26715	12	#Mid	QAM16	19.44	-4.42	-6.57	12.87	38.45	Pass
Band26 (814-824)	5	26715	12	#Max	QAM16	19.37	-4.42	-6.57	12.80	38.45	Pass
Band26 (814-824)	5	26715	25	#0	QAM16	19.75	-4.42	-6.57	13.18	38.45	Pass
Band26 (814-824)	5	26740	1	#0	QPSK	21.54	-4.42	-6.57	14.97	38.45	Pass
Band26 (814-824)	5	26740	1	#Mid	QPSK	21.61	-4.42	-6.57	15.04	38.45	Pass
Band26 (814-824)	5	26740	1	#Max	QPSK	21.58	-4.42	-6.57	15.01	38.45	Pass
Band26 (814-824)	5	26740	12	#0	QPSK	21	-4.42	-6.57	14.43	38.45	Pass
Band26 (814-824)	5	26740	12	#Mid	QPSK	20.96	-4.42	-6.57	14.39	38.45	Pass
Band26 (814-824)	5	26740	12	#Max	QPSK	21	-4.42	-6.57	14.43	38.45	Pass
Band26 (814-824)	5	26740	25	#0	QPSK	21.08	-4.42	-6.57	14.51	38.45	Pass
Band26 (814-824)	5	26740	1	#0	QAM16	20.67	-4.42	-6.57	14.10	38.45	Pass
Band26 (814-824)	5	26740	1	#Mid	QAM16	20.69	-4.42	-6.57	14.12	38.45	Pass

Band26 (814-824)	5	26740	1	#Max	QAM16	20.63	-4.42	-6.57	14.06	38.45	Pass
Band26 (814-824)	5	26740	12	#0	QAM16	19.4	-4.42	-6.57	12.83	38.45	Pass
Band26 (814-824)	5	26740	12	#Mid	QAM16	19.38	-4.42	-6.57	12.81	38.45	Pass
Band26 (814-824)	5	26740	12	#Max	QAM16	19.71	-4.42	-6.57	13.14	38.45	Pass
Band26 (814-824)	5	26740	25	#0	QAM16	19.53	-4.42	-6.57	12.96	38.45	Pass
Band26 (814-824)	5	26765	1	#0	QPSK	21.53	-4.42	-6.57	14.96	38.45	Pass
Band26 (814-824)	5	26765	1	#Mid	QPSK	21.58	-4.42	-6.57	15.01	38.45	Pass
Band26 (814-824)	5	26765	1	#Max	QPSK	21.43	-4.42	-6.57	14.86	38.45	Pass
Band26 (814-824)	5	26765	12	#0	QPSK	21.05	-4.42	-6.57	14.48	38.45	Pass
Band26 (814-824)	5	26765	12	#Mid	QPSK	20.99	-4.42	-6.57	14.42	38.45	Pass
Band26 (814-824)	5	26765	12	#Max	QPSK	21	-4.42	-6.57	14.43	38.45	Pass
Band26 (814-824)	5	26765	25	#0	QPSK	21.04	-4.42	-6.57	14.47	38.45	Pass
Band26 (814-824)	5	26765	1	#0	QAM16	20.95	-4.42	-6.57	14.38	38.45	Pass
Band26 (814-824)	5	26765	1	#Mid	QAM16	20.85	-4.42	-6.57	14.28	38.45	Pass
Band26 (814-824)	5	26765	1	#Max	QAM16	20.88	-4.42	-6.57	14.31	38.45	Pass
Band26 (814-824)	5	26765	12	#0	QAM16	19.68	-4.42	-6.57	13.11	38.45	Pass
Band26 (814-824)	5	26765	12	#Mid	QAM16	19.76	-4.42	-6.57	13.19	38.45	Pass
Band26 (814-824)	5	26765	12	#Max	QAM16	19.48	-4.42	-6.57	12.91	38.45	Pass
Band26 (814-824)	5	26765	25	#0	QAM16	19.72	-4.42	-6.57	13.15	38.45	Pass
Band26 (814-824)	10	26740	1	#0	QPSK	21.54	-4.42	-6.57	14.97	38.45	Pass
Band26 (814-824)	10	26740	1	#Mid	QPSK	21.56	-4.42	-6.57	14.99	38.45	Pass
Band26 (814-824)	10	26740	1	#Max	QPSK	21.54	-4.42	-6.57	14.97	38.45	Pass

Band26 (814-824)	10	26740	25	#0	QPSK	21.23	-4.42	-6.57	14.66	38.45	Pass
Band26 (814-824)	10	26740	25	#Mid	QPSK	21.06	-4.42	-6.57	14.49	38.45	Pass
Band26 (814-824)	10	26740	25	#Max	QPSK	20.97	-4.42	-6.57	14.40	38.45	Pass
Band26 (814-824)	10	26740	50	#0	QPSK	21.1	-4.42	-6.57	14.53	38.45	Pass
Band26 (814-824)	10	26740	1	#0	QAM16	22	-4.42	-6.57	15.43	38.45	Pass
Band26 (814-824)	10	26740	1	#Mid	QAM16	21.98	-4.42	-6.57	15.41	38.45	Pass
Band26 (814-824)	10	26740	1	#Max	QAM16	21.96	-4.42	-6.57	15.39	38.45	Pass
Band26 (814-824)	10	26740	25	#0	QAM16	19.43	-4.42	-6.57	12.86	38.45	Pass
Band26 (814-824)	10	26740	25	#Mid	QAM16	19.32	-4.42	-6.57	12.75	38.45	Pass
Band26 (814-824)	10	26740	25	#Max	QAM16	19.76	-4.42	-6.57	13.19	38.45	Pass
Band26 (814-824)	10	26740	50	#0	QAM16	19.5	-4.42	-6.57	12.93	38.45	Pass

2 Frequency stability


<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
Band26(814-824)	10	26740	50	#0	QPSK	-36.99	-0.04516	-2.5	2.5	PASS
Band26(814-824)	10	26740	50	#0	QAM16	-40.94	-0.04999	-2.5	2.5	PASS

Note: (Voltage: 3.85V, Temperature: 25°C) only reflect the worst mode.


3 Peak-to-Average Ratio

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Result (dB)	high Limit (dB)	Verdict
Band26(814-824)	1.4	26740	1	#0	QPSK	4.34	13	PASS
Band26(814-824)	1.4	26740	1	#0	QAM16	4.98	13	PASS
Band26(814-824)	3	26740	1	#0	QPSK	4.21	13	PASS
Band26(814-824)	3	26740	1	#0	QAM16	5.00	13	PASS
Band26(814-824)	5	26740	1	#0	QPSK	4.20	13	PASS
Band26(814-824)	5	26740	1	#0	QAM16	4.59	13	PASS
Band26(814-824)	10	26740	1	#0	QPSK	4.26	13	PASS
Band26(814-824)	10	26740	1	#0	QAM16	4.97	13	PASS


Band26(814-824) QAM16 BW=3MHz Channel=26740 RB Size=1 Position=#0

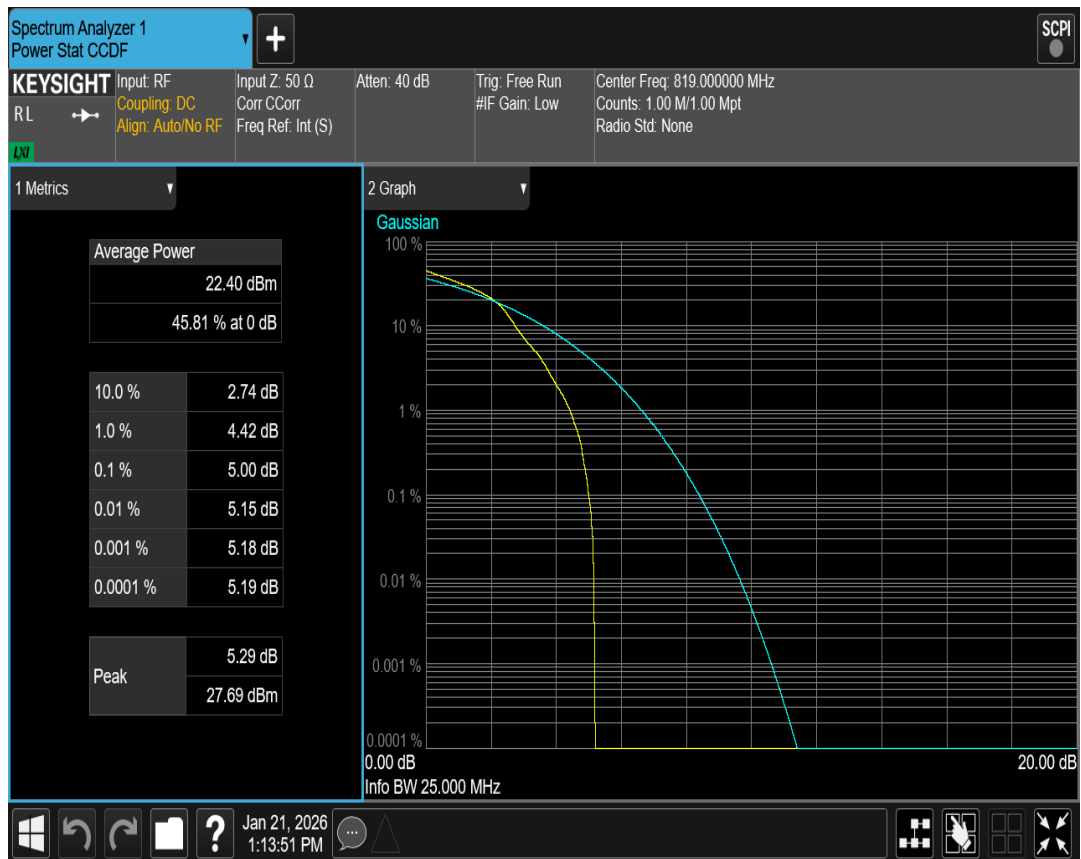


Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=1 Position=#0

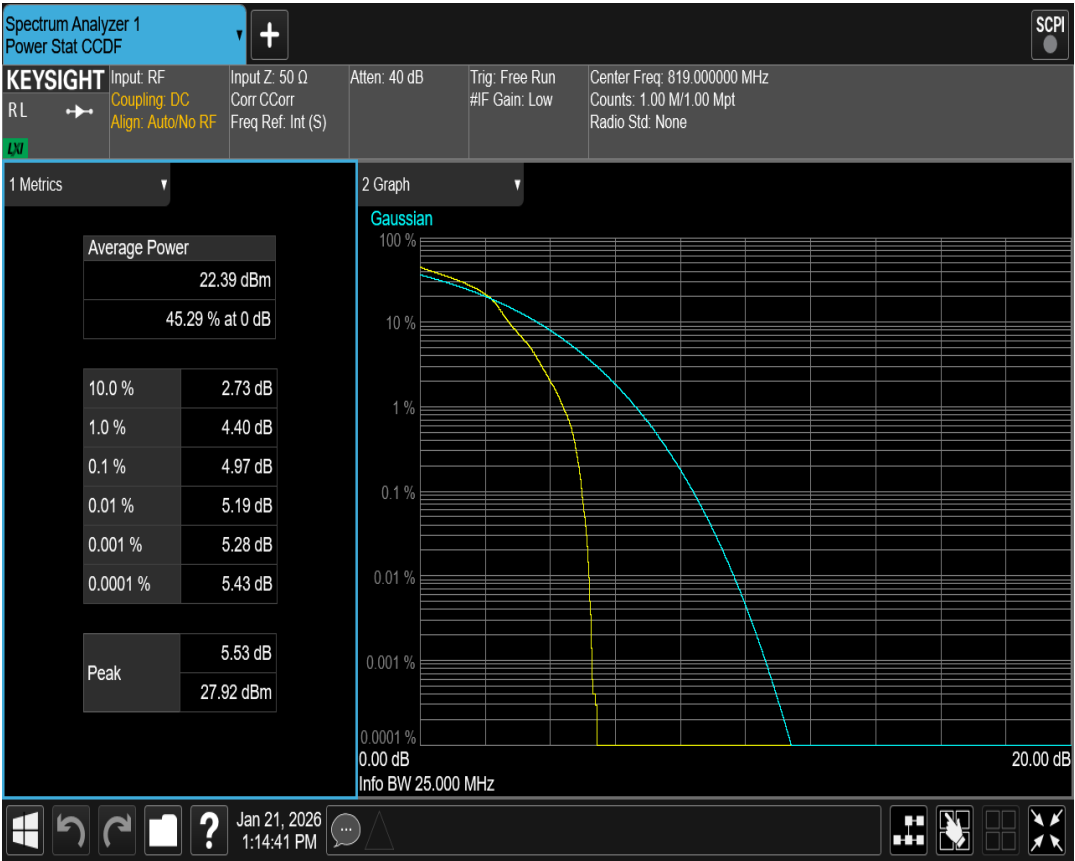


Band26(814-824) QAM16 BW=1.4MHz Channel=26740 RB Size=1 Position=#0

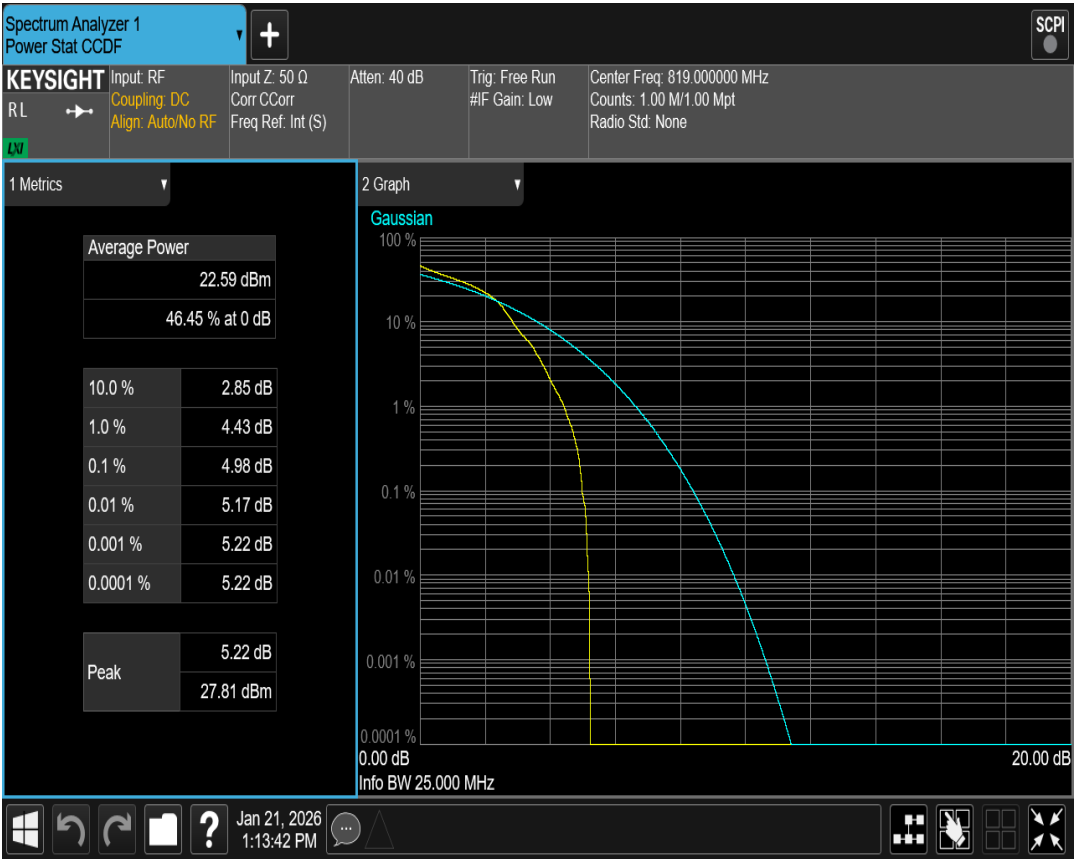


Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=1 Position=#0

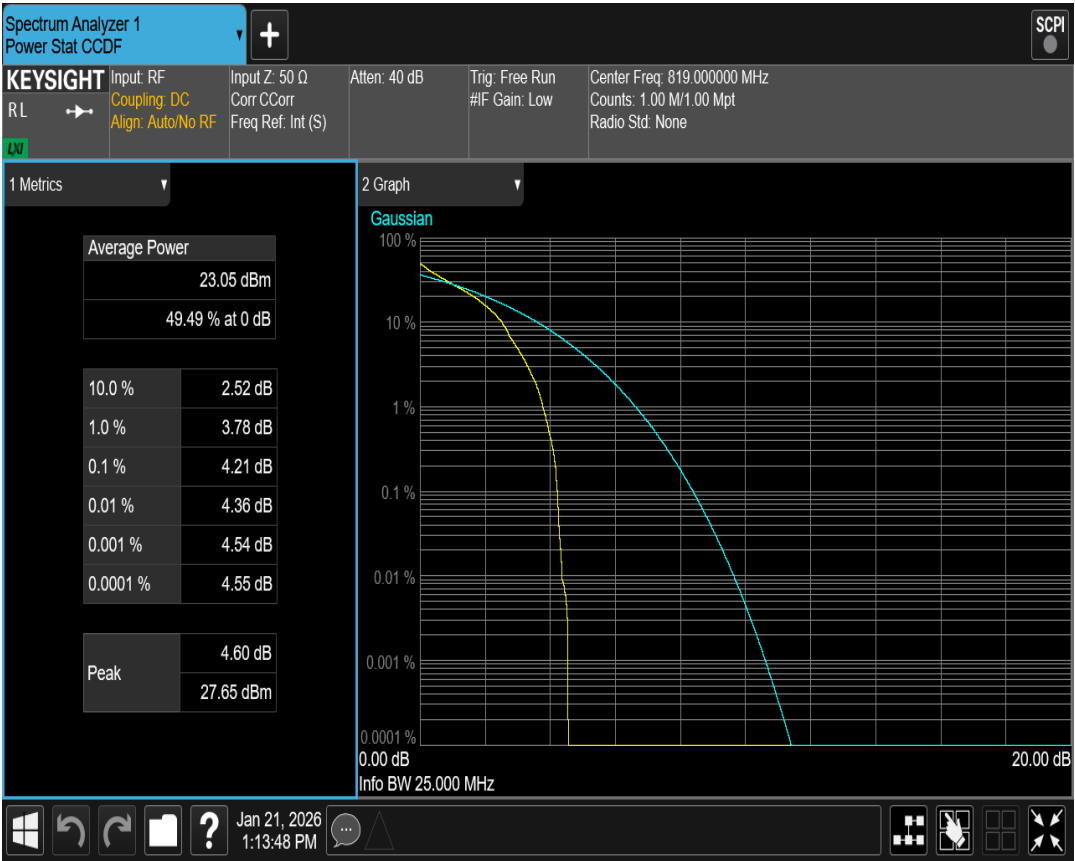


Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=1 Position=#0

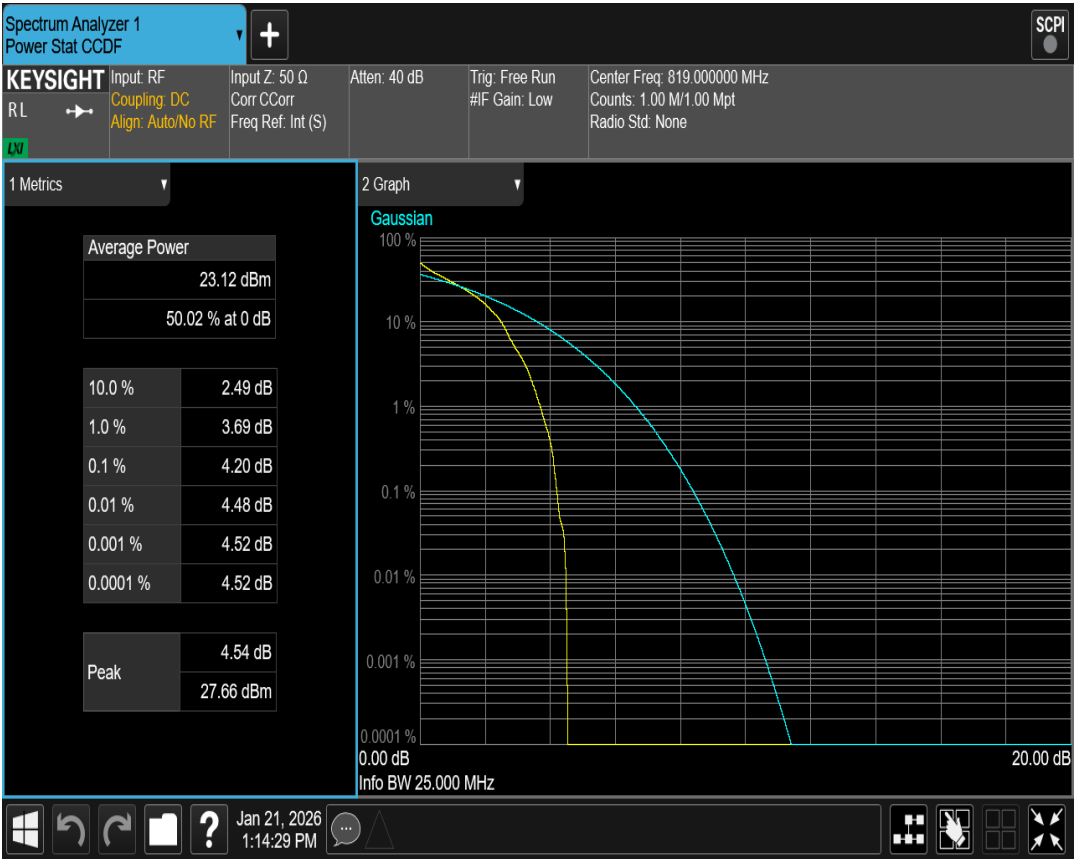


Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=1 Position=#0

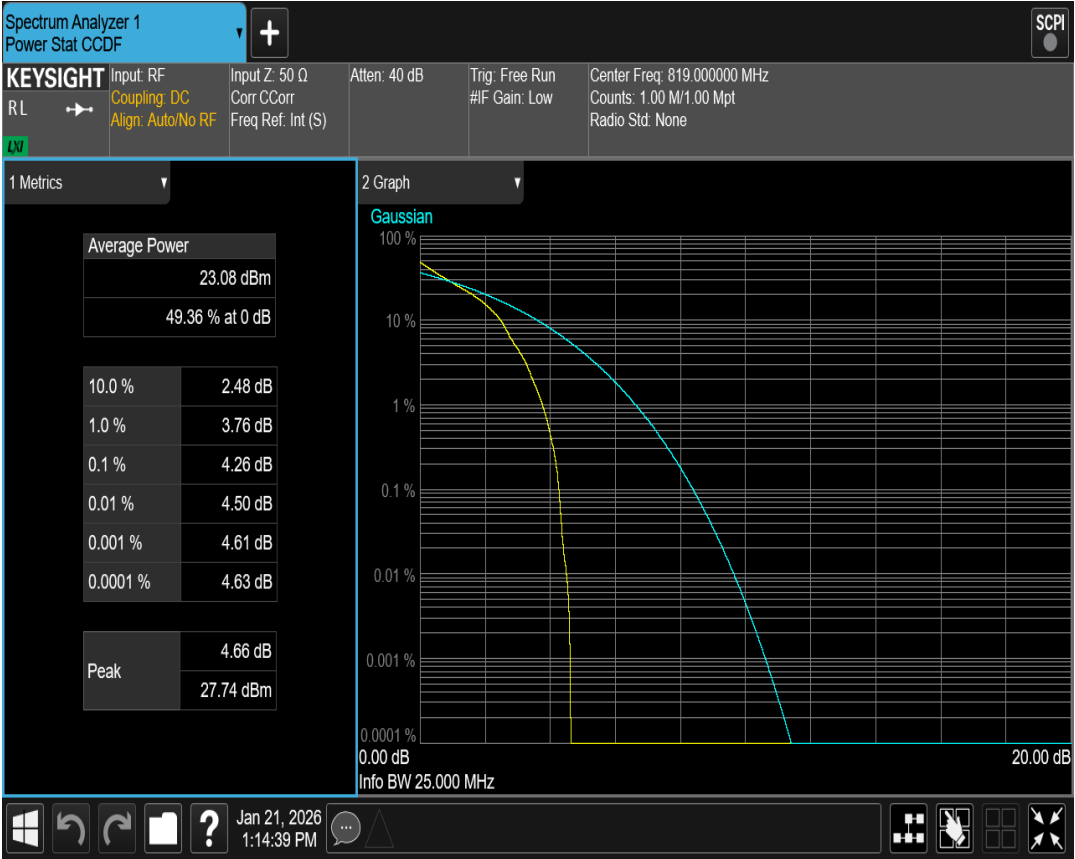

Band26(814-824) QAM16 BW=5MHz Channel=26740 RB Size=1 Position=#0

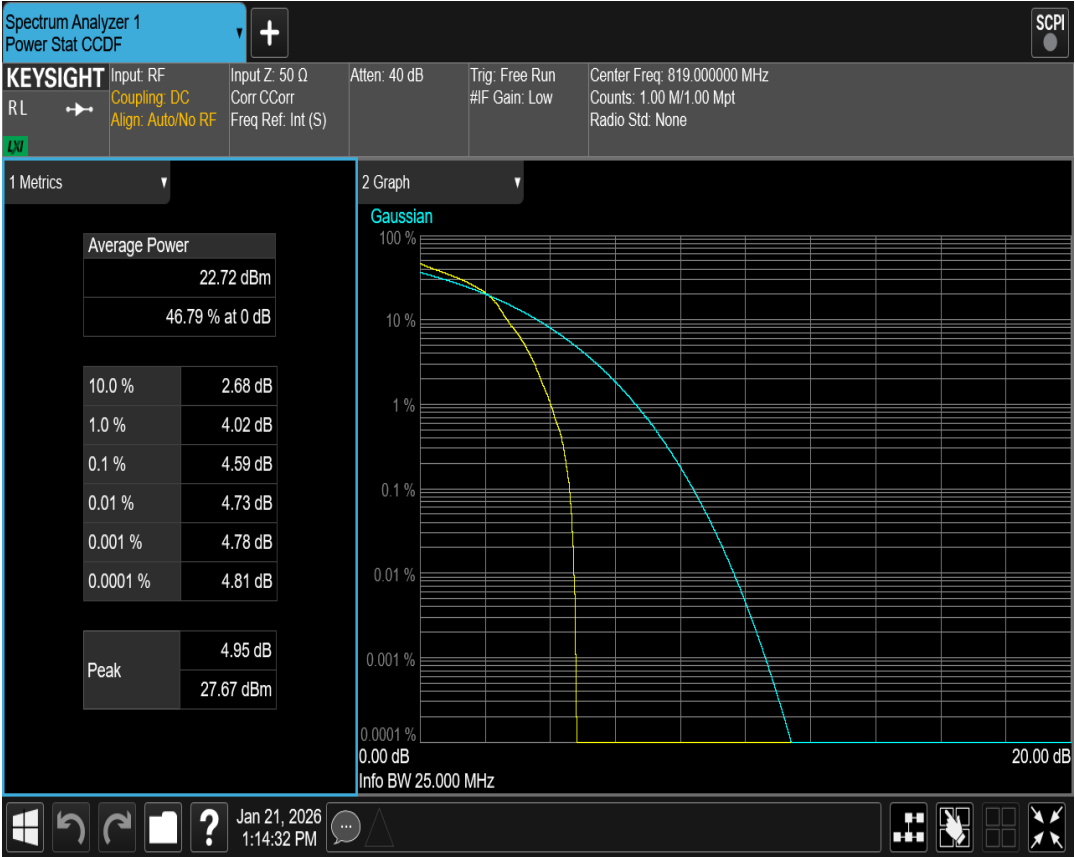


Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=1 Position=#0

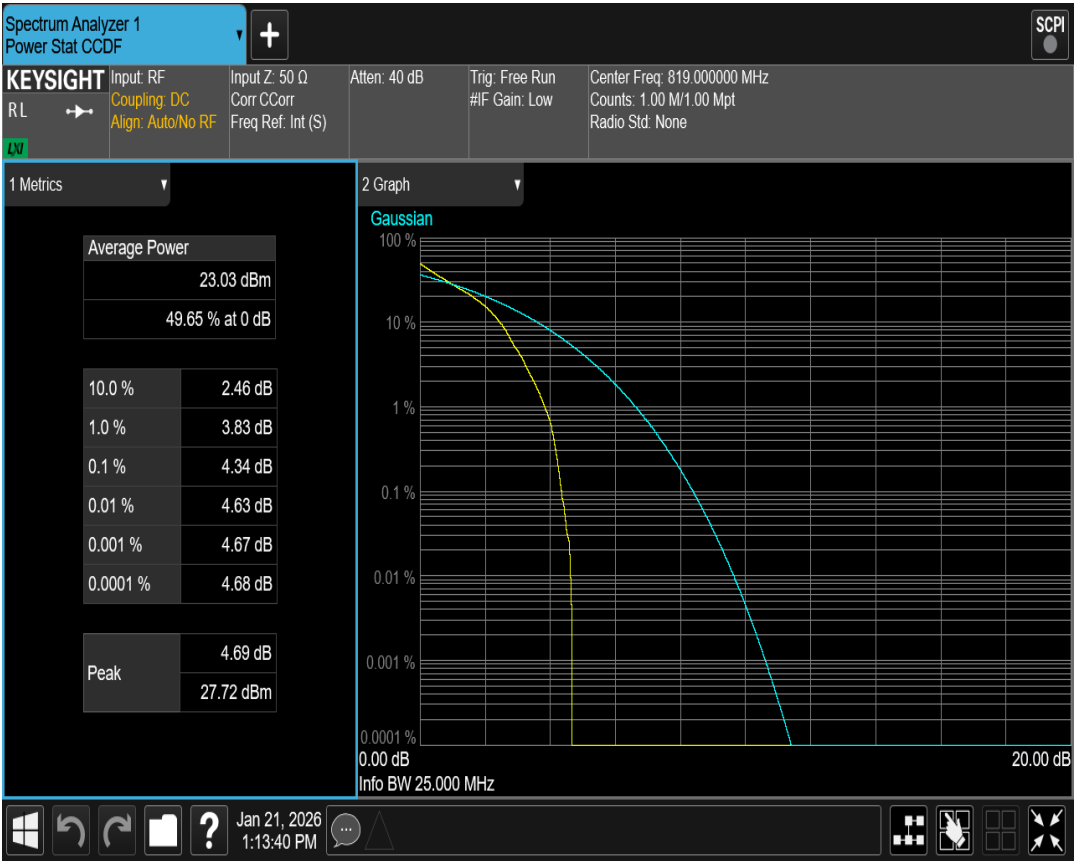


4 Occupied bandwidth

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	1.090	1.232	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	1.093	1.236	PASS
Band26(814-824)	1.4	26740	6	#0	QPSK	1.093	1.234	PASS
Band26(814-824)	1.4	26740	6	#0	QAM16	1.097	1.235	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	1.092	1.230	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	1.092	1.241	PASS
Band26(814-824)	3	26705	15	#0	QPSK	2.693	3.004	PASS
Band26(814-824)	3	26705	15	#0	QAM16	2.698	3.056	PASS
Band26(814-824)	3	26740	15	#0	QPSK	2.701	3.019	PASS
Band26(814-824)	3	26740	15	#0	QAM16	2.700	3.038	PASS
Band26(814-824)	3	26775	15	#0	QPSK	2.687	3.044	PASS
Band26(814-824)	3	26775	15	#0	QAM16	2.714	2.993	PASS
Band26(814-824)	5	26715	25	#0	QPSK	4.518	4.943	PASS
Band26(814-824)	5	26715	25	#0	QAM16	4.495	4.913	PASS
Band26(814-824)	5	26740	25	#0	QPSK	4.495	4.790	PASS
Band26(814-824)	5	26740	25	#0	QAM16	4.504	4.815	PASS
Band26(814-824)	5	26765	25	#0	QPSK	4.499	4.909	PASS
Band26(814-824)	5	26765	25	#0	QAM16	4.506	4.896	PASS
Band26(814-824)	10	26740	50	#0	QPSK	8.968	9.680	PASS
Band26(814-824)	10	26740	50	#0	QAM16	8.983	9.678	PASS


Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0

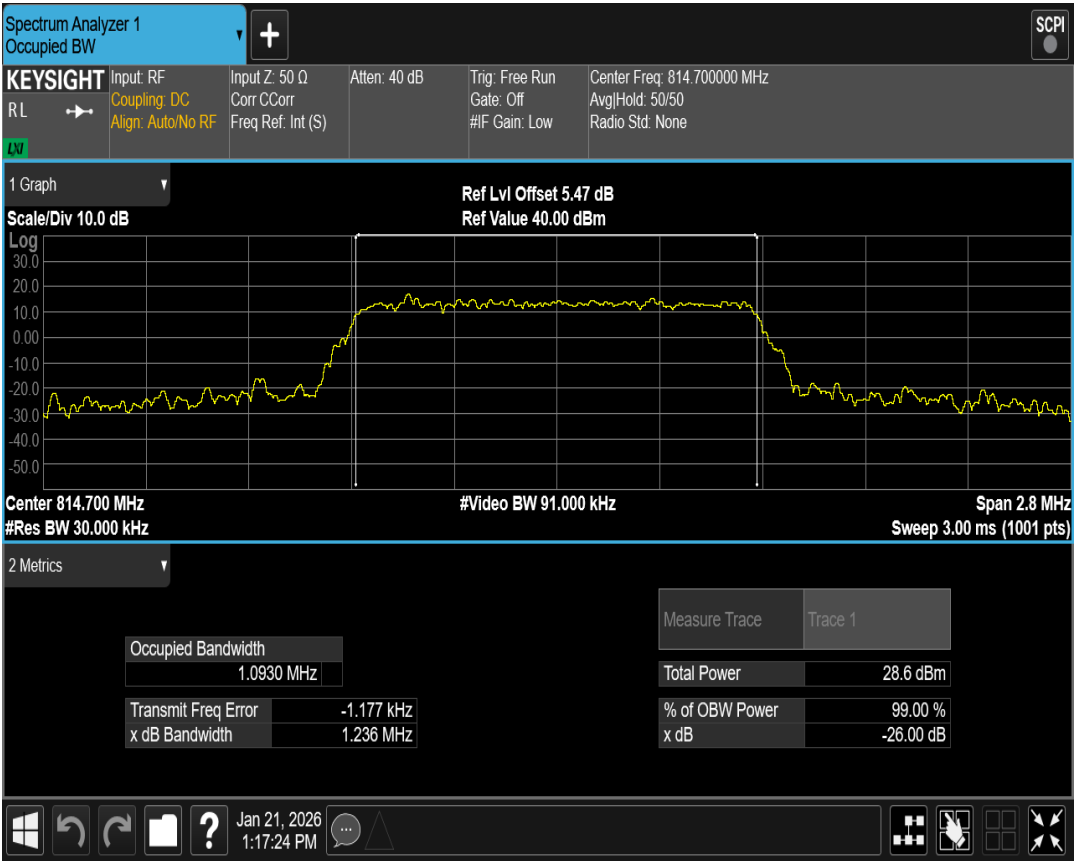


Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0

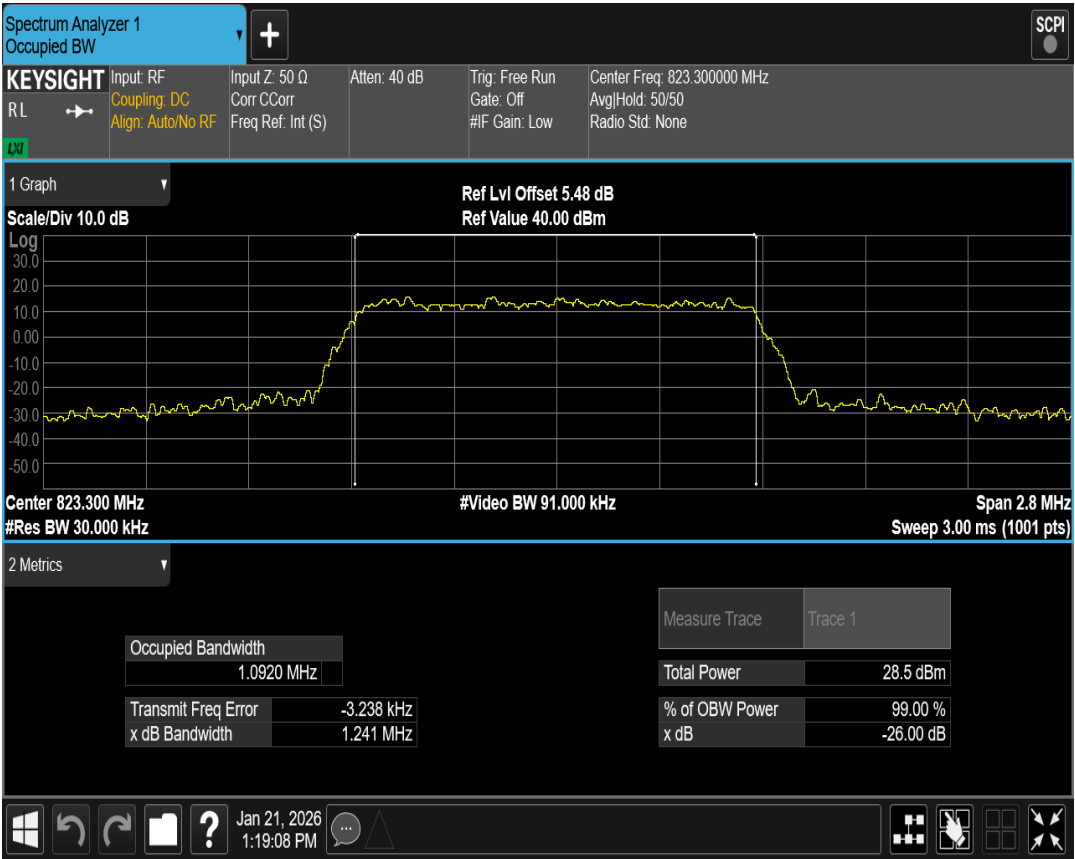


Band26(814-824) QAM16 BW=1.4MHz Channel=26740 RB Size=6 Position=#0

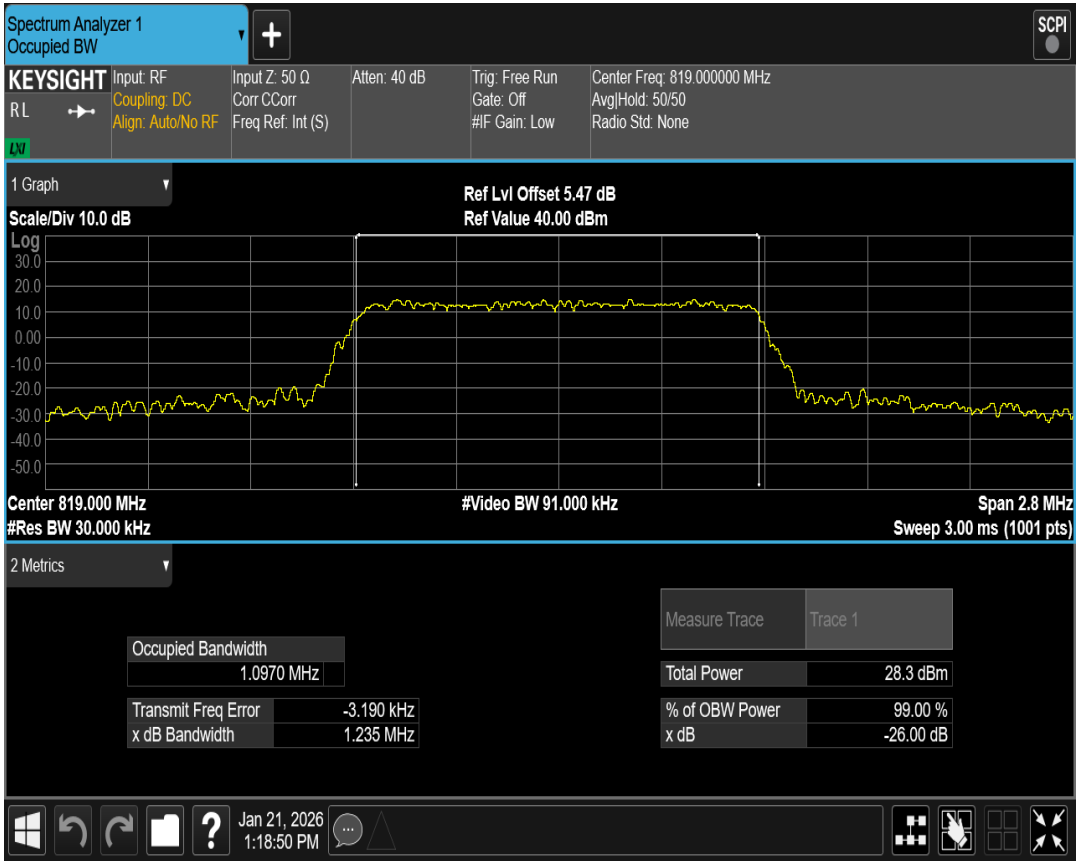


Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0

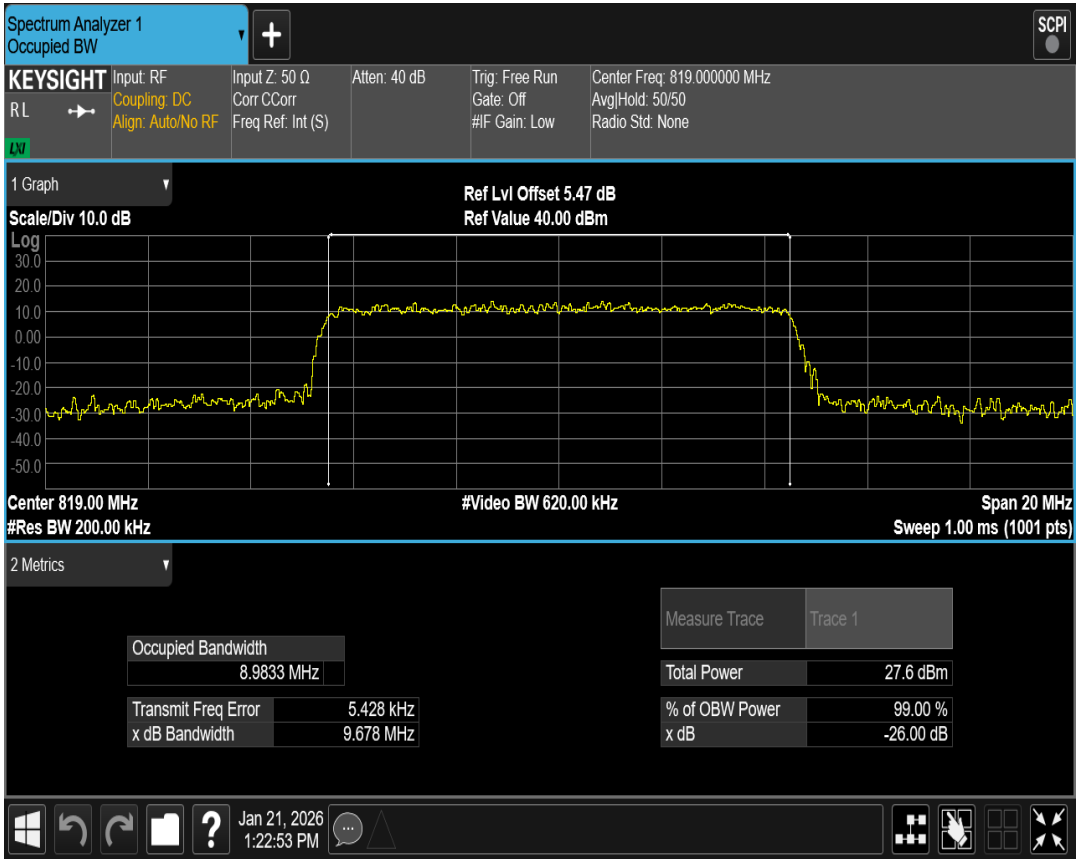


Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0

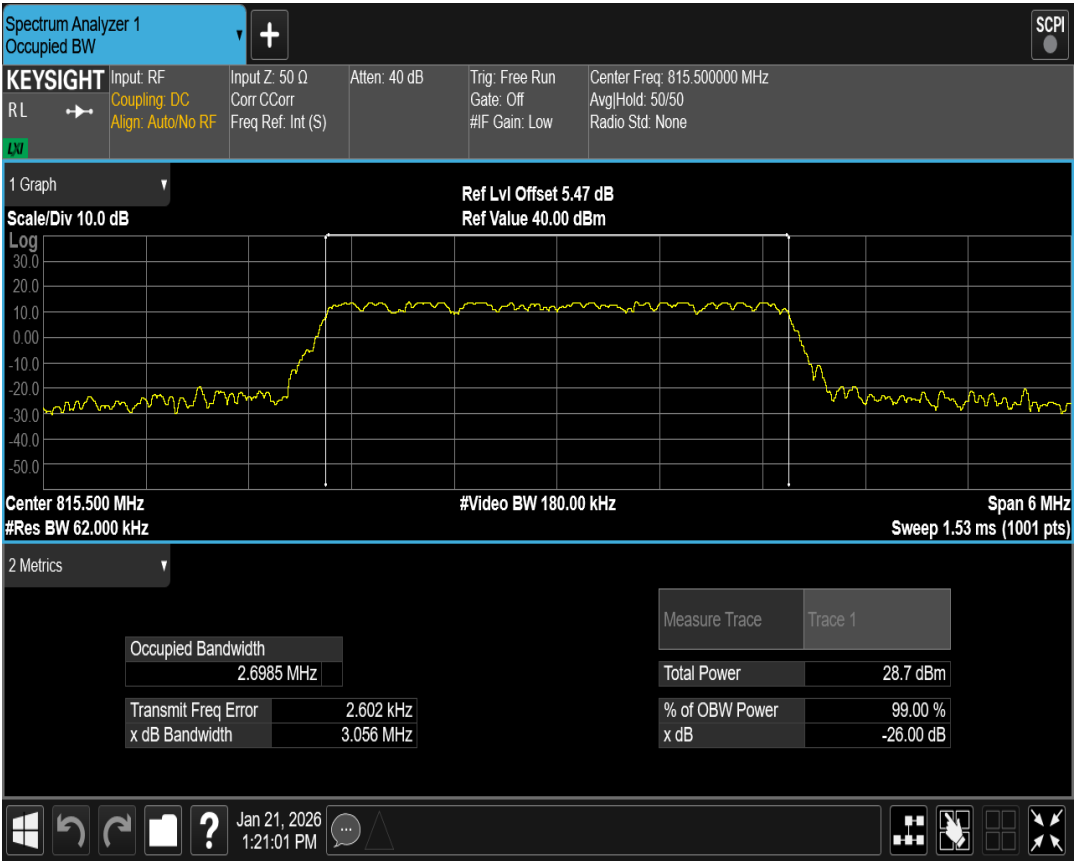


Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0

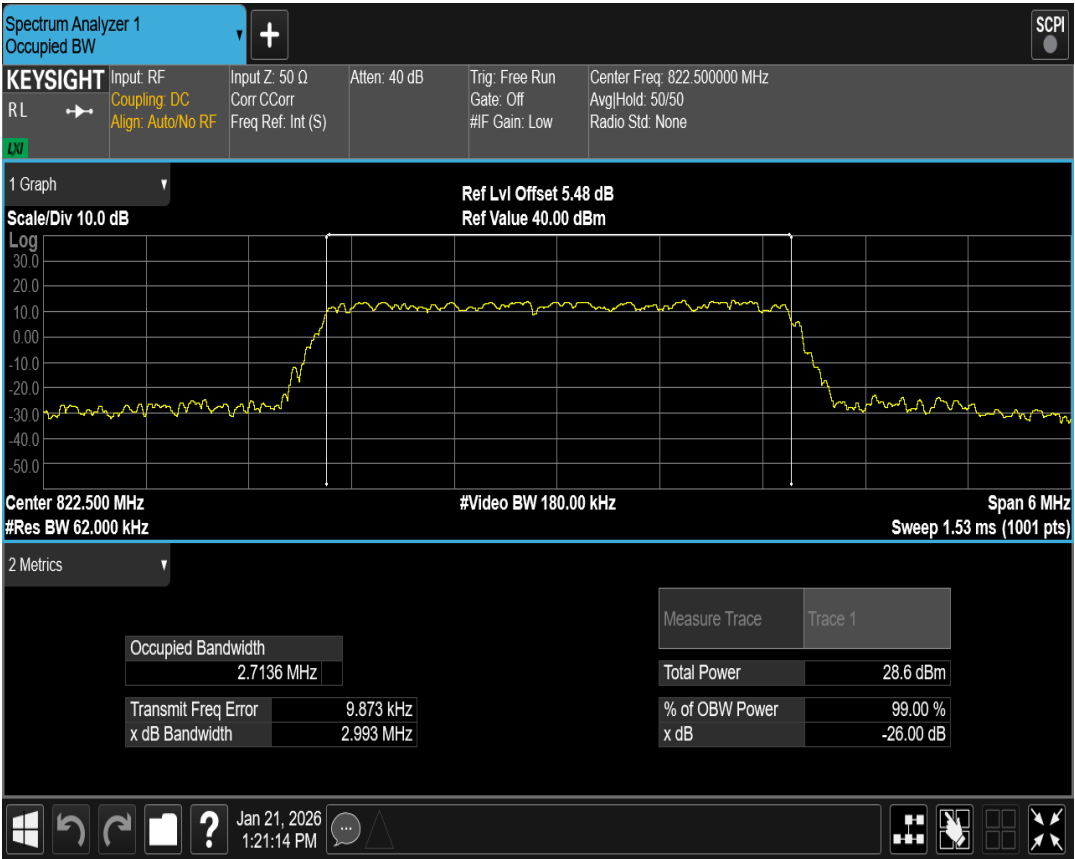


Band26(814-824) QAM16 BW=3MHz Channel=26740 RB Size=15 Position=#0

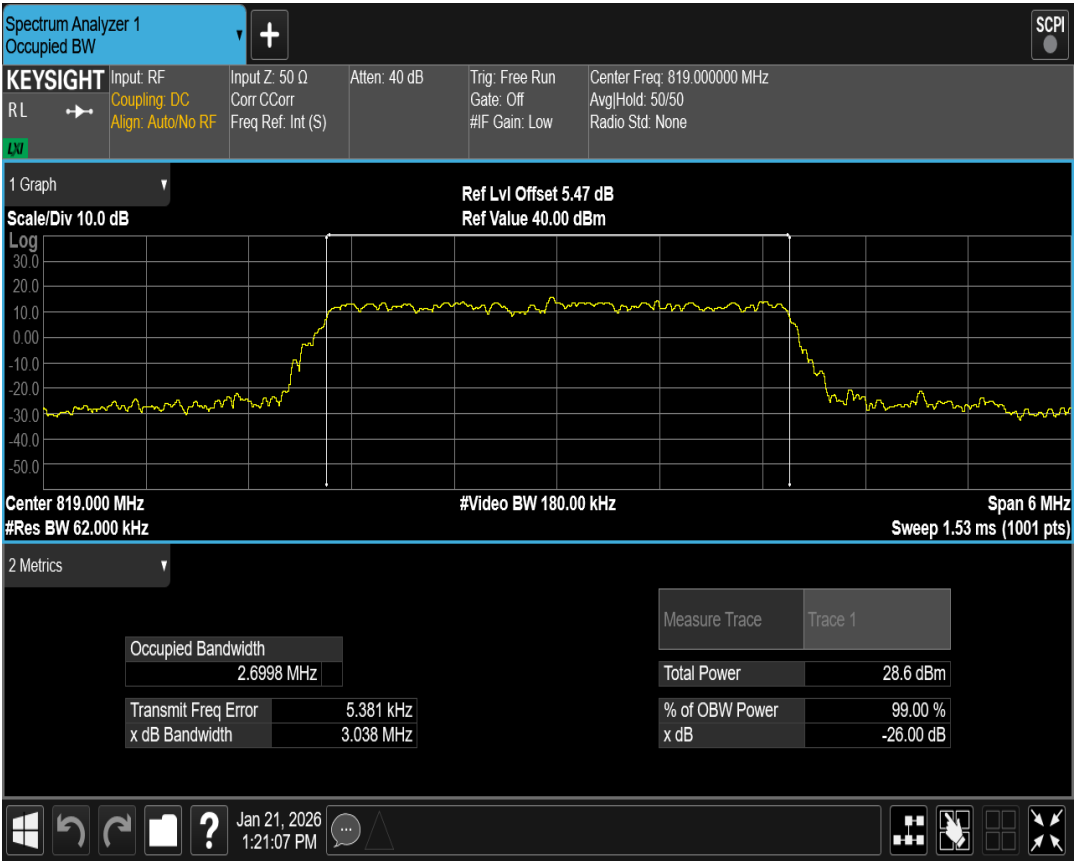


Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0

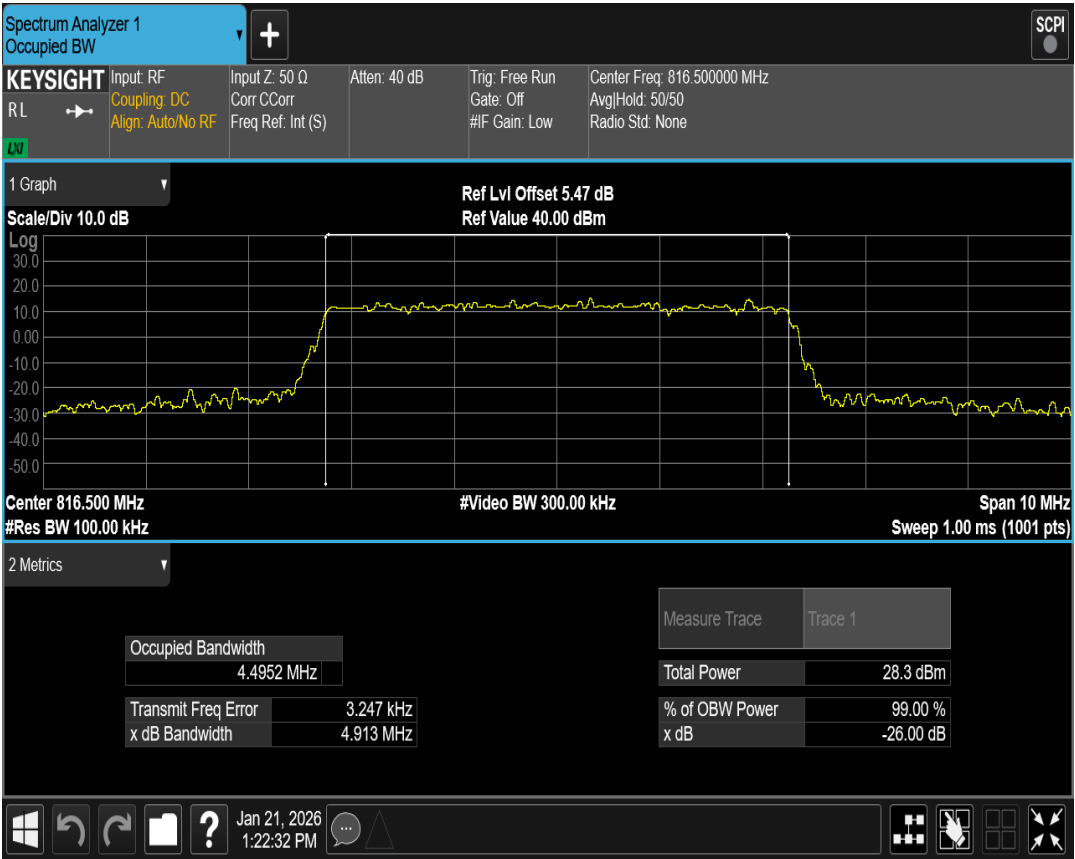


Band26(814-824) QAM16 BW=5MHz Channel=26740 RB Size=25 Position=#0

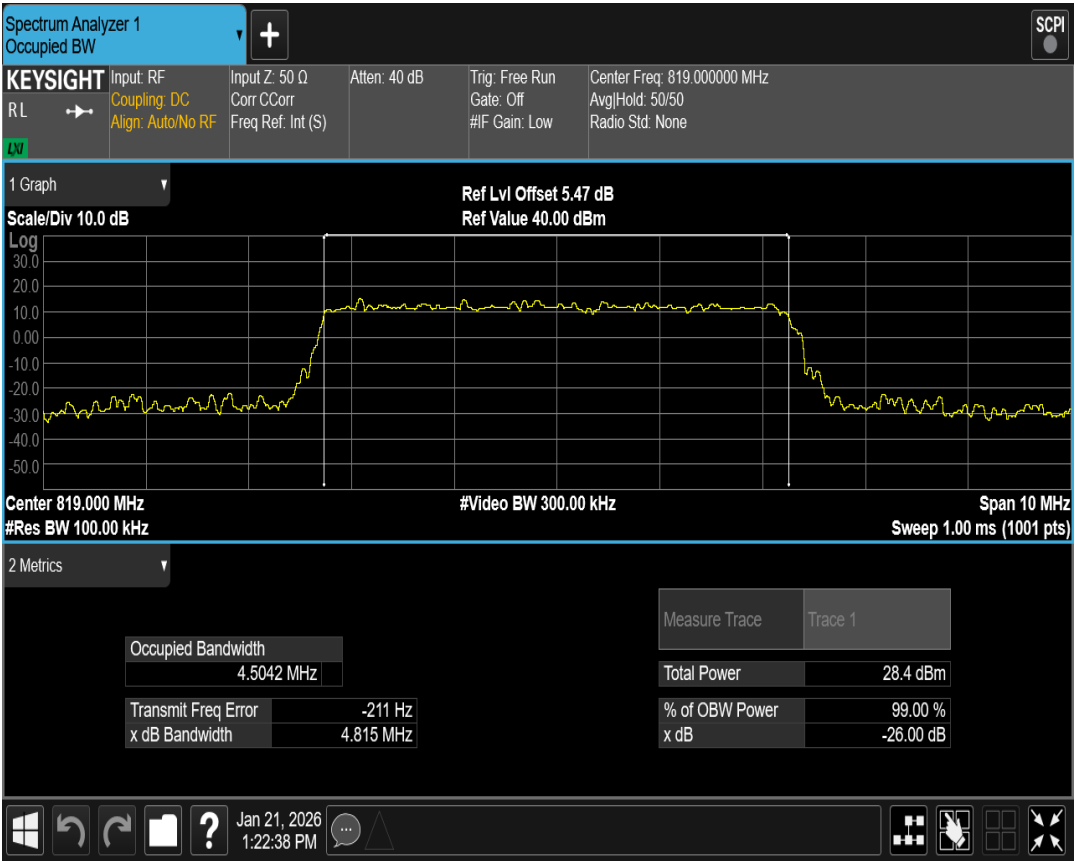


Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0

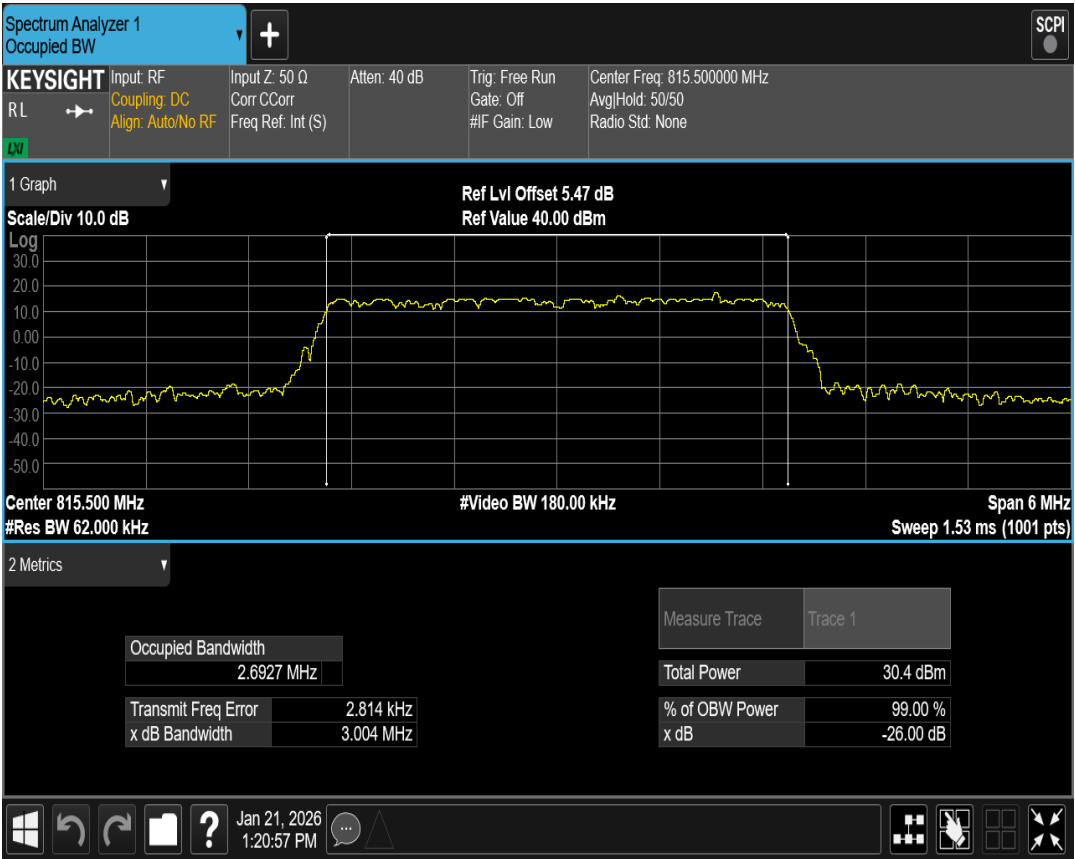


Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0

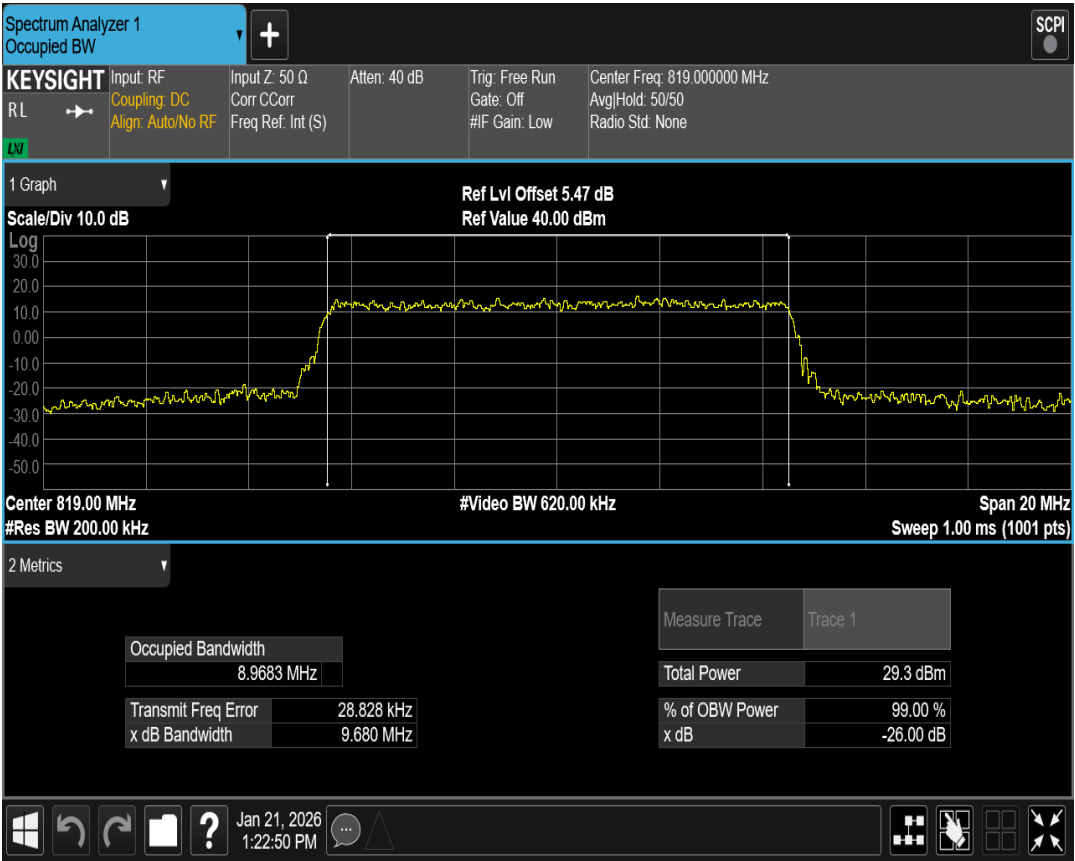


Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0

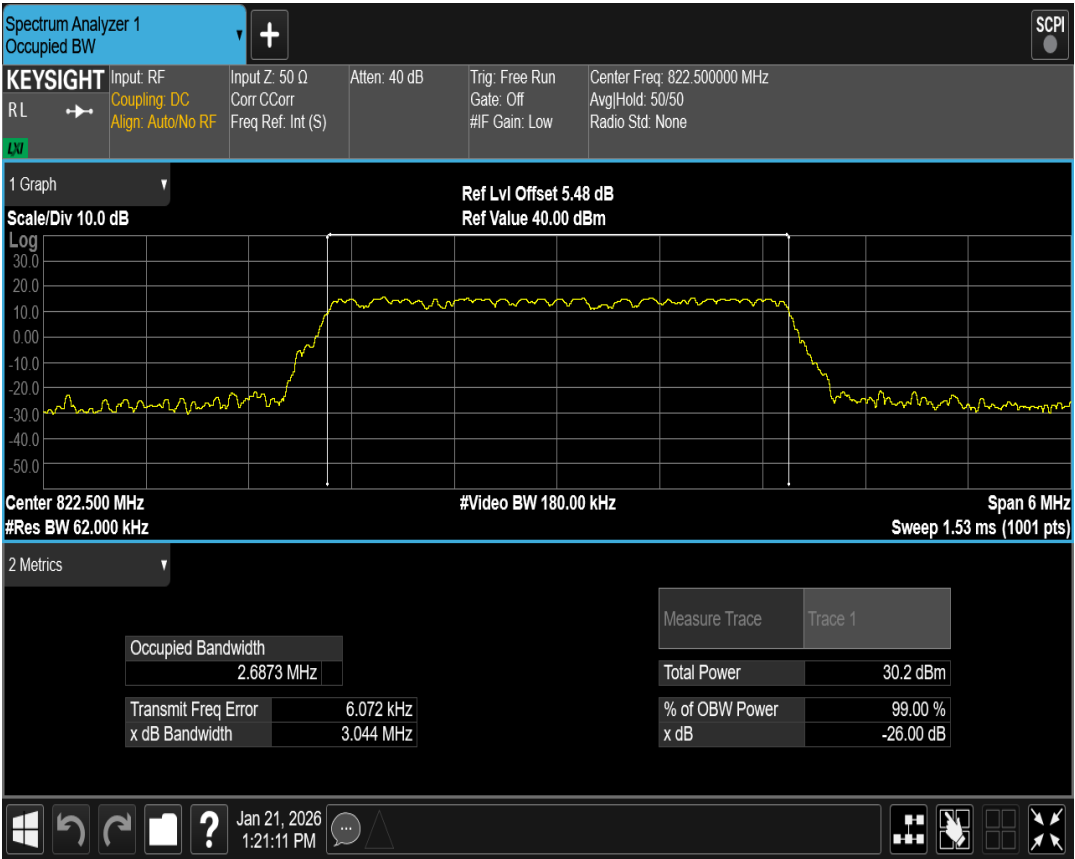


Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=15 Position=#0

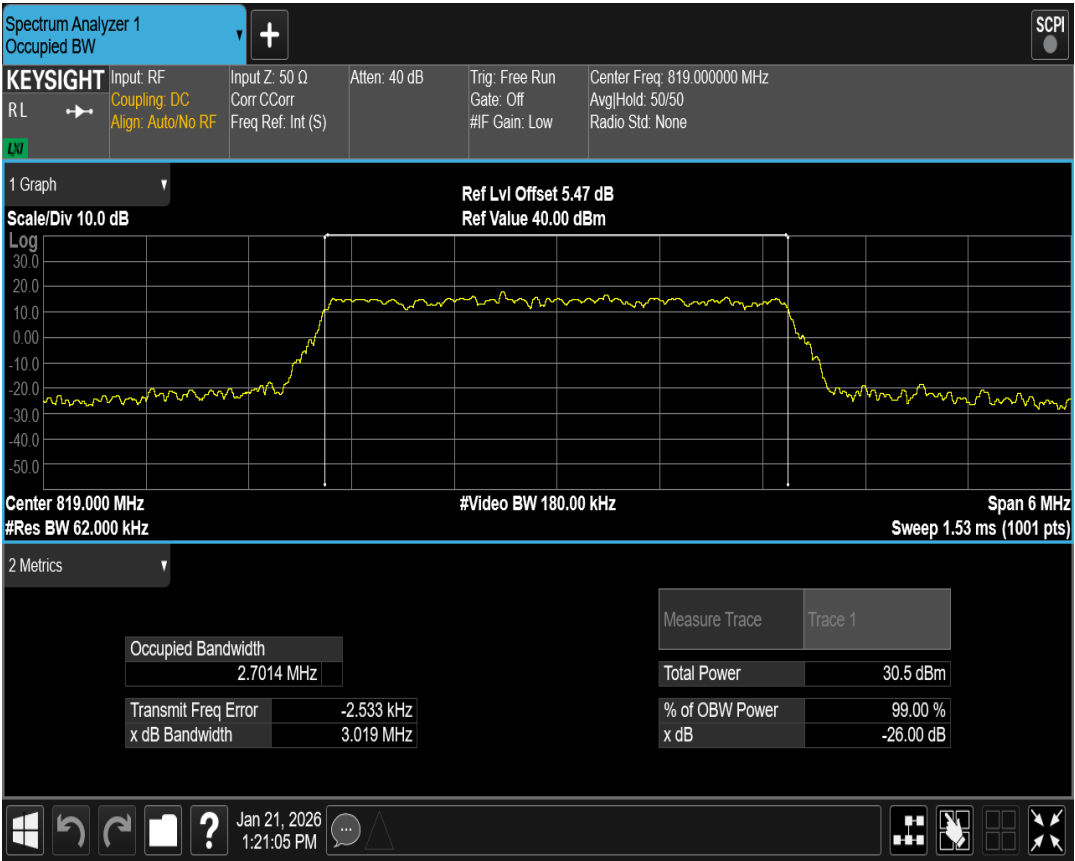


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0

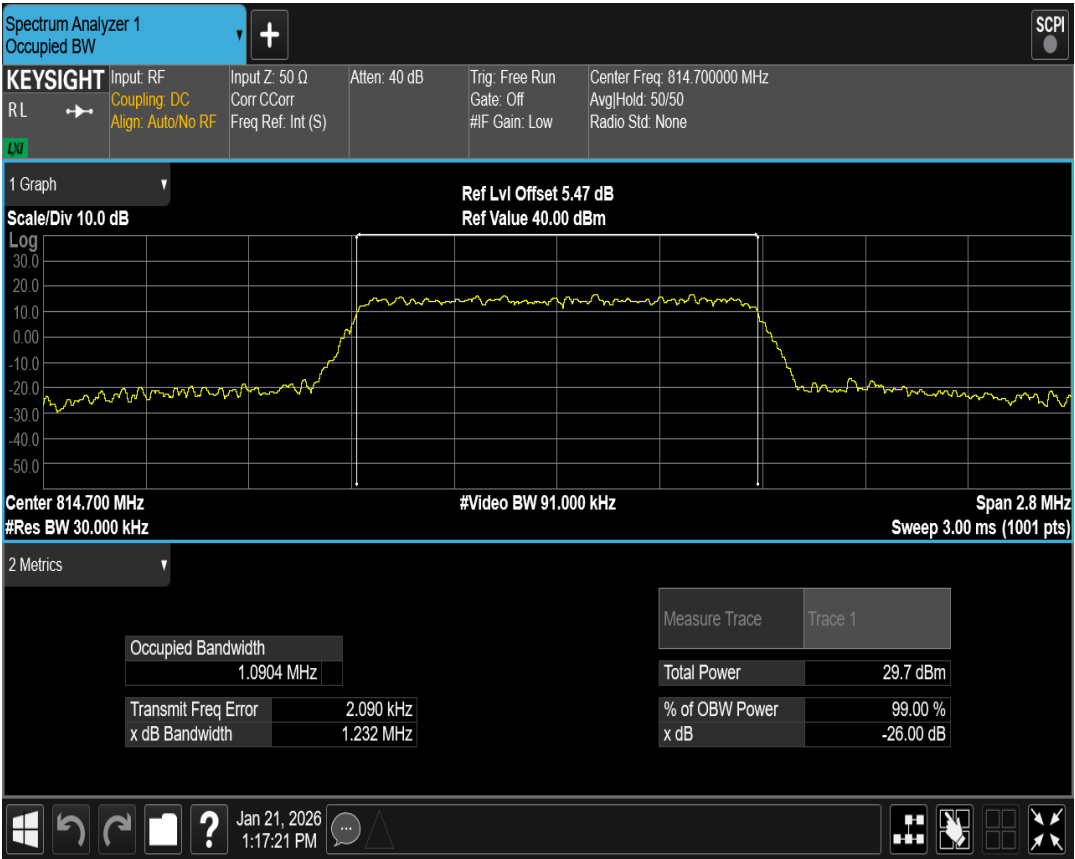


Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0

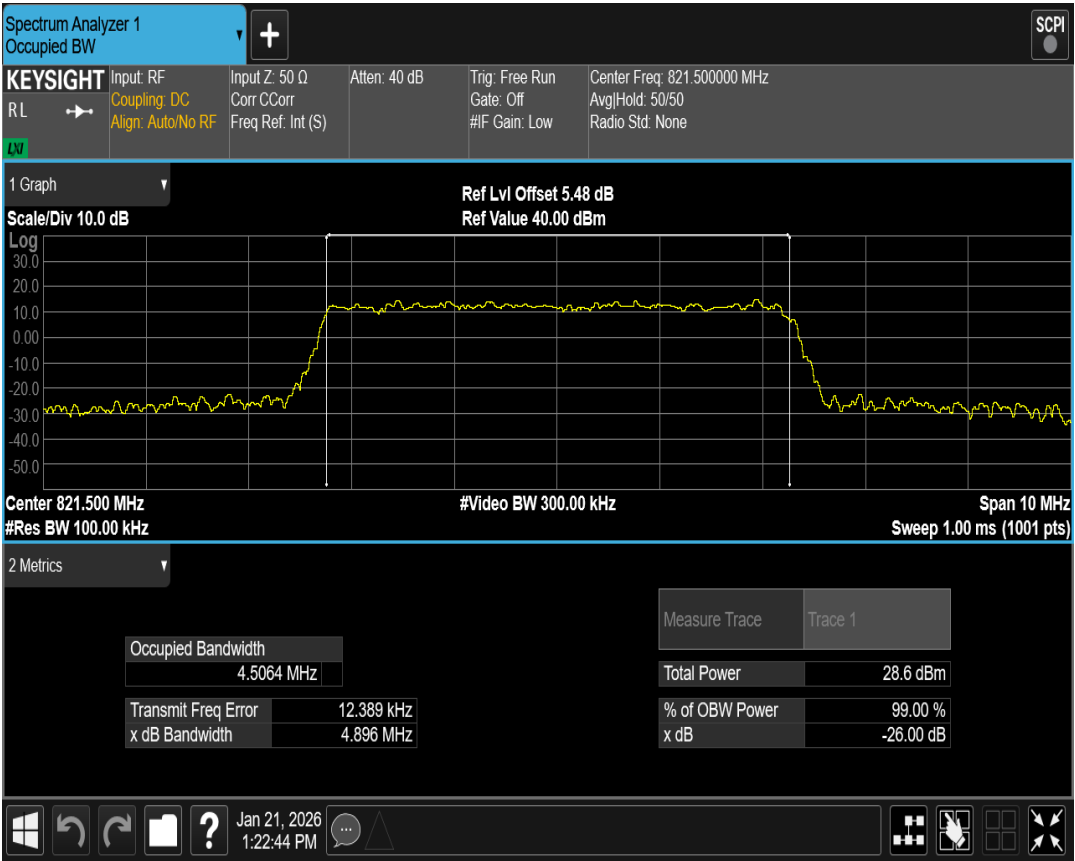


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0

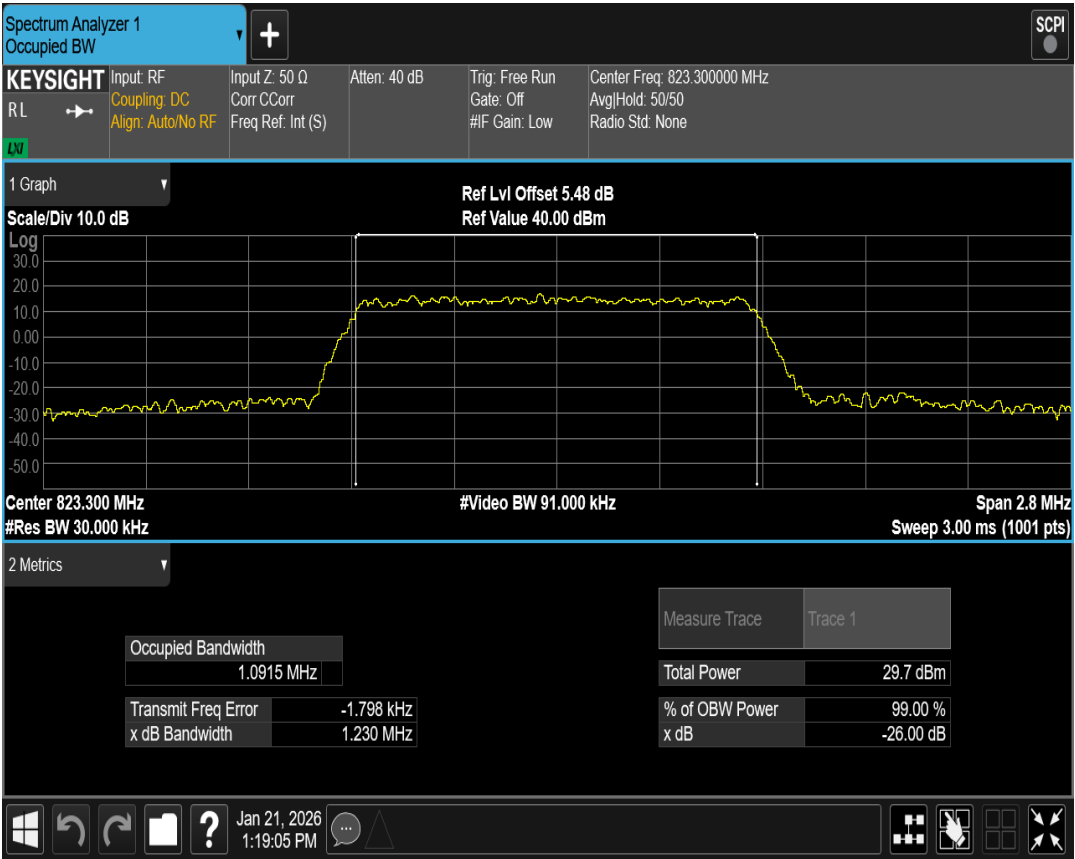


Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=6 Position=#0

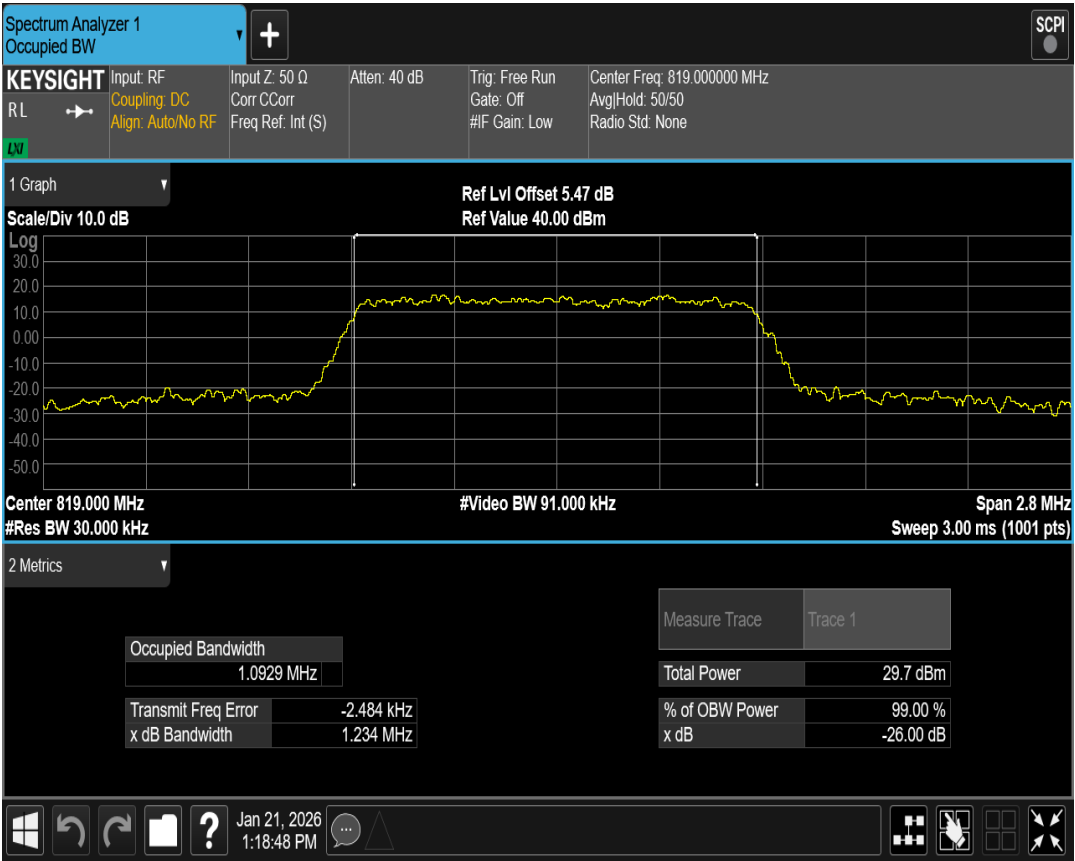


Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0

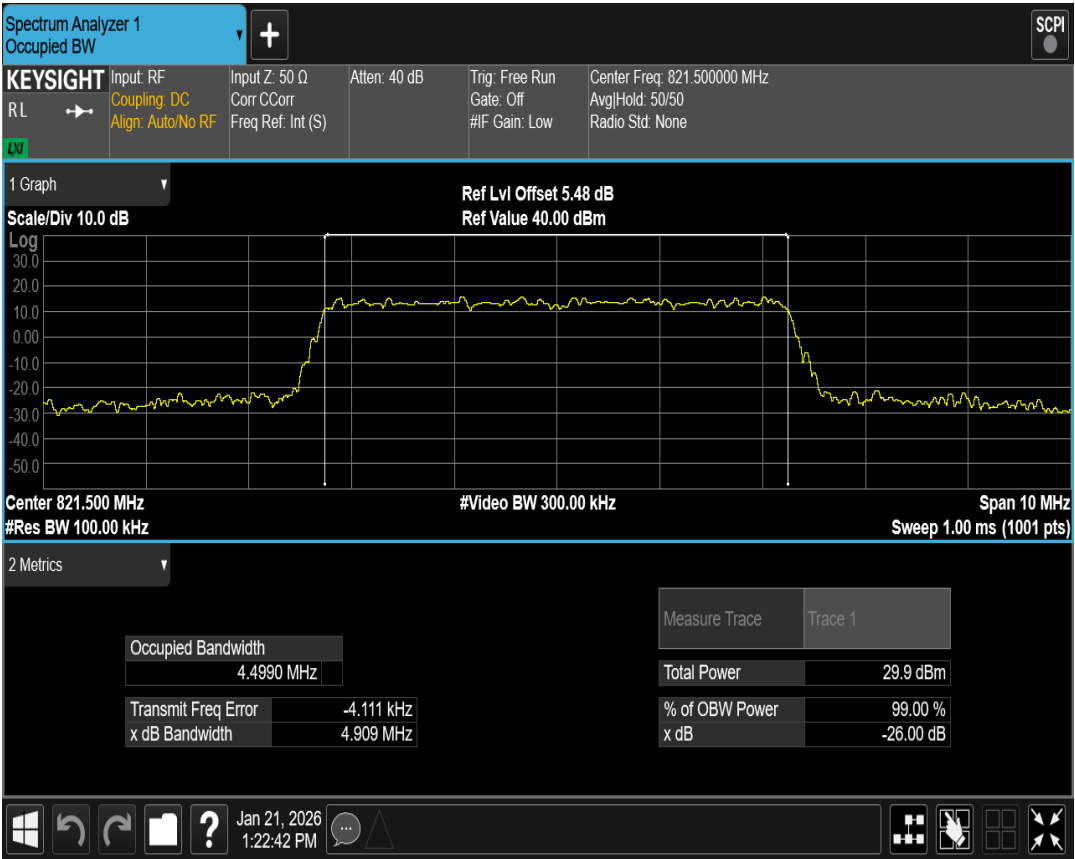

Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=25 Position=#0

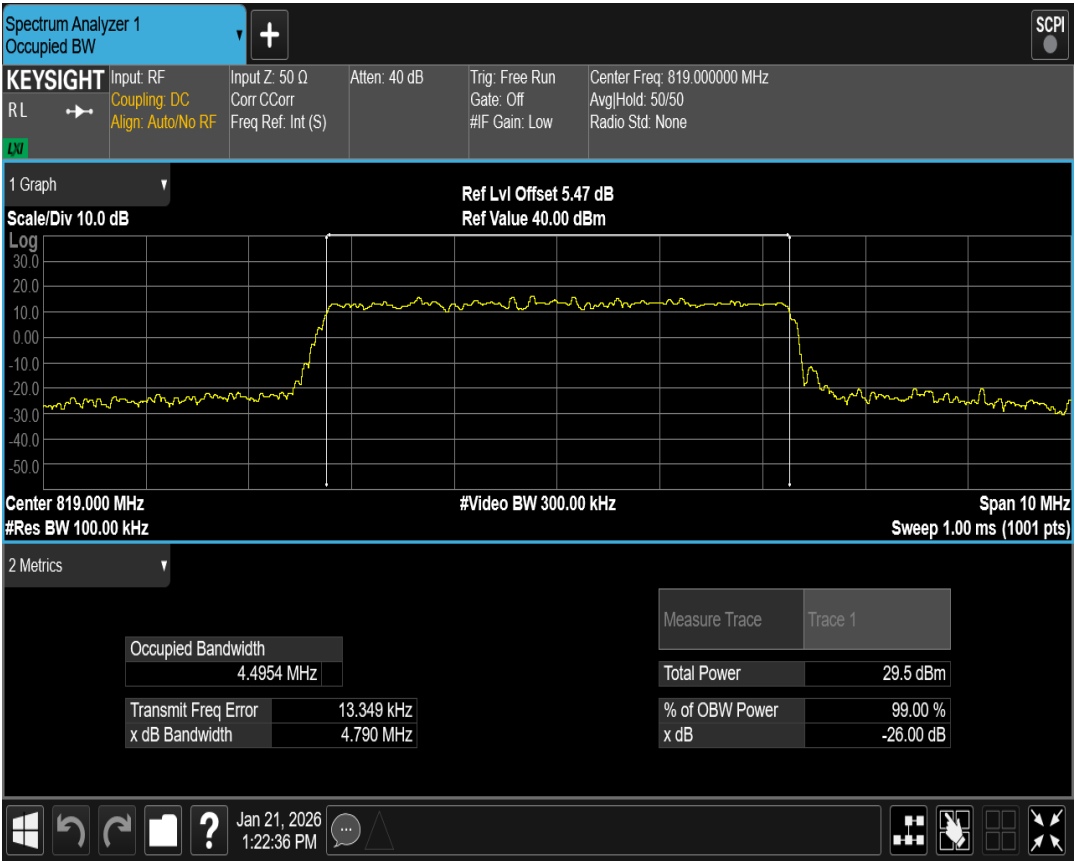


Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0

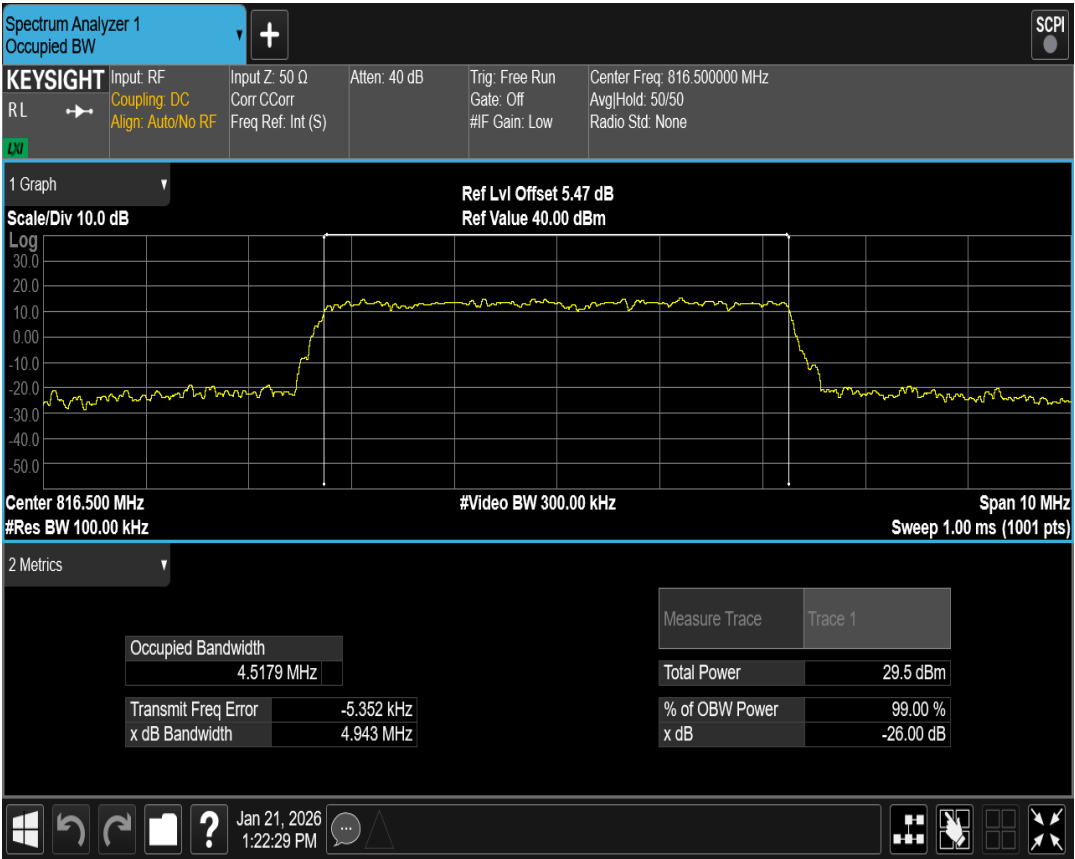


5 Band edge

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	815.51	-19.86	-13	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	813.93	-22.33	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	824.15	-24.77	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	824.10	-26.16	-13	PASS
Band26(814-824)	3	26705	15	#0	QPSK	813.96	-18.22	-13	PASS
Band26(814-824)	3	26705	15	#0	QAM16	813.95	-22.60	-13	PASS
Band26(814-824)	3	26775	15	#0	QPSK	820.96	-18.38	-13	PASS
Band26(814-824)	3	26775	15	#0	QAM16	824.04	-22.40	-13	PASS
Band26(814-824)	5	26715	25	#0	QPSK	813.96	-25.97	-13	PASS
Band26(814-824)	5	26715	25	#0	QAM16	813.96	-27.16	-13	PASS
Band26(814-824)	5	26765	25	#0	QPSK	818.94	-28.56	-13	PASS
Band26(814-824)	5	26765	25	#0	QAM16	824.06	-30.55	-13	PASS
Band26(814-824)	10	26740	50	#0	QPSK	813.96	-30.84	-13	PASS
Band26(814-824)	10	26740	50	#0	QAM16	813.92	-34.00	-13	PASS


Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0

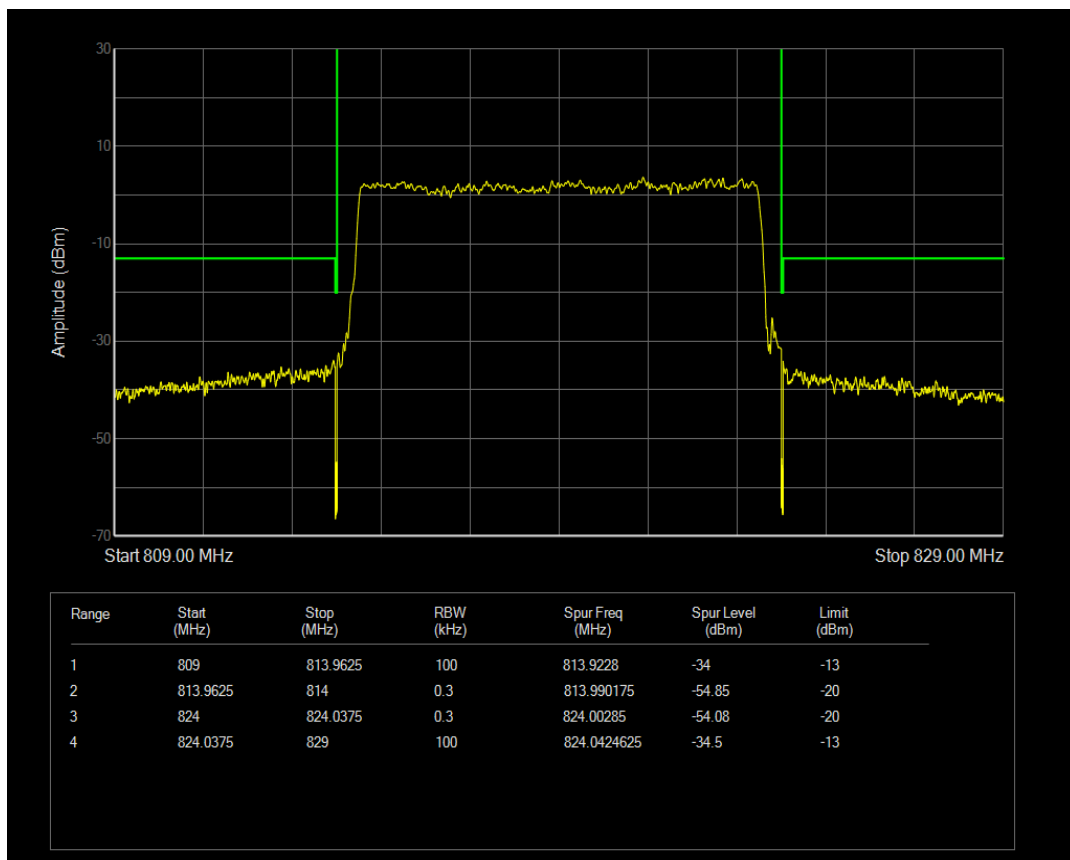


Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0

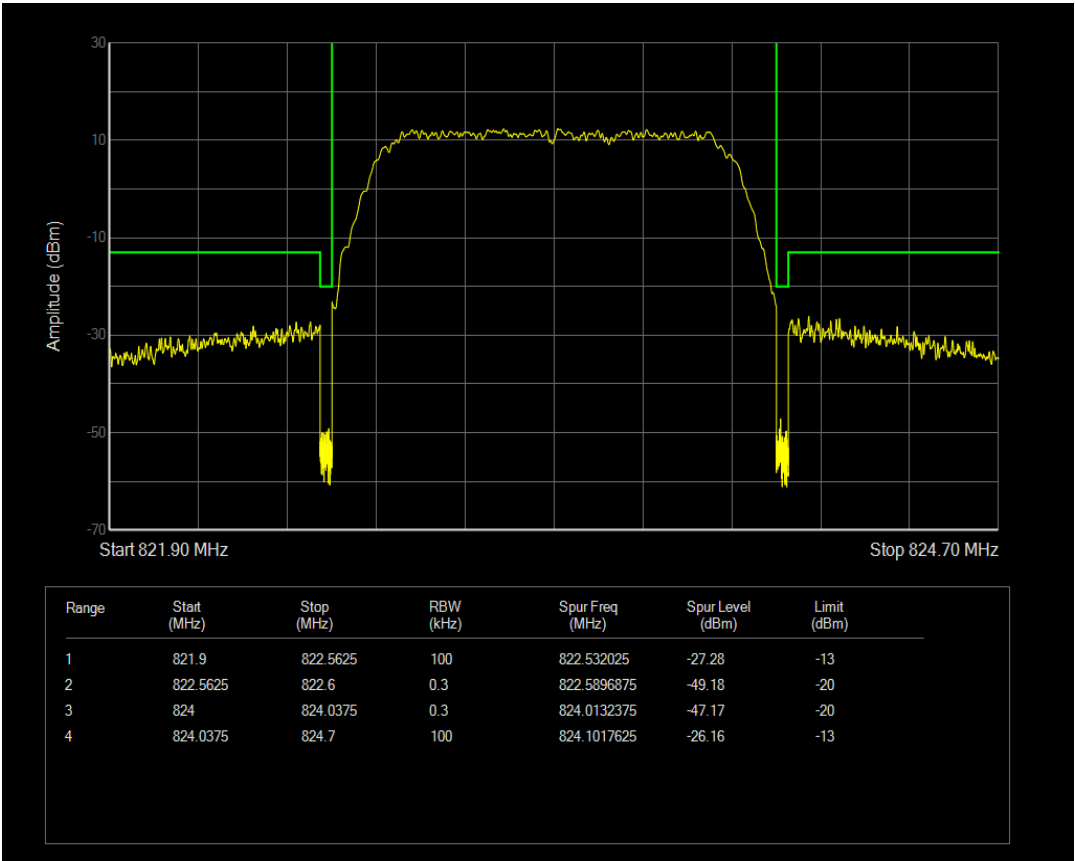


Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0

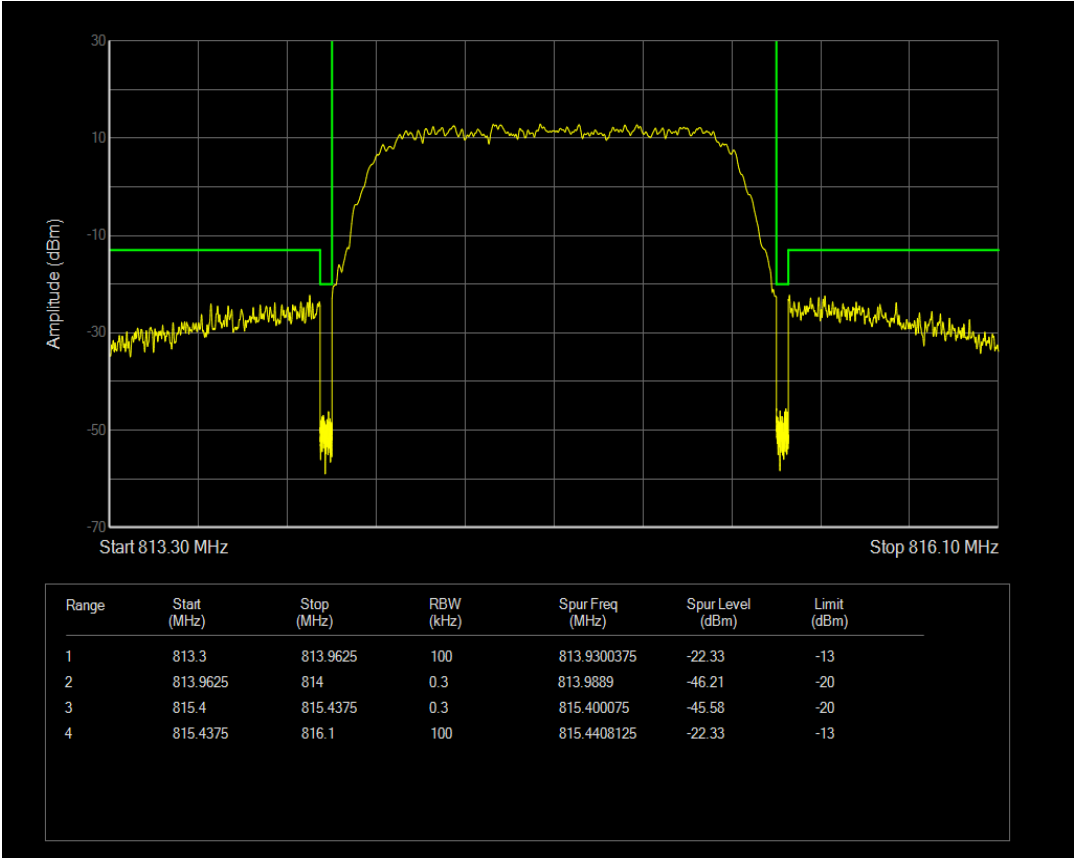


Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0

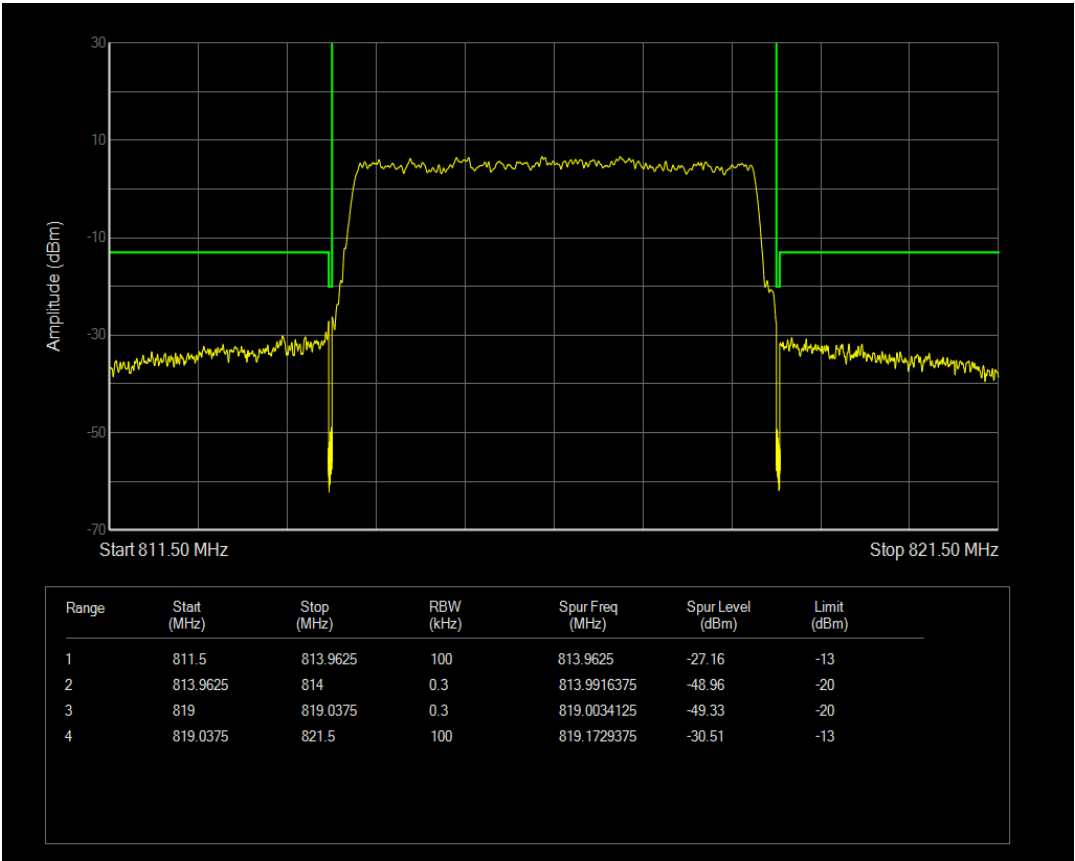


Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0

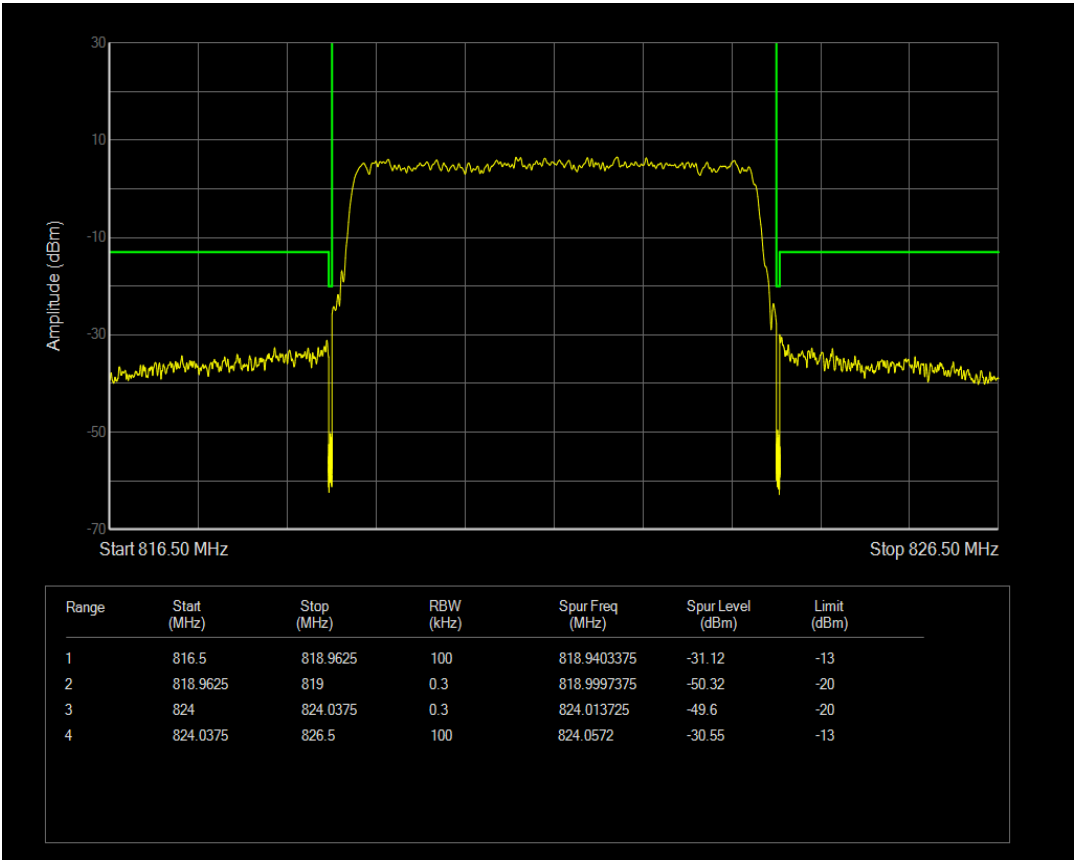


Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0

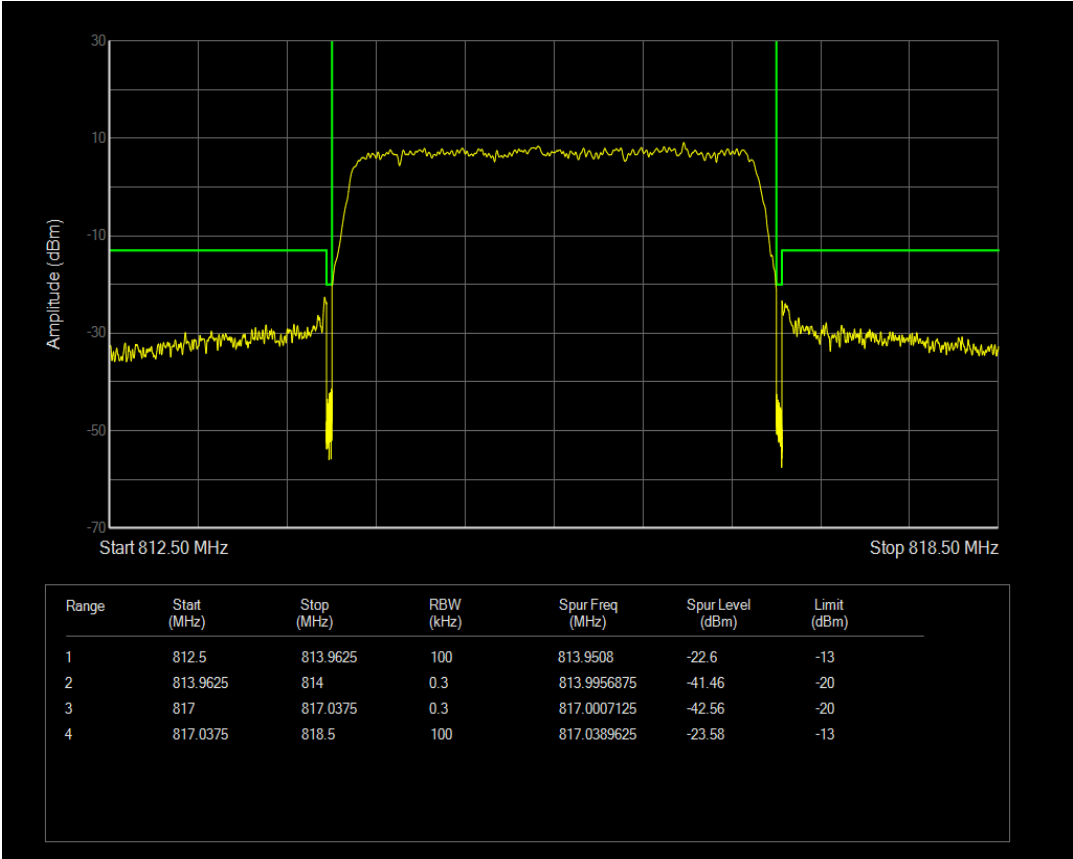


Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0

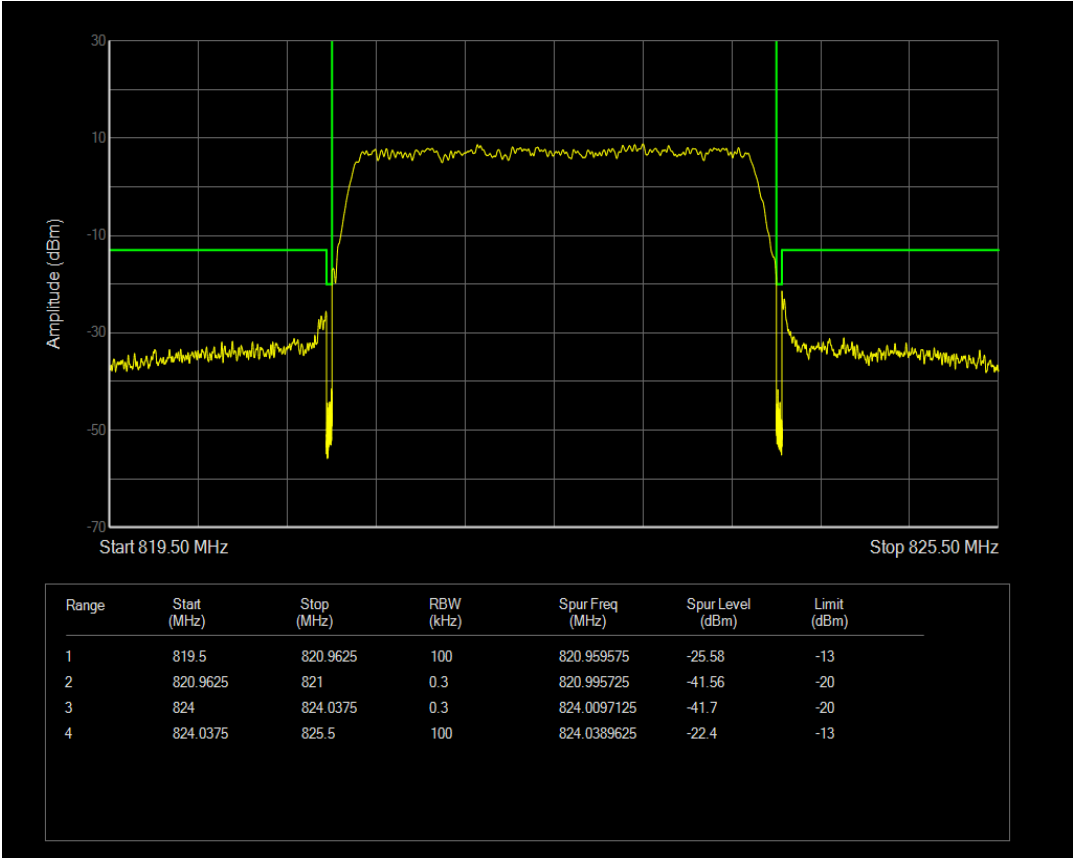


Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0

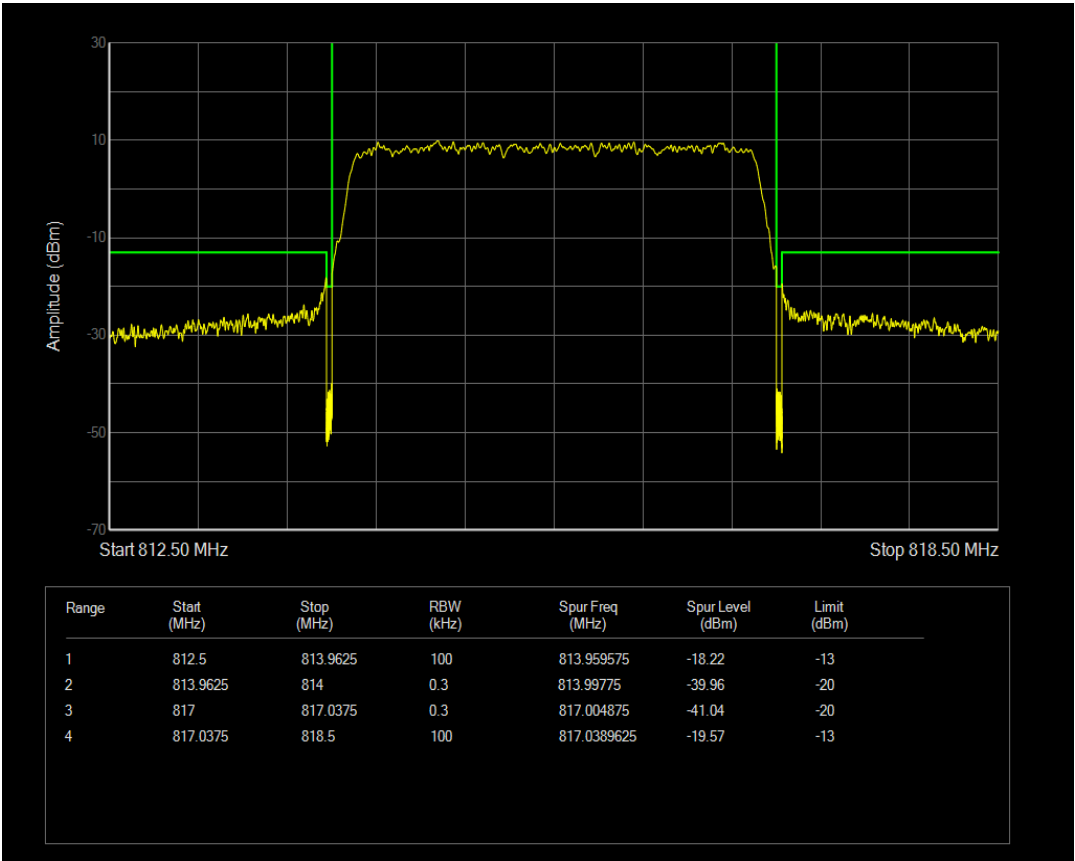


Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0

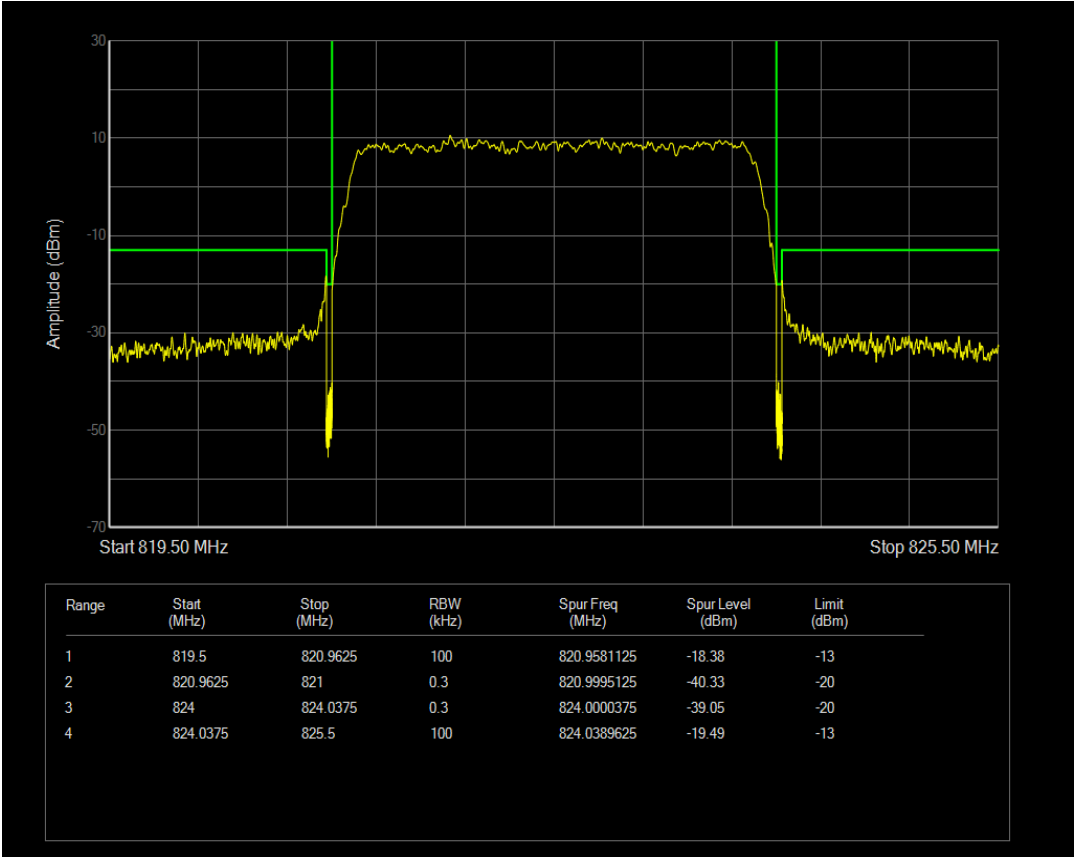


Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0

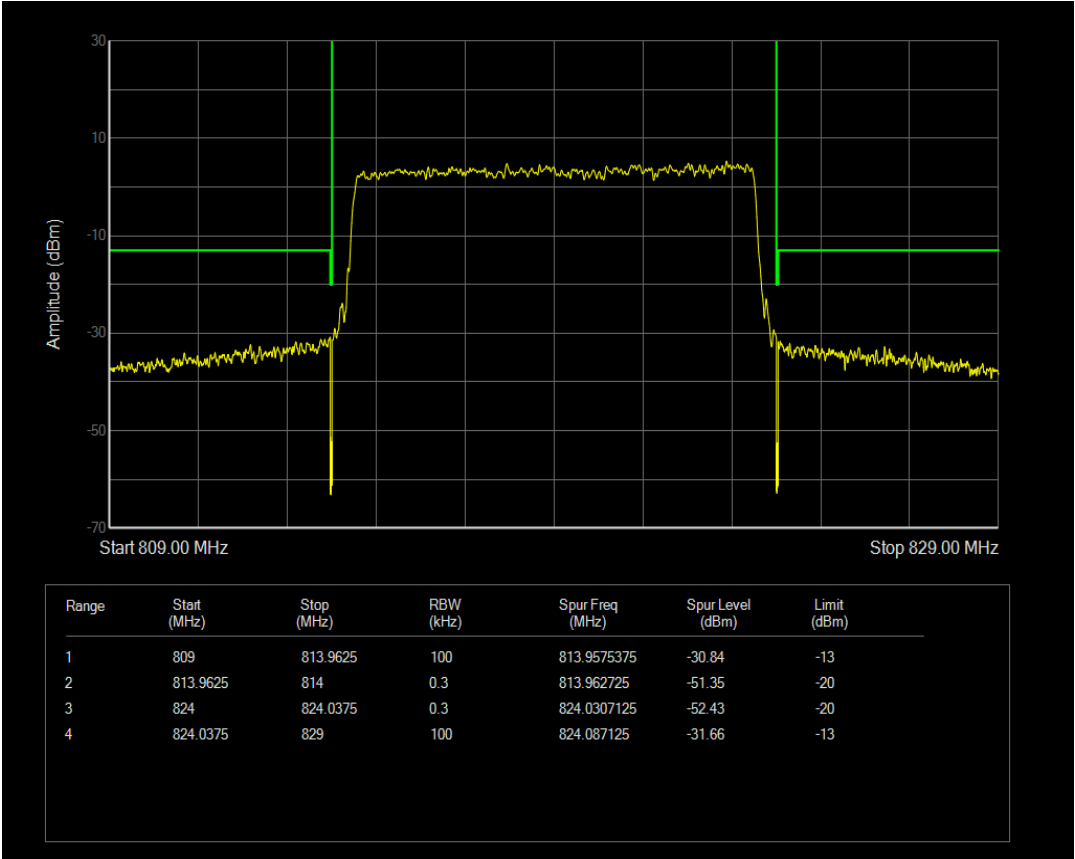


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0

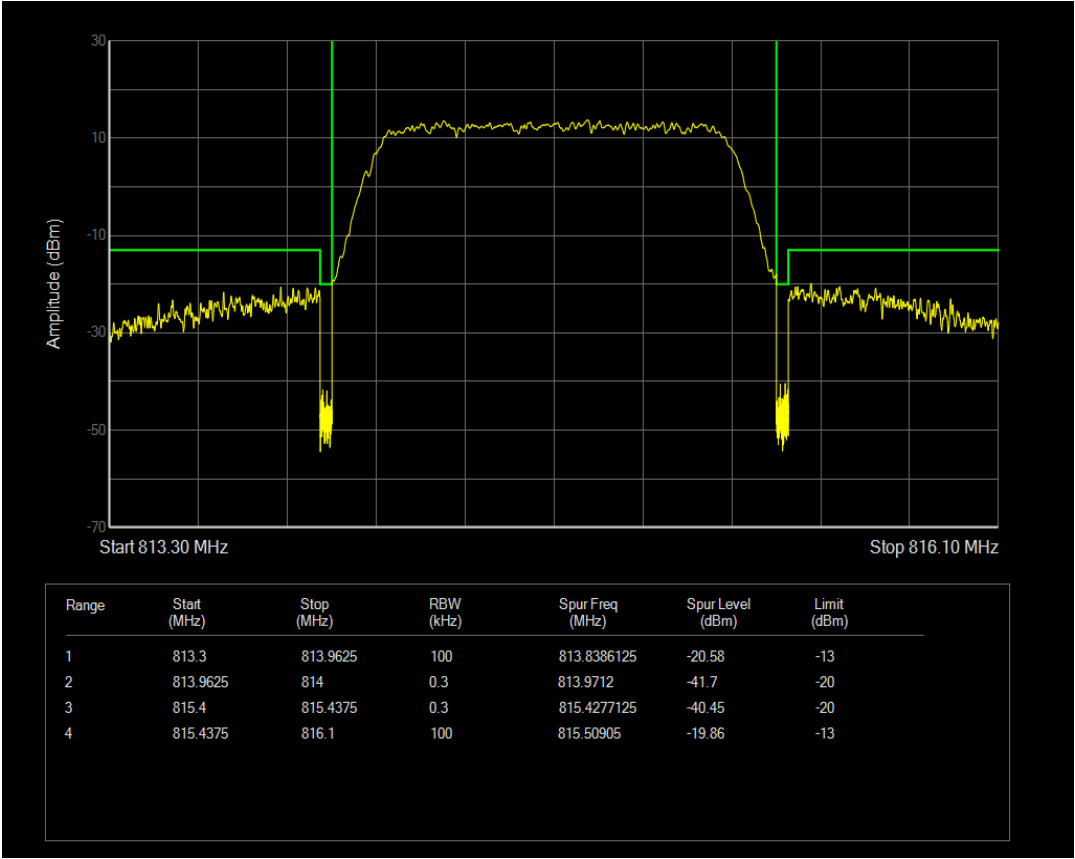


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0

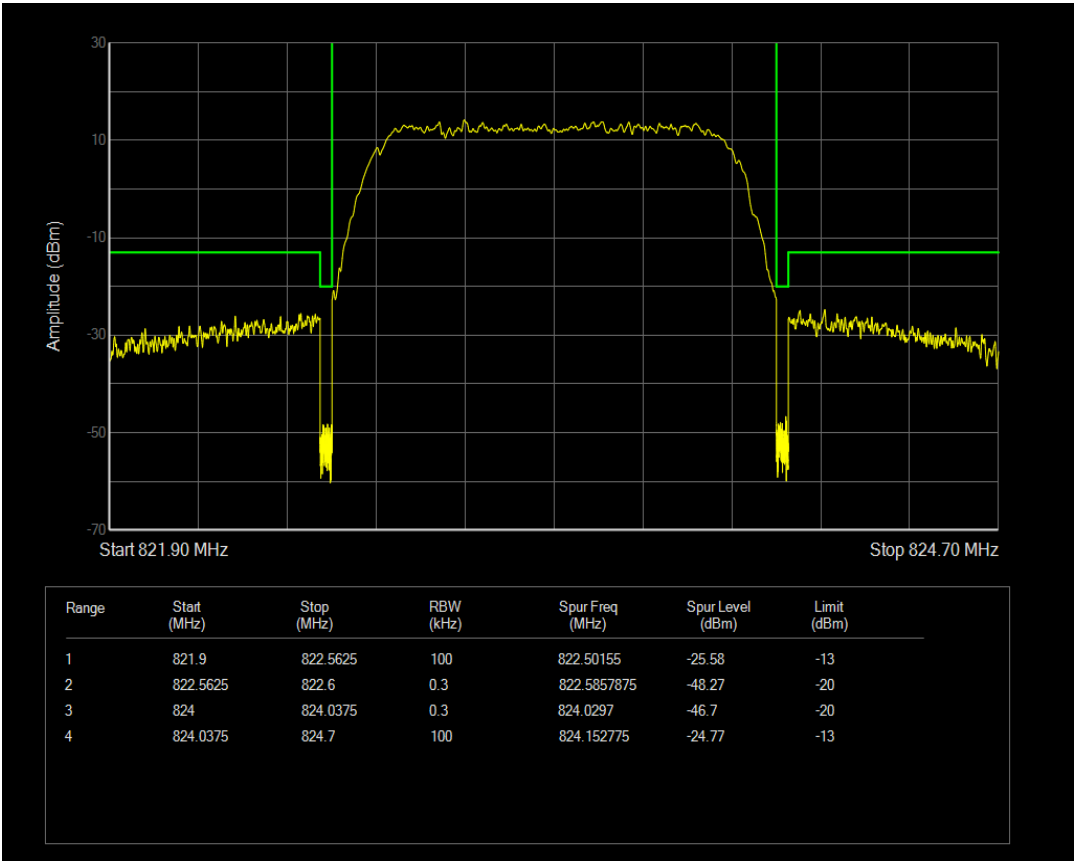

Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0

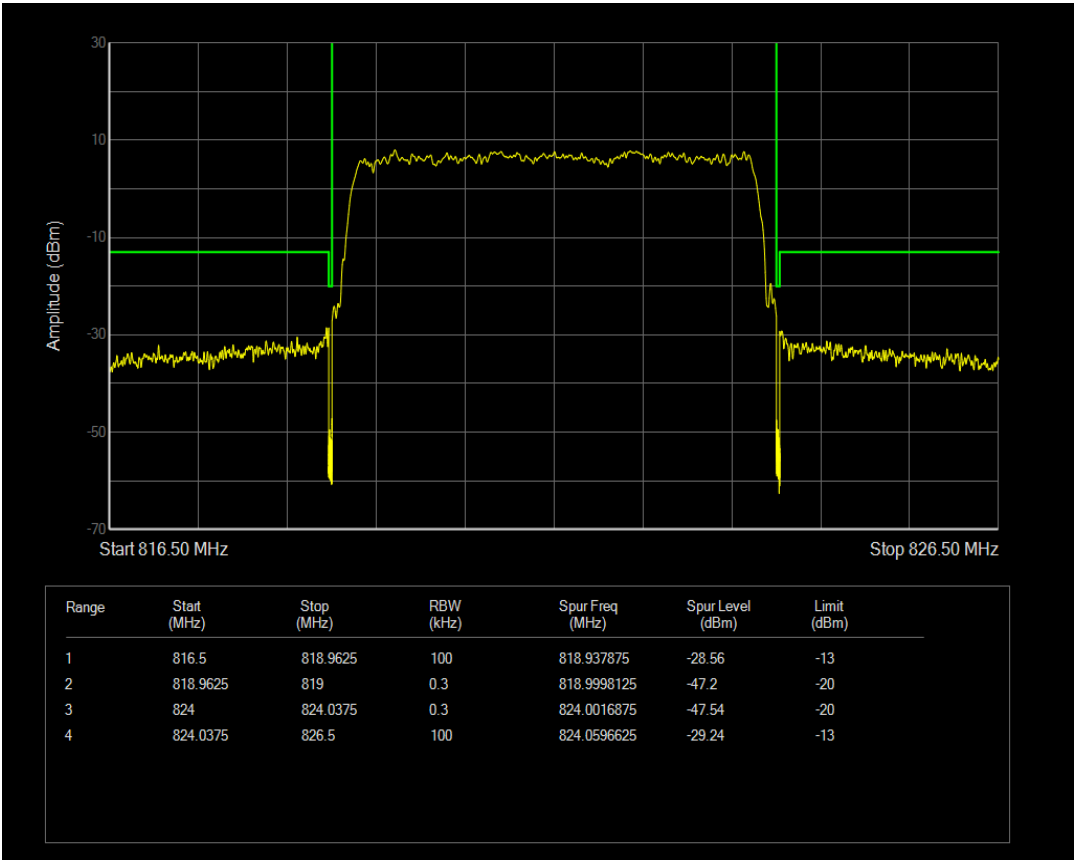


Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0

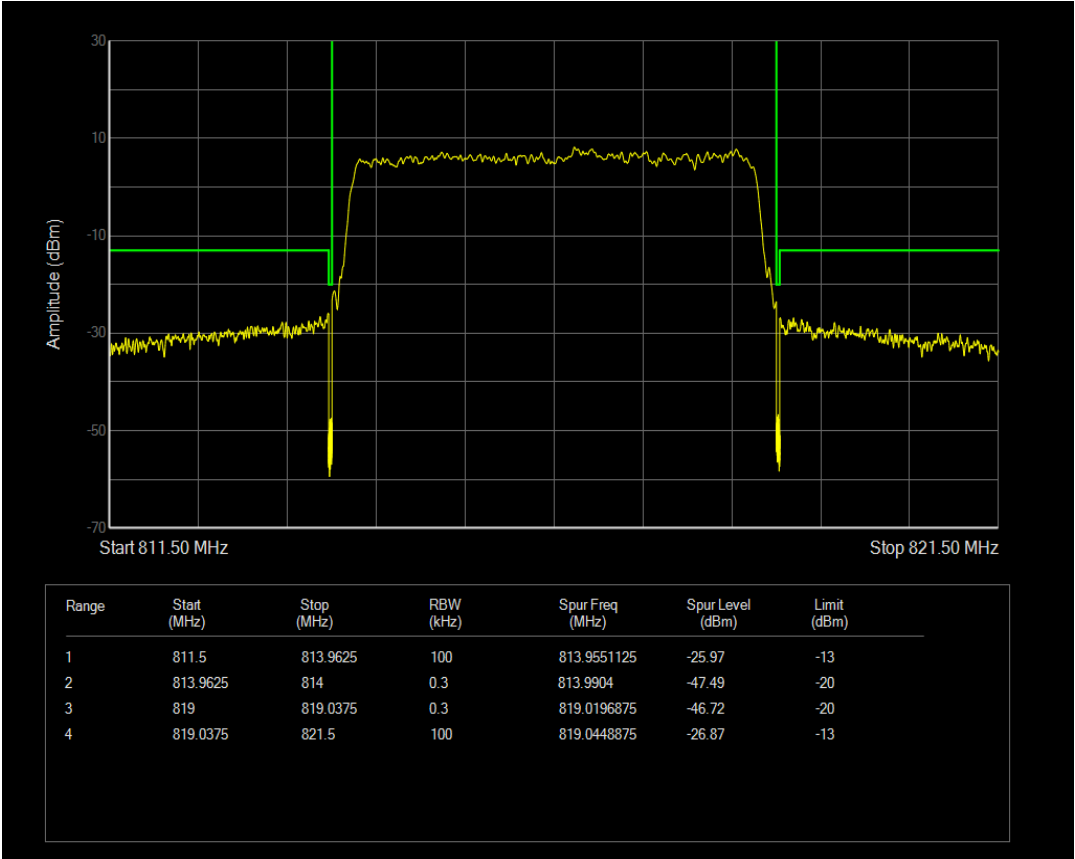


6 Out-of-band emissions

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4	26697	6	#0	QPSK	3904.53	-38.70	-13	PASS
Band26(814-824)	1.4	26697	6	#0	QAM16	4711.60	-38.81	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QPSK	3733.75	-39.53	-13	PASS
Band26(814-824)	1.4	26783	6	#0	QAM16	5067.10	-38.11	-13	PASS
Band26(814-824)	3	26705	15	#0	QPSK	2447.65	-38.68	-13	PASS
Band26(814-824)	3	26705	15	#0	QAM16	3765.93	-38.32	-13	PASS
Band26(814-824)	3	26775	15	#0	QPSK	4653.10	-38.98	-13	PASS
Band26(814-824)	3	26775	15	#0	QAM16	3762.10	-37.99	-13	PASS
Band26(814-824)	5	26715	25	#0	QPSK	3783.03	-39.50	-13	PASS
Band26(814-824)	5	26715	25	#0	QAM16	5074.30	-39.28	-13	PASS
Band26(814-824)	5	26765	25	#0	QPSK	3994.30	-39.18	-13	PASS
Band26(814-824)	5	26765	25	#0	QAM16	3799.45	-38.87	-13	PASS
Band26(814-824)	10	26740	50	#0	QPSK	3727.90	-38.57	-13	PASS
Band26(814-824)	10	26740	50	#0	QAM16	3751.75	-38.10	-13	PASS


Band26(814-824) QAM16 BW=10MHz Channel=26740 RB Size=50 Position=#0

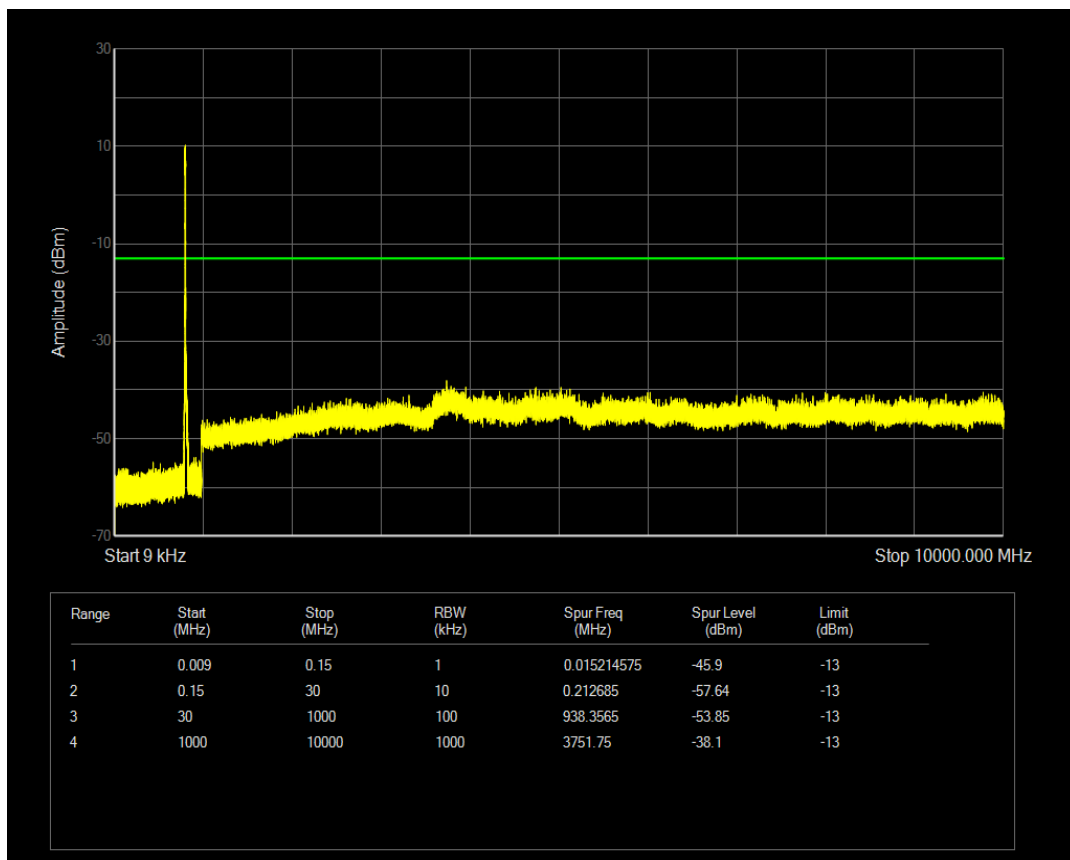


Band26(814-824) QAM16 BW=1.4MHz Channel=26783 RB Size=6 Position=#0

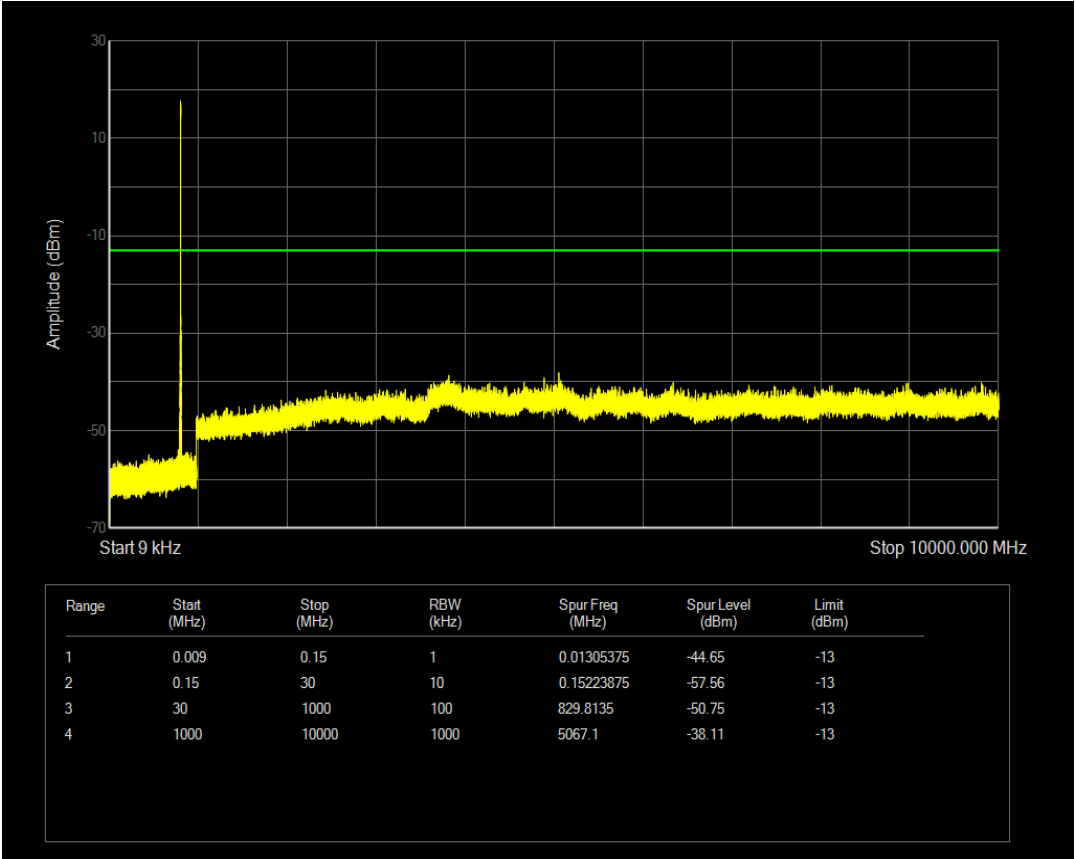


Band26(814-824) QAM16 BW=1.4MHz Channel=26697 RB Size=6 Position=#0

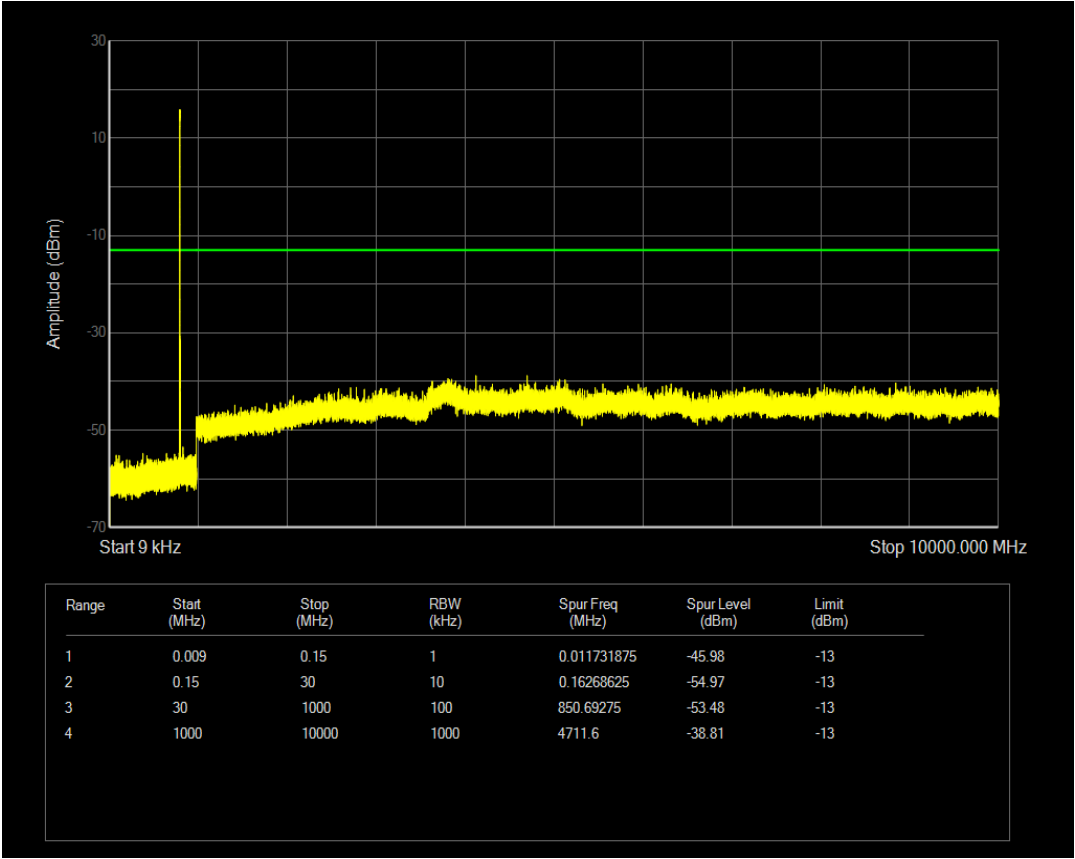


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0

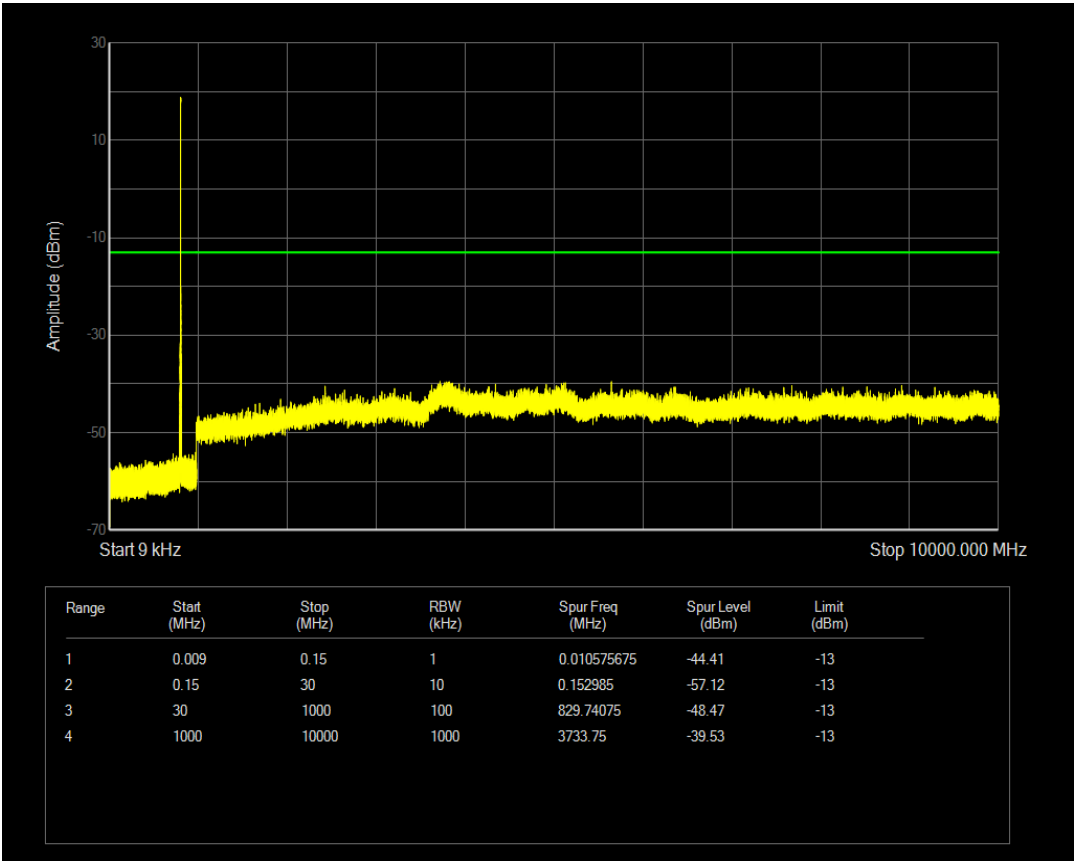


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0

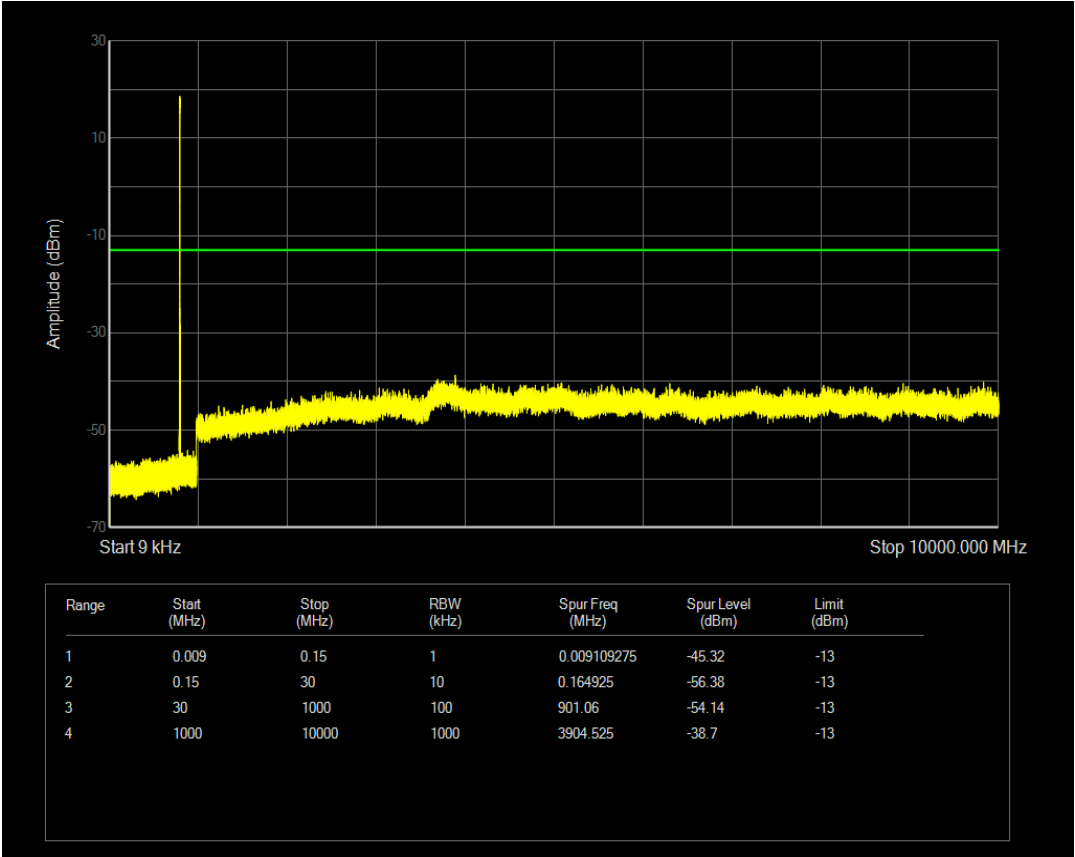


Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0

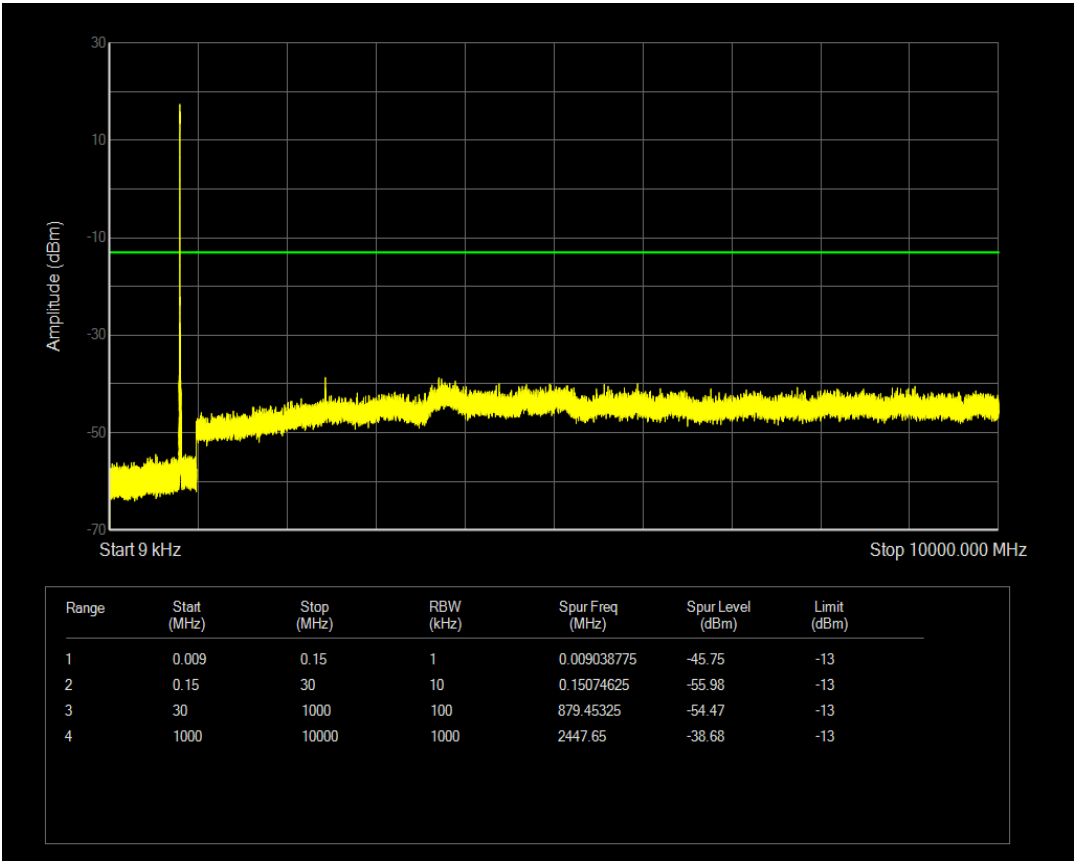


Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0

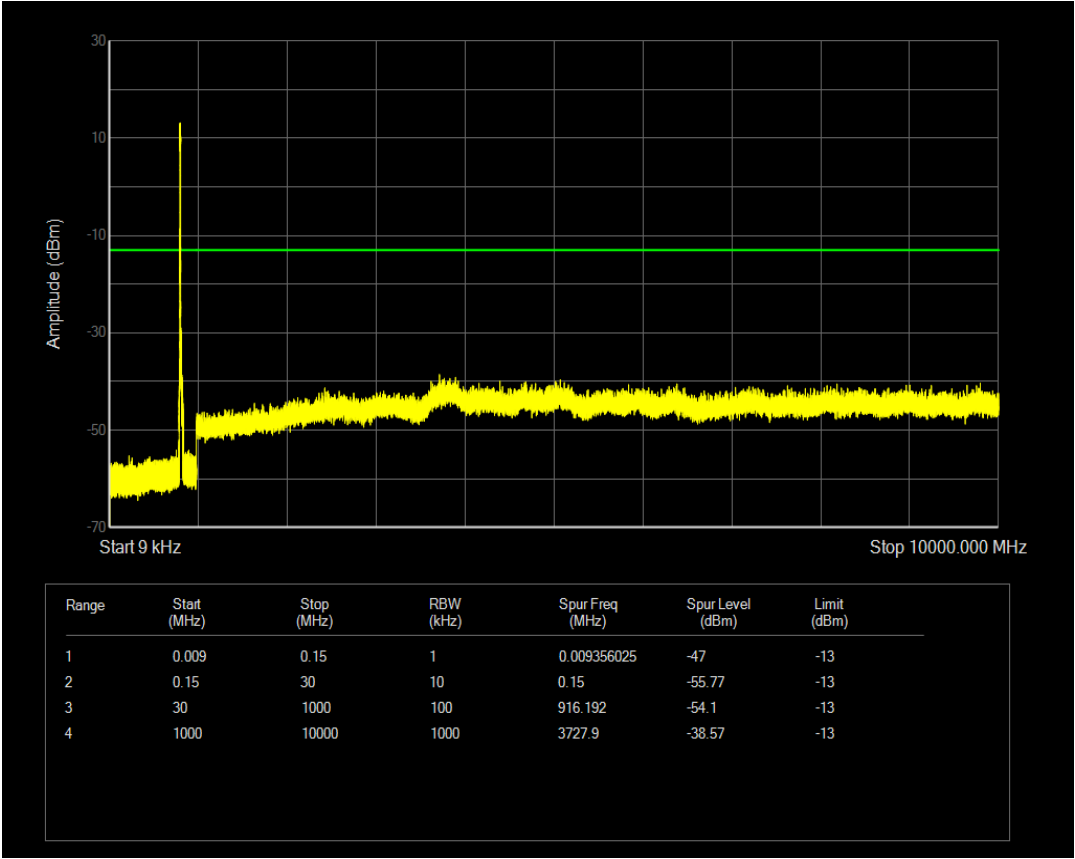


Band26(814-824) QAM16 BW=3MHz Channel=26775 RB Size=15 Position=#0

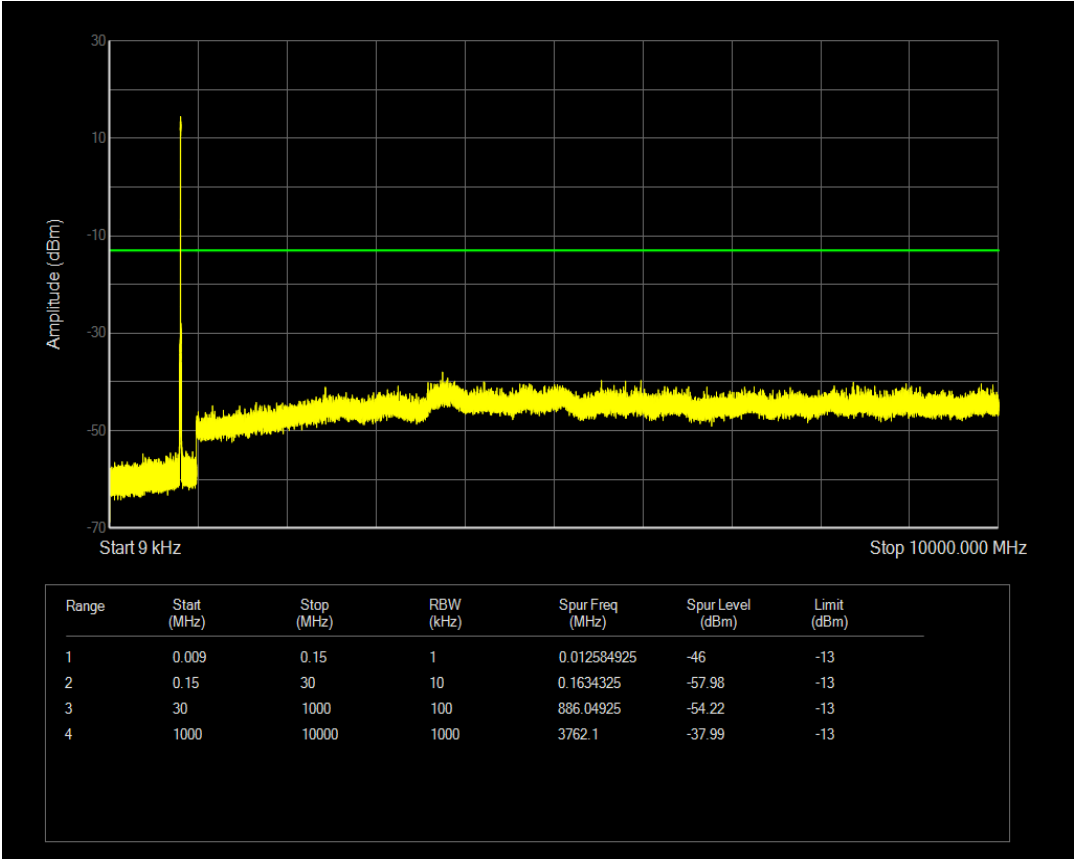


Band26(814-824) QAM16 BW=3MHz Channel=26705 RB Size=15 Position=#0

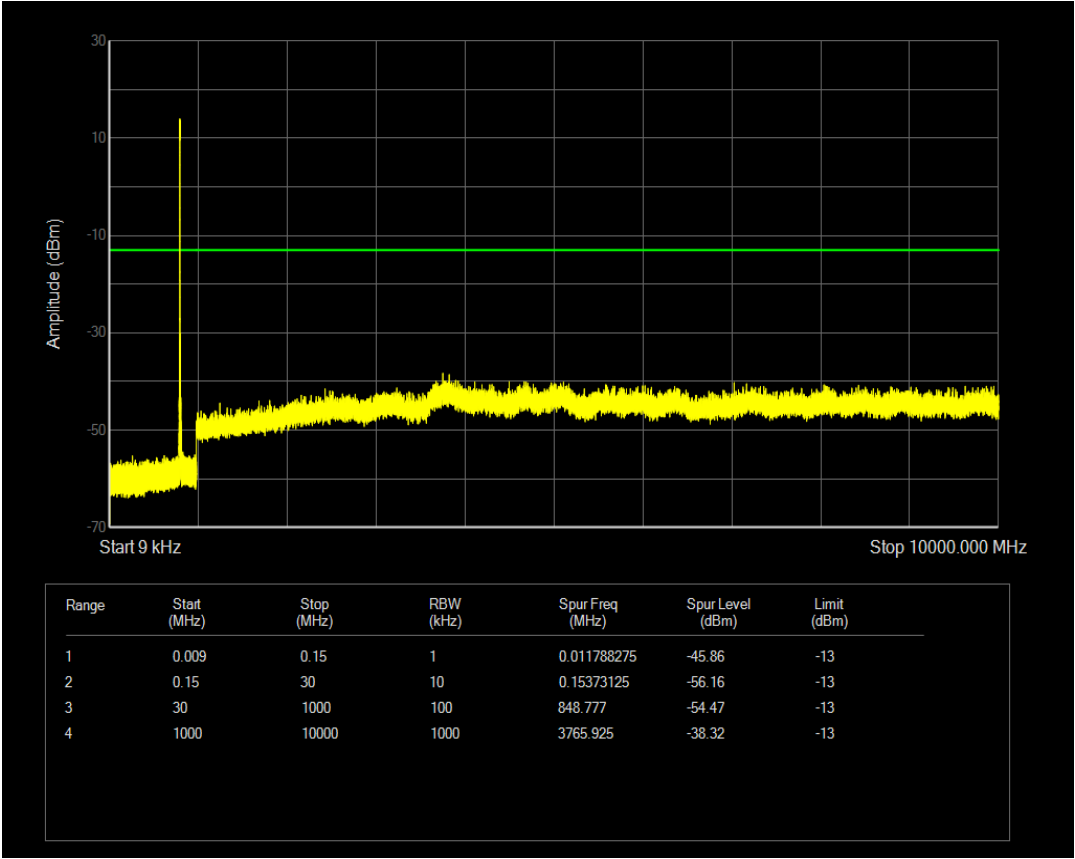


Band26(814-824) QAM16 BW=5MHz Channel=26765 RB Size=25 Position=#0

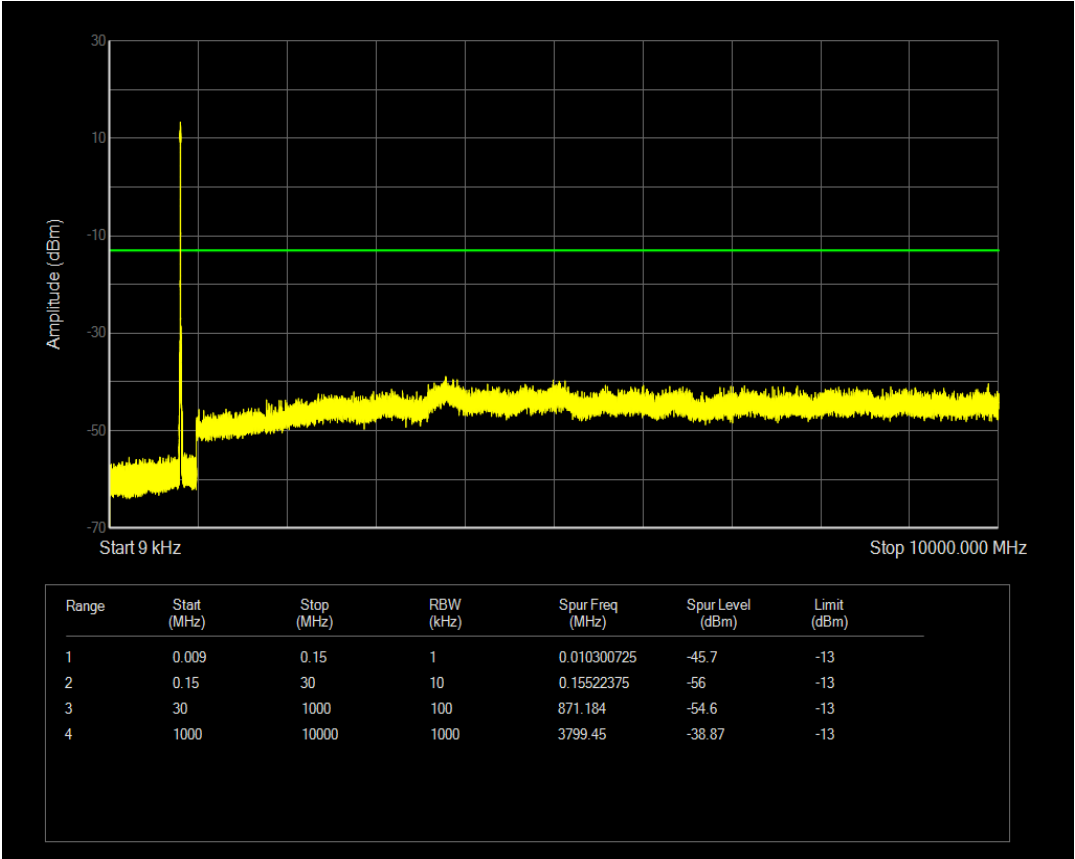


Band26(814-824) QAM16 BW=5MHz Channel=26715 RB Size=25 Position=#0

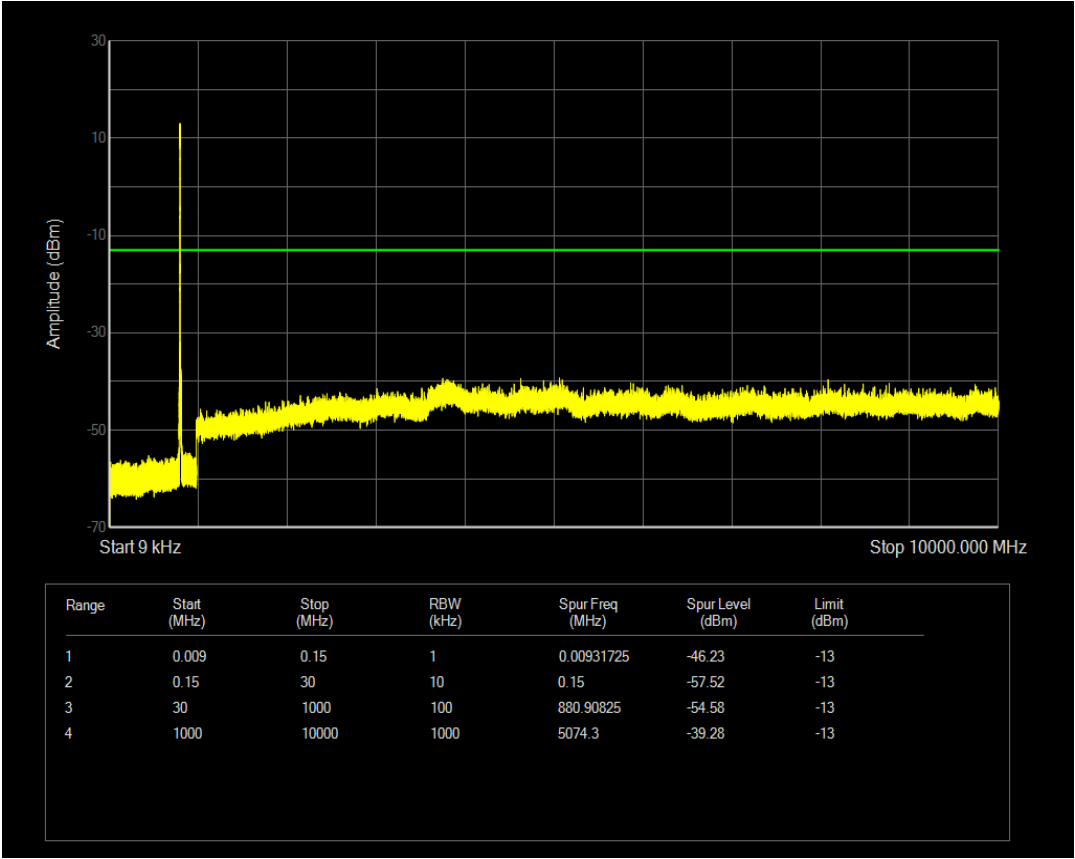

Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0

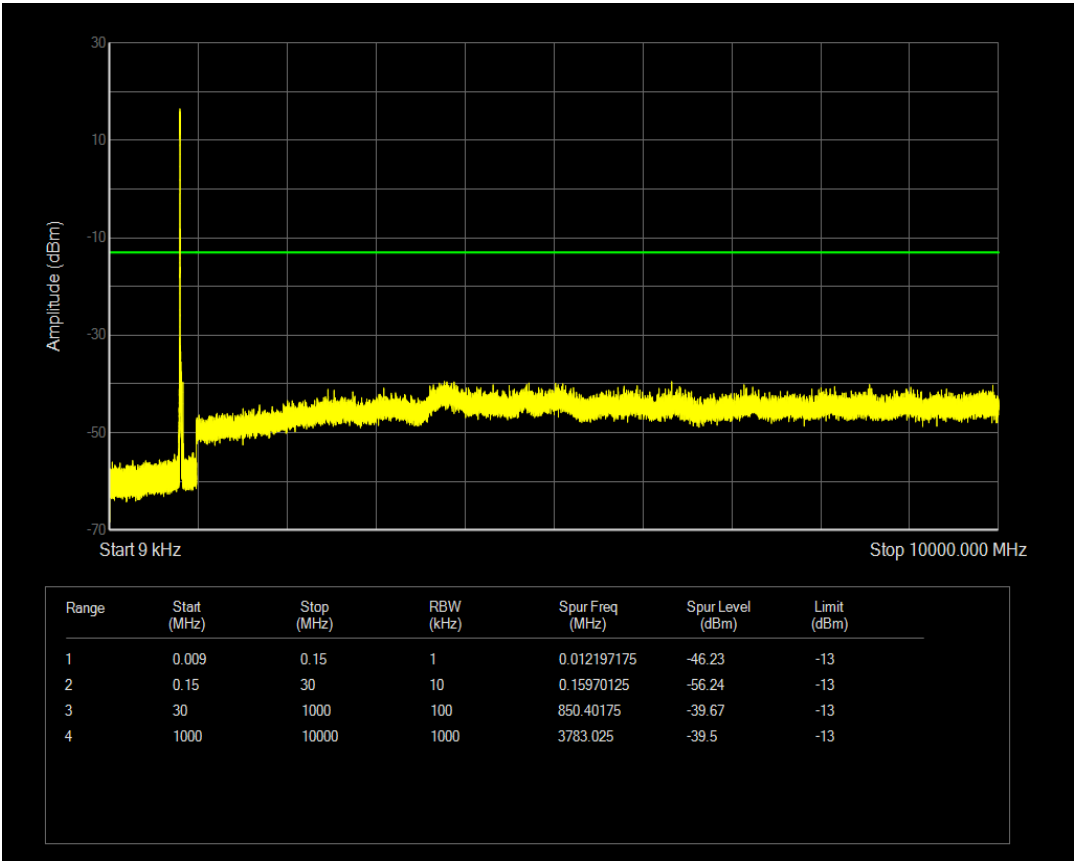

Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0

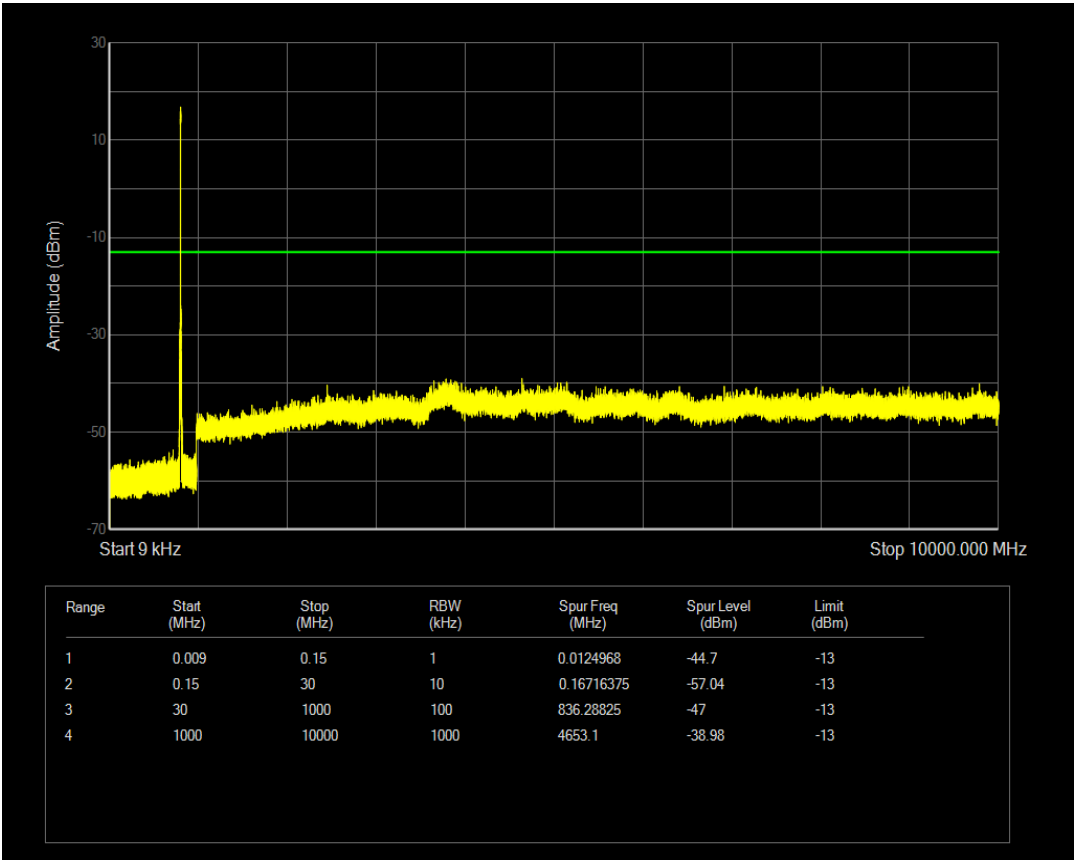

Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0

