

TABLE OF CONTENTS

1 Conducted output power 2

2 Frequency stability 7

3 Peak-to-Average Ratio 8

4 Occupied bandwidth 14

5 Band edge 30

6 Out-of-band emissions 41

1 Conducted output power

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Verdict
Band26(824-849)	1.4	26797	1	#0	QPSK	22.74	-5.64	-7.79	14.95	38.45	PASS
Band26(824-849)	1.4	26797	1	#Mid	QPSK	22.87	-5.64	-7.79	15.08	38.45	PASS
Band26(824-849)	1.4	26797	1	#Max	QPSK	22.78	-5.64	-7.79	14.99	38.45	PASS
Band26(824-849)	1.4	26797	3	#0	QPSK	22.70	-5.64	-7.79	14.91	38.45	PASS
Band26(824-849)	1.4	26797	3	#Mid	QPSK	22.71	-5.64	-7.79	14.92	38.45	PASS
Band26(824-849)	1.4	26797	3	#Max	QPSK	22.76	-5.64	-7.79	14.97	38.45	PASS
Band26(824-849)	1.4	26797	6	#0	QPSK	21.71	-5.64	-7.79	13.92	38.45	PASS
Band26(824-849)	1.4	26797	1	#0	QAM16	21.83	-5.64	-7.79	14.04	38.45	PASS
Band26(824-849)	1.4	26797	1	#Mid	QAM16	21.97	-5.64	-7.79	14.18	38.45	PASS
Band26(824-849)	1.4	26797	1	#Max	QAM16	21.88	-5.64	-7.79	14.09	38.45	PASS
Band26(824-849)	1.4	26797	3	#0	QAM16	21.92	-5.64	-7.79	14.13	38.45	PASS
Band26(824-849)	1.4	26797	3	#Mid	QAM16	21.94	-5.64	-7.79	14.15	38.45	PASS
Band26(824-849)	1.4	26797	3	#Max	QAM16	21.92	-5.64	-7.79	14.13	38.45	PASS
Band26(824-849)	1.4	26797	6	#0	QAM16	20.91	-5.64	-7.79	13.12	38.45	PASS
Band26(824-849)	1.4	26915	1	#0	QPSK	22.90	-5.64	-7.79	15.11	38.45	PASS
Band26(824-849)	1.4	26915	1	#Mid	QPSK	23.09	-5.64	-7.79	15.30	38.45	PASS
Band26(824-849)	1.4	26915	1	#Max	QPSK	22.90	-5.64	-7.79	15.11	38.45	PASS
Band26(824-849)	1.4	26915	3	#0	QPSK	23.02	-5.64	-7.79	15.23	38.45	PASS
Band26(824-849)	1.4	26915	3	#Mid	QPSK	23.03	-5.64	-7.79	15.24	38.45	PASS
Band26(824-849)	1.4	26915	3	#Max	QPSK	23.03	-5.64	-7.79	15.24	38.45	PASS
Band26(824-849)	1.4	26915	6	#0	QPSK	21.95	-5.64	-7.79	14.16	38.45	PASS
Band26(824-849)	1.4	26915	1	#0	QAM16	22.09	-5.64	-7.79	14.30	38.45	PASS
Band26(824-849)	1.4	26915	1	#Mid	QAM16	22.18	-5.64	-7.79	14.39	38.45	PASS
Band26(824-849)	1.4	26915	1	#Max	QAM16	22.16	-5.64	-7.79	14.37	38.45	PASS
Band26(824-849)	1.4	26915	3	#0	QAM16	22.24	-5.64	-7.79	14.45	38.45	PASS
Band26(824-849)	1.4	26915	3	#Mid	QAM16	22.28	-5.64	-7.79	14.49	38.45	PASS
Band26(824-849)	1.4	26915	3	#Max	QAM16	22.25	-5.64	-7.79	14.46	38.45	PASS
Band26(824-849)	1.4	26915	6	#0	QAM16	21.15	-5.64	-7.79	13.36	38.45	PASS
Band26(824-849)	1.4	27033	1	#0	QPSK	22.81	-5.64	-7.79	15.02	38.45	PASS
Band26(824-849)	1.4	27033	1	#Mid	QPSK	23.01	-5.64	-7.79	15.22	38.45	PASS
Band26(824-849)	1.4	27033	1	#Max	QPSK	22.87	-5.64	-7.79	15.08	38.45	PASS
Band26(824-849)	1.4	27033	3	#0	QPSK	22.91	-5.64	-7.79	15.12	38.45	PASS
Band26(824-849)	1.4	27033	3	#Mid	QPSK	22.89	-5.64	-7.79	15.10	38.45	PASS
Band26(824-849)	1.4	27033	3	#Max	QPSK	22.86	-5.64	-7.79	15.07	38.45	PASS
Band26(824-849)	1.4	27033	6	#0	QPSK	21.86	-5.64	-7.79	14.07	38.45	PASS
Band26(824-849)	1.4	27033	1	#0	QAM16	21.74	-5.64	-7.79	13.95	38.45	PASS
Band26(824-849)	1.4	27033	1	#Mid	QAM16	21.91	-5.64	-7.79	14.12	38.45	PASS

Band26(824-849)	1.4	27033	1	#Max	QAM16	21.67	-5.64	-7.79	13.88	38.45	PASS
Band26(824-849)	1.4	27033	3	#0	QAM16	22.04	-5.64	-7.79	14.25	38.45	PASS
Band26(824-849)	1.4	27033	3	#Mid	QAM16	22.06	-5.64	-7.79	14.27	38.45	PASS
Band26(824-849)	1.4	27033	3	#Max	QAM16	22.09	-5.64	-7.79	14.30	38.45	PASS
Band26(824-849)	1.4	27033	6	#0	QAM16	21.09	-5.64	-7.79	13.30	38.45	PASS
Band26(824-849)	3	26805	1	#0	QPSK	22.69	-5.64	-7.79	14.90	38.45	PASS
Band26(824-849)	3	26805	1	#Mid	QPSK	23.05	-5.64	-7.79	15.26	38.45	PASS
Band26(824-849)	3	26805	1	#Max	QPSK	22.75	-5.64	-7.79	14.96	38.45	PASS
Band26(824-849)	3	26805	8	#0	QPSK	21.68	-5.64	-7.79	13.89	38.45	PASS
Band26(824-849)	3	26805	8	#Mid	QPSK	21.70	-5.64	-7.79	13.91	38.45	PASS
Band26(824-849)	3	26805	8	#Max	QPSK	21.72	-5.64	-7.79	13.93	38.45	PASS
Band26(824-849)	3	26805	15	#0	QPSK	21.67	-5.64	-7.79	13.88	38.45	PASS
Band26(824-849)	3	26805	1	#0	QAM16	22.14	-5.64	-7.79	14.35	38.45	PASS
Band26(824-849)	3	26805	1	#Mid	QAM16	22.41	-5.64	-7.79	14.62	38.45	PASS
Band26(824-849)	3	26805	1	#Max	QAM16	22.13	-5.64	-7.79	14.34	38.45	PASS
Band26(824-849)	3	26805	8	#0	QAM16	20.72	-5.64	-7.79	12.93	38.45	PASS
Band26(824-849)	3	26805	8	#Mid	QAM16	20.74	-5.64	-7.79	12.95	38.45	PASS
Band26(824-849)	3	26805	8	#Max	QAM16	20.73	-5.64	-7.79	12.94	38.45	PASS
Band26(824-849)	3	26805	15	#0	QAM16	20.70	-5.64	-7.79	12.91	38.45	PASS
Band26(824-849)	3	26915	1	#0	QPSK	22.93	-5.64	-7.79	15.14	38.45	PASS
Band26(824-849)	3	26915	1	#Mid	QPSK	23.25	-5.64	-7.79	15.46	38.45	PASS
Band26(824-849)	3	26915	1	#Max	QPSK	22.96	-5.64	-7.79	15.17	38.45	PASS
Band26(824-849)	3	26915	8	#0	QPSK	21.94	-5.64	-7.79	14.15	38.45	PASS
Band26(824-849)	3	26915	8	#Mid	QPSK	21.96	-5.64	-7.79	14.17	38.45	PASS
Band26(824-849)	3	26915	8	#Max	QPSK	21.97	-5.64	-7.79	14.18	38.45	PASS
Band26(824-849)	3	26915	15	#0	QPSK	21.96	-5.64	-7.79	14.17	38.45	PASS
Band26(824-849)	3	26915	1	#0	QAM16	22.16	-5.64	-7.79	14.37	38.45	PASS
Band26(824-849)	3	26915	1	#Mid	QAM16	22.45	-5.64	-7.79	14.66	38.45	PASS
Band26(824-849)	3	26915	1	#Max	QAM16	22.22	-5.64	-7.79	14.43	38.45	PASS
Band26(824-849)	3	26915	8	#0	QAM16	20.96	-5.64	-7.79	13.17	38.45	PASS
Band26(824-849)	3	26915	8	#Mid	QAM16	20.98	-5.64	-7.79	13.19	38.45	PASS
Band26(824-849)	3	26915	8	#Max	QAM16	21.00	-5.64	-7.79	13.21	38.45	PASS
Band26(824-849)	3	26915	15	#0	QAM16	20.93	-5.64	-7.79	13.14	38.45	PASS
Band26(824-849)	3	27025	1	#0	QPSK	22.90	-5.64	-7.79	15.11	38.45	PASS
Band26(824-849)	3	27025	1	#Mid	QPSK	23.00	-5.64	-7.79	15.21	38.45	PASS
Band26(824-849)	3	27025	1	#Max	QPSK	22.90	-5.64	-7.79	15.11	38.45	PASS
Band26(824-849)	3	27025	8	#0	QPSK	21.87	-5.64	-7.79	14.08	38.45	PASS
Band26(824-849)	3	27025	8	#Mid	QPSK	21.88	-5.64	-7.79	14.09	38.45	PASS
Band26(824-849)	3	27025	8	#Max	QPSK	21.83	-5.64	-7.79	14.04	38.45	PASS
Band26(824-849)	3	27025	15	#0	QPSK	21.84	-5.64	-7.79	14.05	38.45	PASS
Band26(824-849)	3	27025	1	#0	QAM16	21.80	-5.64	-7.79	14.01	38.45	PASS
Band26(824-849)	3	27025	1	#Mid	QAM16	22.08	-5.64	-7.79	14.29	38.45	PASS
Band26(824-849)	3	27025	1	#Max	QAM16	21.75	-5.64	-7.79	13.96	38.45	PASS
Band26(824-849)	3	27025	8	#0	QAM16	20.88	-5.64	-7.79	13.09	38.45	PASS

Band26(824-849)	3	27025	8	#Mid	QAM16	20.90	-5.64	-7.79	13.11	38.45	PASS
Band26(824-849)	3	27025	8	#Max	QAM16	20.85	-5.64	-7.79	13.06	38.45	PASS
Band26(824-849)	3	27025	15	#0	QAM16	20.90	-5.64	-7.79	13.11	38.45	PASS
Band26(824-849)	5	26815	1	#0	QPSK	22.59	-5.64	-7.79	14.80	38.45	PASS
Band26(824-849)	5	26815	1	#Mid	QPSK	22.97	-5.64	-7.79	15.18	38.45	PASS
Band26(824-849)	5	26815	1	#Max	QPSK	22.72	-5.64	-7.79	14.93	38.45	PASS
Band26(824-849)	5	26815	12	#0	QPSK	21.73	-5.64	-7.79	13.94	38.45	PASS
Band26(824-849)	5	26815	12	#Mid	QPSK	21.81	-5.64	-7.79	14.02	38.45	PASS
Band26(824-849)	5	26815	12	#Max	QPSK	21.79	-5.64	-7.79	14.00	38.45	PASS
Band26(824-849)	5	26815	25	#0	QPSK	21.76	-5.64	-7.79	13.97	38.45	PASS
Band26(824-849)	5	26815	1	#0	QAM16	21.95	-5.64	-7.79	14.16	38.45	PASS
Band26(824-849)	5	26815	1	#Mid	QAM16	22.27	-5.64	-7.79	14.48	38.45	PASS
Band26(824-849)	5	26815	1	#Max	QAM16	22.05	-5.64	-7.79	14.26	38.45	PASS
Band26(824-849)	5	26815	12	#0	QAM16	20.73	-5.64	-7.79	12.94	38.45	PASS
Band26(824-849)	5	26815	12	#Mid	QAM16	20.79	-5.64	-7.79	13.00	38.45	PASS
Band26(824-849)	5	26815	12	#Max	QAM16	20.77	-5.64	-7.79	12.98	38.45	PASS
Band26(824-849)	5	26815	25	#0	QAM16	20.73	-5.64	-7.79	12.94	38.45	PASS
Band26(824-849)	5	26915	1	#0	QPSK	22.84	-5.64	-7.79	15.05	38.45	PASS
Band26(824-849)	5	26915	1	#Mid	QPSK	23.23	-5.64	-7.79	15.44	38.45	PASS
Band26(824-849)	5	26915	1	#Max	QPSK	22.89	-5.64	-7.79	15.10	38.45	PASS
Band26(824-849)	5	26915	12	#0	QPSK	22.01	-5.64	-7.79	14.22	38.45	PASS
Band26(824-849)	5	26915	12	#Mid	QPSK	22.03	-5.64	-7.79	14.24	38.45	PASS
Band26(824-849)	5	26915	12	#Max	QPSK	22.00	-5.64	-7.79	14.21	38.45	PASS
Band26(824-849)	5	26915	25	#0	QPSK	22.01	-5.64	-7.79	14.22	38.45	PASS
Band26(824-849)	5	26915	1	#0	QAM16	22.38	-5.64	-7.79	14.59	38.45	PASS
Band26(824-849)	5	26915	1	#Mid	QAM16	22.82	-5.64	-7.79	15.03	38.45	PASS
Band26(824-849)	5	26915	1	#Max	QAM16	22.53	-5.64	-7.79	14.74	38.45	PASS
Band26(824-849)	5	26915	12	#0	QAM16	20.96	-5.64	-7.79	13.17	38.45	PASS
Band26(824-849)	5	26915	12	#Mid	QAM16	21.03	-5.64	-7.79	13.24	38.45	PASS
Band26(824-849)	5	26915	12	#Max	QAM16	21.00	-5.64	-7.79	13.21	38.45	PASS
Band26(824-849)	5	26915	25	#0	QAM16	20.99	-5.64	-7.79	13.20	38.45	PASS
Band26(824-849)	5	27015	1	#0	QPSK	22.81	-5.64	-7.79	15.02	38.45	PASS
Band26(824-849)	5	27015	1	#Mid	QPSK	23.12	-5.64	-7.79	15.33	38.45	PASS
Band26(824-849)	5	27015	1	#Max	QPSK	22.74	-5.64	-7.79	14.95	38.45	PASS
Band26(824-849)	5	27015	12	#0	QPSK	21.94	-5.64	-7.79	14.15	38.45	PASS
Band26(824-849)	5	27015	12	#Mid	QPSK	21.90	-5.64	-7.79	14.11	38.45	PASS
Band26(824-849)	5	27015	12	#Max	QPSK	21.77	-5.64	-7.79	13.98	38.45	PASS
Band26(824-849)	5	27015	25	#0	QPSK	21.86	-5.64	-7.79	14.07	38.45	PASS
Band26(824-849)	5	27015	1	#0	QAM16	22.22	-5.64	-7.79	14.43	38.45	PASS
Band26(824-849)	5	27015	1	#Mid	QAM16	22.56	-5.64	-7.79	14.77	38.45	PASS
Band26(824-849)	5	27015	1	#Max	QAM16	22.14	-5.64	-7.79	14.35	38.45	PASS
Band26(824-849)	5	27015	12	#0	QAM16	20.82	-5.64	-7.79	13.03	38.45	PASS
Band26(824-849)	5	27015	12	#Mid	QAM16	20.86	-5.64	-7.79	13.07	38.45	PASS
Band26(824-849)	5	27015	12	#Max	QAM16	20.74	-5.64	-7.79	12.95	38.45	PASS

Band26(824-849)	5	27015	25	#0	QAM16	20.94	-5.64	-7.79	13.15	38.45	PASS
Band26(824-849)	10	26840	1	#0	QPSK	22.71	-5.64	-7.79	14.92	38.45	PASS
Band26(824-849)	10	26840	1	#Mid	QPSK	22.94	-5.64	-7.79	15.15	38.45	PASS
Band26(824-849)	10	26840	1	#Max	QPSK	22.91	-5.64	-7.79	15.12	38.45	PASS
Band26(824-849)	10	26840	25	#0	QPSK	21.83	-5.64	-7.79	14.04	38.45	PASS
Band26(824-849)	10	26840	25	#Mid	QPSK	21.86	-5.64	-7.79	14.07	38.45	PASS
Band26(824-849)	10	26840	25	#Max	QPSK	21.97	-5.64	-7.79	14.18	38.45	PASS
Band26(824-849)	10	26840	50	#0	QPSK	21.86	-5.64	-7.79	14.07	38.45	PASS
Band26(824-849)	10	26840	1	#0	QAM16	22.14	-5.64	-7.79	14.35	38.45	PASS
Band26(824-849)	10	26840	1	#Mid	QAM16	22.34	-5.64	-7.79	14.55	38.45	PASS
Band26(824-849)	10	26840	1	#Max	QAM16	22.34	-5.64	-7.79	14.55	38.45	PASS
Band26(824-849)	10	26840	25	#0	QAM16	20.85	-5.64	-7.79	13.06	38.45	PASS
Band26(824-849)	10	26840	25	#Mid	QAM16	20.85	-5.64	-7.79	13.06	38.45	PASS
Band26(824-849)	10	26840	25	#Max	QAM16	21.01	-5.64	-7.79	13.22	38.45	PASS
Band26(824-849)	10	26840	50	#0	QAM16	20.91	-5.64	-7.79	13.12	38.45	PASS
Band26(824-849)	10	26915	1	#0	QPSK	22.88	-5.64	-7.79	15.09	38.45	PASS
Band26(824-849)	10	26915	1	#Mid	QPSK	23.10	-5.64	-7.79	15.31	38.45	PASS
Band26(824-849)	10	26915	1	#Max	QPSK	22.95	-5.64	-7.79	15.16	38.45	PASS
Band26(824-849)	10	26915	25	#0	QPSK	22.01	-5.64	-7.79	14.22	38.45	PASS
Band26(824-849)	10	26915	25	#Mid	QPSK	21.97	-5.64	-7.79	14.18	38.45	PASS
Band26(824-849)	10	26915	25	#Max	QPSK	22.04	-5.64	-7.79	14.25	38.45	PASS
Band26(824-849)	10	26915	50	#0	QPSK	21.95	-5.64	-7.79	14.16	38.45	PASS
Band26(824-849)	10	26915	1	#0	QAM16	22.07	-5.64	-7.79	14.28	38.45	PASS
Band26(824-849)	10	26915	1	#Mid	QAM16	22.27	-5.64	-7.79	14.48	38.45	PASS
Band26(824-849)	10	26915	1	#Max	QAM16	22.18	-5.64	-7.79	14.39	38.45	PASS
Band26(824-849)	10	26915	25	#0	QAM16	21.03	-5.64	-7.79	13.24	38.45	PASS
Band26(824-849)	10	26915	25	#Mid	QAM16	21.00	-5.64	-7.79	13.21	38.45	PASS
Band26(824-849)	10	26915	25	#Max	QAM16	21.07	-5.64	-7.79	13.28	38.45	PASS
Band26(824-849)	10	26915	50	#0	QAM16	21.04	-5.64	-7.79	13.25	38.45	PASS
Band26(824-849)	10	26990	1	#0	QPSK	23.04	-5.64	-7.79	15.25	38.45	PASS
Band26(824-849)	10	26990	1	#Mid	QPSK	23.12	-5.64	-7.79	15.33	38.45	PASS
Band26(824-849)	10	26990	1	#Max	QPSK	22.89	-5.64	-7.79	15.10	38.45	PASS
Band26(824-849)	10	26990	25	#0	QPSK	22.06	-5.64	-7.79	14.27	38.45	PASS
Band26(824-849)	10	26990	25	#Mid	QPSK	21.96	-5.64	-7.79	14.17	38.45	PASS
Band26(824-849)	10	26990	25	#Max	QPSK	21.84	-5.64	-7.79	14.05	38.45	PASS
Band26(824-849)	10	26990	50	#0	QPSK	21.99	-5.64	-7.79	14.20	38.45	PASS
Band26(824-849)	10	26990	1	#0	QAM16	21.90	-5.64	-7.79	14.11	38.45	PASS
Band26(824-849)	10	26990	1	#Mid	QAM16	21.99	-5.64	-7.79	14.20	38.45	PASS
Band26(824-849)	10	26990	1	#Max	QAM16	21.79	-5.64	-7.79	14.00	38.45	PASS
Band26(824-849)	10	26990	25	#0	QAM16	21.10	-5.64	-7.79	13.31	38.45	PASS
Band26(824-849)	10	26990	25	#Mid	QAM16	21.00	-5.64	-7.79	13.21	38.45	PASS
Band26(824-849)	10	26990	25	#Max	QAM16	20.93	-5.64	-7.79	13.14	38.45	PASS
Band26(824-849)	10	26990	50	#0	QAM16	21.00	-5.64	-7.79	13.21	38.45	PASS
Band26(824-849)	15	26865	1	#0	QPSK	22.68	-5.64	-7.79	14.89	38.45	PASS

Band26(824-849)	15	26865	1	#Mid	QPSK	23.25	-5.64	-7.79	15.46	38.45	PASS
Band26(824-849)	15	26865	1	#Max	QPSK	22.93	-5.64	-7.79	15.14	38.45	PASS
Band26(824-849)	15	26865	36	#0	QPSK	21.90	-5.64	-7.79	14.11	38.45	PASS
Band26(824-849)	15	26865	36	#Mid	QPSK	21.95	-5.64	-7.79	14.16	38.45	PASS
Band26(824-849)	15	26865	36	#Max	QPSK	22.05	-5.64	-7.79	14.26	38.45	PASS
Band26(824-849)	15	26865	75	#0	QPSK	21.97	-5.64	-7.79	14.18	38.45	PASS
Band26(824-849)	15	26865	1	#0	QAM16	22.12	-5.64	-7.79	14.33	38.45	PASS
Band26(824-849)	15	26865	1	#Mid	QAM16	22.54	-5.64	-7.79	14.75	38.45	PASS
Band26(824-849)	15	26865	1	#Max	QAM16	22.43	-5.64	-7.79	14.64	38.45	PASS
Band26(824-849)	15	26865	36	#0	QAM16	20.86	-5.64	-7.79	13.07	38.45	PASS
Band26(824-849)	15	26865	36	#Mid	QAM16	20.97	-5.64	-7.79	13.18	38.45	PASS
Band26(824-849)	15	26865	36	#Max	QAM16	21.03	-5.64	-7.79	13.24	38.45	PASS
Band26(824-849)	15	26865	75	#0	QAM16	20.98	-5.64	-7.79	13.19	38.45	PASS
Band26(824-849)	15	26915	1	#0	QPSK	22.81	-5.64	-7.79	15.02	38.45	PASS
Band26(824-849)	15	26915	1	#Mid	QPSK	23.26	-5.64	-7.79	15.47	38.45	PASS
Band26(824-849)	15	26915	1	#Max	QPSK	22.88	-5.64	-7.79	15.09	38.45	PASS
Band26(824-849)	15	26915	36	#0	QPSK	21.94	-5.64	-7.79	14.15	38.45	PASS
Band26(824-849)	15	26915	36	#Mid	QPSK	22.01	-5.64	-7.79	14.22	38.45	PASS
Band26(824-849)	15	26915	36	#Max	QPSK	22.05	-5.64	-7.79	14.26	38.45	PASS
Band26(824-849)	15	26915	75	#0	QPSK	22.01	-5.64	-7.79	14.22	38.45	PASS
Band26(824-849)	15	26915	1	#0	QAM16	21.95	-5.64	-7.79	14.16	38.45	PASS
Band26(824-849)	15	26915	1	#Mid	QAM16	22.42	-5.64	-7.79	14.63	38.45	PASS
Band26(824-849)	15	26915	1	#Max	QAM16	22.12	-5.64	-7.79	14.33	38.45	PASS
Band26(824-849)	15	26915	36	#0	QAM16	20.95	-5.64	-7.79	13.16	38.45	PASS
Band26(824-849)	15	26915	36	#Mid	QAM16	21.04	-5.64	-7.79	13.25	38.45	PASS
Band26(824-849)	15	26915	36	#Max	QAM16	21.05	-5.64	-7.79	13.26	38.45	PASS
Band26(824-849)	15	26915	75	#0	QAM16	20.97	-5.64	-7.79	13.18	38.45	PASS
Band26(824-849)	15	26965	1	#0	QPSK	22.90	-5.64	-7.79	15.11	38.45	PASS
Band26(824-849)	15	26965	1	#Mid	QPSK	23.30	-5.64	-7.79	15.51	38.45	PASS
Band26(824-849)	15	26965	1	#Max	QPSK	22.83	-5.64	-7.79	15.04	38.45	PASS
Band26(824-849)	15	26965	36	#0	QPSK	22.08	-5.64	-7.79	14.29	38.45	PASS
Band26(824-849)	15	26965	36	#Mid	QPSK	22.08	-5.64	-7.79	14.29	38.45	PASS
Band26(824-849)	15	26965	36	#Max	QPSK	21.94	-5.64	-7.79	14.15	38.45	PASS
Band26(824-849)	15	26965	75	#0	QPSK	22.06	-5.64	-7.79	14.27	38.45	PASS
Band26(824-849)	15	26965	1	#0	QAM16	22.01	-5.64	-7.79	14.22	38.45	PASS
Band26(824-849)	15	26965	1	#Mid	QAM16	22.48	-5.64	-7.79	14.69	38.45	PASS
Band26(824-849)	15	26965	1	#Max	QAM16	21.93	-5.64	-7.79	14.14	38.45	PASS
Band26(824-849)	15	26965	36	#0	QAM16	21.03	-5.64	-7.79	13.24	38.45	PASS
Band26(824-849)	15	26965	36	#Mid	QAM16	21.00	-5.64	-7.79	13.21	38.45	PASS
Band26(824-849)	15	26965	36	#Max	QAM16	20.91	-5.64	-7.79	13.12	38.45	PASS
Band26(824-849)	15	26965	75	#0	QAM16	21.09	-5.64	-7.79	13.30	38.45	PASS


2 Frequency stability

<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
Band26(824-849)	15	26865	75	#0	QPSK	-5.26	-0.006	-2.5	2.5	PASS
Band26(824-849)	15	26865	75	#0	QAM16	-4.63	-0.006	-2.5	2.5	PASS
Band26(824-849)	15	26915	75	#0	QPSK	-5.19	-0.006	-2.5	2.5	PASS
Band26(824-849)	15	26915	75	#0	QAM16	-3.10	-0.004	-2.5	2.5	PASS
Band26(824-849)	15	26965	75	#0	QPSK	-1.57	-0.002	-2.5	2.5	PASS
Band26(824-849)	15	26965	75	#0	QAM16	-5.30	-0.006	-2.5	2.5	PASS



3 Peak-to-Average Ratio


Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Result (dB)	high Limit (dB)	Verdict
Band26(824-849)	1.4	26915	1	#0	QPSK	5.12	13	PASS
Band26(824-849)	1.4	26915	1	#0	QAM16	6.07	13	PASS
Band26(824-849)	3	26915	1	#0	QPSK	4.95	13	PASS
Band26(824-849)	3	26915	1	#0	QAM16	5.68	13	PASS
Band26(824-849)	5	26915	1	#0	QPSK	5.05	13	PASS
Band26(824-849)	5	26915	1	#0	QAM16	5.76	13	PASS
Band26(824-849)	10	26915	1	#0	QPSK	4.78	13	PASS
Band26(824-849)	10	26915	1	#0	QAM16	5.67	13	PASS
Band26(824-849)	15	26915	1	#0	QPSK	4.85	13	PASS
Band26(824-849)	15	26915	1	#0	QAM16	5.55	13	PASS

Band26(824-849) QAM16 BW=1.4MHz Channel=26915 RB Size=1 Position=#0

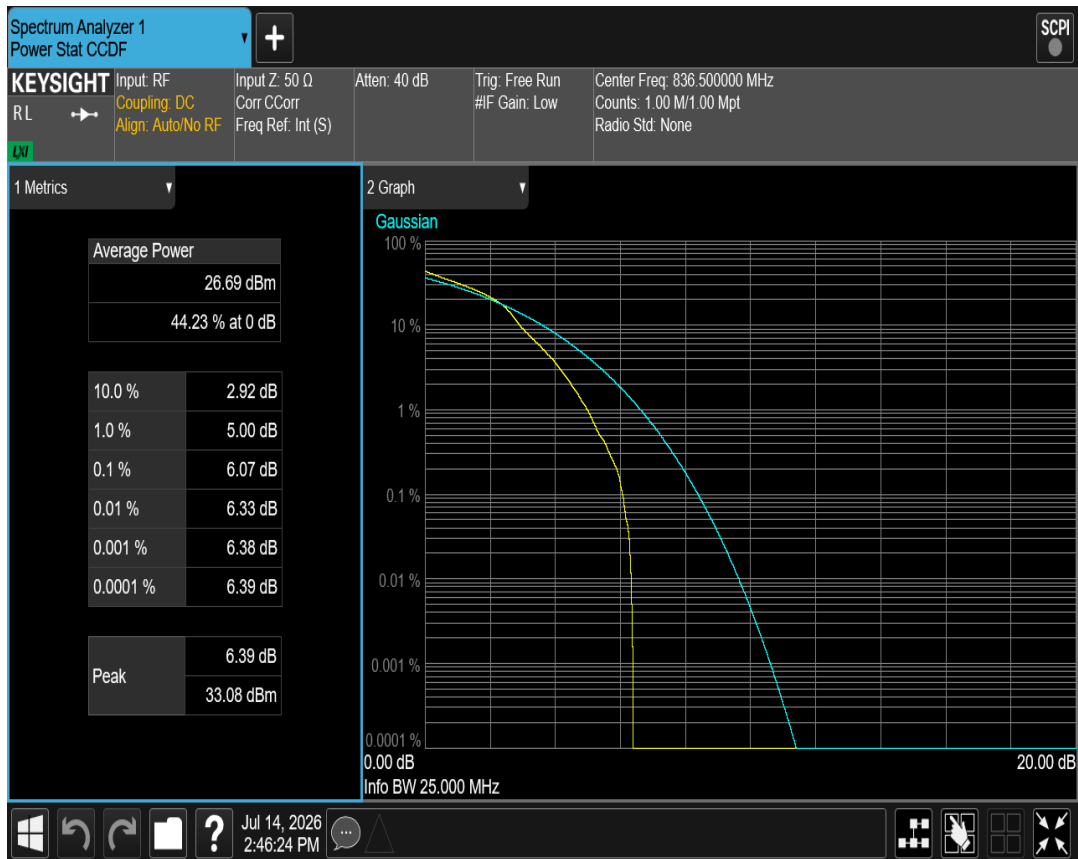


Band26(824-849) QAM16 BW=10MHz Channel=26915 RB Size=1 Position=#0

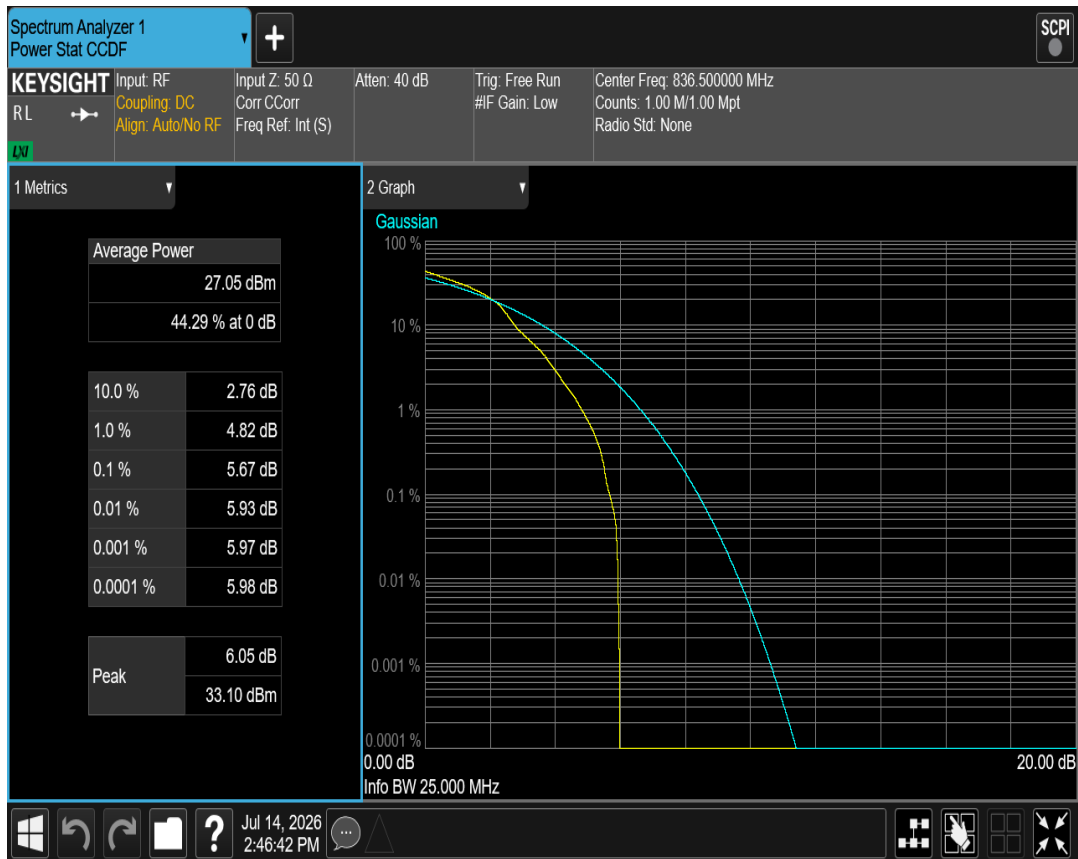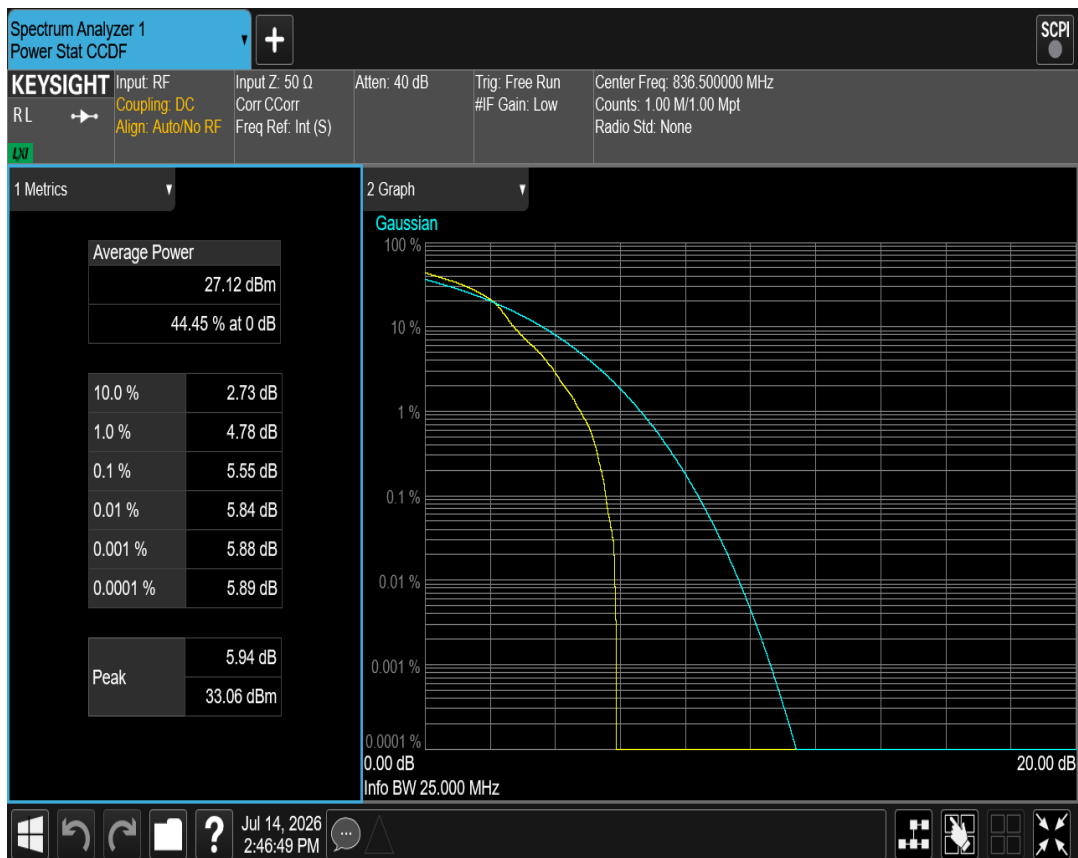
**Band26(824-849) QAM16 BW=15MHz Channel=26915 RB Size=1 Position=#0****Band26(824-849) QAM16 BW=3MHz Channel=26915 RB Size=1 Position=#0**

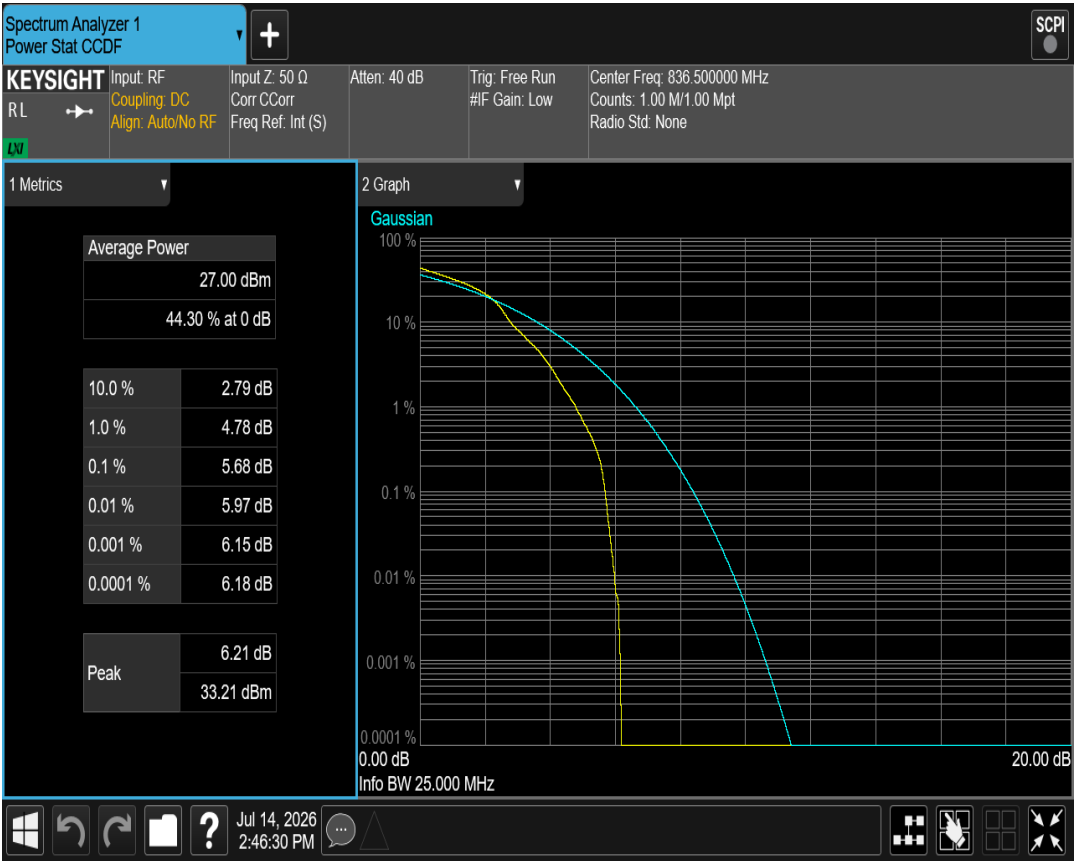


Band26(824-849) QAM16 BW=5MHz Channel=26915 RB Size=1 Position=#0

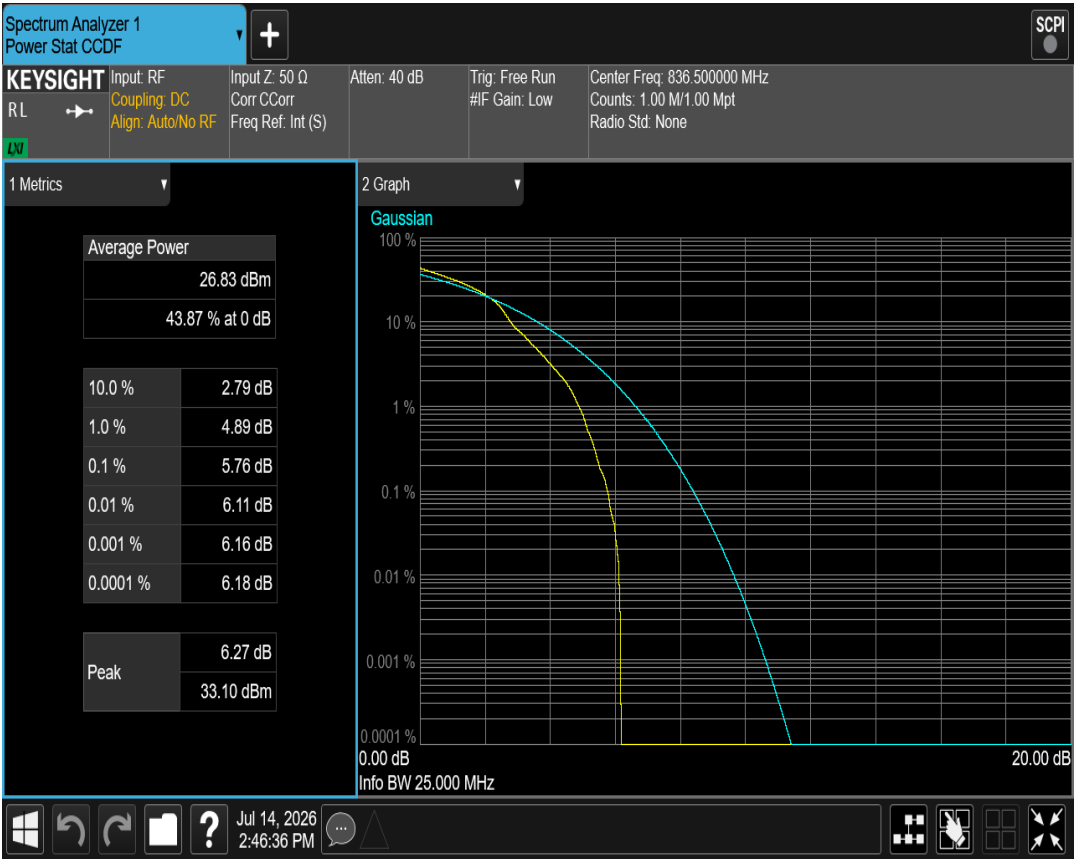


Band26(824-849) QPSK BW=1.4MHz Channel=26915 RB Size=1 Position=#0

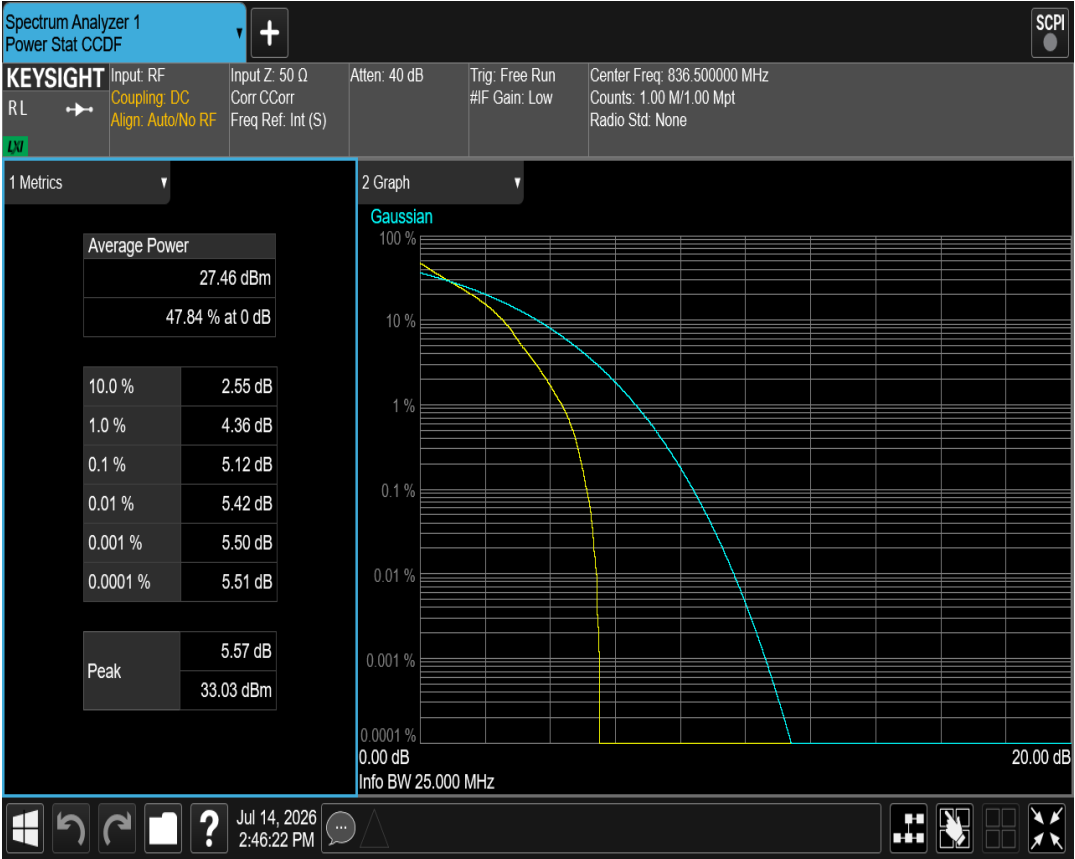


Band26(824-849) QPSK BW=10MHz Channel=26915 RB Size=1 Position=#0

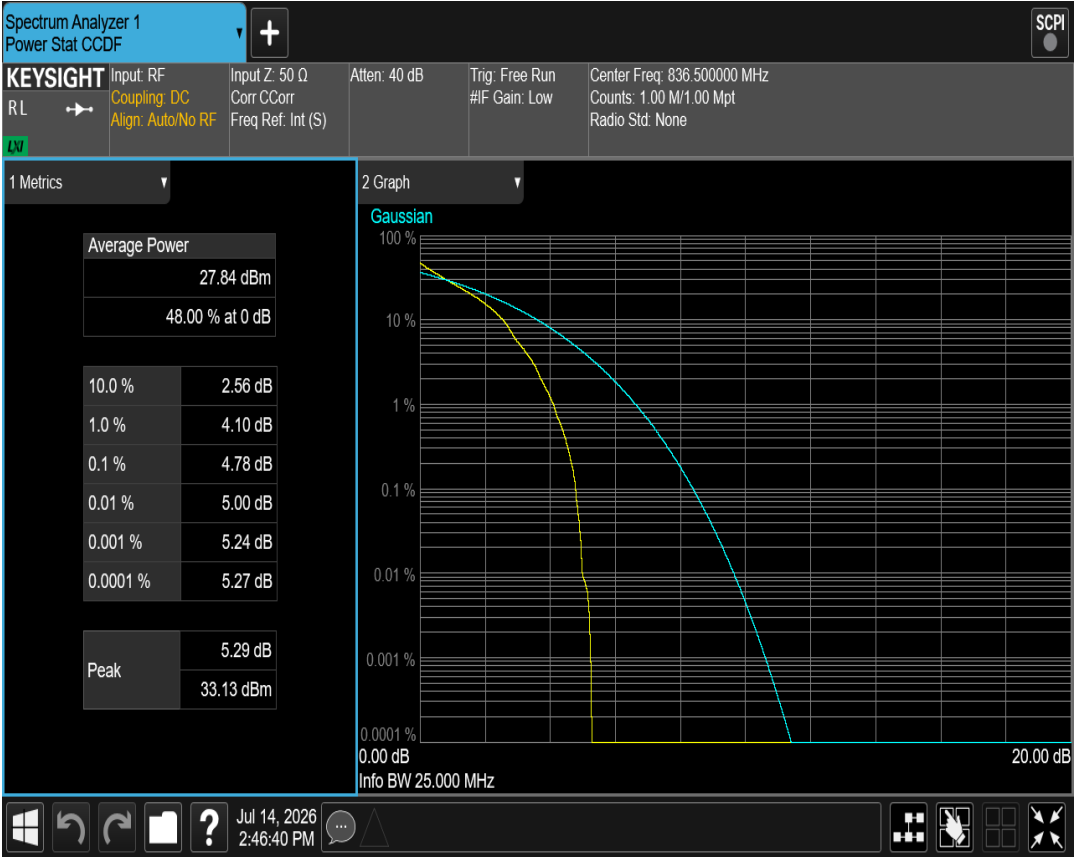


Band26(824-849) QPSK BW=15MHz Channel=26915 RB Size=1 Position=#0

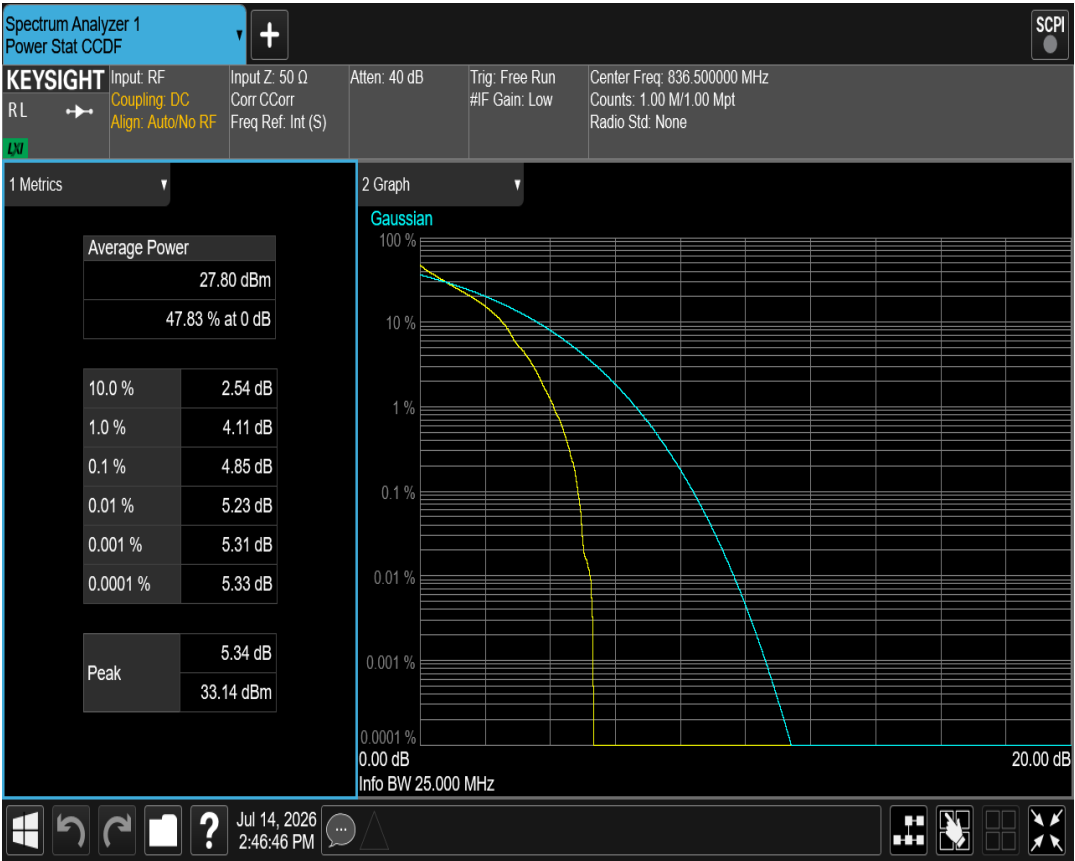

Band26(824-849) QPSK BW=3MHz Channel=26915 RB Size=1 Position=#0

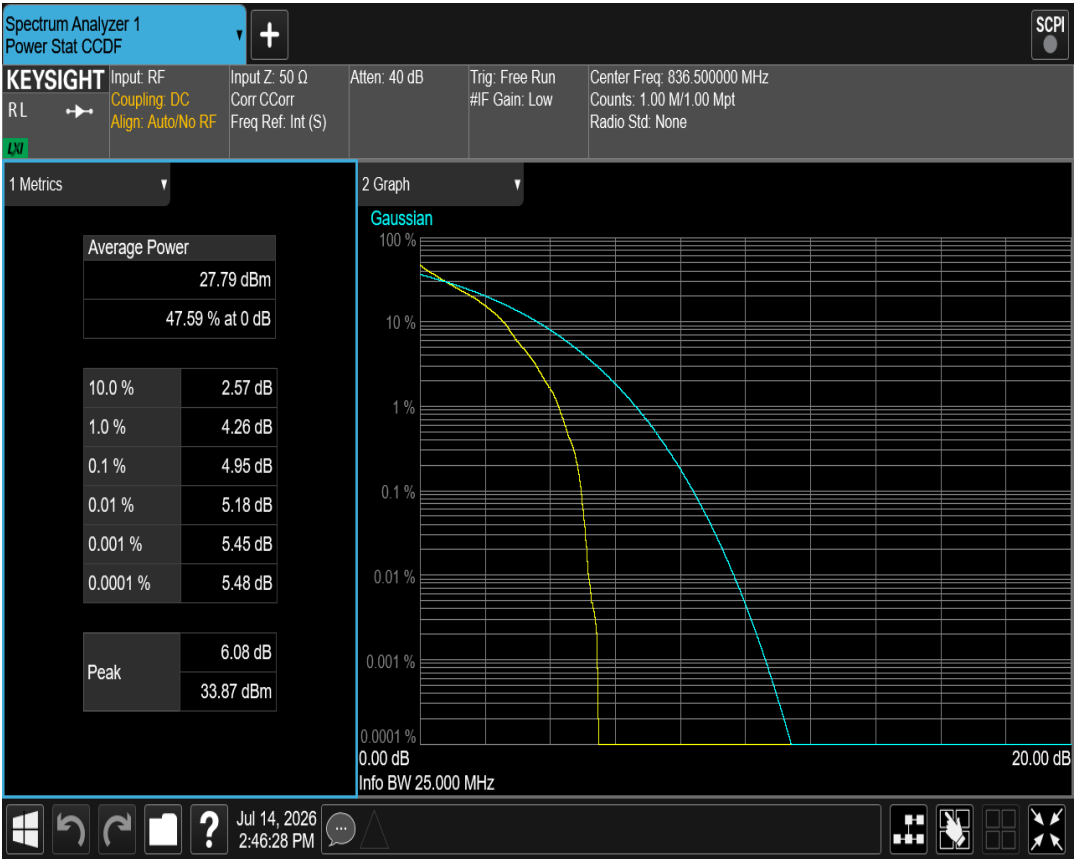



Band26(824-849) QPSK BW=5MHz Channel=26915 RB Size=1 Position=#0


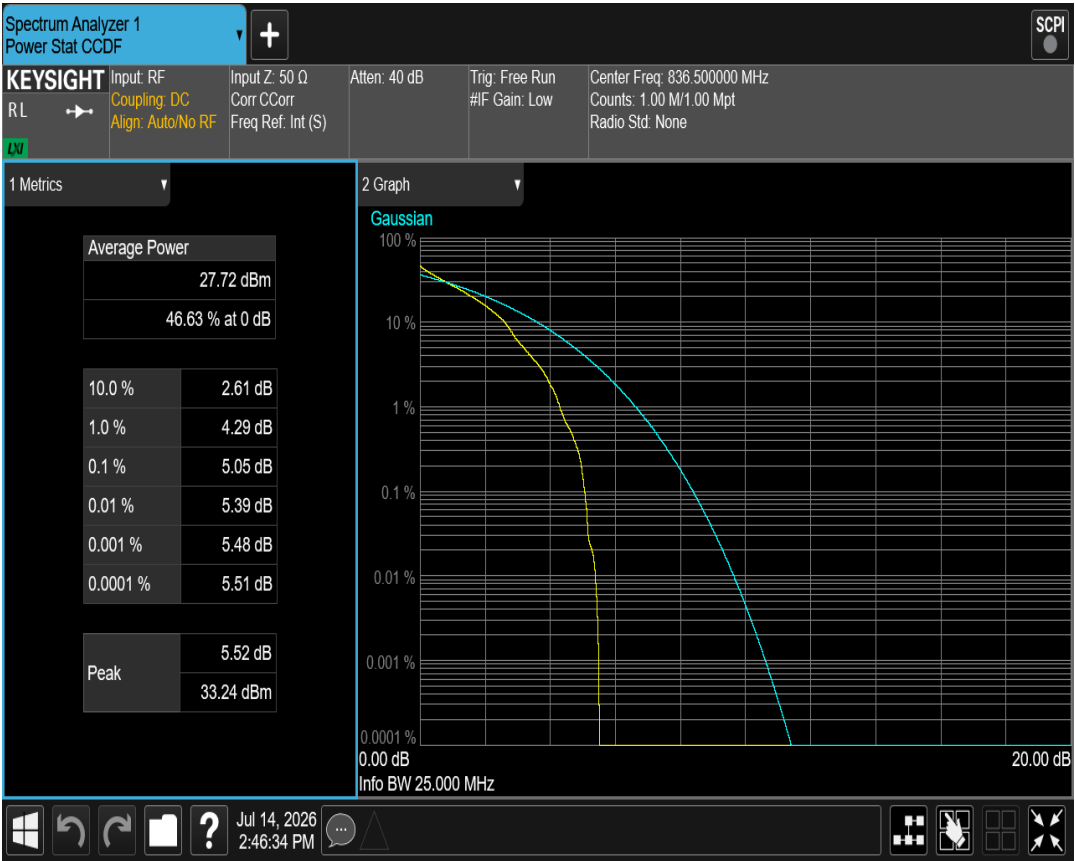




4 Occupied bandwidth


<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>99% OBW (MHz)</i>	<i>-26dB EBW (MHz)</i>	<i>Verdict</i>
Band26(824-849)	1.4	26797	6	#0	QPSK	1.090	1.298	PASS
Band26(824-849)	1.4	26797	6	#0	QAM16	1.093	1.291	PASS
Band26(824-849)	1.4	26915	6	#0	QPSK	1.099	1.292	PASS
Band26(824-849)	1.4	26915	6	#0	QAM16	1.094	1.274	PASS
Band26(824-849)	1.4	27033	6	#0	QPSK	1.096	1.273	PASS
Band26(824-849)	1.4	27033	6	#0	QAM16	1.093	1.284	PASS
Band26(824-849)	3	26805	15	#0	QPSK	2.691	2.916	PASS
Band26(824-849)	3	26805	15	#0	QAM16	2.685	2.933	PASS
Band26(824-849)	3	26915	15	#0	QPSK	2.687	2.930	PASS
Band26(824-849)	3	26915	15	#0	QAM16	2.698	2.922	PASS
Band26(824-849)	3	27025	15	#0	QPSK	2.689	2.915	PASS
Band26(824-849)	3	27025	15	#0	QAM16	2.685	2.904	PASS
Band26(824-849)	5	26815	25	#0	QPSK	4.511	4.901	PASS
Band26(824-849)	5	26815	25	#0	QAM16	4.500	4.924	PASS
Band26(824-849)	5	26915	25	#0	QPSK	4.531	4.889	PASS
Band26(824-849)	5	26915	25	#0	QAM16	4.514	4.896	PASS
Band26(824-849)	5	27015	25	#0	QPSK	4.501	4.914	PASS
Band26(824-849)	5	27015	25	#0	QAM16	4.502	4.914	PASS
Band26(824-849)	10	26840	50	#0	QPSK	8.985	9.699	PASS
Band26(824-849)	10	26840	50	#0	QAM16	8.989	9.661	PASS
Band26(824-849)	10	26915	50	#0	QPSK	8.978	9.615	PASS
Band26(824-849)	10	26915	50	#0	QAM16	8.973	9.710	PASS
Band26(824-849)	10	26990	50	#0	QPSK	8.974	9.628	PASS
Band26(824-849)	10	26990	50	#0	QAM16	8.984	9.710	PASS
Band26(824-849)	15	26865	75	#0	QPSK	13.505	14.415	PASS
Band26(824-849)	15	26865	75	#0	QAM16	13.491	14.507	PASS
Band26(824-849)	15	26915	75	#0	QPSK	13.427	14.547	PASS
Band26(824-849)	15	26915	75	#0	QAM16	13.455	14.357	PASS
Band26(824-849)	15	26965	75	#0	QPSK	13.464	14.546	PASS
Band26(824-849)	15	26965	75	#0	QAM16	13.478	14.409	PASS

Band26(824-849) QAM16 BW=1.4MHz Channel=26797 RB Size=6 Position=#0

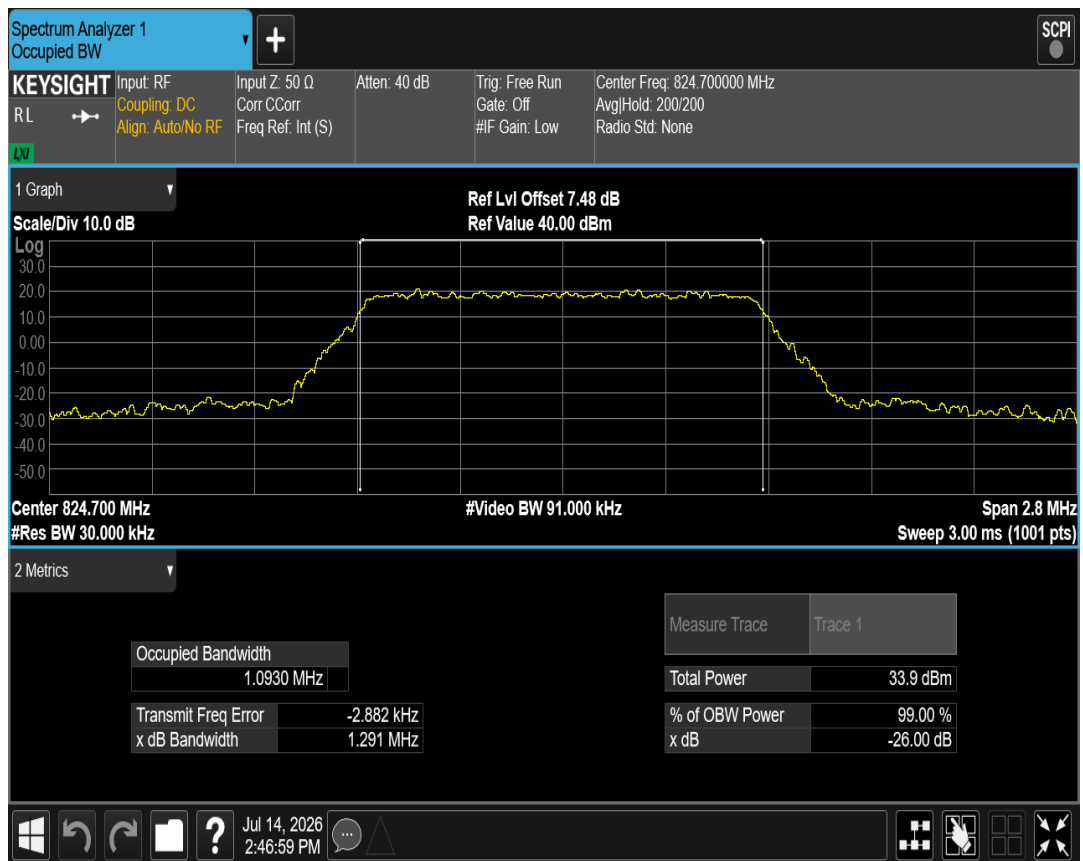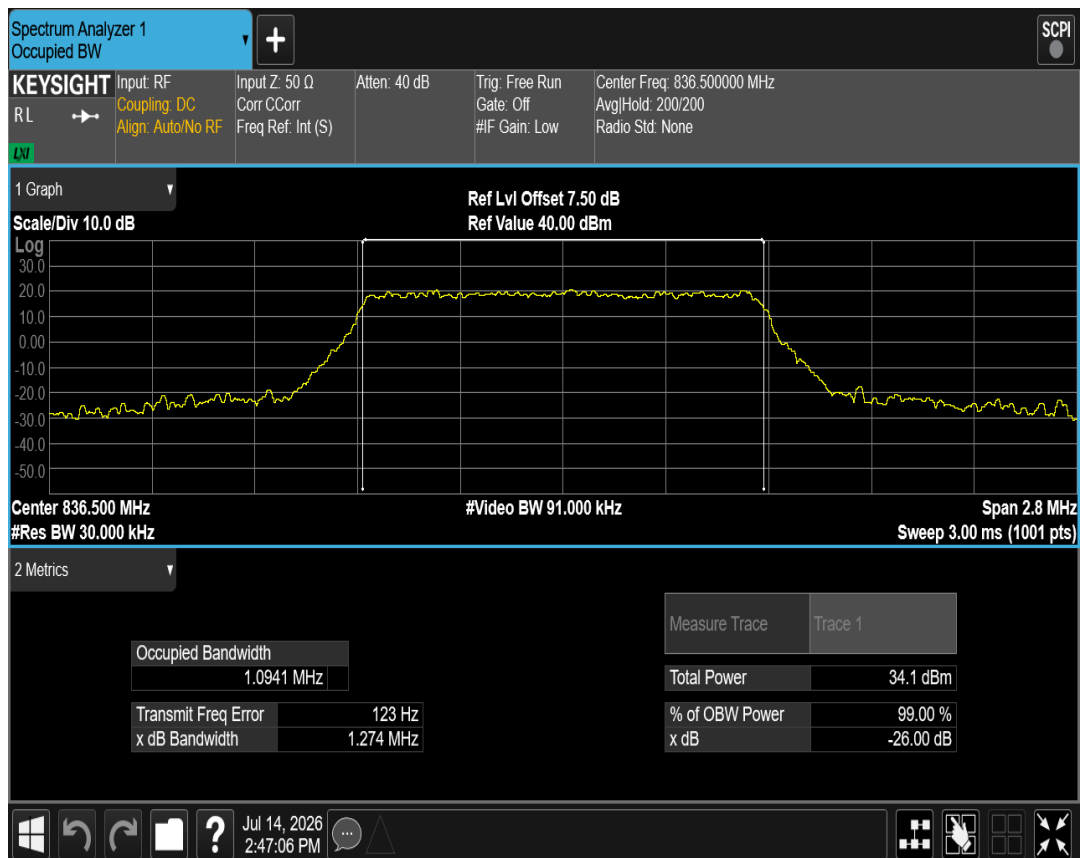
**Band26(824-849) QAM16 BW=1.4MHz Channel=26915 RB Size=6 Position=#0****Band26(824-849) QAM16 BW=1.4MHz Channel=27033 RB Size=6 Position=#0**

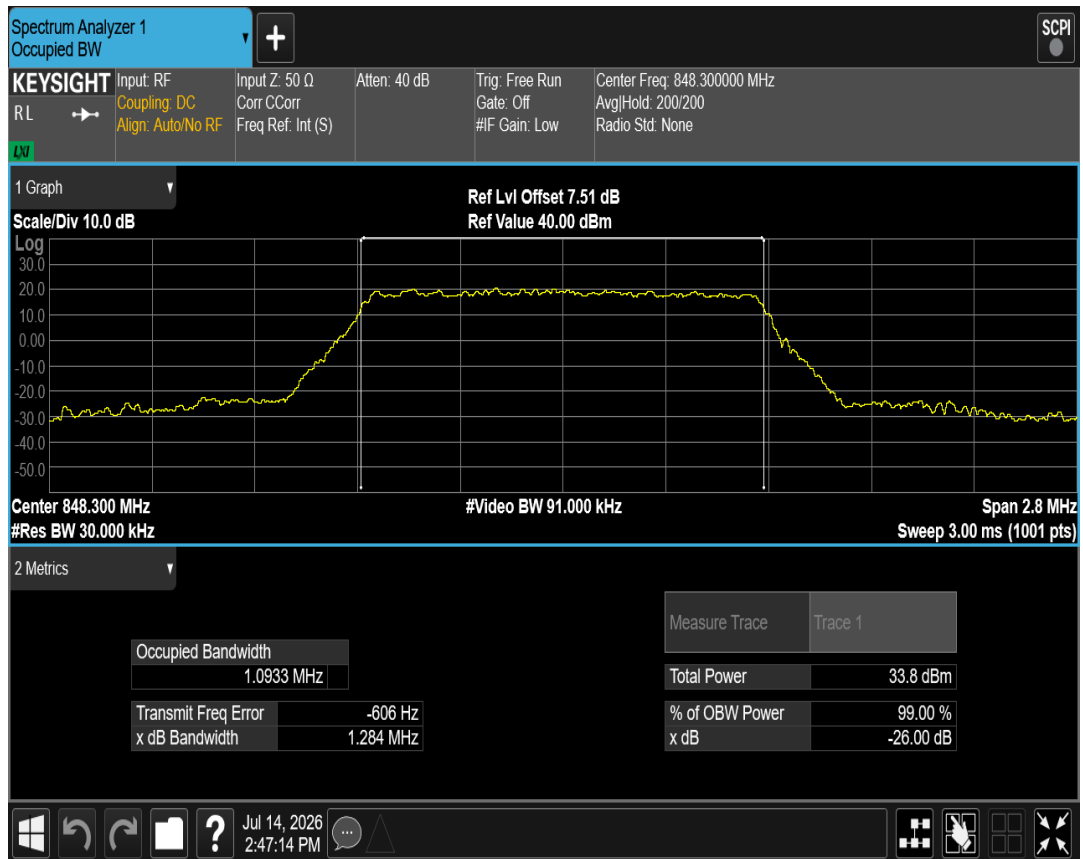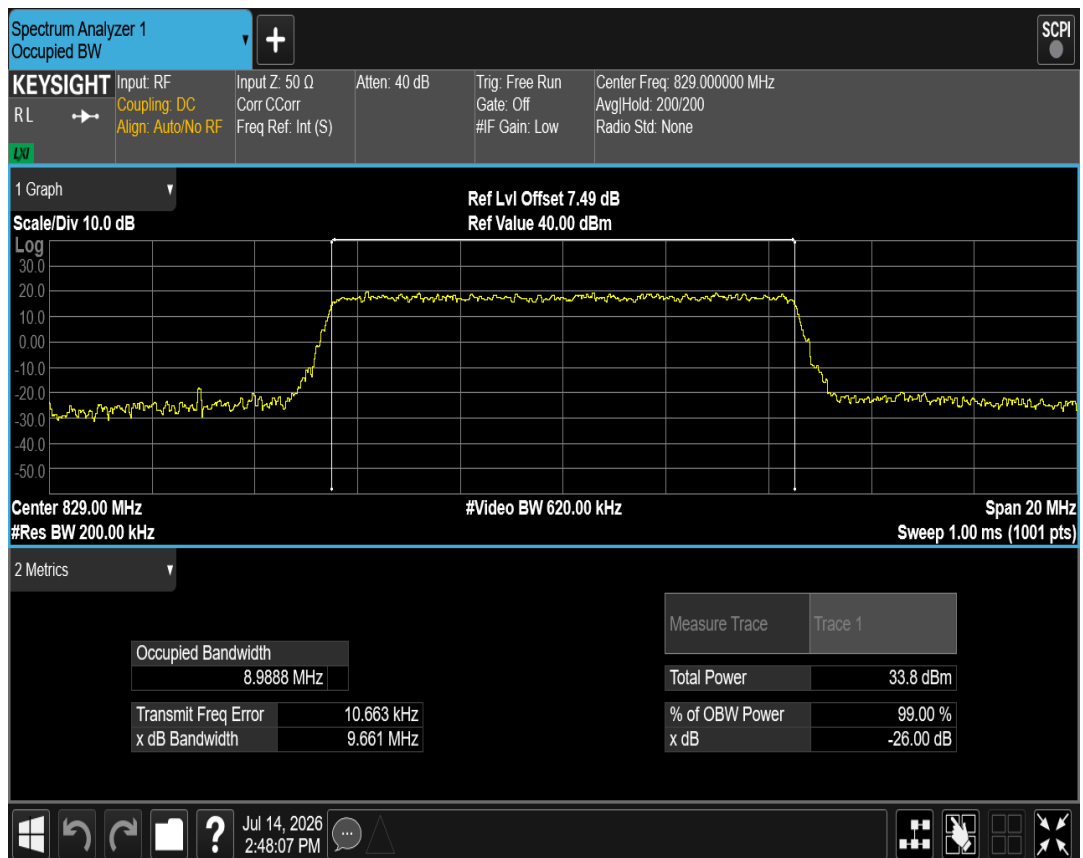**Band26(824-849) QAM16 BW=10MHz Channel=26840 RB Size=50 Position=#0****Band26(824-849) QAM16 BW=10MHz Channel=26915 RB Size=50 Position=#0**

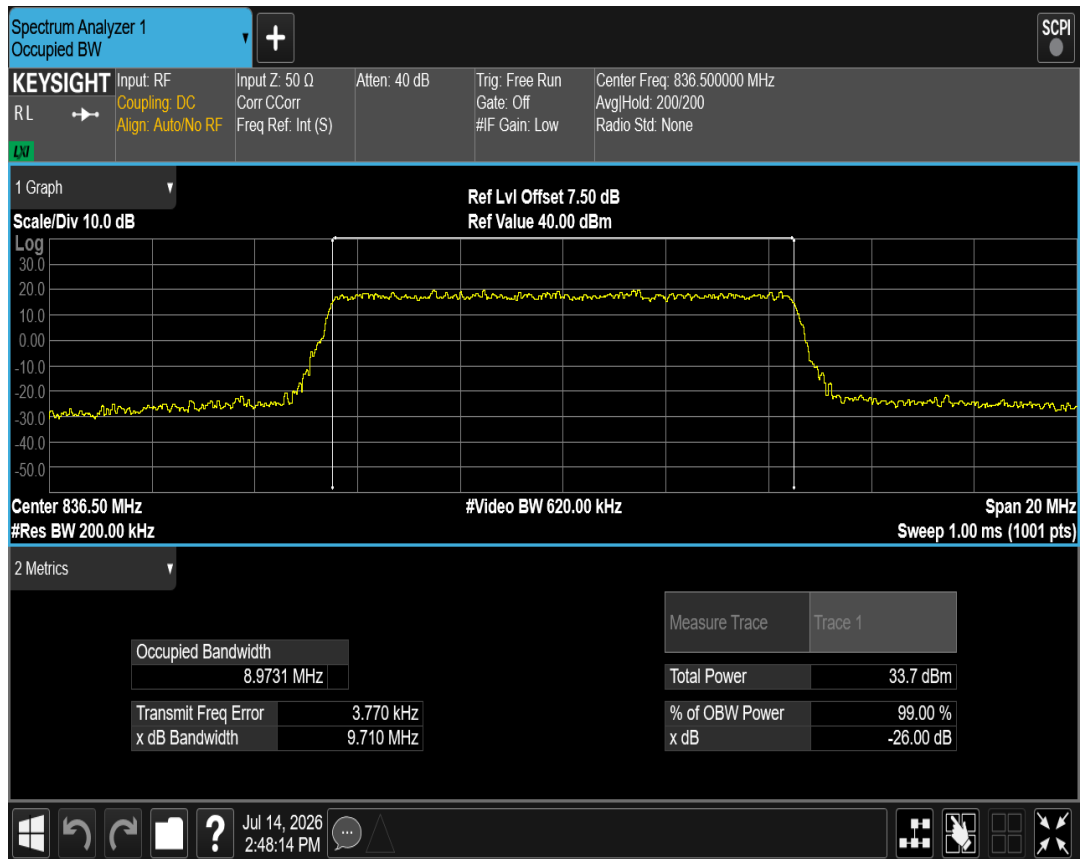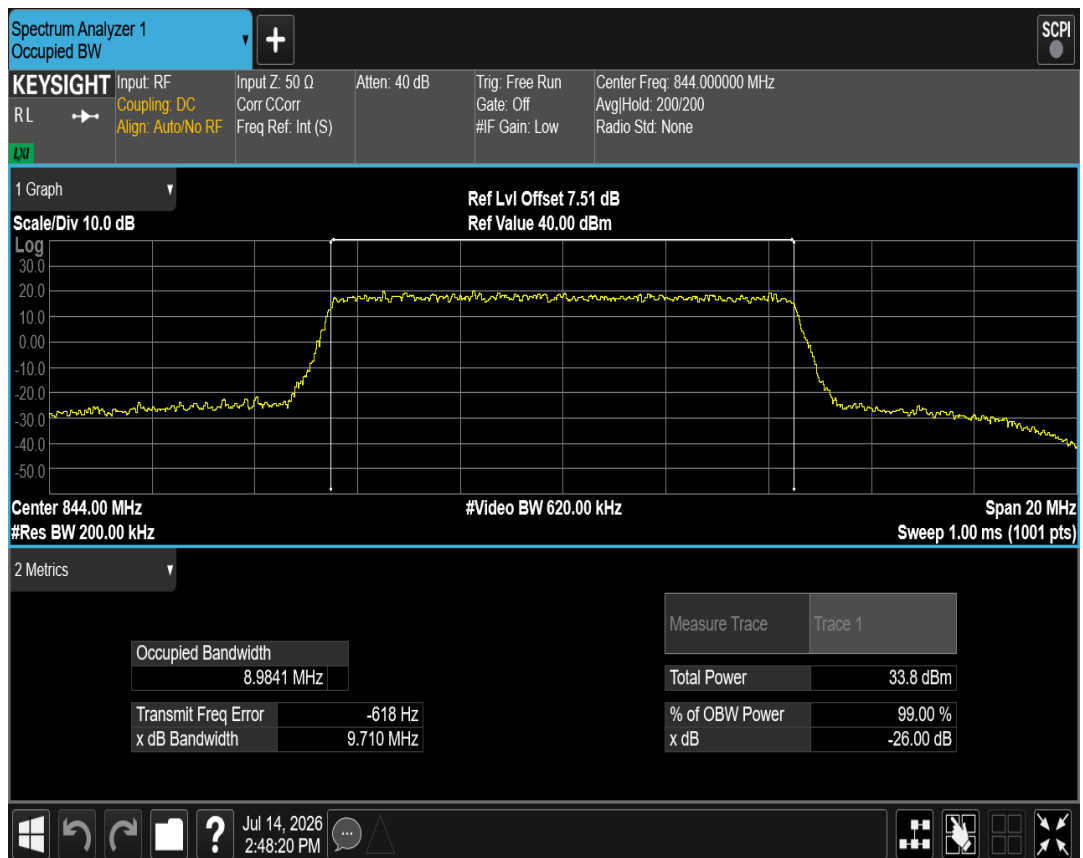
**Band26(824-849) QAM16 BW=10MHz Channel=26990 RB Size=50 Position=#0****Band26(824-849) QAM16 BW=15MHz Channel=26865 RB Size=75 Position=#0**

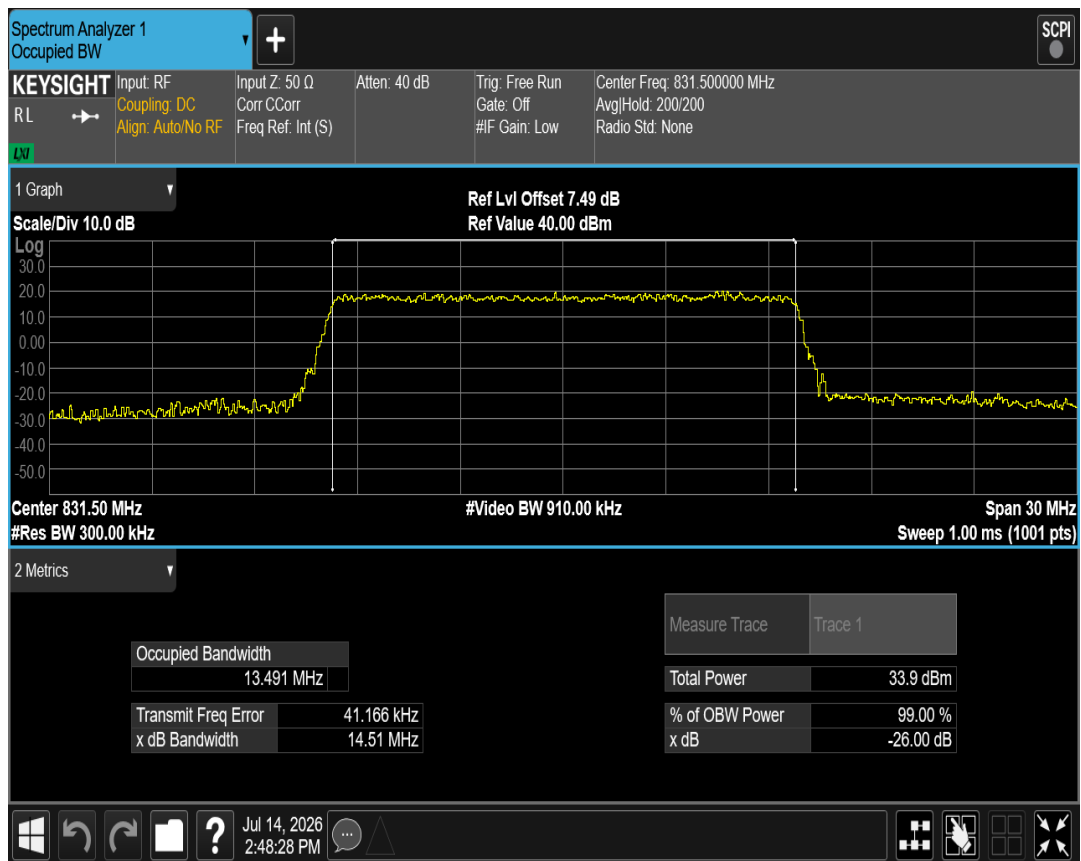


Band26(824-849) QAM16 BW=15MHz Channel=26915 RB Size=75 Position=#0

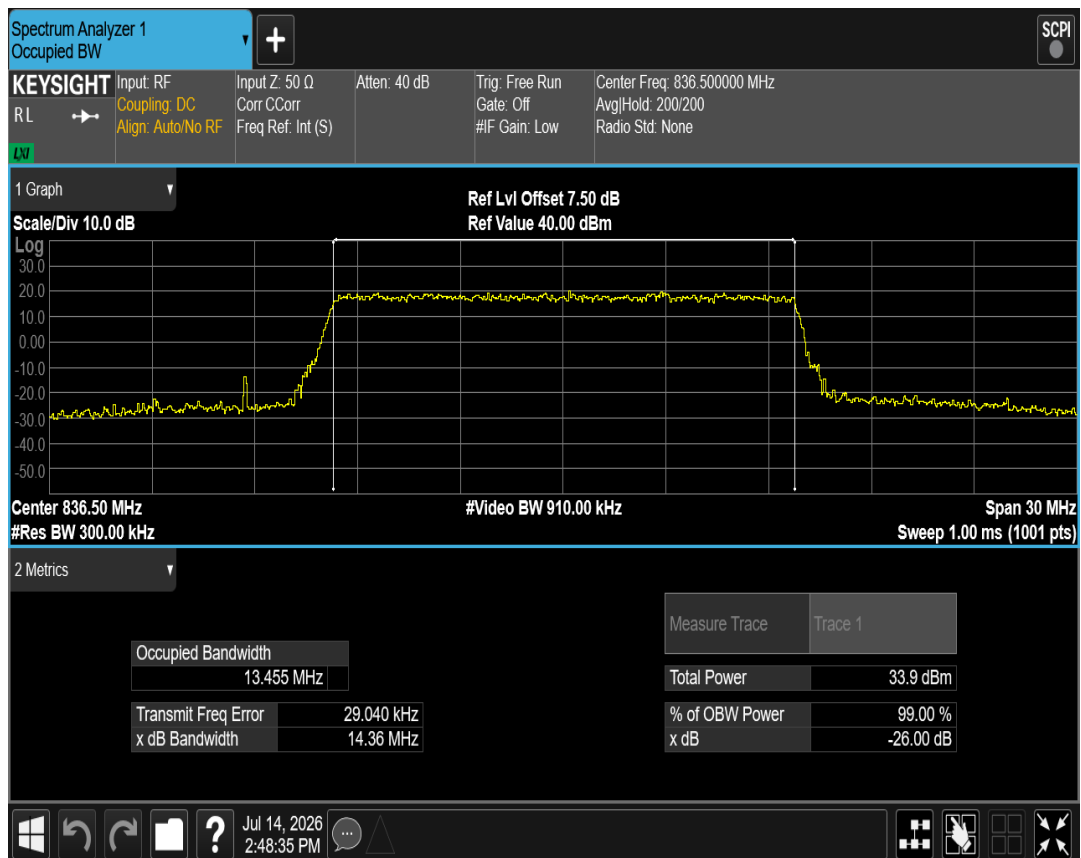


Band26(824-849) QAM16 BW=15MHz Channel=26965 RB Size=75 Position=#0

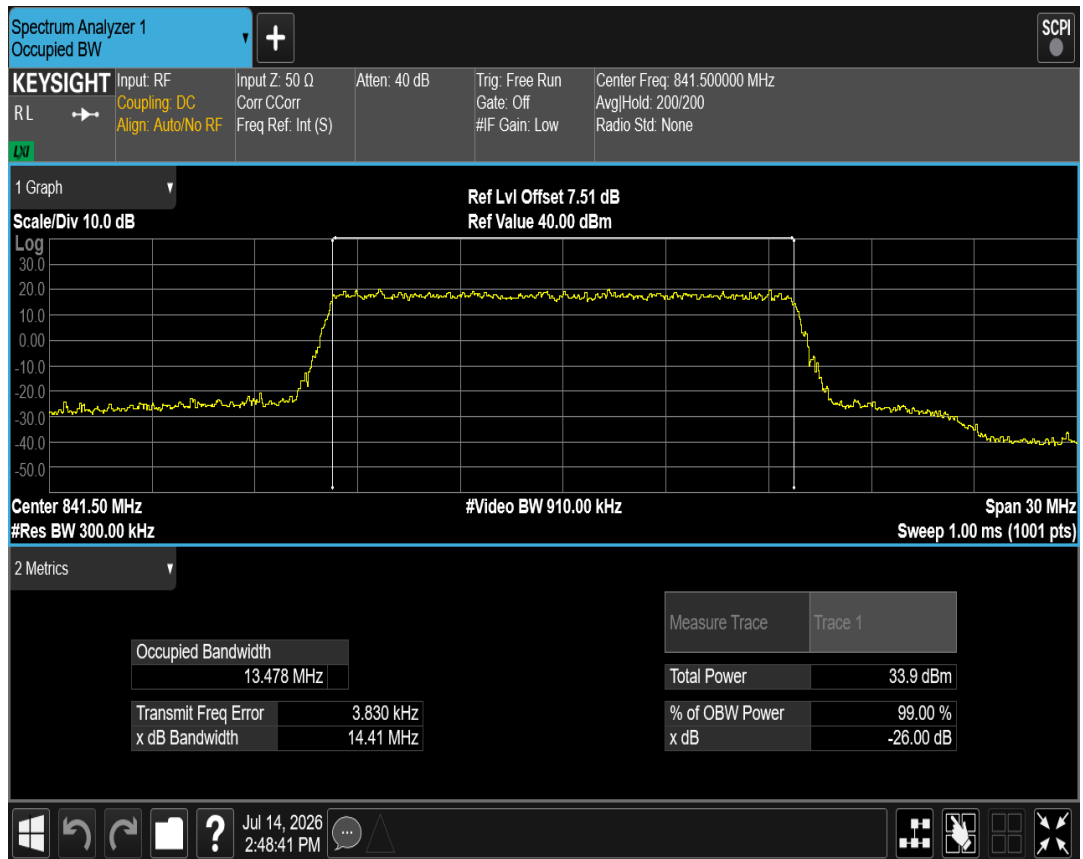


Band26(824-849) QAM16 BW=3MHz Channel=26805 RB Size=15 Position=#0

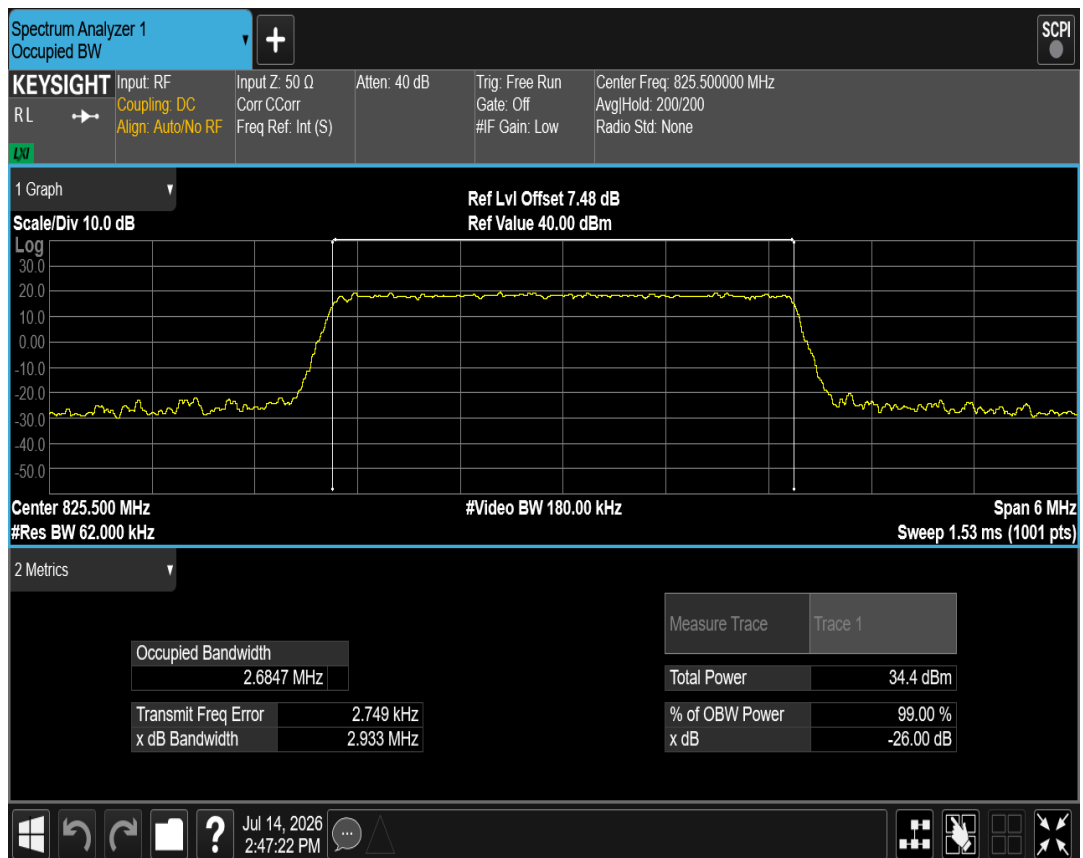


Band26(824-849) QAM16 BW=3MHz Channel=26915 RB Size=15 Position=#0

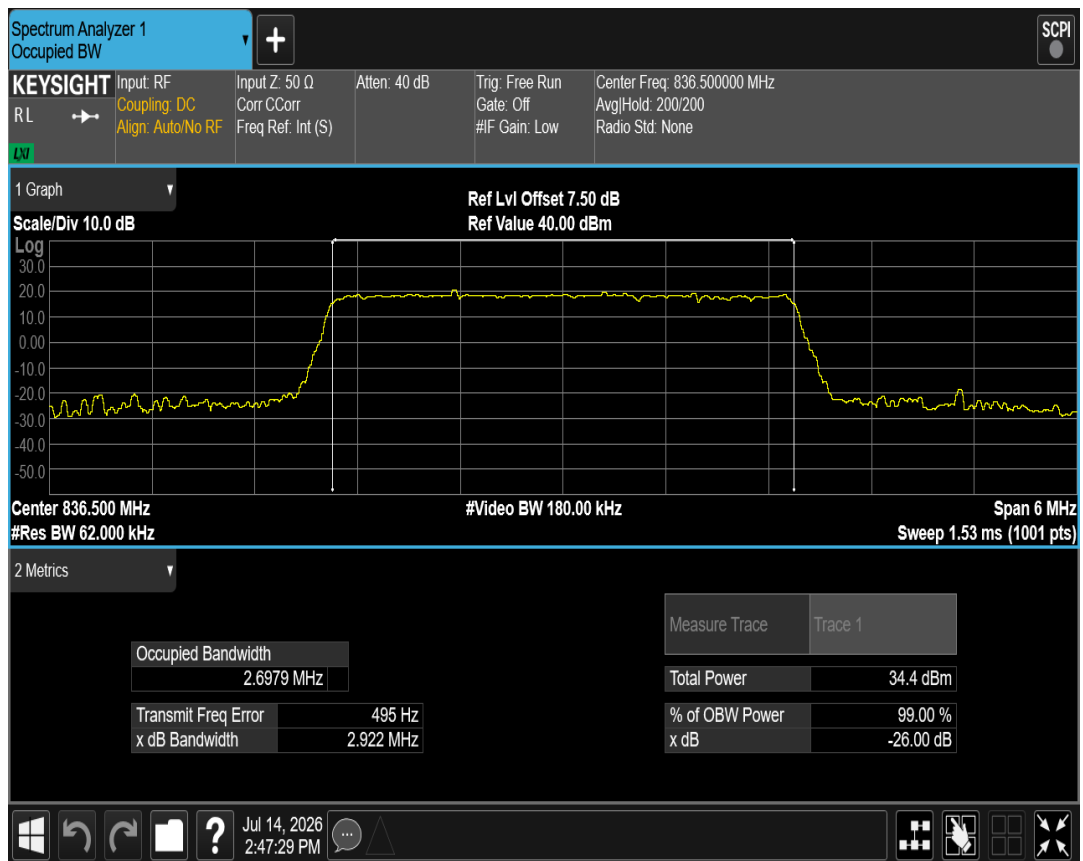


Band26(824-849) QAM16 BW=3MHz Channel=27025 RB Size=15 Position=#0

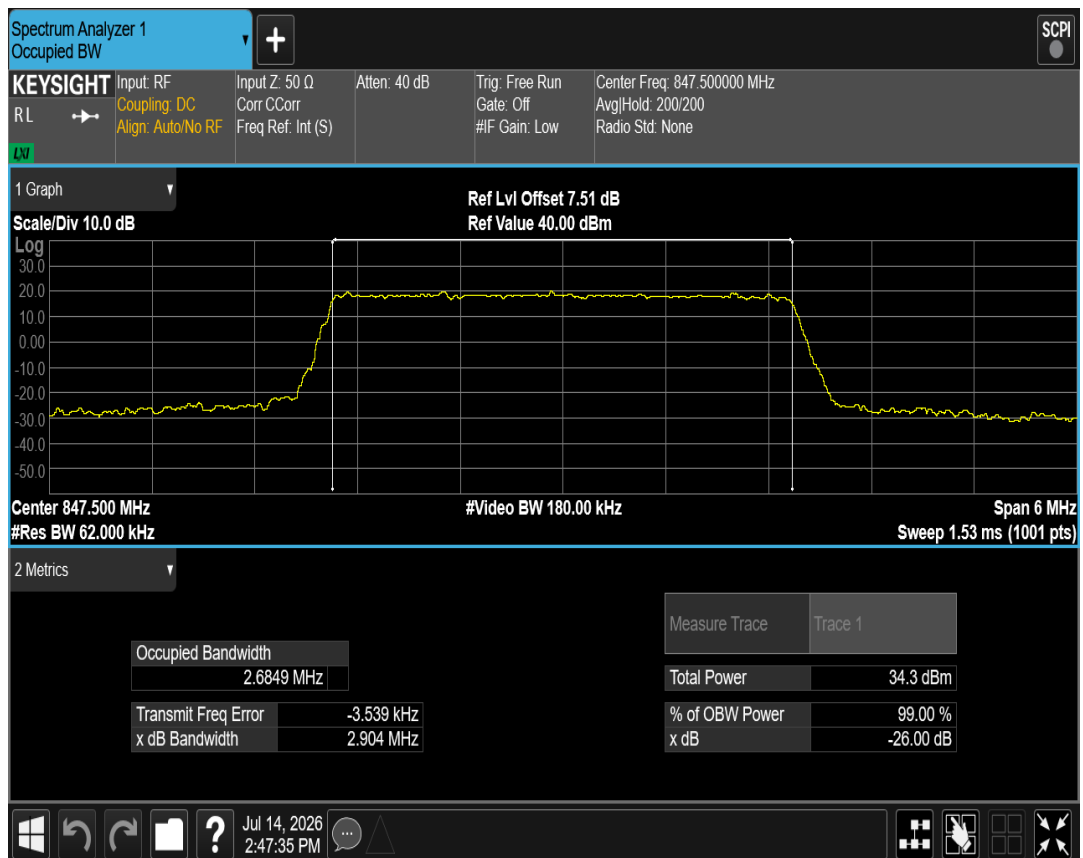



Band26(824-849) QAM16 BW=5MHz Channel=26815 RB Size=25 Position=#0

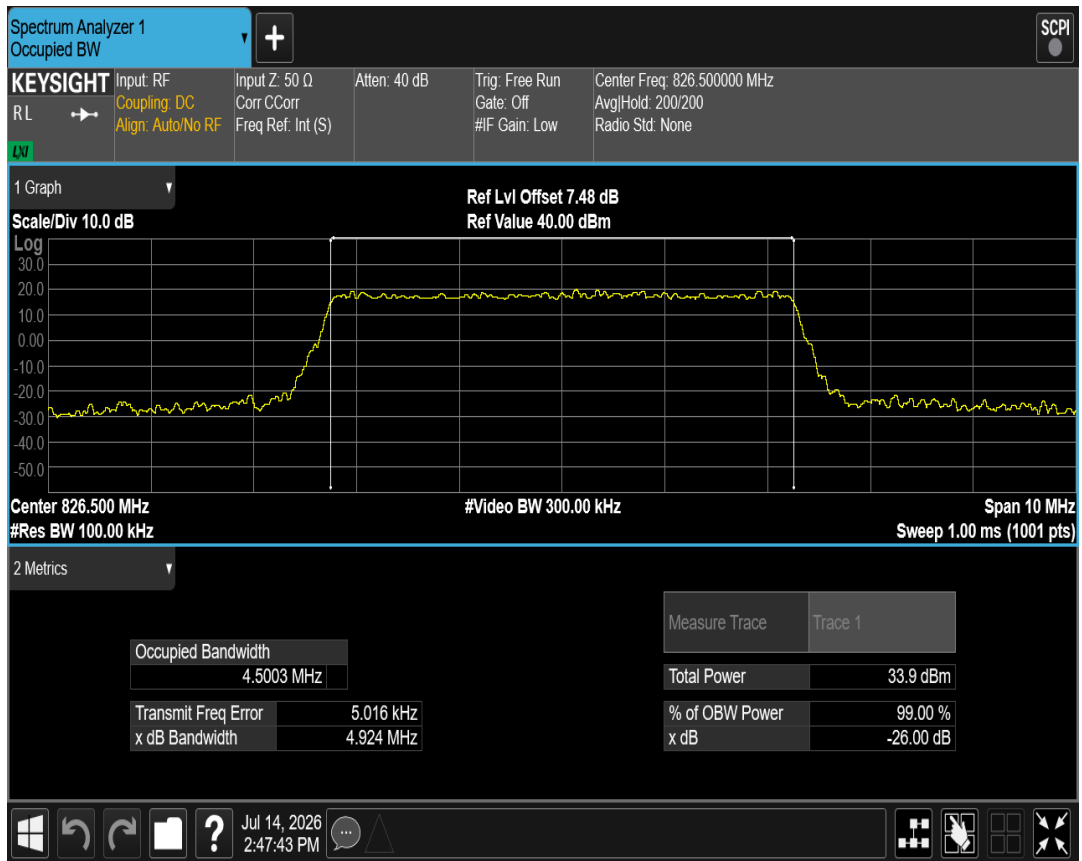


Band26(824-849) QAM16 BW=5MHz Channel=26915 RB Size=25 Position=#0

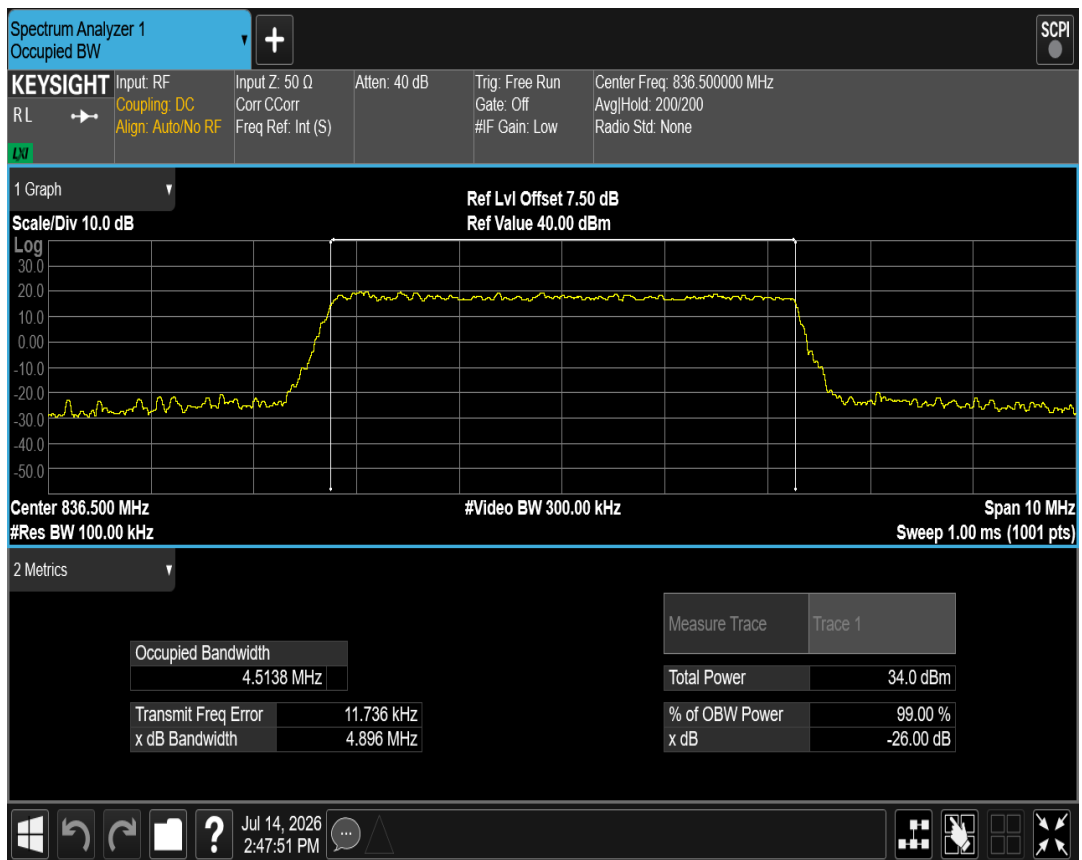


Band26(824-849) QAM16 BW=5MHz Channel=27015 RB Size=25 Position=#0

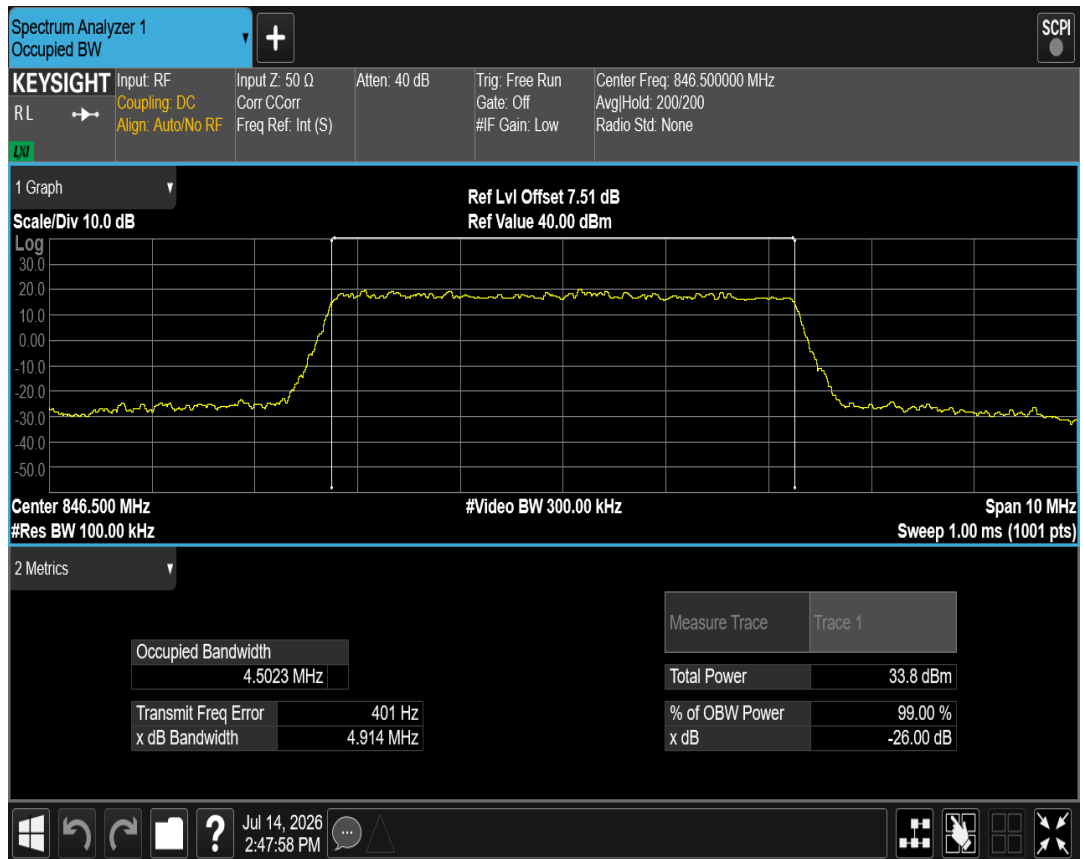
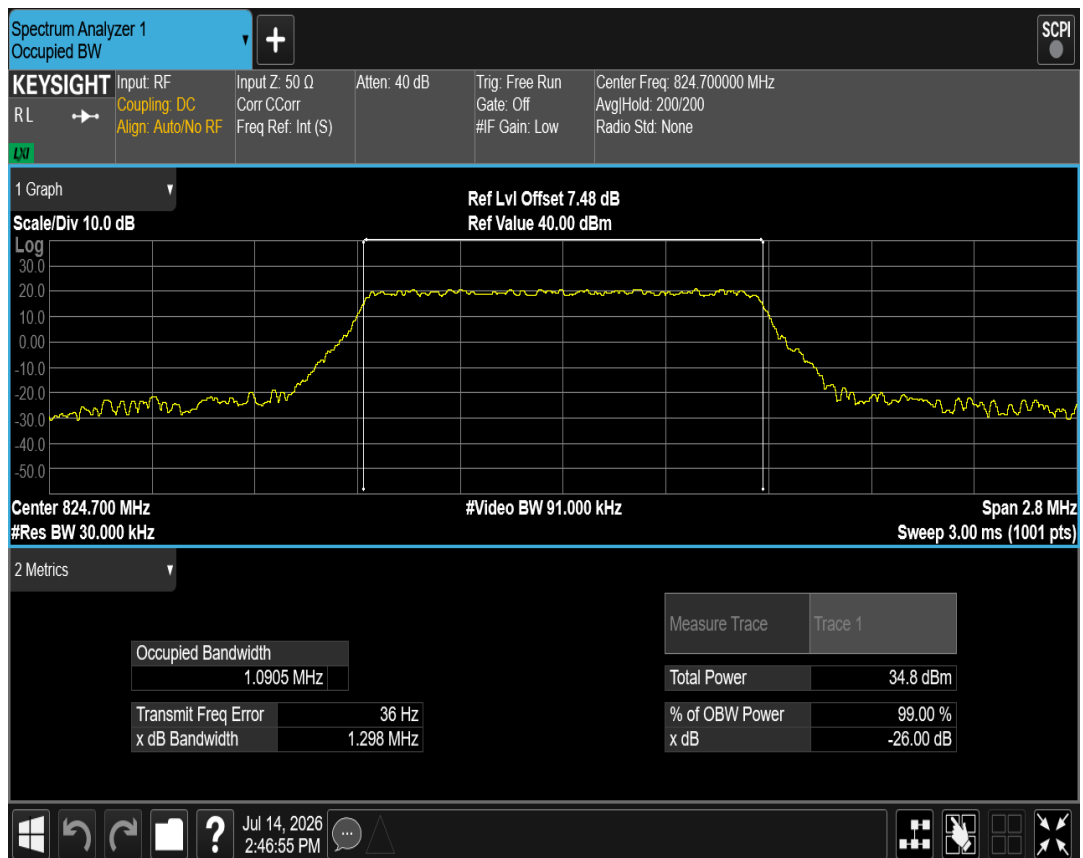
**Band26(824-849) QPSK BW=1.4MHz Channel=26797 RB Size=6 Position=#0****Band26(824-849) QPSK BW=1.4MHz Channel=26915 RB Size=6 Position=#0**

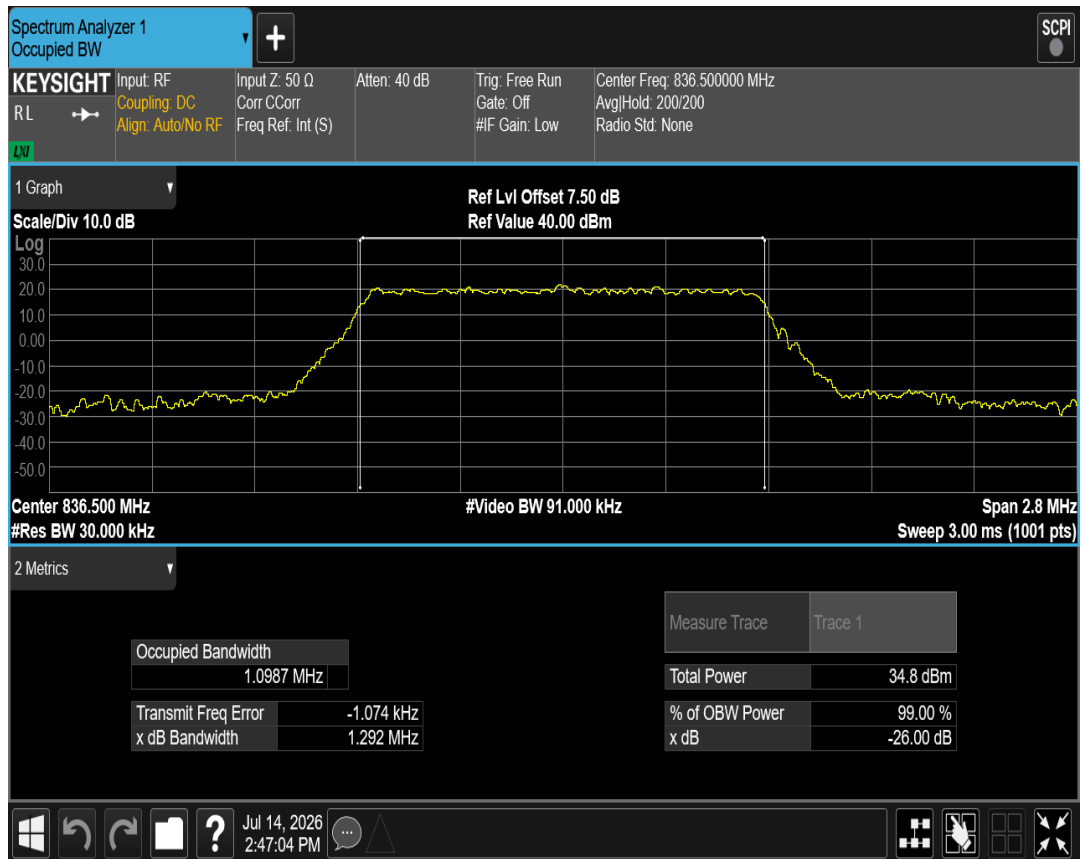


Band26(824-849) QPSK BW=1.4MHz Channel=27033 RB Size=6 Position=#0

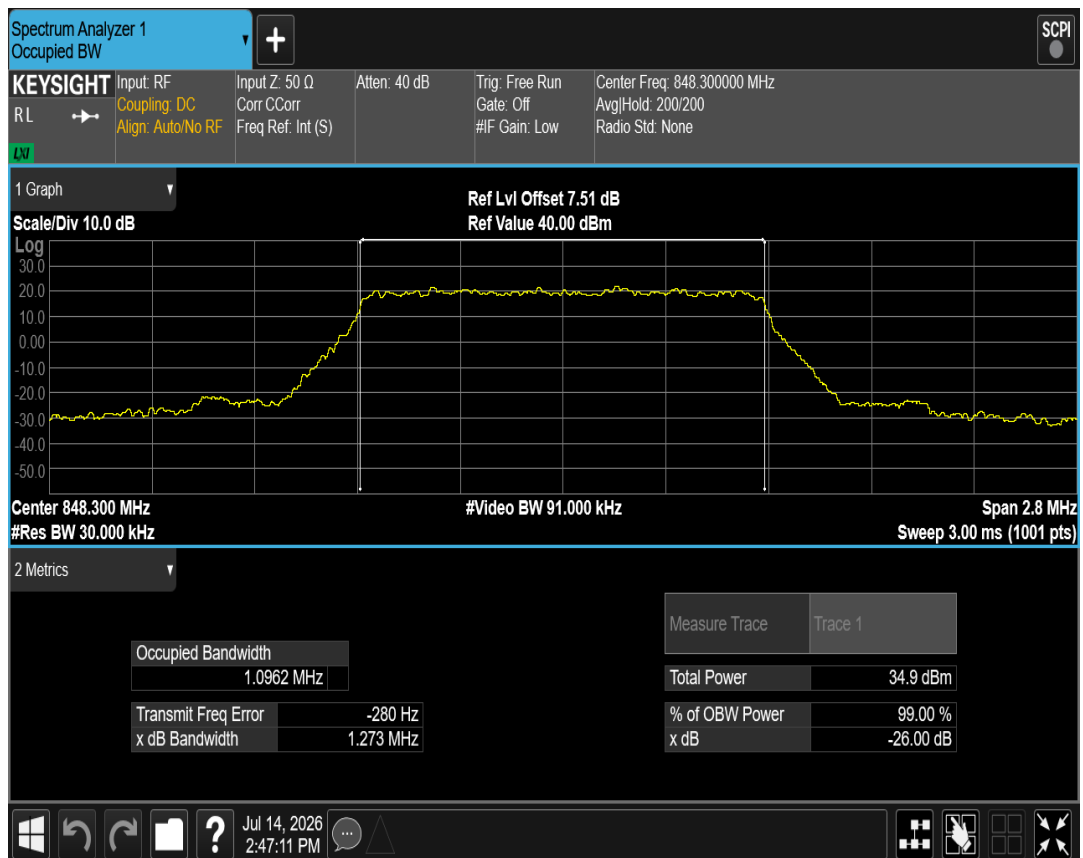


Band26(824-849) QPSK BW=10MHz Channel=26840 RB Size=50 Position=#0

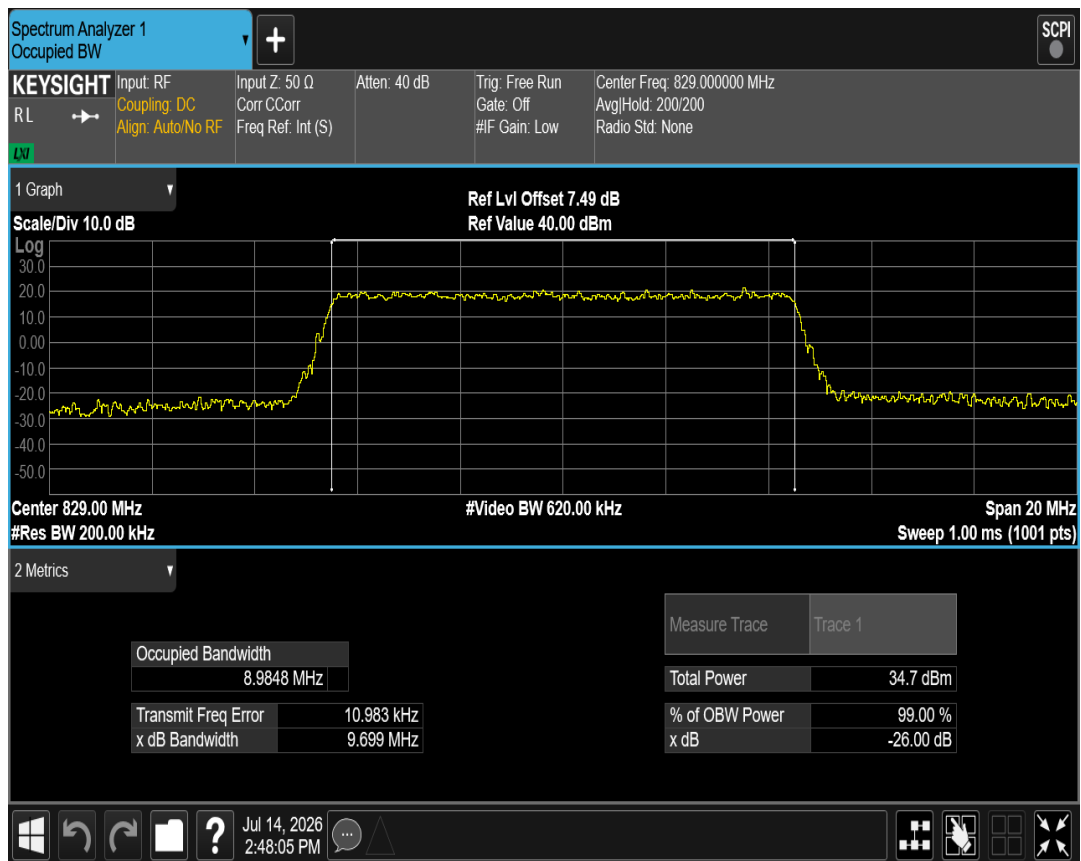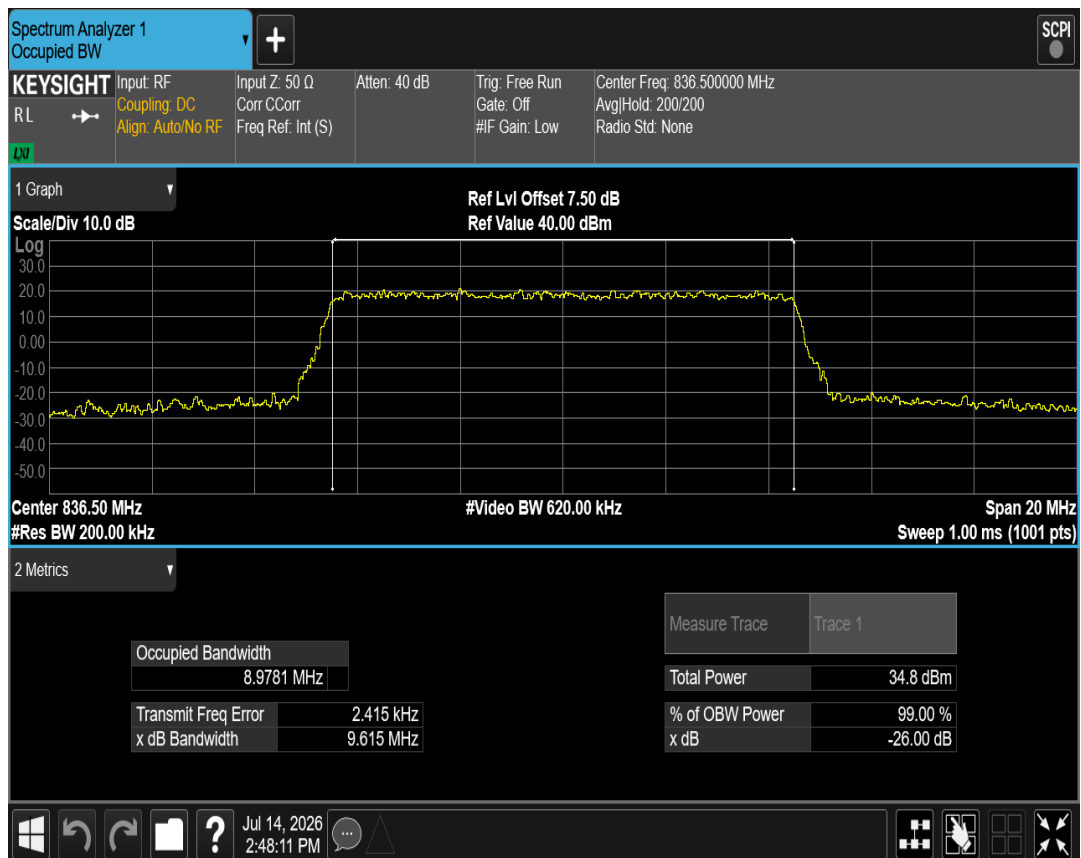
**Band26(824-849) QPSK BW=10MHz Channel=26915 RB Size=50 Position=#0****Band26(824-849) QPSK BW=10MHz Channel=26990 RB Size=50 Position=#0**

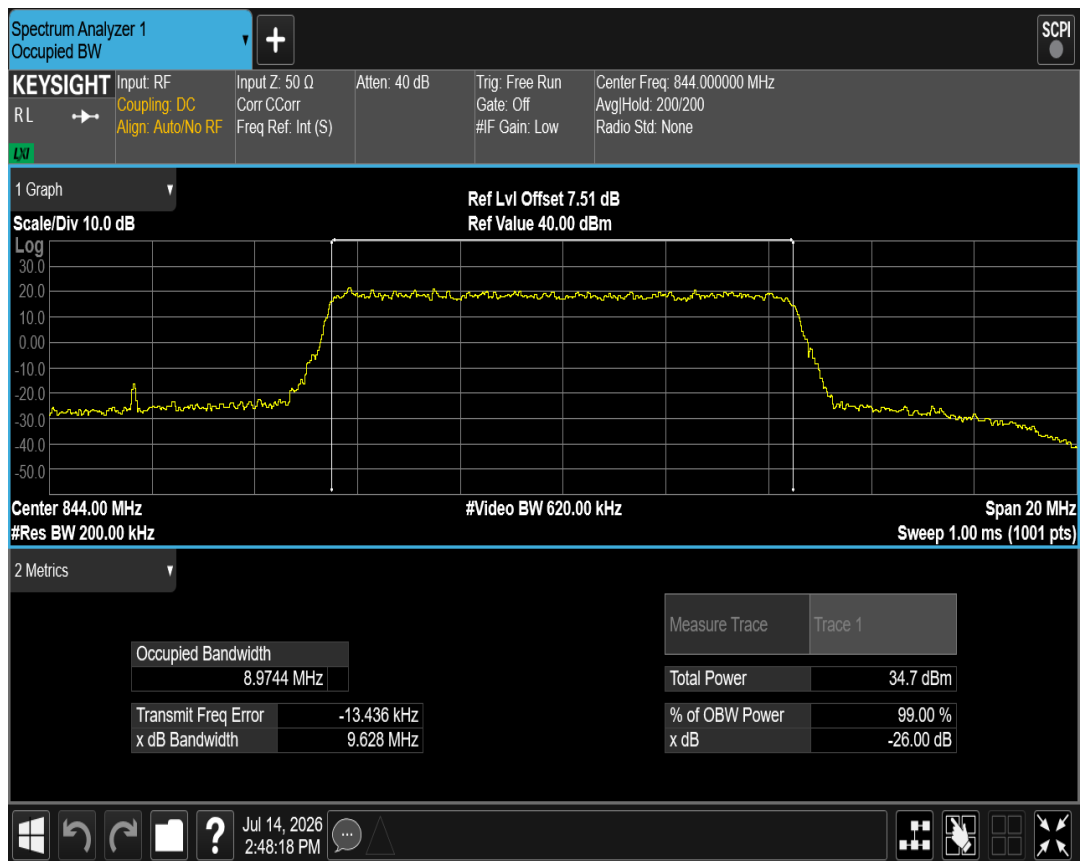


Band26(824-849) QPSK BW=15MHz Channel=26865 RB Size=75 Position=#0

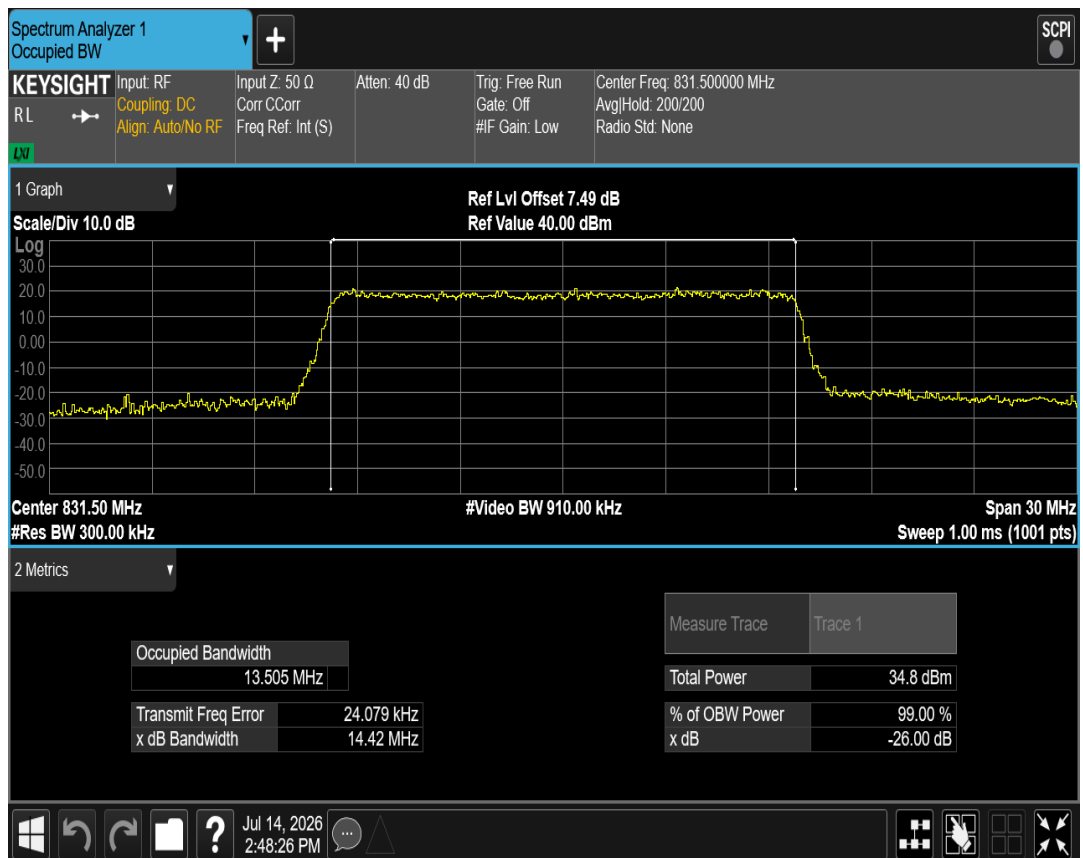



Band26(824-849) QPSK BW=15MHz Channel=26915 RB Size=75 Position=#0

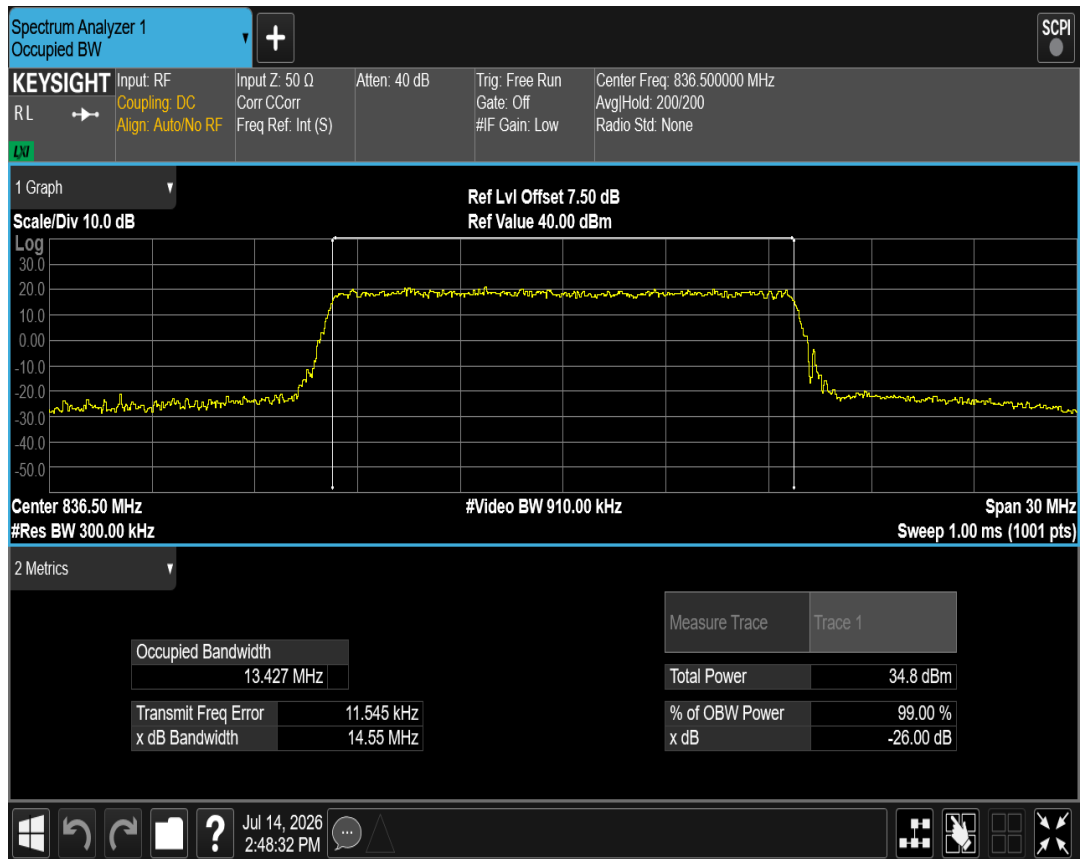


Band26(824-849) QPSK BW=15MHz Channel=26965 RB Size=75 Position=#0

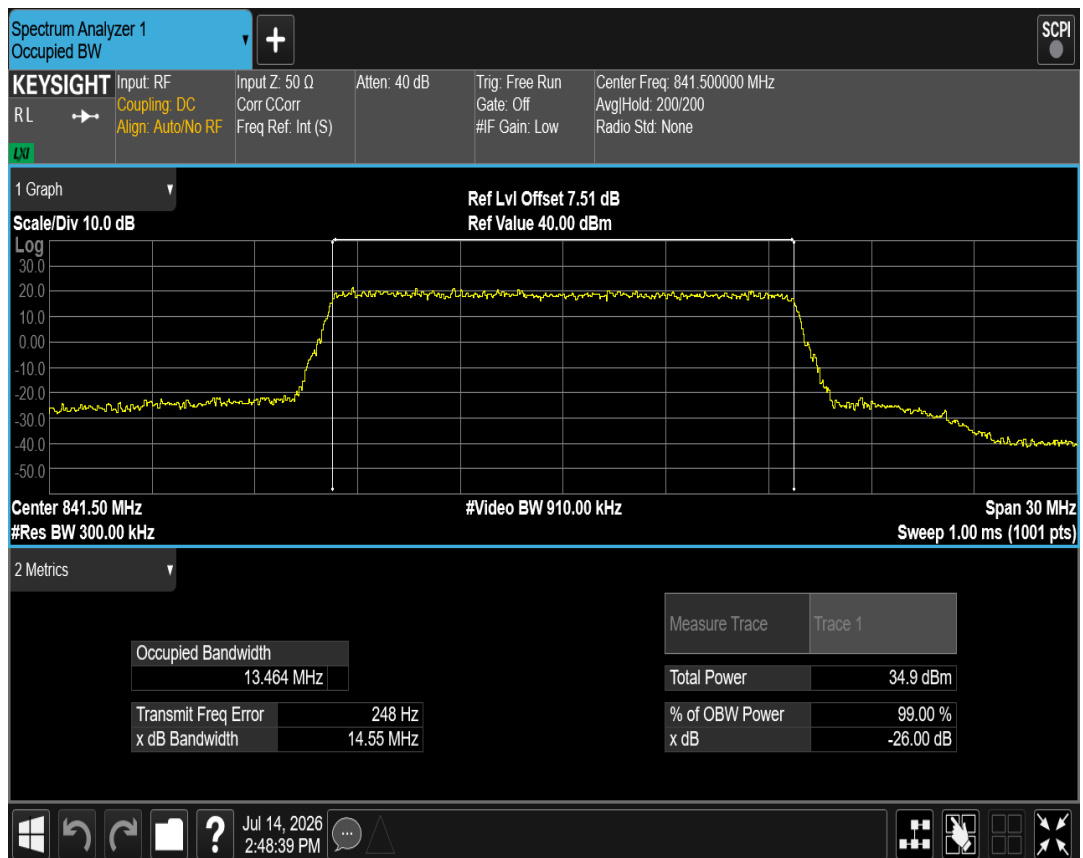


Band26(824-849) QPSK BW=3MHz Channel=26805 RB Size=15 Position=#0

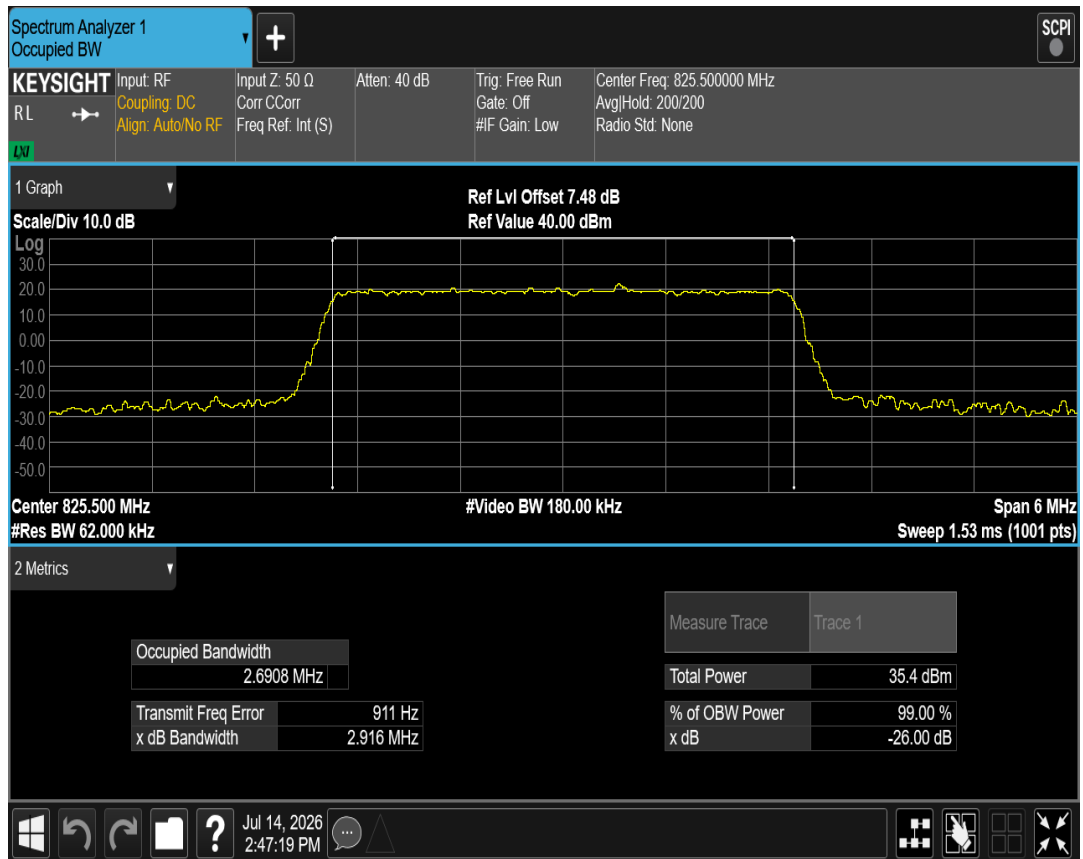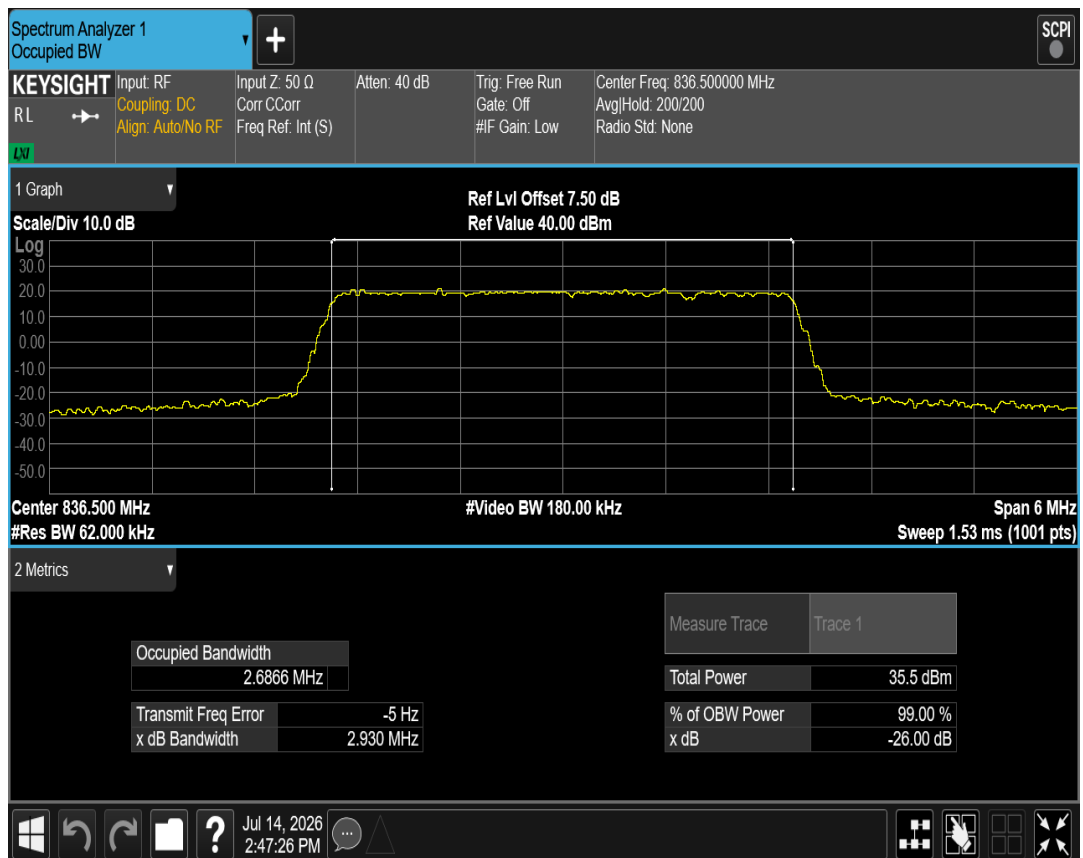
**Band26(824-849) QPSK BW=3MHz Channel=26915 RB Size=15 Position=#0****Band26(824-849) QPSK BW=3MHz Channel=27025 RB Size=15 Position=#0**

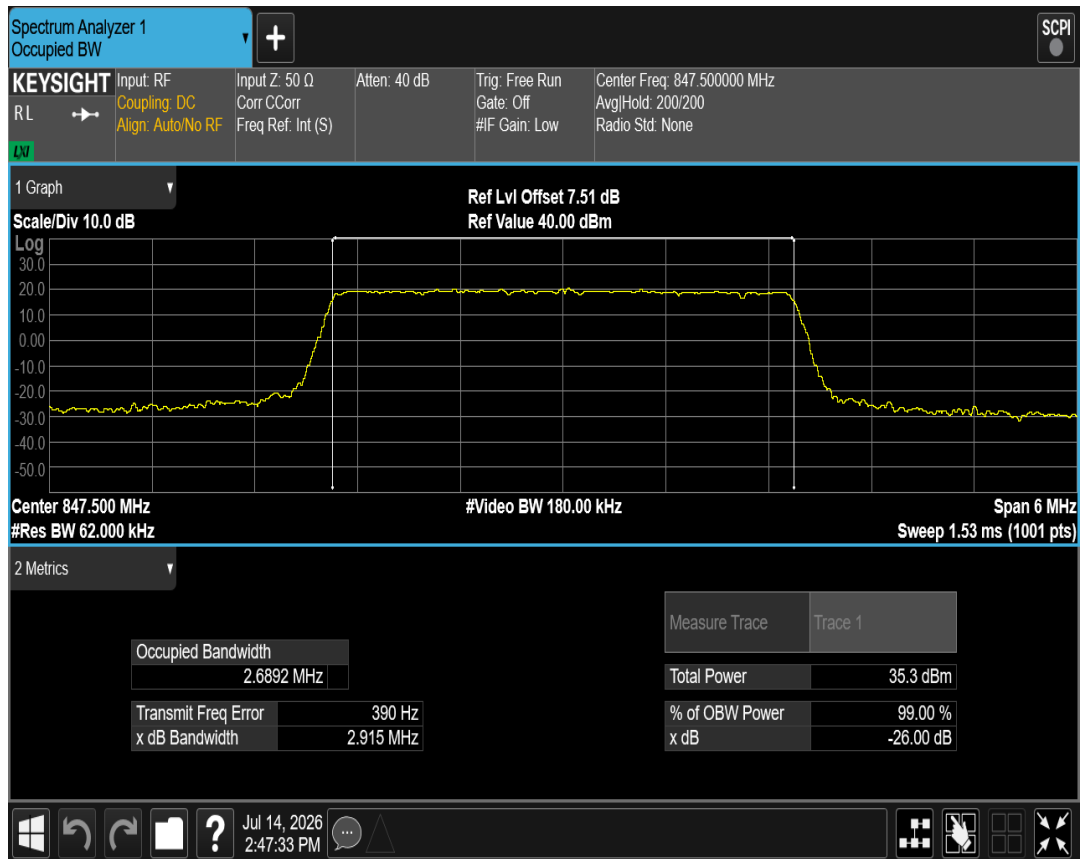


Band26(824-849) QPSK BW=5MHz Channel=26815 RB Size=25 Position=#0

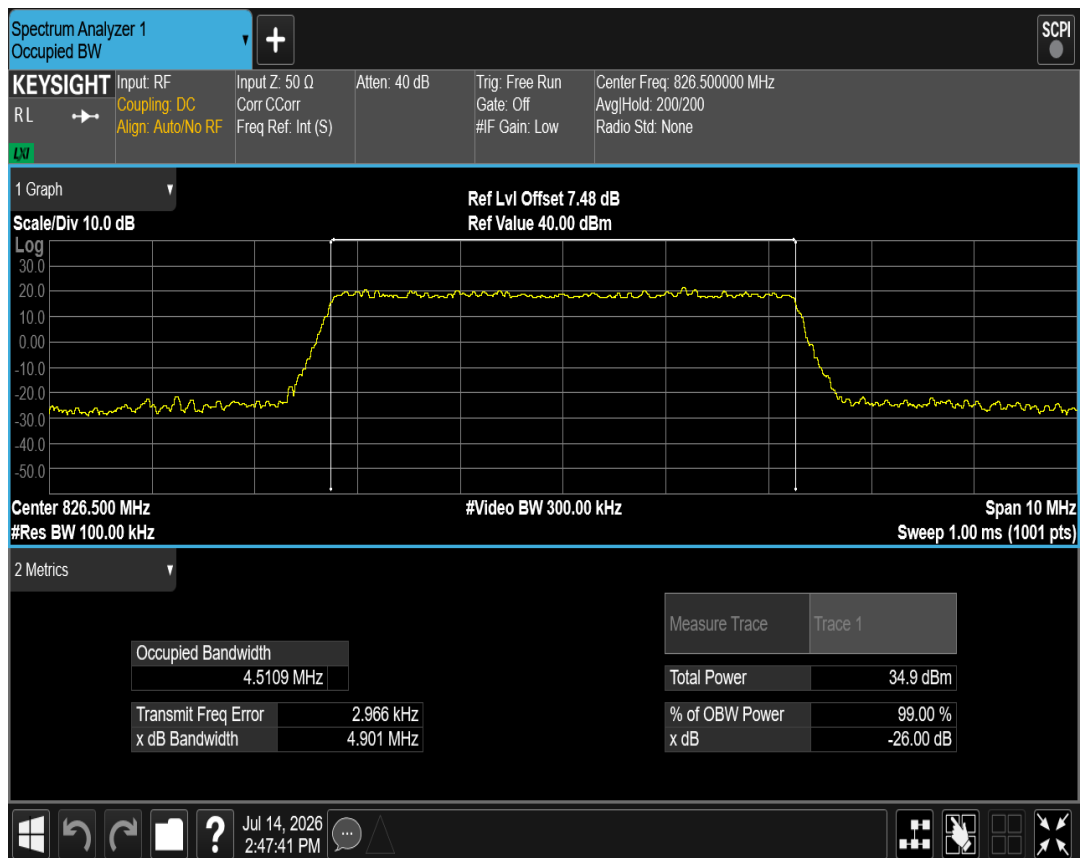

Band26(824-849) QPSK BW=5MHz Channel=26915 RB Size=25 Position=#0

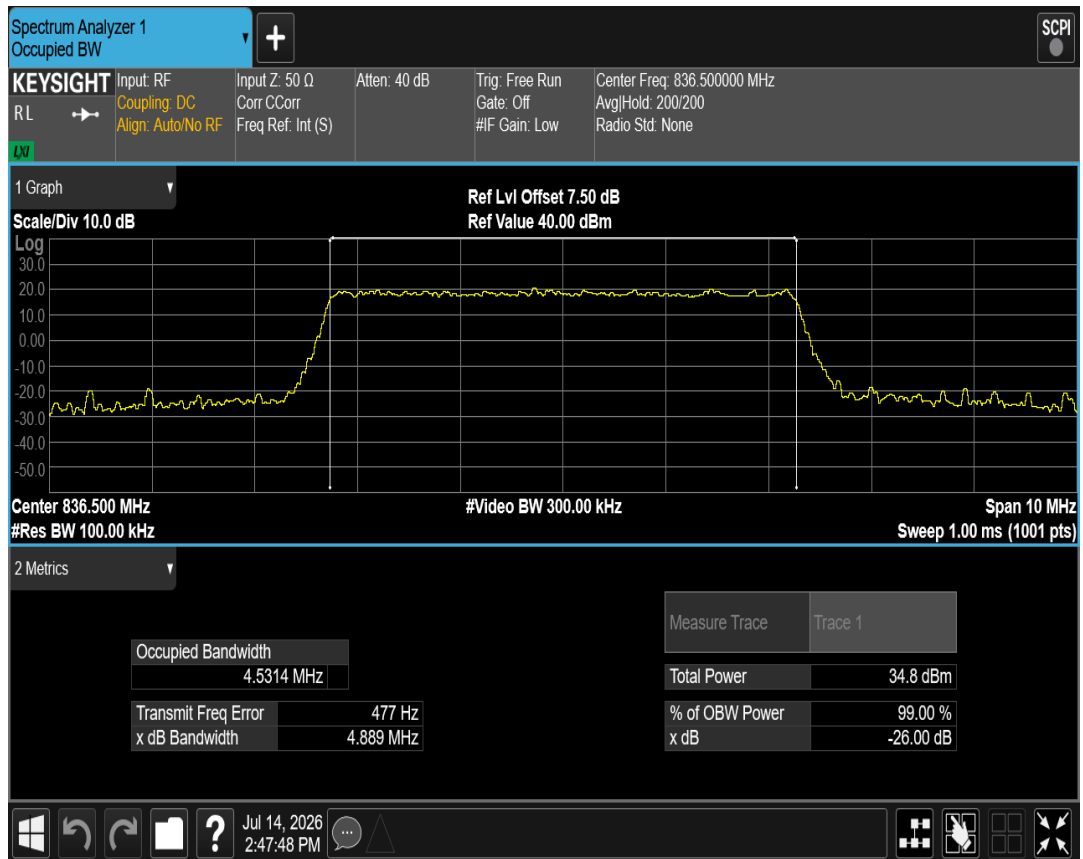


Band26(824-849) QPSK BW=5MHz Channel=27015 RB Size=25 Position=#0

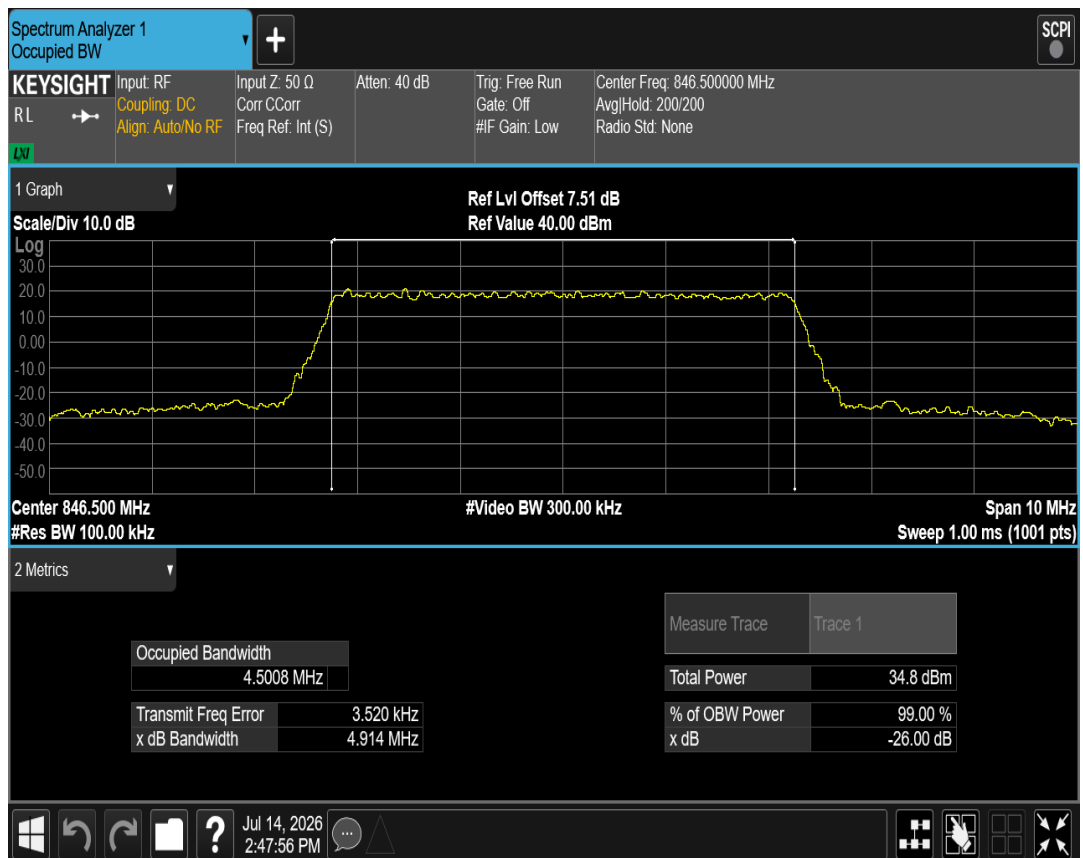

5 Band edge

<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
Band26(824-849)	1.4	26797	6	#0	QPSK	824.00	-28.49	-13	PASS
Band26(824-849)	1.4	26797	6	#0	QAM16	824.00	-29.00	-13	PASS
Band26(824-849)	1.4	27033	6	#0	QPSK	849.00	-28.71	-13	PASS
Band26(824-849)	1.4	27033	6	#0	QAM16	849.00	-29.44	-13	PASS
Band26(824-849)	3	26805	15	#0	QPSK	824.00	-29.52	-13	PASS
Band26(824-849)	3	26805	15	#0	QAM16	823.99	-30.70	-13	PASS
Band26(824-849)	3	27025	15	#0	QPSK	849.00	-30.09	-13	PASS
Band26(824-849)	3	27025	15	#0	QAM16	849.00	-31.26	-13	PASS
Band26(824-849)	5	26815	25	#0	QPSK	823.99	-28.83	-13	PASS
Band26(824-849)	5	26815	25	#0	QAM16	824.00	-29.80	-13	PASS
Band26(824-849)	5	27015	25	#0	QPSK	849.00	-26.99	-13	PASS
Band26(824-849)	5	27015	25	#0	QAM16	849.00	-30.49	-13	PASS
Band26(824-849)	10	26840	50	#0	QPSK	824.00	-29.32	-13	PASS
Band26(824-849)	10	26840	50	#0	QAM16	823.98	-32.85	-13	PASS
Band26(824-849)	10	26990	50	#0	QPSK	849.00	-32.12	-13	PASS
Band26(824-849)	10	26990	50	#0	QAM16	849.04	-33.81	-13	PASS
Band26(824-849)	15	26865	75	#0	QPSK	824.00	-32.93	-13	PASS
Band26(824-849)	15	26865	75	#0	QAM16	823.97	-34.06	-13	PASS
Band26(824-849)	15	26965	75	#0	QPSK	849.00	-31.44	-13	PASS
Band26(824-849)	15	26965	75	#0	QAM16	849.03	-33.63	-13	PASS

Band26(824-849) QAM16 BW=1.4MHz Channel=26797 RB Size=6 Position=#0

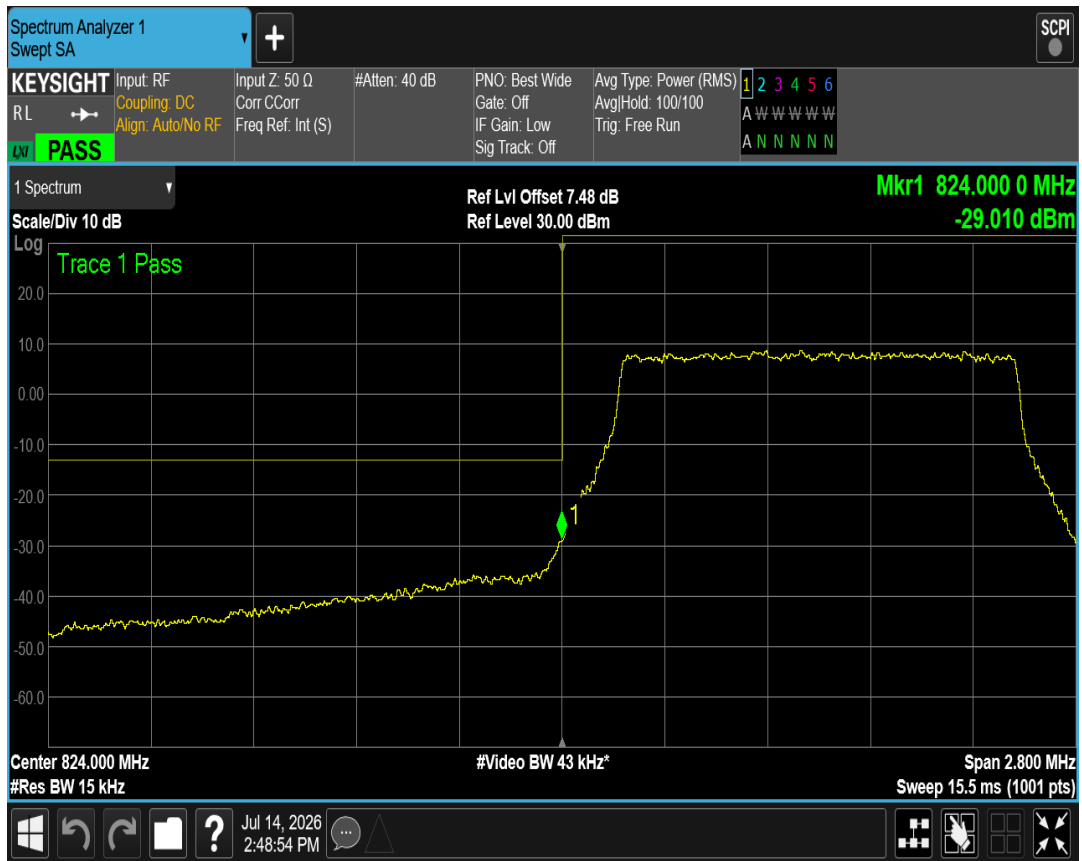

Band26(824-849) QAM16 BW=1.4MHz Channel=27033 RB Size=6 Position=#0




Band26(824-849) QAM16 BW=10MHz Channel=26840 RB Size=50 Position=#0



Band26(824-849) QAM16 BW=10MHz Channel=26990 RB Size=50 Position=#0




Band26(824-849) QAM16 BW=15MHz Channel=26865 RB Size=75 Position=#0

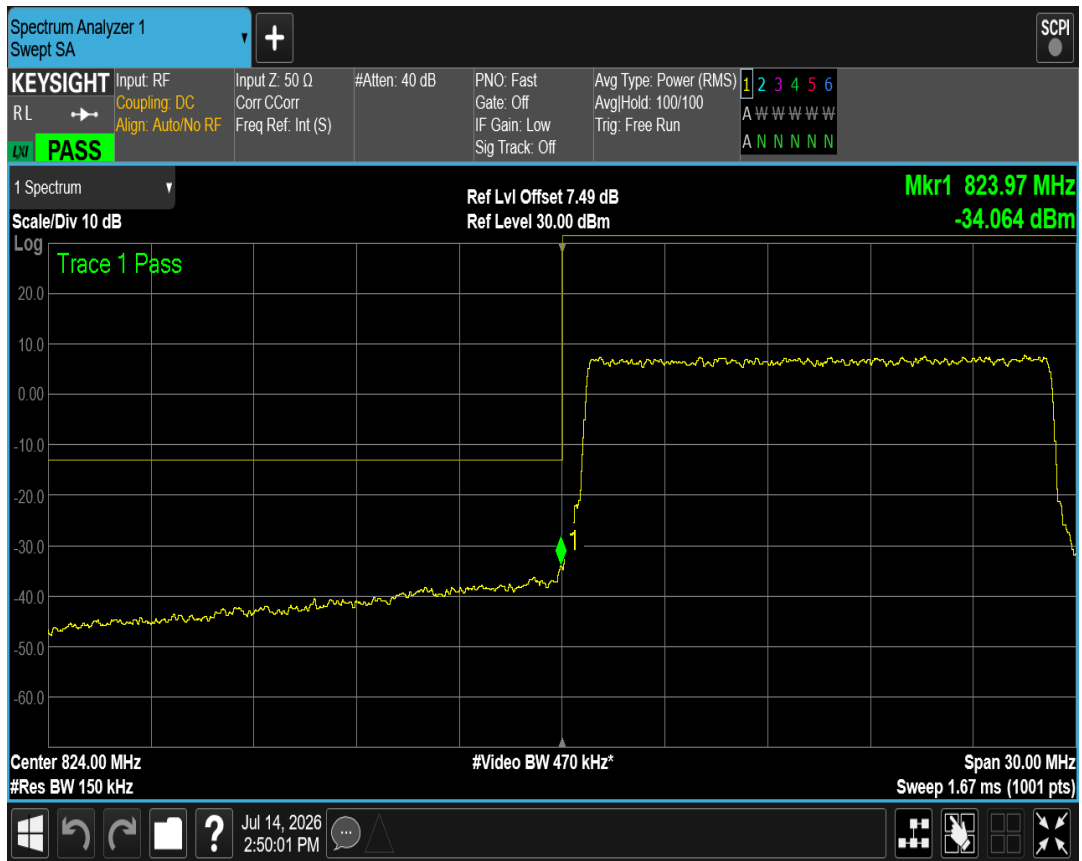

Band26(824-849) QAM16 BW=15MHz Channel=26965 RB Size=75 Position=#0




Band26(824-849) QAM16 BW=3MHz Channel=26805 RB Size=15 Position=#0

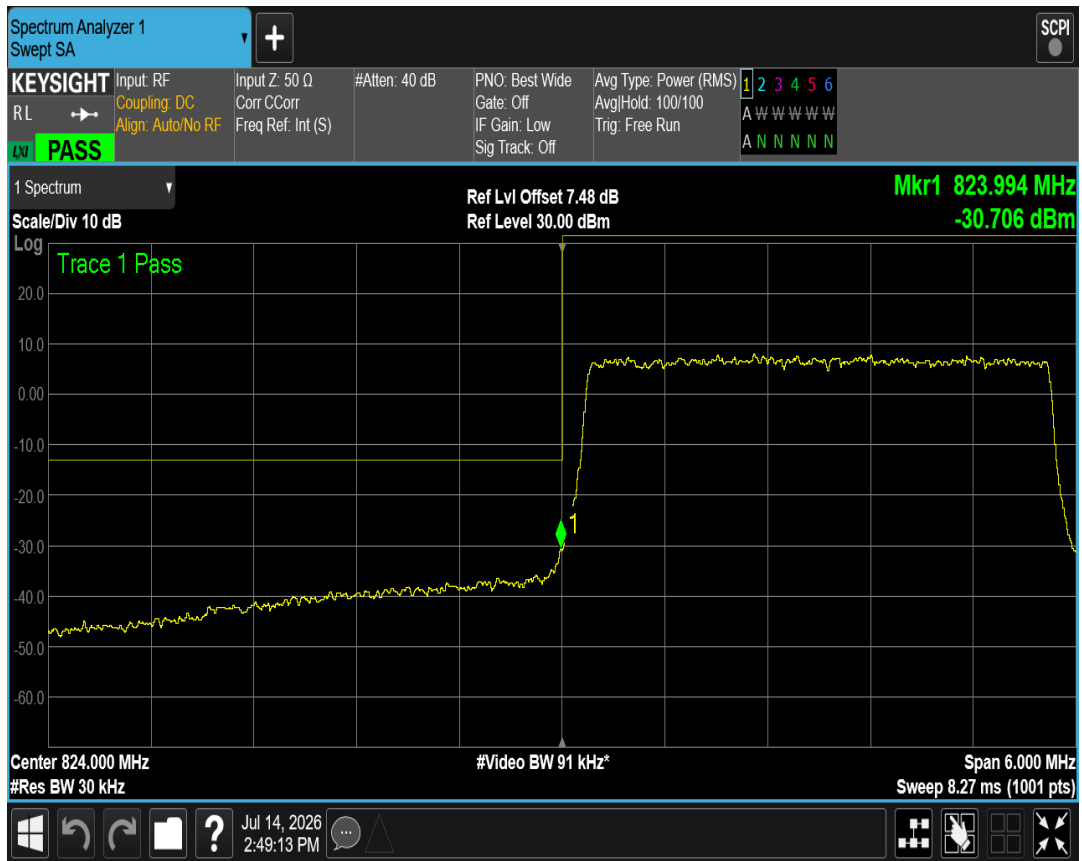

Band26(824-849) QAM16 BW=3MHz Channel=27025 RB Size=15 Position=#0




Band26(824-849) QAM16 BW=5MHz Channel=26815 RB Size=25 Position=#0

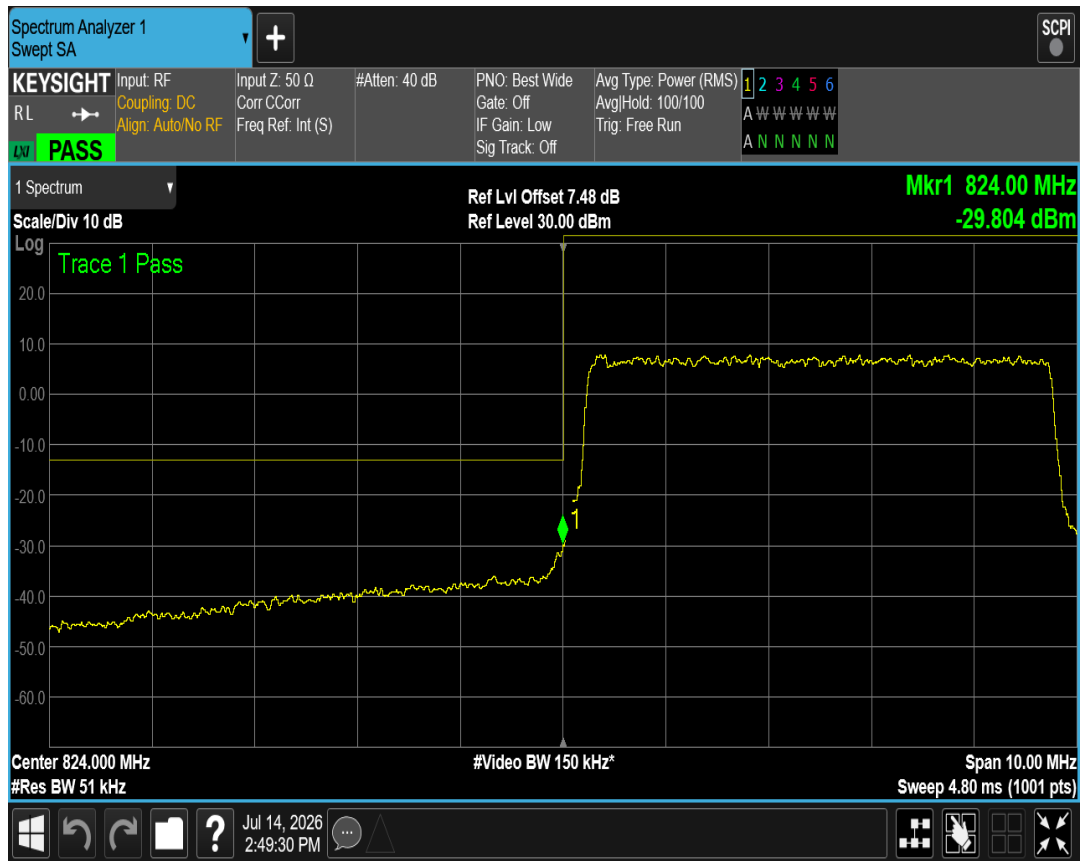

Band26(824-849) QAM16 BW=5MHz Channel=27015 RB Size=25 Position=#0




Band26(824-849) QPSK BW=1.4MHz Channel=26797 RB Size=6 Position=#0

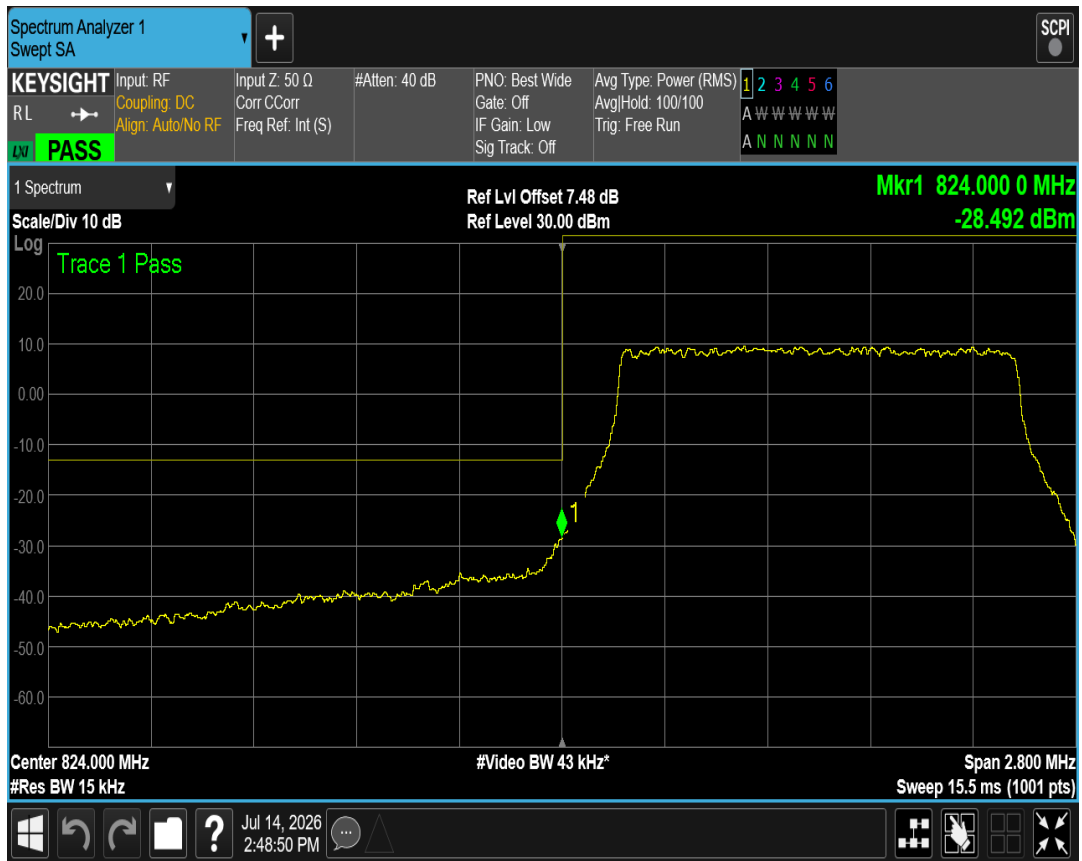

Band26(824-849) QPSK BW=1.4MHz Channel=27033 RB Size=6 Position=#0




Band26(824-849) QPSK BW=10MHz Channel=26840 RB Size=50 Position=#0

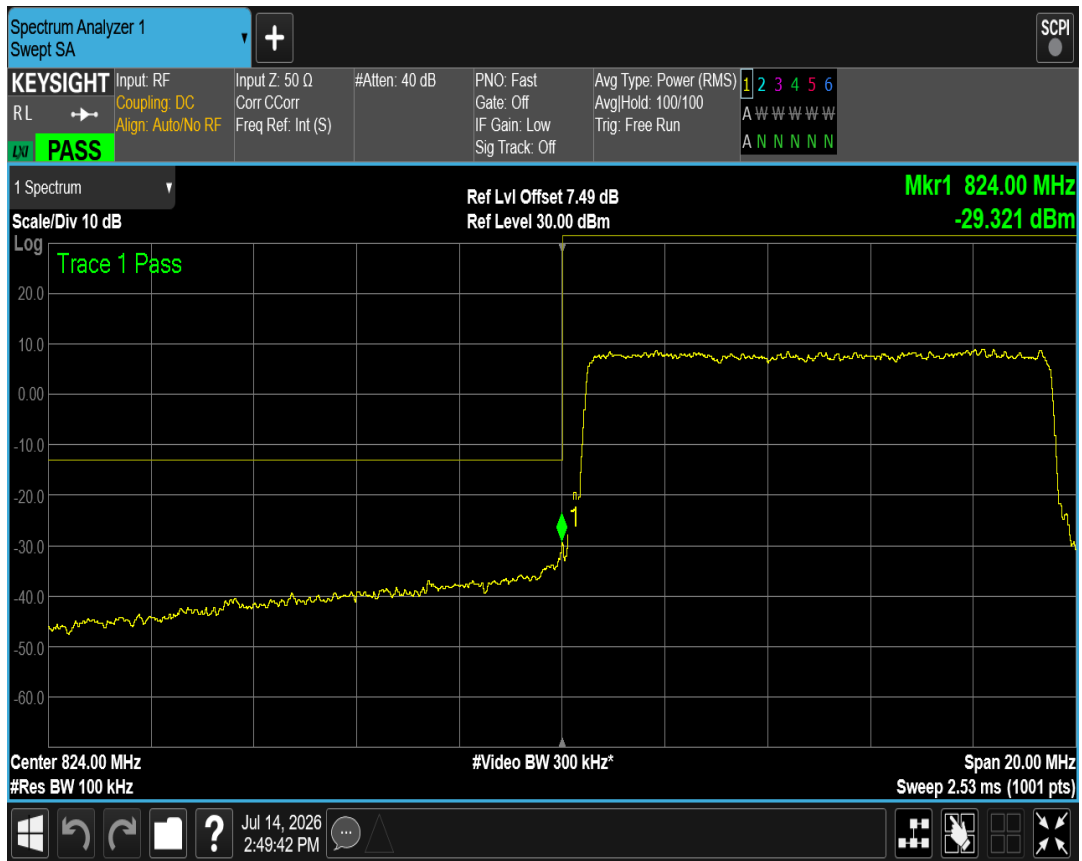

Band26(824-849) QPSK BW=10MHz Channel=26990 RB Size=50 Position=#0




Band26(824-849) QPSK BW=15MHz Channel=26865 RB Size=75 Position=#0

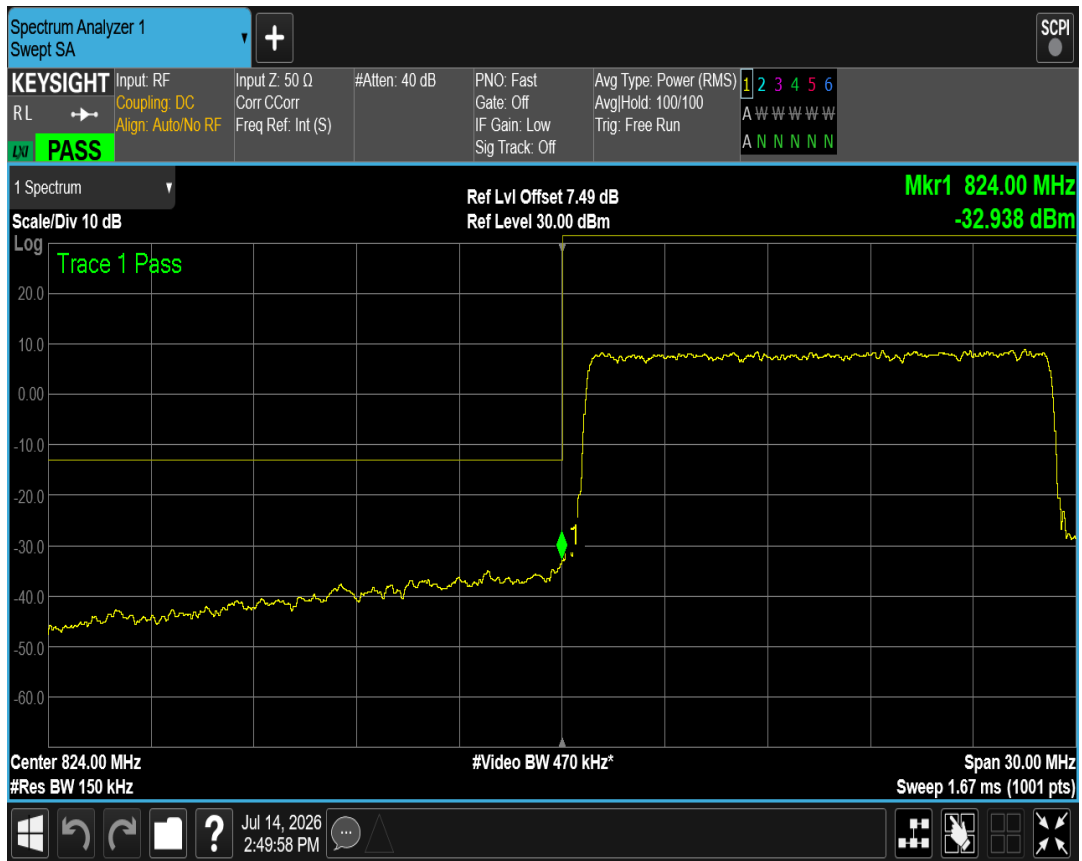


Band26(824-849) QPSK BW=15MHz Channel=26965 RB Size=75 Position=#0




Band26(824-849) QPSK BW=3MHz Channel=26805 RB Size=15 Position=#0

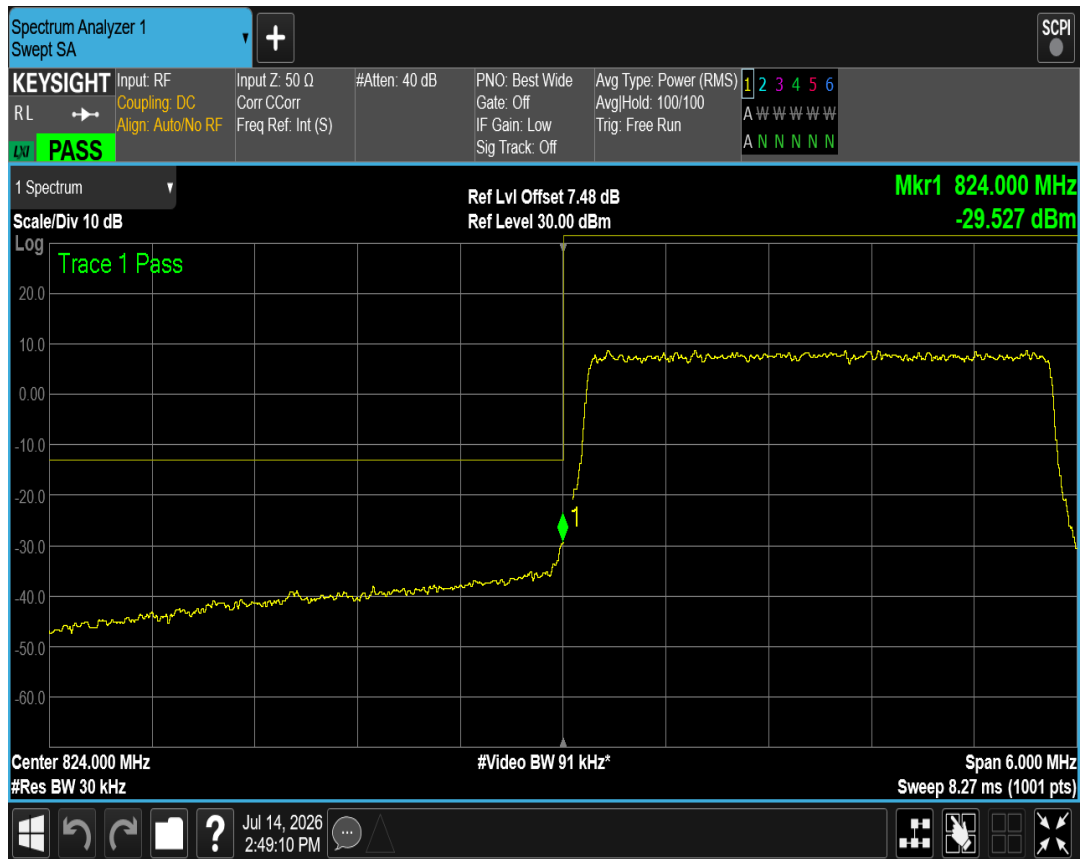


Band26(824-849) QPSK BW=3MHz Channel=27025 RB Size=15 Position=#0

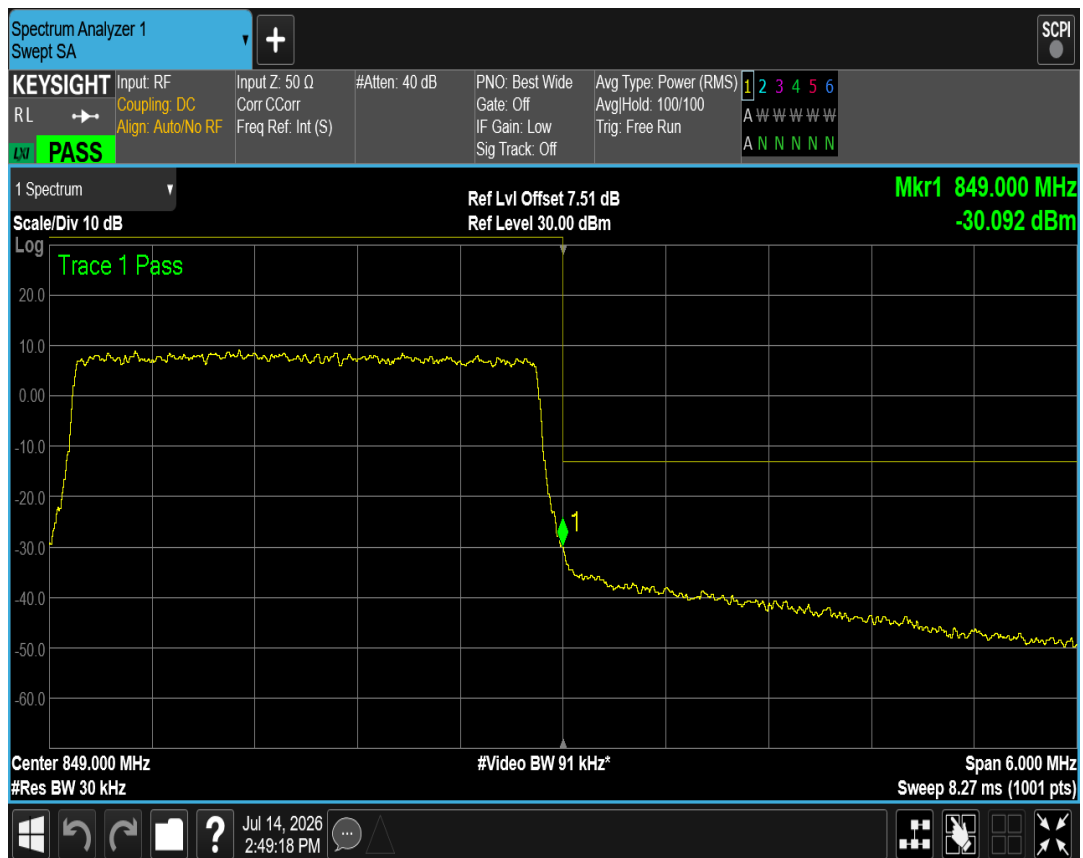

Band26(824-849) QPSK BW=5MHz Channel=26815 RB Size=25 Position=#0

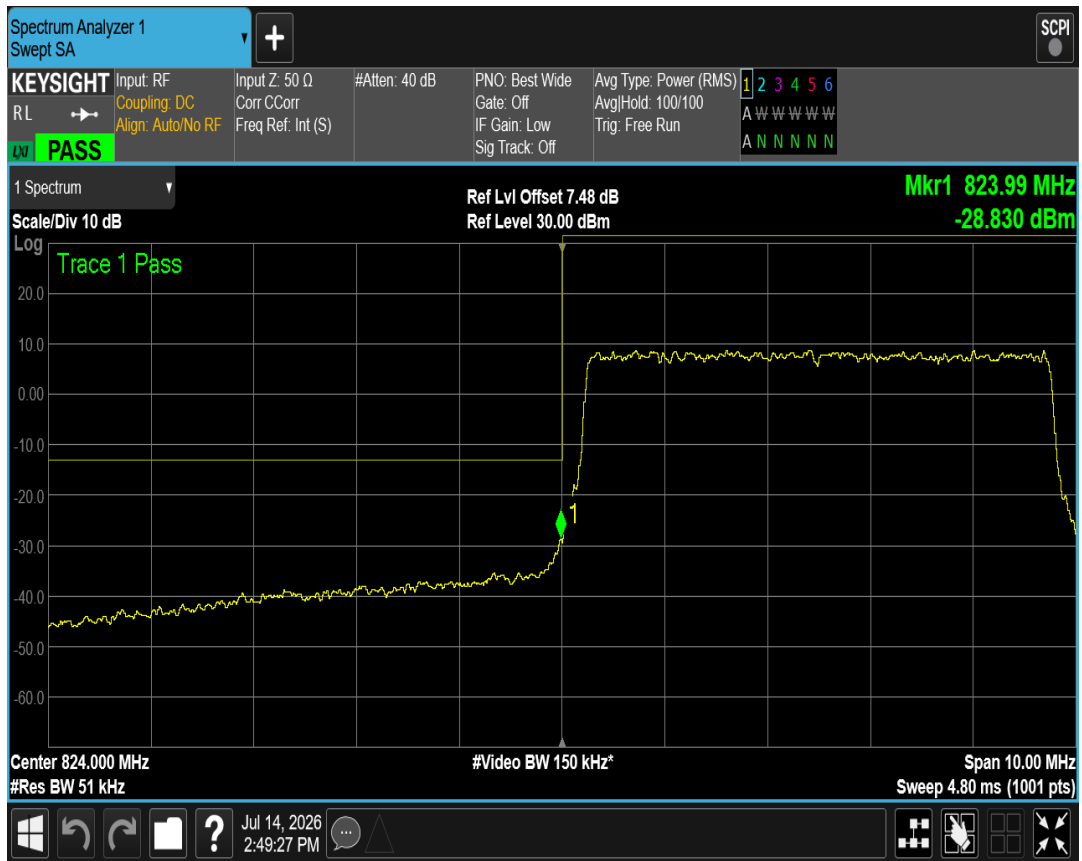


Band26(824-849) QPSK BW=5MHz Channel=27015 RB Size=25 Position=#0

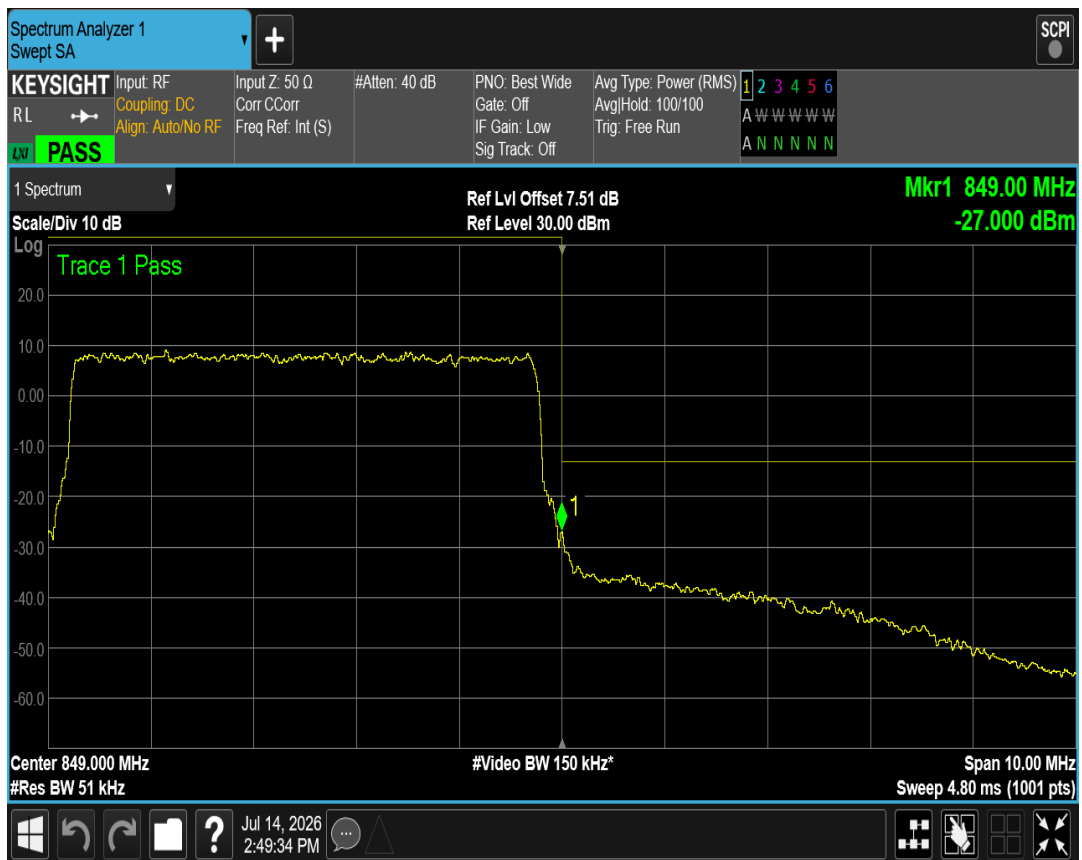


6 Out-of-band emissions

<i>Band</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Size</i>	<i>RB Position</i>	<i>Modulation</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
Band26(824-849)	1.4	26797	6	#0	QPSK	3337.98	-37.56	-13	PASS
Band26(824-849)	1.4	26797	6	#0	QAM16	3180.93	-38.23	-13	PASS
Band26(824-849)	1.4	27033	6	#0	QPSK	3125.35	-37.43	-13	PASS
Band26(824-849)	1.4	27033	6	#0	QAM16	3090.70	-37.30	-13	PASS
Band26(824-849)	3	26805	15	#0	QPSK	3363.85	-37.80	-13	PASS
Band26(824-849)	3	26805	15	#0	QAM16	2610.33	-37.63	-13	PASS
Band26(824-849)	3	27025	15	#0	QPSK	2965.60	-38.11	-13	PASS
Band26(824-849)	3	27025	15	#0	QAM16	3137.50	-37.36	-13	PASS
Band26(824-849)	5	26815	25	#0	QPSK	3718.00	-36.74	-13	PASS
Band26(824-849)	5	26815	25	#0	QAM16	3030.40	-37.45	-13	PASS
Band26(824-849)	5	27015	25	#0	QPSK	3076.75	-37.70	-13	PASS
Band26(824-849)	5	27015	25	#0	QAM16	3030.85	-37.87	-13	PASS
Band26(824-849)	10	26840	50	#0	QPSK	3242.35	-38.27	-13	PASS
Band26(824-849)	10	26840	50	#0	QAM16	2475.33	-37.12	-13	PASS
Band26(824-849)	10	26990	50	#0	QPSK	3228.40	-37.47	-13	PASS
Band26(824-849)	10	26990	50	#0	QAM16	3060.10	-37.80	-13	PASS
Band26(824-849)	15	26865	75	#0	QPSK	3061.68	-37.34	-13	PASS
Band26(824-849)	15	26865	75	#0	QAM16	3248.65	-37.33	-13	PASS
Band26(824-849)	15	26965	75	#0	QPSK	3359.80	-37.00	-13	PASS
Band26(824-849)	15	26965	75	#0	QAM16	3288.93	-38.02	-13	PASS


Band26(824-849) QAM16 BW=1.4MHz Channel=26797 RB Size=6 Position=#0

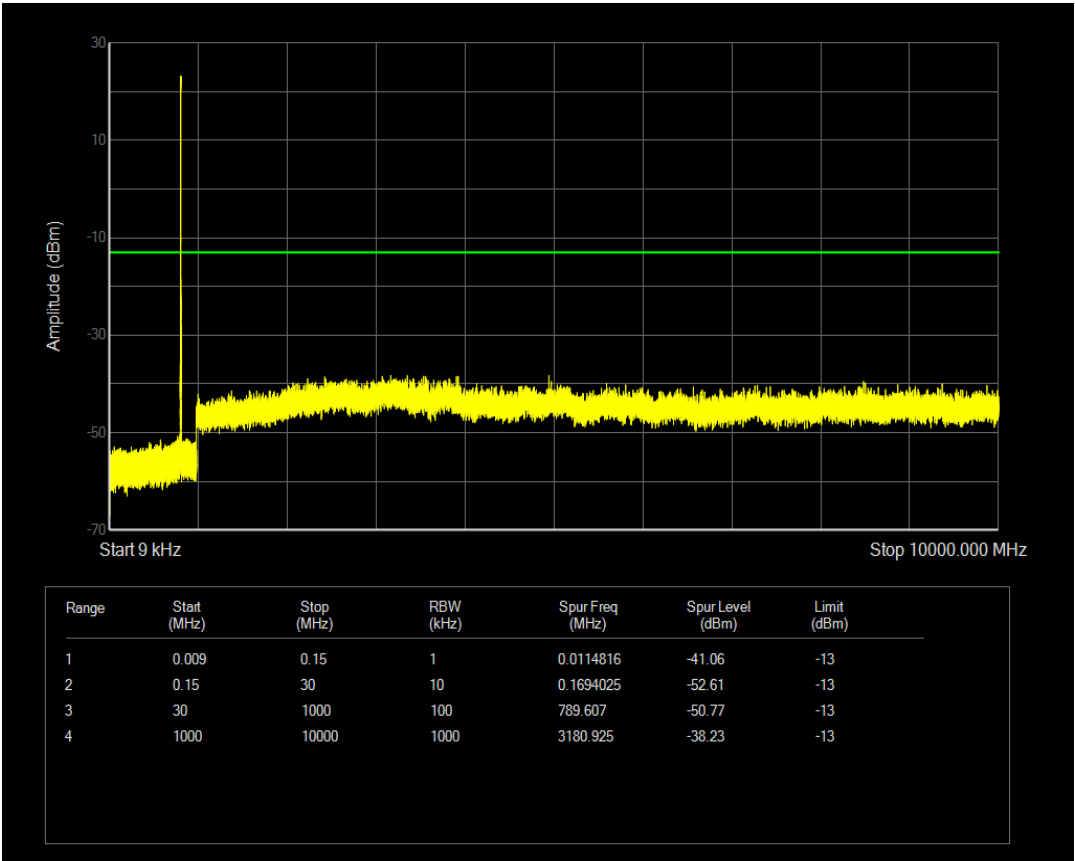


Band26(824-849) QAM16 BW=1.4MHz Channel=27033 RB Size=6 Position=#0

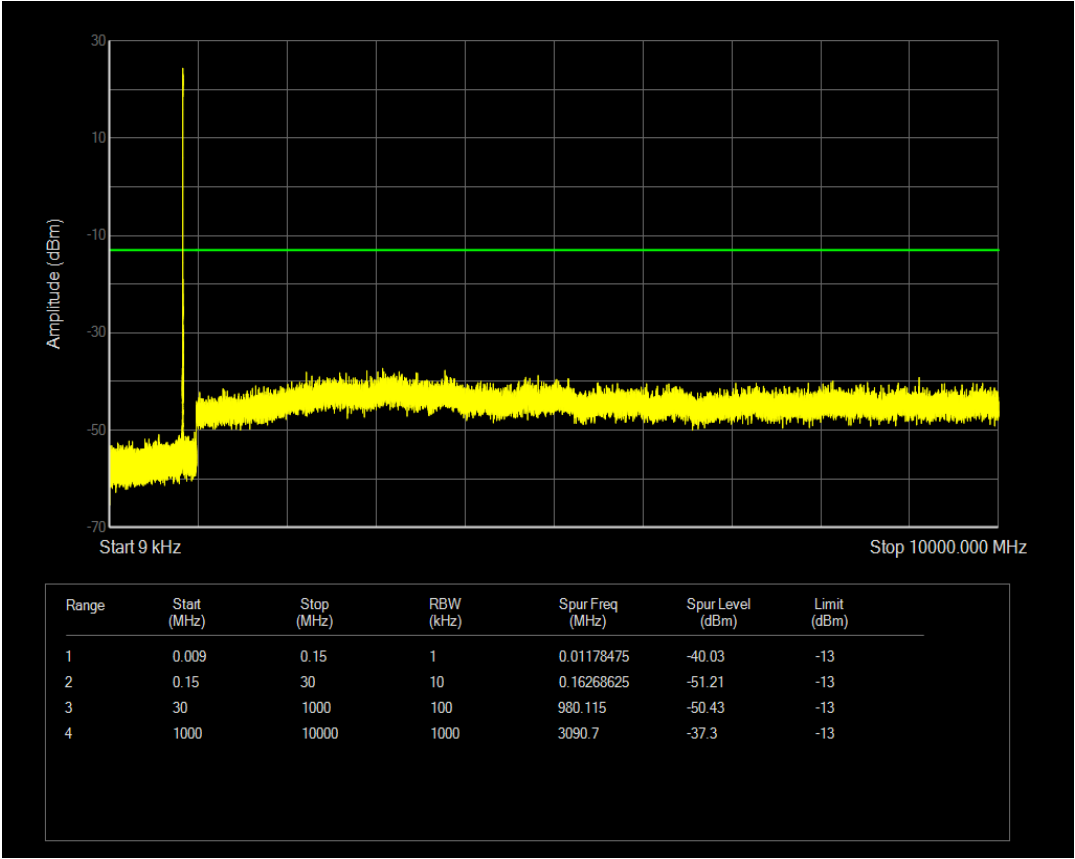


Band26(824-849) QAM16 BW=10MHz Channel=26840 RB Size=50 Position=#0

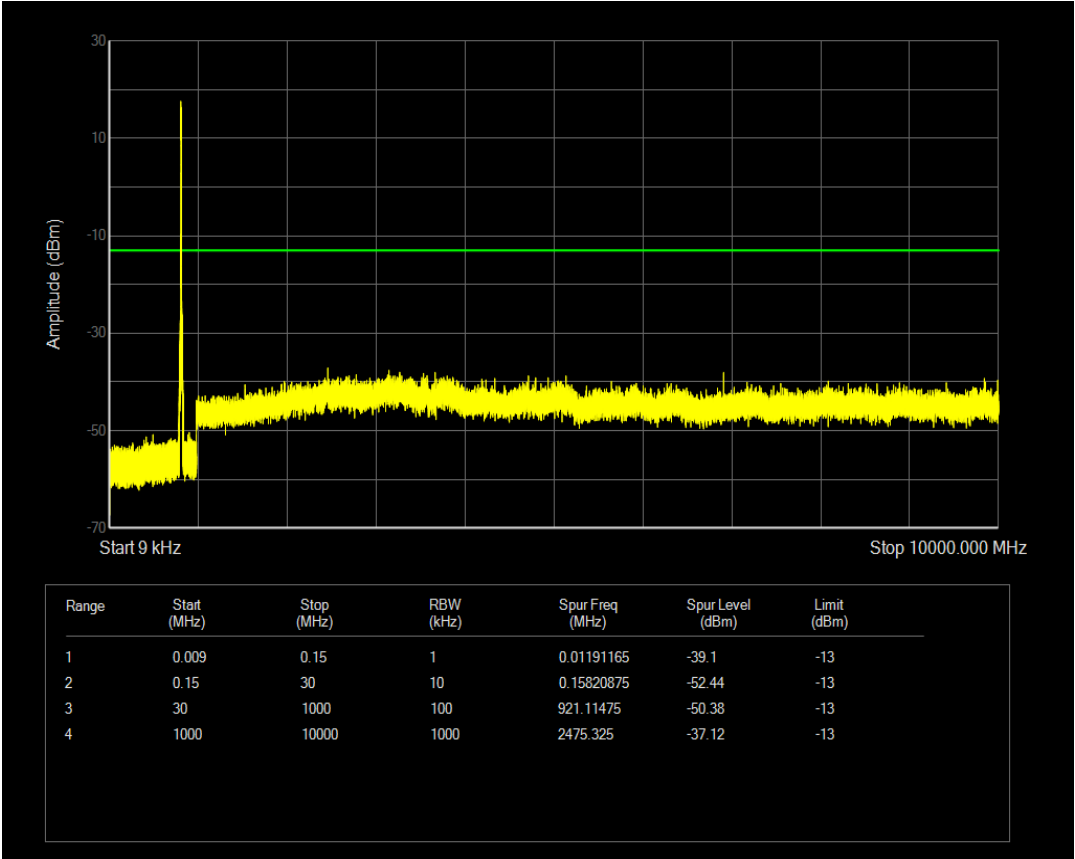


Band26(824-849) QAM16 BW=10MHz Channel=26990 RB Size=50 Position=#0

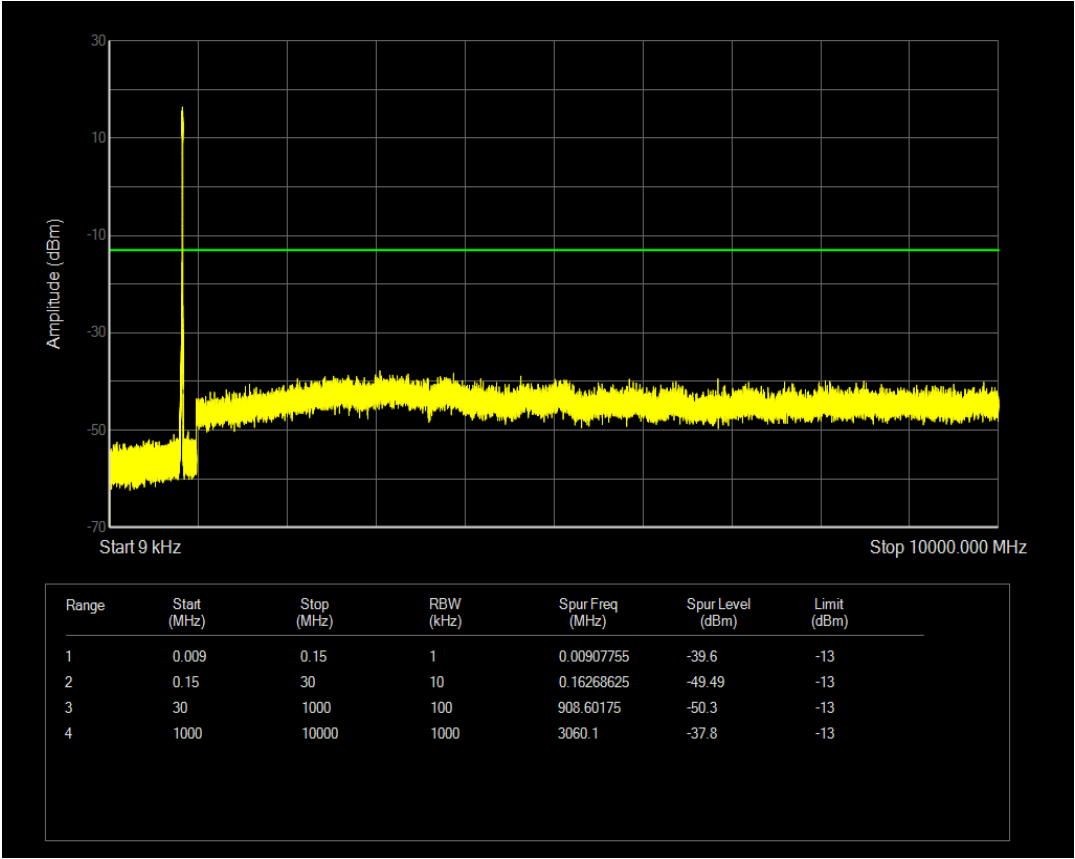


Band26(824-849) QAM16 BW=15MHz Channel=26865 RB Size=75 Position=#0

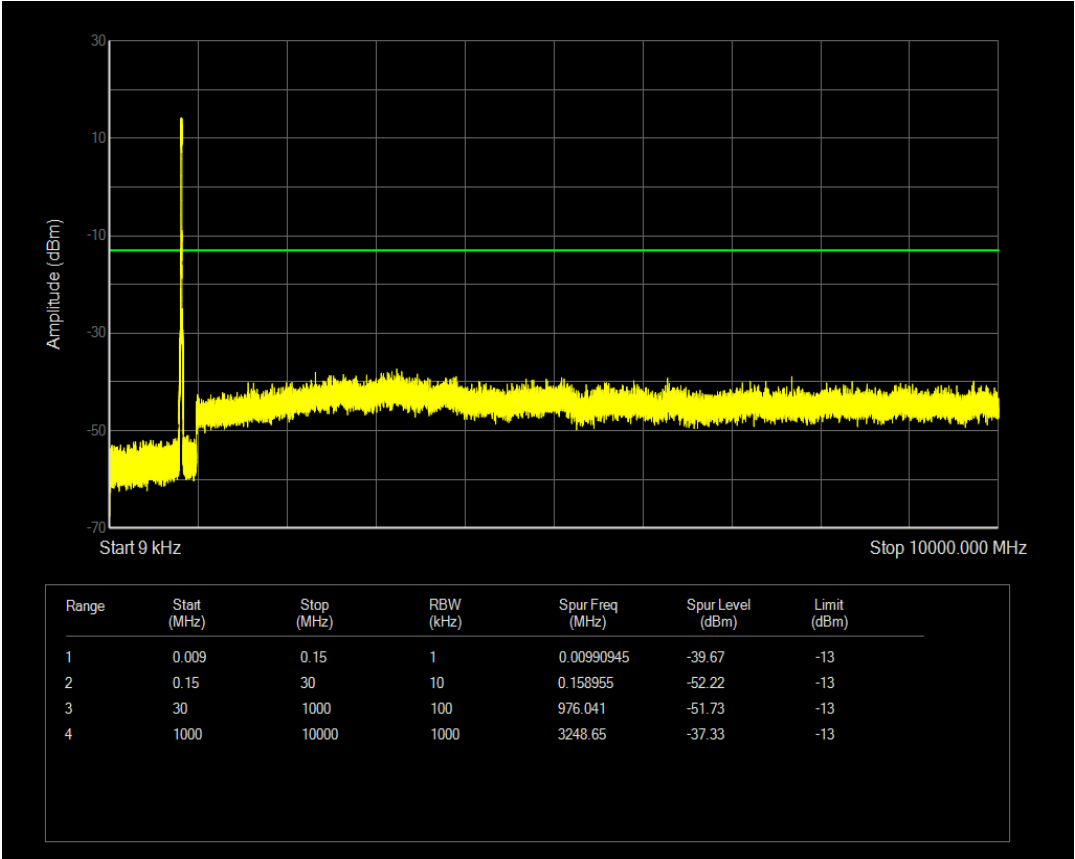


Band26(824-849) QAM16 BW=15MHz Channel=26965 RB Size=75 Position=#0

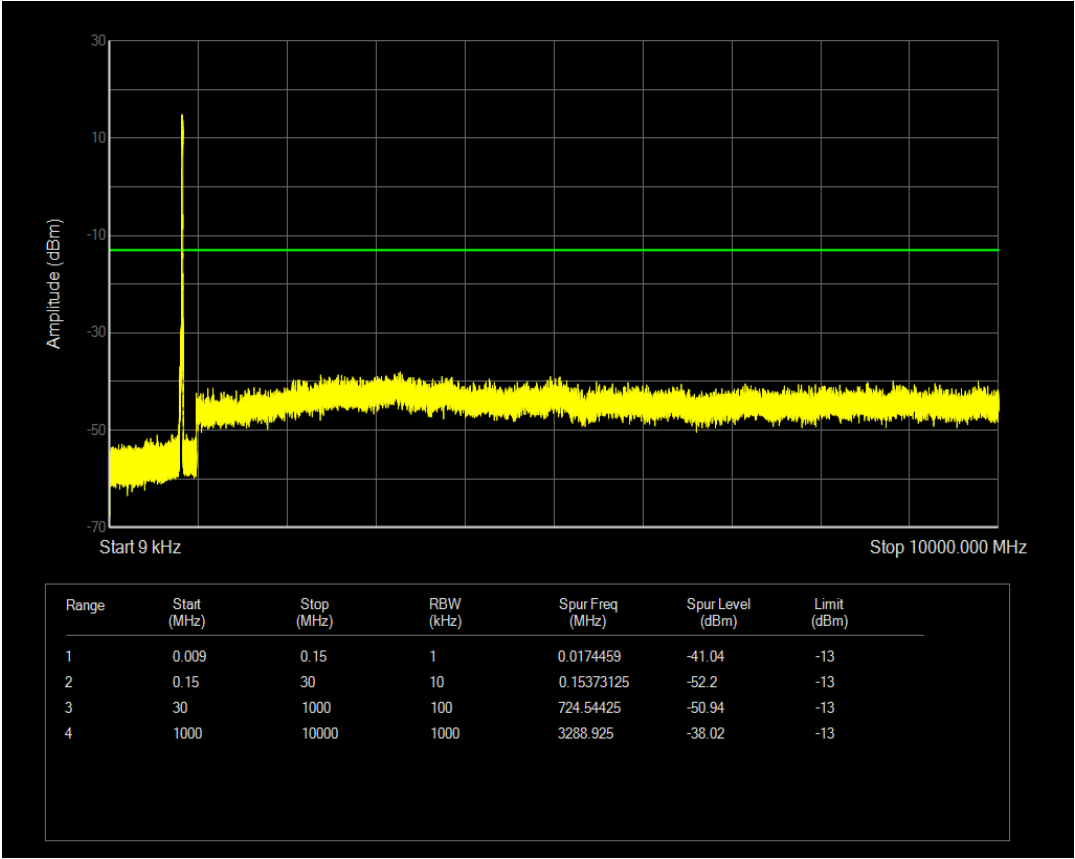


Band26(824-849) QAM16 BW=3MHz Channel=26805 RB Size=15 Position=#0

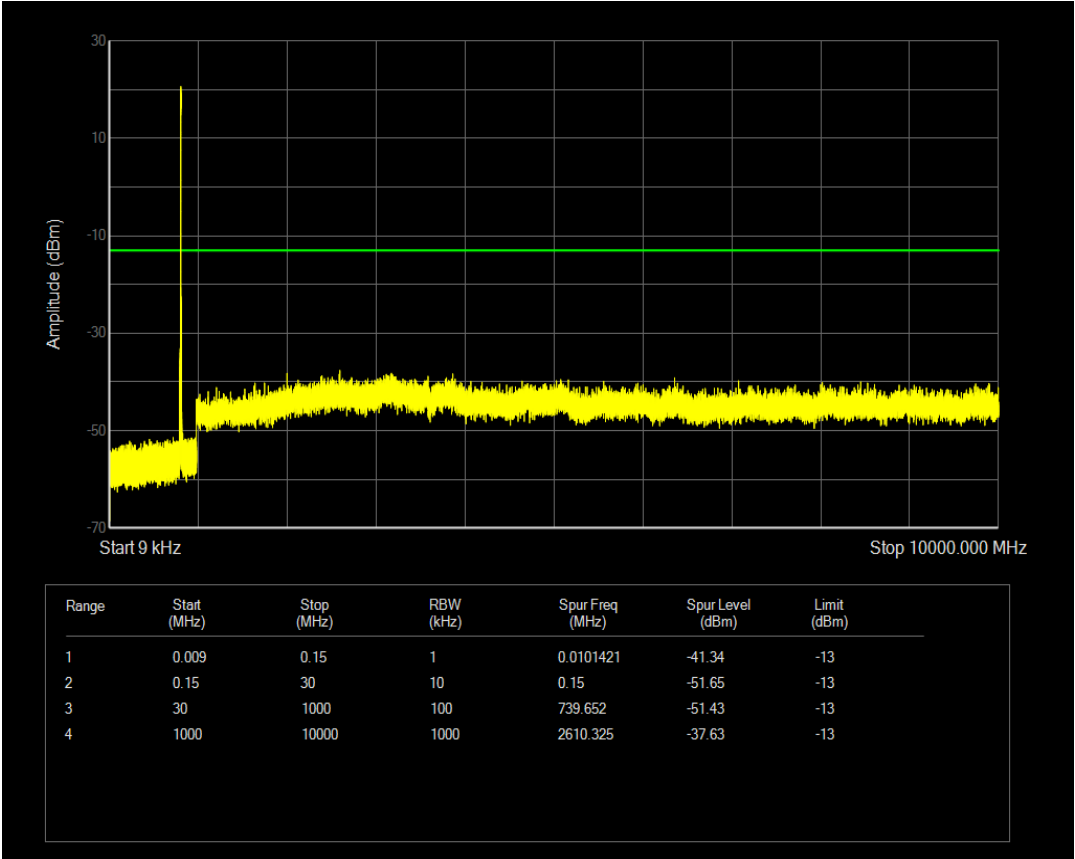


Band26(824-849) QAM16 BW=3MHz Channel=27025 RB Size=15 Position=#0

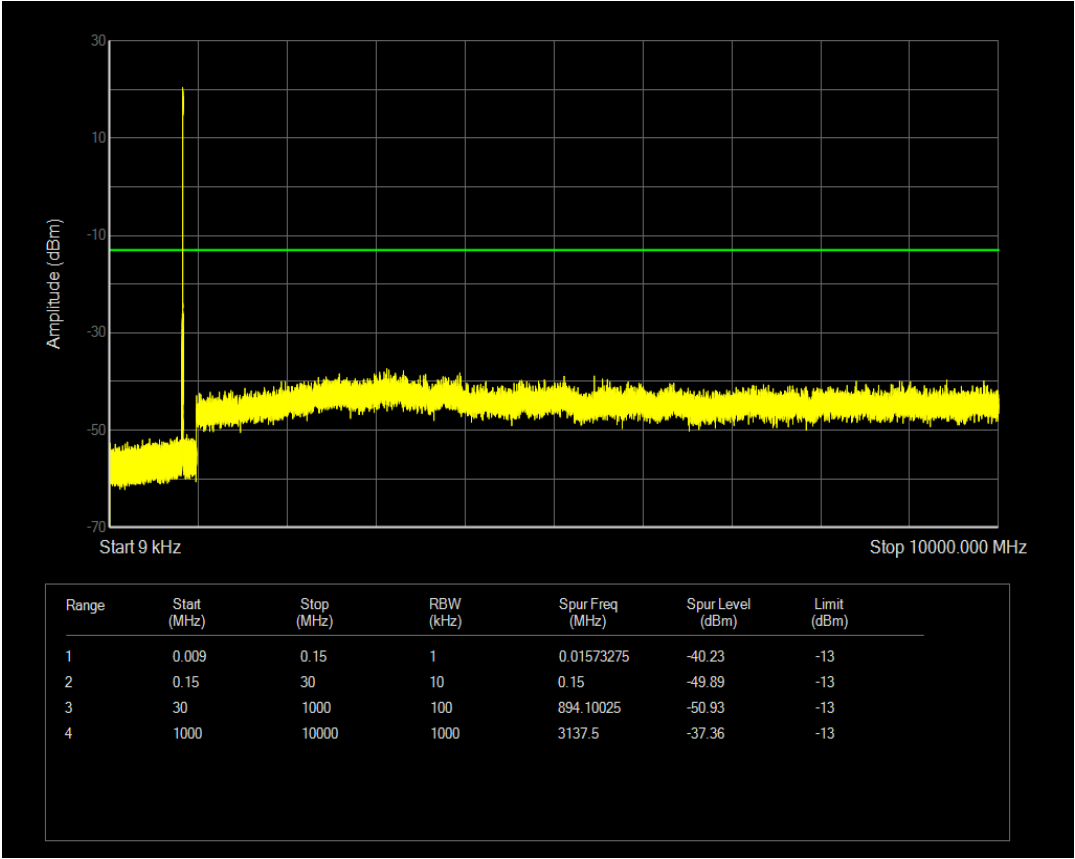


Band26(824-849) QAM16 BW=5MHz Channel=26815 RB Size=25 Position=#0

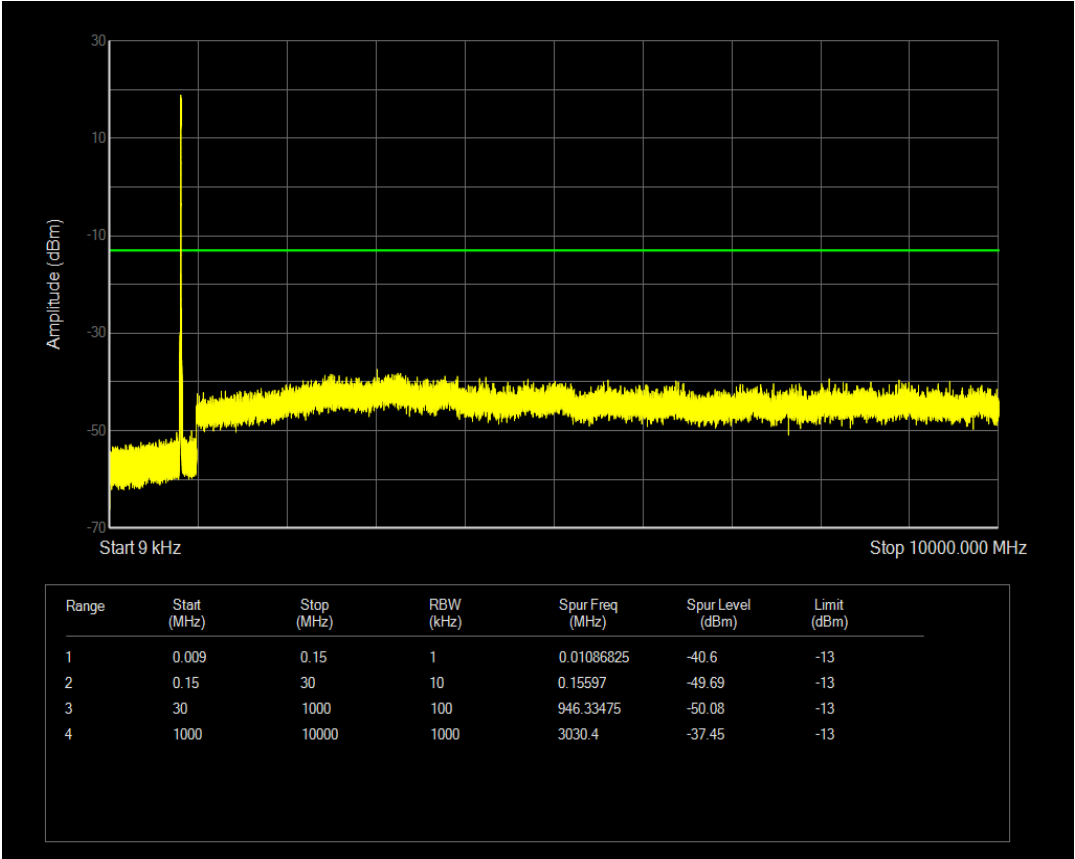


Band26(824-849) QAM16 BW=5MHz Channel=27015 RB Size=25 Position=#0

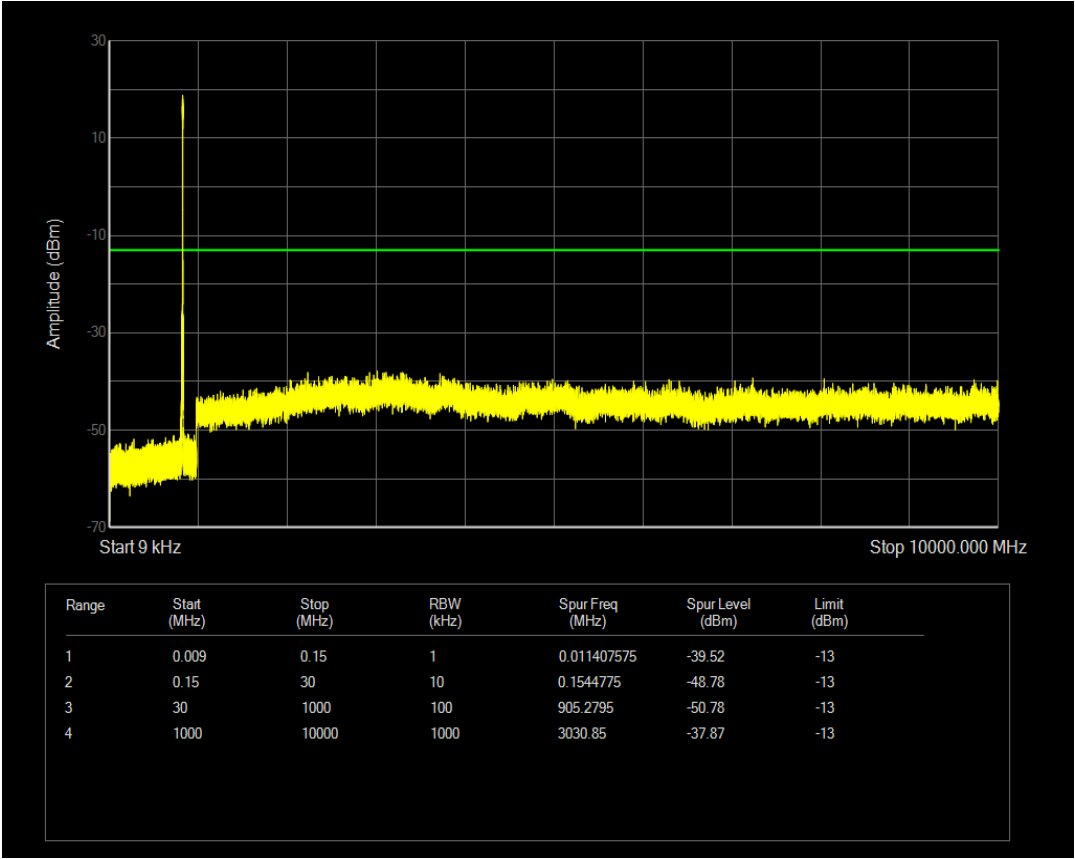


Band26(824-849) QPSK BW=1.4MHz Channel=26797 RB Size=6 Position=#0

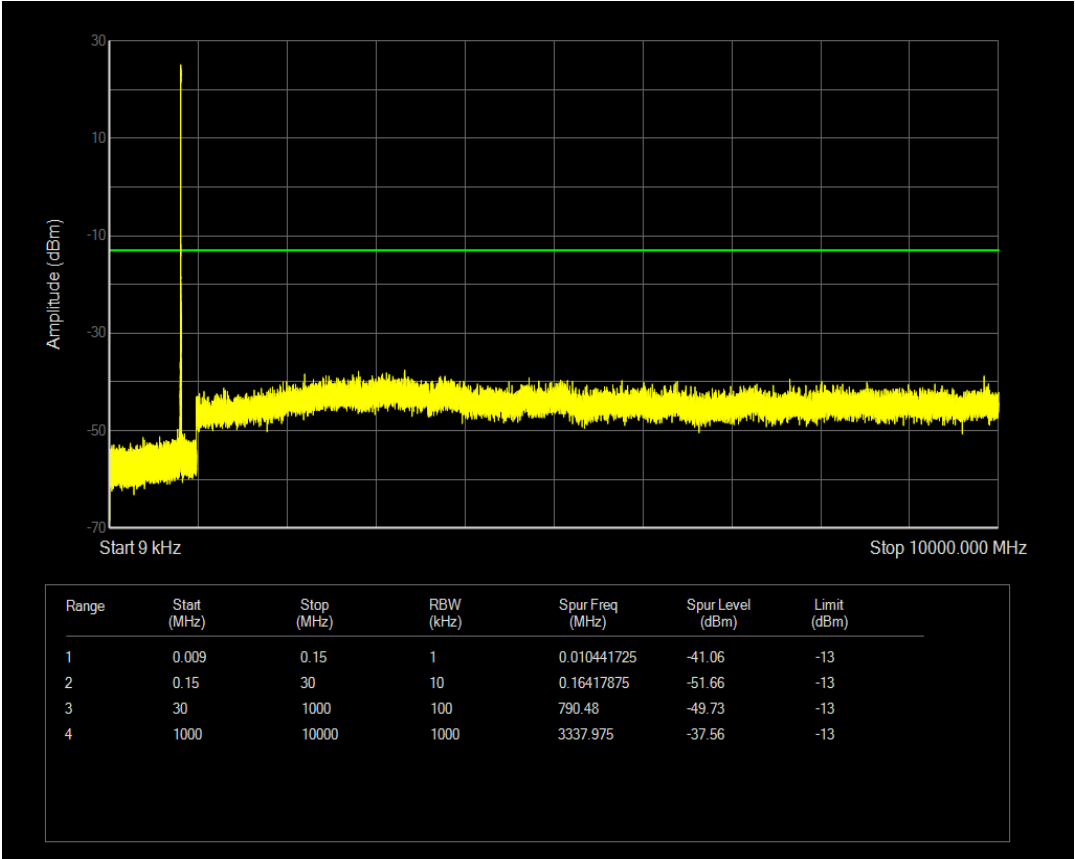


Band26(824-849) QPSK BW=1.4MHz Channel=27033 RB Size=6 Position=#0

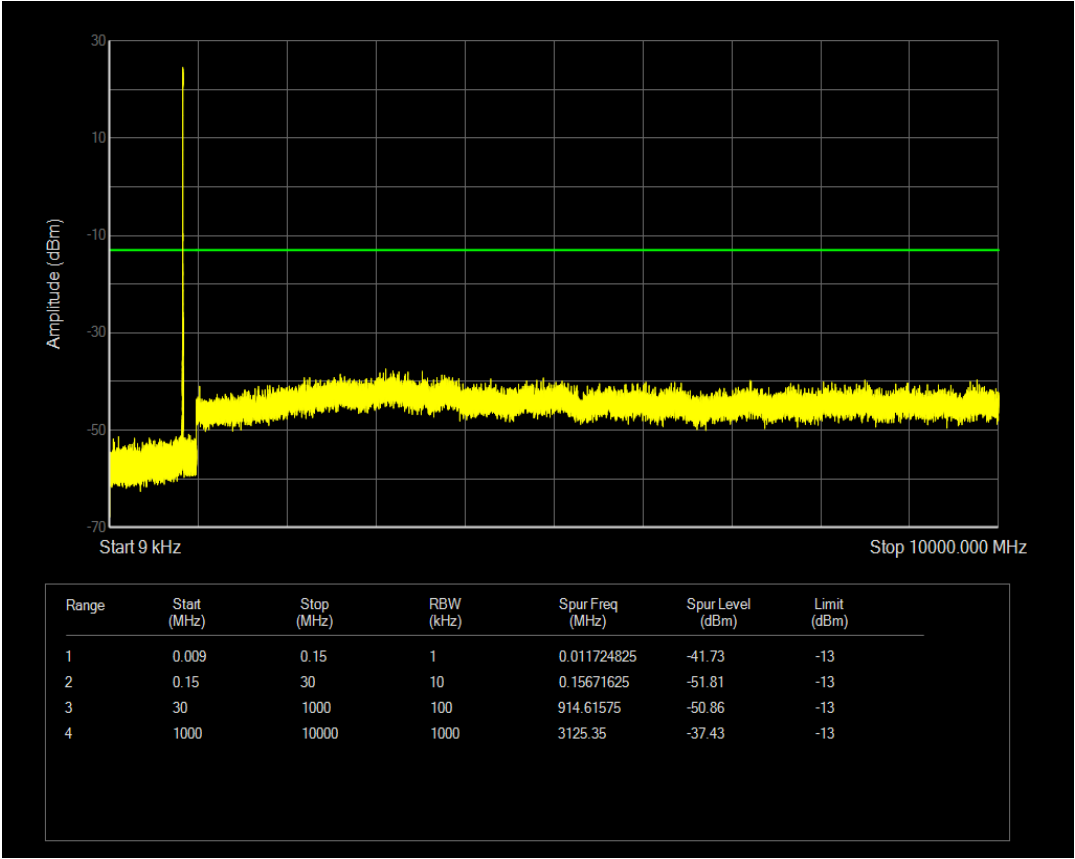


Band26(824-849) QPSK BW=10MHz Channel=26840 RB Size=50 Position=#0

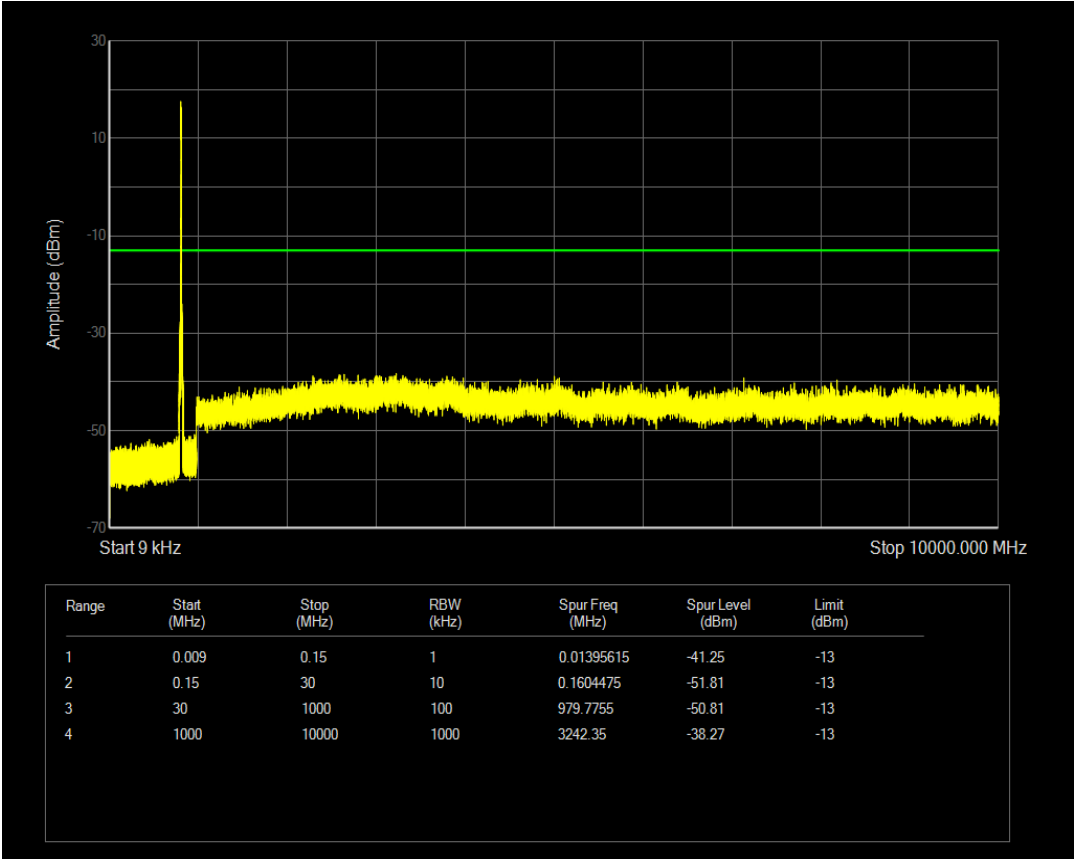


Band26(824-849) QPSK BW=10MHz Channel=26990 RB Size=50 Position=#0

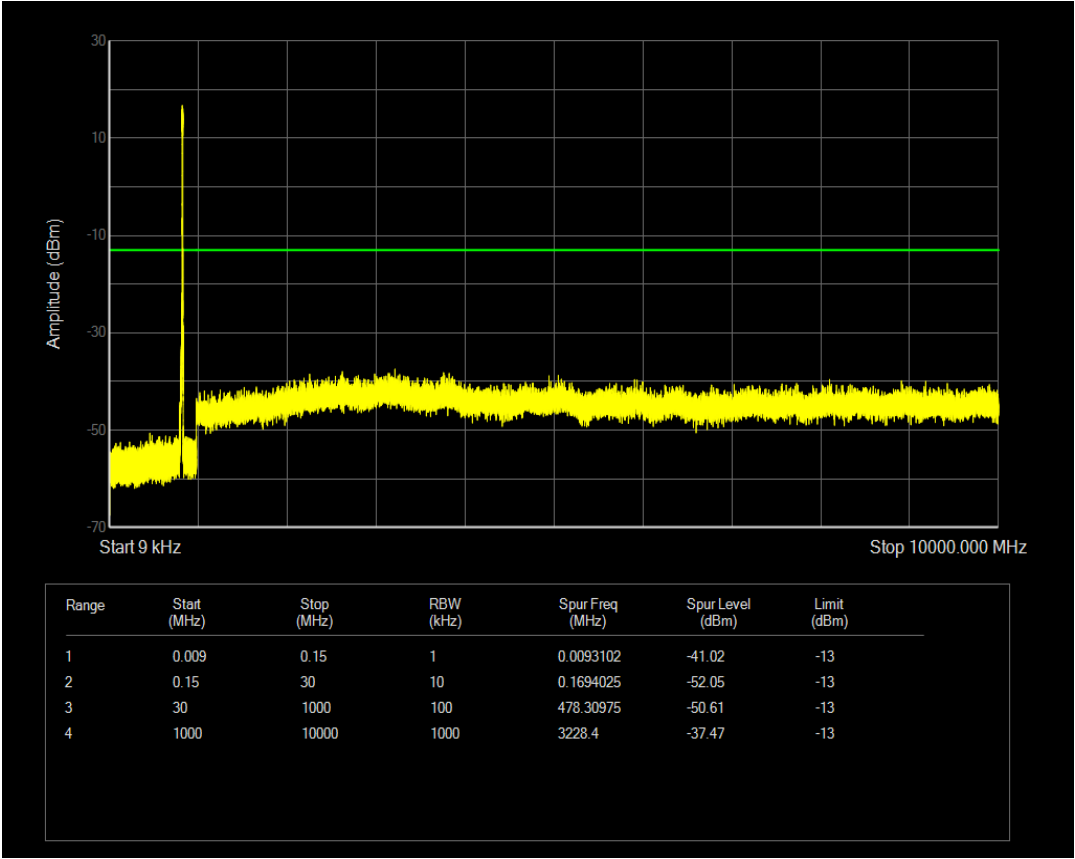


Band26(824-849) QPSK BW=15MHz Channel=26865 RB Size=75 Position=#0

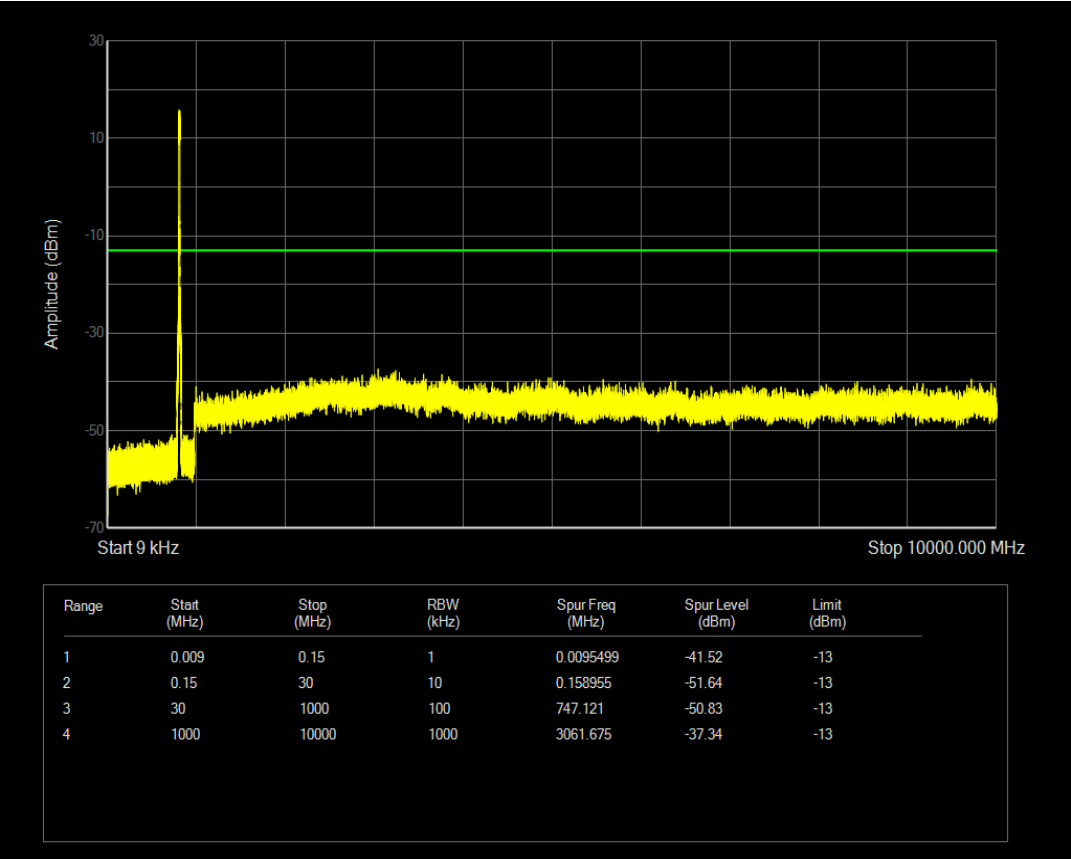


Band26(824-849) QPSK BW=15MHz Channel=26965 RB Size=75 Position=#0

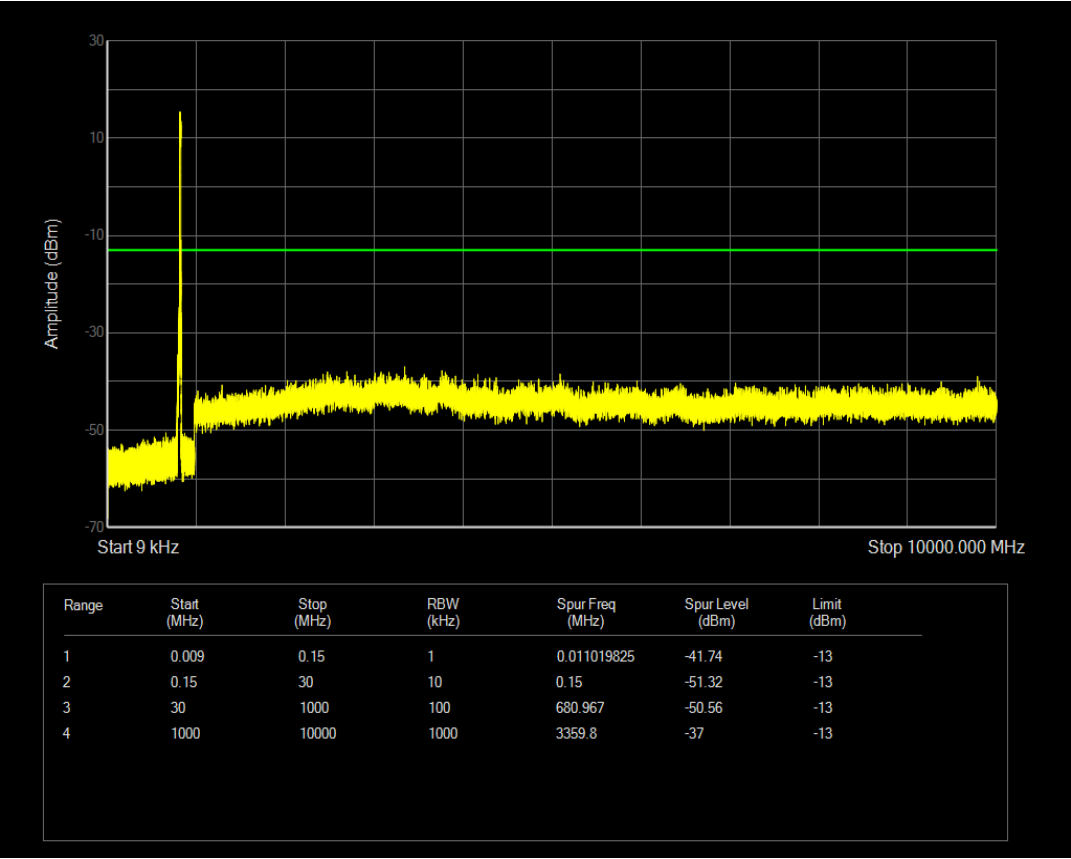


Band26(824-849) QPSK BW=3MHz Channel=26805 RB Size=15 Position=#0

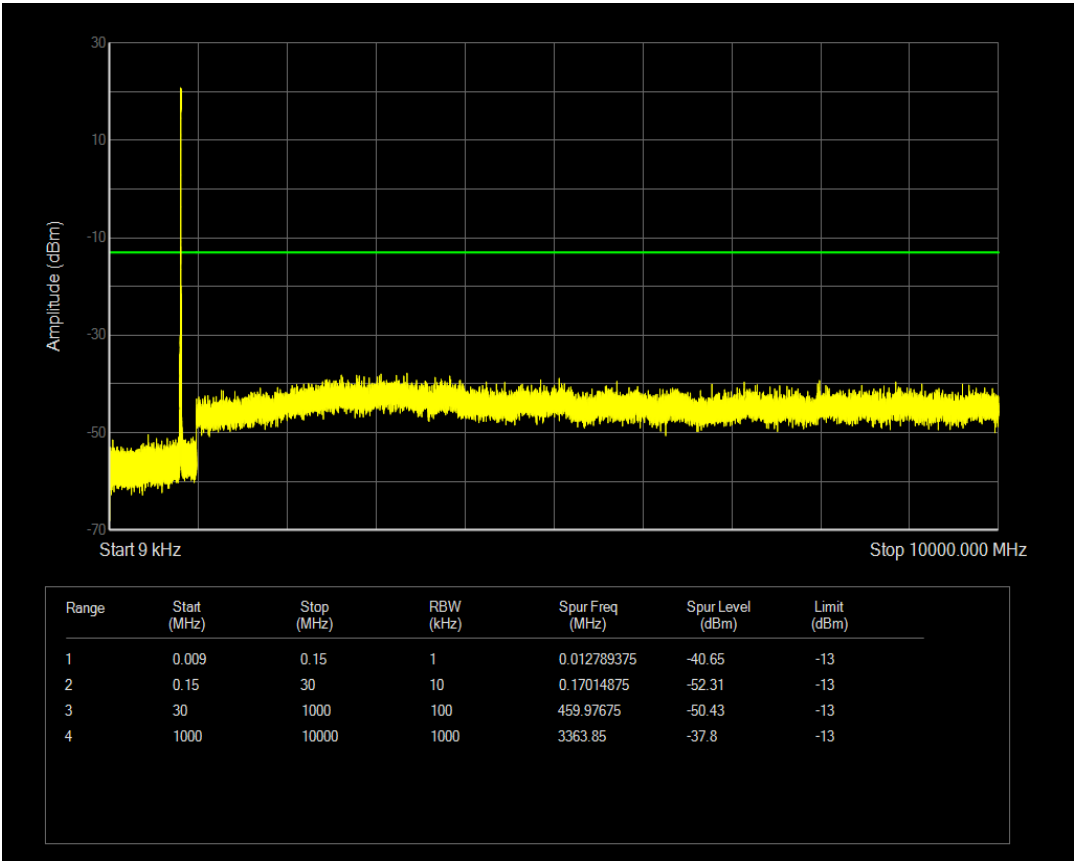

Band26(824-849) QPSK BW=3MHz Channel=27025 RB Size=15 Position=#0

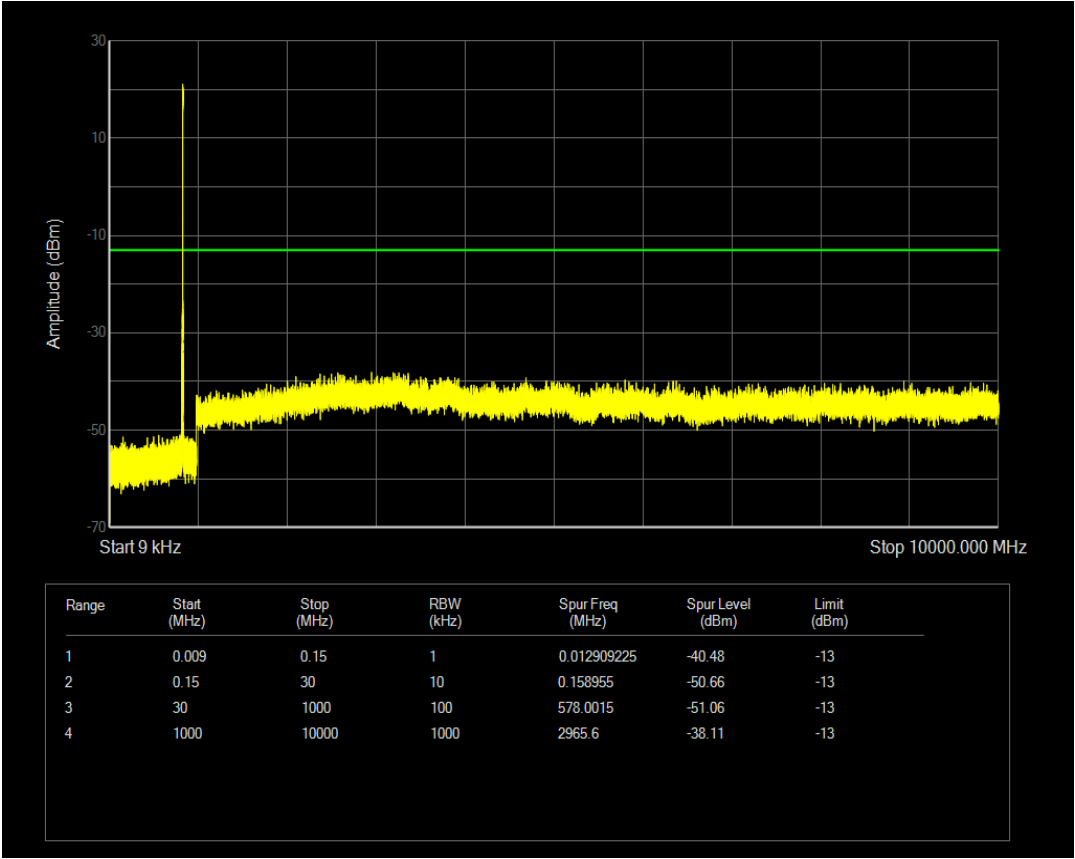

Band26(824-849) QPSK BW=5MHz Channel=26815 RB Size=25 Position=#0

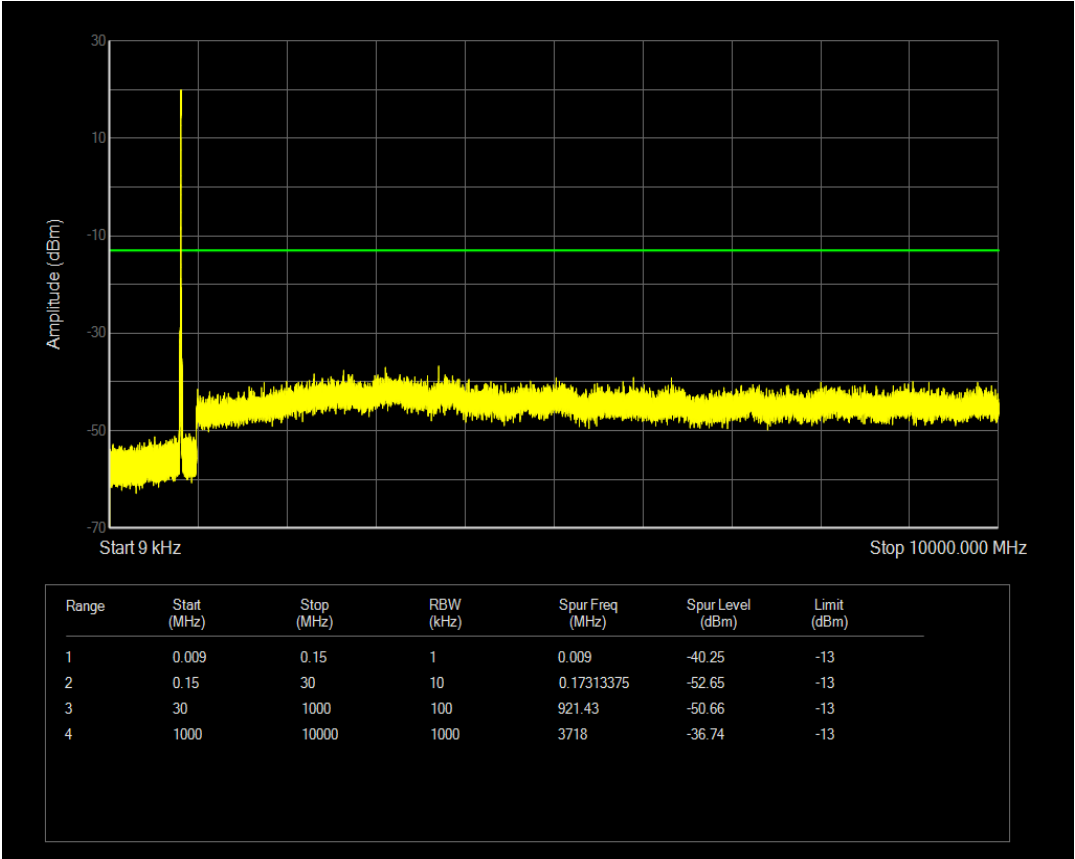

Band26(824-849) QPSK BW=5MHz Channel=27015 RB Size=25 Position=#0

