

TABLE OF CONTENTS

Conducted output power2

Frequency stability.....5

Peak-to-Average Ratio6

Occupied bandwidth17

Band edge.....28

Out-of-band emissions36

Conducted output power

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Power (dBm)</i>	<i>Gain (dBi)</i>	<i>Gain (dBd)</i>	<i>ERP (dBm)</i>	<i>EIRP (dBm)</i>	<i>EIRP/ERP Limit (dBm)</i>	<i>Verdict</i>
EGPRS850 1 Slot	128	824.2	29.70	-1.87	-4.02	25.68	--	38.45	PASS
EGPRS850 1 Slot	190	836.6	29.50	-1.87	-4.02	25.48	--	38.45	PASS
EGPRS850 1 Slot	251	848.8	29.47	-1.87	-4.02	25.45	--	38.45	PASS
EGPRS850 2 Slot	128	824.2	28.63	-1.87	-4.02	24.61	--	38.45	PASS
EGPRS850 2 Slot	190	836.6	27.92	-1.87	-4.02	23.9	--	38.45	PASS
EGPRS850 2 Slot	251	848.8	28.40	-1.87	-4.02	24.38	--	38.45	PASS
EGPRS850 3 Slot	128	824.2	26.31	-1.87	-4.02	22.29	--	38.45	PASS
EGPRS850 3 Slot	190	836.6	25.90	-1.87	-4.02	21.88	--	38.45	PASS
EGPRS850 3 Slot	251	848.8	25.90	-1.87	-4.02	21.88	--	38.45	PASS
EGPRS850 4 Slot	128	824.2	25.21	-1.87	-4.02	21.19	--	38.45	PASS
EGPRS850 4 Slot	190	836.6	25.05	-1.87	-4.02	21.03	--	38.45	PASS
EGPRS850 4 Slot	251	848.8	24.74	-1.87	-4.02	20.72	--	38.45	PASS
GPRS850 1 Slot	128	824.2	33.44	-1.87	-4.02	29.42	--	38.45	PASS
GPRS850 1 Slot	190	836.6	33.54	-1.87	-4.02	29.52	--	38.45	PASS
GPRS850 1 Slot	251	848.8	33.67	-1.87	-4.02	29.65	--	38.45	PASS
GPRS850 2 Slot	128	824.2	32.67	-1.87	-4.02	28.65	--	38.45	PASS
GPRS850 2 Slot	190	836.6	32.77	-1.87	-4.02	28.75	--	38.45	PASS
GPRS850 2 Slot	251	848.8	32.90	-1.87	-4.02	28.88	--	38.45	PASS
GPRS850 3 Slot	128	824.2	30.94	-1.87	-4.02	26.92	--	38.45	PASS
GPRS850 3 Slot	190	836.6	31.01	-1.87	-4.02	26.99	--	38.45	PASS

Slot									
GPRS850 3 Slot	251	848.8	31.18	-1.87	-4.02	27.16	--	38.45	PASS
GPRS850 4 Slot	128	824.2	29.57	-1.87	-4.02	25.55	--	38.45	PASS
GPRS850 4 Slot	190	836.6	29.67	-1.87	-4.02	25.65	--	38.45	PASS
GPRS850 4 Slot	251	848.8	29.88	-1.87	-4.02	25.86	--	38.45	PASS
GSM850	128	824.2	33.47	-1.87	-4.02	29.45	--	38.45	PASS
GSM850	190	836.6	33.57	-1.87	-4.02	29.55	--	38.45	PASS
GSM850	251	848.8	33.70	-1.87	-4.02	29.68	--	38.45	PASS
EGPRS1900 1 Slot	512	1850.2	26.83	-1.13	--	--	25.7	33.01	PASS
EGPRS1900 1 Slot	661	1880	26.90	-1.13	--	--	25.77	33.01	PASS
EGPRS1900 1 Slot	810	1909.8	26.91	-1.13	--	--	25.78	33.01	PASS
EGPRS1900 2 Slot	512	1850.2	25.95	-1.13	--	--	24.82	33.01	PASS
EGPRS1900 2 Slot	661	1880	25.60	-1.13	--	--	24.47	33.01	PASS
EGPRS1900 2 Slot	810	1909.8	26.04	-1.13	--	--	24.91	33.01	PASS
EGPRS1900 3 Slot	512	1850.2	23.68	-1.13	--	--	22.55	33.01	PASS
EGPRS1900 3 Slot	661	1880	23.68	-1.13	--	--	22.55	33.01	PASS
EGPRS1900 3 Slot	810	1909.8	24.25	-1.13	--	--	23.12	33.01	PASS
EGPRS1900 4 Slot	512	1850.2	22.41	-1.13	--	--	21.28	33.01	PASS
EGPRS1900 4 Slot	661	1880	22.41	-1.13	--	--	21.28	33.01	PASS
EGPRS1900 4 Slot	810	1909.8	23.10	-1.13	--	--	21.97	33.01	PASS
GPRS1900 1 Slot	512	1850.2	29.91	-1.13	--	--	28.78	33.01	PASS
GPRS1900 1 Slot	661	1880	29.83	-1.13	--	--	28.7	33.01	PASS
GPRS1900 1 Slot	810	1909.8	29.89	-1.13	--	--	28.76	33.01	PASS
GPRS1900 2 Slot	512	1850.2	28.98	-1.13	--	--	27.85	33.01	PASS


GPRS1900 2 Slot	661	1880	28.85	-1.13	--	--	27.72	33.01	PASS
GPRS1900 2 Slot	810	1909.8	28.86	-1.13	--	--	27.73	33.01	PASS
GPRS1900 3 Slot	512	1850.2	27.11	-1.13	--	--	25.98	33.01	PASS
GPRS1900 3 Slot	661	1880	26.92	-1.13	--	--	25.79	33.01	PASS
GPRS1900 3 Slot	810	1909.8	26.98	-1.13	--	--	25.85	33.01	PASS
GPRS1900 4 Slot	512	1850.2	25.76	-1.13	--	--	24.63	33.01	PASS
GPRS1900 4 Slot	661	1880	25.65	-1.13	--	--	24.52	33.01	PASS
GPRS1900 4 Slot	810	1909.8	25.57	-1.13	--	--	24.44	33.01	PASS
GSM1900	512	1850.2	29.96	-1.13	--	--	28.83	33.01	PASS
GSM1900	661	1880	29.88	-1.13	--	--	28.75	33.01	PASS
GSM1900	810	1909.8	29.93	-1.13	--	--	28.8	33.01	PASS

Frequency stability


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	8.814037	0.01	-2.500	2.5	PASS
EGPRS850	190	836.6	4.100303	0.00	-2.500	2.5	PASS
EGPRS850	251	848.8	7.716318	0.01	-2.500	2.5	PASS
GPRS850	128	824.2	8.749465	0.01	-2.500	2.5	PASS
GPRS850	190	836.6	4.132589	0.00	-2.500	2.5	PASS
GPRS850	251	848.8	9.653469	0.01	-2.500	2.5	PASS
GSM850	128	824.2	9.04	0.011	-2.5	2.5	PASS
GSM850	190	836.6	7.88	0.009	-2.5	2.5	PASS
GSM850	251	848.8	6.55	0.008	-2.5	2.5	PASS
EGPRS1900	512	1850.2	16.07835	0.01	-2.500	2.5	PASS
EGPRS1900	661	1880	22.14809	0.01	-2.500	2.5	PASS
EGPRS1900	810	1909.8	19.04865	0.01	-2.500	2.5	PASS
GPRS1900	512	1850.2	22.47095	0.01	-2.500	2.5	PASS
GPRS1900	661	1880	24.50496	0.01	-2.500	2.5	PASS
GPRS1900	810	1909.8	21.37323	0.01	-2.500	2.5	PASS
GSM1900	512	1850.2	27.31	0.015	-2.5	2.5	PASS
GSM1900	661	1880	28.64	0.015	-2.5	2.5	PASS
GSM1900	810	1909.8	24.76	0.013	-2.5	2.5	PASS

Peak-to-Average Ratio


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
EGPRS850	128	824.2	6.661312057	13.00	PASS
EGPRS850	190	836.6	6.879303279	13.00	PASS
EGPRS850	251	848.8	6.906866953	13.00	PASS
GPRS850	128	824.2	2.748542615	13.00	PASS
GPRS850	190	836.6	2.742717206	13.00	PASS
GPRS850	251	848.8	2.749076923	13.00	PASS
GSM850	128	824.2	2.70	13	PASS
GSM850	190	836.6	2.70	13	PASS
GSM850	251	848.8	2.70	13	PASS
EGPRS1900	512	1850.2	5.693010753	13.00	PASS
EGPRS1900	661	1880	5.705299145	13.00	PASS
EGPRS1900	810	1909.8	5.695223881	13.00	PASS
GPRS1900	512	1850.2	2.824971429	13.00	PASS
GPRS1900	661	1880	2.823108466	13.00	PASS
GPRS1900	810	1909.8	2.826286472	13.00	PASS
GSM1900	512	1850.2	2.76	13	PASS
GSM1900	661	1880	2.78	13	PASS
GSM1900	810	1909.8	2.78	13	PASS

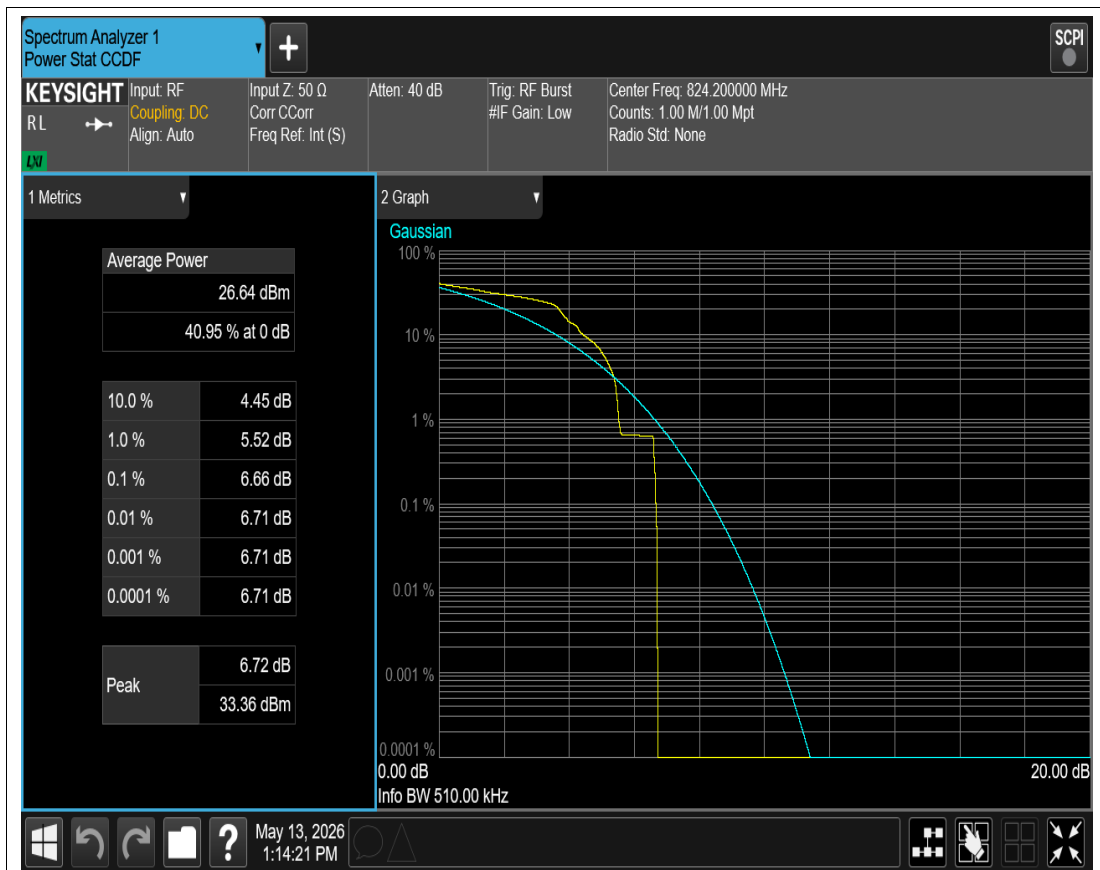


EGPRS850 Channel=128

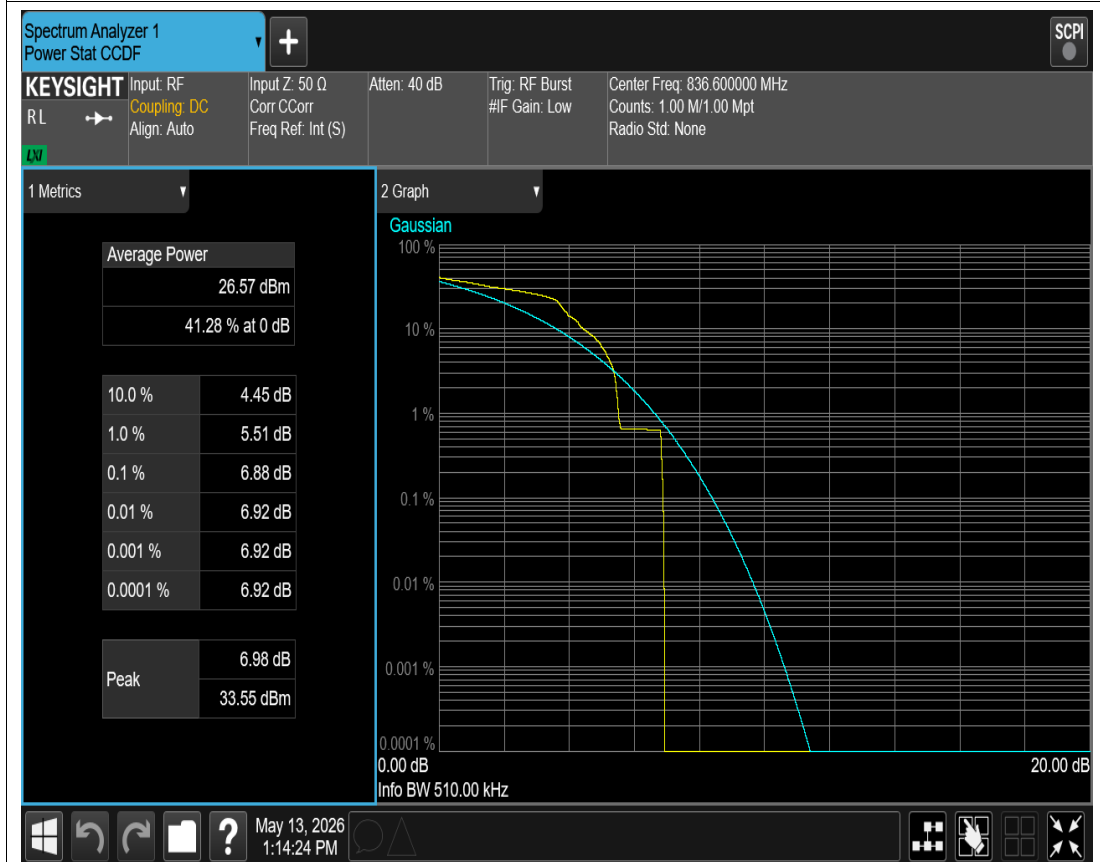


EGPRS850 Channel=190

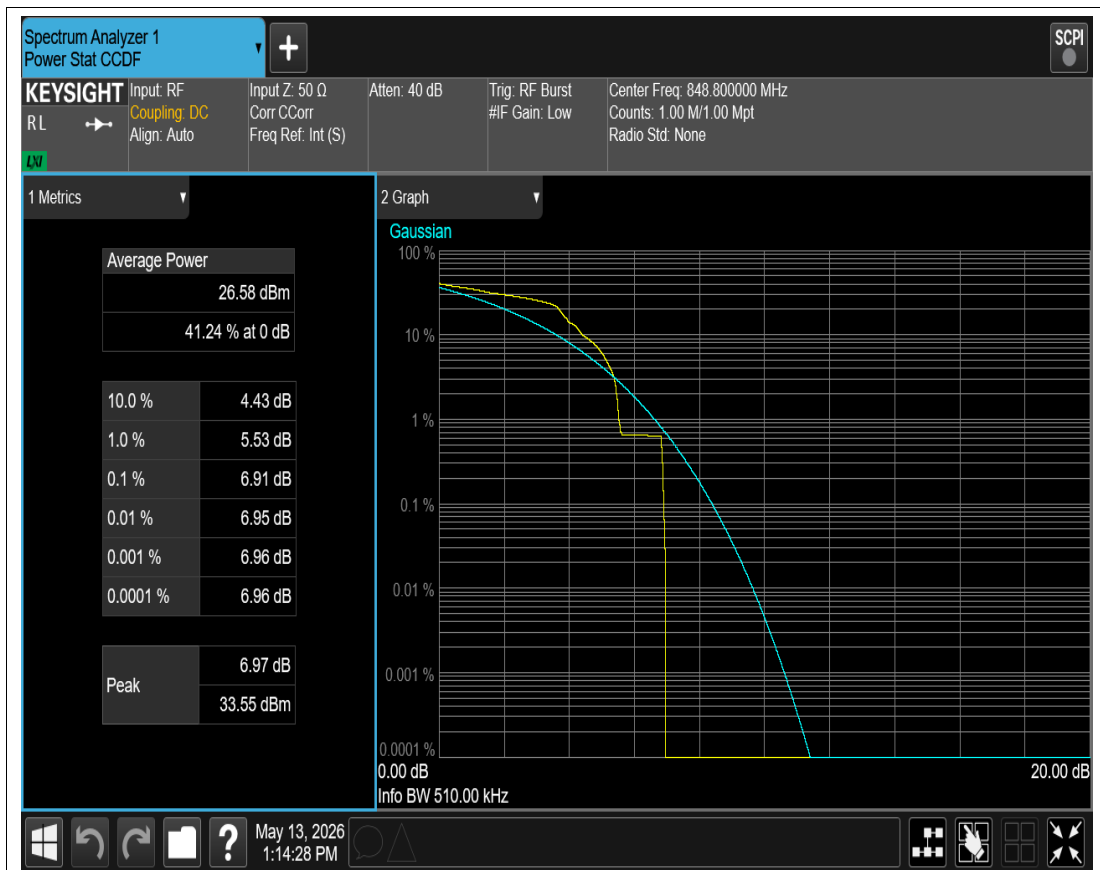


EGPRS850 Channel=251

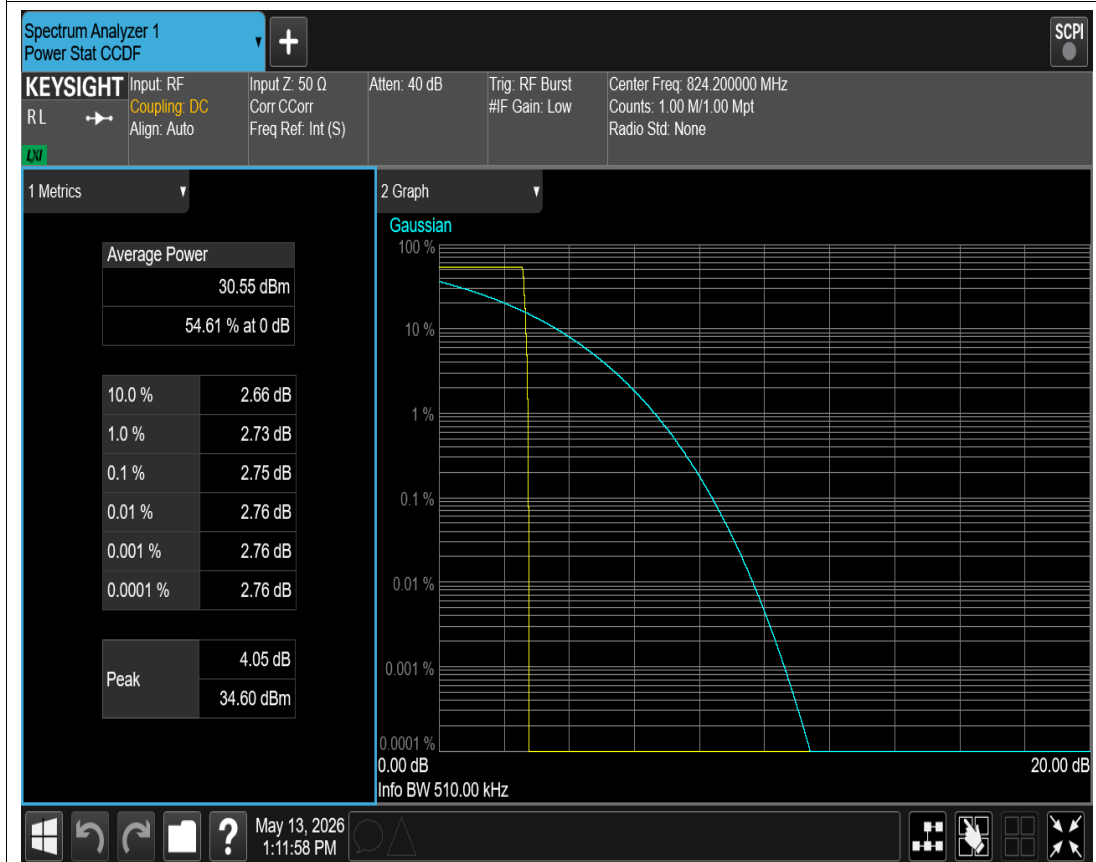


GPRS850 Channel=128

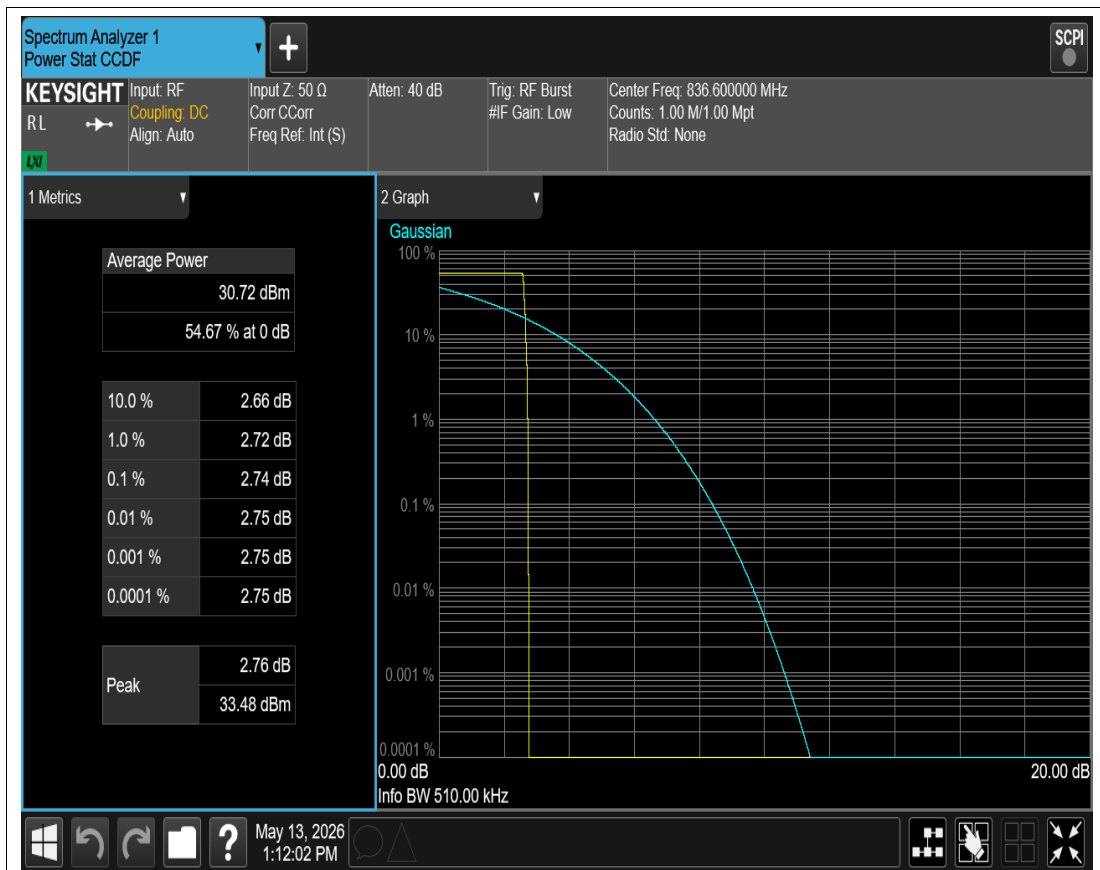


GPRS850 Channel=190

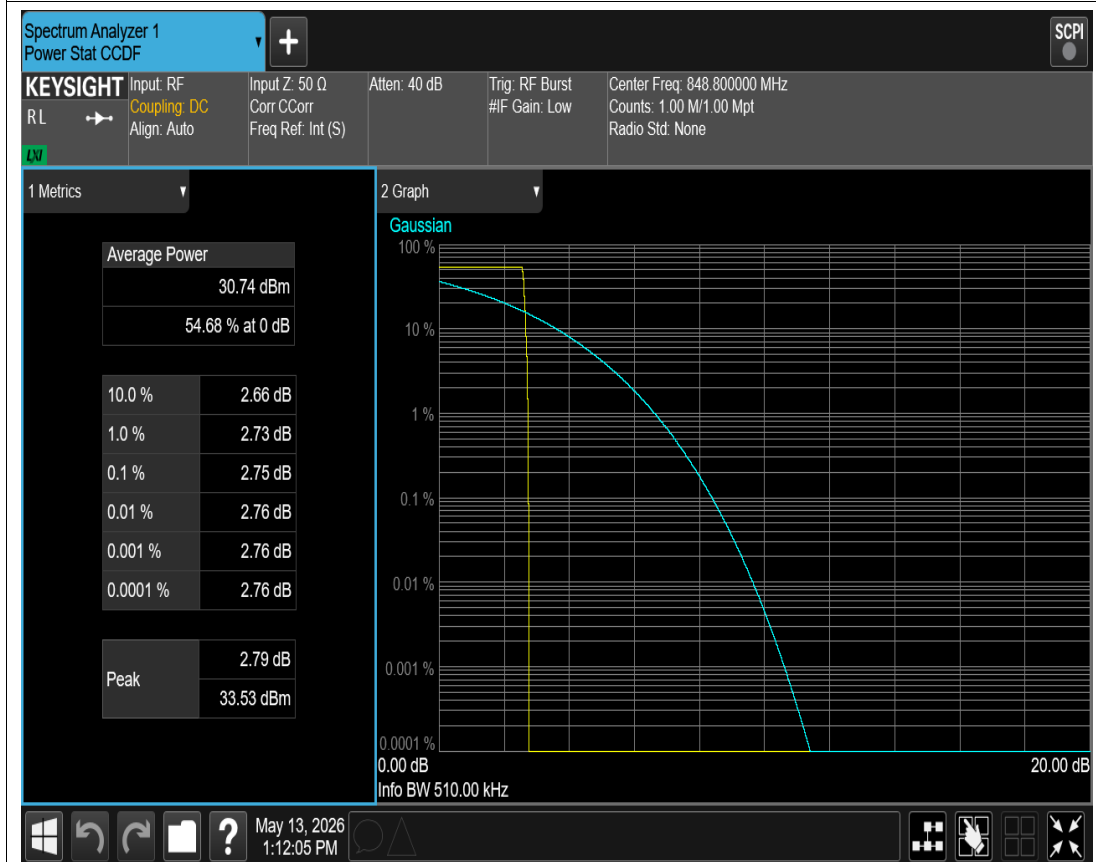


GPRS850 Channel=251

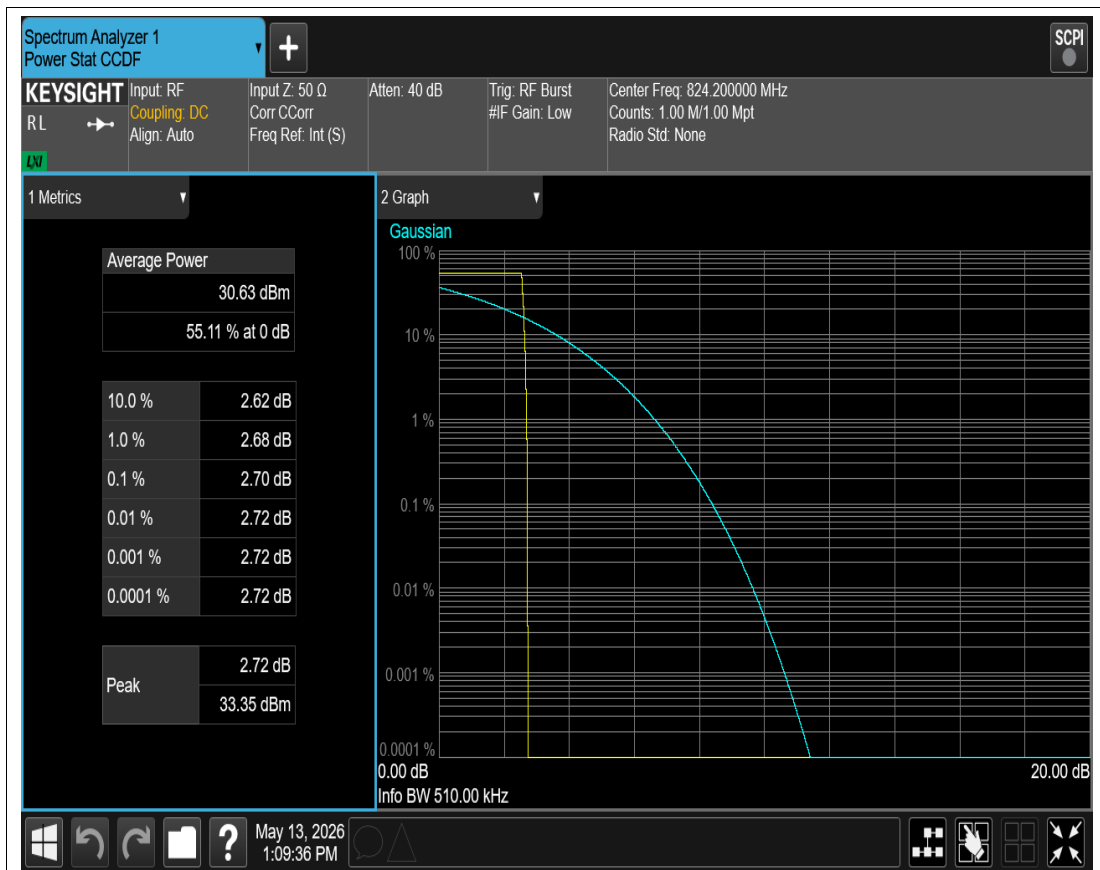


GSM850 Channel=128

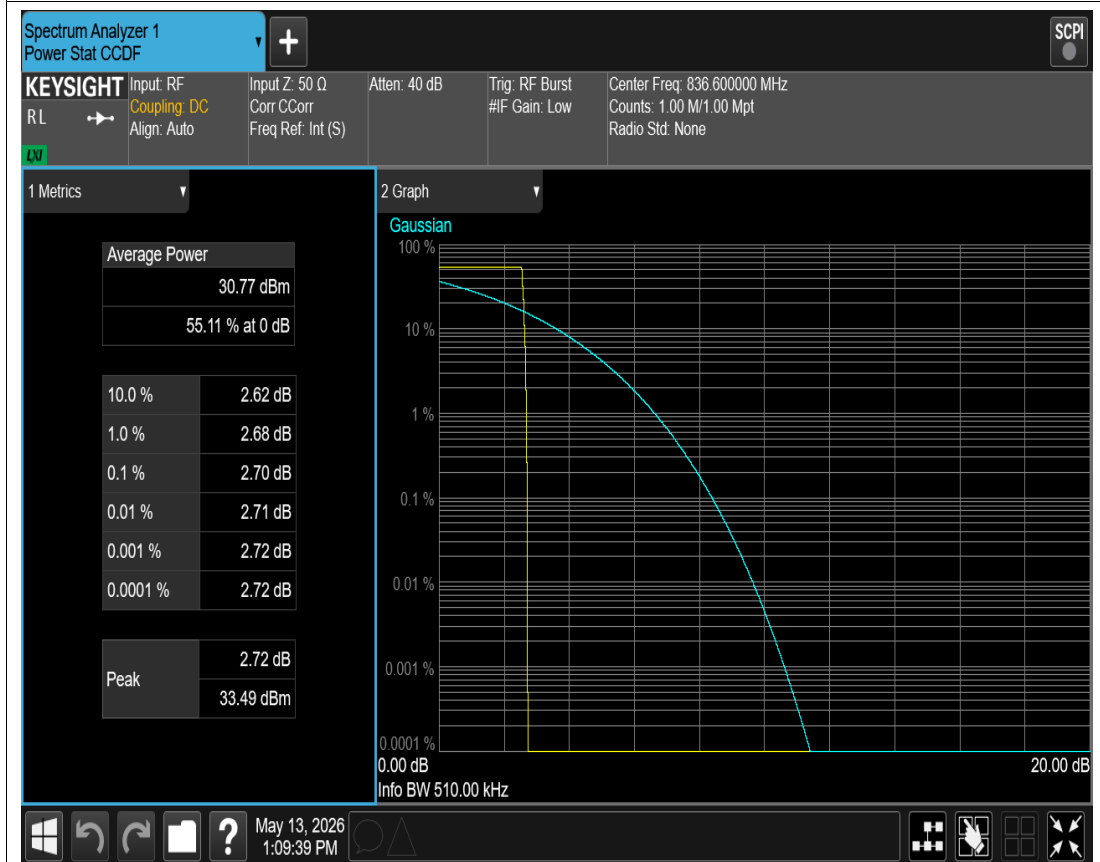


GSM850 Channel=190

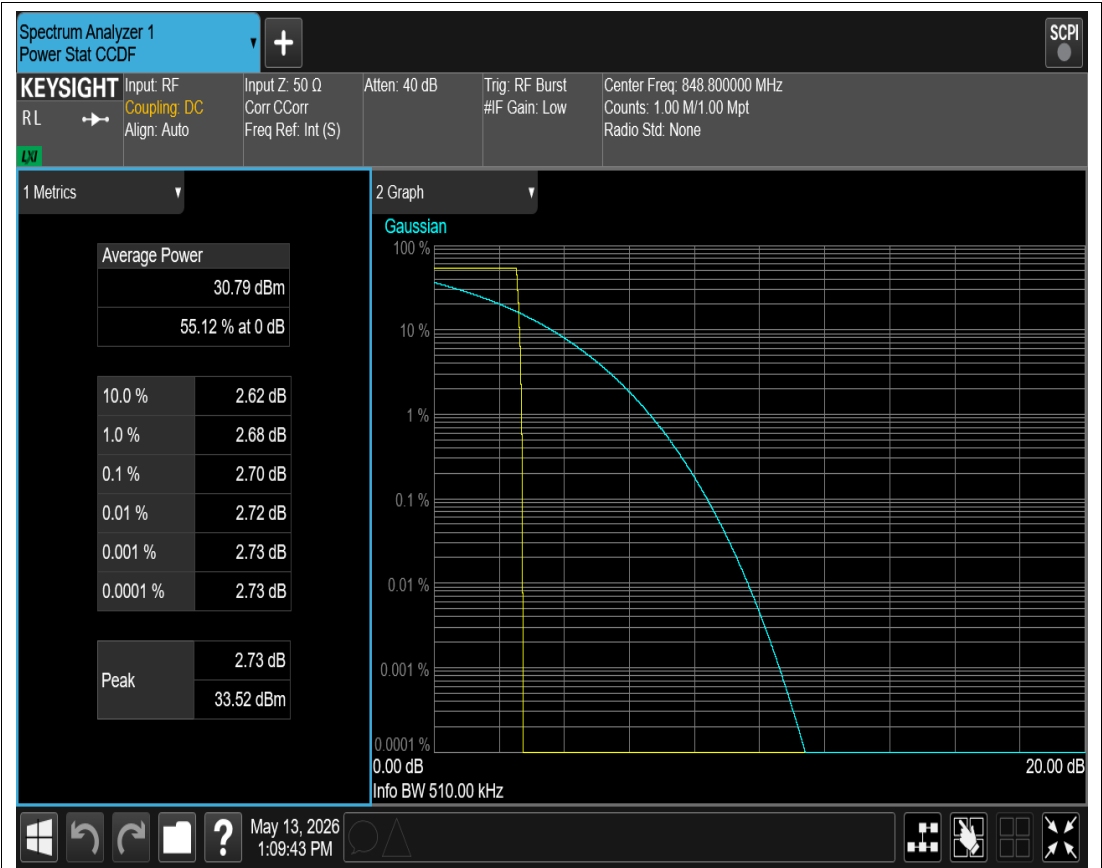


GSM850 Channel=251

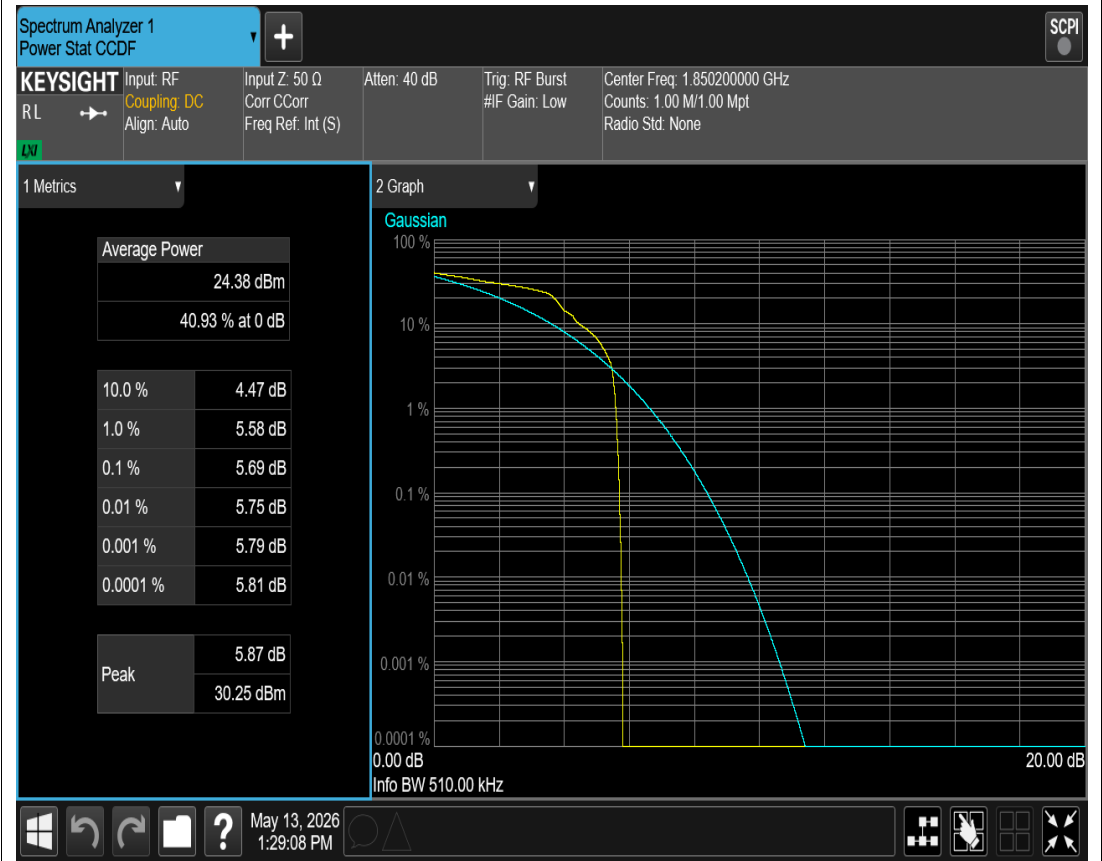


EGPRS1900 Channel=512

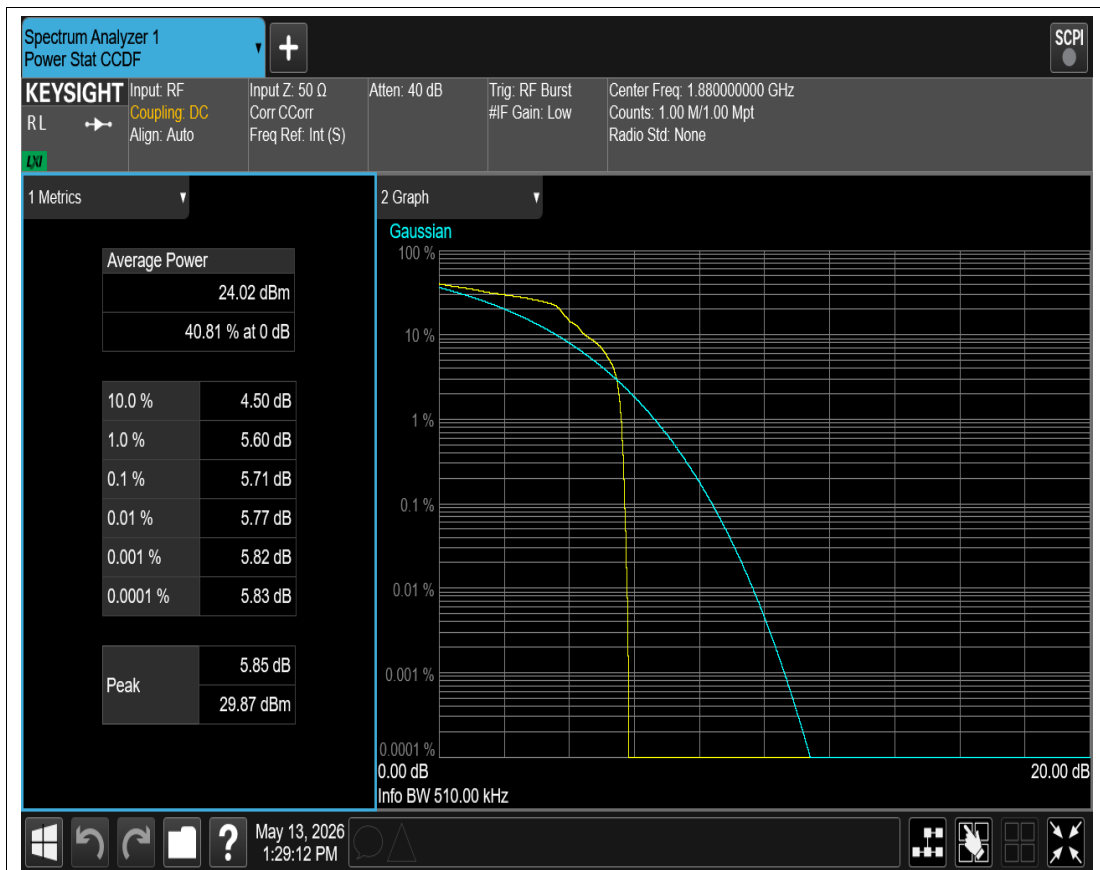


EGPRS1900 Channel=661

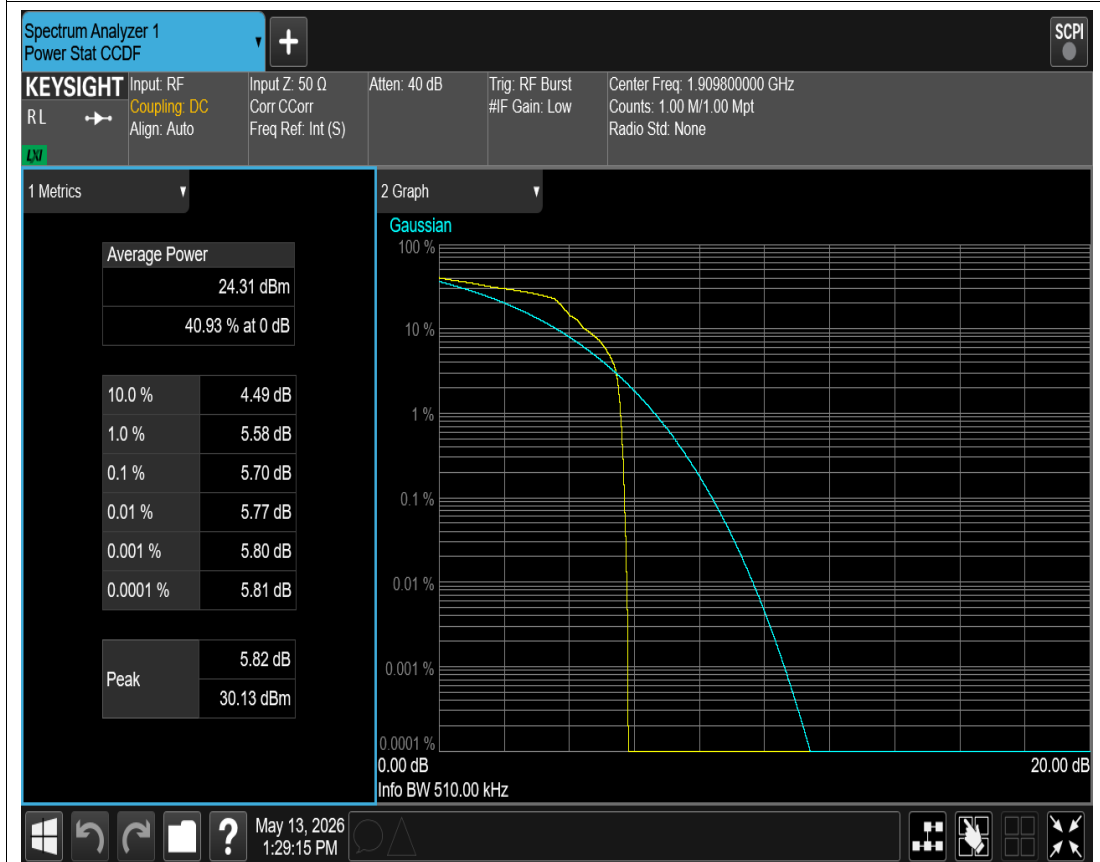


EGPRS1900 Channel=810

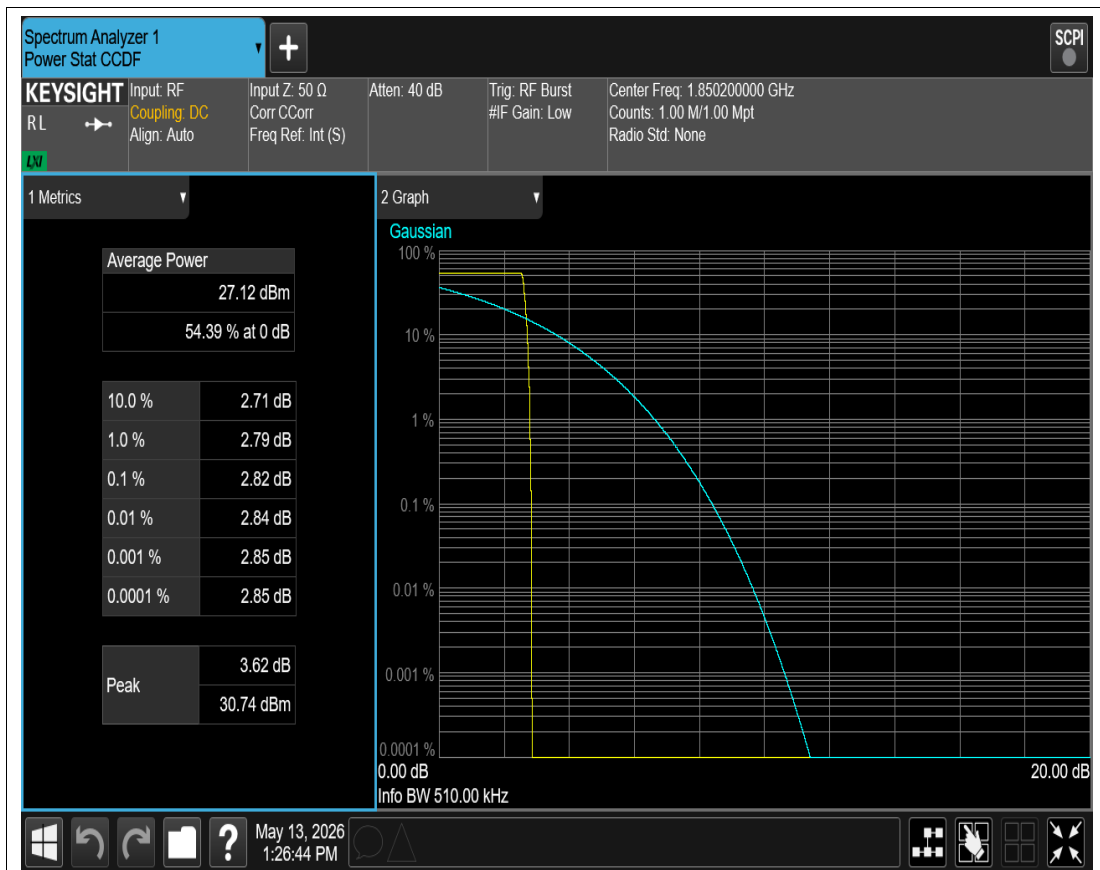


GPRS1900 Channel=512

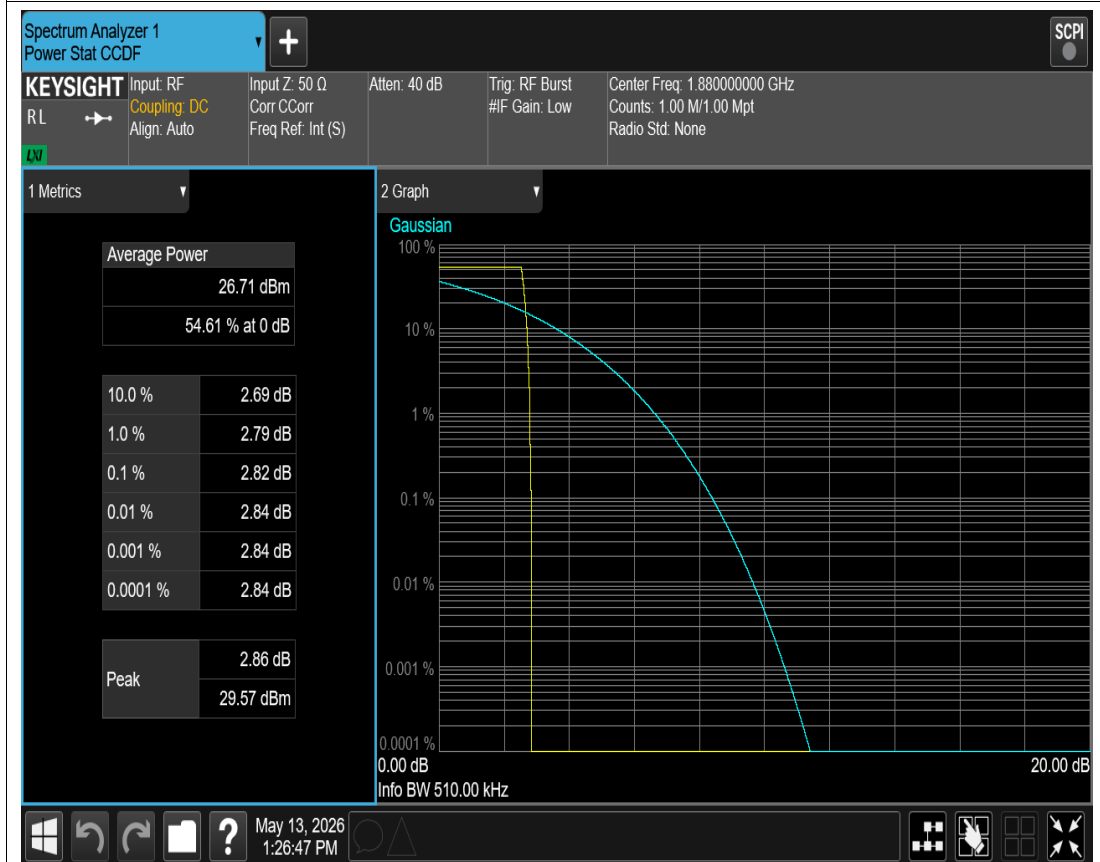


GPRS1900 Channel=661

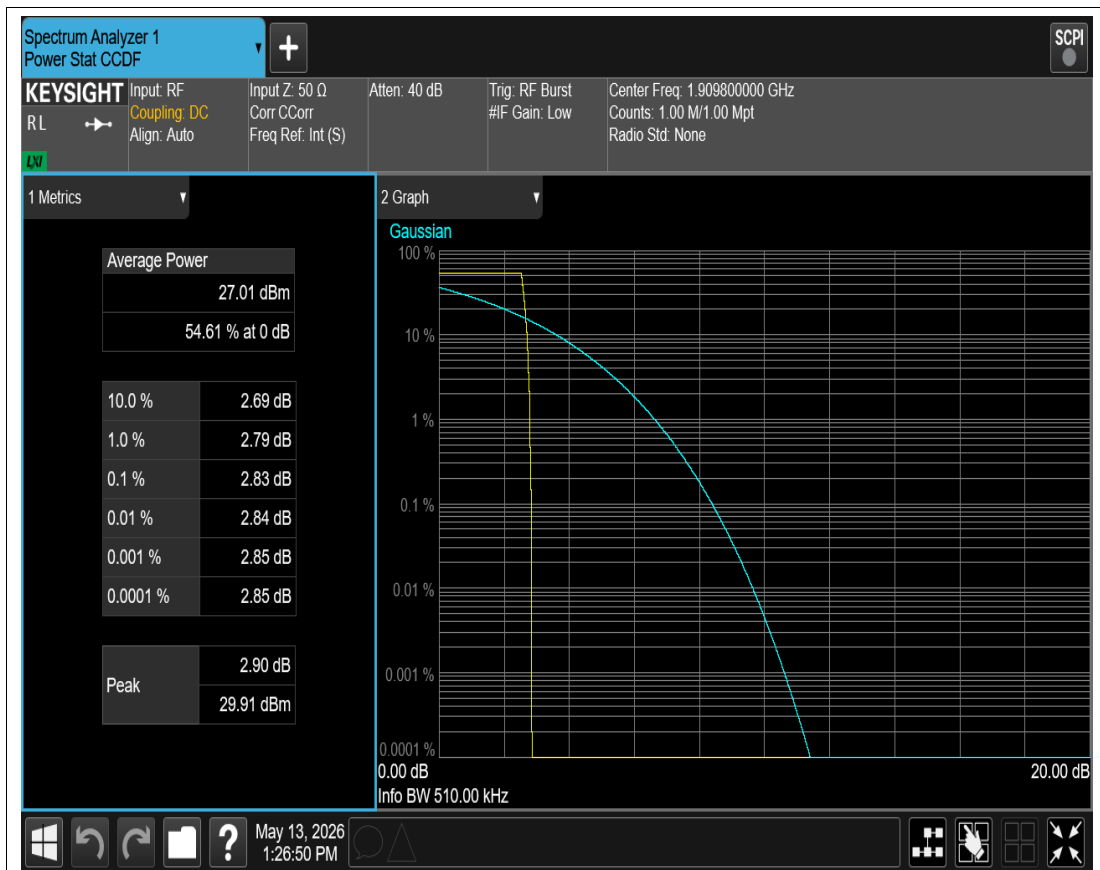


GPRS1900 Channel=810

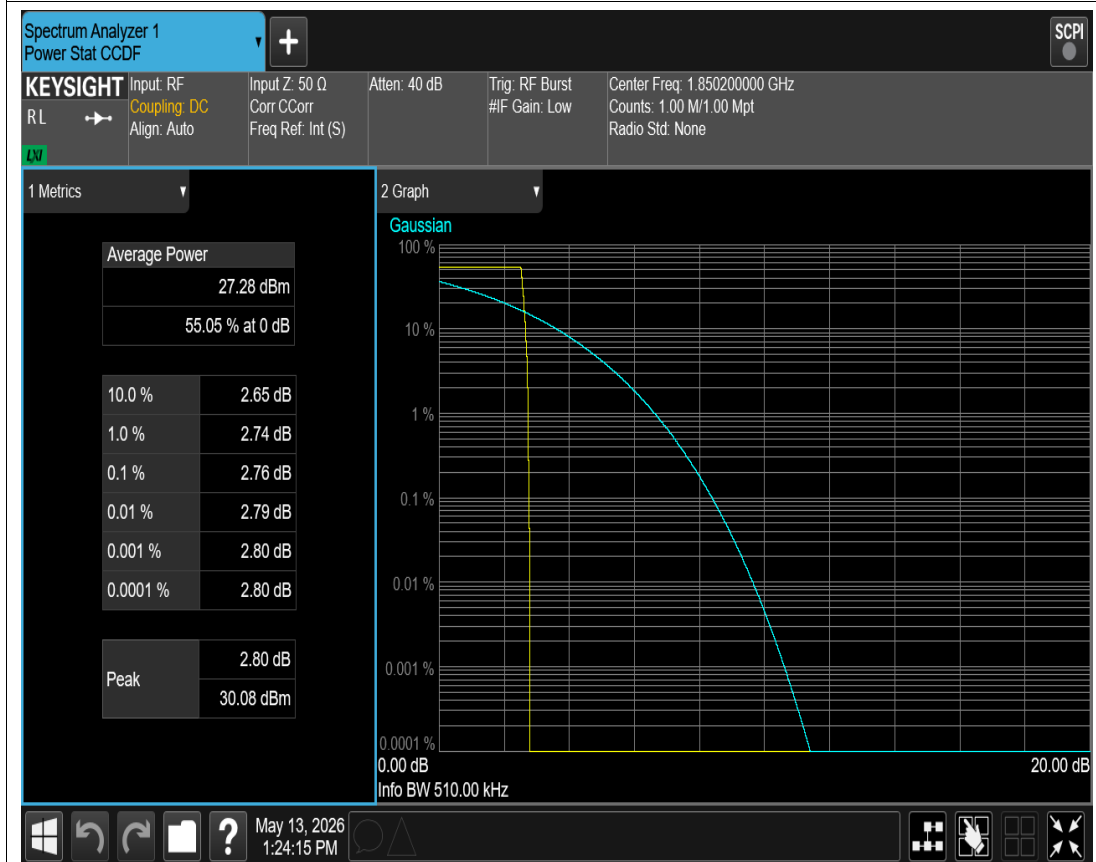

GSM1900 Channel=512

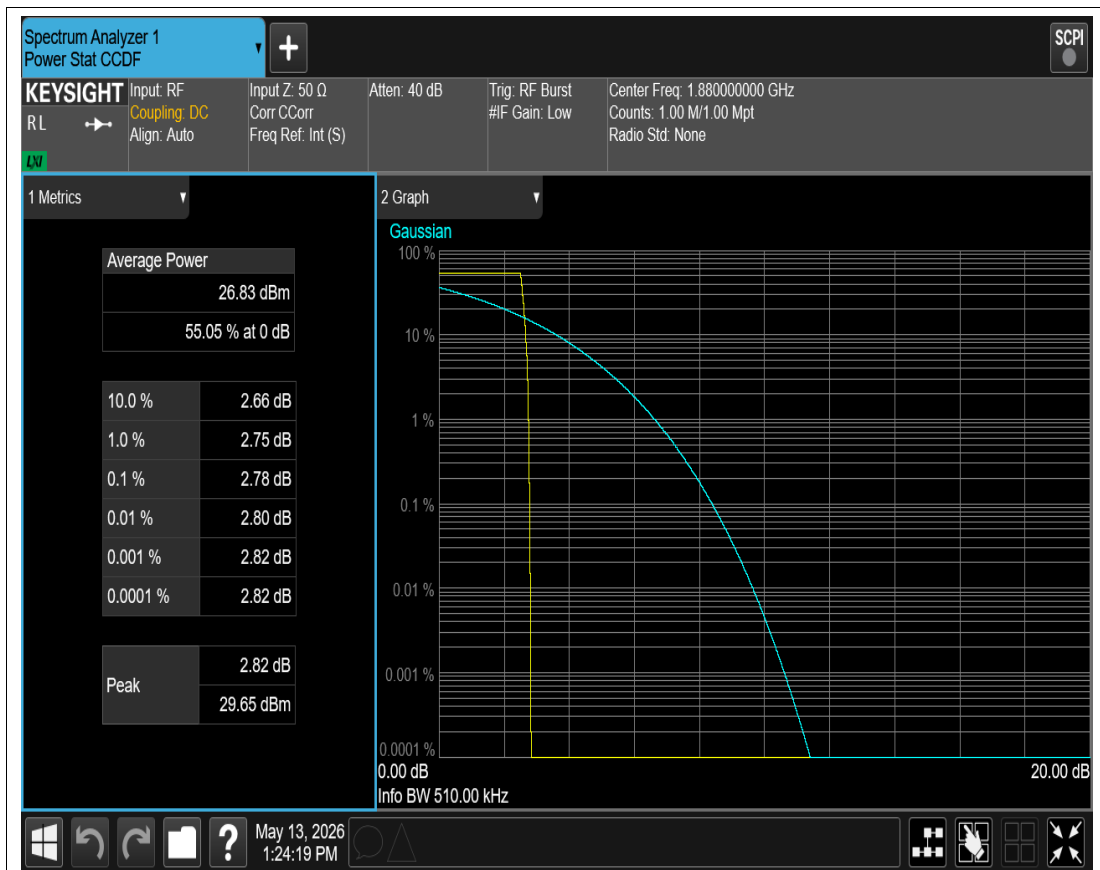


GSM1900 Channel=661

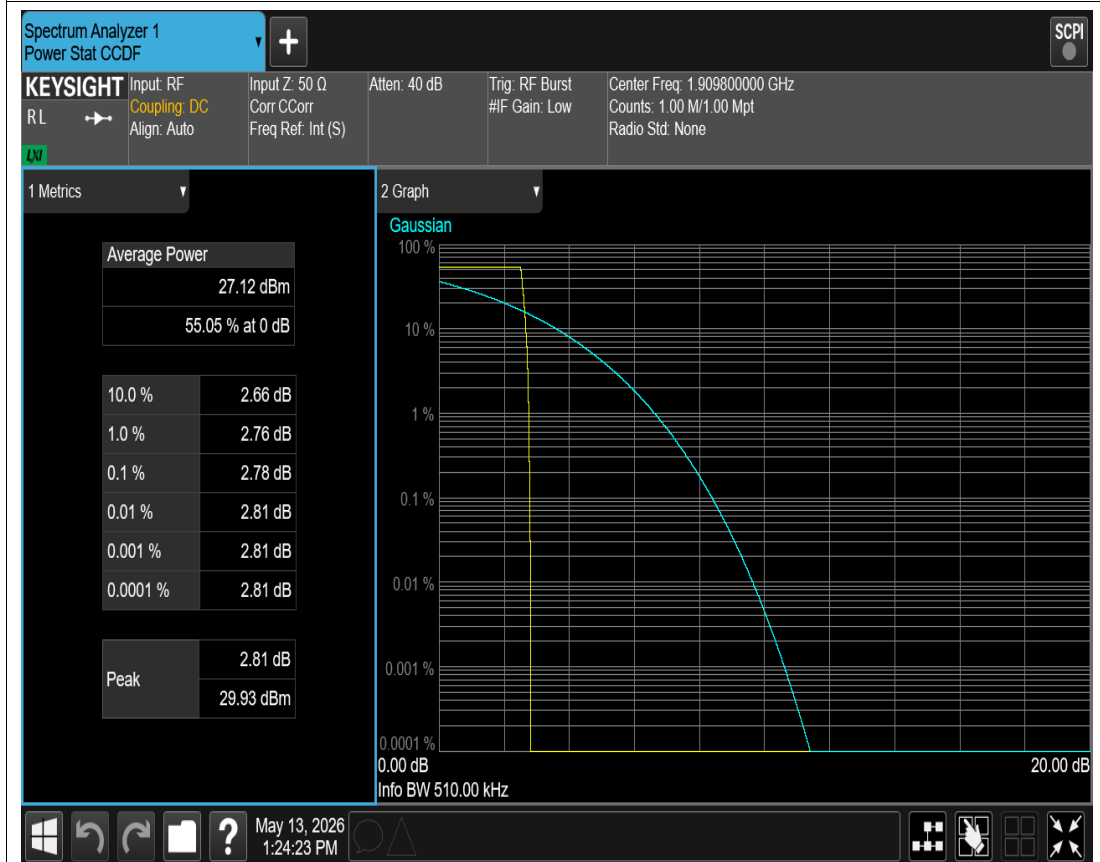


GSM1900 Channel=810

Occupied bandwidth


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>99% OBW (kHz)</i>	<i>-26dB EBW (kHz)</i>	<i>Verdict</i>
EGPRS850	128	824.2	246.562	303.577	PASS
EGPRS850	190	836.6	239.592	302.151	PASS
EGPRS850	251	848.8	241.745	307.974	PASS
GPRS850	128	824.2	244.484	315.711	PASS
GPRS850	190	836.6	243.726	316.603	PASS
GPRS850	251	848.8	243.350	322.247	PASS
GSM850	128	824.2	241.065	315.530	PASS
GSM850	190	836.6	249.452	318.008	PASS
GSM850	251	848.8	247.517	309.024	PASS
EGPRS1900	512	1850.2	244.613	313.107	PASS
EGPRS1900	661	1880	247.815	309.957	PASS
EGPRS1900	810	1909.8	246.427	311.201	PASS
GPRS1900	512	1850.2	248.672	323.039	PASS
GPRS1900	661	1880	249.610	320.222	PASS
GPRS1900	810	1909.8	246.865	325.736	PASS
GSM1900	512	1850.2	240.651	316.468	PASS
GSM1900	661	1880	246.212	318.548	PASS
GSM1900	810	1909.8	249.639	319.392	PASS

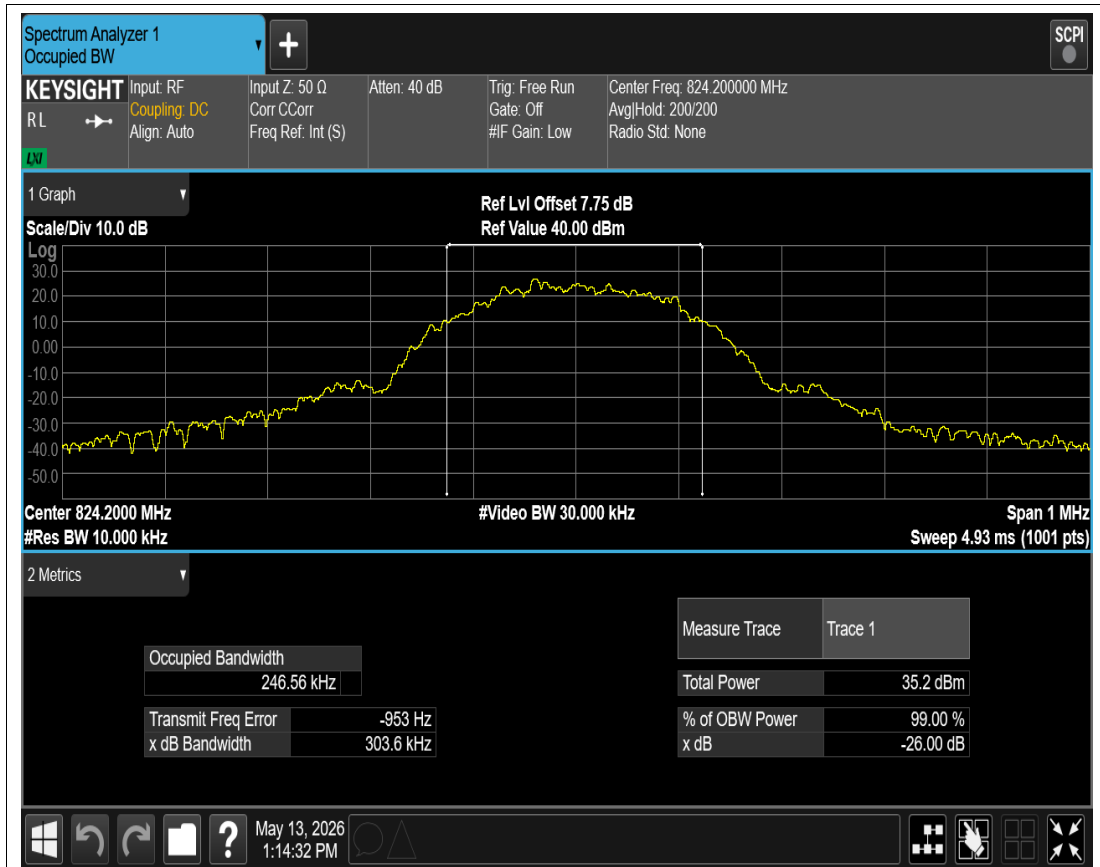


EGPRS850 Channel=128

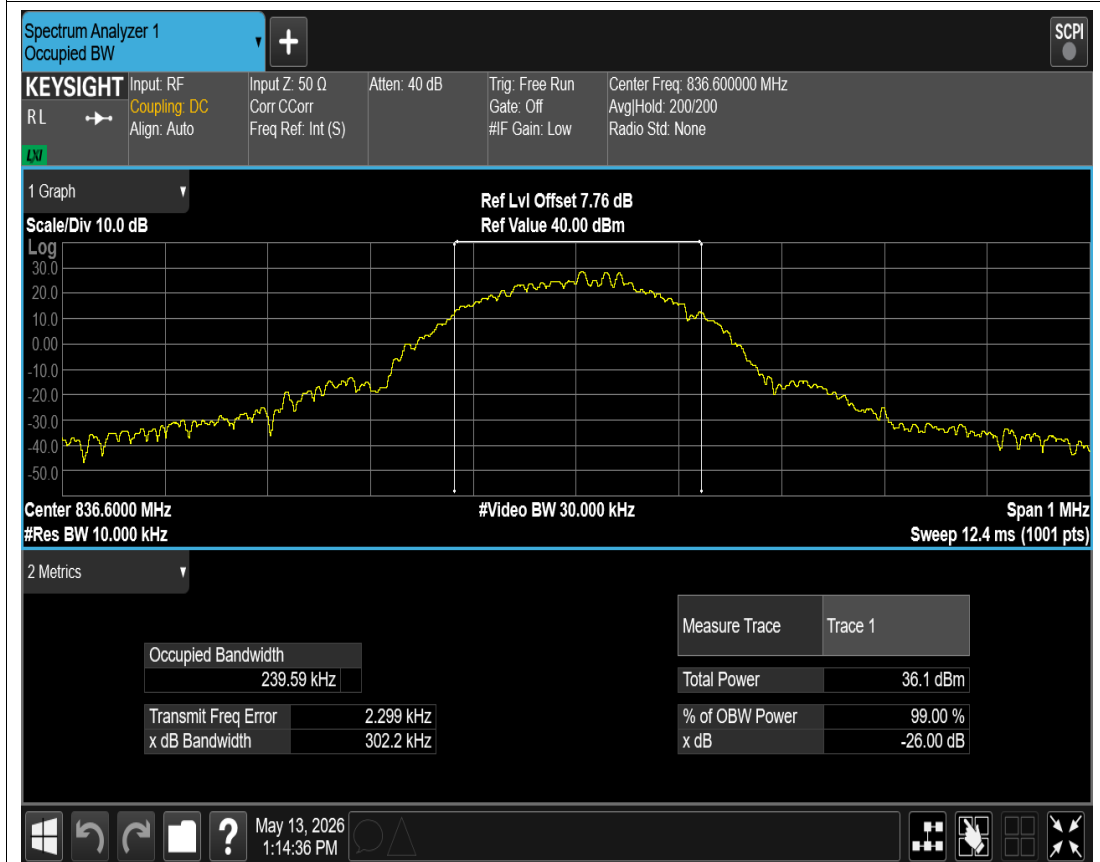


EGPRS850 Channel=190

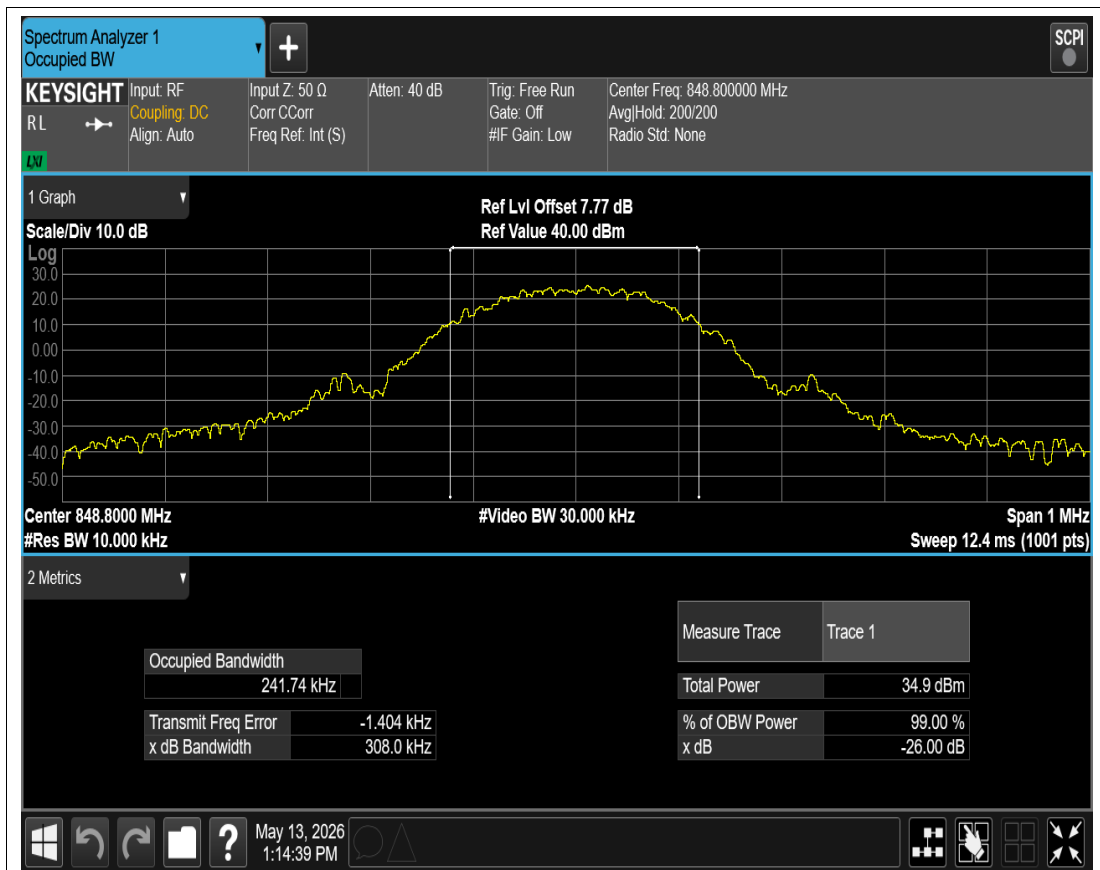


EGPRS850 Channel=251

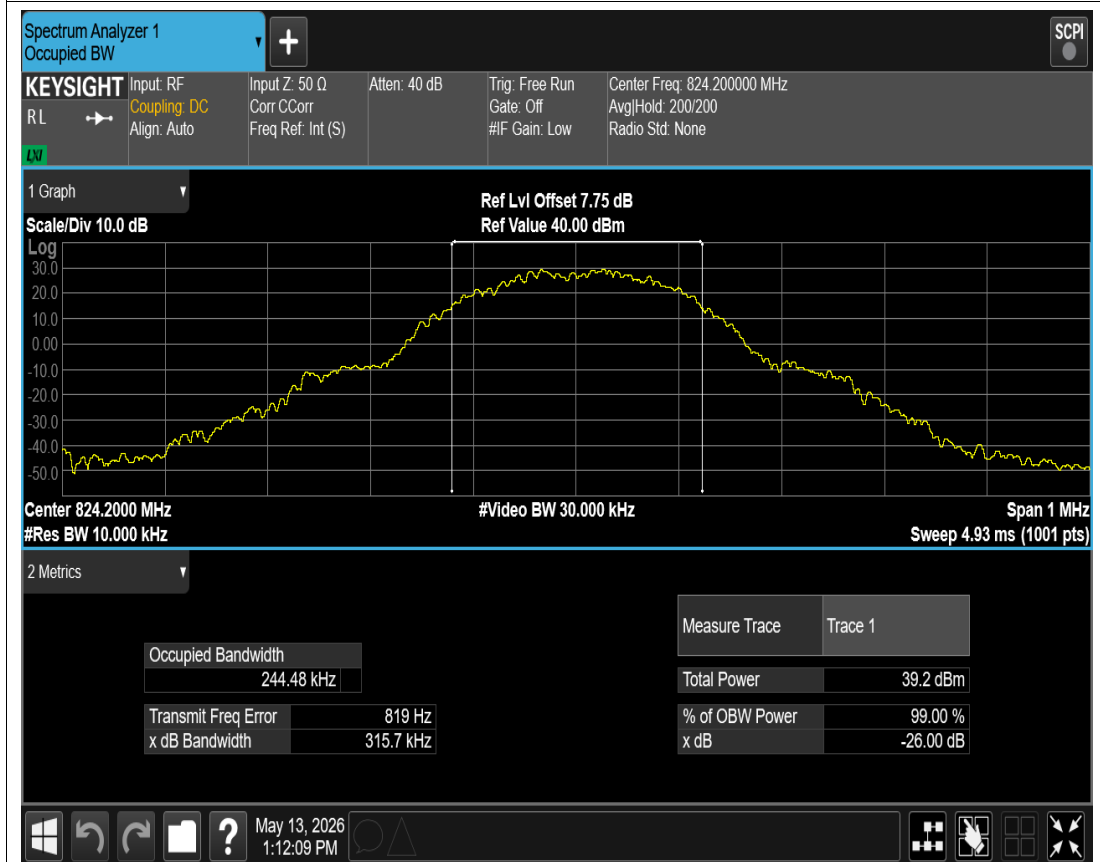


GPRS850 Channel=128

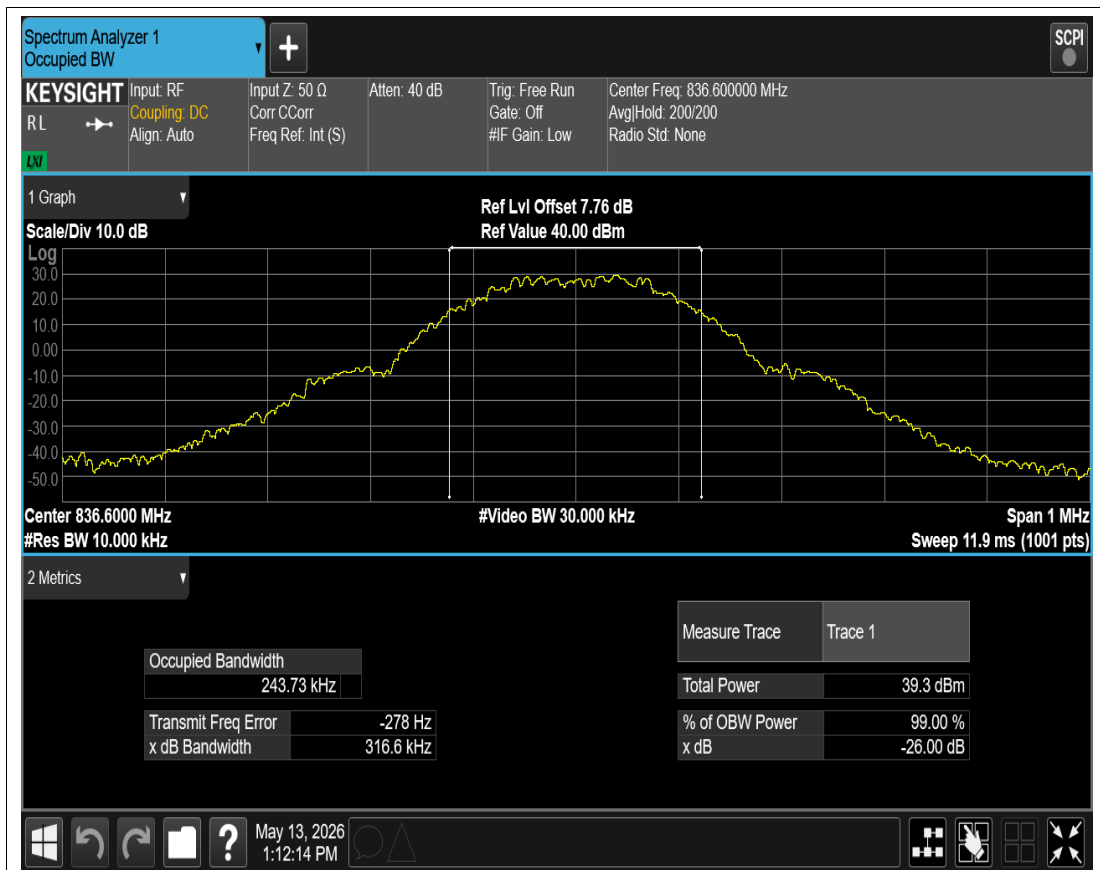


GPRS850 Channel=190

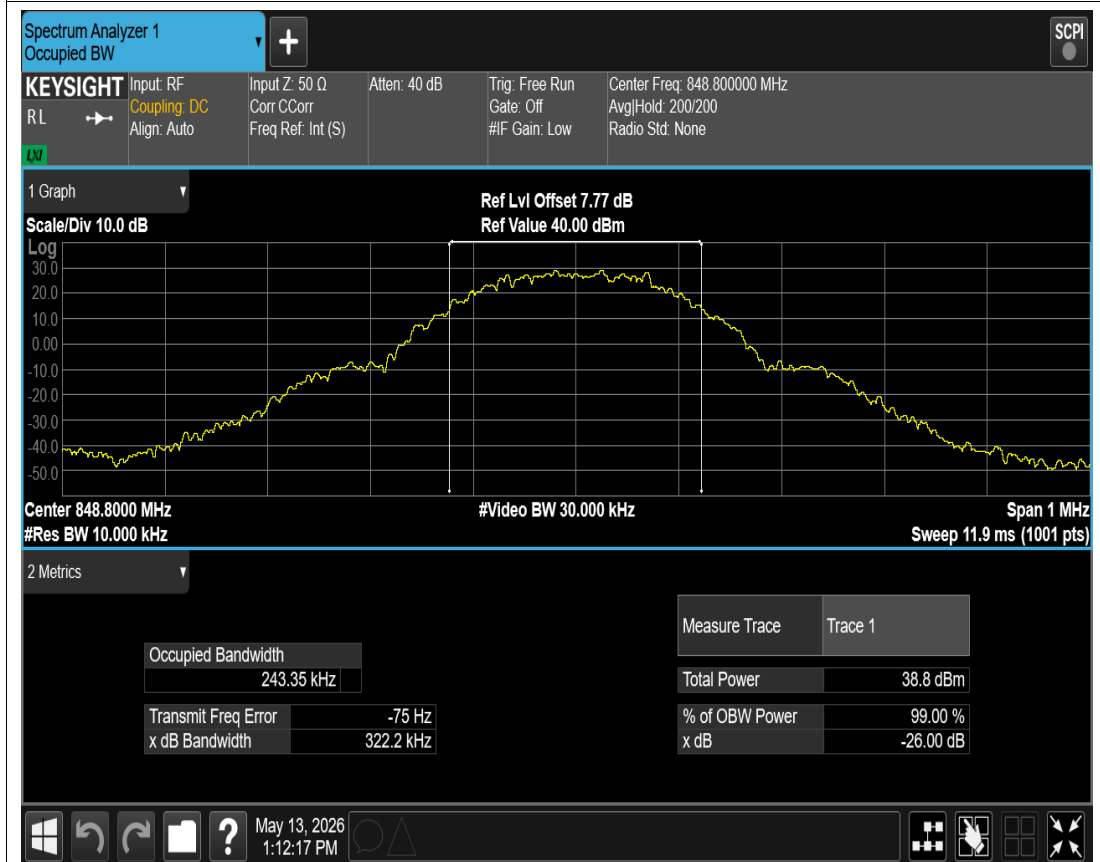


GPRS850 Channel=251

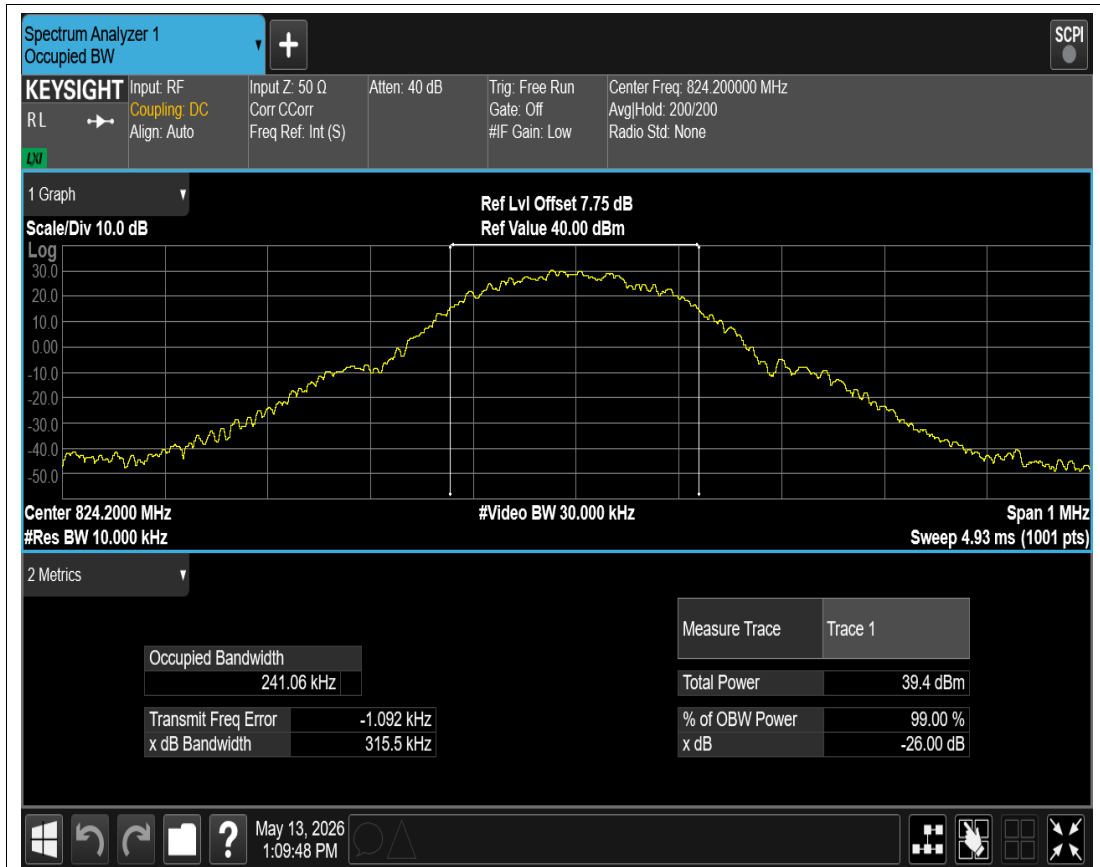


GSM850 Channel=128

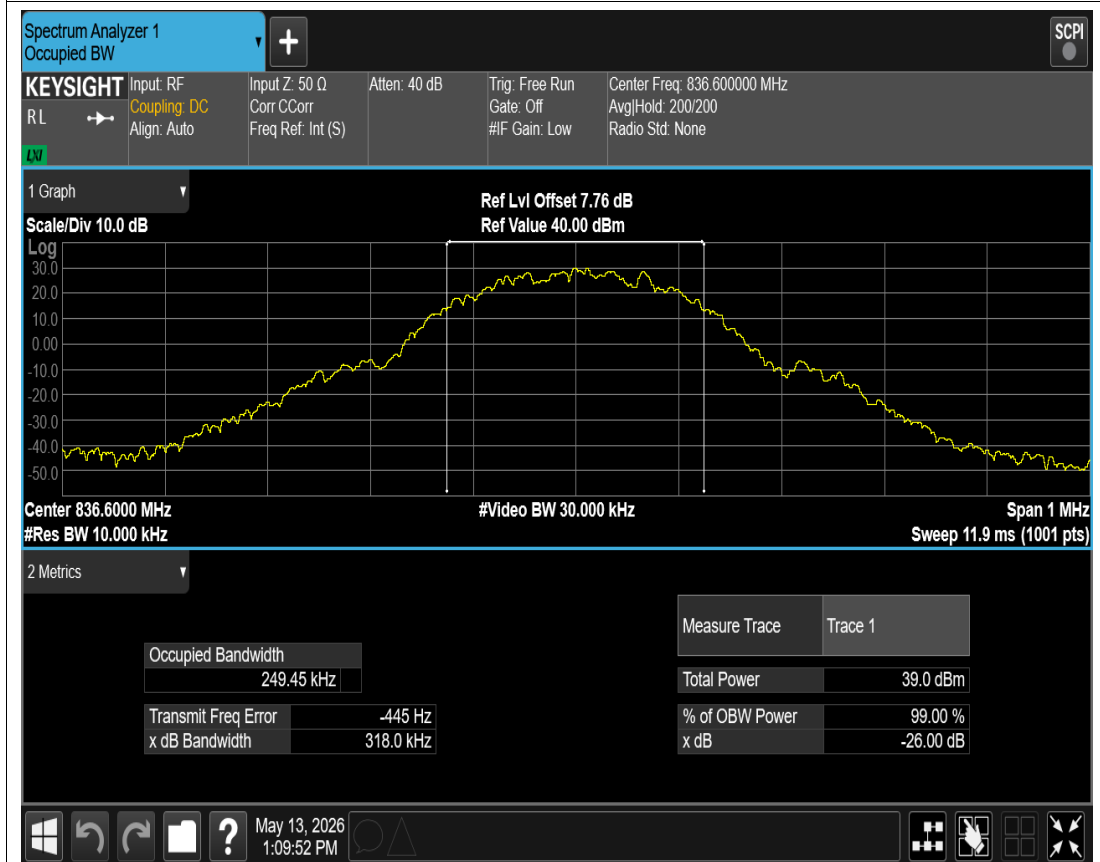


GSM850 Channel=190

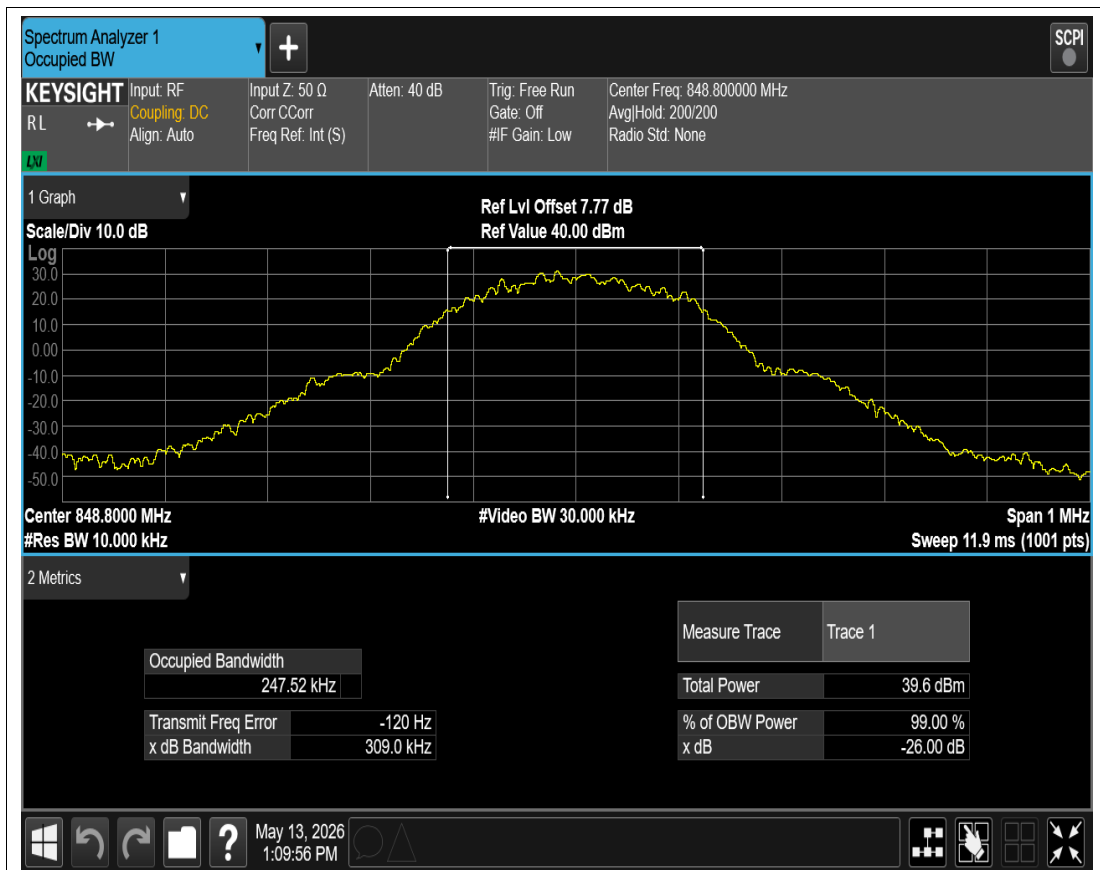


GSM850 Channel=251

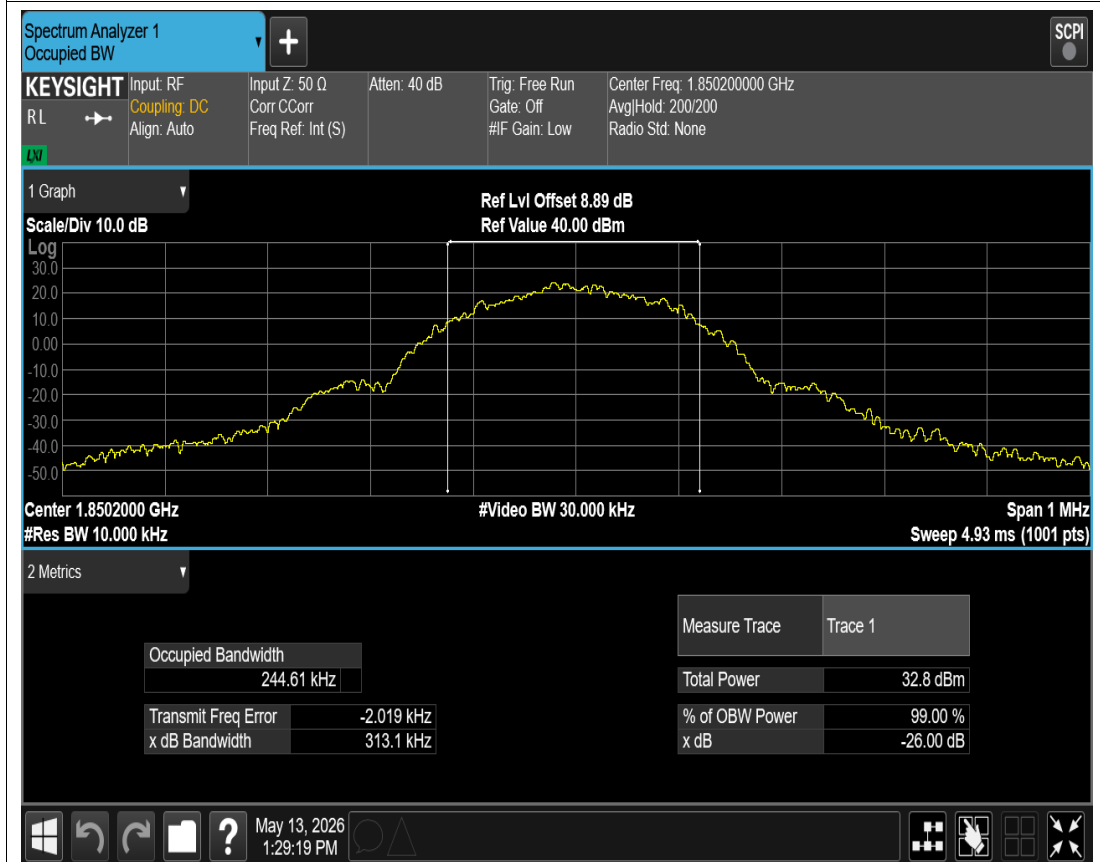


EGPRS1900 Channel=512

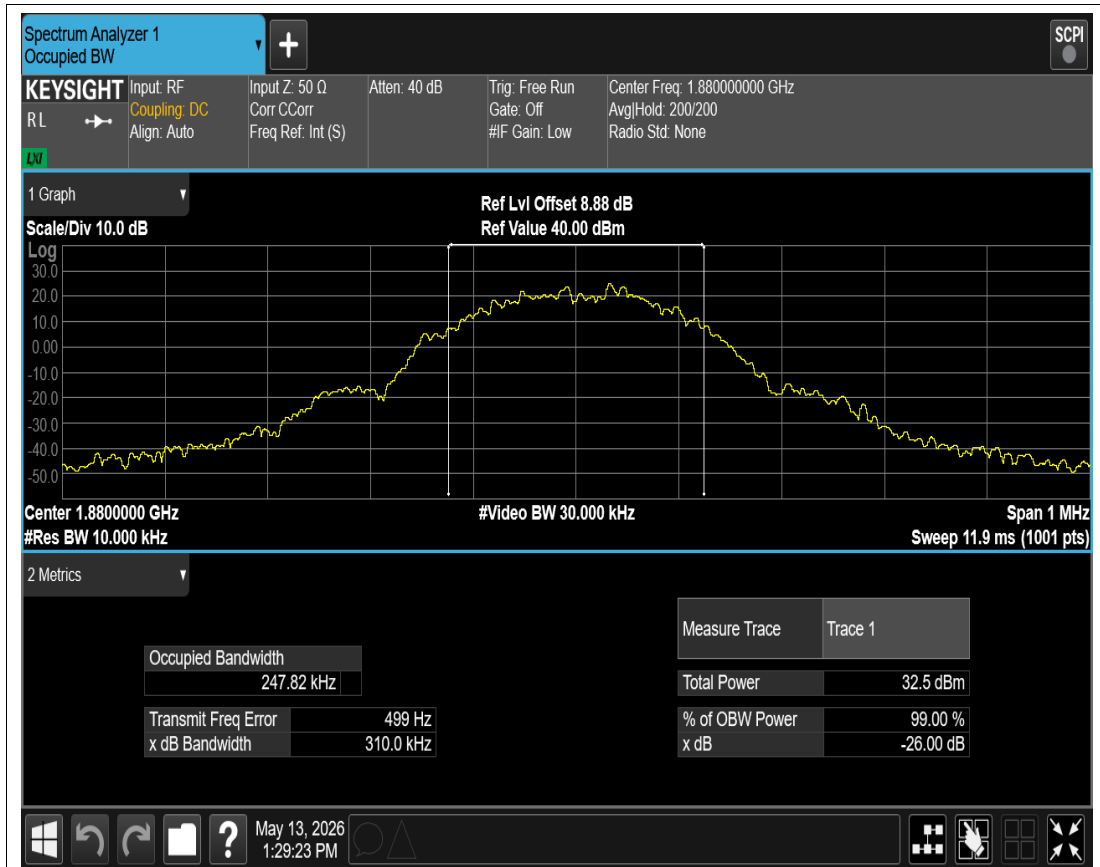


EGPRS1900 Channel=661

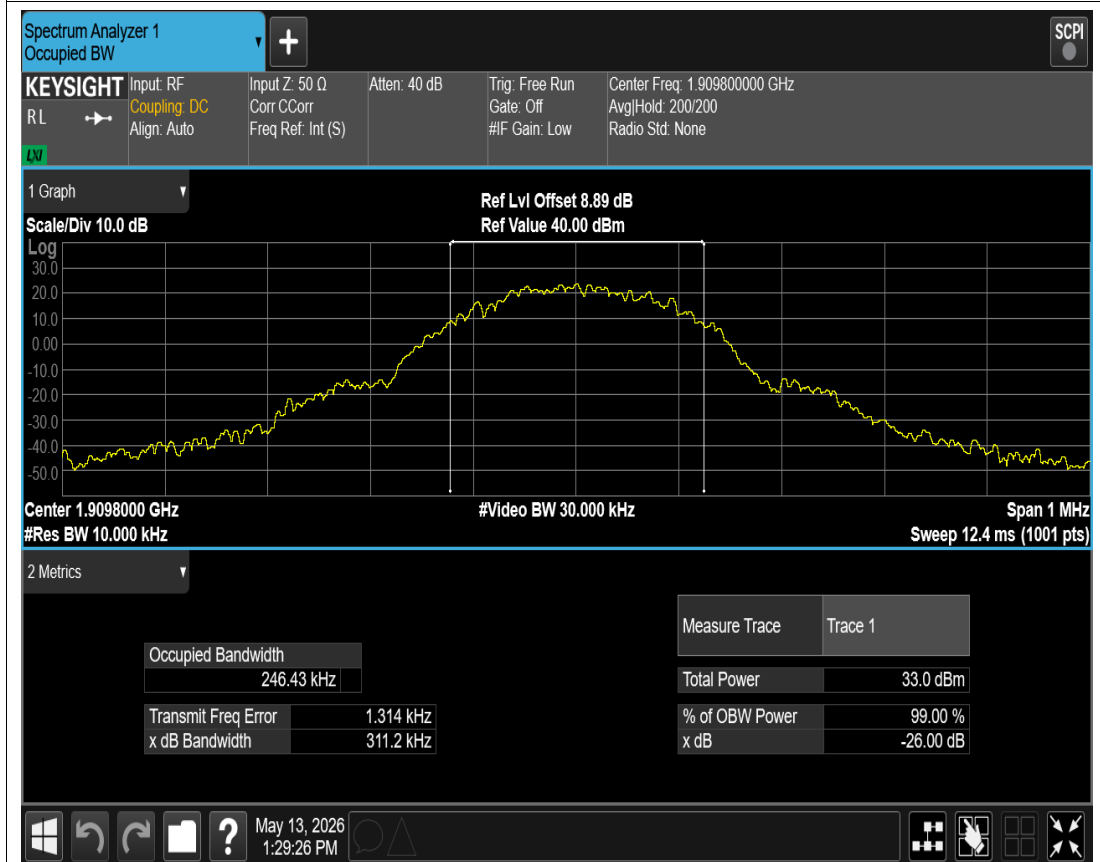


EGPRS1900 Channel=810

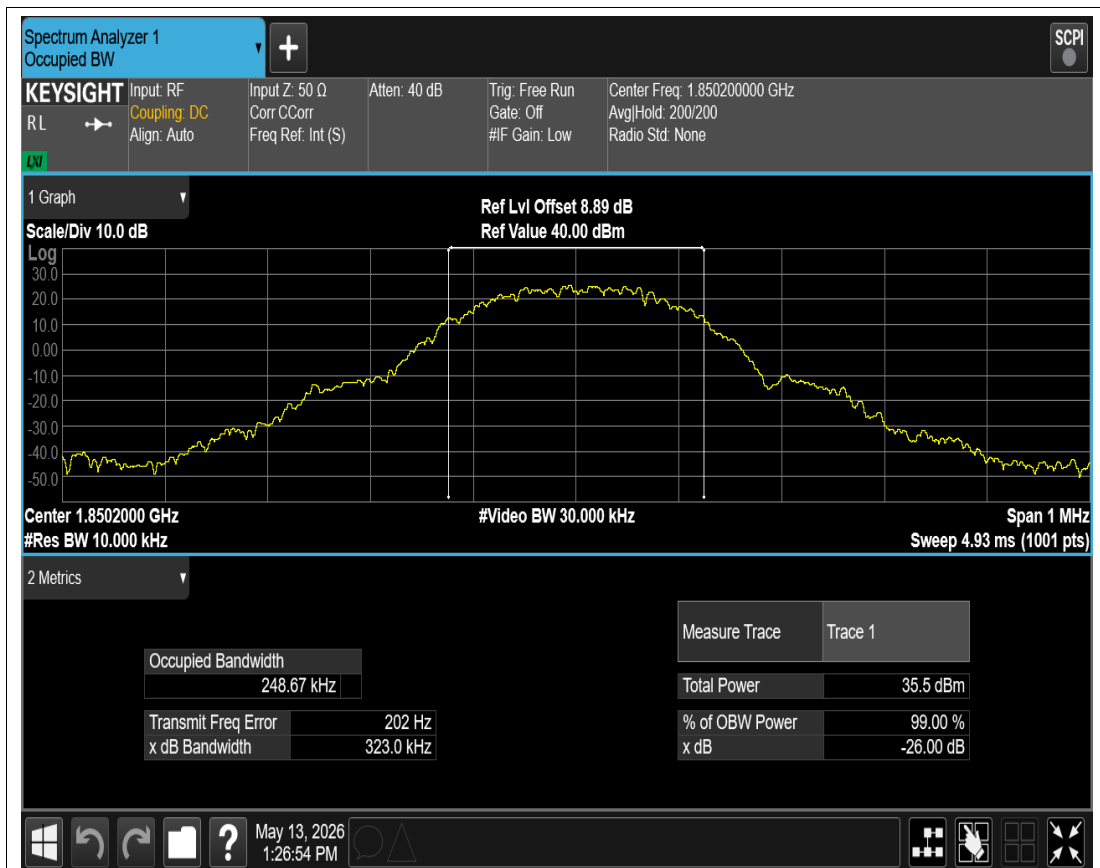


GPRS1900 Channel=512

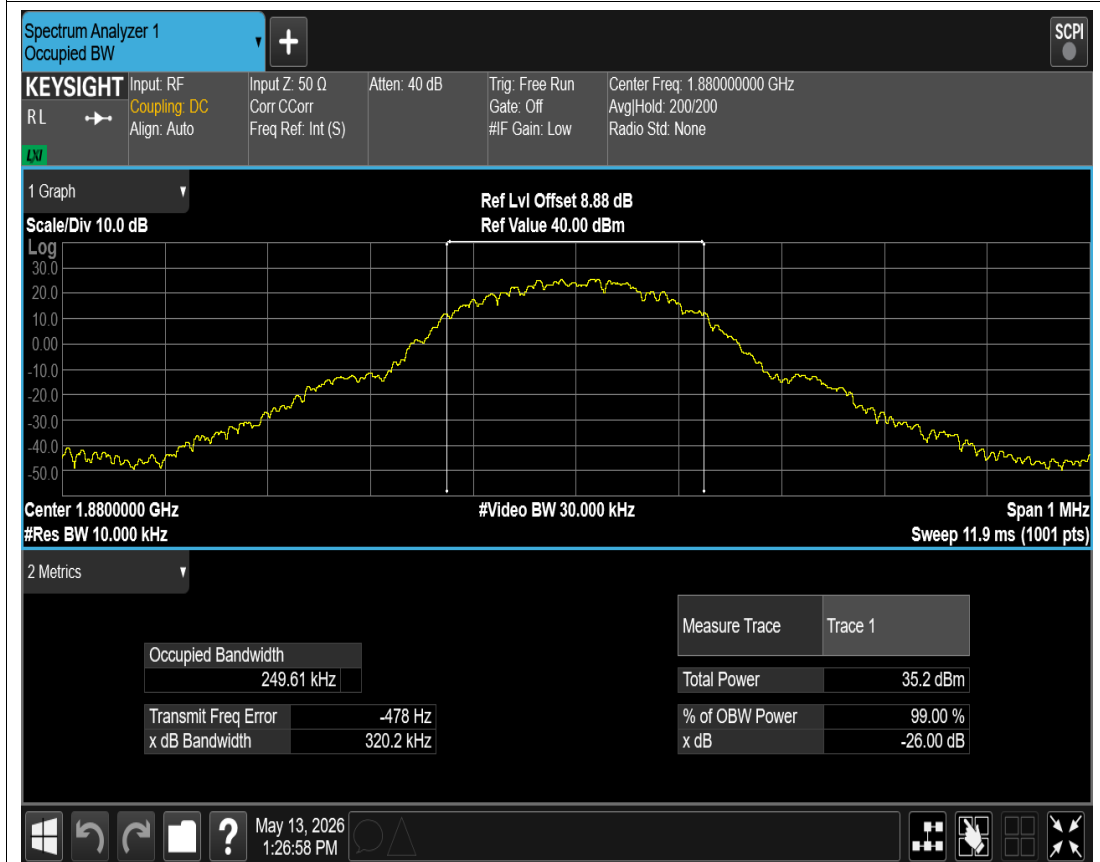


GPRS1900 Channel=661

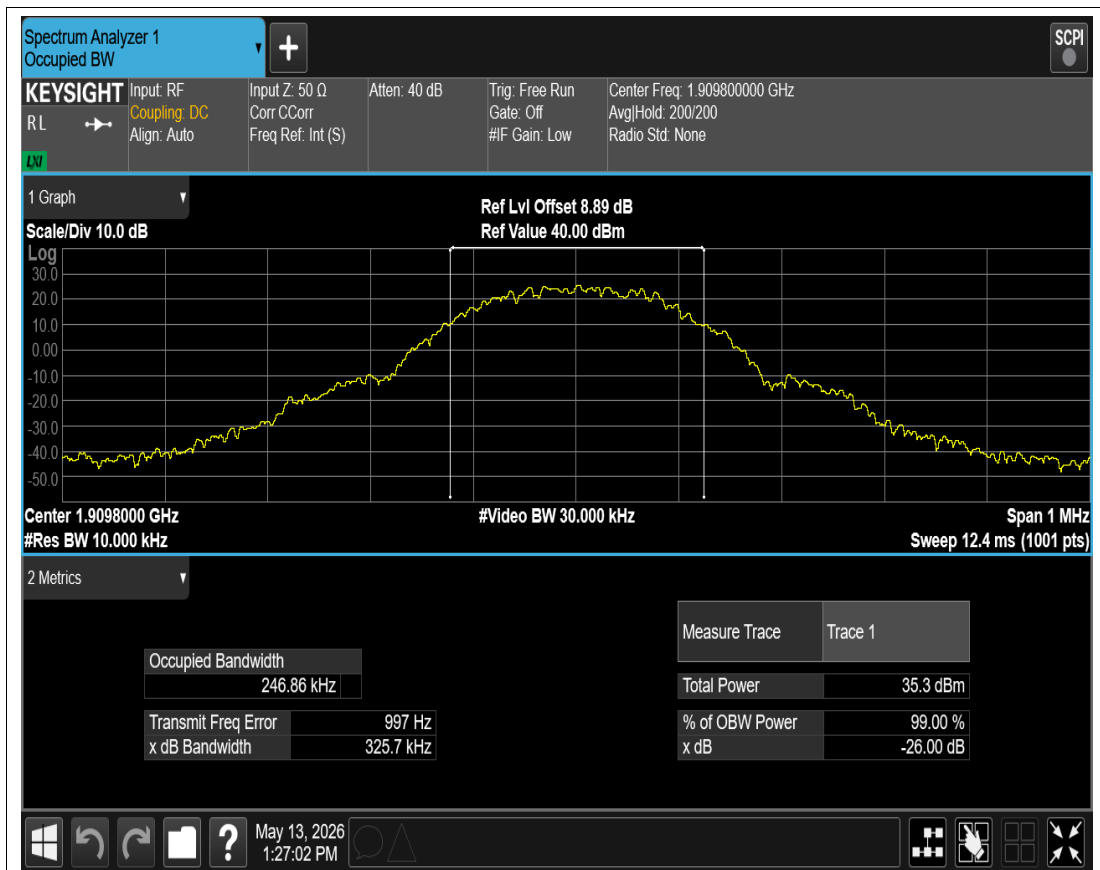


GPRS1900 Channel=810

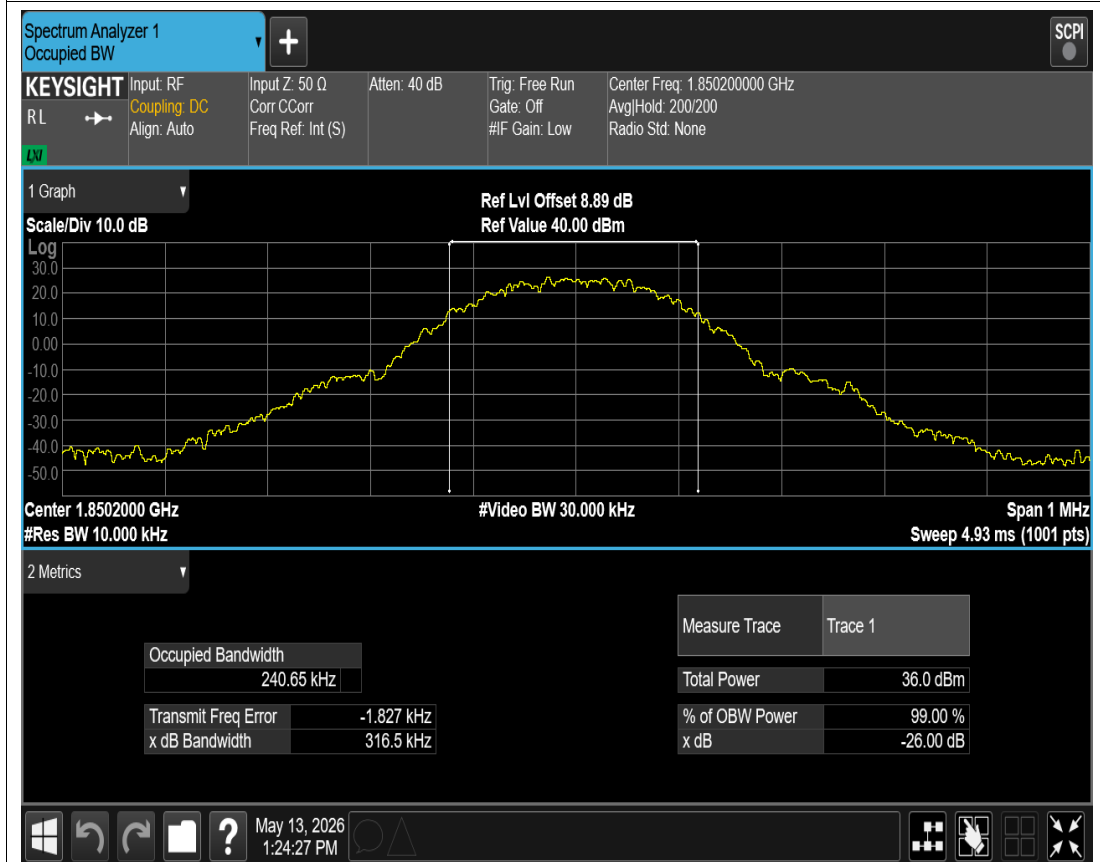

GSM1900 Channel=512

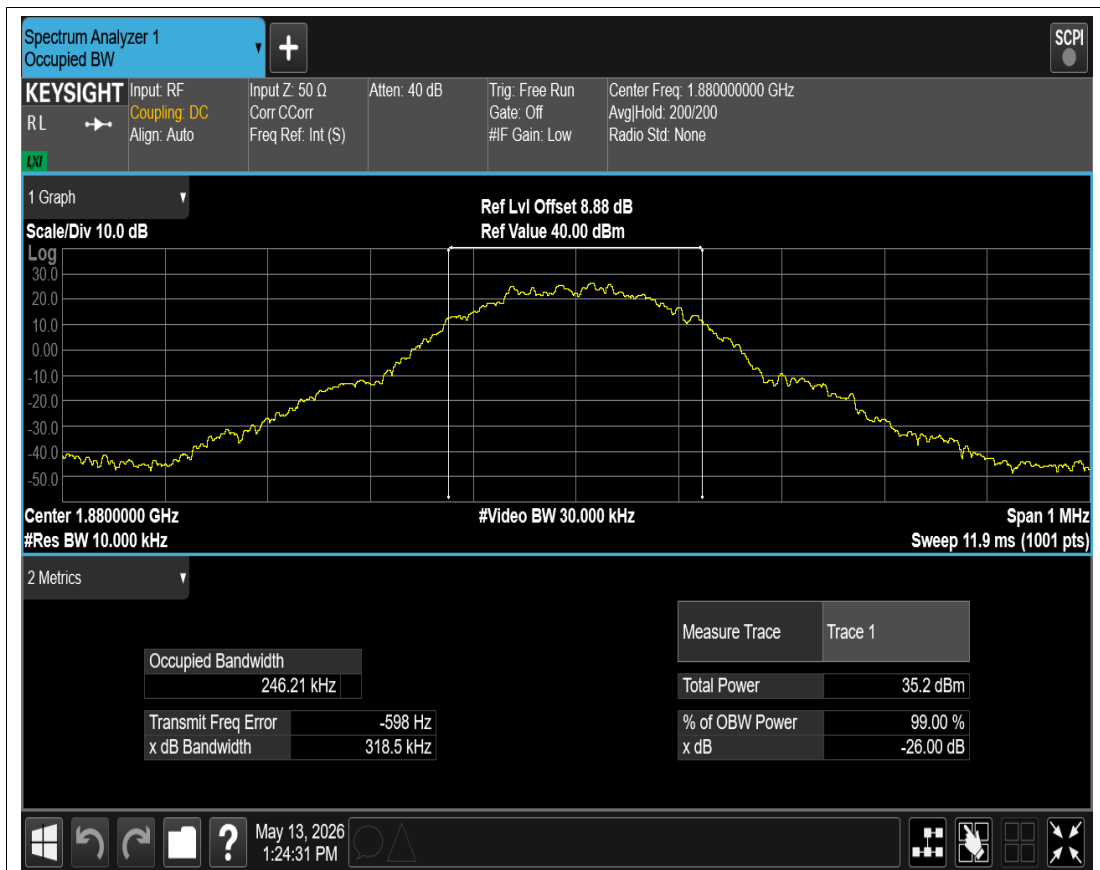


GSM1900 Channel=661

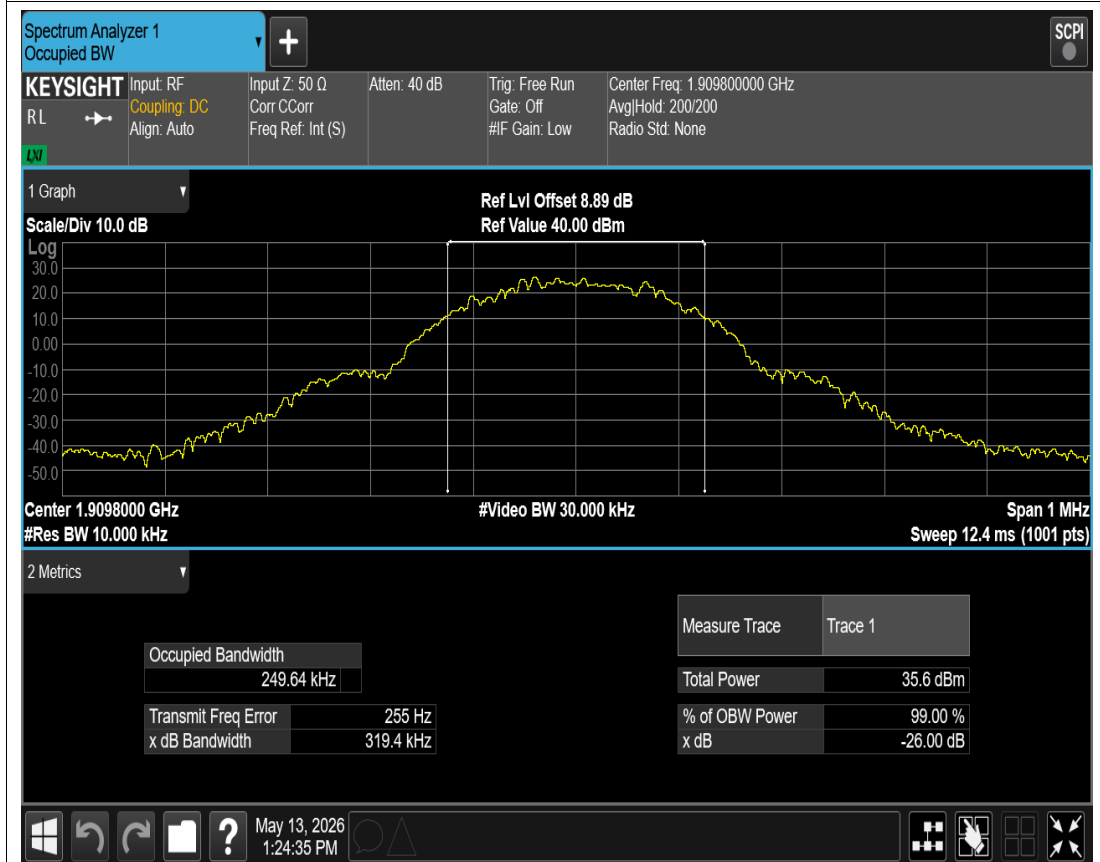


GSM1900 Channel=810

Band edge


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	823.98	-34.18	-13	PASS
EGPRS850	251	848.8	849.04	-33.41	-13	PASS
GPRS850	128	824.2	823.98	-27.24	-13	PASS
GPRS850	251	848.8	849.02	-26.40	-13	PASS
GSM850	128	824.2	823.99	-27.28	-13	PASS
GSM850	251	848.8	849.02	-24.97	-13	PASS
EGPRS1900	512	1850.2	1849.97	-34.86	-13	PASS
EGPRS1900	810	1909.8	1910.00	-34.68	-13	PASS
GPRS1900	512	1850.2	1849.98	-30.01	-13	PASS
GPRS1900	810	1909.8	1910.02	-31.97	-13	PASS
GSM1900	512	1850.2	1849.98	-29.29	-13	PASS
GSM1900	810	1909.8	1910.02	-29.89	-13	PASS

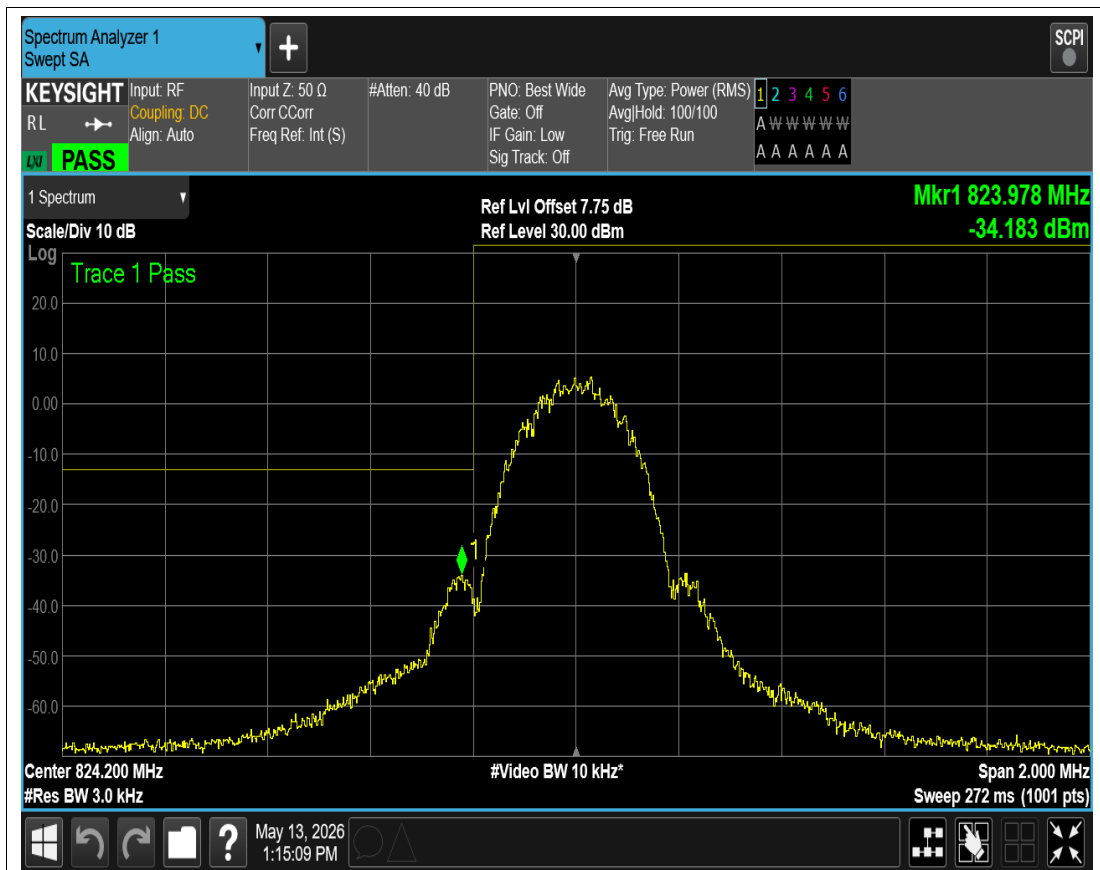


EGPRS850 Channel=128

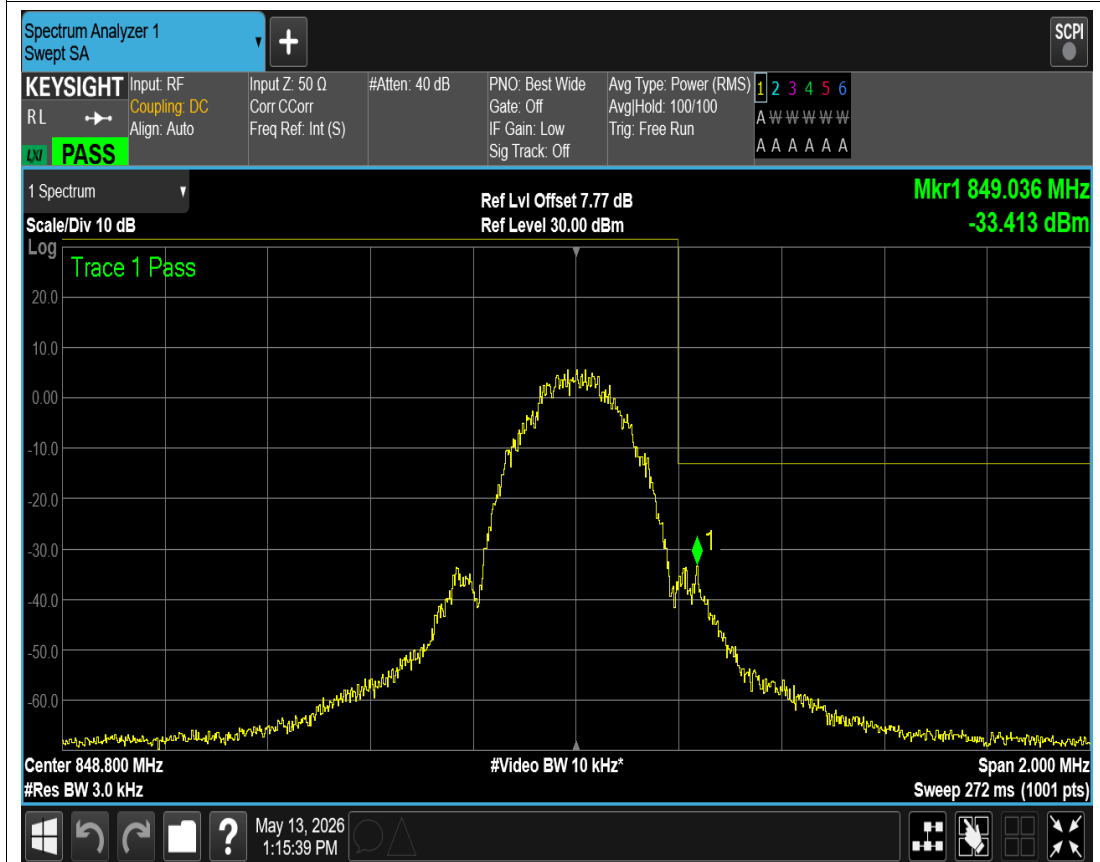


EGPRS850 Channel=251

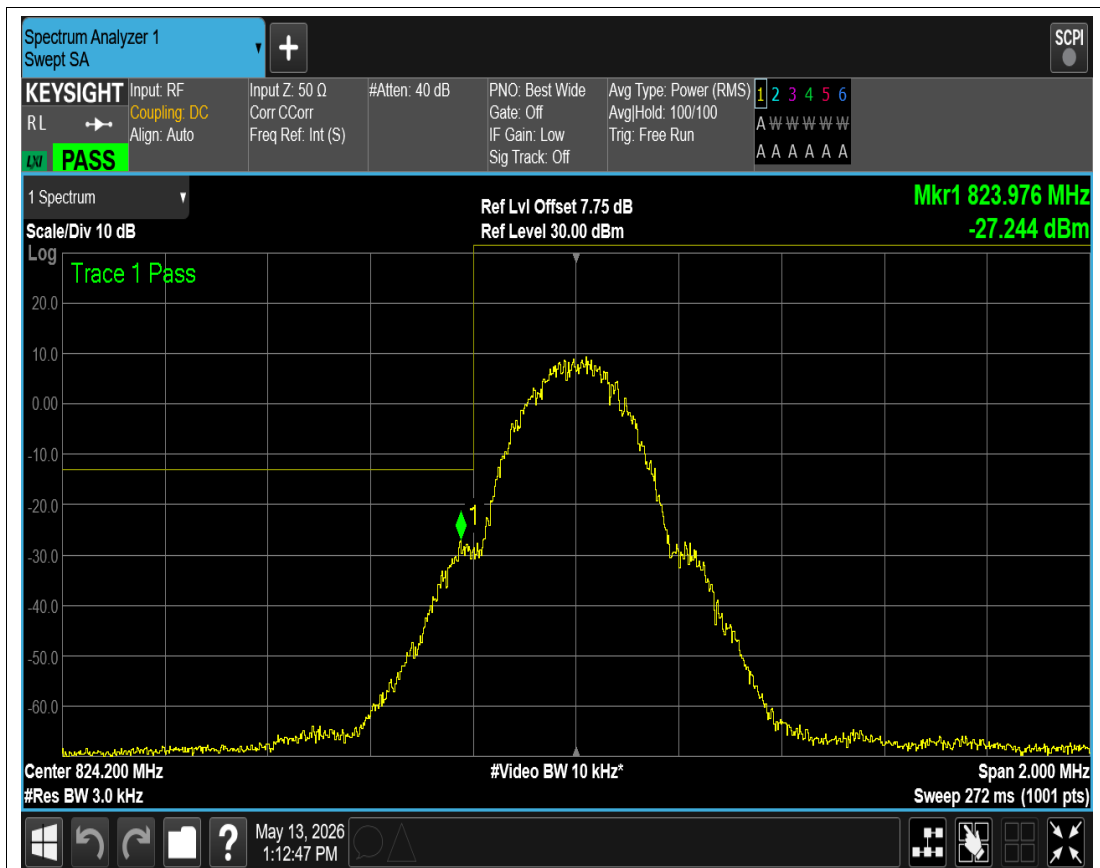


GPRS850 Channel=128

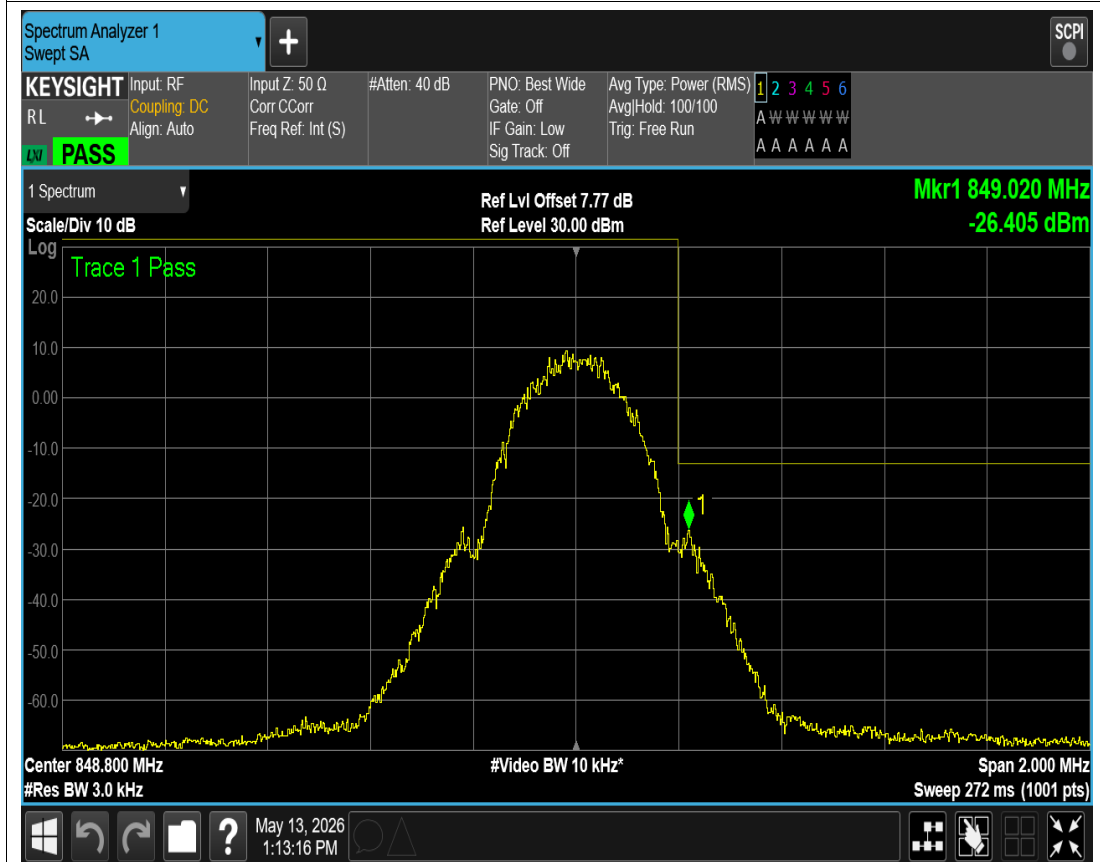


GPRS850 Channel=251

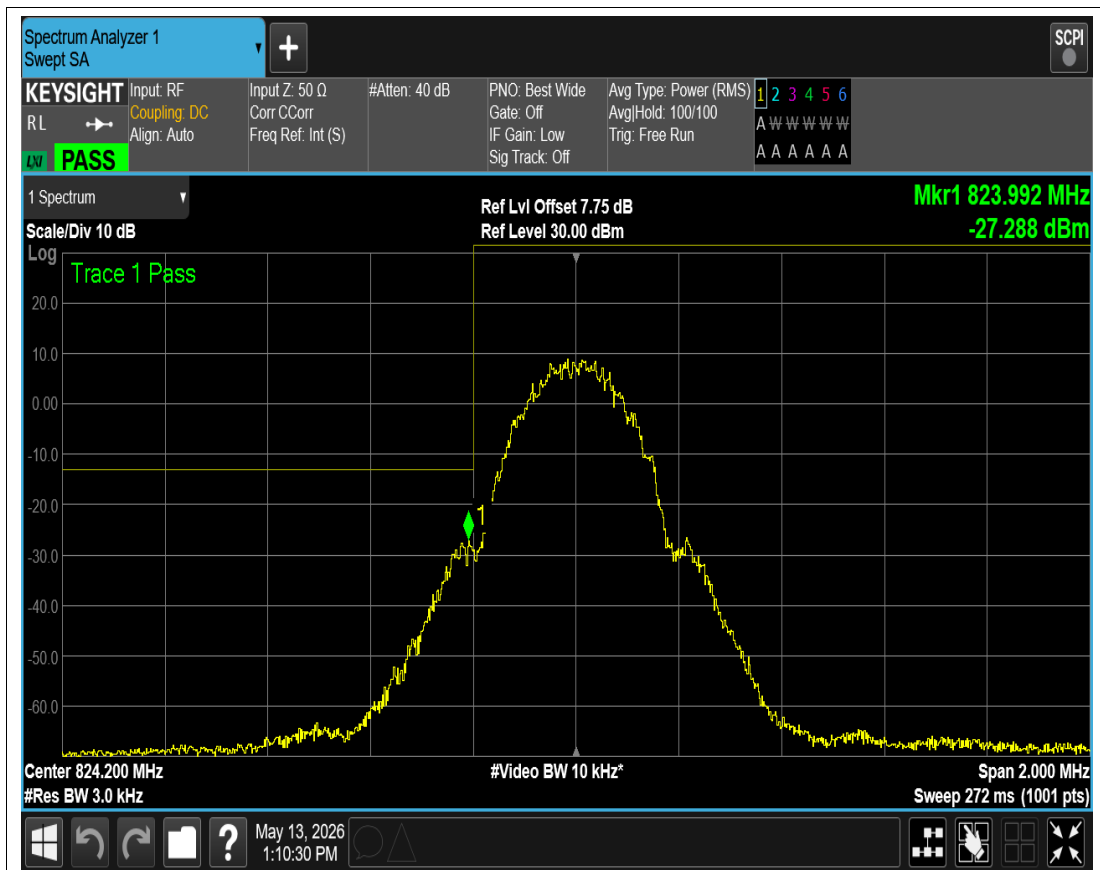


GSM850 Channel=128

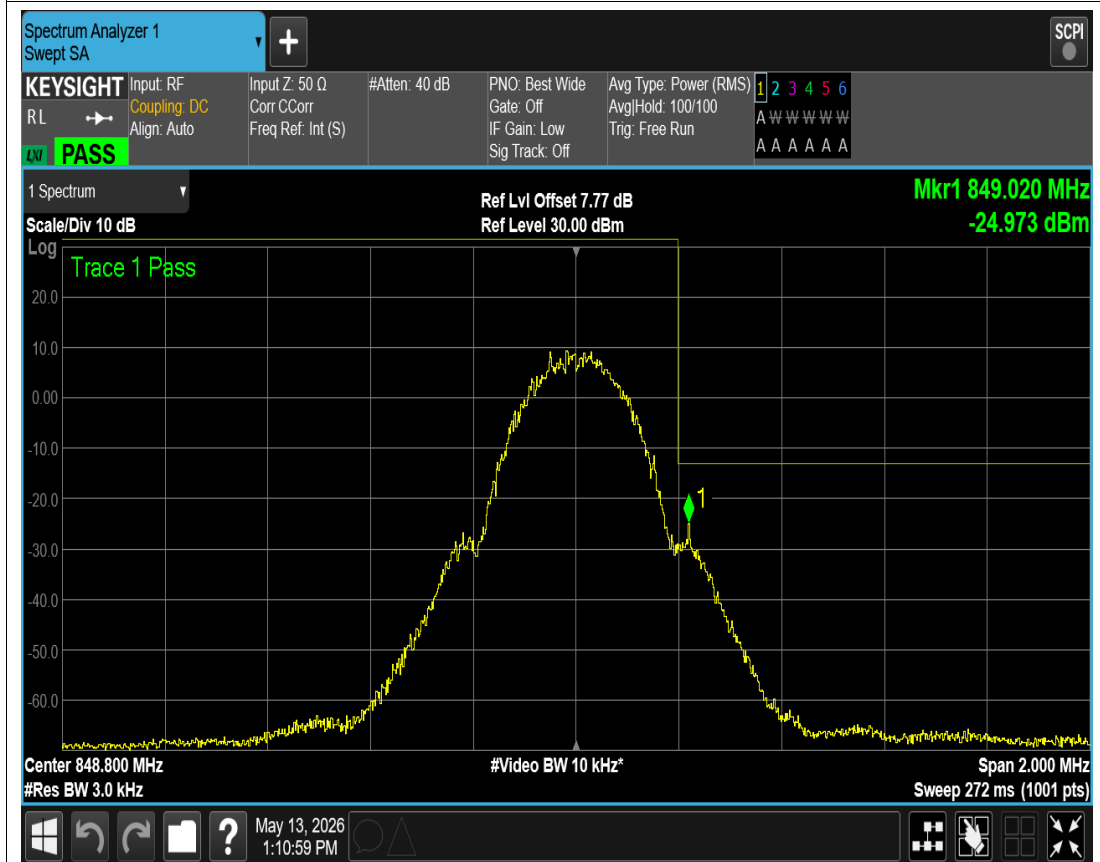


GSM850 Channel=251

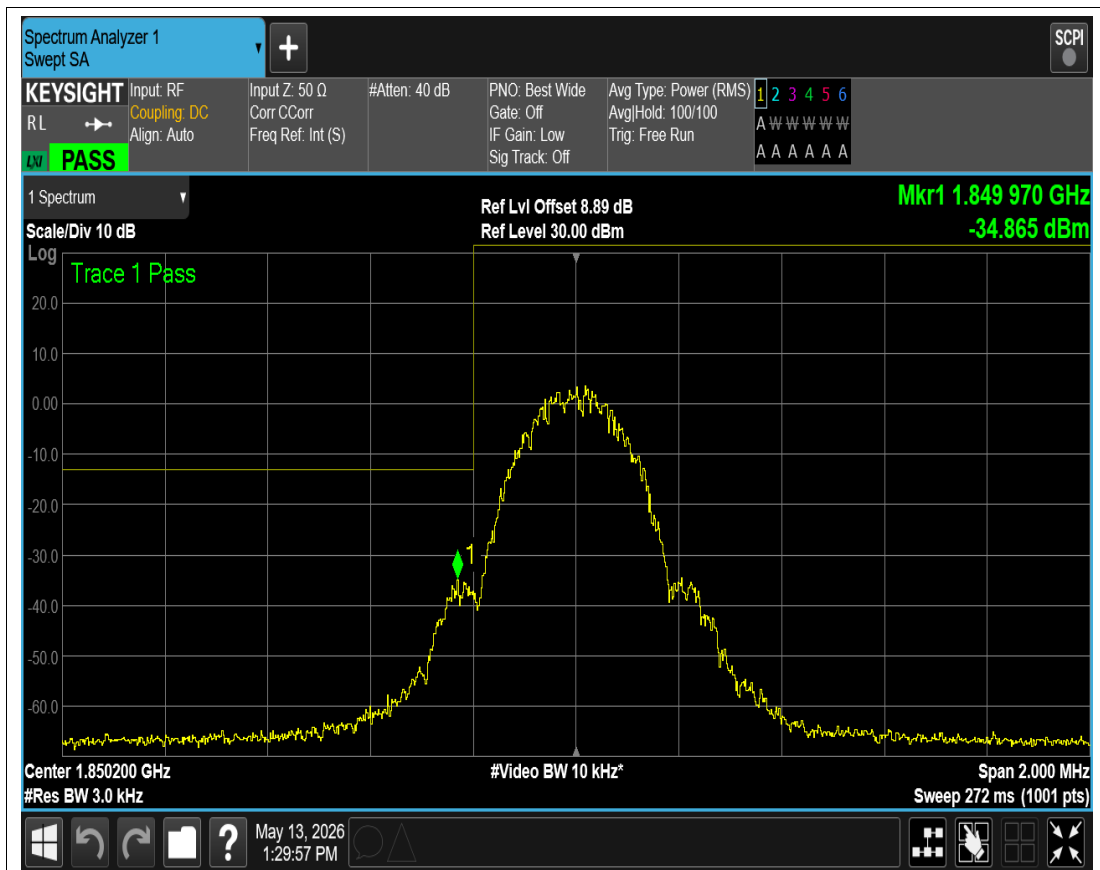


EGPRS1900 Channel=512

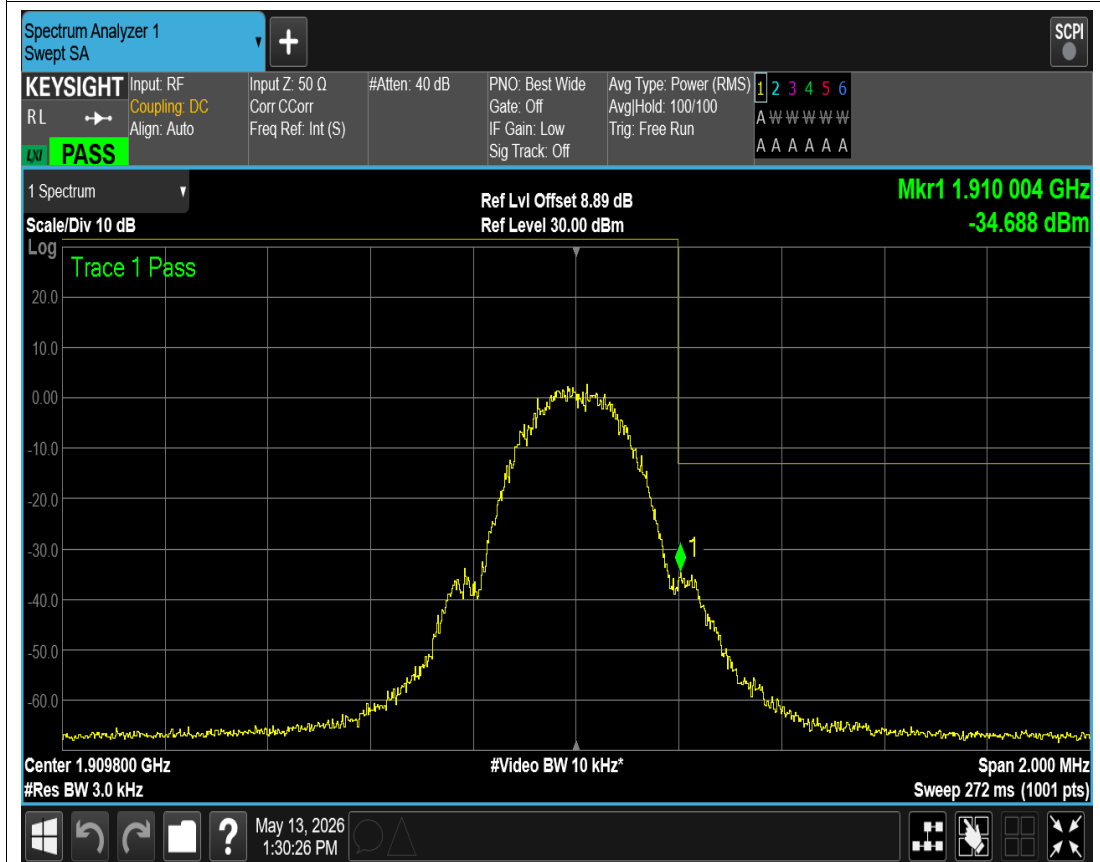


EGPRS1900 Channel=810

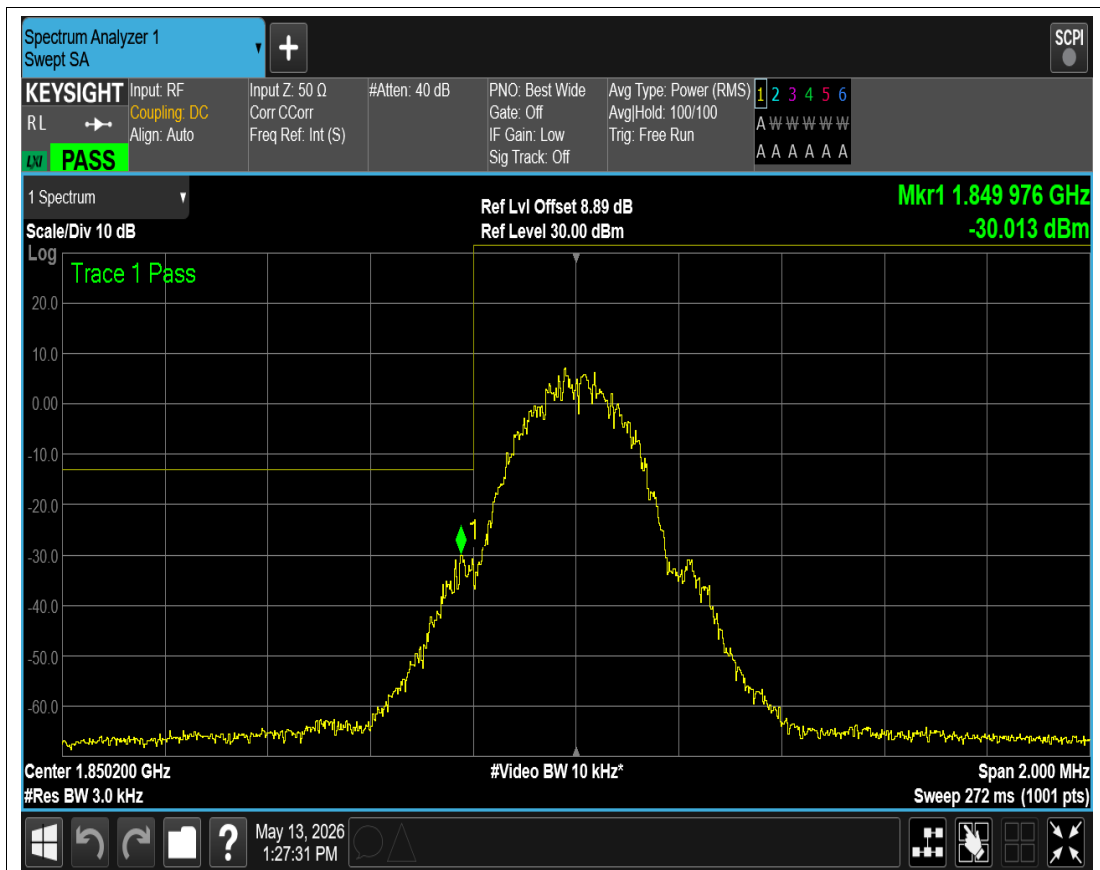


GPRS1900 Channel=512

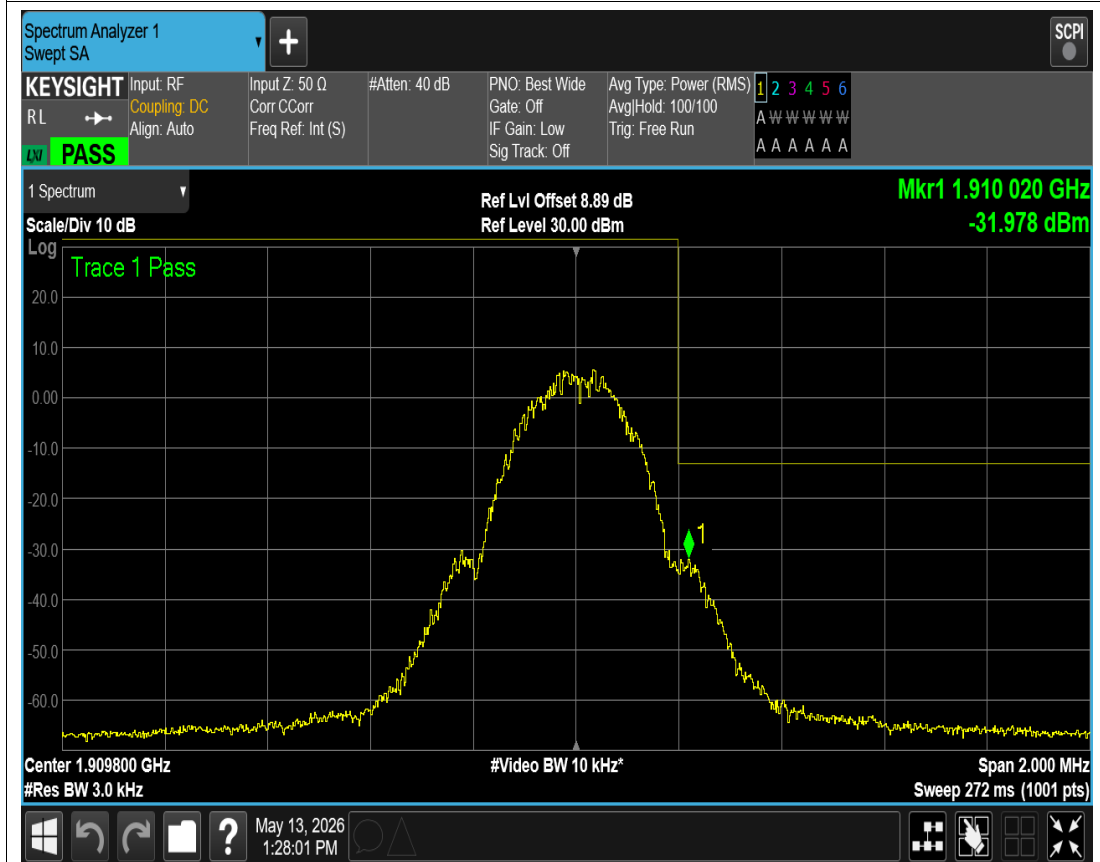

GPRS1900 Channel=810

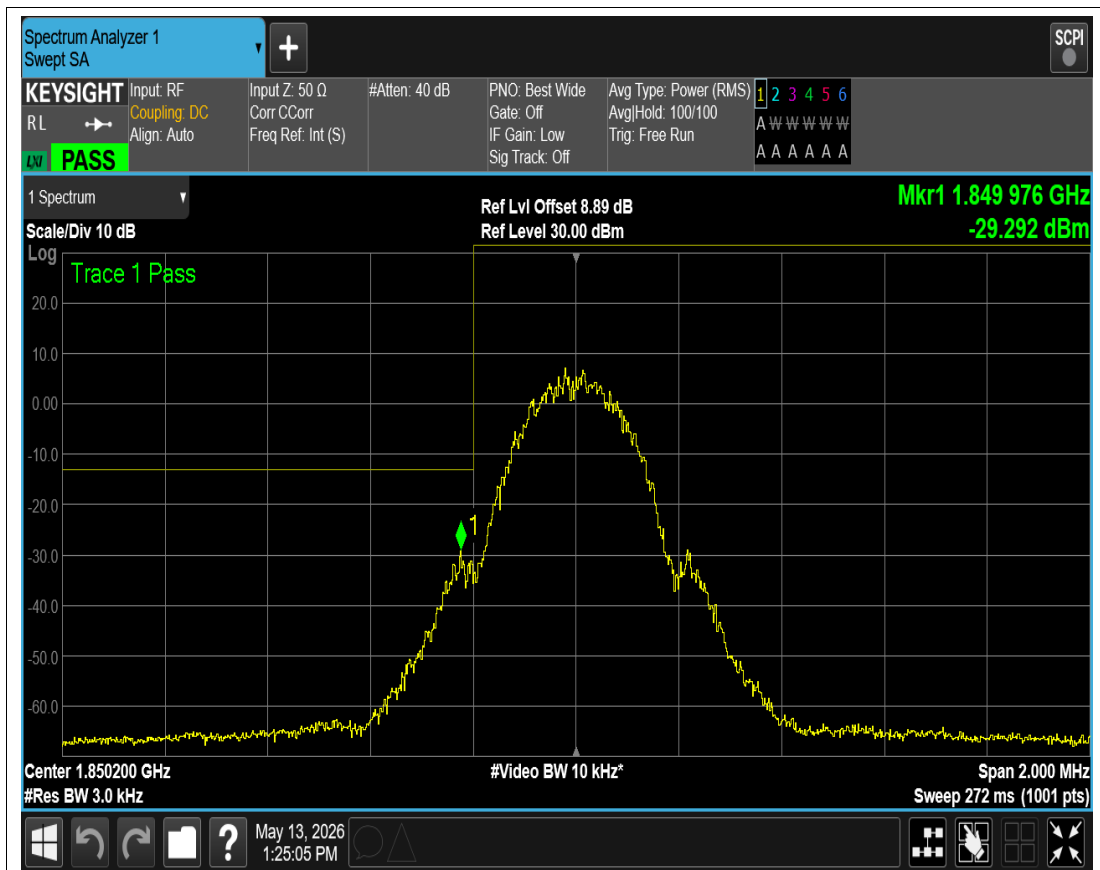


GSM1900 Channel=512

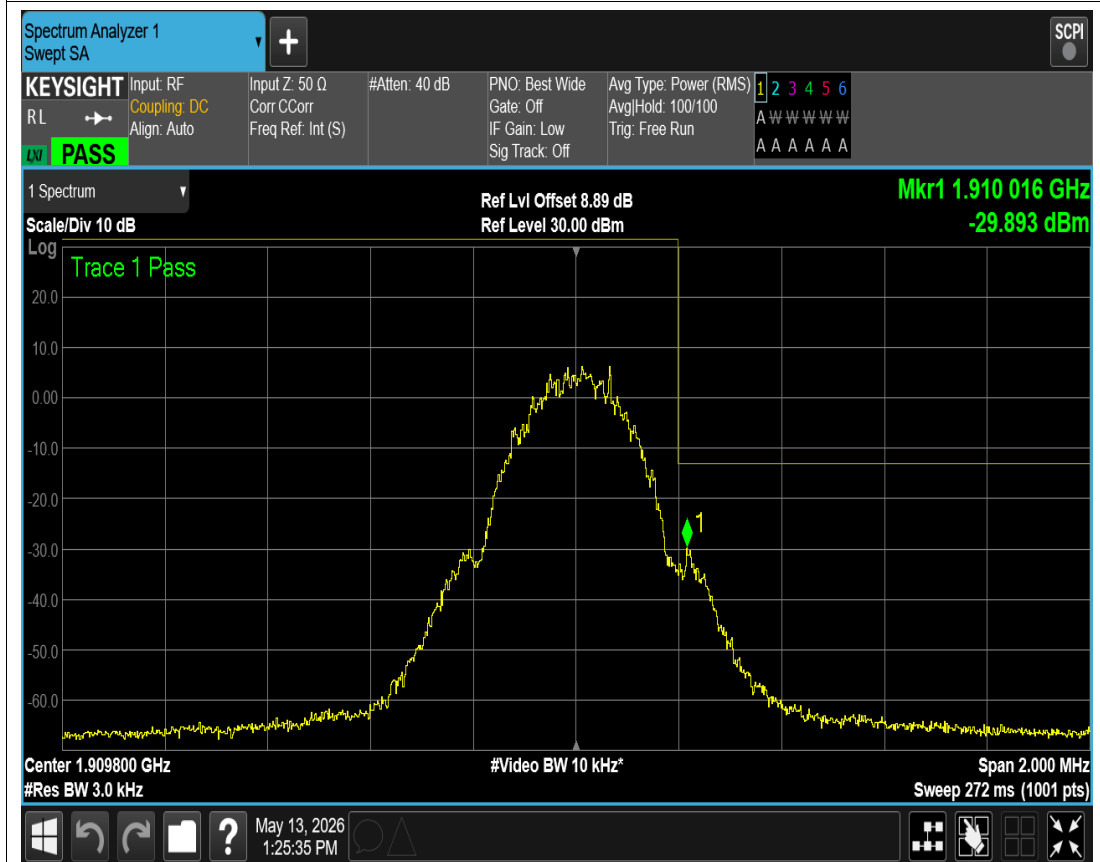


GSM1900 Channel=810

Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	3787.19	-26.56	-13	PASS
EGPRS850	190	836.6	3862.22	-26.16	-13	PASS
EGPRS850	251	848.8	3864.21	-26.55	-13	PASS
GPRS850	128	824.2	3820.59	-26.92	-13	PASS
GPRS850	190	836.6	3816.36	-26.99	-13	PASS
GPRS850	251	848.8	3776.23	-26.70	-13	PASS
GSM850	128	824.2	9488.29	-27.91	-13	PASS
GSM850	190	836.6	3716.66	-27.44	-13	PASS
GSM850	251	848.8	3766.51	-27.84	-13	PASS
EGPRS1900	512	1850.2	3707.48	-25.45	-13	PASS
EGPRS1900	661	1880	3687.51	-25.87	-13	PASS
EGPRS1900	810	1909.8	3828.29	-25.10	-13	PASS
GPRS1900	512	1850.2	3889.70	-26.15	-13	PASS
GPRS1900	661	1880	3868.73	-25.84	-13	PASS
GPRS1900	810	1909.8	19149.78	-26.51	-13	PASS
GSM1900	512	1850.2	3868.73	-25.91	-13	PASS
GSM1900	661	1880	3887.70	-26.43	-13	PASS
GSM1900	810	1909.8	18786.32	-25.90	-13	PASS

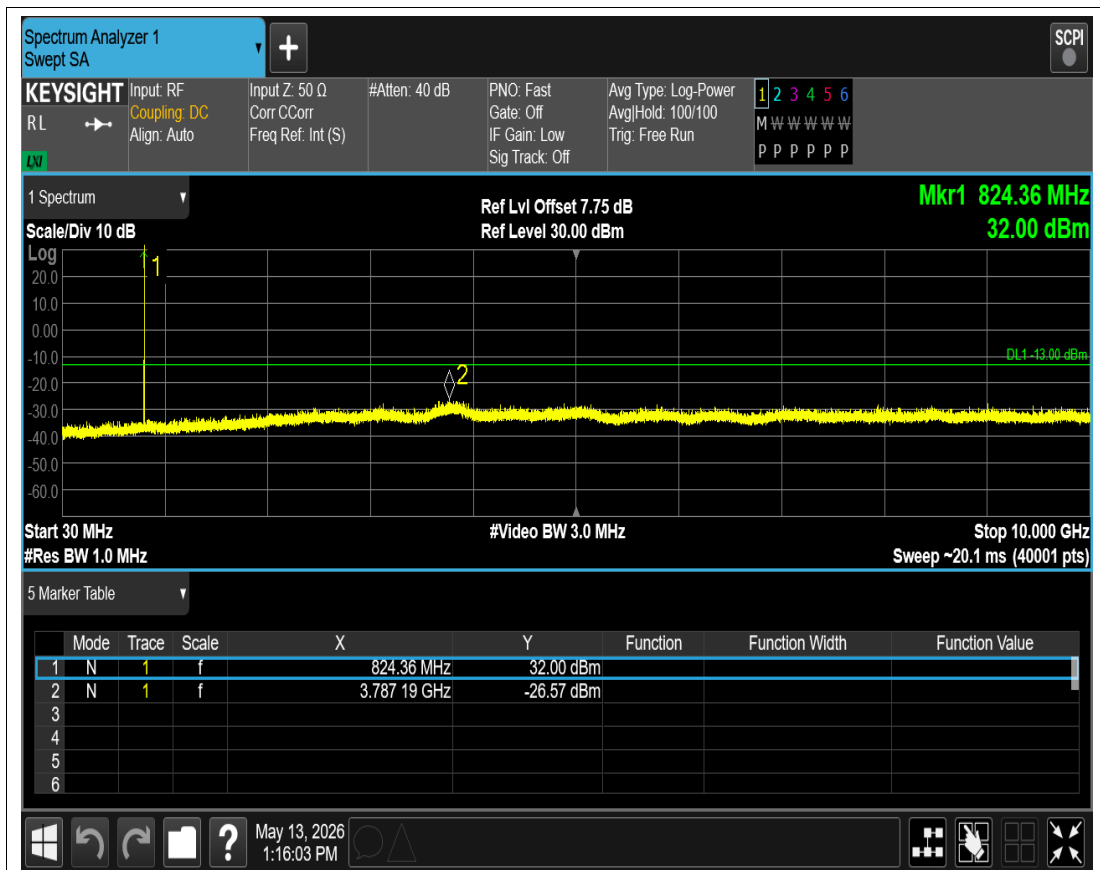


EGPRS850 Channel=128

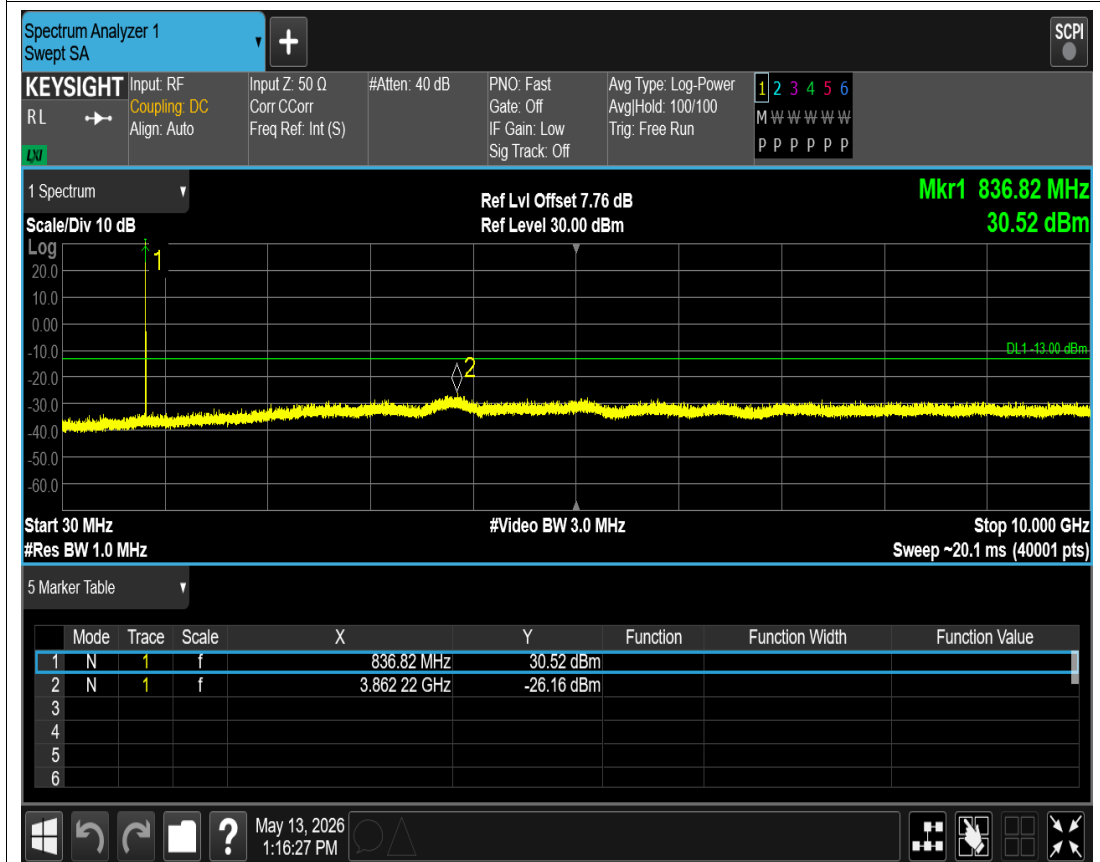


EGPRS850 Channel=190

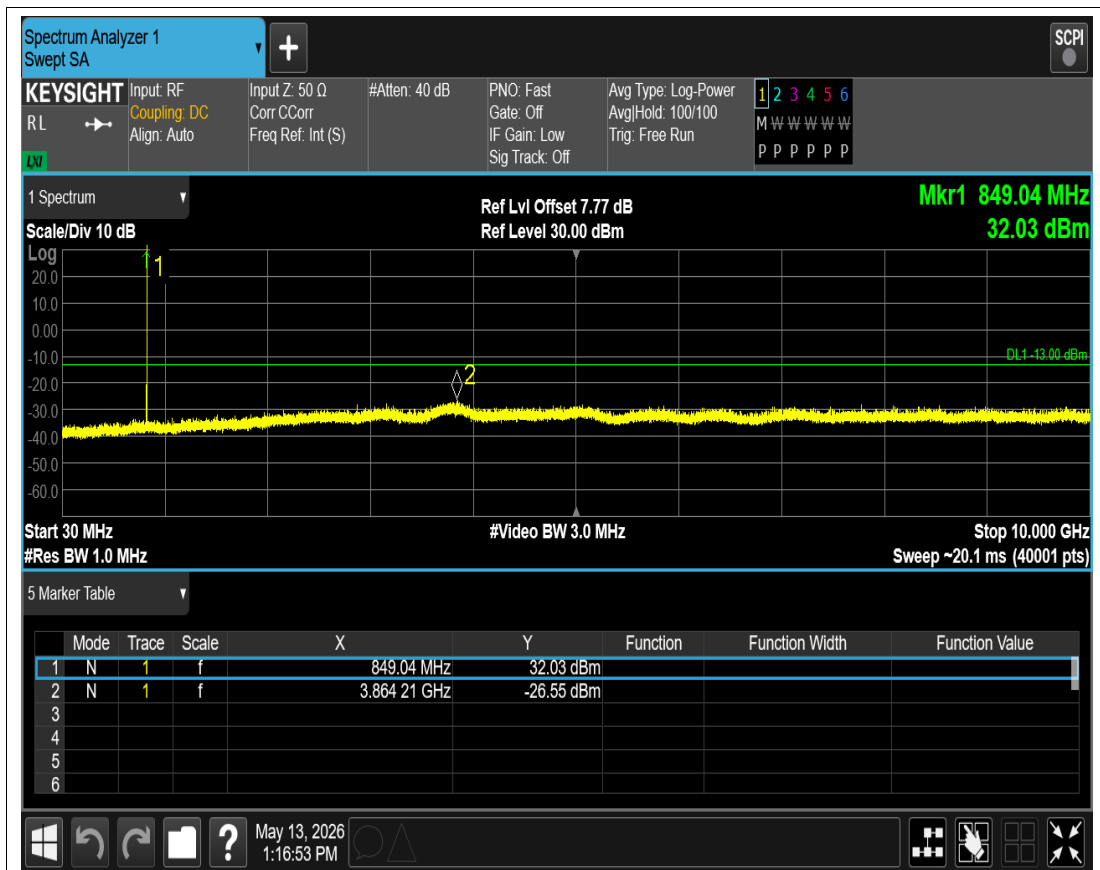


EGPRS850 Channel=251

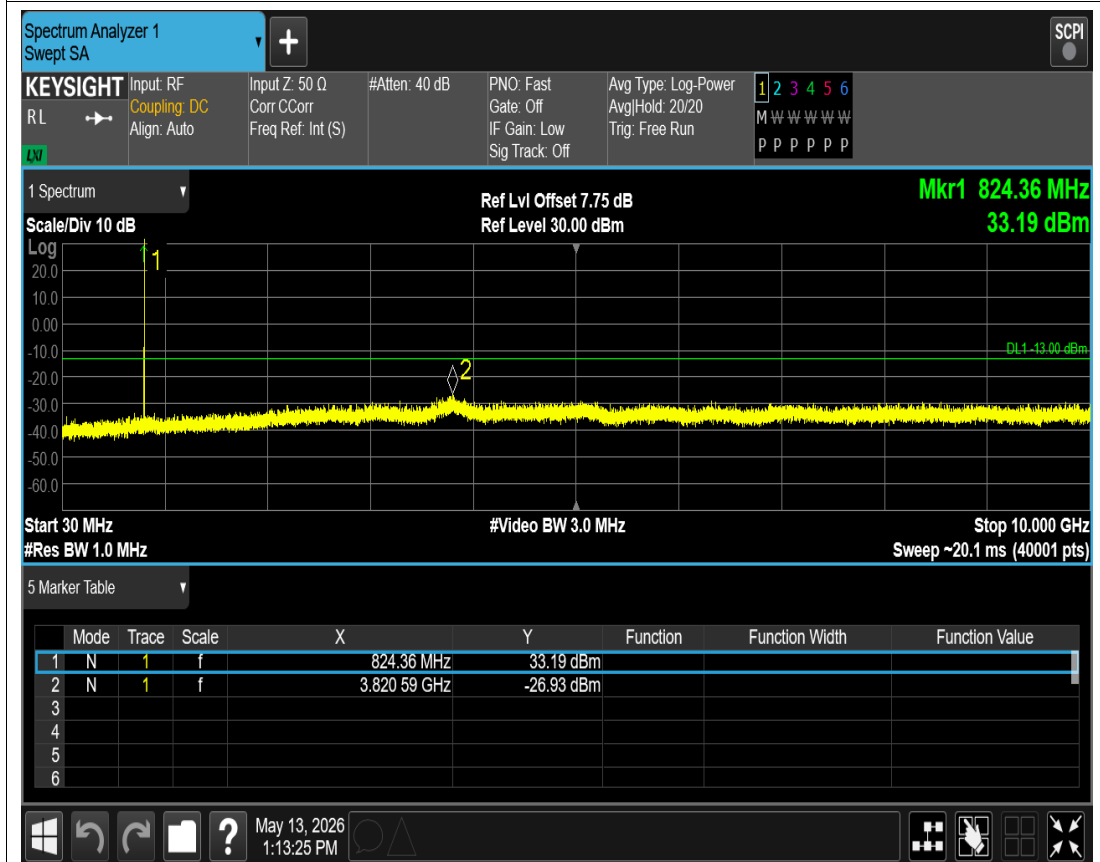

GPRS850 Channel=128

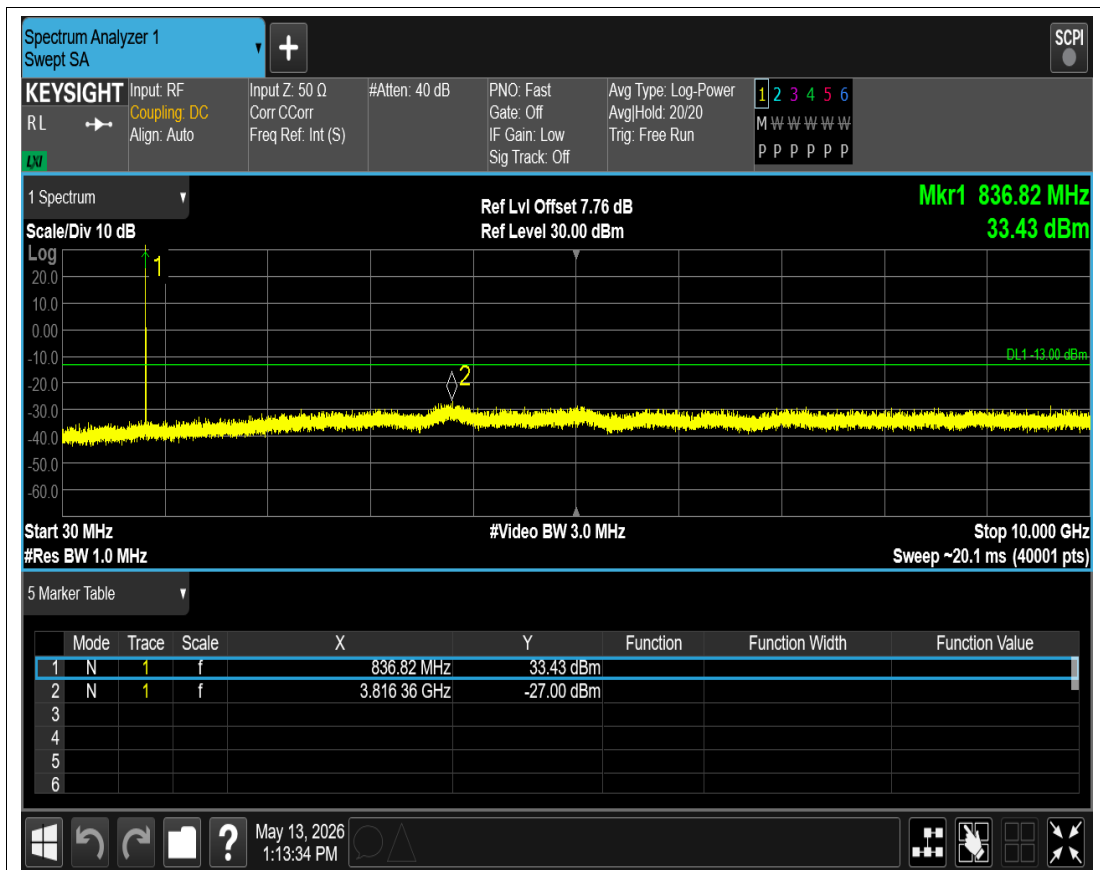

GPRS850 Channel=190

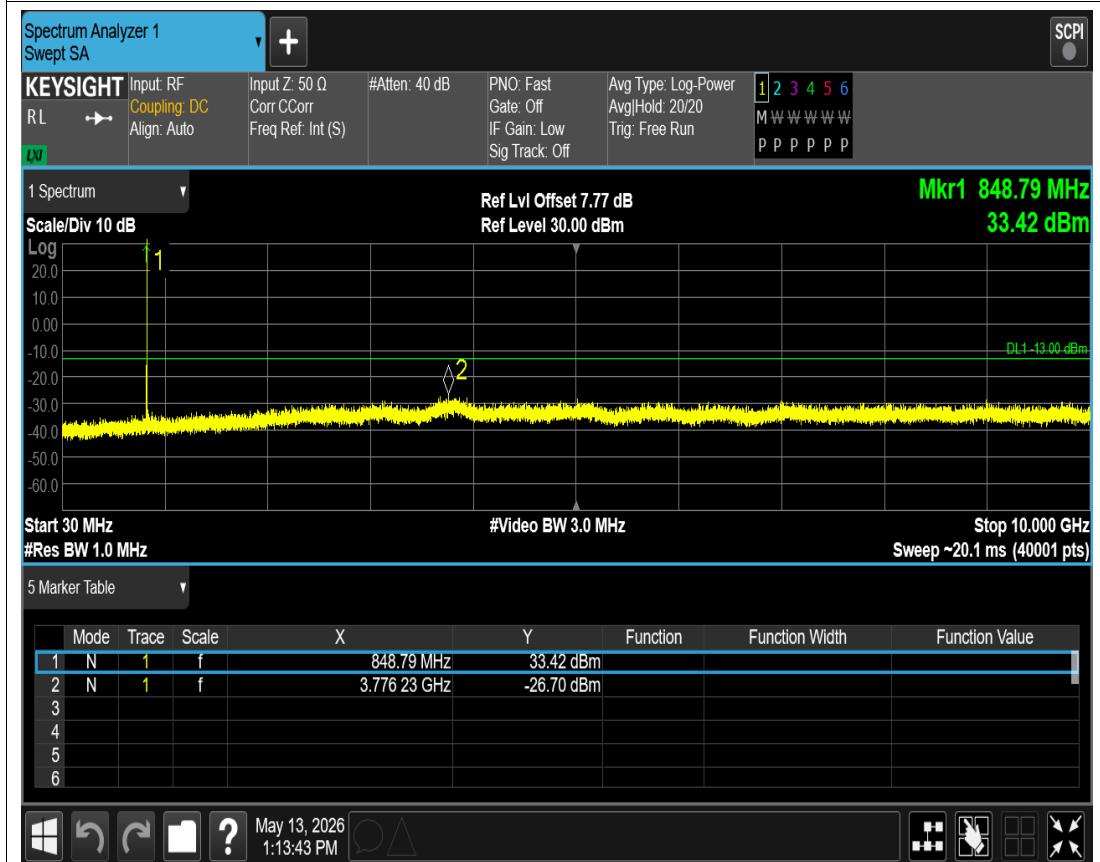

GPRS850 Channel=251




GSM850 Channel=128




GSM850 Channel=190




GSM850 Channel=251

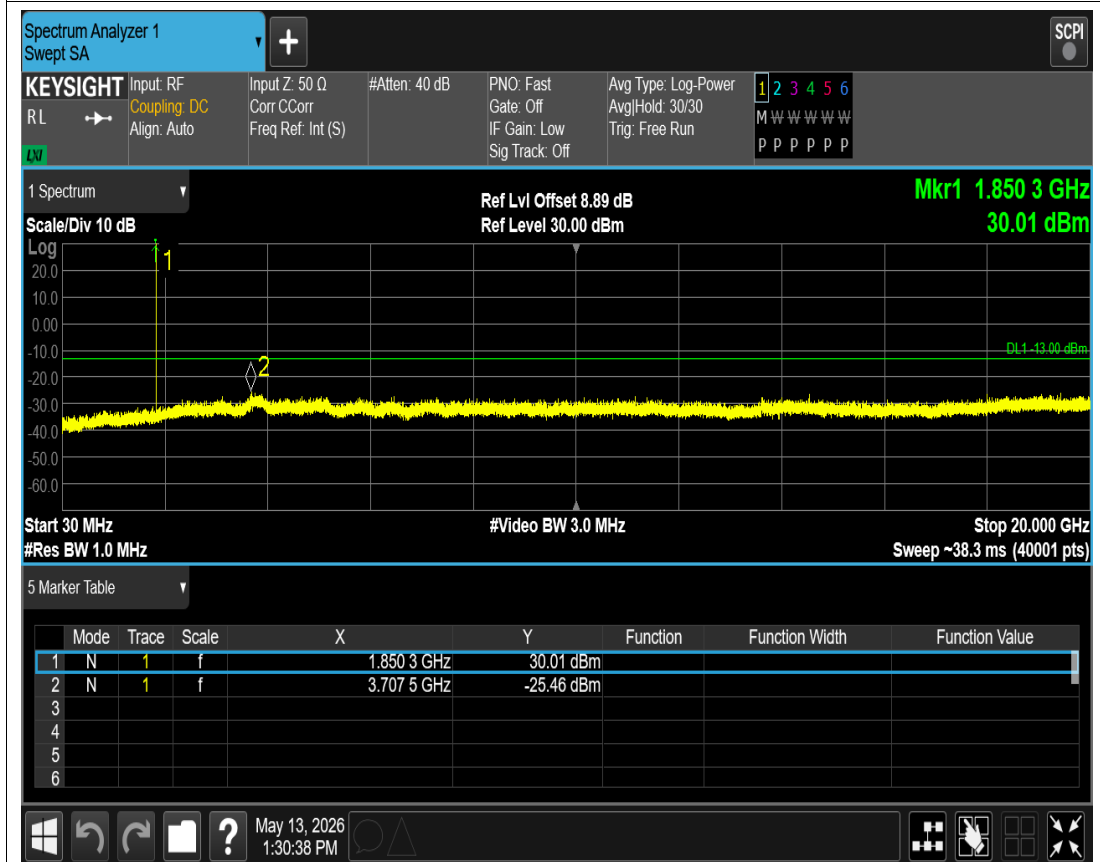


EGPRS1900 Channel=512

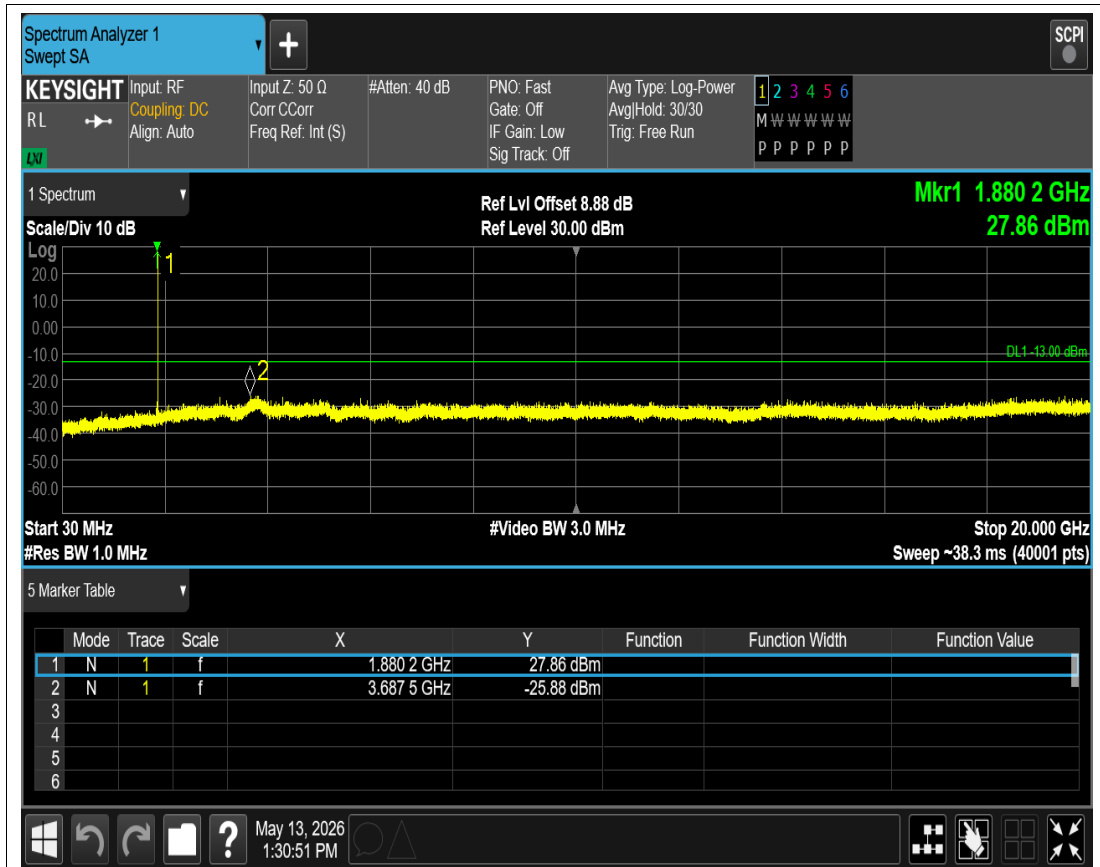


EGPRS1900 Channel=661

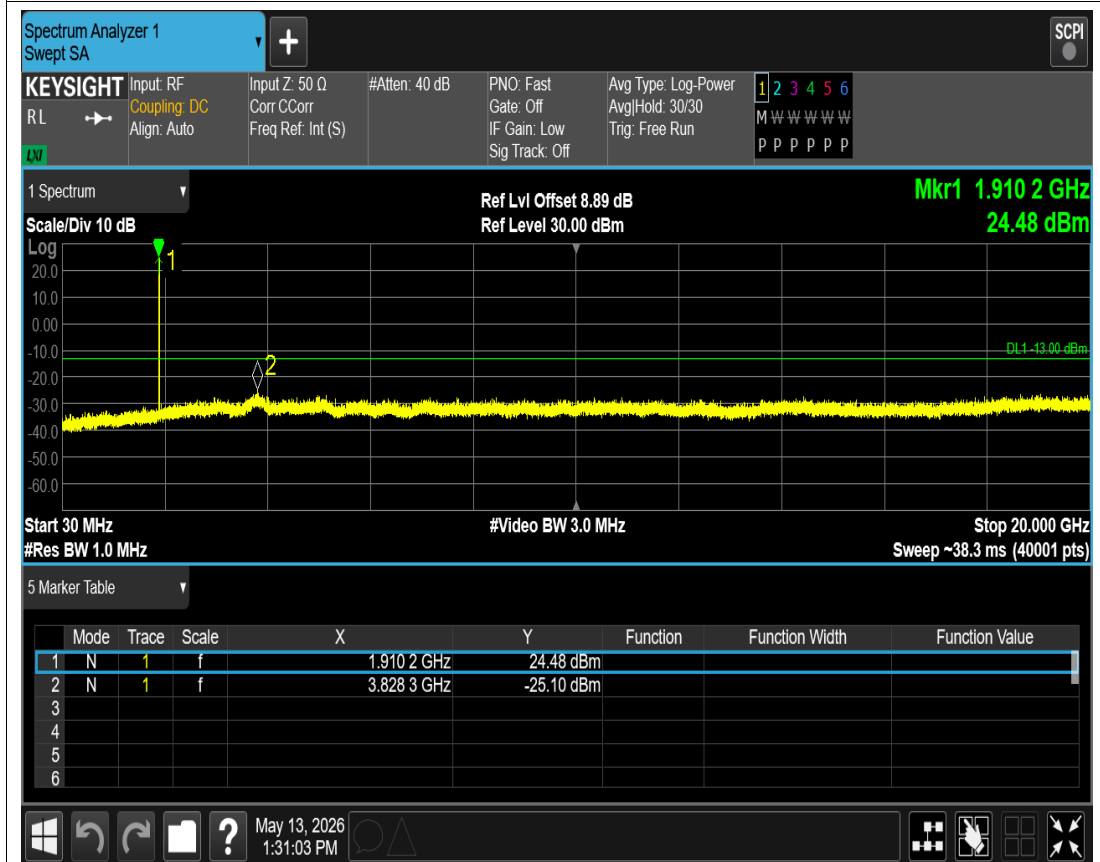


EGPRS1900 Channel=810

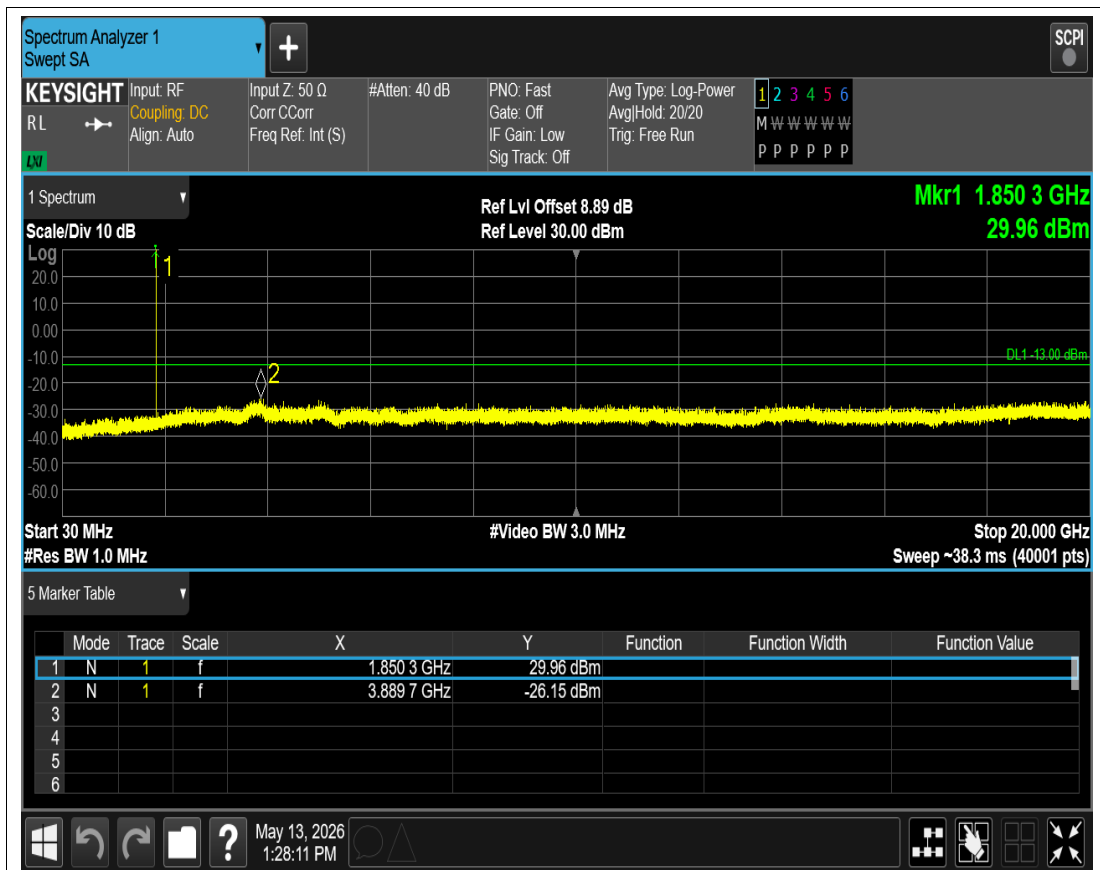


GPRS1900 Channel=512

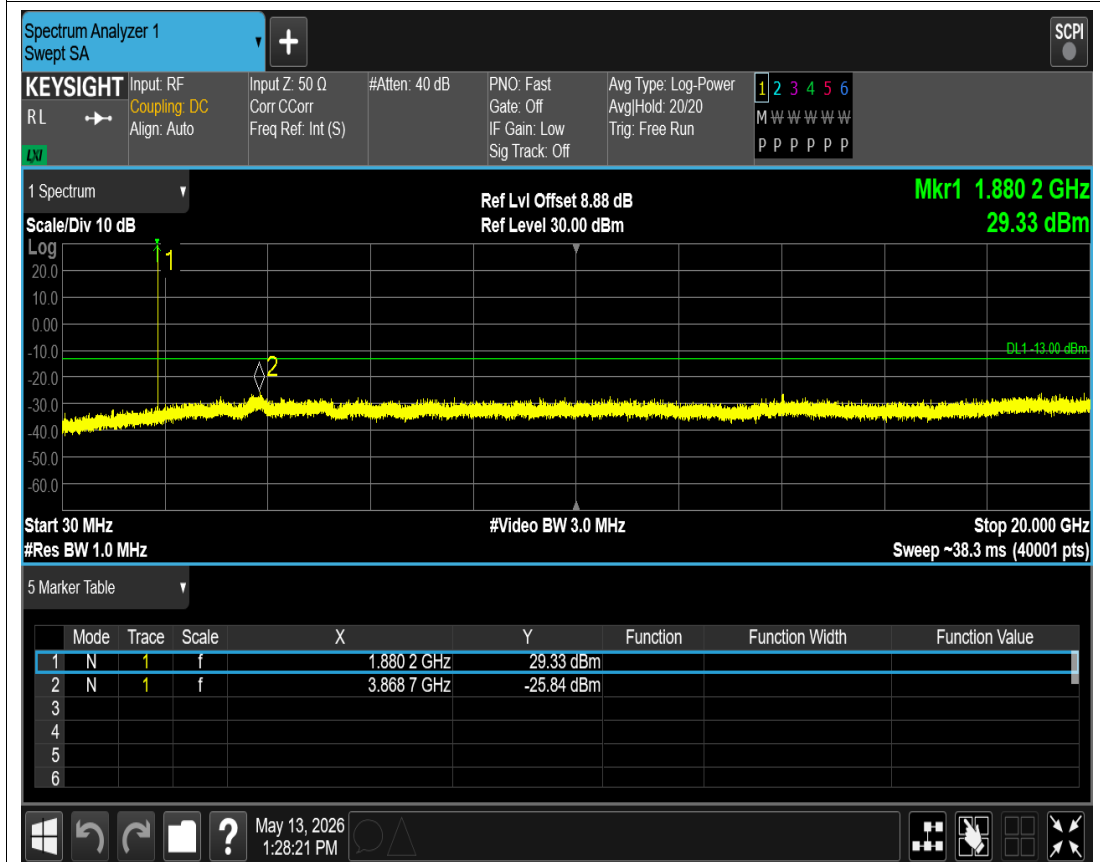


GPRS1900 Channel=661

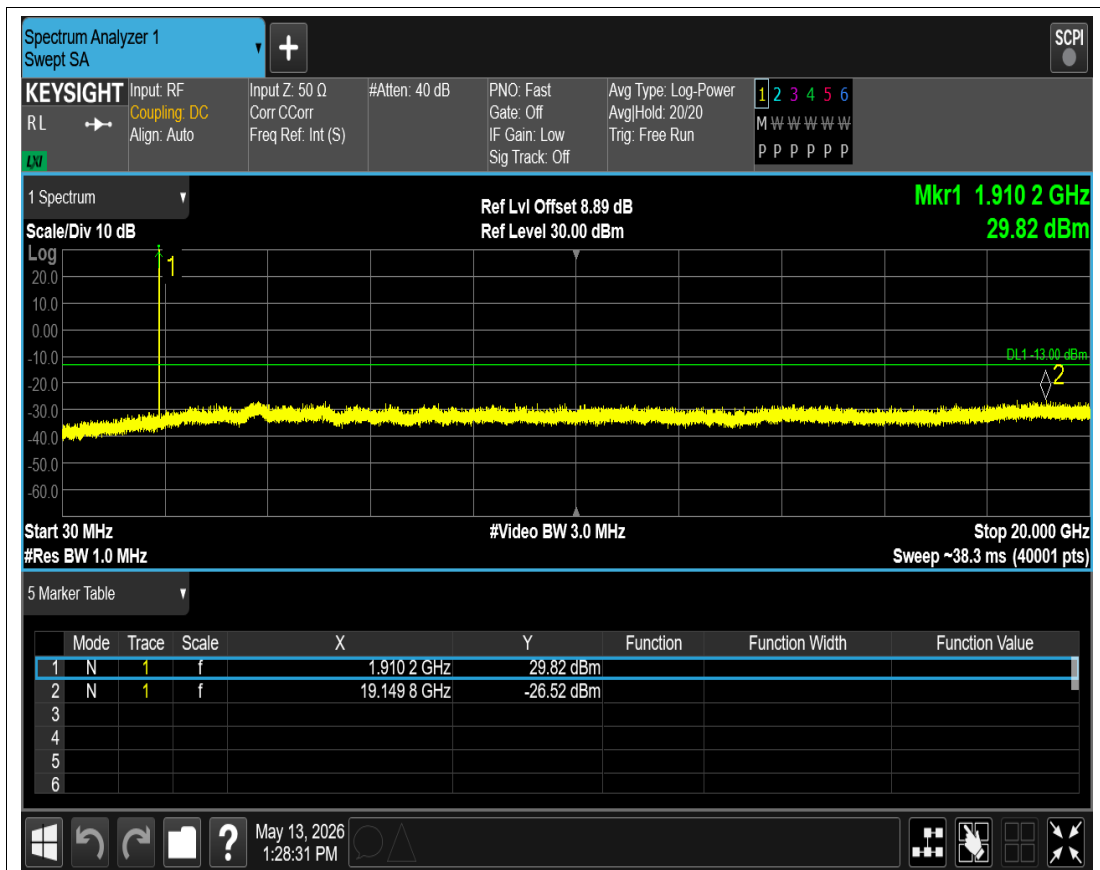


GPRS1900 Channel=810

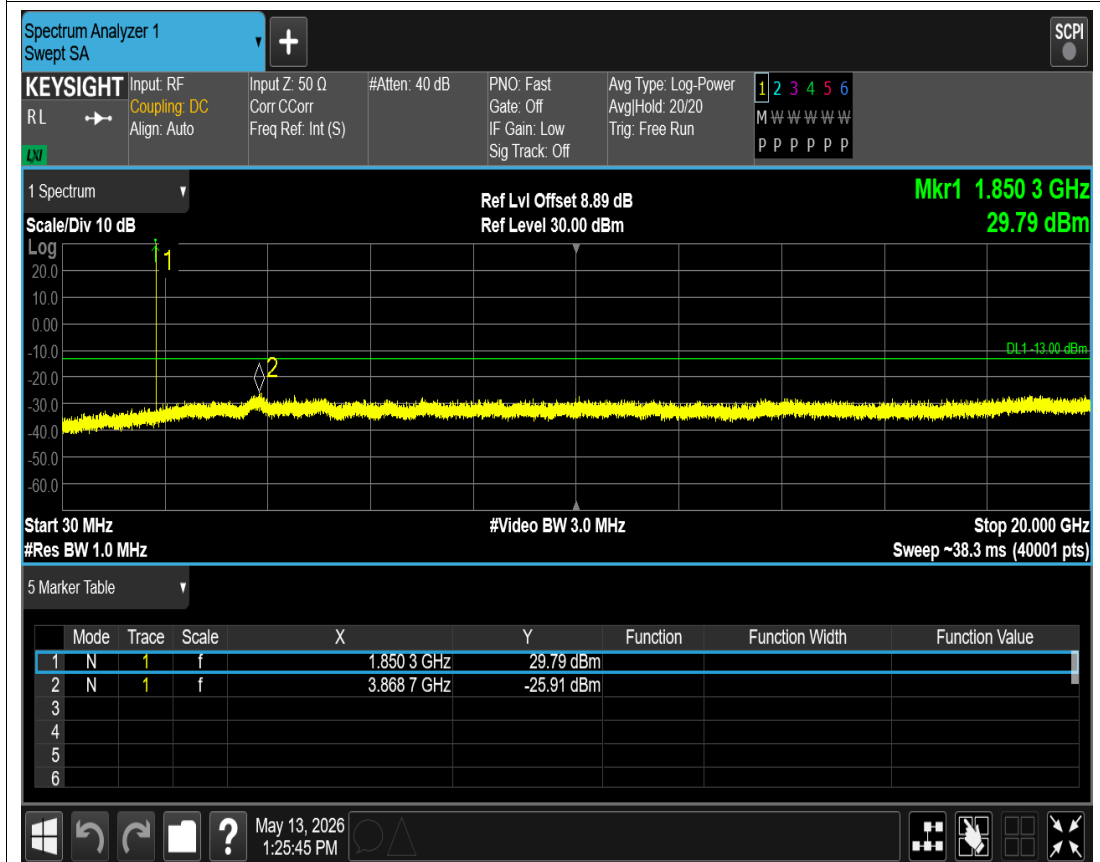

GSM1900 Channel=512

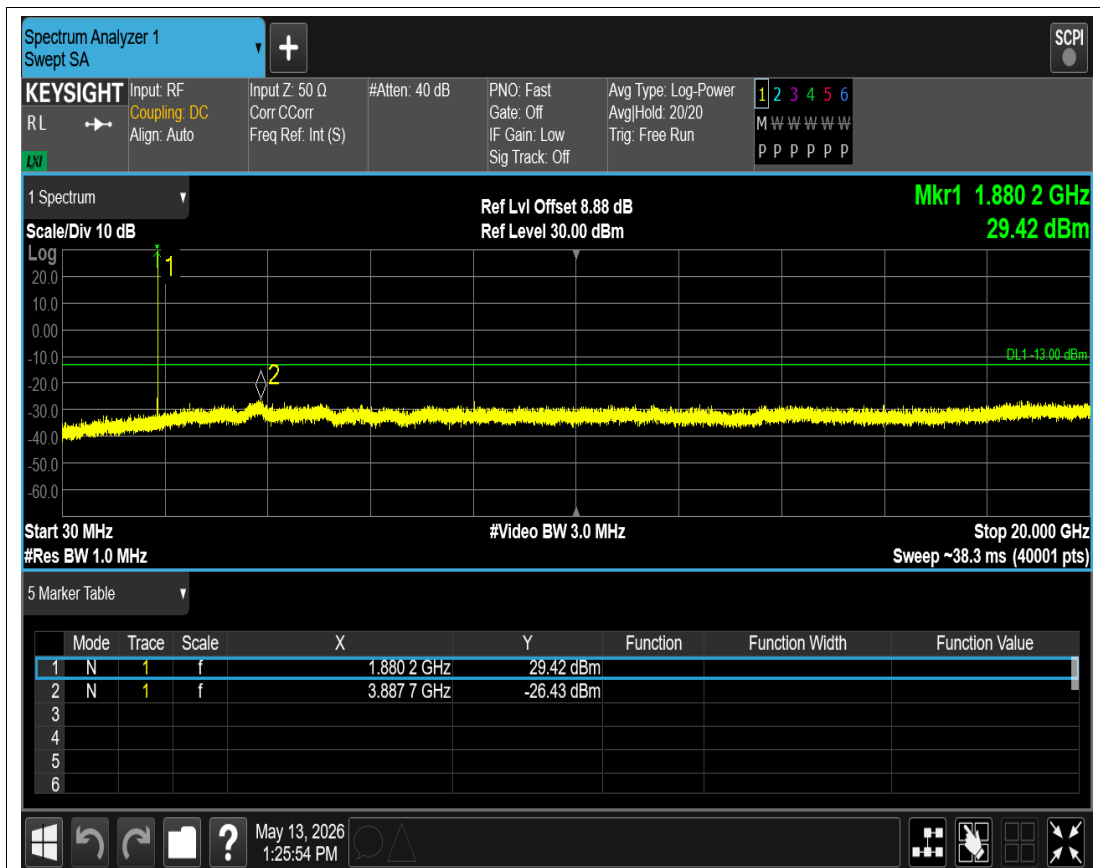

GSM1900 Channel=661

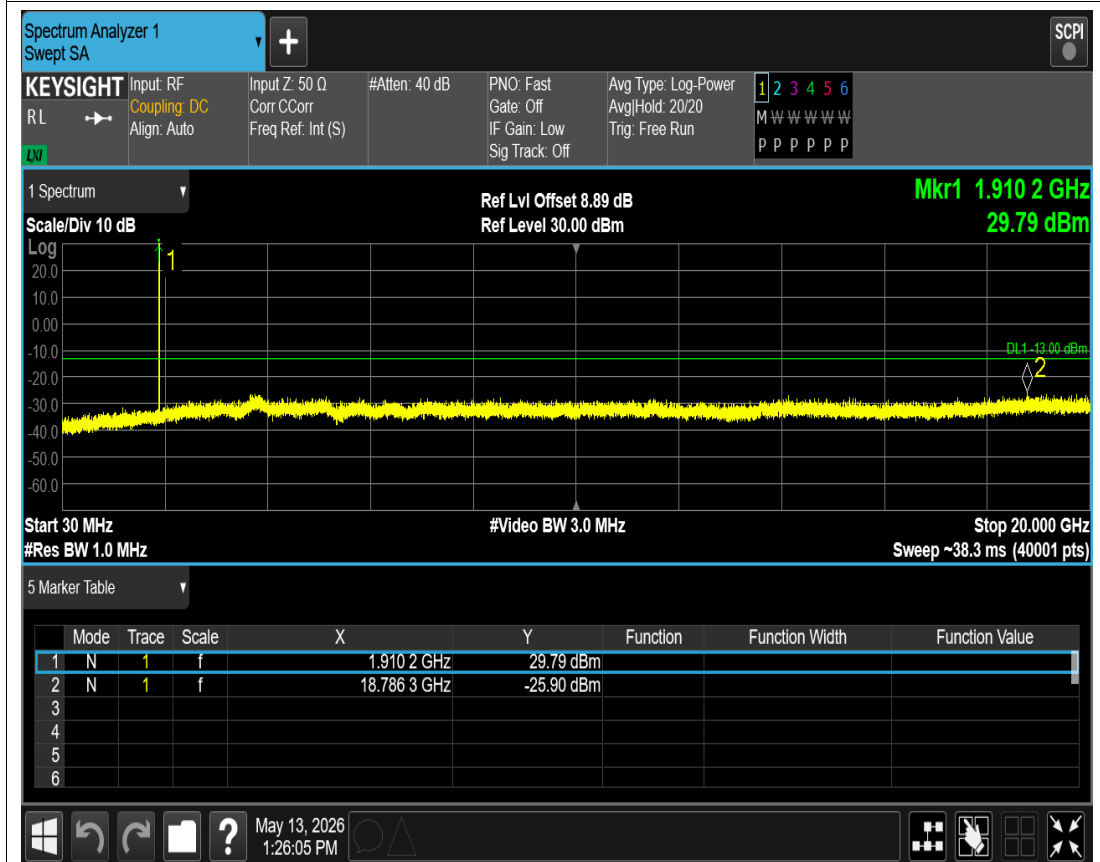

GSM1900 Channel=810

