

High brightness wide illumination without dark shadows

Brightness up to 1250LUX

50CM ultra-high irradiation height, the measured center brightness up to 1250LUX is much higher than the office Lighting standards; 40CM height test under 500LUX.

Testing items	Technical Requirements	Reference Values	Ours
Illuminance	The radius distance from the center of the circle is 30cm Illumination within one-third of the sector	500LUX	670LUX
	The radius distance from the center of the circle is 50 cm One third of the sector is cut by the front sector Illumination within the area cropped by the previous sector	250LUX	300LUX
Illumination Uniformity	The radius distance from the center of the circle is 30cm within one-third of the sector; $U=E_{max}/E_{min} \leq 3$	≤ 3	≤ 1.87
	The radius distance from the center of the circle is 50 cm One third of the sector is cut off by the previous sector within the area cut off by the previous sector; $U=E_{max}/E_{min} \leq 3$	≤ 3	≤ 2.23




Warnings

- × Place the lamp on a flat and horizontal surface
- × Do not place the lamp in a hot or humid environment
- × Do not look directly into the light beam
- × Do not attempt to open, repair or replace any part of the lamp.
This includes all components, power supply and electric cable
- × Do not cover the lamp with flammable material
- × Do not spray any liquid on the lamp




CLED-5501C

IP 20    
Made In China

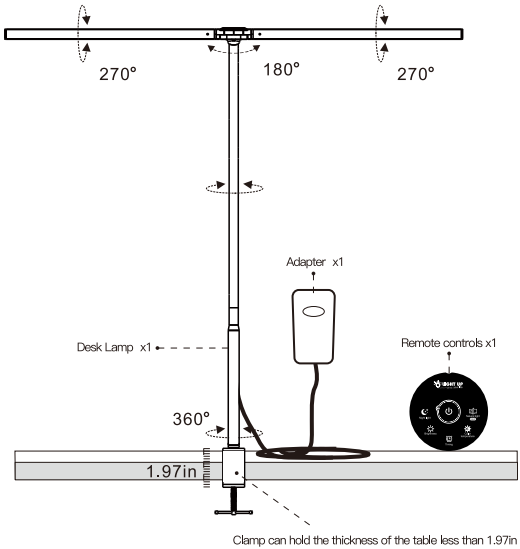

Characteristics

Model	CLED-5501C
Input AC	100V-240V 50/60 Hz
Output DC	24V = 1 A
Color Temperature	3000K-5500K
Lamp Power	24W Max
Lifespan	6000-50000 Hours

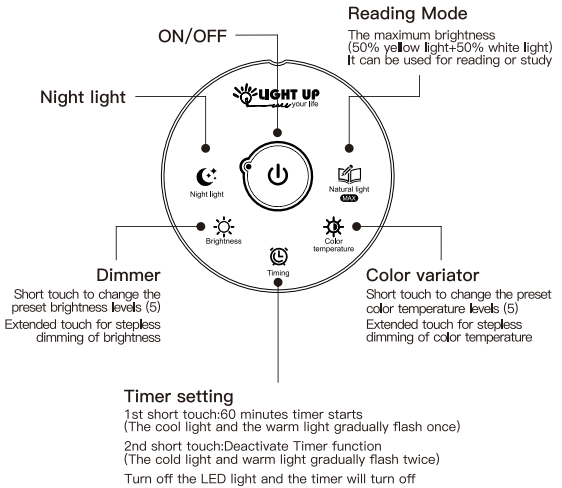

Night light mode:
It's power is only eight-thousands of the power of normal brightness.
opened in the OFF mode and it can be canceled by touching any key.

Re-set Code :
If the lamp cannot be remotely controlled, please power it on again. Press and hold the " " + " " button on the remote control at the same time within 30 seconds until the LED light flashes alternately

Please use two AAA batteries which are high-quality and non-leakage for the remote control so as not to damage it. The battery can be used continuously for more than 6 months. The particular time depends on the use frequency. If you don't use it for a long time, please take out the battery.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.