


Appendix A. Test Result of Radiated Emissions and Co-location


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5825MHz
Test BY :Rock

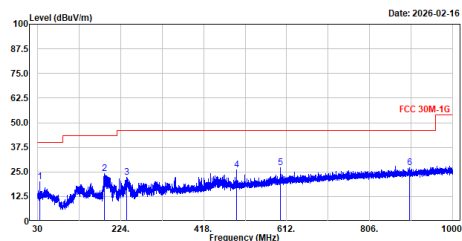

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	34.850	20.01	40.00	-19.99	44.76	-24.75	QP
2	186.752	24.10	43.50	-19.40	50.24	-26.14	QP
3	238.065	22.20	46.00	-23.80	47.43	-25.23	QP
4	494.921	26.20	46.00	-19.80	44.50	-18.30	QP
5	597.450	27.08	46.00	-18.92	42.95	-15.87	QP
6	899.799	27.19	46.00	-18.81	38.85	-11.66	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5825MHz
Test BY :Rock

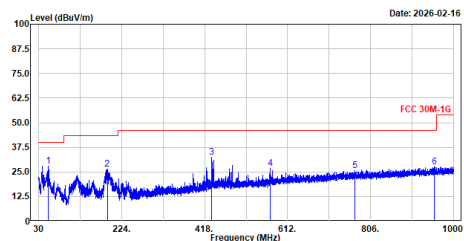

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	52.601	27.83	40.00	-12.17	51.34	-23.51	QP
2	190.341	26.48	43.50	-17.02	53.00	-26.52	QP
3	435.072	32.36	46.00	-13.64	51.87	-19.51	QP
4	571.357	26.86	46.00	-19.14	43.49	-16.63	QP
5	769.431	25.58	46.00	-20.42	38.46	-12.88	QP
6	955.477	27.67	46.00	-18.33	38.36	-10.69	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5825MHz
Test BY :Ashton

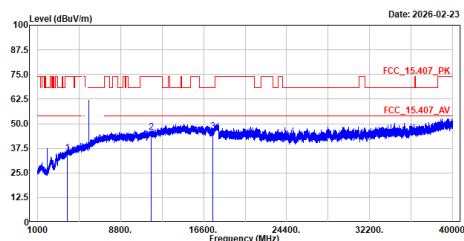

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3800.000	35.02	74.00	-38.98	54.34	-19.32	Peak
2	11650.000	45.67	74.00	-28.33	47.68	-2.01	Peak
3	17475.000	45.90	68.22	-22.32	47.41	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100+TX_be20_5825MHz
Test BY :Ashton

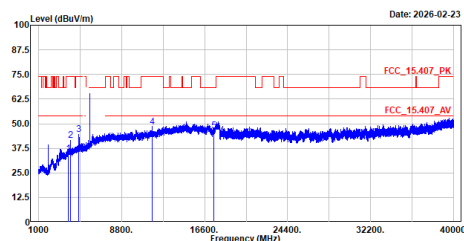

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	3800.000	34.78	74.00	-39.22	54.10	-19.32	Peak
2	3992.850	41.33	74.00	-32.67	60.13	-18.80	Peak
3	4782.500	44.45	74.00	-29.55	59.48	-15.03	Peak
4	11650.000	48.40	74.00	-25.60	50.41	-2.01	Peak
5	17475.000	46.49	68.22	-21.73	48.00	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5825MHz
Test BY :Rock

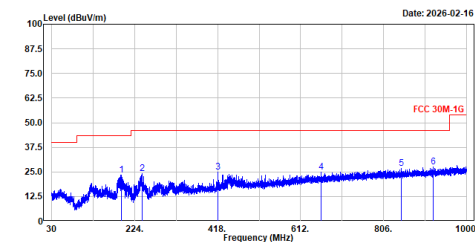

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	192.960	23.37	43.50	-20.13	50.08	-26.71	QP
2	241.460	24.04	46.00	-21.96	49.10	-25.06	QP
3	418.776	24.83	46.00	-21.17	45.00	-20.17	QP
4	668.209	25.04	46.00	-20.96	39.91	-14.87	QP
5	848.195	26.71	46.00	-19.29	38.80	-12.89	QP
6	922.691	27.67	46.00	-18.33	38.86	-11.19	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5825MHz
Test BY :Rock

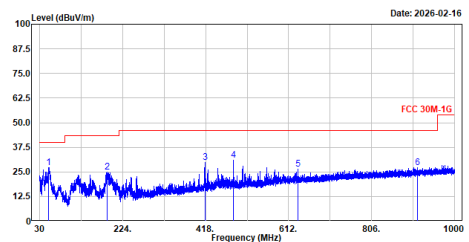

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	51.243	27.35	40.00	-12.65	50.86	-23.51	QP
2	188.498	24.77	43.50	-18.73	51.21	-26.44	QP
3	416.254	29.85	46.00	-16.15	50.07	-20.22	QP
4	482.998	31.03	46.00	-14.97	49.60	-18.57	QP
5	633.340	26.54	46.00	-19.46	41.71	-15.17	QP
6	914.155	27.29	46.00	-18.71	38.69	-11.40	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5825MHz
Test BY :Ashton

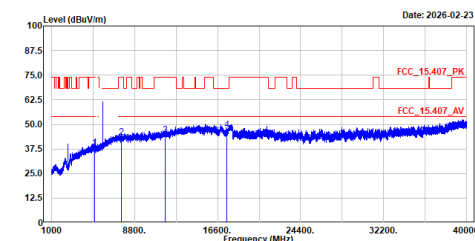

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5020.000	38.07	74.00	-35.93	52.09	-14.02	Peak
2	7530.000	43.27	74.00	-30.73	50.54	-7.27	Peak
3	11650.000	44.47	74.00	-29.53	46.48	-2.01	Peak
4	17475.000	47.08	68.22	-21.14	48.59	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850+TX_be20_5825MHz
Test BY :Ashton

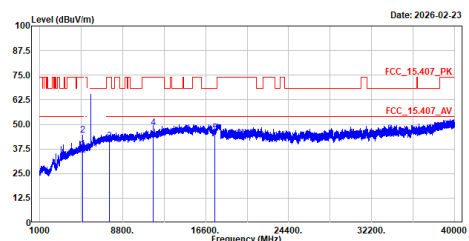

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5020.000	37.54	74.00	-36.46	51.56	-14.02	Peak
2	5051.950	44.57	74.00	-29.43	58.49	-13.92	Peak
3	7530.000	41.57	74.00	-32.43	48.84	-7.27	Peak
4	11650.000	48.12	74.00	-25.88	50.13	-2.01	Peak
5	17475.000	45.66	68.22	-22.56	47.17	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_IRB0_CH23305+TX_b_2412MHz
Test BY :Rock

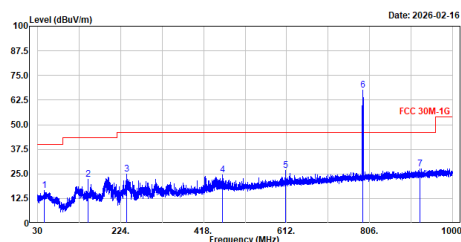

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	44.744	16.78	40.00	-23.22	40.46	-23.68	QP
2	148.534	22.19	43.50	-21.31	46.14	-23.95	QP
3	237.968	25.01	46.00	-20.99	50.24	-25.23	QP
4	461.844	24.63	46.00	-21.37	43.39	-18.76	QP
5	609.478	26.82	46.00	-19.18	42.45	-15.63	QP
6	790.480	67.48	-----	-----	80.18	-12.70	QP
7	924.631	27.54	46.00	-18.46	38.68	-11.14	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_IRB0_CH23305+TX_b_2412MHz
Test BY :Rock

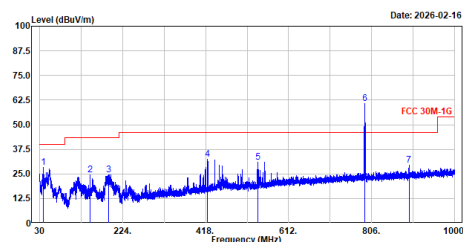

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	38.342	28.28	40.00	-11.72	52.55	-24.27	QP
2	148.534	24.37	43.50	-19.13	48.32	-23.95	QP
3	191.602	24.51	43.50	-18.99	51.03	-26.52	QP
4	422.947	32.34	46.00	-13.66	52.36	-28.02	QP
5	560.802	30.97	46.00	-15.03	48.43	-17.46	QP
6	790.480	60.69	-----	-----	73.39	-12.70	QP
7	893.591	29.25	46.00	-16.75	40.97	-11.72	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_IRB0_CH23305+TX_b_2412MHz
Test BY :Ashton

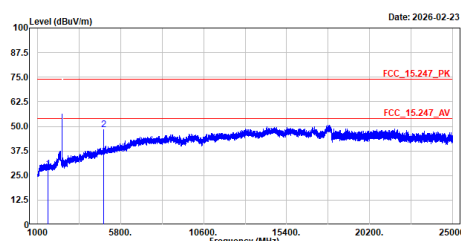

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1581.000	28.47	74.00	-45.53	54.15	-25.68	Peak
2	4824.000	48.27	74.00	-25.73	63.09	-14.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_IRB0_CH23305+TX_b_2412MHz
Test BY :Ashton

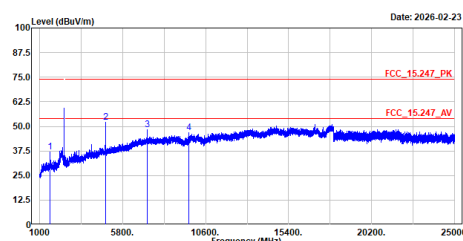

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1581.000	36.86	74.00	-37.14	62.54	-25.68	Peak
2	4824.000	52.00	74.00	-22.00	66.82	-14.82	Peak
3	7236.000	48.36	74.00	-25.64	55.38	-7.02	Peak
4	9648.000	46.77	74.00	-27.23	53.17	-6.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_be00_6785MHz
Test BY :Rock

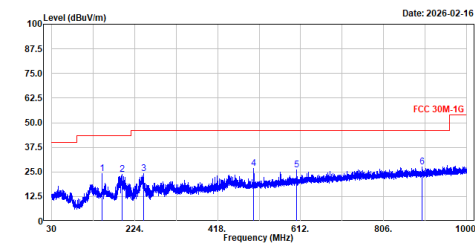

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	148.534	24.02	43.50	-19.48	47.97	-23.95	QP
2	193.930	23.80	43.50	-19.70	50.50	-26.70	QP
3	244.952	24.12	46.00	-21.88	49.10	-24.98	QP
4	502.504	26.02	46.00	-19.10	45.00	-18.18	QP
5	603.270	26.05	46.00	-19.95	41.79	-15.74	QP
6	896.501	27.50	46.00	-18.50	39.18	-11.68	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_be00_6785MHz
Test BY :Rock

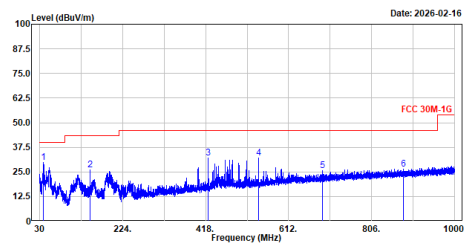

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	38.439	29.63	40.00	-10.37	53.89	-24.26	QP
2	148.534	26.18	43.50	-17.32	50.13	-23.95	QP
3	423.626	32.00	46.00	-14.00	51.99	-19.99	QP
4	501.966	31.89	46.00	-14.11	49.32	-17.43	QP
5	691.346	25.54	46.00	-20.46	39.86	-14.32	QP
6	880.884	26.27	46.00	-19.73	38.10	-11.83	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_be00_6785MHz
Test BY :Ashton

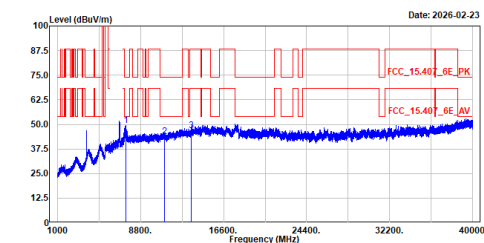

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	7380.000	49.60	74.00	-24.40	56.51	-6.91	Peak
2	11070.000	43.81	74.00	-30.19	46.69	-2.88	Peak
3	13570.000	46.87	68.22	-21.35	46.02	0.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_20M_QPSK_1RB0_CH56640+TX_be00_6785MHz
Test BY :Ashton

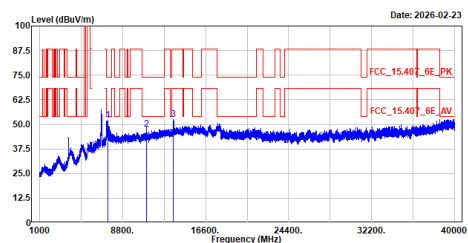

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	7380.000	52.06	74.00	-21.94	58.97	-6.91	Peak
2	11070.000	47.52	74.00	-26.48	50.40	-2.88	Peak
3	13570.000	52.50	88.22	-35.72	51.65	0.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :iCDMA_B5_CH4233+TX_b_2412MHz
Test BY :Rock

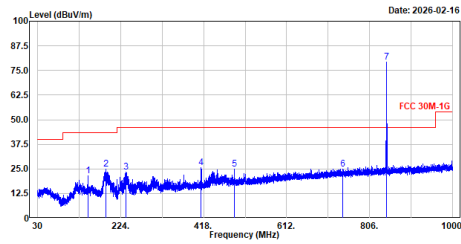

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	148.534	21.35	43.50	-22.15	45.30	-23.95	QP
2	189.177	24.74	43.50	-18.76	51.27	-26.53	QP
3	236.416	23.48	46.00	-22.60	48.73	-25.33	QP
4	412.083	25.70	46.00	-20.30	46.01	-20.31	QP
5	490.556	25.00	46.00	-21.00	43.40	-18.40	QP
6	742.562	25.07	46.00	-20.93	38.20	-13.13	QP
7	846.600	79.19	-----	-----	91.32	-12.13	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :iCDMA_B5_CH4233+TX_b_2412MHz
Test BY :Rock

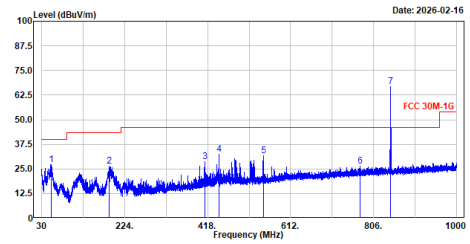

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	52.989	27.11	40.00	-12.89	50.58	-23.47	QP
2	188.013	26.45	43.50	-17.05	52.79	-26.34	QP
3	412.083	28.77	46.00	-17.23	49.08	-20.31	QP
4	444.287	32.31	46.00	-13.69	51.51	-19.20	QP
5	548.562	31.87	46.00	-14.13	49.23	-17.36	QP
6	774.669	26.45	46.00	-19.55	39.24	-12.79	QP
7	846.600	66.97	-----	-----	79.10	-12.13	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :iCDMA_B5_CH4233+TX_b_2412MHz
Test BY :Ashton

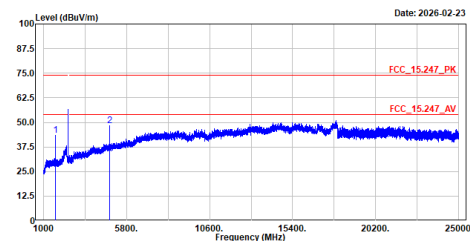

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1693.200	43.34	74.00	-30.66	68.91	-25.57	Peak
2	4824.000	48.32	74.00	-25.68	63.14	-14.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :iCDMA_B5_CH4233+TX_b_2412MHz
Test BY :Ashton

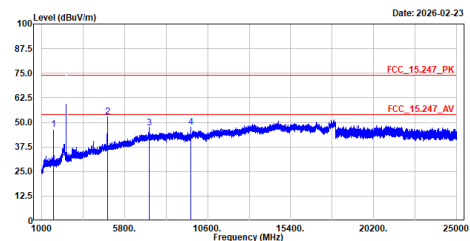

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1693.200	46.59	74.00	-27.41	72.16	-25.57	Peak
2	4824.000	52.69	74.00	-21.31	67.51	-14.82	Peak
3	7236.000	47.15	74.00	-26.85	54.17	-7.02	Peak
4	9648.000	47.53	74.00	-26.47	53.93	-6.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Rock

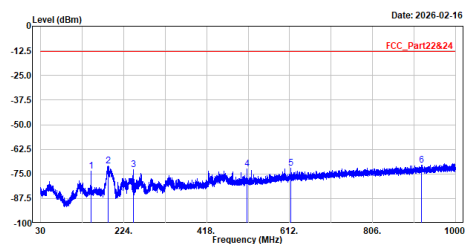

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	148.534	-73.47	-13.00	-60.47	-59.17	-14.30	Peak
2	187.819	-70.88	-13.00	-57.88	-54.23	-16.65	Peak
3	246.019	-72.75	-13.00	-59.75	-57.44	-15.31	Peak
4	511.993	-72.59	-13.00	-59.59	-64.36	-8.23	Peak
5	615.201	-72.08	-13.00	-59.08	-66.23	-5.85	Peak
6	920.363	-70.52	-13.00	-57.52	-68.93	-1.59	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Rock

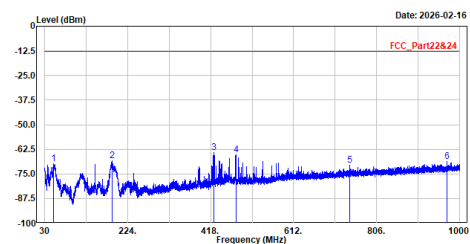

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	51.049	-69.78	-13.00	-56.78	-55.94	-13.84	Peak
2	187.043	-68.37	-13.00	-55.37	-51.87	-16.50	Peak
3	426.342	-64.03	-13.00	-51.03	-53.79	-10.24	Peak
4	477.655	-65.34	-13.00	-52.34	-56.30	-9.04	Peak
5	742.562	-70.61	-13.00	-57.61	-67.13	-3.48	Peak
6	970.900	-68.75	-13.00	-55.75	-67.84	-0.91	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Ashton

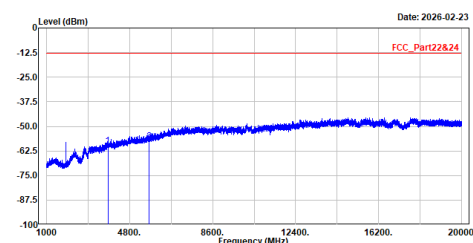

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3800.000	-60.00	-13.00	-47.00	-52.48	-7.52	Peak
2	5700.000	-57.76	-13.00	-44.76	-57.74	-0.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B2_20M_QPSK_1RB0_CH19100
Test BY :Ashton

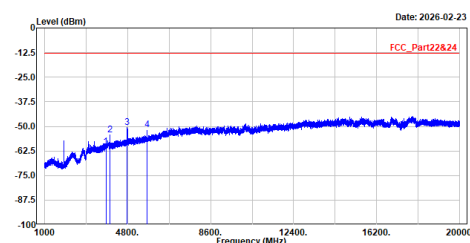

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3800.000	-60.26	-13.00	-47.26	-52.74	-7.52	Peak
2	3990.300	-54.35	-13.00	-41.35	-47.36	-6.99	Peak
3	4783.358	-50.71	-13.00	-37.71	-47.48	-3.23	Peak
4	5700.000	-51.58	-13.00	-38.58	-51.56	-0.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Rock

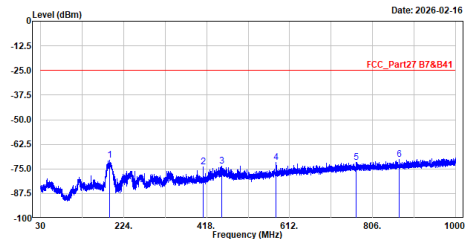

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	190.535	-70.74	-25.00	-45.74	-53.87	-16.87	Peak
2	409.561	-74.07	-25.00	-49.07	-63.37	-18.70	Peak
3	453.793	-73.62	-25.00	-48.62	-64.32	-9.30	Peak
4	580.475	-71.00	-25.00	-46.00	-65.10	-6.70	Peak
5	767.297	-71.54	-25.00	-46.54	-68.30	-3.24	Peak
6	868.662	-70.05	-25.00	-45.05	-67.68	-2.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Rock

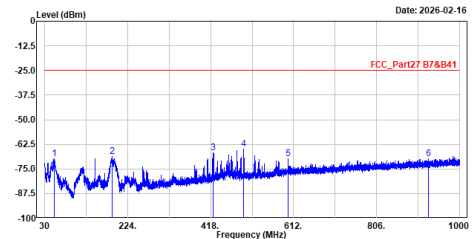

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	52.407	-69.89	-25.00	-44.89	-56.00	-13.89	Peak
2	187.819	-68.78	-25.00	-43.78	-52.13	-16.65	Peak
3	424.385	-66.89	-25.00	-41.89	-56.57	-10.32	Peak
4	455.697	-64.93	-25.00	-39.93	-56.29	-8.64	Peak
5	599.972	-69.68	-25.00	-44.68	-63.58	-6.10	Peak
6	926.959	-69.82	-25.00	-44.82	-68.36	-1.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Ashton

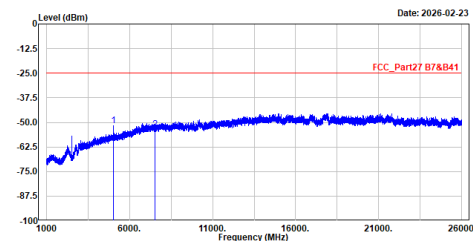

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	5020.000	-51.81	-25.00	-26.81	-49.59	-2.22	Peak
2	7530.000	-53.52	-25.00	-28.52	-58.05	4.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB0_CH20850
Test BY :Ashton

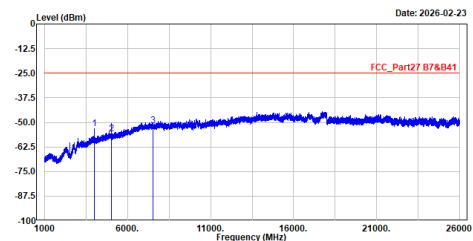

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3997.100	-53.02	-25.00	-28.02	-46.01	-7.01	Peak
2	5020.000	-56.01	-25.00	-31.01	-53.79	-2.22	Peak
3	7530.000	-51.77	-25.00	-26.77	-56.30	4.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Rock

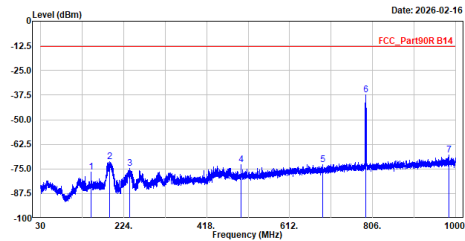

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	148.534	-76.68	-13.00	-63.68	-62.38	-14.30	Peak
2	190.535	-71.17	-13.00	-58.17	-54.30	-16.87	Peak
3	238.744	-74.77	-13.00	-61.77	-59.24	-15.53	Peak
4	498.898	-73.01	-13.00	-60.01	-64.38	-8.63	Peak
5	689.988	-72.67	-13.00	-59.67	-67.96	-4.71	Peak
6	790.674	-37.30	-13.00	-24.30	-34.27	-3.03	Peak
7	983.898	-67.86	-13.00	-54.86	-67.07	-0.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Rock

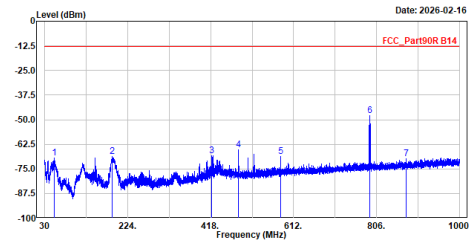

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	52.213	-69.59	-13.00	-56.59	-55.68	-13.91	Peak
2	187.916	-68.65	-13.00	-55.65	-51.98	-16.67	Peak
3	420.328	-68.32	-13.00	-55.32	-57.83	-10.49	Peak
4	482.699	-65.44	-13.00	-52.44	-56.51	-8.93	Peak
5	582.415	-68.84	-13.00	-55.84	-62.20	-6.64	Peak
6	790.480	-47.97	-13.00	-34.97	-44.92	-3.05	Peak
7	875.064	-69.85	-13.00	-56.85	-67.59	-2.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Ashton

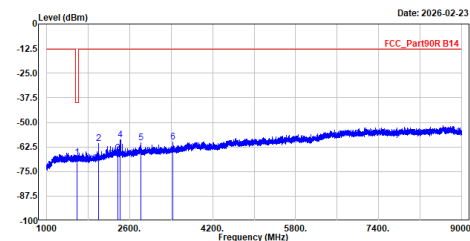

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1581.000	-67.93	-40.00	-27.93	-51.90	-16.03	Peak
2	2000.000	-60.93	-13.00	-47.93	-46.16	-14.77	Peak
3	2371.500	-65.47	-13.00	-52.47	-51.39	-14.08	Peak
4	2420.800	-58.68	-13.00	-45.68	-44.62	-14.06	Peak
5	2810.800	-60.40	-13.00	-47.40	-47.67	-12.73	Peak
6	3431.600	-60.12	-13.00	-47.12	-48.19	-11.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B14_5M_QPSK_1RB0_CH23305
Test BY :Ashton

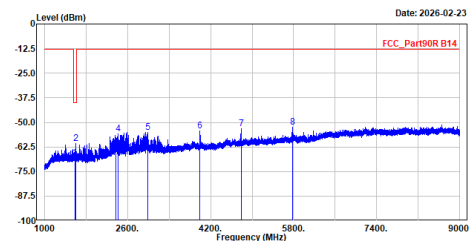

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1581.000	-68.10	-40.00	-28.10	-52.07	-16.03	Peak
2	1593.600	-60.67	-40.00	-20.67	-44.73	-15.94	Peak
3	2371.500	-63.38	-13.00	-50.38	-49.30	-14.08	Peak
4	2412.400	-55.72	-13.00	-42.72	-41.68	-14.04	Peak
5	2983.200	-55.01	-13.00	-42.01	-42.52	-12.49	Peak
6	3985.600	-54.49	-13.00	-41.49	-45.35	-9.14	Peak
7	4791.200	-53.39	-13.00	-40.39	-48.03	-5.36	Peak
8	5775.600	-52.43	-13.00	-39.43	-50.49	-1.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_20M_QPSK_1RB0_CH56640
Test BY :Rock

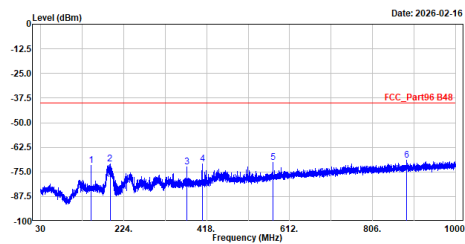

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	148.534	-71.58	-40.00	-31.58	-57.28	-14.30	Peak
2	192.087	-71.03	-40.00	-31.03	-54.14	-16.89	Peak
3	371.731	-72.58	-40.00	-32.58	-61.03	-11.55	Peak
4	407.912	-71.09	-40.00	-31.09	-60.38	-10.71	Peak
5	572.521	-70.24	-40.00	-30.24	-63.31	-6.93	Peak
6	885.443	-69.05	-40.00	-29.05	-66.79	-2.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_20M_QPSK_1RB0_CH56640
Test BY :Rock

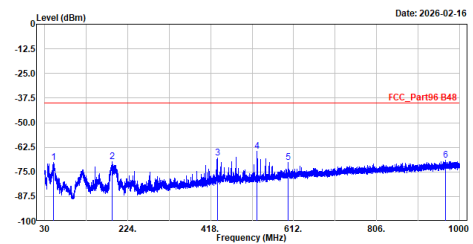

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	51.340	-70.18	-40.00	-30.18	-56.31	-13.87	Peak
2	187.237	-69.75	-40.00	-29.75	-53.21	-16.54	Peak
3	434.296	-67.83	-40.00	-27.83	-57.94	-9.89	Peak
4	526.737	-64.57	-40.00	-24.57	-56.55	-8.02	Peak
5	599.972	-70.12	-40.00	-30.12	-64.02	-6.10	Peak
6	967.893	-68.99	-40.00	-28.99	-68.05	-0.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_20M_QPSK_1RB0_CH56640
Test BY :Ashton

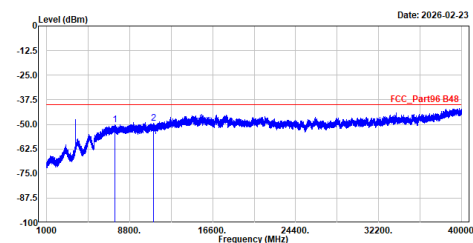

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	7380.000	-50.36	-40.00	-10.36	-55.25	4.89	Peak
2	11070.000	-49.60	-40.00	-9.60	-58.52	8.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_20M_QPSK_1RB0_CH56640
Test BY :Ashton

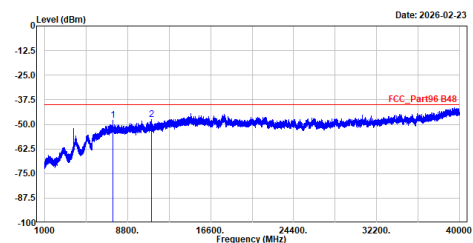

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	7380.000	-47.95	-40.00	-7.95	-52.84	4.89	Peak
2	11070.000	-47.61	-40.00	-7.61	-56.53	8.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :iCDMA_B5_CH4233
Test BY :Rock

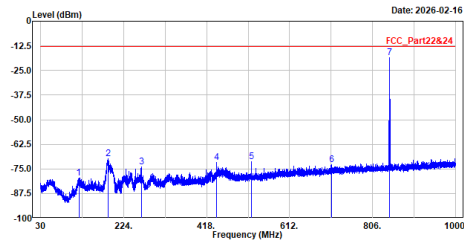

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	119.143	-79.51	-13.00	-66.51	-62.87	-16.64	Peak
2	187.140	-69.87	-13.00	-56.87	-53.35	-16.52	Peak
3	265.128	-73.94	-13.00	-60.94	-59.22	-14.72	Peak
4	441.668	-71.60	-13.00	-58.60	-61.99	-9.61	Peak
5	523.439	-71.39	-13.00	-58.39	-63.31	-8.08	Peak
6	710.746	-73.00	-13.00	-60.00	-68.70	-4.30	Peak
7	846.600	-18.43	-13.00	-15.43	-15.93	-2.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :iCDMA_B5_CH4233
Test BY :Rock

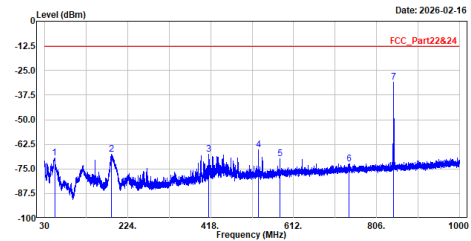

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	53.183	-69.50	-13.00	-56.50	-55.67	-13.83	Peak
2	186.364	-67.56	-13.00	-54.56	-51.07	-16.49	Peak
3	414.120	-67.72	-13.00	-54.72	-57.10	-10.62	Peak
4	529.744	-65.17	-13.00	-52.17	-57.22	-7.95	Peak
5	579.990	-69.96	-13.00	-56.96	-63.25	-6.71	Peak
6	741.689	-72.60	-13.00	-59.60	-69.10	-3.50	Peak
7	846.600	-31.07	-13.00	-18.07	-28.57	-2.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :iCDMA_B5_CH4233
Test BY :Ashton

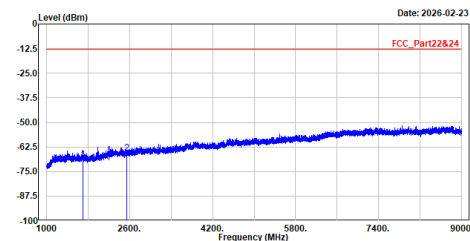

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1693.200	-69.03	-13.00	-56.03	-53.11	-15.92	Peak
2	2539.800	-65.73	-13.00	-52.73	-51.66	-14.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :iCDMA_B5_CH4233
Test BY :Ashton

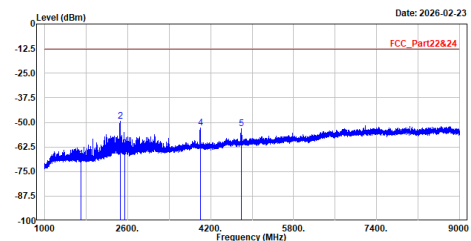

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1693.200	-68.83	-13.00	-55.83	-52.91	-15.92	Peak
2	2453.600	-49.46	-13.00	-36.46	-35.22	-14.24	Peak
3	2539.800	-63.41	-13.00	-50.41	-49.34	-14.07	Peak
4	3998.400	-52.79	-13.00	-39.79	-43.63	-9.16	Peak
5	4794.800	-53.13	-13.00	-40.13	-47.79	-5.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.