


Appendix A. Test Result of Radiated Emissions and Co-location


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_10M_QPSK_1RB0_CH23095+TX_be20_2462MHz
Test BY :Rock

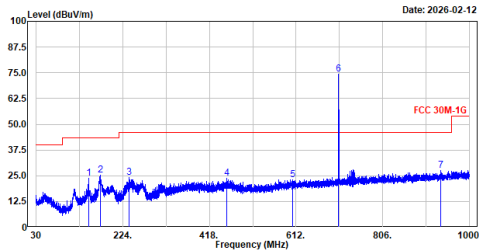

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	148.534	23.74	43.50	-19.76	47.69	-23.95	QP
2	173.269	25.35	43.50	-18.15	50.00	-24.65	QP
3	238.744	24.18	46.00	-21.82	49.36	-25.18	QP
4	456.121	23.89	46.00	-22.11	42.80	-18.91	QP
5	605.113	23.21	46.00	-22.79	38.95	-15.74	QP
6	707.500	74.22	-----	-----	88.26	-14.04	QP
7	935.980	27.57	46.00	-18.43	38.58	-11.01	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_10M_QPSK_1RB0_CH23095+TX_be20_2462MHz
Test BY :Rock

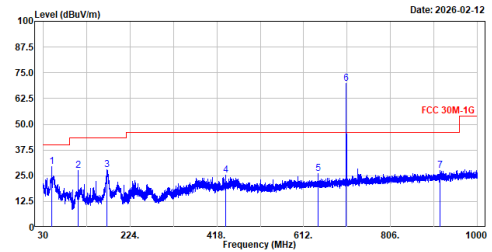

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.721	29.40	40.00	-10.60	52.89	-23.49	QP
2	108.473	27.46	43.50	-16.04	54.51	-27.05	QP
3	172.590	27.85	43.50	-15.65	52.40	-24.55	QP
4	437.109	25.39	46.00	-20.61	44.82	-19.43	QP
5	644.301	25.93	46.00	-20.07	40.96	-15.03	QP
6	707.500	69.94	-----	-----	83.98	-14.04	QP
7	917.647	27.54	46.00	-18.46	38.86	-11.32	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_10M_QPSK_1RB0_CH23095+TX_be20_2462MHz
Test BY :Rock

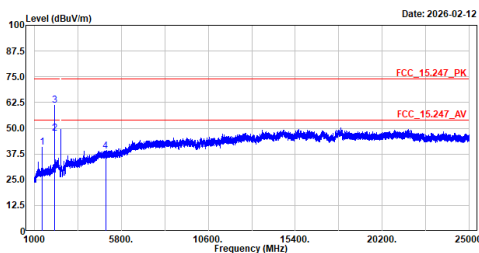

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1415.000	40.85	74.00	-33.15	66.26	-25.41	Peak
2	2122.667	47.68	54.00	-6.32	71.72	-24.04	Average
3	2122.667	61.16	74.00	-12.84	85.20	-24.04	Peak
4	4924.000	38.99	74.00	-35.01	53.29	-14.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_10M_QPSK_1RB0_CH23095+TX_be20_2462MHz
Test BY :Rock

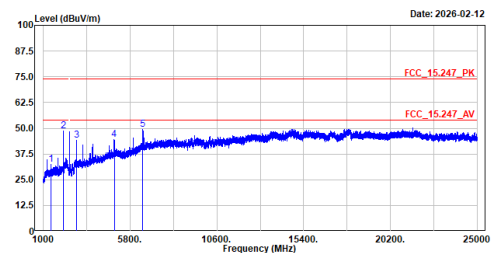

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1415.000	32.37	74.00	-41.63	57.78	-25.41	Peak
2	2122.500	48.66	74.00	-25.34	72.70	-24.04	Peak
3	2830.000	44.23	74.00	-29.77	66.62	-22.39	Peak
4	4924.000	44.35	74.00	-29.65	58.65	-14.30	Peak
5	6503.750	49.33	74.00	-24.67	57.68	-8.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_10M_QPSK_1RB0_CH26740+TX_be20_5745MHz
Test BY :Rock

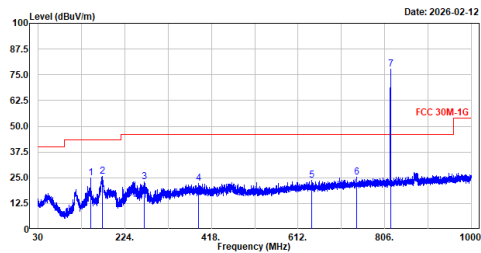

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	148.534	24.91	43.50	-18.59	48.86	-23.95	QP
2	173.560	25.67	43.50	-17.83	50.34	-24.67	QP
3	268.038	23.15	46.00	-22.85	47.34	-24.19	QP
4	389.967	22.13	46.00	-23.87	42.77	-20.64	QP
5	642.943	23.83	46.00	-22.17	38.89	-15.06	QP
6	742.562	25.17	46.00	-20.83	38.30	-13.13	QP
7	819.000	77.77	-----	-----	90.18	-12.41	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_10M_QPSK_1RB0_CH26740+TX_be20_5745MHz
Test BY :Rock

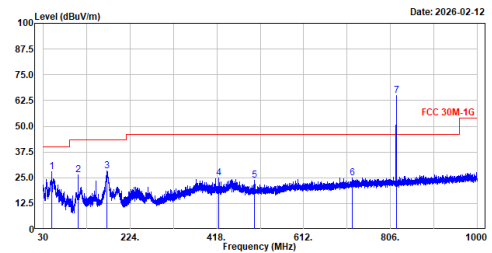

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48.721	28.11	40.00	-11.89	51.60	-23.49	QP
2	108.473	26.24	43.50	-17.26	53.29	-27.05	QP
3	172.784	28.35	43.50	-15.15	52.94	-24.59	QP
4	422.462	24.79	46.00	-21.21	44.83	-20.04	QP
5	501.420	23.70	46.00	-22.30	41.92	-18.22	QP
6	720.834	25.04	46.00	-20.96	38.74	-13.70	QP
7	819.000	64.98	-----	-----	77.39	-12.41	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_10M_QPSK_1RB0_CH26740+TX_be20_5745MHz
Test BY :Rock

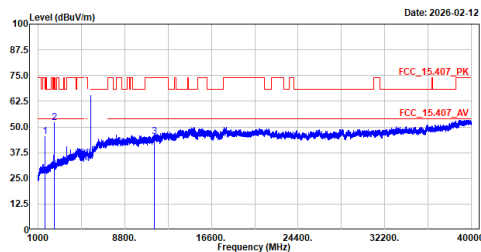

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1638.000	45.15	68.22	-23.07	70.67	-25.52	Peak
2	2457.000	52.06	68.22	-16.16	75.92	-23.86	Peak
3	11490.000	45.37	74.00	-28.63	47.33	-1.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_10M_QPSK_1RB0_CH26740+TX_be20_5745MHz
Test BY :Rock

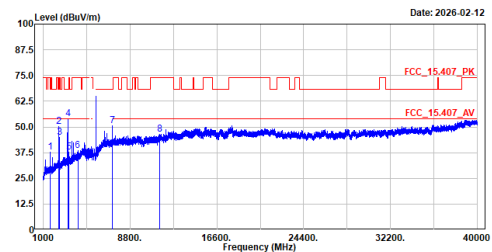

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1638.000	37.69	68.22	-30.53	63.21	-25.52	Peak
2	2392.300	50.35	68.22	-17.87	74.10	-23.75	Peak
3	2457.000	45.00	68.22	-23.22	68.86	-23.86	Peak
4	3196.400	53.94	68.22	-14.28	75.93	-21.99	Peak
5	3276.000	37.88	68.22	-30.34	59.94	-22.06	Peak
6	4095.000	38.40	74.00	-35.60	56.93	-18.53	Peak
7	7195.650	50.71	68.22	-17.51	57.71	-7.00	Peak
8	11490.000	46.42	74.00	-27.58	48.38	-1.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B5_10M_QPSK_1RB0_CH20450+TX_ax20_5955MHz
Test BY :Rock

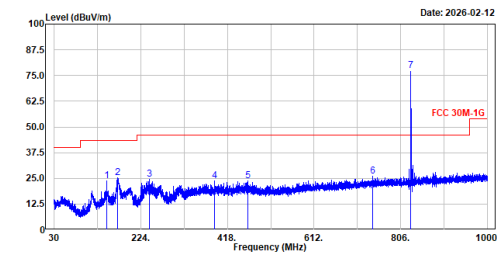


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	148.534	23.64	43.50	-19.86	47.59	-23.95	QP
2	172.784	25.11	43.50	-18.39	49.70	-24.59	QP
3	243.691	24.36	46.00	-21.64	49.37	-25.01	QP
4	389.870	23.64	46.00	-22.36	44.28	-20.64	QP
5	463.493	23.93	46.00	-22.07	42.65	-18.72	QP
6	742.562	26.11	46.00	-19.89	39.24	-13.13	QP
7	829.000	77.23	-----	-----	89.71	-12.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B5_10M_QPSK_1RB0_CH20450+TX_ax20_5955MHz
Test BY :Rock

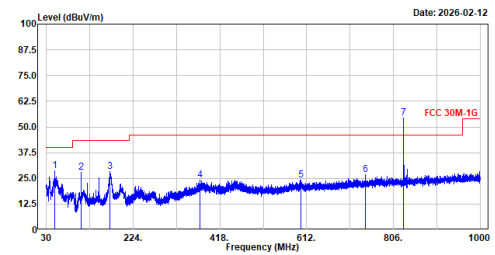


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.721	28.84	40.00	-11.16	52.33	-23.49	QP
2	108.473	28.01	43.50	-15.49	55.06	-27.05	QP
3	172.881	28.18	43.50	-15.32	52.79	-24.61	QP
4	373.671	24.02	46.00	-21.98	45.09	-21.07	QP
5	599.972	24.14	46.00	-21.86	39.89	-15.75	QP
6	742.562	26.63	46.00	-19.37	39.76	-13.13	QP
7	829.000	54.31	-----	-----	66.79	-12.48	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B5_10M_QPSK_1RB0_CH20450+TX_ax20_5955MHz
Test BY :Rock

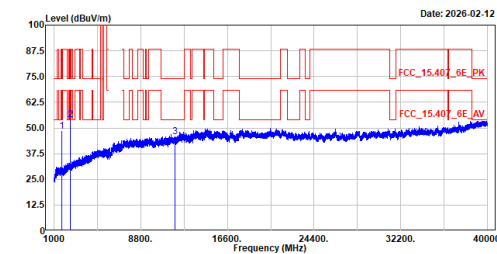


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1658.000	48.23	88.22	-39.99	73.80	-25.57	Peak
2	2487.000	53.85	74.00	-20.15	77.74	-23.89	Peak
3	11910.000	45.48	74.00	-28.52	47.07	-1.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B5_10M_QPSK_1RB0_CH20450+TX_ax20_5955MHz
Test BY :Rock

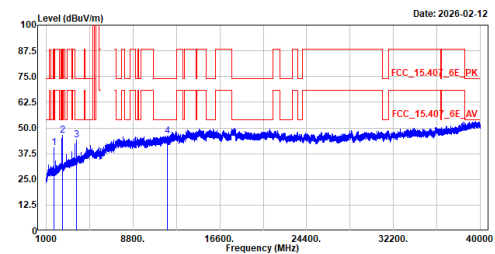


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1658.000	40.37	88.22	-47.85	65.94	-25.57	Peak
2	2487.000	46.40	74.00	-27.60	70.29	-23.89	Peak
3	3731.900	44.29	74.00	-29.71	63.96	-19.67	Peak
4	11910.000	46.07	74.00	-27.93	47.66	-1.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_10M_QPSK_1RB0_CH23095
Test BY :Rock

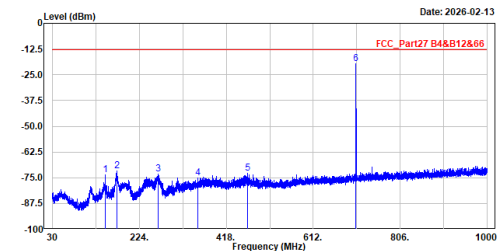


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	148.534	-73.49	-13.00	-60.49	-59.19	-14.30	Peak
2	173.948	-71.58	-13.00	-58.58	-56.53	-15.05	Peak
3	265.710	-73.13	-13.00	-60.13	-58.44	-14.69	Peak
4	353.883	-75.01	-13.00	-62.01	-62.69	-12.32	Peak
5	464.851	-73.01	-13.00	-60.01	-63.98	-9.03	Peak
6	707.500	-19.62	-13.00	-6.62	-15.23	-4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_10M_QPSK_1RB0_CH23095
Test BY :Rock

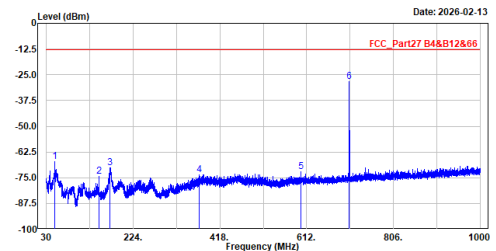


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	48.721	-67.28	-13.00	-54.28	-53.44	-13.84	Peak
2	148.534	-74.46	-13.00	-61.46	-60.16	-14.30	Peak
3	172.687	-70.27	-13.00	-57.27	-55.35	-14.92	Peak
4	371.246	-73.44	-13.00	-60.44	-61.86	-11.58	Peak
5	599.972	-72.22	-13.00	-59.22	-66.12	-6.10	Peak
6	707.500	-28.46	-13.00	-15.46	-24.07	-4.39	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_10M_QPSK_1RB0_CH23095
Test BY :Rock

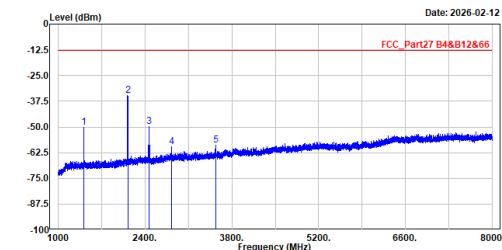


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1415.000	-50.30	-13.00	-37.30	-34.54	-15.76	Peak
2	2122.500	-34.67	-13.00	-21.67	-20.28	-14.39	Peak
3	2466.500	-49.97	-13.00	-36.97	-35.72	-14.25	Peak
4	2830.000	-59.65	-13.00	-46.65	-46.91	-12.74	Peak
5	3537.500	-58.74	-13.00	-45.74	-47.29	-11.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_10M_QPSK_1RB0_CH23095
Test BY :Rock

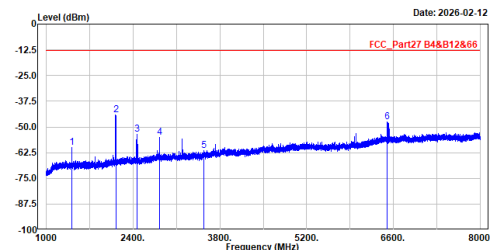


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1415.000	-60.10	-13.00	-47.10	-44.34	-15.76	Peak
2	2122.500	-44.18	-13.00	-31.18	-29.79	-14.39	Peak
3	2461.250	-53.48	-13.00	-40.48	-39.28	-14.20	Peak
4	2830.000	-54.96	-13.00	-41.96	-42.22	-12.74	Peak
5	3537.500	-61.65	-13.00	-48.65	-50.20	-11.45	Peak
6	6503.050	-47.56	-13.00	-34.56	-48.87	1.31	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_10M_QPSK_1RB0_CH26740
Test BY :Rock

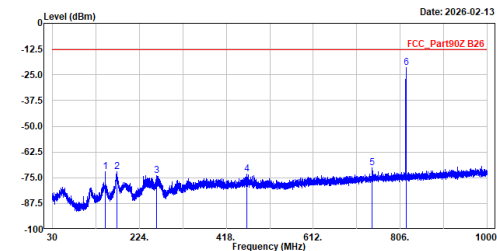


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	148.534	-72.14	-13.00	-59.14	-57.84	-14.30	Peak
2	173.851	-72.16	-13.00	-59.16	-57.11	-15.05	Peak
3	262.994	-73.97	-13.00	-60.97	-59.16	-14.81	Peak
4	464.366	-73.12	-13.00	-60.12	-64.08	-9.04	Peak
5	742.562	-70.11	-13.00	-57.11	-66.63	-3.48	Peak
6	819.000	-21.68	-----	-----	-18.92	-2.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_10M_QPSK_1RB0_CH26740
Test BY :Rock

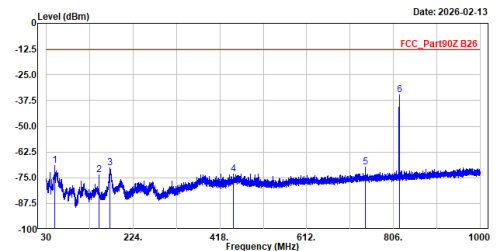


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	48.721	-69.23	-13.00	-56.23	-55.39	-13.84	Peak
2	148.534	-73.57	-13.00	-60.57	-59.27	-14.30	Peak
3	172.105	-70.15	-13.00	-57.15	-55.35	-14.80	Peak
4	447.779	-73.03	-13.00	-60.03	-63.58	-9.45	Peak
5	742.562	-69.86	-13.00	-56.86	-66.38	-3.48	Peak
6	819.000	-34.72	-----	-----	-31.96	-2.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_10M_QPSK_1RB0_CH26740
Test BY :Rock

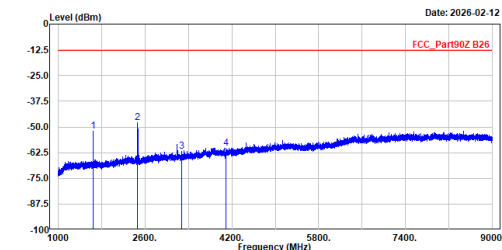


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1638.000	-51.95	-13.00	-38.95	-36.08	-15.87	Peak
2	2457.000	-48.04	-13.00	-35.04	-33.83	-14.21	Peak
3	3276.000	-62.03	-13.00	-49.03	-49.62	-12.41	Peak
4	4095.000	-68.46	-13.00	-47.46	-51.58	-8.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_10M_QPSK_1RB0_CH26740
Test BY :Rock

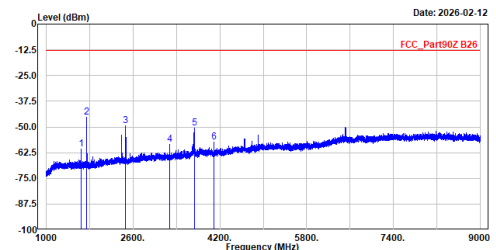


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1638.000	-60.81	-13.00	-47.81	-44.94	-15.87	Peak
2	1741.600	-45.40	-13.00	-32.40	-29.65	-15.75	Peak
3	2457.000	-49.60	-13.00	-36.60	-35.39	-14.21	Peak
4	3276.000	-58.32	-13.00	-45.32	-45.91	-12.41	Peak
5	3728.800	-50.44	-13.00	-37.44	-40.40	-10.04	Peak
6	4095.000	-57.50	-13.00	-44.50	-48.62	-8.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B5_10M_QPSK_1RB0_CH20450
Test BY :Rock

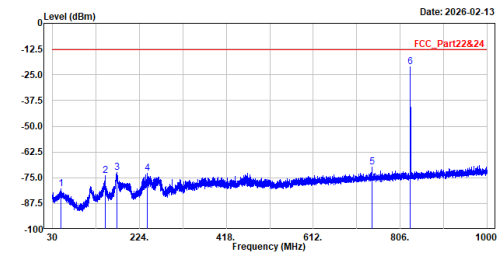


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	48.042	-80.46	-13.00	-67.46	-66.61	-13.85	Peak
2	148.534	-74.06	-13.00	-61.06	-59.76	-14.30	Peak
3	173.172	-72.34	-13.00	-59.34	-57.35	-14.99	Peak
4	242.236	-72.98	-13.00	-59.98	-57.58	-15.40	Peak
5	742.562	-69.92	-13.00	-56.92	-66.44	-3.48	Peak
6	829.000	-21.28	-----	-----	-18.45	-2.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B5_10M_QPSK_1RB0_CH20450
Test BY :Rock

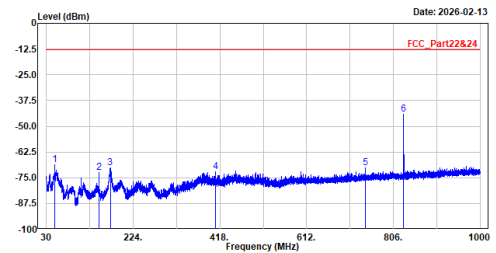


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	48.721	-68.73	-13.00	-55.73	-54.89	-13.84	Peak
2	148.534	-72.61	-13.00	-59.61	-58.31	-14.30	Peak
3	172.978	-70.12	-13.00	-57.12	-55.15	-14.97	Peak
4	408.494	-71.95	-13.00	-58.95	-61.24	-10.71	Peak
5	742.562	-70.22	-13.00	-57.22	-66.74	-3.48	Peak
6	829.000	-44.17	-----	-----	-41.34	-2.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B5_10M_QPSK_1RB0_CH20450
Test BY :Rock

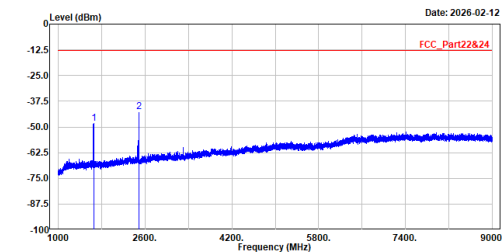


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1658.000	-48.43	-13.00	-35.43	-32.51	-15.92	Peak
2	2487.000	-42.60	-13.00	-29.60	-28.36	-14.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B5_10M_QPSK_1RB0_CH20450
Test BY :Rock

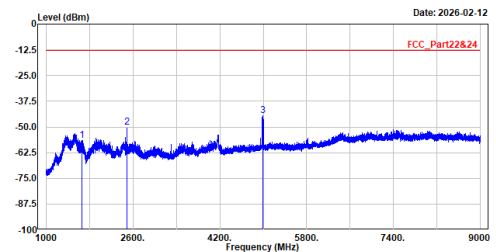

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	1658.000	-56.65	-13.00	-43.65	-40.73	-15.92	Peak
2	2487.000	-50.07	-13.00	-37.07	-35.83	-14.24	Peak
3	4990.000	-44.57	-13.00	-31.57	-40.12	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.