



SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V06

Report Template Revision Date: 2026-01-30

TEST REPORT

Report No.: CQASZ20260400731E-02
Applicant: Hesung Innovation Limited
Address of Applicant: Room 803, Chevalier House, 45-51 Chatham Road South, Tsim Sha Tsui, Kowloon, HongKong
Equipment Under Test (EUT):
Product: Smart Humidifier
Model No.: DR-HHM005S, DWHM05S
Test Model No.: DR-HHM005S
Brand Name: DREO, DREO HOME
FCC ID: 2A3SYHMM005
Standards: 47 CFR Part 15, Subpart C KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10 2020
Date of Receipt: 2026-4-9
Date of Test: 2025-09-28 to 2025-10-24
2026-04-09 to 2026-05-22
Date of Issue: 2026-5-29
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20240701401E-02	Rev.01	Initial report	2024-07-31
CQASZ20260400731E-02	Rev.02	Update report	2026-5-29

Note:

This test report (Ref. No.: CQASZ20260400731E-02)

All test data comes from source test reports (Ref. No.: CQASZ20240701401E-02).

Only based on the original report, the factory, factory address, product name and trademark have been updated, Due to the updated appearance of the control panel and the change in antenna size of the product, Added tests for the restricted bandwidth around the fundamental frequency (radiation emission) as well as the peak and average output power of conduction.

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10 2020	N/A
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10 2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10 2020	N/A
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10 2020	N/A
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10 2020	N/A
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10 2020	N/A
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10 2020	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10 2020	PASS

Remark1:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

Remark 2:

For the fundamental testing items that are not applicable here since the application type is permissive change,
please refer to the IC test report in original grant for the result.

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	8
4.5 DESCRIPTION OF SUPPORT UNITS	9
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
4.9 DEVIATION FROM STANDARDS	10
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	10
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
4.12 EQUIPMENT LIST	11
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 CONDUCTED PEAK & AVERAGE OUTPUT POWER	13
<i>Test Result</i>	14
<i>Note:</i>	14
<i>When Duty cycle >98%, D.C.F is not required.</i>	14
<i>Test Graphs</i>	15
5.3 RADIATED SPURIOUS EMISSIONS	19
5.3.1 Radiated emission below 1GHz	22
5.3.2 Transmitter emission above 1GHz	24
5.4 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	30
6 PHOTOGRAPHS - EUT TEST SETUP	35
6.1 RADIATED SPURIOUS EMISSION	35
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	37

4 General Information

4.1 Client Information

Applicant:	Hesung Innovation Limited
Address of Applicant:	Room 803, Chevalier House, 45-51 Chatham Road South, Tsim Sha Tsui, Kowloon, HongKong
Manufacturer:	Shenzhen Hesung Innovation Technology Co., LTD
Address of Manufacturer:	26th Floor, Building A7, Chuangzhiyun Cheng, Liuxian Avenue, Nanshan District, Shenzhen
Factory 1:	Jiangmen Honetian Technology Co., Ltd.
Address of Factory 1:	No.71, Third Road Xinle, Lile, Jianghai District, Jiangmen, Guangdong, China
Factory 2:	Huizhou Huimo Technology Co., Ltd
Address of Factory 2:	Office building Tower four, Tower Five, Tower Six of Shuangjie Industrial Co., Ltd., Yinshan Industrial Zone, Beilian Village, Liangjing Town, Huiyang District, HUIZHOU CITY, Guangdong Province

4.2 General Description of EUT

Product Name:	Smart Humidifier
Model No.:	DR-HHM005S, DWHM05S
Test Model No.:	DR-HHM005S
Trade Mark:	DREO, DREO HOME
Software Version:	V1.0
Hardware Version:	PAI-051 V1.2 20210824
Power Supply:	AC120V
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	☒ Mobile ☐ Portable
Test Software of EUT:	Beken WIFI Test Tool V1.7.2

Antenna Type:	FPC antenna
Antenna Gain:	3.56dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz


Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.

Run Software:

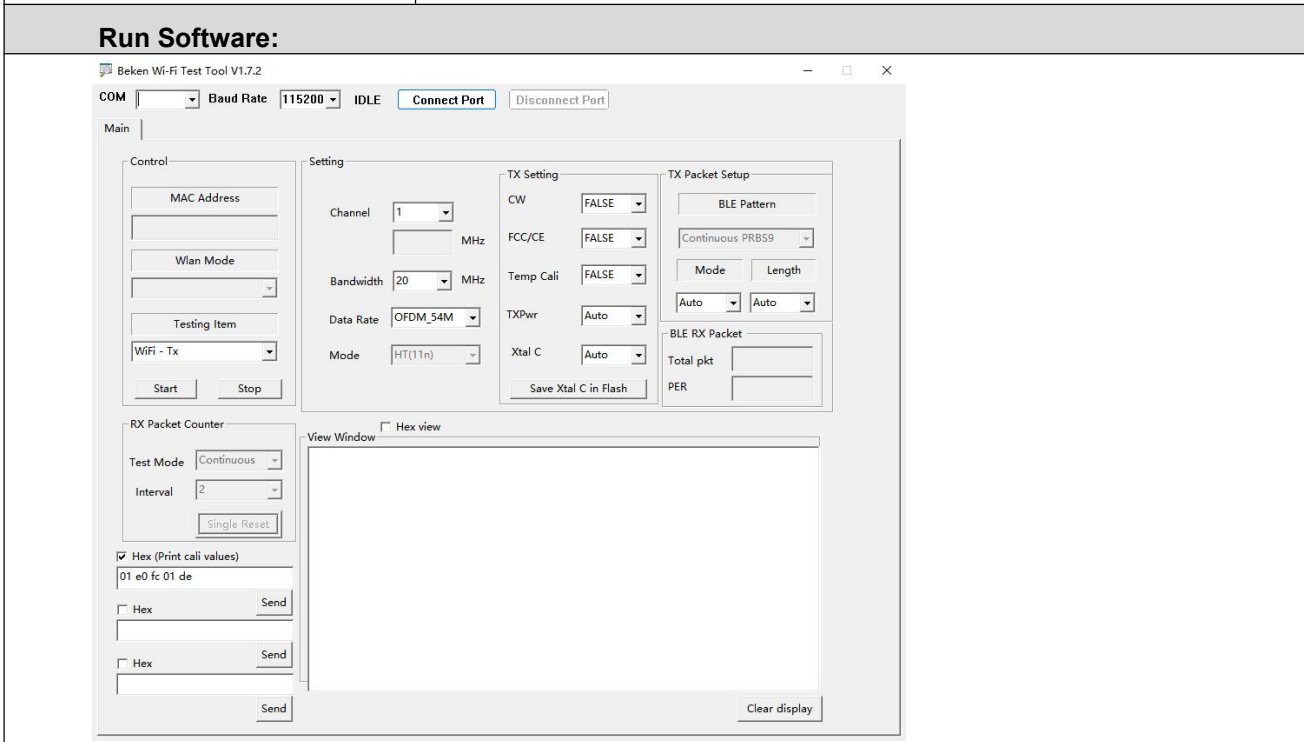

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community,
Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31
Band Reject Filter	Wainwright instrument gmbh	WRCG2400/2483-2390/2493-35/10SS	CQA-037	2025/9/1	2026/8/31

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling. This is either permanently attachment or a unique coupling that satisfies the requirement.	

5.2 Conducted Peak & Average Output Power

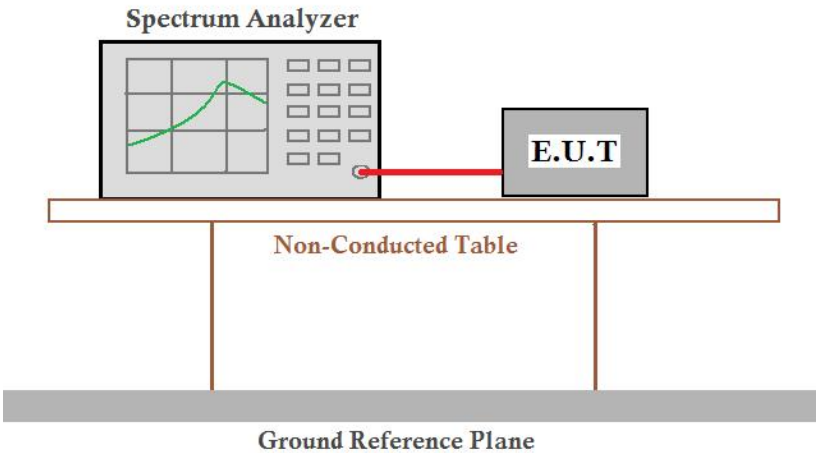Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2020
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]
11B	2412	7.44	≤30.00
	2437	7.91	≤30.00
	2462	9.32	≤30.00
11G	2412	5.89	≤30.00
	2437	7.46	≤30.00
	2462	9.79	≤30.00
11N20SISO	2412	5.77	≤30.00
	2437	7.31	≤30.00
	2462	9.65	≤30.00

Note:

When Duty cycle >98%, D.C.F is not required.


Test Graphs

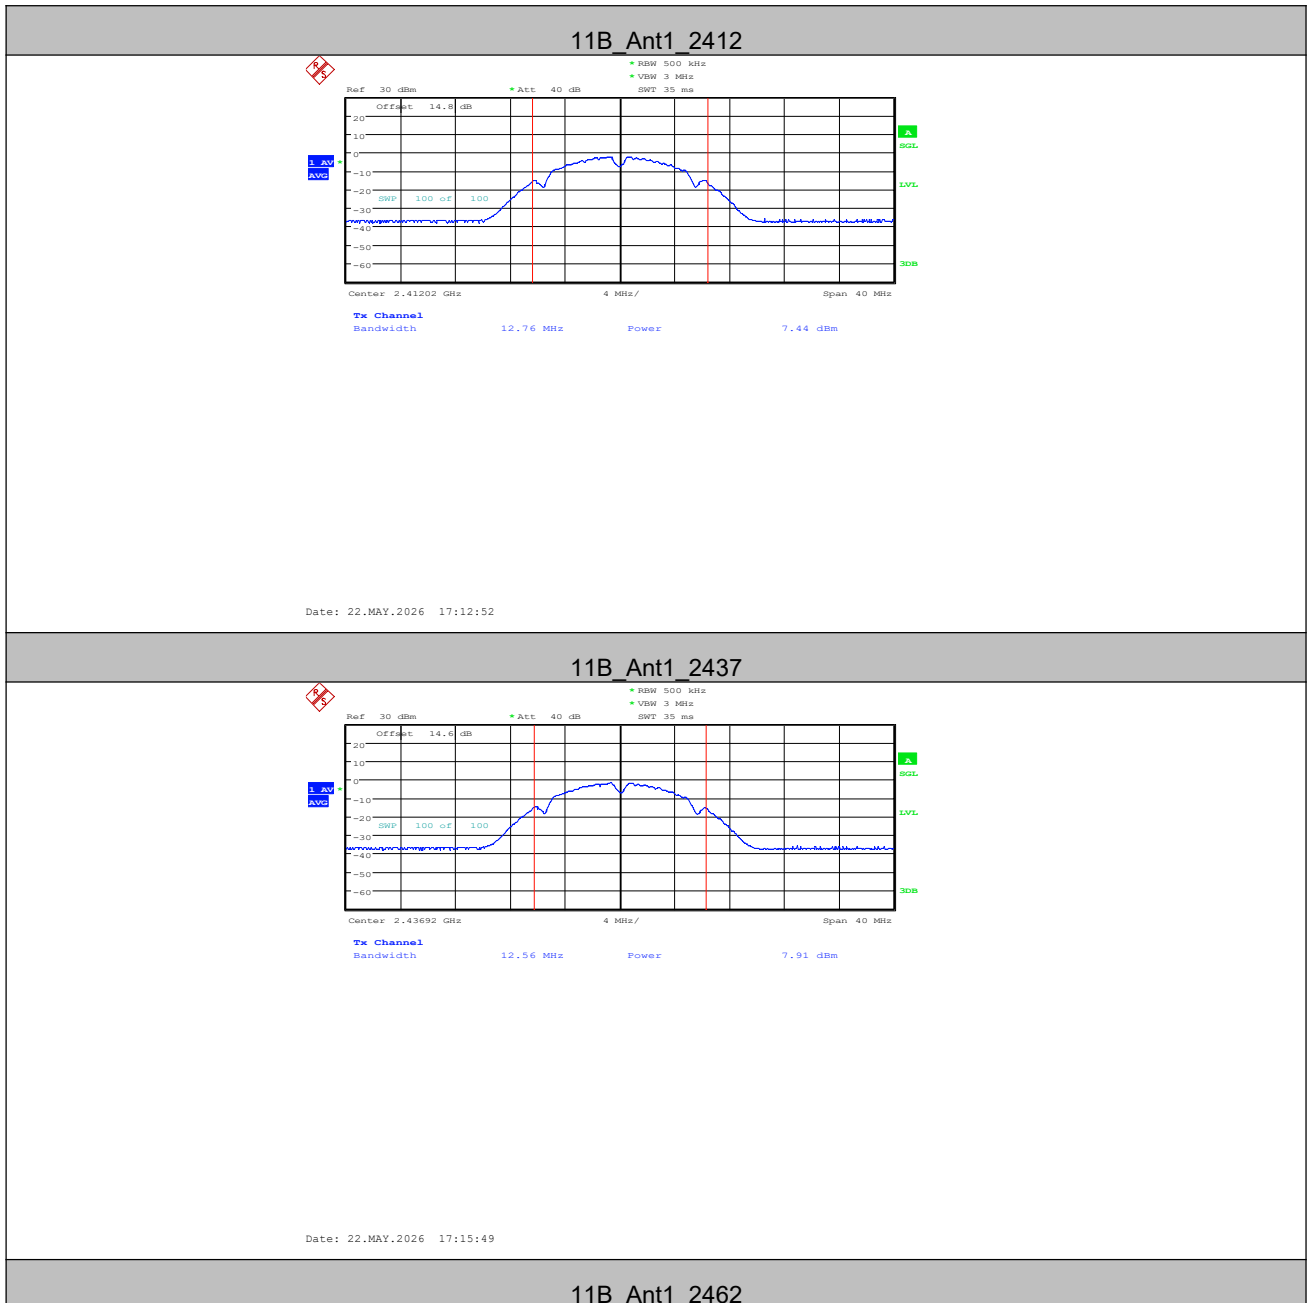

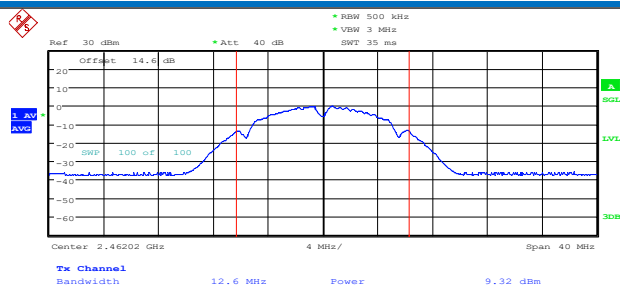


Date: 22.MAY.2026 17:16:59

11G_Ant1_2412

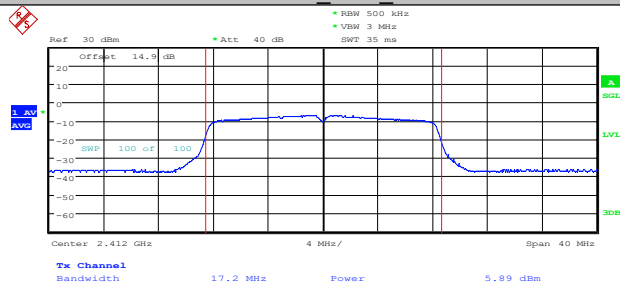


Date: 22.MAY.2026 17:18:25

11G_Ant1_2437

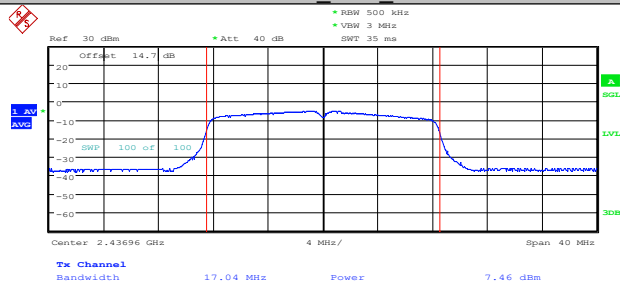


Date: 22.MAY.2026 17:19:43

11G_Ant1_2462

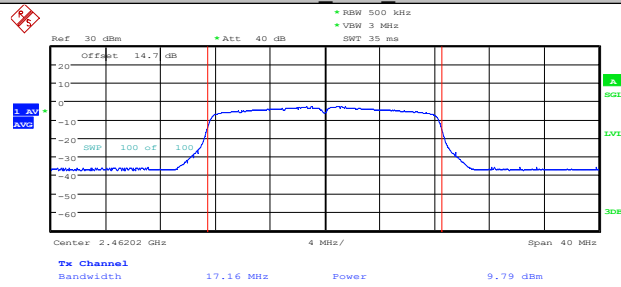


Date: 22.MAY.2026 17:22:06

11N20SISO_Ant1_2412

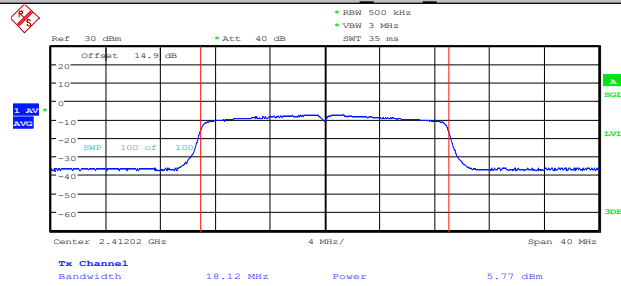


Date: 22.MAY.2026 17:23:34

11N20SISO_Ant1_2437

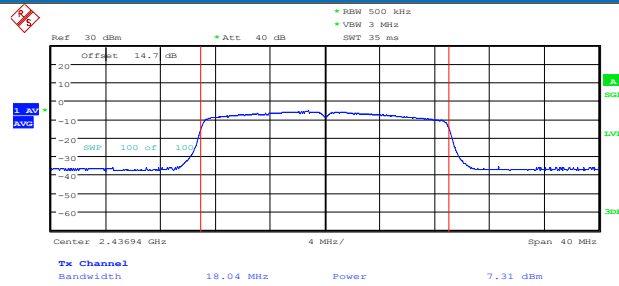

Date: 22.MAY.2026 17:25:00

11N20SISO_Ant1_2462

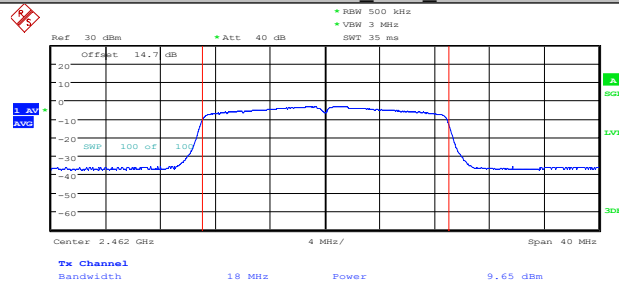

Date: 22.MAY.2026 17:26:12

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.3 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2020				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

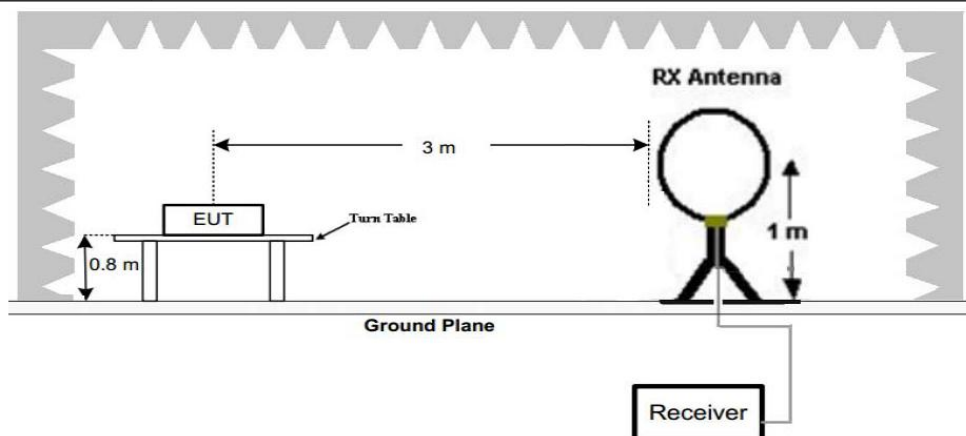


Figure 1. Below 30MHz

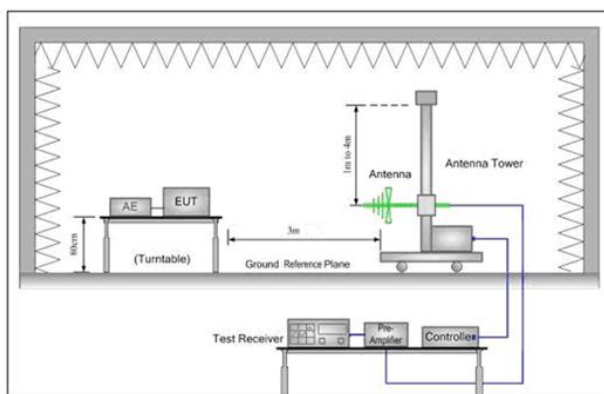


Figure 2. 30MHz to 1GHz

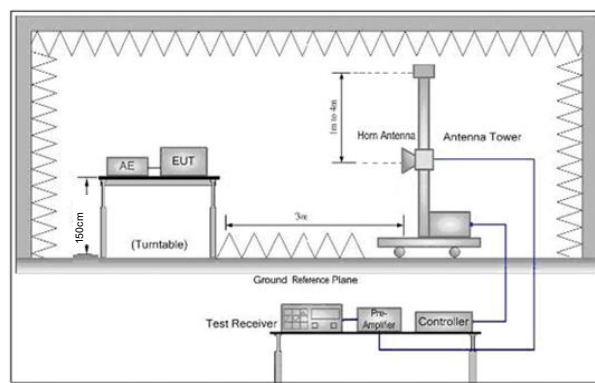


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

5.3.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

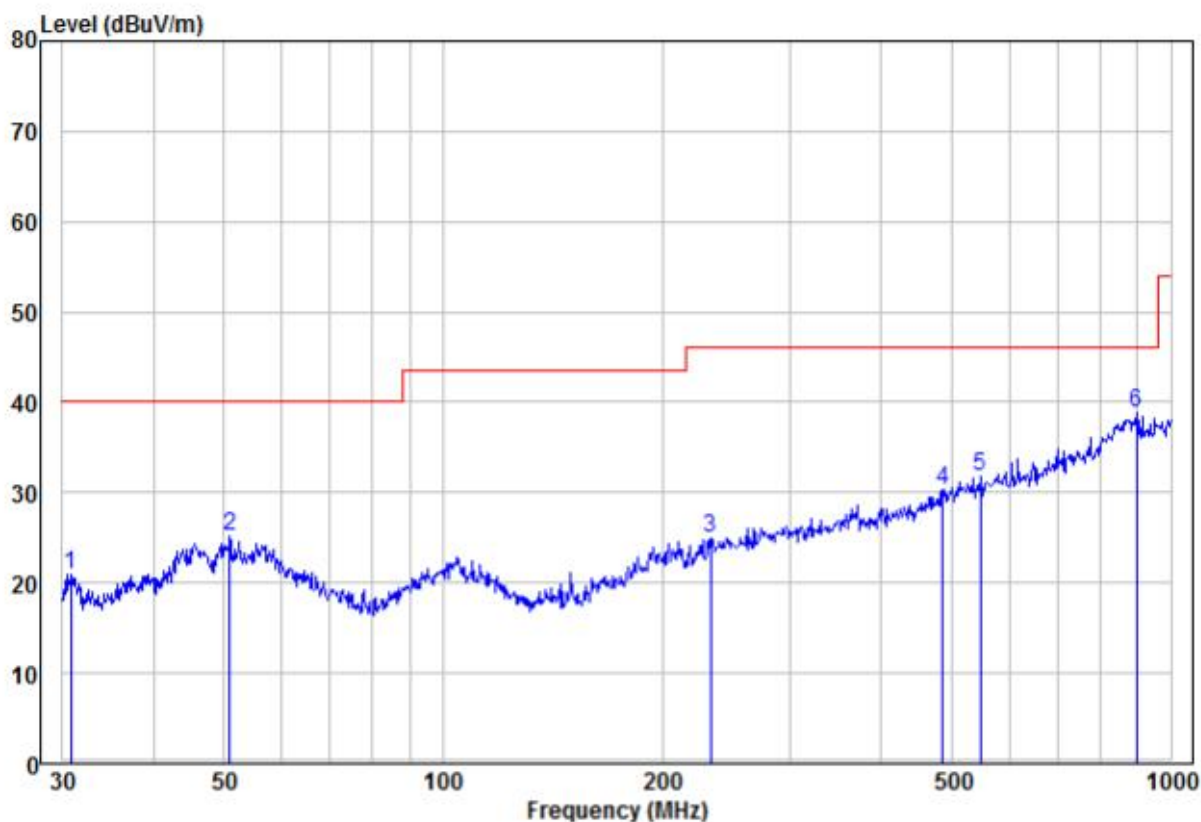

	Freq	Read		Limit	Over			
	MHz	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.75	12.75	8.23	20.98	40.00	-19.02	Peak	VERTICAL
2	50.94	12.52	12.62	25.14	40.00	-14.86	Peak	VERTICAL
3	233.35	10.46	14.53	24.99	46.00	-21.01	Peak	VERTICAL
4	485.61	9.83	20.50	30.33	46.00	-15.67	Peak	VERTICAL
5	547.10	10.26	21.57	31.83	46.00	-14.17	Peak	VERTICAL
6 pp	897.00	9.86	29.05	38.91	46.00	-7.09	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

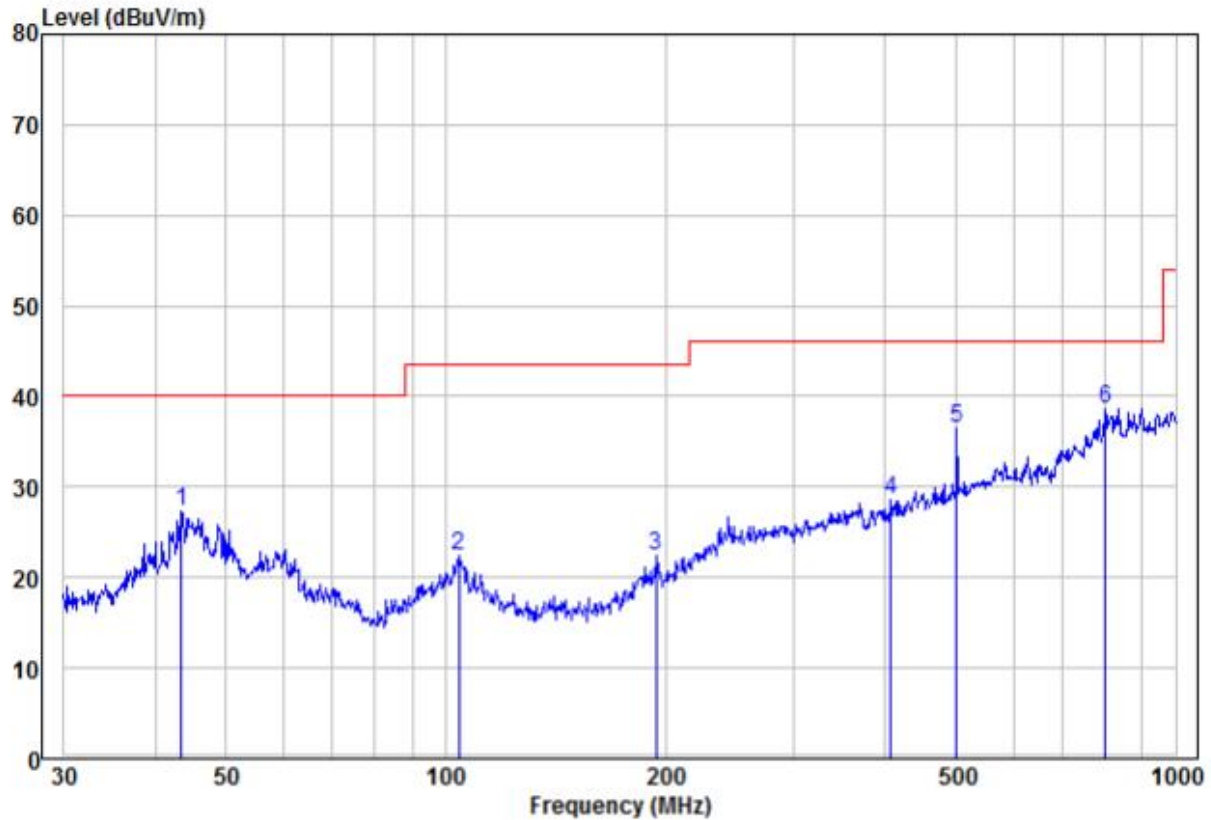

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	43.51	15.65	11.64	27.29	40.00	-12.71 Peak	HORIZONTAL
2	104.17	10.59	11.87	22.46	43.50	-21.04 Peak	HORIZONTAL
3	194.45	10.71	11.77	22.48	43.50	-21.02 Peak	HORIZONTAL
4	407.51	9.96	18.54	28.50	46.00	-17.50 Peak	HORIZONTAL
5	501.18	15.47	20.94	36.41	46.00	-9.59 Peak	HORIZONTAL
6 pp	801.79	12.75	25.97	38.72	46.00	-7.28 Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.3.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.90	-4.26	49.64	74	-24.36	peak	H	1.5	96
4824.000	37.46	-4.26	33.20	54	-20.80	AVG	H	1.5	297
7236.000	52.00	1.18	53.18	74	-20.82	peak	H	1.5	116
7236.000	38.87	1.18	40.05	54	-13.95	AVG	H	1.5	179
4824.000	54.85	-4.26	50.59	74	-23.41	peak	V	1.5	317
4824.000	38.98	-4.26	34.72	54	-19.28	AVG	V	1.5	225
7236.000	51.18	1.18	52.36	74	-21.64	peak	V	1.5	246
7236.000	36.86	1.18	38.04	54	-15.96	AVG	V	1.5	288

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.97	-4.12	48.85	74	-25.15	peak	H	1.5	24
4874.000	37.08	-4.12	32.96	54	-21.04	AVG	H	1.5	272
7311.000	48.78	1.46	50.24	74	-23.76	peak	H	1.5	129
7311.000	35.06	1.46	36.52	54	-17.48	AVG	H	1.5	200
4874.000	53.06	-4.12	48.94	74	-25.06	peak	V	1.5	117
4874.000	37.96	-4.12	33.84	54	-20.16	AVG	V	1.5	171
7311.000	49.98	1.46	51.44	74	-22.56	peak	V	1.5	335
7311.000	35.97	1.46	37.43	54	-16.57	AVG	V	1.5	222

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	52.64	-4.03	48.61	74	-25.39	peak	H	1.5	13
4924.000	37.11	-4.03	33.08	54	-20.92	AVG	H	1.5	162
7386.000	49.49	1.66	51.15	74	-22.85	peak	H	1.5	187
7386.000	36.69	1.66	38.35	54	-15.65	AVG	H	1.5	135
4924.000	54.96	-4.03	50.93	74	-23.07	peak	V	1.5	116
4924.000	38.22	-4.03	34.19	54	-19.81	AVG	V	1.5	300
7386.000	50.08	1.66	51.74	74	-22.26	peak	V	1.5	235
7386.000	36.28	1.66	37.94	54	-16.06	AVG	V	1.5	270

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.62	-4.26	49.36	74	-24.64	peak	H	1.5	112
4824.000	36.79	-4.26	32.53	54	-21.47	AVG	H	1.5	257
7236.000	50.48	1.18	51.66	74	-22.34	peak	H	1.5	187
7236.000	38.15	1.18	39.33	54	-14.67	AVG	H	1.5	146
4824.000	54.83	-4.26	50.57	74	-23.43	peak	V	1.5	281
4824.000	38.36	-4.26	34.10	54	-19.90	AVG	V	1.5	212
7236.000	50.83	1.18	52.01	74	-21.99	peak	V	1.5	25
7236.000	36.16	1.18	37.34	54	-16.66	AVG	V	1.5	233

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.65	-4.12	48.53	74	-25.47	peak	H	1.5	321
4874.000	36.20	-4.12	32.08	54	-21.92	AVG	H	1.5	34
7311.000	48.70	1.46	50.16	74	-23.84	peak	H	1.5	265
7311.000	35.45	1.46	36.91	54	-17.09	AVG	H	1.5	191
4874.000	53.02	-4.12	48.90	74	-25.10	peak	V	1.5	217
4874.000	37.68	-4.12	33.56	54	-20.44	AVG	V	1.5	286
7311.000	48.61	1.46	50.07	74	-23.93	peak	V	1.5	53
7311.000	35.58	1.46	37.04	54	-16.96	AVG	V	1.5	299

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height (m)	Table Angle (Degree)
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)				
4924.000	51.70	-4.03	47.67	74	-26.33	peak	H	1.5	35
4924.000	37.39	-4.03	33.36	54	-20.64	AVG	H	1.5	352
7386.000	51.09	1.66	52.75	74	-21.25	peak	H	1.5	279
7386.000	37.59	1.66	39.25	54	-14.75	AVG	H	1.5	133
4924.000	53.45	-4.03	49.42	74	-24.58	peak	V	1.5	135
4924.000	37.19	-4.03	33.16	54	-20.84	AVG	V	1.5	9
7386.000	51.19	1.66	52.85	74	-21.15	peak	V	1.5	238
7386.000	37.21	1.66	38.87	54	-15.13	AVG	V	1.5	227

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.95	-4.26	49.69	74	-24.31	peak	H	1.5	254
4824.000	37.16	-4.26	32.90	54	-21.10	AVG	H	1.5	290
7236.000	51.61	1.18	52.79	74	-21.21	peak	H	1.5	174
7236.000	38.88	1.18	40.06	54	-13.94	AVG	H	1.5	179
4824.000	55.26	-4.26	51.00	74	-23.00	peak	V	1.5	305
4824.000	39.59	-4.26	35.33	54	-18.67	AVG	V	1.5	224
7236.000	50.50	1.18	51.68	74	-22.32	peak	V	1.5	28
7236.000	36.39	1.18	37.57	54	-16.43	AVG	V	1.5	306

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.98	-4.12	47.86	74	-26.14	peak	H	1.5	340
4874.000	37.78	-4.12	33.66	54	-20.34	AVG	H	1.5	236
7311.000	48.40	1.46	49.86	74	-24.14	peak	H	1.5	47
7311.000	36.45	1.46	37.91	54	-16.09	AVG	H	1.5	113
4874.000	52.97	-4.12	48.85	74	-25.15	peak	V	1.5	333
4874.000	37.18	-4.12	33.06	54	-20.94	AVG	V	1.5	56
7311.000	48.25	1.46	49.71	74	-24.29	peak	V	1.5	81
7311.000	35.52	1.46	36.98	54	-17.02	AVG	V	1.5	184

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.36	-4.03	47.33	74	-26.67	peak	H	1.5	341
4924.000	38.55	-4.03	34.52	54	-19.48	AVG	H	1.5	333
7386.000	50.15	1.66	51.81	74	-22.19	peak	H	1.5	355
7386.000	36.02	1.66	37.68	54	-16.32	AVG	H	1.5	25
4924.000	53.43	-4.03	49.40	74	-24.60	peak	V	1.5	265
4924.000	37.36	-4.03	33.33	54	-20.67	AVG	V	1.5	27
7386.000	50.35	1.66	52.01	74	-21.99	peak	V	1.5	144
7386.000	37.83	1.66	39.49	54	-14.51	AVG	V	1.5	333

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.4 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2020		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

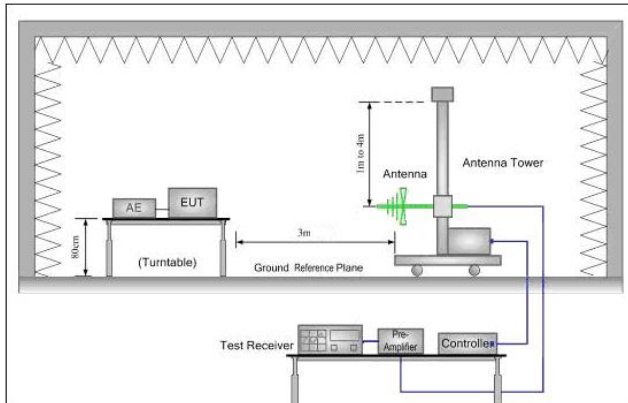


Figure 1. 30MHz to 1GHz

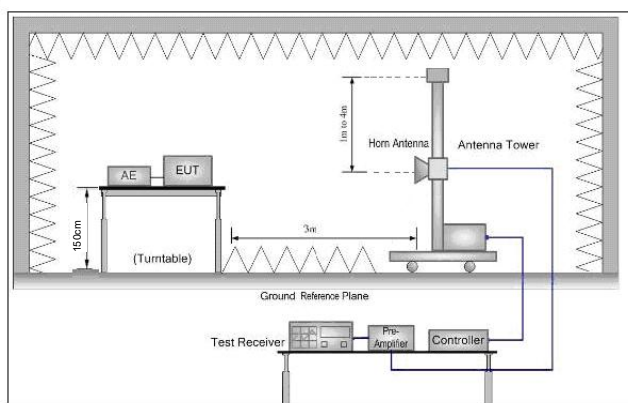


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20). Only the worst case is recorded in the report.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.35	-9.2	49.15	74	-24.85	peak	H	1.5	111
2390.000	43.99	-9.2	34.79	54	-19.21	AVG	H	1.5	170
2400.000	59.44	-9.39	50.05	74	-23.95	peak	H	1.5	290
2400.000	46.62	-9.39	37.23	54	-16.77	AVG	H	1.5	88
2390.000	59.19	-9.2	49.99	74	-24.01	peak	V	1.5	306
2390.000	44.67	-9.2	35.47	54	-18.53	AVG	V	1.5	205
2400.000	59.95	-9.39	50.56	74	-23.44	peak	V	1.5	230
2400.000	46.79	-9.39	37.40	54	-16.60	AVG	V	1.5	114

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	58.31	-9.29	49.02	74	-24.98	peak	H	1.5	316
2483.500	44.08	-9.29	34.79	54	-19.21	AVG	H	1.5	301
2483.500	58.21	-9.29	48.92	74	-25.08	peak	V	1.5	166
2483.500	46.39	-9.29	37.10	54	-16.90	AVG	V	1.5	337

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.03	-9.2	49.83	74	-24.17	peak	H	1.5	192
2390.000	44.50	-9.2	35.30	54	-18.70	AVG	H	1.5	287
2400.000	60.24	-9.39	50.85	74	-23.15	peak	H	1.5	352
2400.000	46.81	-9.39	37.42	54	-16.58	AVG	H	1.5	9
2390.000	58.27	-9.2	49.07	74	-24.93	peak	V	1.5	206
2390.000	44.91	-9.2	35.71	54	-18.29	AVG	V	1.5	36
2400.000	59.61	-9.39	50.22	74	-23.78	peak	V	1.5	201
2400.000	46.34	-9.39	36.95	54	-17.05	AVG	V	1.5	241

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	58.10	-9.29	48.81	74	-25.19	peak	H	1.5	4
2483.500	43.73	-9.29	34.44	54	-19.56	AVG	H	1.5	34
2483.500	57.93	-9.29	48.64	74	-25.36	peak	V	1.5	214
2483.500	46.11	-9.29	36.82	54	-17.18	AVG	V	1.5	33

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.28	-9.2	49.08	74	-24.92	peak	H	1.5	1
2390.000	44.36	-9.2	35.16	54	-18.84	AVG	H	1.5	44
2400.000	59.58	-9.39	50.19	74	-23.81	peak	H	1.5	234
2400.000	46.25	-9.39	36.86	54	-17.14	AVG	H	1.5	250
2390.000	58.66	-9.2	49.46	74	-24.54	peak	V	1.5	51
2390.000	43.99	-9.2	34.79	54	-19.21	AVG	V	1.5	20
2400.000	59.72	-9.39	50.33	74	-23.67	peak	V	1.5	190
2400.000	46.66	-9.39	37.27	54	-16.73	AVG	V	1.5	188

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.05	-9.29	48.76	74	-25.24	peak	H	1.5	295
2483.500	43.74	-9.29	34.45	54	-19.55	AVG	H	1.5	27
2483.500	58.17	-9.29	48.88	74	-25.12	peak	V	1.5	240
2483.500	45.68	-9.29	36.39	54	-17.61	AVG	V	1.5	81

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:

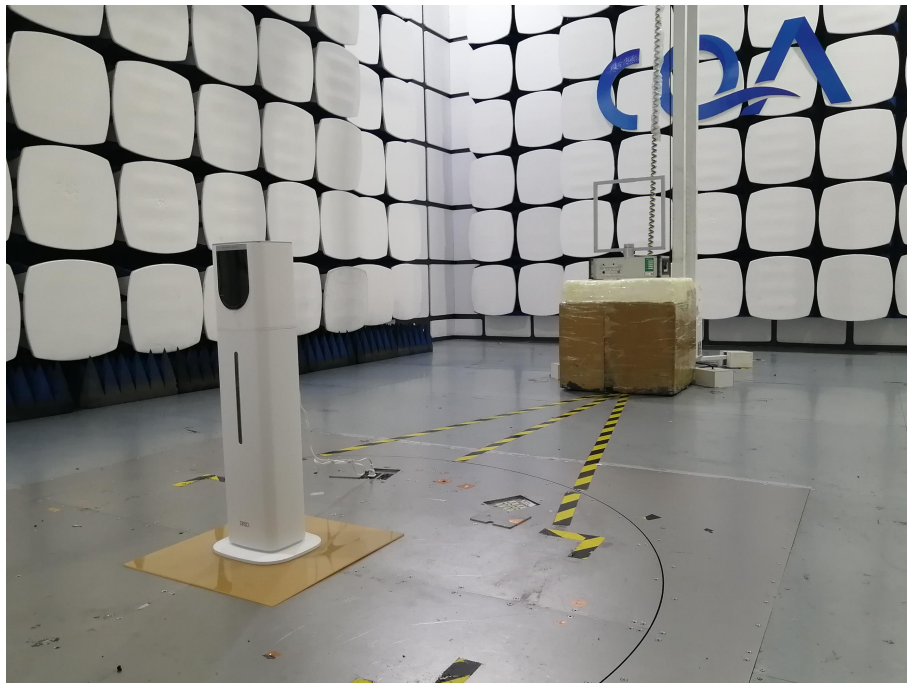

30MHz~1GHz:

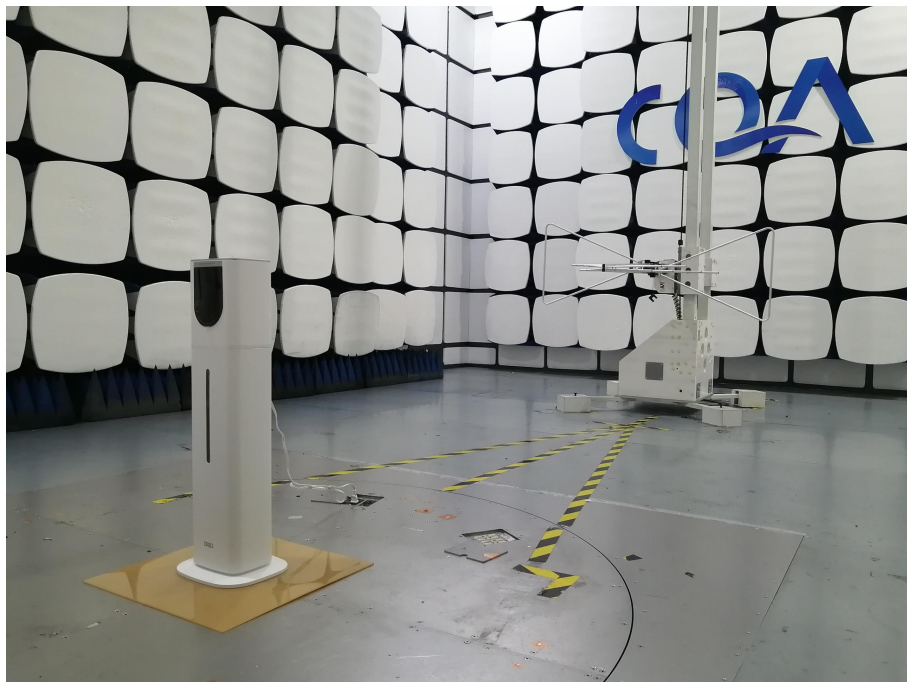

Above 1GHz:



7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20260400731E-01.

*** END OF REPORT ***