


1. Features

We adopt a high precision capacitive touch screen IC. Touch screen is very stable; 2.4GHz high RF wireless control with long distance controlling, low power consumption and high speed transmitting rate. This product widely work on our smart LED Lighting, LED controller etc.

2. Parameters

Working Voltage: 3V(2*AAA Battery)
Standby Power Consumption: 20μA
Transmitting Power: 6dBm

Transmission Frequency: 2.4GHz
Control Distance: 100 ft
Working Temp.: 14°F~104°F

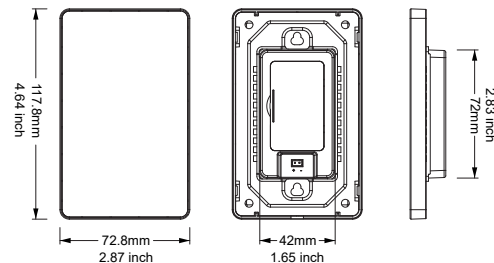

Panel Remote (2.4G)


Model No.: U1 / U2 / U3

3. Function of keys

Remark: When touching the button, LED indicating lamp will flash once with different sound (Touch slider with no sound).

Model No.: U1

3-Zone Panel Remote (Brightness)

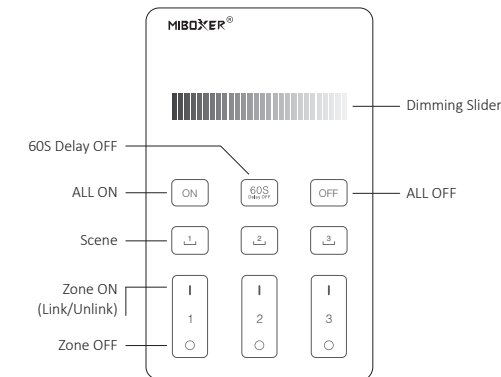

Touch dimming slider to change the brightness from 1~100%.


Touch master ON, turn on all linked lights.
Long press 5 seconds to turn ON the indicating sound.

Touch master OFF, turn off all linked lights.
Long press 5 seconds to turn OFF the indicating sound.

Short press: activate scene.
Long press 3 seconds: save current brightness (the light flashes one time slowly once completed successfully).

Model No.: U2

3-Zone Panel Remote (Color Temperature)

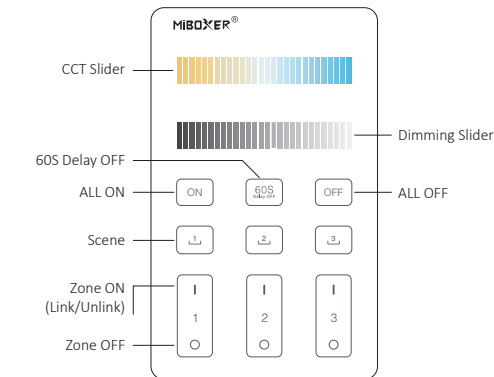

Touch the slider to change color temperature.


Touch dimming slider to change the brightness from 1~100%.

Touch master ON, turn on all linked lights.
Long press 5 seconds to turn ON the indicating sound.

Touch master OFF, turn off all linked lights.
Long press 5 seconds to turn OFF the indicating sound.



Short press: activate scene.
Long press 3 seconds: save Current brightness and color temperature (the light flashes one time slowly once completed successfully).

Model No.: U3
3-Zone Panel Remote (RGB+CCT)

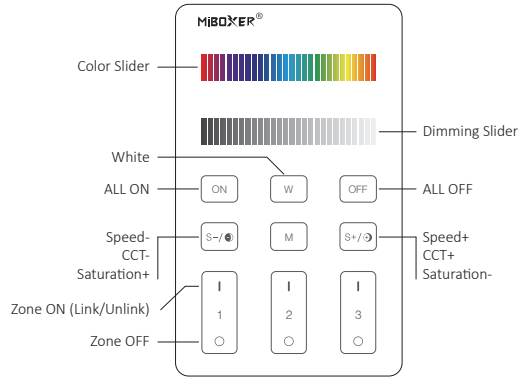


- Touch color slider, choose the color you want.
- Touch dimming slider to change the brightness from 1~100%.
- Short press turn on all linked lights. Long press 5 seconds to turn ON the indicating sound.
- Short press turn off all linked lights. Long press 5 seconds to turn OFF the indicating sound.
- Short press switch to white light mode.
- Short press switch to Dynamic Mode.
- For dynamic mode, speed- For RGB mode, saturation+ For white mode, CCT-
- For dynamic mode, speed+ For RGB mode, saturation- For white mode, CCT+

4. Installation

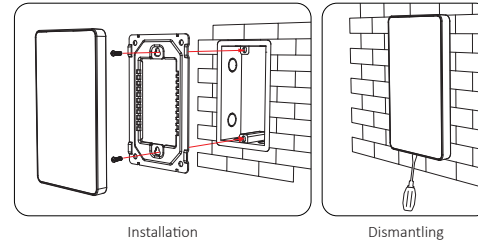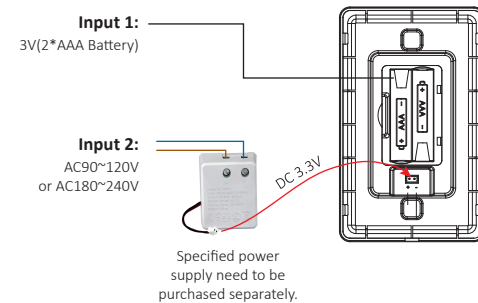


5. Link / Unlink

Linking Instructions

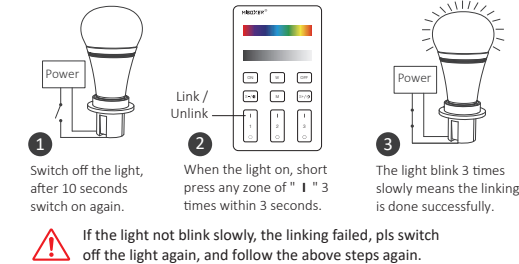

Unlinking Instructions

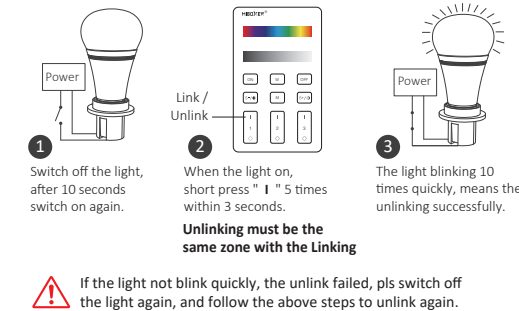

6. Attention

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.



Made in China