


Changing the Administrator Passcode

For security reasons, it is recommended that the default administrator passcode be changed. To change the admin passcode:

- 1: From the **Settings** screen, tap the **Passcode** option.
- 2: Enter the new passcode desired (must be 6 digits) and then enter the same passcode in the second field. Tap **CONFIRM**.
- 3: Tap the **OK** button once the success message box is displayed.
- 4: Tap the lock icon to exit the settings screen.

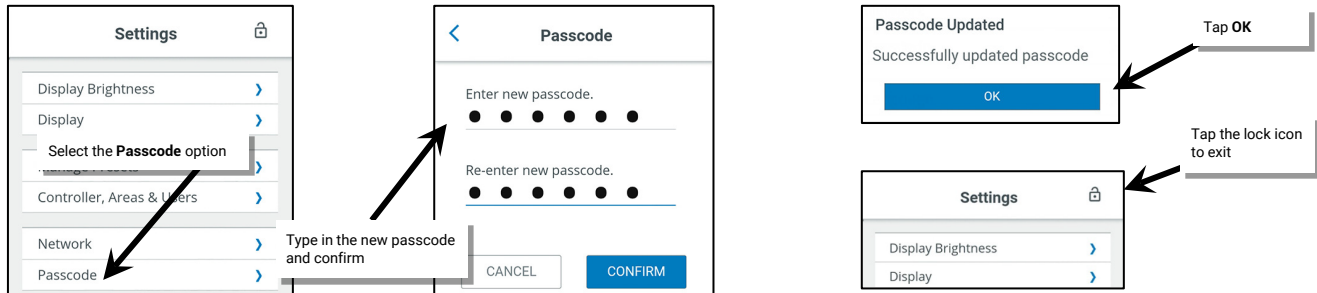



The new passcode must now be used for administrative functions. The default passcode will no longer be valid.

Performing a Factory Reset

A factory reset will erase the current touchscreen setup and return the device to factory defaults. Use it with caution!

- 1: From the **Settings** screen, tap the **Factory Reset** option.
- 2: Tap the **FACTORY RESET** link.
- 3: Tap the **RESET** option when prompted to confirm.

The display will show the blue screen and then request the passcode. Enter the default administrative passcode 266737⁽³⁸²⁾ to begin the setup process. Reconfigure the touchscreen using the steps outlined in this chapter.

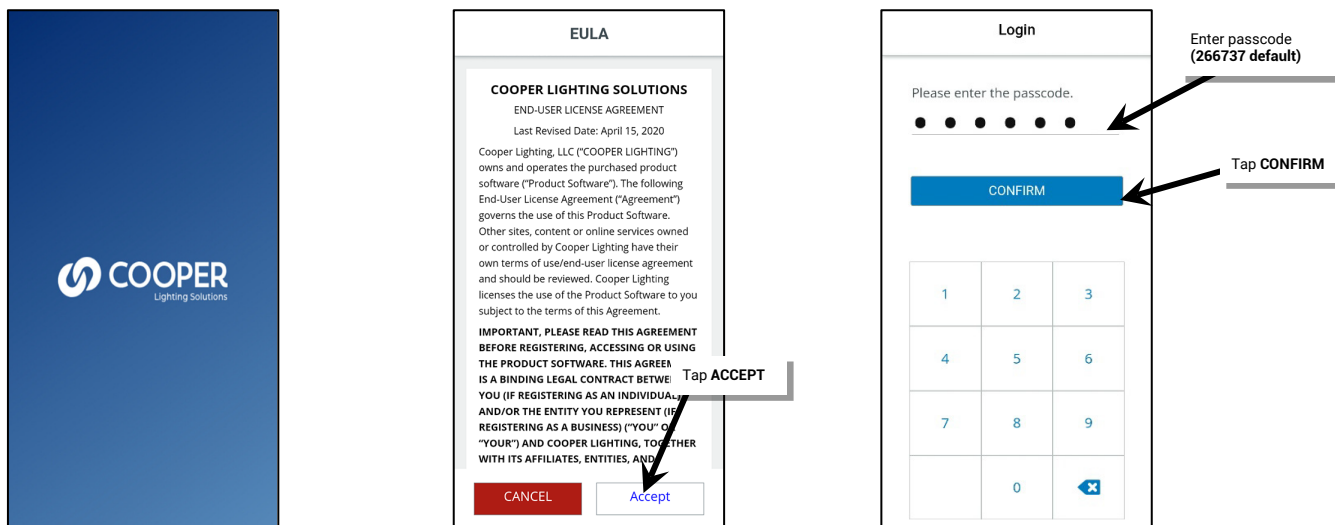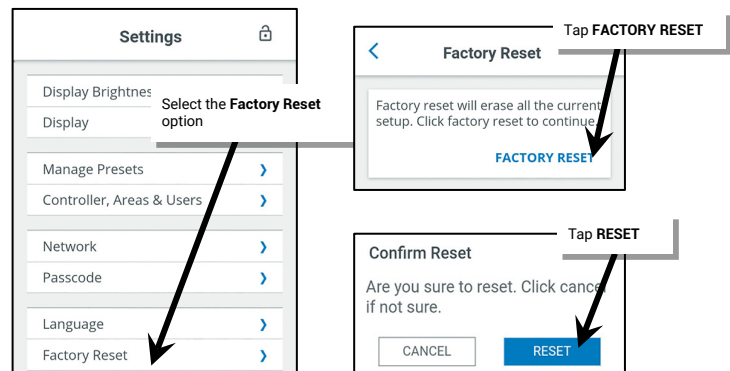

³⁸² For security, it is recommended that default passcode be changed once the initial touchscreen configuration is complete. Refer to "Changing the Administrator Passcode" on page 334 for step-by-step instructions. In previous touchscreen versions, the default passcode was 328661.

IC Caution:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions::

- (1) this device may not cause interference,
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class [B] digital apparatus complies with Canadian ICE-003.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

L'appareil a été évalué pour répondre aux exigences générales d'exposition RF.

L'appareil peut être utilisé en condition d'exposition portable sans restriction.

The device for operation in the band 5150–5350 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

les dispositifs fonctionnant dans la bande de 5150 à 5350MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;



TSC-E-7 WaveLinx Touchscreen 7 inch

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

FCC ID: 2AKCY-TSCE7