


Quick Guide

Note Plus

1. Product Overview

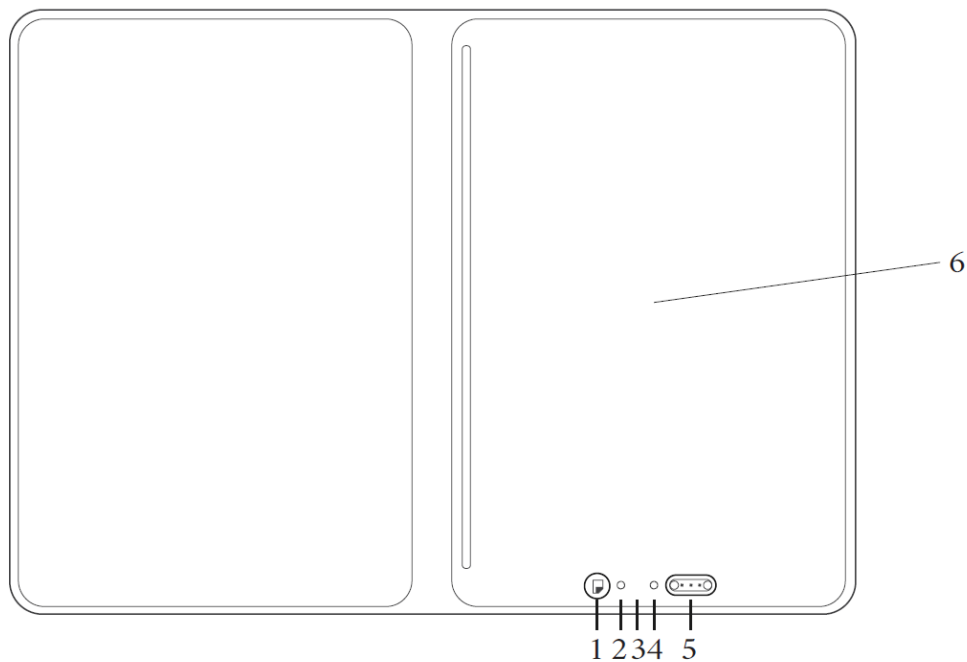

1. Multi-function Button

- a. Single-click for page-turning
- b. Press and hold the multi-function button for 3 seconds to activate Bluetooth pairing mode.
- c. In sleep mode, single-click to power on

2. Status indicator light

3. Hidden reset button

4. Power indicator light

5. Charging port

6. Writing sensing area

Note:

- a. You must write within the right-side writing sensing area for content to

be recorded.

b. Use an A5 notebook with a thickness no greater than 8mm.

Power On

Open the Note Plus device, and when the pen is in the sensing area, the status indicator light will turn green.

Sleep Mode

- 1) The device will automatically enter sleep mode when closed.
- 2) After powering on the Note Plus device, it will automatically enter sleep mode after 15 minutes of inactivity. Press the Multi-function Button once or close and reopen the device to wake it up.
- 3) The default sleep time is 15 minutes, which can be adjusted in the app from 5 to 30 minutes.
- 4) In sleep mode, no green light will be shown when writing in the sensing area, and the pen strokes will not be stored.

Status Indicator Light

Working Status	LED On Status
Handwriting Detected	Green Light Turns On
Single-press the Multi-function Button to Turn the Page	Green Light Flashes Three Times
Import Offline Notes	Green Light Stays On During Import, Then Turns Off Upon Completion
Long-press the Multi-function Button for 3 Seconds to Enter Bluetooth Pairing Mode	Blue Light Flashes Rapidly
Bluetooth Connected Successfully	Blue Light Stays On for 3 Seconds, Then Turns Off

Power indicator light

Working Status	LED On Status
Low Battery ($\leq 10\%$)	Red Light Flashes Continuously
Charging	Red Light Stays On
Fully Charged	Green Light Stays On

Note:

In working/boot state, press the reset button for 3 seconds to reset and restart. Status indicator light turns green, power indicator light turns red, flashing three times before turning off.

2.How to Connect Note Plus to a Mobile Phone

Step 1:

Download and install the “Note Plus” APP



You can download and install the “Note Plus” app from Google Play or the App Store.

Step 2:

For first-time device connection:


1. Turn on Bluetooth on your phone and open the APP. For iOS users, go to Settings > APP > Note Plus to enable Bluetooth permissions.
2. Long press the multi-function button for 3 seconds until the blue light flashes quickly to enter Bluetooth pairing mode.
3. On the app, select “Note Plus” from the Bluetooth Connection page.
4. When the message “Note Plus Connected” appears, it means the connection is successful, and the status indicator light will turn blue, then

automatically turn off after 3 seconds. The device enters real-time transmission mode.

For already paired devices:

1. The device will automatically connect when the APP and Note Plus are both open, and a slow-flashing blue light will appear.
2. When the app is connected to Note Plus, the icon in the top right corner

of the home page will show




, if not connected, it will show



3. If the Bluetooth does not connect automatically, tap the icon in the top

right corner



to manually enter the Bluetooth connection page.

3. Note Plus Usage Instructions

1.Offline Notes

You can write notes immediately after opening the Note Plus device. When the device is not connected to the app, the written content is stored locally. To create a new page in the notebook, click the Multi-function Button when turning the page. The device can store up to 50 pages of offline notes.

2.Real-time Synchronization

When Note Plus is connected to the app, the content written on the notebook will be displayed in real-time on the app' s editing page. Click the Multi-function Button or press the "New Page" icon in the app to create a new


page in real-time.

3.Import Offline Notes

Once the Note Plus device is successfully connected to the app, if there are offline notes on the device, the app will prompt you with a pop-up. Click "Import" to upload the offline notes to the app. Once the import is complete, the offline notes on the device will be automatically cleared, freeing up device memory. **During the import process, the green light will stay on. Do not write during this time, as the device will not record or store the input.**

4.Reset Note Plus

If the device is not working properly, long press the hidden reset button for 3 seconds. This will not delete offline notes stored in the device.

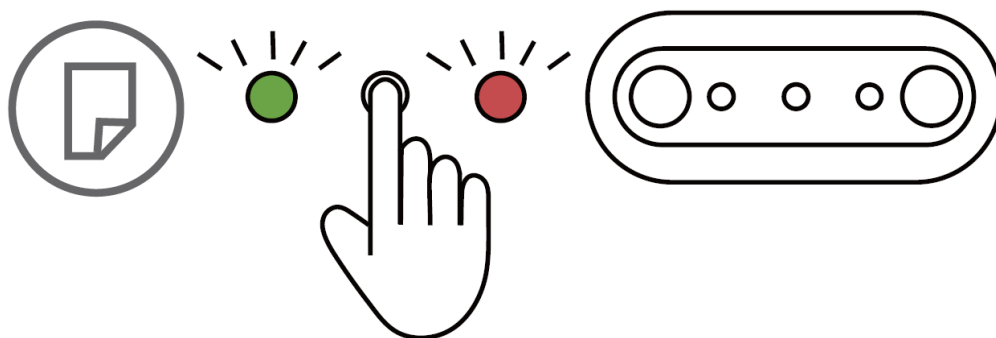


5.Pen Nib Replacement

Use the pen clip to gently remove the old pen nib and insert a new one.



6.Charging Cable

The charging cable is a magnetic charging cable developed by XPPen.



7. Safety Instructions

This manual uses the following safety symbols to ensure the correct and safe use of the XPPen Note Plus product. Please read and strictly follow all safety precautions.

Device Placement Requirements

- Avoid placing the device on unstable surfaces

Do not use the device on sloped, unstable, or vibrantly shaking surfaces to prevent it from falling and getting damaged.

- Do not place heavy objects on the device

Avoid applying excessive pressure, stepping on, or leaning on the device to prevent structural damage.

- Keep the product out of reach of infants and young children

Accessories such as the stylus and pen holder may pose a choking hazard to infants and children. Please store all accessories safely.

Environmental Temperature and Humidity

- Storage temperature range: 5°C to 40°C

Avoid storing the device in environments with sudden temperature fluctuations to prevent accelerated component aging. Do not place heavy objects on cables or expose them to overheated environments, as this could lead to fire, electric shock, or product failure. If the cable is damaged, stop

using it and contact XPPen Support.

Device Maintenance Instructions

- Do not attempt to disassemble the product

Tampering may result in electric shock, fire, or other safety hazards, and will void the warranty.

- Cleaning Instructions

Do not use alcohol, thinners, or other organic solvents for cleaning, as this may cause material degradation.

- Water and Moisture Protection

Keep the device away from all liquids. Liquid ingress will result in permanent damage to the device.

- Charging Cable Usage Instructions

Do not place heavy objects on the charging cable or expose it to overheated environments, as this may lead to fire, electric shock, or product failure. If the charging cable is damaged, stop using it and contact XPPen Support.

Use only the dedicated charging cable designed for this product. Using alternative cables may cause the product to malfunction or be damaged. Damage caused by using non-compatible charging cables will not be covered under warranty.

If you have any questions, please contact us via the following:

Website: www.xp-pen.com

Email: service@xp-pen.com

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

FCC ID: 2AKDT-CT860B

