



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2018-07-06

Test Report

Report No.: CQASZ20250501057E-04

Applicant: Shenzhen Kean Digital Co., Ltd.

Address of Applicant: Room 1001, Rujun Building, No. 105, Zhongxing Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China 518129

Equipment Under Test (EUT):

Product: Wireless Home Base

Model No.: N54WHF, N54WHP, N54WHQ, N54WHR, N54WHS, N58WHP, N58WHQ, N58WHR, N58WHS, N94WHF, N94WHP, N94WHQ, N94WHR, N94WHS, N98WHF, N98WHP, N98WHQ, N98WHS

Test Model No.: N54WHF

Brand Name: N/A

FCC ID: 2AKL2N54WHF

Standards: 47 CFR Part 15, Subpart E
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Date of Receipt: 2025-05-15

Date of Test: 2025-05-15 to 2025-11-14

Date of Issue: 2025-11-14

Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above.

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250501057E-04	Rev.01	Initial report	2025-09-28

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2020; KDB789033	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.207	ANSI C63.10-2020; KDB789033	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.407 (a)	ANSI C63.10-2020; KDB789033	PASS
Emission Bandwidth	47 CFR Part 15 Subpart C Section 15.407 (a)(e)	ANSI C63.10-2020; KDB789033	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	ANSI C63.10-2020; KDB789033	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.209 & 15.407(b)	ANSI C63.10-2020; KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	ANSI C63.10-2020; KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	ANSI C63.10-2020; KDB789033	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application


3 Content

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENT	4
4 TEST REQUIREMENT	5
4.1 TEST SETUP	5
4.1.1 For Conducted test setup	5
4.1.2 For Radiated Emissions test setup	5
4.1.3 For Conducted Emissions test setup	6
4.2 TEST ENVIRONMENT	6
4.3 TEST CONDITION	7
5 GENERAL INFORMATION	9
5.1 CLIENT INFORMATION	9
5.2 GENERAL DESCRIPTION OF EUT	9
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	10
5.4 DESCRIPTION OF SUPPORT UNITS	11
5.5 TEST CONFIGURATION	12
5.6 TEST LOCATION	13
5.7 TEST FACILITY	13
5.8 DEVIATION FROM STANDARDS	13
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	13
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	13
5.11 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	13
6 EQUIPMENT LIST	14
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	15
Appendix A): Emission Bandwidth	16
Appendix B): Maximum Conduct Output Power	54
Appendix C): Maximum Power Spectral Density	133
Appendix D): Band Edge Measurements	171
7.1.1 Test Result B1/2/3	173
7.1.2 Test Result B4	174
7.1.3 Test Graphs B1/2/3	177
7.1.4 Test Graphs B4	192
Appendix E): Frequency Stability	200
Appendix F): Antenna Requirement	202
Appendix G): Operation in the absence of information to the transmit	203
Appendix H): AC Power Line Conducted Emission	204
Appendix I): Restricted bands around fundamental frequency (Radiated Emission)	207
Appendix J): Radiated Spurious Emissions	217
8 PHOTOGRAPHS - EUT TEST SETUP	230
8.1 RADIATED SPURIOUS EMISSION	230
8.2 CONDUCTED EMISSION	231
8.3 RF CONDUCTED MEASUREMENT	232
9 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	233

4 Test Requirement

4.1 Test setup

4.1.1 For Conducted test setup

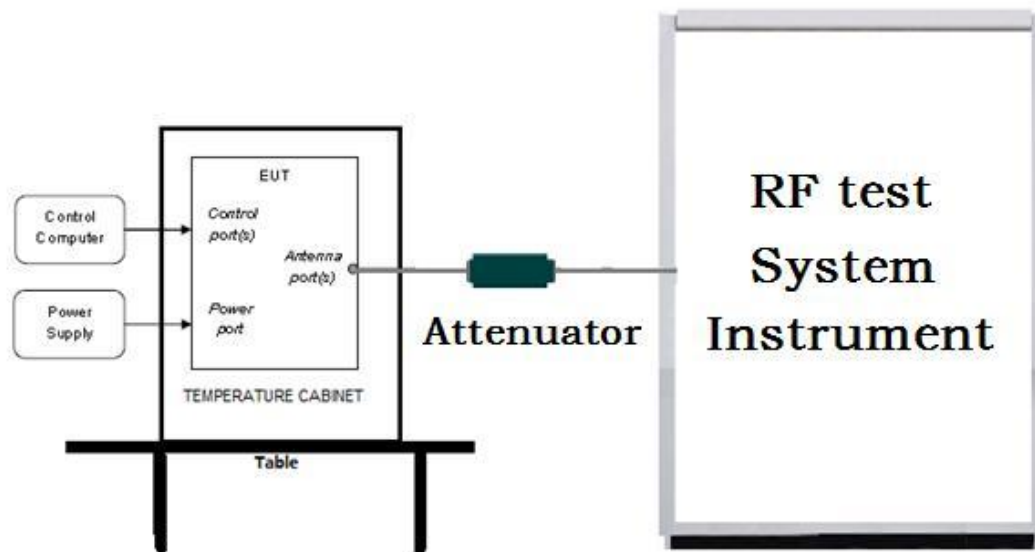

4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

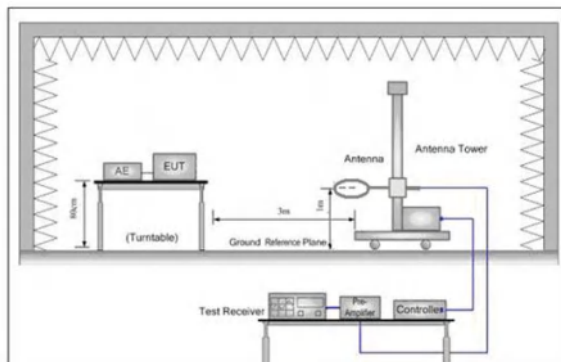


Figure 1. Below 30MHz

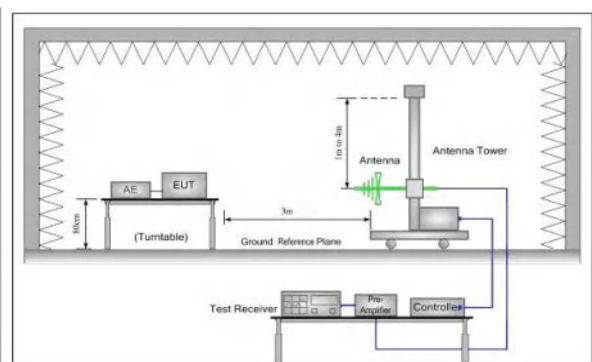


Figure 2. 30MHz to 1GHz


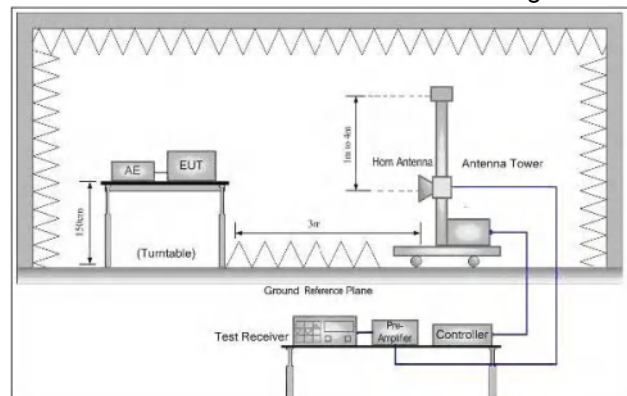


Figure 3. Above 1GHz

4.1.3 For Conducted Emissions test setup

Conducted Emissions setup

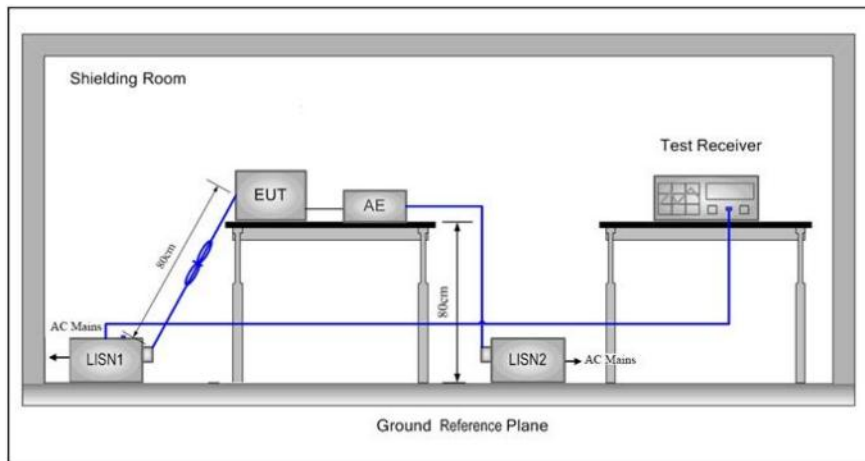


4.2 Test Environment

Operating Environment:		
Conducted Emissions:		
Temperature:	25.6 °C	
Humidity:	60 % RH	
Atmospheric Pressure:	1009 mbar	
Radiated Emissions:		
Temperature:	25.5 °C	
Humidity:	54 % RH	
Atmospheric Pressure:	1009mbar	
Radio conducted item test (RF Conducted test room):		
Temperature:	25.3 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1009 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	5
TL/VL	-30	5.5
TH/VL	50	5.5
TL/VH	-30	4.5
TH/VH	50	4.5
Remark:		
1)The EUT just work in such extreme temperature of -30 °C to 50 °C and the extreme voltage of 6.84V to 8.36V, so here the EUT is tested in the temperature of -30 °C to 50 °C and the voltage of 6.84V to 8.36V.		
2)VN: Normal Voltage; TN: Normal Temperature;		
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;		
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.		

4.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac/ax(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac/ax(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11n/ac/ax(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac/ax(20M)	5250MHz ~5350 MHz	Channel 52	Channel 56	Channel 64
		5260MHz	5280MHz	5320MHz
802.11n/ac/ax(40M)	5250MHz ~5350 MHz	Channel 54	N/A	Channel 62
		5270MHz	N/A	5310MHz
802.11n/ac/ax(80M)	5250MHz ~5350 MHz	N/A	Channel 58	N/A
		N/A	5290MHz	N/A
802.11a/n/ac/ax(20M)	5470MHz ~5725 MHz	Channel 100	Channel 116	Channel 144
		5500MHz	5580MHz	5720MHz
802.11n/ac/ax(40M)	5470MHz ~5725 MHz	Channel 102	Channel 110	Channel 142
		5510MHz	5550MHz	5710MHz
802.11n/ac/ax(80M)	5470MHz ~5725 MHz	Channel 106	N/A	Channel 138
		5530MHz	N/A	5690MHz
802.11a/n/ac/ax(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac/ax(40M)	5725MHz ~5850 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11n/ac/ax(80M)	5725MHz ~5850 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

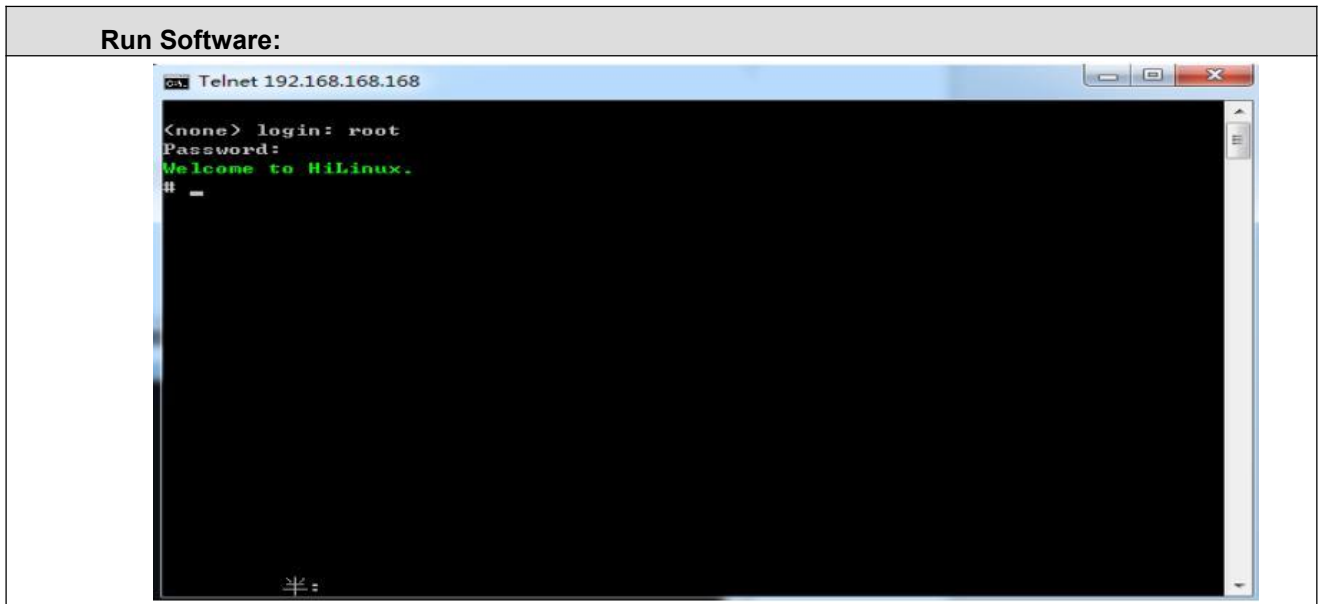

Test mode:

Pre-scan under all rate at lowest channel for Ant1

Through Pre-scan, 6Mbps is the worst case of 802.11a (20M); MCS0 is the worst case of 802.11n (20M); MCS0 is the worst case of 802.11ac (20M); MCS0 is the worst case of 802.11ax (20M);MCS0 is the worst case of 802.11n(40M); MCS0 is the worst case of 802.11ac (40M); MCS0 is the worst case of 802.11ax(40M);MCS0 is the worst case of 802.11n(80M); MCS0 is the worst case of 802.11ac (80M); MCS0 is the worst case of 802.11ax(80M)

5 General Information

5.1 Client Information

Applicant:	Shenzhen Kean Digital Co., Ltd.
Address of Applicant:	Room 1001, Rujun Building, No. 105, Zhongxing Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China 518129
Manufacturer:	Shenzhen Kean Digital Co., Ltd.
Address of Manufacturer:	Room 1001, Rujun Building, No. 105, Zhongxing Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China 518129
Factory:	Shenzhen Kean Digital Co., Ltd.
Address of Factory:	Room 1001, Rujun Building, No. 105, Zhongxing Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China 518129

5.2 General Description of EUT

Product Name:	Wireless Home Base
Model No.:	N54WHF, N54WHP, N54WHQ, N54WHR, N54WHS, N58WHP, N58WHQ, N58WHR, N58WHS, N94WHF, N94WHP, N94WHQ, N94WHR, N94WHS, N98WHF, N98WHP, N98WHQ, N98WHS
Test Model No.:	N54WHF
Trade Mark:	N/A
Software Version:	V1.0
Hardware Version:	V1.0
RF Model:	AIC8800D40L
EUT Power Supply:	Adapter: Model:CS-0501000 Input:100-240V~0.5A Max.50/60Hz Output:5V $\overline{\text{---}}$ 1.0A
EUT Supports Radios application:	U-NII-1: 5.15-5.25GHz; U-NII-2a: 5.25-5.35GHz U-NII-2c: 5.47-5.725GHz; U-NII-3: 5.725-5.850GHz
EUT Type:	Client devices

5.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/n/ac/ax(20M): 5150MHz ~5250 MHz IEEE802.11n/ac/ax(40M): 5150MHz ~5250 MHz IEEE802.11ac/ax(80M): 5150MHz ~5250 MHz IEEE 802.11a/n/ac/ax(20M): 5250MHz ~5350 MHz IEEE802.11n/ac/ax(40M): 5250MHz ~5350 MHz IEEE802.11ac/ax(80M): 5250MHz ~5350 MHz IEEE 802.11a/n/ac/ax(20M): 5470MHz ~5725 MHz IEEE802.11n/ac/ax(40M): 5470MHz ~5725 MHz IEEE802.11ac/ax(80M): 5470MHz ~5725 MHz IEEE 802.11a/n/ac/ax(20M): 5725MHz ~5850 MHz IEEE802.11n/ac/ax(40M): 5725MHz ~5850 MHz IEEE802.11ac/ax(80M): 5725MHz ~5850 MHz
Channel Numbers:	IEEE 802.11a/n/ac/ax(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac/ax(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac/ax(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac/ax(20M): 5250MHz ~5350MHz/ 4 channel IEEE 802.11n/ac/ax(40M): 5250MHz ~5350MHz/ 2 channel IEEE 802.11ac/ax(80M): 5250MHz ~5350MHz/ 1 channel IEEE 802.11a/n/ac/ax(20M): 5470MHz ~5725MHz/ 9 channel IEEE 802.11n/ac/ax(40M): 5470MHz ~5725MHz/ 4 channel IEEE 802.11ac/ax(80M): 5470MHz ~5725MHz/ 2 channel IEEE 802.11a/n/ac/ax(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac/ax(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac/ax(80M): 5725MHz ~5850MHz/ 1 channel
Type of Modulation:	IEEE for 802.11ax: OFDMA(1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11a/n/ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)
Sample Type:	☒ Mobile ☐ Portable
Test Software of EUT:	CMD
Antenna Type:	PCB antenna
Antenna gain:	2.43dBi@5GHz: Wi-Fi: U-NII-1 3.35dBi@5GHz: Wi-Fi: U-NII-2A 2.9dBi@5GHz: Wi-Fi: U-NII-2C 3.11dBi@5GHz: Wi-Fi: U-NII-3
Cable loss:	1.0 dB

Operation Frequency each of channel


(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210	/	/
(U-NII-2A) 5260MHz-5320MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
40MHz	54	5270	62	5310
80MHz	58	5290	/	/
(U-NII-2C) 5500MHz-5700MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	100	5500	104	5520
	108	5540	112	5560
	116	5580	132	5660
	136	5680	140	5700
	144	5720	/	/
40MHz	102	5510	110	5550
	134	5670	142	5710
80MHz	106	5530	138	5690
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825	/	/
40MHz	151	5755	159	5795
80MHz	165	5775	/	/

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

5.5 Test configuration

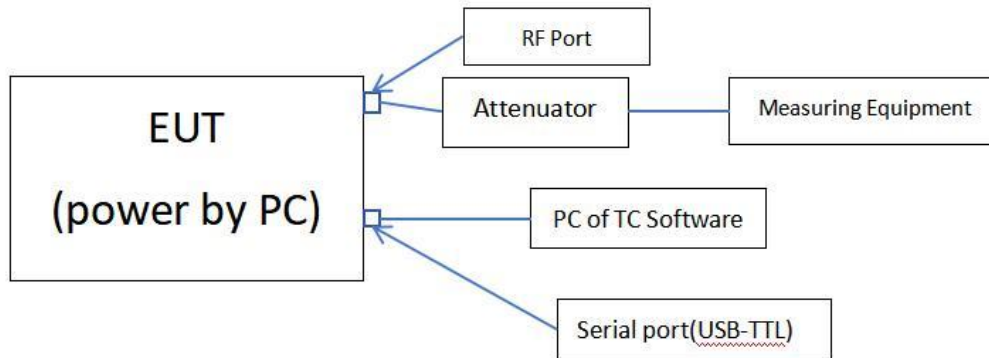

5.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.7 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	3×10^{-8}
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2 2025/8/31	2025/9/1 2026/8/30
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2024/9/2 2025/8/31	2025/9/1 2026/8/30
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Power meter	R&S	NRVD	CQA-029	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2 2025/8/31	2025/9/1 2026/8/30
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2 2025/8/31	2025/9/1 2026/8/30
LISN	R&S	ENV216	CQA-003	2024/9/2 2025/8/31	2025/9/1 2026/8/30
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2 2025/8/31	2025/9/1 2026/8/30
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2 2025/8/31	2025/9/1 2026/8/30

Test software:

	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

7 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15E	Subpart C-Intentional Radiators
2	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E

Appendix A): Emission Bandwidth

26dB Emission bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II C 1

6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)


Test Method: KDB 789033 D02 II C 2

Limit: ≥ 500 kHz

Test Procedure:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Setup Diagram

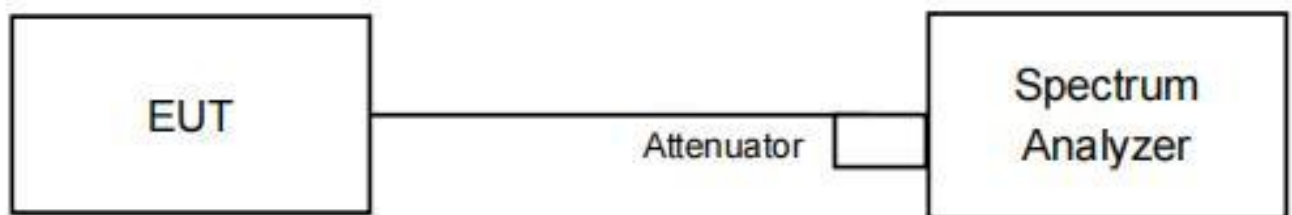

Result Table


TestMode	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	5180	20.68	5169.88	5190.56	---	---
	5200	20.48	5189.32	5209.80	---	---
	5240	20.60	5230.24	5250.84	---	---
	5260	20.92	5249.48	5270.40	---	---
	5280	20.96	5269.20	5290.16	---	---
	5320	20.32	5309.88	5330.20	---	---
	5500	20.88	5489.72	5510.60	---	---
	5580	20.64	5569.80	5590.44	---	---
	5700	19.60	5690.12	5709.72	---	---
	5745	19.80	5734.56	5754.36	---	---
	5785	19.60	5775.68	5795.28	---	---
	5825	21.08	5814.48	5835.56	---	---
11N20SISO	5180	20.80	5169.68	5190.48	---	---
	5200	20.96	5189.16	5210.12	---	---
	5240	21.20	5229.68	5250.88	---	---
	5260	20.48	5249.72	5270.20	---	---
	5280	21.16	5269.36	5290.52	---	---
	5320	21.20	5309.40	5330.60	---	---
	5500	21.12	5489.56	5510.68	---	---
	5580	21.24	5569.36	5590.60	---	---
	5700	19.92	5689.88	5709.80	---	---
	5745	20.92	5734.16	5755.08	---	---
	5785	20.36	5775.16	5795.52	---	---
	5825	21.52	5814.36	5835.88	---	---
11N40SISO	5190	39.76	5170.00	5209.76	---	---
	5230	40.40	5210.08	5250.48	---	---
	5270	39.84	5249.92	5289.76	---	---
	5310	39.68	5290.40	5330.08	---	---
	5510	39.92	5490.08	5530.00	---	---
	5550	40.56	5529.68	5570.24	---	---
	5670	40.16	5649.68	5689.84	---	---
	5755	50.72	5723.88	5774.60	---	---
	5795	38.16	5775.96	5814.12	---	---
	5825	21.32	5814.36	5835.88	---	---
11AC20SISO	5180	21.32	5169.52	5190.84	---	---

	5200	20.84	5189.16	5210.00	---	---
	5240	20.60	5229.80	5250.40	---	---
	5260	20.08	5249.76	5269.84	---	---
	5280	19.88	5269.76	5289.64	---	---
	5320	20.28	5309.80	5330.08	---	---
	5500	20.40	5489.88	5510.28	---	---
	5580	20.40	5569.84	5590.24	---	---
	5700	20.12	5689.96	5710.08	---	---
	5745	20.16	5734.52	5754.68	---	---
	5785	19.84	5775.36	5795.20	---	---
	5825	20.56	5814.72	5835.28	---	---
11AC40SISO	5190	39.12	5170.40	5209.52	---	---
	5230	40.96	5209.60	5250.56	---	---
	5270	40.32	5248.96	5289.28	---	---
	5310	39.76	5290.32	5330.08	---	---
	5510	39.52	5490.16	5529.68	---	---
	5550	40.08	5530.00	5570.08	---	---
	5670	40.16	5649.68	5689.84	---	---
	5755	39.84	5734.36	5774.20	---	---
	5795	38.96	5775.80	5814.76	---	---
11AC80SISO	5210	79.84	5170.16	5250.00	---	---
	5290	80.32	5249.36	5329.68	---	---
	5530	79.68	5490.16	5569.84	---	---
	5610	79.84	5570.16	5650.00	---	---
	5775	80.96	5733.88	5814.84	---	---
11AX20SISO	5180	20.32	5169.92	5190.24	---	---
	5200	20.08	5189.80	5209.88	---	---
	5240	20.12	5229.96	5250.08	---	---
	5260	20.28	5249.72	5270.00	---	---
	5280	20.12	5269.80	5289.92	---	---
	5320	20.12	5309.84	5329.96	---	---
	5500	20.32	5489.76	5510.08	---	---
	5580	20.32	5569.88	5590.20	---	---
	5700	20.04	5689.84	5709.88	---	---
	5745	20.04	5734.64	5754.68	---	---
	5785	19.48	5775.52	5795.00	---	---
	5825	20.40	5814.84	5835.24	---	---

11AX40SISO	5190	39.76	5170.00	5209.76	---	---
	5230	40.72	5209.68	5250.40	---	---
	5270	40.48	5249.52	5290.00	---	---
	5310	39.84	5290.08	5329.92	---	---
	5510	39.44	5490.64	5530.08	---	---
	5550	40.08	5529.92	5570.00	---	---
	5670	40.00	5649.60	5689.60	---	---
	5755	40.32	5733.80	5774.12	---	---
	5795	38.16	5775.88	5814.04	---	---
11AX80SISO	5210	80.32	5170.16	5250.48	---	---
	5290	80.64	5249.20	5329.84	---	---
	5530	79.68	5490.00	5569.68	---	---
	5610	79.68	5570.16	5649.84	---	---
	5775	80.32	5734.20	5814.52	---	---


Test Graph

11A_Ant1_5180

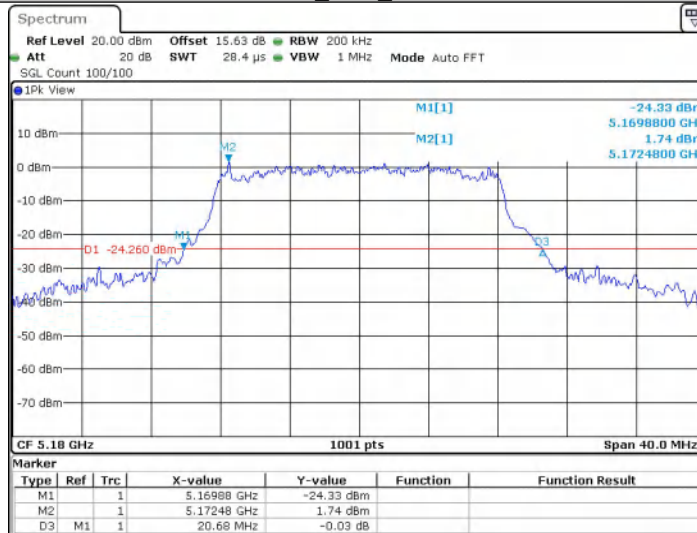


Date: 10 JUN 2025 16:53:09

11A_Ant1_5200

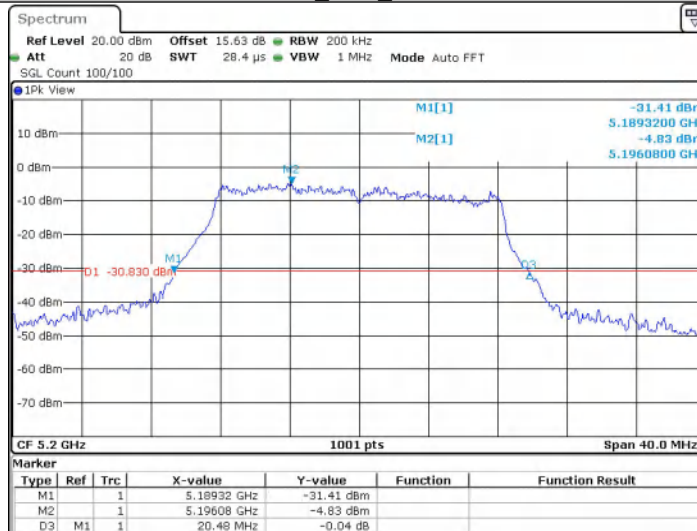


Date: 10 JUN 2025 16:56:00

11A_Ant1_5240

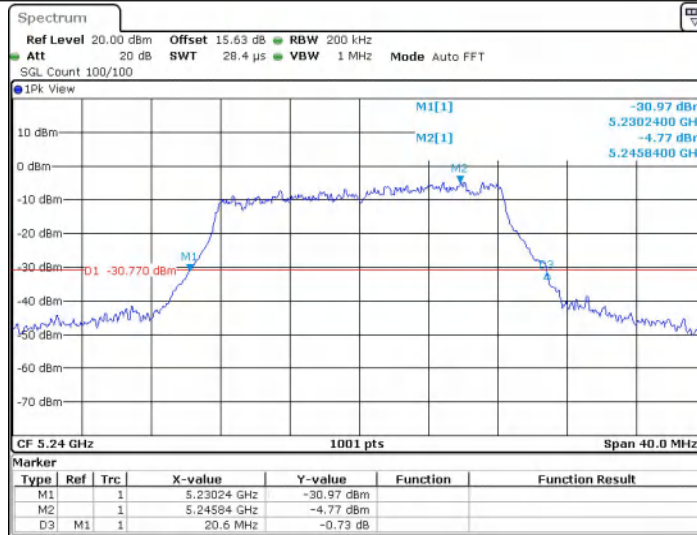


Date: 10 JUN 2025 16:58:15

11A_Ant1_5260

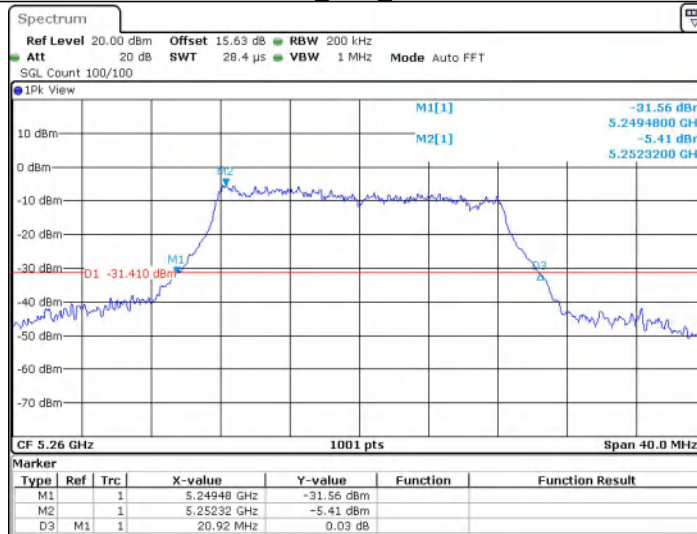


Date: 10 JUN 2025 17:17:27

11A_Ant1_5280

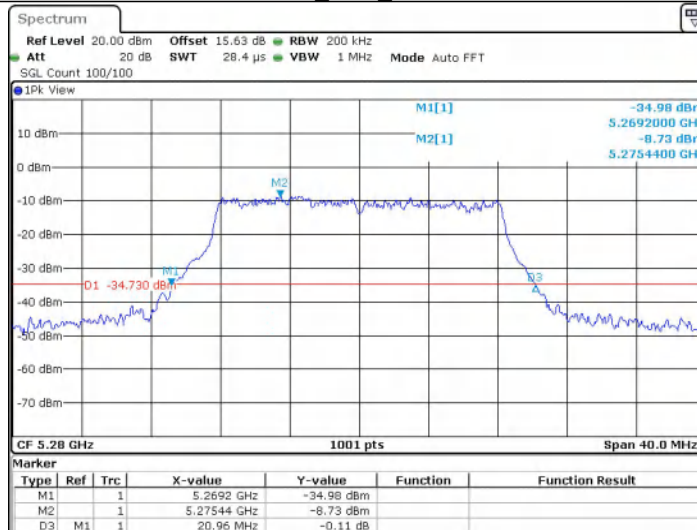


Date: 10 JUN 2025 17:18:38

11A_Ant1_5320

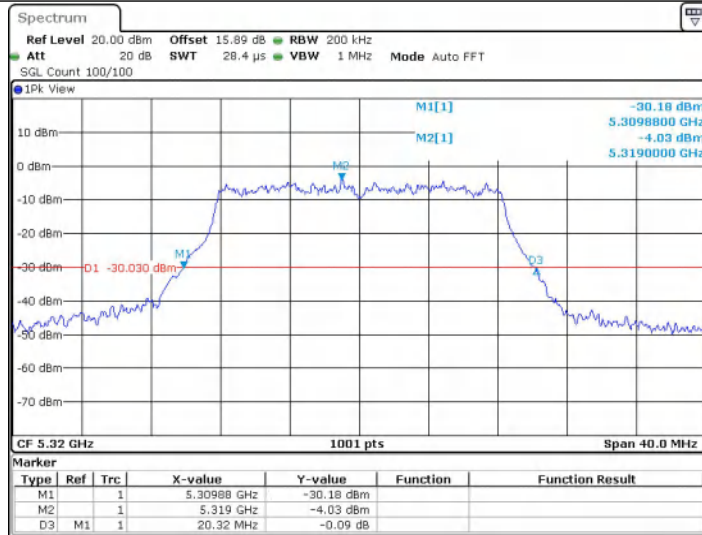


Date: 10 JUN 2025 17:19:43

11A_Ant1_5500

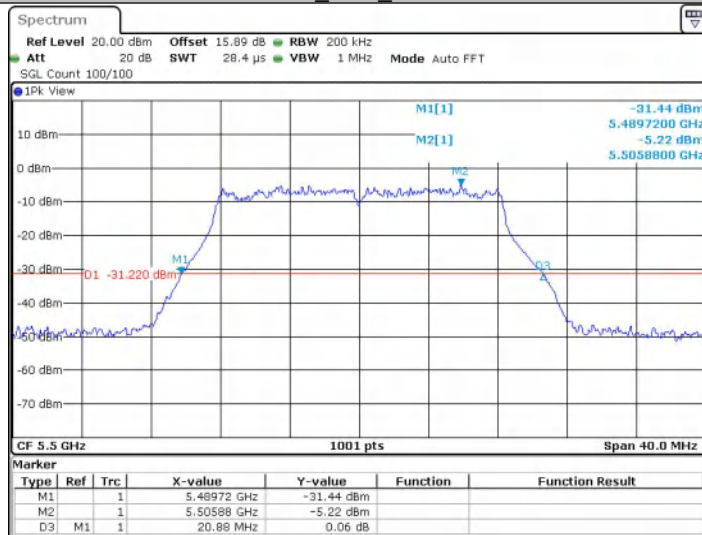


Date: 10 JUN 2025 17:24:03

11A_Ant1_5580

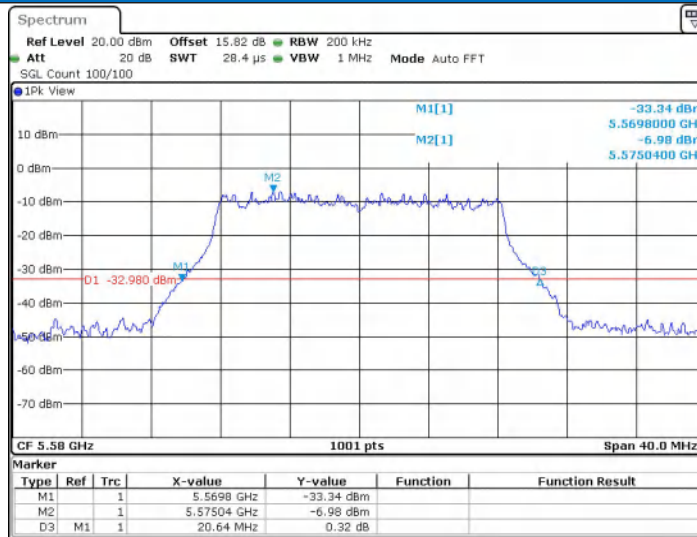


Date: 10 JUN 2025 17:25:56

11A_Ant1_5700

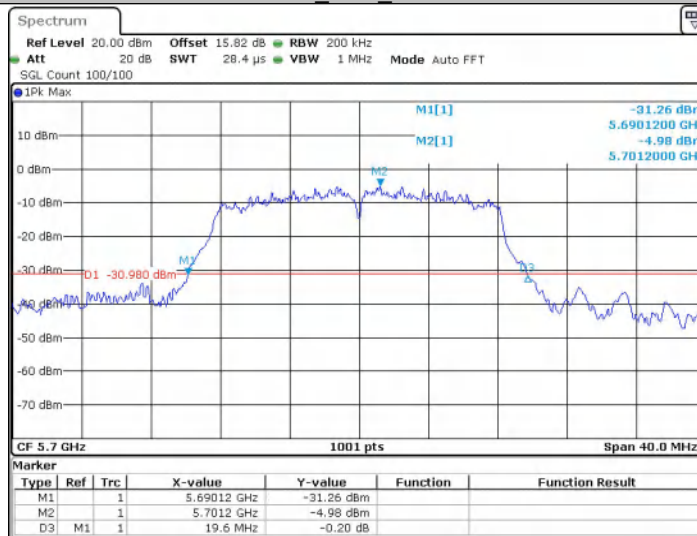


Date: 9 SEP 2025 12:39:08

11A_Ant1_5745

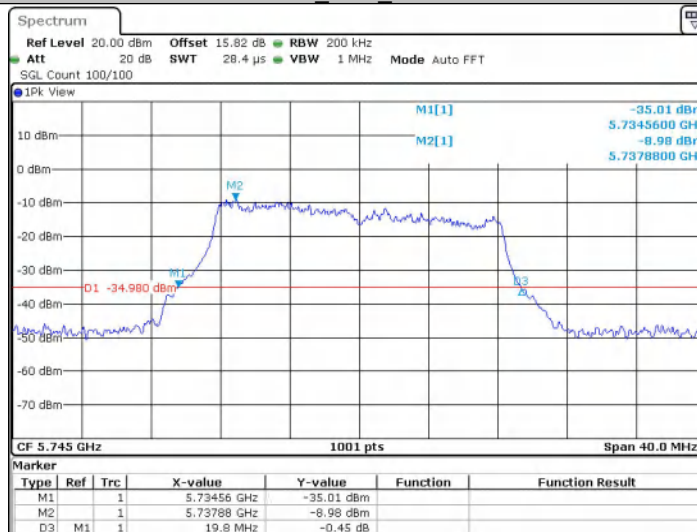


Date: 10 JUN 2025 17:36:17

11A_Ant1_5785

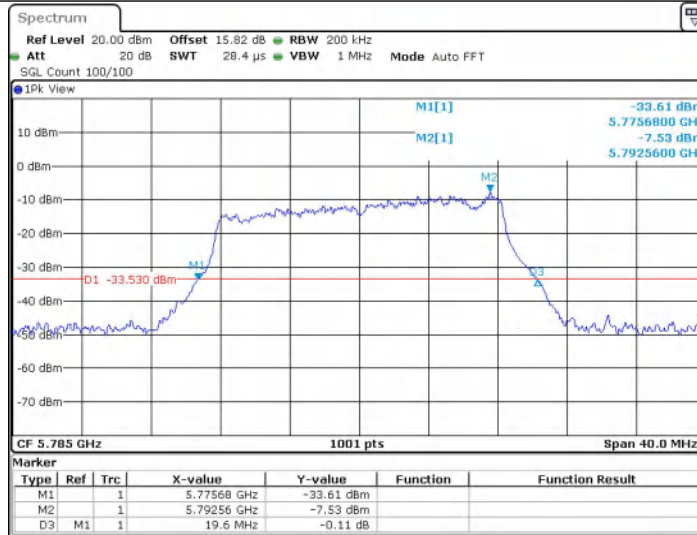


Date: 10 JUN 2025 17:42:41

11A_Ant1_5825

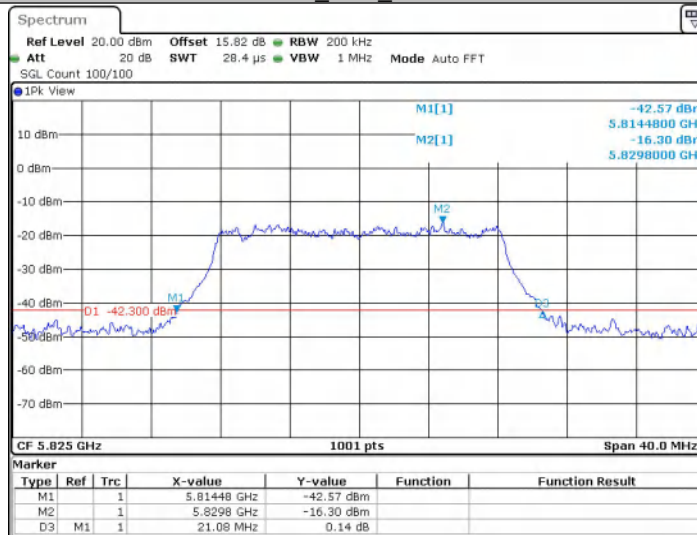


Date: 10 JUN 2025 17:44:34

11N20SISO_Ant1_5180

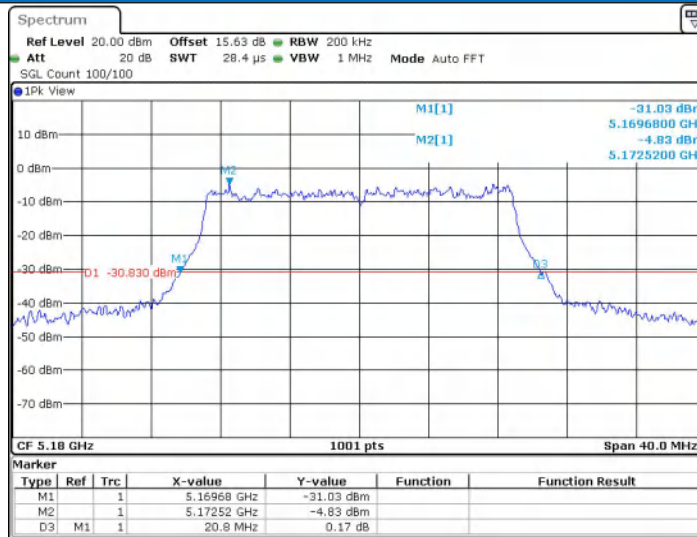


Date: 10 JUN 2025 17:52:53

11N20SISO_Ant1_5200

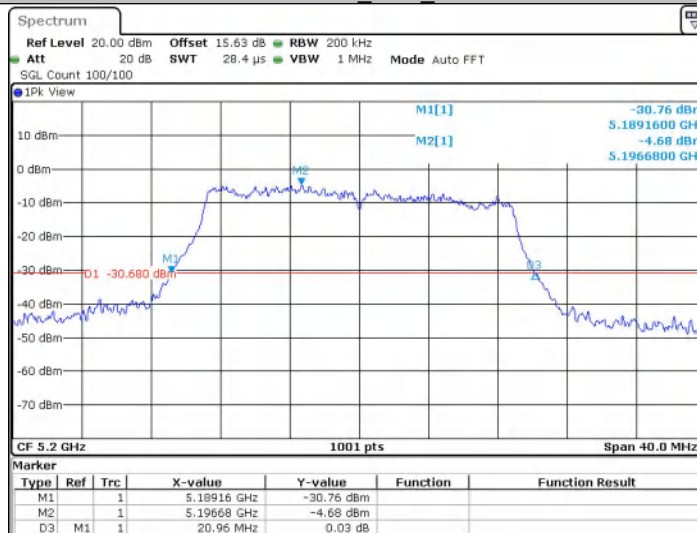


Date: 10 JUN 2025 17:55:49

11N20SISO_Ant1_5240

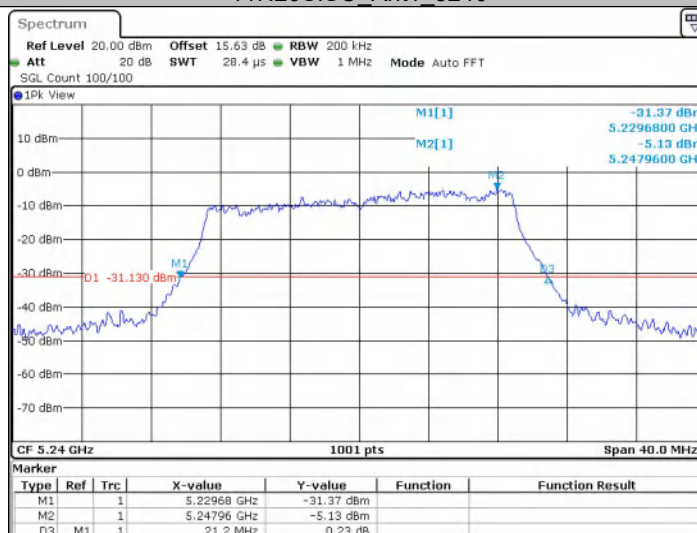


Date: 10 JUN 2025 17:57:34

11N20SISO_Ant1_5260

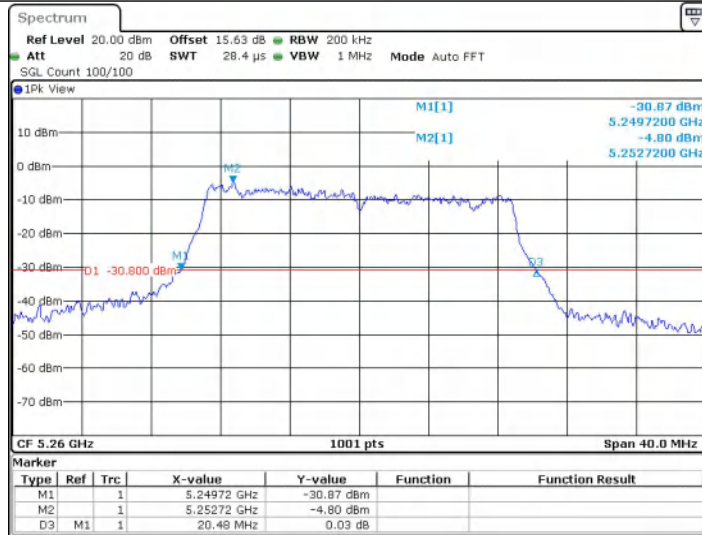


Date: 10 JUN 2025 18:00:35

11N20SISO_Ant1_5280

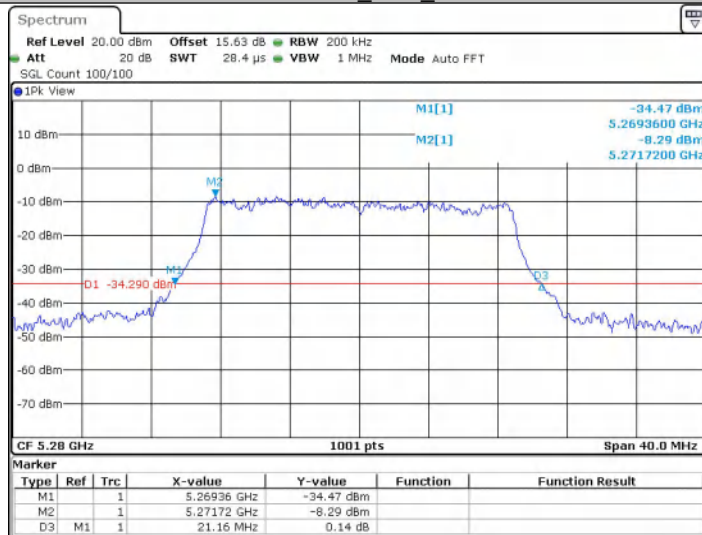


Date: 10 JUN 2025 18:07:48

11N20SISO_Ant1_5320

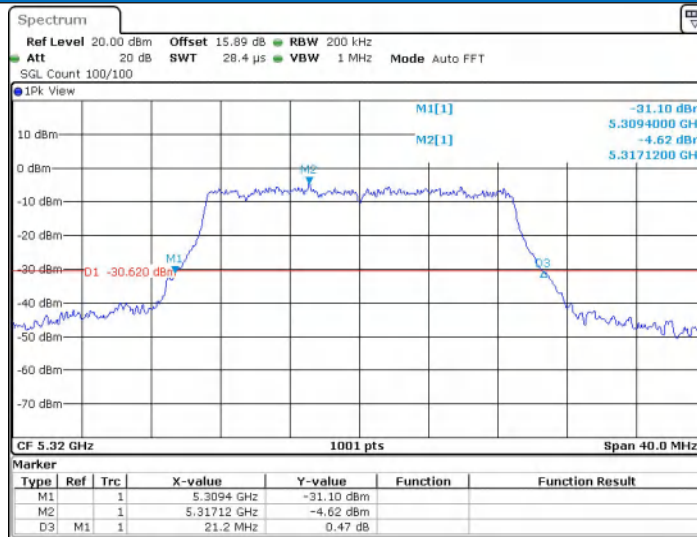


Date: 10 JUN 2025 18:08:57

11N20SISO_Ant1_5500

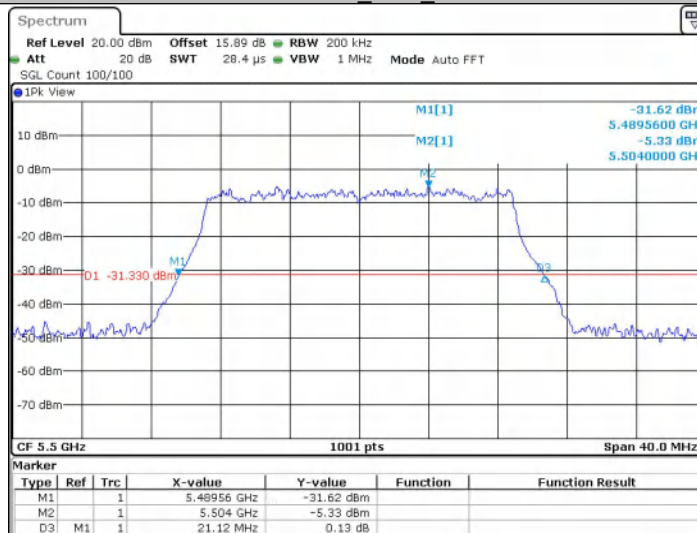


Date: 10 JUN 2025 18:10:44

11N20SISO_Ant1_5580

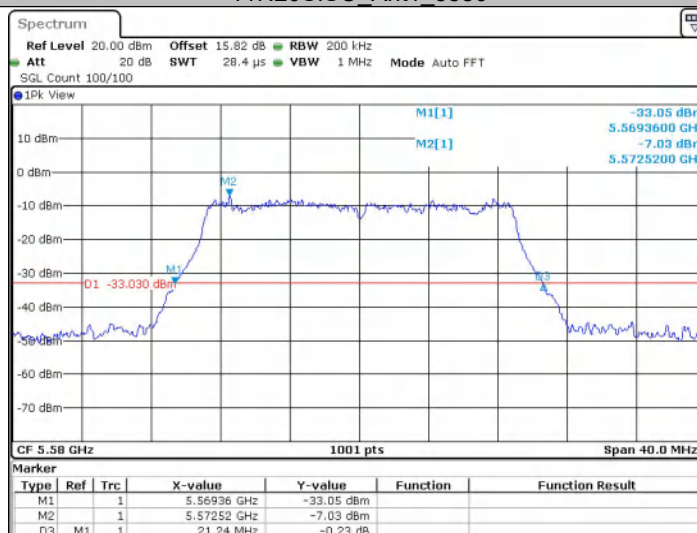


Date: 10 JUN 2025 18:12:48

11N20SISO_Ant1_5700

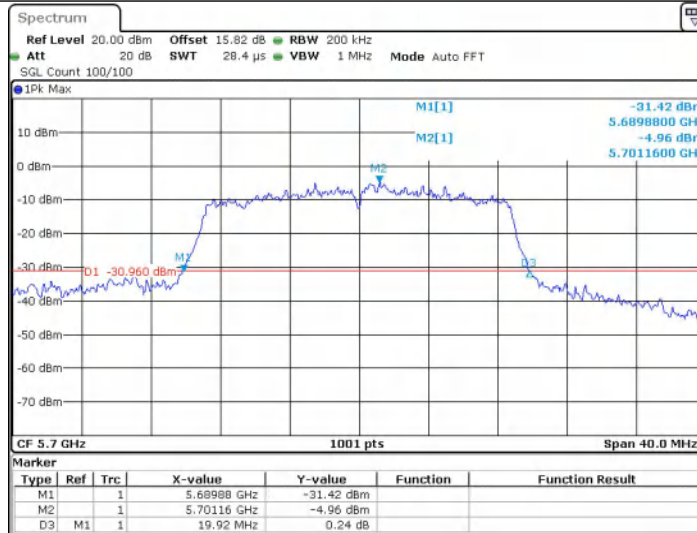


Date: 9 SEP 2025 12:51:44

11N20SISO_Ant1_5745

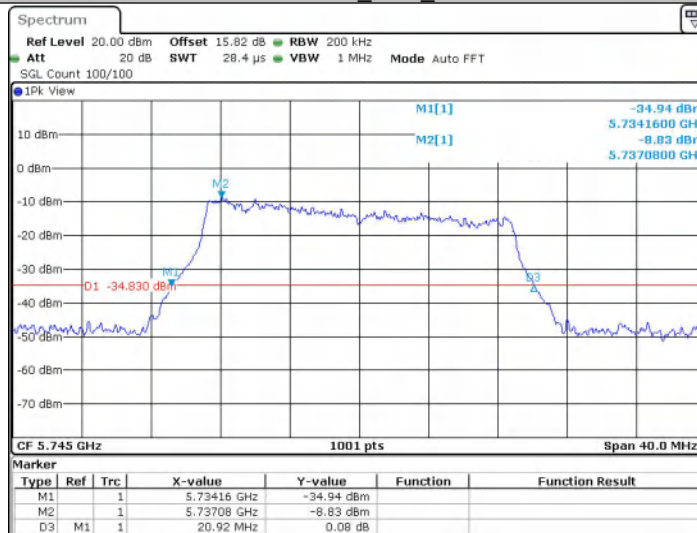


Date: 10 JUN 2025 18:15:50

11N20SISO_Ant1_5785

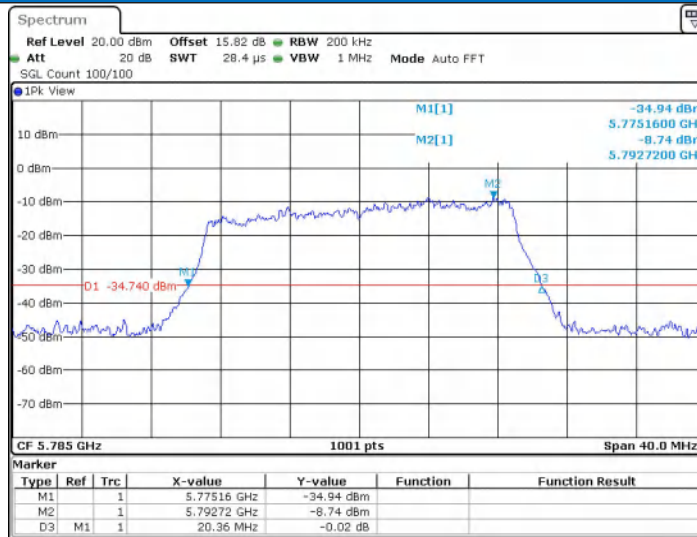


Date: 10 JUN 2025 18:20:38

11N20SISO_Ant1_5825

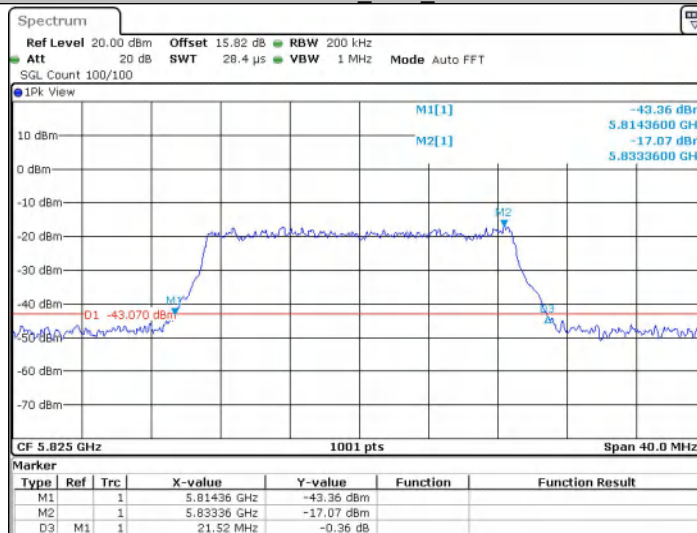


Date: 10 JUN 2025 18:22:14

11N40SISO_Ant1_5190

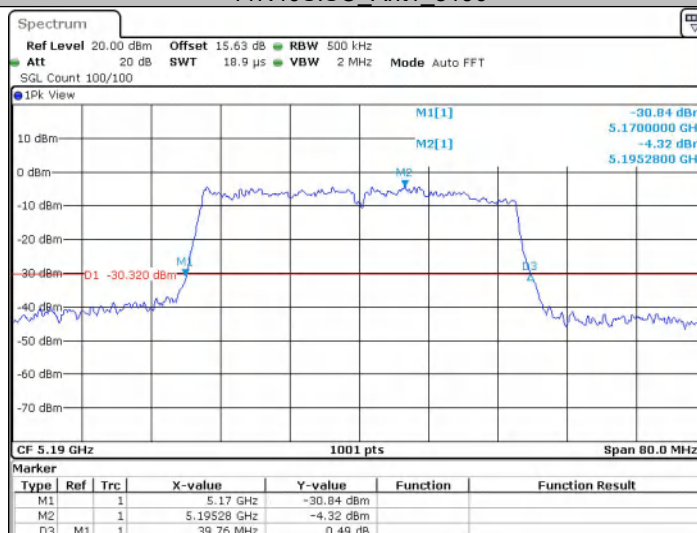


Date: 10 JUN 2025 18:23:45

11N40SISO_Ant1_5230

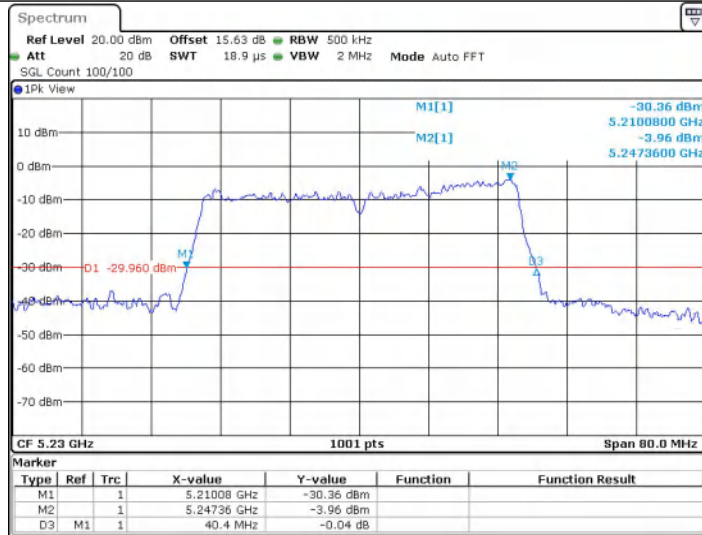


Date: 10 JUN 2025 18:28:13

11N40SISO_Ant1_5270

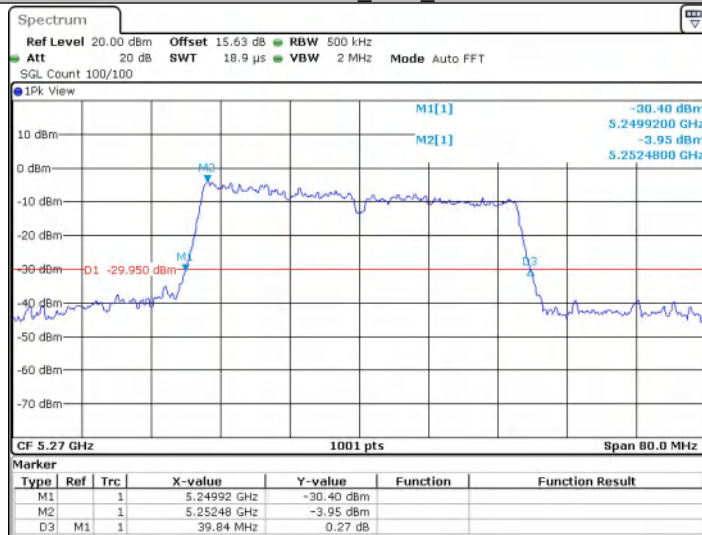


Date: 10 JUN 2025 18:29:39

11N40SISO_Ant1_5310

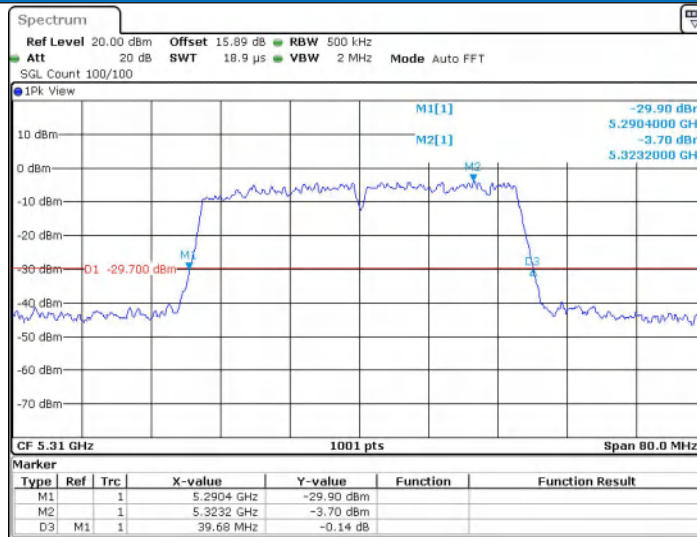


Date: 10 JUN 2025 18:30:50

11N40SISO_Ant1_5510

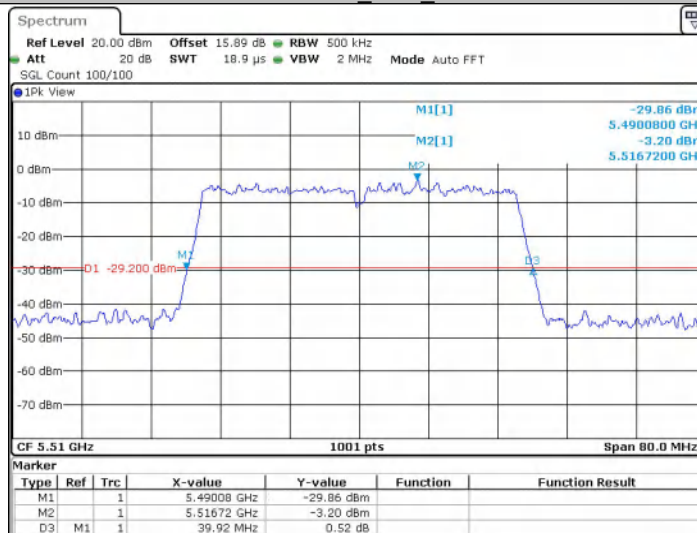


Date: 10 JUN 2025 18:35:51

11N40SISO_Ant1_5550

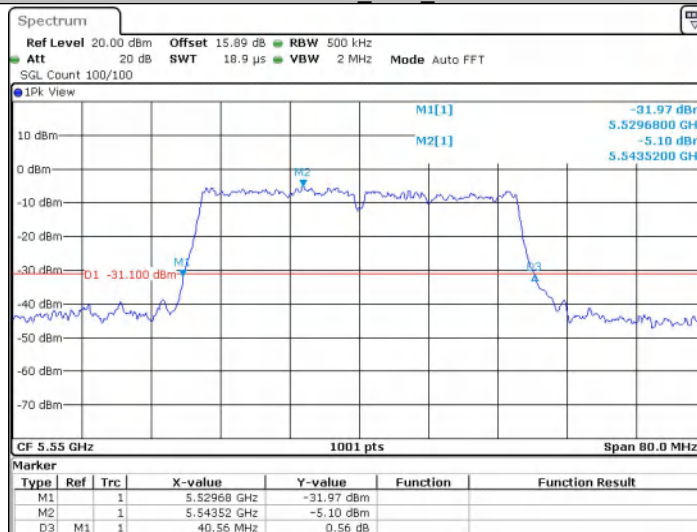


Date: 10 JUN 2025 18:38:32

11N40SISO_Ant1_5670

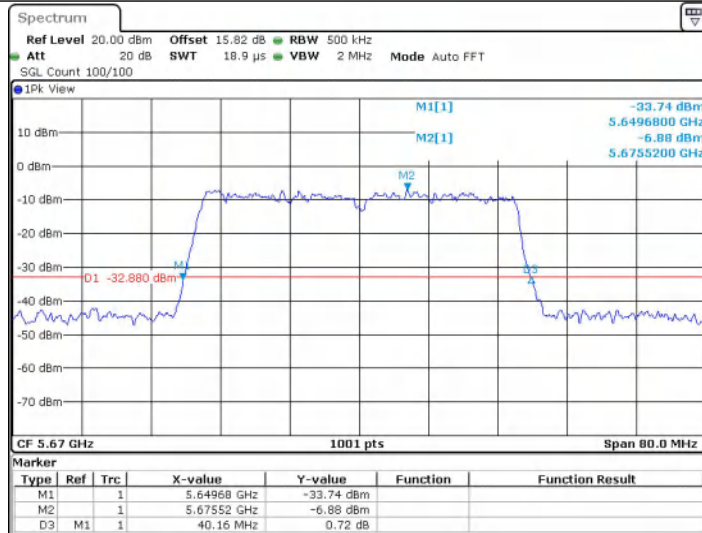


Date: 10 JUN 2025 18:39:51

11N40SISO_Ant1_5755

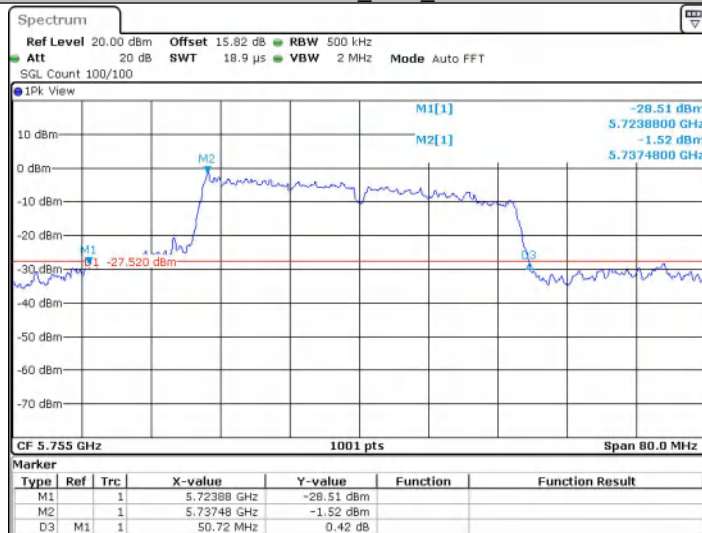


Date: 10 JUN 2025 18:42:25

11N40SISO_Ant1_5795

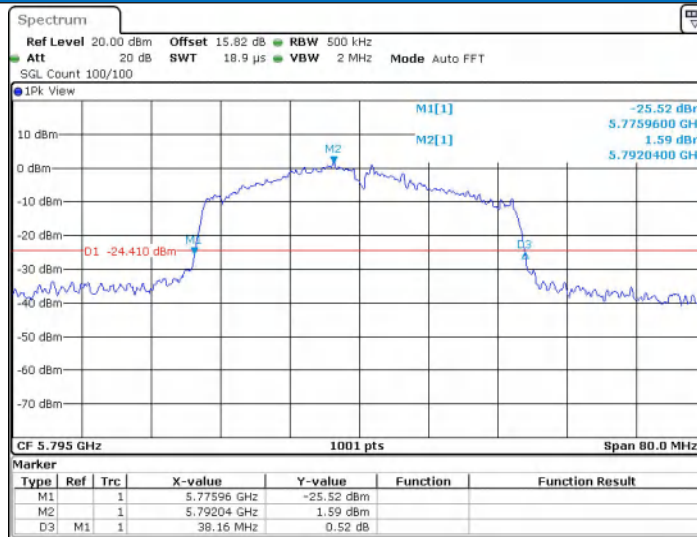


Date: 10 JUN 2025 18:43:58

11AC20SISO_Ant1_5180

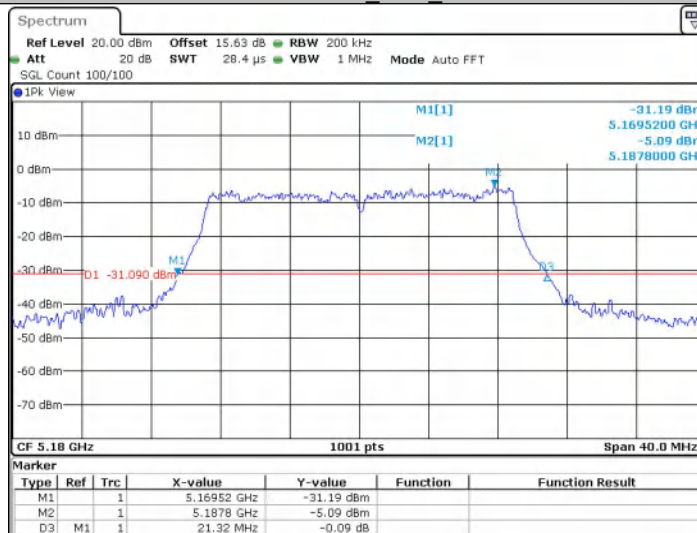


Date: 10 JUN 2025 18:45:51

11AC20SISO_Ant1_5200

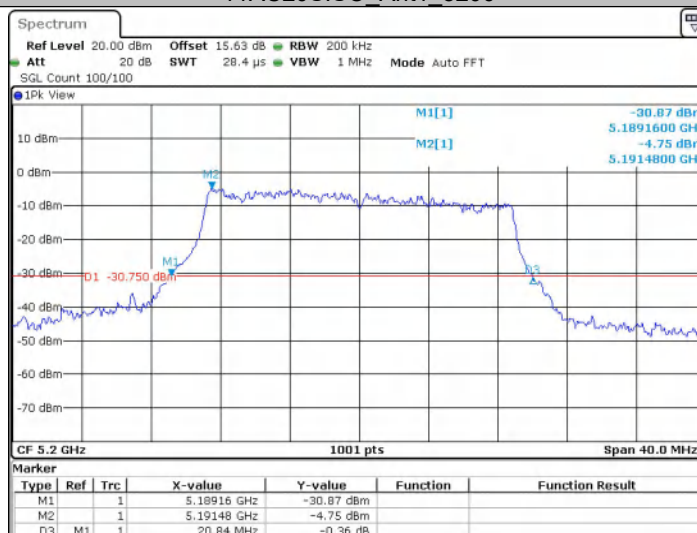


Date: 10 JUN 2025 18:54:36

11AC20SISO_Ant1_5240

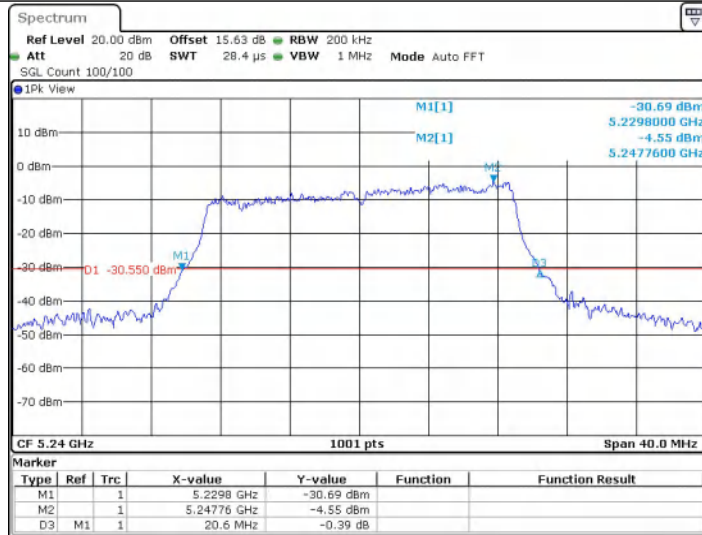


Date: 10 JUN 2025 18:57:54

11AC20SISO_Ant1_5260

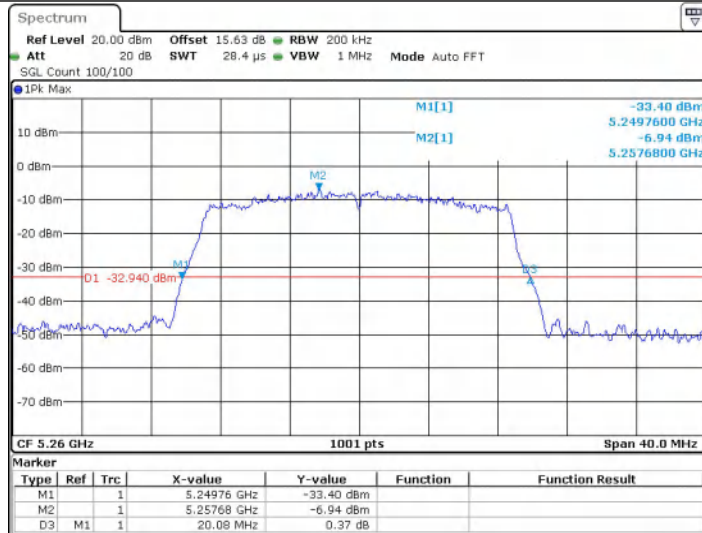


Date: 12 NOV 2025 16:22:52

11AC20SISO_Ant1_5280

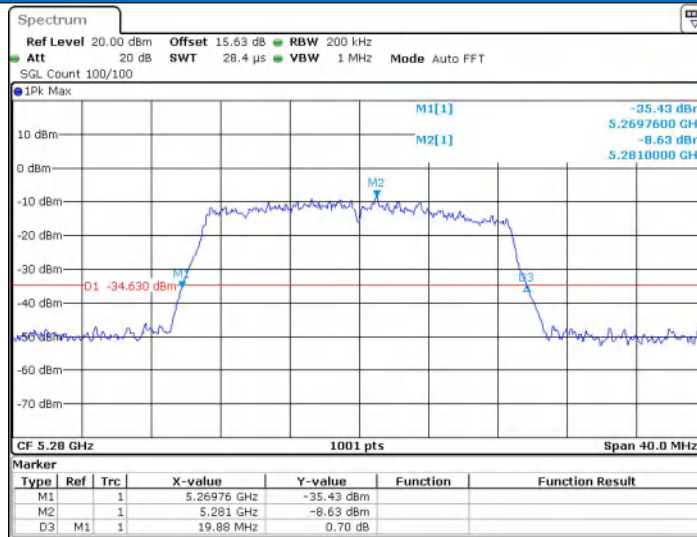


Date: 12.NOV.2025 16:24:43

11AC20SISO_Ant1_5320

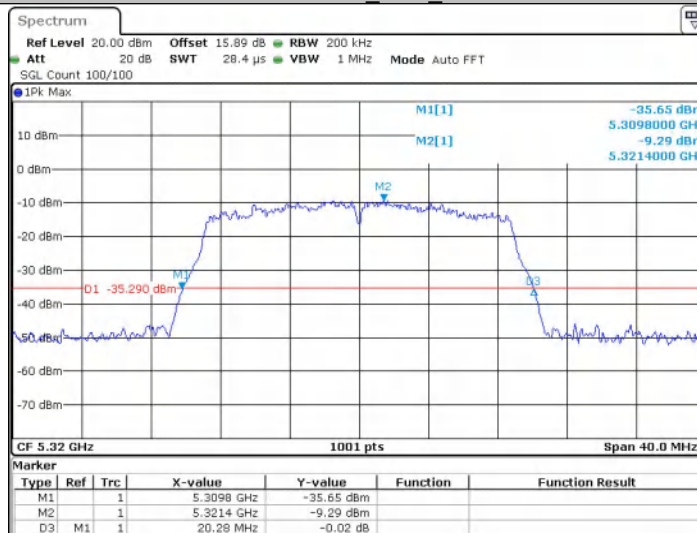


Date: 12.NOV.2025 16:25:56

11AC20SISO_Ant1_5500

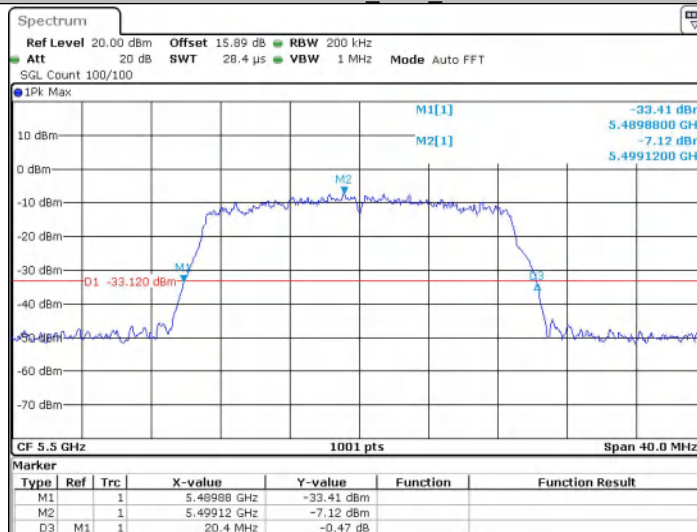


Date: 12.NOV.2025 16:29:18

11AC20SISO_Ant1_5580

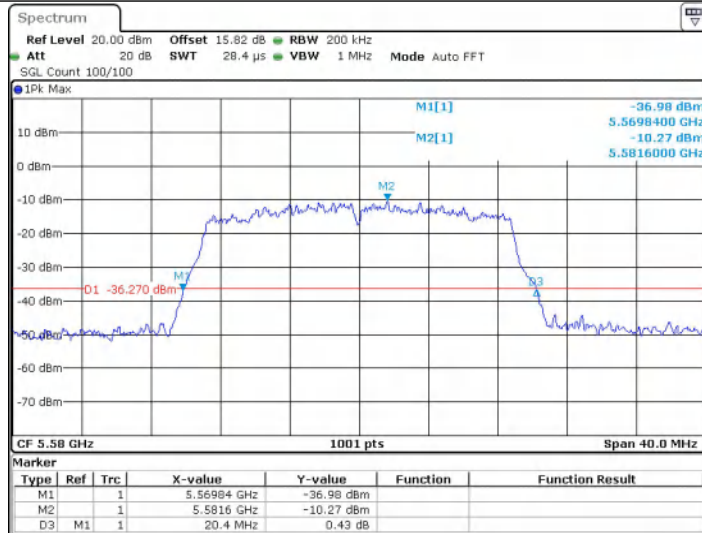


Date: 12 NOV. 2025 16:30:32

11AC20SISO_Ant1_5700

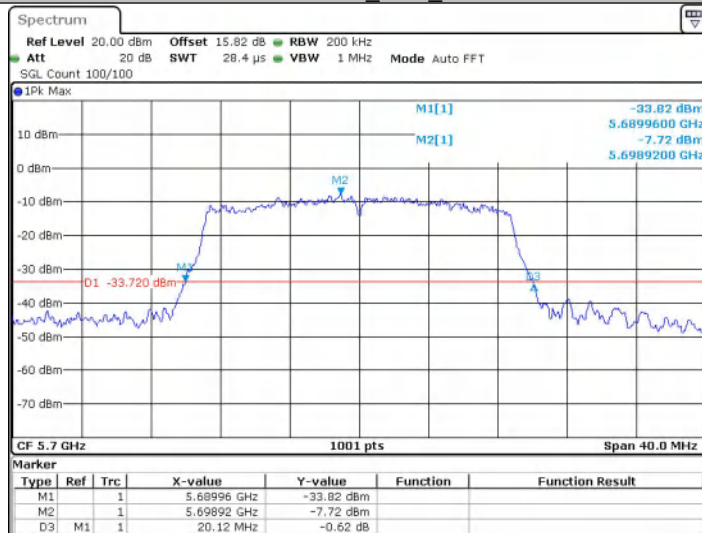


Date: 9 SEP. 2025 16:16:38

11AC20SISO_Ant1_5745

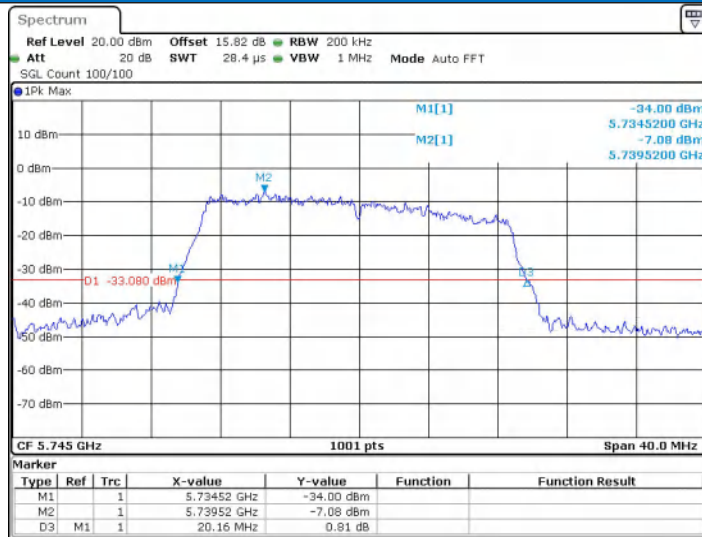


Date: 9 SEP 2025 16:19:13

11AC20SISO_Ant1_5785

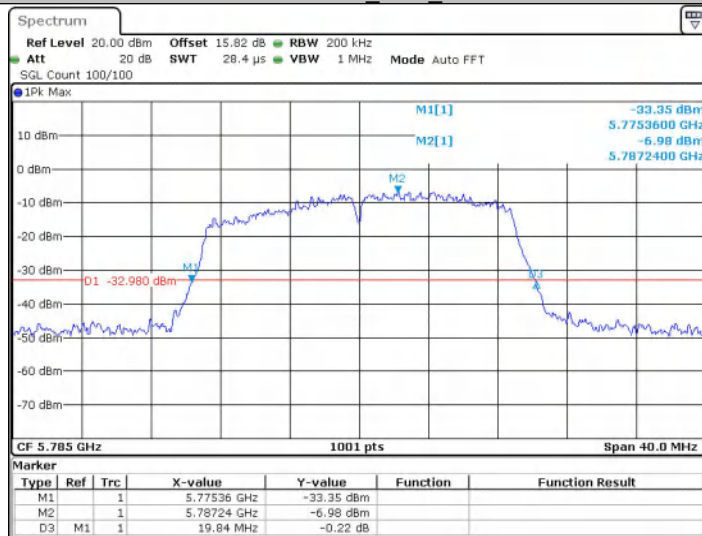


Date: 9 SEP 2025 16:20:57

11AC20SISO_Ant1_5825

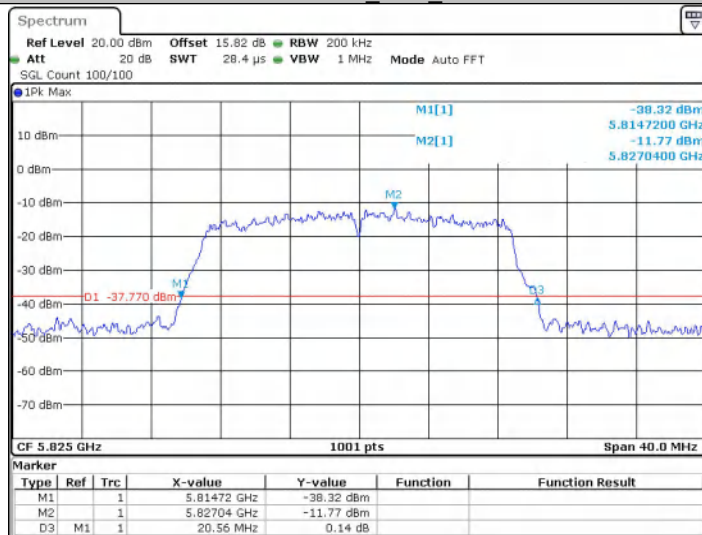


Date: 9 SEP 2025 16:22:21

11AC40SISO_Ant1_5190

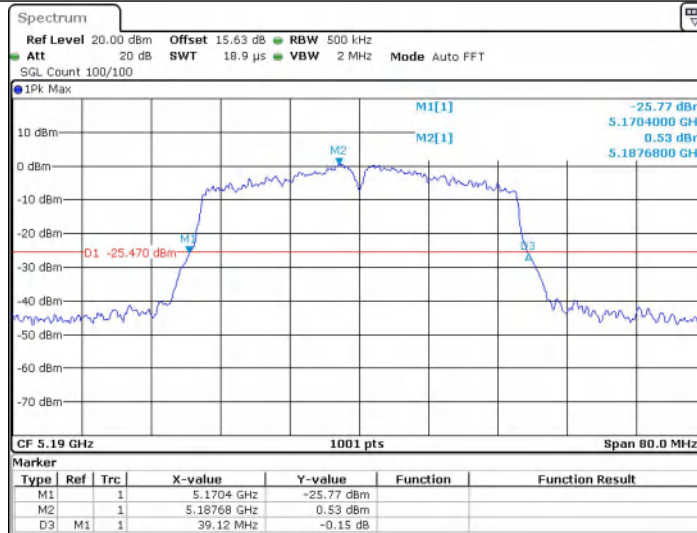


Date: 9 SEP 2025 16:25:00

11AC40SISO_Ant1_5230

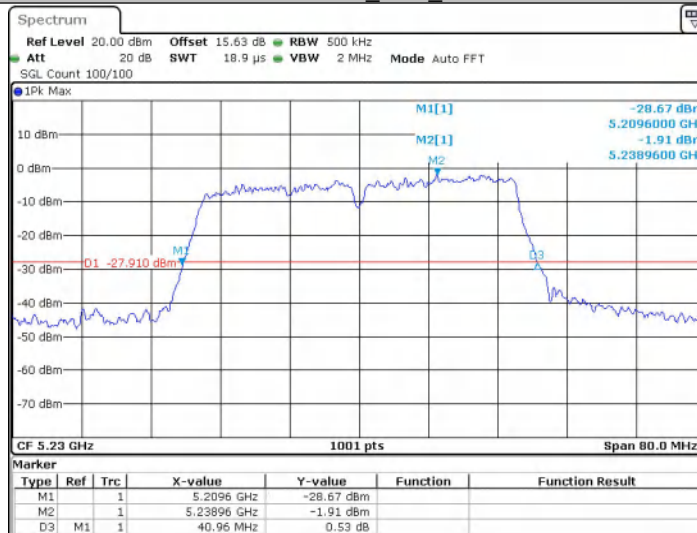


Date: 9 SEP 2025 16:27:31

11AC40SISO_Ant1_5270

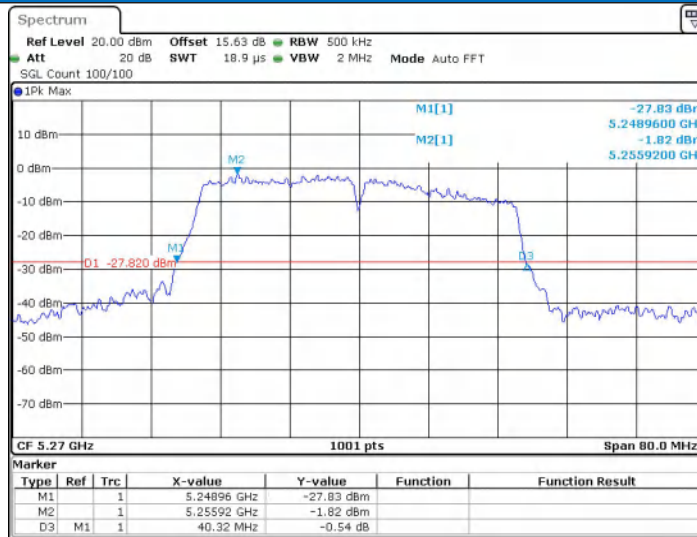


Date: 9 SEP 2025 16:31:55

11AC40SISO_Ant1_5310

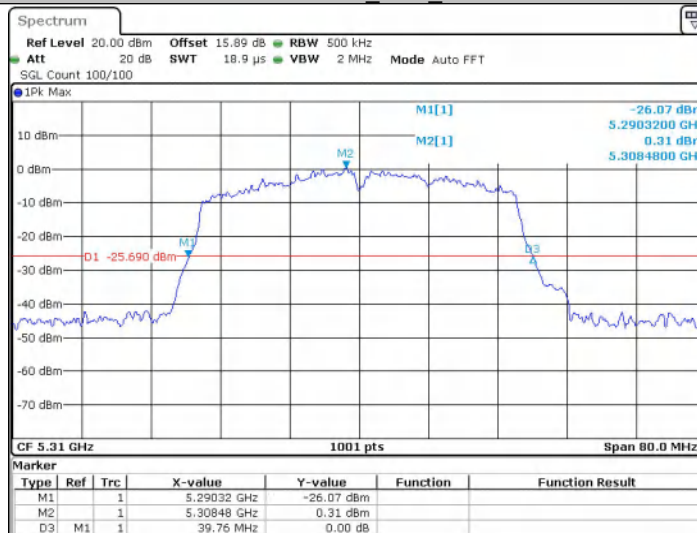


Date: 9 SEP 2025 16:38:20

11AC40SISO_Ant1_5510

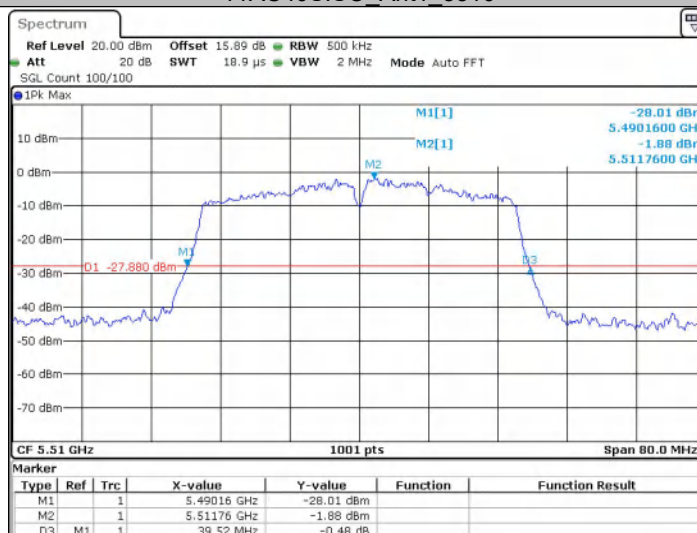


Date: 9 SEP 2025 16:40:36

11AC40SISO_Ant1_5550

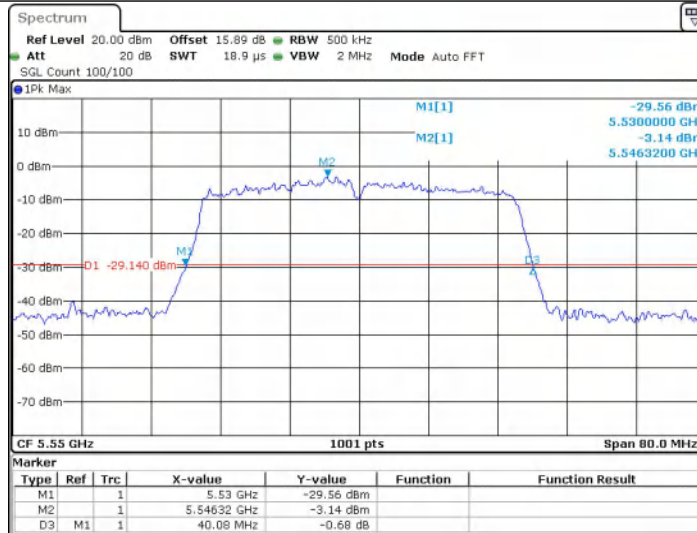


Date: 9 SEP 2025 16:43:51

11AC40SISO_Ant1_5670

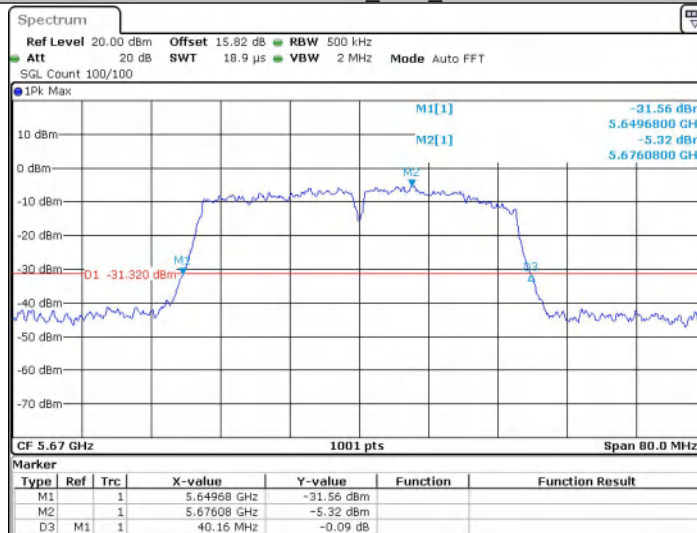


Date: 9 SEP 2025 16:45:29

11AC40SISO_Ant1_5755

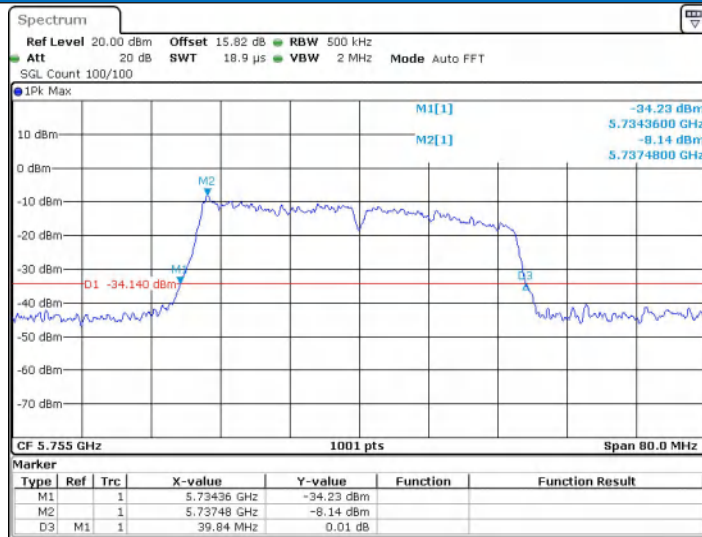


Date: 9 SEP 2025 16:50:33

11AC40SISO_Ant1_5795

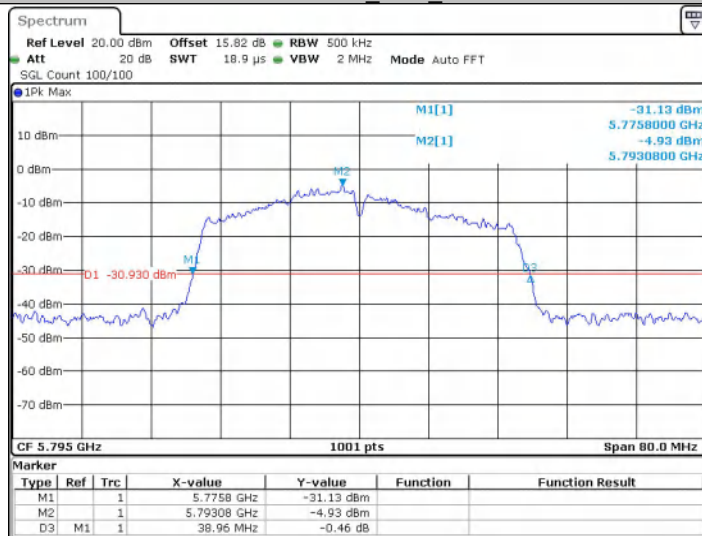


Date: 9 SEP 2025 16:52:08

11AC80SISO_Ant1_5210

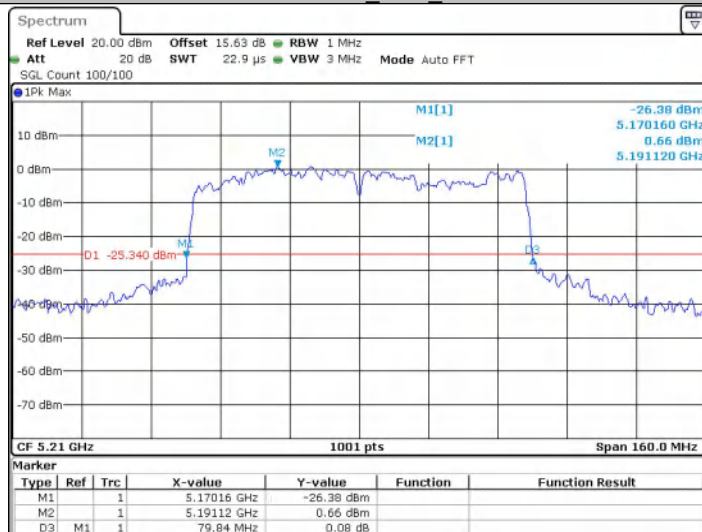


Date: 9 SEP 2025 16:54:38

11AC80SISO_Ant1_5290

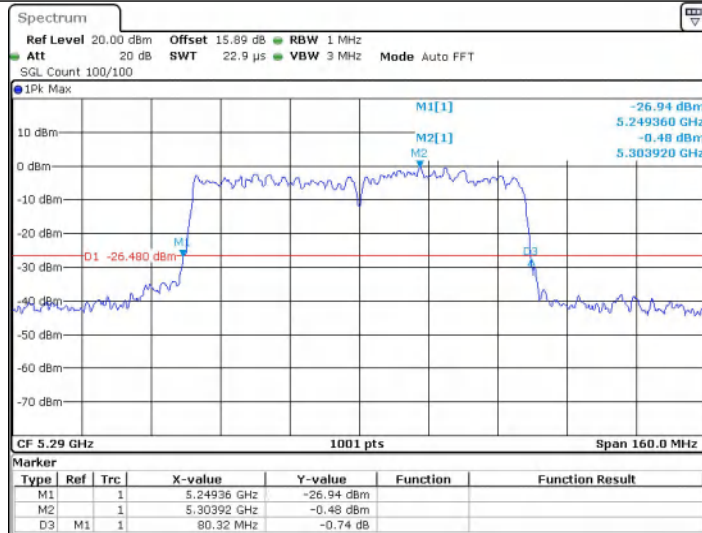


Date: 9 SEP 2025 17:17:50

11AC80SISO_Ant1_5530

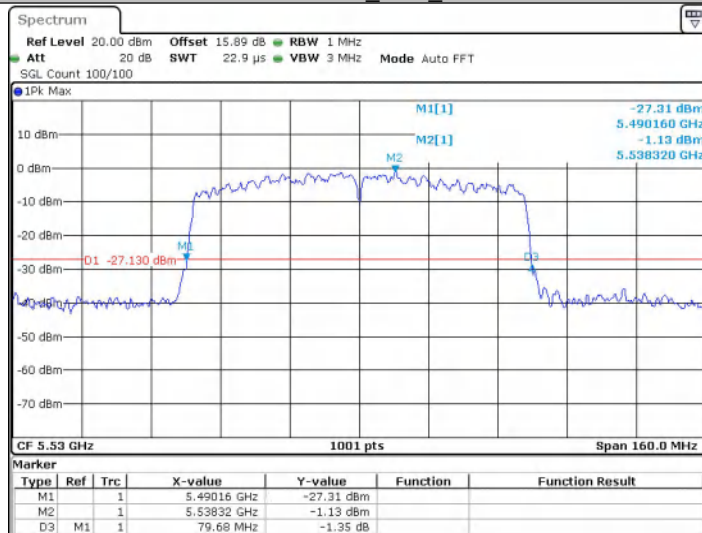


Date: 9 SEP 2025 17:19:42

11AC80SISO_Ant1_5610

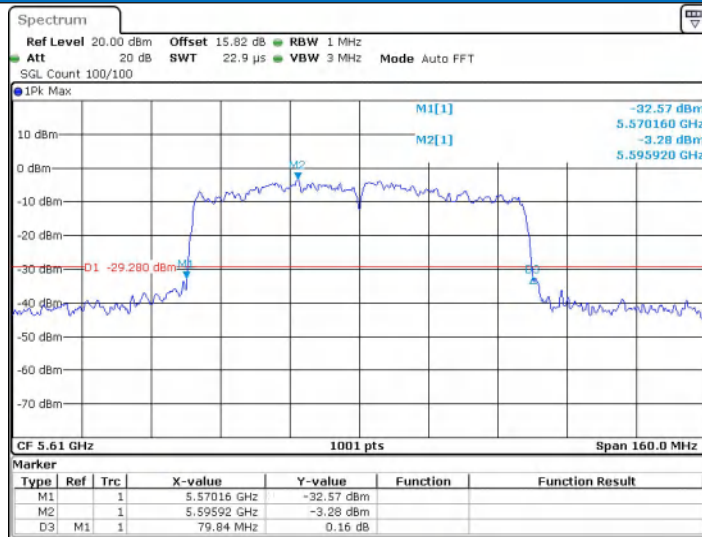


Date: 9 SEP 2025 17:21:49

11AC80SISO_Ant1_5775

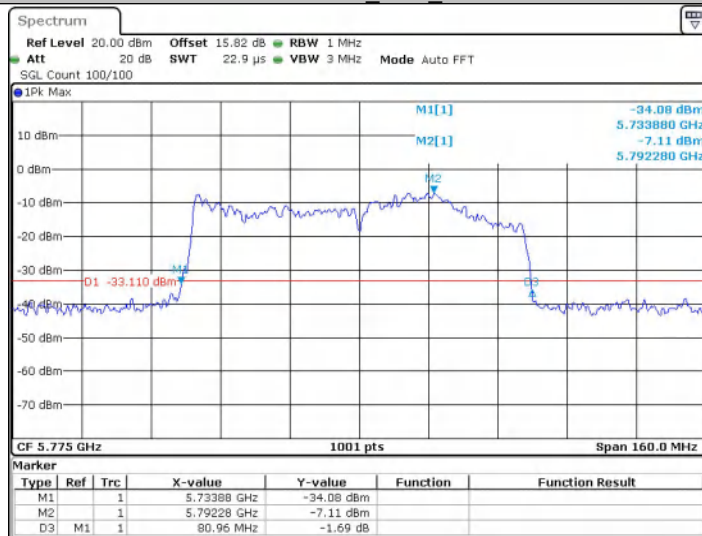


Date: 9 SEP 2025 17:24:03

11AX20SISO_Ant1_5180

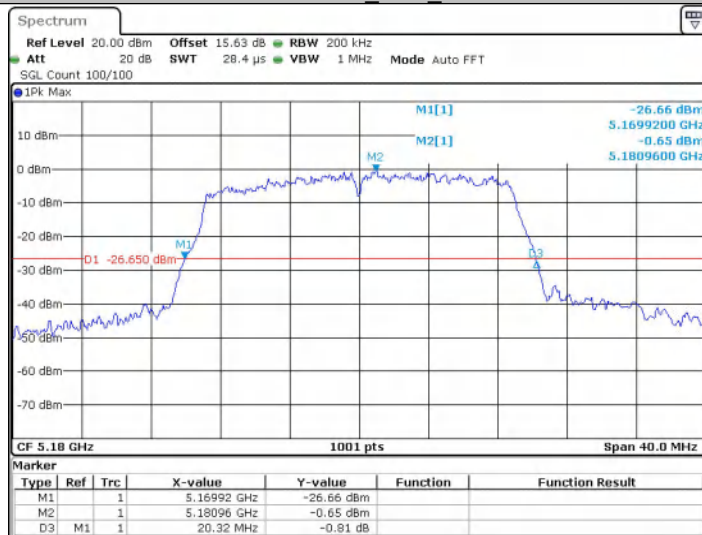


Date: 9 SEP 2025 17:26:34

11AX20SISO_Ant1_5200

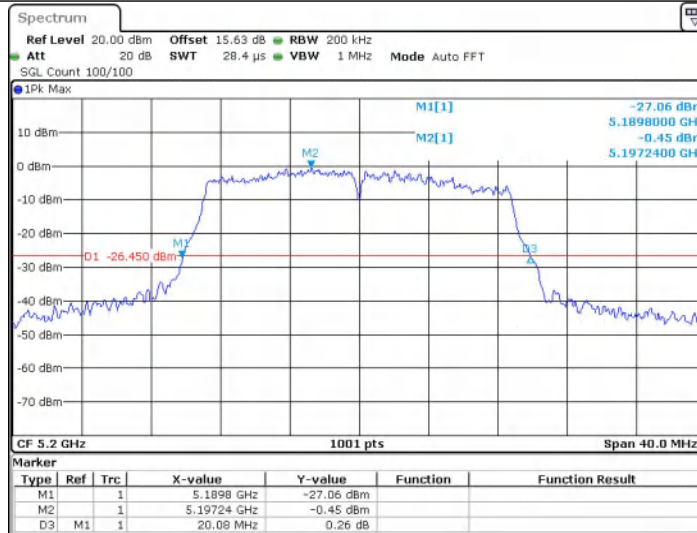


Date: 9 SEP 2025 17:30:48

11AX20SISO_Ant1_5240

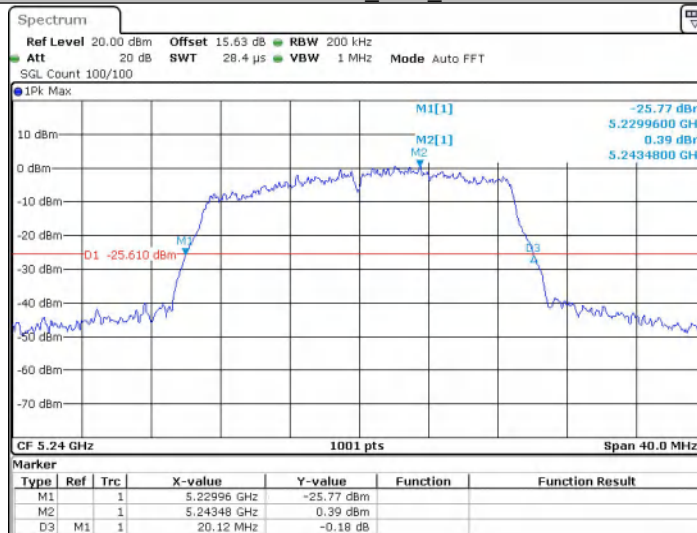


Date: 9 SEP 2025 17:34:05

11AX20SISO_Ant1_5260

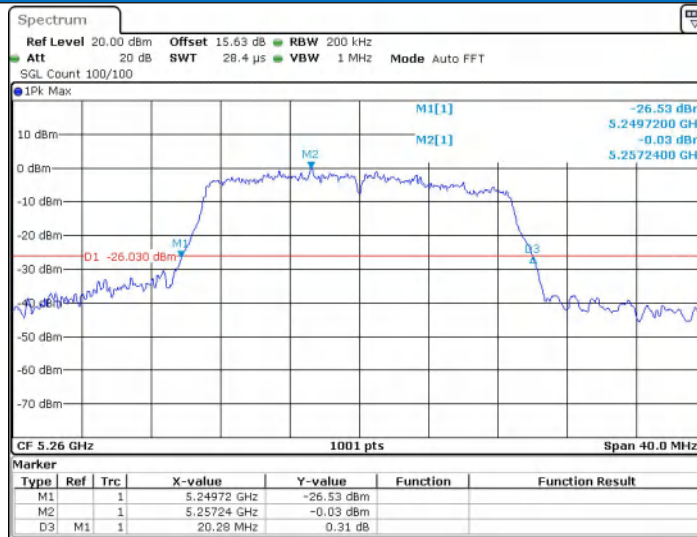


Date: 9 SEP 2025 17:35:53

11AX20SISO_Ant1_5280

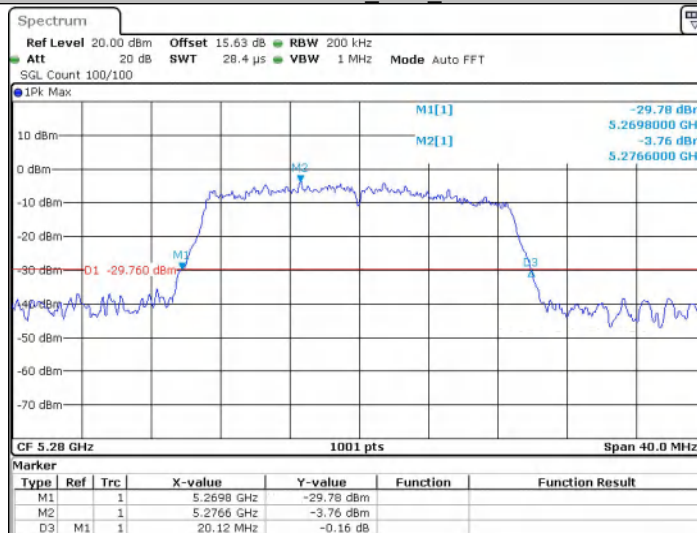


Date: 9 SEP 2025 17:37:39

11AX20SISO_Ant1_5320

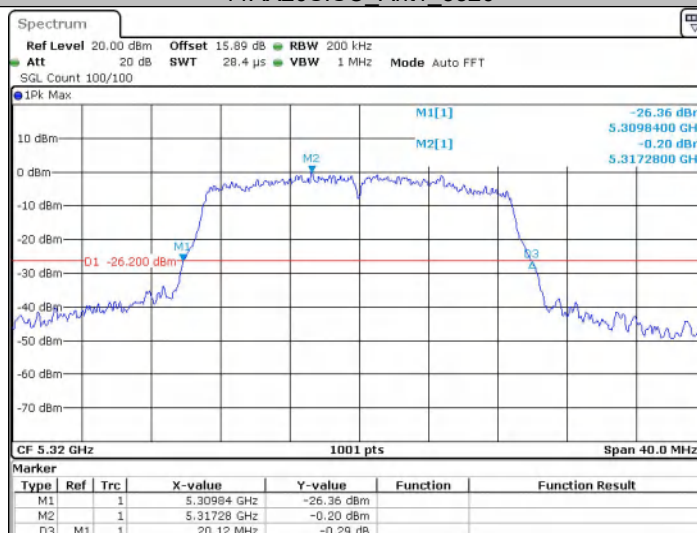


Date: 9 SEP 2025 17:39:26

11AX20SISO_Ant1_5500

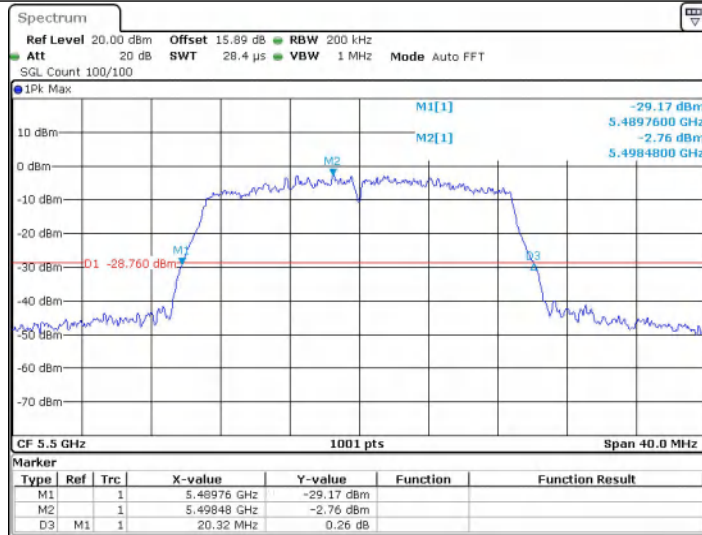


Date: 9 SEP 2025 17:41:20

11AX20SISO_Ant1_5580

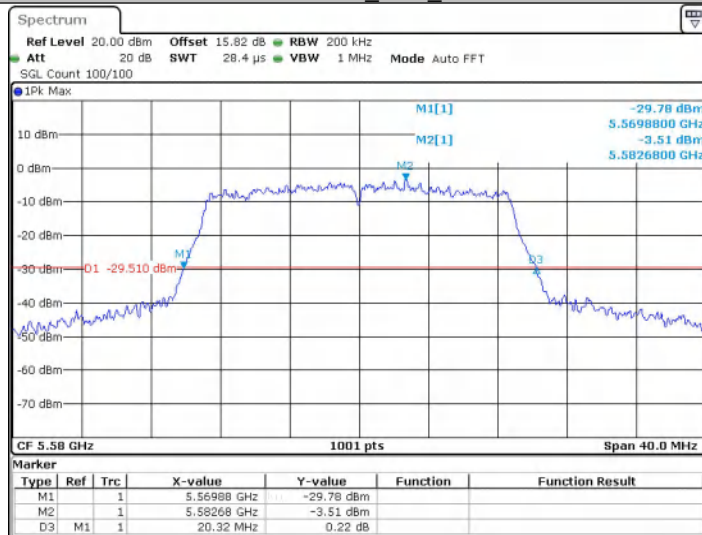


Date: 9 SEP 2025 17:57:37

11AX20SISO_Ant1_5700

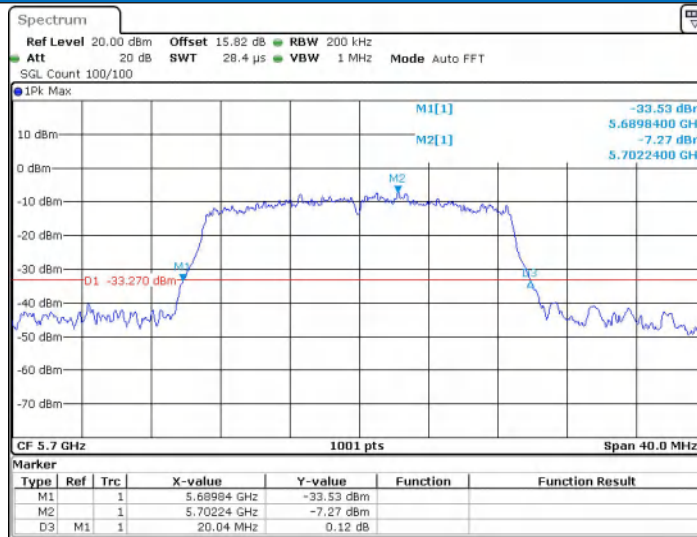


Date: 9 SEP 2025 17:58:45

11AX20SISO_Ant1_5745

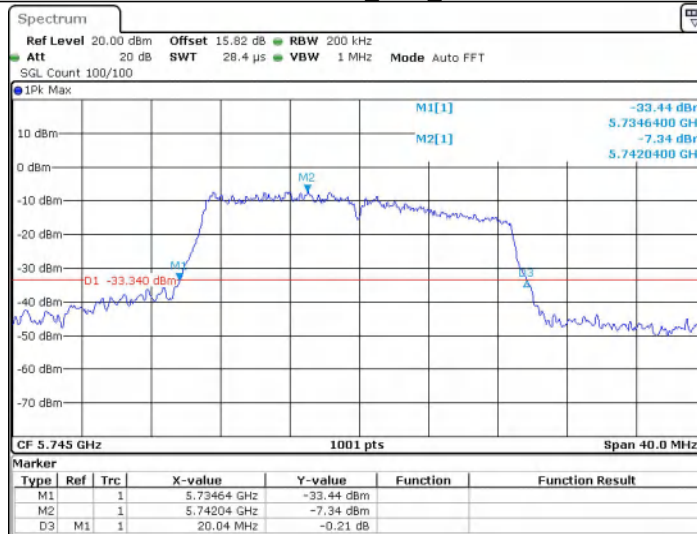


Date: 9 SEP 2025 18:00:42

11AX20SISO_Ant1_5785

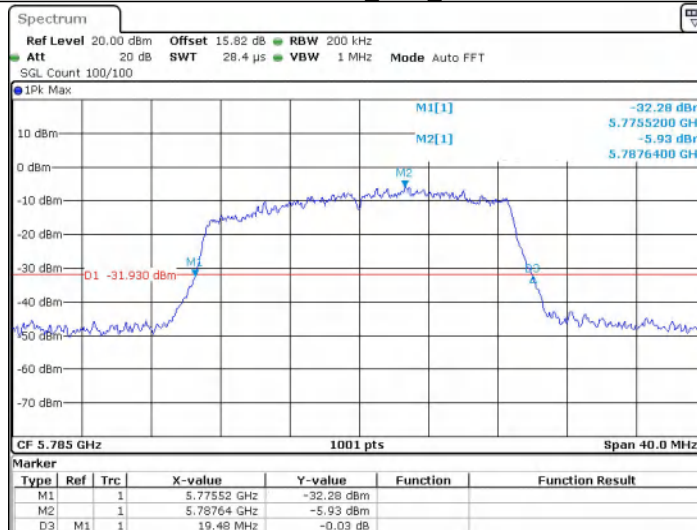


Date: 9 SEP 2025 18:02:04

11AX20SISO_Ant1_5825

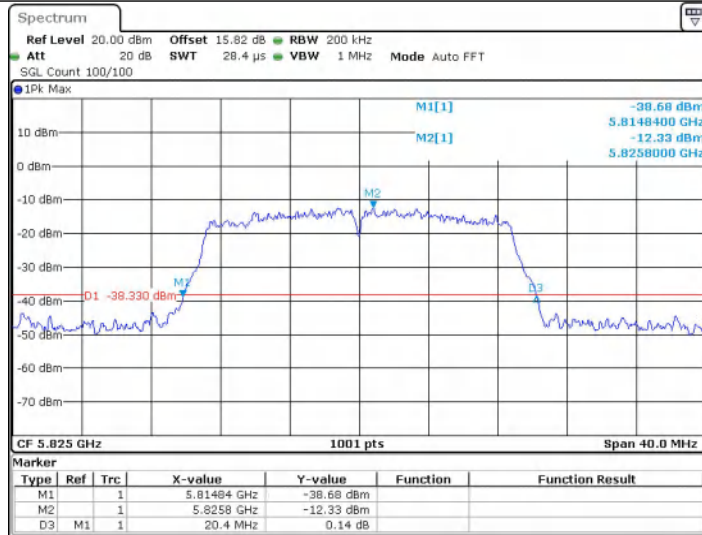

Date: 9 SEP 2025 18:03:20

11AX40SISO_Ant1_5190

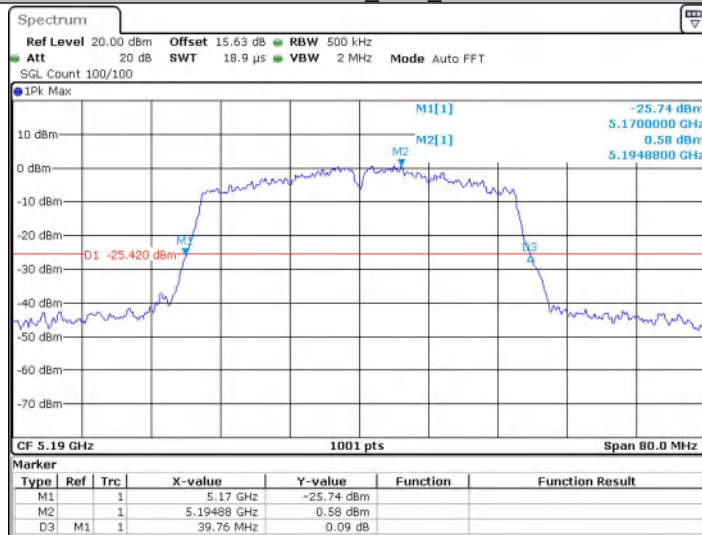


Date: 9 SEP 2025 18:04:52

11AX40SISO_Ant1_5230




Date: 9 SEP 2025 18:07:16

11AX40SISO_Ant1_5270

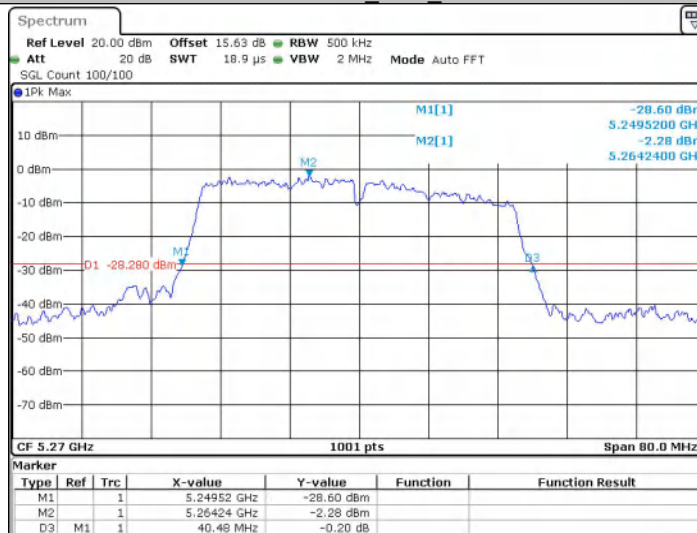


Date: 9 SEP 2025 18:08:20

11AX40SISO_Ant1_5310

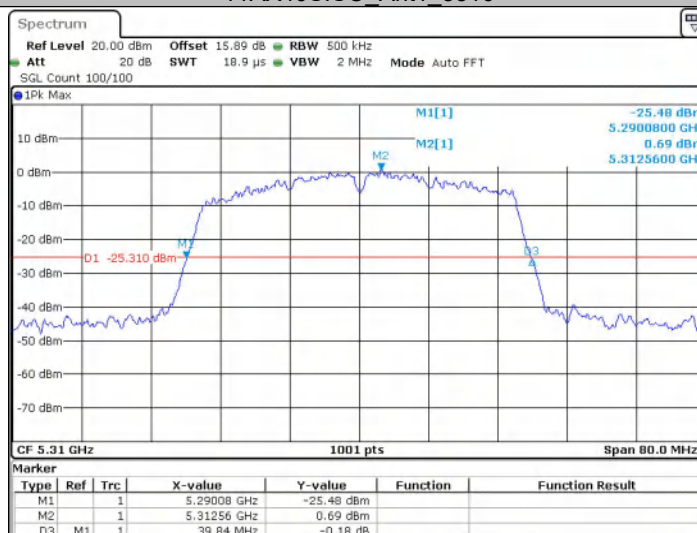


Date: 9 SEP 2025 18:09:24

11AX40SISO_Ant1_5510

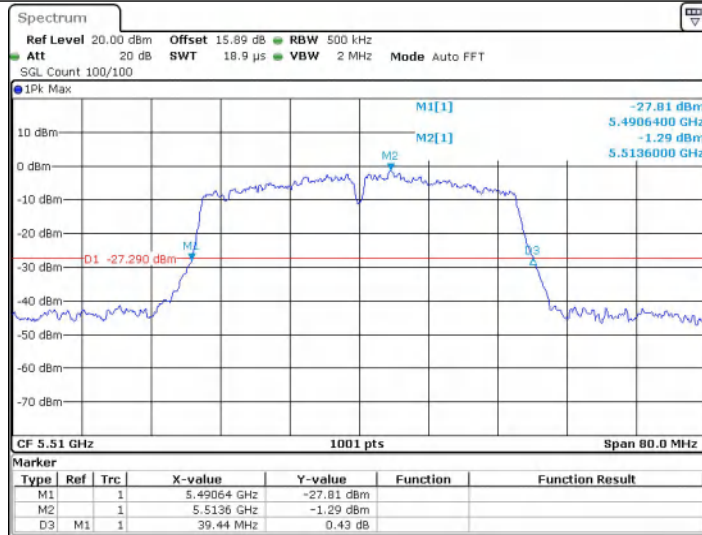


Date: 9 SEP 2025 18:12:28

11AX40SISO_Ant1_5550

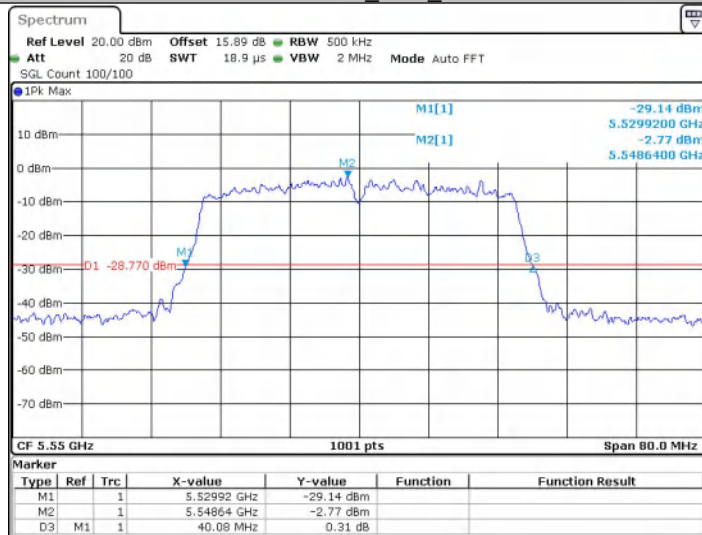


Date: 9 SEP 2025 18:15:33

11AX40SISO_Ant1_5670

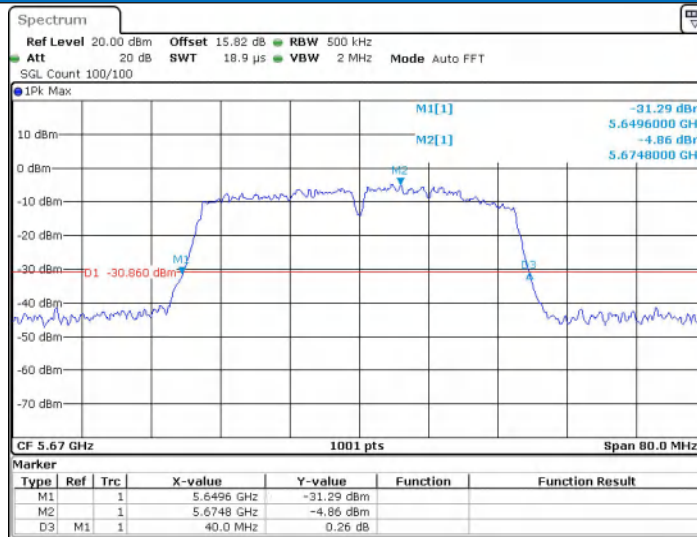


Date: 9 SEP 2025 18:16:38

11AX40SISO_Ant1_5755

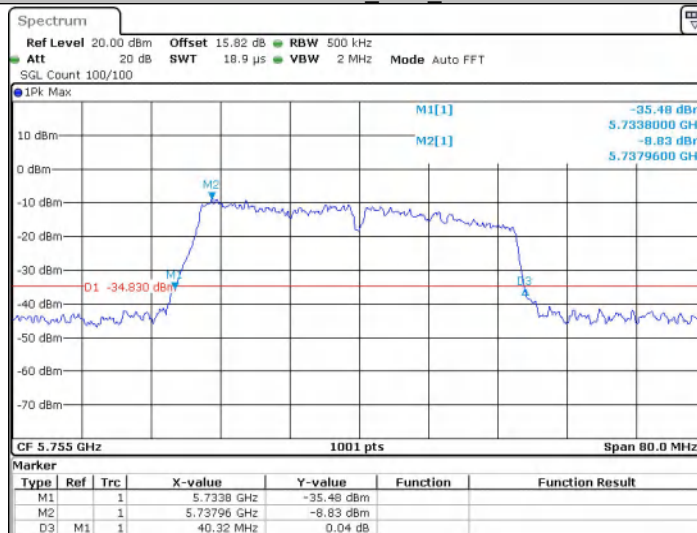

Date: 9 SEP 2025 18:18:04

11AX40SISO_Ant1_5795

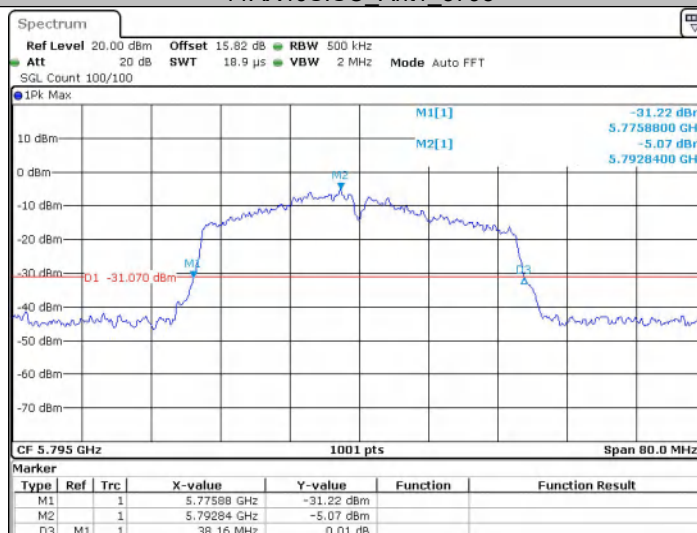


Date: 9 SEP 2025 18:19:58

11AX80SISO_Ant1_5210




Date: 9 SEP 2025 18:21:27

11AX80SISO_Ant1_5290

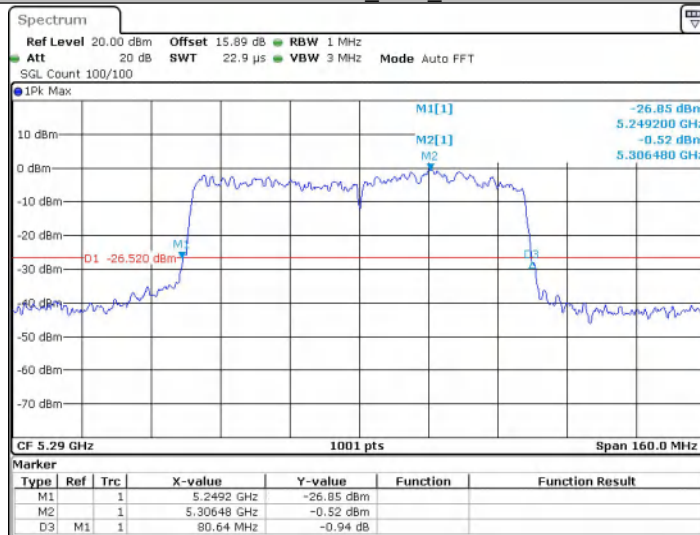


Date: 9 SEP 2025 18:25:44

11AX80SISO_Ant1_5530

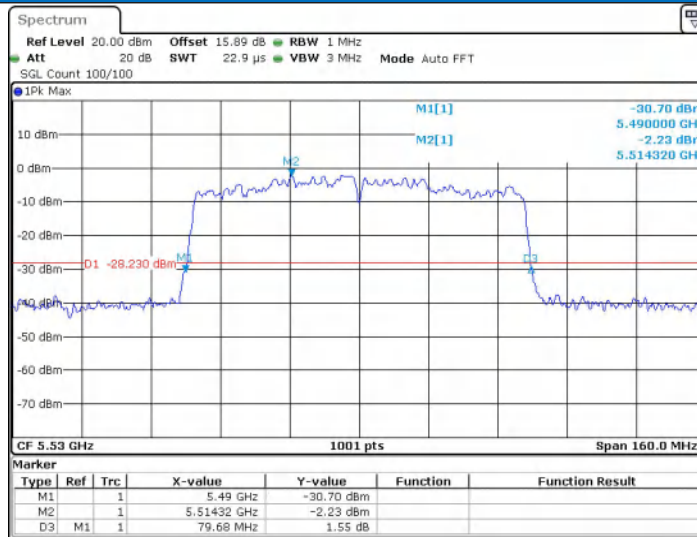


Date: 9 SEP 2025 18:29:00

11AX80SISO_Ant1_5610

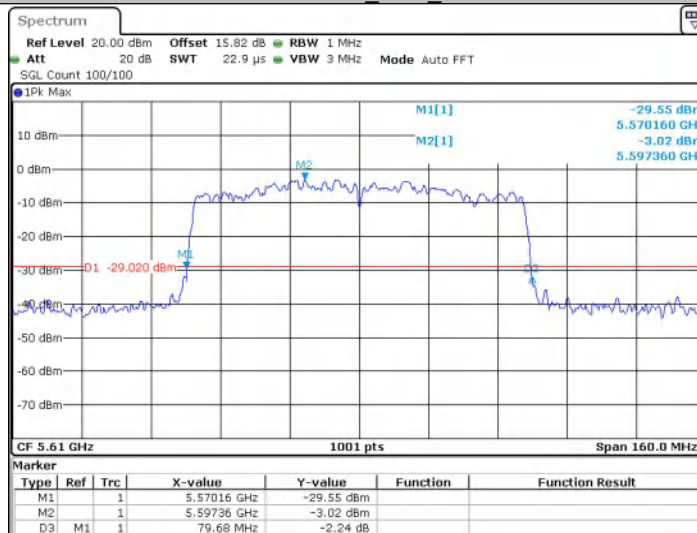

Date: 9 SEP 2025 18:30:59

11AX80SISO_Ant1_5775

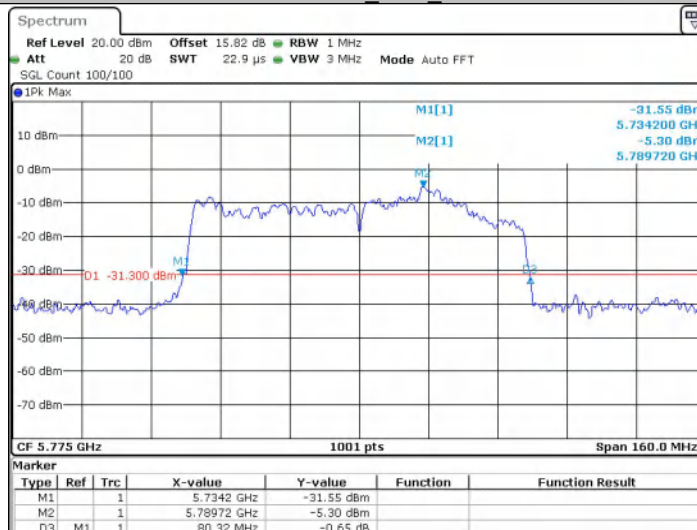

Date: 9 SEP 2025 18:33:02

Appendix B): Maximum Conduct Output Power

1.Duty Cycle (x)

Test Requirement KDB 789033 D02 II B 1

Test Method: KDB 789033 II B 1

Test Procedure:


Set RBW = 20MHz

Set VBW = 40MHz

Set detector = peak.

Set span =0Hz

Test Setup Diagram

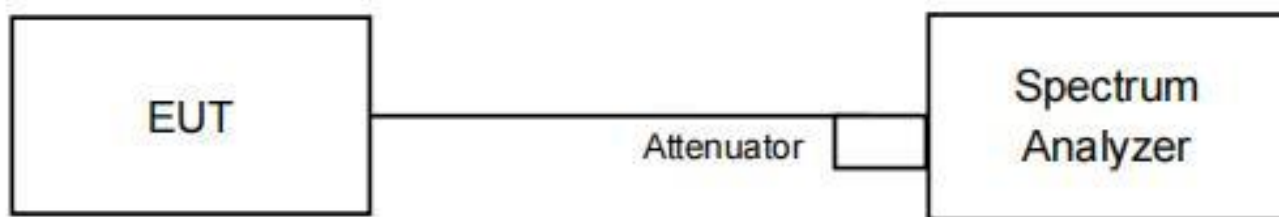


Measurement Data

TestMode	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	5180	5.48	5.58	98.21
	5200	5.48	5.58	98.21
	5240	5.48	5.58	98.21
	5260	5.48	5.56	98.56
	5280	1.30	1.35	96.30
	5320	5.48	5.58	98.21
	5500	5.50	5.58	98.57
	5580	5.50	5.58	98.57
	5700	1.33	1.35	98.52
	5745	10.00	10.00	100.00
	5785	10.00	10.00	100.00
	5825	10.00	10.00	100.00
11N20SISO	5180	5.36	5.46	98.17
	5200	5.38	5.48	98.18
	5240	5.38	5.48	98.18
	5260	5.36	5.46	98.17
	5280	5.40	5.48	98.54
	5320	10.00	10.00	100.00
	5500	10.00	10.00	100.00
	5580	5.38	5.42	99.26
	5700	10.00	10.00	100.00
	5745	10.00	10.00	100.00
	5785	10.00	10.00	100.00
	5825	20.00	20.00	100.00
11N40SISO	5190	3.02	3.12	96.79
	5230	10.00	10.00	100.00
	5270	10.00	10.00	100.00
	5310	10.00	10.00	100.00
	5510	10.00	10.00	100.00
	5550	12.42	12.46	99.68
	5670	10.00	10.00	100.00
	5755	10.00	10.00	100.00
	5795	3.02	3.12	96.79
11AC20SISO	5180	1.31	1.36	96.32

		5200	5.38	5.48	98.18
		5240	5.38	5.48	98.18
		5260	10.00	10.00	100.00
		5280	10.00	10.00	100.00
		5320	10.00	10.00	100.00
		5500	10.00	10.00	100.00
		5580	10.00	10.00	100.00
		5700	10.00	10.00	100.00
		5745	10.00	10.00	100.00
		5785	10.00	10.00	100.00
		5825	10.00	10.00	100.00
11AC40SISO		5190	10.00	10.00	100.00
		5230	10.00	10.00	100.00
		5270	10.00	10.00	100.00
		5310	10.00	10.00	100.00
		5510	10.00	10.00	100.00
		5550	10.00	10.00	100.00
		5670	10.00	10.00	100.00
		5755	10.00	10.00	100.00
		5795	10.00	10.00	100.00
11AC80SISO		5210	10.00	10.00	100.00
		5290	10.00	10.00	100.00
		5530	10.00	10.00	100.00
		5610	10.00	10.00	100.00
		5775	10.00	10.00	100.00
11AX20SISO		5180	10.00	10.00	100.00
		5200	10.00	10.00	100.00
		5240	10.00	10.00	100.00
		5260	10.00	10.00	100.00
		5280	10.00	10.00	100.00
		5320	10.00	10.00	100.00
		5500	10.00	10.00	100.00
		5580	10.00	10.00	100.00
		5700	10.00	10.00	100.00
		5745	10.00	10.00	100.00
		5785	10.00	10.00	100.00
		5825	10.00	10.00	100.00


11AX40SISO	5190	10.00	10.00	100.00
	5230	10.00	10.00	100.00
	5270	10.00	10.00	100.00
	5310	10.00	10.00	100.00
	5510	10.00	10.00	100.00
	5550	10.00	10.00	100.00
	5670	10.00	10.00	100.00
	5755	10.00	10.00	100.00
	5795	10.00	10.00	100.00
11AX80SISO	5210	10.00	10.00	100.00
	5290	10.00	10.00	100.00
	5530	10.00	10.00	100.00
	5610	10.00	10.00	100.00
	5775	10.00	10.00	100.00

11A_Ant1_5180

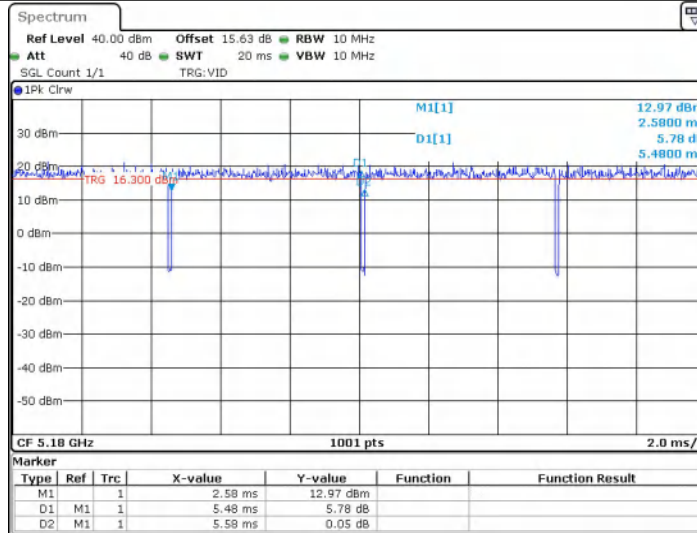


Date: 10 JUN 2025 16:53:28

11A_Ant1_5200

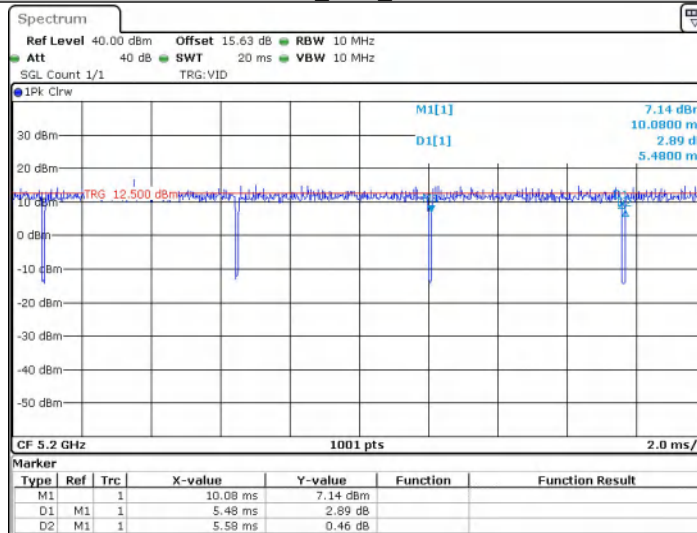


Date: 10 JUN 2025 16:56:19

11A_Ant1_5240

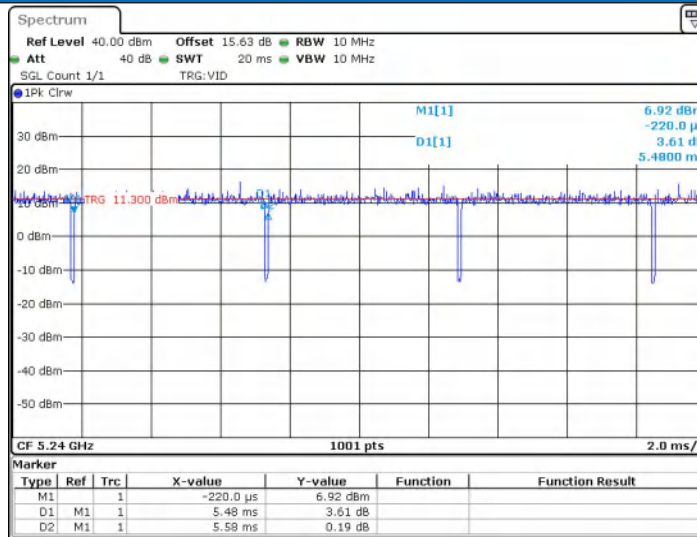


Date: 10 JUN 2025 16:58:34

11A_Ant1_5260

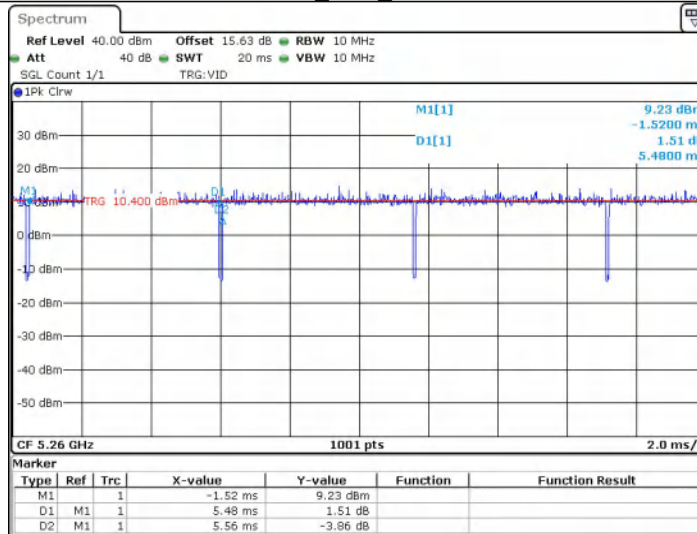


Date: 10 JUN 2025 17:17:46

11A_Ant1_5280

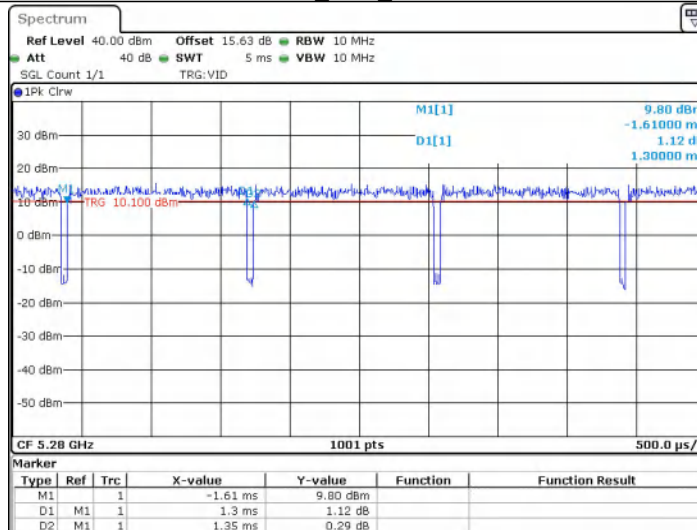


Date: 9 SEP 2025 15:12:31

11A_Ant1_5320

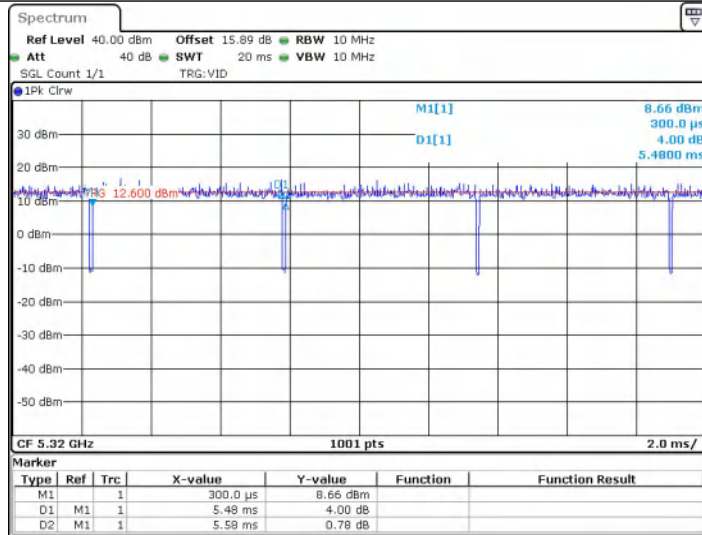


Date: 10 JUN 2025 17:20:02

11A_Ant1_5500

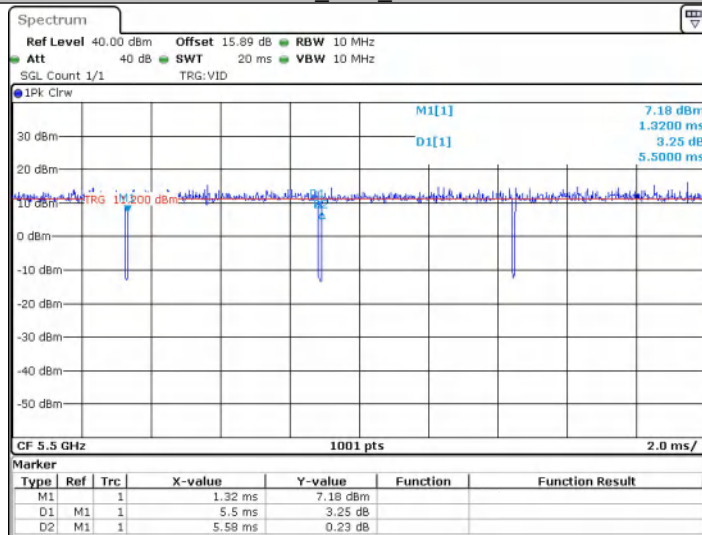


Date: 10 JUN 2025 17:24:22

11A_Ant1_5580

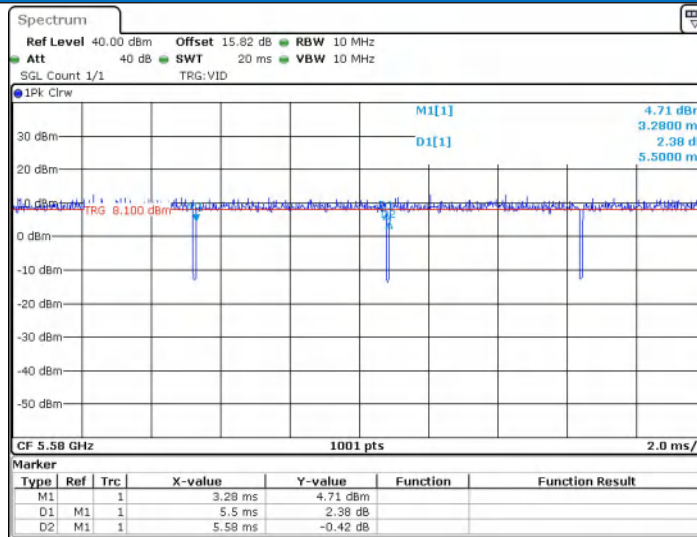


Date: 10 JUN 2025 17:26:14

11A_Ant1_5700

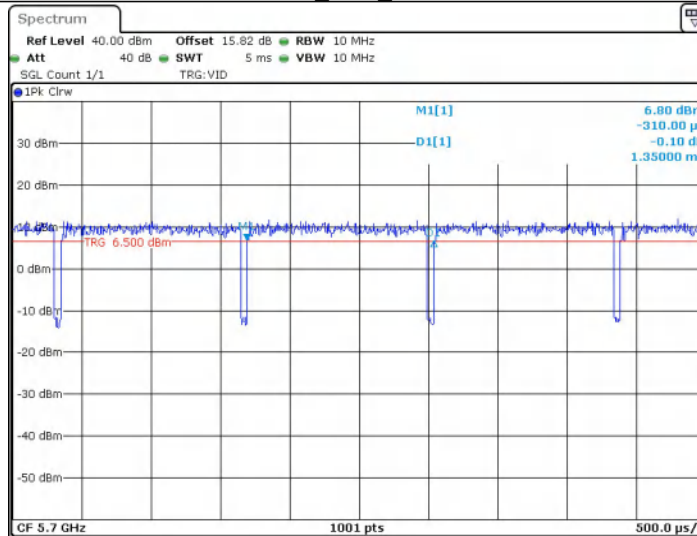


Date: 9 SEP 2025 15:20:08

11A_Ant1_5745

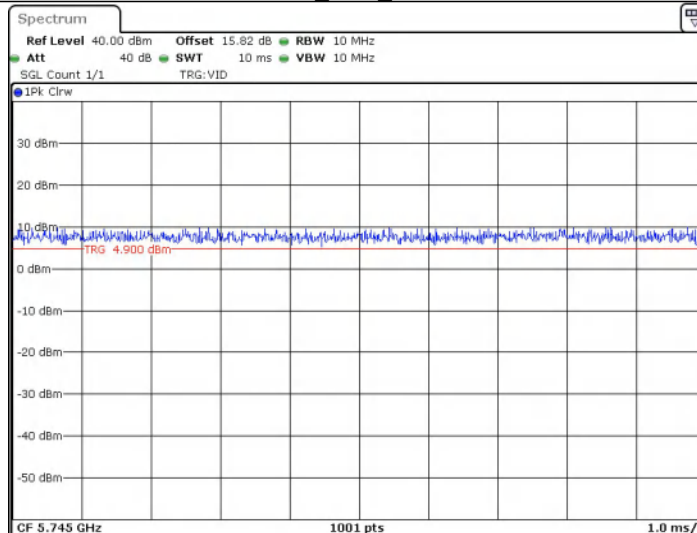


Date: 9 SEP 2025 15:55:39

11A_Ant1_5785

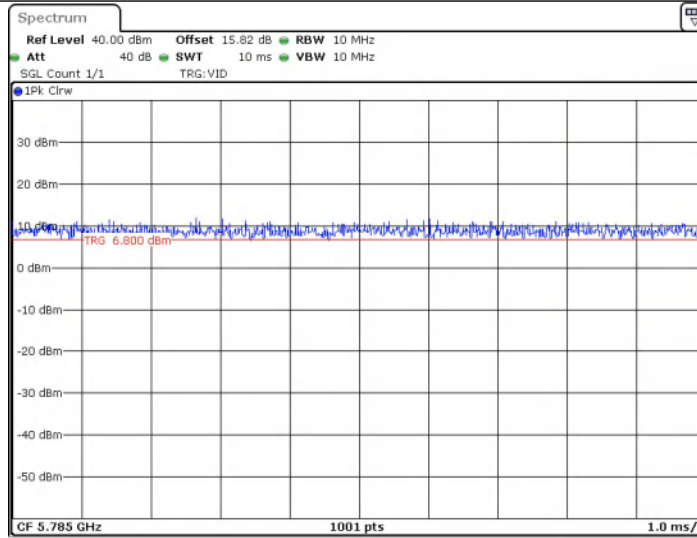


Date: 9 SEP. 2025 15:56:29

11A_Ant1_5825

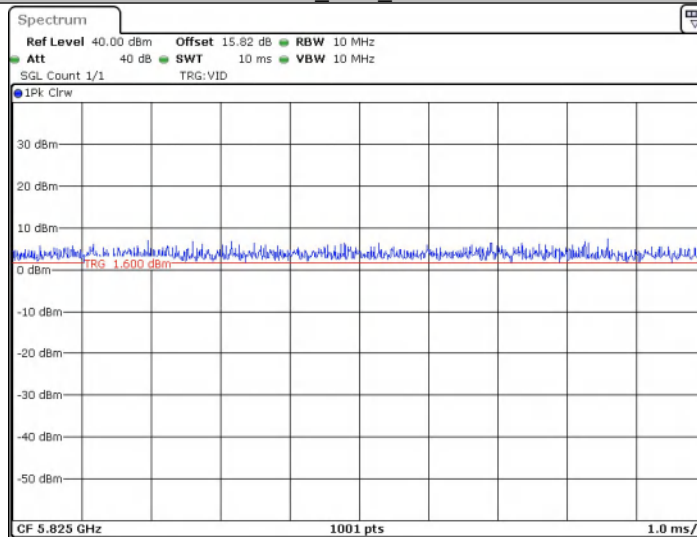


Date: 9 SEP. 2025 15:57:15

11N20SISO_Ant1_5180

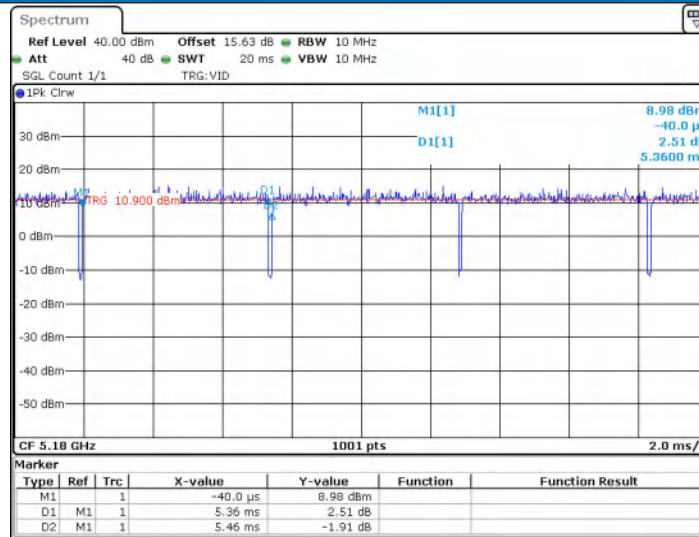


Date: 10 JUN 2025 17:53:12

11N20SISO_Ant1_5200

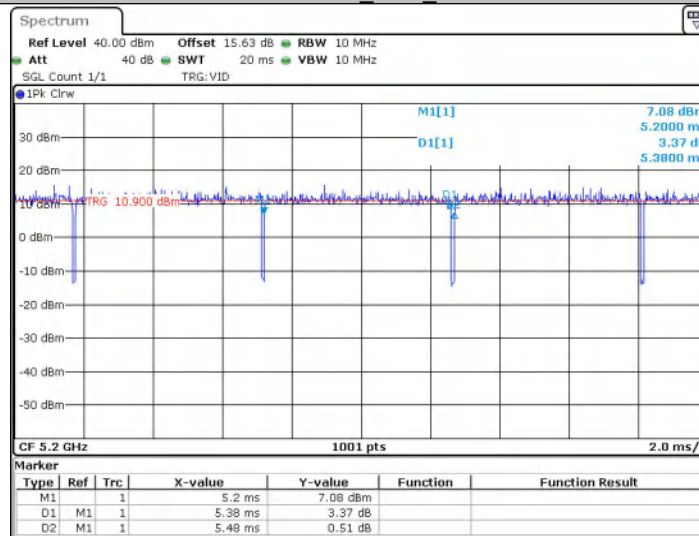


Date: 10 JUN 2025 17:56:08

11N20SISO_Ant1_5240

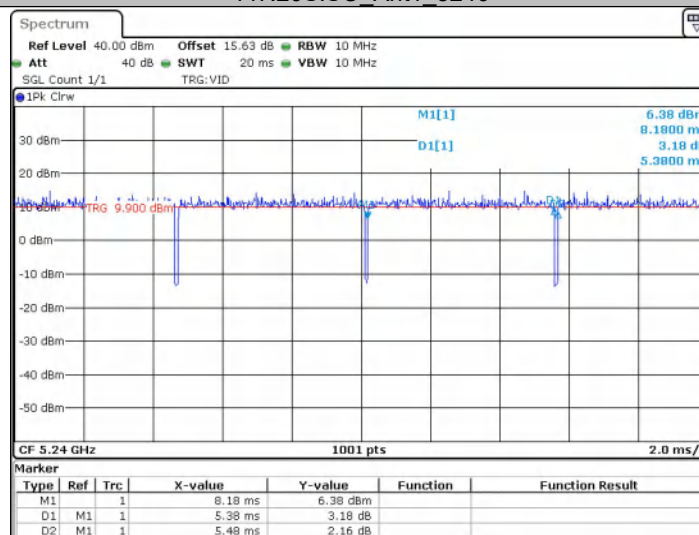


Date: 10 JUN 2025 17:57:52

11N20SISO_Ant1_5260

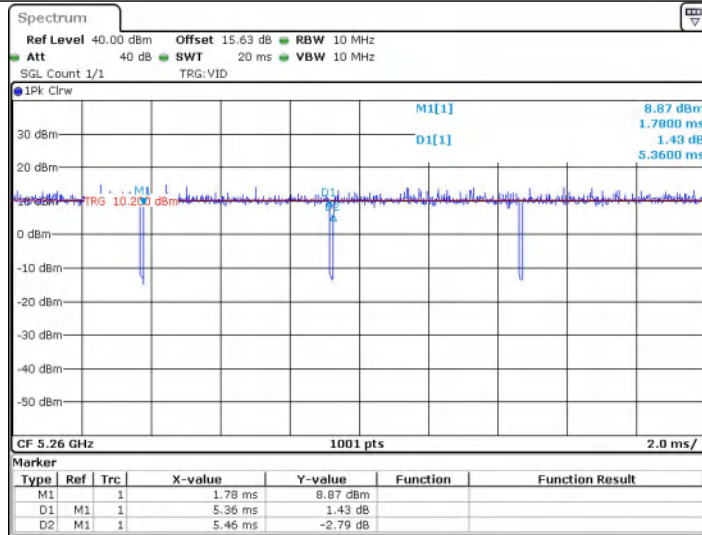


Date: 10 JUN 2025 18:00:54

11N20SISO_Ant1_5280

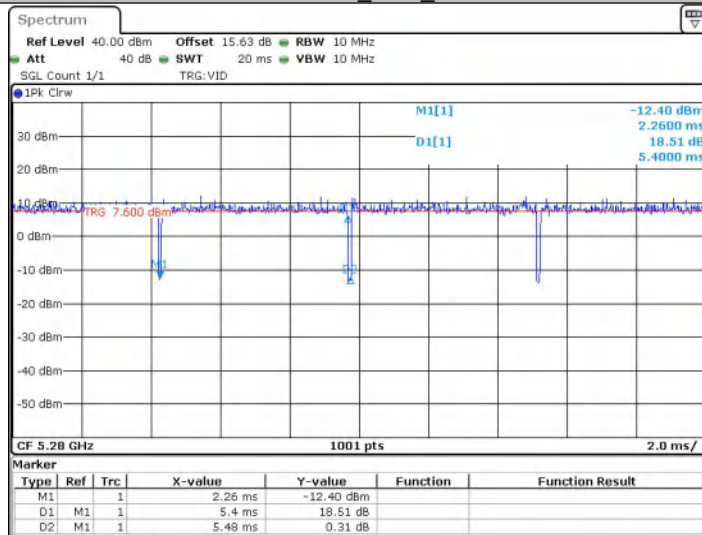


Date: 10 JUN 2025 18:08:07

11N20SISO_Ant1_5320

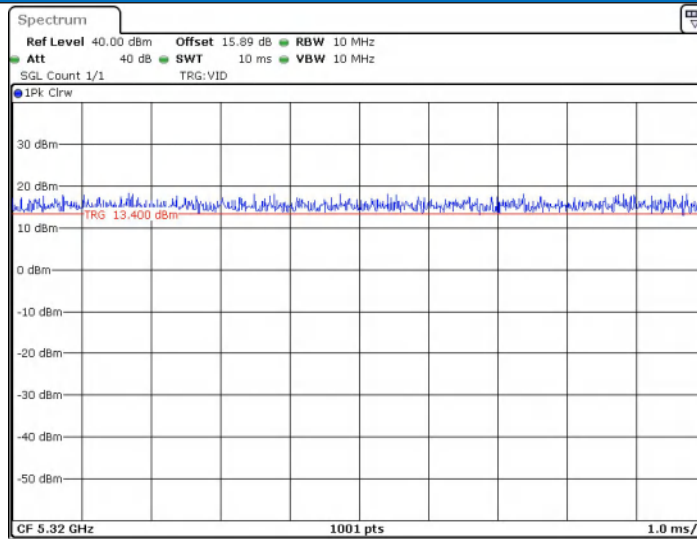


Date: 9 SEP 2025 15:58:44

11N20SISO_Ant1_5500

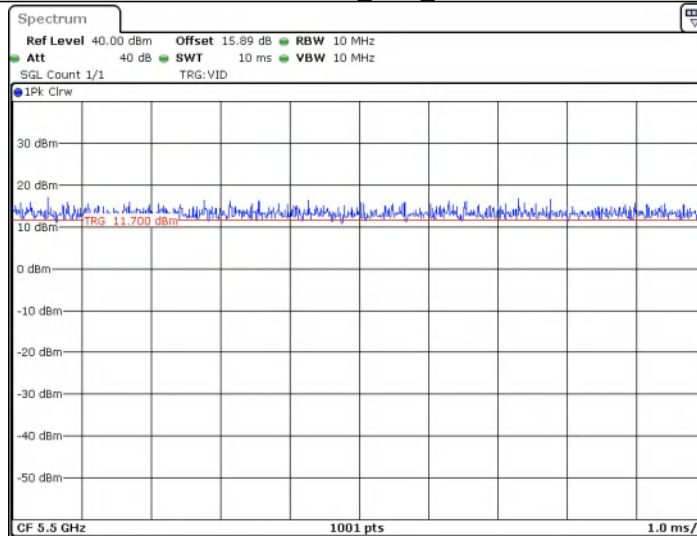


Date: 9 SEP 2025 16:00:09

11N20SISO_Ant1_5580

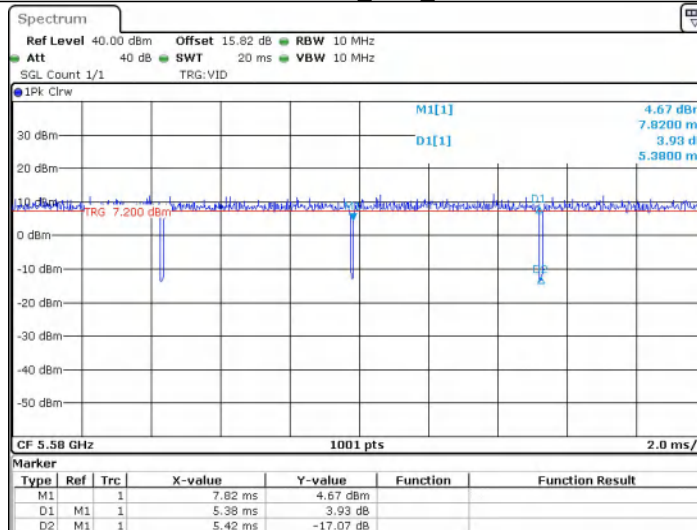


Date: 10 JUN 2025 18:13:07

11N20SISO_Ant1_5700

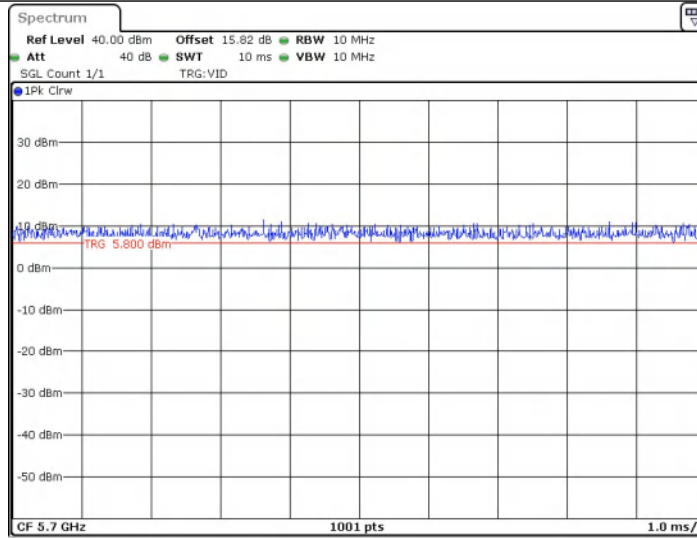


Date: 9 SEP. 2025 16:01:35

11N20SISO_Ant1_5745

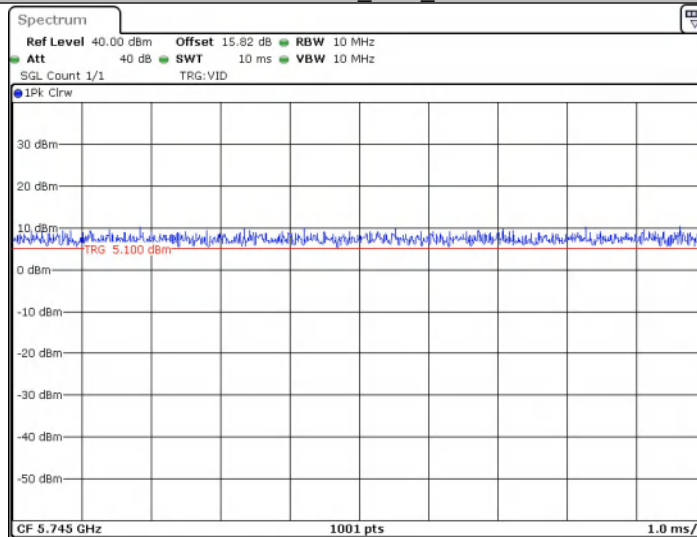


Date: 9 SEP. 2025 16:03:03

11N20SISO_Ant1_5785

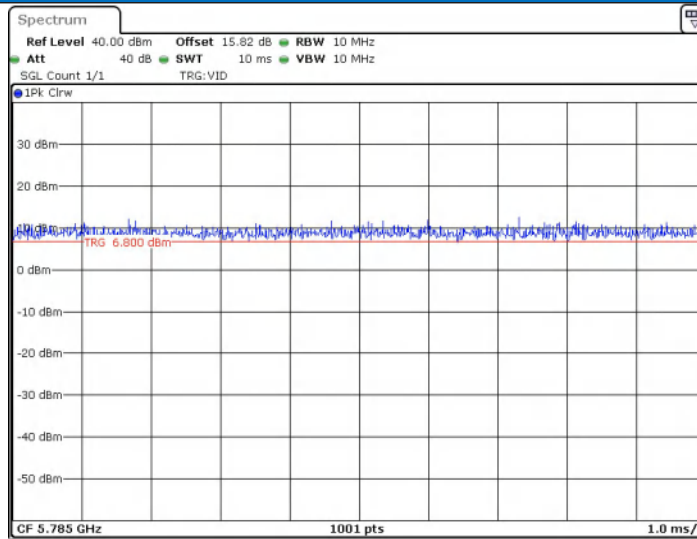


Date: 9 SEP 2025 16:03:46

11N20SISO_Ant1_5825

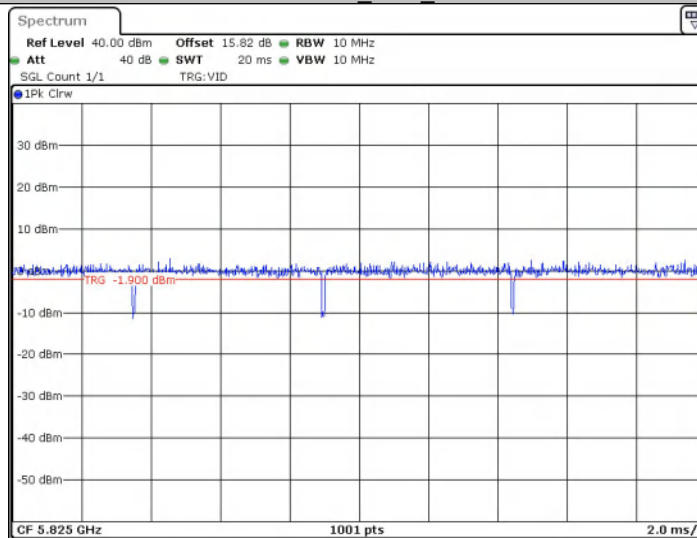


Date: 10 JUN 2025 18:22:35

11N40SISO_Ant1_5190

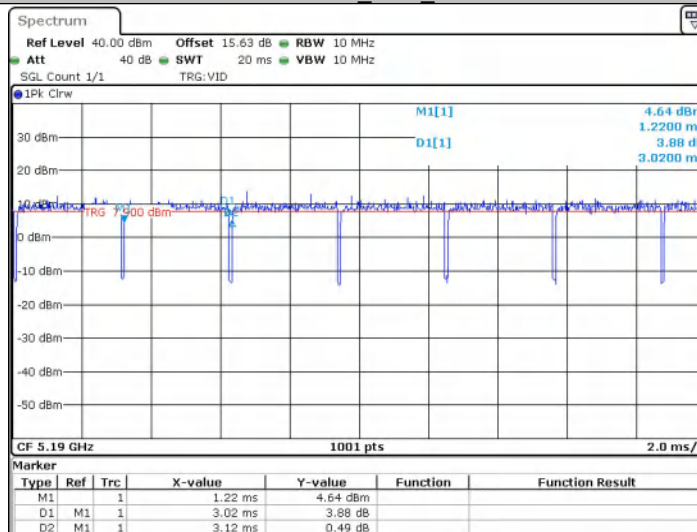


Date: 10 JUN 2025 18:24:07

11N40SISO_Ant1_5230

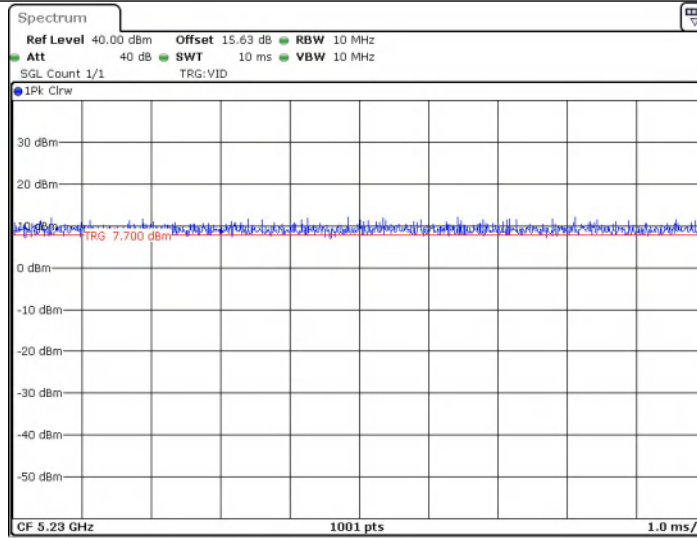


Date: 9 SEP. 2025 16:05:31

11N40SISO_Ant1_5270

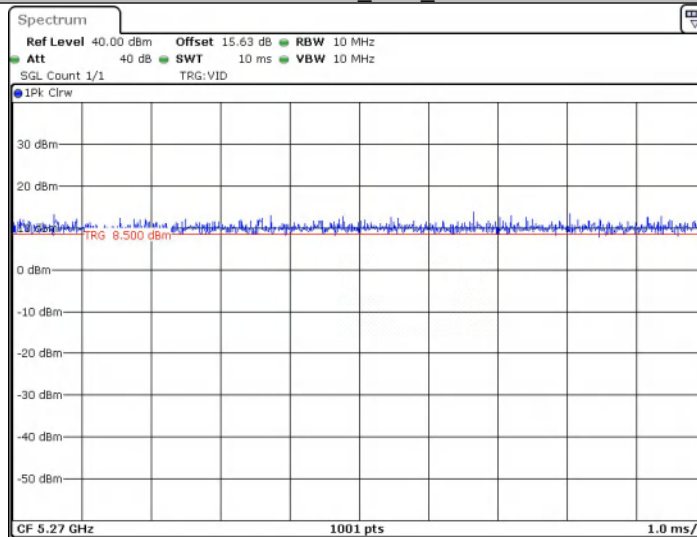


Date: 9 SEP. 2025 16:06:47

11N40SISO_Ant1_5310

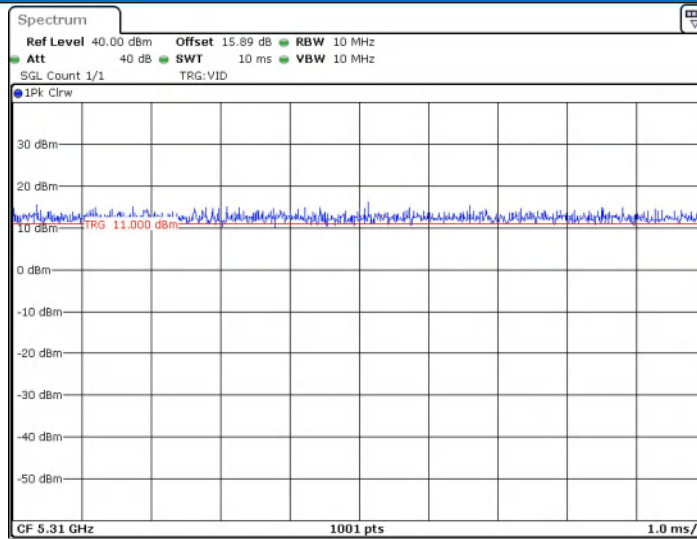


Date: 9 SEP 2025 16:07:46

11N40SISO_Ant1_5510

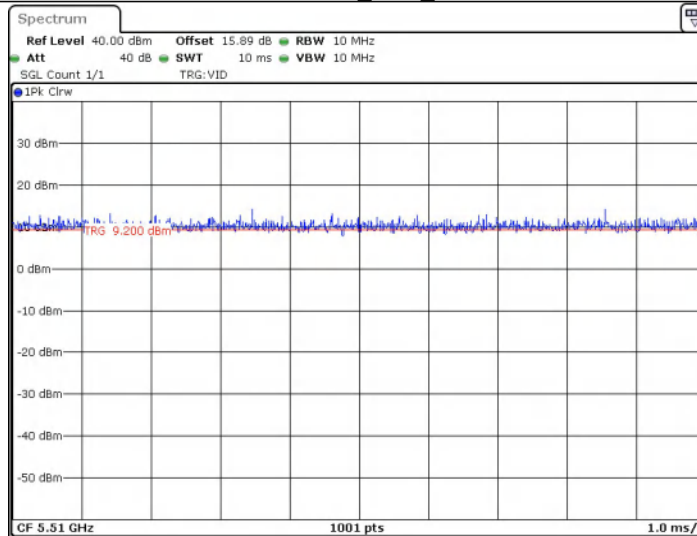


Date: 9 SEP 2025 16:08:07

11N40SISO_Ant1_5550

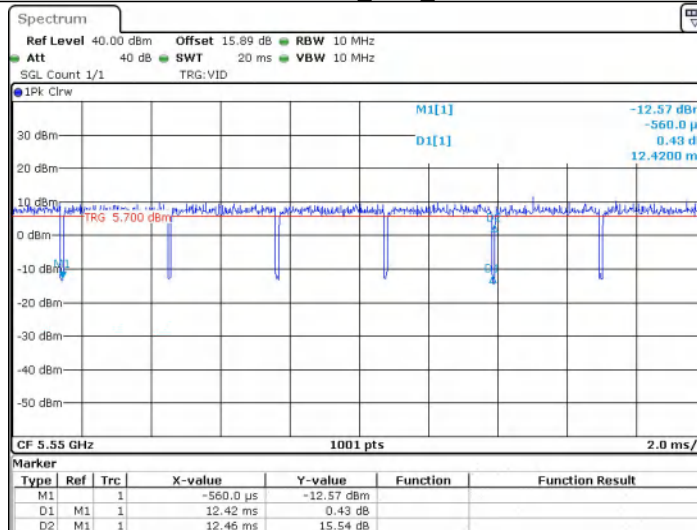


Date: 10 JUN 2025 18:38:54

11N40SISO_Ant1_5670

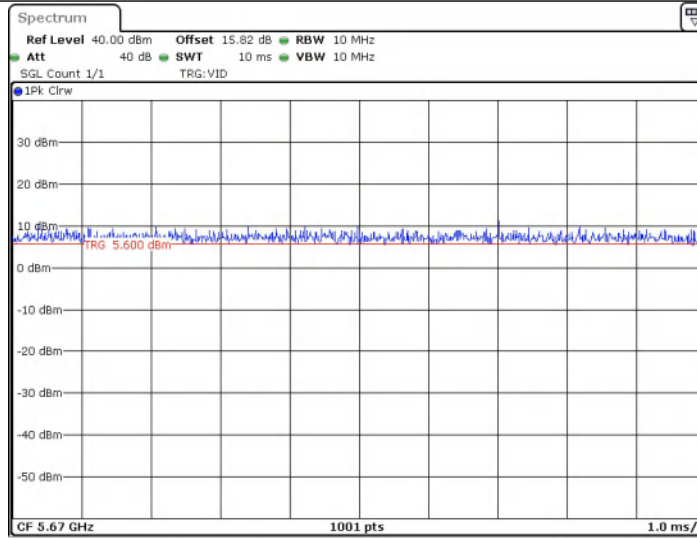


Date: 9 SEP. 2025 16:09:20

11N40SISO_Ant1_5755

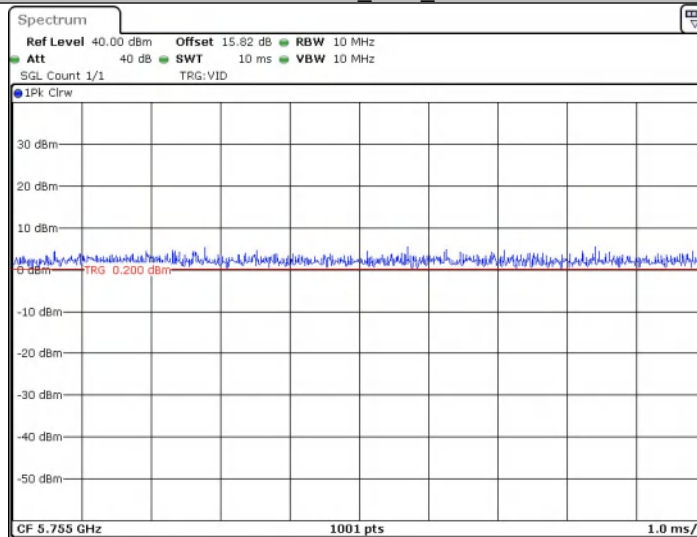


Date: 9 SEP. 2025 16:10:31

11N40SISO_Ant1_5795

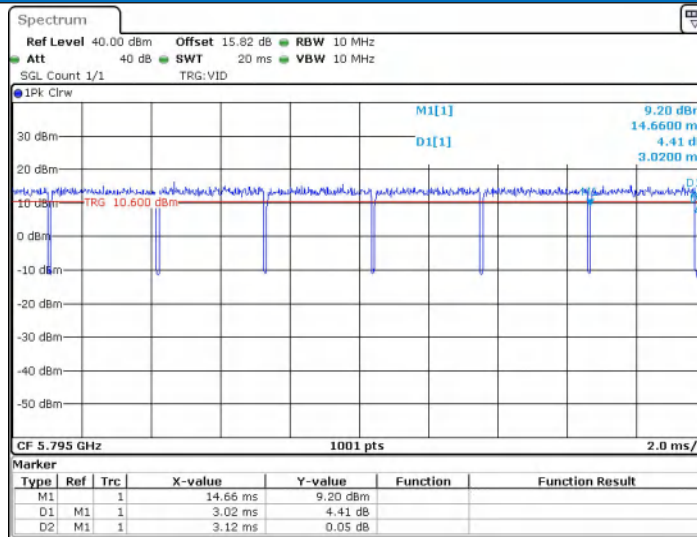


Date: 10 JUN 2025 18:44:26

11AC20SISO_Ant1_5180

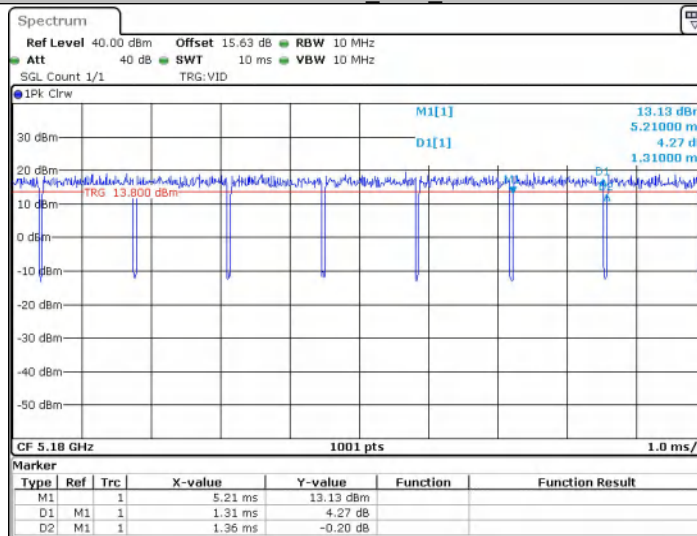


Date: 9 SEP 2025 16:11:51

11AC20SISO_Ant1_5200

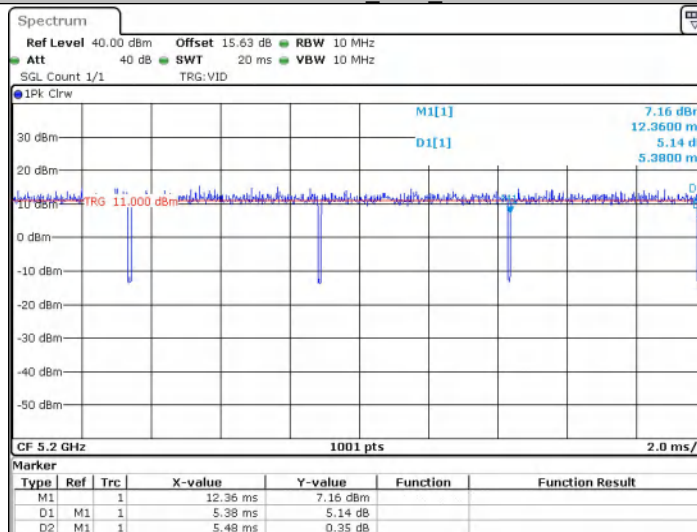


Date: 10 JUN 2025 18:54:55

11AC20SISO_Ant1_5240

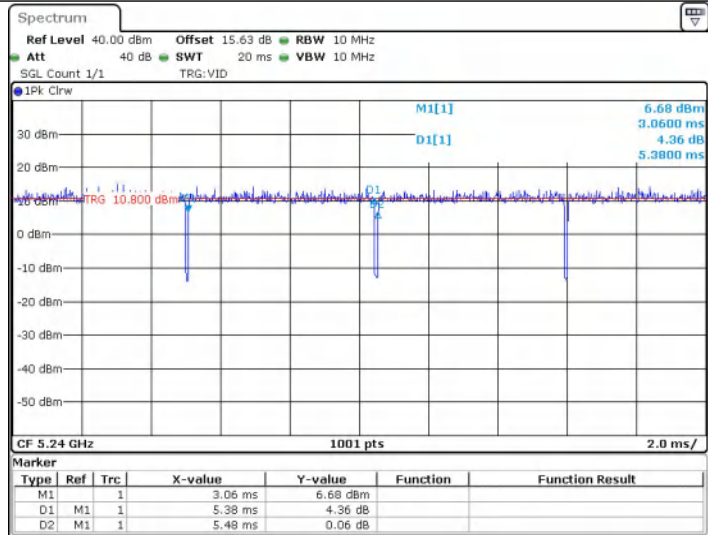


Date: 10 JUN 2025 18:58:13

11AC20SISO_Ant1_5260

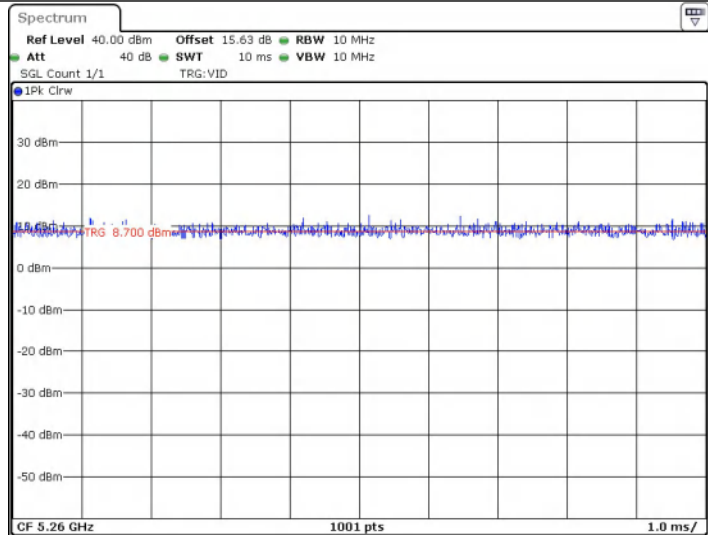


Date: 12 NOV 2025 16:23:07

11AC20SISO_Ant1_5280

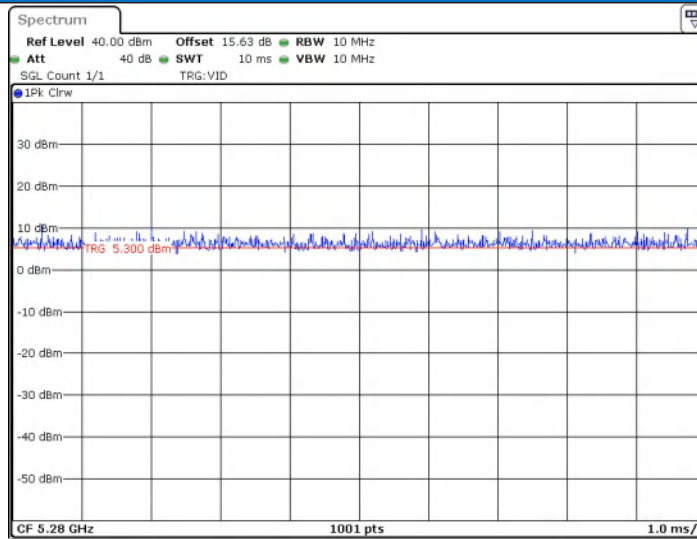


Date: 12.NOV.2025 16:24:59

11AC20SISO_Ant1_5320

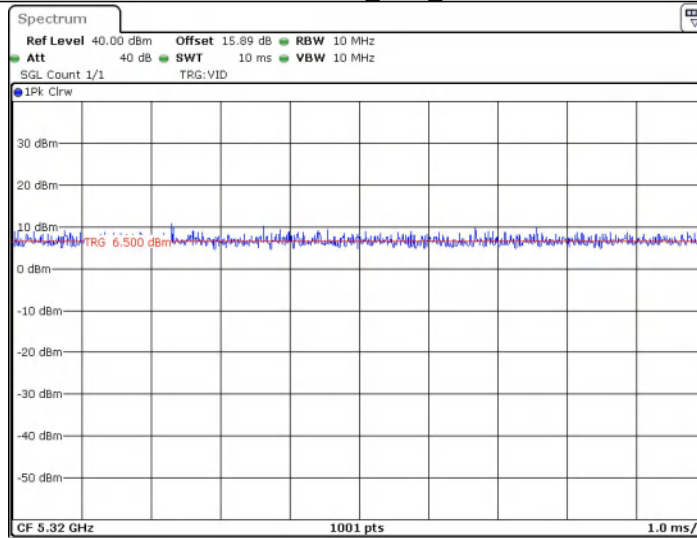


Date: 12.NOV.2025 16:26:12

11AC20SISO_Ant1_5500

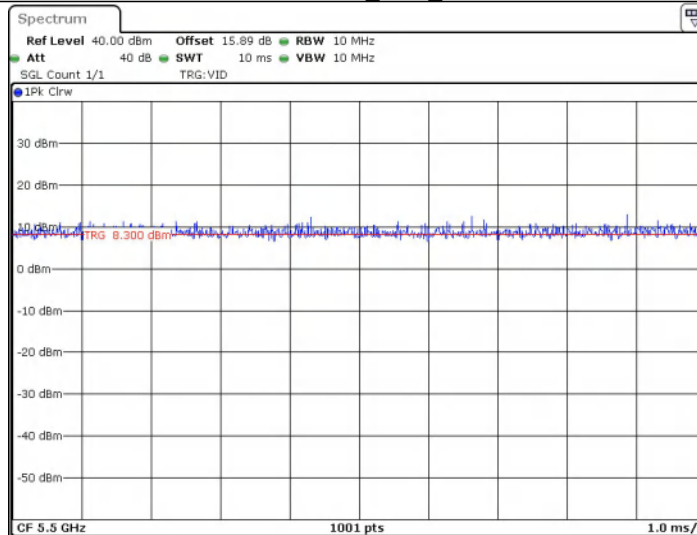


Date: 12.NOV.2025 16:29:33

11AC20SISO_Ant1_5580

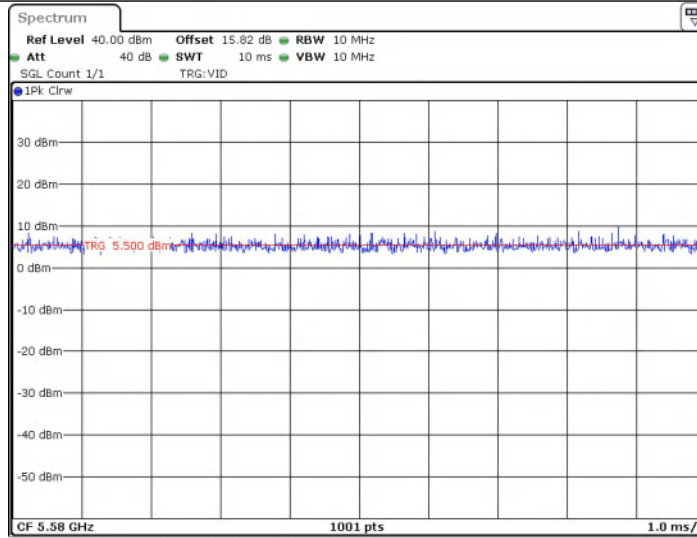


Date: 12.NOV.2025 16:30:48

11AC20SISO_Ant1_5700

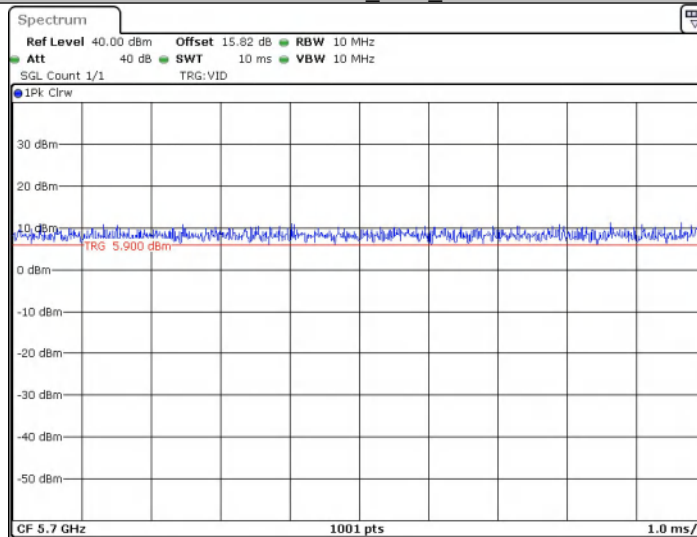


Date: 9.SEP.2025 16:16:55

11AC20SISO_Ant1_5745

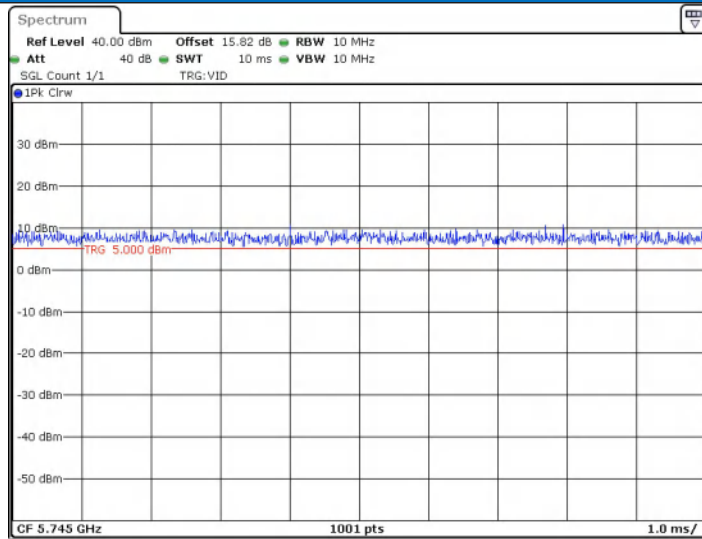


Date: 9 SEP 2025 16:19:29

11AC20SISO_Ant1_5785

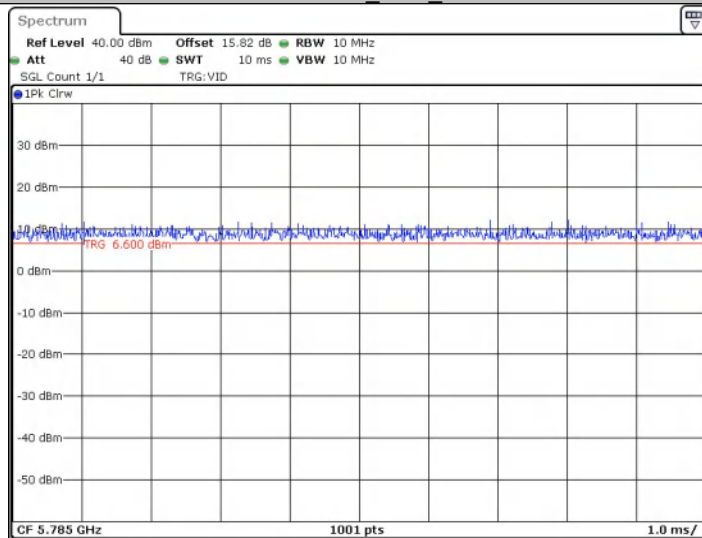


Date: 9 SEP 2025 16:21:13

11AC20SISO_Ant1_5825

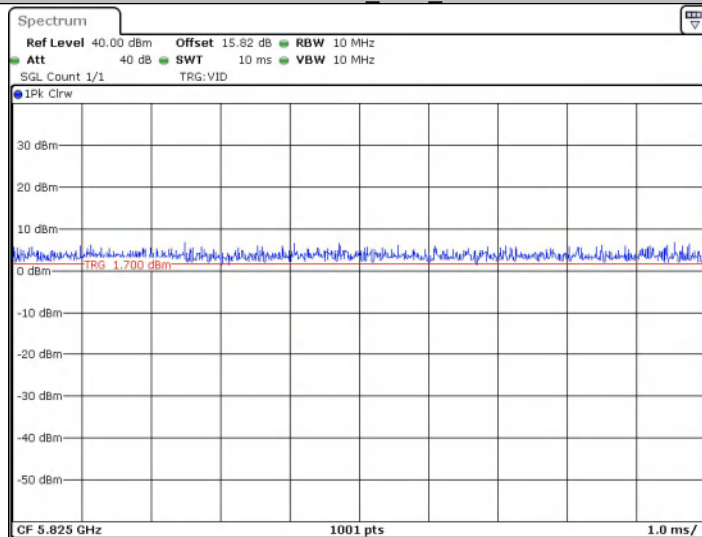


Date: 9 SEP 2025 16:22:36

11AC40SISO_Ant1_5190

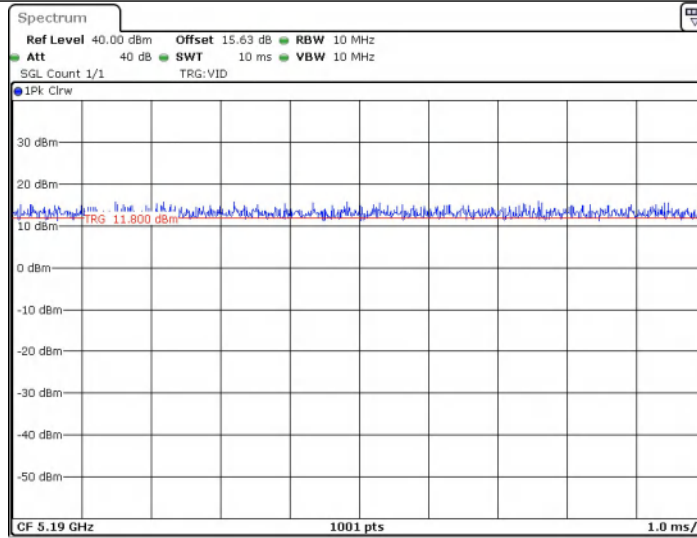


Date: 9 SEP. 2025 16:25:18

11AC40SISO_Ant1_5230

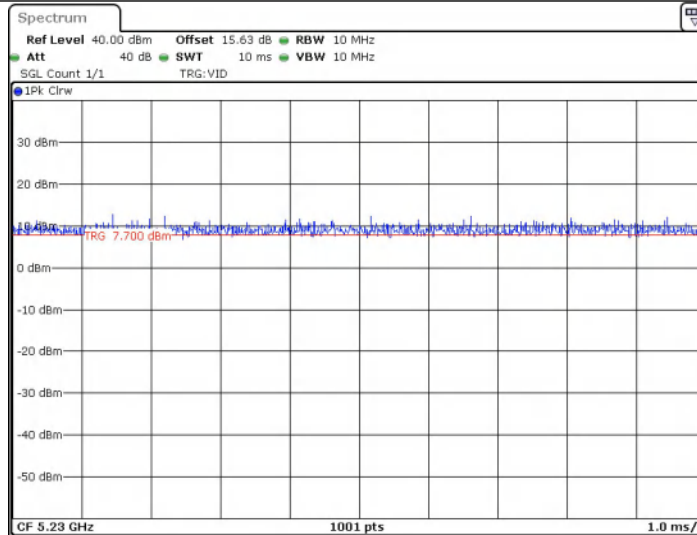


Date: 9 SEP. 2025 16:27:49

11AC40SISO_Ant1_5270

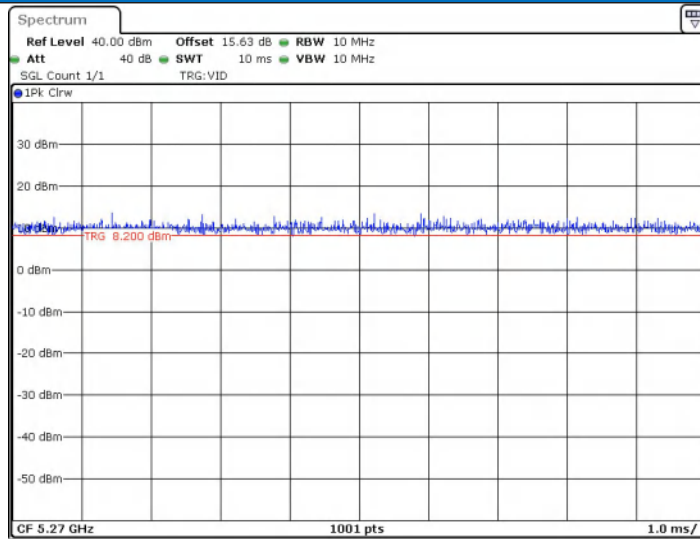


Date: 9 SEP 2025 16:32:14

11AC40SISO_Ant1_5310

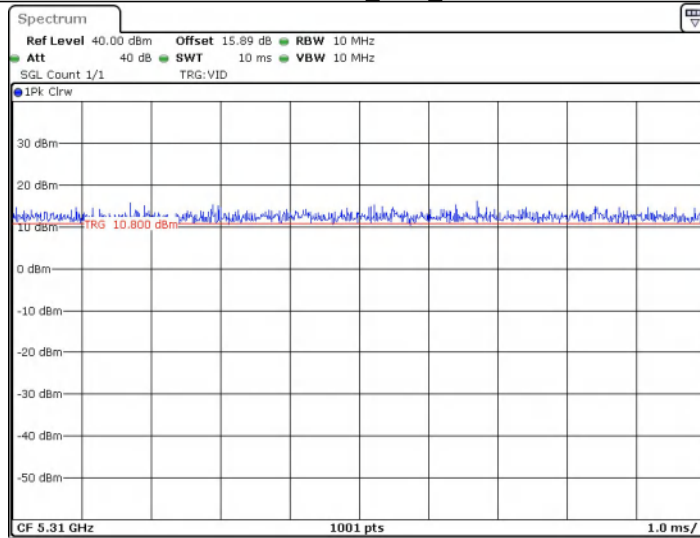


Date: 9 SEP 2025 16:38:39

11AC40SISO_Ant1_5510

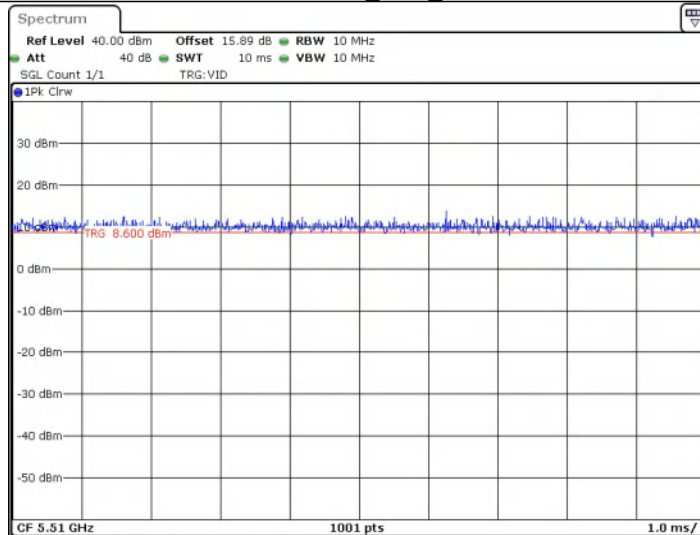


Date: 9 SEP 2025 16:40:54

11AC40SISO_Ant1_5550

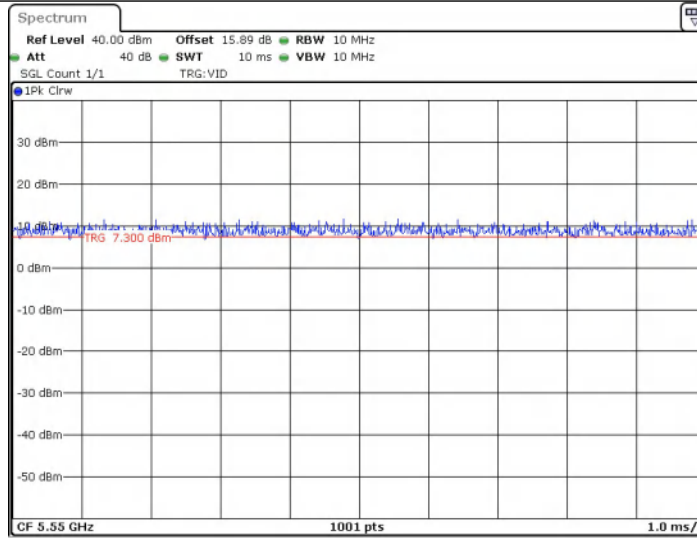


Date: 9 SEP. 2025 16:44:09

11AC40SISO_Ant1_5670

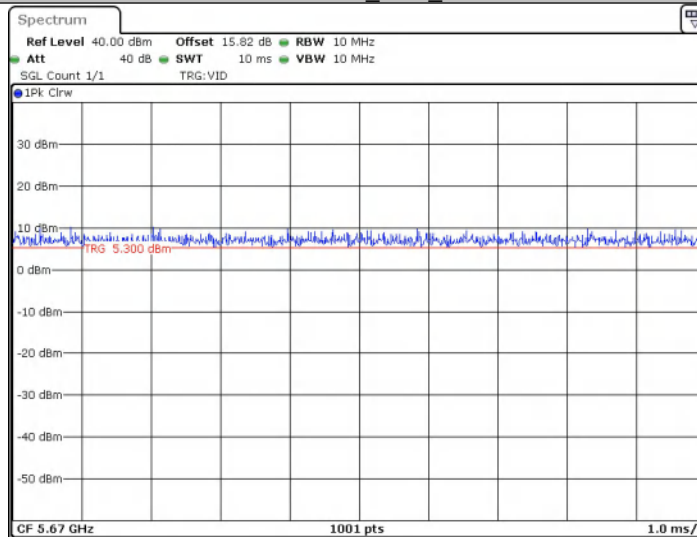


Date: 9 SEP. 2025 16:45:48

11AC40SISO_Ant1_5755

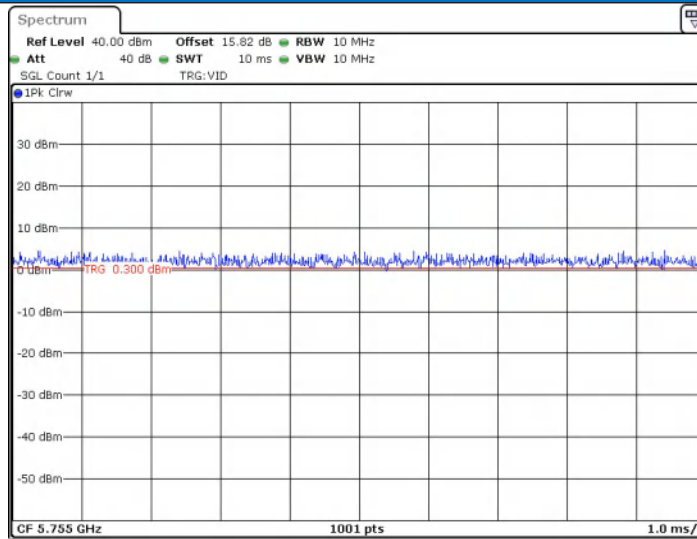


Date: 9 SEP 2025 16:50:51

11AC40SISO_Ant1_5795

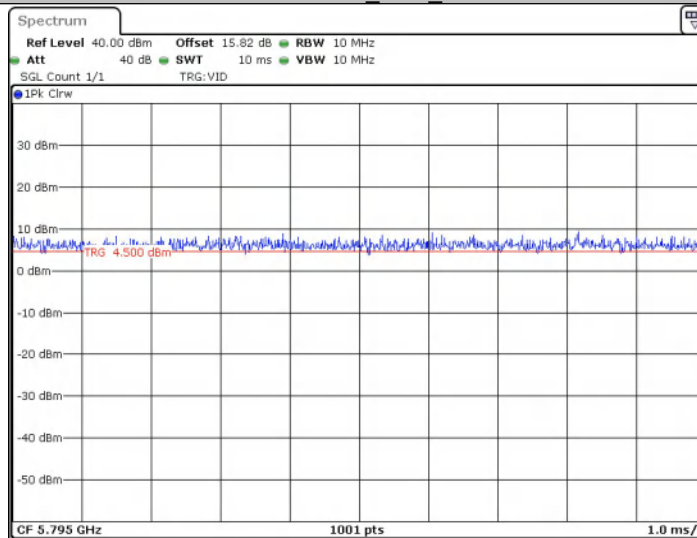


Date: 9 SEP 2025 16:52:27

11AC80SISO_Ant1_5210

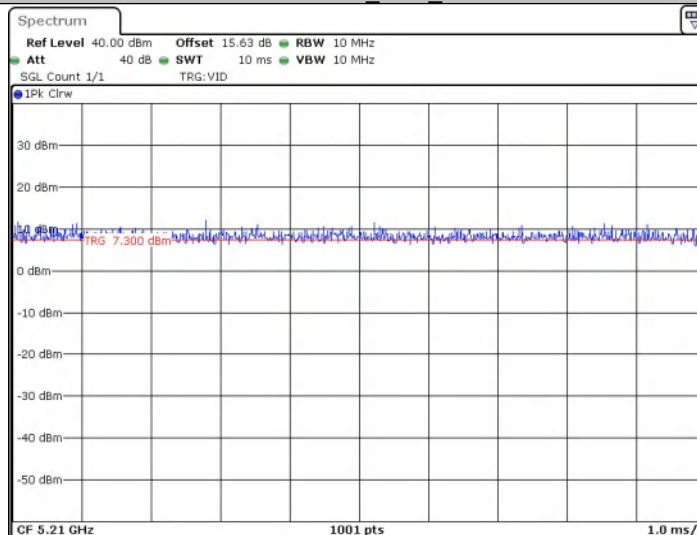


Date: 9 SEP 2025 16:55:07

11AC80SISO_Ant1_5290

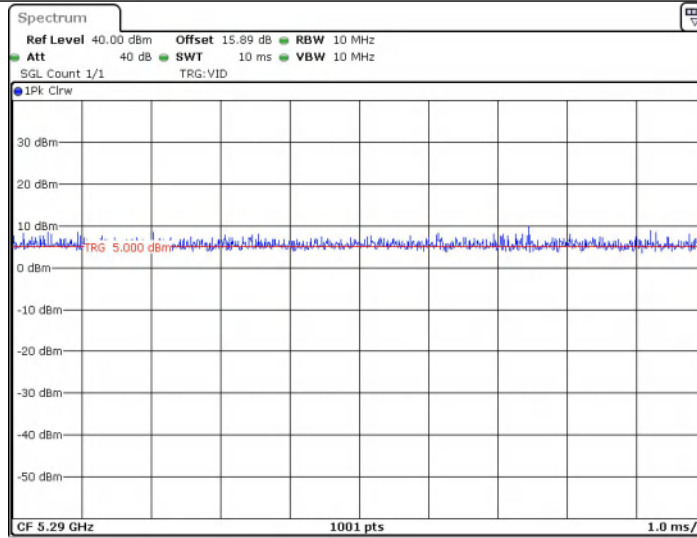


Date: 9 SEP. 2025 17:18:19

11AC80SISO_Ant1_5530

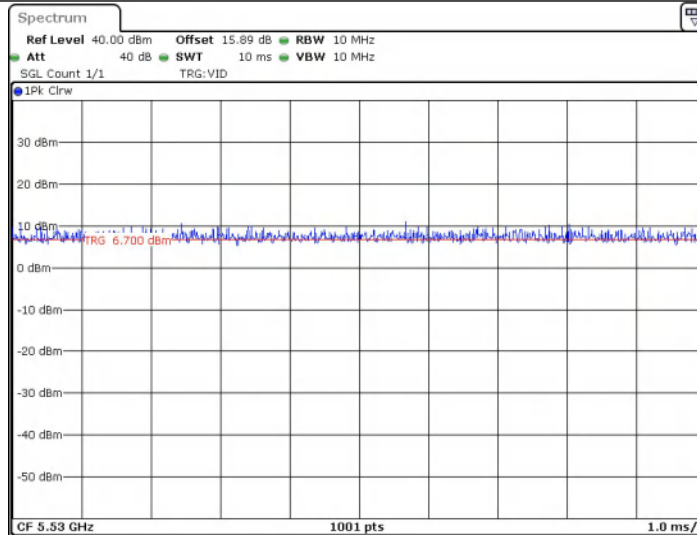


Date: 9 SEP. 2025 17:20:10

11AC80SISO_Ant1_5610

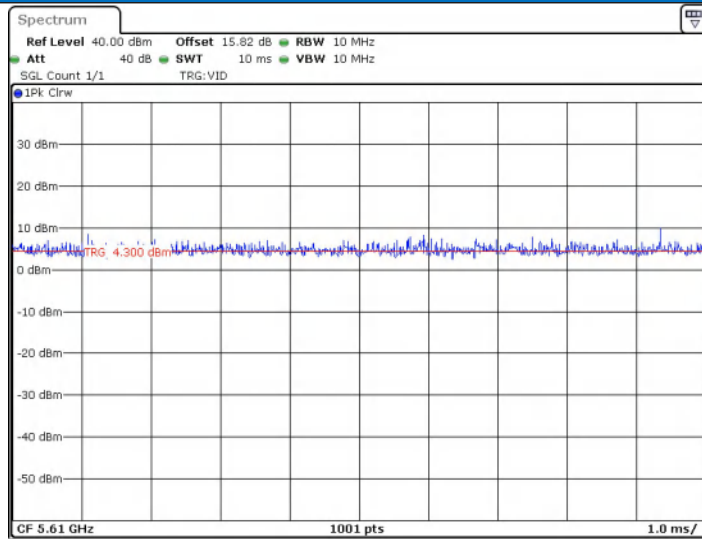


Date: 9 SEP 2025 17:22:17

11AC80SISO_Ant1_5775

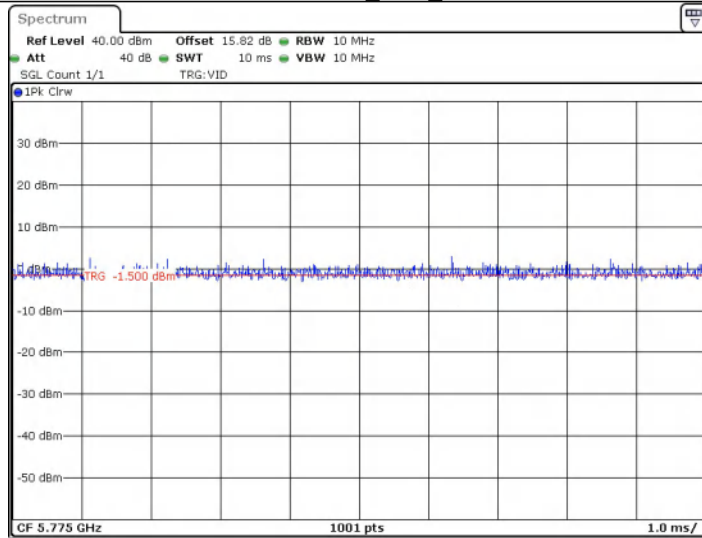


Date: 9 SEP 2025 17:24:31

11AX20SISO_Ant1_5180

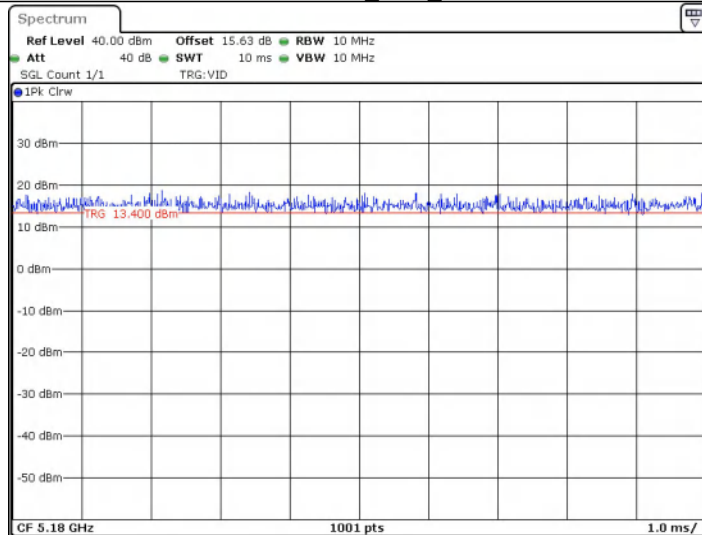


Date: 9 SEP 2025 17:26:49

11AX20SISO_Ant1_5200

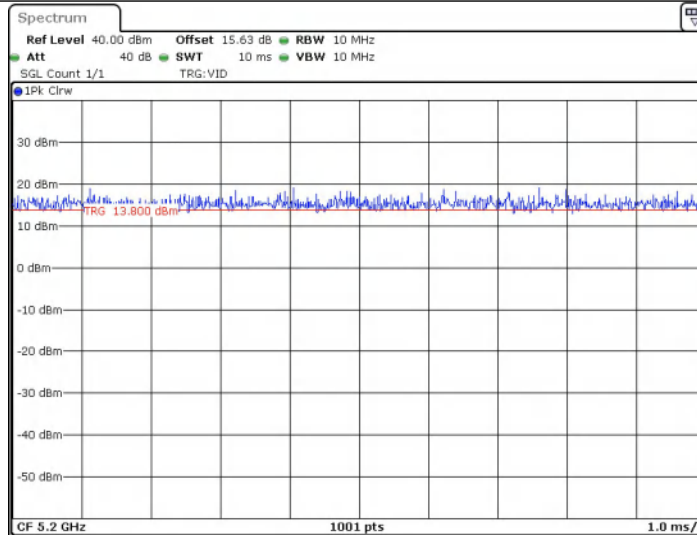


Date: 9 SEP. 2025 17:31:04

11AX20SISO_Ant1_5240

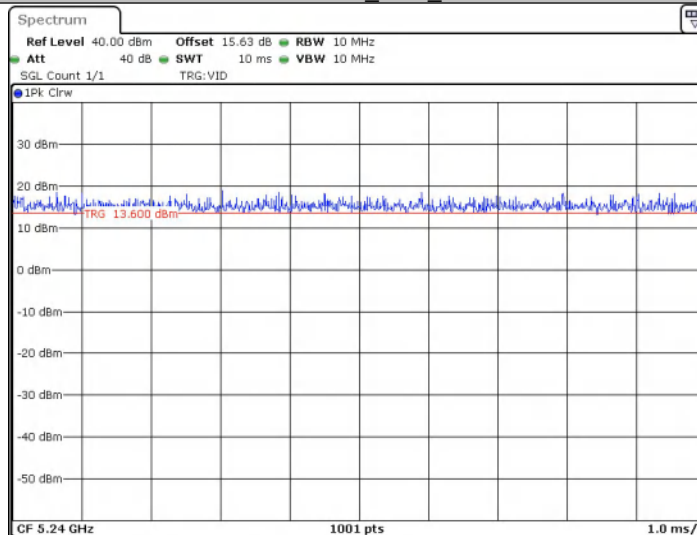


Date: 9 SEP. 2025 17:34:21

11AX20SISO_Ant1_5260

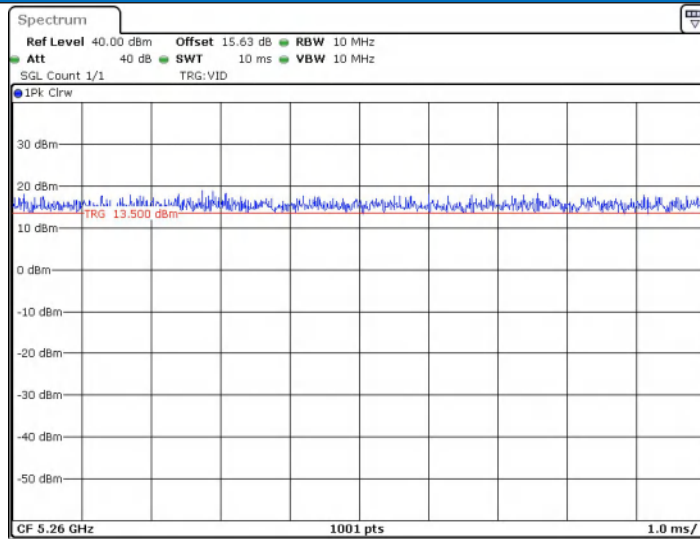


Date: 9 SEP 2025 17:36:08

11AX20SISO_Ant1_5280

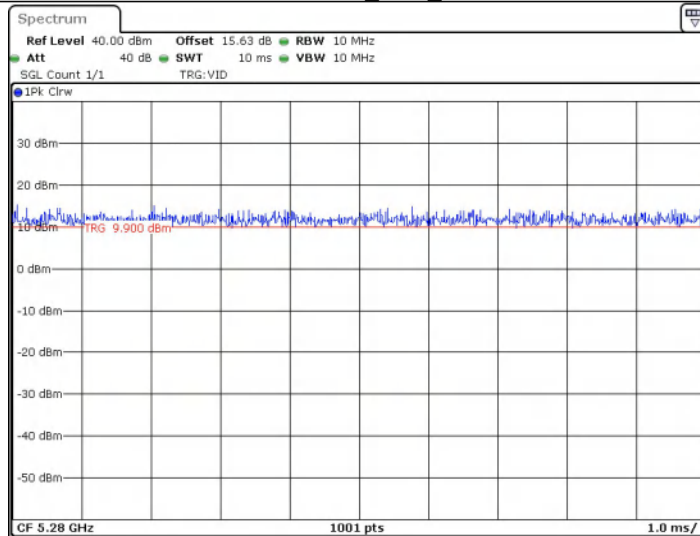


Date: 9 SEP 2025 17:37:54

11AX20SISO_Ant1_5320

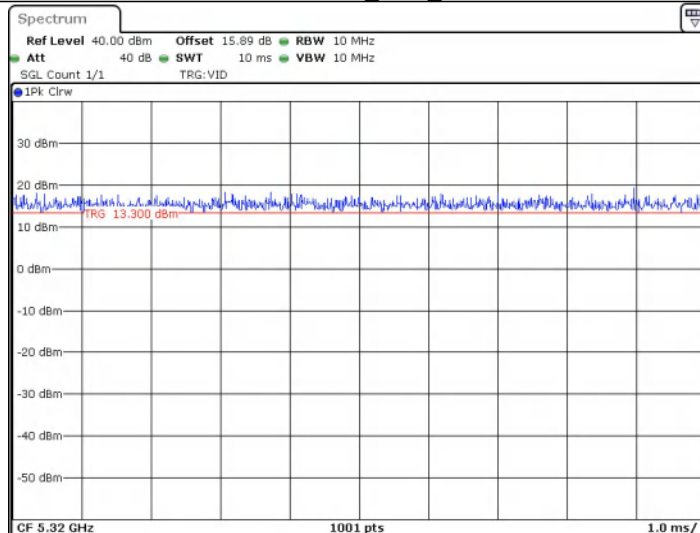


Date: 9 SEP 2025 17:39:41

11AX20SISO_Ant1_5500

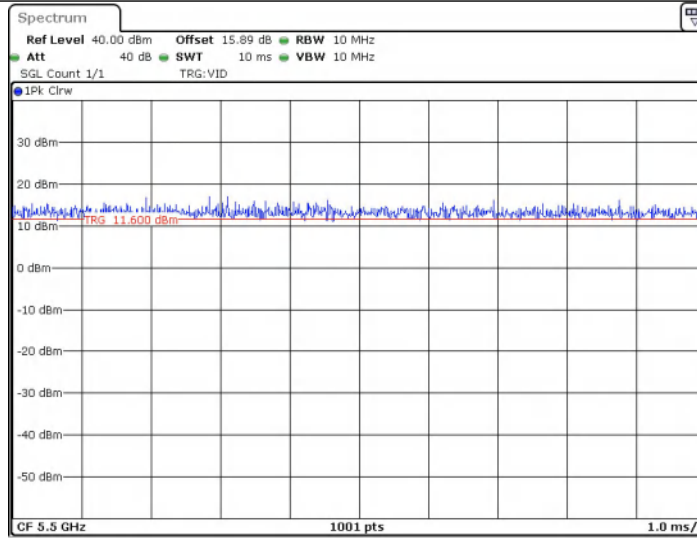


Date: 9 SEP. 2025 17:41:36

11AX20SISO_Ant1_5580

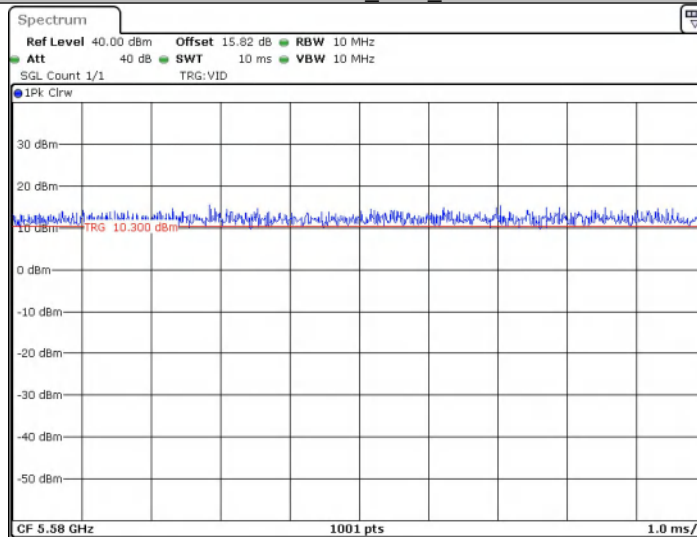


Date: 9 SEP. 2025 17:57:53

11AX20SISO_Ant1_5700

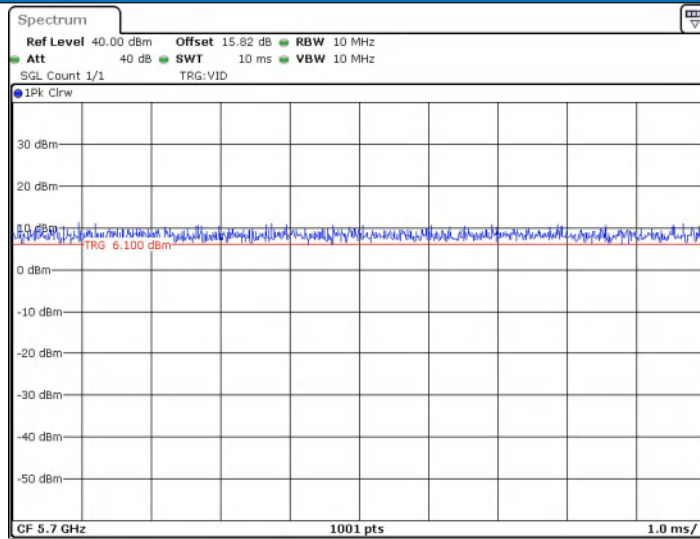


Date: 9 SEP 2025 17:59:00

11AX20SISO_Ant1_5745

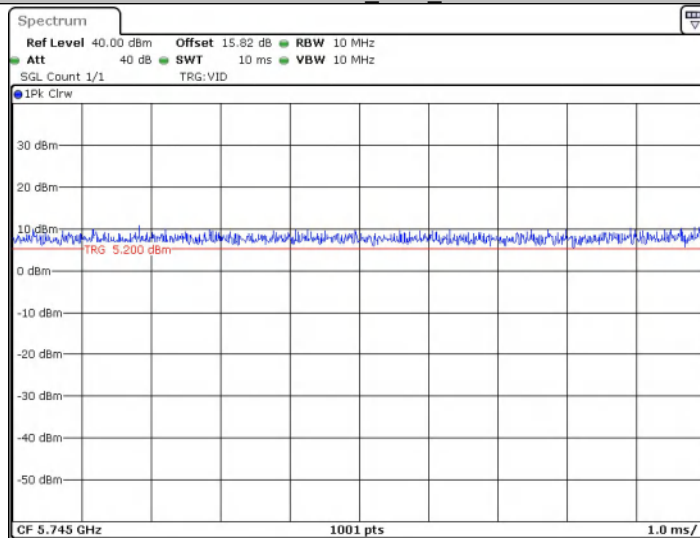


Date: 9 SEP 2025 18:00:57

11AX20SISO_Ant1_5785

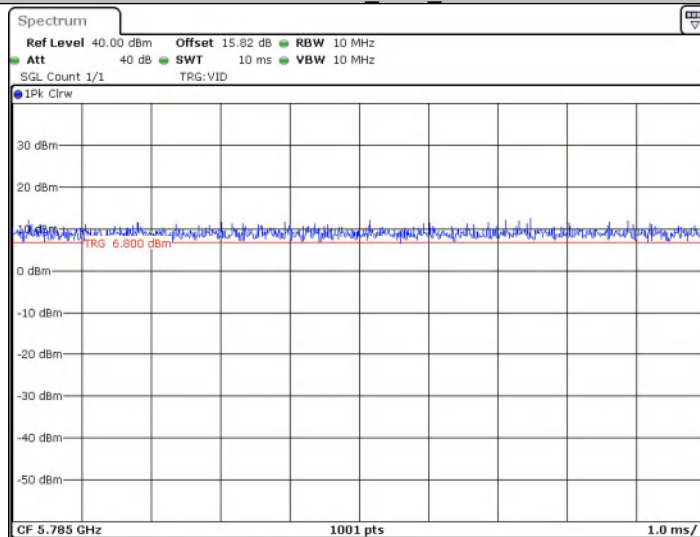


Date: 9 SEP 2025 18:02:21

11AX20SISO_Ant1_5825

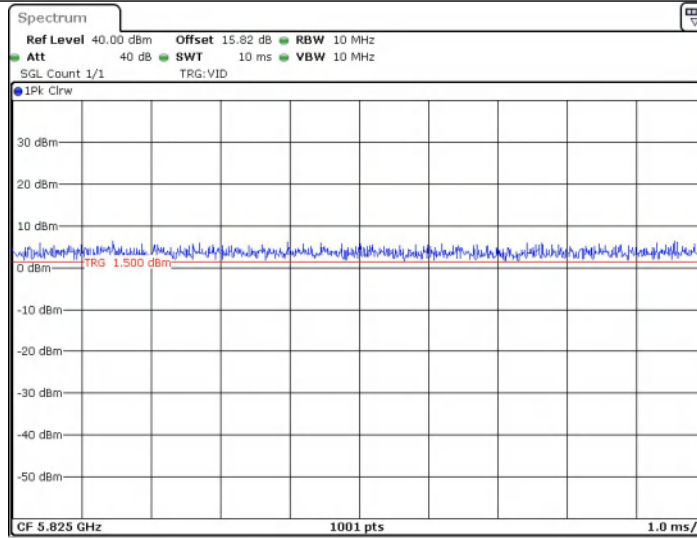


Date: 9 SEP. 2025 18:03:35

11AX40SISO_Ant1_5190

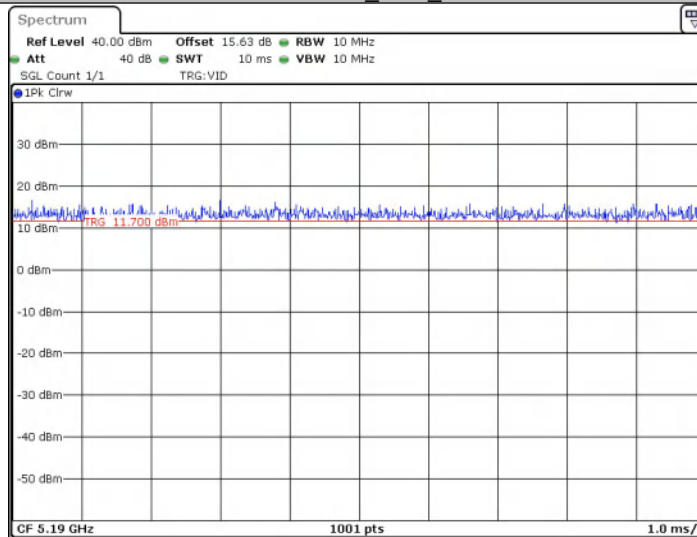


Date: 9 SEP. 2025 18:05:10

11AX40SISO_Ant1_5230

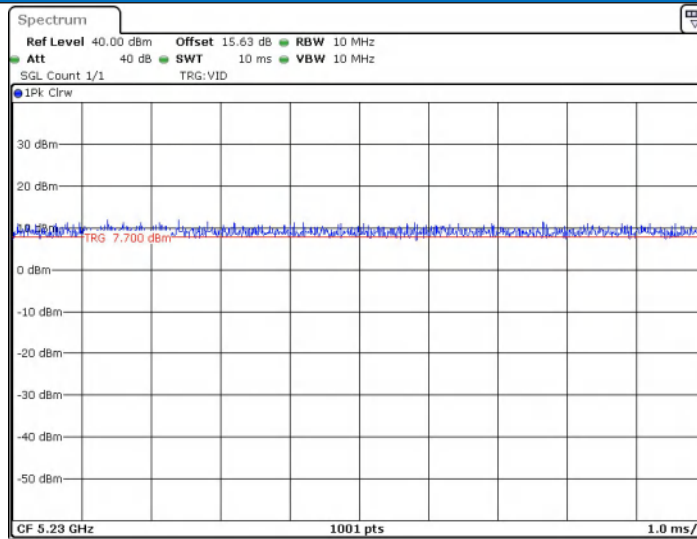


Date: 9 SEP 2025 18:07:34

11AX40SISO_Ant1_5270

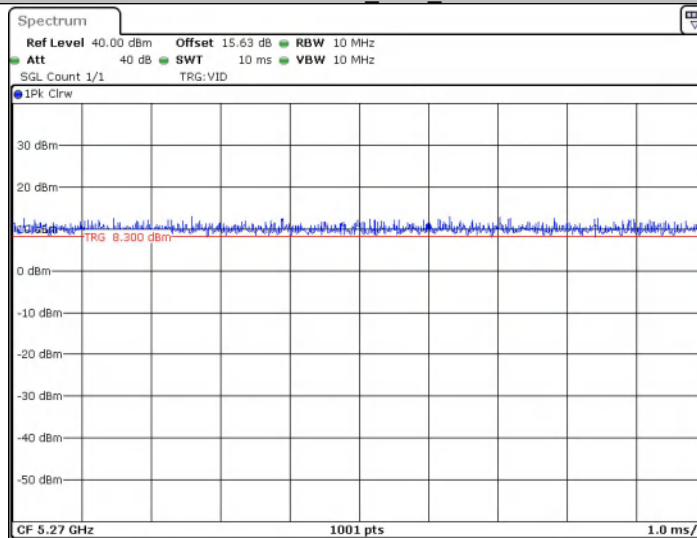


Date: 9 SEP 2025 18:08:38

11AX40SISO_Ant1_5310

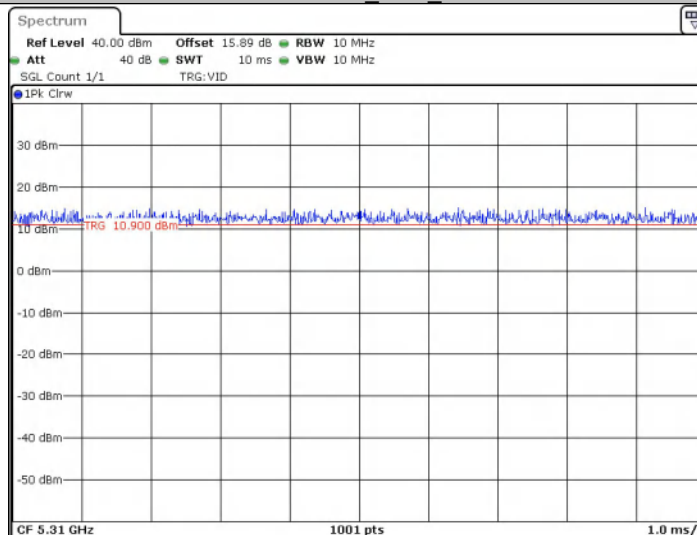


Date: 9 SEP 2025 18:09:42

11AX40SISO_Ant1_5510

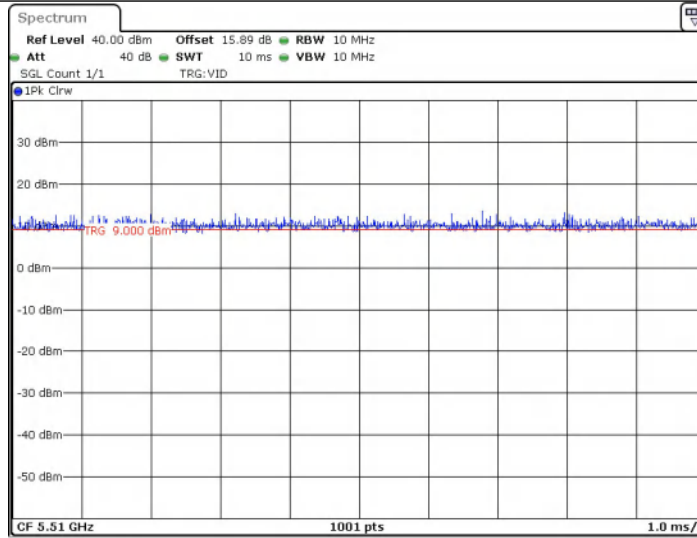


Date: 9 SEP. 2025 18:12:46

11AX40SISO_Ant1_5550

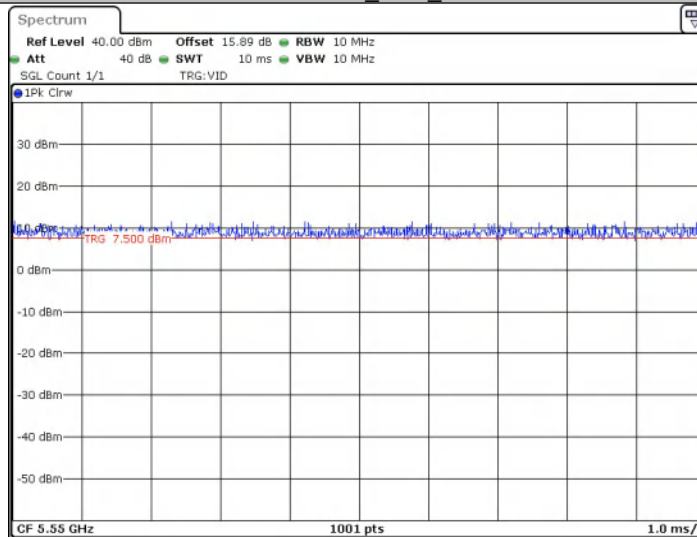


Date: 9 SEP. 2025 18:15:52

11AX40SISO_Ant1_5670

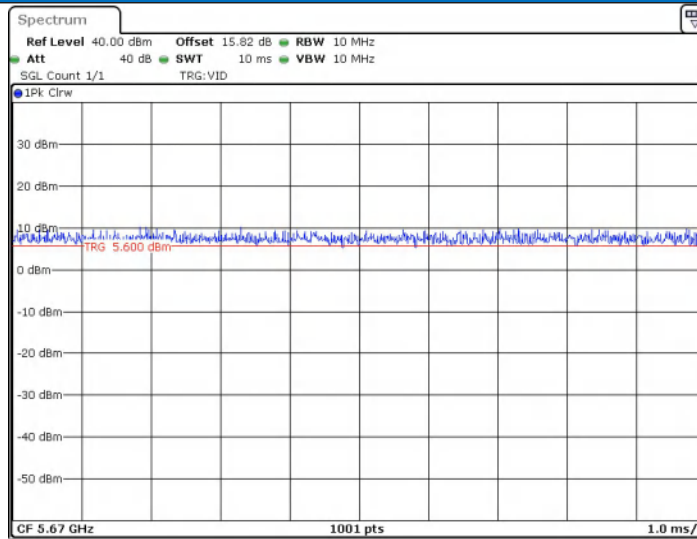


Date: 9 SEP 2025 18:16:56

11AX40SISO_Ant1_5755

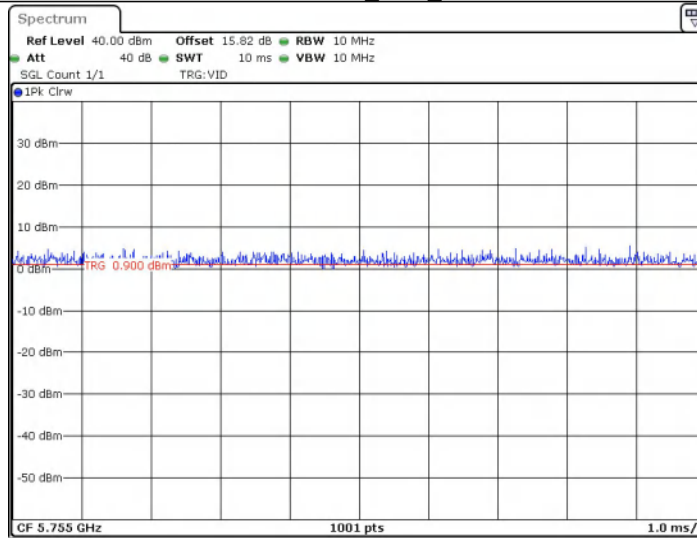

Date: 9 SEP 2025 18:18:22

11AX40SISO_Ant1_5795

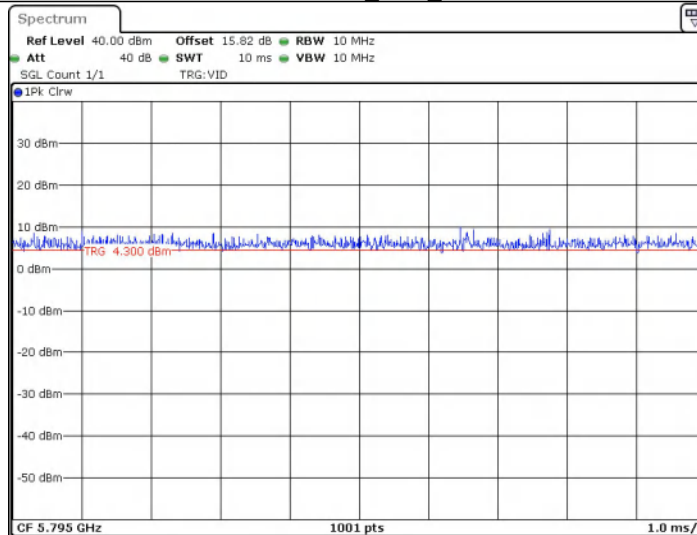

Date: 9 SEP 2025 18:20:16