



SAR TEST REPORT

For

Minno LLC

Rugged Tablet

Test Model: A08M08

Additional Model No.: A08Z08, A10M10

Prepared for : Minno LLC
Address : 421 N Milpas St, Santa Barbara, California 93103 USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 28, 2025
Number of tested samples : 1
Sample number : B251027039-1
Serial number : Prototype
Date of Test : October 28, 2025 ~ November 13, 2025
Date of Report : November 14, 2025



**SAR TEST REPORT**Report Reference No.....: **LCSA10275132EB**

Date Of Issue: November 14, 2025

Testing Laboratory Name.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Address: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Testing Location/ Procedure: Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐**Applicant's Name: Minno LLC**

Address: 421 N Milpas St, Santa Barbara, California 93103 USA

Test Specification:Standard.....: FCC 47CFR §2.1093
IEEE C95.1-2019
IEEE 1528-2013

Test Report Form No.....: TRF-4-E-102 A/0

TRF Originator.....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF: Dated 2014-09

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description.: Rugged Tablet

Trade Mark: Minno Maverick

Model/Type Reference: A08M08

Ratings.....: Please Refer to Page 10

Result: Positive**Compiled by:**

Jay zhan

Jay Zhan/ File administrators

Supervised by:

Jack Liu

Jack Liu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager





SAR -- TEST REPORT

Test Report No. :	LCSA10275132EB	<u>November 14, 2025</u> Date of issue
EUT..... : Rugged Tablet		
Type/Model : A08M08		
Applicant..... : Minno LLC Address..... : 421 N Milpas St, Santa Barbara, California 93103 USA Telephone..... : / Fax..... : /		
Manufacturer..... : Shanghai ZoomSmart Technology Co., Ltd Address..... : Room 702, No.189, Hengxi Road, Pujiang Town Minhang district, Shanghai, China, 201114 Telephone..... : / Fax..... : /		
Factory..... : Zhejiang Ruisuo Electronic Technology Co., Ltd. Assembly Address..... : No. 555 JiaZe Road, Weitang Street, Jiashan CountyJiaxing City. Zhejiang Province, China Telephone..... : / Fax..... : /		

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Revision	Issue Date	Revision Content	Revised By
000	November 14, 2025	Initial Issue	---





TABLE OF CONTENTS

1. TEST STANDARDS AND TEST DESCRIPTION.....	6
1.1. STATEMENT OF COMPLIANCE	6
1.2. TEST LOCATION.....	7
1.3. TEST FACILITY.....	7
1.4. TEST LABORATORY ENVIRONMENT	7
1.5. PRODUCT DESCRIPTION	8
1.6. DUT ANTENNA LOCATIONS	10
1.7. TEST SPECIFICATION.....	12
1.8. RF EXPOSURE LIMITS	13
1.9. EQUIPMENT LIST	14
2. SAR MEASUREMENTS SYSTEM CONFIGURATION	15
2.1. SAR MEASUREMENT SYSTEM	15
2.2. ISOTROPIC E-FIELD PROBE EX3DV4.....	17
2.3. DATA ACQUISITION ELECTRONICS (DAE).....	18
2.4. SAM TWIN PHANTOM	18
2.5. ELI PHANTOM	19
2.6. DEVICE HOLDER FOR TRANSMITTERS.....	20
2.7. MEASUREMENT PROCEDURE	21
3. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY.....	25
3.1. SAR MEASUREMENT VARIABILITY.....	25
3.2. SAR MEASUREMENT UNCERTAINTY	25
4. DESCRIPTION OF TEST POSITION.....	26
4.1. BODY EXPOSURE CONDITION	26
4.2. EXTREMITY EXPOSURE CONDITIONS	27
5. SAR SYSTEM VERIFICATION PROCEDURE	28
5.1. TISSUE SIMULATE LIQUID.....	28
5.2. SAR SYSTEM CHECK.....	30
6. SAR MEASUREMENT PROCEDURE	34
6.1. CONDUCTED POWER MEASUREMENT	34
6.2. GSM TEST CONFIGURATION.....	34
6.3. UMTS TEST CONFIGURATION	34
6.4. LTE TEST CONFIGURATION.....	36
6.5. POWER REDUCTION	36
6.6. POWER DRIFT	36
7. TEST CONDITIONS AND RESULTS.....	37
7.1. CONDUCTED POWER RESULTS	37
7.2. STAND-ALONE SAR TEST EVALUATION	77
7.3. SAR MEASUREMENT RESULTS	81
7.4. MULTIPLE TRANSMITTER EVALUATION.....	94
APPENDIX A: DETAILED SYSTEM CHECK RESULTS	97
APPENDIX B: DETAILED TEST RESULTS	97
APPENDIX C: CALIBRATION CERTIFICATE.....	97
APPENDIX D: PHOTOGRAPHS.....	97





1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Statement of Compliance

The maximum of results of SAR found during testing for A08M08 are follows:

<Highest Reported standalone SAR Summary>

Classment Class	Frequency Band	Body (Report SAR1-g (W/kg))
		(Separation Distance 0mm)
PCB	GSM 850	0.528
	GSM1900	0.593
	WCDMA Band II	0.675
	WCDMA Band V	0.460
	LTE Band 2	0.450
	LTE Band 7	0.746
	LTE Band 17	0.511
	LTE Band 26/5	0.628
	LTE Band 41/38	0.570
	LTE Band 66/4	0.692
DTS	WIFI2.4G	0.730
NII	WIFI5.2G	0.550
	WIFI5.8G	0.517

Note

- 1) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
- 2) According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

a) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.

b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

•LTE Band 4 (1710-1755 MHz) is covered by LTE band 66 (1710-1780 MHz) and has the same maximum tune-up power, so only LTE Band 66 needs to be tested.

•LTE Band 5 (824-849 MHz) is covered by LTE band 26 (814-849 MHz) and has the same maximum tune-up power, so only LTE Band 26 needs to be tested.

•LTE Band 38 (2570-2620 MHz) is covered by LTE band 41 (2496-2690 MHz) and has the same maximum tune-up power, so only LTE Band 41 needs to be tested.

<Highest Reported simultaneous SAR Summary>

Exposure Position	Classment Class	(Report SAR1-g (W/kg))	Highest Reported Simultaneous Transmission SAR1-g (W/kg)
Bdoy	PCB	0.746	1.476
	DTS	0.730	





1.2. Test Location

Company: Shenzhen LCS Compliance Testing Laboratory Ltd.
Address: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Telephone: (+86)755-82591330
Fax: (+86)755-82591330
Web: www.LCS-cert.com
E-mail: webmaster@LCS-cert.com

1.3. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description
SAR Lab. : NVLAP Accreditation Code is 600167-0.
FCC Designation Number is CN5024.
CAB identifier is CN0071.
CNAS Registration Number is L4595.
Test Firm Registration Number: 254912.

1.4. Test Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Atmospheric pressure:	950-1050mbar
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	





1.5. Product Description

The **Minno LLC** 's Model: **A08M08** or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

EUT	: Rugged Tablet
Test Model	: A08M08
Additional Model No.	: A08Z08, A10M10
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Ratings	: Input:5.0V $\overline{\sim}$ 3A, 9V $\overline{\sim}$ 2A, 12V $\overline{\sim}$ 1.5A For Adapter Input:100-240V~, 50/60Hz, 0.5A Max Output: 5.0V $\overline{\sim}$ 3A, 9V $\overline{\sim}$ 2A, 12V $\overline{\sim}$ 1.5A DC 3.8V by Rechargeable Li-ion Battery, 9000mAh
Hardware Version	: A8003B_Main_RevC
Software Version	: A08M08_V2.00
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V5.1 (DSS) 40 channels for Bluetooth V5.1 (DTS)
Channel Spacing	: 1MHz for Bluetooth V5.1 (DSS) 2MHz for Bluetooth V5.1 (DTS)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.1 (DSS) GFSK for Bluetooth V5.1 (DTS)
Bluetooth Version	: V5.1
Antenna Description	: FPC Antenna, 2.03dBi(Max.)
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz~2462MHz
Channel Spacing	: 5MHz
Channel Number	: 11 Channels for 20MHz bandwidth (2412~2462MHz) 7 Channels for 40MHz bandwidth (2422~2452MHz)
Modulation Type	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: FPC Antenna, 2.03dBi(Max.)
WIFI(5.2G Band)	:
Frequency Range	: 5180MHz~5240MHz
Channel Number	: 4 Channels for 20MHz bandwidth(5180MHz~5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: FPC Antenna, 2.61dBi(Max.)
WIFI(5.8G Band)	:
Frequency Range	: 5745MHz~5825MHz
Channel Number	: 5 channels for 20MHz bandwidth(5745MHz~5825MHz) 2 channels for 40MHz bandwidth(5755MHz~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)	
IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)	
IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)	
Antenna Description	: FPC Antenna, 2.93dBi(Max.)
2G	:
Support Band	: ☒ GSM 850 (U.S.-Band) ☒ PCS 1900 (U.S.-Band)
Release Version	: R99
GPRS Class	: Class 12
EGPRS Class	: Class 12
Type Of Modulation	: GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description	: FPC Antenna -1.48dBi (max.) For GSM 850 3.62dBi (max.) For PCS 1900
3G	:
Support Band	: ☒ WCDMA Band II (U.S.-Band) ☒ WCDMA Band V (U.S.-Band)
Release Version	: R99
Type Of Modulation	: QPSK
Antenna Description	: FPC Antenna -1.48dBi (max.) For WCDMA Band II 3.62dBi (max.) For WCDMA Band V
LTE	:
Support Band	: ☒ E-UTRA Band 2(U.S.-Band) ☒ E-UTRA Band 4(U.S.-Band) ☒ E-UTRA Band 5(U.S.-Band) ☒ E-UTRA Band 7(U.S.-Band) ☒ E-UTRA Band 17(U.S.-Band) ☒ E-UTRA Band 26(U.S.-Band) ☒ E-UTRA Band 38(U.S.-Band) ☒ E-UTRA Band 41(U.S.-Band) ☒ E-UTRA Band 66(U.S.-Band)
LTE Release Version	: R10
Type Of Modulation	: QPSK/16QAM
Antenna Description	: FPC Antenna -1.48dBi (max.) For E-UTRA Band 2 0.48dBi (max.) For E-UTRA Band 4 3.62dBi (max.) For E-UTRA Band 5 1.92dBi (max.) For E-UTRA Band 7 -6.6dBi (max.) For E-UTRA Band 17 -1.48dBi (max.) For E-UTRA Band 26 0.9dBi (max.) For E-UTRA Band 38 3.58dBi (max.) For E-UTRA Band 41 0.74dBi (max.) For E-UTRA Band 66
Power Class	: Class 3
NFC	:
Frequency Range	: 13.56MHz
Modulation Type	: ASK
Antenna Description	: FPC Antenna, 0dBi(Max.)
GPS Function	: Support and only RX

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.



1.6. DUT Antenna Locations

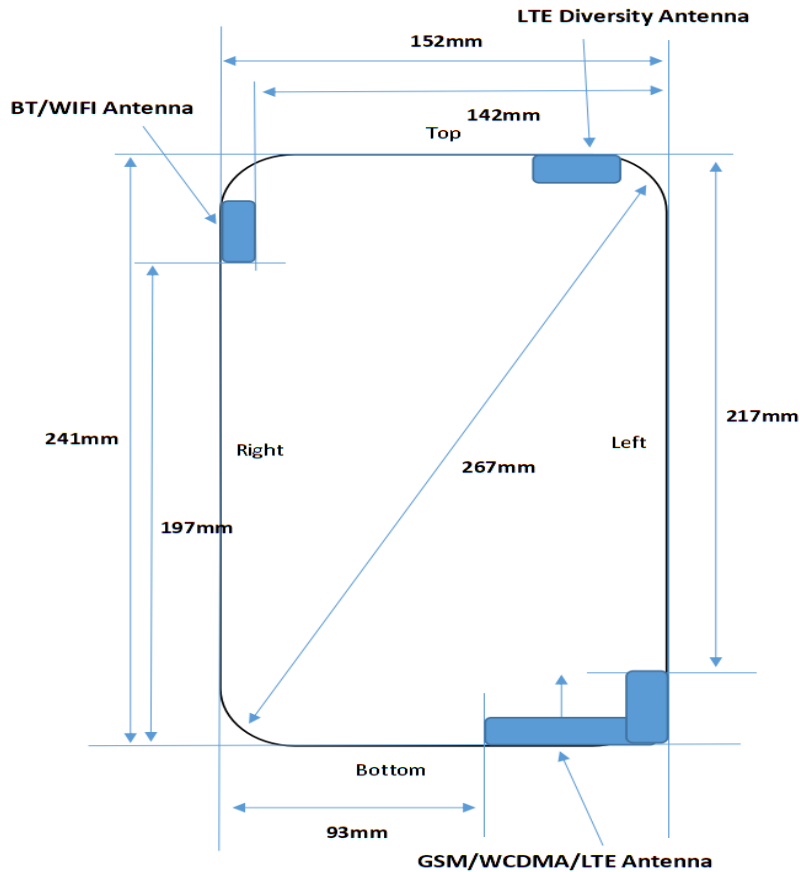

Rear view


Note:

- 1) Main Antenna: GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/7/17/26/38/41/66, the Div ant only for Rx.
- 2) Per KDB 616217, the diagonal length is > 200mm, the device is considered a "tablet" device and needed to test 0mm 1-g body SAR.

Distance from the antenna to the EUT edge(mm)						
ANT	Front	Back	Left	Right	Top	Bottom
MAIN	5	5	5	93	217	5
WIFI&BT	5	5	142	5	5	197



The location of DUT and phantom

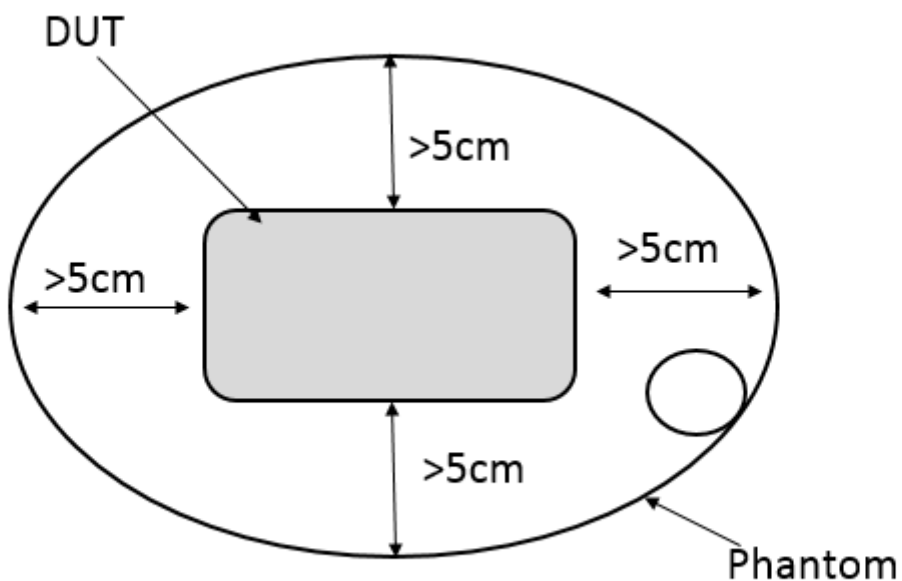

Note: phantom can fully cover DUT and the distance from the edge of EUT to the edge of phantom is greater than 5cm





1.7. Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 616217 D04	SAR for Tablet and Laptop
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03





1.8. RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.9. Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52; SEMCAD X				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	PC	Lenovo	NA	NA	NA ¹	NA ¹
☒	Twin Phantom	SPEAG	SAM V5.0	1850	NA ¹	NA ¹
☒	ELI Phantom	SPEAG	ELI V6.0	2010	NA ¹	NA ¹
☒	DAE	SPEAG	DAE3	373	2025/2/17	2026/2/16
☒	E-Field Probe	SPEAG	EX3DV4	3805	2025/2/25	2026/2/24
☒	Validation Kits	SPEAG	D750V3	1105	2025/7/28	2028/7/27
☒	Validation Kits	SPEAG	D835V2	4d124	2023/10/24	2026/10/23
☒	Validation Kits	SPEAG	D1750V2	1110	2025/8/1	2028/7/31
☒	Validation Kits	SPEAG	D1900V2	5d055	2023/10/20	2026/10/19
☒	Validation Kits	SPEAG	D2450V2	808	2023/10/23	2026/10/22
☒	Validation Kits	SPEAG	D2600V2	1231	2025/7/15	2028/7/14
☒	Validation Kits	SPEAG	D5GHzV2	1046	2023/10/23	2026/10/22
☒	Agilent Network Analyzer	Agilent	8753E	SU38432944	2025/5/22	2026/5/21
☒	Dielectric Probe Kit	SPEAG	DAKS3.5	1157	2025/8/18	2026/8/17
☒	Universal Radio Communication Tester	R&S	CMW500	42115	2025/9/27	2026/9/26
☒	Directional Coupler	MCLI/USA	4426-20	03746	2025/9/27	2026/9/26
☒	Power meter	Agilent	E4419B	MY45104493	2025/9/27	2026/9/26
☒	Power meter	Agilent	E4419B	MY45100308	2025/9/27	2026/9/26
☒	Power sensor	Agilent	E9301H	MY41495616	2025/9/27	2026/9/26
☒	Power sensor	Agilent	E9301H	MY41495234	2025/9/27	2026/9/26
☒	3dB Attenuator	NA	2N-3dB	NA	2025/9/27	2026/9/26
☒	3dB Attenuator	NA	2N-3dB	NA	2025/9/27	2026/9/26
☒	3dB Attenuator	NA	2N-3dB	NA	2025/9/27	2026/9/26
☒	Signal Generator	Agilent	E4438C	MY49072627	2025/9/27	2026/9/26
☒	Broadband Preamplifier	/	BP-01M18G	P190501	2025/9/27	2026/9/26
☒	DC POWER SUPPLY	I-SHENG	SP-504	NA	2025/9/27	2026/9/26
☒	Speed reading thermometer	HTC-1	NA	LCS-E-138	2025/9/27	2026/9/26


Note: All the equipments are within the valid period when the tests are performed.

“1” : NA as this is not measurement equipment.



2.1. SAR Measurement System

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

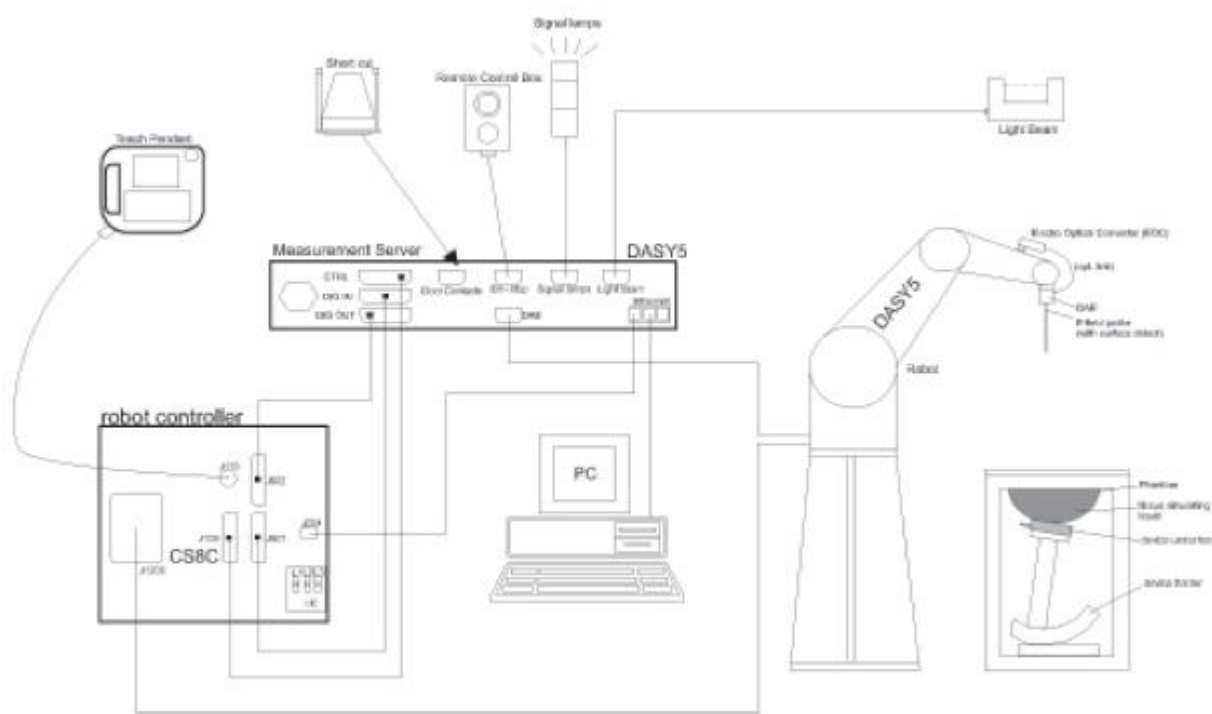

F-1. SAR Measurement System Configuration





- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.




2.2. Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



2.3. Data Acquisition Electronics (DAE)

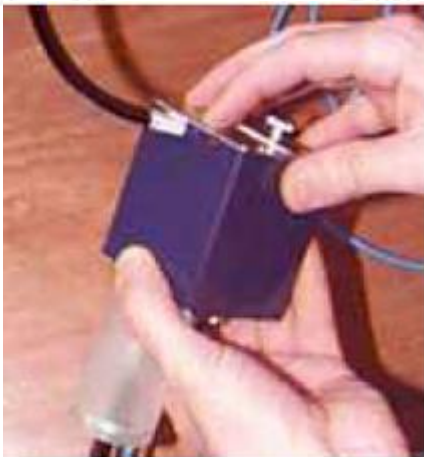Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

2.4. SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



2.5. ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



2.6. Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.





2.7. Measurement procedure

2.7.1. Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.





			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

2.7.2. Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.





2.7.3. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ϵ
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$





H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm $_i$ = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SAR measurement variability and uncertainty

3.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

3.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

4. Description of Test Position

4.1. Body Exposure Condition


4.1.1. Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

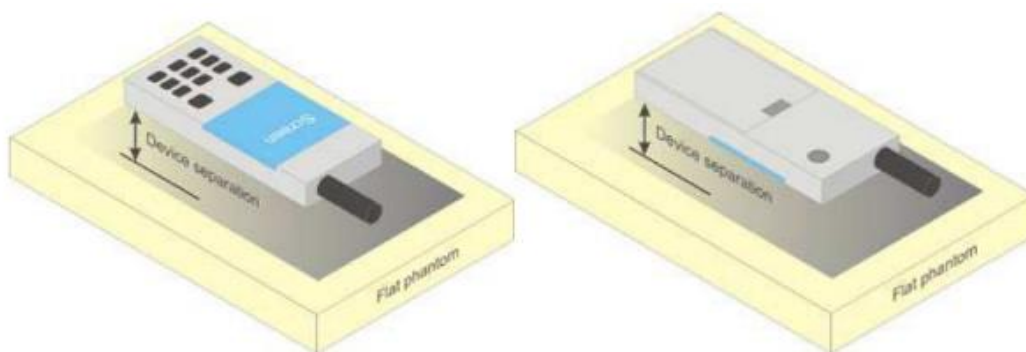

F-1. Test positions for body-worn devices





4.1.2. Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

4.2. Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, the Main antenna frequency bands are not required to test with 0mm for the Product Specific 10 g SAR.





5. SAR System Verification Procedure

5.1. Tissue Simulate Liquid

5.1.1. Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99 ⁺ % Pure Sodium Chloride Water: De-ionized, 16 MΩ ⁺ resistivity Tween: Polyoxyethylene (20) sorbitan monolaurate Sucrose: 98 ⁺ % Pure Sucrose HEC: Hydroxyethyl Cellulose					
HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 1: Recipe of Tissue Simulate Liquid





5.1.2. Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the DAKS. The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm2^{\circ}\text{C}$.


Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44.00)	0.89 (0.85~0.93)	41.467	0.874	21.9	October 30, 2025
835 Head	835	41.5 (39.43~43.58)	0.9 (0.86~0.95)	42.126	0.891	21.8	November 3, 2025
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.961	1.382	22.1	November 5, 2025
1900 Head	1900	40 (38.00~42.00)	1.4 (1.33~1.47)	39.281	1.371	22.3	November 7, 2025
2450 Head	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	38.318	1.779	21.8	November 10, 2025
2600 Head	2600	39 (37.05~40.95)	1.96 (1.86~2.06)	38.677	1.923	22.2	November 11, 2025
5250 Head	5250	36.0 (34.20~37.80)	4.66 (4.43~4.89)	36.209	4.875	21.8	November 12, 2025
5750 Head	5750	35.3 (33.54~37.07)	5.27 (5.01~5.53)	34.802	5.166	21.8	November 12, 2025

Table 2: Measurement result of Tissue electric parameters



5.2. SAR System Check

The microwave circuit arrangement for system Check is sketched in F-1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 100mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above $15\pm 0.5\text{ cm}$ in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

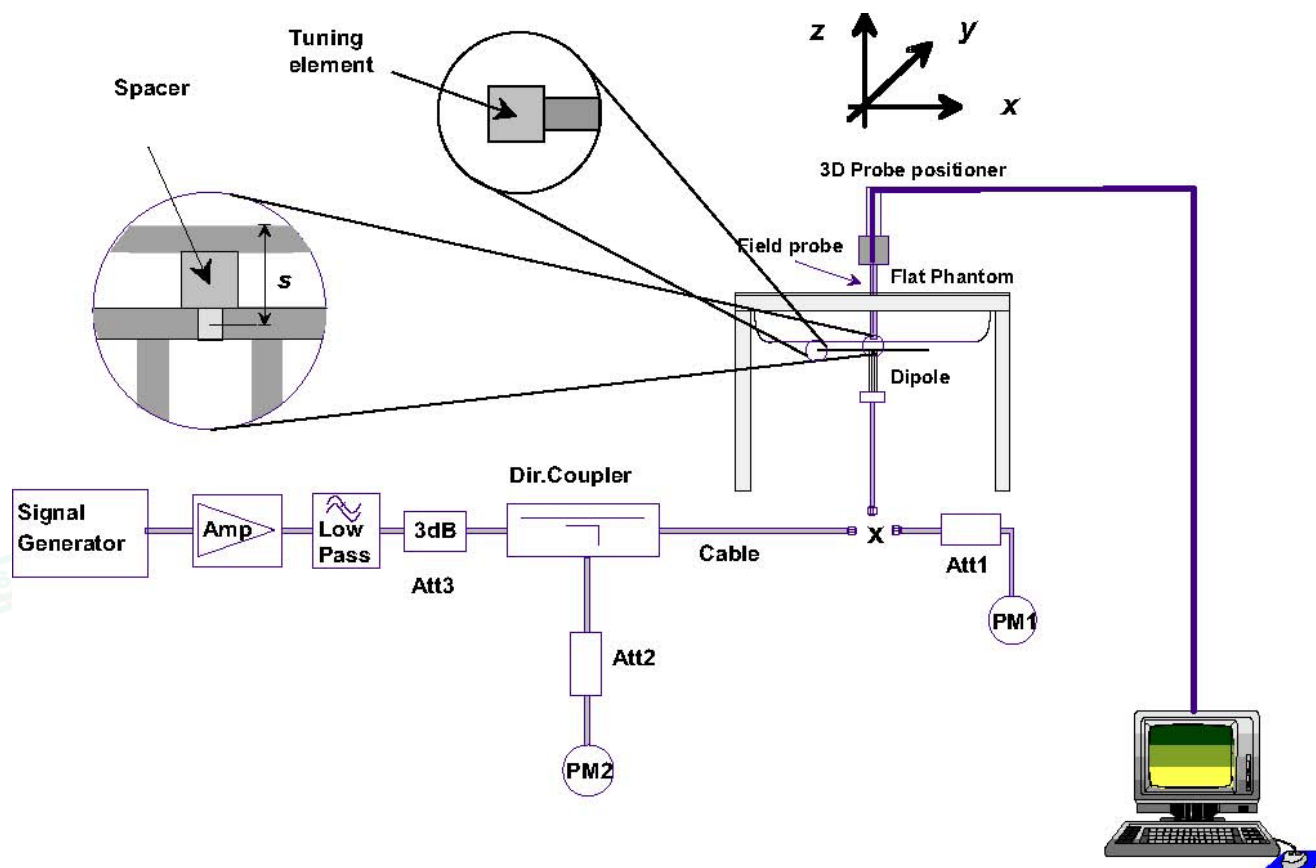

F-1. the microwave circuit arrangement used for SAR system check





5.2.1. Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- Return-loss is within 20% of calibrated measurement;
- Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

D750V3 SN 1105 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2025-07-28	-29.1		50.7		-3.47	

D835V2 SN 4d124 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-24	-35.6		50.2		1.65	
2024-10-23	-35.56	-0.11	49.8	-0.4	1.64	-0.01
2025-10-22	-35.49	-0.30	49.5	-0.7	1.62	-0.03

D1750V2 SN 1110 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2025-08-01	-36.9		48.6		-0.37	

D1900V2 SN 5d055 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-20	-26.1		51.3		4.84	
2024-10-19	-26.0	-0.38	51.5	0.2	4.85	0.01
2025-10-18	-26.2	0.76	51.1	-0.2	4.82	-0.02

D2450V2 SN 808 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-23	-26.3		51.4		4.73	
2024-10-22	-26.27	-0.11	51.2	-0.2	4.70	-0.03
2025-10-21	-26.31	0.04	51.6	0.2	4.75	0.02

D2600V2 SN 1231 Extend Dipole Calibrations

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2025-07-15	-34.0		48.5		1.3	

D5GHzV2 SN 1046 Extend Dipole Calibrations(5250MHz)

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance	Delta (ohm)	Imaginary Impedance	Delta (ohm)
---------------------	------------------	-----------	----------------	-------------	---------------------	-------------





			(ohm)		(ohm)	
2023-10-23	-28.6		49.9		-3.71	
2024-10-22	-28.5	-0.35	49.6	-0.3	-3.70	0.01
2025-10-21	-28.3	-1.05	49.7	-0.2	-3.74	-0.03

D5GHzV2 SN 1046 Extend Dipole Calibrations(5750MHz)

Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2023-10-23	-26.8		54.6		1.18	
2024-10-22	-26.74	-0.22	54.9	0.3	1.20	0.02
2025-10-21	-26.83	0.11	54.2	-0.4	1.15	0.03





5.2.2. Summary System Check Result(s)

Validation Kit		Measure d SAR 250mW	Measure d SAR 250mW	Measured SAR (normaliz ed to 1W)	Measured SAR (normaliz ed to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liqui d Tem p. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V3	Head	0.846	0.557	8.46	5.57	8.52 (7.67~9.37)	5.63 (5.07~6.19)	21.9	October 30, 2025
D835V2	Head	0.935	0.624	9.35	6.24	9.59 (8.63~10.55)	6.37 (5.73~7.01)	21.8	November 3, 2025
D1750V2	Head	3.57	1.85	35.70	18.50	36.5 (32.85~40.15)	19.5 (17.55~21.45)	22.1	November 5, 2025
D1900V2	Head	4.07	2.11	40.70	21.10	40.2 (36.18~44.22)	20.9 (18.81~22.99)	22.3	November 7, 2025
D2450V2	Head	5.39	2.53	53.90	25.30	53.5 (48.15~58.85)	24.8 (22.32~27.28)	21.8	November 10, 2025
D2600V2	Head	5.71	2.49	57.10	24.90	54.9 (49.41~60.39)	24.6 (22.14~27.06)	22.2	November 11, 2025
D5GHzV 2	Head (5.25GH z)	7.87	2.25	78.70	22.50	78.1 (70.29~85.91)	22.2 (19.98~24.42)	21.8	November 12, 2025
	Head (5.75GH z)	7.64	2.12	76.40	21.20	77.4 (69.66~85.14)	21.6 (19.44~23.76)	21.8	November 12, 2025

Table 3: Please see the Appendix A





6. SAR measurement procedure

The measurement procedures are as follows:

6.1. Conducted power measurement

- For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

6.2. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

6.3. UMTS Test Configuration

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.





Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1) Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

2) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set

Table 2: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} 47/15 β_{ed2} 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

6.4. LTE Test Configuration

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.8 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.9

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

6.5. Power Reduction

The product without any power reduction.

6.6. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within ± 0.2 dB.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7. TEST CONDITIONS AND RESULTS

7.1. Conducted Power Results

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. According to October 2013TCB Workshop, for GSM / GPRS , the number of time slots to test for SAR should correspond to the highest frame-average maximum output power configuration, considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slot) for GSM850/GSM1900 band due to their highest frame-average power.
3. For hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.

7.1.1. Conducted power measurement results for GSM850

GSM 850										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	32.41	32.41	32.40	33.00	-9.19	23.22	23.22	23.21	23.81
GPRS(GMSK)	1 TX Slot	32.32	32.29	32.29	33.00	-9.03	23.29	23.26	23.26	23.97
	2 TX Slots	31.00	31.02	31.02	31.50	-6.02	24.98	25.00	25.00	25.48
	3 TX Slots	29.52	29.51	29.48	30.00	-4.26	25.26	25.25	25.22	25.74
	4 TX Slots	28.01	28.02	28.00	28.50	-3.01	25.00	25.01	24.99	25.49
EGPRS(8PSK)	1 TX Slot	26.02	26.02	26.00	27.00	-9.03	16.99	16.99	16.97	17.97
	2 TX Slots	24.49	24.50	24.48	25.00	-6.02	18.47	18.48	18.46	18.98
	3 TX Slots	22.98	22.98	22.97	23.00	-4.26	18.72	18.72	18.71	18.74
	4 TX Slots	21.51	21.49	21.51	22.00	-3.01	18.50	18.48	18.50	18.99

7.1.2. Conducted power measurement results for PCS1900

GSM 1900										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	29.47	29.44	29.44	30.00	-9.19	20.28	20.25	20.25	20.81
GPRS(GMSK)	1 TX Slot	29.38	29.41	29.42	30.00	-9.03	20.35	20.38	20.39	20.97
	2 TX Slots	28.02	28.03	28.03	28.50	-6.02	22.00	22.01	22.01	22.48
	3 TX Slots	26.47	26.50	26.52	27.00	-4.26	22.21	22.24	22.26	22.74
	4 TX Slots	25.00	25.01	25.01	25.50	-3.01	21.99	22.00	22.00	22.49
EGPRS(8PSK)	1 TX Slot	25.47	25.47	25.49	26.00	-9.03	16.44	16.44	16.46	16.97
	2 TX Slots	24.01	23.99	23.99	25.00	-6.02	17.99	17.97	17.97	18.98
	3 TX Slots	22.48	22.50	22.49	23.00	-4.26	18.22	18.24	18.23	18.74
	4 TX Slots	20.99	21.01	21.01	22.00	-3.01	17.98	18.00	18.00	18.99

Note:

1)CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17
--	-------	-------	-------	-------

2) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

3) Frame-averaged power = $10 \times \log(\text{Burst-averaged power mW} \times \text{Slot used} / 8)$

When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used

When multiple slots can be used, SAR should be tested to account for the maximum source-based time-averaged output power.

<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- The EUT was connected to Base Station CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set Gain Factors (β_c and β_d) and parameters were set according to each
 - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - Set RMC 12.2Kbps + HSDPA mode.
 - Set Cell Power = -86 dBm
 - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - Select HSDPA Uplink Parameters
 - Set Delta ACK, Delta NACK and Delta CQI = 8
 - Set Ack-Nack Repetition Factor to 3
 - Set CQI Feedback Cycle (k) to 4 ms
 - Set CQI Repetition Factor to 2
 - Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station R&S CMW500 referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :





- i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
- ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
- iii. Set Cell Power = -86 dBm
- iv. Set Channel Type = 12.2k + HSPA
- v. Set UE Target Power
- vi. Power Ctrl Mode= Alternating bits
- vii. Set and observe the E-TFCI
- viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

General Note

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.





7.1.3. Conducted Power Measurement Results(WCDMA Band II)

Item	Band	WCDMA Band II result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	9262/1852.4	9400/1880	9538/1907.6	Tune up
RMC	12.2kbps RMC	23.24	23.24	23.26	24.00
HSDPA	Sub –Test 1	22.75	22.76	22.60	23.00
	Sub –Test 2	22.60	22.58	22.72	23.00
	Sub –Test 3	22.50	22.58	22.58	23.00
	Sub –Test 4	22.47	22.64	22.67	23.00
HSUPA	Sub –Test 1	22.47	22.56	22.52	23.00
	Sub –Test 2	22.36	22.55	22.37	23.00
	Sub –Test 3	22.51	22.67	22.56	23.00
	Sub –Test 4	22.36	22.31	22.27	23.00
	Sub –Test 5	21.35	21.71	21.61	22.00

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

7.1.4. Conducted Power Measurement Results(WCDMA Band V)

Item	Band	WCDMA Band V result (dBm)			
		Channel/Frequency(MHz)			
	sub-test	4132/826.4	4182/836.4	4233/846.6	Tune up
RMC	12.2kbps RMC	22.74	22.94	22.74	23.00
HSDPA	Sub –Test 1	22.54	22.88	22.78	23.00
	Sub –Test 2	22.57	22.74	22.58	23.00
	Sub –Test 3	22.60	22.76	22.53	23.00
	Sub –Test 4	22.62	22.72	22.68	23.00
HSUPA	Sub –Test 1	22.61	22.71	22.55	23.00
	Sub –Test 2	22.36	22.67	22.56	23.00
	Sub –Test 3	22.42	22.66	22.52	23.00
	Sub –Test 4	22.36	22.56	22.50	23.00
	Sub –Test 5	21.45	21.60	21.40	22.00

Note:

- 2) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.



**7.1.5. Conducted Power Measurement Results(LTE Band 2)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band2	1.4MHz	QPSK	18607	1RB#0	23.51	24.00
Band2	1.4MHz	16QAM	18607	1RB#0	23.79	24.00
Band2	1.4MHz	QPSK	18607	1RB#2	23.69	24.00
Band2	1.4MHz	16QAM	18607	1RB#2	23.80	24.00
Band2	1.4MHz	QPSK	18607	1RB#5	23.68	24.00
Band2	1.4MHz	16QAM	18607	1RB#5	23.75	24.00
Band2	1.4MHz	QPSK	18607	3RB#0	23.72	24.00
Band2	1.4MHz	16QAM	18607	3RB#0	22.70	23.00
Band2	1.4MHz	QPSK	18607	3RB#1	23.69	24.00
Band2	1.4MHz	16QAM	18607	3RB#1	22.44	23.00
Band2	1.4MHz	QPSK	18607	3RB#3	23.68	24.00
Band2	1.4MHz	16QAM	18607	3RB#3	22.44	23.00
Band2	1.4MHz	QPSK	18607	6RB#0	22.76	23.00
Band2	1.4MHz	16QAM	18607	6RB#0	21.94	22.00
Band2	1.4MHz	QPSK	18900	1RB#0	22.05	23.00
Band2	1.4MHz	16QAM	18900	1RB#0	21.80	22.00
Band2	1.4MHz	QPSK	18900	1RB#2	22.05	23.00
Band2	1.4MHz	16QAM	18900	1RB#2	21.79	22.00
Band2	1.4MHz	QPSK	18900	1RB#5	22.43	23.00
Band2	1.4MHz	16QAM	18900	1RB#5	22.11	23.00
Band2	1.4MHz	QPSK	18900	3RB#0	22.18	23.00
Band2	1.4MHz	16QAM	18900	3RB#0	21.15	22.00
Band2	1.4MHz	QPSK	18900	3RB#1	22.17	23.00
Band2	1.4MHz	16QAM	18900	3RB#1	21.13	22.00
Band2	1.4MHz	QPSK	18900	3RB#3	22.25	23.00
Band2	1.4MHz	16QAM	18900	3RB#3	21.21	22.00
Band2	1.4MHz	QPSK	18900	6RB#0	21.21	22.00
Band2	1.4MHz	16QAM	18900	6RB#0	20.41	21.00
Band2	1.4MHz	QPSK	19193	1RB#0	23.15	24.00
Band2	1.4MHz	16QAM	19193	1RB#0	22.58	23.00
Band2	1.4MHz	QPSK	19193	1RB#2	23.17	24.00
Band2	1.4MHz	16QAM	19193	1RB#2	22.68	23.00
Band2	1.4MHz	QPSK	19193	1RB#5	23.25	24.00
Band2	1.4MHz	16QAM	19193	1RB#5	23.11	24.00
Band2	1.4MHz	QPSK	19193	3RB#0	23.39	24.00
Band2	1.4MHz	16QAM	19193	3RB#0	22.22	23.00
Band2	1.4MHz	QPSK	19193	3RB#1	23.38	24.00
Band2	1.4MHz	16QAM	19193	3RB#1	22.27	23.00
Band2	1.4MHz	QPSK	19193	3RB#3	23.31	24.00
Band2	1.4MHz	16QAM	19193	3RB#3	22.32	23.00
Band2	1.4MHz	QPSK	19193	6RB#0	22.26	23.00
Band2	1.4MHz	16QAM	19193	6RB#0	21.55	22.00
Band2	3MHz	QPSK	18615	1RB#0	21.72	22.00
Band2	3MHz	16QAM	18615	1RB#0	20.96	21.00
Band2	3MHz	QPSK	18615	1RB#8	21.77	22.00
Band2	3MHz	16QAM	18615	1RB#8	21.02	22.00
Band2	3MHz	QPSK	18615	1RB#14	21.79	22.00
Band2	3MHz	16QAM	18615	1RB#14	20.94	21.00
Band2	3MHz	QPSK	18615	8RB#0	20.88	21.00
Band2	3MHz	16QAM	18615	8RB#0	20.22	21.00
Band2	3MHz	QPSK	18615	8RB#4	20.89	21.00
Band2	3MHz	16QAM	18615	8RB#4	20.22	21.00
Band2	3MHz	QPSK	18615	8RB#7	20.84	21.00
Band2	3MHz	16QAM	18615	8RB#7	20.27	21.00
Band2	3MHz	QPSK	18615	15RB#0	20.75	21.00
Band2	3MHz	16QAM	18615	15RB#0	20.00	21.00
Band2	3MHz	QPSK	18900	1RB#0	22.02	23.00
Band2	3MHz	16QAM	18900	1RB#0	21.21	22.00
Band2	3MHz	QPSK	18900	1RB#8	22.21	23.00
Band2	3MHz	16QAM	18900	1RB#8	21.34	22.00
Band2	3MHz	QPSK	18900	1RB#14	22.26	23.00
Band2	3MHz	16QAM	18900	1RB#14	21.39	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	3MHz	QPSK	18900	8RB#0	21.29	22.00
Band2	3MHz	16QAM	18900	8RB#0	20.56	21.00
Band2	3MHz	QPSK	18900	8RB#4	21.30	22.00
Band2	3MHz	16QAM	18900	8RB#4	20.57	21.00
Band2	3MHz	QPSK	18900	8RB#7	21.36	22.00
Band2	3MHz	16QAM	18900	8RB#7	20.63	21.00
Band2	3MHz	QPSK	18900	15RB#0	21.33	22.00
Band2	3MHz	16QAM	18900	15RB#0	20.39	21.00
Band2	3MHz	QPSK	19185	1RB#0	23.07	24.00
Band2	3MHz	16QAM	19185	1RB#0	22.18	23.00
Band2	3MHz	QPSK	19185	1RB#8	23.17	24.00
Band2	3MHz	16QAM	19185	1RB#8	22.33	23.00
Band2	3MHz	QPSK	19185	1RB#14	23.12	24.00
Band2	3MHz	16QAM	19185	1RB#14	22.33	23.00
Band2	3MHz	QPSK	19185	8RB#0	22.32	23.00
Band2	3MHz	16QAM	19185	8RB#0	21.63	22.00
Band2	3MHz	QPSK	19185	8RB#4	22.34	23.00
Band2	3MHz	16QAM	19185	8RB#4	21.61	22.00
Band2	3MHz	QPSK	19185	8RB#7	22.27	23.00
Band2	3MHz	16QAM	19185	8RB#7	21.68	22.00
Band2	3MHz	QPSK	19185	15RB#0	22.31	23.00
Band2	3MHz	16QAM	19185	15RB#0	21.52	22.00
Band2	5MHz	QPSK	18625	1RB#0	21.89	22.00
Band2	5MHz	16QAM	18625	1RB#0	19.46	20.00
Band2	5MHz	QPSK	18625	1RB#12	20.94	21.00
Band2	5MHz	16QAM	18625	1RB#12	19.46	20.00
Band2	5MHz	QPSK	18625	1RB#24	21.02	22.00
Band2	5MHz	16QAM	18625	1RB#24	19.40	20.00
Band2	5MHz	QPSK	18625	12RB#0	20.07	21.00
Band2	5MHz	16QAM	18625	12RB#0	19.19	20.00
Band2	5MHz	QPSK	18625	12RB#6	19.96	20.00
Band2	5MHz	16QAM	18625	12RB#6	19.09	20.00
Band2	5MHz	QPSK	18625	12RB#13	19.94	20.00
Band2	5MHz	16QAM	18625	12RB#13	19.12	20.00
Band2	5MHz	QPSK	18625	25RB#0	20.02	21.00
Band2	5MHz	16QAM	18625	25RB#0	19.23	20.00
Band2	5MHz	QPSK	18900	1RB#0	22.18	23.00
Band2	5MHz	16QAM	18900	1RB#0	19.80	20.00
Band2	5MHz	QPSK	18900	1RB#12	21.36	22.00
Band2	5MHz	16QAM	18900	1RB#12	20.01	21.00
Band2	5MHz	QPSK	18900	1RB#24	21.37	22.00
Band2	5MHz	16QAM	18900	1RB#24	19.92	20.00
Band2	5MHz	QPSK	18900	12RB#0	20.37	21.00
Band2	5MHz	16QAM	18900	12RB#0	19.57	20.00
Band2	5MHz	QPSK	18900	12RB#6	20.38	21.00
Band2	5MHz	16QAM	18900	12RB#6	19.71	20.00
Band2	5MHz	QPSK	18900	12RB#13	20.52	21.00
Band2	5MHz	16QAM	18900	12RB#13	20.16	21.00
Band2	5MHz	QPSK	18900	25RB#0	20.40	21.00
Band2	5MHz	16QAM	18900	25RB#0	19.99	20.00
Band2	5MHz	QPSK	19175	1RB#0	23.13	24.00
Band2	5MHz	16QAM	19175	1RB#0	21.71	22.00
Band2	5MHz	QPSK	19175	1RB#12	22.25	23.00
Band2	5MHz	16QAM	19175	1RB#12	20.84	21.00
Band2	5MHz	QPSK	19175	1RB#24	22.30	23.00
Band2	5MHz	16QAM	19175	1RB#24	20.92	21.00
Band2	5MHz	QPSK	19175	12RB#0	21.43	22.00
Band2	5MHz	16QAM	19175	12RB#0	20.46	21.00
Band2	5MHz	QPSK	19175	12RB#6	21.43	22.00
Band2	5MHz	16QAM	19175	12RB#6	20.46	21.00
Band2	5MHz	QPSK	19175	12RB#13	21.37	22.00
Band2	5MHz	16QAM	19175	12RB#13	20.60	21.00
Band2	5MHz	QPSK	19175	25RB#0	21.34	22.00
Band2	5MHz	16QAM	19175	25RB#0	20.65	21.00
Band2	10MHz	QPSK	18650	1RB#0	20.83	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	10MHz	16QAM	18650	1RB#0	20.09	21.00
Band2	10MHz	QPSK	18650	1RB#24	20.79	21.00
Band2	10MHz	16QAM	18650	1RB#24	20.04	21.00
Band2	10MHz	QPSK	18650	1RB#49	20.78	21.00
Band2	10MHz	16QAM	18650	1RB#49	19.88	20.00
Band2	10MHz	QPSK	18650	25RB#0	20.08	21.00
Band2	10MHz	16QAM	18650	25RB#0	19.09	20.00
Band2	10MHz	QPSK	18650	25RB#12	19.98	20.00
Band2	10MHz	16QAM	18650	25RB#12	19.10	20.00
Band2	10MHz	QPSK	18650	25RB#25	19.94	20.00
Band2	10MHz	16QAM	18650	25RB#25	19.06	20.00
Band2	10MHz	QPSK	18650	50RB#0	20.08	21.00
Band2	10MHz	16QAM	18650	50RB#0	19.10	20.00
Band2	10MHz	QPSK	18900	1RB#0	21.11	22.00
Band2	10MHz	16QAM	18900	1RB#0	20.53	21.00
Band2	10MHz	QPSK	18900	1RB#24	21.21	22.00
Band2	10MHz	16QAM	18900	1RB#24	20.56	21.00
Band2	10MHz	QPSK	18900	1RB#49	21.33	22.00
Band2	10MHz	16QAM	18900	1RB#49	20.73	21.00
Band2	10MHz	QPSK	18900	25RB#0	20.30	21.00
Band2	10MHz	16QAM	18900	25RB#0	19.52	20.00
Band2	10MHz	QPSK	18900	25RB#12	20.31	21.00
Band2	10MHz	16QAM	18900	25RB#12	19.52	20.00
Band2	10MHz	QPSK	18900	25RB#25	20.48	21.00
Band2	10MHz	16QAM	18900	25RB#25	19.57	20.00
Band2	10MHz	QPSK	18900	50RB#0	20.40	21.00
Band2	10MHz	16QAM	18900	50RB#0	19.63	20.00
Band2	10MHz	QPSK	19150	1RB#0	22.19	23.00
Band2	10MHz	16QAM	19150	1RB#0	21.18	22.00
Band2	10MHz	QPSK	19150	1RB#24	22.08	23.00
Band2	10MHz	16QAM	19150	1RB#24	21.32	22.00
Band2	10MHz	QPSK	19150	1RB#49	22.25	23.00
Band2	10MHz	16QAM	19150	1RB#49	21.33	22.00
Band2	10MHz	QPSK	19150	25RB#0	21.24	22.00
Band2	10MHz	16QAM	19150	25RB#0	20.36	21.00
Band2	10MHz	QPSK	19150	25RB#12	21.25	22.00
Band2	10MHz	16QAM	19150	25RB#12	20.36	21.00
Band2	10MHz	QPSK	19150	25RB#25	21.44	22.00
Band2	10MHz	16QAM	19150	25RB#25	20.47	21.00
Band2	10MHz	QPSK	19150	50RB#0	21.35	22.00
Band2	10MHz	16QAM	19150	50RB#0	20.39	21.00
Band2	15MHz	QPSK	18675	1RB#0	20.80	21.00
Band2	15MHz	16QAM	18675	1RB#0	20.11	21.00
Band2	15MHz	QPSK	18675	1RB#38	20.82	21.00
Band2	15MHz	16QAM	18675	1RB#38	19.93	20.00
Band2	15MHz	QPSK	18675	1RB#74	20.86	21.00
Band2	15MHz	16QAM	18675	1RB#74	19.95	20.00
Band2	15MHz	QPSK	18675	38RB#0	20.02	21.00
Band2	15MHz	16QAM	18675	38RB#0	20.02	21.00
Band2	15MHz	QPSK	18675	38RB#18	20.03	21.00
Band2	15MHz	16QAM	18675	38RB#18	20.02	21.00
Band2	15MHz	QPSK	18675	38RB#37	20.02	21.00
Band2	15MHz	16QAM	18675	38RB#37	20.01	21.00
Band2	15MHz	QPSK	18675	75RB#0	20.01	21.00
Band2	15MHz	16QAM	18675	75RB#0	19.22	20.00
Band2	15MHz	QPSK	18900	1RB#0	21.00	22.00
Band2	15MHz	16QAM	18900	1RB#0	20.43	21.00
Band2	15MHz	QPSK	18900	1RB#38	21.19	22.00
Band2	15MHz	16QAM	18900	1RB#38	20.61	21.00
Band2	15MHz	QPSK	18900	1RB#74	21.41	22.00
Band2	15MHz	16QAM	18900	1RB#74	20.83	21.00
Band2	15MHz	QPSK	18900	38RB#0	20.40	21.00
Band2	15MHz	16QAM	18900	38RB#0	20.40	21.00
Band2	15MHz	QPSK	18900	38RB#18	20.40	21.00
Band2	15MHz	16QAM	18900	38RB#18	20.40	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	15MHz	QPSK	18900	38RB#37	20.40	21.00
Band2	15MHz	16QAM	18900	38RB#37	20.41	21.00
Band2	15MHz	QPSK	18900	75RB#0	20.40	21.00
Band2	15MHz	16QAM	18900	75RB#0	19.65	20.00
Band2	15MHz	QPSK	19125	1RB#0	21.70	22.00
Band2	15MHz	16QAM	19125	1RB#0	20.97	21.00
Band2	15MHz	QPSK	19125	1RB#38	22.00	23.00
Band2	15MHz	16QAM	19125	1RB#38	21.24	22.00
Band2	15MHz	QPSK	19125	1RB#74	22.23	23.00
Band2	15MHz	16QAM	19125	1RB#74	21.44	22.00
Band2	15MHz	QPSK	19125	38RB#0	21.13	22.00
Band2	15MHz	16QAM	19125	38RB#0	21.13	22.00
Band2	15MHz	QPSK	19125	38RB#18	21.13	22.00
Band2	15MHz	16QAM	19125	38RB#18	21.13	22.00
Band2	15MHz	QPSK	19125	38RB#37	21.13	22.00
Band2	15MHz	16QAM	19125	38RB#37	21.13	22.00
Band2	15MHz	QPSK	19125	75RB#0	21.13	22.00
Band2	15MHz	16QAM	19125	75RB#0	20.37	21.00
Band2	20MHz	QPSK	18700	1RB#0	21.16	22.00
Band2	20MHz	16QAM	18700	1RB#0	20.03	21.00
Band2	20MHz	QPSK	18700	1RB#49	21.05	22.00
Band2	20MHz	16QAM	18700	1RB#49	20.01	21.00
Band2	20MHz	QPSK	18700	1RB#99	21.25	22.00
Band2	20MHz	16QAM	18700	1RB#99	20.11	21.00
Band2	20MHz	QPSK	18700	50RB#0	19.97	20.00
Band2	20MHz	16QAM	18700	50RB#0	19.33	20.00
Band2	20MHz	QPSK	18700	50RB#25	20.09	21.00
Band2	20MHz	16QAM	18700	50RB#25	19.33	20.00
Band2	20MHz	QPSK	18700	50RB#50	20.05	21.00
Band2	20MHz	16QAM	18700	50RB#50	19.39	20.00
Band2	20MHz	QPSK	18700	100RB#0	20.09	21.00
Band2	20MHz	16QAM	18700	100RB#0	19.21	20.00
Band2	20MHz	QPSK	18900	1RB#0	21.14	22.00
Band2	20MHz	16QAM	18900	1RB#0	20.40	21.00
Band2	20MHz	QPSK	18900	1RB#49	21.37	22.00
Band2	20MHz	16QAM	18900	1RB#49	20.59	21.00
Band2	20MHz	QPSK	18900	1RB#99	21.51	22.00
Band2	20MHz	16QAM	18900	1RB#99	20.82	21.00
Band2	20MHz	QPSK	18900	50RB#0	20.40	21.00
Band2	20MHz	16QAM	18900	50RB#0	19.54	20.00
Band2	20MHz	QPSK	18900	50RB#25	20.41	21.00
Band2	20MHz	16QAM	18900	50RB#25	19.57	20.00
Band2	20MHz	QPSK	18900	50RB#50	20.61	21.00
Band2	20MHz	16QAM	18900	50RB#50	19.77	20.00
Band2	20MHz	QPSK	18900	100RB#0	20.53	21.00
Band2	20MHz	16QAM	18900	100RB#0	19.55	20.00
Band2	20MHz	QPSK	19100	1RB#0	21.61	22.00
Band2	20MHz	16QAM	19100	1RB#0	20.96	21.00
Band2	20MHz	QPSK	19100	1RB#49	21.99	22.00
Band2	20MHz	16QAM	19100	1RB#49	21.35	22.00
Band2	20MHz	QPSK	19100	1RB#99	22.33	23.00
Band2	20MHz	16QAM	19100	1RB#99	21.61	22.00
Band2	20MHz	QPSK	19100	50RB#0	20.98	21.00
Band2	20MHz	16QAM	19100	50RB#0	20.19	21.00
Band2	20MHz	QPSK	19100	50RB#25	20.99	21.00
Band2	20MHz	16QAM	19100	50RB#25	20.19	21.00
Band2	20MHz	QPSK	19100	50RB#50	21.29	22.00
Band2	20MHz	16QAM	19100	50RB#50	20.49	21.00
Band2	20MHz	QPSK	19100	100RB#0	21.16	22.00
Band2	20MHz	16QAM	19100	100RB#0	20.25	21.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.6. Conducted Power Measurement Results(LTE Band 4)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band4	1.4MHz	QPSK	19957	1RB#0	20.80	21.00
Band4	1.4MHz	16QAM	19957	1RB#0	20.69	21.00
Band4	1.4MHz	QPSK	19957	1RB#2	20.80	21.00
Band4	1.4MHz	16QAM	19957	1RB#2	20.69	21.00
Band4	1.4MHz	QPSK	19957	1RB#5	21.06	22.00
Band4	1.4MHz	16QAM	19957	1RB#5	20.26	21.00
Band4	1.4MHz	QPSK	19957	3RB#0	20.90	21.00
Band4	1.4MHz	16QAM	19957	3RB#0	20.22	21.00
Band4	1.4MHz	QPSK	19957	3RB#1	20.93	21.00
Band4	1.4MHz	16QAM	19957	3RB#1	20.21	21.00
Band4	1.4MHz	QPSK	19957	3RB#3	20.94	21.00
Band4	1.4MHz	16QAM	19957	3RB#3	19.89	20.00
Band4	1.4MHz	QPSK	19957	6RB#0	20.10	21.00
Band4	1.4MHz	16QAM	19957	6RB#0	19.39	20.00
Band4	1.4MHz	QPSK	20175	1RB#0	21.07	22.00
Band4	1.4MHz	16QAM	20175	1RB#0	20.78	21.00
Band4	1.4MHz	QPSK	20175	1RB#2	21.18	22.00
Band4	1.4MHz	16QAM	20175	1RB#2	20.80	21.00
Band4	1.4MHz	QPSK	20175	1RB#5	21.16	22.00
Band4	1.4MHz	16QAM	20175	1RB#5	21.32	22.00
Band4	1.4MHz	QPSK	20175	3RB#0	21.15	22.00
Band4	1.4MHz	16QAM	20175	3RB#0	20.26	21.00
Band4	1.4MHz	QPSK	20175	3RB#1	21.14	22.00
Band4	1.4MHz	16QAM	20175	3RB#1	20.30	21.00
Band4	1.4MHz	QPSK	20175	3RB#3	21.18	22.00
Band4	1.4MHz	16QAM	20175	3RB#3	20.31	21.00
Band4	1.4MHz	QPSK	20175	6RB#0	20.38	21.00
Band4	1.4MHz	16QAM	20175	6RB#0	19.79	20.00
Band4	1.4MHz	QPSK	20393	1RB#0	21.93	22.00
Band4	1.4MHz	16QAM	20393	1RB#0	20.76	21.00
Band4	1.4MHz	QPSK	20393	1RB#2	21.83	22.00
Band4	1.4MHz	16QAM	20393	1RB#2	20.74	21.00
Band4	1.4MHz	QPSK	20393	1RB#5	21.86	22.00
Band4	1.4MHz	16QAM	20393	1RB#5	20.81	21.00
Band4	1.4MHz	QPSK	20393	3RB#0	21.79	22.00
Band4	1.4MHz	16QAM	20393	3RB#0	20.81	21.00
Band4	1.4MHz	QPSK	20393	3RB#1	21.79	22.00
Band4	1.4MHz	16QAM	20393	3RB#1	21.07	22.00
Band4	1.4MHz	QPSK	20393	3RB#3	21.89	22.00
Band4	1.4MHz	16QAM	20393	3RB#3	21.04	22.00
Band4	1.4MHz	QPSK	20393	6RB#0	21.01	22.00
Band4	1.4MHz	16QAM	20393	6RB#0	20.36	21.00
Band4	3MHz	QPSK	19965	1RB#0	23.00	24.00
Band4	3MHz	16QAM	19965	1RB#0	22.38	23.00
Band4	3MHz	QPSK	19965	1RB#8	22.98	23.00
Band4	3MHz	16QAM	19965	1RB#8	22.39	23.00
Band4	3MHz	QPSK	19965	1RB#14	22.97	23.00
Band4	3MHz	16QAM	19965	1RB#14	22.36	23.00
Band4	3MHz	QPSK	19965	8RB#0	22.38	23.00
Band4	3MHz	16QAM	19965	8RB#0	21.84	22.00
Band4	3MHz	QPSK	19965	8RB#4	22.30	23.00
Band4	3MHz	16QAM	19965	8RB#4	21.82	22.00
Band4	3MHz	QPSK	19965	8RB#7	22.32	23.00
Band4	3MHz	16QAM	19965	8RB#7	21.65	22.00
Band4	3MHz	QPSK	19965	15RB#0	22.30	23.00
Band4	3MHz	16QAM	19965	15RB#0	21.57	22.00
Band4	3MHz	QPSK	20175	1RB#0	23.08	24.00
Band4	3MHz	16QAM	20175	1RB#0	21.72	22.00
Band4	3MHz	QPSK	20175	1RB#8	23.04	24.00
Band4	3MHz	16QAM	20175	1RB#8	21.75	22.00
Band4	3MHz	QPSK	20175	1RB#14	23.20	24.00
Band4	3MHz	16QAM	20175	1RB#14	22.42	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	3MHz	QPSK	20175	8RB#0	22.30	23.00
Band4	3MHz	16QAM	20175	8RB#0	21.74	22.00
Band4	3MHz	QPSK	20175	8RB#4	22.30	23.00
Band4	3MHz	16QAM	20175	8RB#4	21.75	22.00
Band4	3MHz	QPSK	20175	8RB#7	22.29	23.00
Band4	3MHz	16QAM	20175	8RB#7	21.82	22.00
Band4	3MHz	QPSK	20175	15RB#0	22.33	23.00
Band4	3MHz	16QAM	20175	15RB#0	21.55	22.00
Band4	3MHz	QPSK	20385	1RB#0	22.94	23.00
Band4	3MHz	16QAM	20385	1RB#0	22.48	23.00
Band4	3MHz	QPSK	20385	1RB#8	22.97	23.00
Band4	3MHz	16QAM	20385	1RB#8	22.50	23.00
Band4	3MHz	QPSK	20385	1RB#14	22.92	23.00
Band4	3MHz	16QAM	20385	1RB#14	22.65	23.00
Band4	3MHz	QPSK	20385	8RB#0	22.23	23.00
Band4	3MHz	16QAM	20385	8RB#0	21.66	22.00
Band4	3MHz	QPSK	20385	8RB#4	22.25	23.00
Band4	3MHz	16QAM	20385	8RB#4	21.60	22.00
Band4	3MHz	QPSK	20385	8RB#7	22.28	23.00
Band4	3MHz	16QAM	20385	8RB#7	21.58	22.00
Band4	3MHz	QPSK	20385	15RB#0	22.22	23.00
Band4	3MHz	16QAM	20385	15RB#0	21.47	22.00
Band4	5MHz	QPSK	19975	1RB#0	23.08	24.00
Band4	5MHz	16QAM	19975	1RB#0	21.95	22.00
Band4	5MHz	QPSK	19975	1RB#12	23.09	24.00
Band4	5MHz	16QAM	19975	1RB#12	21.88	22.00
Band4	5MHz	QPSK	19975	1RB#24	23.01	24.00
Band4	5MHz	16QAM	19975	1RB#24	21.81	22.00
Band4	5MHz	QPSK	19975	12RB#0	22.35	23.00
Band4	5MHz	16QAM	19975	12RB#0	21.60	22.00
Band4	5MHz	QPSK	19975	12RB#6	22.36	23.00
Band4	5MHz	16QAM	19975	12RB#6	21.64	22.00
Band4	5MHz	QPSK	19975	12RB#13	22.30	23.00
Band4	5MHz	16QAM	19975	12RB#13	21.60	22.00
Band4	5MHz	QPSK	19975	25RB#0	22.30	23.00
Band4	5MHz	16QAM	19975	25RB#0	21.72	22.00
Band4	5MHz	QPSK	20175	1RB#0	22.93	23.00
Band4	5MHz	16QAM	20175	1RB#0	22.70	23.00
Band4	5MHz	QPSK	20175	1RB#12	22.91	23.00
Band4	5MHz	16QAM	20175	1RB#12	22.65	23.00
Band4	5MHz	QPSK	20175	1RB#24	22.89	23.00
Band4	5MHz	16QAM	20175	1RB#24	22.67	23.00
Band4	5MHz	QPSK	20175	12RB#0	22.31	23.00
Band4	5MHz	16QAM	20175	12RB#0	21.76	22.00
Band4	5MHz	QPSK	20175	12RB#6	22.31	23.00
Band4	5MHz	16QAM	20175	12RB#6	21.71	22.00
Band4	5MHz	QPSK	20175	12RB#13	22.32	23.00
Band4	5MHz	16QAM	20175	12RB#13	21.64	22.00
Band4	5MHz	QPSK	20175	25RB#0	22.26	23.00
Band4	5MHz	16QAM	20175	25RB#0	21.69	22.00
Band4	5MHz	QPSK	20375	1RB#0	23.02	24.00
Band4	5MHz	16QAM	20375	1RB#0	21.95	22.00
Band4	5MHz	QPSK	20375	1RB#12	22.98	23.00
Band4	5MHz	16QAM	20375	1RB#12	21.97	22.00
Band4	5MHz	QPSK	20375	1RB#24	23.23	24.00
Band4	5MHz	16QAM	20375	1RB#24	22.22	23.00
Band4	5MHz	QPSK	20375	12RB#0	22.33	23.00
Band4	5MHz	16QAM	20375	12RB#0	21.53	22.00
Band4	5MHz	QPSK	20375	12RB#6	22.36	23.00
Band4	5MHz	16QAM	20375	12RB#6	21.55	22.00
Band4	5MHz	QPSK	20375	12RB#13	22.27	23.00
Band4	5MHz	16QAM	20375	12RB#13	21.56	22.00
Band4	5MHz	QPSK	20375	25RB#0	22.30	23.00
Band4	5MHz	16QAM	20375	25RB#0	21.51	22.00
Band4	10MHz	QPSK	20000	1RB#0	22.98	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	10MHz	16QAM	20000	1RB#0	22.36	23.00
Band4	10MHz	QPSK	20000	1RB#24	22.90	23.00
Band4	10MHz	16QAM	20000	1RB#24	22.33	23.00
Band4	10MHz	QPSK	20000	1RB#49	22.91	23.00
Band4	10MHz	16QAM	20000	1RB#49	22.37	23.00
Band4	10MHz	QPSK	20000	25RB#0	22.31	23.00
Band4	10MHz	16QAM	20000	25RB#0	21.53	22.00
Band4	10MHz	QPSK	20000	25RB#12	22.26	23.00
Band4	10MHz	16QAM	20000	25RB#12	21.46	22.00
Band4	10MHz	QPSK	20000	25RB#25	22.20	23.00
Band4	10MHz	16QAM	20000	25RB#25	21.47	22.00
Band4	10MHz	QPSK	20000	50RB#0	22.23	23.00
Band4	10MHz	16QAM	20000	50RB#0	21.53	22.00
Band4	10MHz	QPSK	20175	1RB#0	23.10	24.00
Band4	10MHz	16QAM	20175	1RB#0	22.36	23.00
Band4	10MHz	QPSK	20175	1RB#24	23.09	24.00
Band4	10MHz	16QAM	20175	1RB#24	22.40	23.00
Band4	10MHz	QPSK	20175	1RB#49	23.08	24.00
Band4	10MHz	16QAM	20175	1RB#49	22.34	23.00
Band4	10MHz	QPSK	20175	25RB#0	22.31	23.00
Band4	10MHz	16QAM	20175	25RB#0	21.75	22.00
Band4	10MHz	QPSK	20175	25RB#12	22.20	23.00
Band4	10MHz	16QAM	20175	25RB#12	21.74	22.00
Band4	10MHz	QPSK	20175	25RB#25	22.34	23.00
Band4	10MHz	16QAM	20175	25RB#25	21.77	22.00
Band4	10MHz	QPSK	20175	50RB#0	22.17	23.00
Band4	10MHz	16QAM	20175	50RB#0	21.63	22.00
Band4	10MHz	QPSK	20350	1RB#0	22.81	23.00
Band4	10MHz	16QAM	20350	1RB#0	22.85	23.00
Band4	10MHz	QPSK	20350	1RB#24	22.83	23.00
Band4	10MHz	16QAM	20350	1RB#24	22.81	23.00
Band4	10MHz	QPSK	20350	1RB#49	23.01	24.00
Band4	10MHz	16QAM	20350	1RB#49	22.51	23.00
Band4	10MHz	QPSK	20350	25RB#0	22.23	23.00
Band4	10MHz	16QAM	20350	25RB#0	21.64	22.00
Band4	10MHz	QPSK	20350	25RB#12	22.26	23.00
Band4	10MHz	16QAM	20350	25RB#12	21.65	22.00
Band4	10MHz	QPSK	20350	25RB#25	22.26	23.00
Band4	10MHz	16QAM	20350	25RB#25	21.59	22.00
Band4	10MHz	QPSK	20350	50RB#0	22.28	23.00
Band4	10MHz	16QAM	20350	50RB#0	21.57	22.00
Band4	15MHz	QPSK	20025	1RB#0	22.99	23.00
Band4	15MHz	16QAM	20025	1RB#0	22.37	23.00
Band4	15MHz	QPSK	20025	1RB#38	22.89	23.00
Band4	15MHz	16QAM	20025	1RB#38	22.25	23.00
Band4	15MHz	QPSK	20025	1RB#74	22.87	23.00
Band4	15MHz	16QAM	20025	1RB#74	22.33	23.00
Band4	15MHz	QPSK	20025	38RB#0	22.20	23.00
Band4	15MHz	16QAM	20025	38RB#0	22.21	23.00
Band4	15MHz	QPSK	20025	38RB#18	22.21	23.00
Band4	15MHz	16QAM	20025	38RB#18	22.20	23.00
Band4	15MHz	QPSK	20025	38RB#37	22.20	23.00
Band4	15MHz	16QAM	20025	38RB#37	22.20	23.00
Band4	15MHz	QPSK	20025	75RB#0	22.20	23.00
Band4	15MHz	16QAM	20025	75RB#0	21.52	22.00
Band4	15MHz	QPSK	20175	1RB#0	22.61	23.00
Band4	15MHz	16QAM	20175	1RB#0	22.23	23.00
Band4	15MHz	QPSK	20175	1RB#38	22.59	23.00
Band4	15MHz	16QAM	20175	1RB#38	22.18	23.00
Band4	15MHz	QPSK	20175	1RB#74	23.23	24.00
Band4	15MHz	16QAM	20175	1RB#74	22.60	23.00
Band4	15MHz	QPSK	20175	38RB#0	22.31	23.00
Band4	15MHz	16QAM	20175	38RB#0	22.30	23.00
Band4	15MHz	QPSK	20175	38RB#18	22.30	23.00
Band4	15MHz	16QAM	20175	38RB#18	22.29	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	15MHz	QPSK	20175	38RB#37	22.29	23.00
Band4	15MHz	16QAM	20175	38RB#37	22.29	23.00
Band4	15MHz	QPSK	20175	75RB#0	22.28	23.00
Band4	15MHz	16QAM	20175	75RB#0	21.62	22.00
Band4	15MHz	QPSK	20325	1RB#0	22.84	23.00
Band4	15MHz	16QAM	20325	1RB#0	22.74	23.00
Band4	15MHz	QPSK	20325	1RB#38	22.84	23.00
Band4	15MHz	16QAM	20325	1RB#38	22.61	23.00
Band4	15MHz	QPSK	20325	1RB#74	22.91	23.00
Band4	15MHz	16QAM	20325	1RB#74	22.65	23.00
Band4	15MHz	QPSK	20325	38RB#0	22.31	23.00
Band4	15MHz	16QAM	20325	38RB#0	22.31	23.00
Band4	15MHz	QPSK	20325	38RB#18	22.32	23.00
Band4	15MHz	16QAM	20325	38RB#18	22.32	23.00
Band4	15MHz	QPSK	20325	38RB#37	22.24	23.00
Band4	15MHz	16QAM	20325	38RB#37	22.24	23.00
Band4	15MHz	QPSK	20325	75RB#0	22.25	23.00
Band4	15MHz	16QAM	20325	75RB#0	21.57	22.00
Band4	20MHz	QPSK	20050	1RB#0	23.03	24.00
Band4	20MHz	16QAM	20050	1RB#0	22.28	23.00
Band4	20MHz	QPSK	20050	1RB#49	22.94	23.00
Band4	20MHz	16QAM	20050	1RB#49	22.13	23.00
Band4	20MHz	QPSK	20050	1RB#99	22.89	23.00
Band4	20MHz	16QAM	20050	1RB#99	22.16	23.00
Band4	20MHz	QPSK	20050	50RB#0	22.32	23.00
Band4	20MHz	16QAM	20050	50RB#0	21.70	22.00
Band4	20MHz	QPSK	20050	50RB#25	22.25	23.00
Band4	20MHz	16QAM	20050	50RB#25	21.60	22.00
Band4	20MHz	QPSK	20050	50RB#50	22.19	23.00
Band4	20MHz	16QAM	20050	50RB#50	21.63	22.00
Band4	20MHz	QPSK	20050	100RB#0	22.30	23.00
Band4	20MHz	16QAM	20050	100RB#0	21.57	22.00
Band4	20MHz	QPSK	20175	1RB#0	22.98	23.00
Band4	20MHz	16QAM	20175	1RB#0	23.06	24.00
Band4	20MHz	QPSK	20175	1RB#49	23.05	24.00
Band4	20MHz	16QAM	20175	1RB#49	22.97	23.00
Band4	20MHz	QPSK	20175	1RB#99	22.95	23.00
Band4	20MHz	16QAM	20175	1RB#99	22.93	23.00
Band4	20MHz	QPSK	20175	50RB#0	22.32	23.00
Band4	20MHz	16QAM	20175	50RB#0	21.68	22.00
Band4	20MHz	QPSK	20175	50RB#25	22.28	23.00
Band4	20MHz	16QAM	20175	50RB#25	21.67	22.00
Band4	20MHz	QPSK	20175	50RB#50	22.28	23.00
Band4	20MHz	16QAM	20175	50RB#50	21.63	22.00
Band4	20MHz	QPSK	20175	100RB#0	22.32	23.00
Band4	20MHz	16QAM	20175	100RB#0	21.74	22.00
Band4	20MHz	QPSK	20300	1RB#0	23.15	24.00
Band4	20MHz	16QAM	20300	1RB#0	21.96	22.00
Band4	20MHz	QPSK	20300	1RB#49	23.10	24.00
Band4	20MHz	16QAM	20300	1RB#49	21.92	22.00
Band4	20MHz	QPSK	20300	1RB#99	23.17	24.00
Band4	20MHz	16QAM	20300	1RB#99	21.87	22.00
Band4	20MHz	QPSK	20300	50RB#0	22.22	23.00
Band4	20MHz	16QAM	20300	50RB#0	21.68	22.00
Band4	20MHz	QPSK	20300	50RB#25	22.34	23.00
Band4	20MHz	16QAM	20300	50RB#25	21.68	22.00
Band4	20MHz	QPSK	20300	50RB#50	22.31	23.00
Band4	20MHz	16QAM	20300	50RB#50	21.60	22.00
Band4	20MHz	QPSK	20300	100RB#0	22.27	23.00
Band4	20MHz	16QAM	20300	100RB#0	21.59	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.7. Conducted Power Measurement Results(LTE Band 5)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band5	1.4MHz	QPSK	20407	1RB#0	23.63	24.00
Band5	1.4MHz	16QAM	20407	1RB#0	22.80	23.00
Band5	1.4MHz	QPSK	20407	1RB#2	23.57	24.00
Band5	1.4MHz	16QAM	20407	1RB#2	22.75	23.00
Band5	1.4MHz	QPSK	20407	1RB#5	23.48	24.00
Band5	1.4MHz	16QAM	20407	1RB#5	22.90	23.00
Band5	1.4MHz	QPSK	20407	3RB#0	23.60	24.00
Band5	1.4MHz	16QAM	20407	3RB#0	23.25	24.00
Band5	1.4MHz	QPSK	20407	3RB#1	23.49	24.00
Band5	1.4MHz	16QAM	20407	3RB#1	23.18	24.00
Band5	1.4MHz	QPSK	20407	3RB#3	23.42	24.00
Band5	1.4MHz	16QAM	20407	3RB#3	23.23	24.00
Band5	1.4MHz	QPSK	20407	6RB#0	23.04	24.00
Band5	1.4MHz	16QAM	20407	6RB#0	22.44	23.00
Band5	1.4MHz	QPSK	20525	1RB#0	23.61	24.00
Band5	1.4MHz	16QAM	20525	1RB#0	23.26	24.00
Band5	1.4MHz	QPSK	20525	1RB#2	23.43	24.00
Band5	1.4MHz	16QAM	20525	1RB#2	23.24	24.00
Band5	1.4MHz	QPSK	20525	1RB#5	23.53	24.00
Band5	1.4MHz	16QAM	20525	1RB#5	23.44	24.00
Band5	1.4MHz	QPSK	20525	3RB#0	23.68	24.00
Band5	1.4MHz	16QAM	20525	3RB#0	23.08	24.00
Band5	1.4MHz	QPSK	20525	3RB#1	23.50	24.00
Band5	1.4MHz	16QAM	20525	3RB#1	22.86	23.00
Band5	1.4MHz	QPSK	20525	3RB#3	23.47	24.00
Band5	1.4MHz	16QAM	20525	3RB#3	22.77	23.00
Band5	1.4MHz	QPSK	20525	6RB#0	22.72	23.00
Band5	1.4MHz	16QAM	20525	6RB#0	22.13	23.00
Band5	1.4MHz	QPSK	20643	1RB#0	23.11	24.00
Band5	1.4MHz	16QAM	20643	1RB#0	23.36	24.00
Band5	1.4MHz	QPSK	20643	1RB#2	23.01	24.00
Band5	1.4MHz	16QAM	20643	1RB#2	23.10	24.00
Band5	1.4MHz	QPSK	20643	1RB#5	22.85	23.00
Band5	1.4MHz	16QAM	20643	1RB#5	22.75	23.00
Band5	1.4MHz	QPSK	20643	3RB#0	23.41	24.00
Band5	1.4MHz	16QAM	20643	3RB#0	22.65	23.00
Band5	1.4MHz	QPSK	20643	3RB#1	23.42	24.00
Band5	1.4MHz	16QAM	20643	3RB#1	22.73	23.00
Band5	1.4MHz	QPSK	20643	3RB#3	23.14	24.00
Band5	1.4MHz	16QAM	20643	3RB#3	22.56	23.00
Band5	1.4MHz	QPSK	20643	6RB#0	22.68	23.00
Band5	1.4MHz	16QAM	20643	6RB#0	22.39	23.00
Band5	3MHz	QPSK	20415	1RB#0	23.29	24.00
Band5	3MHz	16QAM	20415	1RB#0	22.86	23.00
Band5	3MHz	QPSK	20415	1RB#8	23.31	24.00
Band5	3MHz	16QAM	20415	1RB#8	22.48	23.00
Band5	3MHz	QPSK	20415	1RB#14	23.17	24.00
Band5	3MHz	16QAM	20415	1RB#14	22.52	23.00
Band5	3MHz	QPSK	20415	8RB#0	22.55	23.00
Band5	3MHz	16QAM	20415	8RB#0	22.18	23.00
Band5	3MHz	QPSK	20415	8RB#4	22.55	23.00
Band5	3MHz	16QAM	20415	8RB#4	22.03	23.00
Band5	3MHz	QPSK	20415	8RB#7	22.57	23.00
Band5	3MHz	16QAM	20415	8RB#7	22.19	23.00
Band5	3MHz	QPSK	20415	15RB#0	22.44	23.00
Band5	3MHz	16QAM	20415	15RB#0	21.92	22.00
Band5	3MHz	QPSK	20525	1RB#0	23.41	24.00
Band5	3MHz	16QAM	20525	1RB#0	22.28	23.00
Band5	3MHz	QPSK	20525	1RB#8	23.34	24.00
Band5	3MHz	16QAM	20525	1RB#8	22.29	23.00
Band5	3MHz	QPSK	20525	1RB#14	23.57	24.00
Band5	3MHz	16QAM	20525	1RB#14	23.10	24.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band5	3MHz	QPSK	20525	8RB#0	22.43	23.00
Band5	3MHz	16QAM	20525	8RB#0	22.18	23.00
Band5	3MHz	QPSK	20525	8RB#4	22.49	23.00
Band5	3MHz	16QAM	20525	8RB#4	22.19	23.00
Band5	3MHz	QPSK	20525	8RB#7	22.40	23.00
Band5	3MHz	16QAM	20525	8RB#7	22.16	23.00
Band5	3MHz	QPSK	20525	15RB#0	22.47	23.00
Band5	3MHz	16QAM	20525	15RB#0	21.82	22.00
Band5	3MHz	QPSK	20635	1RB#0	23.38	24.00
Band5	3MHz	16QAM	20635	1RB#0	23.74	24.00
Band5	3MHz	QPSK	20635	1RB#8	23.12	24.00
Band5	3MHz	16QAM	20635	1RB#8	23.68	24.00
Band5	3MHz	QPSK	20635	1RB#14	22.88	23.00
Band5	3MHz	16QAM	20635	1RB#14	22.64	23.00
Band5	3MHz	QPSK	20635	8RB#0	22.64	23.00
Band5	3MHz	16QAM	20635	8RB#0	22.21	23.00
Band5	3MHz	QPSK	20635	8RB#4	22.60	23.00
Band5	3MHz	16QAM	20635	8RB#4	22.22	23.00
Band5	3MHz	QPSK	20635	8RB#7	22.48	23.00
Band5	3MHz	16QAM	20635	8RB#7	22.09	23.00
Band5	3MHz	QPSK	20635	15RB#0	22.52	23.00
Band5	3MHz	16QAM	20635	15RB#0	21.94	22.00
Band5	5MHz	QPSK	20425	1RB#0	23.41	24.00
Band5	5MHz	16QAM	20425	1RB#0	22.29	23.00
Band5	5MHz	QPSK	20425	1RB#12	23.39	24.00
Band5	5MHz	16QAM	20425	1RB#12	22.29	23.00
Band5	5MHz	QPSK	20425	1RB#24	23.37	24.00
Band5	5MHz	16QAM	20425	1RB#24	22.25	23.00
Band5	5MHz	QPSK	20425	12RB#0	22.47	23.00
Band5	5MHz	16QAM	20425	12RB#0	21.92	22.00
Band5	5MHz	QPSK	20425	12RB#6	22.52	23.00
Band5	5MHz	16QAM	20425	12RB#6	21.92	22.00
Band5	5MHz	QPSK	20425	12RB#13	22.46	23.00
Band5	5MHz	16QAM	20425	12RB#13	21.94	22.00
Band5	5MHz	QPSK	20425	25RB#0	22.44	23.00
Band5	5MHz	16QAM	20425	25RB#0	22.10	23.00
Band5	5MHz	QPSK	20525	1RB#0	23.14	24.00
Band5	5MHz	16QAM	20525	1RB#0	23.41	24.00
Band5	5MHz	QPSK	20525	1RB#12	23.18	24.00
Band5	5MHz	16QAM	20525	1RB#12	23.40	24.00
Band5	5MHz	QPSK	20525	1RB#24	23.09	24.00
Band5	5MHz	16QAM	20525	1RB#24	23.39	24.00
Band5	5MHz	QPSK	20525	12RB#0	22.56	23.00
Band5	5MHz	16QAM	20525	12RB#0	22.05	23.00
Band5	5MHz	QPSK	20525	12RB#6	22.52	23.00
Band5	5MHz	16QAM	20525	12RB#6	21.93	22.00
Band5	5MHz	QPSK	20525	12RB#13	22.53	23.00
Band5	5MHz	16QAM	20525	12RB#13	21.99	22.00
Band5	5MHz	QPSK	20525	25RB#0	22.49	23.00
Band5	5MHz	16QAM	20525	25RB#0	21.80	22.00
Band5	5MHz	QPSK	20625	1RB#0	23.42	24.00
Band5	5MHz	16QAM	20625	1RB#0	22.89	23.00
Band5	5MHz	QPSK	20625	1RB#12	23.36	24.00
Band5	5MHz	16QAM	20625	1RB#12	22.97	23.00
Band5	5MHz	QPSK	20625	1RB#24	22.96	23.00
Band5	5MHz	16QAM	20625	1RB#24	22.50	23.00
Band5	5MHz	QPSK	20625	12RB#0	22.78	23.00
Band5	5MHz	16QAM	20625	12RB#0	22.00	23.00
Band5	5MHz	QPSK	20625	12RB#6	22.63	23.00
Band5	5MHz	16QAM	20625	12RB#6	22.13	23.00
Band5	5MHz	QPSK	20625	12RB#13	22.59	23.00
Band5	5MHz	16QAM	20625	12RB#13	22.12	23.00
Band5	5MHz	QPSK	20625	25RB#0	22.61	23.00
Band5	5MHz	16QAM	20625	25RB#0	22.25	23.00
Band5	10MHz	QPSK	20450	1RB#0	23.30	24.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band5	10MHz	16QAM	20450	1RB#0	22.88	23.00
Band5	10MHz	QPSK	20450	1RB#24	23.26	24.00
Band5	10MHz	16QAM	20450	1RB#24	22.96	23.00
Band5	10MHz	QPSK	20450	1RB#49	23.31	24.00
Band5	10MHz	16QAM	20450	1RB#49	23.07	24.00
Band5	10MHz	QPSK	20450	25RB#0	22.39	23.00
Band5	10MHz	16QAM	20450	25RB#0	22.19	23.00
Band5	10MHz	QPSK	20450	25RB#12	22.39	23.00
Band5	10MHz	16QAM	20450	25RB#12	21.85	22.00
Band5	10MHz	QPSK	20450	25RB#25	22.40	23.00
Band5	10MHz	16QAM	20450	25RB#25	22.01	23.00
Band5	10MHz	QPSK	20450	50RB#0	22.47	23.00
Band5	10MHz	16QAM	20450	50RB#0	21.76	22.00
Band5	10MHz	QPSK	20525	1RB#0	23.39	24.00
Band5	10MHz	16QAM	20525	1RB#0	23.08	24.00
Band5	10MHz	QPSK	20525	1RB#24	23.43	24.00
Band5	10MHz	16QAM	20525	1RB#24	23.10	24.00
Band5	10MHz	QPSK	20525	1RB#49	23.47	24.00
Band5	10MHz	16QAM	20525	1RB#49	22.36	23.00
Band5	10MHz	QPSK	20525	25RB#0	22.39	23.00
Band5	10MHz	16QAM	20525	25RB#0	22.08	23.00
Band5	10MHz	QPSK	20525	25RB#12	22.59	23.00
Band5	10MHz	16QAM	20525	25RB#12	22.09	23.00
Band5	10MHz	QPSK	20525	25RB#25	22.59	23.00
Band5	10MHz	16QAM	20525	25RB#25	22.15	23.00
Band5	10MHz	QPSK	20525	50RB#0	22.57	23.00
Band5	10MHz	16QAM	20525	50RB#0	21.98	22.00
Band5	10MHz	QPSK	20600	1RB#0	23.27	24.00
Band5	10MHz	16QAM	20600	1RB#0	23.46	24.00
Band5	10MHz	QPSK	20600	1RB#24	23.44	24.00
Band5	10MHz	16QAM	20600	1RB#24	23.57	24.00
Band5	10MHz	QPSK	20600	1RB#49	23.34	24.00
Band5	10MHz	16QAM	20600	1RB#49	22.82	23.00
Band5	10MHz	QPSK	20600	25RB#0	22.62	23.00
Band5	10MHz	16QAM	20600	25RB#0	22.17	23.00
Band5	10MHz	QPSK	20600	25RB#12	22.46	23.00
Band5	10MHz	16QAM	20600	25RB#12	22.15	23.00
Band5	10MHz	QPSK	20600	25RB#25	22.45	23.00
Band5	10MHz	16QAM	20600	25RB#25	22.19	23.00
Band5	10MHz	QPSK	20600	50RB#0	22.61	23.00
Band5	10MHz	16QAM	20600	50RB#0	22.24	23.00



**7.1.8. Conducted Power Measurement Results(LTE Band 7)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band7	5MHz	QPSK	20775	1RB#0	21.60	22.00
Band7	5MHz	16QAM	20775	1RB#0	20.54	21.00
Band7	5MHz	QPSK	20775	1RB#12	21.84	22.00
Band7	5MHz	16QAM	20775	1RB#12	20.62	21.00
Band7	5MHz	QPSK	20775	1RB#24	21.32	22.00
Band7	5MHz	16QAM	20775	1RB#24	20.61	21.00
Band7	5MHz	QPSK	20775	12RB#0	21.09	22.00
Band7	5MHz	16QAM	20775	12RB#0	20.26	21.00
Band7	5MHz	QPSK	20775	12RB#6	21.00	22.00
Band7	5MHz	16QAM	20775	12RB#6	20.21	21.00
Band7	5MHz	QPSK	20775	12RB#13	21.02	22.00
Band7	5MHz	16QAM	20775	12RB#13	20.27	21.00
Band7	5MHz	QPSK	20775	25RB#0	21.04	22.00
Band7	5MHz	16QAM	20775	25RB#0	20.46	21.00
Band7	5MHz	QPSK	21100	1RB#0	21.54	22.00
Band7	5MHz	16QAM	21100	1RB#0	21.18	22.00
Band7	5MHz	QPSK	21100	1RB#12	21.40	22.00
Band7	5MHz	16QAM	21100	1RB#12	21.15	22.00
Band7	5MHz	QPSK	21100	1RB#24	21.52	22.00
Band7	5MHz	16QAM	21100	1RB#24	21.21	22.00
Band7	5MHz	QPSK	21100	12RB#0	20.93	21.00
Band7	5MHz	16QAM	21100	12RB#0	20.33	21.00
Band7	5MHz	QPSK	21100	12RB#6	20.95	21.00
Band7	5MHz	16QAM	21100	12RB#6	20.14	21.00
Band7	5MHz	QPSK	21100	12RB#13	20.89	21.00
Band7	5MHz	16QAM	21100	12RB#13	20.09	21.00
Band7	5MHz	QPSK	21100	25RB#0	20.94	21.00
Band7	5MHz	16QAM	21100	25RB#0	19.91	20.00
Band7	5MHz	QPSK	21425	1RB#0	21.56	22.00
Band7	5MHz	16QAM	21425	1RB#0	21.30	22.00
Band7	5MHz	QPSK	21425	1RB#12	21.95	22.00
Band7	5MHz	16QAM	21425	1RB#12	21.44	22.00
Band7	5MHz	QPSK	21425	1RB#24	21.61	22.00
Band7	5MHz	16QAM	21425	1RB#24	21.52	22.00
Band7	5MHz	QPSK	21425	12RB#0	21.62	22.00
Band7	5MHz	16QAM	21425	12RB#0	21.05	22.00
Band7	5MHz	QPSK	21425	12RB#6	21.60	22.00
Band7	5MHz	16QAM	21425	12RB#6	21.14	22.00
Band7	5MHz	QPSK	21425	12RB#13	21.79	22.00
Band7	5MHz	16QAM	21425	12RB#13	21.01	22.00
Band7	5MHz	QPSK	21425	25RB#0	21.72	22.00
Band7	5MHz	16QAM	21425	25RB#0	21.16	22.00
Band7	10MHz	QPSK	20800	1RB#0	21.24	22.00
Band7	10MHz	16QAM	20800	1RB#0	21.21	22.00
Band7	10MHz	QPSK	20800	1RB#24	21.33	22.00
Band7	10MHz	16QAM	20800	1RB#24	21.33	22.00
Band7	10MHz	QPSK	20800	1RB#49	21.48	22.00
Band7	10MHz	16QAM	20800	1RB#49	21.49	22.00
Band7	10MHz	QPSK	20800	25RB#0	21.29	22.00
Band7	10MHz	16QAM	20800	25RB#0	20.90	21.00
Band7	10MHz	QPSK	20800	25RB#12	21.31	22.00
Band7	10MHz	16QAM	20800	25RB#12	20.90	21.00
Band7	10MHz	QPSK	20800	25RB#25	21.48	22.00
Band7	10MHz	16QAM	20800	25RB#25	20.95	21.00
Band7	10MHz	QPSK	20800	50RB#0	21.38	22.00
Band7	10MHz	16QAM	20800	50RB#0	21.07	22.00
Band7	10MHz	QPSK	21100	1RB#0	22.59	23.00
Band7	10MHz	16QAM	21100	1RB#0	21.74	22.00
Band7	10MHz	QPSK	21100	1RB#24	22.58	23.00
Band7	10MHz	16QAM	21100	1RB#24	21.69	22.00
Band7	10MHz	QPSK	21100	1RB#49	22.54	23.00
Band7	10MHz	16QAM	21100	1RB#49	21.74	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band7	10MHz	QPSK	21100	25RB#0	21.75	22.00
Band7	10MHz	16QAM	21100	25RB#0	21.08	22.00
Band7	10MHz	QPSK	21100	25RB#12	21.78	22.00
Band7	10MHz	16QAM	21100	25RB#12	21.06	22.00
Band7	10MHz	QPSK	21100	25RB#25	21.74	22.00
Band7	10MHz	16QAM	21100	25RB#25	21.00	22.00
Band7	10MHz	QPSK	21100	50RB#0	21.73	22.00
Band7	10MHz	16QAM	21100	50RB#0	20.99	21.00
Band7	10MHz	QPSK	21400	1RB#0	21.33	22.00
Band7	10MHz	16QAM	21400	1RB#0	21.19	22.00
Band7	10MHz	QPSK	21400	1RB#24	21.53	22.00
Band7	10MHz	16QAM	21400	1RB#24	21.52	22.00
Band7	10MHz	QPSK	21400	1RB#49	21.92	22.00
Band7	10MHz	16QAM	21400	1RB#49	21.74	22.00
Band7	10MHz	QPSK	21400	25RB#0	21.47	22.00
Band7	10MHz	16QAM	21400	25RB#0	21.11	22.00
Band7	10MHz	QPSK	21400	25RB#12	21.44	22.00
Band7	10MHz	16QAM	21400	25RB#12	21.10	22.00
Band7	10MHz	QPSK	21400	25RB#25	21.85	22.00
Band7	10MHz	16QAM	21400	25RB#25	21.08	22.00
Band7	10MHz	QPSK	21400	50RB#0	21.66	22.00
Band7	10MHz	16QAM	21400	50RB#0	21.12	22.00
Band7	15MHz	QPSK	20825	1RB#0	21.22	22.00
Band7	15MHz	16QAM	20825	1RB#0	21.18	22.00
Band7	15MHz	QPSK	20825	1RB#38	21.27	22.00
Band7	15MHz	16QAM	20825	1RB#38	21.26	22.00
Band7	15MHz	QPSK	20825	1RB#74	21.34	22.00
Band7	15MHz	16QAM	20825	1RB#74	21.37	22.00
Band7	15MHz	QPSK	20825	38RB#0	21.30	22.00
Band7	15MHz	16QAM	20825	38RB#0	21.30	22.00
Band7	15MHz	QPSK	20825	38RB#18	21.29	22.00
Band7	15MHz	16QAM	20825	38RB#18	21.29	22.00
Band7	15MHz	QPSK	20825	38RB#37	21.28	22.00
Band7	15MHz	16QAM	20825	38RB#37	21.28	22.00
Band7	15MHz	QPSK	20825	75RB#0	21.28	22.00
Band7	15MHz	16QAM	20825	75RB#0	20.89	21.00
Band7	15MHz	QPSK	21100	1RB#0	22.19	23.00
Band7	15MHz	16QAM	21100	1RB#0	21.96	22.00
Band7	15MHz	QPSK	21100	1RB#38	22.20	23.00
Band7	15MHz	16QAM	21100	1RB#38	21.82	22.00
Band7	15MHz	QPSK	21100	1RB#74	22.04	23.00
Band7	15MHz	16QAM	21100	1RB#74	21.86	22.00
Band7	15MHz	QPSK	21100	38RB#0	21.71	22.00
Band7	15MHz	16QAM	21100	38RB#0	21.72	22.00
Band7	15MHz	QPSK	21100	38RB#18	21.72	22.00
Band7	15MHz	16QAM	21100	38RB#18	21.72	22.00
Band7	15MHz	QPSK	21100	38RB#37	21.73	22.00
Band7	15MHz	16QAM	21100	38RB#37	21.73	22.00
Band7	15MHz	QPSK	21100	75RB#0	21.73	22.00
Band7	15MHz	16QAM	21100	75RB#0	20.98	21.00
Band7	15MHz	QPSK	21375	1RB#0	21.42	22.00
Band7	15MHz	16QAM	21375	1RB#0	21.09	22.00
Band7	15MHz	QPSK	21375	1RB#38	21.40	22.00
Band7	15MHz	16QAM	21375	1RB#38	21.18	22.00
Band7	15MHz	QPSK	21375	1RB#74	21.55	22.00
Band7	15MHz	16QAM	21375	1RB#74	21.35	22.00
Band7	15MHz	QPSK	21375	38RB#0	21.45	22.00
Band7	15MHz	16QAM	21375	38RB#0	21.43	22.00
Band7	15MHz	QPSK	21375	38RB#18	21.43	22.00
Band7	15MHz	16QAM	21375	38RB#18	21.42	22.00
Band7	15MHz	QPSK	21375	38RB#37	21.42	22.00
Band7	15MHz	16QAM	21375	38RB#37	21.42	22.00
Band7	15MHz	QPSK	21375	75RB#0	21.42	22.00
Band7	15MHz	16QAM	21375	75RB#0	21.12	22.00
Band7	20MHz	QPSK	20850	1RB#0	21.25	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band7	20MHz	16QAM	20850	1RB#0	21.10	22.00
Band7	20MHz	QPSK	20850	1RB#49	21.32	22.00
Band7	20MHz	16QAM	20850	1RB#49	21.18	22.00
Band7	20MHz	QPSK	20850	1RB#99	22.24	23.00
Band7	20MHz	16QAM	20850	1RB#99	21.27	22.00
Band7	20MHz	QPSK	20850	50RB#0	21.10	22.00
Band7	20MHz	16QAM	20850	50RB#0	21.11	22.00
Band7	20MHz	QPSK	20850	50RB#25	21.09	22.00
Band7	20MHz	16QAM	20850	50RB#25	21.10	22.00
Band7	20MHz	QPSK	20850	50RB#50	21.70	22.00
Band7	20MHz	16QAM	20850	50RB#50	21.12	22.00
Band7	20MHz	QPSK	20850	100RB#0	21.40	22.00
Band7	20MHz	16QAM	20850	100RB#0	20.91	21.00
Band7	20MHz	QPSK	21100	1RB#0	22.47	23.00
Band7	20MHz	16QAM	21100	1RB#0	22.28	23.00
Band7	20MHz	QPSK	21100	1RB#49	22.59	23.00
Band7	20MHz	16QAM	21100	1RB#49	22.31	23.00
Band7	20MHz	QPSK	21100	1RB#99	22.44	23.00
Band7	20MHz	16QAM	21100	1RB#99	22.32	23.00
Band7	20MHz	QPSK	21100	50RB#0	21.71	22.00
Band7	20MHz	16QAM	21100	50RB#0	20.98	21.00
Band7	20MHz	QPSK	21100	50RB#25	21.67	22.00
Band7	20MHz	16QAM	21100	50RB#25	20.87	21.00
Band7	20MHz	QPSK	21100	50RB#50	21.68	22.00
Band7	20MHz	16QAM	21100	50RB#50	20.94	21.00
Band7	20MHz	QPSK	21100	100RB#0	21.69	22.00
Band7	20MHz	16QAM	21100	100RB#0	21.05	22.00
Band7	20MHz	QPSK	21350	1RB#0	21.63	22.00
Band7	20MHz	16QAM	21350	1RB#0	21.39	22.00
Band7	20MHz	QPSK	21350	1RB#49	21.24	22.00
Band7	20MHz	16QAM	21350	1RB#49	21.10	22.00
Band7	20MHz	QPSK	21350	1RB#99	21.95	22.00
Band7	20MHz	16QAM	21350	1RB#99	21.82	22.00
Band7	20MHz	QPSK	21350	50RB#0	21.33	22.00
Band7	20MHz	16QAM	21350	50RB#0	21.27	22.00
Band7	20MHz	QPSK	21350	50RB#25	21.32	22.00
Band7	20MHz	16QAM	21350	50RB#25	21.27	22.00
Band7	20MHz	QPSK	21350	50RB#50	21.60	22.00
Band7	20MHz	16QAM	21350	50RB#50	21.13	22.00
Band7	20MHz	QPSK	21350	100RB#0	21.46	22.00
Band7	20MHz	16QAM	21350	100RB#0	21.07	22.00



**7.1.9. Conducted Power Measurement Results(LTE Band 17)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band17	5MHz	QPSK	23755	1RB#0	23.81	24.00
Band17	5MHz	16QAM	23755	1RB#0	22.16	23.00
Band17	5MHz	QPSK	23755	1RB#12	23.77	24.00
Band17	5MHz	16QAM	23755	1RB#12	22.04	23.00
Band17	5MHz	QPSK	23755	1RB#24	23.67	24.00
Band17	5MHz	16QAM	23755	1RB#24	22.16	23.00
Band17	5MHz	QPSK	23755	12RB#0	22.85	23.00
Band17	5MHz	16QAM	23755	12RB#0	21.83	22.00
Band17	5MHz	QPSK	23755	12RB#6	22.68	23.00
Band17	5MHz	16QAM	23755	12RB#6	21.85	22.00
Band17	5MHz	QPSK	23755	12RB#13	22.73	23.00
Band17	5MHz	16QAM	23755	12RB#13	21.93	22.00
Band17	5MHz	QPSK	23755	25RB#0	22.46	23.00
Band17	5MHz	16QAM	23755	25RB#0	21.95	22.00
Band17	5MHz	QPSK	23790	1RB#0	23.43	24.00
Band17	5MHz	16QAM	23790	1RB#0	22.99	23.00
Band17	5MHz	QPSK	23790	1RB#12	23.42	24.00
Band17	5MHz	16QAM	23790	1RB#12	22.96	23.00
Band17	5MHz	QPSK	23790	1RB#24	23.24	24.00
Band17	5MHz	16QAM	23790	1RB#24	23.00	24.00
Band17	5MHz	QPSK	23790	12RB#0	22.69	23.00
Band17	5MHz	16QAM	23790	12RB#0	21.82	22.00
Band17	5MHz	QPSK	23790	12RB#6	22.71	23.00
Band17	5MHz	16QAM	23790	12RB#6	21.82	22.00
Band17	5MHz	QPSK	23790	12RB#13	22.65	23.00
Band17	5MHz	16QAM	23790	12RB#13	21.93	22.00
Band17	5MHz	QPSK	23790	25RB#0	22.63	23.00
Band17	5MHz	16QAM	23790	25RB#0	21.86	22.00
Band17	5MHz	QPSK	23825	1RB#0	23.44	24.00
Band17	5MHz	16QAM	23825	1RB#0	22.42	23.00
Band17	5MHz	QPSK	23825	1RB#12	23.38	24.00
Band17	5MHz	16QAM	23825	1RB#12	22.53	23.00
Band17	5MHz	QPSK	23825	1RB#24	23.41	24.00
Band17	5MHz	16QAM	23825	1RB#24	22.48	23.00
Band17	5MHz	QPSK	23825	12RB#0	22.66	23.00
Band17	5MHz	16QAM	23825	12RB#0	21.71	22.00
Band17	5MHz	QPSK	23825	12RB#6	22.61	23.00
Band17	5MHz	16QAM	23825	12RB#6	21.71	22.00
Band17	5MHz	QPSK	23825	12RB#13	22.75	23.00
Band17	5MHz	16QAM	23825	12RB#13	21.79	22.00
Band17	5MHz	QPSK	23825	25RB#0	22.62	23.00
Band17	5MHz	16QAM	23825	25RB#0	21.90	22.00
Band17	10MHz	QPSK	23780	1RB#0	23.27	24.00
Band17	10MHz	16QAM	23780	1RB#0	22.29	23.00
Band17	10MHz	QPSK	23780	1RB#24	23.16	24.00
Band17	10MHz	16QAM	23780	1RB#24	22.58	23.00
Band17	10MHz	QPSK	23780	1RB#49	23.21	24.00
Band17	10MHz	16QAM	23780	1RB#49	22.67	23.00
Band17	10MHz	QPSK	23780	25RB#0	22.54	23.00
Band17	10MHz	16QAM	23780	25RB#0	21.58	22.00
Band17	10MHz	QPSK	23780	25RB#12	22.55	23.00
Band17	10MHz	16QAM	23780	25RB#12	21.59	22.00
Band17	10MHz	QPSK	23780	25RB#25	22.59	23.00
Band17	10MHz	16QAM	23780	25RB#25	21.67	22.00
Band17	10MHz	QPSK	23780	50RB#0	22.66	23.00
Band17	10MHz	16QAM	23780	50RB#0	21.65	22.00
Band17	10MHz	QPSK	23790	1RB#0	23.57	24.00
Band17	10MHz	16QAM	23790	1RB#0	22.55	23.00
Band17	10MHz	QPSK	23790	1RB#24	23.51	24.00
Band17	10MHz	16QAM	23790	1RB#24	22.48	23.00
Band17	10MHz	QPSK	23790	1RB#49	23.44	24.00
Band17	10MHz	16QAM	23790	1RB#49	22.43	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band17	10MHz	QPSK	23790	25RB#0	22.43	23.00
Band17	10MHz	16QAM	23790	25RB#0	21.78	22.00
Band17	10MHz	QPSK	23790	25RB#12	22.59	23.00
Band17	10MHz	16QAM	23790	25RB#12	21.79	22.00
Band17	10MHz	QPSK	23790	25RB#25	22.70	23.00
Band17	10MHz	16QAM	23790	25RB#25	21.77	22.00
Band17	10MHz	QPSK	23790	50RB#0	22.29	23.00
Band17	10MHz	16QAM	23790	50RB#0	21.76	22.00
Band17	10MHz	QPSK	23800	1RB#0	23.25	24.00
Band17	10MHz	16QAM	23800	1RB#0	23.18	24.00
Band17	10MHz	QPSK	23800	1RB#24	23.20	24.00
Band17	10MHz	16QAM	23800	1RB#24	23.15	24.00
Band17	10MHz	QPSK	23800	1RB#49	23.17	24.00
Band17	10MHz	16QAM	23800	1RB#49	22.66	23.00
Band17	10MHz	QPSK	23800	25RB#0	22.52	23.00
Band17	10MHz	16QAM	23800	25RB#0	21.76	22.00
Band17	10MHz	QPSK	23800	25RB#12	22.53	23.00
Band17	10MHz	16QAM	23800	25RB#12	21.69	22.00
Band17	10MHz	QPSK	23800	25RB#25	22.40	23.00
Band17	10MHz	16QAM	23800	25RB#25	21.65	22.00
Band17	10MHz	QPSK	23800	50RB#0	22.34	23.00
Band17	10MHz	16QAM	23800	50RB#0	21.72	22.00



**7.1.10. Conducted Power Measurement Results(LTE Band 26)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
26(814-824)	1.4MHz	QPSK	26697	1RB#0	23.41	24.00
26(814-824)	1.4MHz	16QAM	26697	1RB#0	23.12	24.00
26(814-824)	1.4MHz	QPSK	26697	1RB#2	23.40	24.00
26(814-824)	1.4MHz	16QAM	26697	1RB#2	23.11	24.00
26(814-824)	1.4MHz	QPSK	26697	1RB#5	23.40	24.00
26(814-824)	1.4MHz	16QAM	26697	1RB#5	23.27	24.00
26(814-824)	1.4MHz	QPSK	26697	3RB#0	23.39	24.00
26(814-824)	1.4MHz	16QAM	26697	3RB#0	22.47	23.00
26(814-824)	1.4MHz	QPSK	26697	3RB#1	23.38	24.00
26(814-824)	1.4MHz	16QAM	26697	3RB#1	22.47	23.00
26(814-824)	1.4MHz	QPSK	26697	3RB#3	23.49	24.00
26(814-824)	1.4MHz	16QAM	26697	3RB#3	22.43	23.00
26(814-824)	1.4MHz	QPSK	26697	6RB#0	22.59	23.00
26(814-824)	1.4MHz	16QAM	26697	6RB#0	22.12	23.00
26(814-824)	1.4MHz	QPSK	26740	1RB#0	23.26	24.00
26(814-824)	1.4MHz	16QAM	26740	1RB#0	23.40	24.00
26(814-824)	1.4MHz	QPSK	26740	1RB#2	23.29	24.00
26(814-824)	1.4MHz	16QAM	26740	1RB#2	23.47	24.00
26(814-824)	1.4MHz	QPSK	26740	1RB#5	23.47	24.00
26(814-824)	1.4MHz	16QAM	26740	1RB#5	23.75	24.00
26(814-824)	1.4MHz	QPSK	26740	3RB#0	23.29	24.00
26(814-824)	1.4MHz	16QAM	26740	3RB#0	22.08	23.00
26(814-824)	1.4MHz	QPSK	26740	3RB#1	23.31	24.00
26(814-824)	1.4MHz	16QAM	26740	3RB#1	22.08	23.00
26(814-824)	1.4MHz	QPSK	26740	3RB#3	23.26	24.00
26(814-824)	1.4MHz	16QAM	26740	3RB#3	22.14	23.00
26(814-824)	1.4MHz	QPSK	26740	6RB#0	22.54	23.00
26(814-824)	1.4MHz	16QAM	26740	6RB#0	21.98	22.00
26(814-824)	1.4MHz	QPSK	26783	1RB#0	23.40	24.00
26(814-824)	1.4MHz	16QAM	26783	1RB#0	22.60	23.00
26(814-824)	1.4MHz	QPSK	26783	1RB#2	23.40	24.00
26(814-824)	1.4MHz	16QAM	26783	1RB#2	22.53	23.00
26(814-824)	1.4MHz	QPSK	26783	1RB#5	23.75	24.00
26(814-824)	1.4MHz	16QAM	26783	1RB#5	22.92	23.00
26(814-824)	1.4MHz	QPSK	26783	3RB#0	23.30	24.00
26(814-824)	1.4MHz	16QAM	26783	3RB#0	22.71	23.00
26(814-824)	1.4MHz	QPSK	26783	3RB#1	23.32	24.00
26(814-824)	1.4MHz	16QAM	26783	3RB#1	22.71	23.00
26(814-824)	1.4MHz	QPSK	26783	3RB#3	23.32	24.00
26(814-824)	1.4MHz	16QAM	26783	3RB#3	22.47	23.00
26(814-824)	1.4MHz	QPSK	26783	6RB#0	22.58	23.00
26(814-824)	1.4MHz	16QAM	26783	6RB#0	22.12	23.00
26(814-824)	3MHz	QPSK	26705	1RB#0	23.00	24.00
26(814-824)	3MHz	16QAM	26705	1RB#0	22.32	23.00
26(814-824)	3MHz	QPSK	26705	1RB#8	23.03	24.00
26(814-824)	3MHz	16QAM	26705	1RB#8	22.25	23.00
26(814-824)	3MHz	QPSK	26705	1RB#14	23.00	24.00
26(814-824)	3MHz	16QAM	26705	1RB#14	22.29	23.00
26(814-824)	3MHz	QPSK	26705	8RB#0	22.25	23.00
26(814-824)	3MHz	16QAM	26705	8RB#0	21.75	22.00
26(814-824)	3MHz	QPSK	26705	8RB#4	22.26	23.00
26(814-824)	3MHz	16QAM	26705	8RB#4	21.66	22.00
26(814-824)	3MHz	QPSK	26705	8RB#7	22.13	23.00
26(814-824)	3MHz	16QAM	26705	8RB#7	21.54	22.00
26(814-824)	3MHz	QPSK	26705	15RB#0	22.26	23.00
26(814-824)	3MHz	16QAM	26705	15RB#0	21.57	22.00
26(814-824)	3MHz	QPSK	26740	1RB#0	23.05	24.00
26(814-824)	3MHz	16QAM	26740	1RB#0	22.17	23.00
26(814-824)	3MHz	QPSK	26740	1RB#8	23.11	24.00
26(814-824)	3MHz	16QAM	26740	1RB#8	22.45	23.00
26(814-824)	3MHz	QPSK	26740	1RB#14	23.43	24.00
26(814-824)	3MHz	16QAM	26740	1RB#14	22.53	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



26(814-824)	3MHz	QPSK	26740	8RB#0	22.27	23.00
26(814-824)	3MHz	16QAM	26740	8RB#0	21.78	22.00
26(814-824)	3MHz	QPSK	26740	8RB#4	22.28	23.00
26(814-824)	3MHz	16QAM	26740	8RB#4	21.79	22.00
26(814-824)	3MHz	QPSK	26740	8RB#7	22.22	23.00
26(814-824)	3MHz	16QAM	26740	8RB#7	21.88	22.00
26(814-824)	3MHz	QPSK	26740	15RB#0	22.27	23.00
26(814-824)	3MHz	16QAM	26740	15RB#0	21.45	22.00
26(814-824)	3MHz	QPSK	26775	1RB#0	23.10	24.00
26(814-824)	3MHz	16QAM	26775	1RB#0	22.75	23.00
26(814-824)	3MHz	QPSK	26775	1RB#8	23.04	24.00
26(814-824)	3MHz	16QAM	26775	1RB#8	22.71	23.00
26(814-824)	3MHz	QPSK	26775	1RB#14	23.05	24.00
26(814-824)	3MHz	16QAM	26775	1RB#14	22.74	23.00
26(814-824)	3MHz	QPSK	26775	8RB#0	22.15	23.00
26(814-824)	3MHz	16QAM	26775	8RB#0	21.66	22.00
26(814-824)	3MHz	QPSK	26775	8RB#4	22.16	23.00
26(814-824)	3MHz	16QAM	26775	8RB#4	21.67	22.00
26(814-824)	3MHz	QPSK	26775	8RB#7	22.13	23.00
26(814-824)	3MHz	16QAM	26775	8RB#7	21.80	22.00
26(814-824)	3MHz	QPSK	26775	15RB#0	22.21	23.00
26(814-824)	3MHz	16QAM	26775	15RB#0	21.63	22.00
26(814-824)	5MHz	QPSK	26715	1RB#0	23.06	24.00
26(814-824)	5MHz	16QAM	26715	1RB#0	21.82	22.00
26(814-824)	5MHz	QPSK	26715	1RB#12	23.07	24.00
26(814-824)	5MHz	16QAM	26715	1RB#12	21.79	22.00
26(814-824)	5MHz	QPSK	26715	1RB#24	23.12	24.00
26(814-824)	5MHz	16QAM	26715	1RB#24	21.85	22.00
26(814-824)	5MHz	QPSK	26715	12RB#0	22.22	23.00
26(814-824)	5MHz	16QAM	26715	12RB#0	21.60	22.00
26(814-824)	5MHz	QPSK	26715	12RB#6	22.23	23.00
26(814-824)	5MHz	16QAM	26715	12RB#6	21.60	22.00
26(814-824)	5MHz	QPSK	26715	12RB#13	22.14	23.00
26(814-824)	5MHz	16QAM	26715	12RB#13	21.59	22.00
26(814-824)	5MHz	QPSK	26715	25RB#0	22.30	23.00
26(814-824)	5MHz	16QAM	26715	25RB#0	21.67	22.00
26(814-824)	5MHz	QPSK	26740	1RB#0	22.71	23.00
26(814-824)	5MHz	16QAM	26740	1RB#0	22.45	23.00
26(814-824)	5MHz	QPSK	26740	1RB#12	22.91	23.00
26(814-824)	5MHz	16QAM	26740	1RB#12	22.50	23.00
26(814-824)	5MHz	QPSK	26740	1RB#24	23.09	24.00
26(814-824)	5MHz	16QAM	26740	1RB#24	22.18	23.00
26(814-824)	5MHz	QPSK	26740	12RB#0	22.24	23.00
26(814-824)	5MHz	16QAM	26740	12RB#0	21.55	22.00
26(814-824)	5MHz	QPSK	26740	12RB#6	22.30	23.00
26(814-824)	5MHz	16QAM	26740	12RB#6	21.56	22.00
26(814-824)	5MHz	QPSK	26740	12RB#13	22.15	23.00
26(814-824)	5MHz	16QAM	26740	12RB#13	21.60	22.00
26(814-824)	5MHz	QPSK	26740	25RB#0	22.18	23.00
26(814-824)	5MHz	16QAM	26740	25RB#0	21.63	22.00
26(814-824)	5MHz	QPSK	26765	1RB#0	22.93	23.00
26(814-824)	5MHz	16QAM	26765	1RB#0	22.23	23.00
26(814-824)	5MHz	QPSK	26765	1RB#12	22.91	23.00
26(814-824)	5MHz	16QAM	26765	1RB#12	22.17	23.00
26(814-824)	5MHz	QPSK	26765	1RB#24	22.90	23.00
26(814-824)	5MHz	16QAM	26765	1RB#24	22.30	23.00
26(814-824)	5MHz	QPSK	26765	12RB#0	22.26	23.00
26(814-824)	5MHz	16QAM	26765	12RB#0	21.45	22.00
26(814-824)	5MHz	QPSK	26765	12RB#6	22.22	23.00
26(814-824)	5MHz	16QAM	26765	12RB#6	21.41	22.00
26(814-824)	5MHz	QPSK	26765	12RB#13	22.24	23.00
26(814-824)	5MHz	16QAM	26765	12RB#13	21.41	22.00
26(814-824)	5MHz	QPSK	26765	25RB#0	22.18	23.00
26(814-824)	5MHz	16QAM	26765	25RB#0	21.57	22.00
26(814-824)	10MHz	QPSK	26740	1RB#0	22.78	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



26(814-824)	10MHz	16QAM	26740	1RB#0	21.95	22.00
26(814-824)	10MHz	QPSK	26740	1RB#24	22.89	23.00
26(814-824)	10MHz	16QAM	26740	1RB#24	21.92	22.00
26(814-824)	10MHz	QPSK	26740	1RB#49	22.88	23.00
26(814-824)	10MHz	16QAM	26740	1RB#49	22.00	23.00
26(814-824)	10MHz	QPSK	26740	25RB#0	22.05	23.00
26(814-824)	10MHz	16QAM	26740	25RB#0	21.24	22.00
26(814-824)	10MHz	QPSK	26740	25RB#12	22.01	23.00
26(814-824)	10MHz	16QAM	26740	25RB#12	21.24	22.00
26(814-824)	10MHz	QPSK	26740	25RB#25	21.92	22.00
26(814-824)	10MHz	16QAM	26740	25RB#25	21.28	22.00
26(814-824)	10MHz	QPSK	26740	50RB#0	21.94	22.00
26(814-824)	10MHz	16QAM	26740	50RB#0	21.38	22.00

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
26(824-849)	1.4MHz	QPSK	26797	1RB#0	22.86	23.00
26(824-849)	1.4MHz	16QAM	26797	1RB#0	22.93	23.00
26(824-849)	1.4MHz	QPSK	26797	1RB#2	22.92	23.00
26(824-849)	1.4MHz	16QAM	26797	1RB#2	22.88	23.00
26(824-849)	1.4MHz	QPSK	26797	1RB#5	22.93	23.00
26(824-849)	1.4MHz	16QAM	26797	1RB#5	22.89	23.00
26(824-849)	1.4MHz	QPSK	26797	3RB#0	23.09	24.00
26(824-849)	1.4MHz	16QAM	26797	3RB#0	22.46	23.00
26(824-849)	1.4MHz	QPSK	26797	3RB#1	22.99	23.00
26(824-849)	1.4MHz	16QAM	26797	3RB#1	22.45	23.00
26(824-849)	1.4MHz	QPSK	26797	3RB#3	23.16	24.00
26(824-849)	1.4MHz	16QAM	26797	3RB#3	22.44	23.00
26(824-849)	1.4MHz	QPSK	26797	6RB#0	22.12	23.00
26(824-849)	1.4MHz	16QAM	26797	6RB#0	21.94	22.00
26(824-849)	1.4MHz	QPSK	26915	1RB#0	23.13	24.00
26(824-849)	1.4MHz	16QAM	26915	1RB#0	21.96	22.00
26(824-849)	1.4MHz	QPSK	26915	1RB#2	23.09	24.00
26(824-849)	1.4MHz	16QAM	26915	1RB#2	22.02	23.00
26(824-849)	1.4MHz	QPSK	26915	1RB#5	23.24	24.00
26(824-849)	1.4MHz	16QAM	26915	1RB#5	22.59	23.00
26(824-849)	1.4MHz	QPSK	26915	3RB#0	22.99	23.00
26(824-849)	1.4MHz	16QAM	26915	3RB#0	22.47	23.00
26(824-849)	1.4MHz	QPSK	26915	3RB#1	22.99	23.00
26(824-849)	1.4MHz	16QAM	26915	3RB#1	22.47	23.00
26(824-849)	1.4MHz	QPSK	26915	3RB#3	22.84	23.00
26(824-849)	1.4MHz	16QAM	26915	3RB#3	22.29	23.00
26(824-849)	1.4MHz	QPSK	26915	6RB#0	22.18	23.00
26(824-849)	1.4MHz	16QAM	26915	6RB#0	21.62	22.00
26(824-849)	1.4MHz	QPSK	27033	1RB#0	22.81	23.00
26(824-849)	1.4MHz	16QAM	27033	1RB#0	23.05	24.00
26(824-849)	1.4MHz	QPSK	27033	1RB#2	22.71	23.00
26(824-849)	1.4MHz	16QAM	27033	1RB#2	22.75	23.00
26(824-849)	1.4MHz	QPSK	27033	1RB#5	22.38	23.00
26(824-849)	1.4MHz	16QAM	27033	1RB#5	22.24	23.00
26(824-849)	1.4MHz	QPSK	27033	3RB#0	22.84	23.00
26(824-849)	1.4MHz	16QAM	27033	3RB#0	22.09	23.00
26(824-849)	1.4MHz	QPSK	27033	3RB#1	22.84	23.00
26(824-849)	1.4MHz	16QAM	27033	3RB#1	22.09	23.00
26(824-849)	1.4MHz	QPSK	27033	3RB#3	22.68	23.00
26(824-849)	1.4MHz	16QAM	27033	3RB#3	22.02	23.00
26(824-849)	1.4MHz	QPSK	27033	6RB#0	22.11	23.00
26(824-849)	1.4MHz	16QAM	27033	6RB#0	21.70	22.00
26(824-849)	3MHz	QPSK	26805	1RB#0	22.47	23.00
26(824-849)	3MHz	16QAM	26805	1RB#0	21.82	22.00
26(824-849)	3MHz	QPSK	26805	1RB#8	22.43	23.00
26(824-849)	3MHz	16QAM	26805	1RB#8	21.79	22.00
26(824-849)	3MHz	QPSK	26805	1RB#14	22.44	23.00
26(824-849)	3MHz	16QAM	26805	1RB#14	21.77	22.00
26(824-849)	3MHz	QPSK	26805	8RB#0	21.83	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



26(824-849)	3MHz	16QAM	26805	8RB#0	21.46	22.00
26(824-849)	3MHz	QPSK	26805	8RB#4	21.84	22.00
26(824-849)	3MHz	16QAM	26805	8RB#4	21.48	22.00
26(824-849)	3MHz	QPSK	26805	8RB#7	21.81	22.00
26(824-849)	3MHz	16QAM	26805	8RB#7	21.48	22.00
26(824-849)	3MHz	QPSK	26805	15RB#0	21.73	22.00
26(824-849)	3MHz	16QAM	26805	15RB#0	21.18	22.00
26(824-849)	3MHz	QPSK	26915	1RB#0	22.81	23.00
26(824-849)	3MHz	16QAM	26915	1RB#0	21.54	22.00
26(824-849)	3MHz	QPSK	26915	1RB#8	22.59	23.00
26(824-849)	3MHz	16QAM	26915	1RB#8	22.42	23.00
26(824-849)	3MHz	QPSK	26915	1RB#14	23.04	24.00
26(824-849)	3MHz	16QAM	26915	1RB#14	22.31	23.00
26(824-849)	3MHz	QPSK	26915	8RB#0	21.95	22.00
26(824-849)	3MHz	16QAM	26915	8RB#0	21.44	22.00
26(824-849)	3MHz	QPSK	26915	8RB#4	21.81	22.00
26(824-849)	3MHz	16QAM	26915	8RB#4	21.49	22.00
26(824-849)	3MHz	QPSK	26915	8RB#7	21.82	22.00
26(824-849)	3MHz	16QAM	26915	8RB#7	21.50	22.00
26(824-849)	3MHz	QPSK	26915	15RB#0	21.87	22.00
26(824-849)	3MHz	16QAM	26915	15RB#0	21.11	22.00
26(824-849)	3MHz	QPSK	27025	1RB#0	22.67	23.00
26(824-849)	3MHz	16QAM	27025	1RB#0	22.94	23.00
26(824-849)	3MHz	QPSK	27025	1RB#8	22.58	23.00
26(824-849)	3MHz	16QAM	27025	1RB#8	22.58	23.00
26(824-849)	3MHz	QPSK	27025	1RB#14	22.17	23.00
26(824-849)	3MHz	16QAM	27025	1RB#14	22.16	23.00
26(824-849)	3MHz	QPSK	27025	8RB#0	21.89	22.00
26(824-849)	3MHz	16QAM	27025	8RB#0	21.36	22.00
26(824-849)	3MHz	QPSK	27025	8RB#4	21.99	22.00
26(824-849)	3MHz	16QAM	27025	8RB#4	21.39	22.00
26(824-849)	3MHz	QPSK	27025	8RB#7	21.81	22.00
26(824-849)	3MHz	16QAM	27025	8RB#7	21.26	22.00
26(824-849)	3MHz	QPSK	27025	15RB#0	21.85	22.00
26(824-849)	3MHz	16QAM	27025	15RB#0	21.25	22.00
26(824-849)	5MHz	QPSK	26815	1RB#0	22.85	23.00
26(824-849)	5MHz	16QAM	26815	1RB#0	21.61	22.00
26(824-849)	5MHz	QPSK	26815	1RB#12	22.82	23.00
26(824-849)	5MHz	16QAM	26815	1RB#12	21.75	22.00
26(824-849)	5MHz	QPSK	26815	1RB#24	22.93	23.00
26(824-849)	5MHz	16QAM	26815	1RB#24	21.58	22.00
26(824-849)	5MHz	QPSK	26815	12RB#0	21.94	22.00
26(824-849)	5MHz	16QAM	26815	12RB#0	21.40	22.00
26(824-849)	5MHz	QPSK	26815	12RB#6	21.94	22.00
26(824-849)	5MHz	16QAM	26815	12RB#6	21.40	22.00
26(824-849)	5MHz	QPSK	26815	12RB#13	21.90	22.00
26(824-849)	5MHz	16QAM	26815	12RB#13	21.35	22.00
26(824-849)	5MHz	QPSK	26815	25RB#0	21.87	22.00
26(824-849)	5MHz	16QAM	26815	25RB#0	21.45	22.00
26(824-849)	5MHz	QPSK	26915	1RB#0	22.72	23.00
26(824-849)	5MHz	16QAM	26915	1RB#0	22.64	23.00
26(824-849)	5MHz	QPSK	26915	1RB#12	22.59	23.00
26(824-849)	5MHz	16QAM	26915	1RB#12	22.64	23.00
26(824-849)	5MHz	QPSK	26915	1RB#24	23.01	24.00
26(824-849)	5MHz	16QAM	26915	1RB#24	22.31	23.00
26(824-849)	5MHz	QPSK	26915	12RB#0	22.00	23.00
26(824-849)	5MHz	16QAM	26915	12RB#0	21.30	22.00
26(824-849)	5MHz	QPSK	26915	12RB#6	22.01	23.00
26(824-849)	5MHz	16QAM	26915	12RB#6	21.44	22.00
26(824-849)	5MHz	QPSK	26915	12RB#13	21.88	22.00
26(824-849)	5MHz	16QAM	26915	12RB#13	21.55	22.00
26(824-849)	5MHz	QPSK	26915	25RB#0	21.96	22.00
26(824-849)	5MHz	16QAM	26915	25RB#0	21.44	22.00
26(824-849)	5MHz	QPSK	27015	1RB#0	22.96	23.00
26(824-849)	5MHz	16QAM	27015	1RB#0	22.12	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



26(824-849)	5MHz	QPSK	27015	1RB#12	22.88	23.00
26(824-849)	5MHz	16QAM	27015	1RB#12	22.16	23.00
26(824-849)	5MHz	QPSK	27015	1RB#24	22.54	23.00
26(824-849)	5MHz	16QAM	27015	1RB#24	21.86	22.00
26(824-849)	5MHz	QPSK	27015	12RB#0	22.17	23.00
26(824-849)	5MHz	16QAM	27015	12RB#0	21.54	22.00
26(824-849)	5MHz	QPSK	27015	12RB#6	22.08	23.00
26(824-849)	5MHz	16QAM	27015	12RB#6	21.55	22.00
26(824-849)	5MHz	QPSK	27015	12RB#13	22.04	23.00
26(824-849)	5MHz	16QAM	27015	12RB#13	21.46	22.00
26(824-849)	5MHz	QPSK	27015	25RB#0	22.13	23.00
26(824-849)	5MHz	16QAM	27015	25RB#0	21.50	22.00
26(824-849)	10MHz	QPSK	26840	1RB#0	22.84	23.00
26(824-849)	10MHz	16QAM	26840	1RB#0	22.13	23.00
26(824-849)	10MHz	QPSK	26840	1RB#24	22.86	23.00
26(824-849)	10MHz	16QAM	26840	1RB#24	22.23	23.00
26(824-849)	10MHz	QPSK	26840	1RB#49	22.83	23.00
26(824-849)	10MHz	16QAM	26840	1RB#49	22.19	23.00
26(824-849)	10MHz	QPSK	26840	25RB#0	22.03	23.00
26(824-849)	10MHz	16QAM	26840	25RB#0	21.50	22.00
26(824-849)	10MHz	QPSK	26840	25RB#12	21.96	22.00
26(824-849)	10MHz	16QAM	26840	25RB#12	21.37	22.00
26(824-849)	10MHz	QPSK	26840	25RB#25	21.96	22.00
26(824-849)	10MHz	16QAM	26840	25RB#25	21.34	22.00
26(824-849)	10MHz	QPSK	26840	50RB#0	21.80	22.00
26(824-849)	10MHz	16QAM	26840	50RB#0	21.43	22.00
26(824-849)	10MHz	QPSK	26915	1RB#0	22.83	23.00
26(824-849)	10MHz	16QAM	26915	1RB#0	22.42	23.00
26(824-849)	10MHz	QPSK	26915	1RB#24	22.90	23.00
26(824-849)	10MHz	16QAM	26915	1RB#24	22.49	23.00
26(824-849)	10MHz	QPSK	26915	1RB#49	22.97	23.00
26(824-849)	10MHz	16QAM	26915	1RB#49	22.53	23.00
26(824-849)	10MHz	QPSK	26915	25RB#0	21.82	22.00
26(824-849)	10MHz	16QAM	26915	25RB#0	21.50	22.00
26(824-849)	10MHz	QPSK	26915	25RB#12	21.85	22.00
26(824-849)	10MHz	16QAM	26915	25RB#12	21.52	22.00
26(824-849)	10MHz	QPSK	26915	25RB#25	21.99	22.00
26(824-849)	10MHz	16QAM	26915	25RB#25	21.55	22.00
26(824-849)	10MHz	QPSK	26915	50RB#0	21.95	22.00
26(824-849)	10MHz	16QAM	26915	50RB#0	21.51	22.00
26(824-849)	10MHz	QPSK	26990	1RB#0	22.81	23.00
26(824-849)	10MHz	16QAM	26990	1RB#0	22.90	23.00
26(824-849)	10MHz	QPSK	26990	1RB#24	22.79	23.00
26(824-849)	10MHz	16QAM	26990	1RB#24	22.37	23.00
26(824-849)	10MHz	QPSK	26990	1RB#49	22.73	23.00
26(824-849)	10MHz	16QAM	26990	1RB#49	22.18	23.00
26(824-849)	10MHz	QPSK	26990	25RB#0	21.93	22.00
26(824-849)	10MHz	16QAM	26990	25RB#0	21.54	22.00
26(824-849)	10MHz	QPSK	26990	25RB#12	21.90	22.00
26(824-849)	10MHz	16QAM	26990	25RB#12	21.48	22.00
26(824-849)	10MHz	QPSK	26990	25RB#25	21.95	22.00
26(824-849)	10MHz	16QAM	26990	25RB#25	21.54	22.00
26(824-849)	10MHz	QPSK	26990	50RB#0	22.05	23.00
26(824-849)	10MHz	16QAM	26990	50RB#0	21.54	22.00
26(824-849)	15MHz	QPSK	26865	1RB#0	22.79	23.00
26(824-849)	15MHz	16QAM	26865	1RB#0	22.31	23.00
26(824-849)	15MHz	QPSK	26865	1RB#38	22.71	23.00
26(824-849)	15MHz	16QAM	26865	1RB#38	22.39	23.00
26(824-849)	15MHz	QPSK	26865	1RB#74	22.72	23.00
26(824-849)	15MHz	16QAM	26865	1RB#74	22.41	23.00
26(824-849)	15MHz	QPSK	26865	38RB#0	21.99	22.00
26(824-849)	15MHz	16QAM	26865	38RB#0	21.99	22.00
26(824-849)	15MHz	QPSK	26865	38RB#18	21.99	22.00
26(824-849)	15MHz	16QAM	26865	38RB#18	21.99	22.00
26(824-849)	15MHz	QPSK	26865	38RB#37	21.99	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



26(824-849)	15MHz	16QAM	26865	38RB#37	21.99	22.00
26(824-849)	15MHz	QPSK	26865	75RB#0	21.99	22.00
26(824-849)	15MHz	16QAM	26865	75RB#0	21.30	22.00
26(824-849)	15MHz	QPSK	26915	1RB#0	22.25	23.00
26(824-849)	15MHz	16QAM	26915	1RB#0	22.24	23.00
26(824-849)	15MHz	QPSK	26915	1RB#38	23.24	24.00
26(824-849)	15MHz	16QAM	26915	1RB#38	22.85	23.00
26(824-849)	15MHz	QPSK	26915	1RB#74	23.24	24.00
26(824-849)	15MHz	16QAM	26915	1RB#74	22.94	23.00
26(824-849)	15MHz	QPSK	26915	38RB#0	21.89	22.00
26(824-849)	15MHz	16QAM	26915	38RB#0	22.05	23.00
26(824-849)	15MHz	QPSK	26915	38RB#18	22.05	23.00
26(824-849)	15MHz	16QAM	26915	38RB#18	21.96	22.00
26(824-849)	15MHz	QPSK	26915	38RB#37	21.93	22.00
26(824-849)	15MHz	16QAM	26915	38RB#37	21.99	22.00
26(824-849)	15MHz	QPSK	26915	75RB#0	21.90	22.00
26(824-849)	15MHz	16QAM	26915	75RB#0	21.59	22.00
26(824-849)	15MHz	QPSK	26965	1RB#0	22.68	23.00
26(824-849)	15MHz	16QAM	26965	1RB#0	22.95	23.00
26(824-849)	15MHz	QPSK	26965	1RB#38	22.82	23.00
26(824-849)	15MHz	16QAM	26965	1RB#38	22.93	23.00
26(824-849)	15MHz	QPSK	26965	1RB#74	22.63	23.00
26(824-849)	15MHz	16QAM	26965	1RB#74	22.68	23.00
26(824-849)	15MHz	QPSK	26965	38RB#0	22.04	23.00
26(824-849)	15MHz	16QAM	26965	38RB#0	21.96	22.00
26(824-849)	15MHz	QPSK	26965	38RB#18	22.03	23.00
26(824-849)	15MHz	16QAM	26965	38RB#18	22.05	23.00
26(824-849)	15MHz	QPSK	26965	38RB#37	21.92	22.00
26(824-849)	15MHz	16QAM	26965	38RB#37	22.23	23.00
26(824-849)	15MHz	QPSK	26965	75RB#0	21.85	22.00
26(824-849)	15MHz	16QAM	26965	75RB#0	21.48	22.00



**7.1.11. Conducted Power Measurement Results(LTE Band 38)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band38	5MHz	QPSK	37775	1RB#0	22.60	23.00
Band38	5MHz	16QAM	37775	1RB#0	22.59	23.00
Band38	5MHz	QPSK	37775	1RB#12	22.59	23.00
Band38	5MHz	16QAM	37775	1RB#12	23.10	24.00
Band38	5MHz	QPSK	37775	1RB#24	22.63	23.00
Band38	5MHz	16QAM	37775	1RB#24	22.55	23.00
Band38	5MHz	QPSK	37775	12RB#0	21.88	22.00
Band38	5MHz	16QAM	37775	12RB#0	21.15	22.00
Band38	5MHz	QPSK	37775	12RB#6	21.75	22.00
Band38	5MHz	16QAM	37775	12RB#6	21.14	22.00
Band38	5MHz	QPSK	37775	12RB#13	21.84	22.00
Band38	5MHz	16QAM	37775	12RB#13	21.08	22.00
Band38	5MHz	QPSK	37775	25RB#0	21.75	22.00
Band38	5MHz	16QAM	37775	25RB#0	21.17	22.00
Band38	5MHz	QPSK	38000	1RB#0	22.12	23.00
Band38	5MHz	16QAM	38000	1RB#0	22.04	23.00
Band38	5MHz	QPSK	38000	1RB#12	22.09	23.00
Band38	5MHz	16QAM	38000	1RB#12	22.03	23.00
Band38	5MHz	QPSK	38000	1RB#24	22.17	23.00
Band38	5MHz	16QAM	38000	1RB#24	22.01	23.00
Band38	5MHz	QPSK	38000	12RB#0	21.37	22.00
Band38	5MHz	16QAM	38000	12RB#0	20.67	21.00
Band38	5MHz	QPSK	38000	12RB#6	21.39	22.00
Band38	5MHz	16QAM	38000	12RB#6	20.67	21.00
Band38	5MHz	QPSK	38000	12RB#13	21.37	22.00
Band38	5MHz	16QAM	38000	12RB#13	20.66	21.00
Band38	5MHz	QPSK	38000	25RB#0	21.40	22.00
Band38	5MHz	16QAM	38000	25RB#0	20.66	21.00
Band38	5MHz	QPSK	38225	1RB#0	22.16	23.00
Band38	5MHz	16QAM	38225	1RB#0	21.82	22.00
Band38	5MHz	QPSK	38225	1RB#12	22.14	23.00
Band38	5MHz	16QAM	38225	1RB#12	21.63	22.00
Band38	5MHz	QPSK	38225	1RB#24	22.12	23.00
Band38	5MHz	16QAM	38225	1RB#24	21.73	22.00
Band38	5MHz	QPSK	38225	12RB#0	21.18	22.00
Band38	5MHz	16QAM	38225	12RB#0	20.43	21.00
Band38	5MHz	QPSK	38225	12RB#6	21.19	22.00
Band38	5MHz	16QAM	38225	12RB#6	20.44	21.00
Band38	5MHz	QPSK	38225	12RB#13	20.99	21.00
Band38	5MHz	16QAM	38225	12RB#13	20.38	21.00
Band38	5MHz	QPSK	38225	25RB#0	21.04	22.00
Band38	5MHz	16QAM	38225	25RB#0	20.46	21.00
Band38	10MHz	QPSK	37800	1RB#0	22.99	23.00
Band38	10MHz	16QAM	37800	1RB#0	22.69	23.00
Band38	10MHz	QPSK	37800	1RB#24	22.88	23.00
Band38	10MHz	16QAM	37800	1RB#24	22.66	23.00
Band38	10MHz	QPSK	37800	1RB#49	22.77	23.00
Band38	10MHz	16QAM	37800	1RB#49	22.55	23.00
Band38	10MHz	QPSK	37800	25RB#0	21.73	22.00
Band38	10MHz	16QAM	37800	25RB#0	21.05	22.00
Band38	10MHz	QPSK	37800	25RB#12	21.74	22.00
Band38	10MHz	16QAM	37800	25RB#12	21.06	22.00
Band38	10MHz	QPSK	37800	25RB#25	21.60	22.00
Band38	10MHz	16QAM	37800	25RB#25	20.99	21.00
Band38	10MHz	QPSK	37800	50RB#0	21.65	22.00
Band38	10MHz	16QAM	37800	50RB#0	21.06	22.00
Band38	10MHz	QPSK	38000	1RB#0	22.39	23.00
Band38	10MHz	16QAM	38000	1RB#0	22.15	23.00
Band38	10MHz	QPSK	38000	1RB#24	22.28	23.00
Band38	10MHz	16QAM	38000	1RB#24	22.09	23.00
Band38	10MHz	QPSK	38000	1RB#49	22.39	23.00
Band38	10MHz	16QAM	38000	1RB#49	22.03	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	10MHz	QPSK	38000	25RB#0	21.59	22.00
Band38	10MHz	16QAM	38000	25RB#0	21.06	22.00
Band38	10MHz	QPSK	38000	25RB#12	21.60	22.00
Band38	10MHz	16QAM	38000	25RB#12	21.07	22.00
Band38	10MHz	QPSK	38000	25RB#25	21.52	22.00
Band38	10MHz	16QAM	38000	25RB#25	21.15	22.00
Band38	10MHz	QPSK	38000	50RB#0	21.55	22.00
Band38	10MHz	16QAM	38000	50RB#0	20.76	21.00
Band38	10MHz	QPSK	38200	1RB#0	22.47	23.00
Band38	10MHz	16QAM	38200	1RB#0	22.27	23.00
Band38	10MHz	QPSK	38200	1RB#24	22.33	23.00
Band38	10MHz	16QAM	38200	1RB#24	22.17	23.00
Band38	10MHz	QPSK	38200	1RB#49	22.35	23.00
Band38	10MHz	16QAM	38200	1RB#49	22.20	23.00
Band38	10MHz	QPSK	38200	25RB#0	21.25	22.00
Band38	10MHz	16QAM	38200	25RB#0	20.64	21.00
Band38	10MHz	QPSK	38200	25RB#12	21.25	22.00
Band38	10MHz	16QAM	38200	25RB#12	20.64	21.00
Band38	10MHz	QPSK	38200	25RB#25	21.08	22.00
Band38	10MHz	16QAM	38200	25RB#25	20.46	21.00
Band38	10MHz	QPSK	38200	50RB#0	21.13	22.00
Band38	10MHz	16QAM	38200	50RB#0	20.50	21.00
Band38	15MHz	QPSK	37825	1RB#0	22.98	23.00
Band38	15MHz	16QAM	37825	1RB#0	22.79	23.00
Band38	15MHz	QPSK	37825	1RB#38	22.80	23.00
Band38	15MHz	16QAM	37825	1RB#38	22.59	23.00
Band38	15MHz	QPSK	37825	1RB#74	22.65	23.00
Band38	15MHz	16QAM	37825	1RB#74	22.60	23.00
Band38	15MHz	QPSK	37825	38RB#0	21.72	22.00
Band38	15MHz	16QAM	37825	38RB#0	21.72	22.00
Band38	15MHz	QPSK	37825	38RB#18	21.72	22.00
Band38	15MHz	16QAM	37825	38RB#18	21.72	22.00
Band38	15MHz	QPSK	37825	38RB#37	21.72	22.00
Band38	15MHz	16QAM	37825	38RB#37	21.72	22.00
Band38	15MHz	QPSK	37825	75RB#0	21.72	22.00
Band38	15MHz	16QAM	37825	75RB#0	21.00	22.00
Band38	15MHz	QPSK	38000	1RB#0	23.05	24.00
Band38	15MHz	16QAM	38000	1RB#0	21.46	22.00
Band38	15MHz	QPSK	38000	1RB#38	22.95	23.00
Band38	15MHz	16QAM	38000	1RB#38	20.95	21.00
Band38	15MHz	QPSK	38000	1RB#74	22.99	23.00
Band38	15MHz	16QAM	38000	1RB#74	21.41	22.00
Band38	15MHz	QPSK	38000	38RB#0	21.45	22.00
Band38	15MHz	16QAM	38000	38RB#0	21.45	22.00
Band38	15MHz	QPSK	38000	38RB#18	21.45	22.00
Band38	15MHz	16QAM	38000	38RB#18	21.45	22.00
Band38	15MHz	QPSK	38000	38RB#37	21.45	22.00
Band38	15MHz	16QAM	38000	38RB#37	21.45	22.00
Band38	15MHz	QPSK	38000	75RB#0	21.45	22.00
Band38	15MHz	16QAM	38000	75RB#0	20.90	21.00
Band38	15MHz	QPSK	38175	1RB#0	22.51	23.00
Band38	15MHz	16QAM	38175	1RB#0	22.43	23.00
Band38	15MHz	QPSK	38175	1RB#38	22.39	23.00
Band38	15MHz	16QAM	38175	1RB#38	22.22	23.00
Band38	15MHz	QPSK	38175	1RB#74	22.32	23.00
Band38	15MHz	16QAM	38175	1RB#74	22.15	23.00
Band38	15MHz	QPSK	38175	38RB#0	21.29	22.00
Band38	15MHz	16QAM	38175	38RB#0	21.29	22.00
Band38	15MHz	QPSK	38175	38RB#18	21.29	22.00
Band38	15MHz	16QAM	38175	38RB#18	21.29	22.00
Band38	15MHz	QPSK	38175	38RB#37	21.29	22.00
Band38	15MHz	16QAM	38175	38RB#37	21.29	22.00
Band38	15MHz	QPSK	38175	75RB#0	21.29	22.00
Band38	15MHz	16QAM	38175	75RB#0	20.61	21.00
Band38	20MHz	QPSK	37850	1RB#0	22.42	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	20MHz	16QAM	37850	1RB#0	22.06	23.00
Band38	20MHz	QPSK	37850	1RB#49	22.32	23.00
Band38	20MHz	16QAM	37850	1RB#49	21.95	22.00
Band38	20MHz	QPSK	37850	1RB#99	22.16	23.00
Band38	20MHz	16QAM	37850	1RB#99	21.89	22.00
Band38	20MHz	QPSK	37850	50RB#0	21.75	22.00
Band38	20MHz	16QAM	37850	50RB#0	21.25	22.00
Band38	20MHz	QPSK	37850	50RB#25	21.63	22.00
Band38	20MHz	16QAM	37850	50RB#25	21.25	22.00
Band38	20MHz	QPSK	37850	50RB#50	21.48	22.00
Band38	20MHz	16QAM	37850	50RB#50	21.03	22.00
Band38	20MHz	QPSK	37850	100RB#0	21.68	22.00
Band38	20MHz	16QAM	37850	100RB#0	20.96	21.00
Band38	20MHz	QPSK	38000	1RB#0	22.42	23.00
Band38	20MHz	16QAM	38000	1RB#0	21.83	22.00
Band38	20MHz	QPSK	38000	1RB#49	22.61	23.00
Band38	20MHz	16QAM	38000	1RB#49	21.71	22.00
Band38	20MHz	QPSK	38000	1RB#99	22.50	23.00
Band38	20MHz	16QAM	38000	1RB#99	21.72	22.00
Band38	20MHz	QPSK	38000	50RB#0	21.52	22.00
Band38	20MHz	16QAM	38000	50RB#0	20.97	21.00
Band38	20MHz	QPSK	38000	50RB#25	21.53	22.00
Band38	20MHz	16QAM	38000	50RB#25	20.97	21.00
Band38	20MHz	QPSK	38000	50RB#50	21.57	22.00
Band38	20MHz	16QAM	38000	50RB#50	20.92	21.00
Band38	20MHz	QPSK	38000	100RB#0	21.45	22.00
Band38	20MHz	16QAM	38000	100RB#0	20.93	21.00
Band38	20MHz	QPSK	38150	1RB#0	22.25	23.00
Band38	20MHz	16QAM	38150	1RB#0	22.60	23.00
Band38	20MHz	QPSK	38150	1RB#49	22.10	23.00
Band38	20MHz	16QAM	38150	1RB#49	22.37	23.00
Band38	20MHz	QPSK	38150	1RB#99	22.03	23.00
Band38	20MHz	16QAM	38150	1RB#99	22.30	23.00
Band38	20MHz	QPSK	38150	50RB#0	21.48	22.00
Band38	20MHz	16QAM	38150	50RB#0	20.93	21.00
Band38	20MHz	QPSK	38150	50RB#25	21.49	22.00
Band38	20MHz	16QAM	38150	50RB#25	20.93	21.00
Band38	20MHz	QPSK	38150	50RB#50	21.39	22.00
Band38	20MHz	16QAM	38150	50RB#50	20.80	21.00
Band38	20MHz	QPSK	38150	100RB#0	21.32	22.00
Band38	20MHz	16QAM	38150	100RB#0	20.73	21.00



**7.1.12. Conducted Power Measurement Results(LTE Band 41)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band41	5MHz	QPSK	39675	1RB#0	21.61	22.00
Band41	5MHz	16QAM	39675	1RB#0	22.10	23.00
Band41	5MHz	QPSK	39675	1RB#12	21.67	22.00
Band41	5MHz	16QAM	39675	1RB#12	21.99	22.00
Band41	5MHz	QPSK	39675	1RB#24	21.69	22.00
Band41	5MHz	16QAM	39675	1RB#24	22.10	23.00
Band41	5MHz	QPSK	39675	12RB#0	20.94	21.00
Band41	5MHz	16QAM	39675	12RB#0	20.17	21.00
Band41	5MHz	QPSK	39675	12RB#6	20.99	21.00
Band41	5MHz	16QAM	39675	12RB#6	20.03	21.00
Band41	5MHz	QPSK	39675	12RB#13	20.91	21.00
Band41	5MHz	16QAM	39675	12RB#13	20.16	21.00
Band41	5MHz	QPSK	39675	25RB#0	20.86	21.00
Band41	5MHz	16QAM	39675	25RB#0	20.36	21.00
Band41	5MHz	QPSK	40620	1RB#0	22.41	23.00
Band41	5MHz	16QAM	40620	1RB#0	22.22	23.00
Band41	5MHz	QPSK	40620	1RB#12	22.37	23.00
Band41	5MHz	16QAM	40620	1RB#12	23.02	24.00
Band41	5MHz	QPSK	40620	1RB#24	22.32	23.00
Band41	5MHz	16QAM	40620	1RB#24	22.50	23.00
Band41	5MHz	QPSK	40620	12RB#0	21.46	22.00
Band41	5MHz	16QAM	40620	12RB#0	20.78	21.00
Band41	5MHz	QPSK	40620	12RB#6	21.49	22.00
Band41	5MHz	16QAM	40620	12RB#6	20.84	21.00
Band41	5MHz	QPSK	40620	12RB#13	21.45	22.00
Band41	5MHz	16QAM	40620	12RB#13	20.74	21.00
Band41	5MHz	QPSK	40620	25RB#0	21.49	22.00
Band41	5MHz	16QAM	40620	25RB#0	20.91	21.00
Band41	5MHz	QPSK	41565	1RB#0	21.81	22.00
Band41	5MHz	16QAM	41565	1RB#0	21.68	22.00
Band41	5MHz	QPSK	41565	1RB#12	21.70	22.00
Band41	5MHz	16QAM	41565	1RB#12	21.55	22.00
Band41	5MHz	QPSK	41565	1RB#24	21.82	22.00
Band41	5MHz	16QAM	41565	1RB#24	21.61	22.00
Band41	5MHz	QPSK	41565	12RB#0	20.77	21.00
Band41	5MHz	16QAM	41565	12RB#0	20.12	21.00
Band41	5MHz	QPSK	41565	12RB#6	20.79	21.00
Band41	5MHz	16QAM	41565	12RB#6	20.15	21.00
Band41	5MHz	QPSK	41565	12RB#13	20.73	21.00
Band41	5MHz	16QAM	41565	12RB#13	20.22	21.00
Band41	5MHz	QPSK	41565	25RB#0	20.95	21.00
Band41	5MHz	16QAM	41565	25RB#0	20.32	21.00
Band41	10MHz	QPSK	39700	1RB#0	22.56	23.00
Band41	10MHz	16QAM	39700	1RB#0	22.50	23.00
Band41	10MHz	QPSK	39700	1RB#24	22.53	23.00
Band41	10MHz	16QAM	39700	1RB#24	22.32	23.00
Band41	10MHz	QPSK	39700	1RB#49	22.58	23.00
Band41	10MHz	16QAM	39700	1RB#49	22.48	23.00
Band41	10MHz	QPSK	39700	25RB#0	21.51	22.00
Band41	10MHz	16QAM	39700	25RB#0	20.83	21.00
Band41	10MHz	QPSK	39700	25RB#12	21.38	22.00
Band41	10MHz	16QAM	39700	25RB#12	20.83	21.00
Band41	10MHz	QPSK	39700	25RB#25	21.16	22.00
Band41	10MHz	16QAM	39700	25RB#25	20.59	21.00
Band41	10MHz	QPSK	39700	50RB#0	21.16	22.00
Band41	10MHz	16QAM	39700	50RB#0	20.53	21.00
Band41	10MHz	QPSK	40620	1RB#0	22.65	23.00
Band41	10MHz	16QAM	40620	1RB#0	22.60	23.00
Band41	10MHz	QPSK	40620	1RB#24	22.57	23.00
Band41	10MHz	16QAM	40620	1RB#24	22.55	23.00
Band41	10MHz	QPSK	40620	1RB#49	22.64	23.00
Band41	10MHz	16QAM	40620	1RB#49	22.49	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41	10MHz	QPSK	40620	25RB#0	21.41	22.00
Band41	10MHz	16QAM	40620	25RB#0	20.86	21.00
Band41	10MHz	QPSK	40620	25RB#12	21.43	22.00
Band41	10MHz	16QAM	40620	25RB#12	20.86	21.00
Band41	10MHz	QPSK	40620	25RB#25	21.50	22.00
Band41	10MHz	16QAM	40620	25RB#25	20.88	21.00
Band41	10MHz	QPSK	40620	50RB#0	21.52	22.00
Band41	10MHz	16QAM	40620	50RB#0	20.89	21.00
Band41	10MHz	QPSK	41540	1RB#0	21.95	22.00
Band41	10MHz	16QAM	41540	1RB#0	21.84	22.00
Band41	10MHz	QPSK	41540	1RB#24	21.98	22.00
Band41	10MHz	16QAM	41540	1RB#24	21.76	22.00
Band41	10MHz	QPSK	41540	1RB#49	22.06	23.00
Band41	10MHz	16QAM	41540	1RB#49	21.85	22.00
Band41	10MHz	QPSK	41540	25RB#0	20.89	21.00
Band41	10MHz	16QAM	41540	25RB#0	20.21	21.00
Band41	10MHz	QPSK	41540	25RB#12	20.91	21.00
Band41	10MHz	16QAM	41540	25RB#12	20.20	21.00
Band41	10MHz	QPSK	41540	25RB#25	20.81	21.00
Band41	10MHz	16QAM	41540	25RB#25	20.20	21.00
Band41	10MHz	QPSK	41540	50RB#0	20.95	21.00
Band41	10MHz	16QAM	41540	50RB#0	20.21	21.00
Band41	15MHz	QPSK	39725	1RB#0	22.51	23.00
Band41	15MHz	16QAM	39725	1RB#0	22.44	23.00
Band41	15MHz	QPSK	39725	1RB#38	22.51	23.00
Band41	15MHz	16QAM	39725	1RB#38	22.41	23.00
Band41	15MHz	QPSK	39725	1RB#74	22.55	23.00
Band41	15MHz	16QAM	39725	1RB#74	22.53	23.00
Band41	15MHz	QPSK	39725	38RB#0	21.42	22.00
Band41	15MHz	16QAM	39725	38RB#0	21.42	22.00
Band41	15MHz	QPSK	39725	38RB#18	21.42	22.00
Band41	15MHz	16QAM	39725	38RB#18	21.42	22.00
Band41	15MHz	QPSK	39725	38RB#37	21.42	22.00
Band41	15MHz	16QAM	39725	38RB#37	21.41	22.00
Band41	15MHz	QPSK	39725	75RB#0	21.41	22.00
Band41	15MHz	16QAM	39725	75RB#0	20.78	21.00
Band41	15MHz	QPSK	40620	1RB#0	22.63	23.00
Band41	15MHz	16QAM	40620	1RB#0	22.52	23.00
Band41	15MHz	QPSK	40620	1RB#38	22.55	23.00
Band41	15MHz	16QAM	40620	1RB#38	22.52	23.00
Band41	15MHz	QPSK	40620	1RB#74	22.55	23.00
Band41	15MHz	16QAM	40620	1RB#74	22.52	23.00
Band41	15MHz	QPSK	40620	38RB#0	21.56	22.00
Band41	15MHz	16QAM	40620	38RB#0	21.57	22.00
Band41	15MHz	QPSK	40620	38RB#18	21.41	22.00
Band41	15MHz	16QAM	40620	38RB#18	21.42	22.00
Band41	15MHz	QPSK	40620	38RB#37	21.42	22.00
Band41	15MHz	16QAM	40620	38RB#37	21.42	22.00
Band41	15MHz	QPSK	40620	75RB#0	21.42	22.00
Band41	15MHz	16QAM	40620	75RB#0	20.87	21.00
Band41	15MHz	QPSK	41515	1RB#0	21.91	22.00
Band41	15MHz	16QAM	41515	1RB#0	21.69	22.00
Band41	15MHz	QPSK	41515	1RB#38	21.93	22.00
Band41	15MHz	16QAM	41515	1RB#38	21.76	22.00
Band41	15MHz	QPSK	41515	1RB#74	22.03	23.00
Band41	15MHz	16QAM	41515	1RB#74	21.82	22.00
Band41	15MHz	QPSK	41515	38RB#0	20.91	21.00
Band41	15MHz	16QAM	41515	38RB#0	20.91	21.00
Band41	15MHz	QPSK	41515	38RB#18	20.73	21.00
Band41	15MHz	16QAM	41515	38RB#18	20.73	21.00
Band41	15MHz	QPSK	41515	38RB#37	20.73	21.00
Band41	15MHz	16QAM	41515	38RB#37	20.73	21.00
Band41	15MHz	QPSK	41515	75RB#0	20.73	21.00
Band41	15MHz	16QAM	41515	75RB#0	20.12	21.00
Band41	20MHz	QPSK	39750	1RB#0	22.31	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band41	20MHz	16QAM	39750	1RB#0	21.66	22.00
Band41	20MHz	QPSK	39750	1RB#49	22.08	23.00
Band41	20MHz	16QAM	39750	1RB#49	21.65	22.00
Band41	20MHz	QPSK	39750	1RB#99	22.28	23.00
Band41	20MHz	16QAM	39750	1RB#99	21.76	22.00
Band41	20MHz	QPSK	39750	50RB#0	21.40	22.00
Band41	20MHz	16QAM	39750	50RB#0	20.90	21.00
Band41	20MHz	QPSK	39750	50RB#25	21.40	22.00
Band41	20MHz	16QAM	39750	50RB#25	20.89	21.00
Band41	20MHz	QPSK	39750	50RB#50	21.49	22.00
Band41	20MHz	16QAM	39750	50RB#50	20.79	21.00
Band41	20MHz	QPSK	39750	100RB#0	21.19	22.00
Band41	20MHz	16QAM	39750	100RB#0	20.59	21.00
Band41	20MHz	QPSK	40620	1RB#0	22.28	23.00
Band41	20MHz	16QAM	40620	1RB#0	22.44	23.00
Band41	20MHz	QPSK	40620	1RB#49	22.21	23.00
Band41	20MHz	16QAM	40620	1RB#49	22.20	23.00
Band41	20MHz	QPSK	40620	1RB#99	22.21	23.00
Band41	20MHz	16QAM	40620	1RB#99	22.20	23.00
Band41	20MHz	QPSK	40620	50RB#0	21.51	22.00
Band41	20MHz	16QAM	40620	50RB#0	20.96	21.00
Band41	20MHz	QPSK	40620	50RB#25	21.52	22.00
Band41	20MHz	16QAM	40620	50RB#25	20.97	21.00
Band41	20MHz	QPSK	40620	50RB#50	21.43	22.00
Band41	20MHz	16QAM	40620	50RB#50	21.05	22.00
Band41	20MHz	QPSK	40620	100RB#0	21.45	22.00
Band41	20MHz	16QAM	40620	100RB#0	20.91	21.00
Band41	20MHz	QPSK	41490	1RB#0	21.65	22.00
Band41	20MHz	16QAM	41490	1RB#0	21.91	22.00
Band41	20MHz	QPSK	41490	1RB#49	21.66	22.00
Band41	20MHz	16QAM	41490	1RB#49	21.83	22.00
Band41	20MHz	QPSK	41490	1RB#99	21.85	22.00
Band41	20MHz	16QAM	41490	1RB#99	21.98	22.00
Band41	20MHz	QPSK	41490	50RB#0	20.75	21.00
Band41	20MHz	16QAM	41490	50RB#0	20.14	21.00
Band41	20MHz	QPSK	41490	50RB#25	20.77	21.00
Band41	20MHz	16QAM	41490	50RB#25	20.14	21.00
Band41	20MHz	QPSK	41490	50RB#50	20.70	21.00
Band41	20MHz	16QAM	41490	50RB#50	20.22	21.00
Band41	20MHz	QPSK	41490	100RB#0	20.66	21.00
Band41	20MHz	16QAM	41490	100RB#0	20.16	21.00



**7.1.13. Conducted Power Measurement Results(LTE Band 66)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Tune Up (dBm)
Band66	1.4MHz	QPSK	131979	1RB#0	20.64	21.00
Band66	1.4MHz	16QAM	131979	1RB#0	20.56	21.00
Band66	1.4MHz	QPSK	131979	1RB#2	20.66	21.00
Band66	1.4MHz	16QAM	131979	1RB#2	20.57	21.00
Band66	1.4MHz	QPSK	131979	1RB#5	20.72	21.00
Band66	1.4MHz	16QAM	131979	1RB#5	20.18	21.00
Band66	1.4MHz	QPSK	131979	3RB#0	20.75	21.00
Band66	1.4MHz	16QAM	131979	3RB#0	20.16	21.00
Band66	1.4MHz	QPSK	131979	3RB#1	20.75	21.00
Band66	1.4MHz	16QAM	131979	3RB#1	20.13	21.00
Band66	1.4MHz	QPSK	131979	3RB#3	20.75	21.00
Band66	1.4MHz	16QAM	131979	3RB#3	19.72	20.00
Band66	1.4MHz	QPSK	131979	6RB#0	19.98	20.00
Band66	1.4MHz	16QAM	131979	6RB#0	19.19	20.00
Band66	1.4MHz	QPSK	132322	1RB#0	21.42	22.00
Band66	1.4MHz	16QAM	132322	1RB#0	21.47	22.00
Band66	1.4MHz	QPSK	132322	1RB#2	21.42	22.00
Band66	1.4MHz	16QAM	132322	1RB#2	21.38	22.00
Band66	1.4MHz	QPSK	132322	1RB#5	21.48	22.00
Band66	1.4MHz	16QAM	132322	1RB#5	21.40	22.00
Band66	1.4MHz	QPSK	132322	3RB#0	21.39	22.00
Band66	1.4MHz	16QAM	132322	3RB#0	20.72	21.00
Band66	1.4MHz	QPSK	132322	3RB#1	21.42	22.00
Band66	1.4MHz	16QAM	132322	3RB#1	20.83	21.00
Band66	1.4MHz	QPSK	132322	3RB#3	21.41	22.00
Band66	1.4MHz	16QAM	132322	3RB#3	20.21	21.00
Band66	1.4MHz	QPSK	132322	6RB#0	20.63	21.00
Band66	1.4MHz	16QAM	132322	6RB#0	20.01	21.00
Band66	1.4MHz	QPSK	132665	1RB#0	22.40	23.00
Band66	1.4MHz	16QAM	132665	1RB#0	21.95	22.00
Band66	1.4MHz	QPSK	132665	1RB#2	22.43	23.00
Band66	1.4MHz	16QAM	132665	1RB#2	21.93	22.00
Band66	1.4MHz	QPSK	132665	1RB#5	22.39	23.00
Band66	1.4MHz	16QAM	132665	1RB#5	21.90	22.00
Band66	1.4MHz	QPSK	132665	3RB#0	22.58	23.00
Band66	1.4MHz	16QAM	132665	3RB#0	21.70	22.00
Band66	1.4MHz	QPSK	132665	3RB#1	22.65	23.00
Band66	1.4MHz	16QAM	132665	3RB#1	21.70	22.00
Band66	1.4MHz	QPSK	132665	3RB#3	22.60	23.00
Band66	1.4MHz	16QAM	132665	3RB#3	21.58	22.00
Band66	1.4MHz	QPSK	132665	6RB#0	21.88	22.00
Band66	1.4MHz	16QAM	132665	6RB#0	21.38	22.00
Band66	3MHz	QPSK	131987	1RB#0	22.90	23.00
Band66	3MHz	16QAM	131987	1RB#0	22.30	23.00
Band66	3MHz	QPSK	131987	1RB#8	22.90	23.00
Band66	3MHz	16QAM	131987	1RB#8	22.31	23.00
Band66	3MHz	QPSK	131987	1RB#14	22.79	23.00
Band66	3MHz	16QAM	131987	1RB#14	22.18	23.00
Band66	3MHz	QPSK	131987	8RB#0	22.19	23.00
Band66	3MHz	16QAM	131987	8RB#0	21.60	22.00
Band66	3MHz	QPSK	131987	8RB#4	22.22	23.00
Band66	3MHz	16QAM	131987	8RB#4	21.60	22.00
Band66	3MHz	QPSK	131987	8RB#7	22.14	23.00
Band66	3MHz	16QAM	131987	8RB#7	21.64	22.00
Band66	3MHz	QPSK	131987	15RB#0	22.12	23.00
Band66	3MHz	16QAM	131987	15RB#0	21.50	22.00
Band66	3MHz	QPSK	132322	1RB#0	22.89	23.00
Band66	3MHz	16QAM	132322	1RB#0	21.86	22.00
Band66	3MHz	QPSK	132322	1RB#8	22.87	23.00
Band66	3MHz	16QAM	132322	1RB#8	21.92	22.00
Band66	3MHz	QPSK	132322	1RB#14	22.91	23.00
Band66	3MHz	16QAM	132322	1RB#14	22.11	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	3MHz	QPSK	132322	8RB#0	22.16	23.00
Band66	3MHz	16QAM	132322	8RB#0	21.61	22.00
Band66	3MHz	QPSK	132322	8RB#4	22.09	23.00
Band66	3MHz	16QAM	132322	8RB#4	21.61	22.00
Band66	3MHz	QPSK	132322	8RB#7	22.05	23.00
Band66	3MHz	16QAM	132322	8RB#7	21.56	22.00
Band66	3MHz	QPSK	132322	15RB#0	22.16	23.00
Band66	3MHz	16QAM	132322	15RB#0	21.24	22.00
Band66	3MHz	QPSK	132657	1RB#0	22.51	23.00
Band66	3MHz	16QAM	132657	1RB#0	21.86	22.00
Band66	3MHz	QPSK	132657	1RB#8	22.56	23.00
Band66	3MHz	16QAM	132657	1RB#8	21.84	22.00
Band66	3MHz	QPSK	132657	1RB#14	22.52	23.00
Band66	3MHz	16QAM	132657	1RB#14	21.85	22.00
Band66	3MHz	QPSK	132657	8RB#0	21.94	22.00
Band66	3MHz	16QAM	132657	8RB#0	21.44	22.00
Band66	3MHz	QPSK	132657	8RB#4	21.93	22.00
Band66	3MHz	16QAM	132657	8RB#4	21.32	22.00
Band66	3MHz	QPSK	132657	8RB#7	21.88	22.00
Band66	3MHz	16QAM	132657	8RB#7	21.21	22.00
Band66	3MHz	QPSK	132657	15RB#0	21.82	22.00
Band66	3MHz	16QAM	132657	15RB#0	21.25	22.00
Band66	5MHz	QPSK	131997	1RB#0	22.98	23.00
Band66	5MHz	16QAM	131997	1RB#0	21.75	22.00
Band66	5MHz	QPSK	131997	1RB#12	22.93	23.00
Band66	5MHz	16QAM	131997	1RB#12	21.69	22.00
Band66	5MHz	QPSK	131997	1RB#24	22.94	23.00
Band66	5MHz	16QAM	131997	1RB#24	21.72	22.00
Band66	5MHz	QPSK	131997	12RB#0	22.18	23.00
Band66	5MHz	16QAM	131997	12RB#0	21.51	22.00
Band66	5MHz	QPSK	131997	12RB#6	22.20	23.00
Band66	5MHz	16QAM	131997	12RB#6	21.48	22.00
Band66	5MHz	QPSK	131997	12RB#13	22.17	23.00
Band66	5MHz	16QAM	131997	12RB#13	21.42	22.00
Band66	5MHz	QPSK	131997	25RB#0	22.14	23.00
Band66	5MHz	16QAM	131997	25RB#0	21.54	22.00
Band66	5MHz	QPSK	132322	1RB#0	22.73	23.00
Band66	5MHz	16QAM	132322	1RB#0	22.25	23.00
Band66	5MHz	QPSK	132322	1RB#12	22.61	23.00
Band66	5MHz	16QAM	132322	1RB#12	22.27	23.00
Band66	5MHz	QPSK	132322	1RB#24	22.66	23.00
Band66	5MHz	16QAM	132322	1RB#24	21.88	22.00
Band66	5MHz	QPSK	132322	12RB#0	22.17	23.00
Band66	5MHz	16QAM	132322	12RB#0	21.43	22.00
Band66	5MHz	QPSK	132322	12RB#6	22.17	23.00
Band66	5MHz	16QAM	132322	12RB#6	21.55	22.00
Band66	5MHz	QPSK	132322	12RB#13	22.15	23.00
Band66	5MHz	16QAM	132322	12RB#13	21.49	22.00
Band66	5MHz	QPSK	132322	25RB#0	22.06	23.00
Band66	5MHz	16QAM	132322	25RB#0	21.51	22.00
Band66	5MHz	QPSK	132647	1RB#0	22.66	23.00
Band66	5MHz	16QAM	132647	1RB#0	21.41	22.00
Band66	5MHz	QPSK	132647	1RB#12	22.56	23.00
Band66	5MHz	16QAM	132647	1RB#12	21.41	22.00
Band66	5MHz	QPSK	132647	1RB#24	22.58	23.00
Band66	5MHz	16QAM	132647	1RB#24	21.42	22.00
Band66	5MHz	QPSK	132647	12RB#0	21.92	22.00
Band66	5MHz	16QAM	132647	12RB#0	21.15	22.00
Band66	5MHz	QPSK	132647	12RB#6	21.89	22.00
Band66	5MHz	16QAM	132647	12RB#6	21.15	22.00
Band66	5MHz	QPSK	132647	12RB#13	21.91	22.00
Band66	5MHz	16QAM	132647	12RB#13	21.12	22.00
Band66	5MHz	QPSK	132647	25RB#0	21.84	22.00
Band66	5MHz	16QAM	132647	25RB#0	21.26	22.00
Band66	10MHz	QPSK	132022	1RB#0	22.85	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	10MHz	16QAM	132022	1RB#0	22.25	23.00
Band66	10MHz	QPSK	132022	1RB#24	22.79	23.00
Band66	10MHz	16QAM	132022	1RB#24	22.16	23.00
Band66	10MHz	QPSK	132022	1RB#49	22.74	23.00
Band66	10MHz	16QAM	132022	1RB#49	22.19	23.00
Band66	10MHz	QPSK	132022	25RB#0	22.15	23.00
Band66	10MHz	16QAM	132022	25RB#0	21.36	22.00
Band66	10MHz	QPSK	132022	25RB#12	22.07	23.00
Band66	10MHz	16QAM	132022	25RB#12	21.37	22.00
Band66	10MHz	QPSK	132022	25RB#25	22.01	23.00
Band66	10MHz	16QAM	132022	25RB#25	21.38	22.00
Band66	10MHz	QPSK	132022	50RB#0	22.14	23.00
Band66	10MHz	16QAM	132022	50RB#0	21.36	22.00
Band66	10MHz	QPSK	132322	1RB#0	22.90	23.00
Band66	10MHz	16QAM	132322	1RB#0	22.07	23.00
Band66	10MHz	QPSK	132322	1RB#24	22.89	23.00
Band66	10MHz	16QAM	132322	1RB#24	22.01	23.00
Band66	10MHz	QPSK	132322	1RB#49	22.92	23.00
Band66	10MHz	16QAM	132322	1RB#49	22.02	23.00
Band66	10MHz	QPSK	132322	25RB#0	22.19	23.00
Band66	10MHz	16QAM	132322	25RB#0	21.52	22.00
Band66	10MHz	QPSK	132322	25RB#12	22.17	23.00
Band66	10MHz	16QAM	132322	25RB#12	21.53	22.00
Band66	10MHz	QPSK	132322	25RB#25	22.22	23.00
Band66	10MHz	16QAM	132322	25RB#25	21.47	22.00
Band66	10MHz	QPSK	132322	50RB#0	22.06	23.00
Band66	10MHz	16QAM	132322	50RB#0	21.50	22.00
Band66	10MHz	QPSK	132622	1RB#0	22.70	23.00
Band66	10MHz	16QAM	132622	1RB#0	22.10	23.00
Band66	10MHz	QPSK	132622	1RB#24	22.58	23.00
Band66	10MHz	16QAM	132622	1RB#24	21.93	22.00
Band66	10MHz	QPSK	132622	1RB#49	22.56	23.00
Band66	10MHz	16QAM	132622	1RB#49	21.90	22.00
Band66	10MHz	QPSK	132622	25RB#0	21.94	22.00
Band66	10MHz	16QAM	132622	25RB#0	21.24	22.00
Band66	10MHz	QPSK	132622	25RB#12	22.01	23.00
Band66	10MHz	16QAM	132622	25RB#12	21.22	22.00
Band66	10MHz	QPSK	132622	25RB#25	21.98	22.00
Band66	10MHz	16QAM	132622	25RB#25	21.18	22.00
Band66	10MHz	QPSK	132622	50RB#0	22.01	23.00
Band66	10MHz	16QAM	132622	50RB#0	21.25	22.00
Band66	15MHz	QPSK	132047	1RB#0	22.89	23.00
Band66	15MHz	16QAM	132047	1RB#0	22.26	23.00
Band66	15MHz	QPSK	132047	1RB#38	22.86	23.00
Band66	15MHz	16QAM	132047	1RB#38	22.14	23.00
Band66	15MHz	QPSK	132047	1RB#74	22.77	23.00
Band66	15MHz	16QAM	132047	1RB#74	22.14	23.00
Band66	15MHz	QPSK	132047	38RB#0	22.10	23.00
Band66	15MHz	16QAM	132047	38RB#0	22.11	23.00
Band66	15MHz	QPSK	132047	38RB#18	22.11	23.00
Band66	15MHz	16QAM	132047	38RB#18	22.11	23.00
Band66	15MHz	QPSK	132047	38RB#37	22.11	23.00
Band66	15MHz	16QAM	132047	38RB#37	22.11	23.00
Band66	15MHz	QPSK	132047	75RB#0	22.11	23.00
Band66	15MHz	16QAM	132047	75RB#0	21.43	22.00
Band66	15MHz	QPSK	132322	1RB#0	22.63	23.00
Band66	15MHz	16QAM	132322	1RB#0	22.24	23.00
Band66	15MHz	QPSK	132322	1RB#38	22.62	23.00
Band66	15MHz	16QAM	132322	1RB#38	22.18	23.00
Band66	15MHz	QPSK	132322	1RB#74	22.64	23.00
Band66	15MHz	16QAM	132322	1RB#74	22.32	23.00
Band66	15MHz	QPSK	132322	38RB#0	22.09	23.00
Band66	15MHz	16QAM	132322	38RB#0	22.09	23.00
Band66	15MHz	QPSK	132322	38RB#18	22.09	23.00
Band66	15MHz	16QAM	132322	38RB#18	22.09	23.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band66	15MHz	QPSK	132322	38RB#37	22.09	23.00
Band66	15MHz	16QAM	132322	38RB#37	22.09	23.00
Band66	15MHz	QPSK	132322	75RB#0	22.10	23.00
Band66	15MHz	16QAM	132322	75RB#0	21.45	22.00
Band66	15MHz	QPSK	132597	1RB#0	22.83	23.00
Band66	15MHz	16QAM	132597	1RB#0	22.21	23.00
Band66	15MHz	QPSK	132597	1RB#38	22.70	23.00
Band66	15MHz	16QAM	132597	1RB#38	21.97	22.00
Band66	15MHz	QPSK	132597	1RB#74	22.50	23.00
Band66	15MHz	16QAM	132597	1RB#74	21.80	22.00
Band66	15MHz	QPSK	132597	38RB#0	21.91	22.00
Band66	15MHz	16QAM	132597	38RB#0	22.00	23.00
Band66	15MHz	QPSK	132597	38RB#18	21.99	22.00
Band66	15MHz	16QAM	132597	38RB#18	21.99	22.00
Band66	15MHz	QPSK	132597	38RB#37	21.98	22.00
Band66	15MHz	16QAM	132597	38RB#37	21.98	22.00
Band66	15MHz	QPSK	132597	75RB#0	21.97	22.00
Band66	15MHz	16QAM	132597	75RB#0	21.26	22.00
Band66	20MHz	QPSK	132072	1RB#0	22.86	23.00
Band66	20MHz	16QAM	132072	1RB#0	22.10	23.00
Band66	20MHz	QPSK	132072	1RB#49	22.75	23.00
Band66	20MHz	16QAM	132072	1RB#49	21.96	22.00
Band66	20MHz	QPSK	132072	1RB#99	22.77	23.00
Band66	20MHz	16QAM	132072	1RB#99	22.17	23.00
Band66	20MHz	QPSK	132072	50RB#0	22.13	23.00
Band66	20MHz	16QAM	132072	50RB#0	21.52	22.00
Band66	20MHz	QPSK	132072	50RB#25	22.18	23.00
Band66	20MHz	16QAM	132072	50RB#25	21.53	22.00
Band66	20MHz	QPSK	132072	50RB#50	22.01	23.00
Band66	20MHz	16QAM	132072	50RB#50	21.44	22.00
Band66	20MHz	QPSK	132072	100RB#0	22.11	23.00
Band66	20MHz	16QAM	132072	100RB#0	21.49	22.00
Band66	20MHz	QPSK	132322	1RB#0	22.91	23.00
Band66	20MHz	16QAM	132322	1RB#0	22.79	23.00
Band66	20MHz	QPSK	132322	1RB#49	22.90	23.00
Band66	20MHz	16QAM	132322	1RB#49	22.48	23.00
Band66	20MHz	QPSK	132322	1RB#99	22.93	23.00
Band66	20MHz	16QAM	132322	1RB#99	22.49	23.00
Band66	20MHz	QPSK	132322	50RB#0	22.23	23.00
Band66	20MHz	16QAM	132322	50RB#0	21.45	22.00
Band66	20MHz	QPSK	132322	50RB#25	22.13	23.00
Band66	20MHz	16QAM	132322	50RB#25	21.56	22.00
Band66	20MHz	QPSK	132322	50RB#50	22.12	23.00
Band66	20MHz	16QAM	132322	50RB#50	21.50	22.00
Band66	20MHz	QPSK	132322	100RB#0	22.19	23.00
Band66	20MHz	16QAM	132322	100RB#0	21.50	22.00
Band66	20MHz	QPSK	132572	1RB#0	23.29	24.00
Band66	20MHz	16QAM	132572	1RB#0	22.16	23.00
Band66	20MHz	QPSK	132572	1RB#49	23.12	24.00
Band66	20MHz	16QAM	132572	1RB#49	22.10	23.00
Band66	20MHz	QPSK	132572	1RB#99	22.83	23.00
Band66	20MHz	16QAM	132572	1RB#99	21.73	22.00
Band66	20MHz	QPSK	132572	50RB#0	22.14	23.00
Band66	20MHz	16QAM	132572	50RB#0	21.47	22.00
Band66	20MHz	QPSK	132572	50RB#25	22.11	23.00
Band66	20MHz	16QAM	132572	50RB#25	21.47	22.00
Band66	20MHz	QPSK	132572	50RB#50	21.96	22.00
Band66	20MHz	16QAM	132572	50RB#50	21.36	22.00
Band66	20MHz	QPSK	132572	100RB#0	22.03	23.00
Band66	20MHz	16QAM	132572	100RB#0	21.35	22.00



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.14. Conducted Power Measurement Results(WIFI 2.4G)**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Tune Up (dBm)
NVNT	b	2412	Ant	16.03	17.00
NVNT	b	2437	Ant	15.17	16.00
NVNT	b	2462	Ant	14.77	15.00
NVNT	g	2412	Ant	14.9	15.00
NVNT	g	2437	Ant	14.16	15.00
NVNT	g	2462	Ant	13.97	14.00
NVNT	n20	2412	Ant	13.92	14.00
NVNT	n20	2437	Ant	13.59	14.00
NVNT	n20	2462	Ant	13.88	14.00
NVNT	n40	2422	Ant	12.41	13.00
NVNT	n40	2437	Ant	13.02	14.00
NVNT	n40	2452	Ant	12.21	13.00
NVNT	ax20	2412	Ant	14.87	15.00
NVNT	ax20	2437	Ant	13.93	14.00
NVNT	ax20	2462	Ant	13.93	14.00
NVNT	ax40	2422	Ant	14.12	15.00
NVNT	ax40	2437	Ant	14.14	15.00
NVNT	ax40	2452	Ant	14.07	15.00

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
- 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

WIFI 2.4G (802.11b):

Duty cycle=99.13%

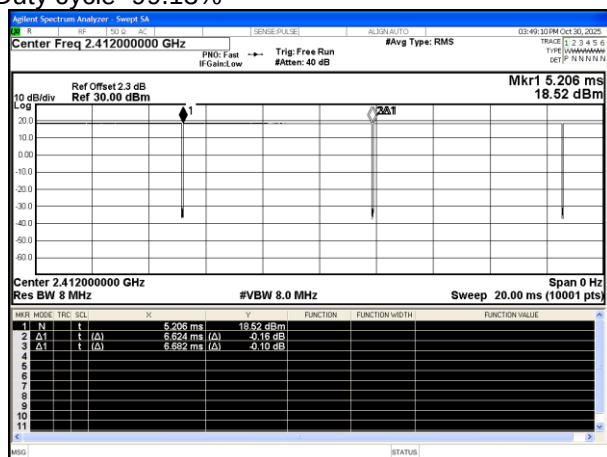

**7.1.15. Conducted Power Measurement Results(WIFI 5.2G)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Tune Up (dBm)
NVNT	a	5180	Ant1	12.88	0.24	13.12	14.00
NVNT	a	5200	Ant1	12.75	0.24	12.99	13.00
NVNT	a	5240	Ant1	10.42	0.24	10.66	11.00
NVNT	n20	5180	Ant1	11.39	0.12	11.51	12.00
NVNT	n20	5200	Ant1	11.41	0.12	11.53	12.00
NVNT	n20	5240	Ant1	11.47	0.12	11.59	12.00
NVNT	n40	5190	Ant1	11.06	0.24	11.3	12.00
NVNT	n40	5230	Ant1	10.59	0.24	10.83	11.00
NVNT	ac20	5180	Ant1	11.39	0.12	11.51	12.00
NVNT	ac20	5200	Ant1	11.32	0.12	11.44	12.00
NVNT	ac20	5240	Ant1	11.82	0.12	11.94	12.00
NVNT	ac40	5190	Ant1	11.09	0.24	11.33	12.00
NVNT	ac40	5230	Ant1	10.72	0.24	10.96	11.00
NVNT	ac80	5210	Ant1	10.09	0.47	10.56	11.00
NVNT	ax20	5180	Ant1	11.39	0.12	11.51	12.00
NVNT	ax20	5200	Ant1	11.35	0.12	11.47	12.00
NVNT	ax20	5240	Ant1	11.75	0.12	11.87	12.00
NVNT	ax40	5190	Ant1	11.11	0.24	11.35	12.00
NVNT	ax40	5230	Ant1	10.95	0.23	11.18	12.00
NVNT	ax80	5210	Ant1	10.07	0.47	10.54	11.00

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.


1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

WIFI 5.2G (802.11a):

Duty cycle=94.56%

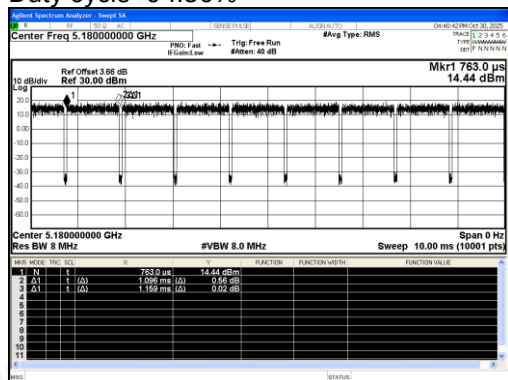

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.1.16. Conducted Power Measurement Results(WIFI 5.8G)**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Tune Up (dBm)
NVNT	a	5745	Ant1	13.01	0.24	13.25	14.00
NVNT	a	5785	Ant1	11.89	0.24	12.13	13.00
NVNT	a	5825	Ant1	12.23	0.24	12.47	13.00
NVNT	n20	5745	Ant1	11.56	0.12	11.68	12.00
NVNT	n20	5785	Ant1	11.4	0.12	11.52	12.00
NVNT	n20	5825	Ant1	11.64	0.12	11.76	12.00
NVNT	n40	5755	Ant1	10.91	0.24	11.15	12.00
NVNT	n40	5795	Ant1	10.88	0.24	11.12	12.00
NVNT	ac20	5745	Ant1	11.44	0.12	11.56	12.00
NVNT	ac20	5785	Ant1	11.37	0.12	11.49	12.00
NVNT	ac20	5825	Ant1	11.64	0.12	11.76	12.00
NVNT	ac40	5755	Ant1	10.96	0.24	11.2	12.00
NVNT	ac40	5795	Ant1	10.77	0.24	11.01	12.00
NVNT	ac80	5775	Ant1	10.78	0.47	11.25	12.00
NVNT	ax20	5745	Ant1	11.47	0.12	11.59	12.00
NVNT	ax20	5785	Ant1	11.36	0.12	11.48	12.00
NVNT	ax20	5825	Ant1	11.6	0.12	11.72	12.00
NVNT	ax40	5755	Ant1	10.94	0.24	11.18	12.00
NVNT	ax40	5795	Ant1	10.84	0.24	11.08	12.00
NVNT	ax80	5775	Ant1	10.82	0.47	11.29	12.00

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
- 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

WIFI 5.8G (802.11a):

Duty cycle=94.56%

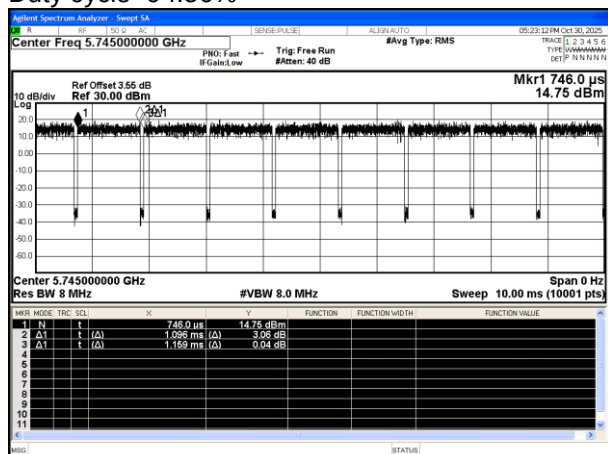

**7.1.17. Conducted Power Measurement Results(Bluetooth)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Tune Up (dBm)
NVNT	1-DH5	2402	Ant1	-0.38	0.00
NVNT	1-DH5	2441	Ant1	-0.37	0.00
NVNT	1-DH5	2480	Ant1	-1.5	-1.00
NVNT	2-DH5	2402	Ant1	1.6	2.00
NVNT	2-DH5	2441	Ant1	1.63	2.00
NVNT	2-DH5	2480	Ant1	0.71	1.00
NVNT	3-DH5	2402	Ant1	1.94	2.00
NVNT	3-DH5	2441	Ant1	2.05	3.00
NVNT	3-DH5	2480	Ant1	1.08	2.00

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Tune Up (dBm)
NVNT	BLE 1M	2402	Ant1	2.22	3.00
NVNT	BLE 1M	2440	Ant1	1.05	2.00
NVNT	BLE 1M	2480	Ant1	-0.14	0.00





7.2. Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.





The test exclusions are applicable only when the minimum test separation distance is > 50 mm and for transmission frequencies between 100 MHz and 6 GHz.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and > 50 mm

MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
100	474	481	487	494	501	507	514	521	527	534	541	547	554	561	567	mW
150	387	397	407	417	427	437	447	457	467	477	487	497	507	517	527	
300	274	294	314	334	354	374	394	414	434	454	474	494	514	534	554	
450	224	254	284	314	344	374	404	434	464	494	524	554	584	614	644	
835	164	220	275	331	387	442	498	554	609	665	721	776	832	888	943	
900	158	218	278	338	398	458	518	578	638	698	758	818	878	938	998	
1500	122	222	322	422	522	622	722	822	922	1022	1122	1222	1322	1422	1522	
1900	109	209	309	409	509	609	709	809	909	1009	1109	1209	1309	1409	1509	
2450	96	196	296	396	496	596	696	796	896	996	1096	1196	1296	1396	1496	
3600	79	179	279	379	479	579	679	779	879	979	1079	1179	1279	1379	1479	
5200	66	166	266	366	466	566	666	766	866	966	1066	1166	1266	1366	1466	
5400	65	165	265	365	465	565	665	765	865	965	1065	1165	1265	1365	1465	
5800	62	162	262	362	462	562	662	762	862	962	1062	1162	1262	1362	1462	

According to the table above, Standalone SAR exclusion calculation for this device are as below:

Freq. Band	Frequency (MHz)	Position	Test Separation (mm)	Max Power (dBm)	Max Power (mW)	Exclusion Threshold (mW)	Exclusion (Yes/No)
Bluetooth	2441	Rear side	5	3.00	1.995	10	YES
	2441	Left side	142	3.00	1.995	1016	YES
	2441	Right side	5	3.00	1.995	10	YES
	2441	Top side	5	3.00	1.995	10	YES
	2441	Bottom side	197	3.00	1.995	1496	YES
Wi-Fi 2.4G	2412	Rear side	5	17.00	50.119	10	NO
	2412	Left side	142	17.00	50.119	1016	YES
	2412	Right side	5	17.00	50.119	10	NO
	2412	Top side	5	17.00	50.119	10	NO
	2412	Bottom side	197	17.00	50.119	1496	YES
Wi-Fi 5.2G	5180	Rear side	5	14.00	25.119	7	NO
	5180	Left side	142	14.00	25.119	986	YES
	5180	Right side	5	14.00	25.119	7	NO
	5180	Top side	5	14.00	25.119	7	NO
	5180	Bottom side	197	14.00	25.119	1466	YES
Wi-Fi 5.8G	5745	Rear side	5	14.00	25.119	6	NO
	5745	Left side	142	14.00	25.119	982	YES
	5745	Right side	5	14.00	25.119	6	NO
	5745	Top side	5	14.00	25.119	6	NO
	5745	Bottom side	197	14.00	25.119	1462	YES



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Freq. Band	Frequency (MHz)	Position	Test Separation (mm)	Max Power (dBm)	Max Power (mW)	Exclusion Threshold (mW)	Exclusion (Yes/No)
GSM 850	824.2	Rear side	5	25.58	361.410	16	No
	824.2	Left side	5	25.58	361.410	16	No
	824.2	Right side	93	25.58	361.410	403.5	Yes
	824.2	Top side	217	25.58	361.410	943	Yes
	824.2	Bottom side	5	25.58	361.410	16	No
PCS 1900	1909.8	Rear side	5	22.58	181.134	11	No
	1909.8	Left side	5	22.58	181.134	11	No
	1909.8	Right side	93	22.58	181.134	539	Yes
	1909.8	Top side	217	22.58	181.134	1509	Yes
	1909.8	Bottom side	5	22.58	181.134	11	No
WCDMA Band II	1907.6	Rear side	5	24.00	251.189	11	No
	1907.6	Left side	5	24.00	251.189	11	No
	1907.6	Right side	93	24.00	251.189	539	Yes
	1907.6	Top side	217	24.00	251.189	1509	Yes
	1907.6	Bottom side	5	24.00	251.189	11	No
WCDMA Band V	836.4	Rear side	5	23.00	199.526	16	No
	836.4	Left side	5	23.00	199.526	16	No
	836.4	Right side	93	23.00	199.526	403.5	Yes
	836.4	Top side	217	23.00	199.526	943	Yes
	836.4	Bottom side	5	23.00	199.526	16	No
LTE Band 2	1900	Rear side	5	23.00	199.526	11	No
	1900	Left side	5	23.00	199.526	11	No
	1900	Right side	93	23.00	199.526	539	Yes
	1900	Top side	217	23.00	199.526	1509	Yes
	1900	Bottom side	5	23.00	199.526	11	No
LTE Band 7	2535	Rear side	5	24.00	251.189	10	No
	2535	Left side	5	24.00	251.189	10	No
	2535	Right side	93	24.00	251.189	526	Yes
	2535	Top side	217	24.00	251.189	1496	Yes
	2535	Bottom side	5	24.00	251.189	10	No
LTE Band 17	710	Rear side	5	24.00	251.189	16	No
	710	Left side	5	24.00	251.189	16	No
	710	Right side	93	24.00	251.189	403.5	Yes
	710	Top side	217	24.00	251.189	943	Yes
	710	Bottom side	5	24.00	251.189	16	No
LTE Band 26	836.5	Rear side	5	24.00	251.189	16	No
	836.5	Left side	5	24.00	251.189	16	No
	836.5	Right side	93	24.00	251.189	403.5	Yes
	836.5	Top side	217	24.00	251.189	943	Yes
	836.5	Bottom side	5	24.00	251.189	16	No
LTE Band 41	2506	Rear side	5	23.00	199.526	10	No
	2506	Left side	5	23.00	199.526	10	No
	2506	Right side	93	23.00	199.526	526	Yes
	2506	Top side	217	23.00	199.526	1496	Yes
	2506	Bottom side	5	23.00	199.526	10	No





LTE Band 66	1770	Rear side	5	24.00	251.189	11	No
	1770	Left side	5	24.00	251.189	11	No
	1770	Right side	93	24.00	251.189	539	Yes
	1770	Top side	217	24.00	251.189	1509	Yes
	1770	Bottom side	5	24.00	251.189	11	No

From what is shown in the table above, we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
BT	Body	N/A	No	No	No	No	No
WIFI 2.4G	Body	N/A	Yes	No	Yes	Yes	No
WIFI 5.2G	Body	N/A	Yes	No	Yes	Yes	No
WIFI 5.3G	Body	N/A	Yes	No	Yes	Yes	No
WIFI 5.8G	Body	N/A	Yes	No	Yes	Yes	No

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
GSM 850	Body	N/A	Yes	Yes	No	No	Yes
PCS 1900	Body	N/A	Yes	Yes	No	No	Yes
WCDMA Band II	Body	N/A	Yes	Yes	No	No	Yes
WCDMA Band IV	Body	N/A	Yes	Yes	No	No	Yes
WCDMA Band V	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 2	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 5	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 7	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 12/17	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 13	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 41/38	Body	N/A	Yes	Yes	No	No	Yes
LTE Band 66/4	Body	N/A	Yes	Yes	No	No	Yes

EUT Sides for SAR Testing.

Note:

According to KDB616217, exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7.3. SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\begin{aligned}\text{Reported SAR} &= \text{Measured SAR} * 10^{(P_{\text{target}} - P_{\text{measured}})/10} * \text{DutyCycle Factor} \\ \text{Scaling factor} &= 10^{(P_{\text{target}} - P_{\text{measured}})/10} \\ \text{DutyCycle Factor} &= 1/\text{Dutycycle\%} \\ \text{Reported SAR} &= \text{Measured SAR} * \text{Scaling factor} * \text{DutyCycle Factor}\end{aligned}$$

Where

P_{target} is the power of manufacturing upper limit;

P_{measured} is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

7.3.1. SAR Results[GSM 850]

SAR Values [GSM850]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)								
128/824.2	GPRS 3TS	Rear side	29.52	30.00	-0.07	1.117	0.473	0.528
128/824.2	GPRS 3TS	Left side	29.52	30.00	-0.02	1.117	0.356	0.398
128/824.2	GPRS 3TS	Bottom side	29.52	30.00	-0.11	1.117	0.332	0.371

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.





7.3.2. SAR Results[PCS 1900]

SAR Values [PCS 1900]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)								
810/1909.8	GPRS 3TS	Rear side	26.52	27.00	-0.15	1.117	0.531	0.593
810/1909.8	GPRS 3TS	Left side	26.52	27.00	-0.02	1.117	0.396	0.442
810/1909.8	GPRS 3TS	Bottom side	26.52	27.00	0.16	1.117	0.354	0.395

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.





7.3.3. SAR Results [WCDMA Band II]

SAR Values [WCDMA Band II]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)								
9538/1907.6	RMC	Rear side	23.26	24.00	0.19	1.186	0.569	0.675
9538/1907.6	RMC	Left side	23.26	24.00	0.16	1.186	0.428	0.508
9538/1907.6	RMC	Bottom side	23.26	24.00	0.05	1.186	0.382	0.453

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;





7.3.4. SAR Results [WCDMA Band V]

SAR Values [WCDMA Band V]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
							Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)								
4182/836.4	RMC	Rear side	22.94	23.00	0.19	1.014	0.454	0.460
4182/836.4	RMC	Left side	22.94	23.00	-0.14	1.014	0.342	0.347
4182/836.4	RMC	Bottom side	22.94	23.00	-0.18	1.014	0.319	0.323

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) RMC* - RMC 12.2kbps mode;





7.3.5. SAR Results [LTE Band 2]

SAR Values [LTE Band 2]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
19100/1900	20M	QPSK 1RB_99	Rear side	22.33	23.00	0.16	1.167	0.386	0.450
19100/1900	20M	QPSK 1RB_99	Left side	22.33	23.00	0.15	1.167	0.297	0.347
19100/1900	20M	QPSK 1RB_99	Bottom side	22.33	23.00	0.04	1.167	0.259	0.302
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
19100/1900	20M	QPSK 50RB_50	Rear side	21.29	22.00	-0.07	1.178	0.344	0.405
19100/1900	20M	QPSK 50RB_50	Left side	21.29	22.00	-0.14	1.178	0.263	0.310
19100/1900	20M	QPSK 50RB_50	Bottom side	21.29	22.00	-0.13	1.178	0.228	0.268

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.





7.3.6. SAR Results [LTE Band 7]

SAR Values [LTE Band 7]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
21100/2535	20M	QPSK 1RB_49	Rear side	23.35	24.00	-0.19	1.161	0.642	0.746
21100/2535	20M	QPSK 1RB_49	Left side	23.35	24.00	-0.03	1.161	0.517	0.600
21100/2535	20M	QPSK 1RB_49	Bottom side	23.35	24.00	-0.18	1.161	0.505	0.587
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
21100/2535	20M	QPSK 50RB_0	Rear side	22.45	23.00	-0.17	1.135	0.573	0.650
21100/2535	20M	QPSK 50RB_0	Left side	22.45	23.00	0.03	1.135	0.463	0.526
21100/2535	20M	QPSK 50RB_0	Bottom side	22.45	23.00	0.17	1.135	0.428	0.486

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.





7.3.7. SAR Results [LTE Band 17]

SAR Values [LTE Band 17]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
23790/710	10M	QPSK 1RB_0	Rear side	23.57	24.00	-0.07	1.104	0.463	0.511
23790/710	10M	QPSK 1RB_0	Left side	23.57	24.00	0.17	1.104	0.357	0.394
23790/710	10M	QPSK 1RB_0	Bottom side	23.57	24.00	-0.12	1.104	0.326	0.360
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
23790/710	10M	QPSK 25RB_25	Rear side	22.70	23.00	-0.13	1.072	0.413	0.443
23790/710	10M	QPSK 25RB_25	Left side	22.70	23.00	0.02	1.072	0.306	0.328
23790/710	10M	QPSK 50RB_50	Bottom side	22.70	23.00	-0.03	1.072	0.289	0.310

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.





7.3.8. SAR Results [LTE Band 26]

SAR Values [LTE Band 26 814-824]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
26740/819	10M	QPSK 1RB_0	Rear side	22.89	23.00	0.03	1.026	0.496	0.509
26740/819	10M	QPSK 1RB_0	Left side	22.89	23.00	-0.14	1.026	0.401	0.411
26740/819	10M	QPSK 1RB_0	Bottom side	22.89	23.00	0.14	1.026	0.384	0.394
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
26740/819	10M	QPSK 25RB_0	Rear side	22.05	23.00	0.13	1.245	0.442	0.550
26740/819	10M	QPSK 25RB_0	Left side	22.05	23.00	-0.19	1.245	0.358	0.446
26740/819	10M	QPSK 25RB_0	Bottom side	22.05	23.00	0.05	1.245	0.343	0.427

SAR Values [LTE Band 26 824-849]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
26915/836.5	15M	QPSK 1RB_38	Rear side	23.24	24.00	0.10	1.191	0.527	0.628
26915/836.5	15M	QPSK 1RB_38	Left side	23.24	24.00	-0.03	1.191	0.416	0.496
26915/836.5	15M	QPSK 1RB_38	Bottom side	23.24	24.00	0.04	1.191	0.397	0.473
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
26915/836.5	15M	QPSK 38RB_18	Rear side	22.05	23.00	-0.05	1.245	0.483	0.601
26915/836.5	15M	QPSK 38RB_18	Left side	22.05	23.00	-0.12	1.245	0.391	0.487
26915/836.5	15M	QPSK 38RB_18	Bottom side	22.05	23.00	-0.17	1.245	0.375	0.467

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.





7.3.9. SAR Results [LTE Band 41]

SAR Values [LTE Band 41]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
39750/2506	20M	QPSK 1RB_0	Rear side	22.31	23.00	-0.17	1.172	0.486	0.570
39750/2506	20M	QPSK 1RB_0	Left side	22.31	23.00	-0.05	1.172	0.397	0.465
39750/2506	20M	QPSK 1RB_0	Bottom side	22.31	23.00	-0.17	1.172	0.376	0.441
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
40620/2593	20M	QPSK 50RB_25	Rear side	21.52	22.00	0.10	1.117	0.404	0.451
40620/2593	20M	QPSK 50RB_25	Left side	21.52	22.00	0.08	1.117	0.352	0.393
40620/2593	20M	QPSK 50RB_25	Bottom side	21.52	22.00	0.16	1.117	0.347	0.388

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.



**7.3.10. SAR Results [LTE Band 66]**

SAR Values [LTE Band 66]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)<1RB>									
132572/1770	20M	QPSK 1RB_0	Rear side	23.29	24.00	-0.06	1.178	0.588	0.692
132572/1770	20M	QPSK 1RB_0	Left side	23.29	24.00	-0.01	1.178	0.512	0.603
132572/1770	20M	QPSK 1RB_0	Bottom side	23.29	24.00	-0.03	1.178	0.497	0.585
measured / reported SAR numbers - Body (Test data distance 0mm)<50%RB>									
132322/1745	20M	QPSK 50RB_0	Rear side	22.23	23.00	-0.15	1.194	0.524	0.626
132322/1745	20M	QPSK 50RB_0	Left side	22.23	23.00	0.14	1.194	0.457	0.546
132322/1745	20M	QPSK 50RB_0	Bottom side	22.23	23.00	0.15	1.194	0.443	0.529

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.



**7.3.11. SAR Results [WIFI 2.4G]**

SAR Values [WIFI 2.4G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)									
1/2412	802.11b	Rear side	1.009	16.03	17.00	0.17	1.250	0.579	0.730
1/2412	802.11b	Right side	1.009	16.03	17.00	0.10	1.250	0.413	0.521
1/2412	802.11b	Top side	1.009	16.03	17.00	-0.20	1.250	0.472	0.595

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**7.3.12. SAR Results [WIFI 5.2G]**

SAR Values [WIFI5.2G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)									
36/5180	802.11a	Rear side	1.058	13.12	14.00	0.13	1.225	0.425	0.550
36/5180	802.11a	Right side	1.058	13.12	14.00	0.12	1.225	0.322	0.417
36/5180	802.11a	Top side	1.058	13.12	14.00	-0.09	1.225	0.357	0.462

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.



**7.3.13. SAR Results [WIFI 5.8G]**

SAR Values [WIFI 5.8G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR _{1-g} results(W/kg)	
								Measured	Reported
measured / reported SAR numbers - Body (Test data distance 0mm)									
149/5745	802.11a	Rear side	1.058	13.25	14.00	0.13	1.189	0.411	0.517
149/5745	802.11a	Right side	1.058	13.25	14.00	0.06	1.189	0.304	0.382
149/5745	802.11a	Top side	1.058	13.25	14.00	0.18	1.189	0.339	0.426

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.





7.4. Multiple Transmitter Evaluation

7.4.1. Simultaneous SAR test evaluation

Simultaneous Transmission Possibilities

NO.	Simultaneous Tx Combination	Body
1	GSM + BT	Yes
2	GSM + WiFi 2.4G	Yes
3	GSM + WiFi 5G	Yes
4	UMTS + BT	Yes
5	UMTS + WiFi 2.4G	Yes
6	UMTS +WiFi 5G	Yes
7	LTE + BT	Yes
8	LTE + WiFi 2.4G	Yes
9	LTE + WiFi 5G	Yes

- 1) Wi-Fi and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) The device does not support DTM function.





7.4.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Estimated SAR Result

Freq. Band	Frequency (GHz)	Test Position	max. power (dBm)	max. power (mw)	Test Separation (mm)	Estimated
						1g SAR (W/kg)
Bluetooth	2.44	Body	3.00	1.995	5	0.084





7.4.3. Simultaneous Transmission SAR Summation Scenario

Test position		Main Antenna SAR _{max} (W/kg)										BT/WIFI Antenna SAR _{max} (W/kg)				Summed 1g SAR _{max} (W/kg)
		GSM850	GSM1900	WCDMA Band II	WCDMA Band V	LTE Band 2	LTE Band 7	LTE Band 17	LTE Band 26	LTE Band 41	LTE Band 66	WiFi 2.4G	WiFi 5.2G	WiFi 5.8G	BT	
Body	Back side	0.528	0.593	0.675	0.46	0.45	0.746	0.511	0.628	0.57	0.692	0.73	0.55	0.517	0.084	1.476
	Left side	0.398	0.442	0.508	0.347	0.347	0.6	0.394	0.496	0.465	0.603	/	/	/	/	0.603
	Right side	/	/	/	/	/	/	/	/	/	/	0.521	0.417	0.382	0.084	0.521
	Top side	/	/	/	/	/	/	/	/	/	/	0.595	0.462	0.426	0.084	0.595
	Bottom side	0.371	0.395	0.453	0.323	0.302	0.587	0.36	0.473	0.441	0.585	/	/	/	/	0.587





APPENDIX A: DETAILED SYSTEM CHECK RESULTS

APPENDIX B: DETAILED TEST RESULTS

APPENDIX C: CALIBRATION CERTIFICATE

APPENDIX D: PHOTOGRAPHS

.....The End of Test Report.....

