



Shenzhen Shuodian Electronic Technology Co.,Ltd

Address : Room 7019, Longxing Commercial Building, No. 58-61 Huarong Road, Sanhe Overseas
Chinese District 1, Tongsheng Community, Dalang Street, Longhua District, Shenzhen



NO.	DETAILS
1	Art Frame
2	2400-2500MHz
3	≤ 2.0
4	50 Ω
5	Slot
6	PCB

S11:

Marker	2400MHz	2450MHz	2500MHz
Returnloss	-12. 23	-23. 66	-10. 31
VSWR	1. 64	1. 15	1. 89



Shenzhen Shuodian Electronic Technology Co.,Ltd

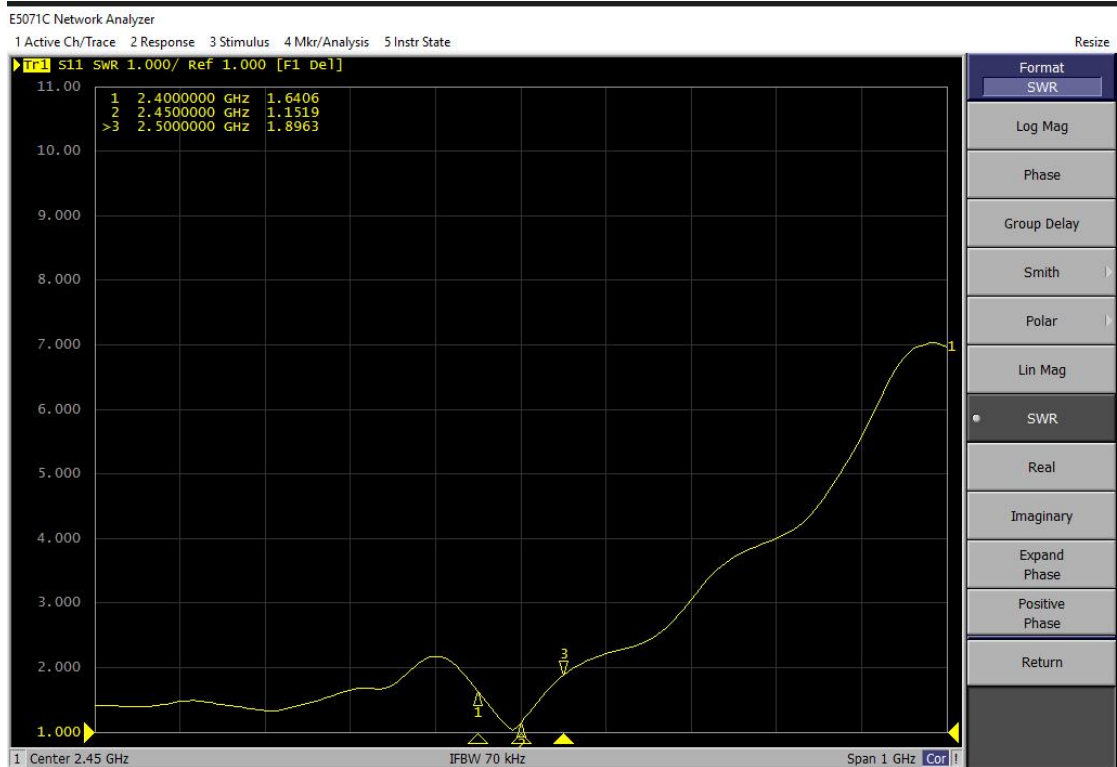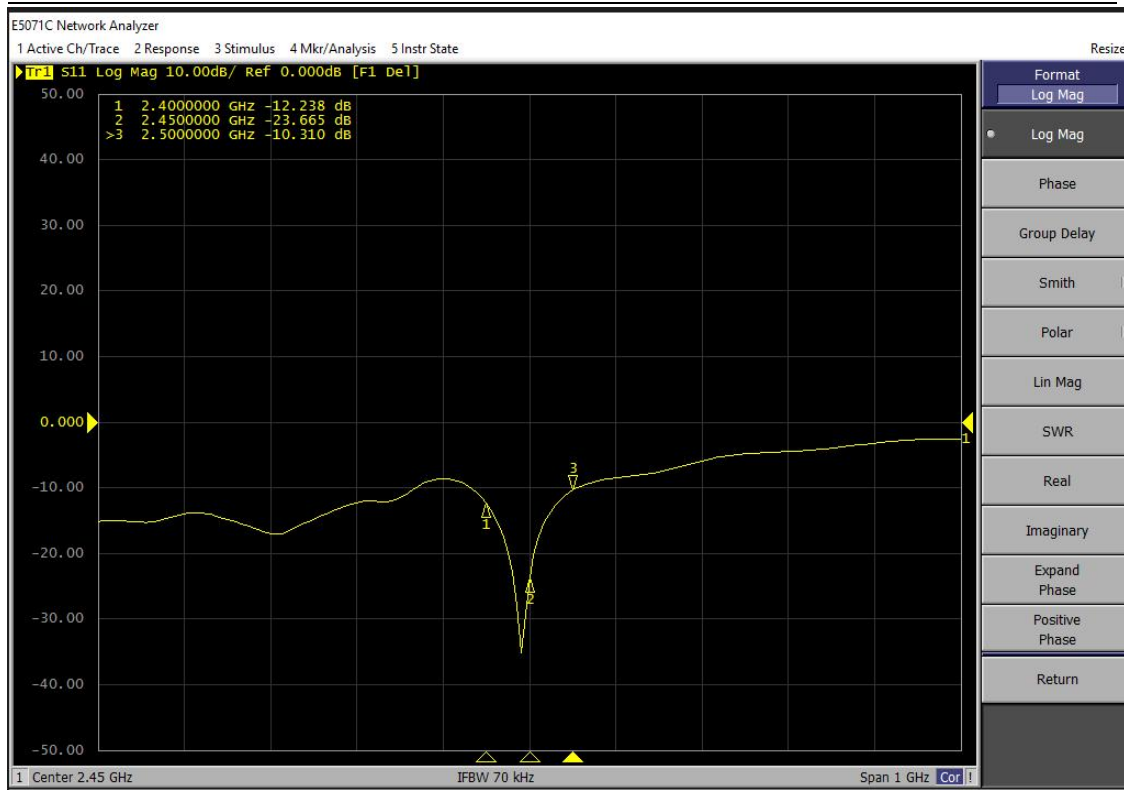





Gain、efficiency、 direction diagram


frequency (MHz)	Gain (dBi)	Efficiency (%)
2400.0	0.62	40.6
2410.0	0.58	41.2
2420.0	0.37	40.7
2430.0	0.29	40.7
2440.0	0.33	40.8
2450.0	0.43	40.4
2460.0	0.51	39.6
2470.0	0.59	38.1
2480.0	0.49	37.5
2490.0	0.51	36.8
2500.0	0.56	36.1

尺寸: 26*8mm


示意图如下

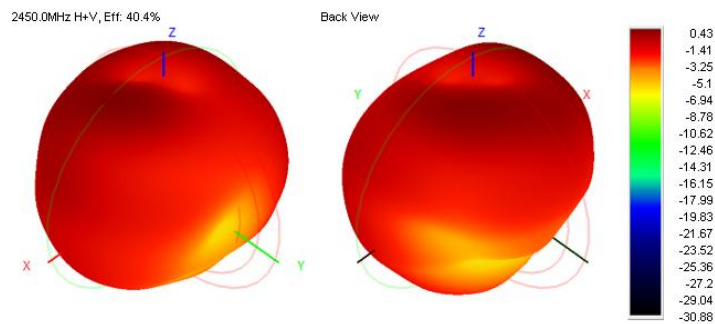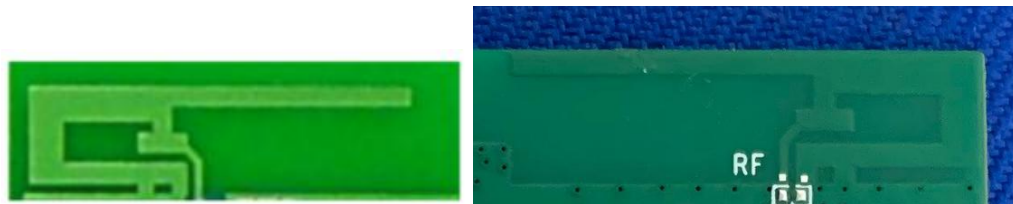

2450.0MHz Total(E1-XZ), Max= 0.42dBi



2450.0MHz Total(E2-YZ), Max= -0.17dBi



Total(H-XY), Max= -1.80dBi, CirD=9.55

