

FCC SAR Test Report

Report No. : 1812C60174812501

Applicant : Teguar corporation

Address : 2920 Whitehall Park Drive Charlotte NC 28273
United States

Product Name : Rugged Tablet

Report Date : 2026-06-24

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. Statement of Compliance	6
2. General Information.....	7
2.1. Client Information.....	7
2.2. Description of Equipment Under Test (EUT)	7
2.3. Device Category and SAR Limits	8
2.4. Applied Standard	8
2.5. Environment of Test Site	8
2.6. Test Configuration	8
2.7. Description of Test Facility.....	8
2.8. Disclaimer	9
3. Specific Absorption Rate (SAR)	10
3.1. Introduction	10
3.2. SAR Definition	10
4. SAR Measurement System	11
4.1. E-Field Probe.....	12
4.2. Data Acquisition Electronics (DAE)	12
4.3. Robot	13
4.4. Measurement Server	14
4.5. Phantom	15
4.6. Device Holder	16
4.7. Data Storage and Evaluation.....	17
5. Test Equipment List.....	19
6. Tissue Simulating Liquids.....	20
7. System Verification Procedures	22
8. EUT Testing Position.....	24
8.1. Body Position.....	24
9. Measurement Procedures	25
9.1. Spatial Peak SAR Evaluation	25
9.2. Power Reference Measurement.....	26
9.3. Area Scan Procedures	26
9.4. Zoom Scan Procedures	27
9.5. Volume Scan Procedures	28
10. Output Power	29
11. Exposure Positions Consideration	41
12. SAR Test Results Summary.....	42
12.1. SAR Test Results	42
13. Simultaneous Transmission Analysis.....	46

13.1. Simultaneous TX SAR Considerations 46

14. Measurement Uncertainty 47

TEST REPORT

Applicant : Teguvar corporation
Manufacturer : Teguvar Corporation
Product Name : Rugged Tablet
Model No. : TRT-6280-10S, TMT-6280-10S
Trade Mark : Teguvar
Rating(s) : Input:AC 100-240V
Output:DC 5V~20V, 1.5A
DC7.74V,4900mAh Battery inside

**Test Standard(s) : IEEE Std 1528™-2013; FCC 47 CFR Part 2.1093;
ANSI/IEEE C95.1:2019; Reference FCC KDB 447498 D01 v06; KDB
248227 D01 v02r02; KDB 865664 D01**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the IEEE Std 1528™-2013, FCC 47 CFR Part 2.1093, IEEE Std C95.1-2019 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt 2026-04-24

Date of Test 2026-04-27 to 2026-06-17

Prepared By

Huisen Guan

(Huisen Guan)

Approved & Authorized Signer

Hugo Chen

(Hugo Chen)

Version

Version No.	Date	Description
R00	2026-06-24	Original

1. Statement of Compliance

<Highest SAR Summary>

Frequency Band		Highest Reported 1g-SAR(W/Kg)	SAR Test Limit (W/Kg)
		Body (5mm)	
WLAN 2.4G	ANT 1	0.087	1.6
	ANT 2	0.188	
RLAN 5.2G	ANT 1	0.163	
	ANT 2	1.053	
RLAN 5.3G	ANT 1	0.331	
	ANT 2	1.171	
RLAN 5.6G	ANT 1	0.624	
	ANT 2	0.852	
RLAN 5.8G	ANT 1	0.914	
	ANT 2	0.343	

This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6 W/kg as averaged over any 1 gram of tissue and 4.0 W/kg as averaged over any 10 gram of tissue).

2. General Information

2.1. Client Information

Applicant	:	Teguar corporation
Address	:	2920 Whitehall Park Drive Charlotte NC 28273 United States
Manufacturer	:	Teguar Corporation
Address	:	2920 Whitehall Park Drive Charlotte NC 28273 United States
Factory	:	Inventec Corporation
Address	:	No.349.Sec.2. Renhe Rd.. DaDist, Taoyuan City 335, Taiwan (R.O.C.)

2.2. Description of Equipment Under Test (EUT)

Product Name	:	Rugged Tablet
Model No.	:	TRT-6280-10S, TMT-6280-10S (Note: All samples are the same except the model number, so we prepare "TRT-6280-10S" for test only.)
Trade Mark	:	Teguar
Test Power Supply	:	DC7.74V,4900mAh Battery inside
Test Sample No.	:	1-2-2(Engineering Sample)
Tx Frequency	:	BLE/BT:2402MHz-2480MHz WIFI:2412MHz-2462MHz
Type of Modulation	:	BLE:GFSK BT: GFSK, $\pi/4$ -DQPSK, 8DPSK WIFI:DSSS,OFDM
Category of device	:	Portable device

Remark:

The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

2.3. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4. Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2.1093
- IEEE Std C95.1-2019
- IEEE Std 1528™-2013
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02

2.5. Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	21~23
Humidity (%RH)	30-70	54~60

2.6. Test Configuration

For WiFi testing, the prototype can continuously transmit RF signals through a frequency-fixing software to conduct SAR testing.

2.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.:279531

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 279531.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China.

2.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.
7. The data in this report will be synchronized with the corresponding national market supervision and management departments and cross-border e-commerce platforms as required by regulatory agencies.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

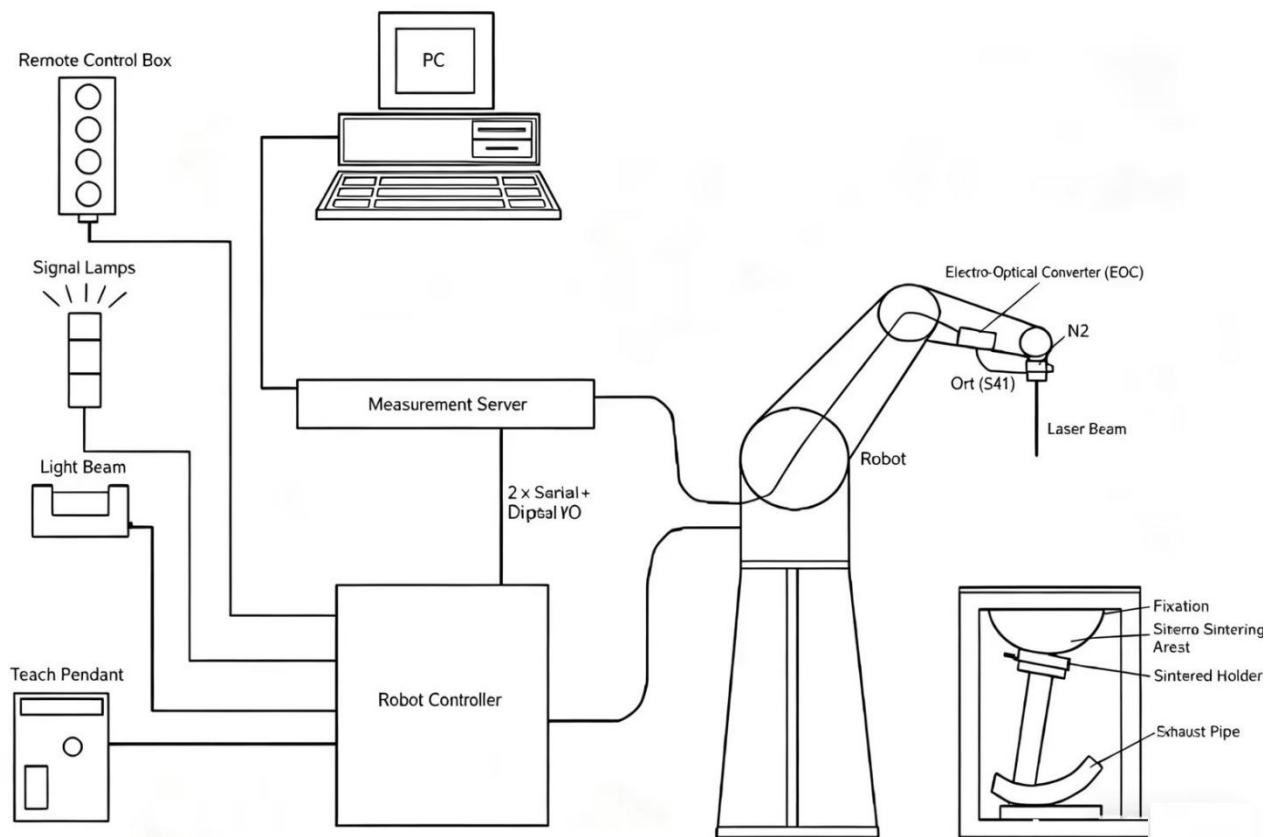

DASY System Configurations

The DASYsystem for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom and ELI4 Phantom
- A device holder
- Tissue simulating liquid

- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

4.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

- **E-Field Probe Specification**

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

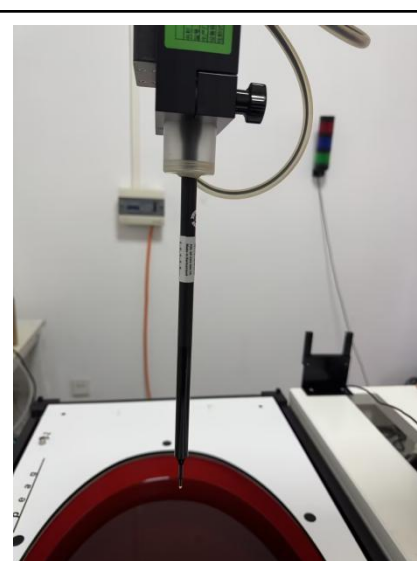


Photo of EX3DV4

- **E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

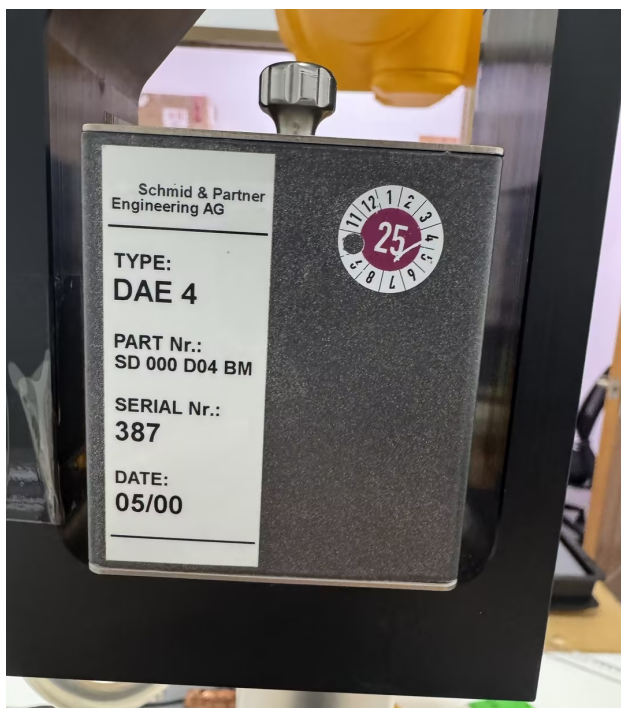


Photo of DAE

4.3. Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

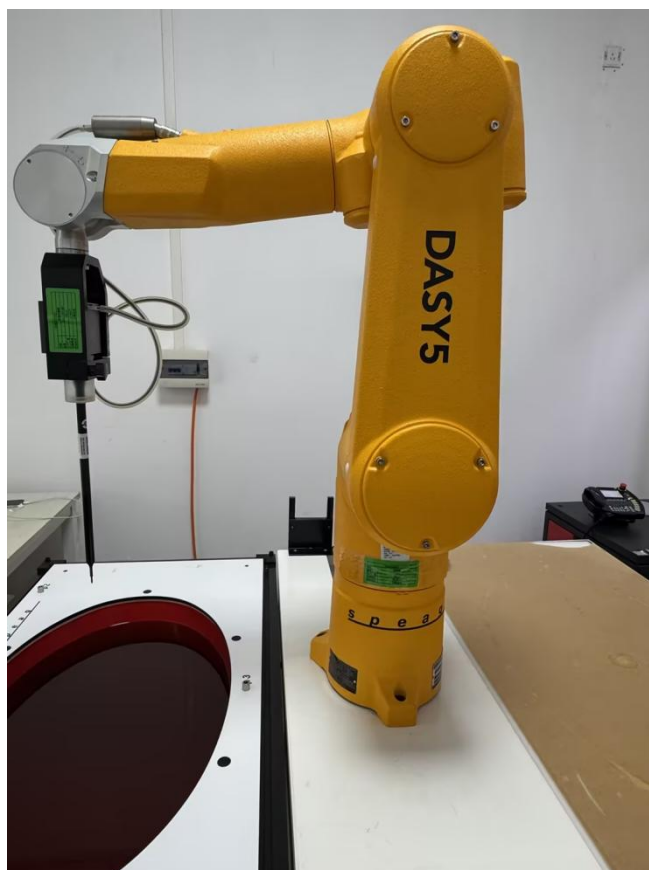


Photo of DASY5

4.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5

4.5. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom

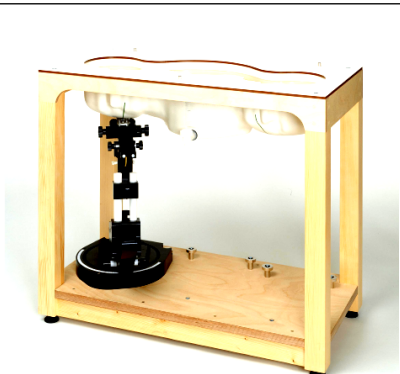
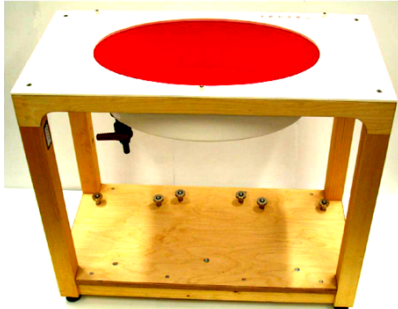


Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	 Photo of ELI4 Phantom
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis:400 mm	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6. Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ±0.5mm would produce a SAR uncertainty of ± 20%. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD X) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	1018	2025-09-16	2028-09-15
SPEAG	5GHz System Validation Kit	D5GHzV2	1093	2025-09-17	2028-09-16
SPEAG	Data Acquisition Electronics	DAE4	387	2025-10-13	2026-10-12
SPEAG	Dosimetric E-Field Probe	EX3DV4	3959	2025-10-09	2026-10-08
Anritsu	Mini Network Analyzerr	MS46121A	1618412	2026-03-26	2027-03-25
SPEAG	DAK	DAK-3.5	1256	2025-10-10	2026-10-09
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
Tailai Microwave	Amplifier	TLPA50K6G-33-33-HS	932502132	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	2025-12-29	2026-12-28
Agilent	Power Sensor	E9323A	US40410647	2025-12-29	2026-12-28
Agilent	Power Sensor	E9323A	MY53100007	2025-12-29	2026-12-28
CDKMV	Attenuator	/	02696	2025-05-21	2026-05-21
Agilent	Spectrum Analyzer	N9020A	MY51170037	2025-09-05	2026-09-04
Agilent	Signal Generation	N5182A	MY48180656	2025-12-29	2026-12-28
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	2025-10-25	2026-10-24

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:

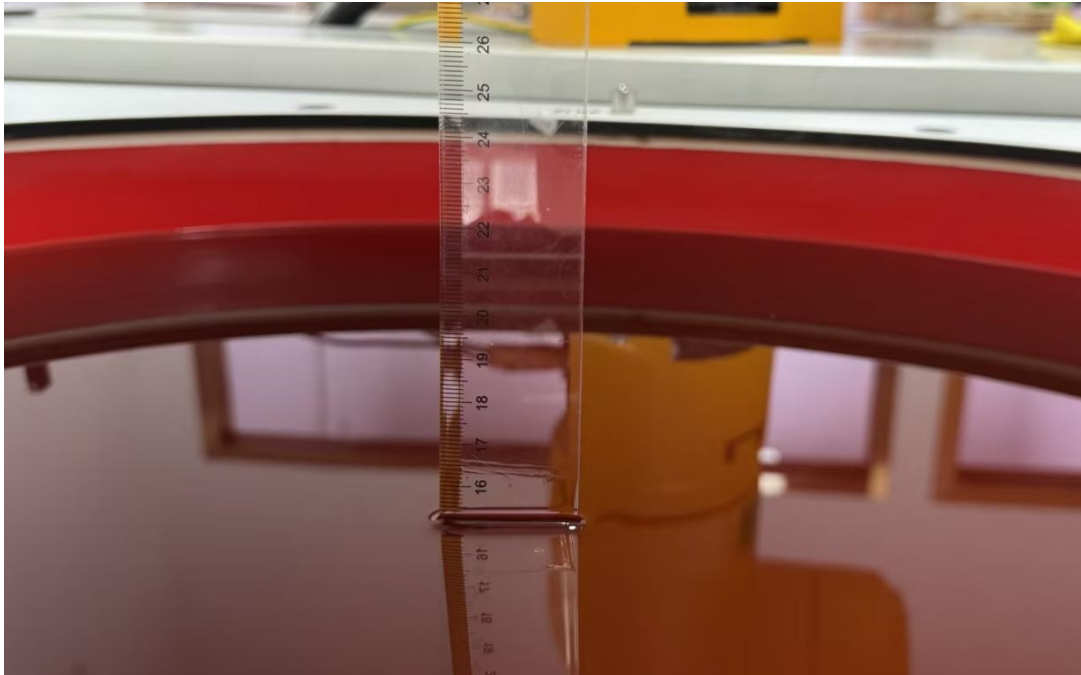


Photo of Liquid Height for Head SAR

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Measured Tissue		Target Tissue		Dev. (%)		Liquid Temp.	Test Date
	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity Target (ϵ_r)	Conductivity Target (σ)	Delta (ϵ_r) (%)	Delta (σ) (%)		
2450	38.678	1.889	39.20	1.80	-1.33	4.94	22.3	2026-04-27
2462	39.334	1.87	39.18	1.81	0.39	3.31	22.3	2026-04-27
5180	35.713	4.692	36.02	4.64	-0.85	1.12	22.3	2026-04-27
5250	35.817	4.858	35.95	4.71	-0.37	3.14	22.3	2026-04-27
5290	35.79	4.782	35.91	4.75	-0.33	0.67	22.6	2026-04-27

5530	35.15	5.012	35.60	5.00	-1.26	0.24	22.6	2026-04-28
5600	35.357	5.154	35.50	5.07	-0.40	1.66	22.6	2026-04-28
5750	35.448	5.385	35.35	5.22	0.28	3.16	22.4	2026-04-29
5825	35.466	5.32	35.28	5.30	0.53	0.38	22.4	2026-04-29

7. System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

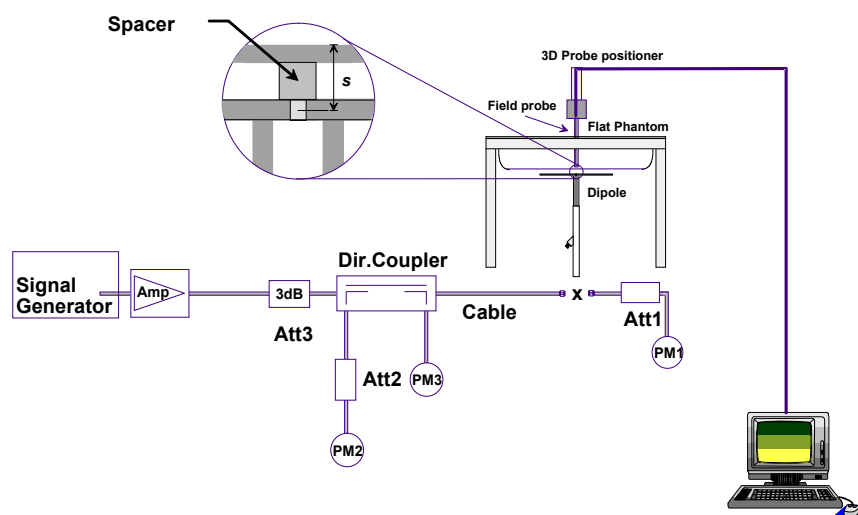

System Setup for System Evaluation

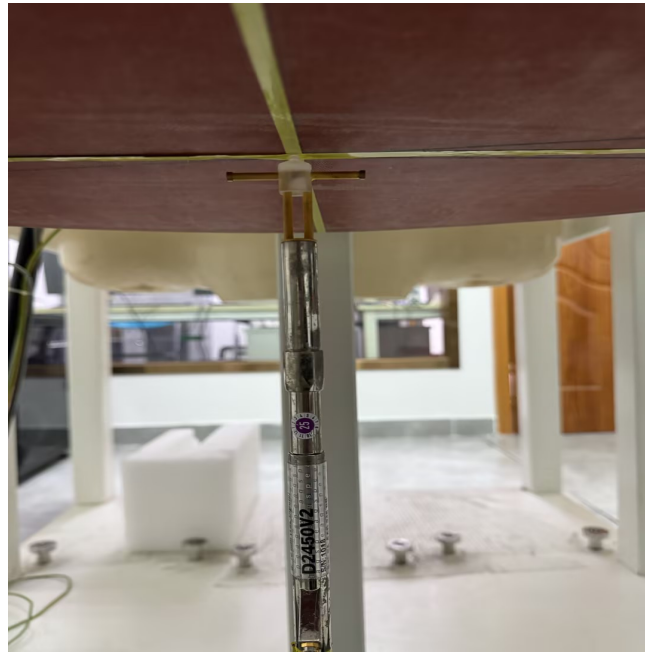


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR 1g(W/kg)	Measured SAR 1g(W/kg)	Normalized SAR 1g(W/kg)	Deviation (%)	Test Date
2450	250	24.6	6.01	24.04	-2.28	2026-04-27
5250	100	23.6	2.5	25	5.93	2026-04-27
5600	100	23.3	2.51	25.1	7.73	2026-04-28
5750	100	22.1	2.43	24.3	9.95	2026-04-29


Target and Measurement SAR after Normalized

8. EUT Testing Position

8.1. Body Position

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 v06, 2015 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

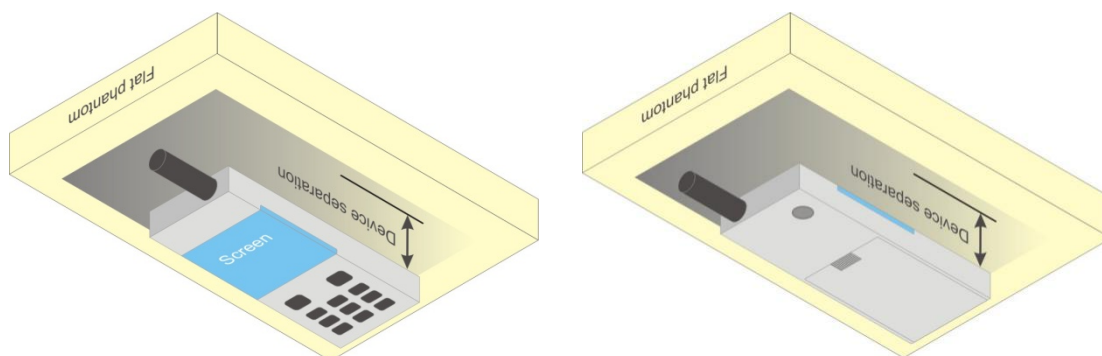

Body Worn Position

9. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3. Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4. Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5. Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregateSAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10. Output Power

<WLAN 2.4G>

ANT 1

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11B	2412	14.61	15.00	Default
	2437	14.65	15.00	Default
	2462	14.84	15.00	Default
802.11G	2412	14.19	15.00	Default
	2437	14.29	15.00	Default
	2462	14.36	15.00	Default
802.11N20	2412	14.01	15.00	Default
	2437	14.04	15.00	Default
	2462	14.16	15.00	Default
802.11N40	2422	14.19	15.00	Default
	2437	14.27	15.00	Default
	2452	14.24	15.00	Default

ANT 2

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11B	2412	14.66	15.00	Default
	2437	14.73	15.00	Default
	2462	14.83	15.00	Default
802.11G	2412	14.32	15.00	Default
	2437	14.39	15.00	Default
	2462	14.56	15.00	Default
802.11N20	2412	14.22	15.00	Default
	2437	14.26	15.00	Default
	2462	14.47	15.00	Default
802.11N40	2422	14.48	15.00	Default
	2437	14.49	15.00	Default
	2452	14.48	15.00	Default

<RLAN 5.2G>

ANT 1

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11A	5180	14.66	15.00	Default
	5220	14.17	15.00	Default
	5240	13.75	14.00	Default
802.11N20	5180	14.64	15.00	Default
	5220	14.13	15.00	Default
	5240	13.61	14.00	Default
802.11N40	5190	14.7	15.00	Default
	5230	13.78	14.00	Default
802.11AC20	5180	14.51	15.00	Default
	5220	14.13	15.00	Default
	5240	13.56	14.00	Default
802.11AC40	5190	14.84	15.00	Default
	5230	14.03	15.00	Default
802.11AC80	5210	14.72	15.00	Default
802.11AX20	5180	15.63	16.00	Default
	5220	14.99	15.00	Default
	5240	14.51	15.00	Default
802.11AX40	5190	15.54	16.00	Default
	5230	14.53	15.00	Default
802.11AX80	5210	15.29	16.00	Default

ANT 2

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11A	5180	14.37	15.00	Default
	5220	14.17	15.00	Default
	5240	13.65	14.00	Default
802.11N20	5180	14.05	15.00	Default
	5220	13.71	14.00	Default
	5240	13.22	14.00	Default
802.11N40	5190	14.04	15.00	Default
	5230	13.46	14.00	Default
802.11AC20	5180	14.01	15.00	Default
	5220	13.69	14.00	Default
	5240	13.26	14.00	Default
802.11AC40	5190	13.85	14.00	Default
	5230	13.4	14.00	Default
802.11AC80	5210	13.97	14.00	Default
802.11AX20	5180	14.69	15.00	Default
	5220	14.25	15.00	Default
	5240	13.86	14.00	Default
802.11AX40	5190	14.54	15.00	Default
	5230	13.93	14.00	Default
802.11AX80	5210	14.37	15.00	Default

<RLAN 5.3G>

ANT 1

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11A	5260	13.31	14.00	Default
	5300	13.91	14.00	Default
	5320	13.98	14.00	Default
802.11N20	5260	13.18	14.00	Default
	5300	13.67	14.00	Default
	5320	13.9	14.00	Default
802.11N40	5270	13.73	14.00	Default
	5310	14.25	15.00	Default
802.11AC20	5260	13.15	14.00	Default
	5300	13.69	14.00	Default
	5320	13.85	14.00	Default
802.11AC40	5270	14.06	15.00	Default
	5310	14.48	15.00	Default
802.11AC80	5290	14.7	15.00	Default
802.11AX20	5260	14.18	15.00	Default
	5300	14.62	15.00	Default
	5320	14.74	15.00	Default
802.11AX40	5270	14.64	15.00	Default
	5310	15.06	16.00	Default
802.11AX80	5290	15.09	15.50	Default

ANT 2

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11A	5260	13.25	14.00	Default
	5300	13.73	14.00	Default
	5320	14.19	15.00	Default
802.11N20	5260	12.87	13.00	Default
	5300	13.3	14.00	Default
	5320	13.68	14.00	Default
802.11N40	5270	13.29	14.00	Default
	5310	13.94	14.00	Default
802.11AC20	5260	12.73	13.00	Default
	5300	13.36	14.00	Default
	5320	13.83	14.00	Default
802.11AC40	5270	13.39	14.00	Default
	5310	13.98	14.00	Default
802.11AC80	5290	13.88	14.00	Default
802.11AX20	5260	13.38	14.00	Default
	5300	13.75	14.00	Default
	5320	14.27	15.00	Default
802.11AX40	5270	13.7	14.00	Default
	5310	14.42	15.00	Default
802.11AX80	5290	14.46	14.50	Default

<RLAN 5.6G>

ANT 1

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
11A	5500	13.8	14.00	Default
	5580	13.33	14.00	Default
	5700	13.68	14.00	Default
11N20SISO	5500	13.5	14.00	Default
	5580	13.02	14.00	Default
	5700	13.36	14.00	Default
11N40SISO	5510	13.71	14.00	Default
	5550	13.2	14.00	Default
	5670	13.5	14.00	Default
11AC20SISO	5500	13.43	14.00	Default
	5580	13.03	14.00	Default
	5700	13.51	14.00	Default
11AC40SISO	5510	13.63	14.00	Default
	5550	13.33	14.00	Default
	5670	13.49	14.00	Default
11AC80SISO	5530	13.78	14.00	Default
	5610	13.88	14.00	Default
11AX20SISO	5500	14.04	15.00	Default
	5580	13.52	14.00	Default
	5700	13.91	14.00	Default
11AX40SISO	5510	14.19	15.00	Default
	5550	13.7	14.00	Default
	5670	13.99	14.00	Default
11AX80SISO	5530	14.24	15.00	Default
	5610	14.22	15.00	Default

ANT 2

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
11A	5500	13.73	14.00	Default
	5580	13.28	14.00	Default
	5700	13.26	14.00	Default
11N20SISO	5500	13.49	14.00	Default
	5580	13.16	14.00	Default
	5700	13.23	14.00	Default
11N40SISO	5510	13.83	14.00	Default
	5550	13.69	14.00	Default
	5670	13.53	14.00	Default
11AC20SISO	5500	13.62	14.00	Default
	5580	13.34	14.00	Default
	5700	13.29	14.00	Default
11AC40SISO	5510	14	14.00	Default
	5550	13.6	14.00	Default
	5670	13.67	14.00	Default
11AC80SISO	5530	14.14	15.00	Default
	5610	14.44	15.00	Default
11AX20SISO	5500	14.53	15.00	Default
	5580	14.06	15.00	Default
	5700	14.03	15.00	Default
11AX40SISO	5510	14.58	15.00	Default
	5550	14.43	15.00	Default
	5670	14.26	15.00	Default
11AX80SISO	5530	14.71	15.00	Default
	5610	14.47	15.00	Default

<RLAN 5.8G>

ANT 1

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11A	5745	13.16	14.00	Default
	5785	13.86	14.00	Default
	5825	14.76	15.00	Default
802.11N20	5745	13.14	14.00	Default
	5785	13.85	14.00	Default
	5825	14.62	15.00	Default
802.11N40	5755	13.56	14.00	Default
	5795	14.24	15.00	Default
802.11AC20	5745	13.24	14.00	Default
	5785	13.91	14.00	Default
	5825	14.77	15.00	Default
802.11AC40	5755	13.59	14.00	Default
	5795	14.31	15.00	Default
802.11AC80	5775	13.93	14.00	Default
802.11AX20	5745	14.03	15.00	Default
	5785	14.71	15.00	Default
	5825	15.64	16.00	Default
802.11AX40	5755	14.37	15.00	Default
	5795	14.97	15.00	Default
802.11AX80	5775	14.55	15.00	Default

ANT 2

Test Mode	Frequency (MHz)	Conducted Power(dBm)	Maximum Tune-Up(dBm)	Power Setting
802.11A	5745	13.91	14.00	Default
	5785	14.58	15.00	Default
	5825	14.96	15.00	Default
802.11N20	5745	13.8	14.00	Default
	5785	14.64	15.00	Default
	5825	15.01	16.00	Default
802.11N40	5755	14.25	15.00	Default
	5795	14.87	15.00	Default
802.11AC20	5745	13.75	14.00	Default
	5785	14.61	15.00	Default
	5825	14.8	15.00	Default
802.11AC40	5755	14.27	15.00	Default
	5795	14.79	15.00	Default
802.11AC80	5775	14.7	15.00	Default
802.11AX20	5745	14.32	15.00	Default
	5785	15.15	16.00	Default
	5825	15.56	16.00	Default
802.11AX40	5755	14.65	15.00	Default
	5795	15.3	16.00	Default
802.11AX80	5775	15.09	16.00	Default

<BR EDR>

ANT 1

BR EDR	Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
	DH5	0	2402	1.61	2.610
	DH5	39	2441	1.62	2.620
	DH5	78	2480	2.04	3.040
	2DH5	0	2402	2.17	3.170
	2DH5	39	2441	2.12	3.120
	2DH5	78	2480	2.36	3.360
	3DH5	0	2402	2.38	3.380
	3DH5	39	2441	2.34	3.340
	3DH5	78	2480	2.52	3.520

Test Mode	Frequency (MHz)	Conducted Power (dBm)	Tune up tolerance (±)	Maximum Tune-Up (dBm)	Maximum Tune-Up (mW)	Distance (mm)	Calculation Results	Limit
DH5	2402	1.61	1	2.610	1.824	5	0.566	3
	2441	1.62	1	2.620	1.828	5	0.571	3
	2480	2.04	1	3.040	2.014	5	0.634	3
2DH5	2402	2.17	1	3.170	2.075	5	0.643	3
	2441	2.12	1	3.120	2.051	5	0.641	3
	2480	2.36	1	3.360	2.168	5	0.683	3
3DH5	2402	2.38	1	3.380	2.178	5	0.675	3
	2441	2.34	1	3.340	2.158	5	0.674	3
	2480	2.52	1	3.520	2.249	5	0.708	3

ANT 2

BR EDR	Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
	DH5	0	2402	1.62	2.620
	DH5	39	2441	1.62	2.620
	DH5	78	2480	1.93	2.930
	2DH5	0	2402	2.12	3.120
	2DH5	39	2441	2.11	3.110
	2DH5	78	2480	2.24	3.240
	3DH5	0	2402	2.42	3.420
	3DH5	39	2441	2.29	3.290
	3DH5	78	2480	2.45	3.450

Test Mode	Frequency (MHz)	Conducted Power (dBm)	Tune up tolerance ($\pm$)	Maximum Tune-Up (dBm)	Maximum Tune-Up (mW)	Distance (mm)	Calculation Results	Limit
DH5	2402	1.62	1	2.620	1.828	5	0.567	3
	2441	1.62	1	2.620	1.828	5	0.571	3
	2480	1.93	1	2.930	1.963	5	0.618	3
2DH5	2402	2.12	1	3.120	2.051	5	0.636	3
	2441	2.11	1	3.110	2.046	5	0.639	3
	2480	2.24	1	3.240	2.109	5	0.664	3
3DH5	2402	2.42	1	3.420	2.198	5	0.681	3
	2441	2.29	1	3.290	2.133	5	0.667	3
	2480	2.45	1	3.450	2.213	5	0.697	3

<BLE>

ANT 1

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
BLE 1M	0	2402	2.57	3.570
	19	2440	2.22	3.220
	39	2480	2.77	3.770
BLE 2M	0	2402	2.5	3.500
	19	2440	2.19	3.190
	39	2480	2.91	3.910

Test Mode	Frequency (MHz)	Conducted Power (dBm)	Tune up tolerance ($\pm$)	Maximum Tune-Up (dBm)	Maximum Tune-Up (mW)	Distance (mm)	Calculation Results	Limit
BLE 1M	2402	2.57	1	3.570	2.275	5	0.706	3
	2440	2.22	1	3.220	2.099	5	0.656	3
	2480	2.77	1	3.770	2.382	5	0.750	3
BLE 2M	2402	2.5	1	3.500	2.239	5	0.694	3
	2440	2.19	1	3.190	2.084	5	0.651	3
	2480	2.91	1	3.910	2.460	5	0.775	3

ANT 2

Mode	Channel	Frequency (MHz)	Conducted Power(dBm)	Tune-up power(dBm)
BLE 1M	0	2402	2.48	3.480
	19	2440	2.48	3.480
	39	2480	2.82	3.820
BLE 2M	0	2402	2.45	3.450
	19	2440	2.45	3.450
	39	2480	2.81	3.810

Test Mode	Frequency (MHz)	Conducted Power (dBm)	Tune up tolerance (±)	Maximum Tune-Up (dBm)	Maximum Tune-Up (mW)	Distance (mm)	Calculation Results	Limit
BLE 1M	2402	2.48	1	3.480	2.228	5	0.691	3
	2440	2.48	1	3.480	2.228	5	0.696	3
	2480	2.82	1	3.820	2.410	5	0.758	3
BLE 2M	2402	2.45	1	3.450	2.213	5	0.686	3
	2440	2.45	1	3.450	2.213	5	0.692	3
	2480	2.81	1	3.810	2.404	5	0.757	3

Note:

1. Per KDB 447498 D01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$$

$$[\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

2. Base on the result of note1, RF exposure evaluation of WLAN 2.4G,RLAN5.2G/53G/5.6G/5.8G mode is required,RF exposure evaluation of BR EDR and BLE is not required.

3. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.

4. Per KDB 248227 D01, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

11. Exposure Positions Consideration

Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
ANT 1	<25mm	<25mm	>25mm	>25mm	>25mm	<25mm
ANT 2	<25mm	<25mm	>25mm	>25mm	<25mm	>25mm

Positions for SAR tests; Body mode						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
ANT 1	Yes	Yes	No	No	No	Yes
ANT 2	Yes	Yes	No	No	Yes	No

12. SAR Test Results Summary

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR(W/kg)= Measured SAR(W/kg) Scaling Factor*

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR≤0.8W/kg, other channels SAR testing are not necessary

12.1. SAR Test Results

<WLAN 2.4G>

ANT 1

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
B	Front	5	11	2462	14.84	15.00	1.038	0.09	0.084	0.087	#1
B	Back	5	11	2462	14.84	15.00	1.038	-0.08	0.006	0.006	
B	Left	5	11	2462	14.84	15.00	1.038	NA	NA	NA	
B	Right	5	11	2462	14.84	15.00	1.038	NA	NA	NA	
B	Top	5	11	2462	14.84	15.00	1.038	NA	NA	NA	
B	Bottom	5	11	2462	14.84	15.00	1.038	-0.14	0.017	0.018	

ANT 2

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
B	Front	5	11	2462	14.83	15.00	1.040	-0.10	0.181	0.188	#2
B	Back	5	11	2462	14.83	15.00	1.040	-0.19	0.023	0.024	
B	Left	5	11	2462	14.83	15.00	1.040	NA	NA	NA	
B	Right	5	11	2462	14.83	15.00	1.040	NA	NA	NA	
B	Top	5	11	2462	14.83	15.00	1.040	0.14	0.116	0.121	
B	Bottom	5	11	2462	14.83	15.00	1.040	NA	NA	NA	

<RLAN 5.2G>

ANT 1

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX20	Front	5	36	5180	15.63	16.00	1.089	0.11	0.150	0.163	#3
AX20	Back	5	36	5180	15.63	16.00	1.089	0.14	0.003	0.003	
AX20	Left	5	36	5180	15.63	16.00	1.089	NA	NA	NA	
AX20	Right	5	36	5180	15.63	16.00	1.089	NA	NA	NA	
AX20	Top	5	36	5180	15.63	16.00	1.089	NA	NA	NA	
AX20	Bottom	5	36	5180	15.63	16.00	1.089	0.17	0.047	0.051	

ANT 2

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX20	Front	5	36	5180	14.69	15.00	1.074	0.17	0.980	1.053	#4
AX20	Back	5	36	5180	14.69	15.00	1.074	-0.18	0.040	0.043	
AX20	Left	5	36	5180	14.69	15.00	1.074	NA	NA	NA	
AX20	Right	5	36	5180	14.69	15.00	1.074	NA	NA	NA	
AX20	Top	5	36	5180	14.69	15.00	1.074	-0.06	0.308	0.331	
AX20	Bottom	5	36	5180	14.69	15.00	1.074	NA	NA	NA	

<RLAN 5.3G>

ANT 1

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX80	Front	5	58	5290	15.09	15.5	1.099	-0.08	0.301	0.331	#5
AX80	Back	5	58	5290	15.09	15.5	1.099	-0.07	0.007	0.008	
AX80	Left	5	58	5290	15.09	15.5	1.099	NA	NA	NA	
AX80	Right	5	58	5290	15.09	15.5	1.099	NA	NA	NA	
AX80	Top	5	58	5290	15.09	15.5	1.099	NA	NA	NA	
AX80	Bottom	5	58	5290	15.09	15.5	1.099	0.02	0.125	0.137	

ANT 2

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX80	Front	5	58	5290	14.46	14.5	1.009	0.15	1.16	1.171	#6
AX80	Back	5	58	5290	14.46	14.5	1.009	-0.09	0.059	0.060	
AX80	Left	5	58	5290	14.46	14.5	1.009	NA	NA	NA	
AX80	Right	5	58	5290	14.46	14.5	1.009	NA	NA	NA	
AX80	Top	5	58	5290	14.46	14.5	1.009	-0.04	0.359	0.362	
AX80	Bottom	5	58	5290	14.46	14.5	1.009	NA	NA	NA	

<RLAN 5.6G>

ANT 1

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX80	Front	5	106	5530	14.24	15.00	1.191	-0.11	0.715	0.852	#8
AX80	Back	5	106	5530	14.24	15.00	1.191	-0.19	0.074	0.088	
AX80	Left	5	106	5530	14.24	15.00	1.191	NA	NA	NA	
AX80	Right	5	106	5530	14.24	15.00	1.191	NA	NA	NA	
AX80	Top	5	106	5530	14.24	15.00	1.191	0.05	0.389	0.463	
AX80	Bottom	5	106	5530	14.24	15.00	1.191	NA	NA	NA	

ANT 2

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX80	Front	5	106	5530	14.71	15.00	1.069	-0.03	0.584	0.624	#7
AX80	Back	5	106	5530	14.71	15.00	1.069	-0.18	0.027	0.029	
AX80	Left	5	106	5530	14.71	15.00	1.069	NA	NA	NA	
AX80	Right	5	106	5530	14.71	15.00	1.069	NA	NA	NA	
AX80	Top	5	106	5530	14.71	15.00	1.069	NA	NA	NA	
AX80	Bottom	5	106	5530	14.71	15.00	1.069	-0.19	0.4	0.428	

<RLAN 5.8G>

ANT 1

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX20	Front	5	165	5825	15.64	16.00	1.086	0.05	0.841	0.914	#9
AX20	Back	5	165	5825	15.64	16.00	1.086	0.08	0.046	0.050	
AX20	Left	5	165	5825	15.64	16.00	1.086	NA	NA	NA	
AX20	Right	5	165	5825	15.64	16.00	1.086	NA	NA	NA	
AX20	Top	5	165	5825	15.64	16.00	1.086	NA	NA	NA	
AX20	Bottom	5	165	5825	15.64	16.00	1.086	0.11	0.497	0.540	

ANT 2

Band	Test Position	Gap (mm)	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR1g (W/kg)	Reported SAR1g (W/kg)	Plot
AX20	Front	5	165	5825	15.56	16.00	1.107	0.13	0.31	0.343	#10
AX20	Back	5	165	5825	15.56	16.00	1.107	0.19	0.069	0.076	
AX20	Left	5	165	5825	15.56	16.00	1.107	NA	NA	NA	
AX20	Right	5	165	5825	15.56	16.00	1.107	NA	NA	NA	
AX20	Top	5	165	5825	15.56	16.00	1.107	0.01	0.25	0.277	
AX20	Bottom	5	165	5825	15.56	16.00	1.107	NA	NA	NA	

13. Simultaneous Transmission Analysis

13.1. Simultaneous TX SAR Considerations

No.	Applicable Simultaneous Transmission
1.	WLAN 2.4G ANT 1+WLAN 2.4G ANT 2
2.	RLAN 5.2G ANT 1+RLAN 5.2G ANT 2
3.	RLAN 5.3G ANT 1+RLAN 5.3G ANT 2
4.	RLAN 5.6G ANT 1+RLAN 5.6G ANT 2
5.	RLAN 5.8G ANT 1+RLAN 5.8G ANT 2

Mode	ANT 1 SAR _{1g} (W/Kg)	ANT 2 SAR _{1g} (W/Kg)	MAX. Σ SAR _{1g} (W/Kg)	Result	SAR _{1g} Limit (W/Kg)
WLAN 2.4G	0.087	0.188	0.275	PASS	1.6
RLAN 5.2G	0.163	1.053	0.275	PASS	
RLAN 5.3G	0.331	1.171	1.216	PASS	
RLAN 5.6G	0.624	0.852	1.502	PASS	
RLAN 5.8G	0.914	0.343	1.476	PASS	

14. Measurement Uncertainty

Measurement uncertainty evaluation for IEC/IEEE 62209-1528:2020 SAR test (Frequency Range: 4 MHz-3GHz)

Symbol	Input quantity X_i (source of uncertainty)	Ref.	Prob. Dist. ^a PDF_i	Unc. $a(x_i)$	Div. a q_i	$u(x_i) = a(x_i)/q_i$	c_i (1g)	c_i (10g)	$u(y) = c_i \cdot u(x_i)$ (1g)	$u(y) = c_i \cdot u(x_i)$ (10g)	v_i
Measurement system errors											
CF	Probe calibration	8.4.1.1	N ($k = 2$)	13	2	6.5	1	1	6.5	6.5	∞
CFdrift	Probe calibration drift	8.4.1.2	R	1.9	$\sqrt{3}$	1.1	1	1	1.1	1.1	∞
LIN	Probe linearity and detection limit	8.4.1.3	R	5.4	$\sqrt{3}$	3.1	1	1	3.1	3.1	∞
BBS	Broadband signal	8.4.1.4	R	2.2	$\sqrt{3}$	1.3	1	1	1.3	1.3	∞
ISO	Probe isotropy	8.4.1.5	R	10.5	$\sqrt{3}$	6.1	1	1	6.1	6.1	∞
DAE	Other probe and data acquisition errors	8.4.1.6	N	0.8	1	0.8	1	1	0.8	0.8	∞
AMB	RF ambient and noise	8.4.1.7	N	0.44	1	0.44	1	1	0.44	0.44	∞
Δ_{xyz}	Probe positioning errors	8.4.1.8	N	0.007	1	0.007	2/5	2/5	0.6	0.6	∞
DAT	Data processing errors	8.4.1.9	N	6.1	1	6.1	1	1	6.1	6.1	∞
Phantom and device (DUT or validation antenna) errors											
L/Q(σ)	Measurement of phantom conductivity(σ)	8.4.2.1	N	2.9	1	2.9	0.92	0.85	2.7	2.5	∞
L/Q(T_c)	Temperature effects (medium)	8.4.2.2	R	2.2	$\sqrt{3}$	1.3	0.92	0.85	1.2	1.1	∞
EPS	Shell permittivity	8.4.2.3	R	4.6	$\sqrt{3}$	2.7	0	0	0	0	∞
DIS	Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	N	3.1	1	3.1	2	2	6.2	6.2	∞
D_{xyz}	Repeatability of positioning the DUT or source against the phantom	8.4.2.5	N	0.43	1	0.43	1	1	0.43	0.43	5
H	Device holder effects	8.4.2.6	N	3.5	1	3.5	1	1	3.5	3.5	∞
MOD	Effect of operating mode on probe sensitivity	8.4.2.7	R	3.5	$\sqrt{3}$	2.0	1	1	2	2	∞
TAS	Time-average SAR	8.4.2.8	R	1.5	$\sqrt{3}$	0.9	1	1	0.9	0.9	∞
RFdrift	Variation in SAR due to drift in output of DUT	8.4.2.9	N	2.3	1	2.3	1	1	2.3	2.3	∞
VAL	Validation antenna uncertainty (validation measurement only)	8.4.2.10	N	2.2	1	2.2	1	1	2.2	2.2	∞
P_{in}	Uncertainty in accepted power (validation measurement only)	8.4.2.11	N	1.4	1	1.4	1	1	1.4	1.4	∞

Corrections to the SAR result (if applied)											
$C(\epsilon', \sigma)$	Phantom deviation from target (ϵ', σ)	8.4.3.1	N	1.4	1	1.4	1	0.82	1.4	1.1	∞
$C(R)$	SAR scaling	8.4.3.2	R	2.8	$\sqrt{3}$	2.8	1	1	1.6	1.6	∞
$u(\Delta S_{AR})$	Combined uncertainty								14.12	14.05	
U	Expanded uncertainty and effective degrees of freedom						$U =$		28.2	28.1	
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.											

Measurement uncertainty evaluation for IEC/IEEE 62209-1528:2020 SAR test (Frequency Range: 3 GHz – 6 GHz)

Symbol	Input quantity X_i (source of uncertainty)	Ref.	Prob. Dist. ^a PDF_i	Unc. $u(x_i)$	Div. q_i	$u(x_i) = u(x_i)/q_i$	c_i (1g)	c_i (10g)	$u(y) = c_i \cdot u(x_i)$ (1g)	$u(y) = c_i \cdot u(x_i)$ (10g)	v_i
Measurement system errors											
CF	Probe calibration	8.4.1.1	N ($k = 2$)	13	2	6.5	1	1	6.5	6.5	∞
CF_{drift}	Probe calibration drift	8.4.1.2	R	1.9	$\sqrt{3}$	1.1	1	1	1.1	1.1	∞
LIN	Probe linearity and detection limit	8.4.1.3	R	5.4	$\sqrt{3}$	3.1	1	1	3.1	3.1	∞
BBS	Broadband signal	8.4.1.4	R	2.2	$\sqrt{3}$	1.3	1	1	1.3	1.3	∞
ISO	Probe isotropy	8.4.1.5	R	10.5	$\sqrt{3}$	6.1	1	1	6.1	6.1	∞
DAE	Other probe and data acquisition errors	8.4.1.6	N	0.8	1	0.8	1	1	0.8	0.8	∞
AMB	RF ambient and noise	8.4.1.7	N	0.44	1	0.44	1	1	0.44	0.44	∞
Δ_{xyz}	Probe positioning errors	8.4.1.8	N	0.007	1	0.007	2/5	2/5	0.6	0.6	∞
DAT	Data processing errors	8.4.1.9	N	6.1	1	6.1	1	1	6.1	6.1	∞
Phantom and device (DUT or validation antenna) errors											
$L/Q(\sigma)$	Measurement of phantom conductivity(σ)	8.4.2.1	N	2.9	1	2.9	0.92	0.85	2.7	2.5	∞
$L/Q(T_c)$	Temperature effects (medium)	8.4.2.2	R	2.2	$\sqrt{3}$	1.3	0.92	0.85	1.2	1.1	∞
EPS	Shell permittivity	8.4.2.3	R	4.6	$\sqrt{3}$	2.7	0	0	0	0	∞
DIS	Distance between the radiating element of the DUT and the phantom medium	8.4.2.4	N	3.1	1	3.1	2	2	6.2	6.2	∞
D_{xyz}	Repeatability of positioning the DUT or source against the phantom	8.4.2.5	N	0.43	1	0.43	1	1	0.43	0.43	5
H	Device holder effects	8.4.2.6	N	3.5	1	3.5	1	1	3.5	3.5	∞
MOD	Effect of operating mode on probe sensitivity	8.4.2.7	R	3.5	$\sqrt{3}$	2.0	1	1	2	2	∞
TAS	Time-average SAR	8.4.2.8	R	1.5	$\sqrt{3}$	0.9	1	1	0.9	0.9	∞

RFdrift	Variation in SAR due to drift in output of DUT	8.4.2.9	N	2.3	1	2.3	1	1	2.3	2.3	∞
VAL	Validation antenna uncertainty (validation measurement only)	8.4.2.10	N	2.2	1	2.2	1	1	2.2	2.2	∞
P _{in}	Uncertainty in accepted power (validation measurement only)	8.4.2.11	N	1.4	1	1.4	1	1	1.4	1.4	∞
Corrections to the SAR result (if applied)											
C(ϵ' , σ)	Phantom deviation from target (ϵ' , σ)	8.4.3.1	N	1.4	1	1.4	1	0.82	1.4	1.1	∞
C(R)	SAR scaling	8.4.3.2	R	2.8	$\sqrt{3}$	2.8	1	1	1.6	1.6	∞
$u(\Delta S_{AR})$	Combined uncertainty								14.12	14.05	
U	Expanded uncertainty and effective degrees of freedom						U =		28.2	28.1	
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.											

Note:

The main report is end here and the other Appendix (A,B,C,D) will be submitted separately.

*****END OF MAIN REPORT*****