




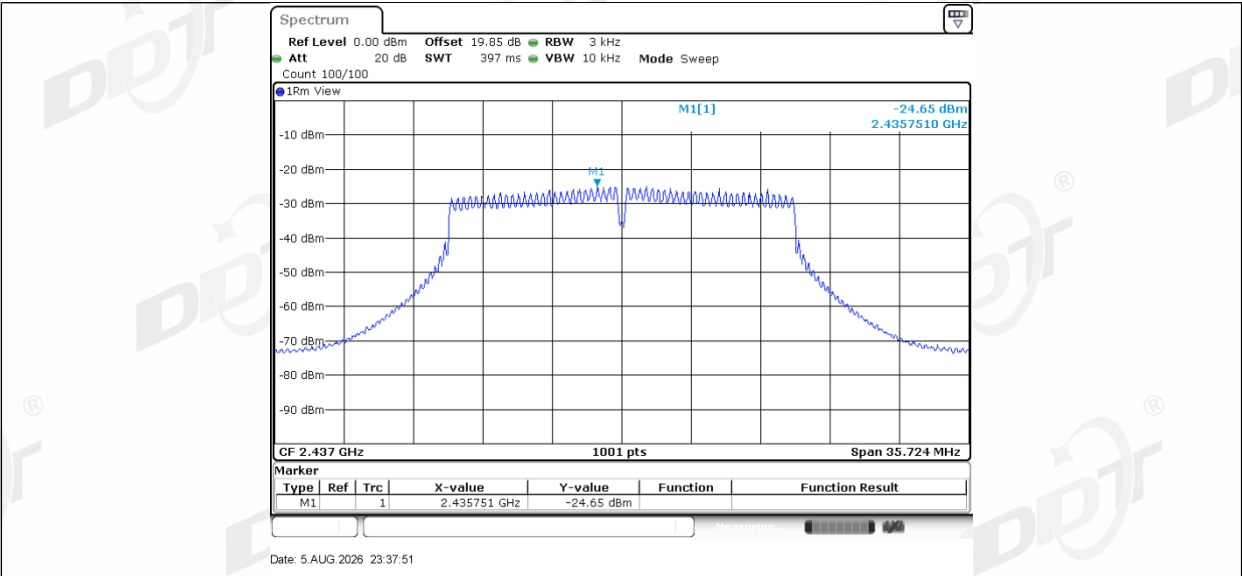


11N20MIMO_Ant1_2462

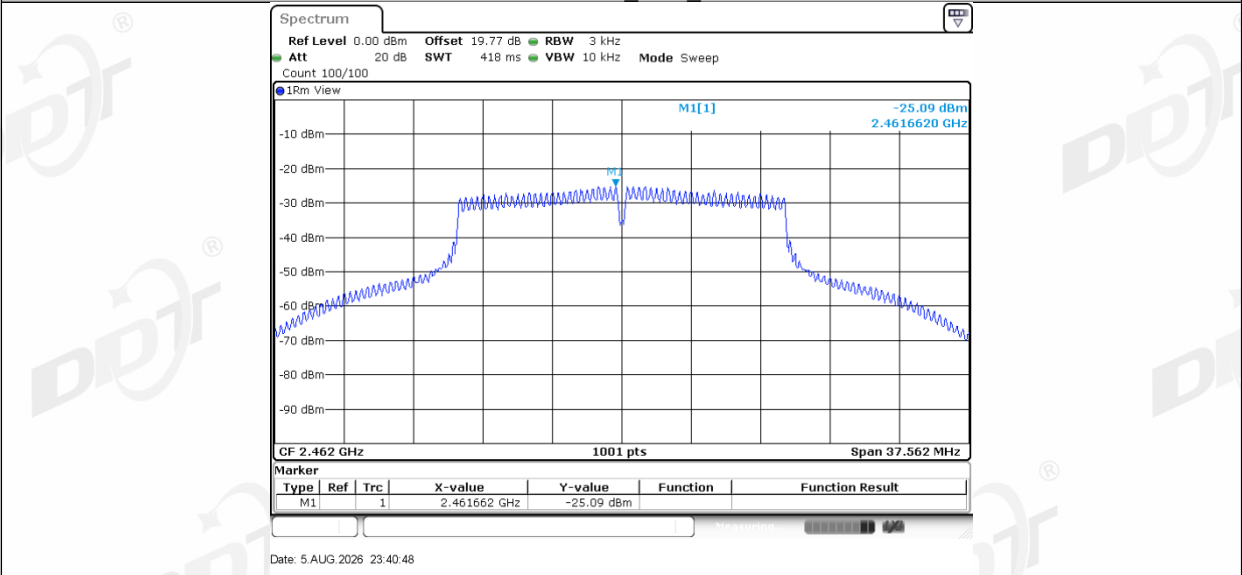


11N20MIMO_Ant2_2462

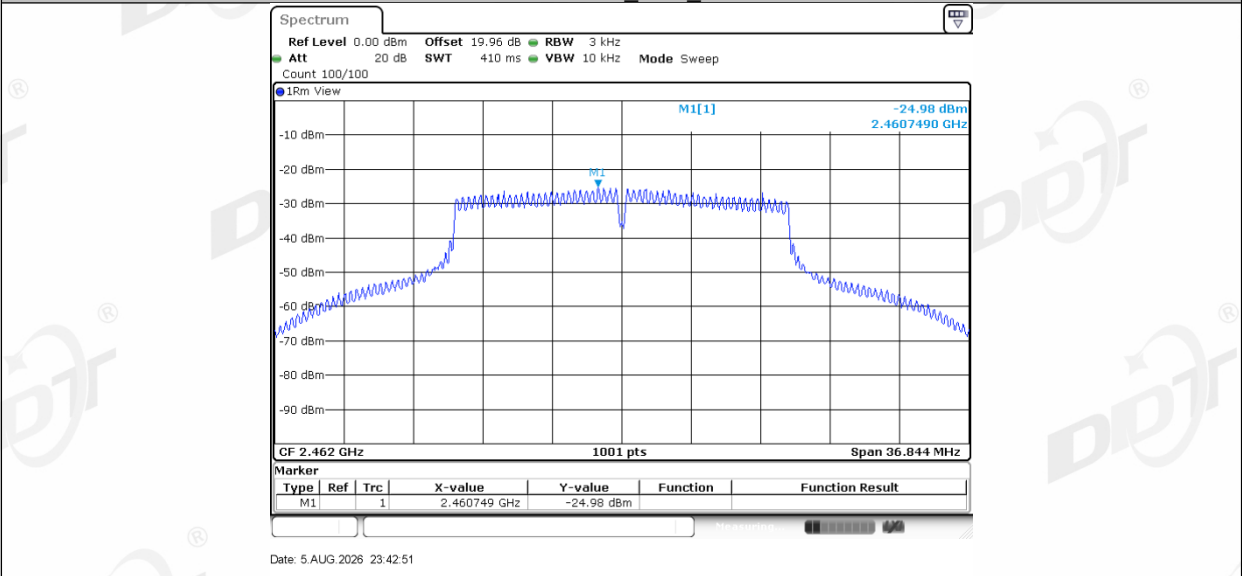


11N40MIMO_Ant1_2422

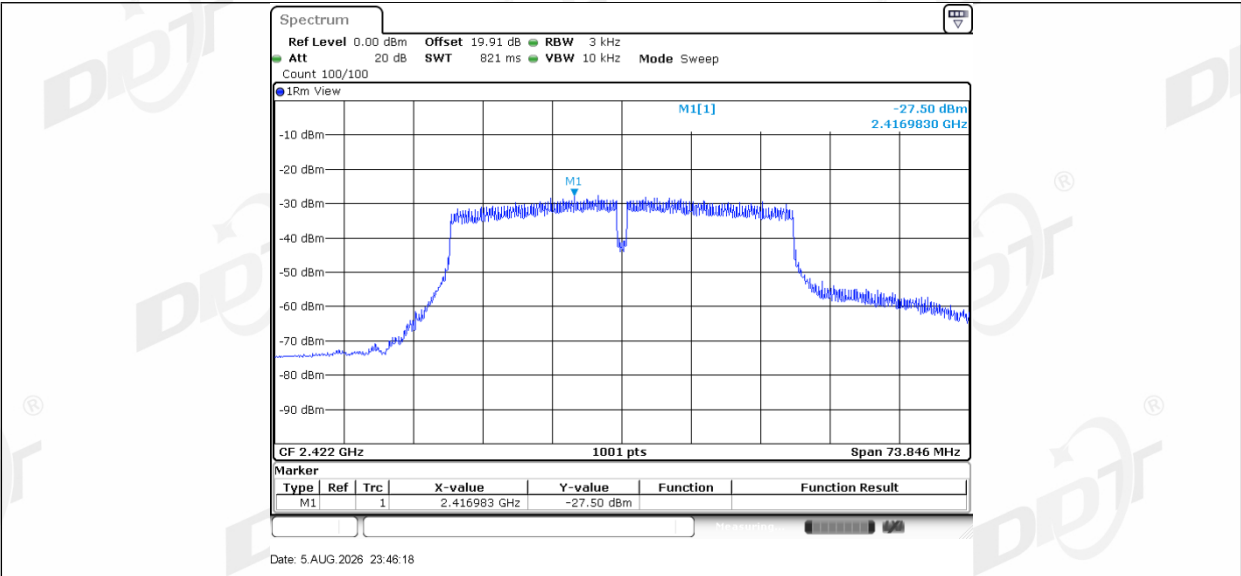


11N40MIMO_Ant2_2422

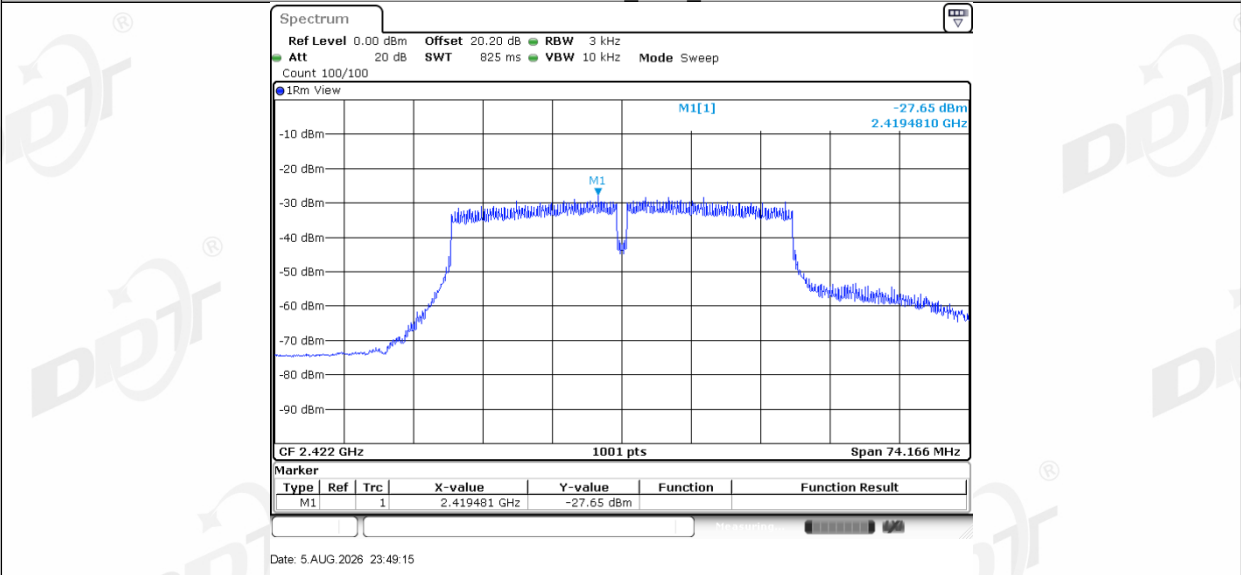


11N40MIMO_Ant1_2437

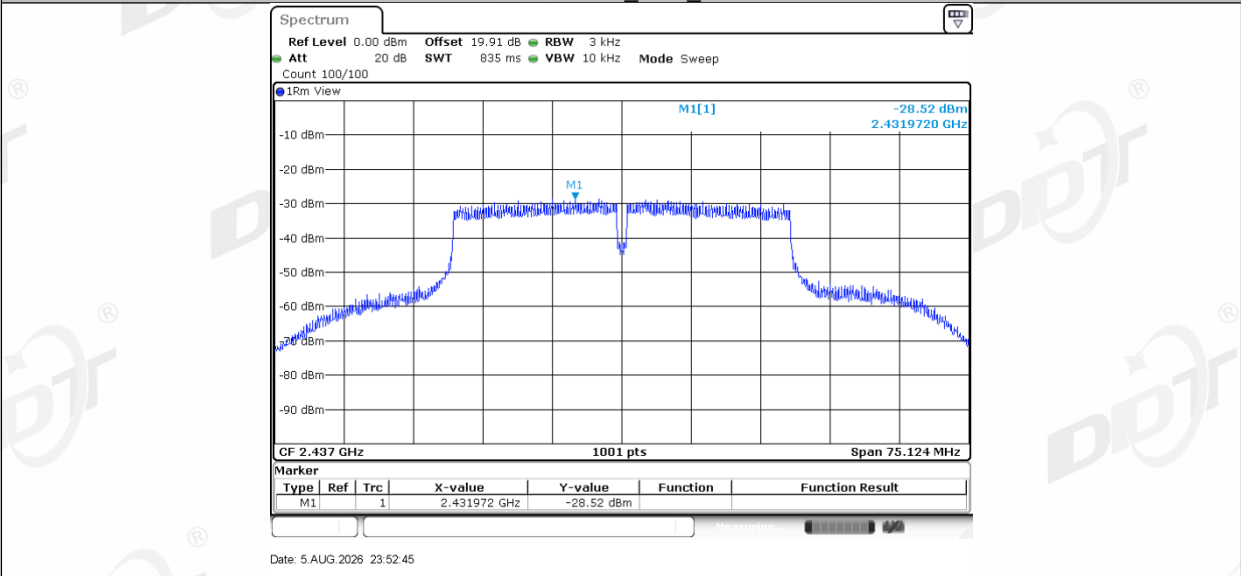


11N40MIMO_Ant2_2437

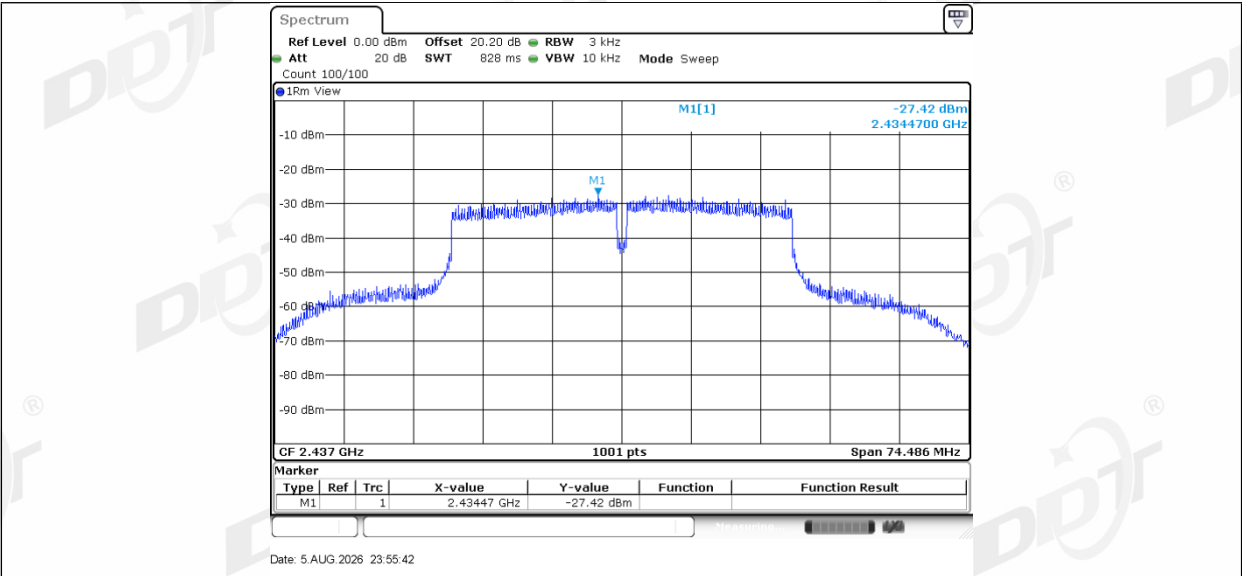

11N40MIMO_Ant1_2452

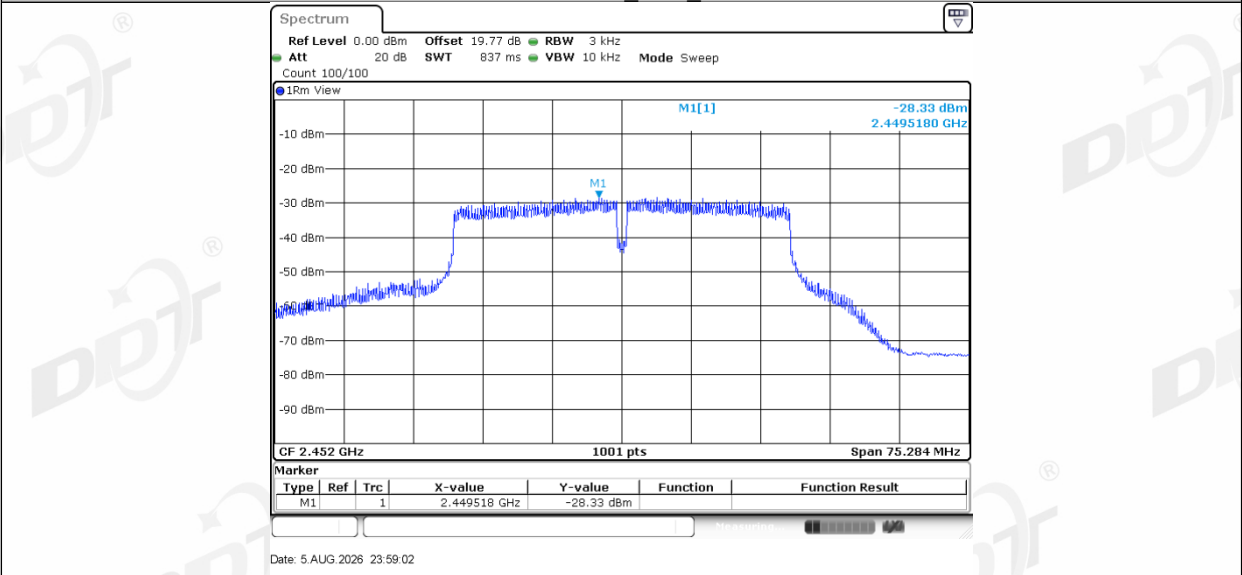


11N40MIMO_Ant2_2452

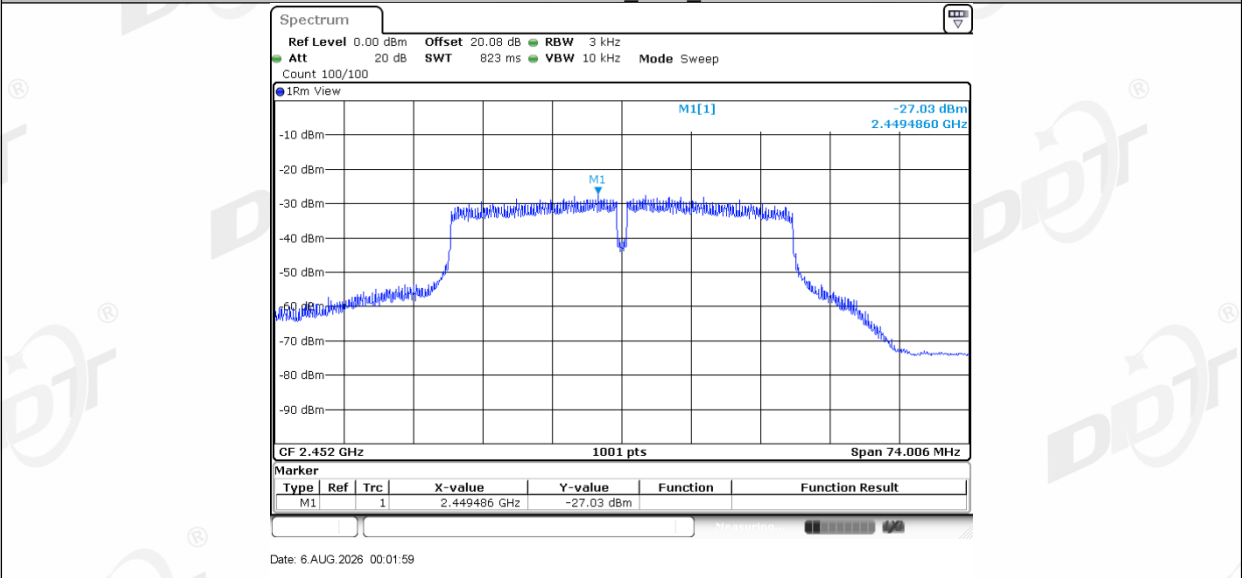

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

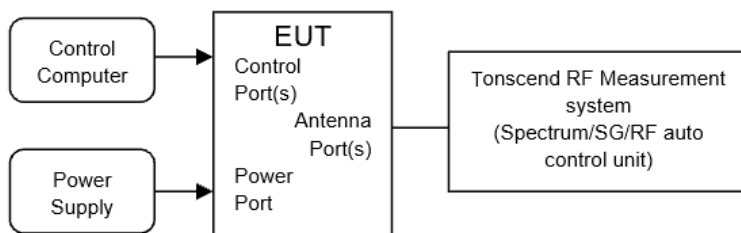

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF Measurement System 3#
Ambient Condition:	24.5-26.1℃,37.2-42.9%RH	Test Date:	2026.7.8-2026.8.10
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass


8.5. Test graphs

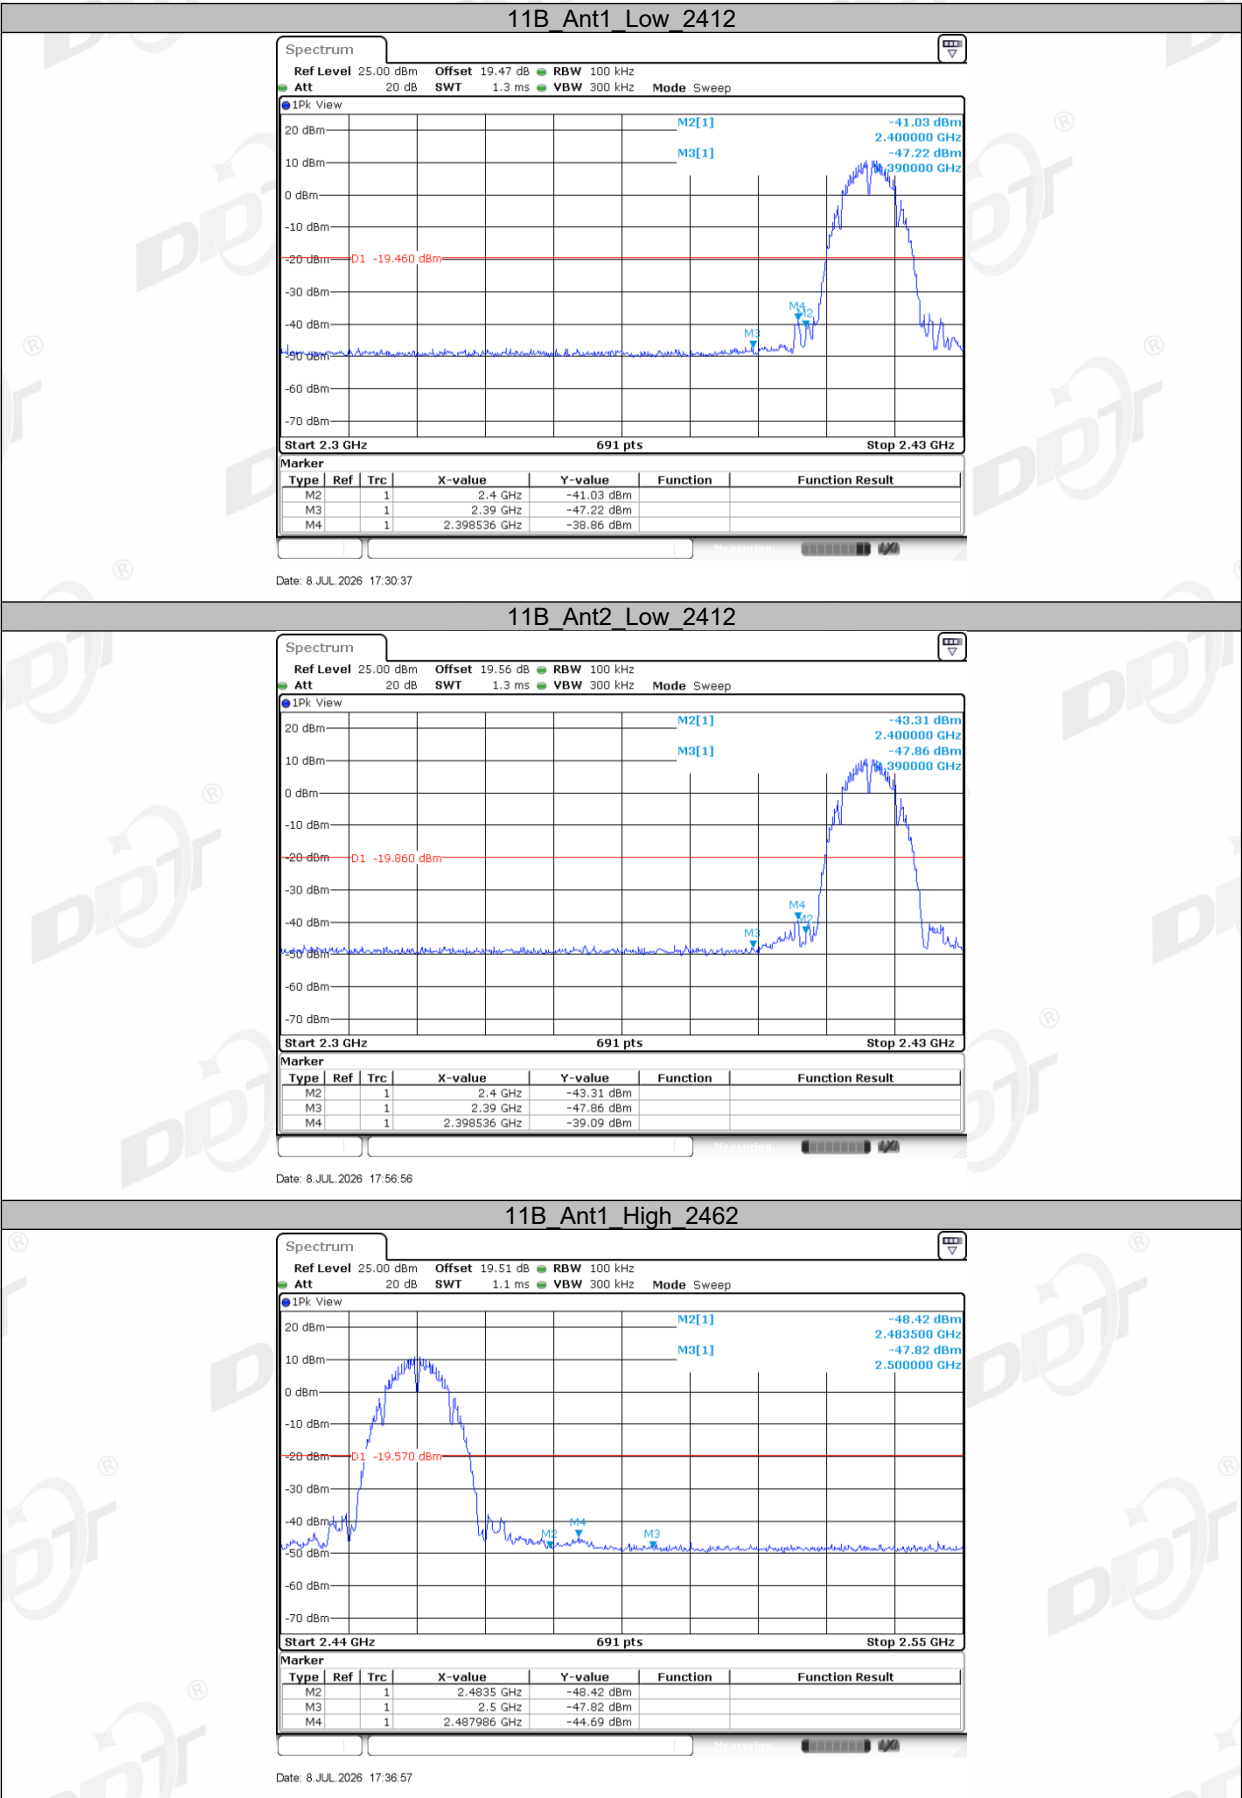

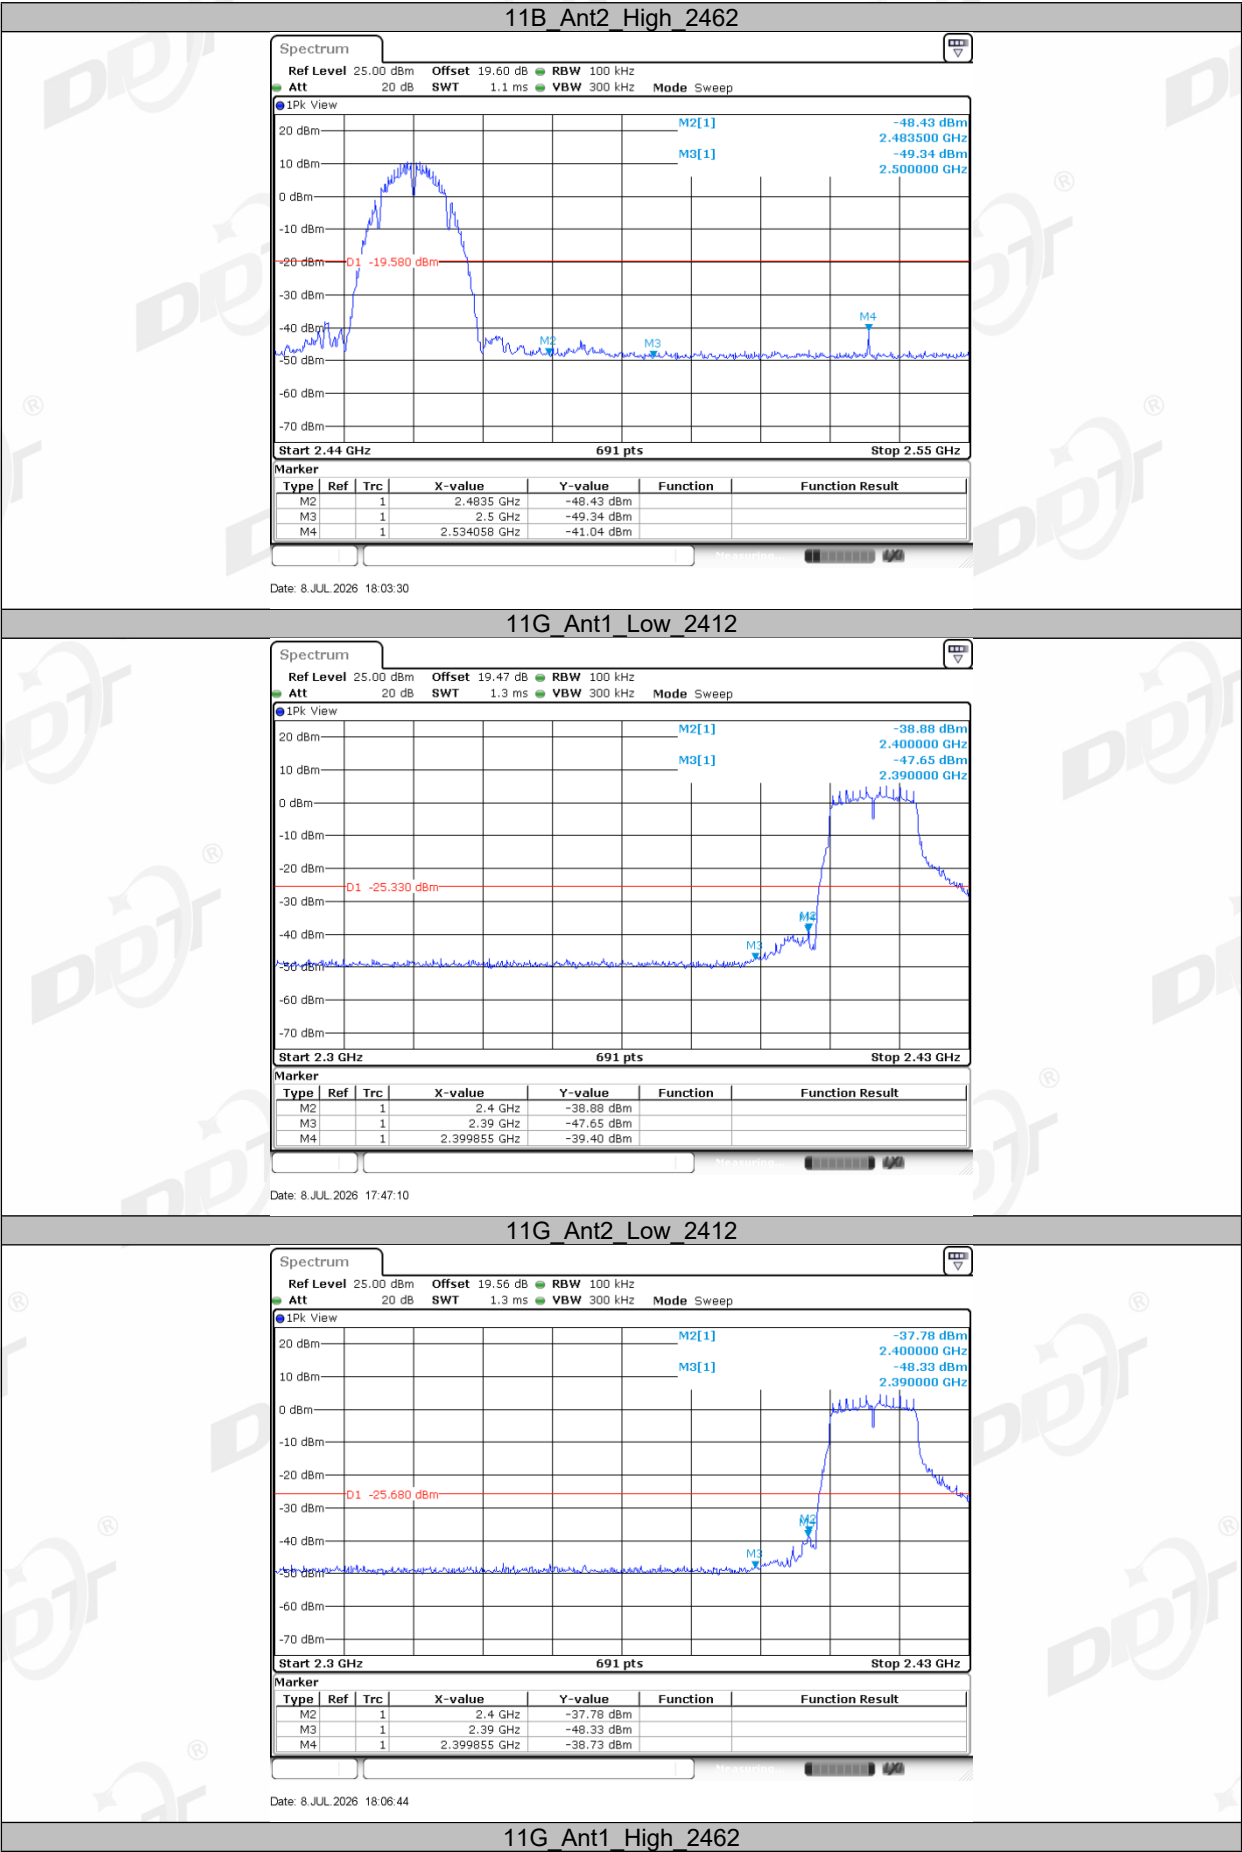


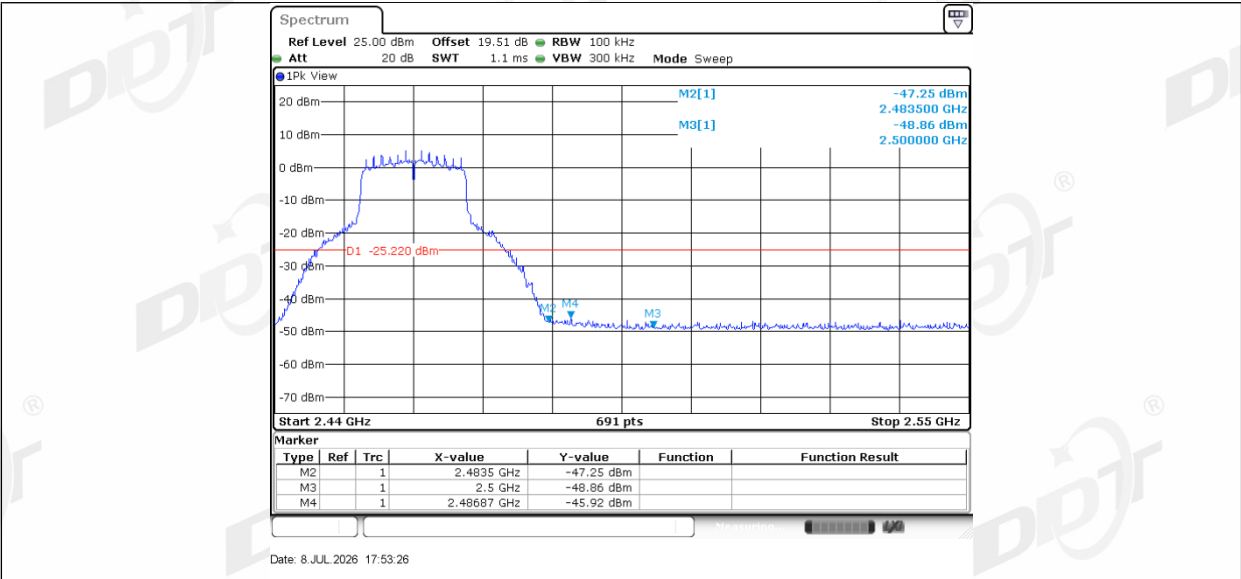


11G Ant2 High 2462

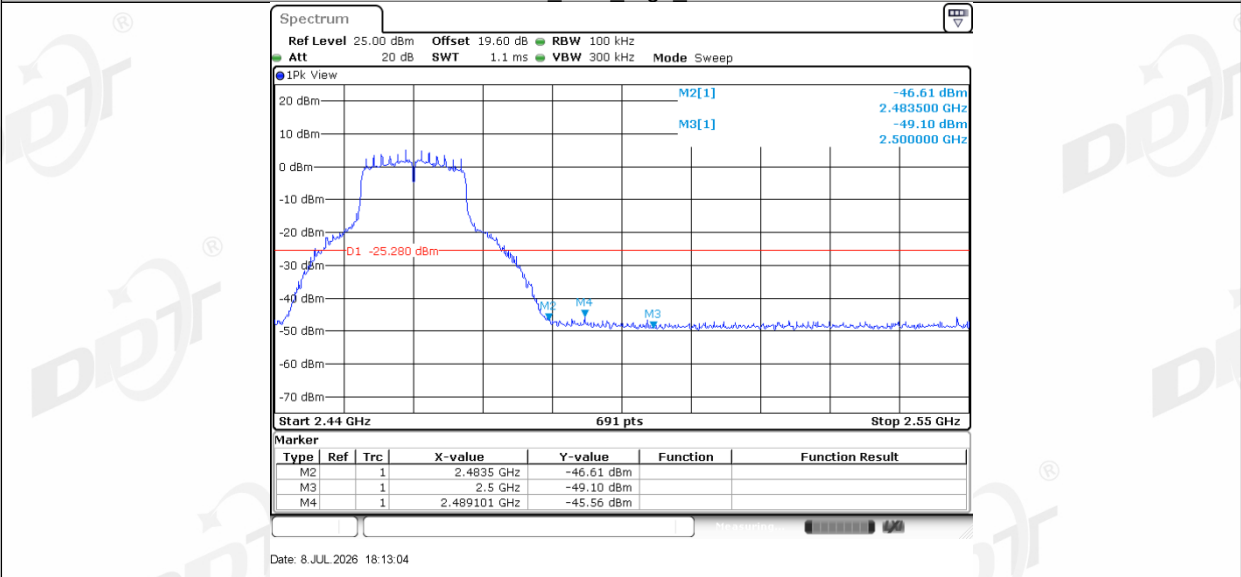


11N20MIMO Ant1 Low 2412

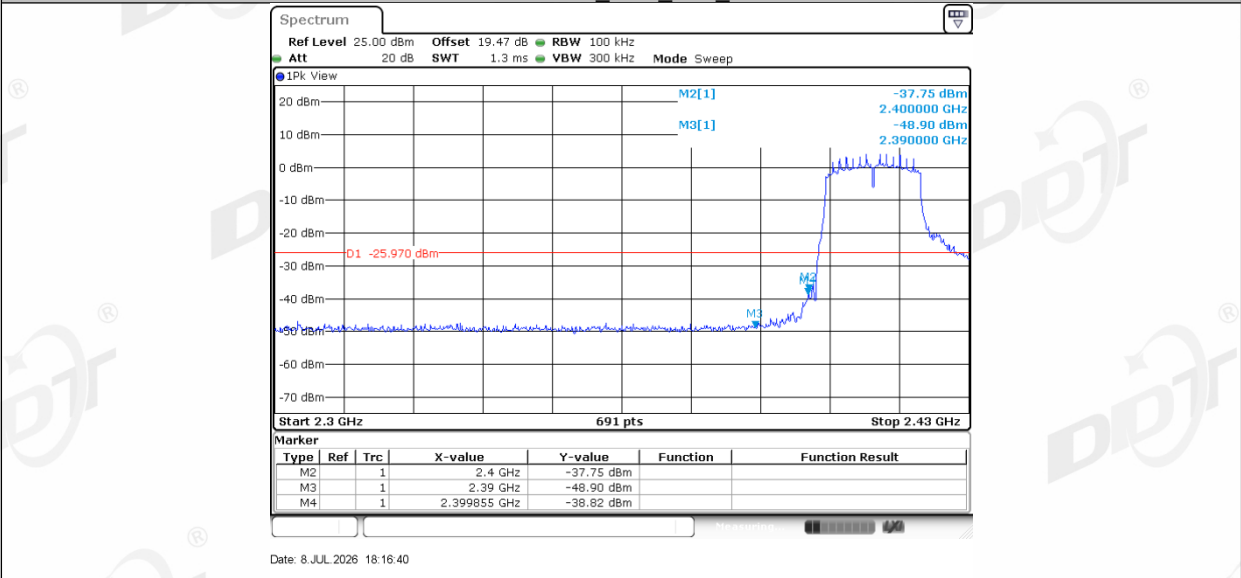


11N20MIMO Ant2 Low 2412

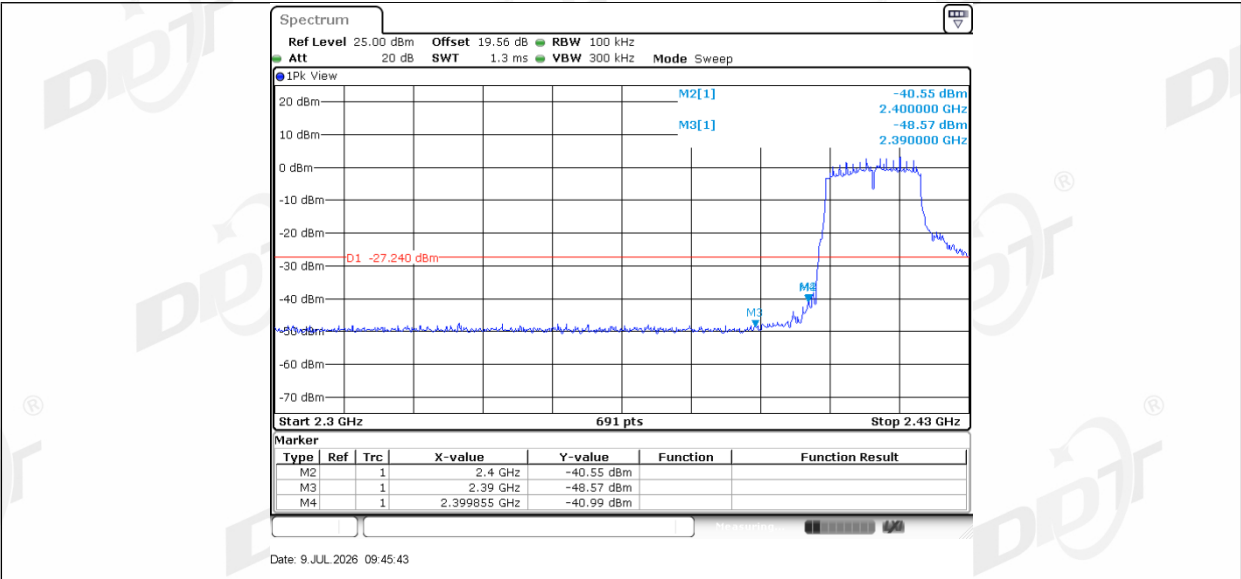


11N20MIMO_Ant1_High_2462

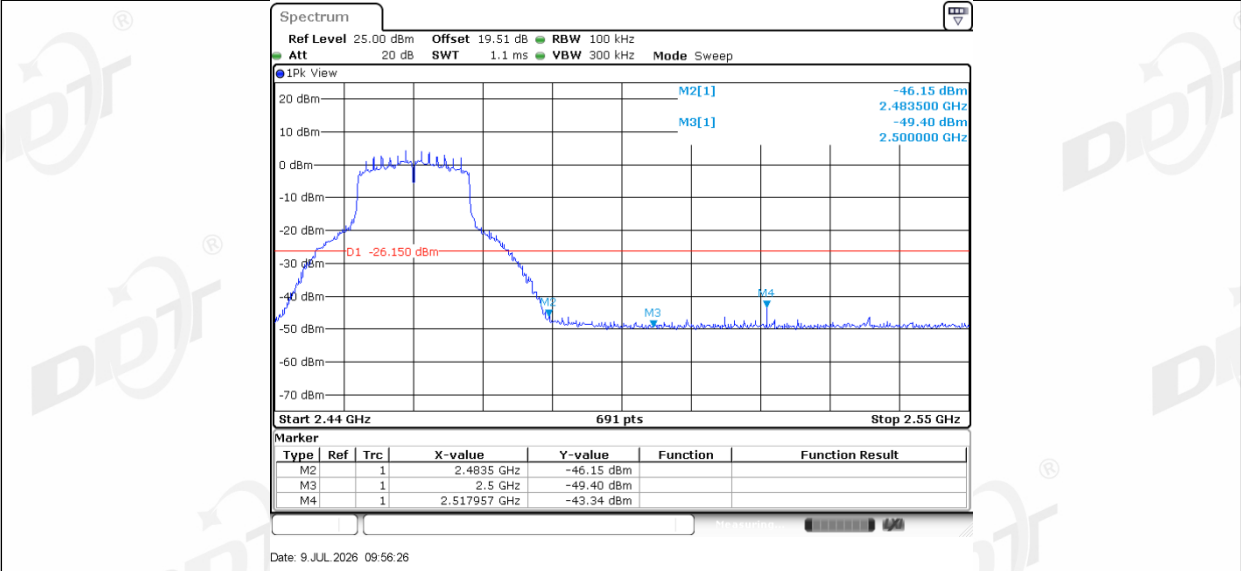


11N20MIMO_Ant2_High_2462

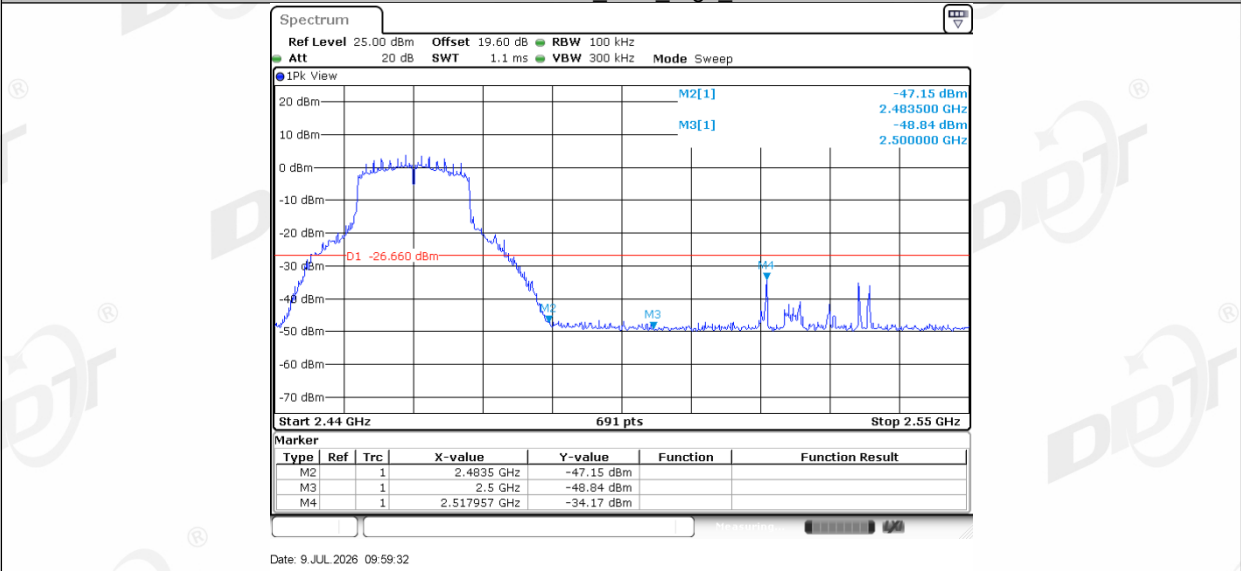


11N40MIMO_Ant1_Low_2422

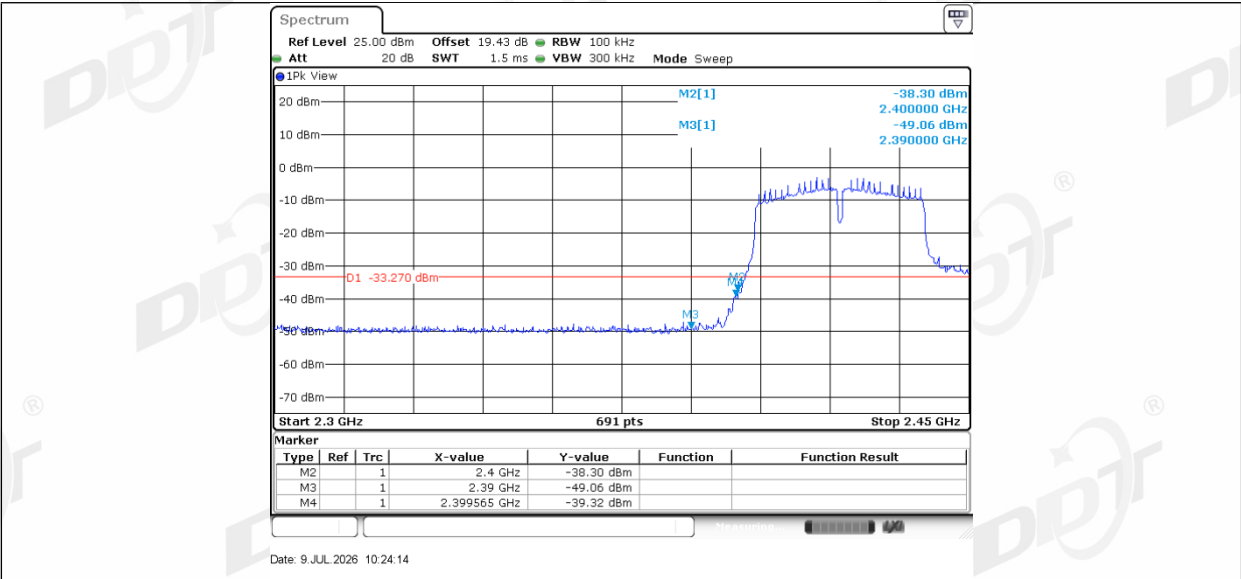


11N40MIMO_Ant2_Low_2422

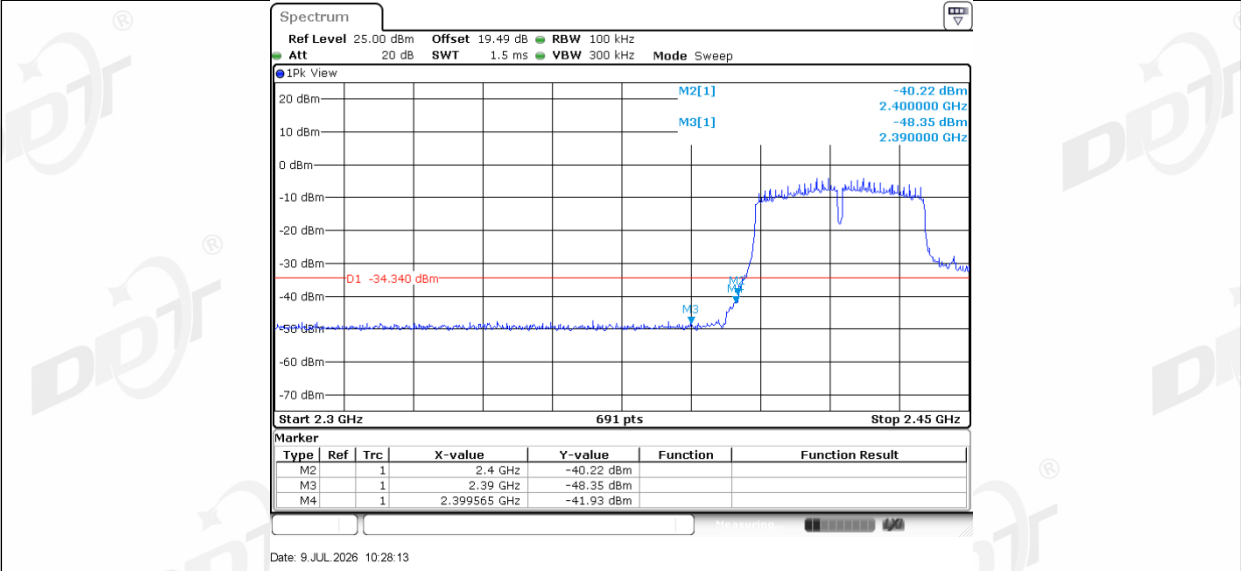

11N40MIMO_Ant1_High_2452

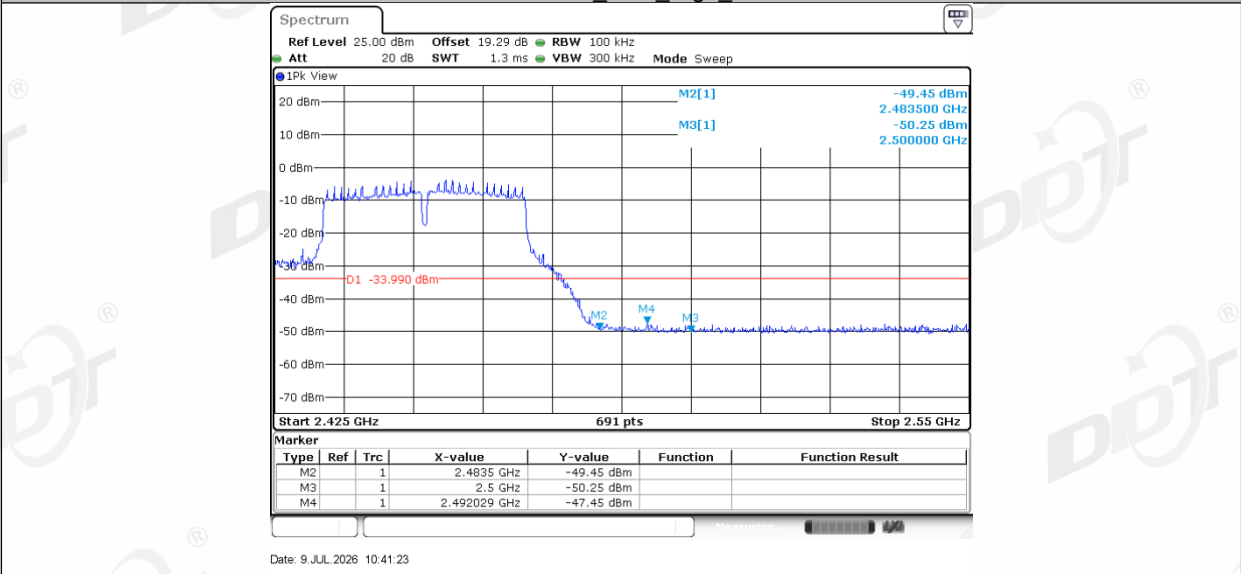


11N40MIMO_Ant2_High_2452

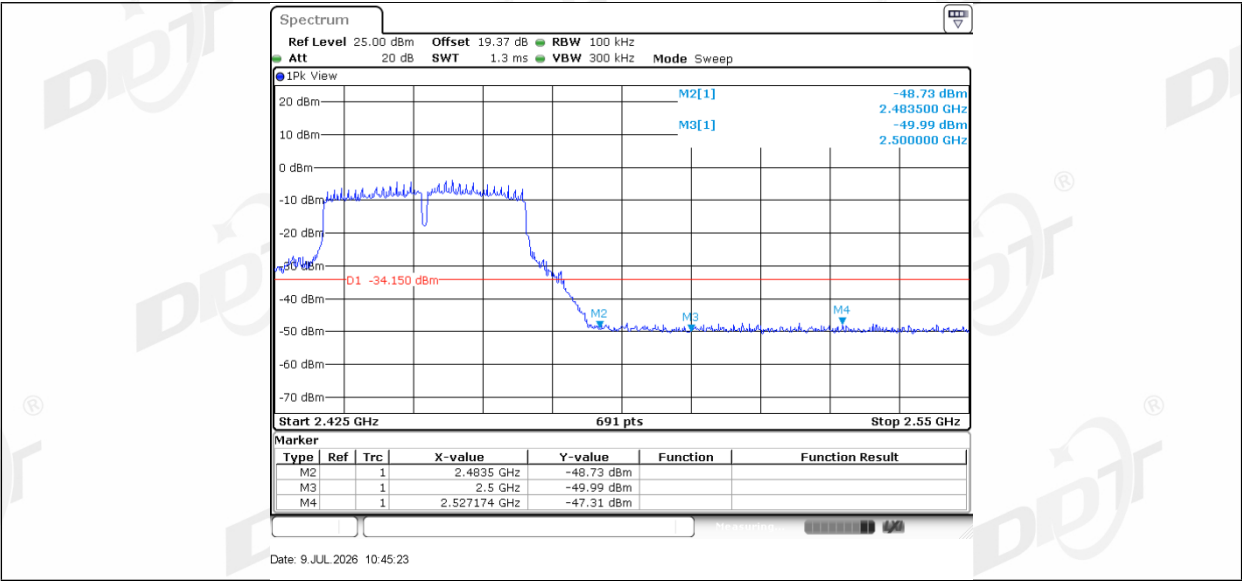

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

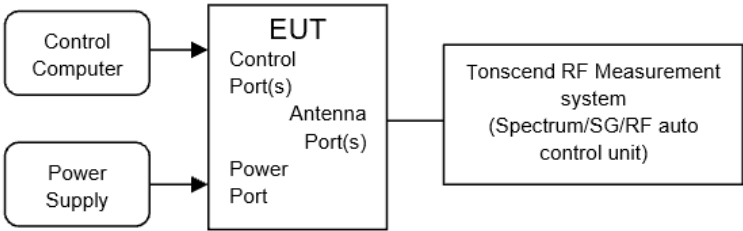

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- (1) Connect EUT’s antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥Span/RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF Measurement System 3#
Ambient Condition:	24.5-26.1℃,37.2-42.9%RH	Test Date:	2026.7.8-2026.8.10
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2413.00	10.54
	Ant2	2412	2411.00	10.14
	Ant1	2437	2436.49	9.75
	Ant2	2437	2438.00	9.64
	Ant1	2462	2461.49	10.43
	Ant2	2462	2461.00	10.42
11G	Ant1	2412	2410.73	4.67
	Ant2	2412	2413.28	4.32
	Ant1	2437	2439.51	3.99
	Ant2	2437	2438.27	4.17
	Ant1	2462	2460.73	4.78
	Ant2	2462	2460.73	4.72
11N20MIMO	Ant1	2412	2413.26	4.03
	Ant2	2412	2416.99	2.76
	Ant1	2437	2435.76	3.26
	Ant2	2437	2435.75	2.96
	Ant1	2462	2460.75	3.85
	Ant2	2462	2460.76	3.34
11N40MIMO	Ant1	2422	2416.97	-3.27
	Ant2	2422	2417.02	-4.34
	Ant1	2437	2432.04	-3.76
	Ant2	2437	2432.03	-4.02
	Ant1	2452	2457.00	-3.99
	Ant2	2452	2457.05	-4.15


9.5. Test graphs

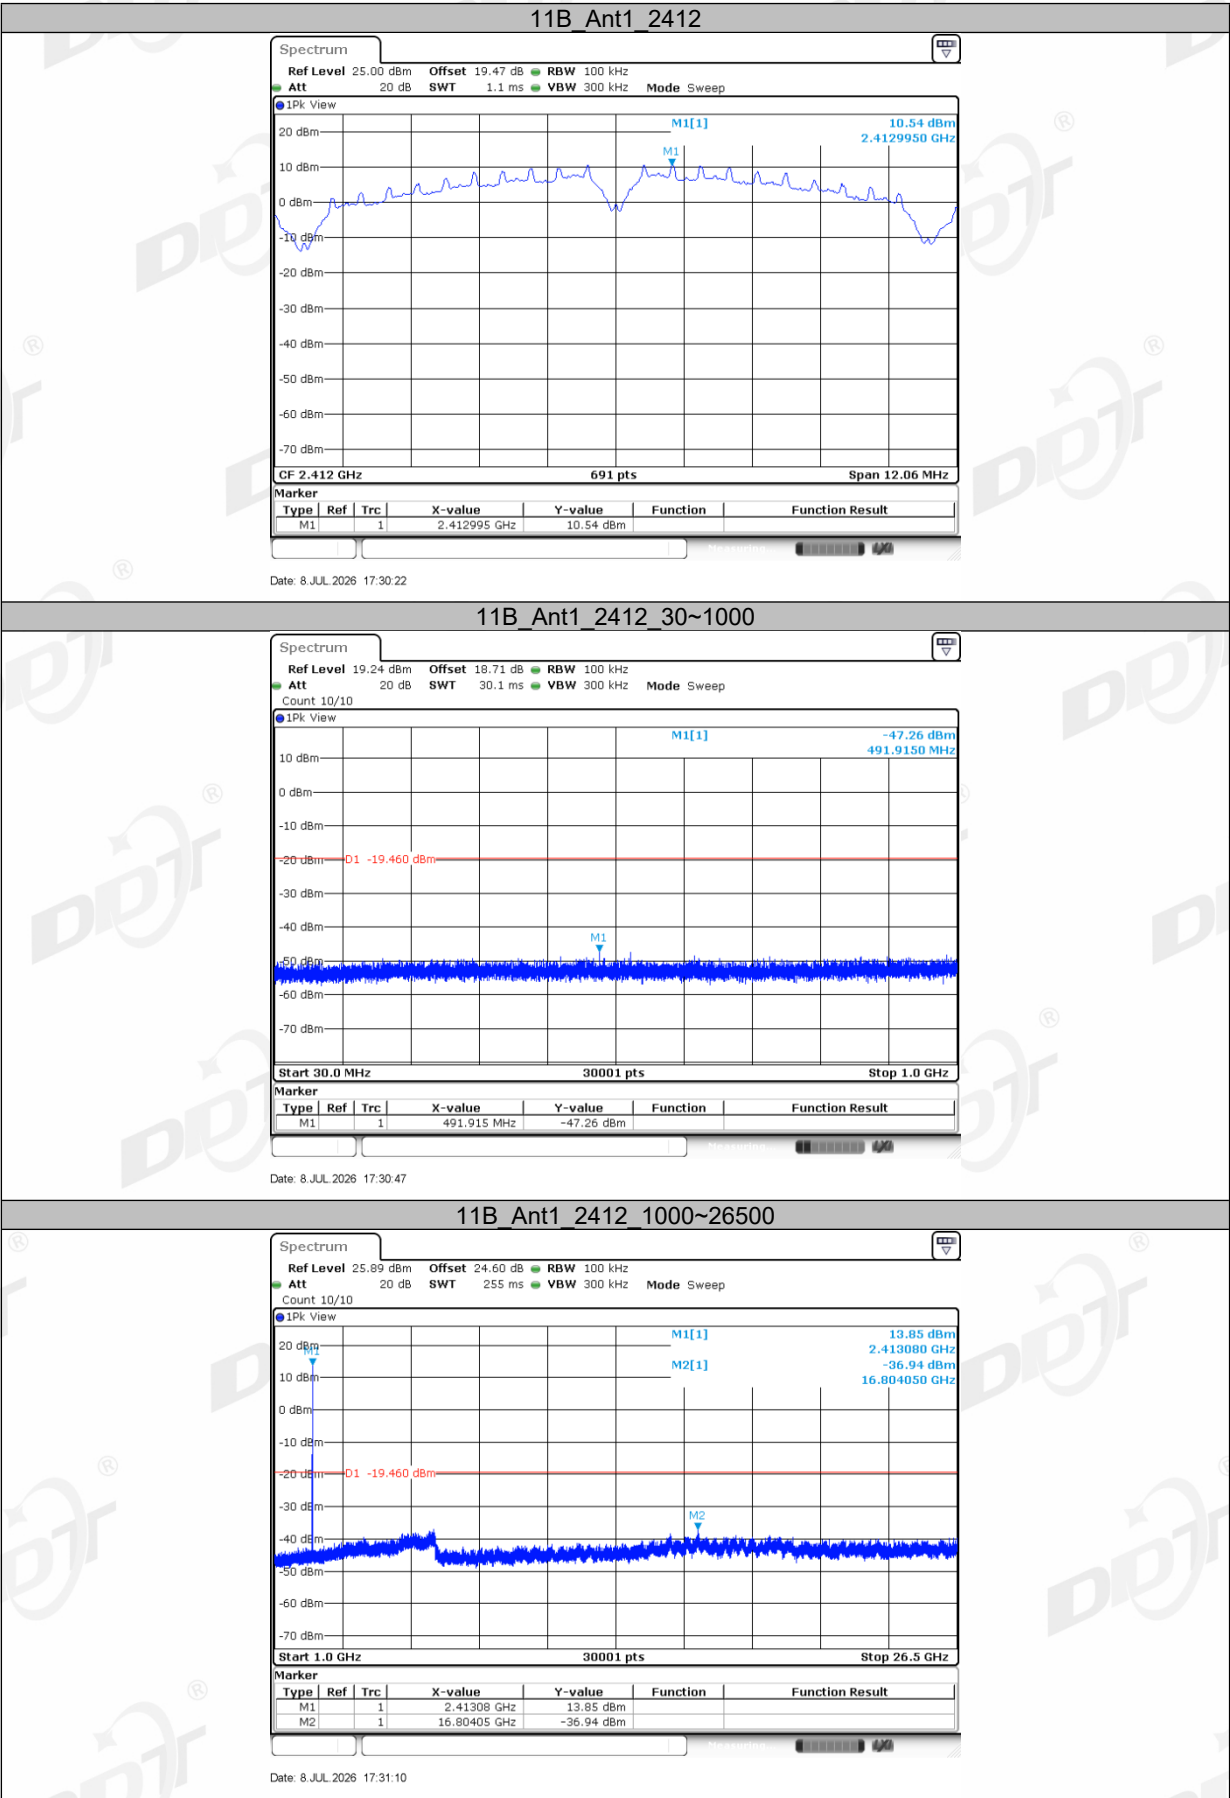

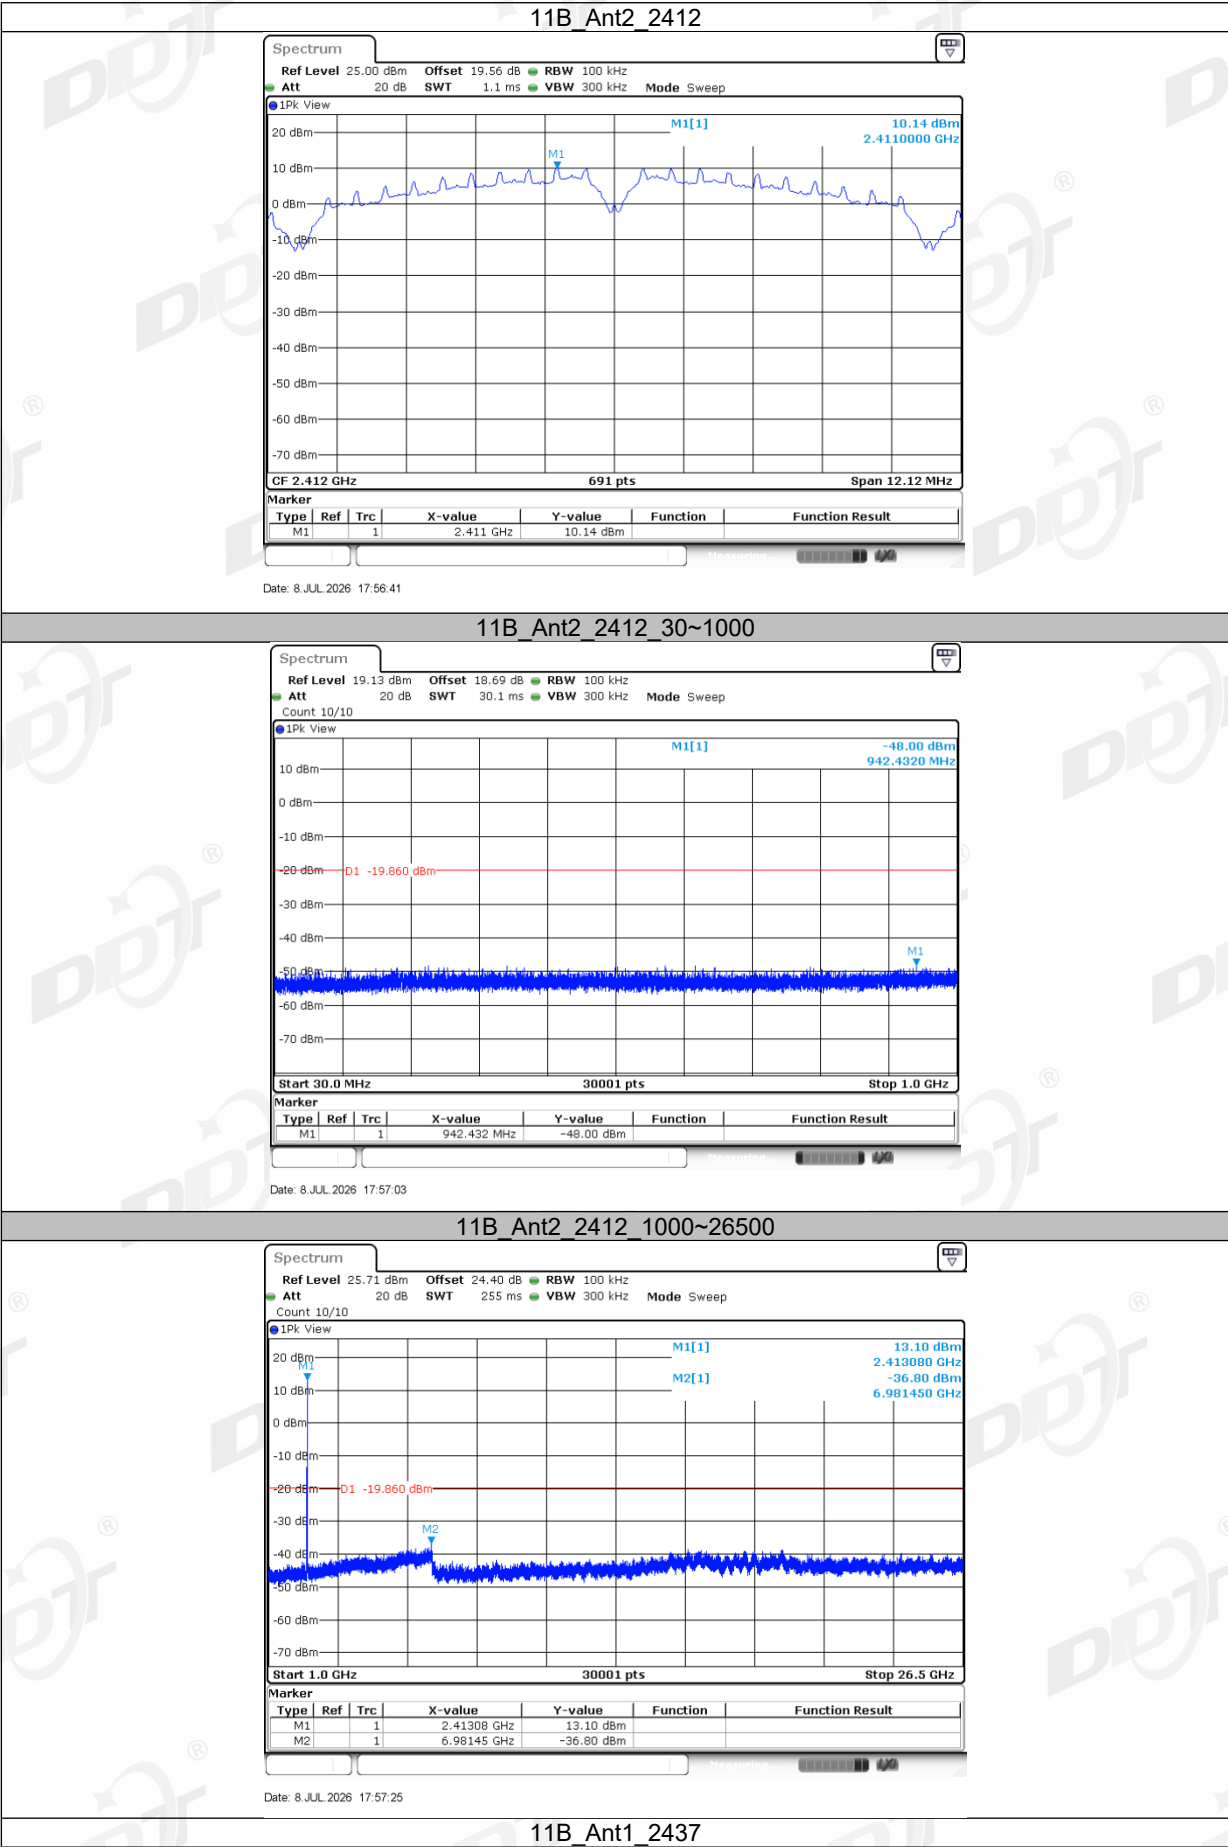


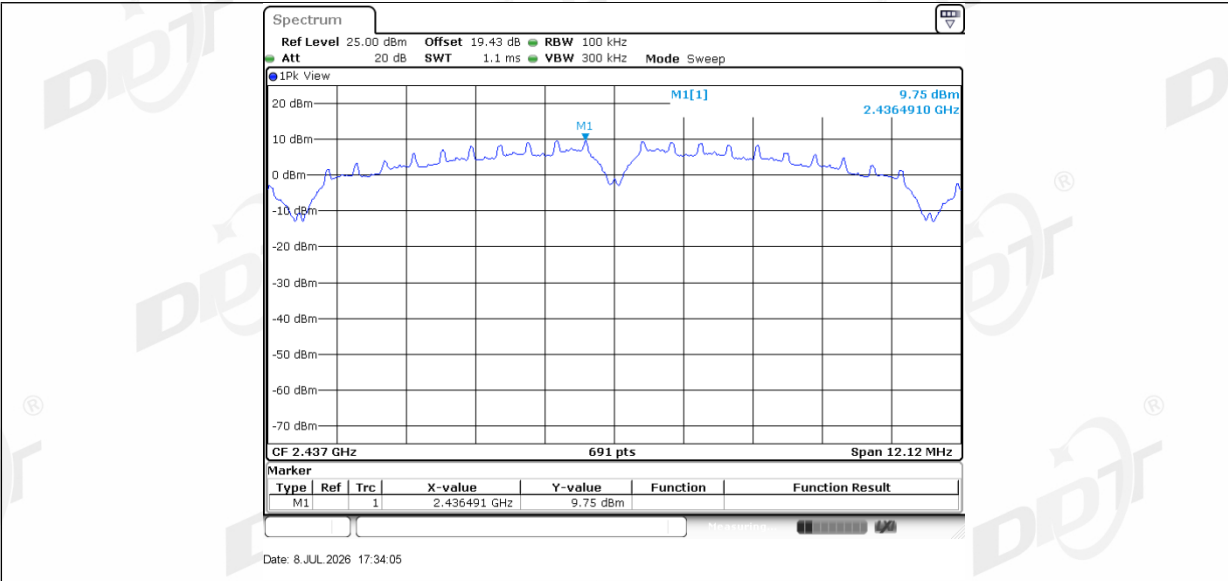


11B_Ant1_2437_30~1000

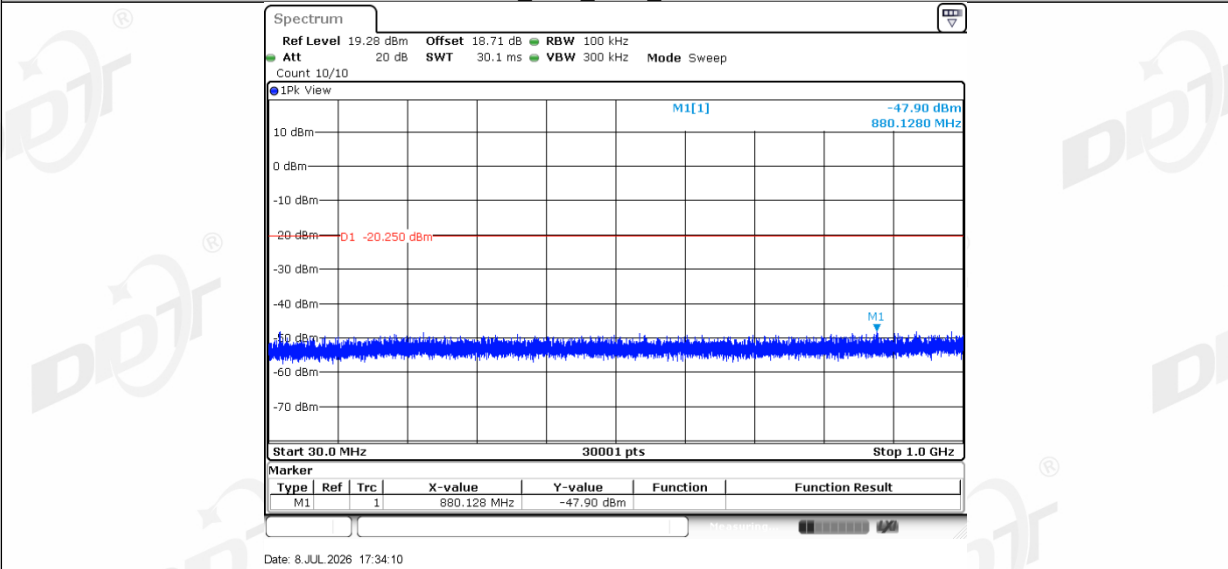


11B_Ant1_2437_1000~26500

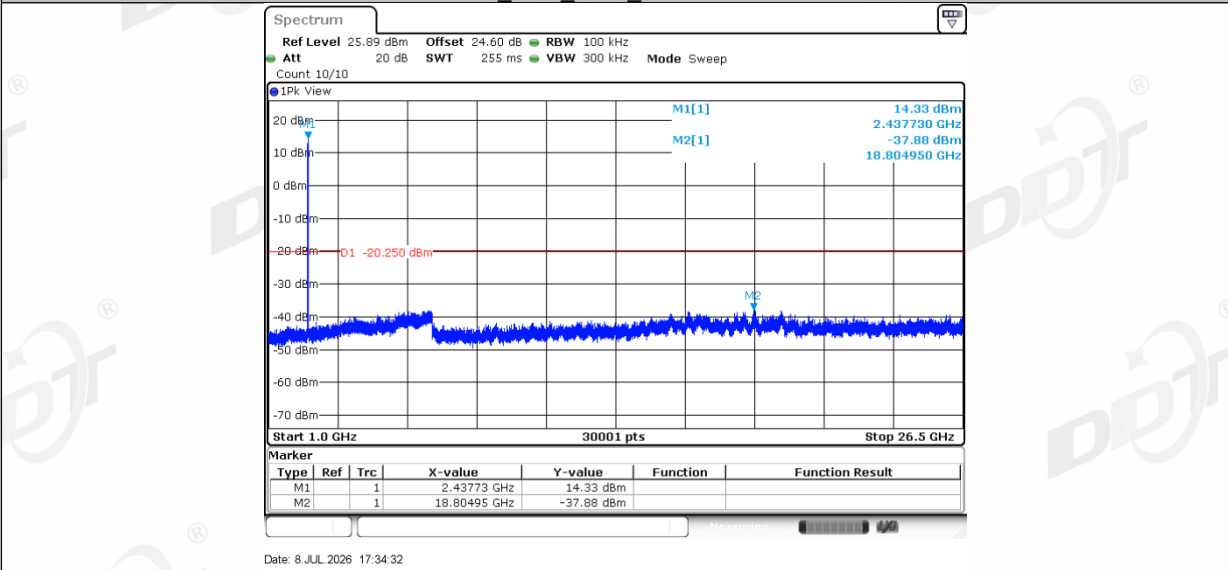


11B_Ant2_2437

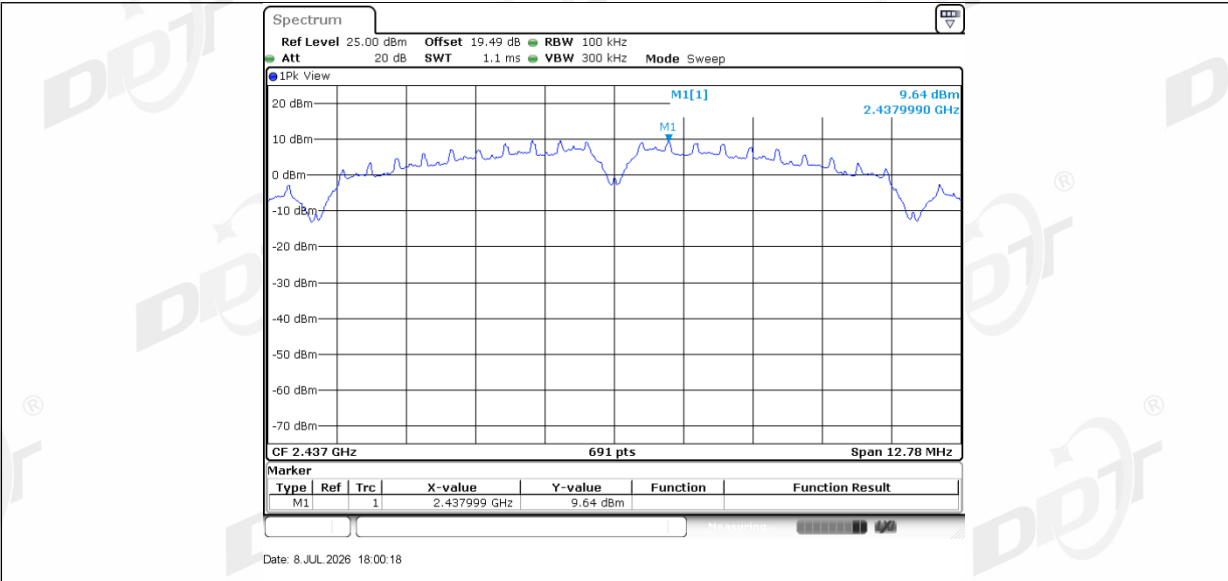


11B_Ant2_2437_30~1000

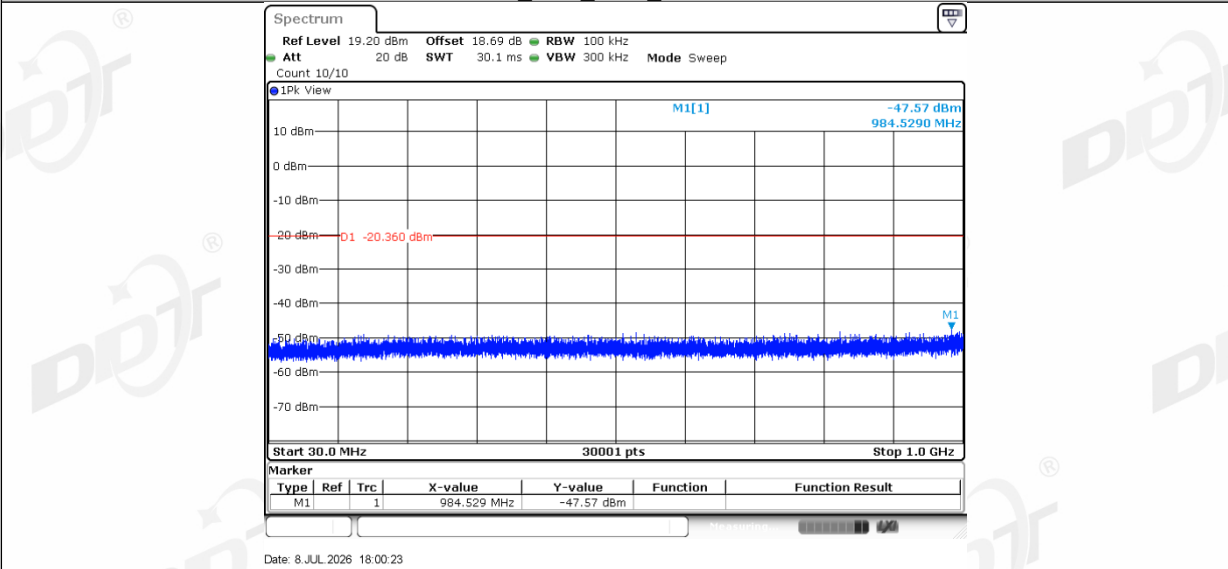


11B_Ant2_2437_1000~26500

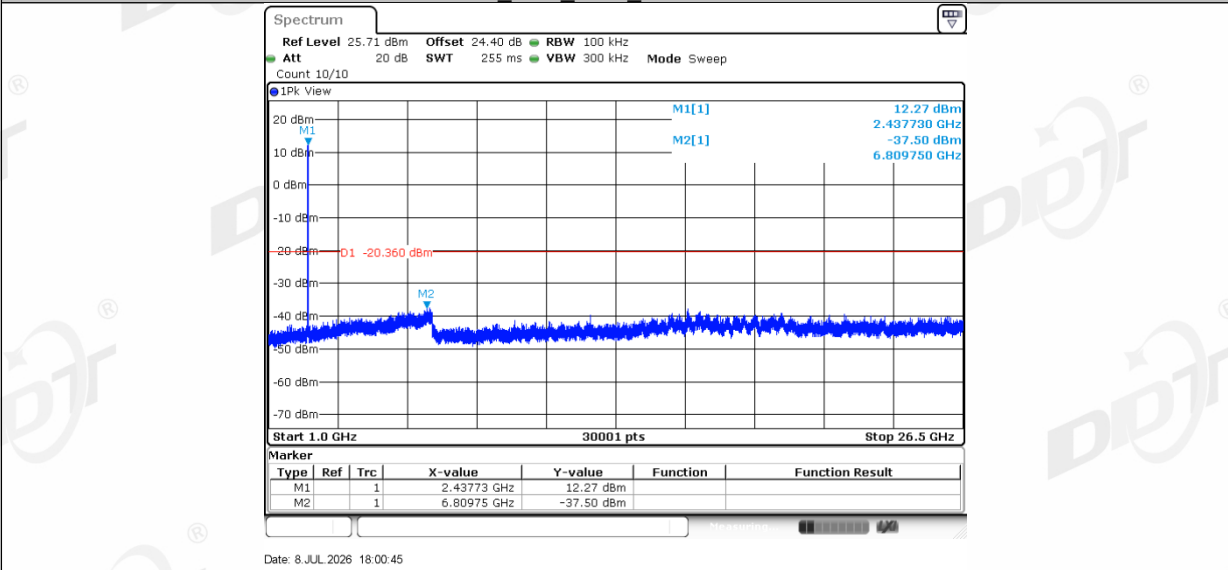


11B_Ant1_2462

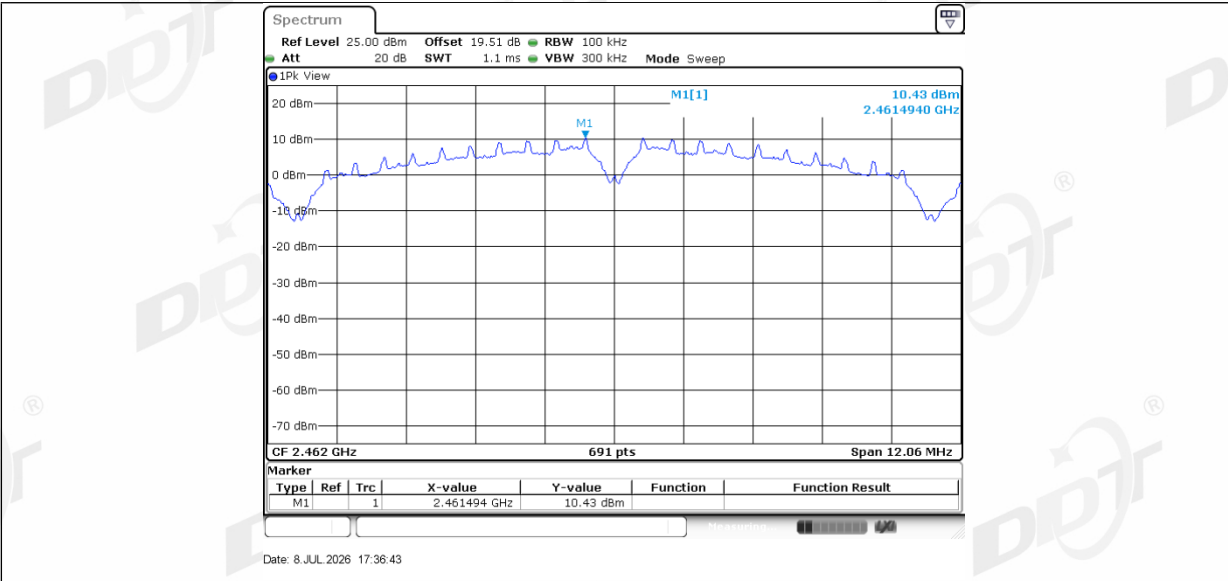


11B_Ant1_2462_30~1000

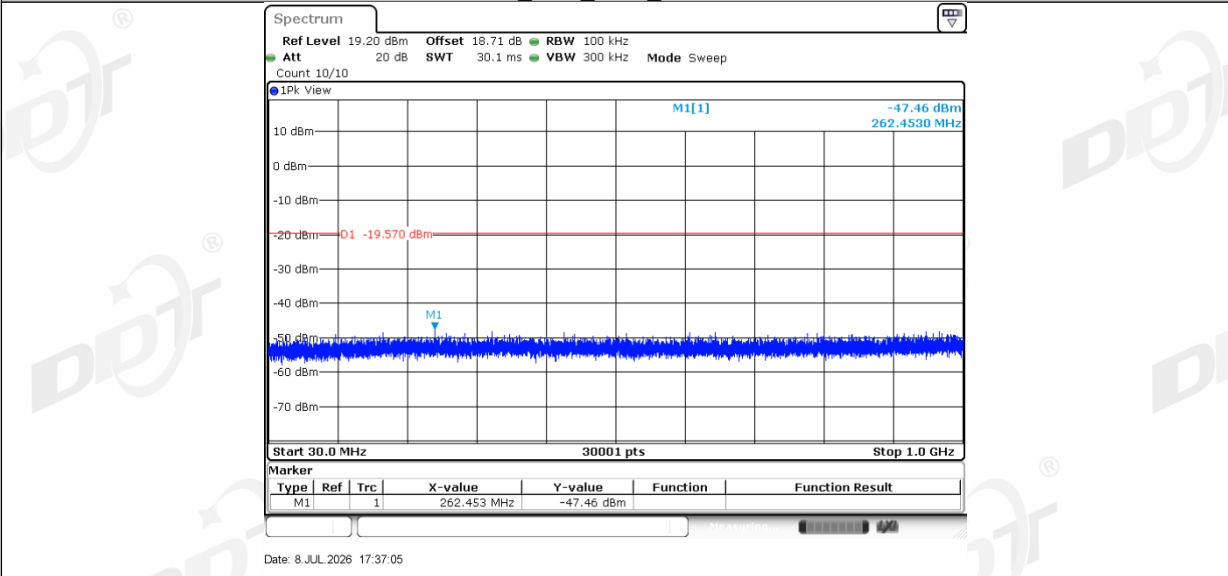


11B_Ant1_2462_1000~26500

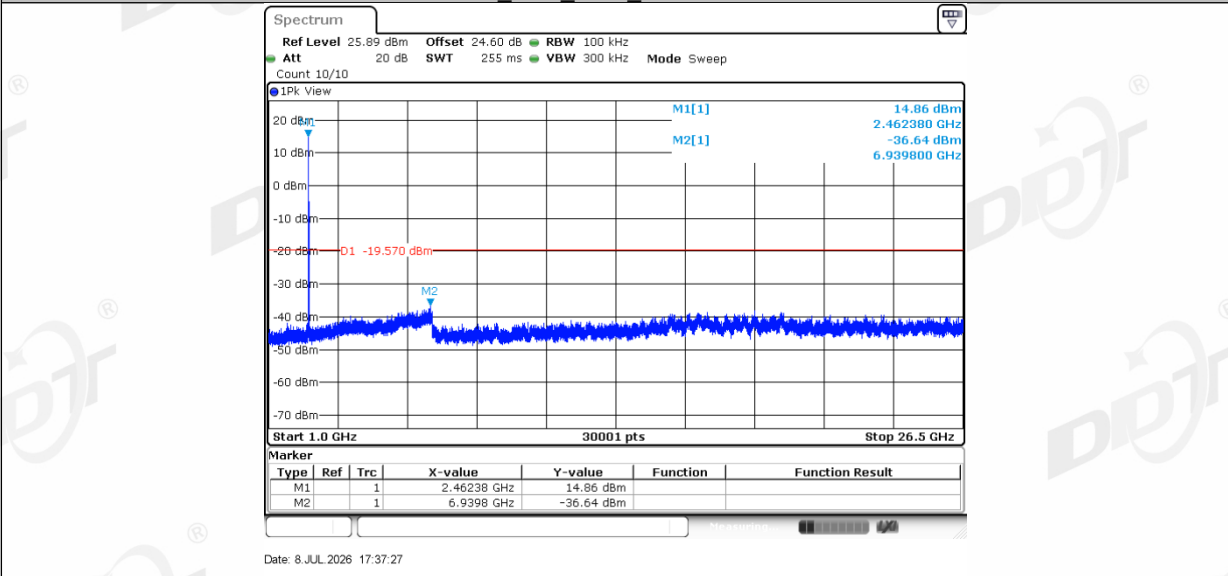


11B_Ant2_2462

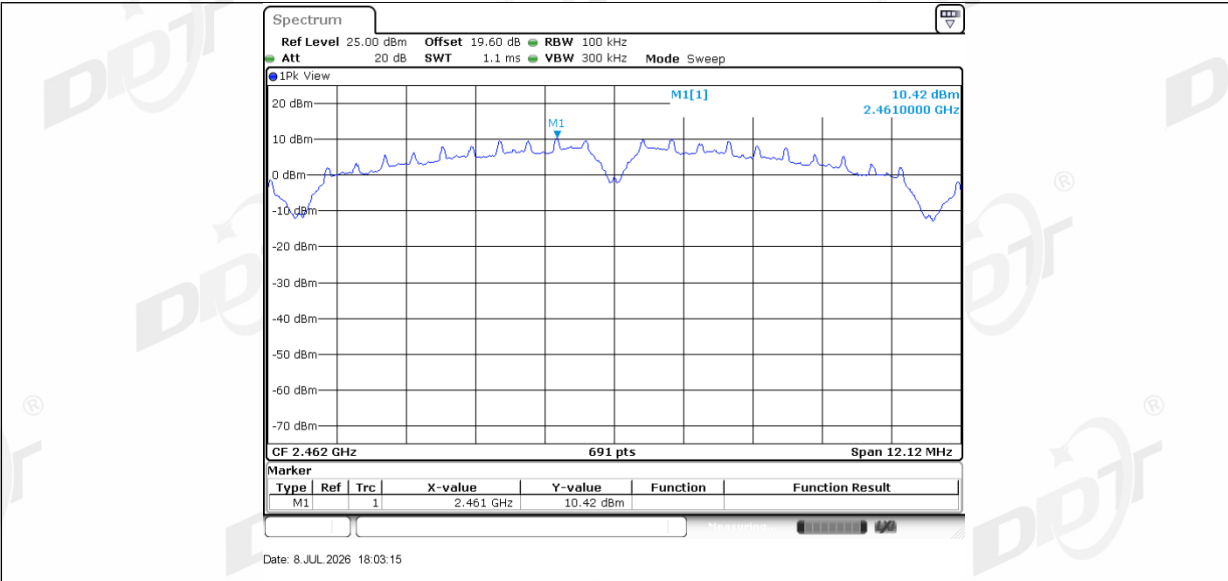


11B_Ant2_2462_30~1000

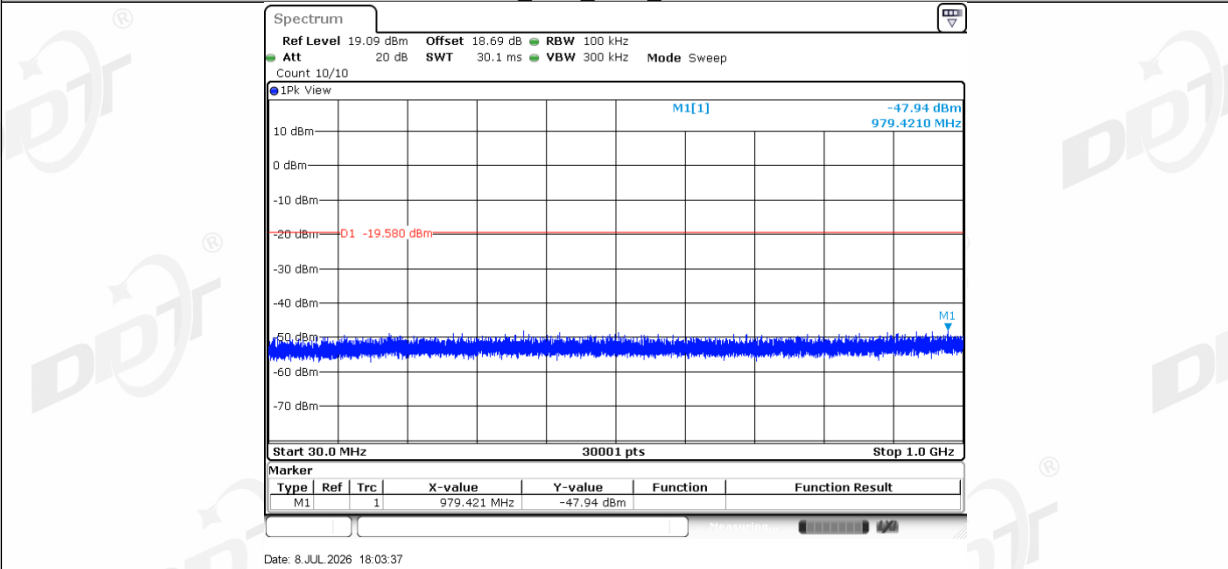


11B_Ant2_2462_1000~26500

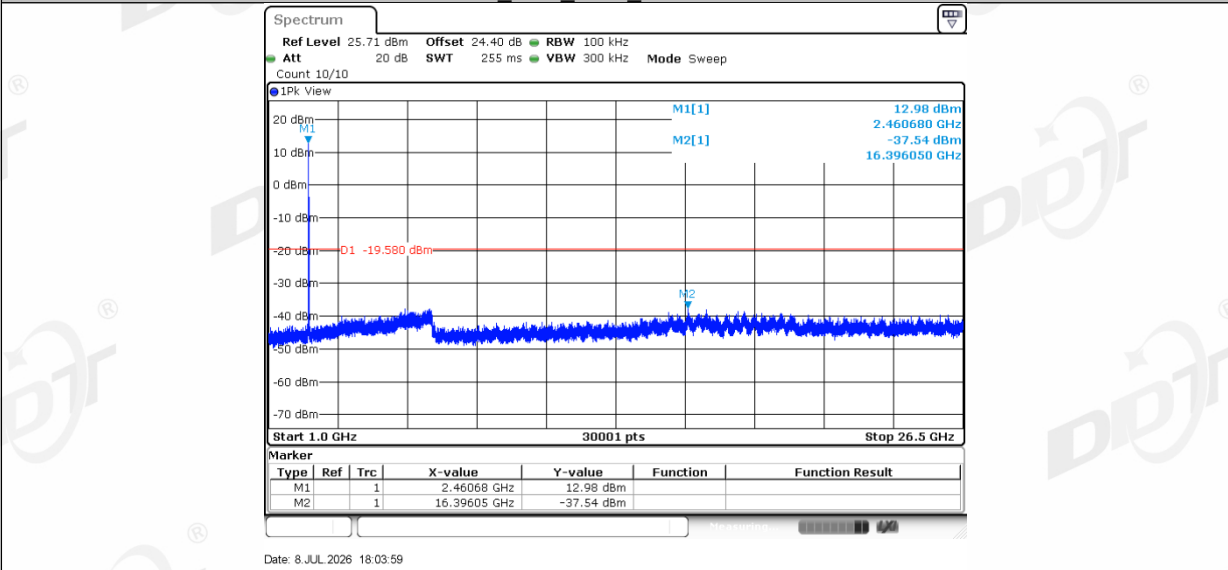


11G_Ant1_2412

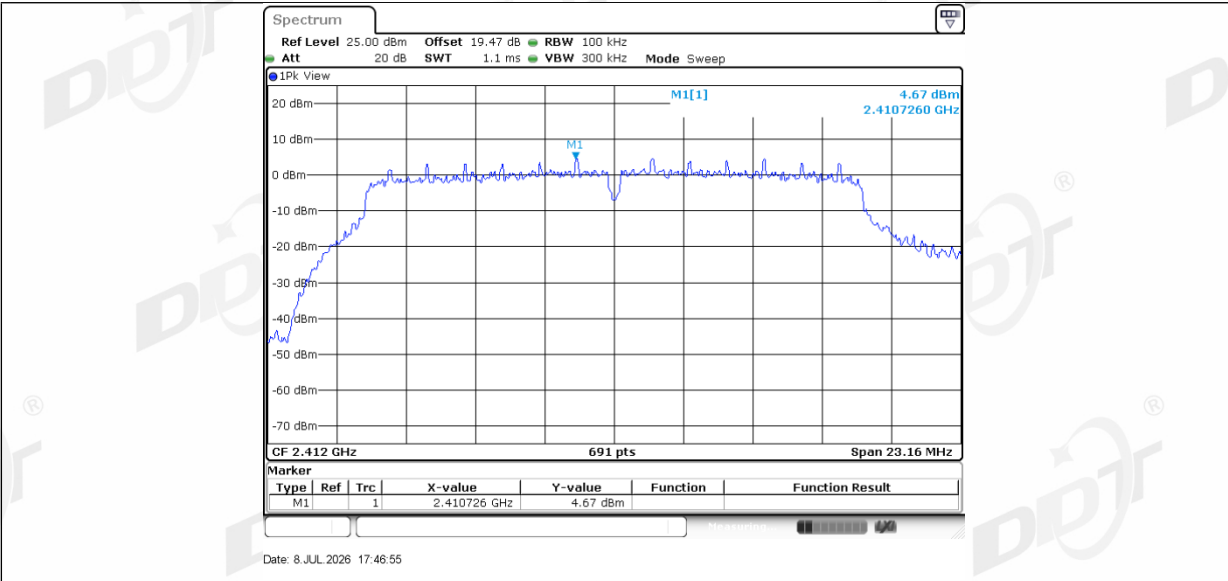


11G_Ant1_2412_30~1000

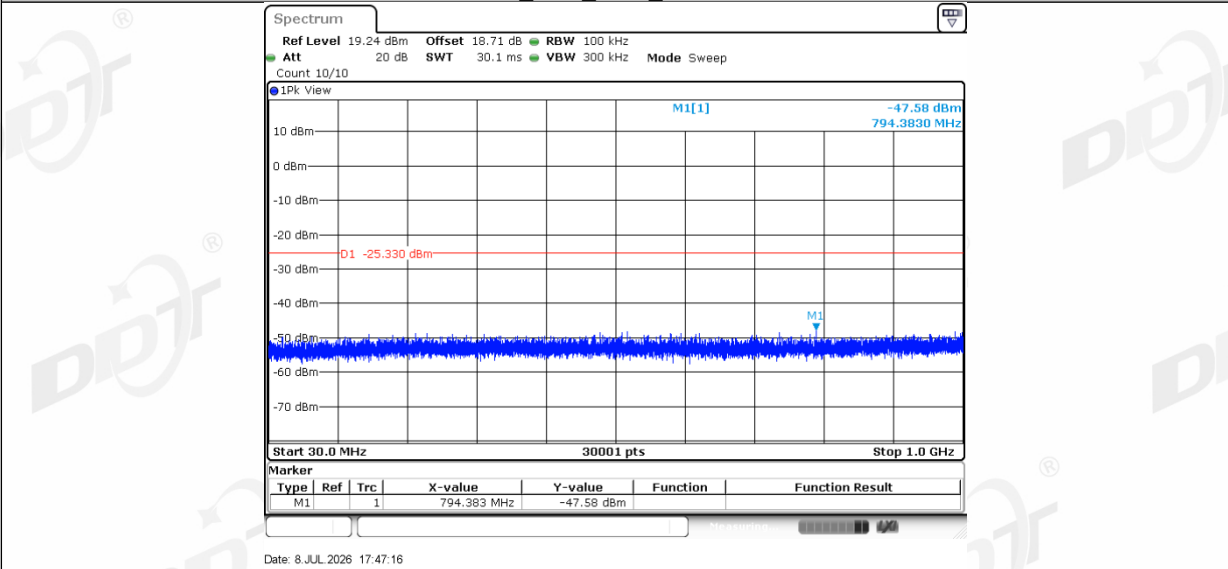


11G_Ant1_2412_1000~26500

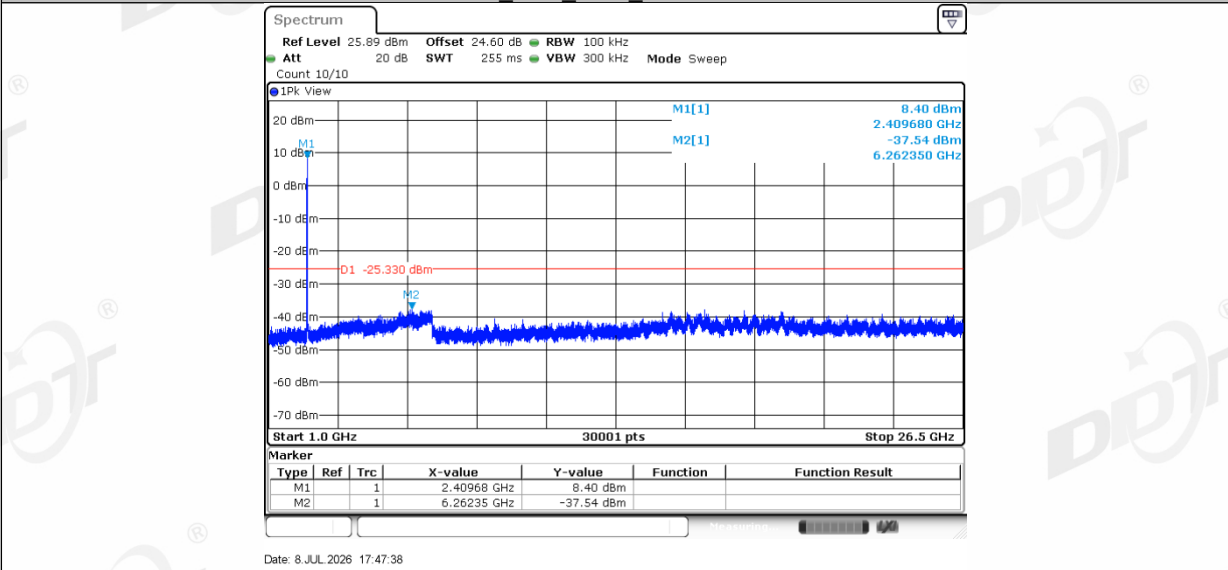


11G_Ant2_2412

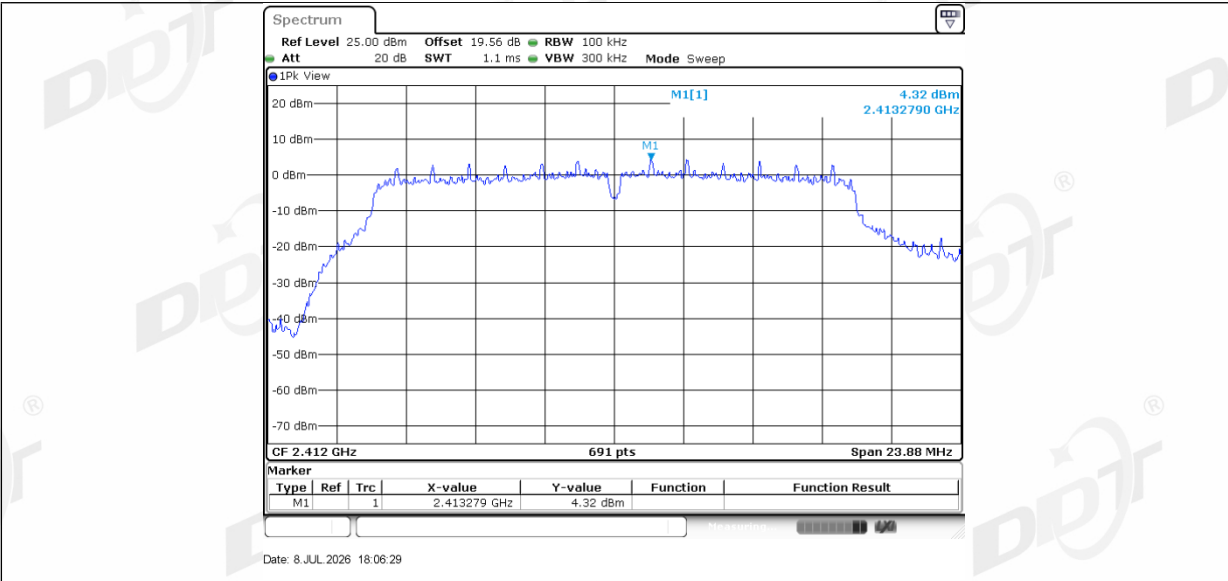


11G_Ant2_2412_30~1000

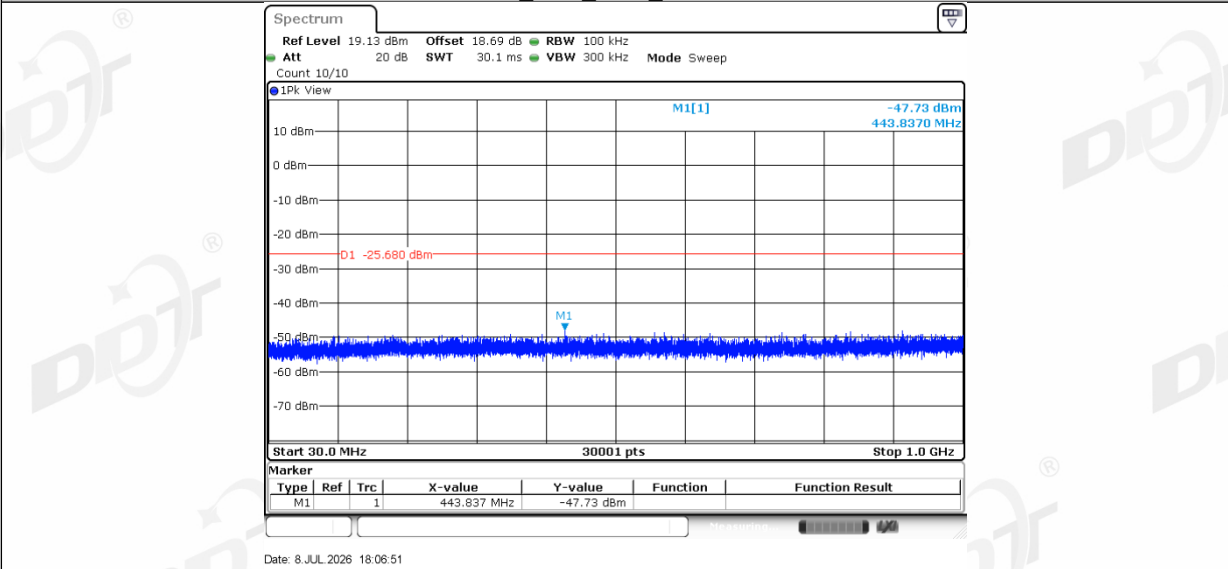


11G_Ant2_2412_1000~26500

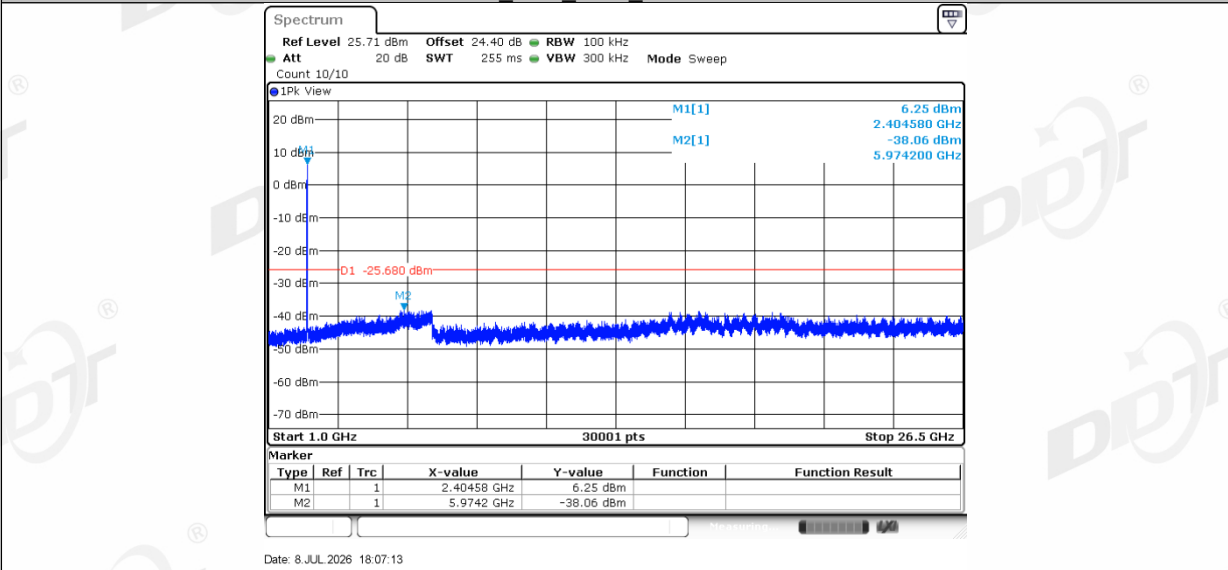


11G_Ant1_2437

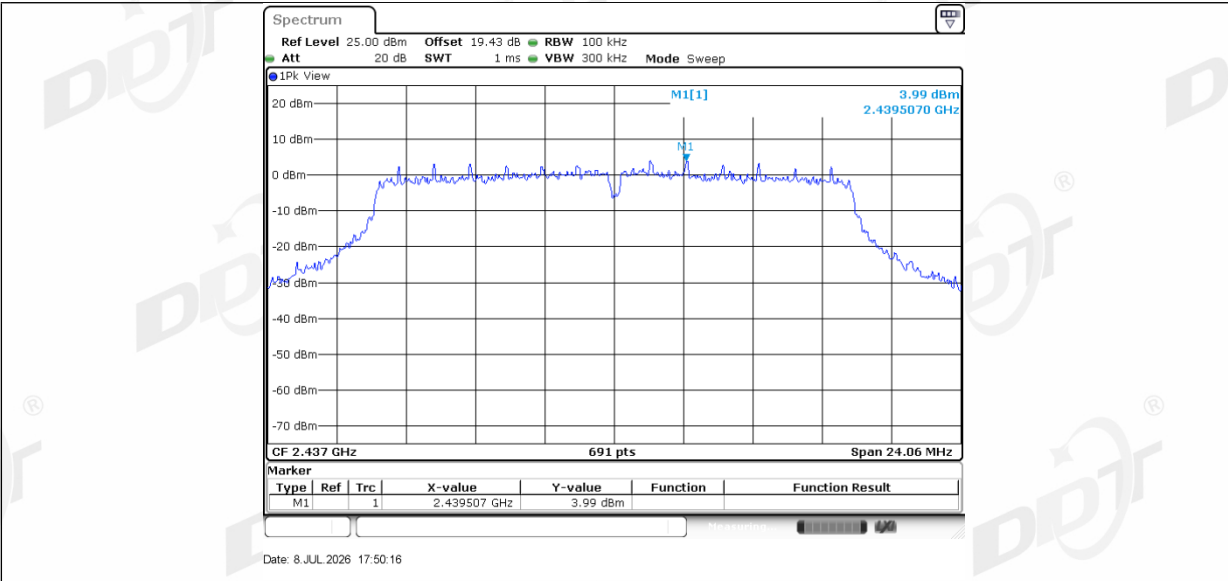


11G_Ant1_2437_30~1000

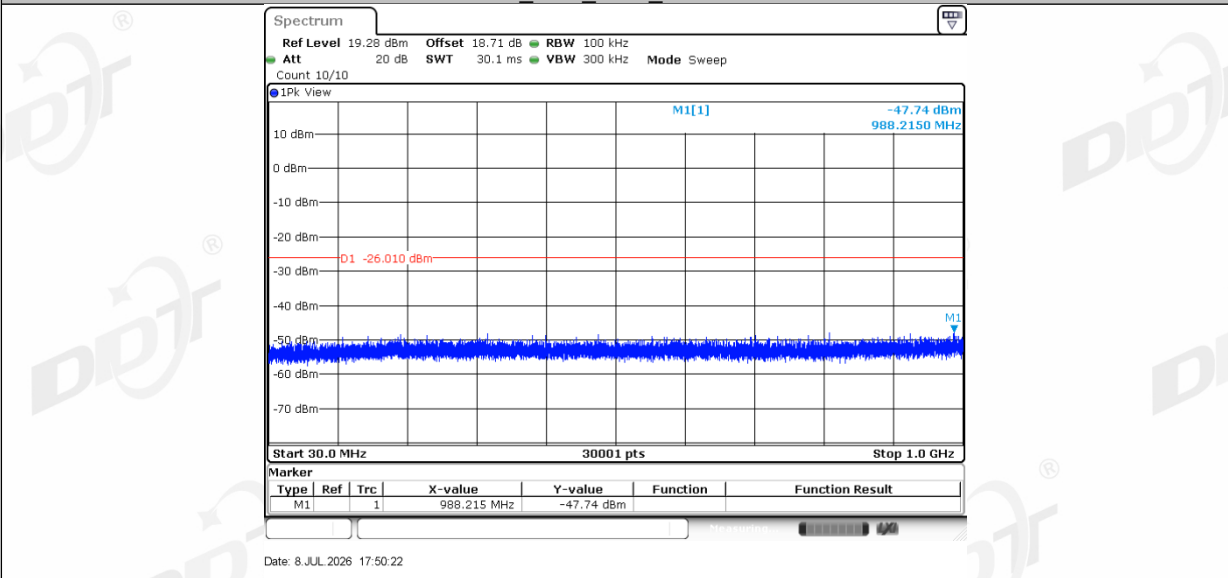


11G_Ant1_2437_1000~26500

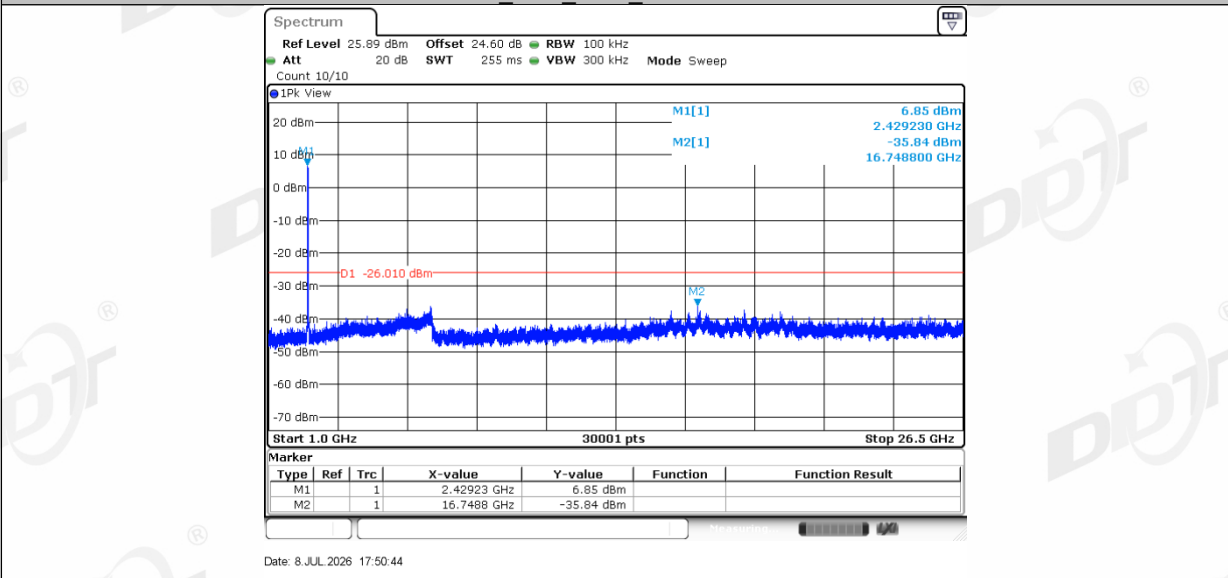


11G_Ant2_2437

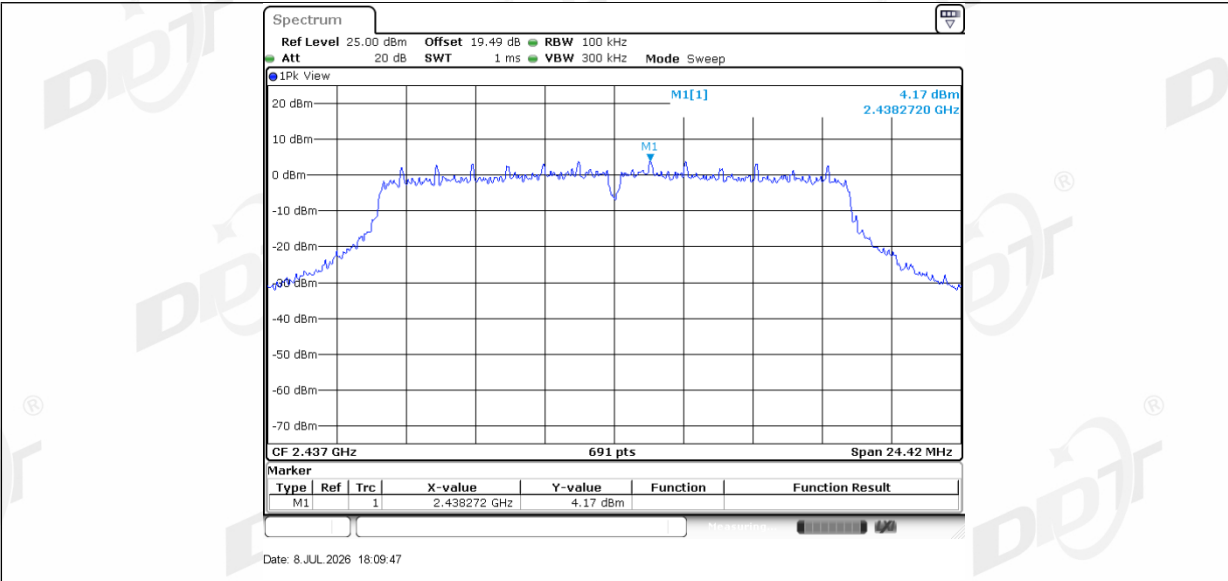


11G_Ant2_2437_30~1000

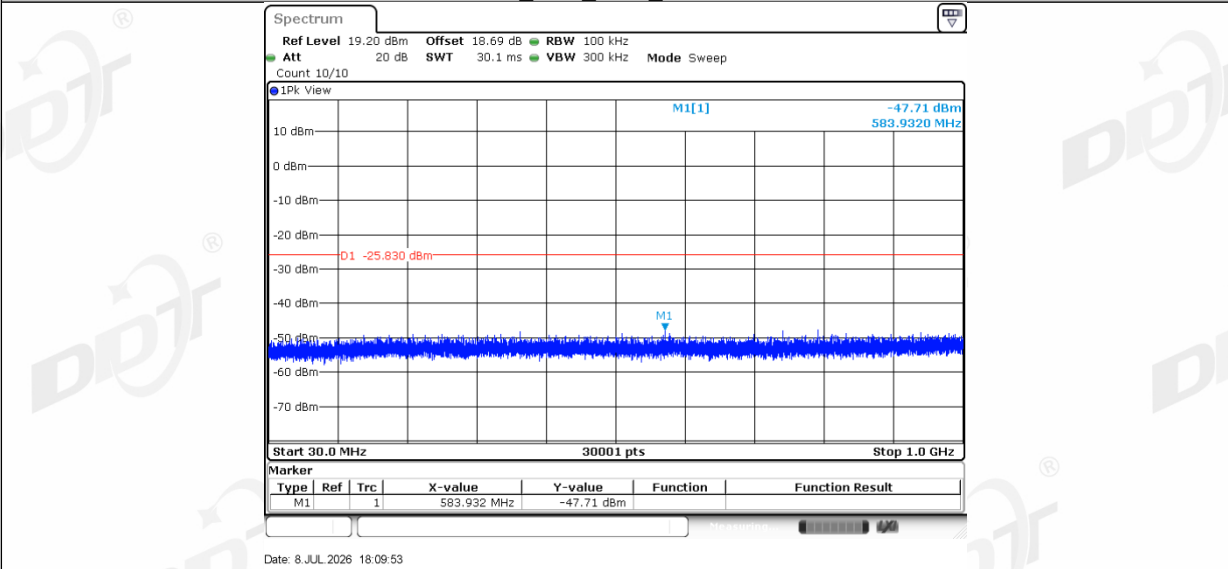


11G_Ant2_2437_1000~26500

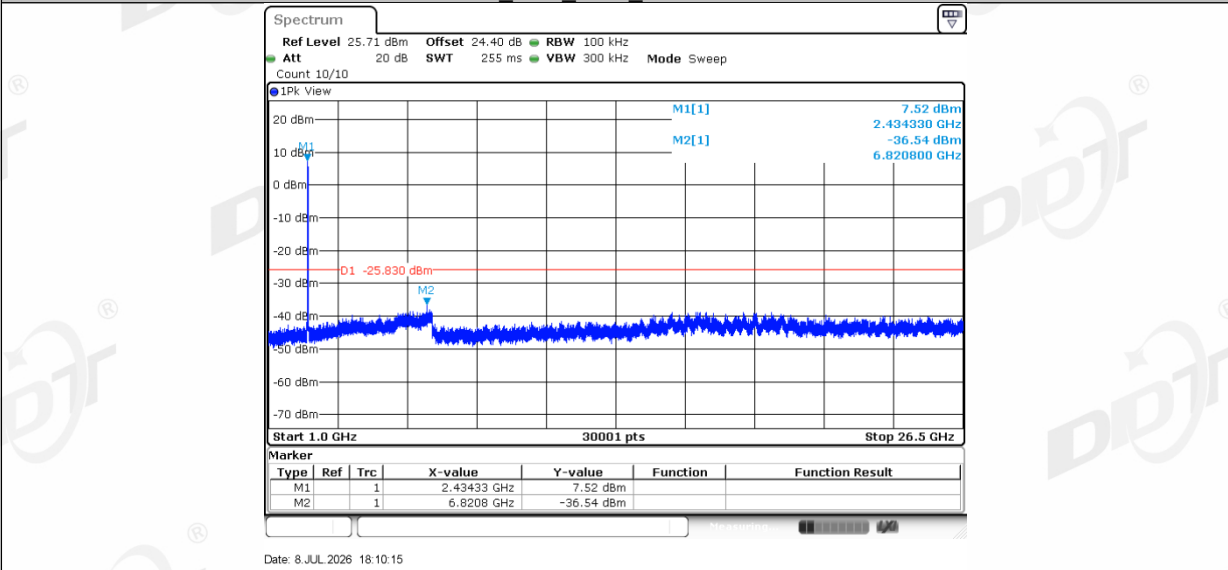


11G_Ant1_2462

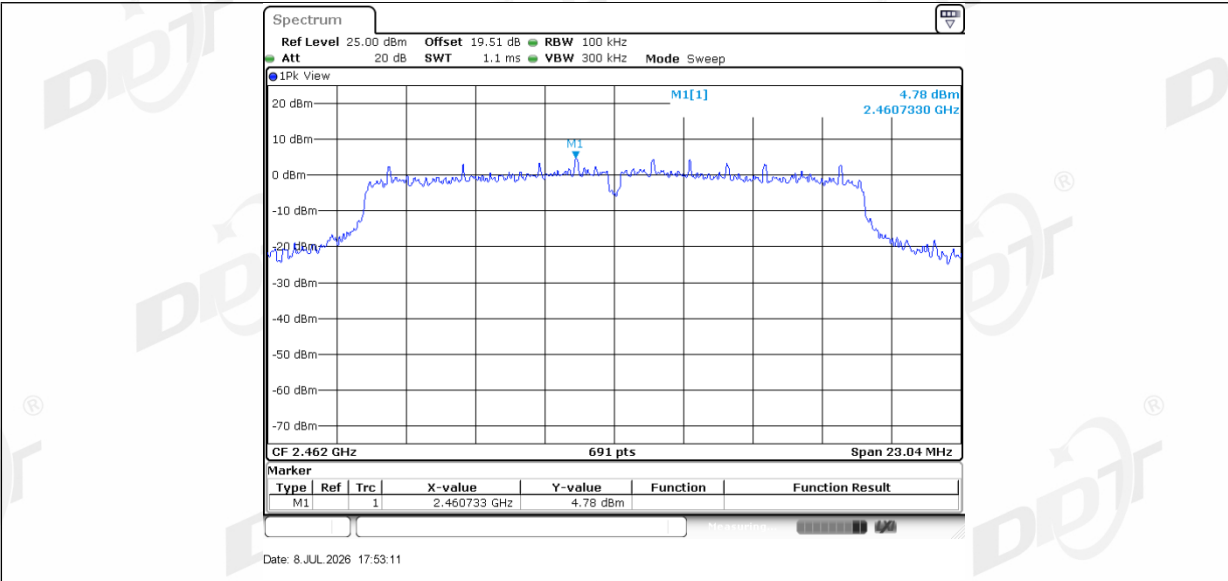

11G_Ant1_2462_30~1000

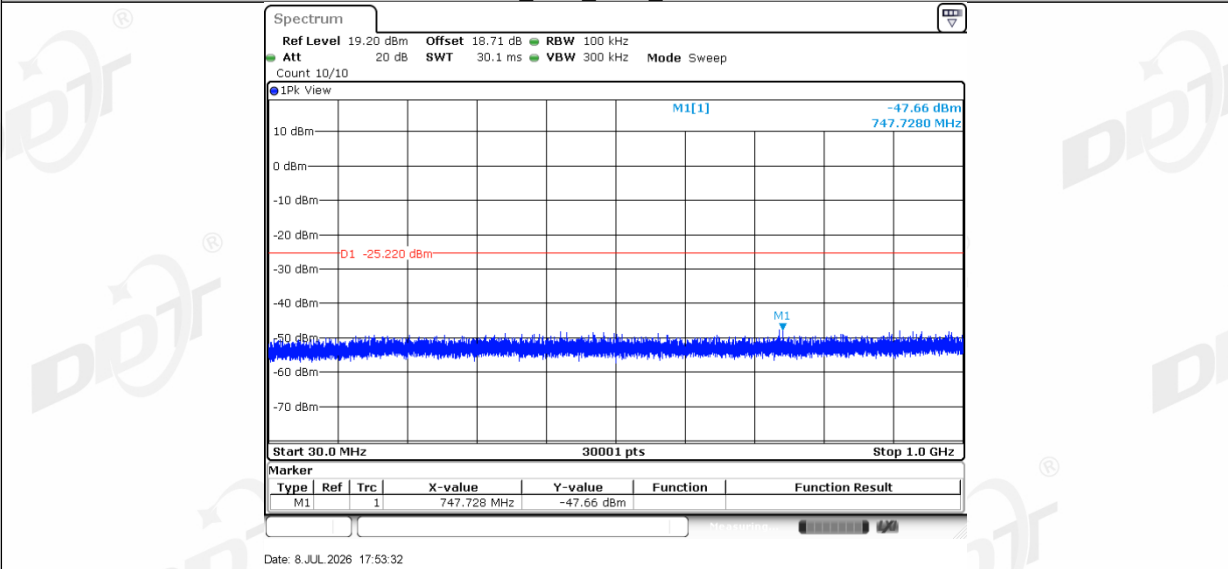

11G_Ant1_2462_1000~26500

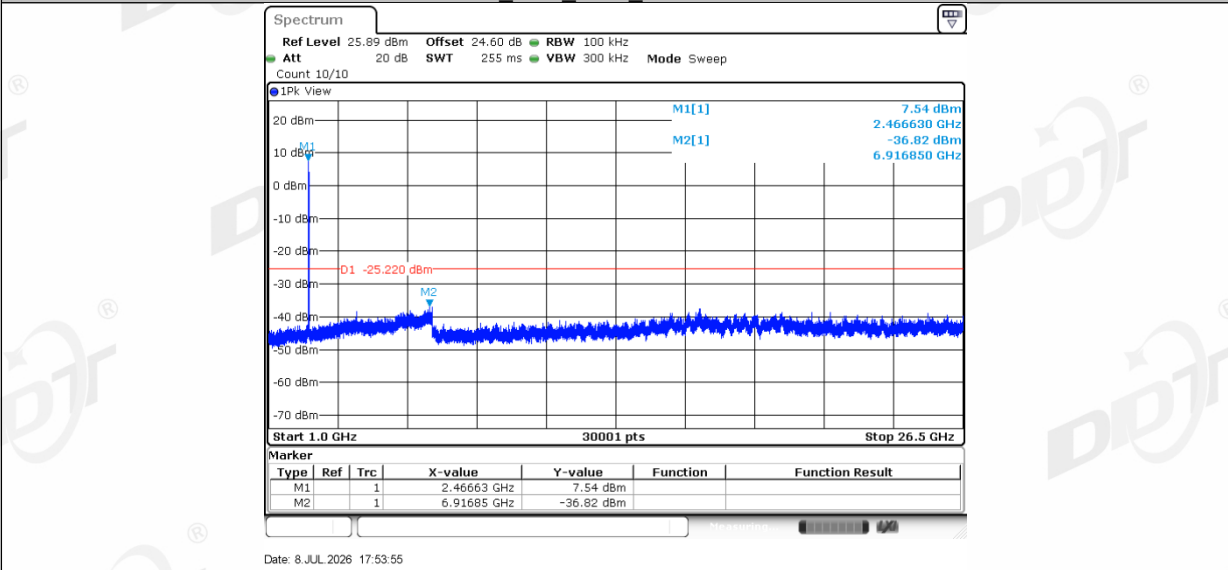

11G_Ant2_2462