FCC Test Report

Report No.:AGC00957190101FE02

FCC ID	:	2ALNV-HUB30
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	HUB
BRAND NAME	:	PROSPACE
MODEL NAME	:	HUB 3.0
CLIENT	:	PROSPACE PTE. LTD.
DATE OF ISSUE	:	Mar. 04, 2019
STANDARD(S)	:	FCC Part 22H & 24E Rules
REPORT VERSION	:	V1.0

Attestation of ***G***lobal ***C***ompliance (Shenzhen) Co., Ltd.

CAUTION:
This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 04, 2019	Valid	Initial Release

TABLE OF CONTENTS

1.VERIFICATION OF COMPLIANCE 5
2. GENERAL INFORMATION 6
2.1 PRODUCT DESCRIPTION 6
2.2RELATED SUBMITTAL(S) / GRANT (S) 7
2.3 TEST METHODOLOGY 8
2.4 TEST FACILITY 9
2.6 SPECIAL ACCESSORIES 11
2.7 EQUIPMENT MODIFICATIONS 11
3. SYSTEM TEST CONFIGURATION 12
3.1 EUT CONFIGURATION 12
3.2 EUT EXERCISE 12
3.3 CONFIGURATION OF EUT SYSTEM 12
4. SUMMARY OF TEST RESULTS 13
5. DESCRIPTION OF TEST MODES 14
6. OUTPUT POWER 15
6.1 CONDUCTED OUTPUT POWER 15
6.2 RADIATED OUTPUT POWER 21
6.2.1 MEASUREMENT METHOD 21
6.2.2 PROVISIONS APPLICABLE 22
6.3. PEAK-TO-AVERAGE RATIO 25
6.3.1 MEASUREMENT METHOD 25
6.3.2 PROVISIONS APPLICABLE 25
6.3.3 MEASUREMENT RESULT 26
7. OCCUPIED BANDWIDTH 27
7.1 MEASUREMENT METHOD 27
7.2 PROVISIONS APPLICABLE 27
7.3 MEASUREMENT RESULT 28
8. BAND EDGE 34
8.1 MEASUREMENT METHOD 34
8.2 PROVISIONS APPLICABLE 34
8.3 MEASUREMENT RESULT 35
9. SPURIOUS EMISSION 38
9.1 CONDUCTED SPURIOUS EMISSION 38
9.2 RADIATED SPURIOUS EMISSION 53
9.2.2 TEST SETUP 54
10. FREQUENCY STABILITY 59
10.1 MEASUREMENT METHOD 59

10.2 PROVISIONS APPLICABLE 60
10.3 MEASUREMENT RESULT 61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP 70

1. VERIFICATION OF COMPLIANCE

Applicant	PROSPACE PTE. LTD.
Address	Block 113, Bishan Street 12, #09-116, 570113 Singapore
Manufacturer	PROSPACE PTE. LTD.
Address	Block 113, Bishan Street 12, #09-116, 570113 Singapore
Factory	NEWWAH TECHNOLOGY PTE. LTD.
Address	21 WOODLANDS CLOSE, #07-38, PRIMZ BIZHUB, SINGAPORE 737854
Product Designation	HUB
Brand Name	PROSPACE
Test Model	HUB 3.0
Date of test	Feb. 27, 2019~Mar. 04, 2019
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E.

The test results of this report relate only to the tested sample identified in this report.

Tested By	Jeast Zhan(Zhan jiangdong)	Mar. 04, 2019
Reviewed By	Bart Xie(Xie Xiaobin)	Mar. 04, 2019
Approved By	Forrest Lei(Lei Yonggang) Authorized Officer	Mar. 04, 2019

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	HUB
Frequency Bands:	☒GPRS 850 ☒PCS1900 (U.S. Bands) ☒GSM 900 ☒DCS 1800 (Non-U.S. Bands) ☒UMTS FDD Band II ☐UMTS FDD Band IV ☒UMTS FDD Band V (U.S. Bands) ☐UMTS FDD Band I ☐UMTS FDD Band VIII (Non-U.S. Bands)
Hardware Version	V1.0
Software Version	V1.0
Antenna Type	External Antenna
Antenna gain	1.0dBi
Power Supply:	DC 5V
Singel Card:	GSM /WCDMA Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC4.25 V to 5.75V (Normal: DC 5V)
Extreme Temp. Tolerance	-10℃ to +50℃
*** Note: 1. The High Voltage DC5.75V and Low Voltage DC4.25V were declared by manufacturer 2. The EUT couldn't be operating normally with higher or lower voltage.	

***** Note:**1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, WCDMA band IV,only these modes were used for all tests.

2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst caseas a representative.

GSM/WCDMA Card1 Slot :

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GPRS 850	31.19	32.14
PCS 1900	30.53	31.65
UMTS BAND II	22.47	23.69
UMTS BAND V	22.42	23.07

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ALNV-HUB30**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

2.4 TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.12, 2018	Jun.11, 2019
LISN	R&S	ESH2-Z5	100086	Aug.19, 2018	Aug.18, 2019
TEST RECEIVER	R&S	ESCI	10096	Jun.18, 2018	Jun.17, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.06, 2018	Dec.05, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Mar. 01, 2018	Feb. 28, 2020
preamplifier	ChengYi	EMC184045SE	980508	Sep.20, 2018	Sep.19, 2019
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 01, 2018	Feb. 28, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.18, 2018	Jun.17, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.20, 2018	Sep.19, 2019
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep.20, 2018	Sep.19, 2019
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Sep.20, 2018	Sep.19, 2019
Universal Radio Communication Tester	R&S	CMU200	120237	Mar.01,2018	Feb.28,2019
Universal Radio Communication Tester	Agilent	8960	GB46200384	July 12,2018	July 11,2019
Power Splitter	Agilent	11636A	34	Sep.20, 2018	Sep.19, 2019
Attenuator	JFW	50FHC-006-50	N/A	Jun.12, 2018	Jun.11, 2019
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170		Mar. 01, 2018	Feb. 28, 2020
Horn Ant (18G-40GHz)	ETS	QWH_SL_18_40_K_SG		Mar. 01, 2018	Feb. 28, 2020
Power Splitter	Agilent	11636A	/	Sep.20, 2018	Sep.19, 2019
CMU200	R&S	120237	/	Mar. 01, 2018	Feb. 28, 2019
Artificial Mains Network ENV4200	R&S	101116	/	July 13, 2018	July 12, 2019

Artificial Mains Network ENV216	R&S	101242	/	July 13, 2018	July 12, 2019
Filter Bank Notch 1(880-915MHz)	MICRO-TRONICS	010	/	Mar. 01, 2018	Feb. 28, 2019
Filter Bank Notch 2 (1710-1785MHz)	MICRO-TRONICS	009	/	Mar. 01, 2018	Feb. 28, 2019
Filter Bank Notch 3 (1920-1980MHz)	MICRO-TRONICS	008	/	Mar. 01, 2018	Feb. 28, 2019

2.6 SPECIAL ACCESSORIES

The battery wassupplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUTconfiguration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

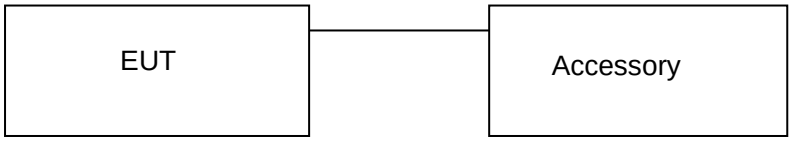

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	HUB	HUB 3.0	2ALNV-HUB30	EUT
2	Antenna	N/A	N/A	Accessory

***Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046	Pass
		Radiated Output Power	22.913(a) (2) / 24.232 (c)/ 27.50(d)(4)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1053/22.917(a)/24.238(a)/27.53(h)	Pass
5	Occupied Bandwidth		2.1049	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200)to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSMand PCS frequency band.

*****Note:** GPRS/EGPRS 850, GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for othermodulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II,WCDMA/HSPA band V)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

GPRS 850:

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GPRS 850	824.2	32.03	-9	23.03
	836.6	32.12	-9	23.12
	848.8	**32.14**	-9	23.14
GPRS 850 (1 Slot)	824.2	31.20	-9	22.20
	836.6	31.19	-9	22.19
	848.8	31.08	-9	22.08
GPRS 850 (2 Slot)	824.2	28.44	-6	22.44
	836.6	28.34	-6	22.34
	848.8	28.19	-6	22.19
GPRS 850 (3 Slot)	824.2	27.46	-4.26	23.20
	836.6	27.92	-4.26	23.66
	848.8	27.58	-4.26	23.32
GPRS 850 (4 Slot)	824.2	25.88	-3	22.88
	836.6	25.94	-3	22.94
	848.8	25.93	-3	22.93

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	26.55
	190	836.6	26.69
	251	848.8	27.40
EDGE (2 Slot)	128	824.2	26.00
	190	836.6	26.53
	251	848.8	26.09
EDGE (3 Slot)	128	824.2	26.11
	190	836.6	26.13
	251	848.8	26.09
EDGE (4 Slot)	128	824.2	25.58
	190	836.6	25.72
	251	848.8	26.66

PCS 1900:

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GRPS1900	1850.2	31.44	-9	22.44
	1880	**31.65**	-9	22.65
	1909.8	31.47	-9	22.47
GPRS1900 (1 Slot)	1850.2	31.00	-9	22.00
	1880	31.13	-9	22.13
	1909.8	31.11	-9	22.11
GPRS1900 (2 Slot)	1850.2	28.33	-6	22.33
	1880	28.49	-6	22.49
	1909.8	28.52	-6	22.52
GPRS1900 (3 Slot)	1850.2	27.43	-4.26	23.17
	1880	27.59	-4.26	23.33
	1909.8	27.44	-4.26	23.18
GPRS1900 (4 Slot)	1850.2	25.46	-3	22.46
	1880	25.49	-3	22.49
	1909.8	25.62	-3	22.62

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	28.54
	661	1880	28.38
	810	1909.8	28.89
EDGE (2 Slot)	512	1850.2	27.00
	661	1880	27.11
	810	1909.8	27.36
EDGE (3 Slot)	512	1850.2	26.43
	661	1880	26.56
	810	1909.8	25.28
EDGE (4 Slot)	512	1850.2	26.11
	661	1880	25.13
	810	1909.8	25.21

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA1900 AMR	1852.4	24	23.05
	1880	24	23.64
	1907.6	24	**23.69**
HSDPA Subtest 1	1852.4	24	21.78
	1880	24	21.19
	1907.6	24	21.55
HSDPA Subtest 2	1852.4	24	21.57
	1880	24	21.83
	1907.6	24	21.73
HSDPA Subtest 3	1852.4	24	22.14
	1880	24	22.65
	1907.6	24	22.24
HSDPA Subtest 4	1852.4	24	21.13
	1880	24	21.50
	1907.6	24	21.20
HSUPA Subtest 1	1852.4	24	22.43
	1880	24	22.81
	1907.6	24	22.36
HSUPA Subtest 2	1852.4	24	21.71
	1880	24	21.17
	1907.6	24	21.82
HSUPA Subtest 3	1852.4	24	22.63
	1880	24	22.09
	1907.6	24	22.28
HSUPA Subtest 4	1852.4	24	22.27
	1880	24	22.69
	1907.6	24	22.09
HSUPA Subtest 5	1852.4	24	21.93
	1880	24	21.16
	1907.6	24	21.85

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA850 AMR	826.4	24	**23.07**
	836.4	24	22.54
	846.6	24	22.26
HSDPA Subtest 1	826.4	24	22.41
	836.4	24	22.33
	846.6	24	22.64
HSDPA Subtest 2	826.4	24	21.97
	836.4	24	22.58
	846.6	24	22.77
HSDPA Subtest 3	826.4	24	21.32
	836.4	24	22.30
	846.6	24	22.52
HSDPA Subtest 4	826.4	24	21.24
	836.4	24	22.24
	846.6	24	22.71
HSUPA Subtest 1	826.4	24	22.04
	836.4	24	22.23
	846.6	24	22.75
HSUPA Subtest 2	826.4	24	21.29
	836.4	24	21.61
	846.6	24	22.23
HSUPA Subtest 3	826.4	24	21.78
	836.4	24	22.15
	846.6	24	22.18
HSUPA Subtest 4	826.4	24	21.15
	836.4	24	22.11
	846.6	24	22.18
HSUPA Subtest 5	826.4	24	21.16
	836.4	24	21.90
	846.6	24	21.99

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)
Note: CM=1 for β_c/β_d=12/15, β_{hs}/β_c=24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 - Pr. TheARpl is the attenuation of “reference path loss”, and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...

6.2.2 PROVISIONS APPLICABLE

Mode	FCC Part Section(s)	Nominal Peak Power
GPRS/EDGE 850	22.913(a)(2)	<=38.45dBm (7W). ERP
GPRS/EDGE 1900	24.232(c)	<=33dBm (2W). EIRP
UMTS BAND II	24.232(c)	<=33dBm (2W).EIRP
UMTS BANDV	22.913(a)(2)	<=38.45dBm (7W).ERP

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GPRS/EDGE 850				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	31.00	Horizontal	Pass
	836.6	31.05	Horizontal	Pass
	848.8	**31.19**	Horizontal	Pass
	824.2	29.26	Vertical	Pass
	836.6	29.42	Vertical	Pass
	848.8	29.24	Vertical	Pass
EDGE	824.2	25.13	Horizontal	Pass
	836.6	25.22	Horizontal	Pass
	848.8	25.24	Horizontal	Pass
	824.2	23.42	Vertical	Pass
	836.6	23.32	Vertical	Pass
	848.8	23.28	Vertical	Pass

Radiated Power (E.I.R.P) for GPRS/EDGE 1900				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	30.42	Horizontal	Pass
	1880.0	30.46	Horizontal	Pass
	1909.8	**30.53**	Horizontal	Pass
	1850.2	27.24	Vertical	Pass
	1880.0	27.29	Vertical	Pass
	1909.8	27.42	Vertical	Pass
EDGE	1850.2	24.46	Horizontal	Pass
	1880.0	24.24	Horizontal	Pass
	1909.8	24.33	Horizontal	Pass
	1850.2	21.00	Vertical	Pass
	1880.0	21.13	Vertical	Pass
	1909.8	21.09	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	**Frequency**	**Result**		**Conclusion**
		Max. Peak E.I.R.P (dBm)	**Polarization Of Max. E.I.R.P**	
UMTS	1852.4	**22.47**	Horizontal	Pass
	1880	22.37	Horizontal	Pass
	1907.6	22.42	Horizontal	Pass
	1852.4	19.49	Vertical	Pass
	1880	19.52	Vertical	Pass
	1907.6	19.46	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	**Frequency**	**Result**		**Conclusion**
		Max. Peak ERP (dBm)	**Polarization Of Max. ERP**	
UMTS	826.4	**22.42**	Horizontal	Pass
	836.4	22.19	Horizontal	Pass
	846.6	22.28	Horizontal	Pass
	826.4	19.35	Vertical	Pass
	836.4	19.27	Vertical	Pass
	846.6	19.42	Vertical	Pass

Note: Above is the worst mode data.

6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument’s resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	2.11	2.08	2.00
Peak-To-Average Ratio (dB)/EDGE	1.07	1.42	1.00

Modes	PCS1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	1.35	1.45	1.43
Peak-To-Average Ratio (dB)/EDGE	2.00	2.28	1.93

Modes	UMTS BAND II		
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	2.10	2.06	2.11

Modes	UMTS BAND V		
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	1.74	1.75	1.69

7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

7.3 MEASUREMENT RESULT

Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GPRS	LCH	247.07	316.4	PASS
		MCH	247.18	310.0	PASS
		HCH	244.68	312.1	PASS
	EDGE	LCH	242.21	303.1	PASS
		MCH	241.43	306.6	PASS
		HCH	245.74	308.8	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GPRS	LCH	245.64	311.1	PASS
		MCH	243.26	314.4	PASS
		HCH	244.76	312.4	PASS
	EDGE	LCH	245.64	311.1	PASS
		MCH	248.41	305.5	PASS
		HCH	247.37	310.1	PASS

For GSM

Test Band=GPRS850/PCS1900

Test Mode=GPRS/EDGE

GPRS 850-LCH-GSM	GPRS 850-MCH-GSM
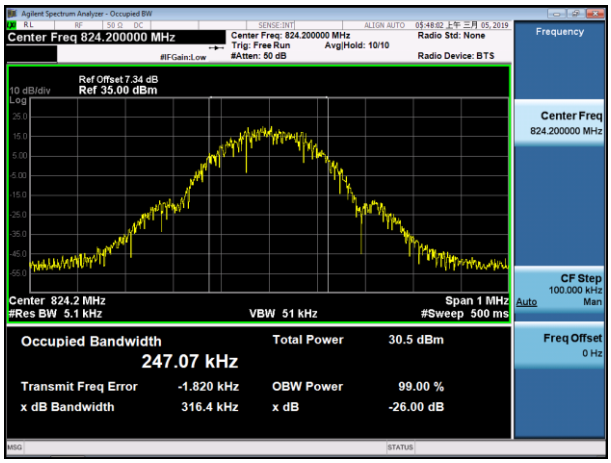	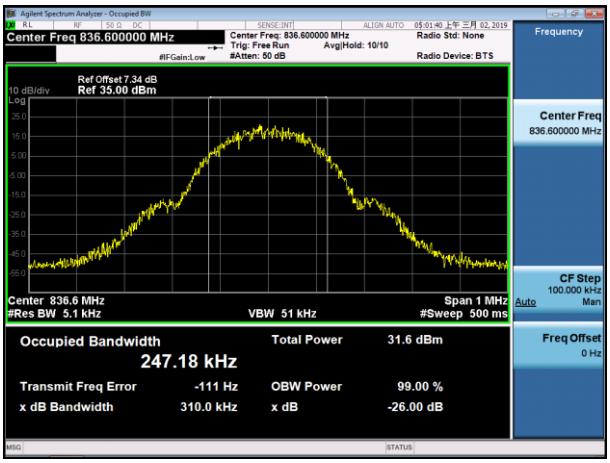
GPRS 850-HCH-GSM	**GPRS 850-LCH-EDGE**
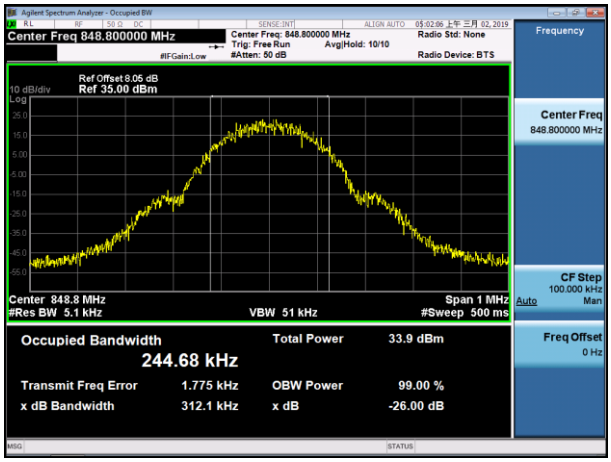	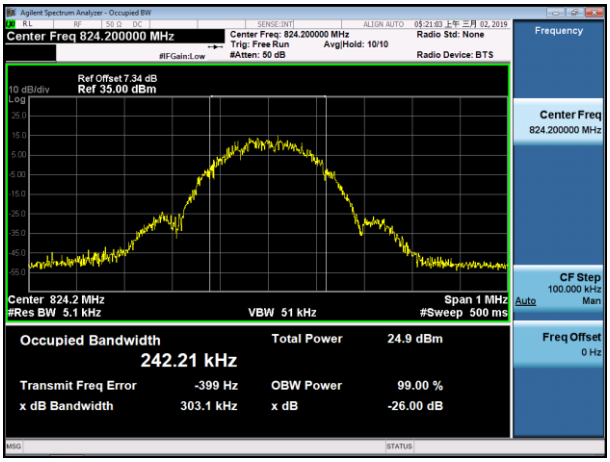

GPRS 850-MCH-EDGE	GPRS 850-HCH-EDGE
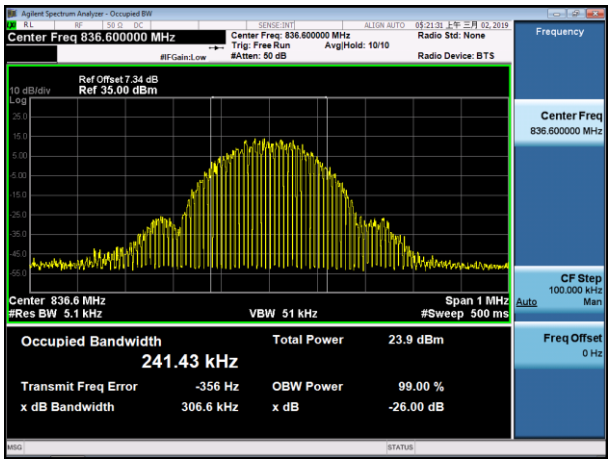	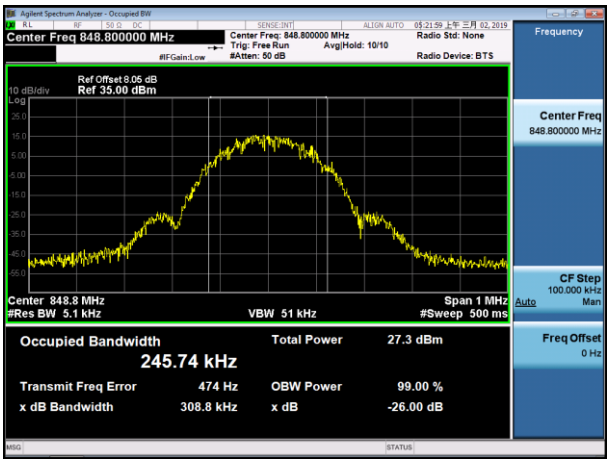

GPRS 1900-LCH-GSM	GPRS 1900-MCH-GSM
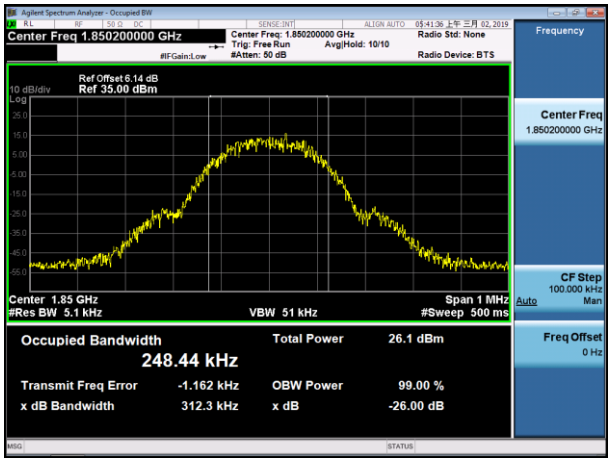	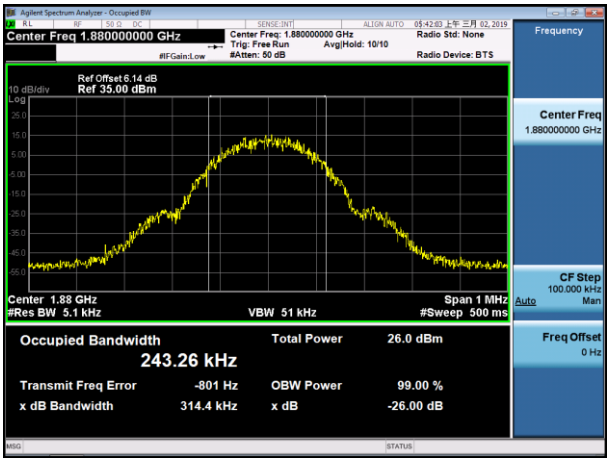

GPRS 1900-HCH-GSM	GPRS 1900-LCH-EGPRS
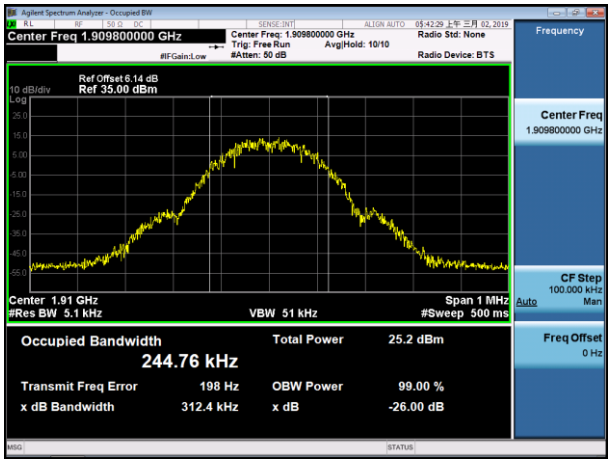	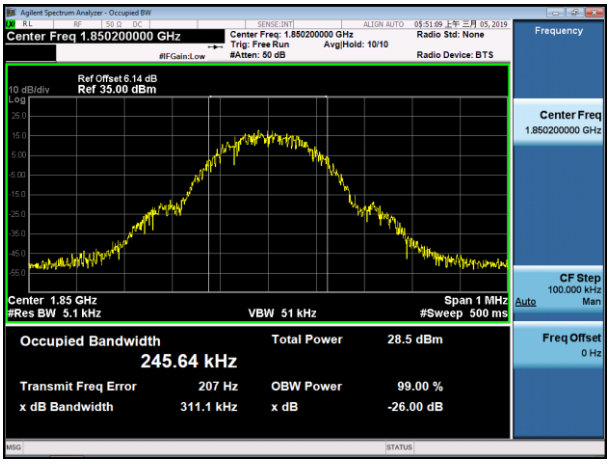

GPRS 1900-MCH-EGPRS	GPRS 1900-HCH-EGPRS
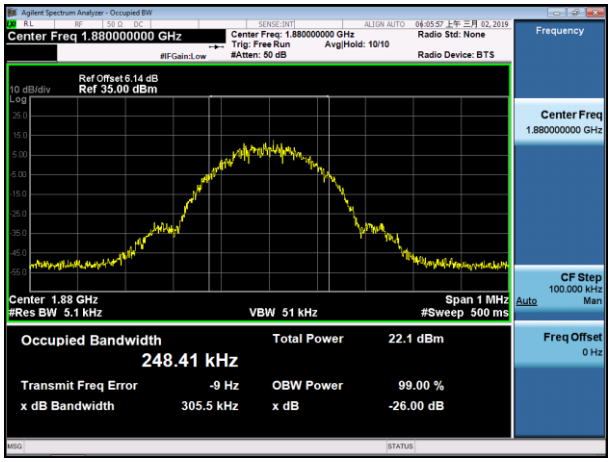	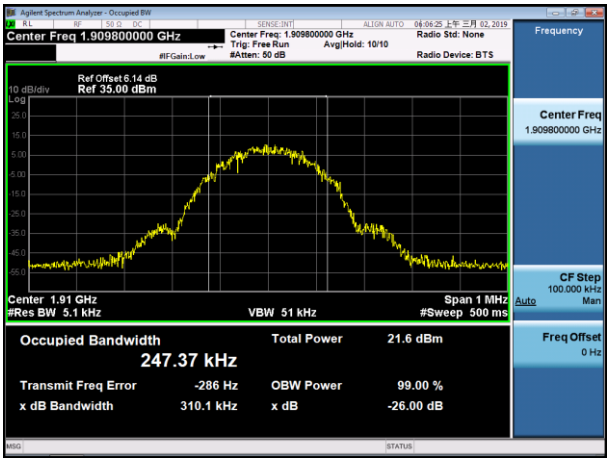

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4141.8	4640	PASS
		MCH	4130.7	4655	PASS
		HCH	4140.4	4654	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4158.0	4682	PASS
		MCH	4140.9	4677	PASS
		HCH	4161.6	4676	PASS

For WCDMA

Test Band=WCDMA850/WCDMA1900

Test Mode=UMTS

WCDMA 850-LCH	WCDMA 850-MCH
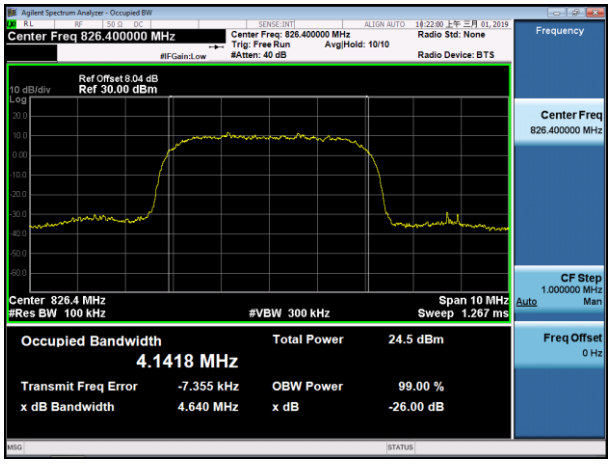	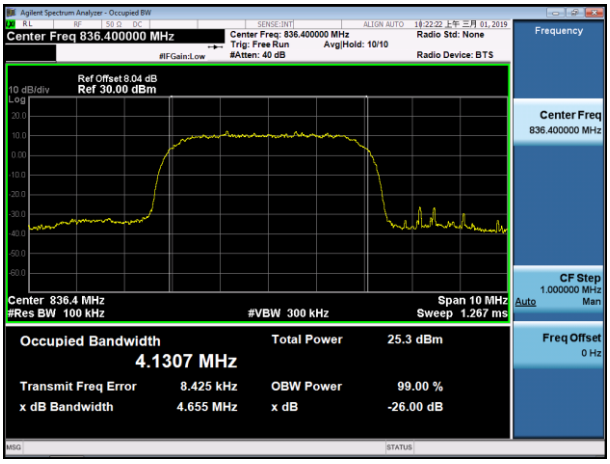

WCDMA 850-HCH	WCDMA 1900-LCH
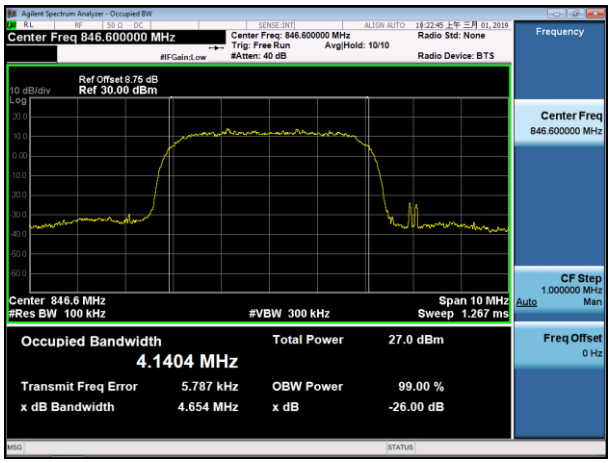	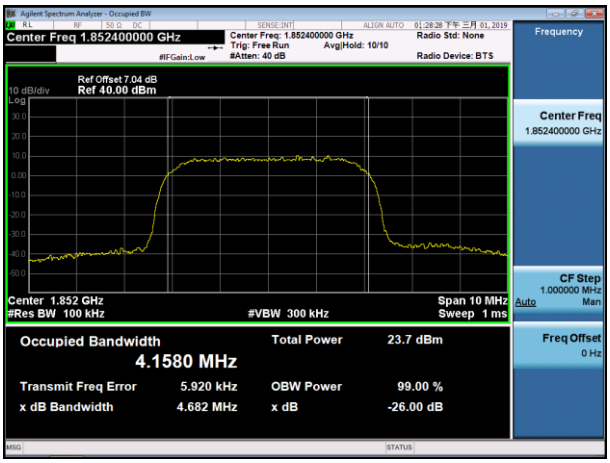

WCDMA 1900-MCH	WCDMA 1900-HCH
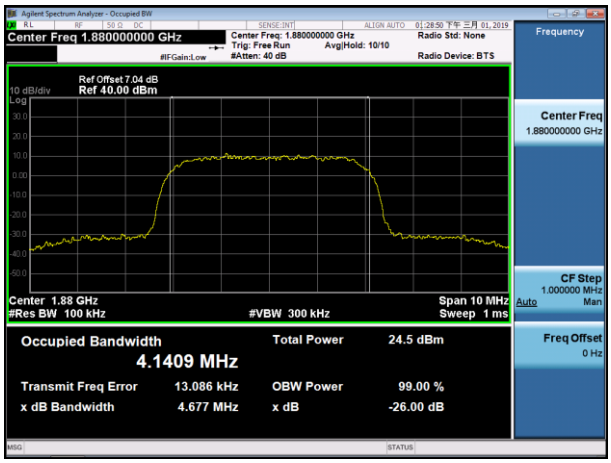	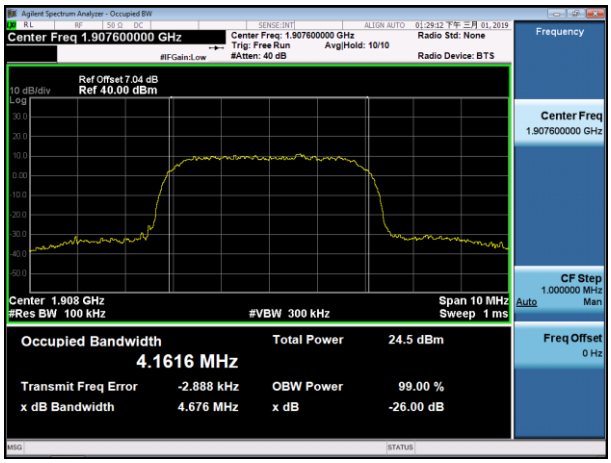

8. BAND EDGE

8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW>1% of the emission bandwidth, VBW >=3 x RBW, Detector=RMS, Number of points>=2 x Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) 、24.238(a)and KDB 971168 D1 V03R01.

8.3 MEASUREMENT RESULT

Test Results

For GSM

Test Band=GPRS850/GPRS1900

Test Mode=GPRS/EDGE

GPRS 850-LCH-GSM	GPRS 850-HCH-GSM
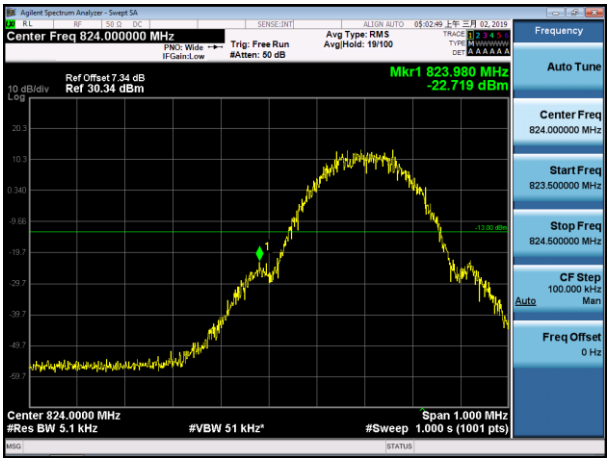	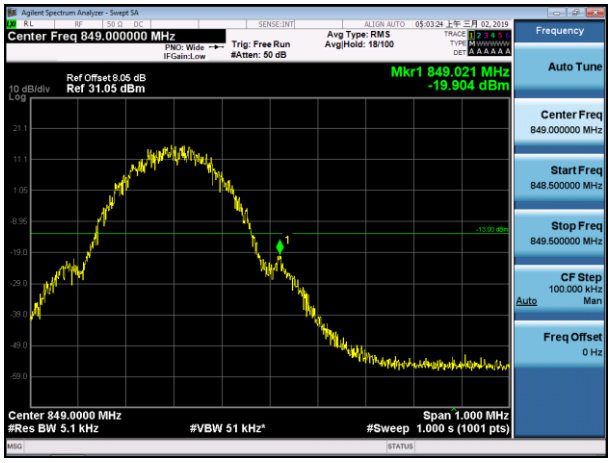

GPRS 850-LCH-EDGE	GPRS 850-HCH-EDGE
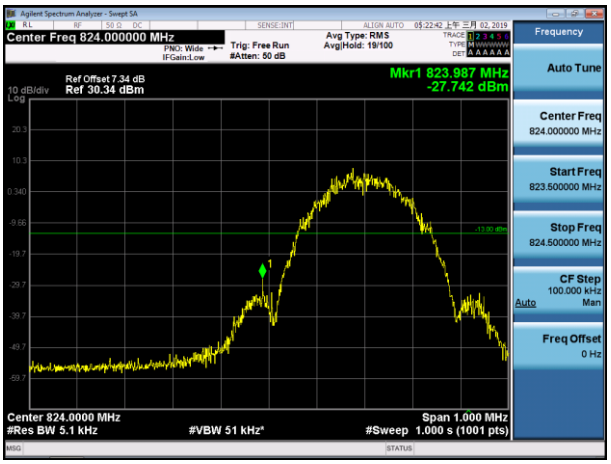	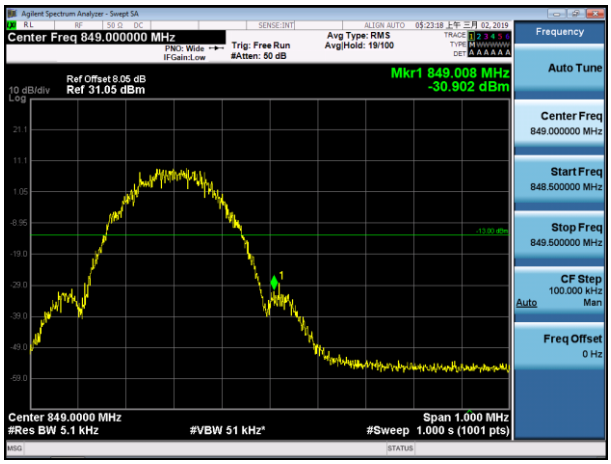

GPRS 1900-LCH-GSM	GPRS 1900-HCH-GSM
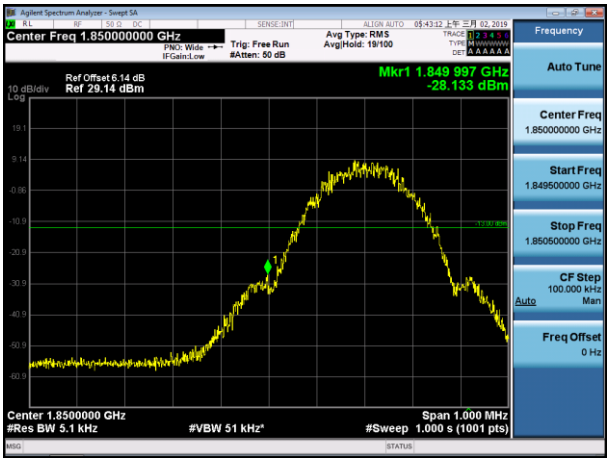	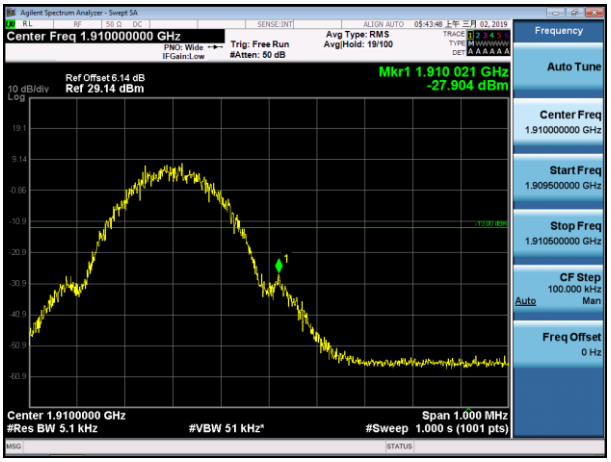

GPRS 1900-LCH-EDGE	GPRS 1900-HCH-EDGE
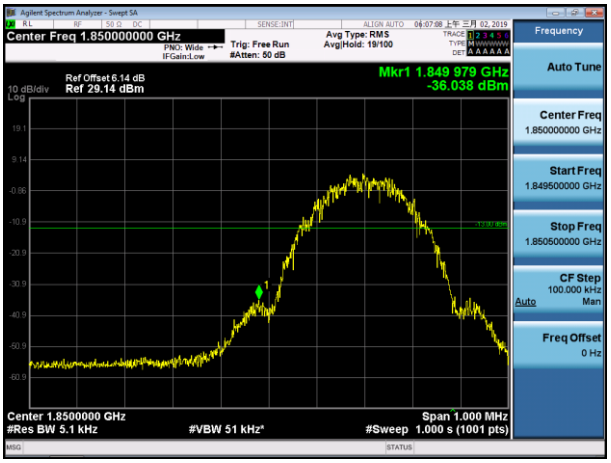	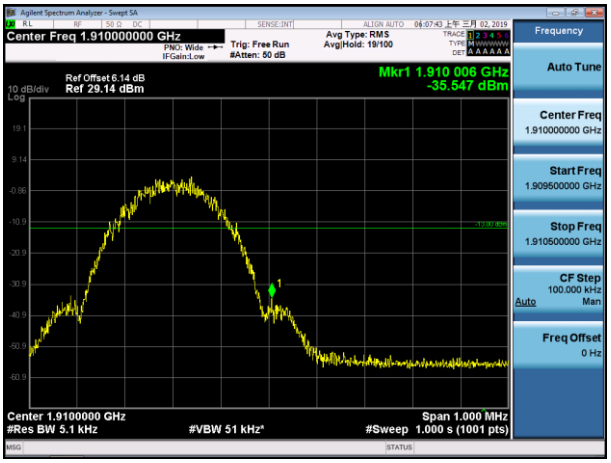

For WCDMA

Test Band=WCDMA850/WCDMA1900

Test Mode=UMTS

WCDMA 850-LCH	WCDMA 850-HCH
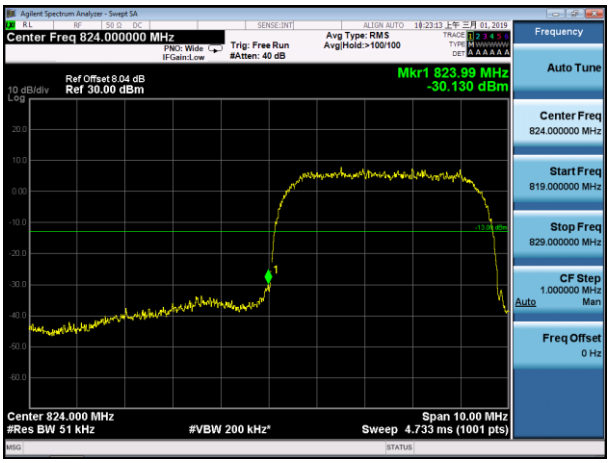	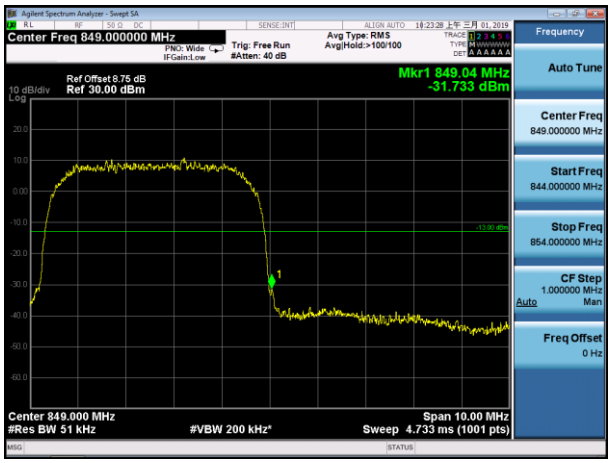

WCDMA 1900-LCH	WCDMA 1900-HCH
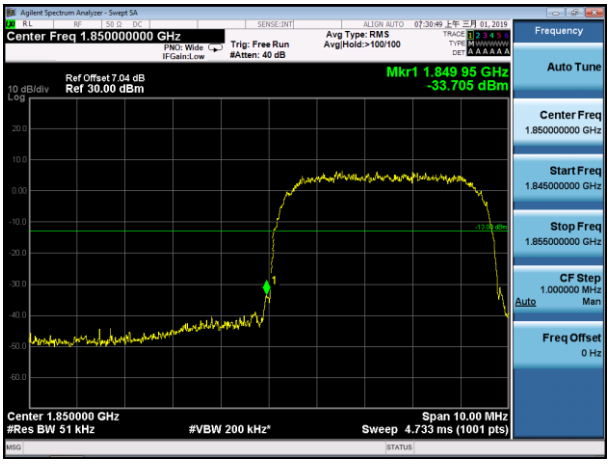	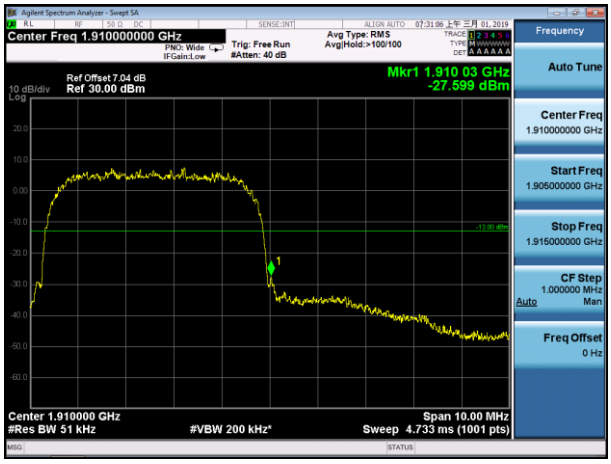

9. SPURIOUS EMISSION

9.1 CONDUCTED SPURIOUS EMISSION

9.1.1MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.

2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

3. Determine EUT transmit frequencies: the following typical channelswere chosen to conducted emissions testing.

Typical Channels for testing of GPRS 850	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880
9538	1907.6

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4182	836.4
4233	846.6

9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

9.1.3MEASUREMENT RESULT

Test Results

Test Band=GPRS850/GPRS1900

Test Mode=GPRS/EDGE

GPRS 850-LCH-GSM	GPRS 850-LCH-GSM
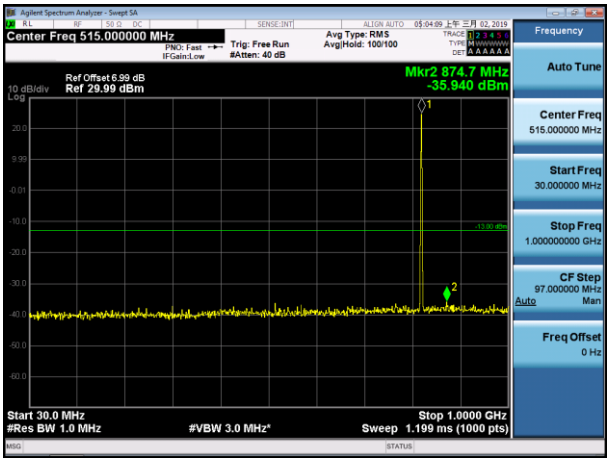	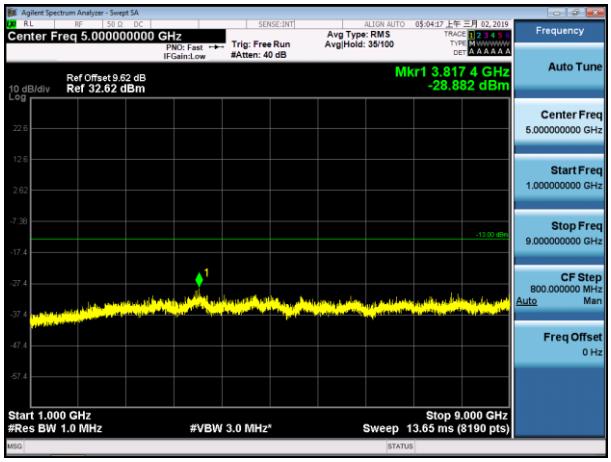

GPRS 850-MCH-GSM	GPRS 850-MCH-GSM
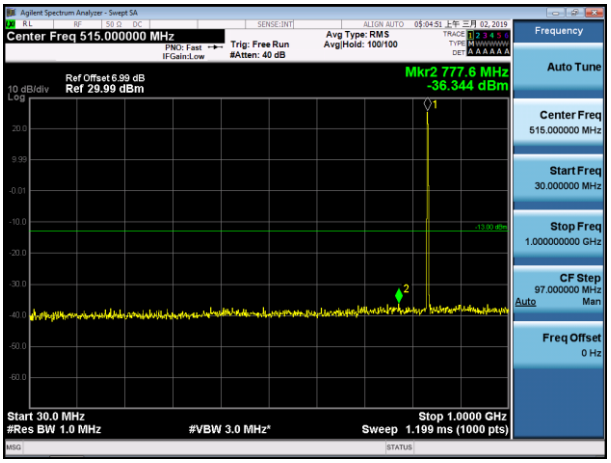	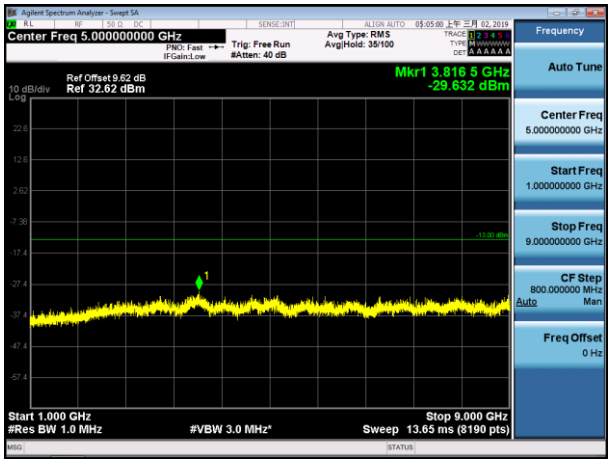

GPRS 850-HCH-GSM	GPRS 850-HCH-GSM
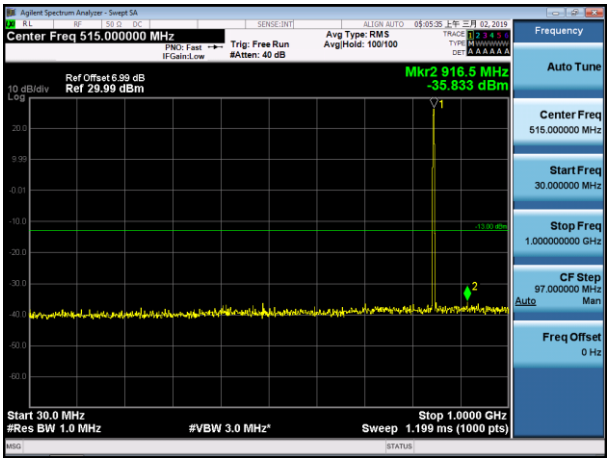	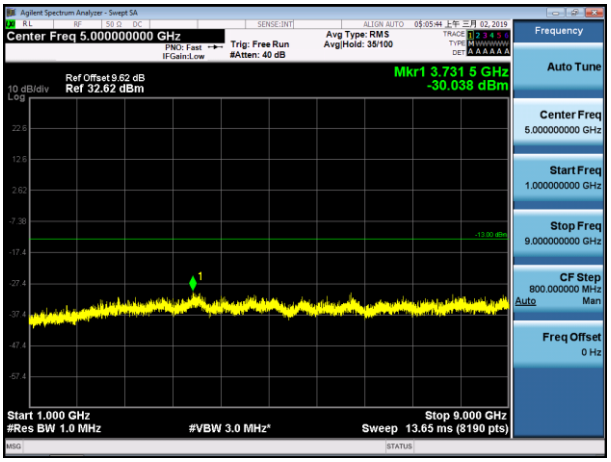

GPRS 850-LCH-EDGE	GPRS 850-LCH- EDGE
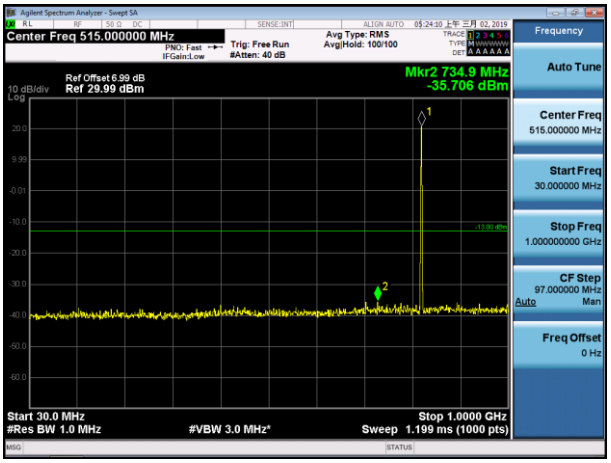	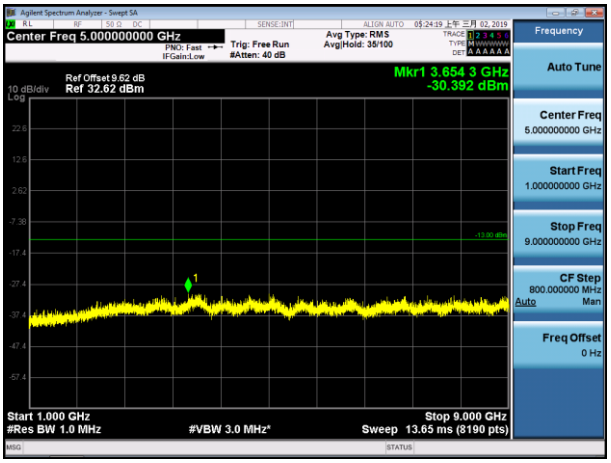
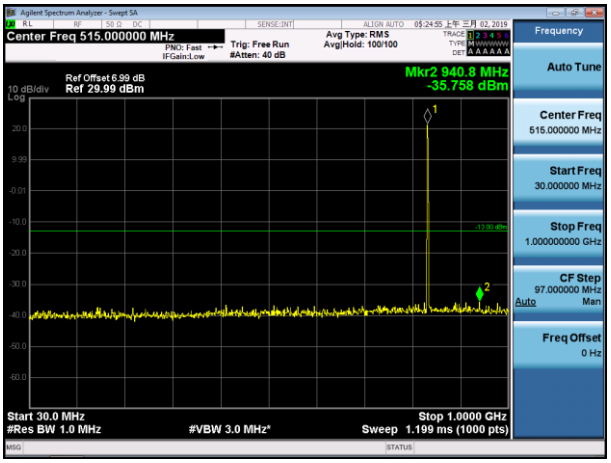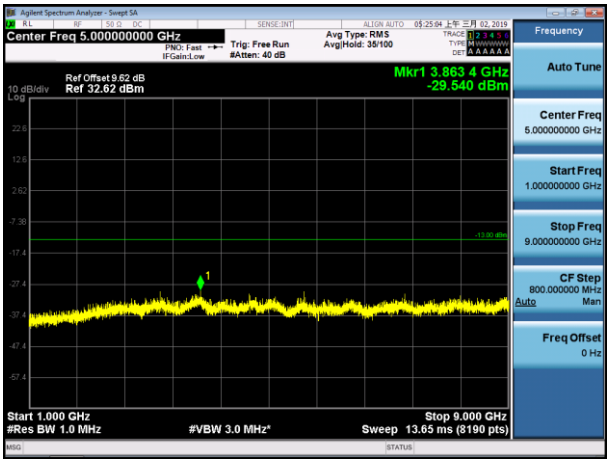
GPRS 850-MCH-EDGE	GPRS 850-MCH-EDGE