

FCC TEST REPORT

Client Name : INDUSTRIA FUEGUINA DE RELOJERIA
ELECTRONICA SA

Address : SARMIENTO 2920, RIO GRANDE, Argentina 9420

Product Name : SMARTWAY L1

Date : Apr. 17, 2019

Shenzhen Anbotech Compliance Laboratory Limited

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	7
1.4. Description of Test Modes.....	7
1.5. Description Of Test Setup.....	8
1.6. Test Equipment List.....	10
1.7. Measurement Uncertainty.....	11
1.8. Description of Test Facility.....	11
2. Summary of Test.....	12
2.1. Summary of test result.....	12
2.2. Test mode.....	12
3. RF Output Power Test.....	15
3.1. Test Standard and Limit.....	15
3.2. Test Setup.....	15
3.3. Test Procedure.....	15
3.4. Test Data.....	15
4. Peak-Average Ratio.....	45
4.1. Test Standard and Limit.....	45
4.2. Test Setup.....	45
4.3. Test Procedure.....	45
4.4. Test Data.....	45
5. Modulation Characteristic.....	125
6. Occupied Bandwidth.....	126
6.1. Test Standard and Limit.....	126
6.2. Test Setup.....	126
6.3. Test Procedure.....	126
6.4. Test Data.....	126
7. Spurious Emissions at Antenna Terminals.....	168
7.1. Test Standard and Limit.....	168
7.2. Test Setup.....	168
7.3. Test Procedure.....	168
7.4. Test Data.....	168
8. Spurious Radiated Emissions.....	405
8.1. Test Standard and Limit.....	405
8.2. Test Setup.....	405
8.3. Test Procedure.....	405
8.4. Test Data.....	405
9. Band Edge Compliance.....	409
9.1. Test Standard and Limit.....	409

9.2. Test Setup.....	409
9.3. Test Procedure.....	409
9.4. Test Data.....	409
10. Frequency Stability.....	440
10.1. Test Standard and Limit.....	440
10.2. Test Setup.....	440
10.3. Test Procedure.....	440
10.4. Test Data.....	440
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	447
APPENDIX II -- PHOTOGRAPH.....	448

TEST REPORT

Applicant : INDUSTRIA FUEGUINA DE RELOJERIA ELECTRONICA SA
Manufacturer : Shen Zhen Cheng Fong Digital-tech Ltd
Product Name : SMARTWAY L1
Model No. : L1
Trade Mark : KODAK
Rating(s) : Input: DC 5V, 1A(Via adapter Input: AC 100~240V, 50/60Hz, Max: 0.15A; with DC 3.8V, 2000mAh Battery inside)

Test Standard(s) : FCC PART 2, FCC Part 22(H) :2018, FCC Part 24(E):2018, FCC Part 27: 2018

Test Method(s) : ANSI C63.26-2015, KDB971168 D01 v03

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 22/FCC Part 24/FCC Part 27 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Mar. 13, 2019

Date of Test :

Mar. 13~Apr. 16, 2019

Prepared by :



Oliay Yang

(Engineer / Oliay Yang)

Reviewer :

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer :

Sally Zhang

(Manager / Sally Zhang)

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

1. General Information

1.1. Client Information

Applicant	:	INDUSTRIA FUEGUINA DE RELOJERIA ELECTRONICA SA
Address	:	SARMIENTO 2920, RIO GRANDE, Argentina 9420
Manufacturer	:	Shen Zhen Cheng Fong Digital-tech Ltd
Address	:	Building A, ChengFong Industrial Area, HuaXing Rd, DaLang, LongHua, Shenzhen, China
Factory	:	INDUSTRIA FUEGUINA DE RELOJERIA ELECTRONICA SA
Address	:	SARMIENTO 2920, RIO GRANDE, Argentina 9420

1.2. Description of Device (EUT)

Product Name	:	SMARTWAY L1
Model No.	:	L1
Trade Mark	:	KODAK
Test Sample NO.	:	1-2-1(Normal Sample)
Test Power Supply	:	DC 3.8V Battery inside
Product Description	:	Operation Frequency: BDR+EDR: 2402MHz~2480MHz BLE: 2402MHz~2480MHz 802.11b/ g/ n(HT20) 2412-2462MHz 802.11n(HT40) 2422-2452MHz GSM/GPRS 850 TX:824.2~848.8 MHz; RX:869.2~893.8 MHz PCS/GPRS 1900 TX:1850.2~1909.8 MHz; RX:1930.2~1989.8 MHz UMTS-FDD Band 5 TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band 2 TX:1852.4~1907.6 MHz; RX: 1932.4~1987.6 MHz LTE-FDD Band 2 TX: 1850.7 ~ 1909.3 MHz; RX: 1930.7 ~ 1989.3 MHz LTE-FDD Band 4 TX:1710.7 ~ 1754.3 MHz; RX: 2110.7 ~ 2154.3 MHz LTE-FDD Band 7 TX:2502.5 ~ 2567.5 MHz; RX: 2625.5 ~ 2687.5 MHz
	:	Number of Channel: BDR+EDR: 79 Channels BLE: 40 Channels

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com


Hotline
400-003-0500
www.anbotech.com

	802.11b/ g/ n(HT20): 11 Channels 802.11n(HT40): 7 Channels
Transfer Rate:	BDR+EDR: 1/2/3 Mbits/s BLE:1 Mbits/s 802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 150Mbps
GPRS Class	8/10/12
Modulation Type:	GSM/GPRS: GMSK WCDMA: BPSK, 16QAM; LTE: QPSK, 16QAM BDR+EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK BLE:GFSK 802.11b: CCK; 802.11g/n: OFDM
Antenna Type:	GSM/GPRS: PIFA Antenna WCDMA: PIFA Antenna LTE: PIFA Antenna BDR+EDR: PIFA Antenna BLE: PIFA Antenna 802.11b/ g/ n(HT20/HT40): PIFA Antenna
Antenna Gain(Peak):	GSM 850: -1.5 dBi PCS 1900: -0.8 dBi UMTS-FDD Band 2: -0.7 dBi UMTS-FDD Band 5: -1.6 dBi LTE-FDD Band 2: -0.6 dBi LTE-FDD Band 4: -0.6 dBi LTE-FDD Band 7: -1 dBi BDR+EDR:0.6 dBi BLE: 0.6 dBi 802.11b/ g/ n(HT20/HT40): 0.4 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2) This report is for GSM&WCDMA<E module.

1.3. Auxiliary Equipment Used During Test

Adapter	:	MODEL: K-T50501000U1 INPUT: 100-240V~ 50/60Hz, 0.15A Output: DC 5V, 1000mA
---------	---	--


1.4. Description of Test Modes

The following is the description of how the EUT is exercised during testing.


Test	Description Of Operation
Emissions Testing	The EUT was communicating with base station.
Others Testing	The EUT was communicating with base station.

1.5. Description Of Test Setup

1.5.1 Conducted Test Setup

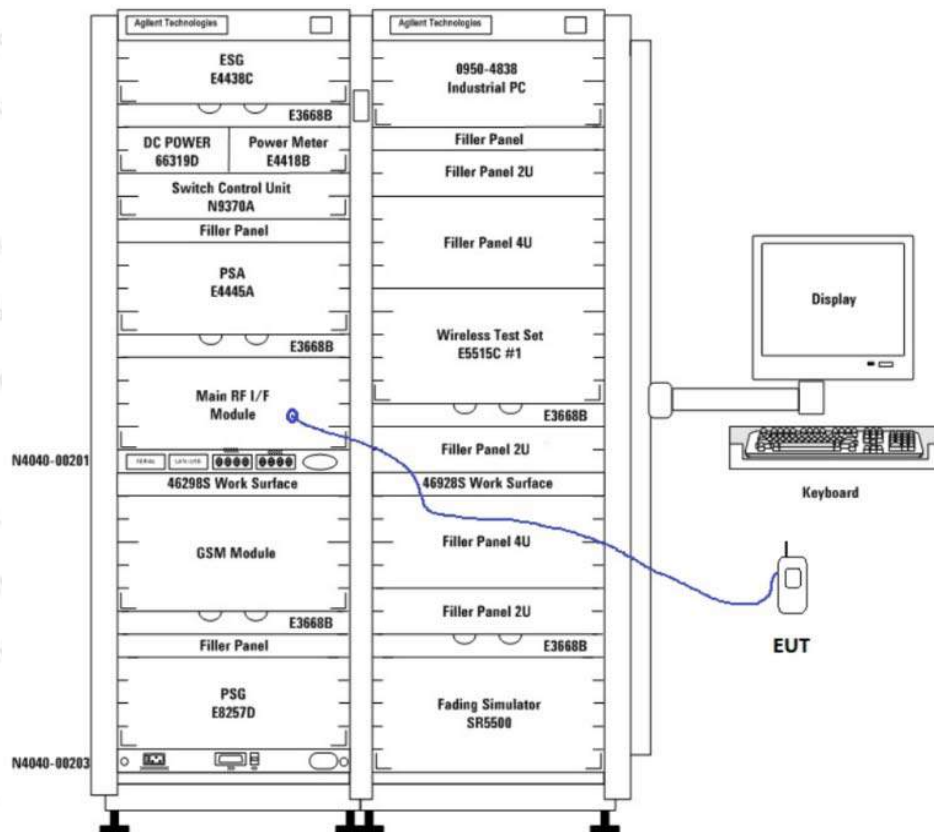

1.5.2 Radiated Test Setup

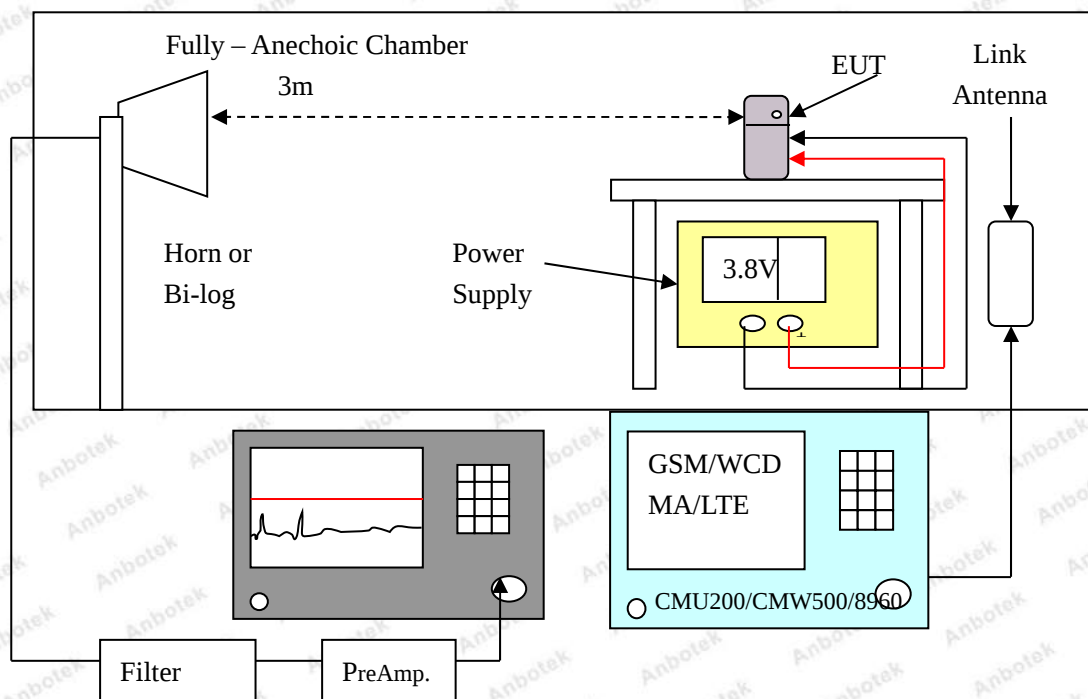

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
2.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 19, 2018	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
6.	Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	01109	Nov. 20, 2018	1 Year
7.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
10.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
11.	DC Power Supply	LW	TPR-6420D	374470	Oct. 31, 2018	1 Year
12.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Nov. 01, 2018	1 Year
13.	Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	117888	Nov. 05, 2018	1 Year
14.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	104209	Nov. 05, 2018	1 Year
15.	High-Pass Filter	CDKMV	ZHPF-BM1100-4000-0730	B2015094550	Nov. 08, 2018	1 Year
16.	High-Pass Filter	CDKMV	ZHPF-M3.5-18G-3834	1307006523	Nov. 05, 2018	1 Year
17.	4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063507	Nov. 05, 2018	1 Year
18.	4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063513	Nov. 05, 2018	1 Year

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

 Hotline
400-003-0500
www.anbotech.com

1.7. Measurement Uncertainty

Maximum measurement uncertainty

Parameter	Uncertainty
RF output power, conducted	±1,5 dB
Power Spectral Density, conducted	±3 dB
Unwanted Emissions, conducted	±3 dB
All emissions, radiated	±6 dB
Temperature	±1 °C
Humidity	±5 %
DC and low frequency voltages	±3 %
Time	±5 %
Confidence interval: 95%. Confidence factor:k=2	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com

2. Summary of Test

2.1. Summary of test result

FCC Rules	Description of Test	Result
§2.1046; § 22.913(a); § 24.232(c); § 27.50(c.10); § 27.50(d.4)	RF Output Power	Compliance
§ 24.232 (d); § 27.50(d)	Peak-Average Ratio	Compliance
§ 2.1047	Modulation Characteristics	N/A
§ 2.1049; § 22.905; § 22.917; § 24.238; § 27.53(a.5)	99% & -26 dB Occupied Bandwidth	Compliance
§ 2.1051; § 22.917(a); § 24.238(a); § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917(a); § 24.238(a); § 27.53(h)	Field Strength of Spurious Radiation	Compliance
§ 22.917(a); § 24.238(a); § 27.53(h)	Out of band emission, Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; § 27.5(h); § 27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

2.2. Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level in each test mode and channel as below:

Temperature range	21-25℃
Humidity range	40-75%
Pressure range	86-106kPa

Mode	Channel	Frequency(MHz)
GSM 850	128	824.2
	190	836.6
	251	848.8
PCS 1900	512	1850.2
	661	1880.0
	810	1909.8
UMTS BAND V	4132	826.4
	4182	836.4
	4233	846.6
UMTS BAND II	9262	1852.4
	9400	1880.0
	9538	1907.6

Support Band	Test Mode BW(MHz)	Channel Frequency	Channel Number
LTE Band 2	1.4	1850.7 MHz	18607
		1880.0 MHz	18900
		1909.3 MHz	19193
	3	1851.5 MHz	18615
		1880.0 MHz	18900
		1908.5 MHz	19185
	5	1852.5 MHz	18625
		1880.0 MHz	18900
		1907.5 MHz	19175
	10	1855.0 MHz	18650
		1880.0 MHz	18900
		1905.0 MHz	19150
	15	1857.5 MHz	18675
		1880.0 MHz	18900
		1902.5 MHz	19125
	20	1860.0 MHz	18700
		1880.0 MHz	18900
		1900.0 MHz	19100

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com

 Hotline
400-003-0500
www.anbotech.com


LTE Band 4	1.4	1710.7 MHz	19957
		1732.5 MHz	20175
		1754.3 MHz	20393
	3	1711.5 MHz	19965
		1732.5 MHz	20175
		1753.5 MHz	20385
	5	1712.5 MHz	19975
		1732.5 MHz	20175
		1752.5 MHz	20375
	10	1715.0 MHz	20000
		1732.5 MHz	20175
		1750.0 MHz	20350
LTE Band 7	15	1717.5 MHz	20025
		1732.5 MHz	20175
		1747.5 MHz	20325
	20	1720.0 MHz	20050
		1732.5 MHz	20175
		1745.0 MHz	20300
	5	2502.5 MHz	20775
		2535 MHz	21100
		2567.5 MHz	21425
	10	2505 MHz	20800
		2535 MHz	21100
		2565 MHz	21400
	15	2507.5 MHz	20825
		2535 MHz	21100
		2562.5 MHz	21375
	20	2510 MHz	20850
		2535 MHz	21100
		2560 MHz	21350

3. RF Output Power Test

3.1. Test Standard and Limit

Spec	Item	Requirement
§22.913 (a)	a)	ERP:38.5dBm
§24.232 (c)	b)	EIRP:33dBm
§27.50 (c)	c)	EIRP:30dBm

3.2. Test Setup

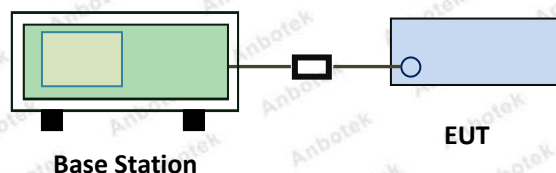

3.3. Test Procedure

For Conducted Power:

The transmitter output port was connected to base station.

Set EUT at maximum power through base station.

Select lowest, middle, and highest channels for each band and different test mode.

For ERP/EIRP:

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TX power in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts).

3.4. Test Data

Please to see the following pages

Conducted Power:

GSM Mode:

Band	Channel	PCL	Power(dBm)	Limit(dBm)	Verdict
GSM850	128	5	29.46	38.5	PASS
GSM850	190	5	29.77	38.5	PASS
GSM850	251	5	29.97	38.5	PASS
GSM1900	512	0	28.85	33	PASS
GSM1900	661	0	28.53	33	PASS
GSM1900	810	0	28.64	33	PASS

GPRS Mode:

Band	Channel	PCL	Slot	Power(dBm)	Limit(dBm)	Verdict
GPRS850	128	5	1	29.55	38.5	PASS
GPRS850	128	5	2	27.13	38.5	PASS
GPRS850	128	5	3	25.84	38.5	PASS
GPRS850	128	5	4	24.41	38.5	PASS
GPRS850	190	5	1	29.71	38.5	PASS
GPRS850	190	5	2	27.25	38.5	PASS
GPRS850	190	5	3	26.05	38.5	PASS
GPRS850	190	5	4	24.54	38.5	PASS
GPRS850	251	5	1	30.26	38.5	PASS
GPRS850	251	5	2	27.81	38.5	PASS
GPRS850	251	5	3	26.21	38.5	PASS
GPRS850	251	5	4	24.77	38.5	PASS
GPRS1900	512	0	1	28.97	33	PASS
GPRS1900	512	0	2	28.74	33	PASS
GPRS1900	512	0	3	26.32	33	PASS
GPRS1900	512	0	4	25.05	33	PASS
GPRS1900	661	0	1	28.57	33	PASS
GPRS1900	661	0	2	28.40	33	PASS
GPRS1900	661	0	3	26.41	33	PASS
GPRS1900	661	0	4	26.81	33	PASS
GPRS1900	810	0	1	27.71	33	PASS
GPRS1900	810	0	2	28.44	33	PASS
GPRS1900	810	0	3	26.35	33	PASS
GPRS1900	810	0	4	24.97	33	PASS

WCDMA Mode:

Band	Channel	Power(dBm)	Limit(dBm)	Verdict
Band II	9262	23.59	33	PASS
Band II	9400	23.44	33	PASS
Band II	9538	23.64	33	PASS
Band V	4132	20.52	38.5	PASS
Band V	4182	20.63	38.5	PASS
Band V	4233	20.91	38.5	PASS

Band	Channel	SubTest	Power(dBm)	Limit(dBm)	Verdict
Band II	9262	HSDPA_Sub1	22.08	33	PASS
Band II	9262	HSDPA_Sub2	21.12	33	PASS
Band II	9262	HSDPA_Sub3	21.90	33	PASS
Band II	9262	HSDPA_Sub4	21.91	33	PASS
Band II	9400	HSDPA_Sub1	21.67	33	PASS
Band II	9400	HSDPA_Sub2	21.42	33	PASS
Band II	9400	HSDPA_Sub3	20.61	33	PASS
Band II	9400	HSDPA_Sub4	21.08	33	PASS
Band II	9538	HSDPA_Sub1	22.44	33	PASS
Band II	9538	HSDPA_Sub2	22.40	33	PASS
Band II	9538	HSDPA_Sub3	20.87	33	PASS
Band II	9538	HSDPA_Sub4	20.85	33	PASS
Band V	4132	HSDPA_Sub1	20.33	38.5	PASS
Band V	4132	HSDPA_Sub2	20.36	38.5	PASS
Band V	4132	HSDPA_Sub3	20.32	38.5	PASS
Band V	4132	HSDPA_Sub4	21.29	38.5	PASS
Band V	4182	HSDPA_Sub1	20.35	38.5	PASS
Band V	4182	HSDPA_Sub2	21.48	38.5	PASS
Band V	4182	HSDPA_Sub3	20.73	38.5	PASS
Band V	4182	HSDPA_Sub4	21.15	38.5	PASS
Band V	4233	HSDPA_Sub1	21.47	38.5	PASS
Band V	4233	HSDPA_Sub2	21.01	38.5	PASS
Band V	4233	HSDPA_Sub3	22.12	38.5	PASS
Band V	4233	HSDPA_Sub4	20.82	38.5	PASS

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

 Hotline
400-003-0500
www.anbotech.com

Band	Channel	SubTest	Power(dBm)	Limit(dBm)	Verdict
Band II	9262	HSUPA_Sub1	20.44	33	PASS
Band II	9262	HSUPA_Sub2	21.11	33	PASS
Band II	9262	HSUPA_Sub3	21.26	33	PASS
Band II	9262	HSUPA_Sub4	21.21	33	PASS
Band II	9262	HSUPA_Sub5	20.74	33	PASS
Band II	9400	HSUPA_Sub1	22.07	33	PASS
Band II	9400	HSUPA_Sub2	21.33	33	PASS
Band II	9400	HSUPA_Sub3	20.77	33	PASS
Band II	9400	HSUPA_Sub4	21.26	33	PASS
Band II	9400	HSUPA_Sub5	20.73	33	PASS
Band II	9538	HSUPA_Sub1	20.49	33	PASS
Band II	9538	HSUPA_Sub2	20.63	33	PASS
Band II	9538	HSUPA_Sub3	20.72	33	PASS
Band II	9538	HSUPA_Sub4	20.47	33	PASS
Band II	9538	HSUPA_Sub5	20.80	33	PASS
Band V	4132	HSUPA_Sub1	20.34	38.5	PASS
Band V	4132	HSUPA_Sub2	20.51	38.5	PASS
Band V	4132	HSUPA_Sub3	20.40	38.5	PASS
Band V	4132	HSUPA_Sub4	21.04	38.5	PASS
Band V	4132	HSUPA_Sub5	20.89	38.5	PASS
Band V	4182	HSUPA_Sub1	21.15	38.5	PASS
Band V	4182	HSUPA_Sub2	20.90	38.5	PASS
Band V	4182	HSUPA_Sub3	21.40	38.5	PASS
Band V	4182	HSUPA_Sub4	21.01	38.5	PASS
Band V	4182	HSUPA_Sub5	20.72	38.5	PASS
Band V	4233	HSUPA_Sub1	21.20	38.5	PASS
Band V	4233	HSUPA_Sub2	20.62	38.5	PASS
Band V	4233	HSUPA_Sub3	20.45	38.5	PASS
Band V	4233	HSUPA_Sub4	21.14	38.5	PASS
Band V	4233	HSUPA_Sub5	21.31	38.5	PASS

LTE Mode:

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	24.02	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	24.07	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	23.54	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	23.62	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	23.60	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	23.64	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	22.60	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	22.99	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	22.96	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	22.82	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	22.93	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	22.90	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	22.93	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	21.88	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	23.16	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	23.35	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	23.19	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	23.19	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	23.18	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	23.17	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	22.24	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	23.17	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	23.15	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	22.65	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	23.60	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	23.62	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	23.65	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	21.46	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	21.93	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	22.09	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	21.94	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	22.92	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	22.93	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	22.91	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	20.89	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	22.21	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	22.32	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	22.15	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	23.18	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	23.22	PASS

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com



Hotline
400-003-0500

www.anbotech.com

Band2	1.4MHz	16QAM	19193	3RB#3	23.16	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	21.20	PASS
Band2	3MHz	QPSK	18615	1RB#0	23.49	PASS
Band2	3MHz	QPSK	18615	1RB#8	23.47	PASS
Band2	3MHz	QPSK	18615	1RB#14	23.52	PASS
Band2	3MHz	QPSK	18615	8RB#0	22.59	PASS
Band2	3MHz	QPSK	18615	8RB#4	22.51	PASS
Band2	3MHz	QPSK	18615	8RB#7	22.56	PASS
Band2	3MHz	QPSK	18615	15RB#0	22.47	PASS
Band2	3MHz	QPSK	18900	1RB#0	23.03	PASS
Band2	3MHz	QPSK	18900	1RB#8	22.93	PASS
Band2	3MHz	QPSK	18900	1RB#14	22.93	PASS
Band2	3MHz	QPSK	18900	8RB#0	21.91	PASS
Band2	3MHz	QPSK	18900	8RB#4	21.78	PASS
Band2	3MHz	QPSK	18900	8RB#7	21.78	PASS
Band2	3MHz	QPSK	18900	15RB#0	21.88	PASS
Band2	3MHz	QPSK	19185	1RB#0	23.19	PASS
Band2	3MHz	QPSK	19185	1RB#8	23.20	PASS
Band2	3MHz	QPSK	19185	1RB#14	23.22	PASS
Band2	3MHz	QPSK	19185	8RB#0	22.36	PASS
Band2	3MHz	QPSK	19185	8RB#4	22.27	PASS
Band2	3MHz	QPSK	19185	8RB#7	22.22	PASS
Band2	3MHz	QPSK	19185	15RB#0	22.19	PASS
Band2	3MHz	16QAM	18615	1RB#0	22.61	PASS
Band2	3MHz	16QAM	18615	1RB#8	22.51	PASS
Band2	3MHz	16QAM	18615	1RB#14	22.54	PASS
Band2	3MHz	16QAM	18615	8RB#0	22.60	PASS
Band2	3MHz	16QAM	18615	8RB#4	22.52	PASS
Band2	3MHz	16QAM	18615	8RB#7	22.55	PASS
Band2	3MHz	16QAM	18615	15RB#0	21.33	PASS
Band2	3MHz	16QAM	18900	1RB#0	21.90	PASS
Band2	3MHz	16QAM	18900	1RB#8	21.82	PASS
Band2	3MHz	16QAM	18900	1RB#14	21.79	PASS
Band2	3MHz	16QAM	18900	8RB#0	21.84	PASS
Band2	3MHz	16QAM	18900	8RB#4	21.80	PASS
Band2	3MHz	16QAM	18900	8RB#7	21.81	PASS
Band2	3MHz	16QAM	18900	15RB#0	20.80	PASS
Band2	3MHz	16QAM	19185	1RB#0	22.34	PASS
Band2	3MHz	16QAM	19185	1RB#8	22.26	PASS
Band2	3MHz	16QAM	19185	1RB#14	22.27	PASS
Band2	3MHz	16QAM	19185	8RB#0	22.35	PASS
Band2	3MHz	16QAM	19185	8RB#4	22.27	PASS

Band2	3MHz	16QAM	19185	8RB#7	22.23	PASS
Band2	3MHz	16QAM	19185	15RB#0	21.17	PASS
Band2	5MHz	QPSK	18625	1RB#0	23.47	PASS
Band2	5MHz	QPSK	18625	1RB#12	23.56	PASS
Band2	5MHz	QPSK	18625	1RB#24	23.46	PASS
Band2	5MHz	QPSK	18625	12RB#0	22.48	PASS
Band2	5MHz	QPSK	18625	12RB#6	22.47	PASS
Band2	5MHz	QPSK	18625	12RB#13	22.45	PASS
Band2	5MHz	QPSK	18625	25RB#0	22.53	PASS
Band2	5MHz	QPSK	18900	1RB#0	23.04	PASS
Band2	5MHz	QPSK	18900	1RB#12	23.03	PASS
Band2	5MHz	QPSK	18900	1RB#24	22.94	PASS
Band2	5MHz	QPSK	18900	12RB#0	21.99	PASS
Band2	5MHz	QPSK	18900	12RB#6	22.01	PASS
Band2	5MHz	QPSK	18900	12RB#13	21.83	PASS
Band2	5MHz	QPSK	18900	25RB#0	21.97	PASS
Band2	5MHz	QPSK	19175	1RB#0	23.22	PASS
Band2	5MHz	QPSK	19175	1RB#12	23.33	PASS
Band2	5MHz	QPSK	19175	1RB#24	23.25	PASS
Band2	5MHz	QPSK	19175	12RB#0	22.24	PASS
Band2	5MHz	QPSK	19175	12RB#6	22.25	PASS
Band2	5MHz	QPSK	19175	12RB#13	22.19	PASS
Band2	5MHz	QPSK	19175	25RB#0	22.27	PASS
Band2	5MHz	16QAM	18625	1RB#0	22.60	PASS
Band2	5MHz	16QAM	18625	1RB#12	22.69	PASS
Band2	5MHz	16QAM	18625	1RB#24	22.60	PASS
Band2	5MHz	16QAM	18625	12RB#0	22.50	PASS
Band2	5MHz	16QAM	18625	12RB#6	22.48	PASS
Band2	5MHz	16QAM	18625	12RB#13	22.47	PASS
Band2	5MHz	16QAM	18625	25RB#0	21.48	PASS
Band2	5MHz	16QAM	18900	1RB#0	22.00	PASS
Band2	5MHz	16QAM	18900	1RB#12	21.99	PASS
Band2	5MHz	16QAM	18900	1RB#24	21.89	PASS
Band2	5MHz	16QAM	18900	12RB#0	22.02	PASS
Band2	5MHz	16QAM	18900	12RB#6	21.99	PASS
Band2	5MHz	16QAM	18900	12RB#13	21.84	PASS
Band2	5MHz	16QAM	18900	25RB#0	20.97	PASS
Band2	5MHz	16QAM	19175	1RB#0	22.16	PASS
Band2	5MHz	16QAM	19175	1RB#12	22.29	PASS
Band2	5MHz	16QAM	19175	1RB#24	22.10	PASS
Band2	5MHz	16QAM	19175	12RB#0	22.31	PASS
Band2	5MHz	16QAM	19175	12RB#6	22.24	PASS

Band2	5MHz	16QAM	19175	12RB#13	22.17	PASS
Band2	5MHz	16QAM	19175	25RB#0	21.23	PASS
Band2	10MHz	QPSK	18650	1RB#0	23.53	PASS
Band2	10MHz	QPSK	18650	1RB#24	23.68	PASS
Band2	10MHz	QPSK	18650	1RB#49	23.45	PASS
Band2	10MHz	QPSK	18650	25RB#0	22.62	PASS
Band2	10MHz	QPSK	18650	25RB#12	22.61	PASS
Band2	10MHz	QPSK	18650	25RB#25	22.60	PASS
Band2	10MHz	QPSK	18650	50RB#0	22.59	PASS
Band2	10MHz	QPSK	18900	1RB#0	23.14	PASS
Band2	10MHz	QPSK	18900	1RB#24	23.11	PASS
Band2	10MHz	QPSK	18900	1RB#49	22.89	PASS
Band2	10MHz	QPSK	18900	25RB#0	22.18	PASS
Band2	10MHz	QPSK	18900	25RB#12	22.18	PASS
Band2	10MHz	QPSK	18900	25RB#25	21.93	PASS
Band2	10MHz	QPSK	18900	50RB#0	22.05	PASS
Band2	10MHz	QPSK	19150	1RB#0	23.14	PASS
Band2	10MHz	QPSK	19150	1RB#24	23.38	PASS
Band2	10MHz	QPSK	19150	1RB#49	23.26	PASS
Band2	10MHz	QPSK	19150	25RB#0	22.43	PASS
Band2	10MHz	QPSK	19150	25RB#12	22.44	PASS
Band2	10MHz	QPSK	19150	25RB#25	22.26	PASS
Band2	10MHz	QPSK	19150	50RB#0	22.32	PASS
Band2	10MHz	16QAM	18650	1RB#0	22.64	PASS
Band2	10MHz	16QAM	18650	1RB#24	22.70	PASS
Band2	10MHz	16QAM	18650	1RB#49	22.53	PASS
Band2	10MHz	16QAM	18650	25RB#0	22.62	PASS
Band2	10MHz	16QAM	18650	25RB#12	22.61	PASS
Band2	10MHz	16QAM	18650	25RB#25	22.63	PASS
Band2	10MHz	16QAM	18650	50RB#0	21.58	PASS
Band2	10MHz	16QAM	18900	1RB#0	22.04	PASS
Band2	10MHz	16QAM	18900	1RB#24	21.97	PASS
Band2	10MHz	16QAM	18900	1RB#49	21.80	PASS
Band2	10MHz	16QAM	18900	25RB#0	22.17	PASS
Band2	10MHz	16QAM	18900	25RB#12	22.19	PASS
Band2	10MHz	16QAM	18900	25RB#25	21.95	PASS
Band2	10MHz	16QAM	18900	50RB#0	21.06	PASS
Band2	10MHz	16QAM	19150	1RB#0	22.29	PASS
Band2	10MHz	16QAM	19150	1RB#24	22.49	PASS
Band2	10MHz	16QAM	19150	1RB#49	22.32	PASS
Band2	10MHz	16QAM	19150	25RB#0	22.42	PASS
Band2	10MHz	16QAM	19150	25RB#12	22.43	PASS

Band2	10MHz	16QAM	19150	25RB#25	22.26	PASS
Band2	10MHz	16QAM	19150	50RB#0	21.28	PASS
Band2	15MHz	QPSK	18675	1RB#0	23.60	PASS
Band2	15MHz	QPSK	18675	1RB#38	23.69	PASS
Band2	15MHz	QPSK	18675	1RB#74	23.43	PASS
Band2	15MHz	QPSK	18675	38RB#0	22.84	PASS
Band2	15MHz	QPSK	18675	38RB#18	22.88	PASS
Band2	15MHz	QPSK	18675	38RB#37	22.71	PASS
Band2	15MHz	QPSK	18675	75RB#0	22.79	PASS
Band2	15MHz	QPSK	18900	1RB#0	23.35	PASS
Band2	15MHz	QPSK	18900	1RB#38	23.23	PASS
Band2	15MHz	QPSK	18900	1RB#74	22.99	PASS
Band2	15MHz	QPSK	18900	38RB#0	22.23	PASS
Band2	15MHz	QPSK	18900	38RB#18	22.08	PASS
Band2	15MHz	QPSK	18900	38RB#37	21.87	PASS
Band2	15MHz	QPSK	18900	75RB#0	22.29	PASS
Band2	15MHz	QPSK	19125	1RB#0	23.16	PASS
Band2	15MHz	QPSK	19125	1RB#38	23.38	PASS
Band2	15MHz	QPSK	19125	1RB#74	23.33	PASS
Band2	15MHz	QPSK	19125	38RB#0	22.31	PASS
Band2	15MHz	QPSK	19125	38RB#18	22.49	PASS
Band2	15MHz	QPSK	19125	38RB#37	22.43	PASS
Band2	15MHz	QPSK	19125	75RB#0	22.48	PASS
Band2	15MHz	16QAM	18675	1RB#0	22.87	PASS
Band2	15MHz	16QAM	18675	1RB#38	22.90	PASS
Band2	15MHz	16QAM	18675	1RB#74	22.71	PASS
Band2	15MHz	16QAM	18675	38RB#0	22.85	PASS
Band2	15MHz	16QAM	18675	38RB#18	22.91	PASS
Band2	15MHz	16QAM	18675	38RB#37	22.66	PASS
Band2	15MHz	16QAM	18675	75RB#0	21.74	PASS
Band2	15MHz	16QAM	18900	1RB#0	22.20	PASS
Band2	15MHz	16QAM	18900	1RB#38	22.09	PASS
Band2	15MHz	16QAM	18900	1RB#74	21.88	PASS
Band2	15MHz	16QAM	18900	38RB#0	22.21	PASS
Band2	15MHz	16QAM	18900	38RB#18	22.06	PASS
Band2	15MHz	16QAM	18900	38RB#37	21.90	PASS
Band2	15MHz	16QAM	18900	75RB#0	21.21	PASS
Band2	15MHz	16QAM	19125	1RB#0	22.30	PASS
Band2	15MHz	16QAM	19125	1RB#38	22.53	PASS
Band2	15MHz	16QAM	19125	1RB#74	22.43	PASS
Band2	15MHz	16QAM	19125	38RB#0	22.29	PASS
Band2	15MHz	16QAM	19125	38RB#18	22.53	PASS

Band2	15MHz	16QAM	19125	38RB#37	22.44	PASS
Band2	15MHz	16QAM	19125	75RB#0	21.33	PASS
Band2	20MHz	QPSK	18700	1RB#0	23.56	PASS
Band2	20MHz	QPSK	18700	1RB#49	23.87	PASS
Band2	20MHz	QPSK	18700	1RB#99	23.32	PASS
Band2	20MHz	QPSK	18700	50RB#0	22.66	PASS
Band2	20MHz	QPSK	18700	50RB#25	22.67	PASS
Band2	20MHz	QPSK	18700	50RB#50	22.72	PASS
Band2	20MHz	QPSK	18700	100RB#0	22.68	PASS
Band2	20MHz	QPSK	18900	1RB#0	23.14	PASS
Band2	20MHz	QPSK	18900	1RB#49	23.23	PASS
Band2	20MHz	QPSK	18900	1RB#99	22.78	PASS
Band2	20MHz	QPSK	18900	50RB#0	22.49	PASS
Band2	20MHz	QPSK	18900	50RB#25	22.47	PASS
Band2	20MHz	QPSK	18900	50RB#50	22.12	PASS
Band2	20MHz	QPSK	18900	100RB#0	22.36	PASS
Band2	20MHz	QPSK	19100	1RB#0	23.08	PASS
Band2	20MHz	QPSK	19100	1RB#49	23.51	PASS
Band2	20MHz	QPSK	19100	1RB#99	23.33	PASS
Band2	20MHz	QPSK	19100	50RB#0	22.31	PASS
Band2	20MHz	QPSK	19100	50RB#25	22.30	PASS
Band2	20MHz	QPSK	19100	50RB#50	22.22	PASS
Band2	20MHz	QPSK	19100	100RB#0	22.30	PASS
Band2	20MHz	16QAM	18700	1RB#0	22.61	PASS
Band2	20MHz	16QAM	18700	1RB#49	22.90	PASS
Band2	20MHz	16QAM	18700	1RB#99	22.37	PASS
Band2	20MHz	16QAM	18700	50RB#0	22.70	PASS
Band2	20MHz	16QAM	18700	50RB#25	22.69	PASS
Band2	20MHz	16QAM	18700	50RB#50	22.70	PASS
Band2	20MHz	16QAM	18700	100RB#0	21.64	PASS
Band2	20MHz	16QAM	18900	1RB#0	22.26	PASS
Band2	20MHz	16QAM	18900	1RB#49	22.31	PASS
Band2	20MHz	16QAM	18900	1RB#99	21.87	PASS
Band2	20MHz	16QAM	18900	50RB#0	22.51	PASS
Band2	20MHz	16QAM	18900	50RB#25	22.52	PASS
Band2	20MHz	16QAM	18900	50RB#50	22.15	PASS
Band2	20MHz	16QAM	18900	100RB#0	21.32	PASS
Band2	20MHz	16QAM	19100	1RB#0	22.08	PASS
Band2	20MHz	16QAM	19100	1RB#49	22.59	PASS
Band2	20MHz	16QAM	19100	1RB#99	22.24	PASS
Band2	20MHz	16QAM	19100	50RB#0	22.27	PASS
Band2	20MHz	16QAM	19100	50RB#25	22.34	PASS

Band2	20MHz	16QAM	19100	50RB#50	22.25	PASS
Band2	20MHz	16QAM	19100	100RB#0	21.24	PASS
Band4	1.4MHz	QPSK	19957	1RB#0	23.32	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	23.44	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	23.31	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	23.38	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	23.39	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	23.41	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	22.38	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	23.16	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	23.27	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	23.14	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	23.12	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	23.13	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	23.09	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	22.16	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	23.15	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	23.26	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	23.16	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	23.23	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	23.21	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	23.22	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	22.21	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	22.37	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	22.59	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	22.41	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	23.39	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	23.39	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	23.39	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	21.37	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	22.09	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	22.30	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	22.08	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	23.12	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	23.11	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	23.11	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	21.13	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	22.23	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	22.38	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	22.22	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	23.24	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	23.21	PASS

Band4	1.4MHz	16QAM	20393	3RB#3	23.25	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	21.04	PASS
Band4	3MHz	QPSK	19965	1RB#0	23.42	PASS
Band4	3MHz	QPSK	19965	1RB#8	23.41	PASS
Band4	3MHz	QPSK	19965	1RB#14	23.41	PASS
Band4	3MHz	QPSK	19965	8RB#0	22.58	PASS
Band4	3MHz	QPSK	19965	8RB#4	22.49	PASS
Band4	3MHz	QPSK	19965	8RB#7	22.54	PASS
Band4	3MHz	QPSK	19965	15RB#0	22.46	PASS
Band4	3MHz	QPSK	20175	1RB#0	23.17	PASS
Band4	3MHz	QPSK	20175	1RB#8	23.17	PASS
Band4	3MHz	QPSK	20175	1RB#14	23.18	PASS
Band4	3MHz	QPSK	20175	8RB#0	22.28	PASS
Band4	3MHz	QPSK	20175	8RB#4	22.24	PASS
Band4	3MHz	QPSK	20175	8RB#7	22.22	PASS
Band4	3MHz	QPSK	20175	15RB#0	22.18	PASS
Band4	3MHz	QPSK	20385	1RB#0	23.28	PASS
Band4	3MHz	QPSK	20385	1RB#8	23.30	PASS
Band4	3MHz	QPSK	20385	1RB#14	23.27	PASS
Band4	3MHz	QPSK	20385	8RB#0	22.37	PASS
Band4	3MHz	QPSK	20385	8RB#4	22.27	PASS
Band4	3MHz	QPSK	20385	8RB#7	22.32	PASS
Band4	3MHz	QPSK	20385	15RB#0	22.23	PASS
Band4	3MHz	16QAM	19965	1RB#0	22.57	PASS
Band4	3MHz	16QAM	19965	1RB#8	22.50	PASS
Band4	3MHz	16QAM	19965	1RB#14	22.53	PASS
Band4	3MHz	16QAM	19965	8RB#0	22.58	PASS
Band4	3MHz	16QAM	19965	8RB#4	22.51	PASS
Band4	3MHz	16QAM	19965	8RB#7	22.55	PASS
Band4	3MHz	16QAM	19965	15RB#0	21.35	PASS
Band4	3MHz	16QAM	20175	1RB#0	22.28	PASS
Band4	3MHz	16QAM	20175	1RB#8	22.23	PASS
Band4	3MHz	16QAM	20175	1RB#14	22.27	PASS
Band4	3MHz	16QAM	20175	8RB#0	22.29	PASS
Band4	3MHz	16QAM	20175	8RB#4	22.23	PASS
Band4	3MHz	16QAM	20175	8RB#7	22.24	PASS
Band4	3MHz	16QAM	20175	15RB#0	21.16	PASS
Band4	3MHz	16QAM	20385	1RB#0	22.36	PASS
Band4	3MHz	16QAM	20385	1RB#8	22.28	PASS
Band4	3MHz	16QAM	20385	1RB#14	22.32	PASS
Band4	3MHz	16QAM	20385	8RB#0	22.36	PASS
Band4	3MHz	16QAM	20385	8RB#4	22.31	PASS

Band4	3MHz	16QAM	20385	8RB#7	22.28	PASS
Band4	3MHz	16QAM	20385	15RB#0	21.14	PASS
Band4	5MHz	QPSK	19975	1RB#0	23.40	PASS
Band4	5MHz	QPSK	19975	1RB#12	23.53	PASS
Band4	5MHz	QPSK	19975	1RB#24	23.41	PASS
Band4	5MHz	QPSK	19975	12RB#0	22.45	PASS
Band4	5MHz	QPSK	19975	12RB#6	22.47	PASS
Band4	5MHz	QPSK	19975	12RB#13	22.43	PASS
Band4	5MHz	QPSK	19975	25RB#0	22.53	PASS
Band4	5MHz	QPSK	20175	1RB#0	23.20	PASS
Band4	5MHz	QPSK	20175	1RB#12	23.31	PASS
Band4	5MHz	QPSK	20175	1RB#24	23.17	PASS
Band4	5MHz	QPSK	20175	12RB#0	22.24	PASS
Band4	5MHz	QPSK	20175	12RB#6	22.22	PASS
Band4	5MHz	QPSK	20175	12RB#13	22.18	PASS
Band4	5MHz	QPSK	20175	25RB#0	22.21	PASS
Band4	5MHz	QPSK	20375	1RB#0	23.25	PASS
Band4	5MHz	QPSK	20375	1RB#12	23.37	PASS
Band4	5MHz	QPSK	20375	1RB#24	23.23	PASS
Band4	5MHz	QPSK	20375	12RB#0	22.29	PASS
Band4	5MHz	QPSK	20375	12RB#6	22.28	PASS
Band4	5MHz	QPSK	20375	12RB#13	22.23	PASS
Band4	5MHz	QPSK	20375	25RB#0	22.31	PASS
Band4	5MHz	16QAM	19975	1RB#0	22.59	PASS
Band4	5MHz	16QAM	19975	1RB#12	22.68	PASS
Band4	5MHz	16QAM	19975	1RB#24	22.63	PASS
Band4	5MHz	16QAM	19975	12RB#0	22.48	PASS
Band4	5MHz	16QAM	19975	12RB#6	22.48	PASS
Band4	5MHz	16QAM	19975	12RB#13	22.38	PASS
Band4	5MHz	16QAM	19975	25RB#0	21.48	PASS
Band4	5MHz	16QAM	20175	1RB#0	22.11	PASS
Band4	5MHz	16QAM	20175	1RB#12	22.23	PASS
Band4	5MHz	16QAM	20175	1RB#24	22.11	PASS
Band4	5MHz	16QAM	20175	12RB#0	22.23	PASS
Band4	5MHz	16QAM	20175	12RB#6	22.21	PASS
Band4	5MHz	16QAM	20175	12RB#13	22.20	PASS
Band4	5MHz	16QAM	20175	25RB#0	21.19	PASS
Band4	5MHz	16QAM	20375	1RB#0	22.34	PASS
Band4	5MHz	16QAM	20375	1RB#12	22.43	PASS
Band4	5MHz	16QAM	20375	1RB#24	22.32	PASS
Band4	5MHz	16QAM	20375	12RB#0	22.28	PASS
Band4	5MHz	16QAM	20375	12RB#6	22.29	PASS

Band4	5MHz	16QAM	20375	12RB#13	22.26	PASS
Band4	5MHz	16QAM	20375	25RB#0	21.28	PASS
Band4	10MHz	QPSK	20000	1RB#0	23.44	PASS
Band4	10MHz	QPSK	20000	1RB#24	23.60	PASS
Band4	10MHz	QPSK	20000	1RB#49	23.45	PASS
Band4	10MHz	QPSK	20000	25RB#0	22.52	PASS
Band4	10MHz	QPSK	20000	25RB#12	22.55	PASS
Band4	10MHz	QPSK	20000	25RB#25	22.64	PASS
Band4	10MHz	QPSK	20000	50RB#0	22.58	PASS
Band4	10MHz	QPSK	20175	1RB#0	23.20	PASS
Band4	10MHz	QPSK	20175	1RB#24	23.33	PASS
Band4	10MHz	QPSK	20175	1RB#49	23.25	PASS
Band4	10MHz	QPSK	20175	25RB#0	22.30	PASS
Band4	10MHz	QPSK	20175	25RB#12	22.29	PASS
Band4	10MHz	QPSK	20175	25RB#25	22.21	PASS
Band4	10MHz	QPSK	20175	50RB#0	22.23	PASS
Band4	10MHz	QPSK	20350	1RB#0	23.35	PASS
Band4	10MHz	QPSK	20350	1RB#24	23.49	PASS
Band4	10MHz	QPSK	20350	1RB#49	23.23	PASS
Band4	10MHz	QPSK	20350	25RB#0	22.35	PASS
Band4	10MHz	QPSK	20350	25RB#12	22.34	PASS
Band4	10MHz	QPSK	20350	25RB#25	22.27	PASS
Band4	10MHz	QPSK	20350	50RB#0	22.28	PASS
Band4	10MHz	16QAM	20000	1RB#0	22.58	PASS
Band4	10MHz	16QAM	20000	1RB#24	22.71	PASS
Band4	10MHz	16QAM	20000	1RB#49	22.63	PASS
Band4	10MHz	16QAM	20000	25RB#0	22.55	PASS
Band4	10MHz	16QAM	20000	25RB#12	22.56	PASS
Band4	10MHz	16QAM	20000	25RB#25	22.61	PASS
Band4	10MHz	16QAM	20000	50RB#0	21.60	PASS
Band4	10MHz	16QAM	20175	1RB#0	22.33	PASS
Band4	10MHz	16QAM	20175	1RB#24	22.39	PASS
Band4	10MHz	16QAM	20175	1RB#49	22.28	PASS
Band4	10MHz	16QAM	20175	25RB#0	22.26	PASS
Band4	10MHz	16QAM	20175	25RB#12	22.28	PASS
Band4	10MHz	16QAM	20175	25RB#25	22.19	PASS
Band4	10MHz	16QAM	20175	50RB#0	21.19	PASS
Band4	10MHz	16QAM	20350	1RB#0	22.27	PASS
Band4	10MHz	16QAM	20350	1RB#24	22.42	PASS
Band4	10MHz	16QAM	20350	1RB#49	22.15	PASS
Band4	10MHz	16QAM	20350	25RB#0	22.36	PASS
Band4	10MHz	16QAM	20350	25RB#12	22.35	PASS

Band4	10MHz	16QAM	20350	25RB#25	22.26	PASS
Band4	10MHz	16QAM	20350	50RB#0	21.28	PASS
Band4	15MHz	QPSK	20025	1RB#0	23.39	PASS
Band4	15MHz	QPSK	20025	1RB#38	23.50	PASS
Band4	15MHz	QPSK	20025	1RB#74	23.34	PASS
Band4	15MHz	QPSK	20025	38RB#0	22.59	PASS
Band4	15MHz	QPSK	20025	38RB#18	22.71	PASS
Band4	15MHz	QPSK	20025	38RB#37	22.58	PASS
Band4	15MHz	QPSK	20025	75RB#0	22.56	PASS
Band4	15MHz	QPSK	20175	1RB#0	23.20	PASS
Band4	15MHz	QPSK	20175	1RB#38	23.18	PASS
Band4	15MHz	QPSK	20175	1RB#74	23.04	PASS
Band4	15MHz	QPSK	20175	38RB#0	22.33	PASS
Band4	15MHz	QPSK	20175	38RB#18	22.27	PASS
Band4	15MHz	QPSK	20175	38RB#37	22.05	PASS
Band4	15MHz	QPSK	20175	75RB#0	22.30	PASS
Band4	15MHz	QPSK	20325	1RB#0	23.12	PASS
Band4	15MHz	QPSK	20325	1RB#38	23.20	PASS
Band4	15MHz	QPSK	20325	1RB#74	23.06	PASS
Band4	15MHz	QPSK	20325	38RB#0	22.13	PASS
Band4	15MHz	QPSK	20325	38RB#18	22.22	PASS
Band4	15MHz	QPSK	20325	38RB#37	22.09	PASS
Band4	15MHz	QPSK	20325	75RB#0	22.29	PASS
Band4	15MHz	16QAM	20025	1RB#0	22.64	PASS
Band4	15MHz	16QAM	20025	1RB#38	22.72	PASS
Band4	15MHz	16QAM	20025	1RB#74	22.59	PASS
Band4	15MHz	16QAM	20025	38RB#0	22.56	PASS
Band4	15MHz	16QAM	20025	38RB#18	22.74	PASS
Band4	15MHz	16QAM	20025	38RB#37	22.59	PASS
Band4	15MHz	16QAM	20025	75RB#0	21.55	PASS
Band4	15MHz	16QAM	20175	1RB#0	22.32	PASS
Band4	15MHz	16QAM	20175	1RB#38	22.27	PASS
Band4	15MHz	16QAM	20175	1RB#74	22.07	PASS
Band4	15MHz	16QAM	20175	38RB#0	22.28	PASS
Band4	15MHz	16QAM	20175	38RB#18	22.26	PASS
Band4	15MHz	16QAM	20175	38RB#37	22.06	PASS
Band4	15MHz	16QAM	20175	75RB#0	21.13	PASS
Band4	15MHz	16QAM	20325	1RB#0	22.16	PASS
Band4	15MHz	16QAM	20325	1RB#38	22.24	PASS
Band4	15MHz	16QAM	20325	1RB#74	22.09	PASS
Band4	15MHz	16QAM	20325	38RB#0	22.12	PASS
Band4	15MHz	16QAM	20325	38RB#18	22.22	PASS

Band4	15MHz	16QAM	20325	38RB#37	22.13	PASS
Band4	15MHz	16QAM	20325	75RB#0	21.11	PASS
Band4	20MHz	QPSK	20050	1RB#0	23.29	PASS
Band4	20MHz	QPSK	20050	1RB#49	23.70	PASS
Band4	20MHz	QPSK	20050	1RB#99	23.21	PASS
Band4	20MHz	QPSK	20050	50RB#0	22.46	PASS
Band4	20MHz	QPSK	20050	50RB#25	22.45	PASS
Band4	20MHz	QPSK	20050	50RB#50	22.55	PASS
Band4	20MHz	QPSK	20050	100RB#0	22.49	PASS
Band4	20MHz	QPSK	20175	1RB#0	23.19	PASS
Band4	20MHz	QPSK	20175	1RB#49	23.45	PASS
Band4	20MHz	QPSK	20175	1RB#99	22.95	PASS
Band4	20MHz	QPSK	20175	50RB#0	22.30	PASS
Band4	20MHz	QPSK	20175	50RB#25	22.29	PASS
Band4	20MHz	QPSK	20175	50RB#50	22.07	PASS
Band4	20MHz	QPSK	20175	100RB#0	22.13	PASS
Band4	20MHz	QPSK	20300	1RB#0	23.00	PASS
Band4	20MHz	QPSK	20300	1RB#49	23.45	PASS
Band4	20MHz	QPSK	20300	1RB#99	22.92	PASS
Band4	20MHz	QPSK	20300	50RB#0	22.18	PASS
Band4	20MHz	QPSK	20300	50RB#25	22.20	PASS
Band4	20MHz	QPSK	20300	50RB#50	21.98	PASS
Band4	20MHz	QPSK	20300	100RB#0	22.15	PASS
Band4	20MHz	16QAM	20050	1RB#0	22.24	PASS
Band4	20MHz	16QAM	20050	1RB#49	22.64	PASS
Band4	20MHz	16QAM	20050	1RB#99	22.15	PASS
Band4	20MHz	16QAM	20050	50RB#0	22.44	PASS
Band4	20MHz	16QAM	20050	50RB#25	22.41	PASS
Band4	20MHz	16QAM	20050	50RB#50	22.53	PASS
Band4	20MHz	16QAM	20050	100RB#0	21.44	PASS
Band4	20MHz	16QAM	20175	1RB#0	22.22	PASS
Band4	20MHz	16QAM	20175	1RB#49	22.33	PASS
Band4	20MHz	16QAM	20175	1RB#99	21.80	PASS
Band4	20MHz	16QAM	20175	50RB#0	22.33	PASS
Band4	20MHz	16QAM	20175	50RB#25	22.31	PASS
Band4	20MHz	16QAM	20175	50RB#50	22.08	PASS
Band4	20MHz	16QAM	20175	100RB#0	21.08	PASS
Band4	20MHz	16QAM	20300	1RB#0	22.01	PASS
Band4	20MHz	16QAM	20300	1RB#49	22.28	PASS
Band4	20MHz	16QAM	20300	1RB#99	21.95	PASS
Band4	20MHz	16QAM	20300	50RB#0	22.20	PASS
Band4	20MHz	16QAM	20300	50RB#25	22.20	PASS

Band4	20MHz	16QAM	20300	50RB#50	22.04	PASS
Band4	20MHz	16QAM	20300	100RB#0	21.06	PASS
Band7	5MHz	QPSK	20775	1RB#0	22.46	PASS
Band7	5MHz	QPSK	20775	1RB#12	22.56	PASS
Band7	5MHz	QPSK	20775	1RB#24	22.39	PASS
Band7	5MHz	QPSK	20775	12RB#0	21.55	PASS
Band7	5MHz	QPSK	20775	12RB#6	21.52	PASS
Band7	5MHz	QPSK	20775	12RB#13	21.50	PASS
Band7	5MHz	QPSK	20775	25RB#0	21.56	PASS
Band7	5MHz	QPSK	21100	1RB#0	22.41	PASS
Band7	5MHz	QPSK	21100	1RB#12	22.51	PASS
Band7	5MHz	QPSK	21100	1RB#24	22.41	PASS
Band7	5MHz	QPSK	21100	12RB#0	21.44	PASS
Band7	5MHz	QPSK	21100	12RB#6	21.43	PASS
Band7	5MHz	QPSK	21100	12RB#13	21.46	PASS
Band7	5MHz	QPSK	21100	25RB#0	21.49	PASS
Band7	5MHz	QPSK	21425	1RB#0	22.14	PASS
Band7	5MHz	QPSK	21425	1RB#12	22.26	PASS
Band7	5MHz	QPSK	21425	1RB#24	22.13	PASS
Band7	5MHz	QPSK	21425	12RB#0	21.25	PASS
Band7	5MHz	QPSK	21425	12RB#6	21.22	PASS
Band7	5MHz	QPSK	21425	12RB#13	21.21	PASS
Band7	5MHz	QPSK	21425	25RB#0	21.26	PASS
Band7	5MHz	16QAM	20775	1RB#0	21.66	PASS
Band7	5MHz	16QAM	20775	1RB#12	21.80	PASS
Band7	5MHz	16QAM	20775	1RB#24	21.61	PASS
Band7	5MHz	16QAM	20775	12RB#0	21.53	PASS
Band7	5MHz	16QAM	20775	12RB#6	21.49	PASS
Band7	5MHz	16QAM	20775	12RB#13	21.45	PASS
Band7	5MHz	16QAM	20775	25RB#0	20.49	PASS
Band7	5MHz	16QAM	21100	1RB#0	21.48	PASS
Band7	5MHz	16QAM	21100	1RB#12	21.53	PASS
Band7	5MHz	16QAM	21100	1RB#24	21.44	PASS
Band7	5MHz	16QAM	21100	12RB#0	21.45	PASS
Band7	5MHz	16QAM	21100	12RB#6	21.42	PASS
Band7	5MHz	16QAM	21100	12RB#13	21.44	PASS
Band7	5MHz	16QAM	21100	25RB#0	20.49	PASS
Band7	5MHz	16QAM	21425	1RB#0	21.19	PASS
Band7	5MHz	16QAM	21425	1RB#12	21.30	PASS
Band7	5MHz	16QAM	21425	1RB#24	21.19	PASS
Band7	5MHz	16QAM	21425	12RB#0	21.25	PASS
Band7	5MHz	16QAM	21425	12RB#6	21.24	PASS

Band7	5MHz	16QAM	21425	12RB#13	21.22	PASS
Band7	5MHz	16QAM	21425	25RB#0	21.35	PASS
Band7	10MHz	QPSK	20800	1RB#0	22.54	PASS
Band7	10MHz	QPSK	20800	1RB#24	22.51	PASS
Band7	10MHz	QPSK	20800	1RB#49	22.49	PASS
Band7	10MHz	QPSK	20800	25RB#0	21.58	PASS
Band7	10MHz	QPSK	20800	25RB#12	21.58	PASS
Band7	10MHz	QPSK	20800	25RB#25	21.67	PASS
Band7	10MHz	QPSK	20800	50RB#0	21.58	PASS
Band7	10MHz	QPSK	21100	1RB#0	22.50	PASS
Band7	10MHz	QPSK	21100	1RB#24	22.56	PASS
Band7	10MHz	QPSK	21100	1RB#49	22.50	PASS
Band7	10MHz	QPSK	21100	25RB#0	21.59	PASS
Band7	10MHz	QPSK	21100	25RB#12	21.61	PASS
Band7	10MHz	QPSK	21100	25RB#25	21.63	PASS
Band7	10MHz	QPSK	21100	50RB#0	21.60	PASS
Band7	10MHz	QPSK	21400	1RB#0	22.27	PASS
Band7	10MHz	QPSK	21400	1RB#24	22.36	PASS
Band7	10MHz	QPSK	21400	1RB#49	22.27	PASS
Band7	10MHz	QPSK	21400	25RB#0	21.45	PASS
Band7	10MHz	QPSK	21400	25RB#12	21.47	PASS
Band7	10MHz	QPSK	21400	25RB#25	21.42	PASS
Band7	10MHz	QPSK	21400	50RB#0	21.40	PASS
Band7	10MHz	16QAM	20800	1RB#0	21.71	PASS
Band7	10MHz	16QAM	20800	1RB#24	21.77	PASS
Band7	10MHz	16QAM	20800	1RB#49	21.68	PASS
Band7	10MHz	16QAM	20800	25RB#0	21.56	PASS
Band7	10MHz	16QAM	20800	25RB#12	21.57	PASS
Band7	10MHz	16QAM	20800	25RB#25	21.63	PASS
Band7	10MHz	16QAM	20800	50RB#0	20.59	PASS
Band7	10MHz	16QAM	21100	1RB#0	21.44	PASS
Band7	10MHz	16QAM	21100	1RB#24	21.49	PASS
Band7	10MHz	16QAM	21100	1RB#49	21.46	PASS
Band7	10MHz	16QAM	21100	25RB#0	21.57	PASS
Band7	10MHz	16QAM	21100	25RB#12	21.60	PASS
Band7	10MHz	16QAM	21100	25RB#25	21.64	PASS
Band7	10MHz	16QAM	21100	50RB#0	20.59	PASS
Band7	10MHz	16QAM	21400	1RB#0	21.50	PASS
Band7	10MHz	16QAM	21400	1RB#24	21.56	PASS
Band7	10MHz	16QAM	21400	1RB#49	21.47	PASS
Band7	10MHz	16QAM	21400	25RB#0	21.46	PASS
Band7	10MHz	16QAM	21400	25RB#12	21.45	PASS

Band7	10MHz	16QAM	21400	25RB#25	21.38	PASS
Band7	10MHz	16QAM	21400	50RB#0	20.38	PASS
Band7	15MHz	QPSK	20825	1RB#0	22.52	PASS
Band7	15MHz	QPSK	20825	1RB#38	22.52	PASS
Band7	15MHz	QPSK	20825	1RB#74	22.36	PASS
Band7	15MHz	QPSK	20825	38RB#0	21.81	PASS
Band7	15MHz	QPSK	20825	38RB#18	21.85	PASS
Band7	15MHz	QPSK	20825	38RB#37	21.66	PASS
Band7	15MHz	QPSK	20825	75RB#0	21.71	PASS
Band7	15MHz	QPSK	21100	1RB#0	22.46	PASS
Band7	15MHz	QPSK	21100	1RB#38	22.52	PASS
Band7	15MHz	QPSK	21100	1RB#74	22.42	PASS
Band7	15MHz	QPSK	21100	38RB#0	21.39	PASS
Band7	15MHz	QPSK	21100	38RB#18	21.49	PASS
Band7	15MHz	QPSK	21100	38RB#37	21.34	PASS
Band7	15MHz	QPSK	21100	75RB#0	21.70	PASS
Band7	15MHz	QPSK	21375	1RB#0	22.23	PASS
Band7	15MHz	QPSK	21375	1RB#38	22.29	PASS
Band7	15MHz	QPSK	21375	1RB#74	22.15	PASS
Band7	15MHz	QPSK	21375	38RB#0	21.45	PASS
Band7	15MHz	QPSK	21375	38RB#18	21.56	PASS
Band7	15MHz	QPSK	21375	38RB#37	21.41	PASS
Band7	15MHz	QPSK	21375	75RB#0	21.49	PASS
Band7	15MHz	16QAM	20825	1RB#0	21.83	PASS
Band7	15MHz	16QAM	20825	1RB#38	21.86	PASS
Band7	15MHz	16QAM	20825	1RB#74	21.66	PASS
Band7	15MHz	16QAM	20825	38RB#0	21.81	PASS
Band7	15MHz	16QAM	20825	38RB#18	21.82	PASS
Band7	15MHz	16QAM	20825	38RB#37	21.68	PASS
Band7	15MHz	16QAM	20825	75RB#0	20.62	PASS
Band7	15MHz	16QAM	21100	1RB#0	21.35	PASS
Band7	15MHz	16QAM	21100	1RB#38	21.47	PASS
Band7	15MHz	16QAM	21100	1RB#74	21.34	PASS
Band7	15MHz	16QAM	21100	38RB#0	21.37	PASS
Band7	15MHz	16QAM	21100	38RB#18	21.43	PASS
Band7	15MHz	16QAM	21100	38RB#37	21.38	PASS
Band7	15MHz	16QAM	21100	75RB#0	20.62	PASS
Band7	15MHz	16QAM	21375	1RB#0	21.46	PASS
Band7	15MHz	16QAM	21375	1RB#38	21.54	PASS
Band7	15MHz	16QAM	21375	1RB#74	21.40	PASS
Band7	15MHz	16QAM	21375	38RB#0	21.44	PASS
Band7	15MHz	16QAM	21375	38RB#18	21.50	PASS

Band7	15MHz	16QAM	21375	38RB#37	21.40	PASS
Band7	15MHz	16QAM	21375	75RB#0	20.39	PASS
Band7	20MHz	QPSK	20850	1RB#0	22.45	PASS
Band7	20MHz	QPSK	20850	1RB#49	22.66	PASS
Band7	20MHz	QPSK	20850	1RB#99	22.26	PASS
Band7	20MHz	QPSK	20850	50RB#0	21.52	PASS
Band7	20MHz	QPSK	20850	50RB#25	21.55	PASS
Band7	20MHz	QPSK	20850	50RB#50	21.54	PASS
Band7	20MHz	QPSK	20850	100RB#0	21.54	PASS
Band7	20MHz	QPSK	21100	1RB#0	22.19	PASS
Band7	20MHz	QPSK	21100	1RB#49	22.52	PASS
Band7	20MHz	QPSK	21100	1RB#99	22.18	PASS
Band7	20MHz	QPSK	21100	50RB#0	21.59	PASS
Band7	20MHz	QPSK	21100	50RB#25	21.61	PASS
Band7	20MHz	QPSK	21100	50RB#50	21.61	PASS
Band7	20MHz	QPSK	21100	100RB#0	21.55	PASS
Band7	20MHz	QPSK	21350	1RB#0	22.21	PASS
Band7	20MHz	QPSK	21350	1RB#49	22.54	PASS
Band7	20MHz	QPSK	21350	1RB#99	22.14	PASS
Band7	20MHz	QPSK	21350	50RB#0	21.51	PASS
Band7	20MHz	QPSK	21350	50RB#25	21.51	PASS
Band7	20MHz	QPSK	21350	50RB#50	21.44	PASS
Band7	20MHz	QPSK	21350	100RB#0	21.44	PASS
Band7	20MHz	16QAM	20850	1RB#0	21.59	PASS
Band7	20MHz	16QAM	20850	1RB#49	21.88	PASS
Band7	20MHz	16QAM	20850	1RB#99	21.50	PASS
Band7	20MHz	16QAM	20850	50RB#0	21.56	PASS
Band7	20MHz	16QAM	20850	50RB#25	21.57	PASS
Band7	20MHz	16QAM	20850	50RB#50	21.54	PASS
Band7	20MHz	16QAM	20850	100RB#0	20.48	PASS
Band7	20MHz	16QAM	21100	1RB#0	21.34	PASS
Band7	20MHz	16QAM	21100	1RB#49	21.73	PASS
Band7	20MHz	16QAM	21100	1RB#99	21.32	PASS
Band7	20MHz	16QAM	21100	50RB#0	21.58	PASS
Band7	20MHz	16QAM	21100	50RB#25	21.60	PASS
Band7	20MHz	16QAM	21100	50RB#50	21.62	PASS
Band7	20MHz	16QAM	21100	100RB#0	20.56	PASS
Band7	20MHz	16QAM	21350	1RB#0	21.26	PASS
Band7	20MHz	16QAM	21350	1RB#49	21.58	PASS
Band7	20MHz	16QAM	21350	1RB#99	21.18	PASS
Band7	20MHz	16QAM	21350	50RB#0	21.50	PASS
Band7	20MHz	16QAM	21350	50RB#25	21.52	PASS

Band7	20MHz	16QAM	21350	50RB#50	21.42	PASS
Band7	20MHz	16QAM	21350	100RB#0	20.39	PASS

Radiated Output power:

ERP & EIRP

ERP for Cellular Band (Part 22H)

GSM Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	24.09	V	6.8	0.53	30.36	38.45
824.2	23.35	H	6.8	0.53	29.62	38.45
836.6	23.30	V	6.8	0.53	29.57	38.45
836.6	23.39	H	6.8	0.53	29.66	38.45
848.8	23.21	V	6.9	0.53	29.58	38.45
848.8	21.91	H	6.9	0.53	28.28	38.45

GPRS Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	23.93	V	6.8	0.53	30.20	38.45
824.2	23.58	H	6.8	0.53	29.85	38.45
836.6	22.36	V	6.8	0.53	28.63	38.45
836.6	22.71	H	6.8	0.53	28.98	38.45
848.8	22.26	V	6.9	0.53	28.63	38.45
848.8	22.64	H	6.9	0.53	29.01	38.45

ERP for UMTS-FDD Band V (Part 22H)

WCDMA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.20	V	6.8	0.53	20.47	38.45
826.4	15.02	H	6.8	0.53	21.29	38.45
836.4	15.18	V	6.8	0.53	21.45	38.45
836.4	13.66	H	6.8	0.53	19.93	38.45
846.6	13.20	V	6.9	0.53	19.57	38.45
846.6	15.11	H	6.9	0.53	21.48	38.45

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

HSDPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.98	V	6.8	0.53	21.25	38.45
826.4	13.52	H	6.8	0.53	19.79	38.45
836.4	15.08	V	6.8	0.53	21.35	38.45
836.4	13.97	H	6.8	0.53	20.24	38.45
846.6	14.08	V	6.9	0.53	20.45	38.45
846.6	13.89	H	6.9	0.53	20.26	38.45

HSUPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
826.4	14.72	V	6.8	0.53	20.99	38.45
826.4	14.74	H	6.8	0.53	21.01	38.45
836.4	15.09	V	6.8	0.53	21.36	38.45
836.4	13.63	H	6.8	0.53	19.90	38.45
846.6	15.07	V	6.9	0.53	21.44	38.45
846.6	14.75	H	6.9	0.53	21.12	38.45

EIRP for PCS Band (Part 24E)

GSM Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	22.00	V	7.88	0.85	29.03	33
1850.2	21.75	H	7.88	0.85	28.78	33
1880	20.99	V	7.88	0.85	28.02	33
1880	22.14	H	7.88	0.85	29.17	33
1909.8	20.70	V	7.86	0.85	27.71	33
1909.8	21.31	H	7.86	0.85	28.32	33

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

GPRS Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	20.87	V	7.88	0.85	27.90	33
1850.2	21.00	H	7.88	0.85	28.03	33
1880	19.80	V	7.88	0.85	26.83	33
1880	21.08	H	7.88	0.85	28.11	33
1909.8	20.86	V	7.86	0.85	27.87	33
1909.8	20.36	H	7.86	0.85	27.37	33

EIRP for UMTS-FDD Band II (Part 24E)

WCDMA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	13.83	V	7.88	0.85	20.86	33
1852.4	12.64	H	7.88	0.85	19.67	33
1880	14.55	V	7.88	0.85	21.58	33
1880	13.99	H	7.88	0.85	21.02	33
1907.6	14.19	V	7.86	0.85	21.20	33
1907.6	15.44	H	7.86	0.85	22.45	33

HSDPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	12.51	V	7.88	0.85	19.54	33
1852.4	13.10	H	7.88	0.85	20.13	33
1880	12.51	V	7.88	0.85	19.54	33
1880	13.12	H	7.88	0.85	20.15	33
1907.6	13.87	V	7.86	0.85	20.88	33
1907.6	12.45	H	7.86	0.85	19.46	33

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

HSUPA Mode

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1852.4	13.32	V	7.88	0.85	20.35	33
1852.4	12.41	H	7.88	0.85	19.44	33
1880	12.37	V	7.88	0.85	19.40	33
1880	11.90	H	7.88	0.85	18.93	33
1907.6	11.64	V	7.86	0.85	18.65	33
1907.6	12.71	H	7.86	0.85	19.72	33

EIRP for LTE Band 2 (Part 24E)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.7	1.4	QPSK	1/0	9.84	V	7.88	0.85	16.87	33
1880	1.4	QPSK	1/0	10.63	V	7.88	0.85	17.66	33
1909.3	1.4	QPSK	1/0	9.80	V	7.88	0.85	16.83	33
1850.7	1.4	QPSK	1/0	10.63	H	7.88	0.85	17.66	33
1880	1.4	QPSK	1/0	10.41	H	7.88	0.85	17.44	33
1909.3	1.4	QPSK	1/0	10.07	H	7.88	0.85	17.10	33
1850.7	1.4	16-QAM	1/0	9.83	V	7.88	0.85	16.86	33
1880	1.4	16-QAM	1/0	9.72	V	7.88	0.85	16.75	33
1909.3	1.4	16-QAM	1/0	9.63	V	7.88	0.85	16.66	33
1850.7	1.4	16-QAM	1/0	10.20	H	7.88	0.85	17.23	33
1880	1.4	16-QAM	1/0	9.52	H	7.88	0.85	16.55	33
1909.3	1.4	16-QAM	1/0	10.00	H	7.88	0.85	17.03	33
1851.5	3	QPSK	1/0	9.63	V	7.88	0.85	16.66	33
1880	3	QPSK	1/0	10.44	V	7.88	0.85	17.47	33
1908.5	3	QPSK	1/0	9.61	V	7.88	0.85	16.64	33
1851.5	3	QPSK	1/0	10.60	H	7.88	0.85	17.63	33
1880	3	QPSK	1/0	10.37	H	7.88	0.85	17.40	33
1908.5	3	QPSK	1/0	9.35	H	7.88	0.85	16.38	33
1851.5	3	16-QAM	1/0	11.32	V	7.88	0.85	18.35	33
1880	3	16-QAM	1/0	10.59	V	7.88	0.85	17.62	33
1908.5	3	16-QAM	1/0	9.91	V	7.88	0.85	16.94	33
1851.5	3	16-QAM	1/0	10.24	H	7.88	0.85	17.27	33
1880	3	16-QAM	1/0	9.37	H	7.88	0.85	16.40	33

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 40 of 448

1908.5	3	16-QAM	1/0	10.82	H	7.88	0.85	17.85	33
1852.5	5	QPSK	1/24	10.65	V	7.88	0.85	17.68	33
1880	5	QPSK	1/0	10.24	V	7.88	0.85	17.27	33
1907.5	5	QPSK	1/24	9.46	V	7.88	0.85	16.49	33
1852.5	5	QPSK	1/24	10.75	H	7.88	0.85	17.78	33
1880	5	QPSK	1/0	10.25	H	7.88	0.85	17.28	33
1907.5	5	QPSK	1/24	11.22	H	7.88	0.85	18.25	33
1852.5	5	16-QAM	1/24	9.57	V	7.88	0.85	16.60	33
1880	5	16-QAM	1/0	10.45	V	7.88	0.85	17.48	33
1907.5	5	16-QAM	1/24	10.18	V	7.88	0.85	17.21	33
1852.5	5	16-QAM	1/24	9.95	H	7.88	0.85	16.98	33
1880	5	16-QAM	1/0	10.57	H	7.88	0.85	17.60	33
1907.5	5	16-QAM	1/24	10.43	H	7.88	0.85	17.46	33
1855	10	QPSK	1/0	10.09	V	7.88	0.85	17.12	33
1880	10	QPSK	1/0	9.95	V	7.88	0.85	16.98	33
1905	10	QPSK	1/49	9.41	V	7.88	0.85	16.44	33
1855	10	QPSK	1/0	9.30	H	7.88	0.85	16.33	33
1880	10	QPSK	1/0	10.58	H	7.88	0.85	17.61	33
1905	10	QPSK	1/49	10.15	H	7.88	0.85	17.18	33
1855	10	16-QAM	1/0	9.67	V	7.88	0.85	16.70	33
1880	10	16-QAM	1/0	9.96	V	7.88	0.85	16.99	33
1905	10	16-QAM	1/49	10.02	V	7.88	0.85	17.05	33
1855	10	16-QAM	1/0	10.86	H	7.88	0.85	17.89	33
1880	10	16-QAM	1/0	10.13	H	7.88	0.85	17.16	33
1905	10	16-QAM	1/49	10.05	H	7.88	0.85	17.08	33
1857.5	15	QPSK	1/0	10.37	V	7.88	0.85	17.40	33
1880	15	QPSK	1/0	9.67	V	7.88	0.85	16.70	33
1902.5	15	QPSK	1/0	8.85	V	7.88	0.85	15.88	33
1857.5	15	QPSK	1/0	9.81	H	7.88	0.85	16.84	33
1880	15	QPSK	1/0	10.18	H	7.88	0.85	17.21	33
1902.5	15	QPSK	1/0	9.20	H	7.88	0.85	16.23	33
1857.5	15	16-QAM	1/0	9.32	V	7.88	0.85	16.35	33
1880	15	16-QAM	1/0	10.32	V	7.88	0.85	17.35	33
1902.5	15	16-QAM	1/0	10.34	V	7.88	0.85	17.37	33
1857.5	15	16-QAM	1/0	9.93	H	7.88	0.85	16.96	33
1880	15	16-QAM	1/0	9.76	H	7.88	0.85	16.79	33
1902.5	15	16-QAM	1/0	10.45	H	7.88	0.85	17.48	33
1860	20	QPSK	1/0	9.23	V	7.88	0.85	16.26	33
1880	20	QPSK	1/0	10.77	V	7.88	0.85	17.80	33
1900	20	QPSK	1/0	8.96	V	7.88	0.85	15.99	33
1860	20	QPSK	1/0	10.33	H	7.88	0.85	17.36	33

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 41 of 448

1880	20	QPSK	1/0	10.14	H	7.88	0.85	17.17	33
1900	20	QPSK	1/0	9.52	H	7.88	0.85	16.55	33
1860	20	16-QAM	1/0	10.31	V	7.88	0.85	17.34	33
1880	20	16-QAM	1/0	9.51	V	7.88	0.85	16.54	33
1900	20	16-QAM	1/0	9.94	V	7.88	0.85	16.97	33
1860	20	16-QAM	1/0	9.76	H	7.88	0.85	16.79	33
1880	20	16-QAM	1/0	10.33	H	7.88	0.85	17.36	33
1900	20	16-QAM	1/0	9.45	H	7.88	0.85	16.48	33

EIRP for LTE Band 4 (Part 27)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1710.7	1.4	QPSK	1/0	10.83	V	7.95	0.79	17.99	30
1732.5	1.4	QPSK	1/0	10.52	V	7.95	0.79	17.68	30
1754.3	1.4	QPSK	1/0	9.53	V	7.95	0.79	16.69	30
1710.7	1.4	QPSK	1/0	10.19	H	7.95	0.79	17.35	30
1732.5	1.4	QPSK	1/0	10.14	H	7.95	0.79	17.30	30
1754.3	1.4	QPSK	1/0	10.29	H	7.95	0.79	17.45	30
1710.7	1.4	16-QAM	1/5	9.77	V	7.95	0.79	16.93	30
1732.5	1.4	16-QAM	1/0	10.30	V	7.95	0.79	17.46	30
1754.3	1.4	16-QAM	1/0	10.60	V	7.95	0.79	17.76	30
1710.7	1.4	16-QAM	1/5	9.43	H	7.95	0.79	16.59	30
1732.5	1.4	16-QAM	1/0	9.89	H	7.95	0.79	17.05	30
1754.3	1.4	16-QAM	1/0	9.70	H	7.95	0.79	16.86	30
1711.5	3	QPSK	1/0	9.38	V	7.95	0.79	16.54	30
1732.5	3	QPSK	1/0	10.00	V	7.95	0.79	17.16	30
1753.5	3	QPSK	1/0	9.69	V	7.95	0.79	16.85	30
1711.5	3	QPSK	1/0	10.10	H	7.95	0.79	17.26	30
1732.5	3	QPSK	1/0	9.55	H	7.95	0.79	16.71	30
1753.5	3	QPSK	1/0	9.42	H	7.95	0.79	16.58	30
1711.5	3	16-QAM	1/0	10.05	V	7.95	0.79	17.21	30
1732.5	3	16-QAM	1/0	9.42	V	7.95	0.79	16.58	30
1753.5	3	16-QAM	1/0	9.89	V	7.95	0.79	17.05	30
1711.5	3	16-QAM	1/0	9.36	H	7.95	0.79	16.52	30
1732.5	3	16-QAM	1/0	9.48	H	7.95	0.79	16.64	30
1753.5	3	16-QAM	1/0	10.22	H	7.95	0.79	17.38	30
1712.5	5	QPSK	1/0	9.83	V	7.95	0.79	16.99	30
1732.5	5	QPSK	1/0	9.14	V	7.95	0.79	16.30	30

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 42 of 448

1752.5	5	QPSK	1/24	10.41	V	7.95	0.79	17.57	30
1712.5	5	QPSK	1/0	10.15	H	7.95	0.79	17.31	30
1732.5	5	QPSK	1/0	9.85	H	7.95	0.79	17.01	30
1752.5	5	QPSK	1/24	9.01	H	7.95	0.79	16.17	30
1712.5	5	16-QAM	1/0	9.66	V	7.95	0.79	16.82	30
1732.5	5	16-QAM	1/0	10.52	V	7.95	0.79	17.68	30
1752.5	5	16-QAM	1/24	10.27	V	7.95	0.79	17.43	30
1712.5	5	16-QAM	1/0	10.41	H	7.95	0.79	17.57	30
1732.5	5	16-QAM	1/0	8.96	H	7.95	0.79	16.12	30
1752.5	5	16-QAM	1/24	9.70	H	7.95	0.79	16.86	30
1715	10	QPSK	1/0	10.85	V	7.95	0.79	18.01	30
1732.5	10	QPSK	1/49	9.54	V	7.95	0.79	16.70	30
1750	10	QPSK	1/0	9.59	V	7.95	0.79	16.75	30
1715	10	QPSK	1/0	9.29	H	7.95	0.79	16.45	30
1732.5	10	QPSK	1/49	10.44	H	7.95	0.79	17.60	30
1750	10	QPSK	1/0	10.25	H	7.95	0.79	17.41	30
1715	10	16-QAM	1/0	10.58	V	7.95	0.79	17.74	30
1732.5	10	16-QAM	1/49	10.40	V	7.95	0.79	17.56	30
1750	10	16-QAM	1/0	10.38	V	7.95	0.79	17.54	30
1715	10	16-QAM	1/0	9.93	H	7.95	0.79	17.09	30
1732.5	10	16-QAM	1/49	9.63	H	7.95	0.79	16.79	30
1750	10	16-QAM	1/0	10.62	H	7.95	0.79	17.78	30
1717.5	15	QPSK	1/0	10.73	V	7.95	0.79	17.89	30
1732.5	15	QPSK	1/74	9.15	V	7.95	0.79	16.31	30
1747.5	15	QPSK	1/0	10.41	V	7.95	0.79	17.57	30
1717.5	15	QPSK	1/0	9.78	H	7.95	0.79	16.94	30
1732.5	15	QPSK	1/74	10.46	H	7.95	0.79	17.62	30
1747.5	15	QPSK	1/0	9.00	H	7.95	0.79	16.16	30
1717.5	15	16-QAM	1/0	10.37	V	7.95	0.79	17.53	30
1732.5	15	16-QAM	1/74	9.86	V	7.95	0.79	17.02	30
1747.5	15	16-QAM	1/0	10.51	V	7.95	0.79	17.67	30
1717.5	15	16-QAM	1/0	10.70	H	7.95	0.79	17.86	30
1732.5	15	16-QAM	1/74	10.10	H	7.95	0.79	17.26	30
1747.5	15	16-QAM	1/0	9.78	H	7.95	0.79	16.94	30
1720	20	QPSK	1/99	10.55	V	7.95	0.79	17.71	30
1732.5	20	QPSK	1/99	9.37	V	7.95	0.79	16.53	30
1745	20	QPSK	1/0	9.19	V	7.95	0.79	16.35	30
1720	20	QPSK	1/99	9.89	H	7.95	0.79	17.05	30
1732.5	20	QPSK	1/99	9.77	H	7.95	0.79	16.93	30
1745	20	QPSK	1/0	10.15	H	7.95	0.79	17.31	30
1720	20	16-QAM	1/99	10.75	V	7.95	0.79	17.91	30

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 43 of 448

1732.5	20	16-QAM	1/99	9.90	V	7.95	0.79	17.06	30
1745	20	16-QAM	1/0	10.16	V	7.95	0.79	17.32	30
1720	20	16-QAM	1/99	10.35	H	7.95	0.79	17.51	30
1732.5	20	16-QAM	1/99	9.17	H	7.95	0.79	16.33	30
1745	20	16-QAM	1/0	9.49	H	7.95	0.79	16.65	30

EIRP for LTE Band 7 (Part 24E)

Frequency (MHz)	BW (MHz)	Modulation	RB Size/Offset	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
2502.5	5	QPSK	1/24	10.52	V	8.24	0.96	17.80	33
2535	5	QPSK	1/0	9.95	V	8.24	0.96	17.23	33
2567.5	5	QPSK	1/24	9.27	V	8.24	0.96	16.55	33
2502.5	5	QPSK	1/24	9.93	H	8.24	0.96	17.21	33
2535	5	QPSK	1/0	10.73	H	8.24	0.96	18.01	33
2567.5	5	QPSK	1/24	10.88	H	8.24	0.96	18.16	33
2502.5	5	16-QAM	1/24	9.52	V	8.24	0.96	16.80	33
2535	5	16-QAM	1/0	10.43	V	8.24	0.96	17.71	33
2567.5	5	16-QAM	1/24	10.63	V	8.24	0.96	17.91	33
2502.5	5	16-QAM	1/24	9.82	H	8.24	0.96	17.10	33
2535	5	16-QAM	1/0	10.28	H	8.24	0.96	17.56	33
2567.5	5	16-QAM	1/24	10.01	H	8.24	0.96	17.29	33
2505	10	QPSK	1/0	9.71	V	8.24	0.96	17.18	33
2535	10	QPSK	1/0	9.38	V	8.24	0.96	17.35	33
2565	10	QPSK	1/49	9.26	V	8.24	0.96	17.18	33
2505	10	QPSK	1/0	9.32	H	8.24	0.96	16.57	33
2535	10	QPSK	1/0	10.46	H	8.24	0.96	17.61	33
2565	10	QPSK	1/49	10.00	H	8.24	0.96	16.43	33
2505	10	16-QAM	1/0	9.55	V	8.24	0.96	16.58	33
2535	10	16-QAM	1/0	10.34	V	8.24	0.96	17.38	33
2565	10	16-QAM	1/49	10.48	V	8.24	0.96	16.78	33
2505	10	16-QAM	1/0	10.31	H	8.24	0.96	18.04	33
2535	10	16-QAM	1/0	9.62	H	8.24	0.96	16.61	33
2565	10	16-QAM	1/49	9.89	H	8.24	0.96	17.18	33
2507.5	15	QPSK	1/0	10.19	V	8.24	0.96	16.70	33
2535	15	QPSK	1/0	9.21	V	8.24	0.96	16.59	33
2562.5	15	QPSK	1/0	9.28	V	8.24	0.96	15.87	33
2507.5	15	QPSK	1/0	10.08	H	8.24	0.96	16.93	33
2535	15	QPSK	1/0	10.47	H	8.24	0.96	17.50	33
2562.5	15	QPSK	1/0	9.38	H	8.24	0.96	16.35	33

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 44 of 448

2507.5	15	16-QAM	1/0	10.07	V	8.24	0.96	17.21	33
2535	15	16-QAM	1/0	10.67	V	8.24	0.96	17.33	33
2562.5	15	16-QAM	1/0	9.51	V	8.24	0.96	16.45	33
2507.5	15	16-QAM	1/0	10.42	H	8.24	0.96	16.97	33
2535	15	16-QAM	1/0	9.82	H	8.24	0.96	16.66	33
2562.5	15	16-QAM	1/0	10.28	H	8.24	0.96	17.79	33
2510	20	QPSK	1/0	9.41	V	8.24	0.96	16.99	33
2535	20	QPSK	1/0	10.73	V	8.24	0.96	17.56	33
2560	20	QPSK	1/0	9.30	V	8.24	0.96	15.78	33
2510	20	QPSK	1/0	9.61	H	8.24	0.96	17.48	33
2535	20	QPSK	1/0	10.19	H	8.24	0.96	17.38	33
2560	20	QPSK	1/0	10.16	H	8.24	0.96	16.67	33
2510	20	16-QAM	1/0	9.91	V	8.24	0.96	17.73	33
2535	20	16-QAM	1/0	9.99	V	8.24	0.96	16.54	33
2560	20	16-QAM	1/0	10.44	V	8.24	0.96	17.07	33
2510	20	16-QAM	1/0	9.66	H	8.24	0.96	17.30	33
2535	20	16-QAM	1/0	9.94	H	8.24	0.96	17.03	33
2560	20	16-QAM	1/0	9.57	H	8.24	0.96	16.19	33

Note:

Absolute level=Substituted Level-Cable loss+Antenna Gain


Margin=Limit -Absolute Level

4. Peak-Average Ratio

4.1. Test Standard and Limit

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2. Test Setup

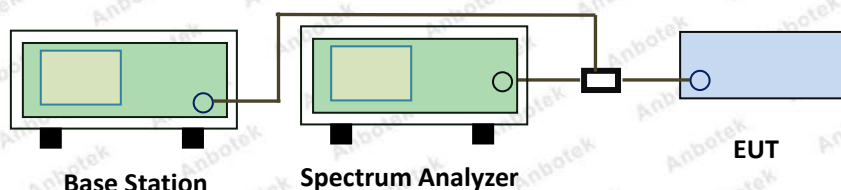

4.3. Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.4. Test Data

GSM Mode:

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
GSM850	128	2.74	13	PASS
GSM850	190	2.75	13	PASS
GSM850	251	2.73	13	PASS
GPRS850	128	2.75	13	PASS
GPRS850	190	2.75	13	PASS
GPRS850	251	2.72	13	PASS
GSM1900	512	2.77	13	PASS
GSM1900	661	2.75	13	PASS
GSM1900	810	2.76	13	PASS
GPRS1900	512	2.77	13	PASS
GPRS1900	661	2.76	13	PASS
GPRS1900	810	2.76	13	PASS

WCDMA Mode:

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band II	9262	3.03	13	PASS
Band II	9400	2.99	13	PASS
Band II	9538	2.73	13	PASS
Band V	4132	2.97	13	PASS
Band V	4182	3.13	13	PASS
Band V	4233	3.09	13	PASS

LTE Mode:

Band	Bandwidth h	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	4.23	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	4.88	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	4.75	13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	4.98	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	3.41	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	4.01	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	4.99	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	5.71	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	5.61	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	5.95	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	4.55	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	5.03	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	4.24	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	4.90	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	4.43	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	5.03	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	3.95	13	PASS
Band2	3MHz	QPSK	19185	15RB#0	4.36	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	5.12	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	5.77	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	5.21	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	5.93	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	4.85	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	5.37	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	4.33	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.89	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	4.50	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.12	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	4.41	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.65	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	5.08	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	5.73	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	5.15	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	5.89	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	5.11	13	PASS
Band2	5MHz	16QAM	19175	25RB#0	5.49	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	4.32	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	4.84	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	4.20	13	PASS

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 48 of 448

Band2	10MHz	QPSK	18900	50RB#0	4.99	13	PASS
Band2	10MHz	QPSK	19150	1RB#0	3.84	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	4.76	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	5.21	13	PASS
Band2	10MHz	16QAM	18650	50RB#0	5.68	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	4.98	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	5.85	13	PASS
Band2	10MHz	16QAM	19150	1RB#0	4.65	13	PASS
Band2	10MHz	16QAM	19150	50RB#0	5.65	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	4.31	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	5.16	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	4.06	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	5.33	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	3.70	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	5.09	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	5.14	13	PASS
Band2	15MHz	16QAM	18675	75RB#0	5.82	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	4.83	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	5.95	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	4.71	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	5.79	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	4.34	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.11	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	4.05	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.35	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	4.35	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.07	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	4.99	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	5.91	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	5.13	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	6.03	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	5.05	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	5.89	13	PASS
Band4	1.4MHz	QPSK	19957	1RB#0	4.00	13	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	4.86	13	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	3.32	13	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	4.11	13	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	3.14	13	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	4.21	13	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	4.98	13	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	5.72	13	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	4.39	13	PASS

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 49 of 448

Band4	1.4MHz	16QAM	20175	6RB#0	5.04	13	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	4.10	13	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	5.18	13	PASS
Band4	3MHz	QPSK	19965	1RB#0	3.86	13	PASS
Band4	3MHz	QPSK	19965	15RB#0	4.90	13	PASS
Band4	3MHz	QPSK	20175	1RB#0	3.33	13	PASS
Band4	3MHz	QPSK	20175	15RB#0	4.14	13	PASS
Band4	3MHz	QPSK	20385	1RB#0	2.89	13	PASS
Band4	3MHz	QPSK	20385	15RB#0	4.14	13	PASS
Band4	3MHz	16QAM	19965	1RB#0	4.74	13	PASS
Band4	3MHz	16QAM	19965	15RB#0	5.83	13	PASS
Band4	3MHz	16QAM	20175	1RB#0	4.23	13	PASS
Band4	3MHz	16QAM	20175	15RB#0	5.12	13	PASS
Band4	3MHz	16QAM	20385	1RB#0	3.88	13	PASS
Band4	3MHz	16QAM	20385	15RB#0	5.10	13	PASS
Band4	5MHz	QPSK	19975	1RB#0	4.05	13	PASS
Band4	5MHz	QPSK	19975	25RB#0	4.95	13	PASS
Band4	5MHz	QPSK	20175	1RB#0	3.61	13	PASS
Band4	5MHz	QPSK	20175	25RB#0	4.14	13	PASS
Band4	5MHz	QPSK	20375	1RB#0	2.91	13	PASS
Band4	5MHz	QPSK	20375	25RB#0	4.09	13	PASS
Band4	5MHz	16QAM	19975	1RB#0	4.84	13	PASS
Band4	5MHz	16QAM	19975	25RB#0	5.80	13	PASS
Band4	5MHz	16QAM	20175	1RB#0	4.36	13	PASS
Band4	5MHz	16QAM	20175	25RB#0	5.08	13	PASS
Band4	5MHz	16QAM	20375	1RB#0	3.72	13	PASS
Band4	5MHz	16QAM	20375	25RB#0	5.00	13	PASS
Band4	10MHz	QPSK	20000	1RB#0	3.88	13	PASS
Band4	10MHz	QPSK	20000	50RB#0	5.12	13	PASS
Band4	10MHz	QPSK	20175	1RB#0	3.70	13	PASS
Band4	10MHz	QPSK	20175	50RB#0	4.21	13	PASS
Band4	10MHz	QPSK	20350	1RB#0	2.54	13	PASS
Band4	10MHz	QPSK	20350	50RB#0	3.98	13	PASS
Band4	10MHz	16QAM	20000	1RB#0	4.78	13	PASS
Band4	10MHz	16QAM	20000	50RB#0	5.96	13	PASS
Band4	10MHz	16QAM	20175	1RB#0	4.68	13	PASS
Band4	10MHz	16QAM	20175	50RB#0	5.15	13	PASS
Band4	10MHz	16QAM	20350	1RB#0	3.53	13	PASS
Band4	10MHz	16QAM	20350	50RB#0	4.92	13	PASS
Band4	15MHz	QPSK	20025	1RB#0	3.92	13	PASS
Band4	15MHz	QPSK	20025	75RB#0	5.44	13	PASS
Band4	15MHz	QPSK	20175	1RB#0	4.18	13	PASS

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 50 of 448

Band4	15MHz	QPSK	20175	75RB#0	4.57	13	PASS
Band4	15MHz	QPSK	20325	1RB#0	2.65	13	PASS
Band4	15MHz	QPSK	20325	75RB#0	4.24	13	PASS
Band4	15MHz	16QAM	20025	1RB#0	4.79	13	PASS
Band4	15MHz	16QAM	20025	75RB#0	6.14	13	PASS
Band4	15MHz	16QAM	20175	1RB#0	5.00	13	PASS
Band4	15MHz	16QAM	20175	75RB#0	5.40	13	PASS
Band4	15MHz	16QAM	20325	1RB#0	3.66	13	PASS
Band4	15MHz	16QAM	20325	75RB#0	5.11	13	PASS
Band4	20MHz	QPSK	20050	1RB#0	4.28	13	PASS
Band4	20MHz	QPSK	20050	100RB#0	5.28	13	PASS
Band4	20MHz	QPSK	20175	1RB#0	4.42	13	PASS
Band4	20MHz	QPSK	20175	100RB#0	4.83	13	PASS
Band4	20MHz	QPSK	20300	1RB#0	3.16	13	PASS
Band4	20MHz	QPSK	20300	100RB#0	4.61	13	PASS
Band4	20MHz	16QAM	20050	1RB#0	5.10	13	PASS
Band4	20MHz	16QAM	20050	100RB#0	6.12	13	PASS
Band4	20MHz	16QAM	20175	1RB#0	5.10	13	PASS
Band4	20MHz	16QAM	20175	100RB#0	5.65	13	PASS
Band4	20MHz	16QAM	20300	1RB#0	4.15	13	PASS
Band4	20MHz	16QAM	20300	100RB#0	5.36	13	PASS
Band7	5MHz	QPSK	20775	1RB#0	4.37	13	PASS
Band7	5MHz	QPSK	20775	25RB#0	5.08	13	PASS
Band7	5MHz	QPSK	21100	1RB#0	4.70	13	PASS
Band7	5MHz	QPSK	21100	25RB#0	5.23	13	PASS
Band7	5MHz	QPSK	21425	1RB#0	4.29	13	PASS
Band7	5MHz	QPSK	21425	25RB#0	5.01	13	PASS
Band7	5MHz	16QAM	20775	1RB#0	5.17	13	PASS
Band7	5MHz	16QAM	20775	25RB#0	5.89	13	PASS
Band7	5MHz	16QAM	21100	1RB#0	5.32	13	PASS
Band7	5MHz	16QAM	21100	25RB#0	6.06	13	PASS
Band7	5MHz	16QAM	21425	1RB#0	4.94	13	PASS
Band7	5MHz	16QAM	21425	25RB#0	5.87	13	PASS
Band7	10MHz	QPSK	20800	1RB#0	4.27	13	PASS
Band7	10MHz	QPSK	20800	50RB#0	5.14	13	PASS
Band7	10MHz	QPSK	21100	1RB#0	4.51	13	PASS
Band7	10MHz	QPSK	21100	50RB#0	5.22	13	PASS
Band7	10MHz	QPSK	21400	1RB#0	4.39	13	PASS
Band7	10MHz	QPSK	21400	50RB#0	5.06	13	PASS
Band7	10MHz	16QAM	20800	1RB#0	5.06	13	PASS
Band7	10MHz	16QAM	20800	50RB#0	5.95	13	PASS
Band7	10MHz	16QAM	21100	1RB#0	5.17	13	PASS

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Report No.: SZAWW190313001-04

FCC ID: 2ALP3L1

Page 51 of 448

Band7	10MHz	16QAM	21100	50RB#0	6.05	13	PASS
Band7	10MHz	16QAM	21400	1RB#0	5.17	13	PASS
Band7	10MHz	16QAM	21400	50RB#0	5.91	13	PASS
Band7	15MHz	QPSK	20825	1RB#0	4.28	13	PASS
Band7	15MHz	QPSK	20825	75RB#0	5.41	13	PASS
Band7	15MHz	QPSK	21100	1RB#0	4.66	13	PASS
Band7	15MHz	QPSK	21100	75RB#0	5.55	13	PASS
Band7	15MHz	QPSK	21375	1RB#0	4.39	13	PASS
Band7	15MHz	QPSK	21375	75RB#0	5.39	13	PASS
Band7	15MHz	16QAM	20825	1RB#0	5.06	13	PASS
Band7	15MHz	16QAM	20825	75RB#0	6.09	13	PASS
Band7	15MHz	16QAM	21100	1RB#0	5.52	13	PASS
Band7	15MHz	16QAM	21100	75RB#0	6.19	13	PASS
Band7	15MHz	16QAM	21375	1RB#0	5.30	13	PASS
Band7	15MHz	16QAM	21375	75RB#0	6.08	13	PASS
Band7	20MHz	QPSK	20850	1RB#0	4.36	13	PASS
Band7	20MHz	QPSK	20850	100RB#0	5.28	13	PASS
Band7	20MHz	QPSK	21100	1RB#0	4.84	13	PASS
Band7	20MHz	QPSK	21100	100RB#0	5.44	13	PASS
Band7	20MHz	QPSK	21350	1RB#0	4.47	13	PASS
Band7	20MHz	QPSK	21350	100RB#0	5.28	13	PASS
Band7	20MHz	16QAM	20850	1RB#0	5.05	13	PASS
Band7	20MHz	16QAM	20850	100RB#0	6.12	13	PASS
Band7	20MHz	16QAM	21100	1RB#0	5.84	13	PASS
Band7	20MHz	16QAM	21100	100RB#0	6.17	13	PASS
Band7	20MHz	16QAM	21350	1RB#0	5.13	13	PASS
Band7	20MHz	16QAM	21350	100RB#0	6.12	13	PASS


GSM 850, Low Channel

Shenzhen Anbotech Compliance Laboratory Limited


Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com


 Hotline
400-003-0500
www.anbotech.com

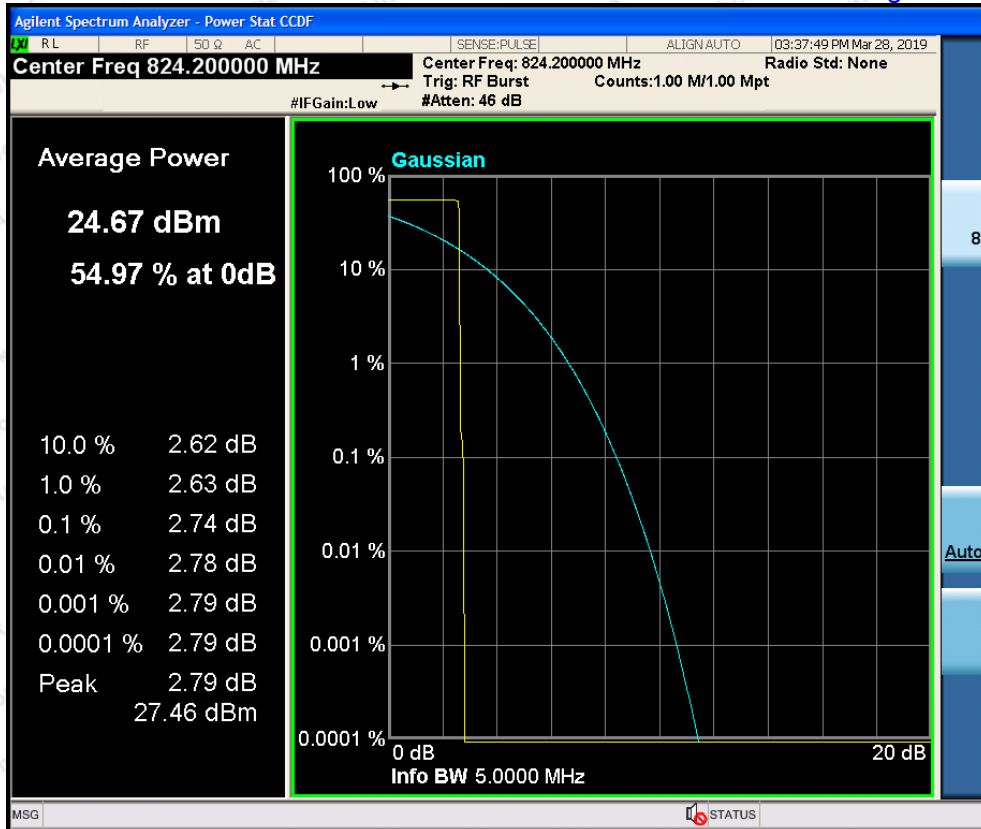


GSM 850, Middle Channel

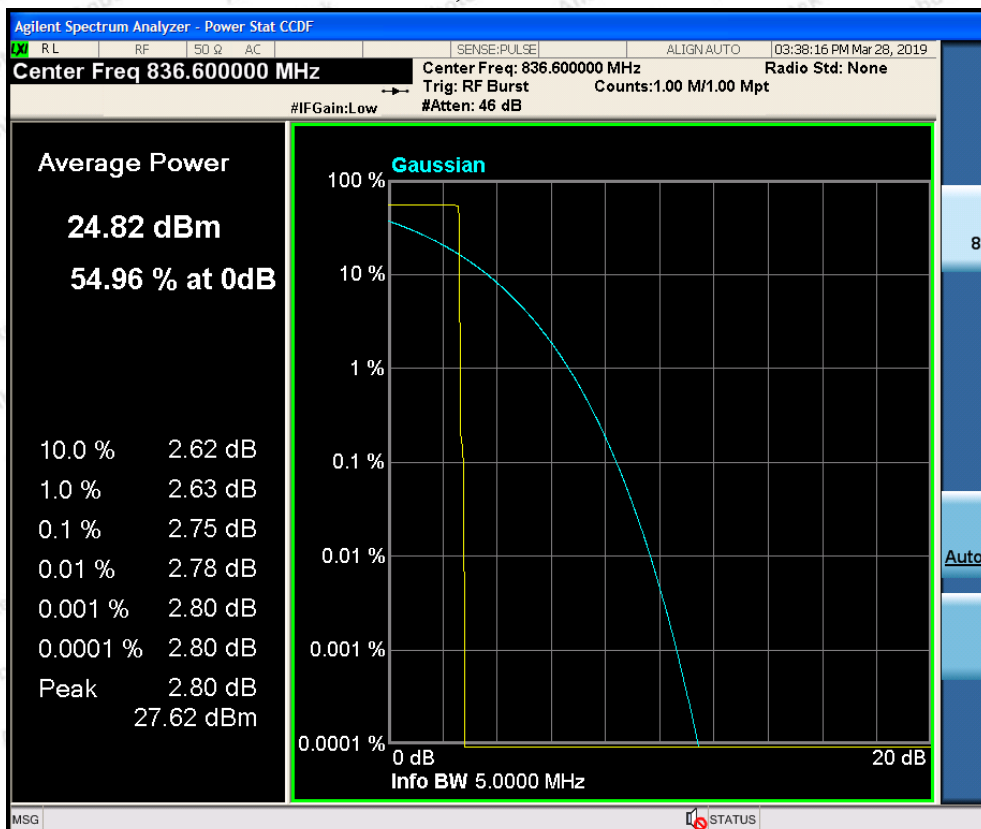


GSM 850, High Channel

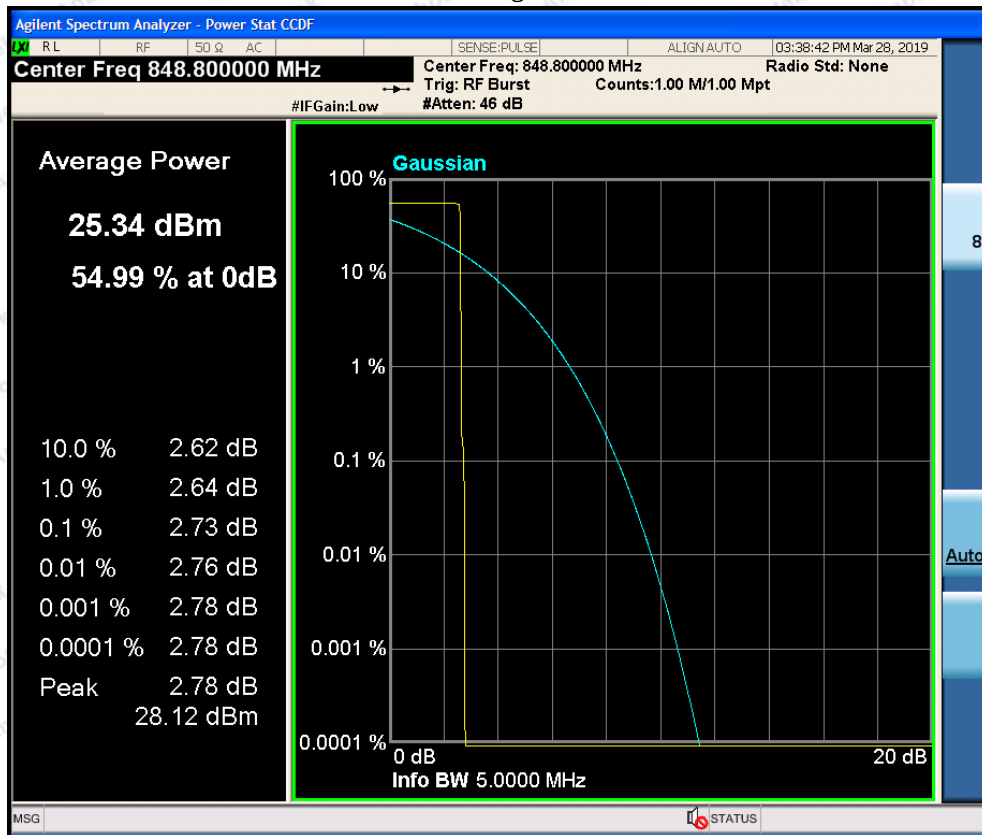


GSM 1900, Low Channel

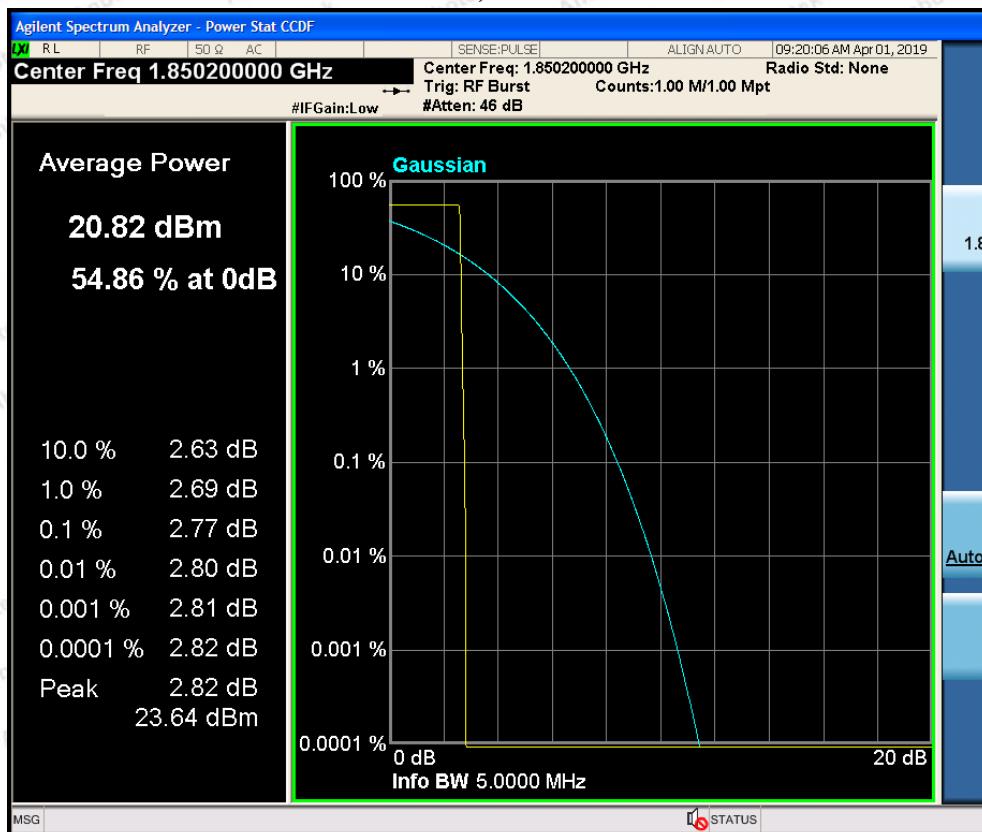


GSM 1900, Middle Channel

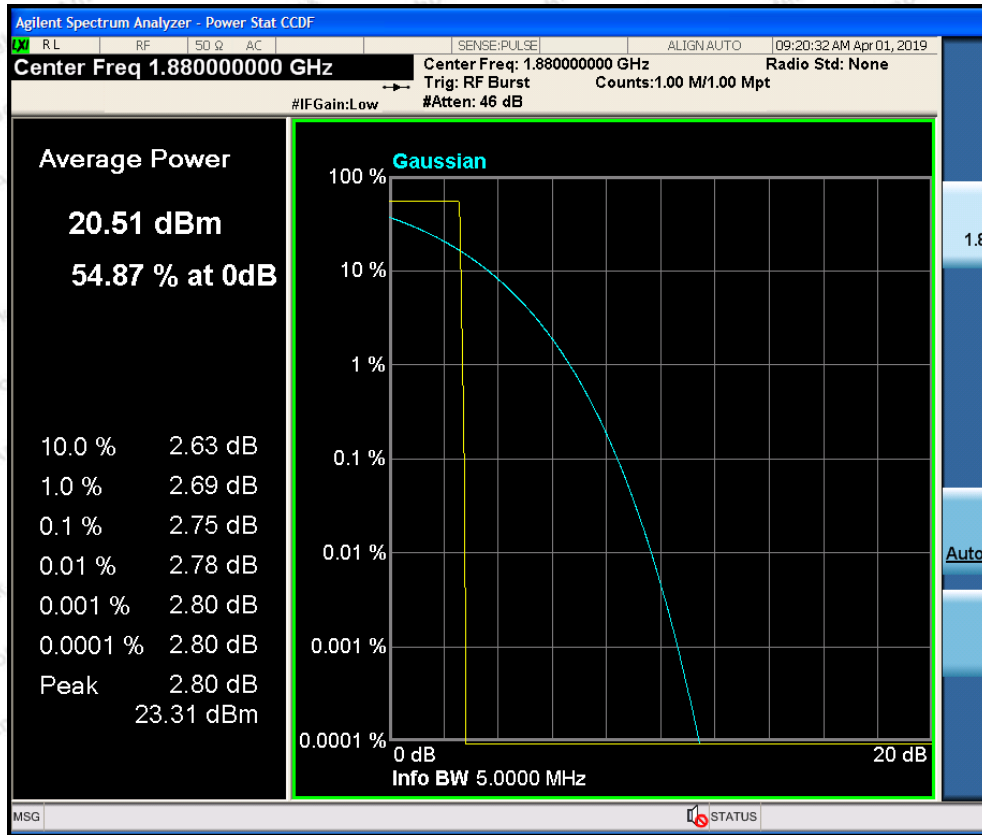


GSM 1900, High Channel

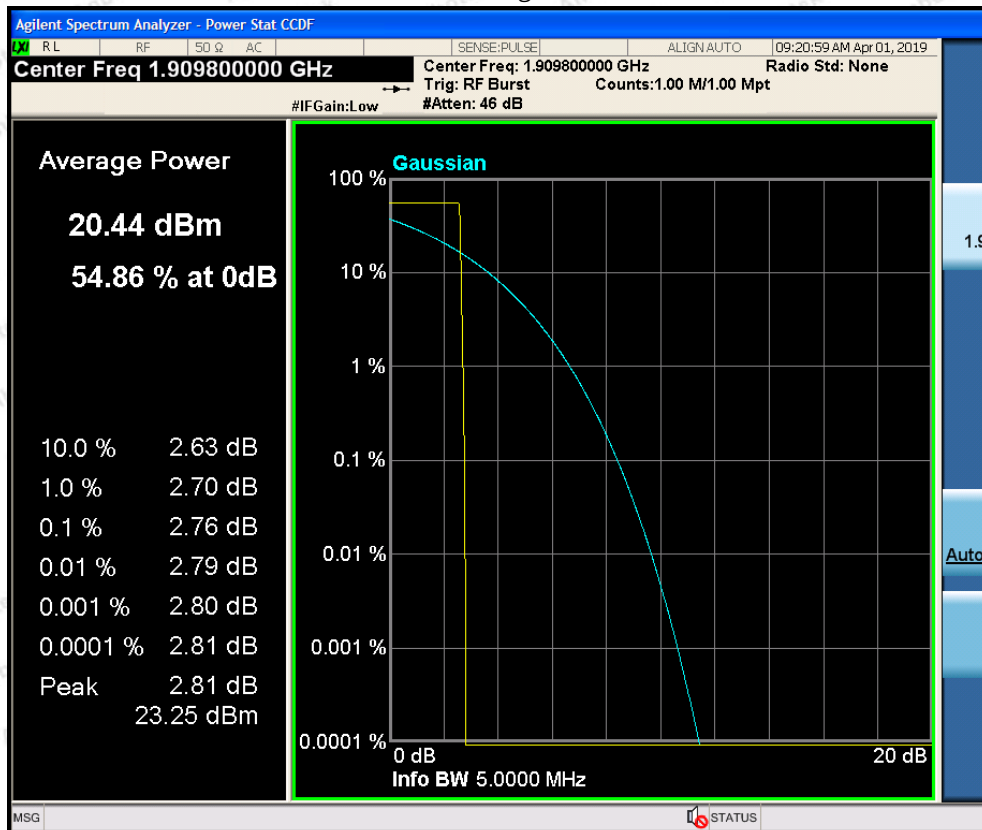


GPRS 850, Low Channel

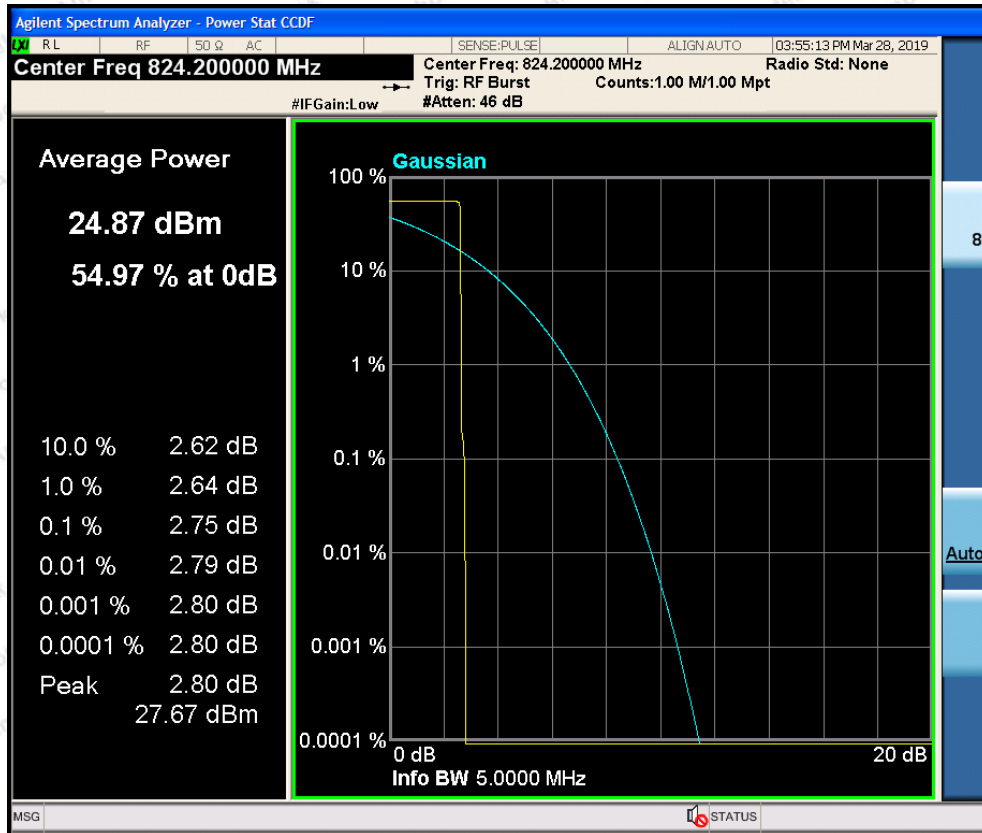


GPRS 850, Middle Channel

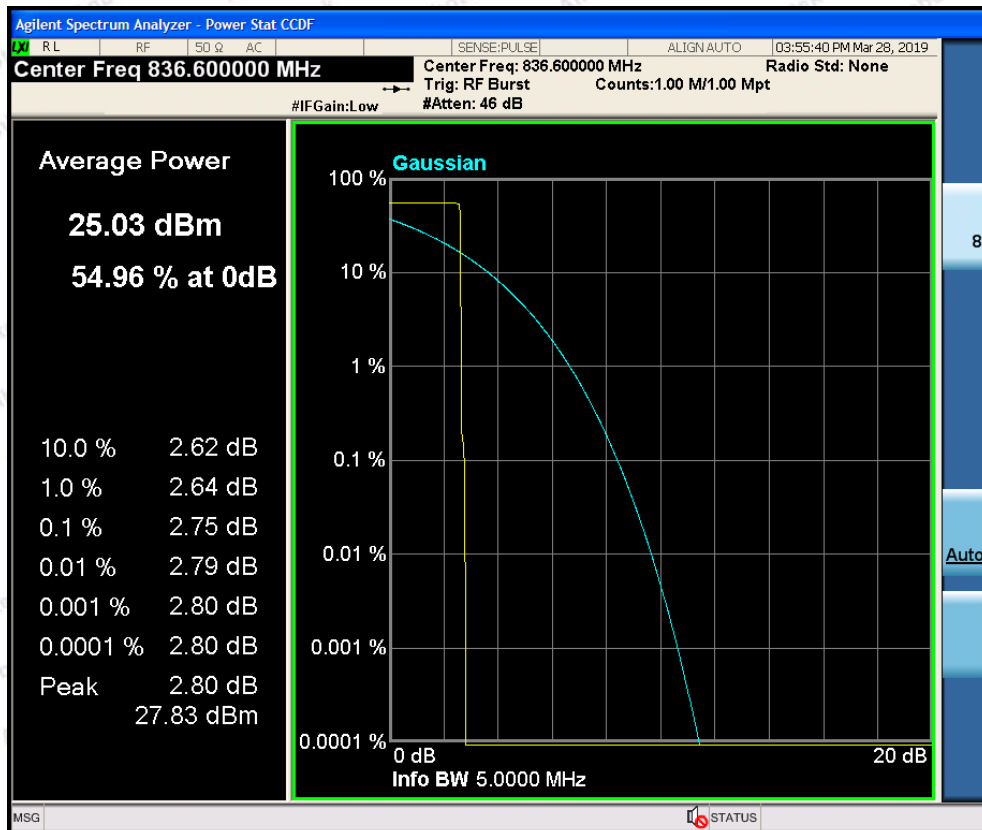

GPRS 850, High Channel

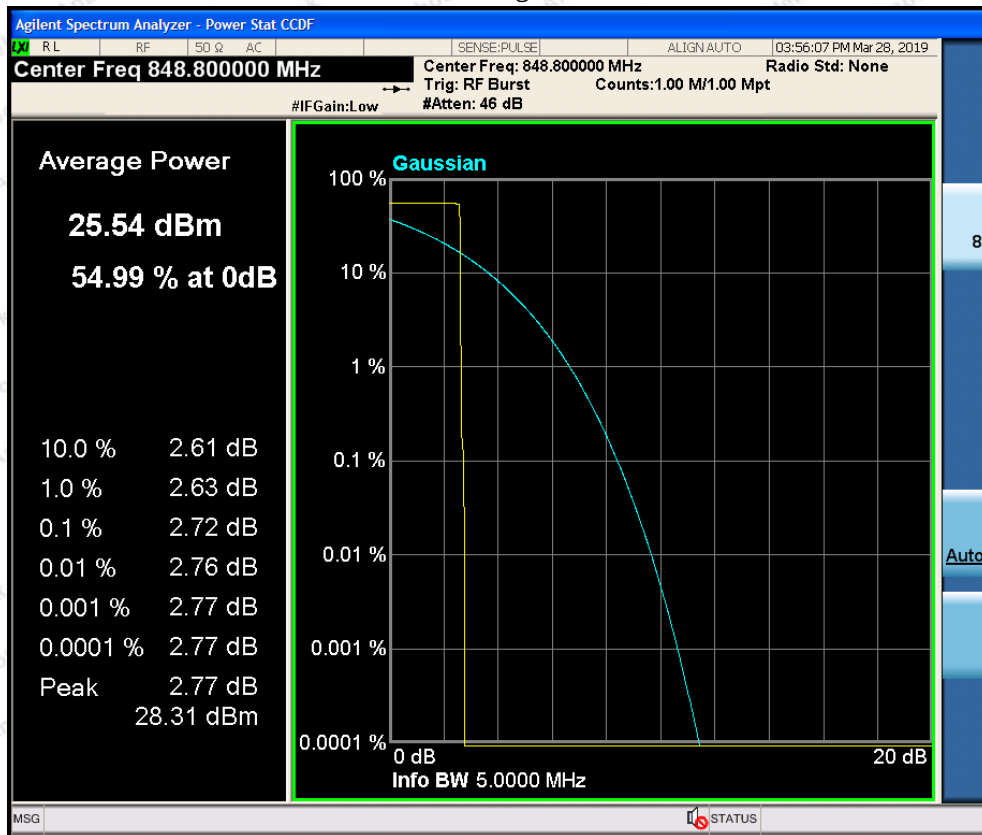

GPRS 1900, Low Channel

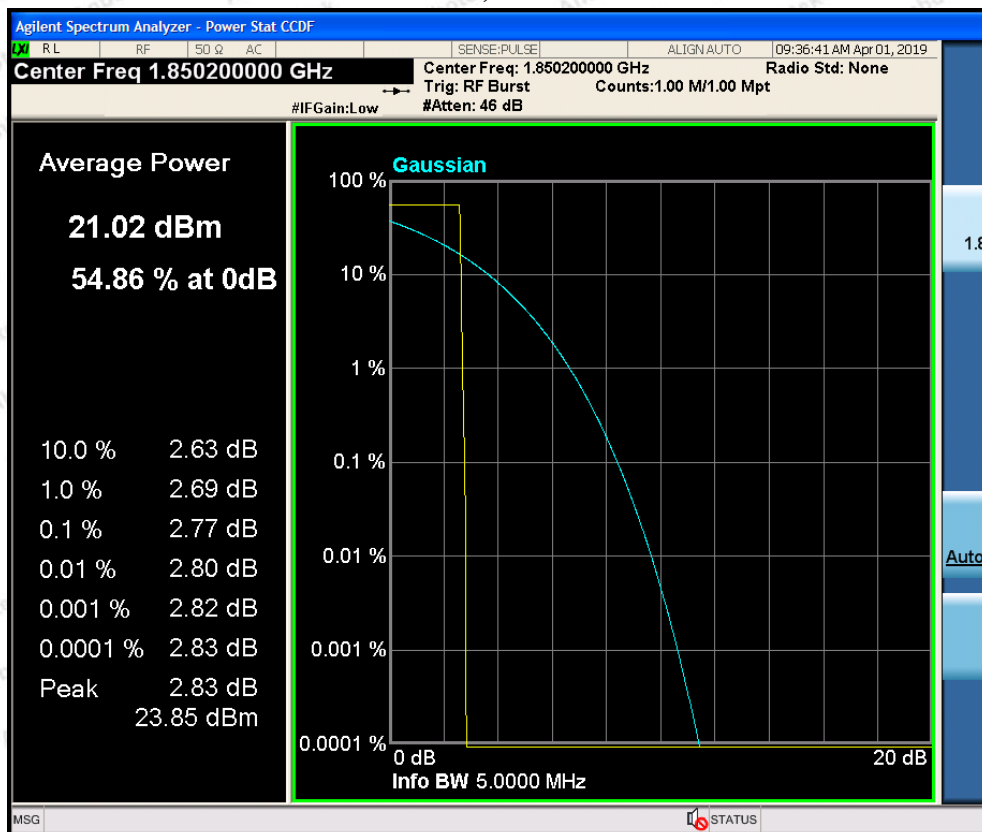

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com




Hotline


400-003-0500

www.anbotech.com


GPRS 1900, Middle Channel

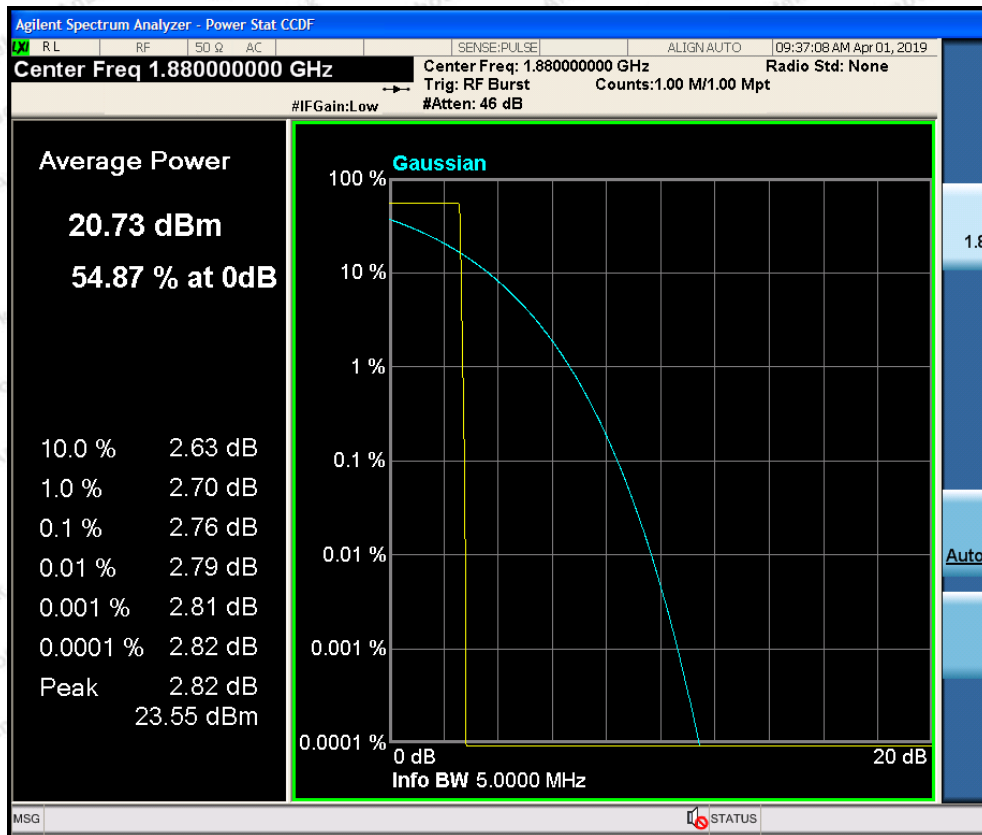


GPRS 1900, High Channel

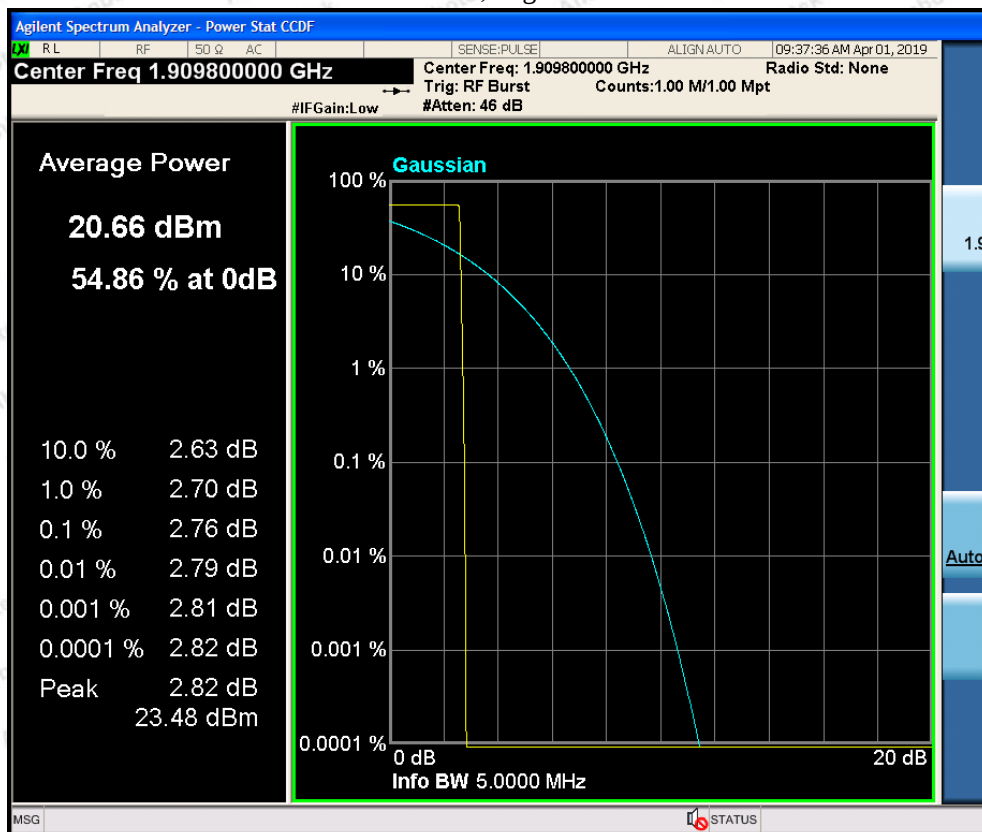

WCDMA Band II, Low Channel

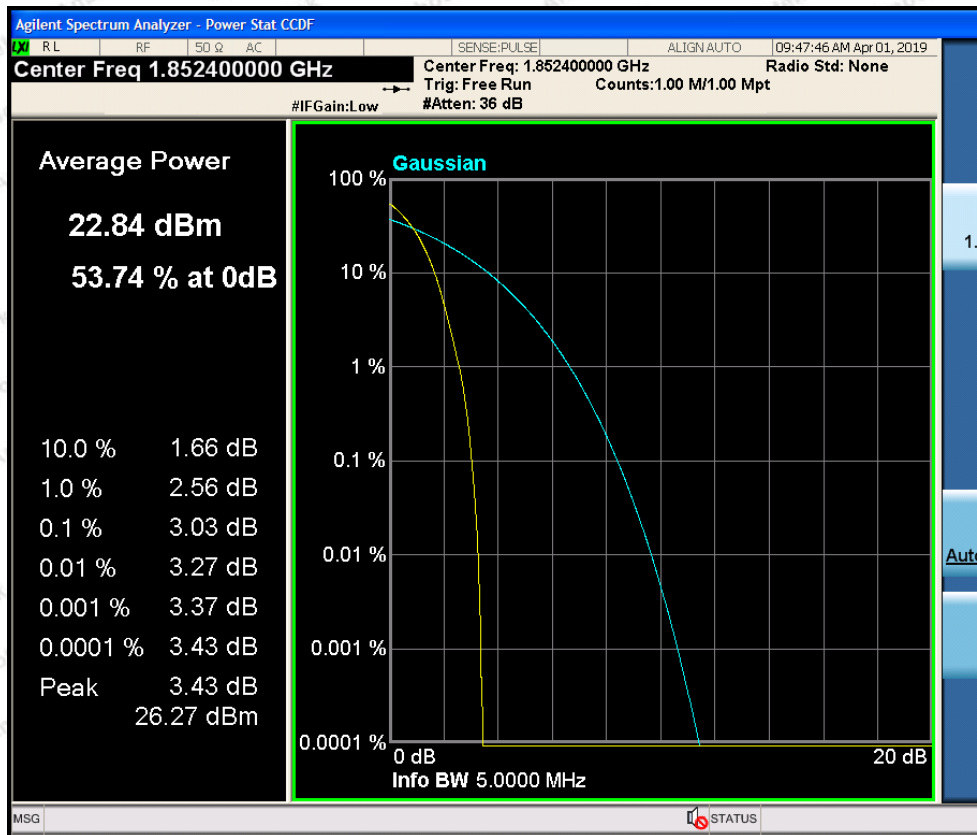

WCDMA Band II, Middle Channel

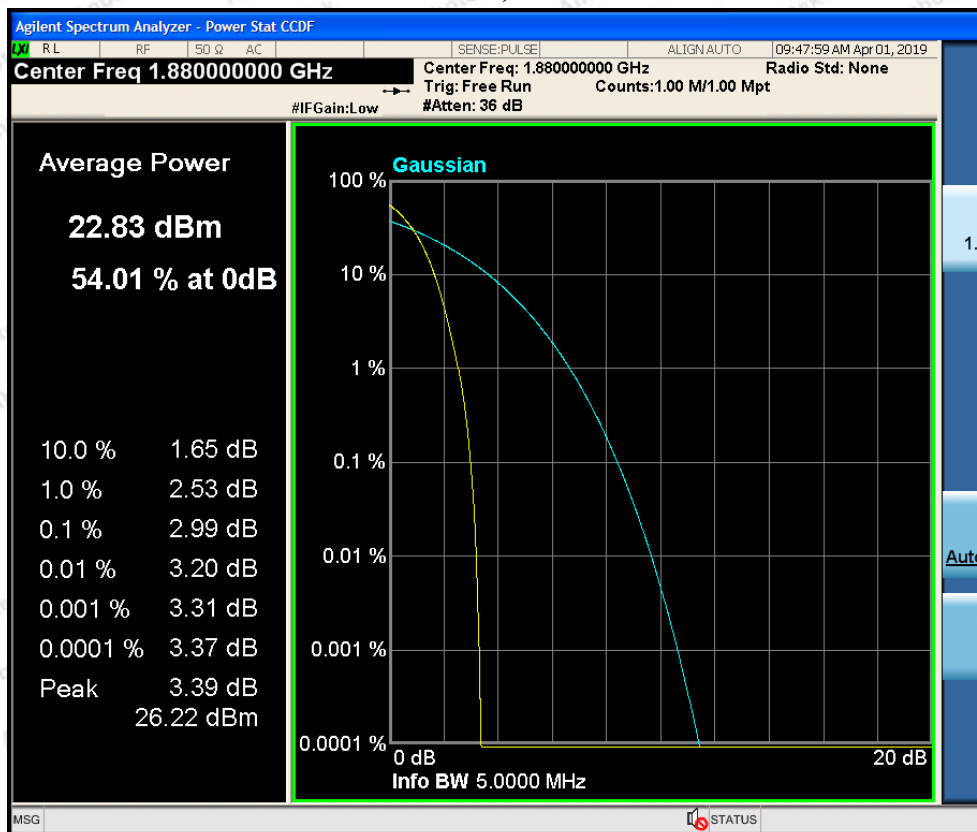

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com




Hotline


400-003-0500

www.anbotech.com

WCDMA Band II, High Channel

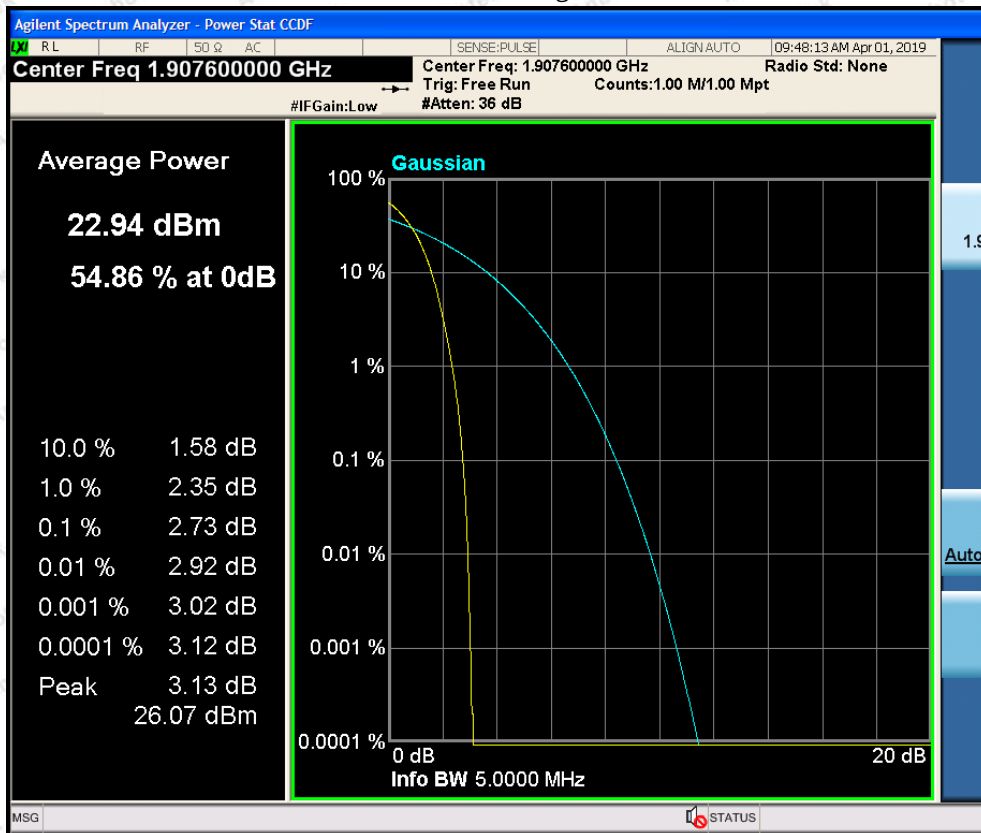

WCDMA Band V, Low Channel

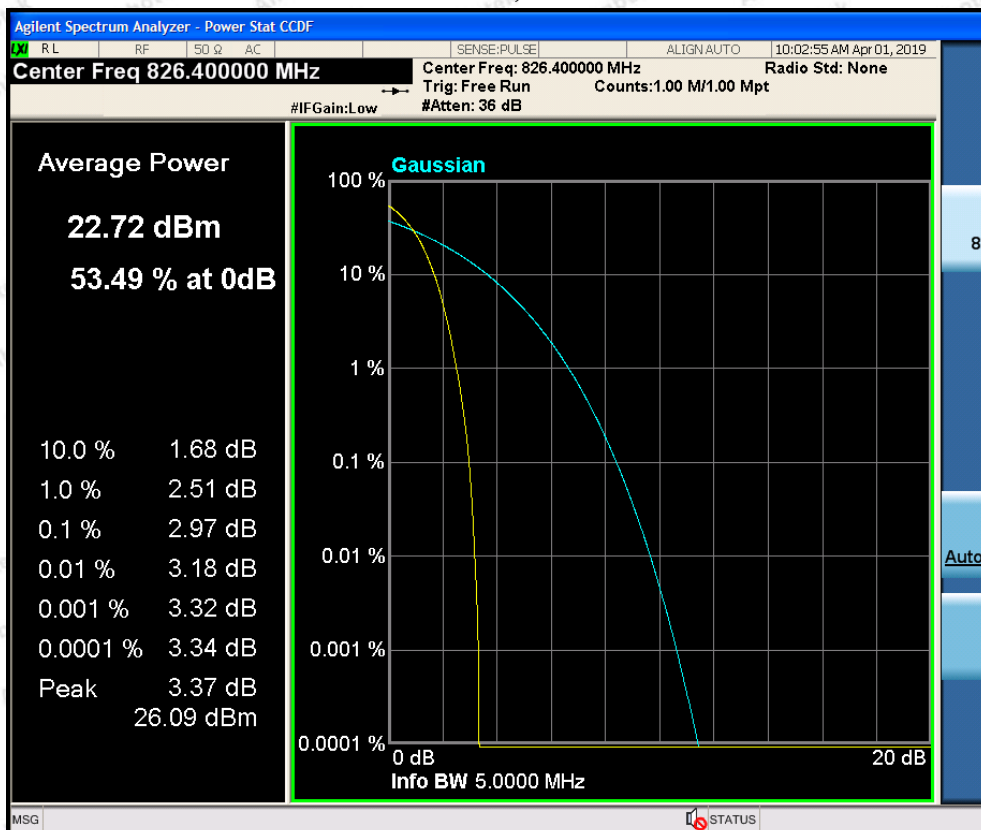

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com




Hotline


400-003-0500

www.anbotech.com

WCDMA Band V, Middle Channel

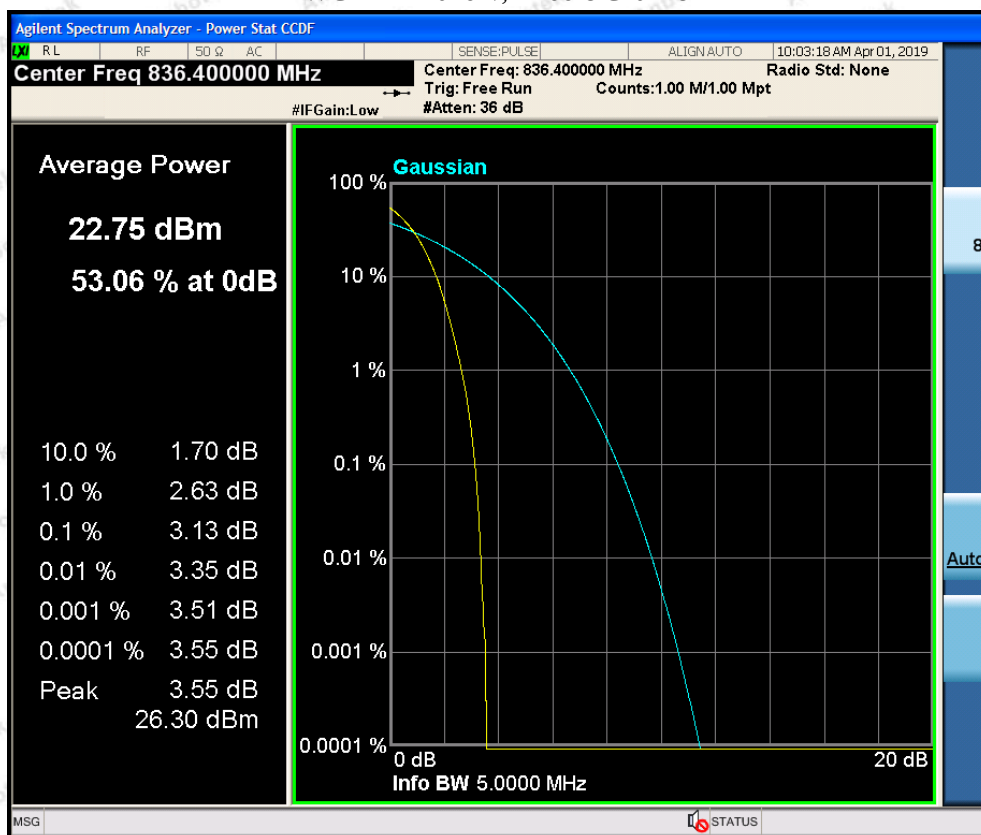

WCDMA Band V, High Channel

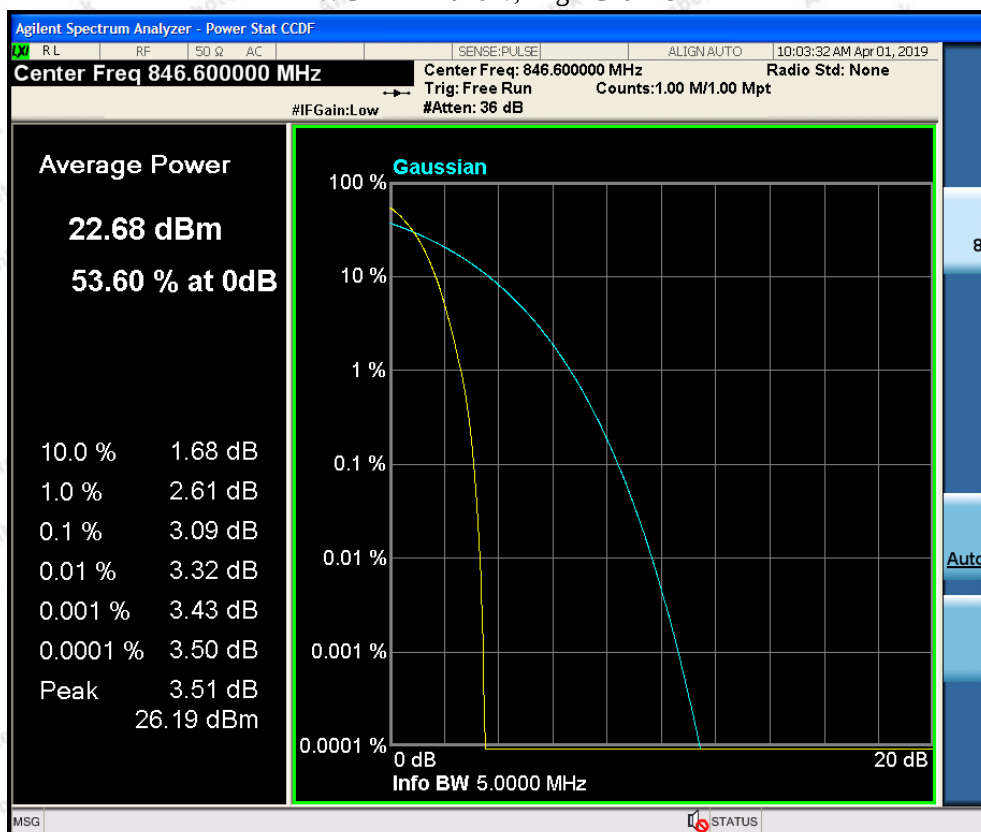

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Band2_1.4MHz_QPSK_18607_1RB#0



Band2_1.4MHz_QPSK_18607_6RB#0



Band2_1.4MHz_QPSK_18900_1RB#0



Band2_1.4MHz_QPSK_18900_6RB#0



Band2_1.4MHz_QPSK_19193_1RB#0



Band2_1.4MHz_QPSK_19193_6RB#0



Band2_1.4MHz_16QAM_18607_1RB#0

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline 400-003-0500
www.anbotech.com





Band2_1.4MHz_16QAM_19193_1RB#0



Band2_1.4MHz_16QAM_19193_6RB#0



Band2_3MHz_QPSK_18615_1RB#0

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com