




2. test equipment

name	modle	model numbei	manufacturer	calibration date	Date of next calibration
OTA test system	RayZone-5000	RFI-LAB-RF-D00	GTS	2021.3.22	2023.3.21
network analyzer	E5071C	RFI-LAB-RF-C02	KEYSIGHT	2022.5.13	2023.5.12
network analyzer	E5071C	RFI-LAB-RF-D01	KEYSIGHT	2022.5.13	2023.5.12

3. testing environment



environment temperature	23.6℃
relative humidity	58%RH
atmospheric pressure	100.14kPa

4. Sample material

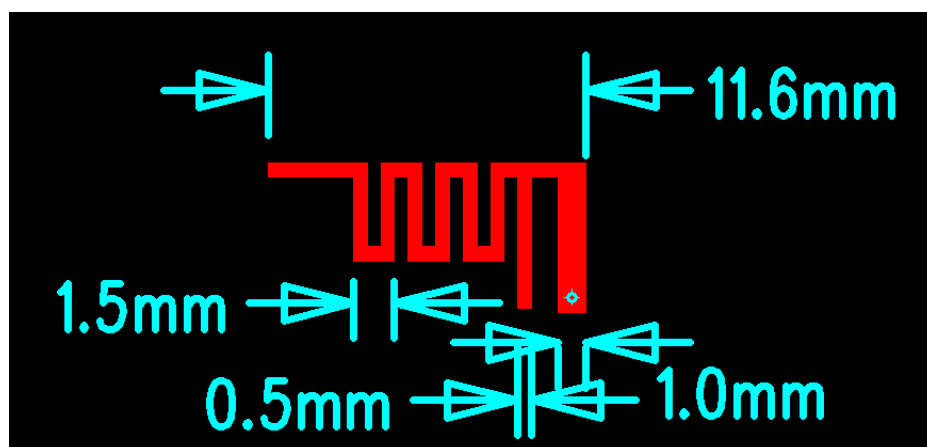

5. Sample layout diagram

front view

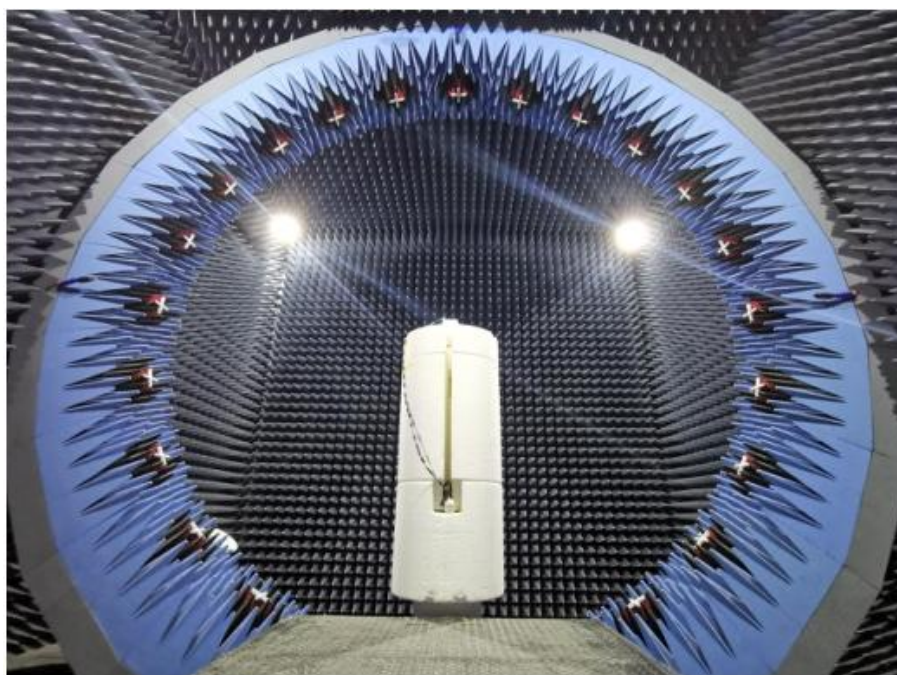

6.test result

6.1 detection principle

Object name	name of parameter	Method name	standard
Mobile communication antenna	radiation pattern	General technical specification for mobile communication antennas	GB/T 9410-2008
	antenna gain		
	voltage standing wave ratio		
	Roundness of the directional graph		
antenna	Gain and directivity	IEEE Standard Procedure for antenna testing	ANSI/IEEE Std 149-1979
	radiant efficiency		
	impedance		


6.2 Test uncertainty

the calculation of Uncertainty is based on the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO, which uses K=2 inclusion factor and 95% confidence level to represent extended uncertainty.

project	uncertainty
standing wave-ratio swr	±0.3
Gain, efficiency	±0.72dB

7. test data

7.1 Network analyzer test

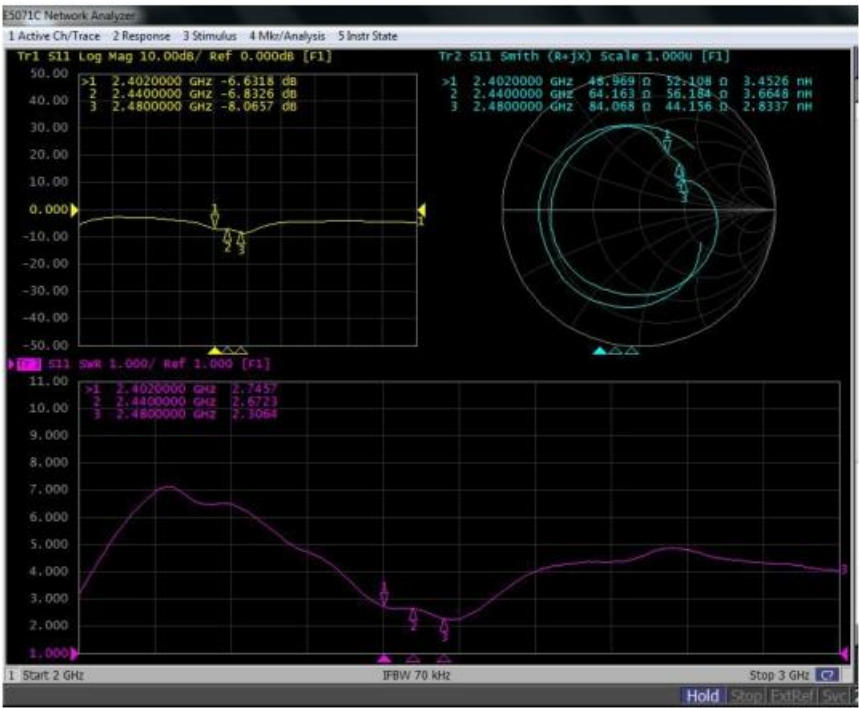

7.2 standing-wave ratio (SWR)

frequency/MHz	2402	2440	2480
voltage standing wave ratio	2.7457	2.6723	2.3064


7.3 Gain and efficiency

frequency/MHz	2402	2410	2420	2430	2440	2450	2460	2470	2480
maximum gain/dBi	-1.97	-1.95	-1.63	-1.49	-1.27	-1.06	-0.89	-0.71	-0.95
efficiency/%	17.88	18.34	19.20	19.89	20.58	20.86	21.78	22.18	21.03


7.4 Directional artwork


frequency/MHz	2402	2410	2420	2430	2440	2450	2460	2470	2480
H Theta=90/dB	20.55	20.57	20.15	19.12	18.93	20.11	20.49	19.26	16.51

7.5 directional diagram

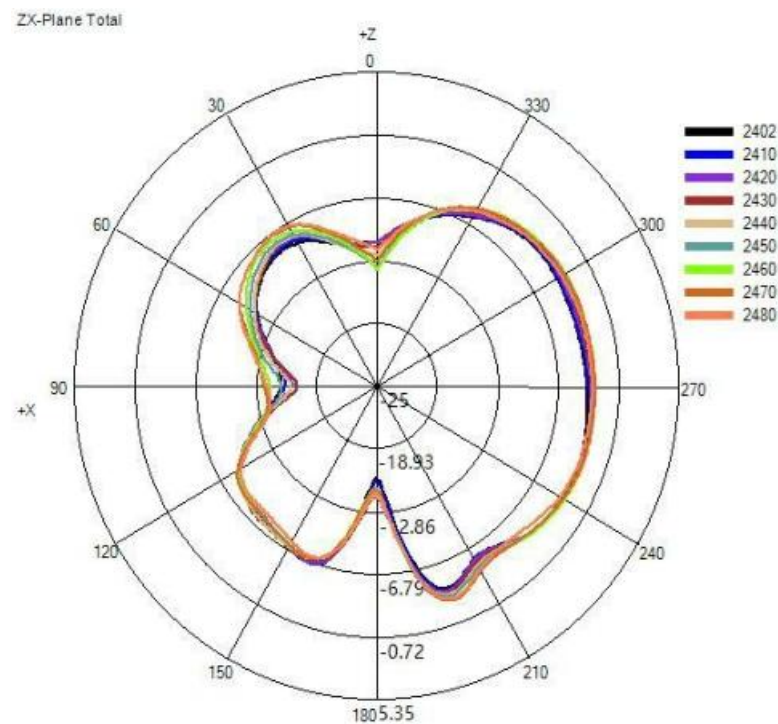


(2) Y-Z (unit: dBi):

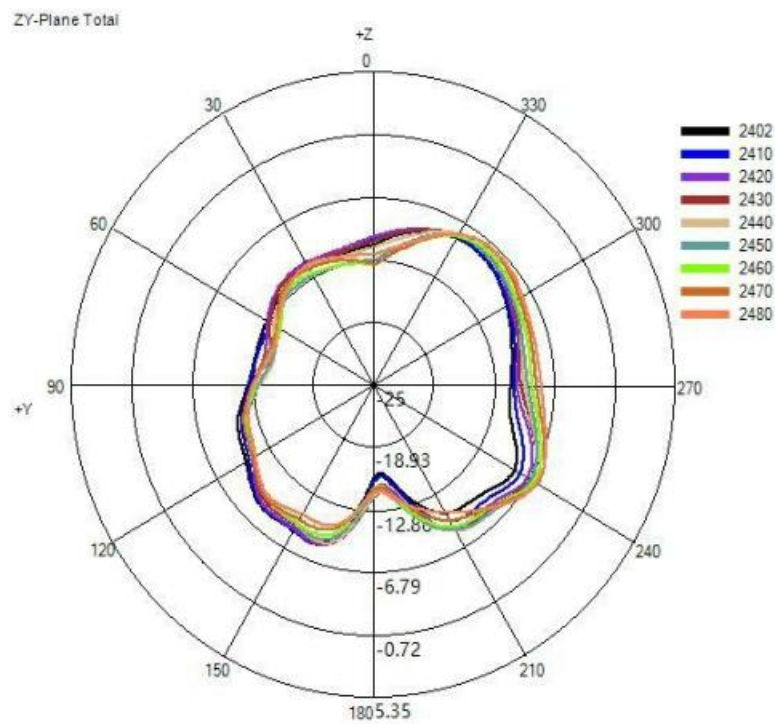

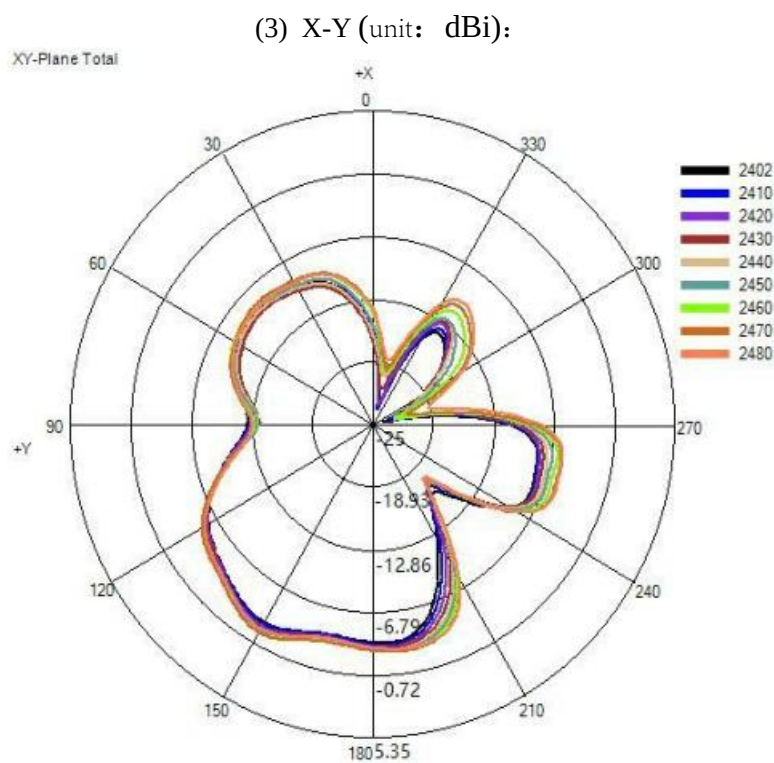

(4) 2470MHz 的 3D directional diagram(unit: dBi):

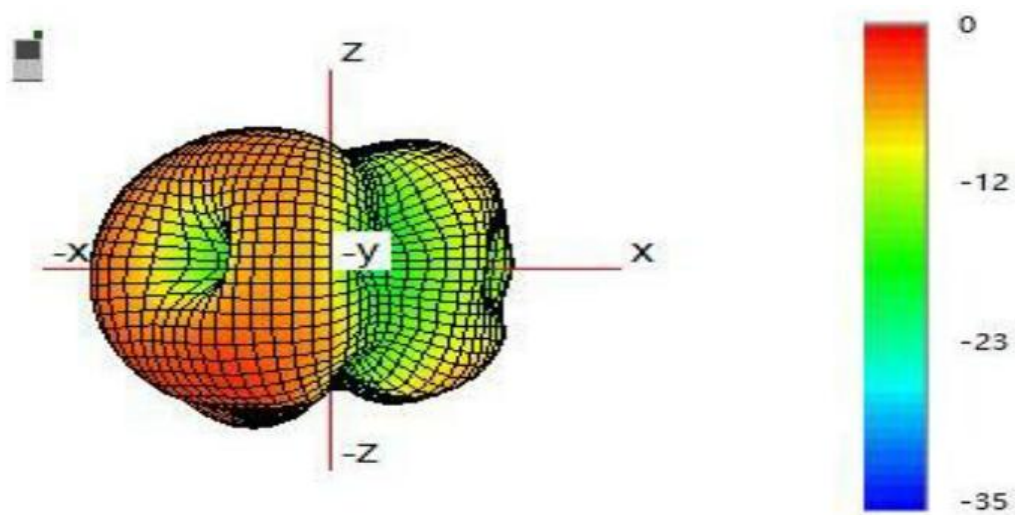

-----end-----

(The following is blank)