





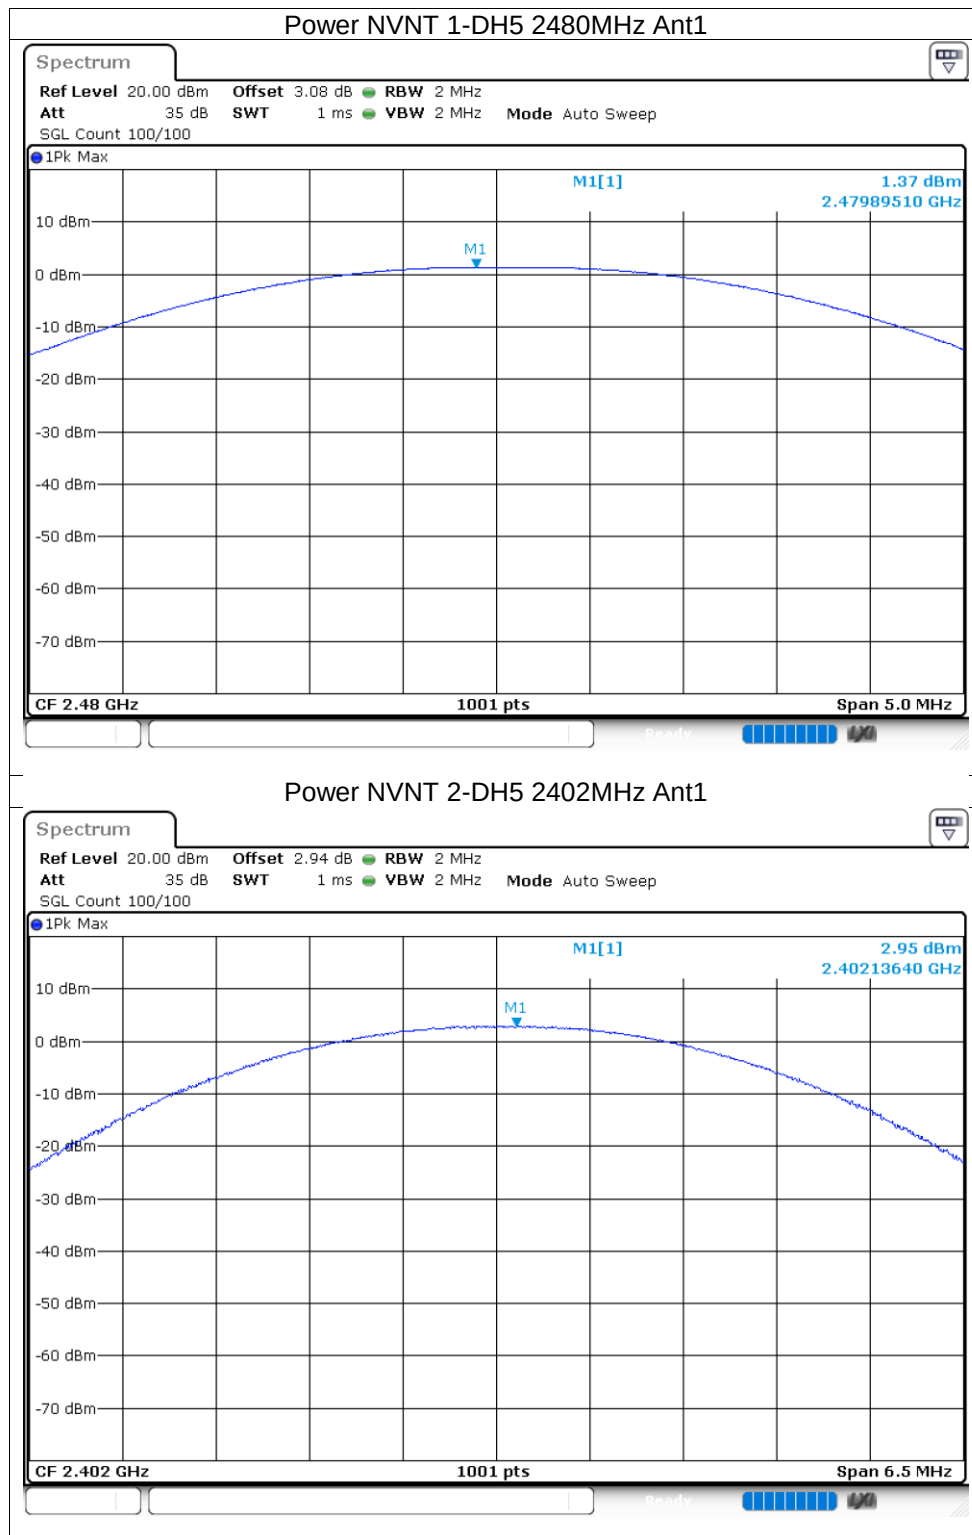

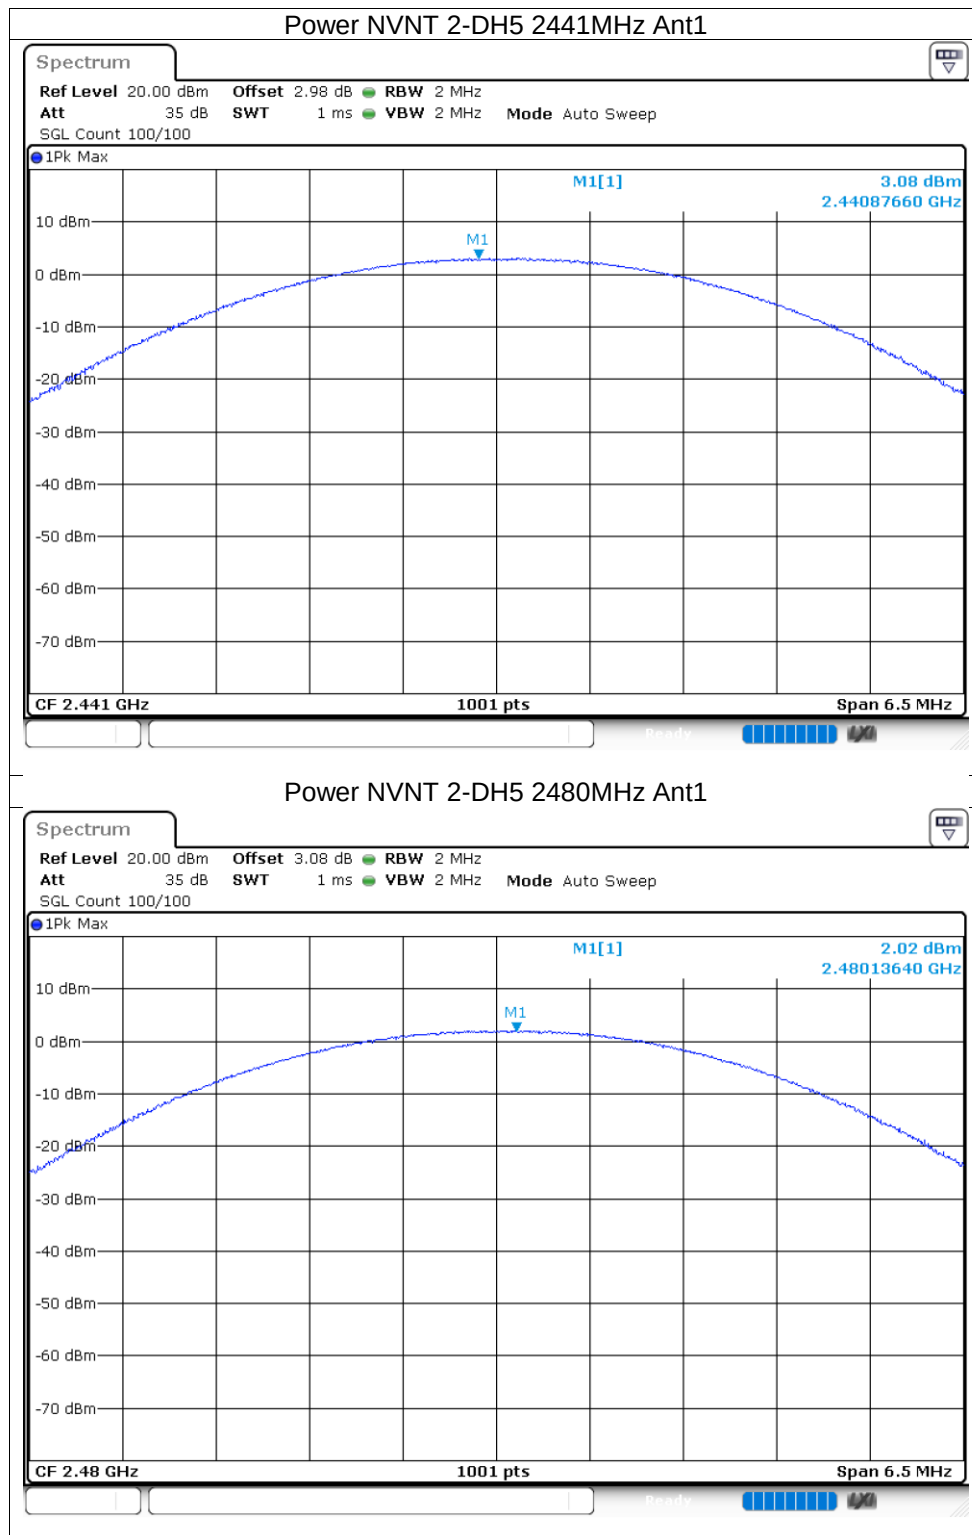


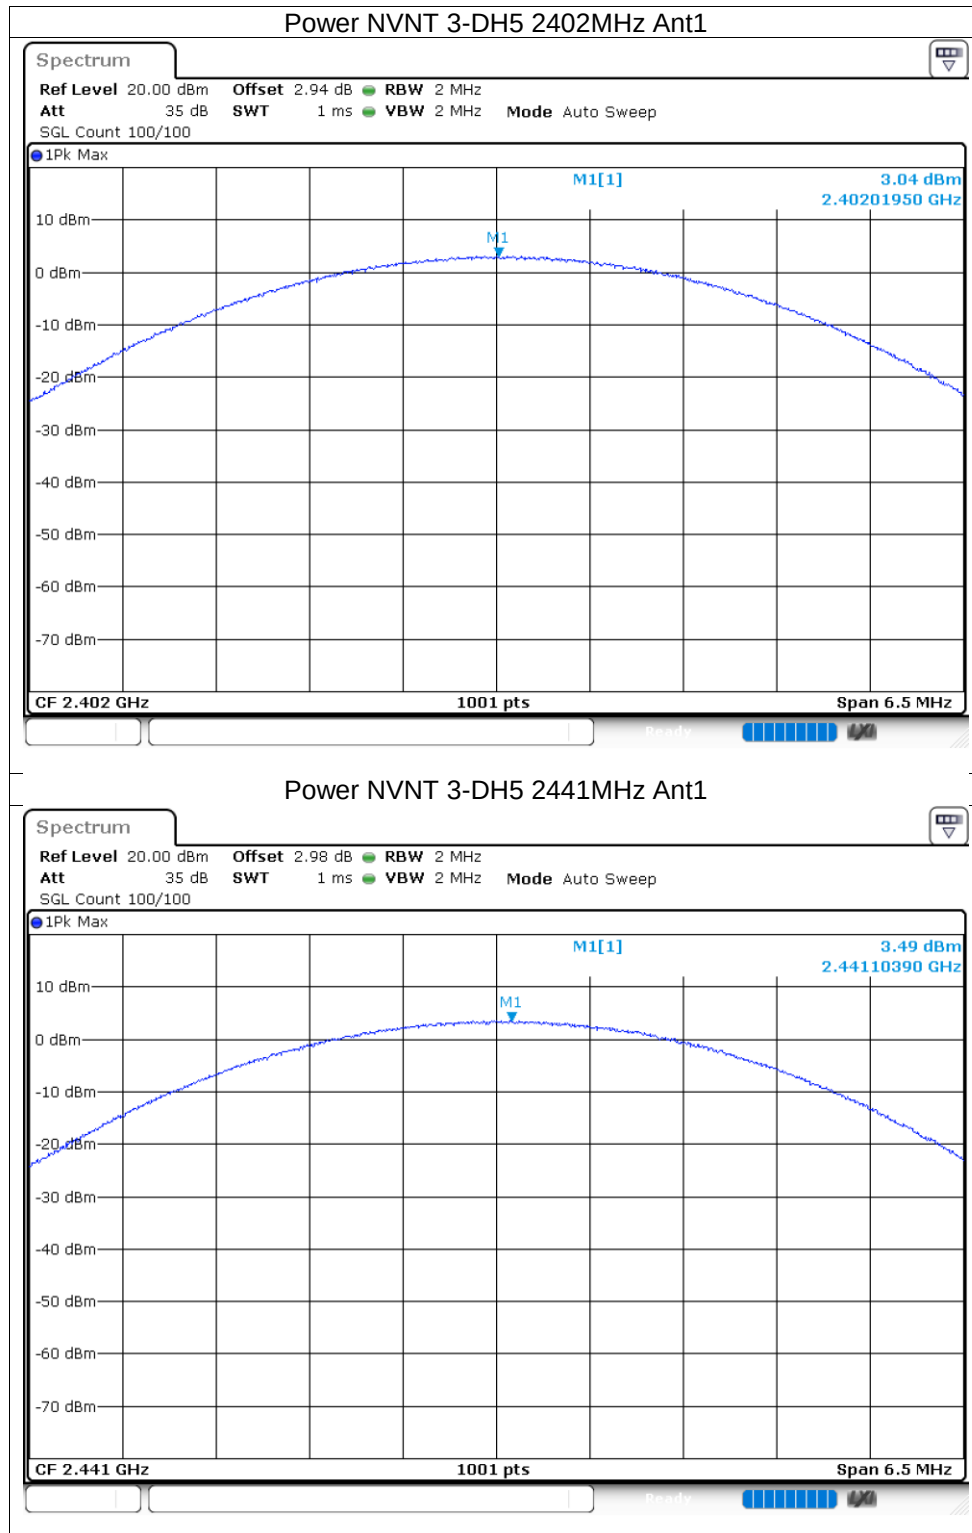


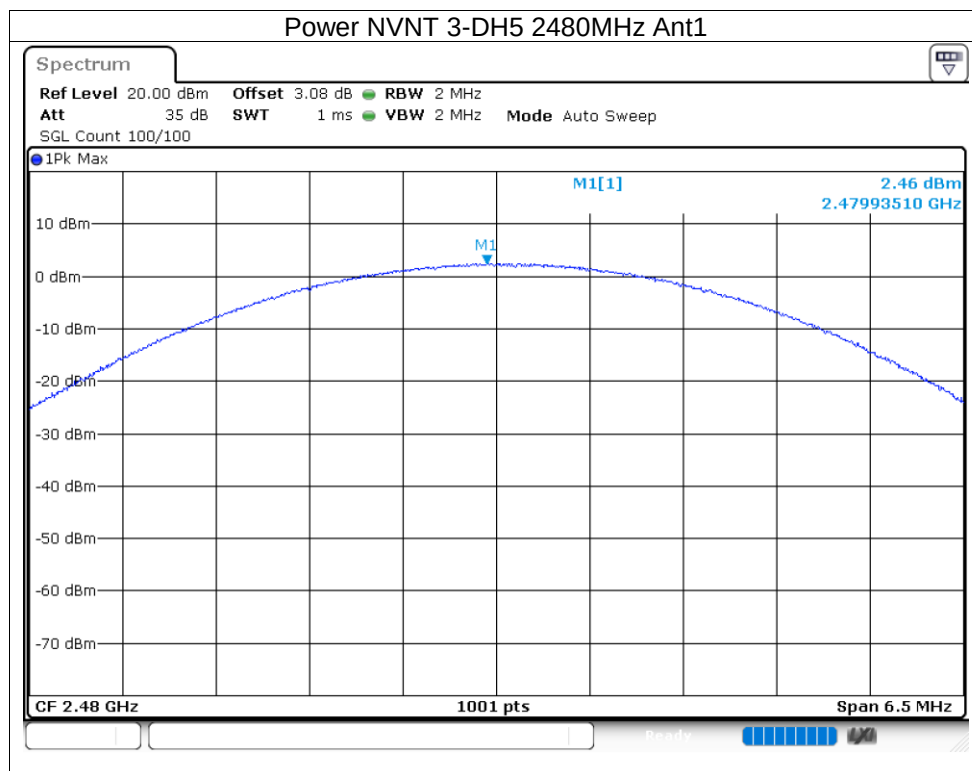



11.1.3 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.942	0	Pass
NVNT	1-DH5	2441	Ant1	0.956	0	Pass
NVNT	1-DH5	2480	Ant1	0.95	0	Pass
NVNT	2-DH5	2402	Ant1	1.28	0	Pass
NVNT	2-DH5	2441	Ant1	1.274	0	Pass
NVNT	2-DH5	2480	Ant1	1.282	0	Pass
NVNT	3-DH5	2402	Ant1	1.3	0	Pass
NVNT	3-DH5	2441	Ant1	1.302	0	Pass
NVNT	3-DH5	2480	Ant1	1.302	0	Pass

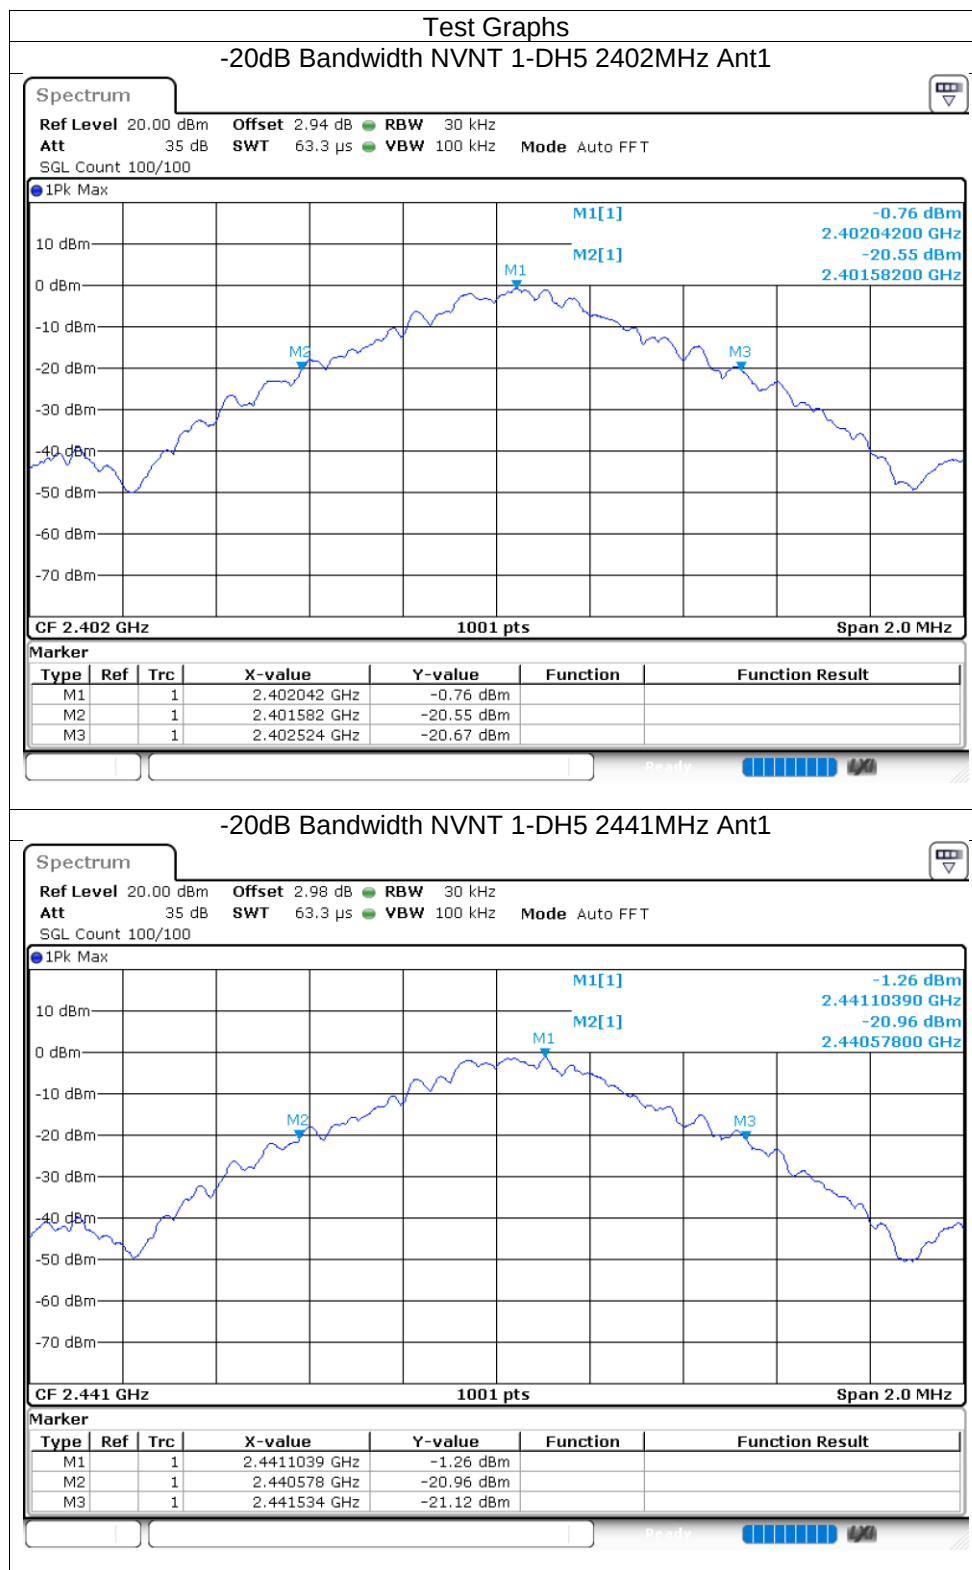

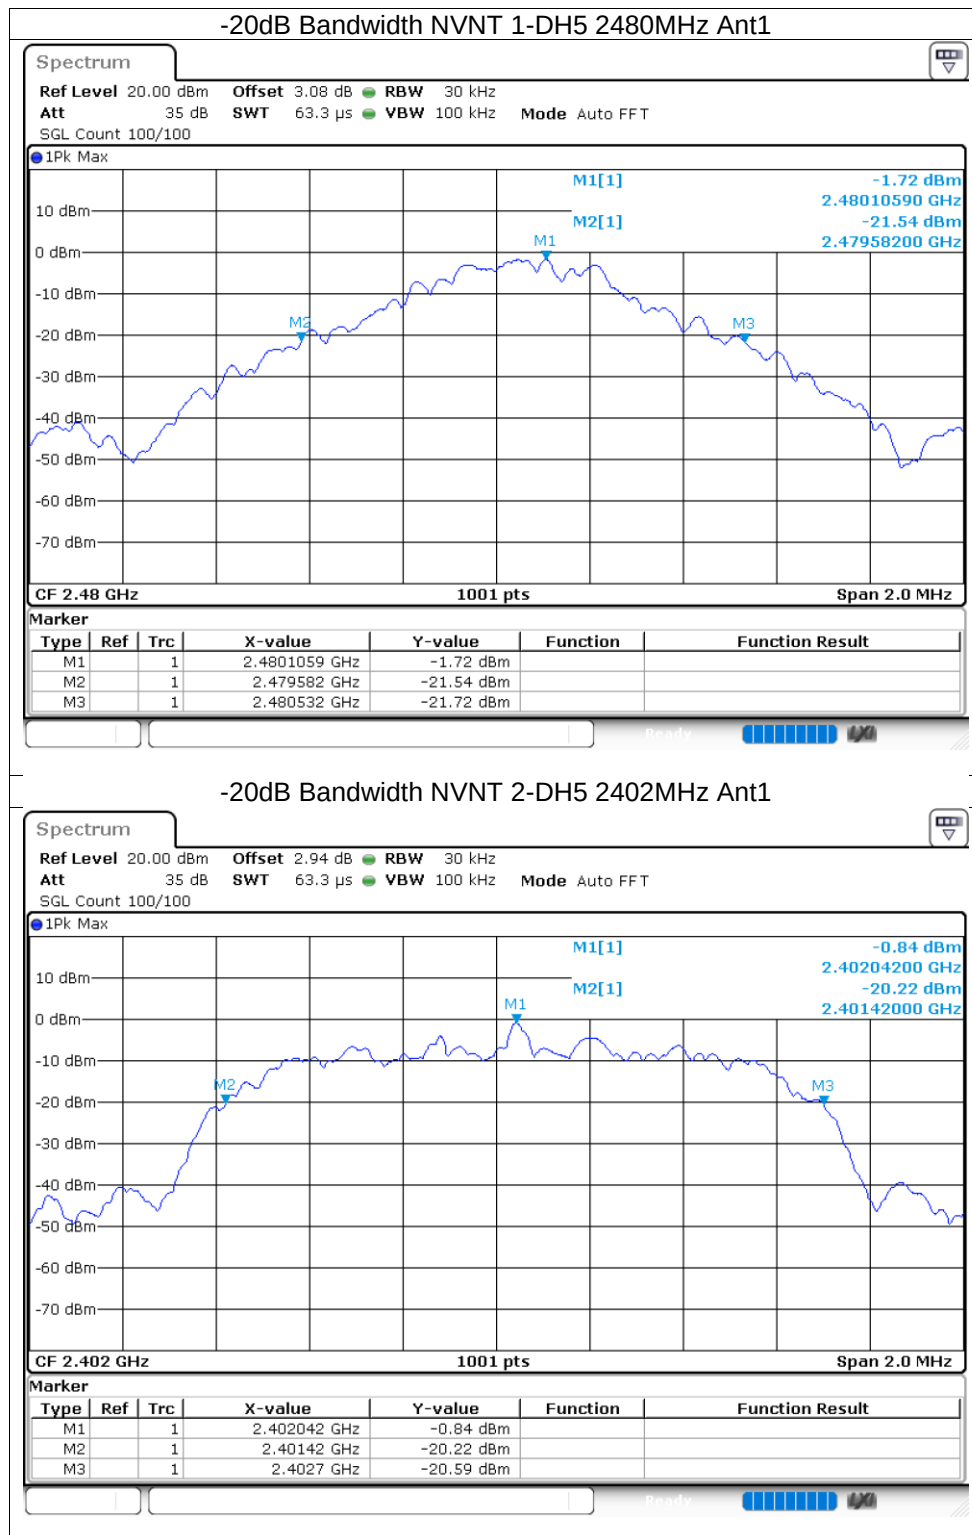

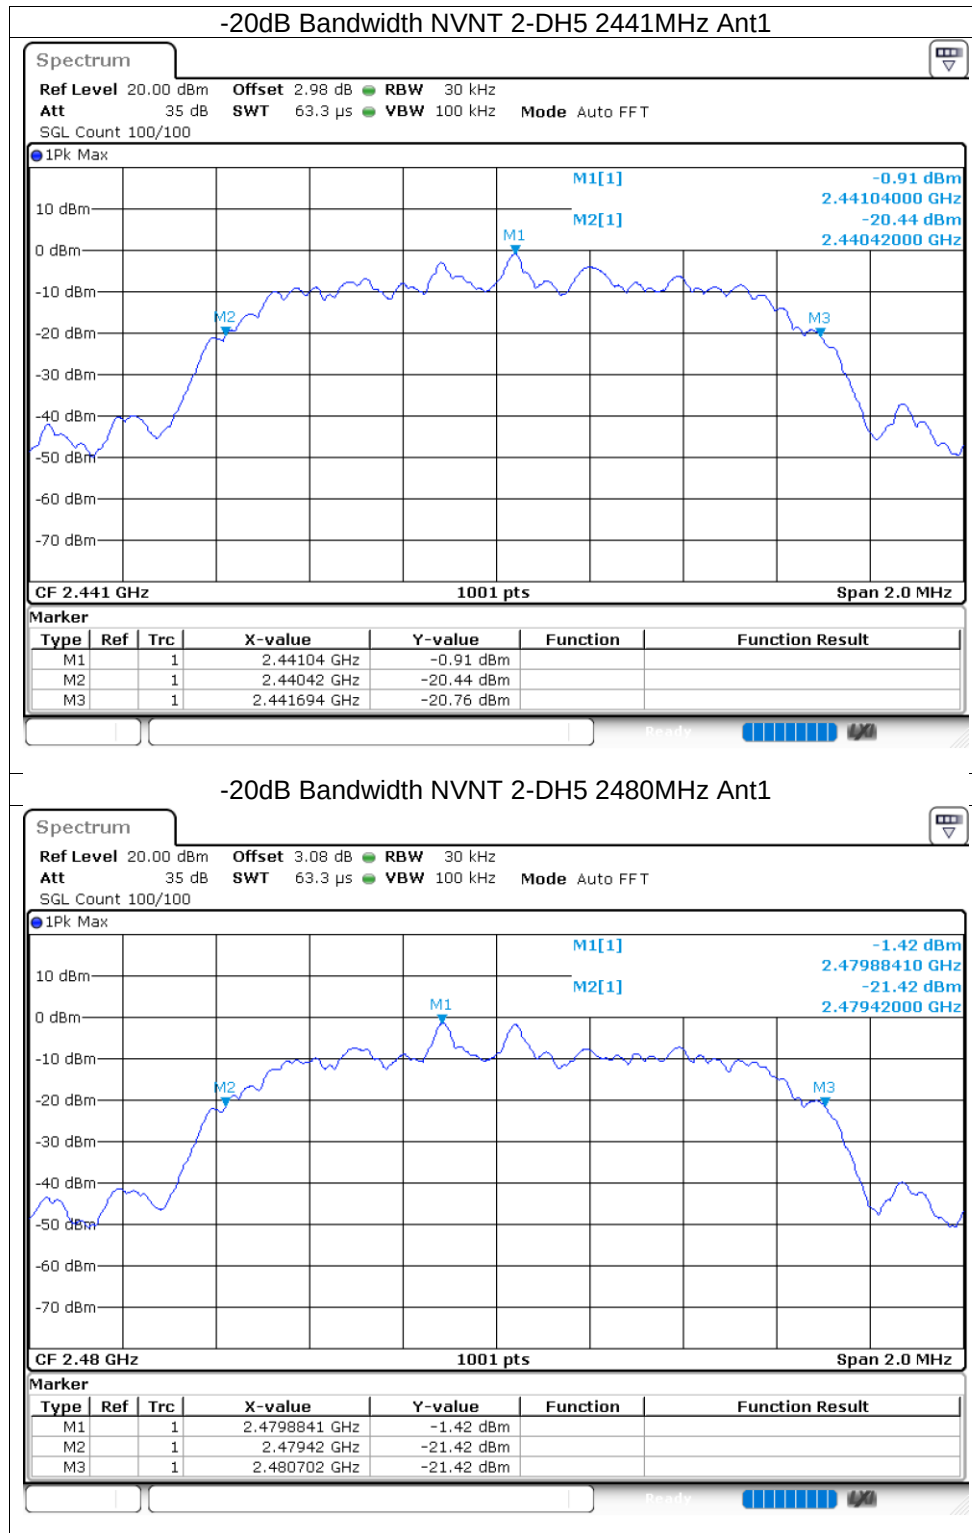


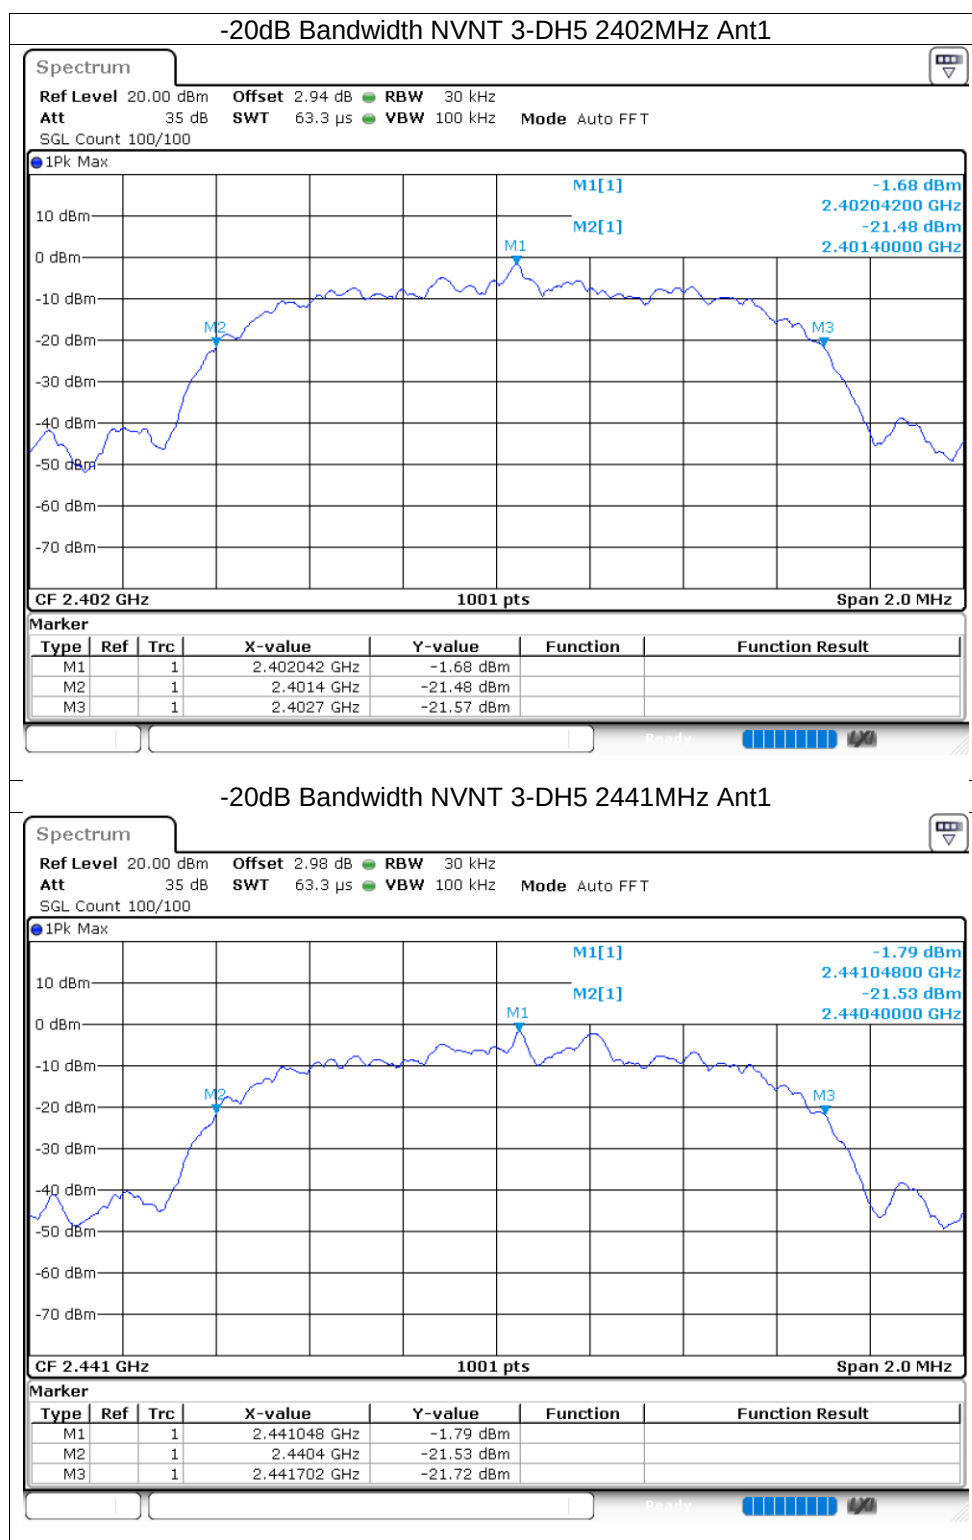


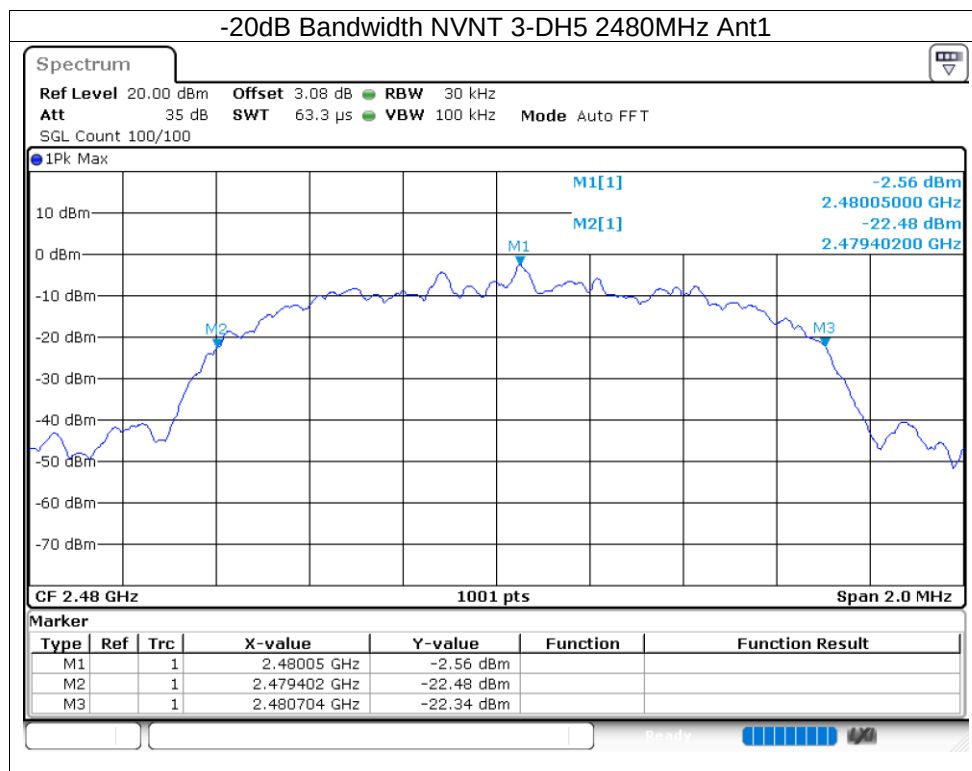



11.1.4 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.863
NVNT	1-DH5	2441	Ant1	0.843
NVNT	1-DH5	2480	Ant1	0.875
NVNT	2-DH5	2402	Ant1	1.187
NVNT	2-DH5	2441	Ant1	1.189
NVNT	2-DH5	2480	Ant1	1.181
NVNT	3-DH5	2402	Ant1	1.195
NVNT	3-DH5	2441	Ant1	1.179
NVNT	3-DH5	2480	Ant1	1.181

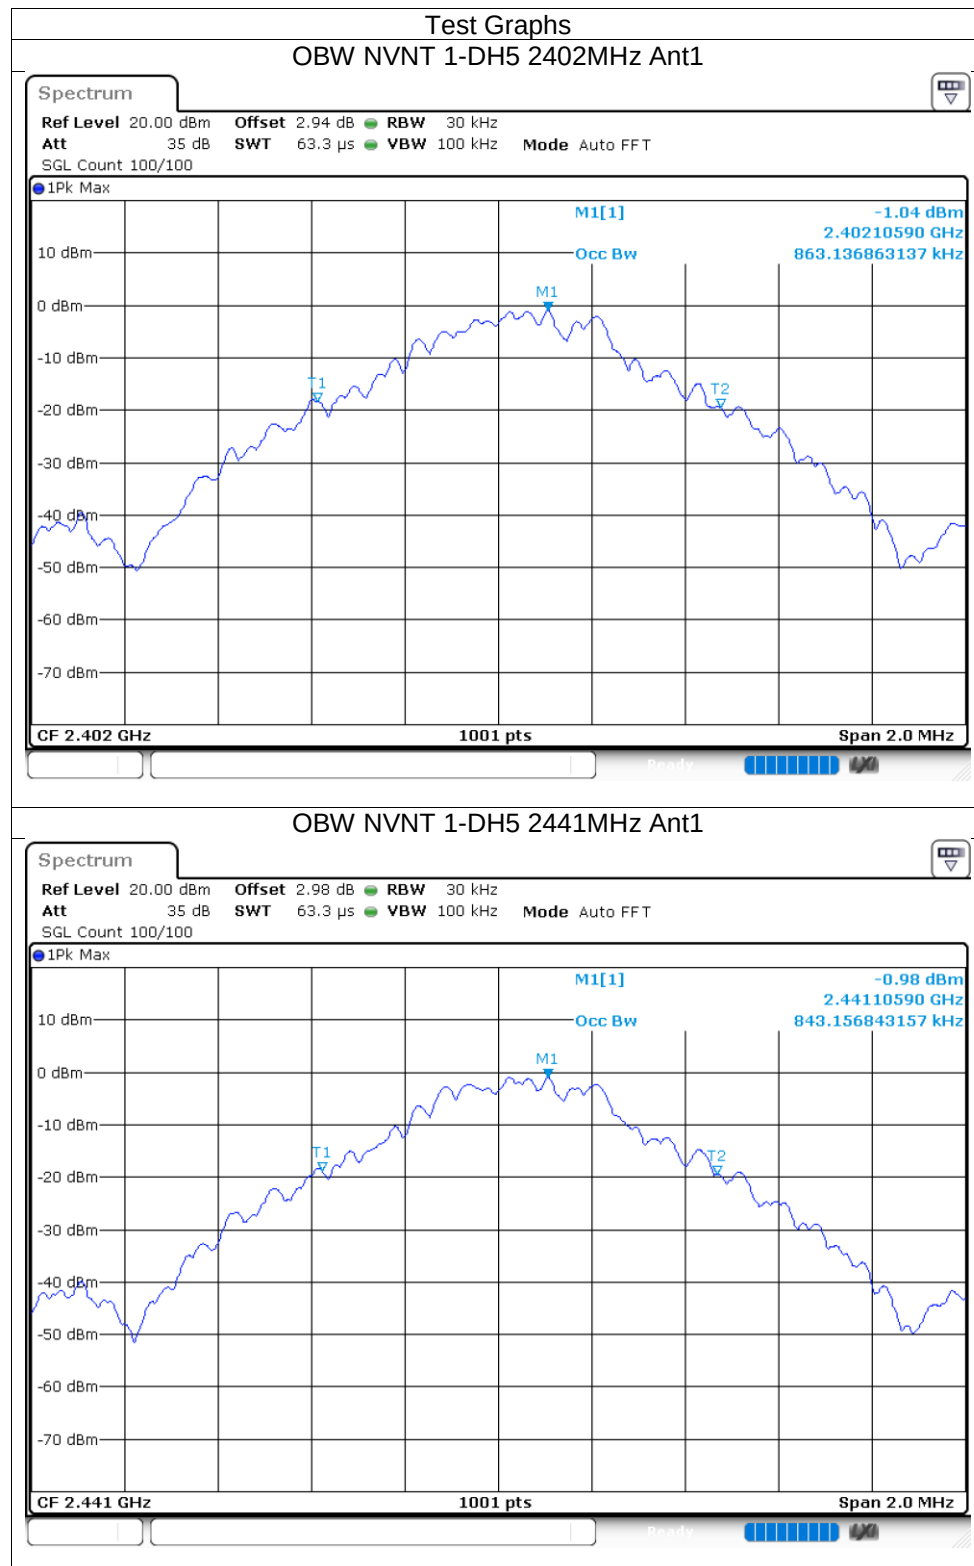

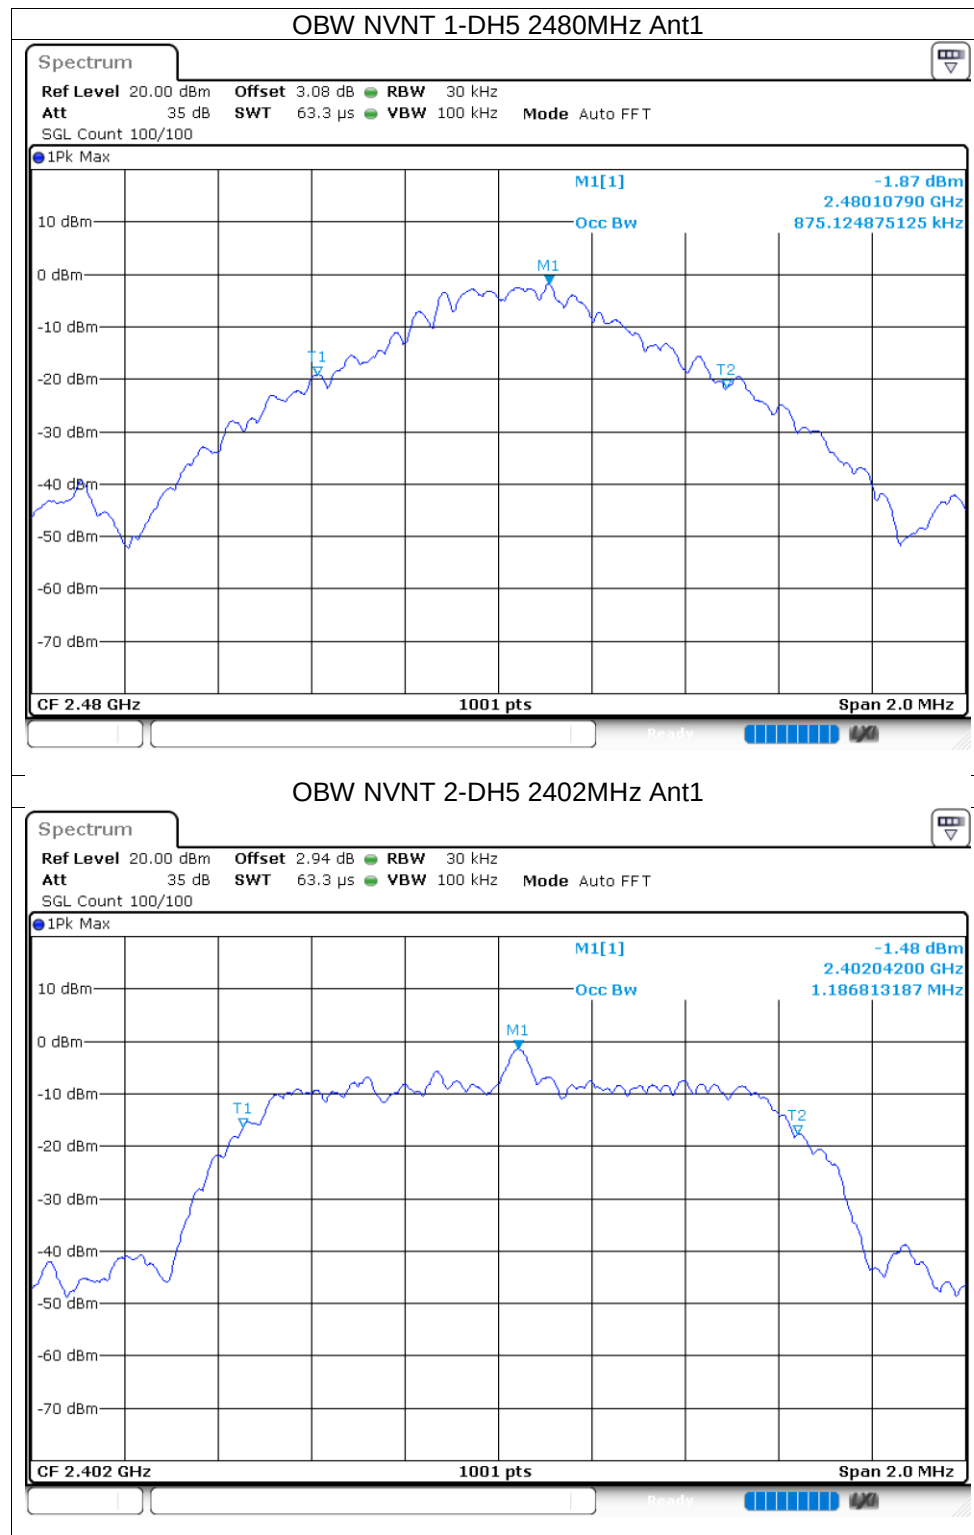

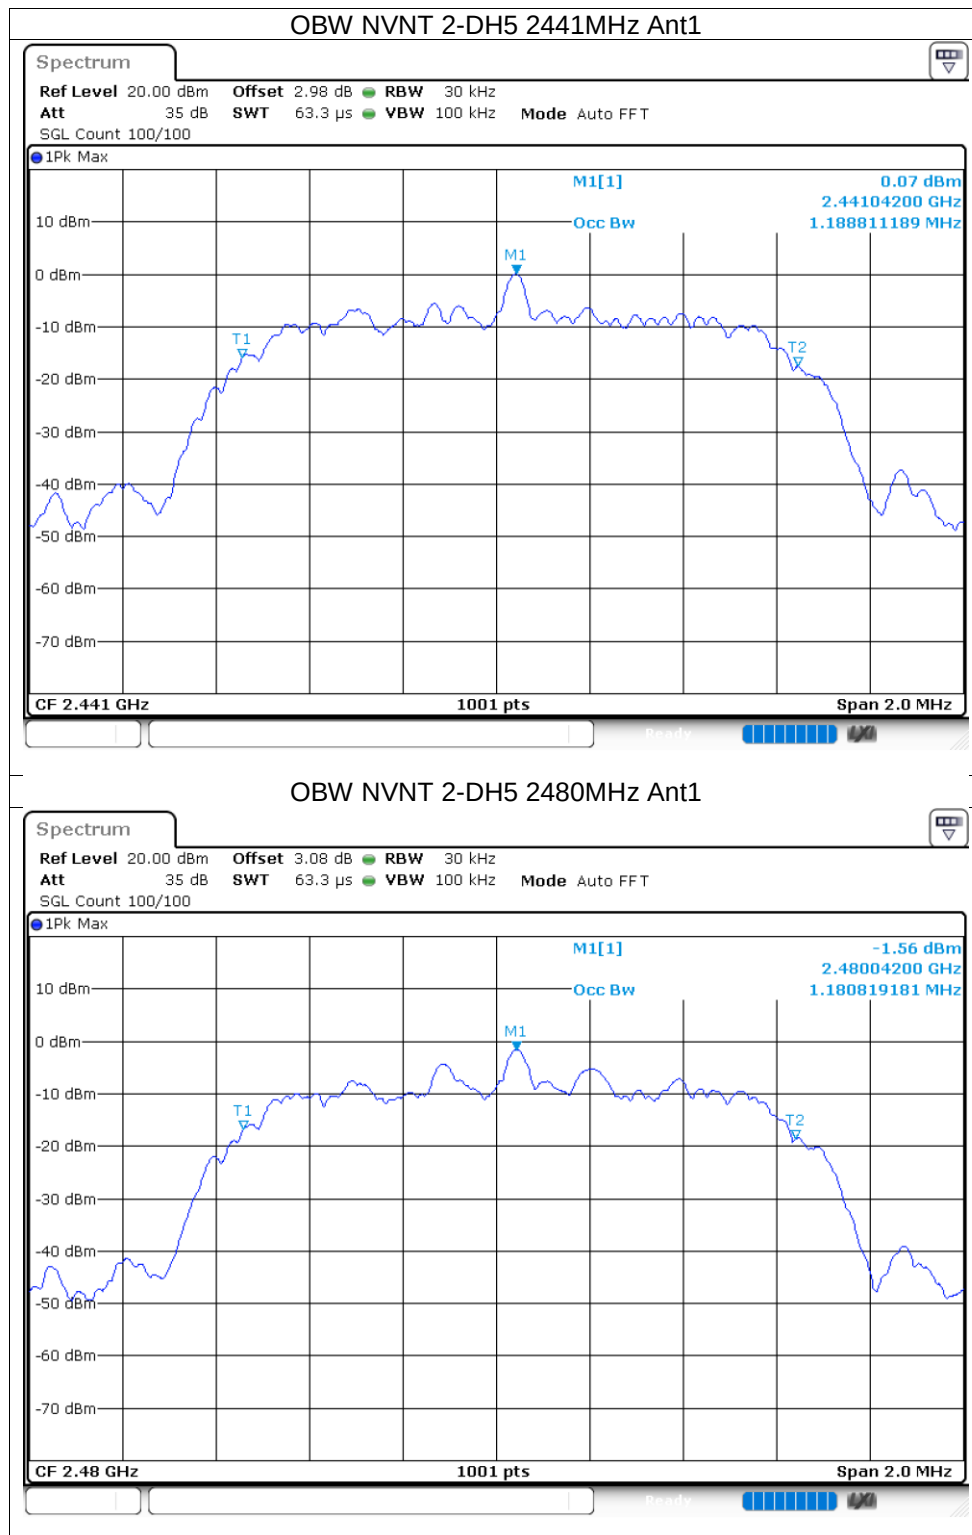


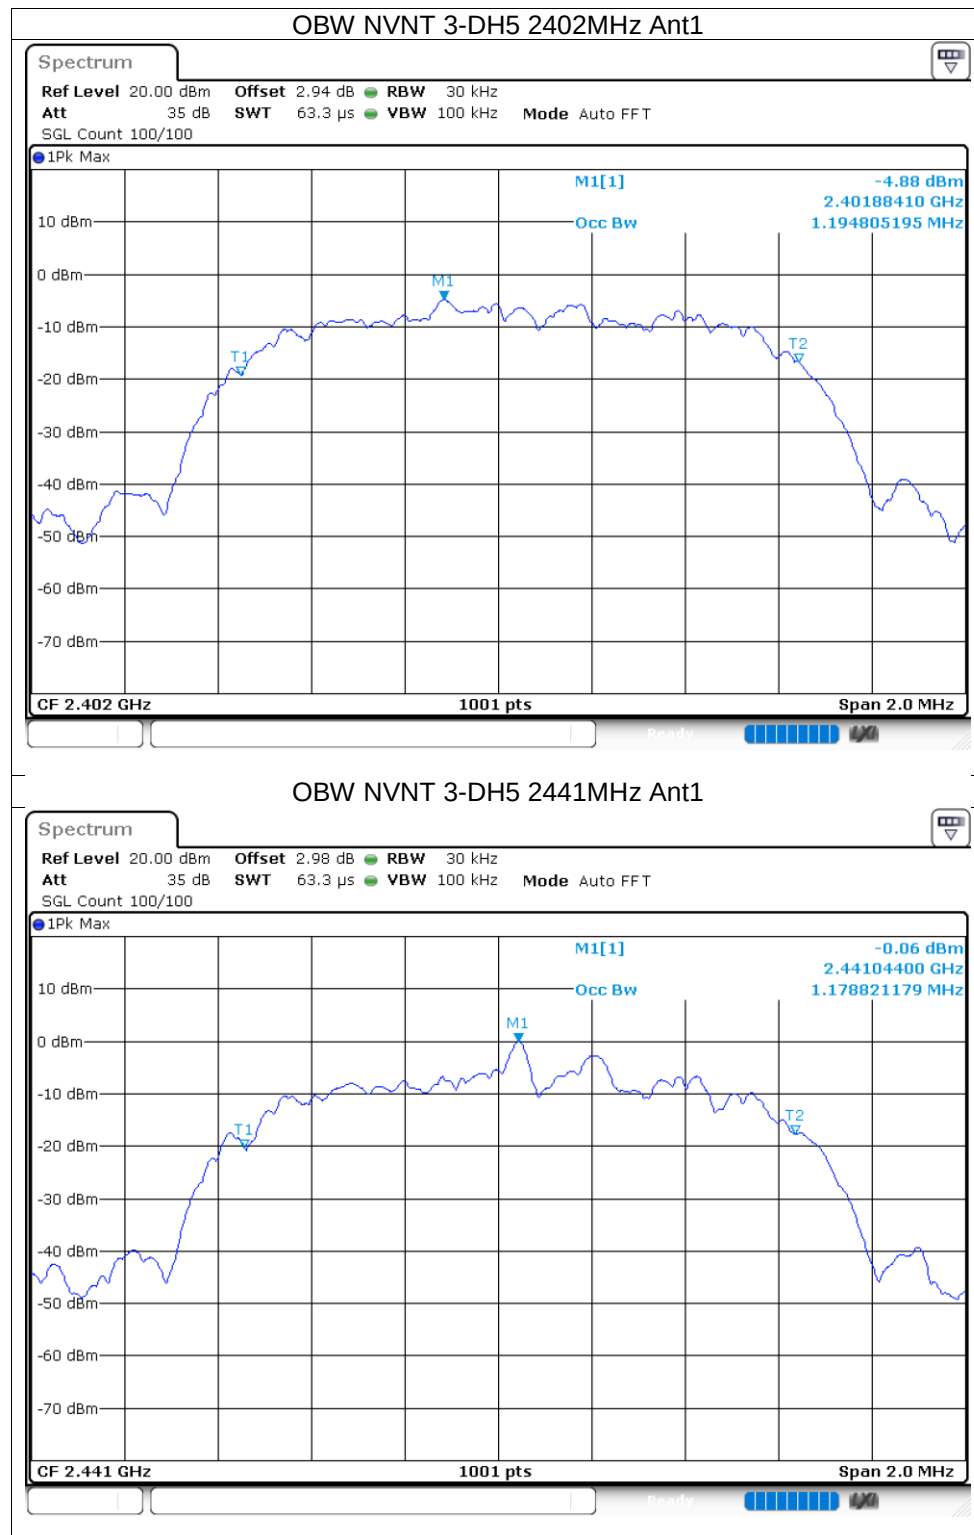


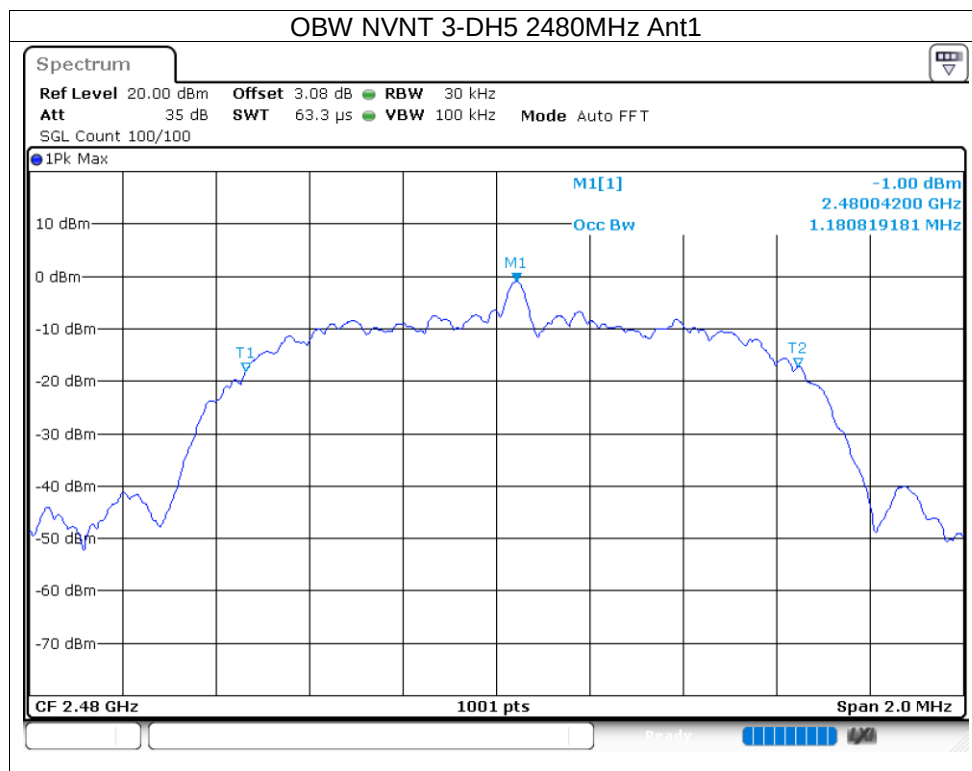



11.1.5 Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.104	2403.042	0.938	0.628	Pass
NVNT	1-DH5	Ant1	2441.04	2442.042	1.002	0.637	Pass
NVNT	1-DH5	Ant1	2479.042	2480.042	1	0.633	Pass
NVNT	2-DH5	Ant1	2402.038	2403.04	1.002	0.853	Pass
NVNT	2-DH5	Ant1	2440.95	2442.013	1.063	0.849	Pass
NVNT	2-DH5	Ant1	2479.064	2480.131	1.067	0.855	Pass
NVNT	3-DH5	Ant1	2402.04	2403.048	1.008	0.867	Pass
NVNT	3-DH5	Ant1	2440.973	2441.956	0.983	0.868	Pass
NVNT	3-DH5	Ant1	2479.042	2480.042	1	0.868	Pass

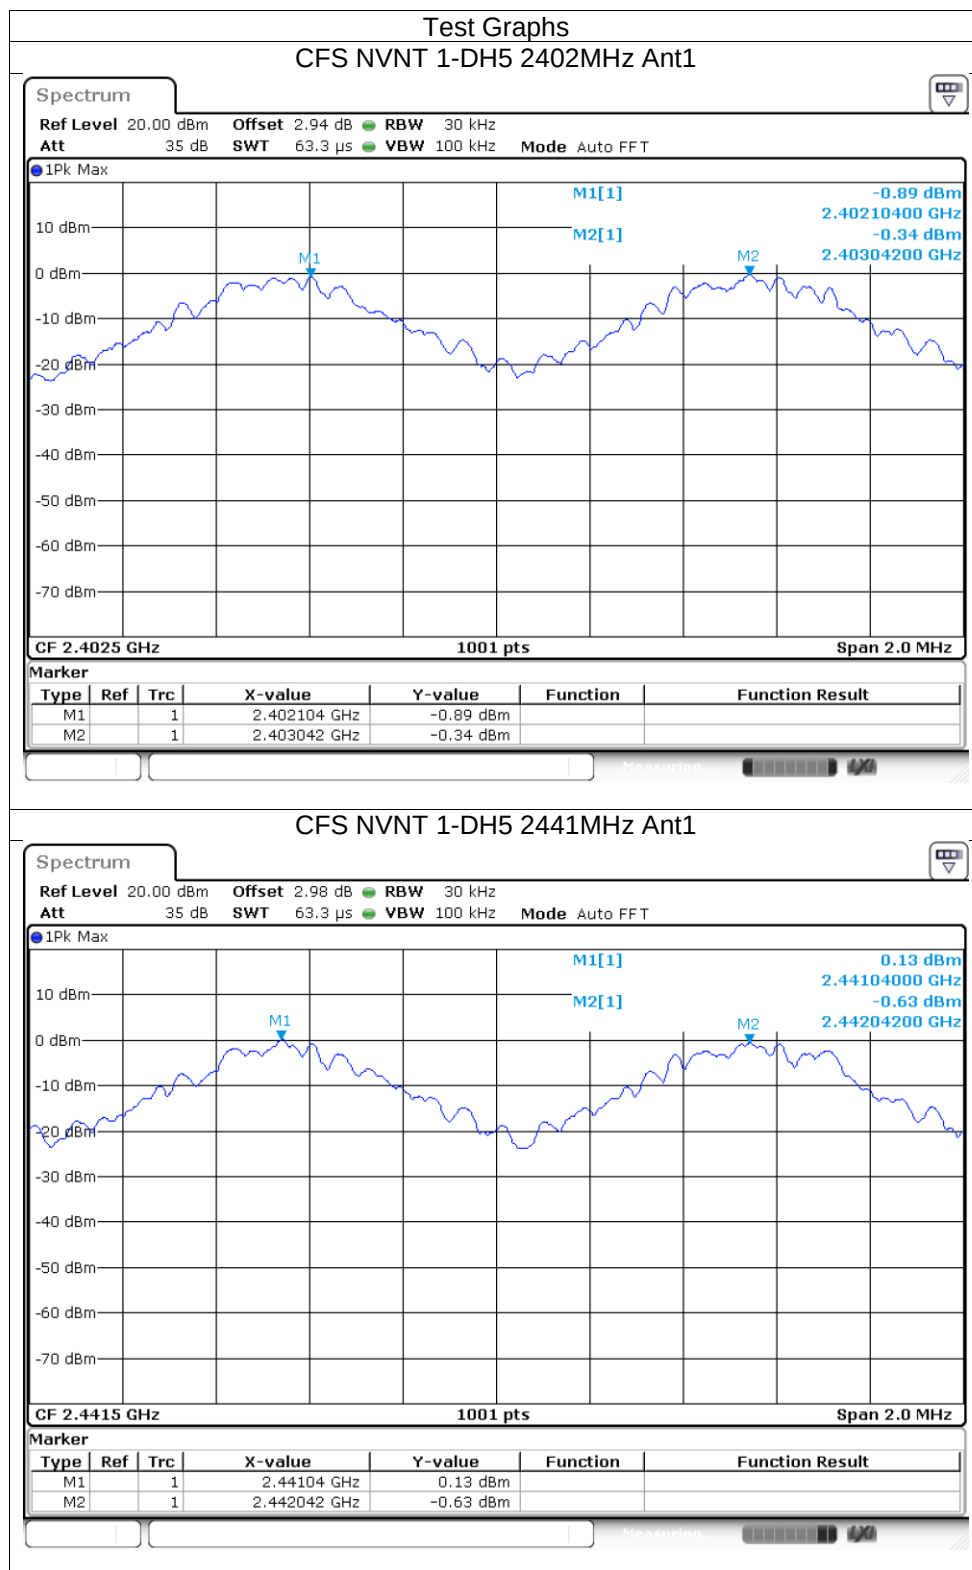

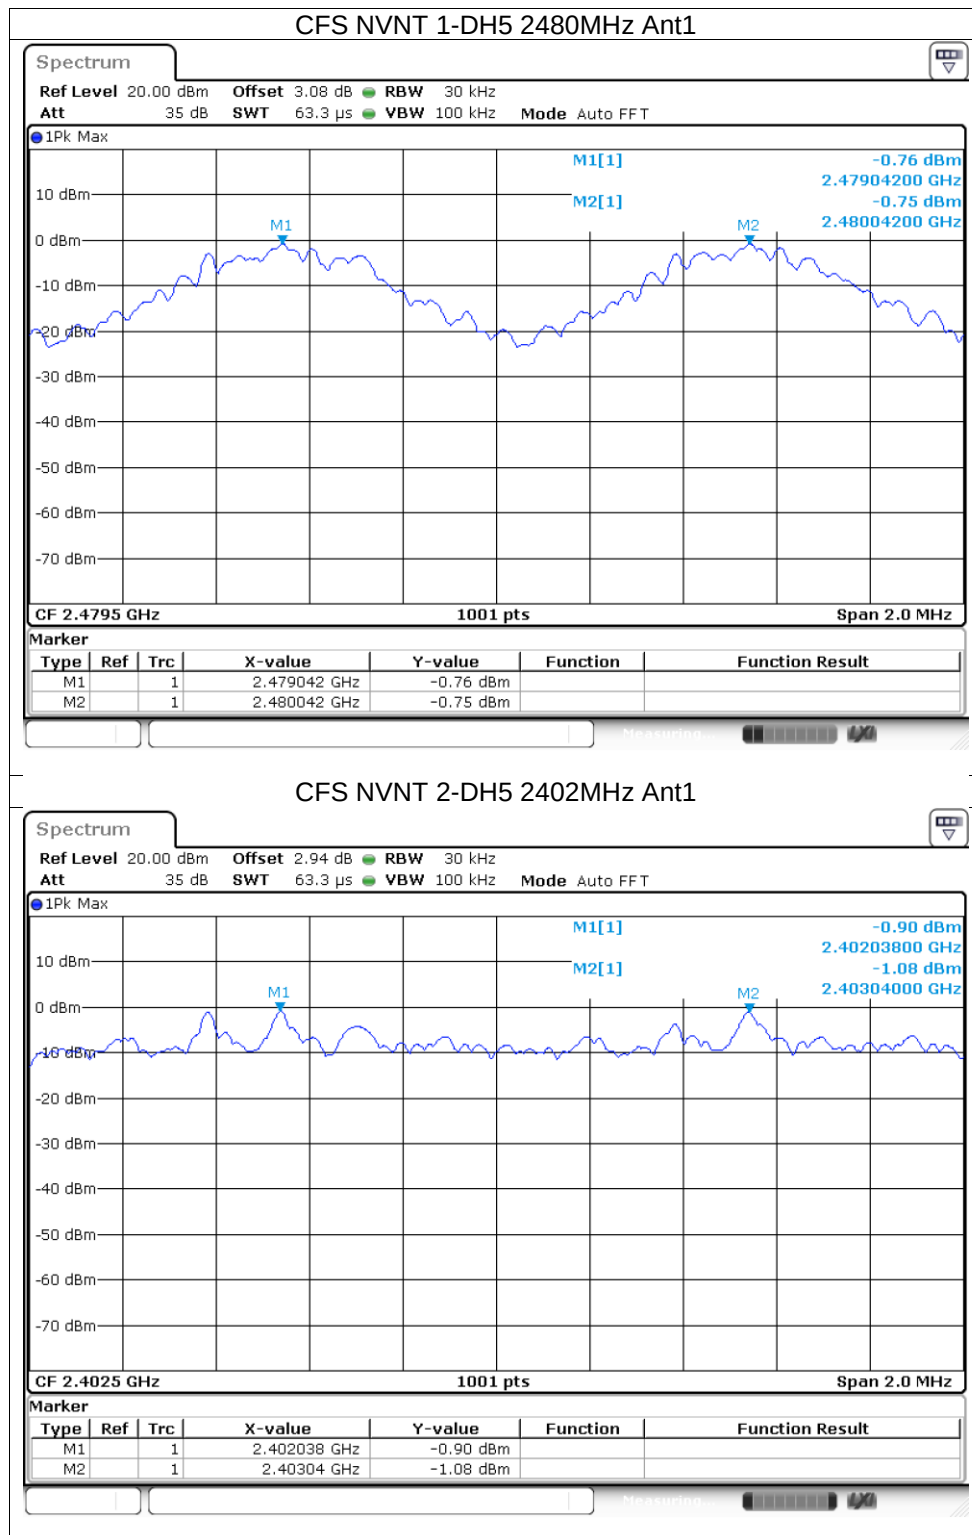

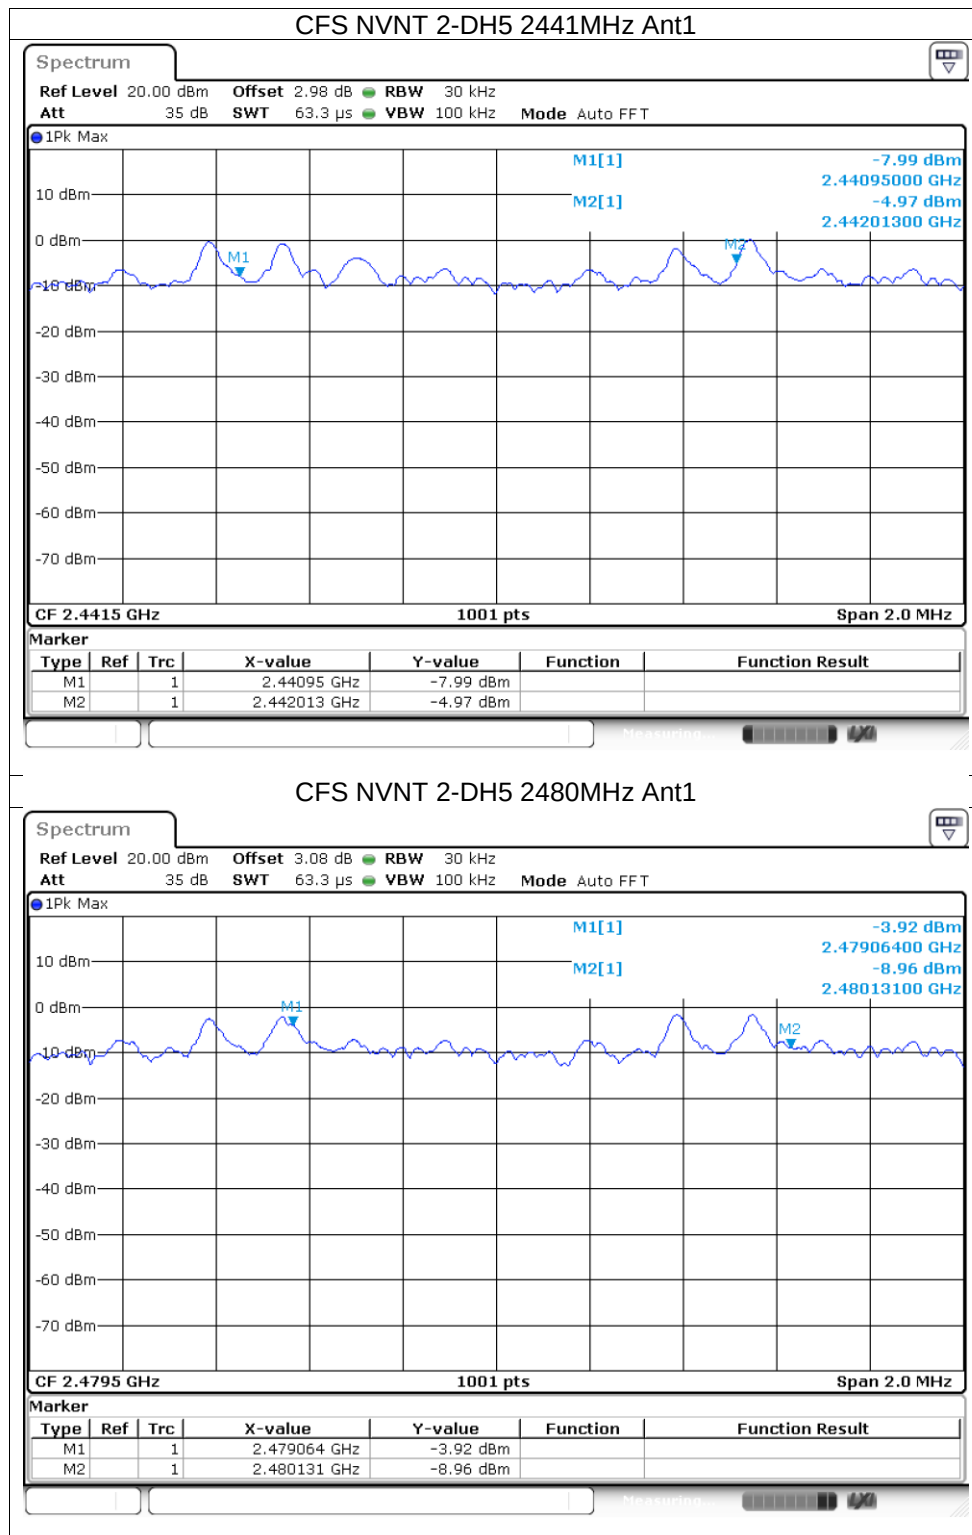


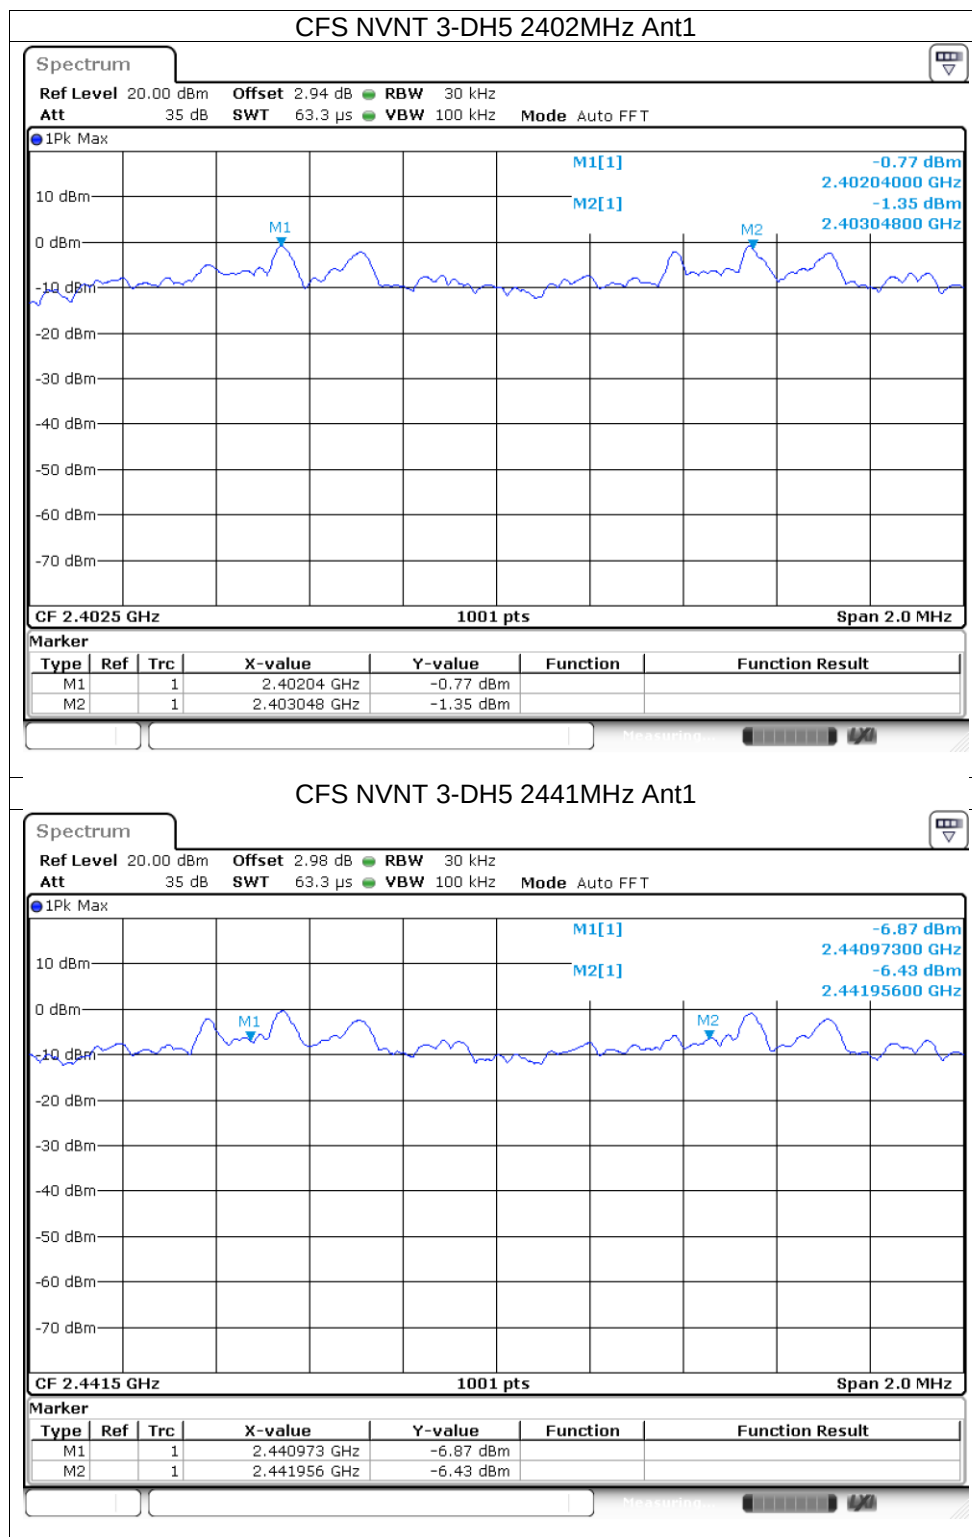


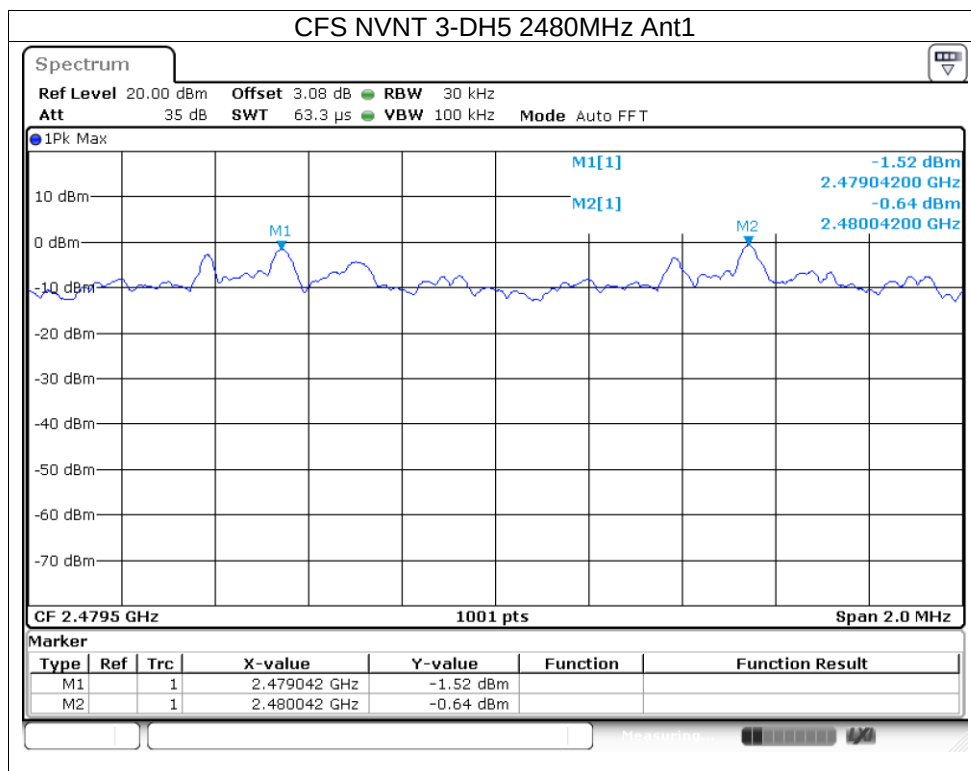

11.1.6 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

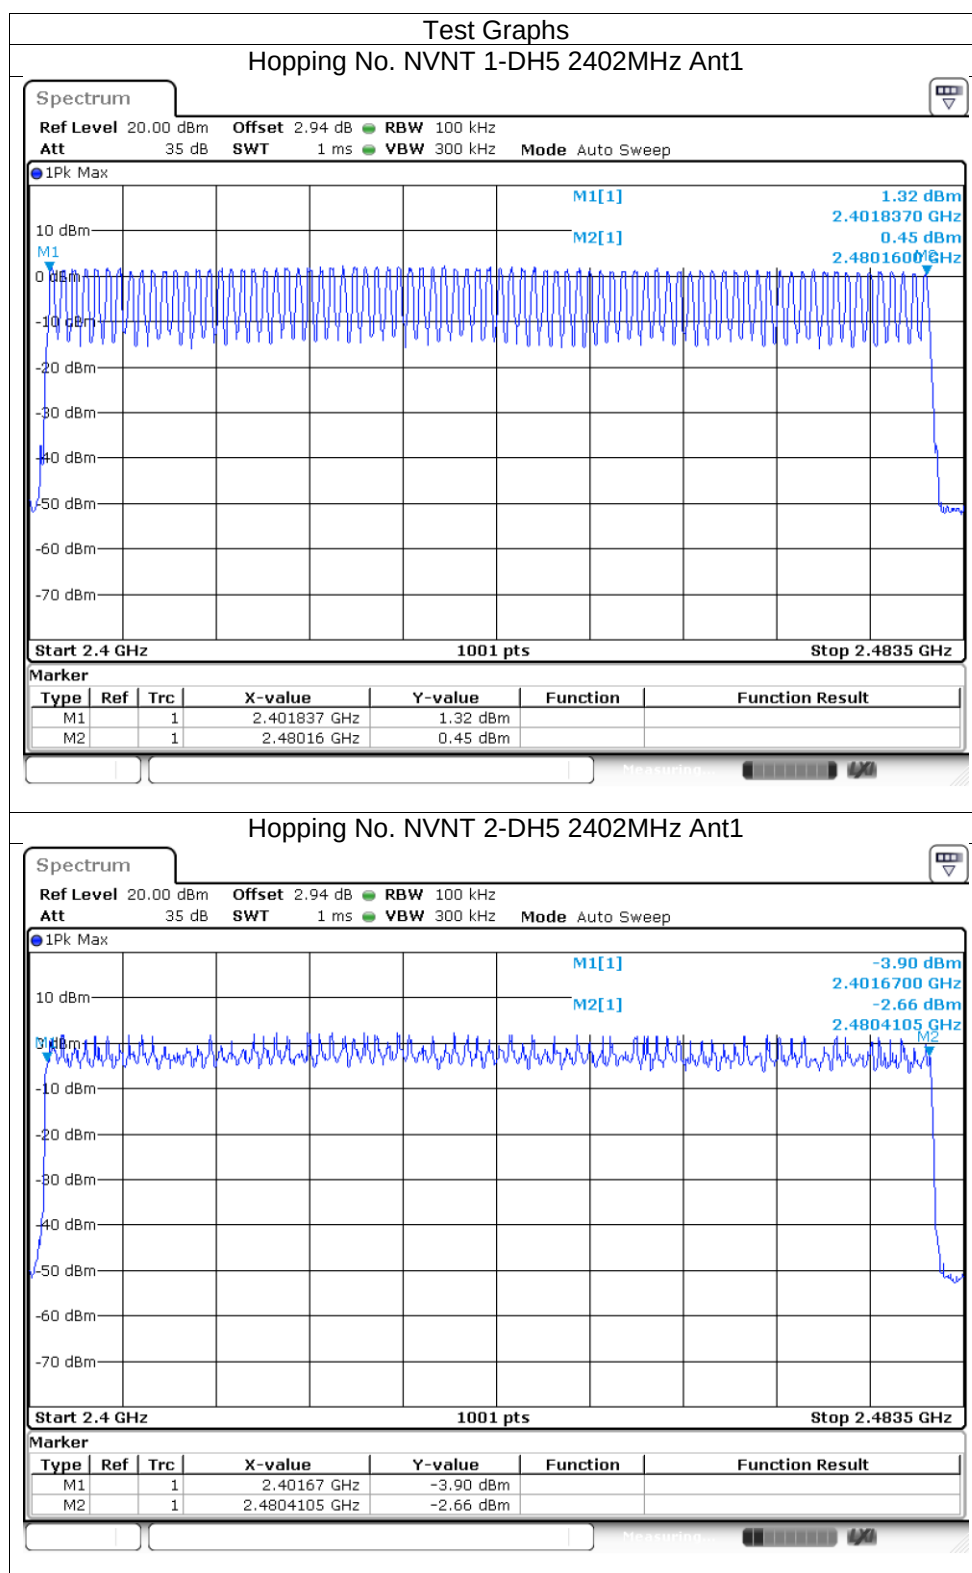


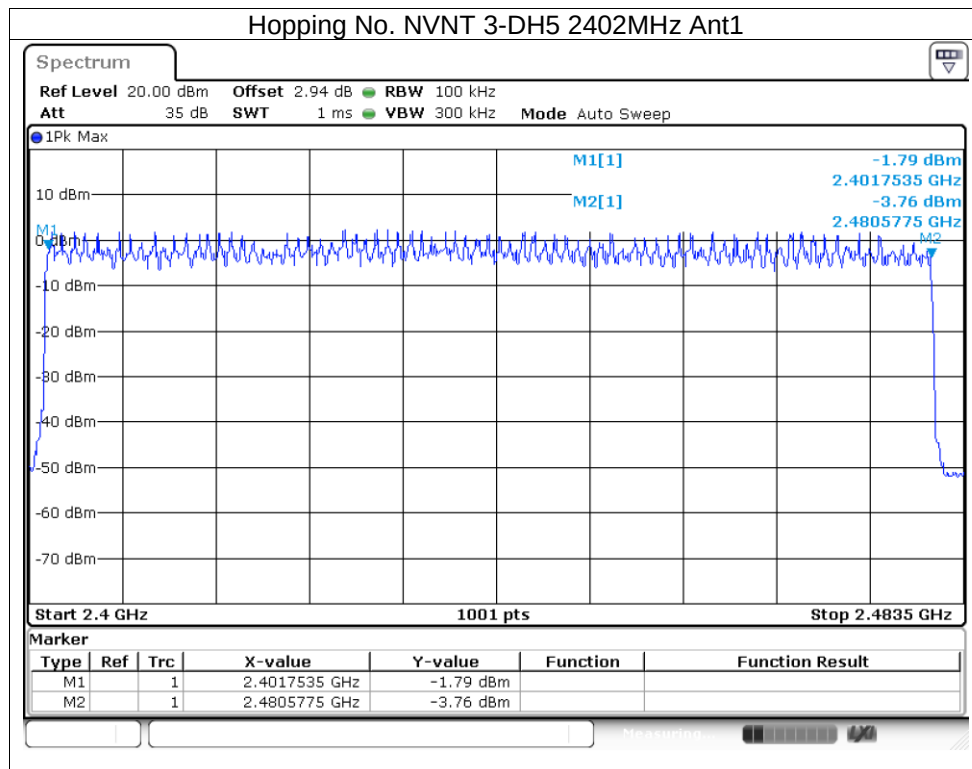



11.1.7 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-50.62	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-51.91	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-51.58	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-52.66	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-51.44	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-50.74	-20	Pass

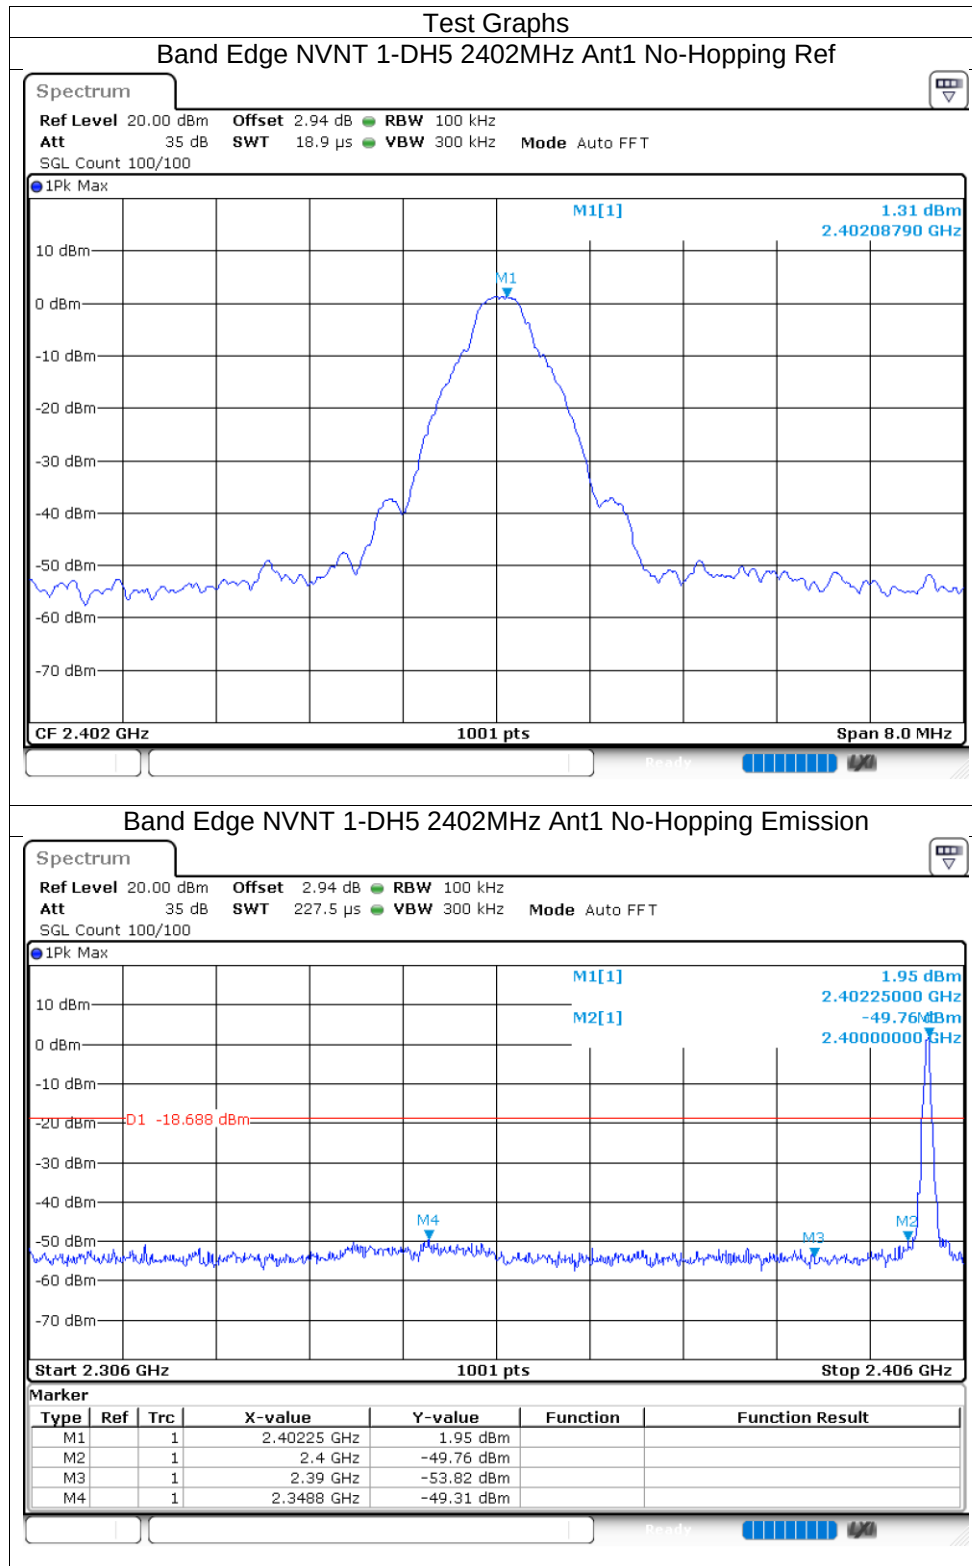


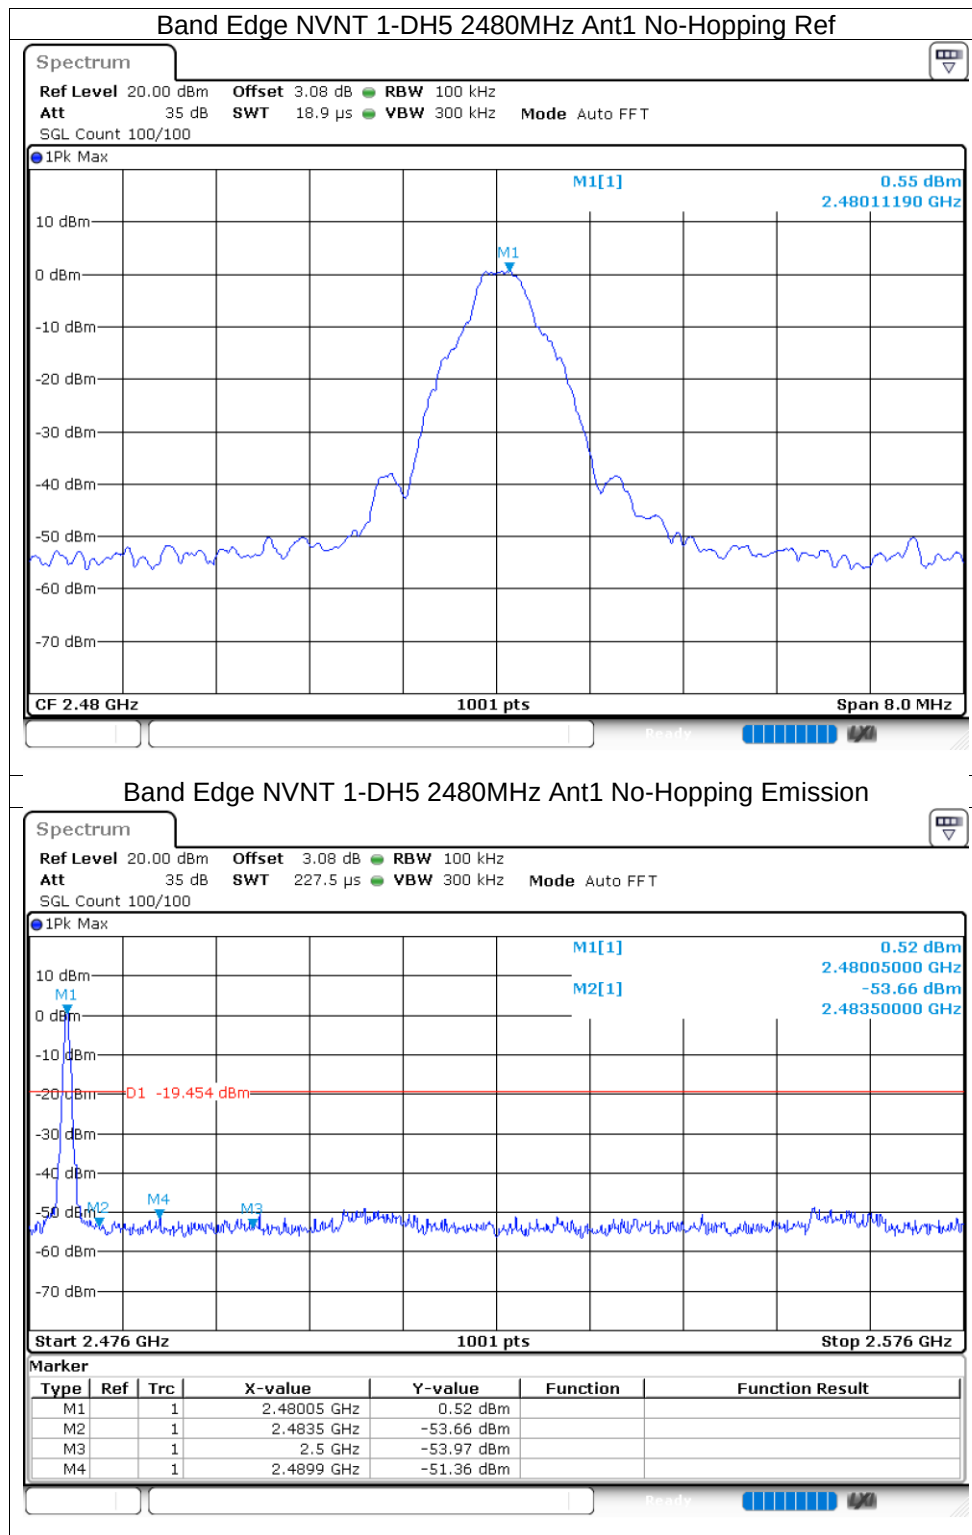

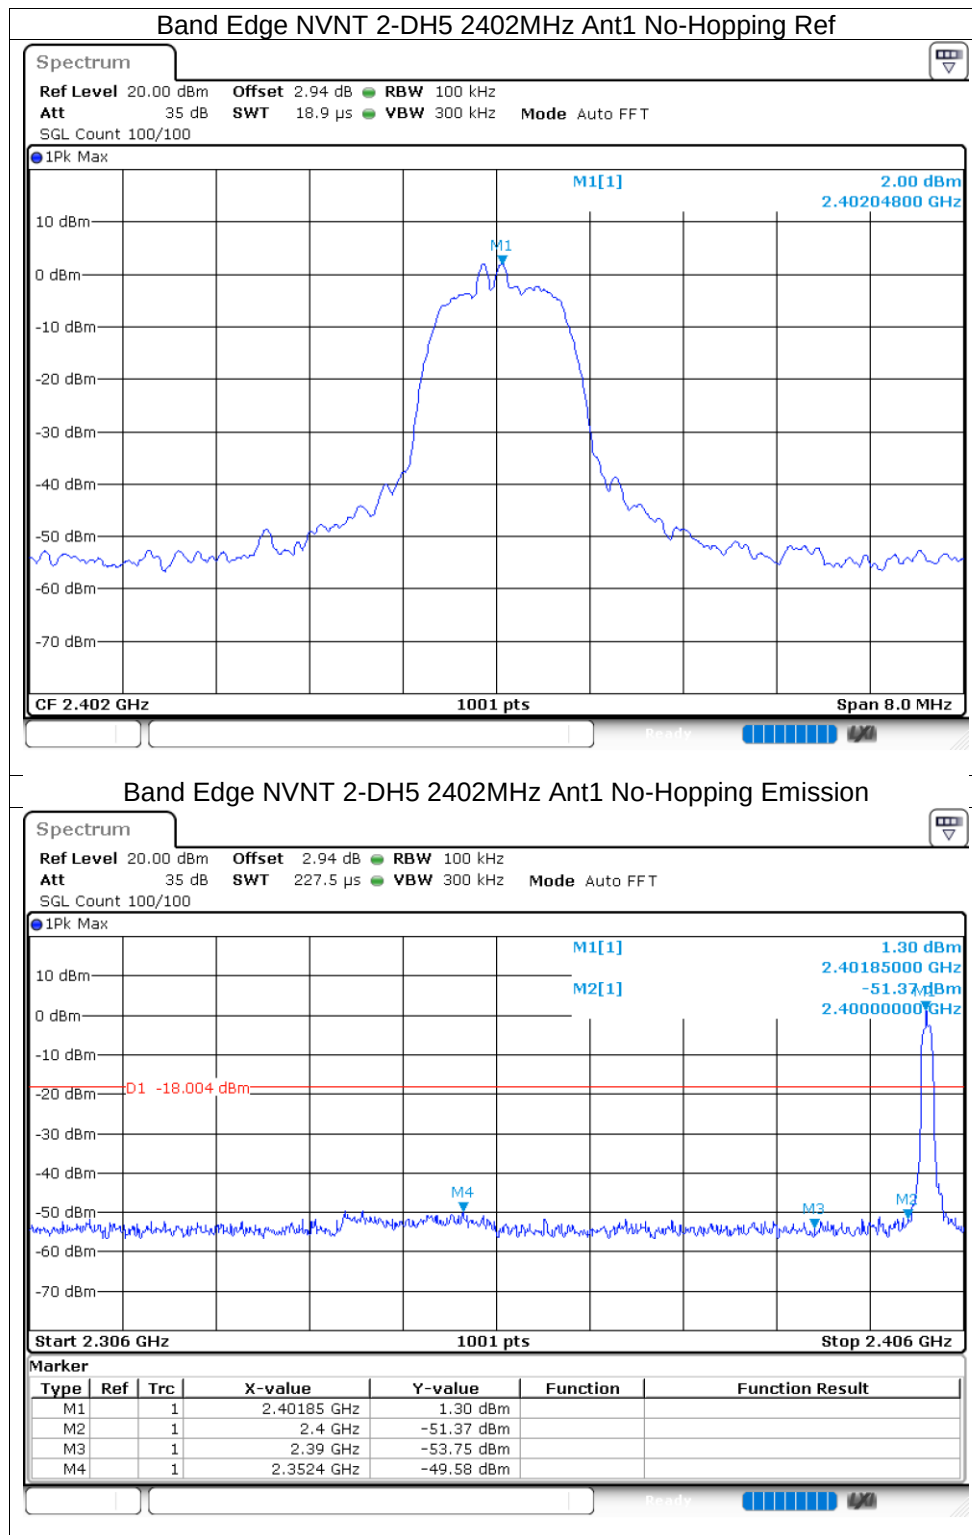

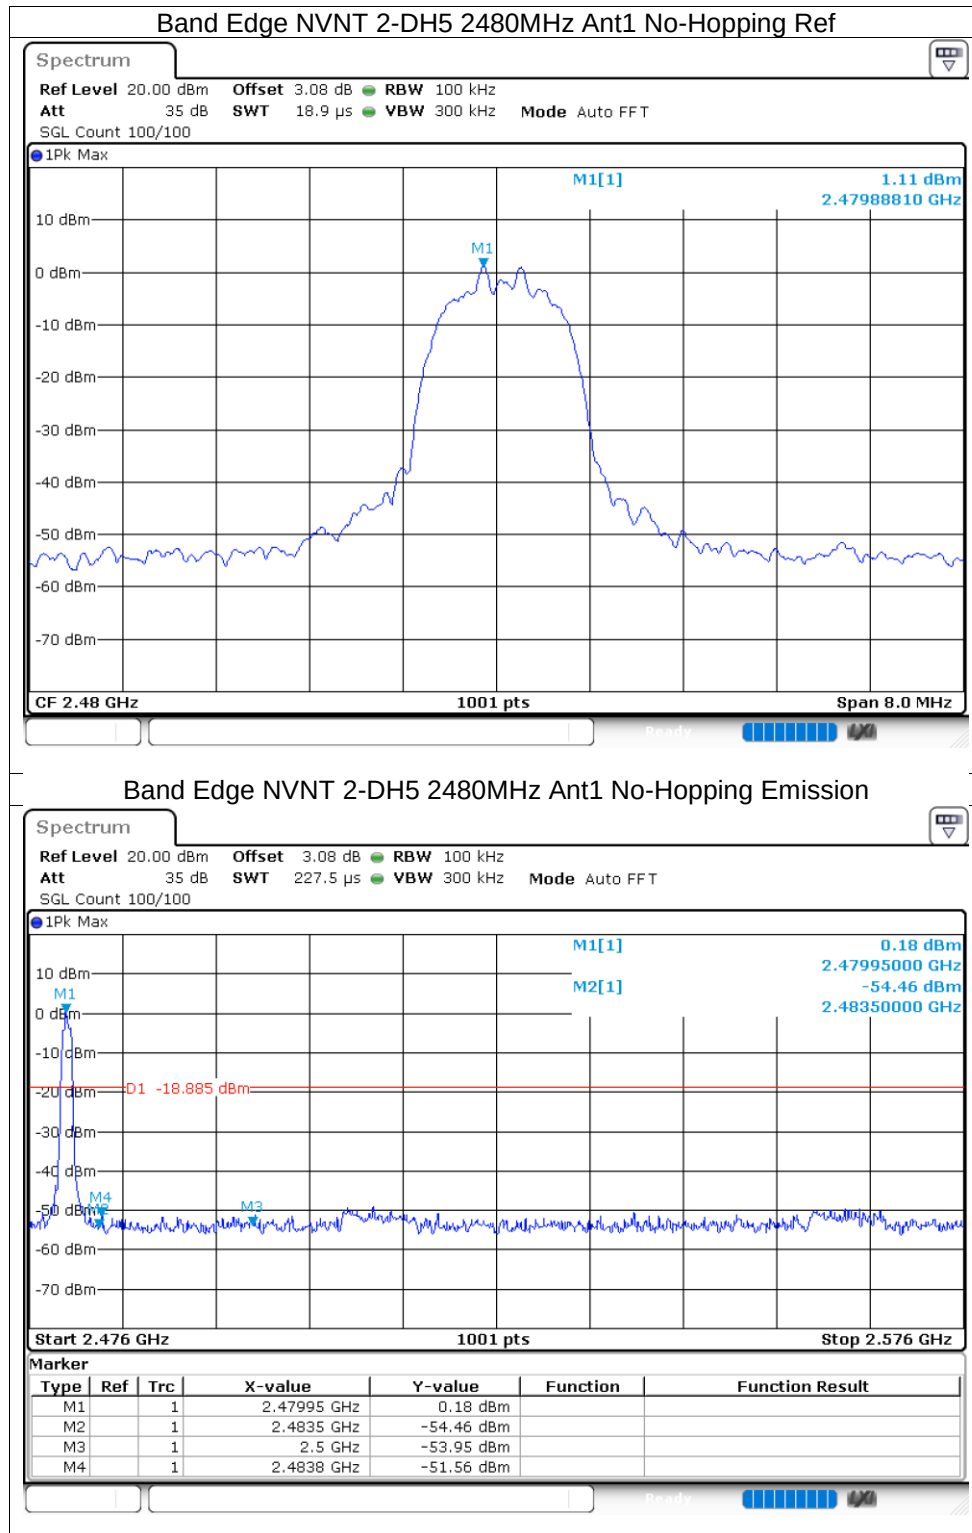


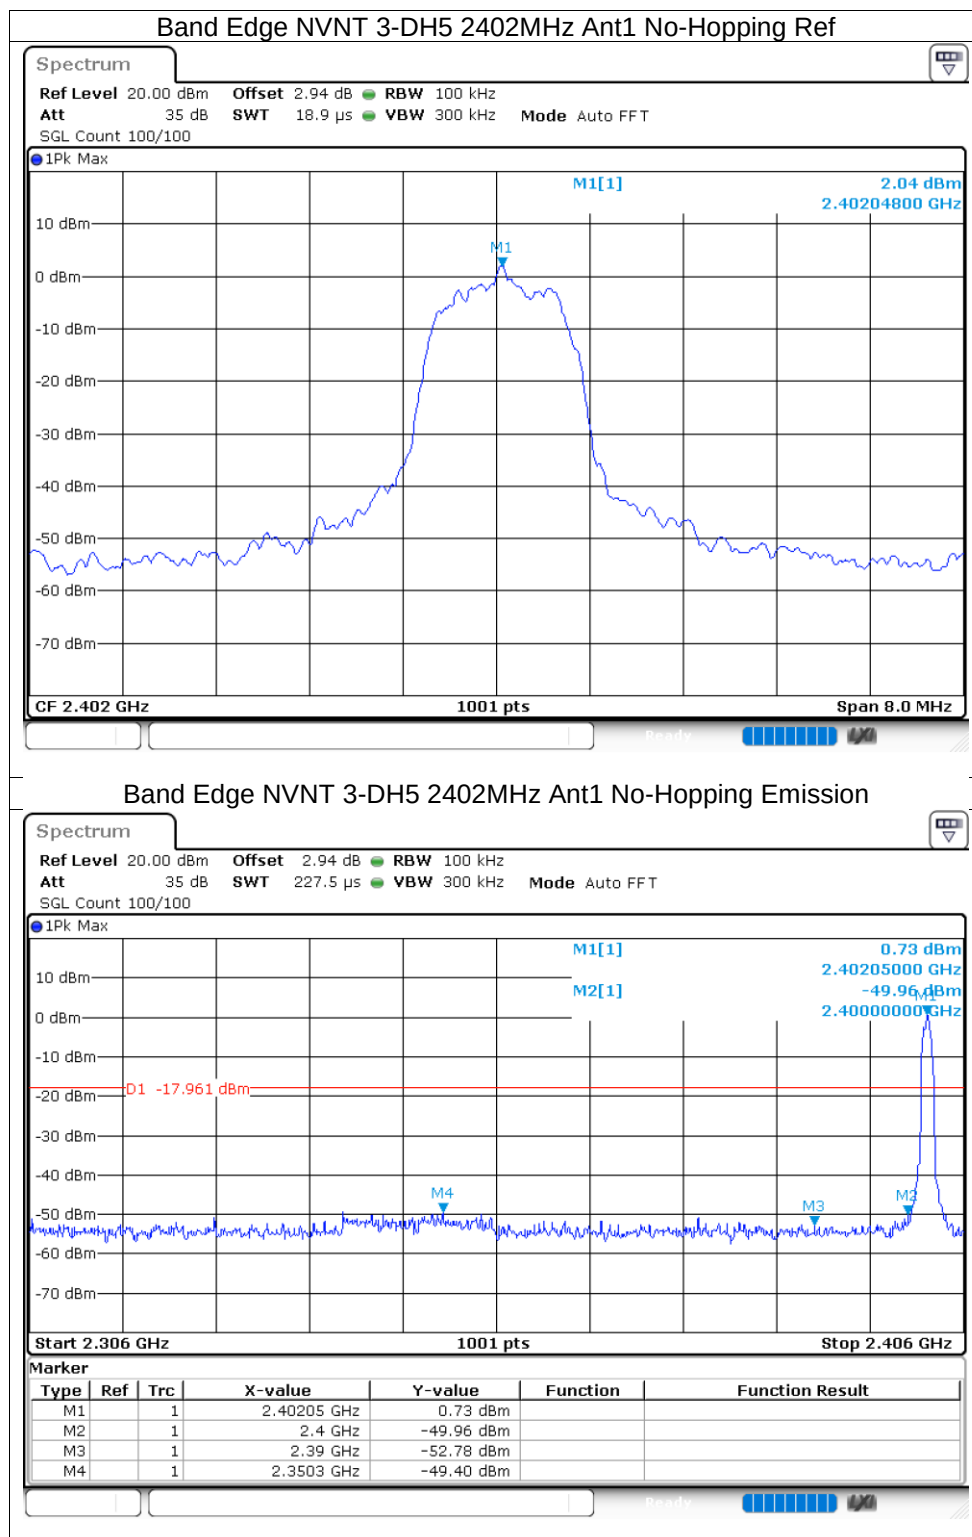


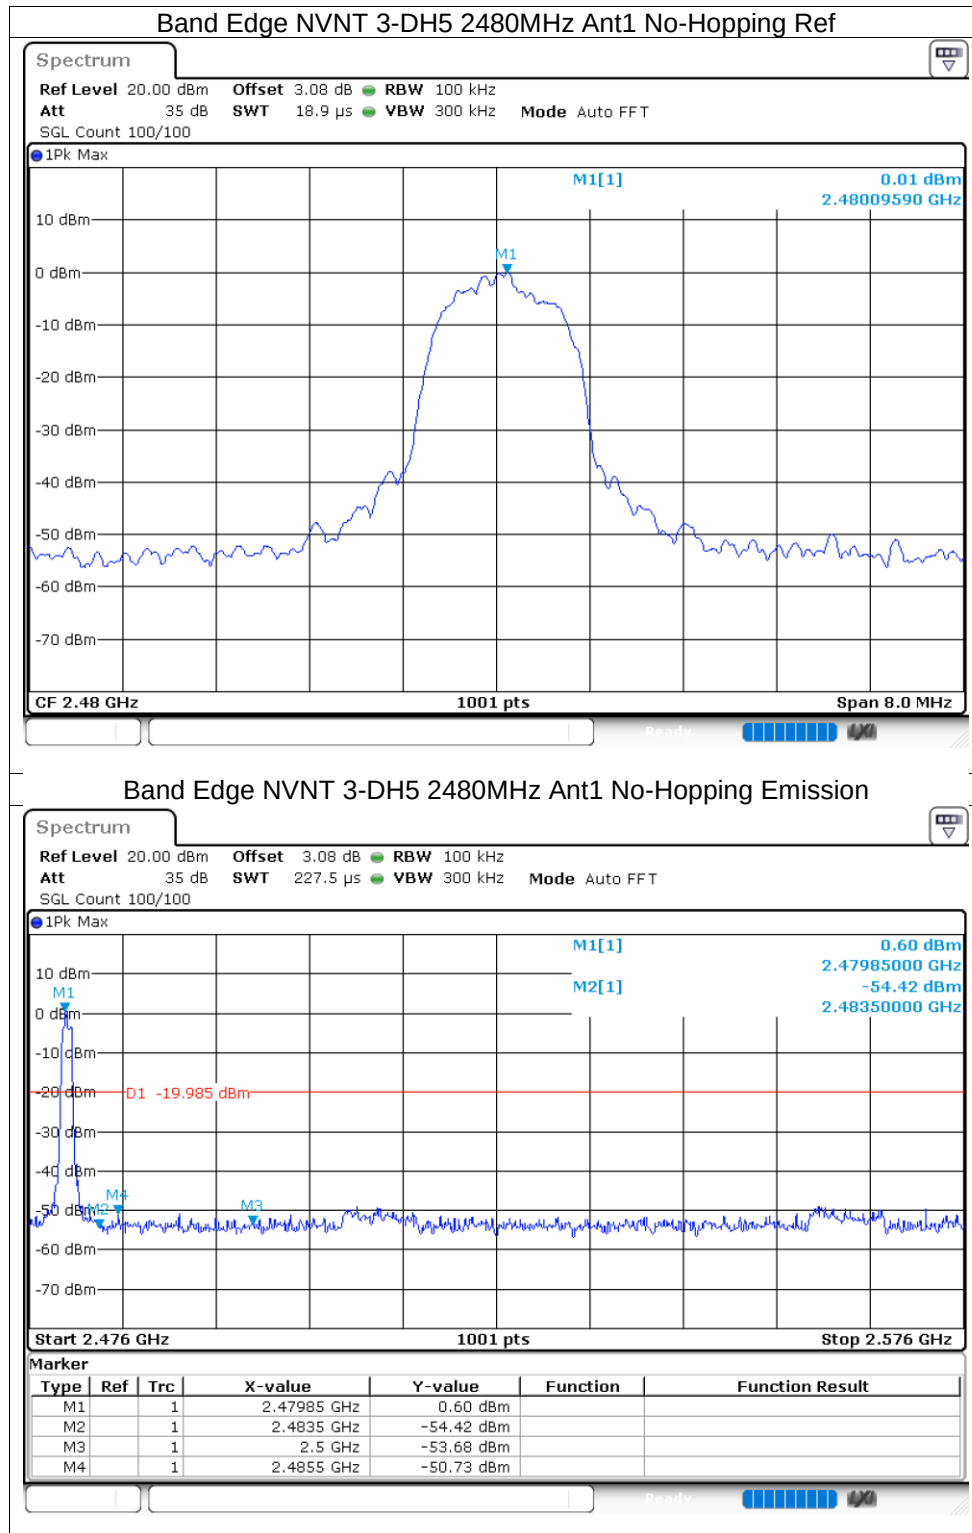



11.1.8 Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-49.84	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-50.84	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-50.68	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-51.16	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-50.23	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-51.02	-20	Pass

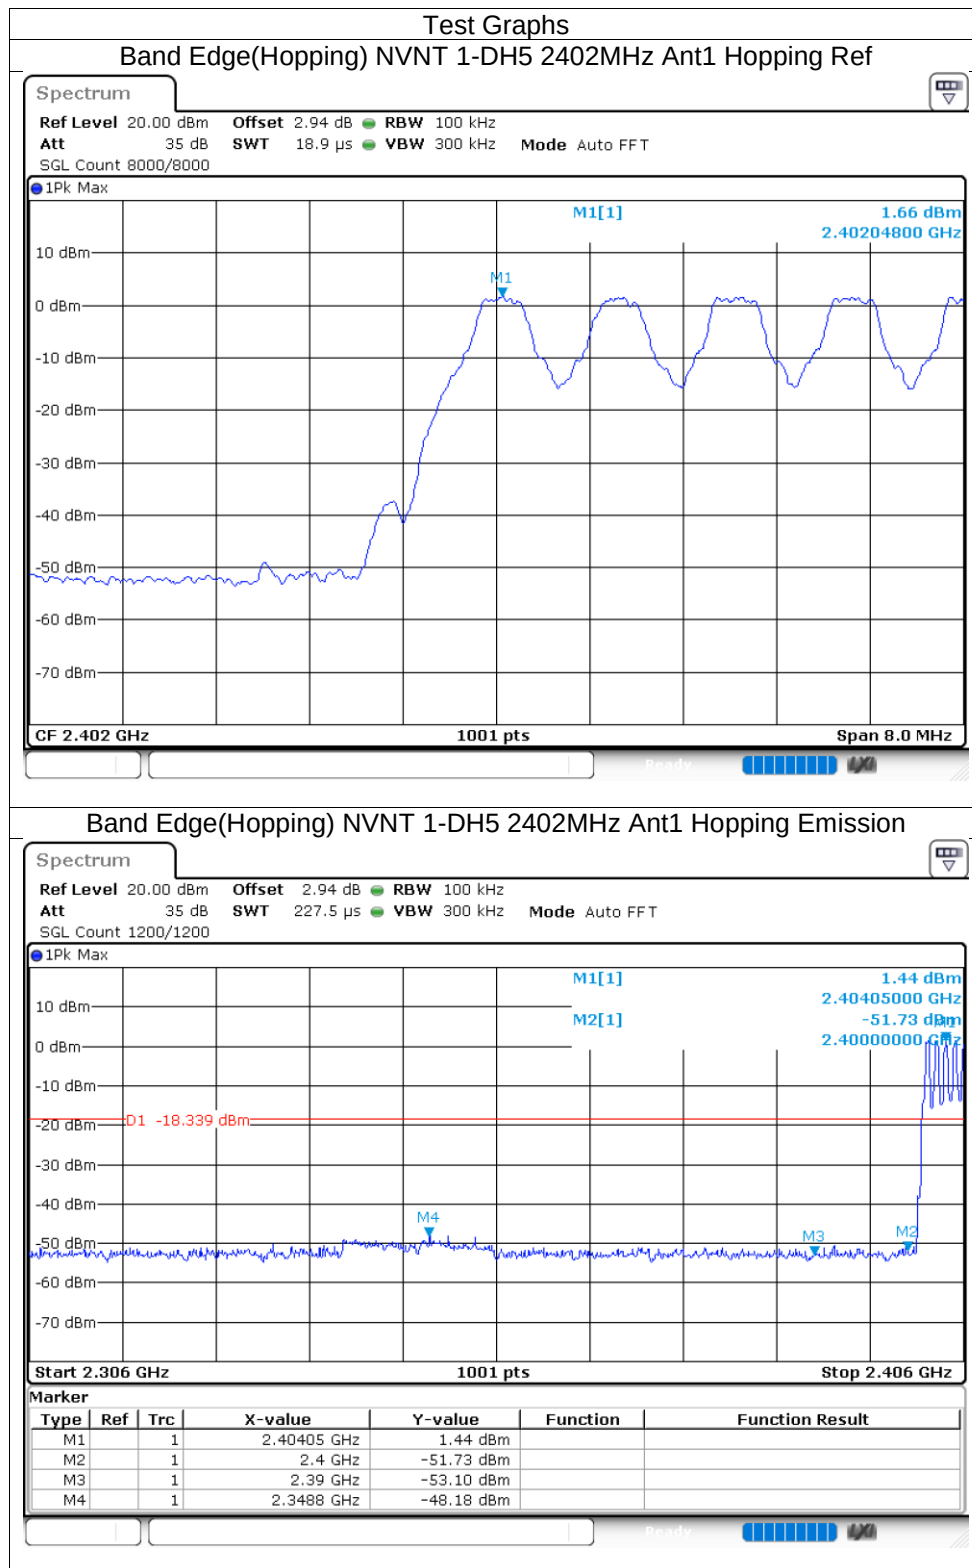


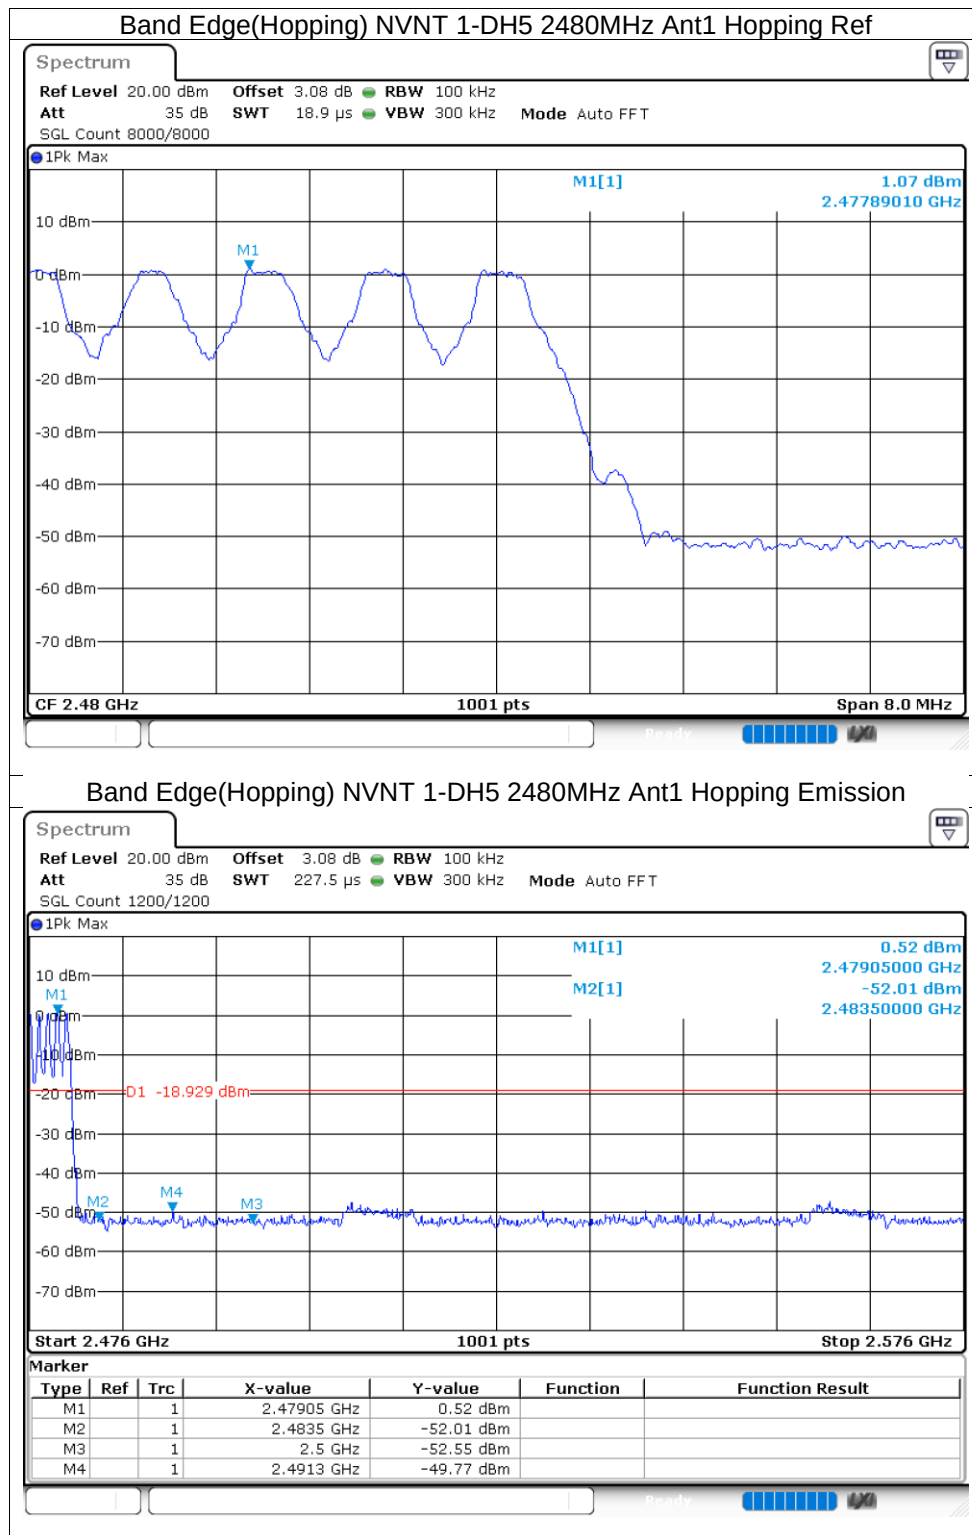

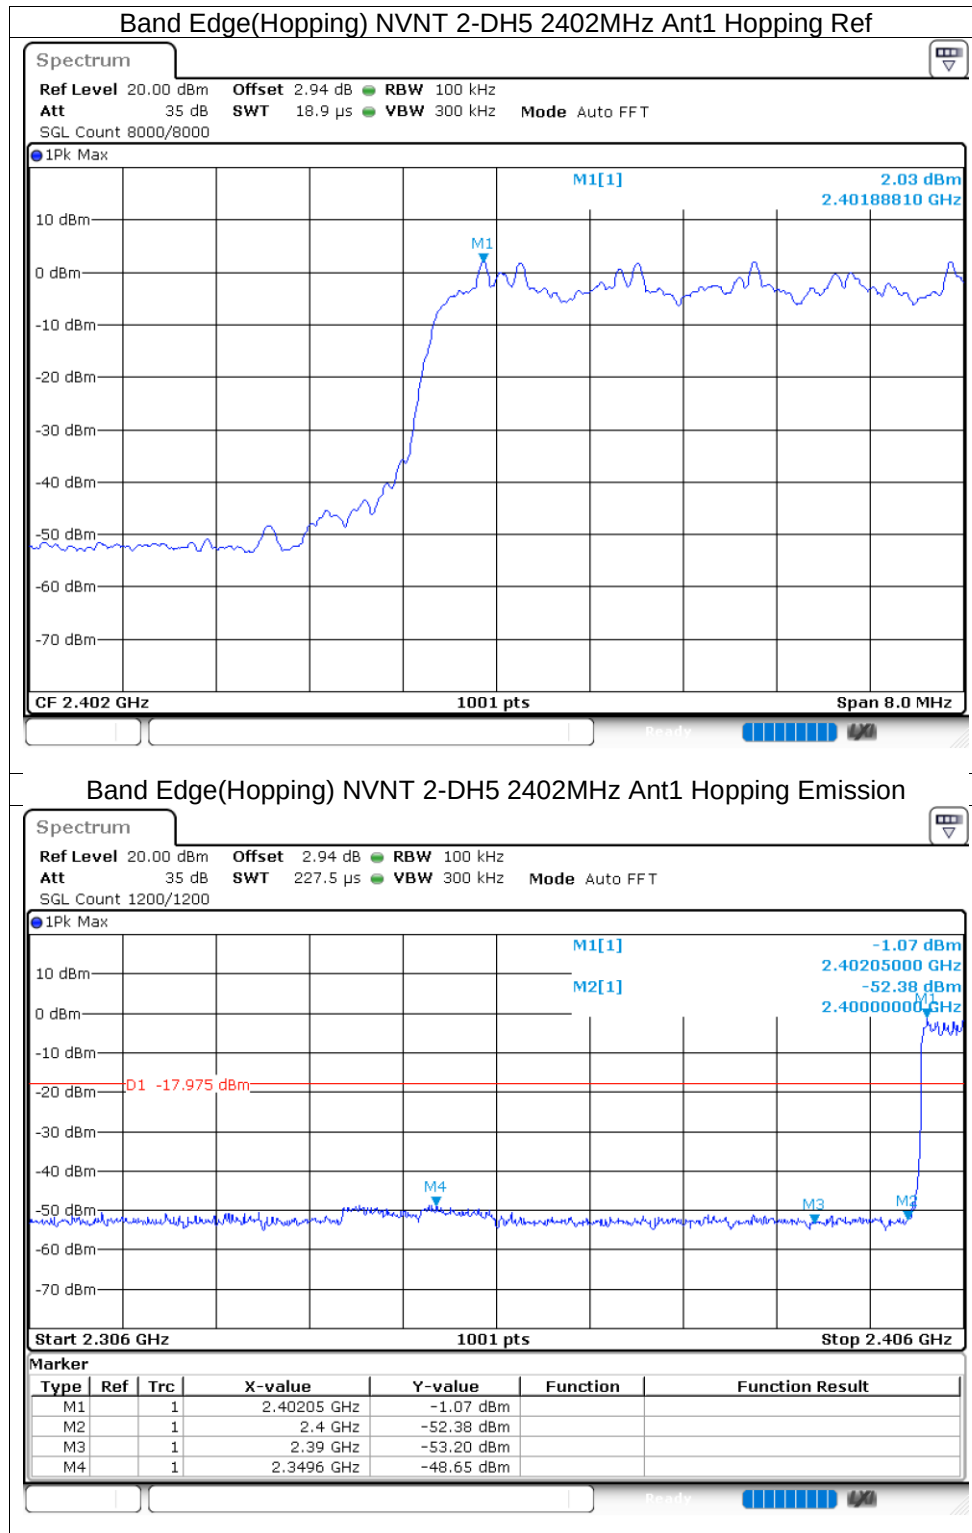

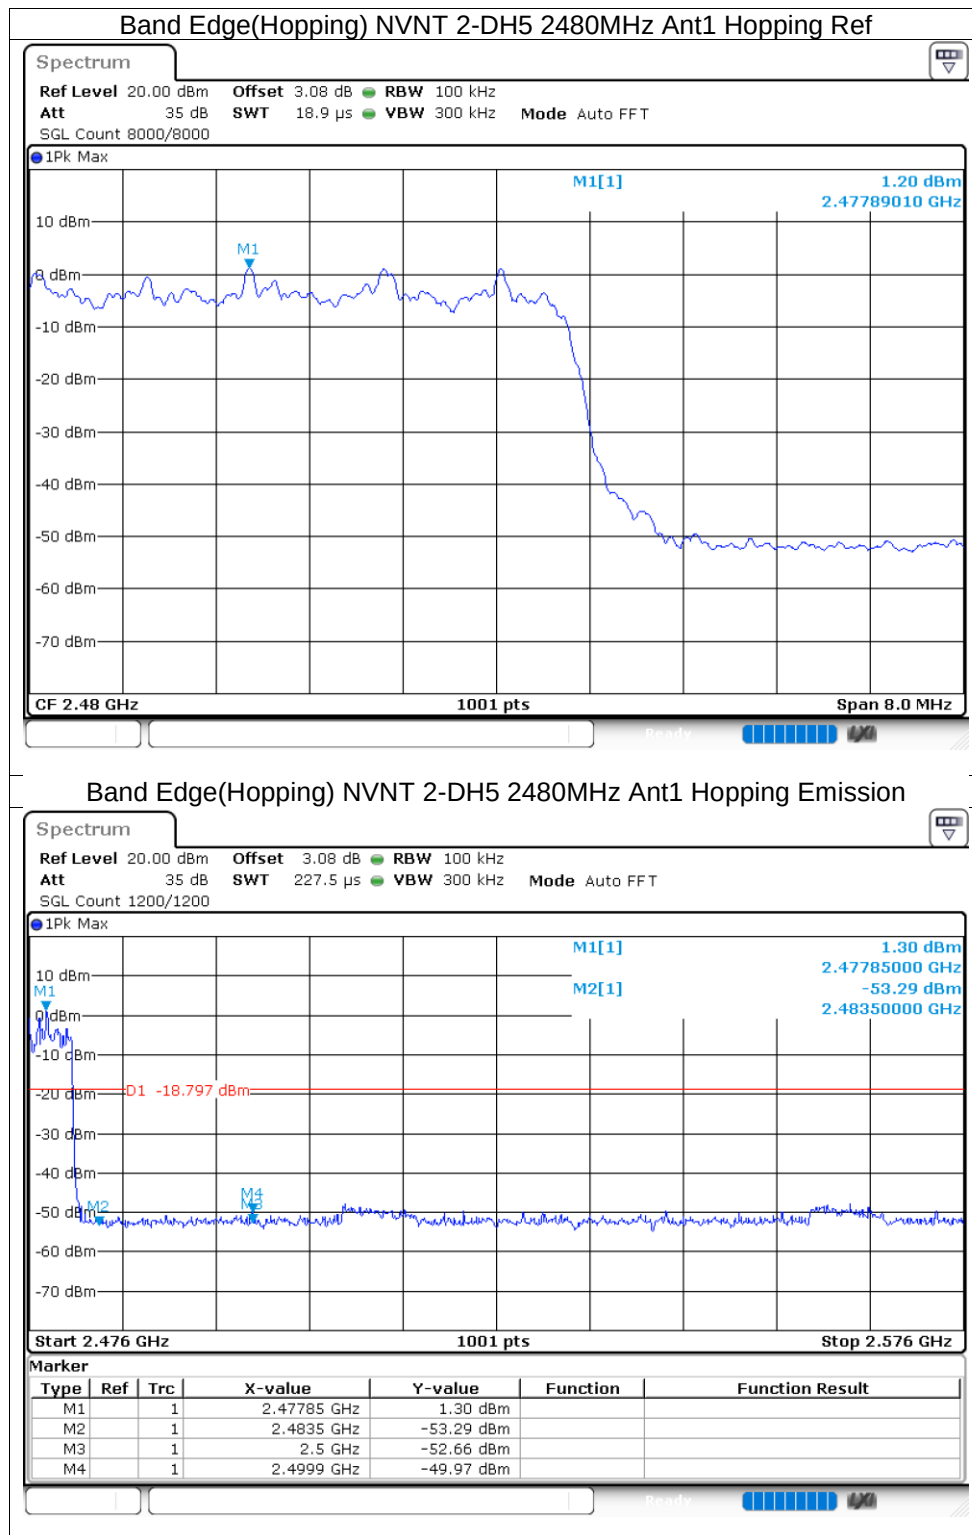


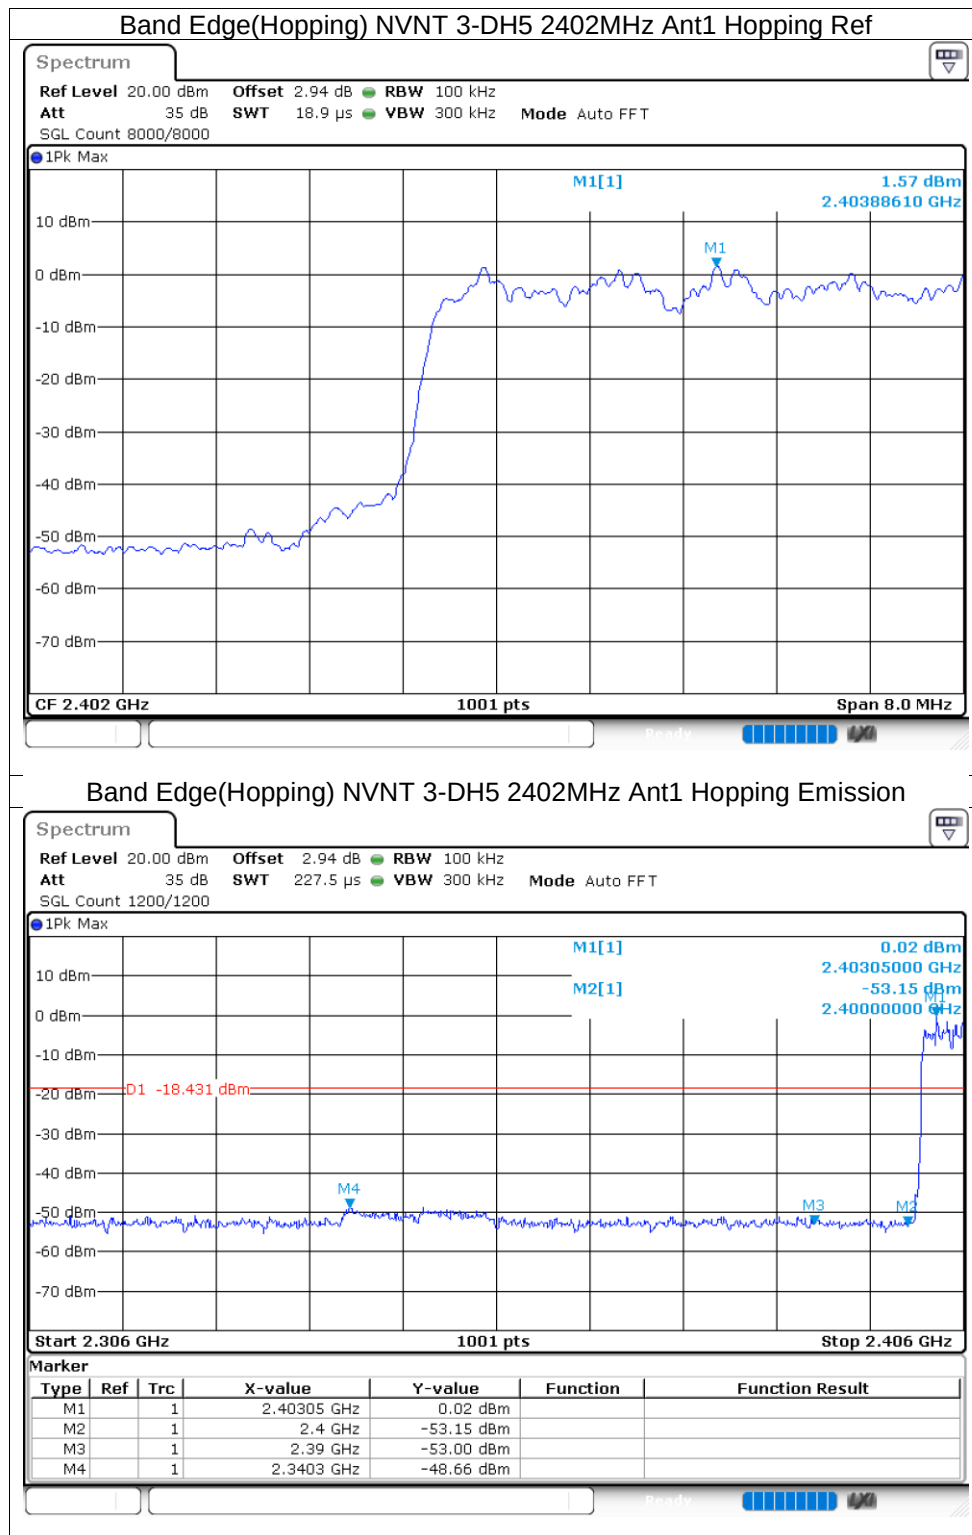


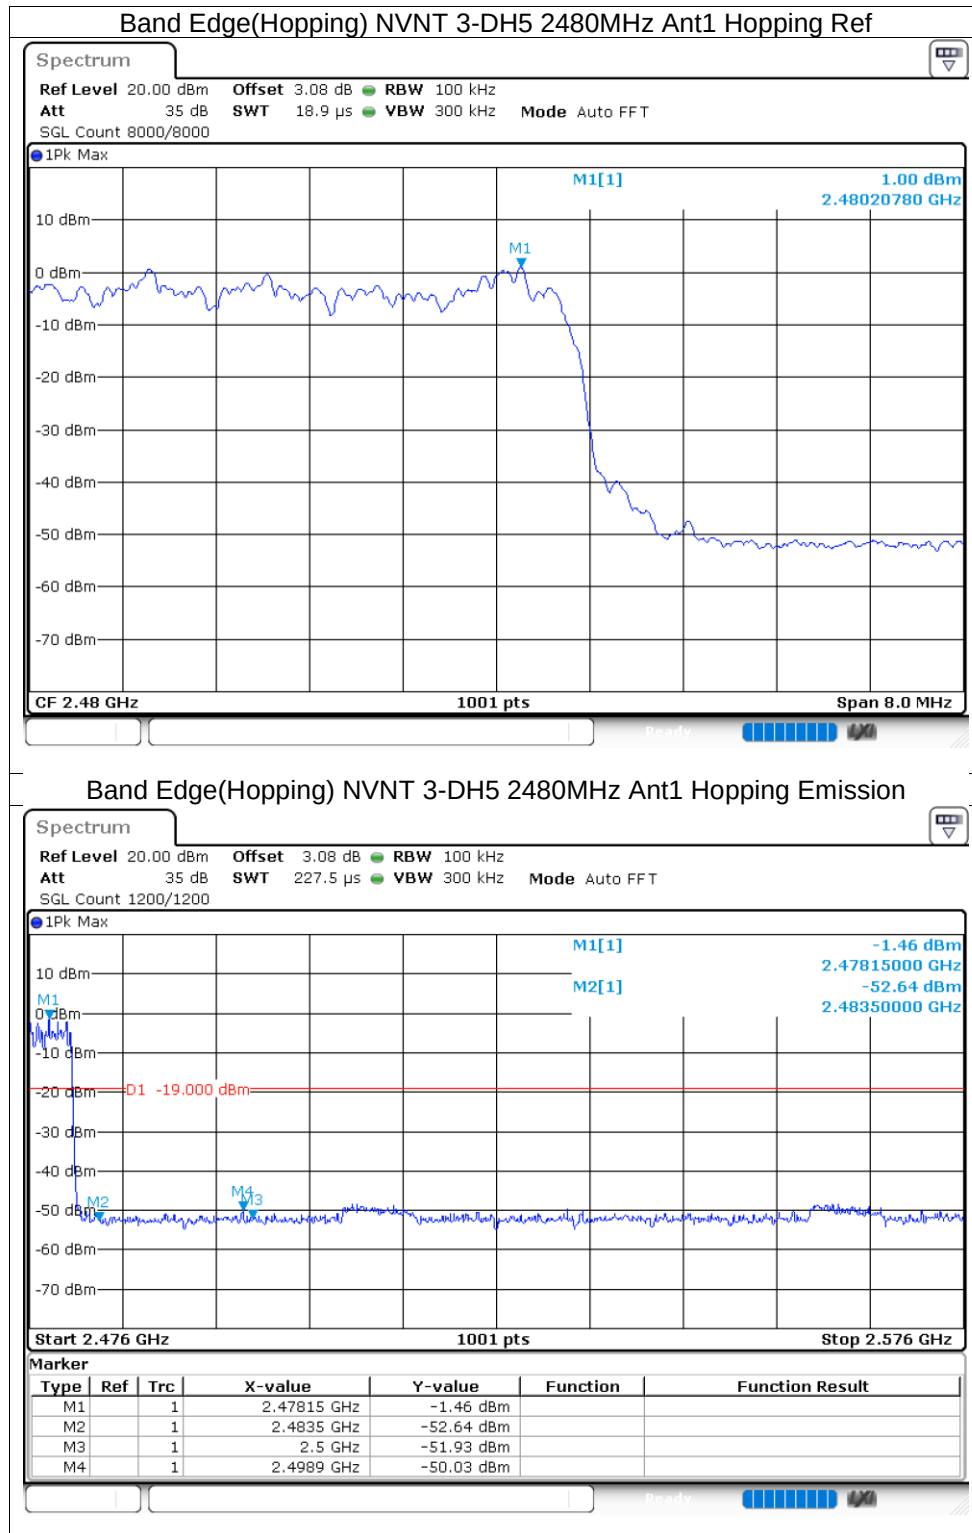



11.1.9 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-38.34	-20	Pass
NVNT	1-DH5	2441	Ant1	-38.46	-20	Pass
NVNT	1-DH5	2480	Ant1	-37.74	-20	Pass
NVNT	2-DH5	2402	Ant1	-41.93	-20	Pass
NVNT	2-DH5	2441	Ant1	-40.04	-20	Pass
NVNT	2-DH5	2480	Ant1	-42.35	-20	Pass
NVNT	3-DH5	2402	Ant1	-41.81	-20	Pass
NVNT	3-DH5	2441	Ant1	-43.16	-20	Pass
NVNT	3-DH5	2480	Ant1	-37.59	-20	Pass

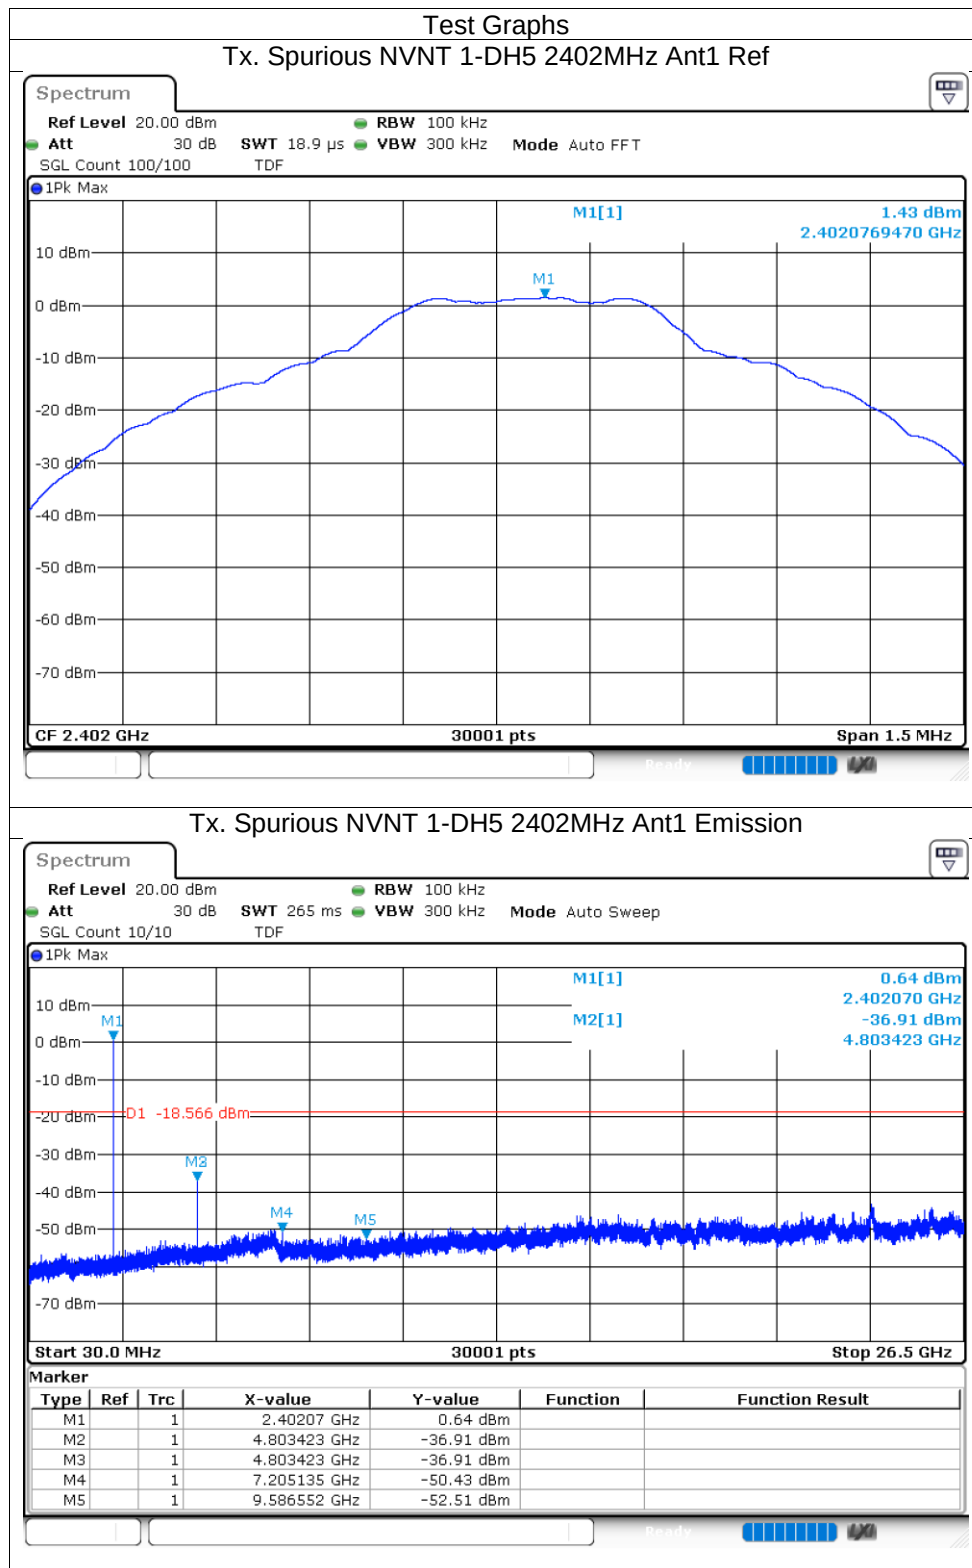


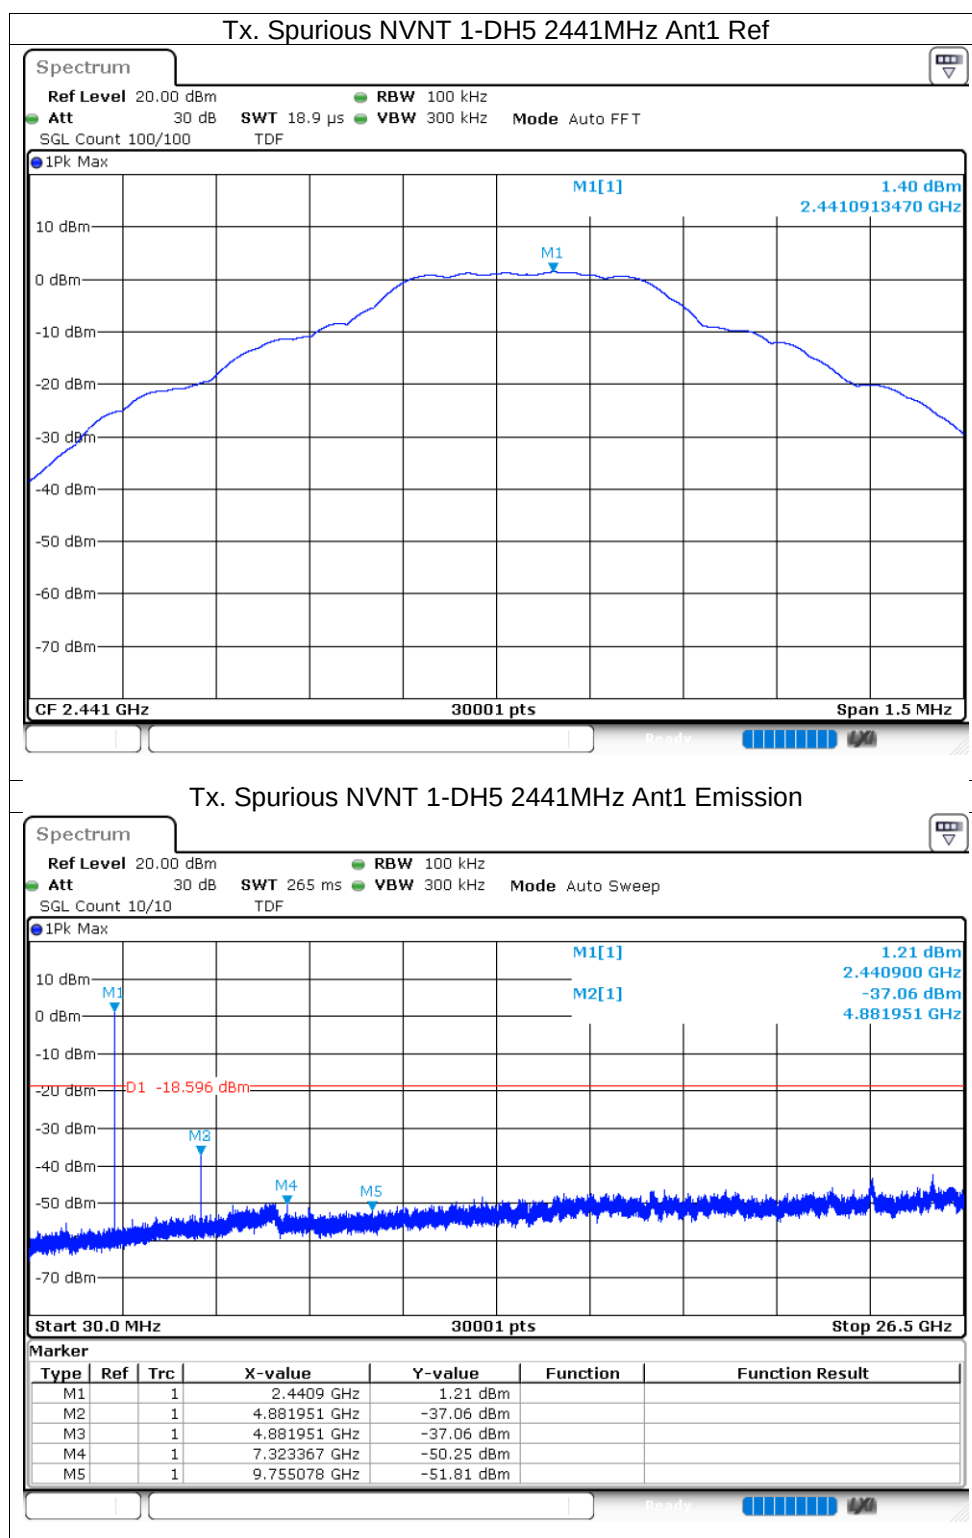


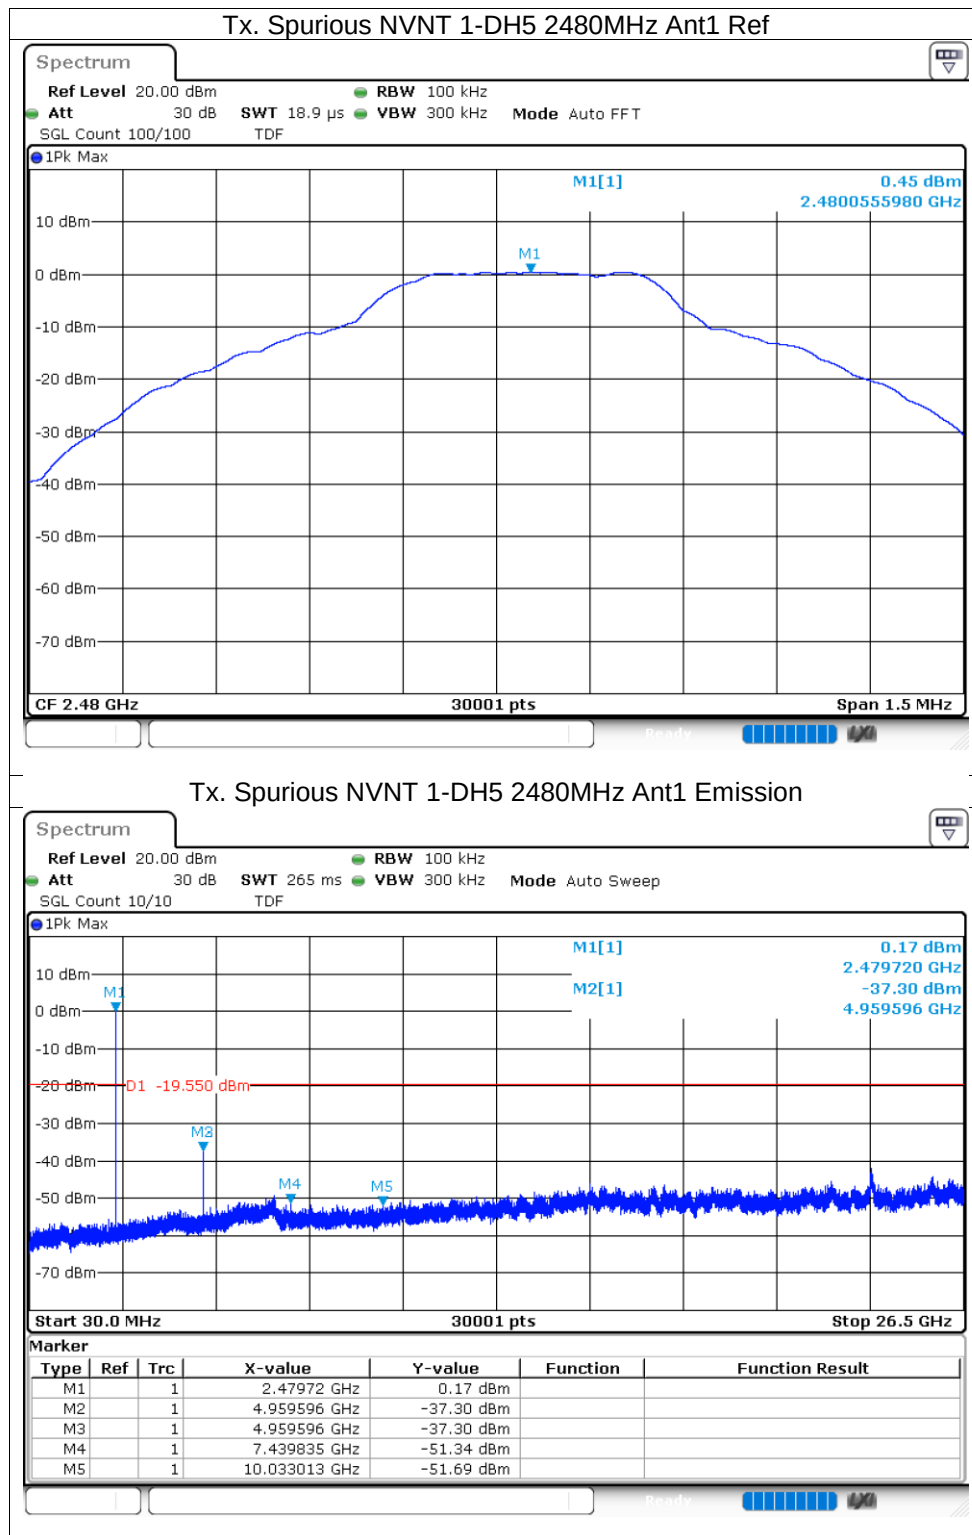


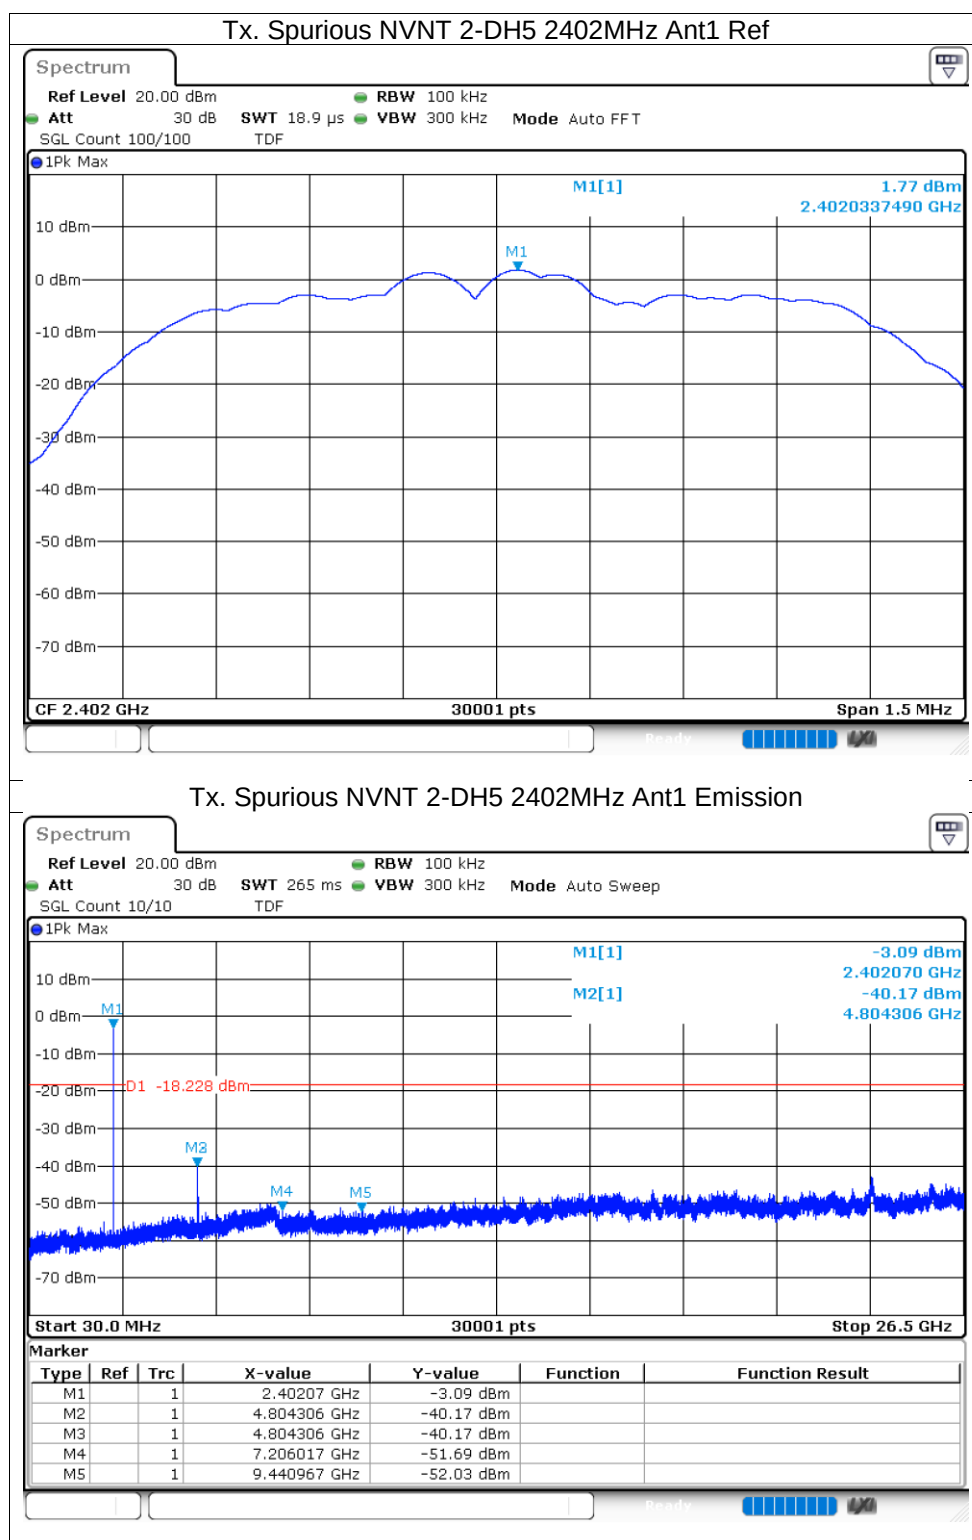


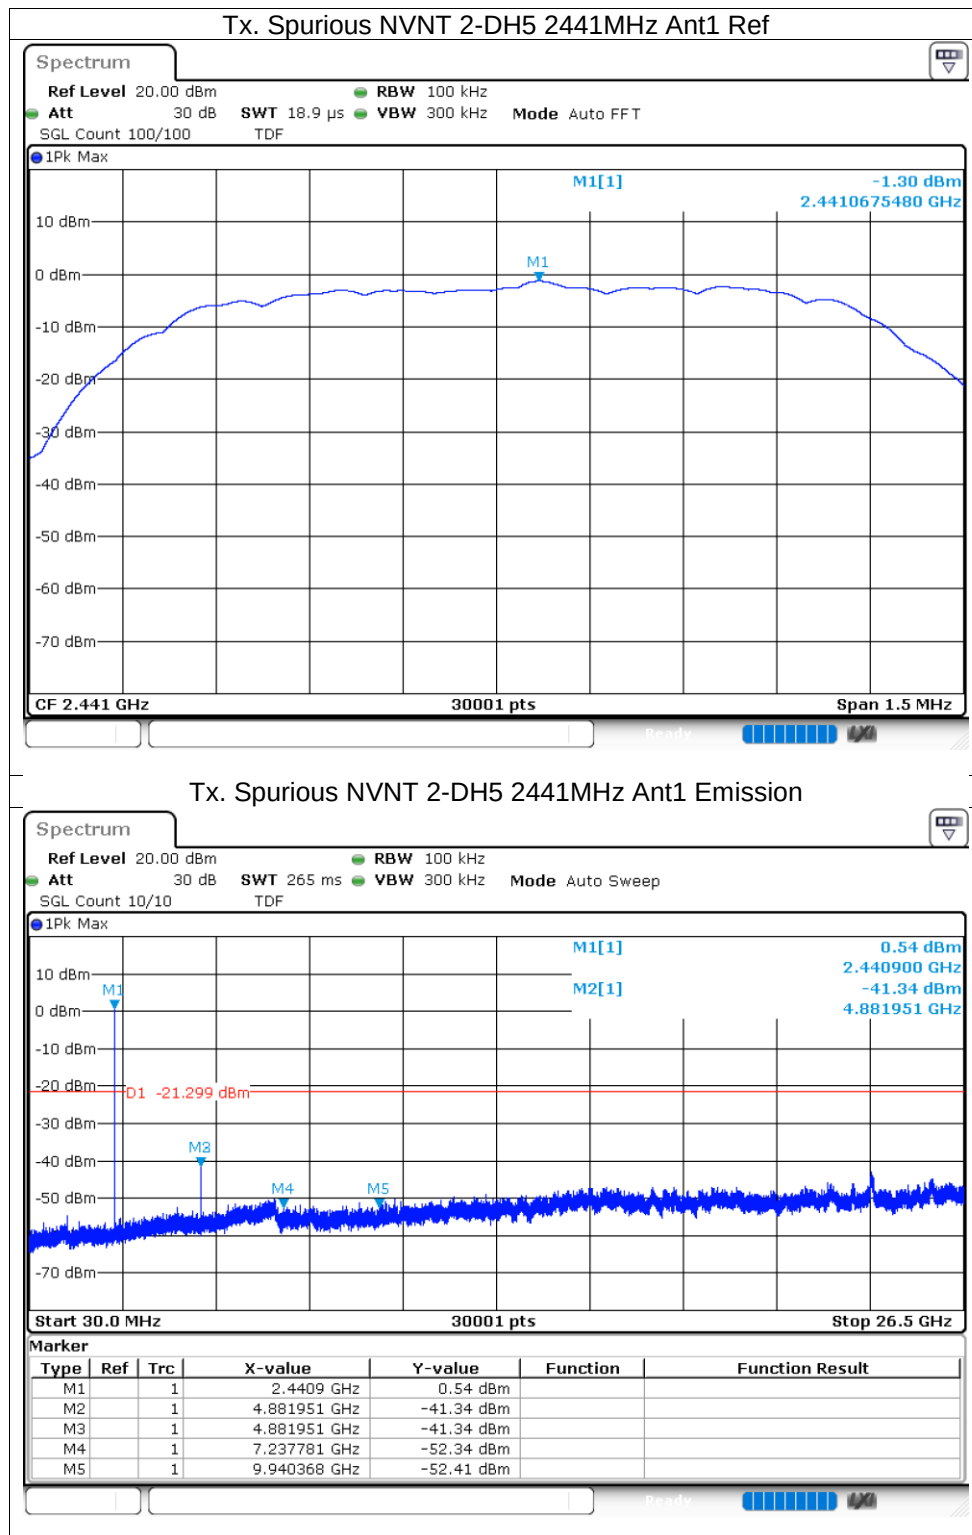

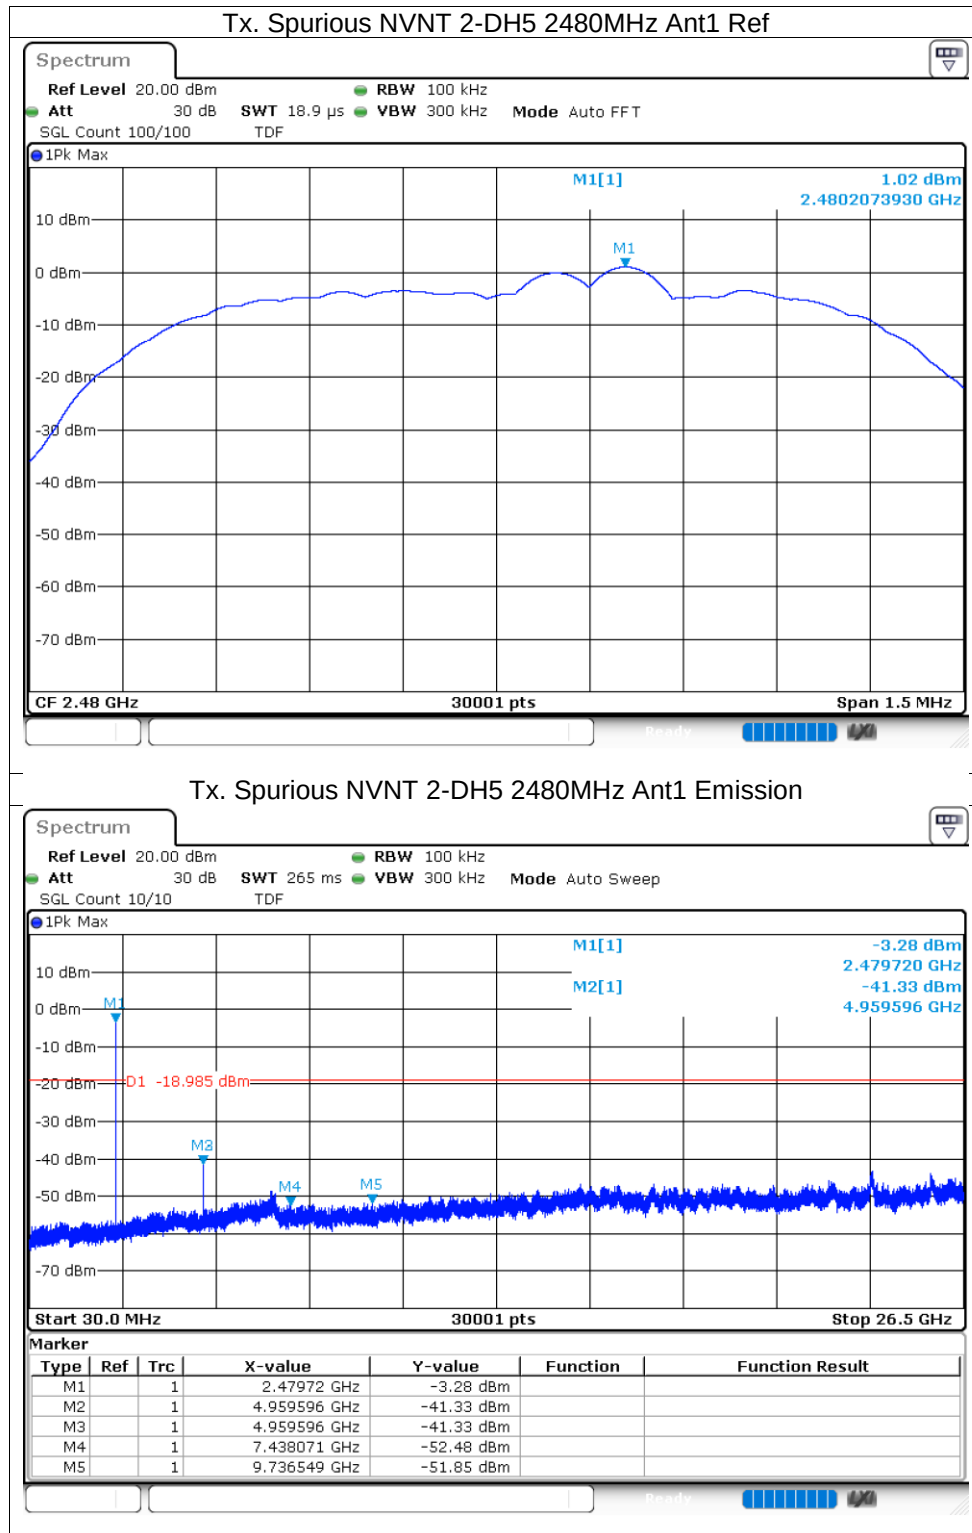

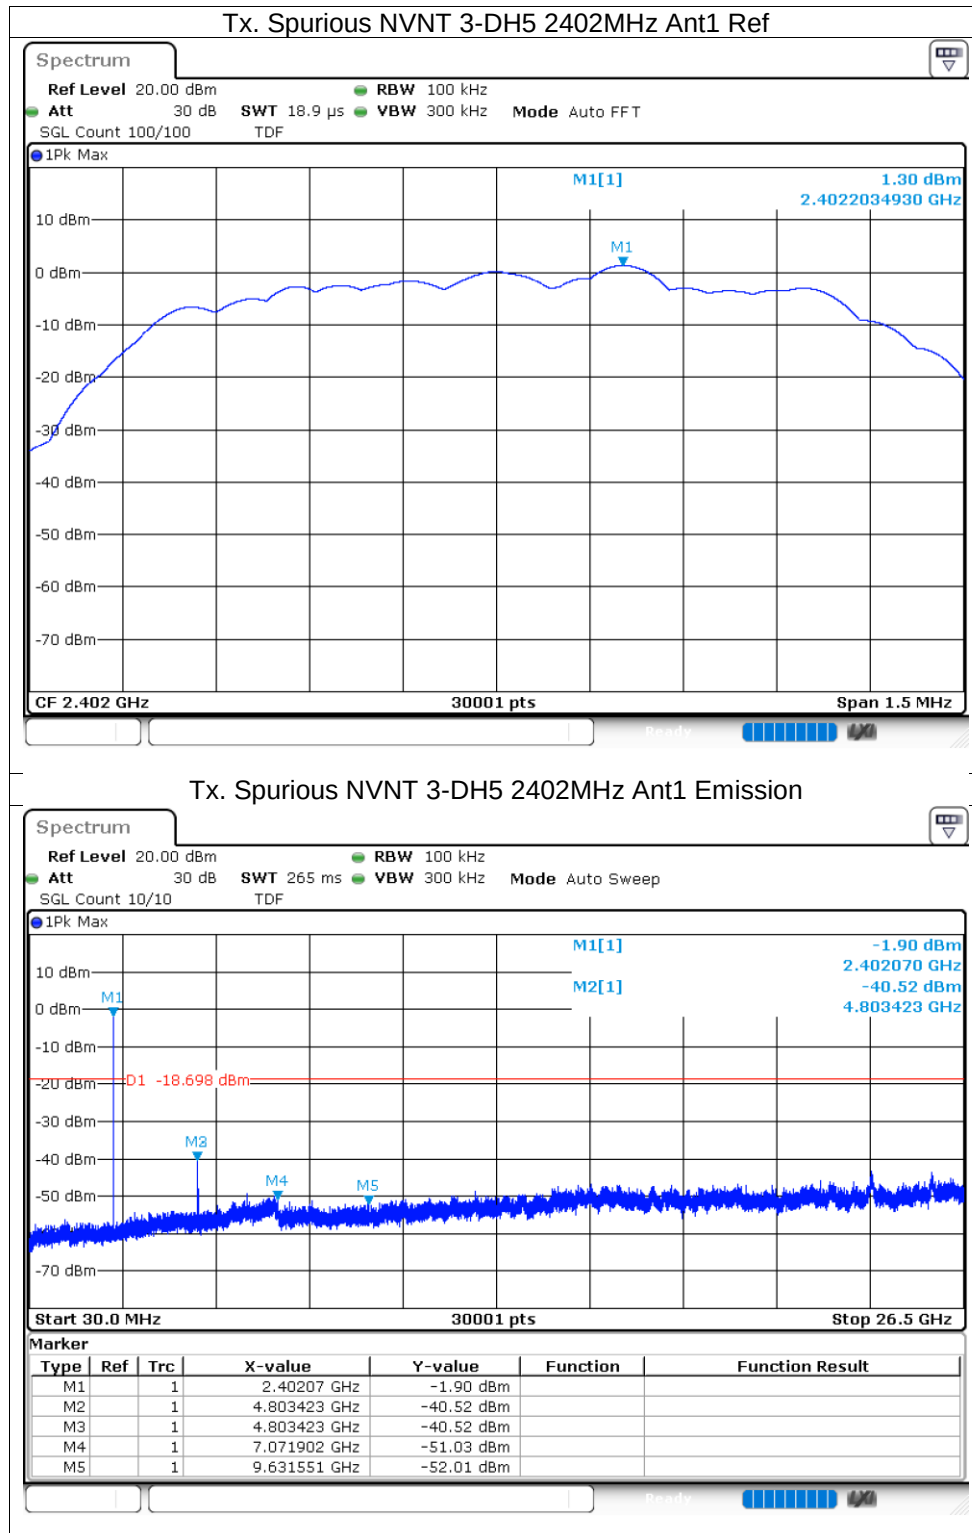

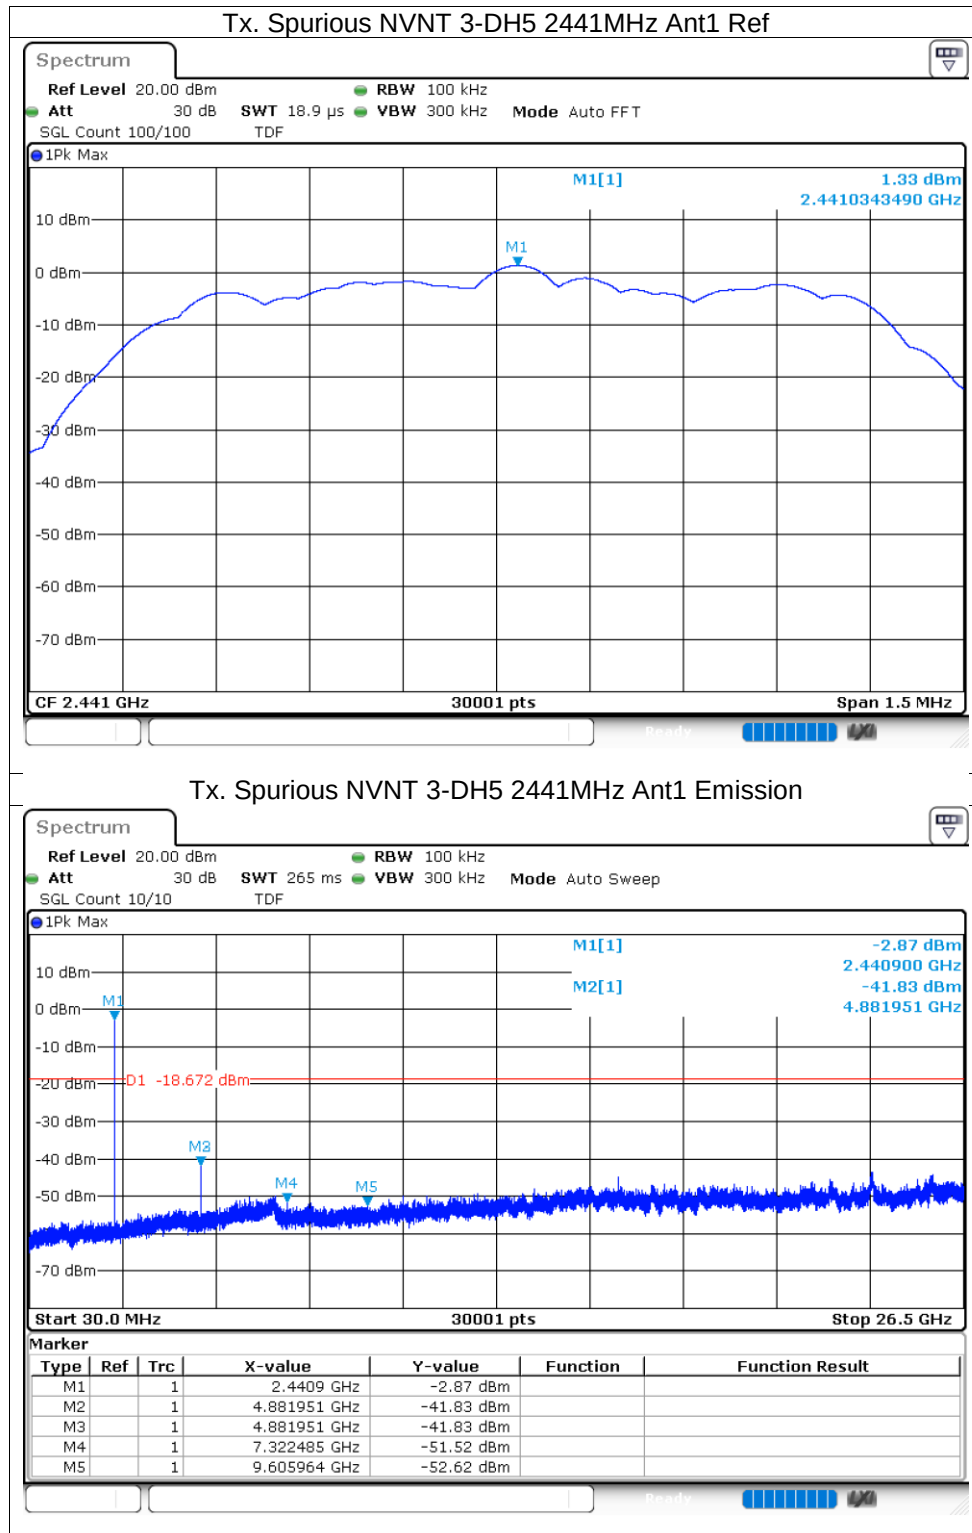

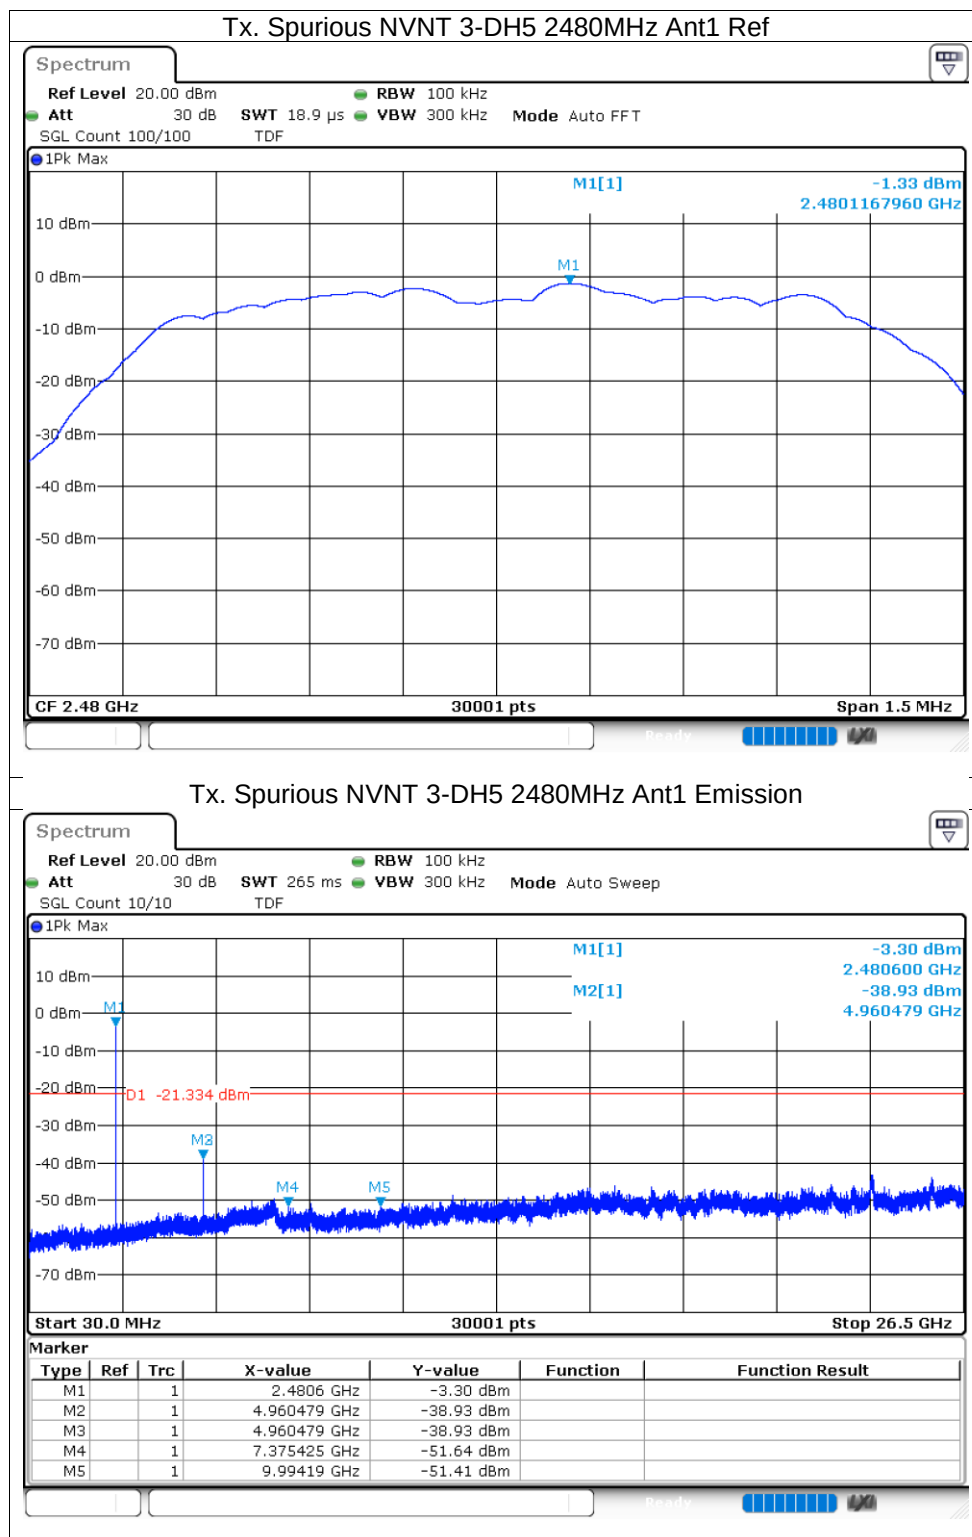

11.2 Right ear

11.2.1 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.384	70.656	184	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.641	200.202	122	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.896	263.536	91	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.396	74.052	187	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.645	202.335	123	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.896	257.744	89	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.396	83.952	212	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.645	195.755	119	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.904	246.84	85	31600	400	Pass

