




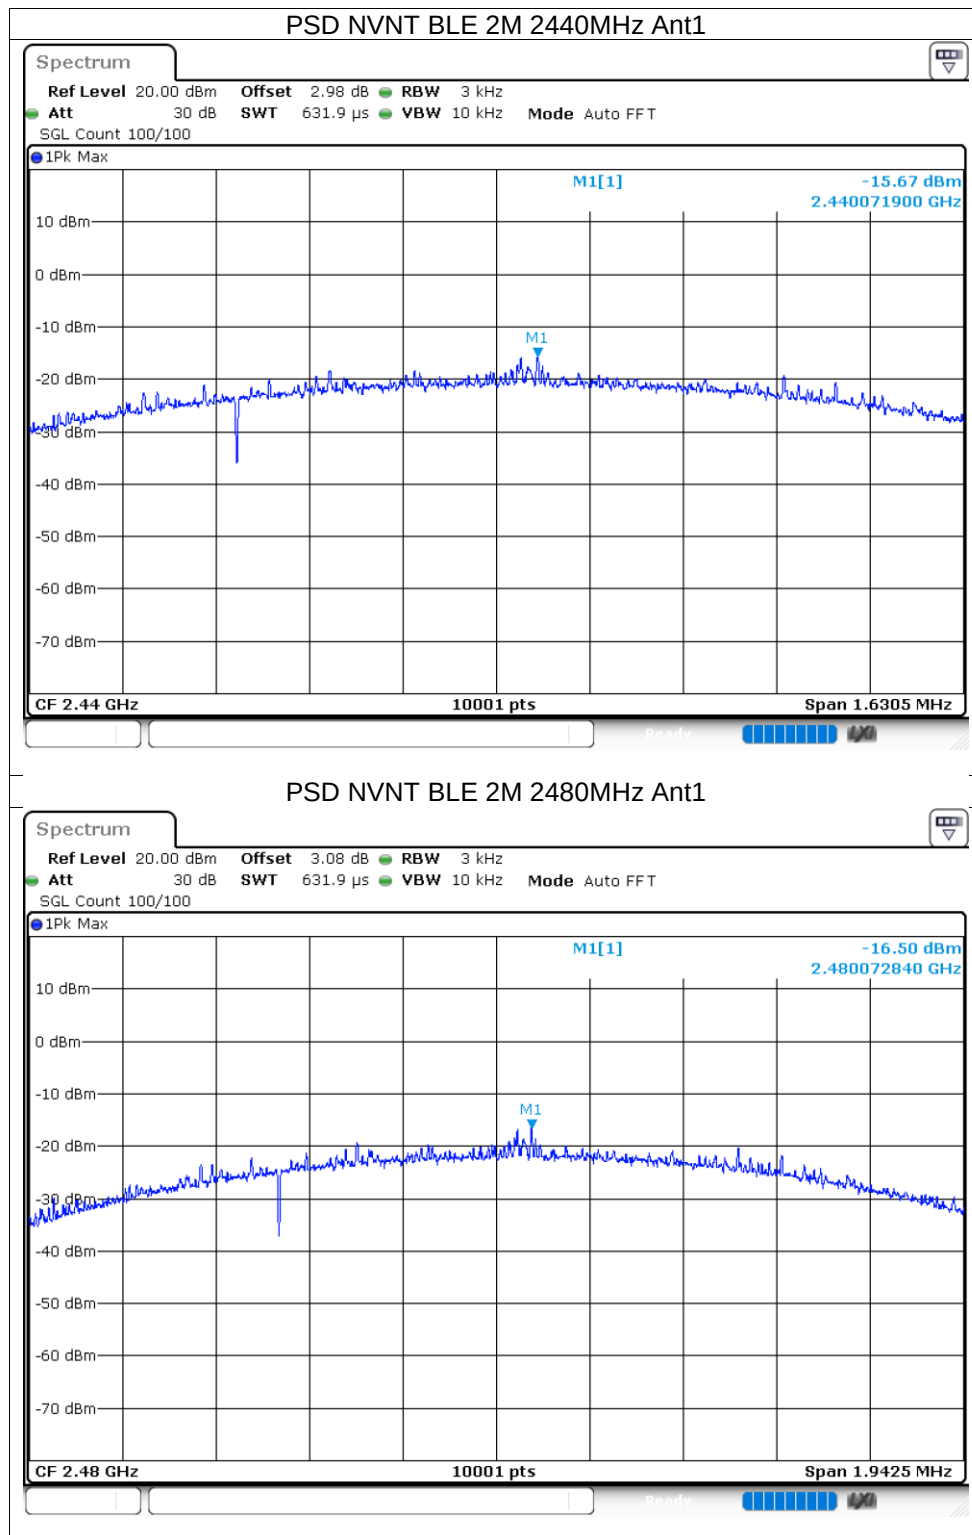



11.1.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-50.09	-20	Pass
NVNT	BLE 1M	2480	Ant1	-51.95	-20	Pass
NVNT	BLE 2M	2402	Ant1	-48.11	-20	Pass
NVNT	BLE 2M	2480	Ant1	-49.44	-20	Pass

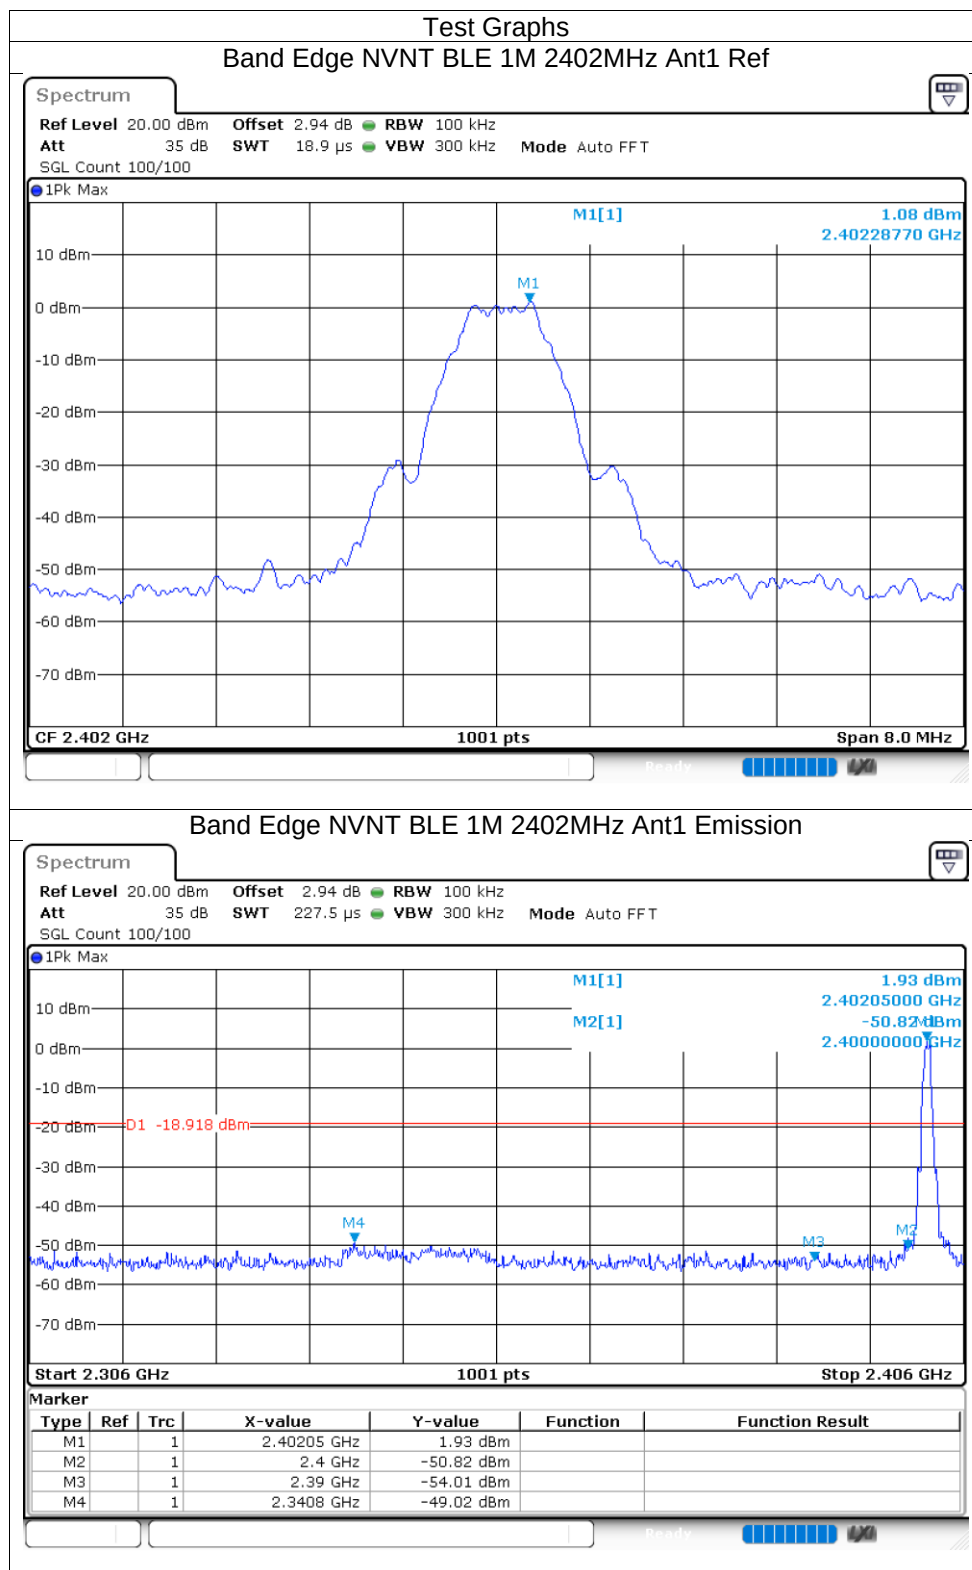

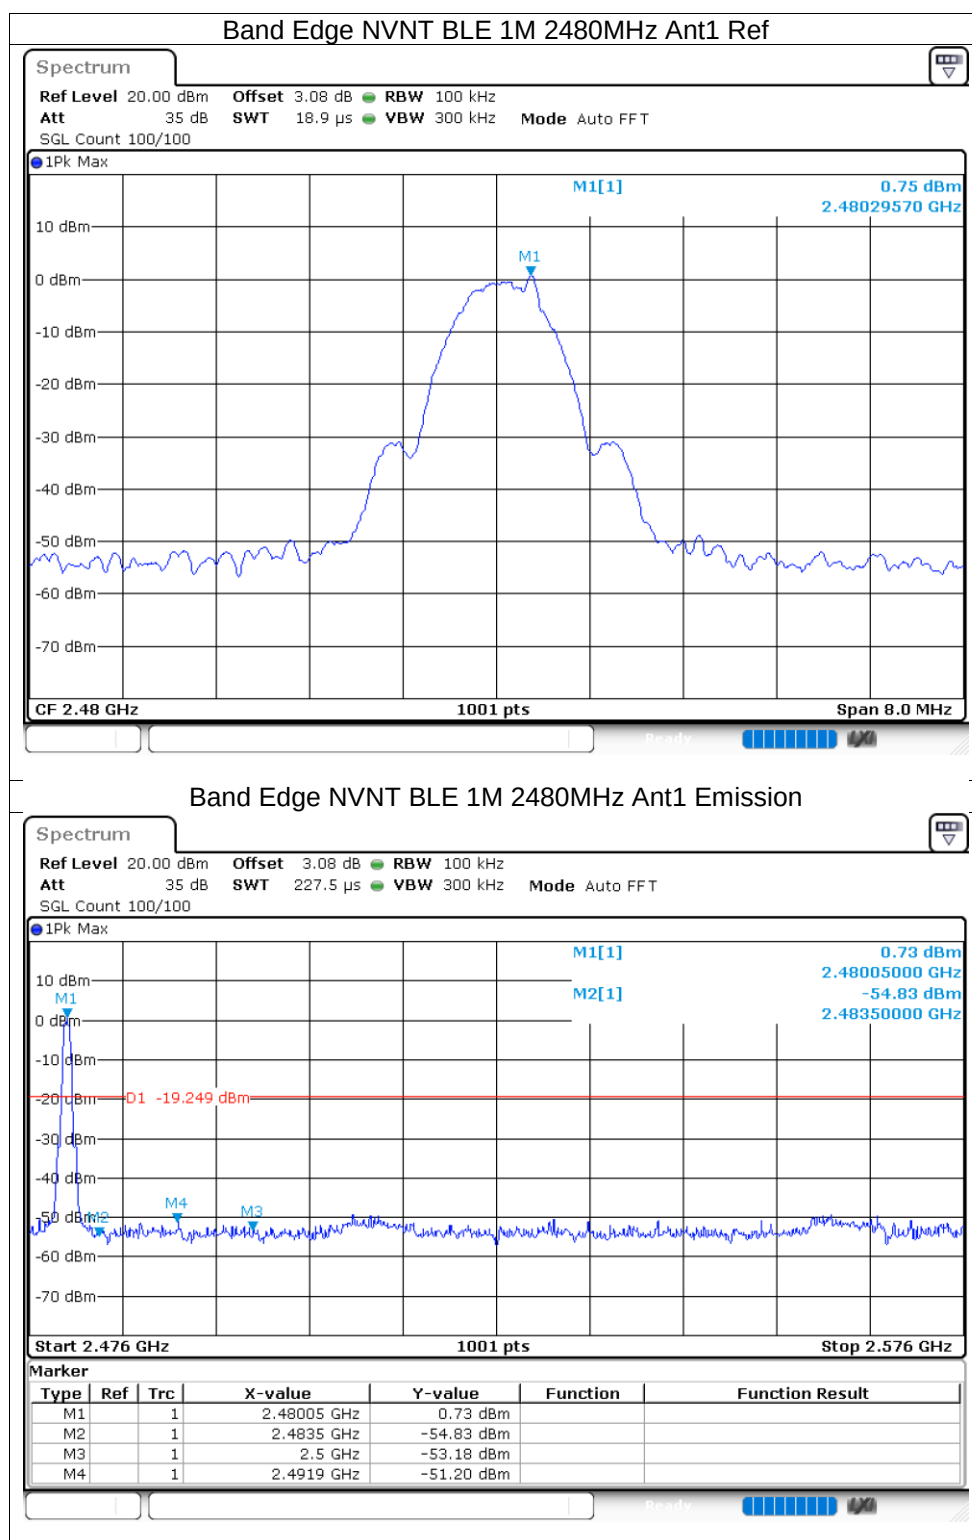


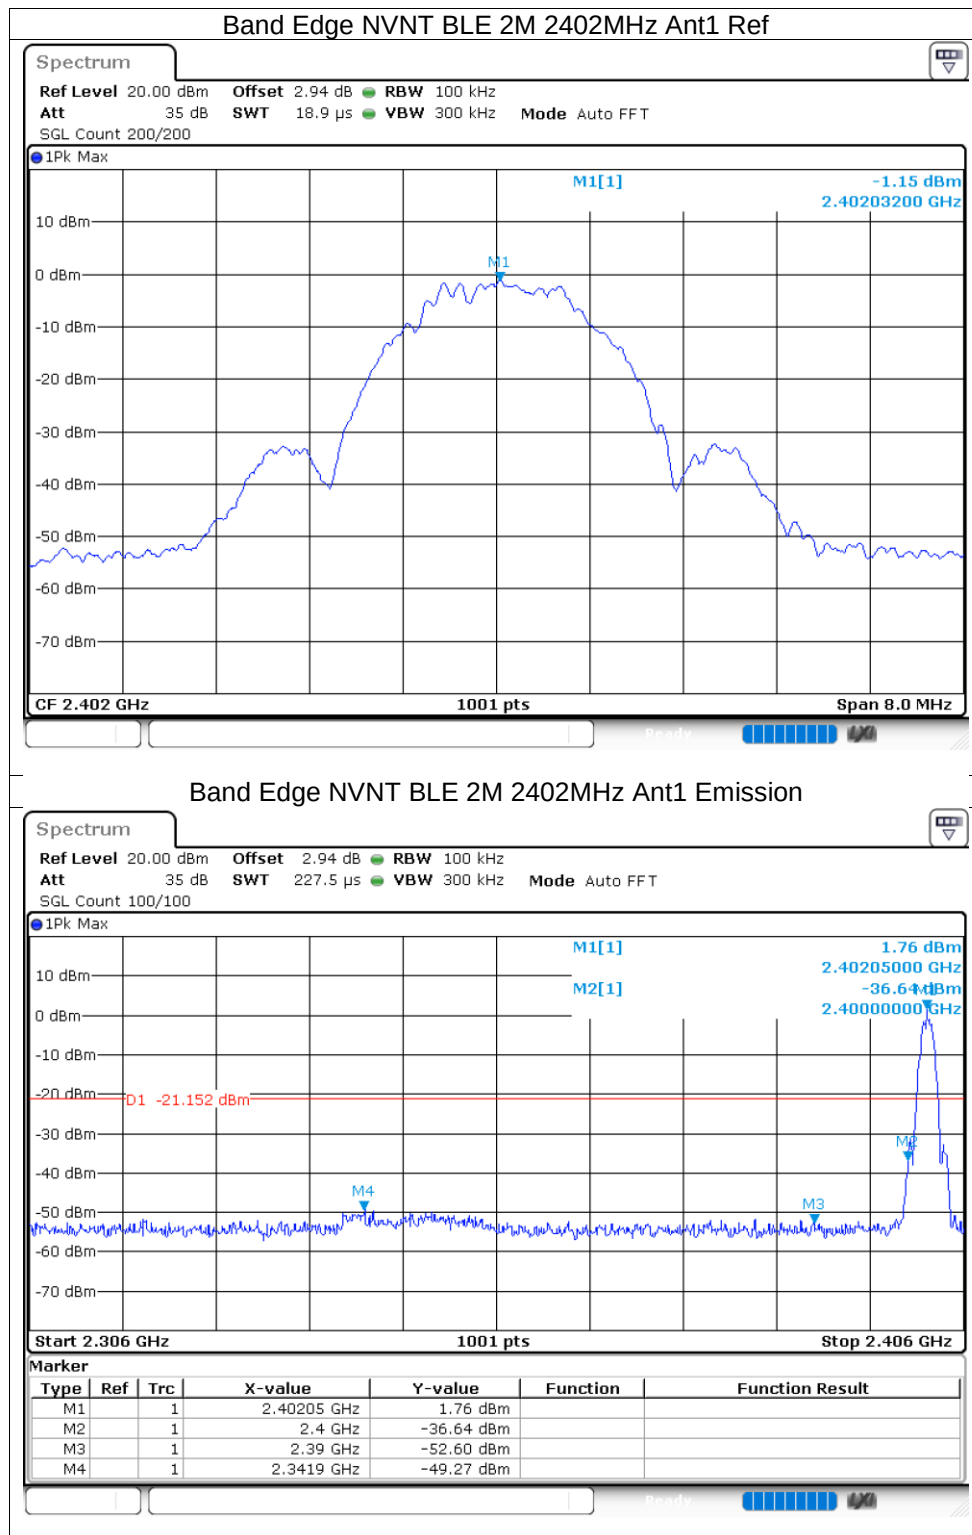


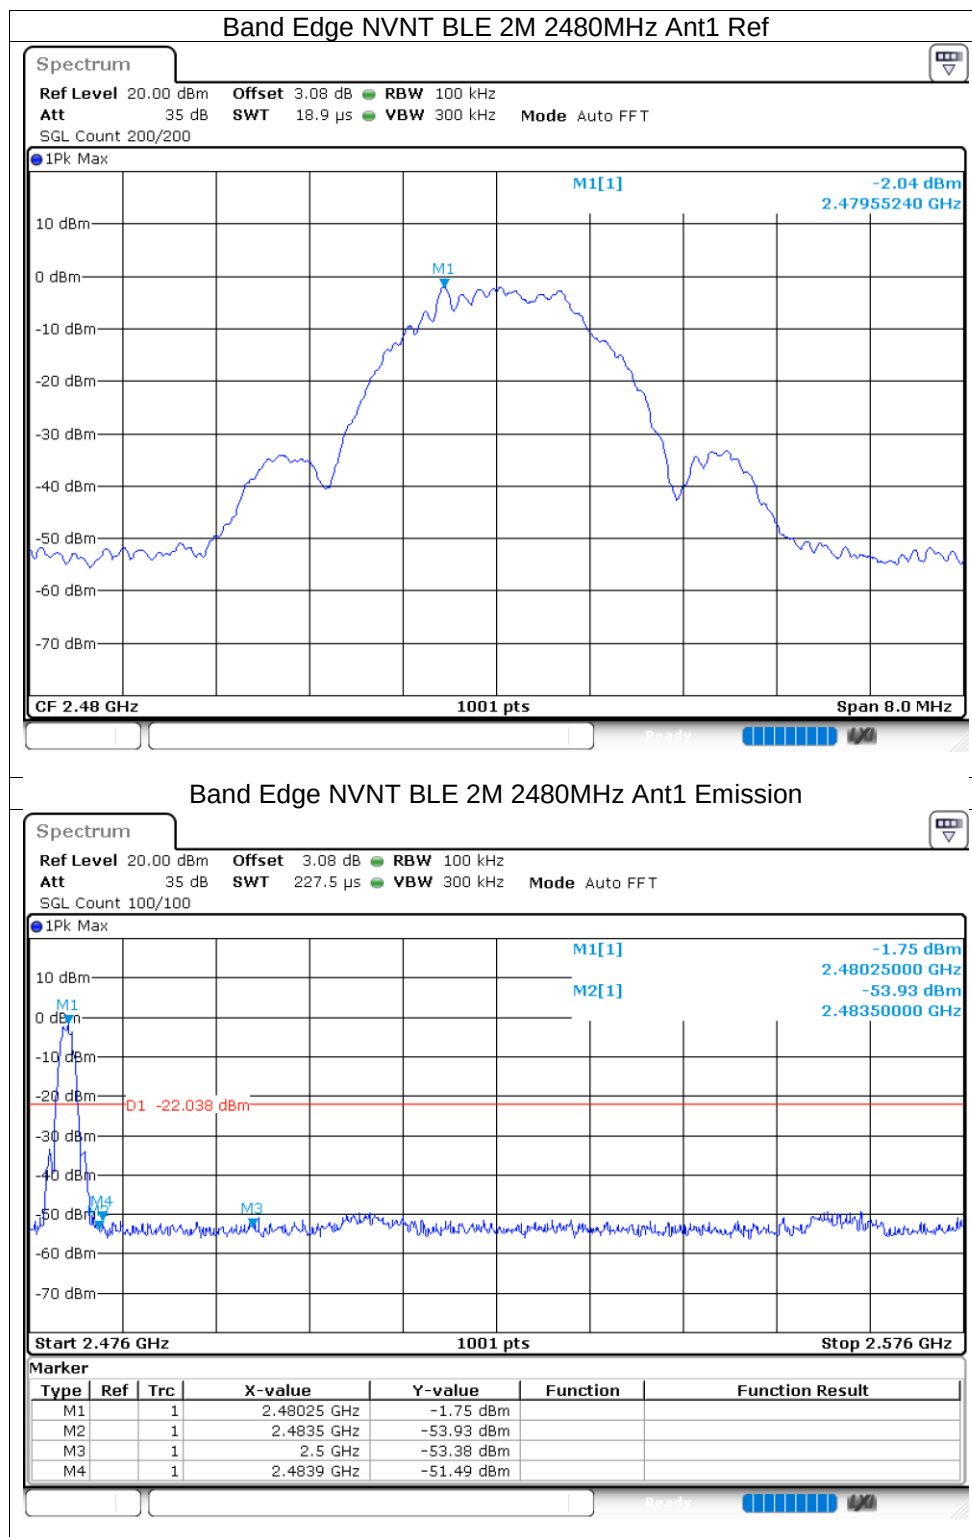



11.1.6 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-37.77	-20	Pass
NVNT	BLE 1M	2440	Ant1	-38.39	-20	Pass
NVNT	BLE 1M	2480	Ant1	-37.8	-20	Pass
NVNT	BLE 2M	2402	Ant1	-40.03	-20	Pass
NVNT	BLE 2M	2440	Ant1	-37.56	-20	Pass
NVNT	BLE 2M	2480	Ant1	-40.54	-20	Pass

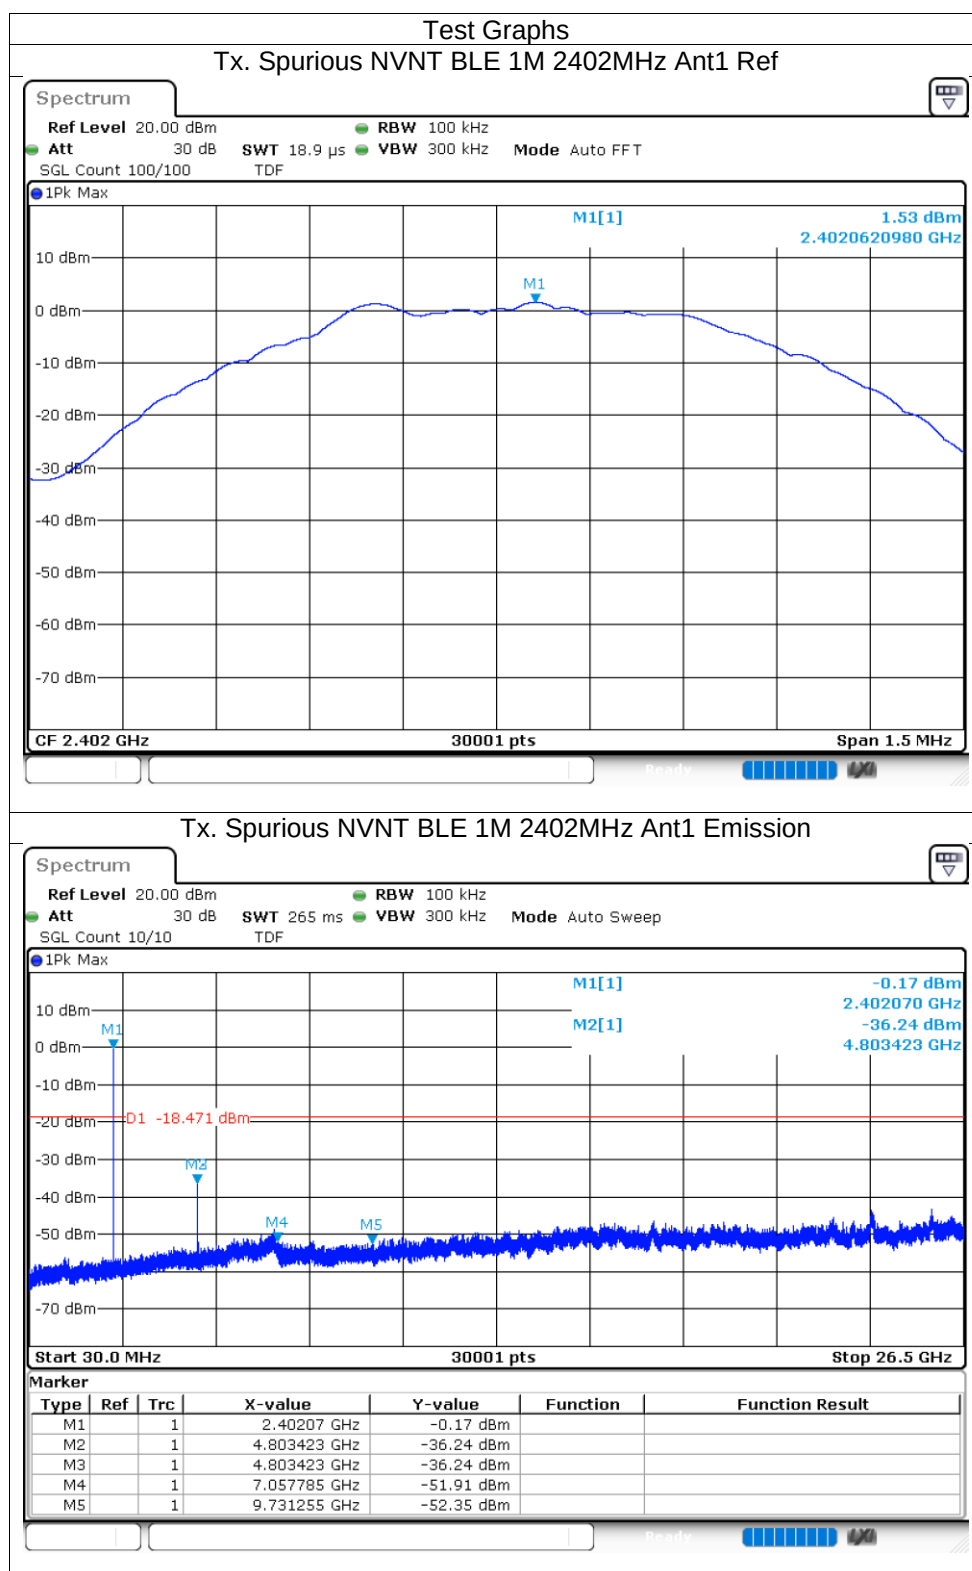

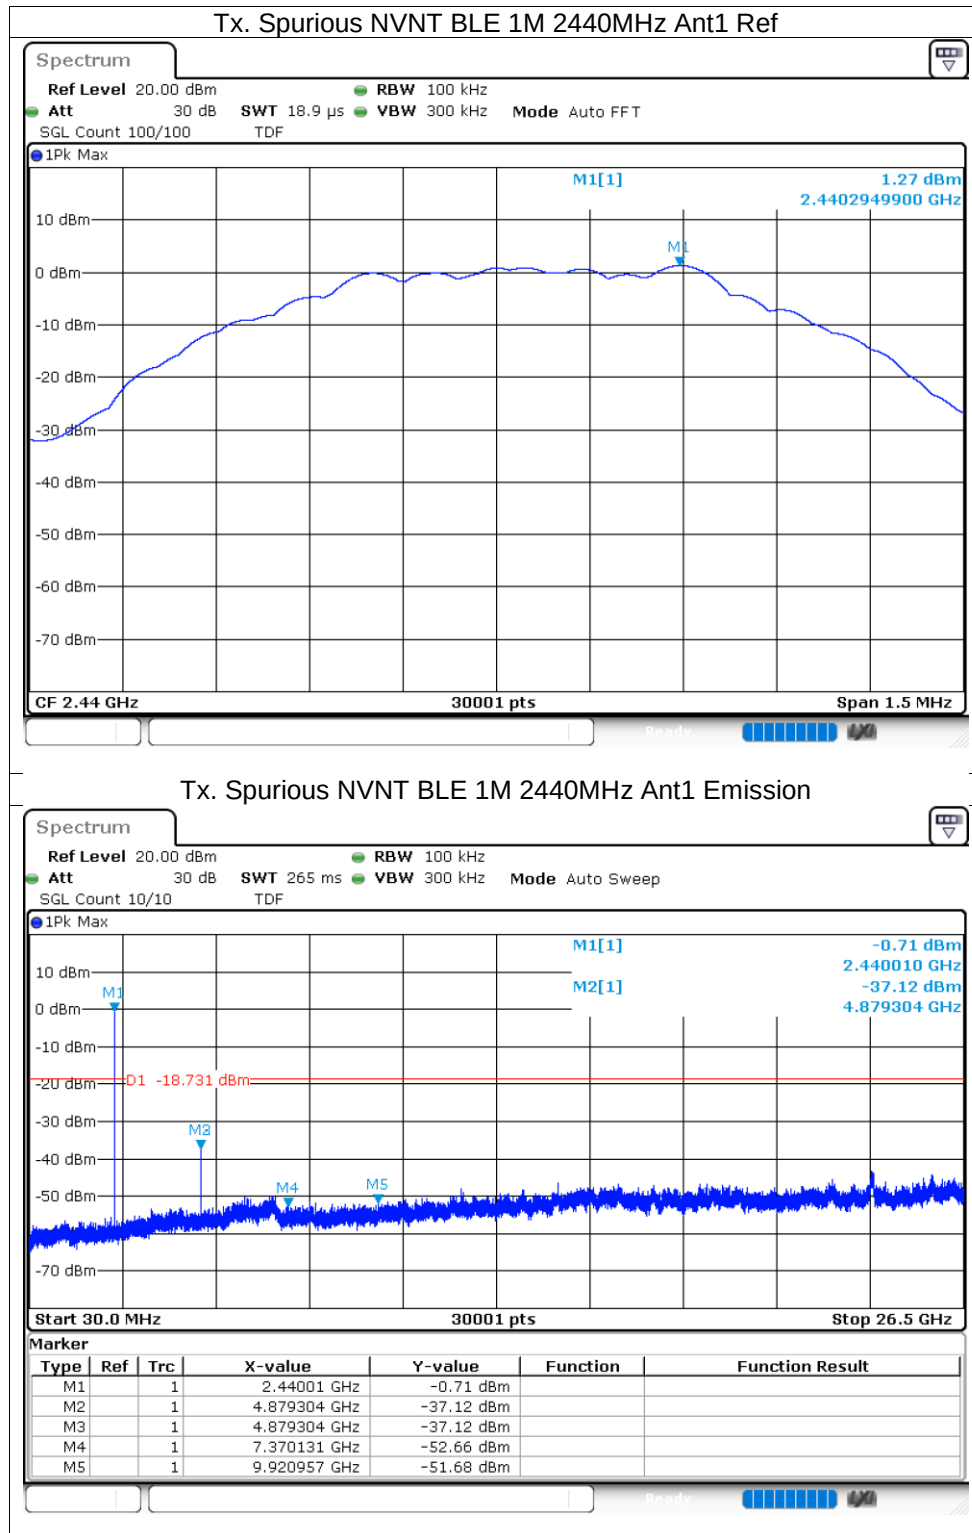


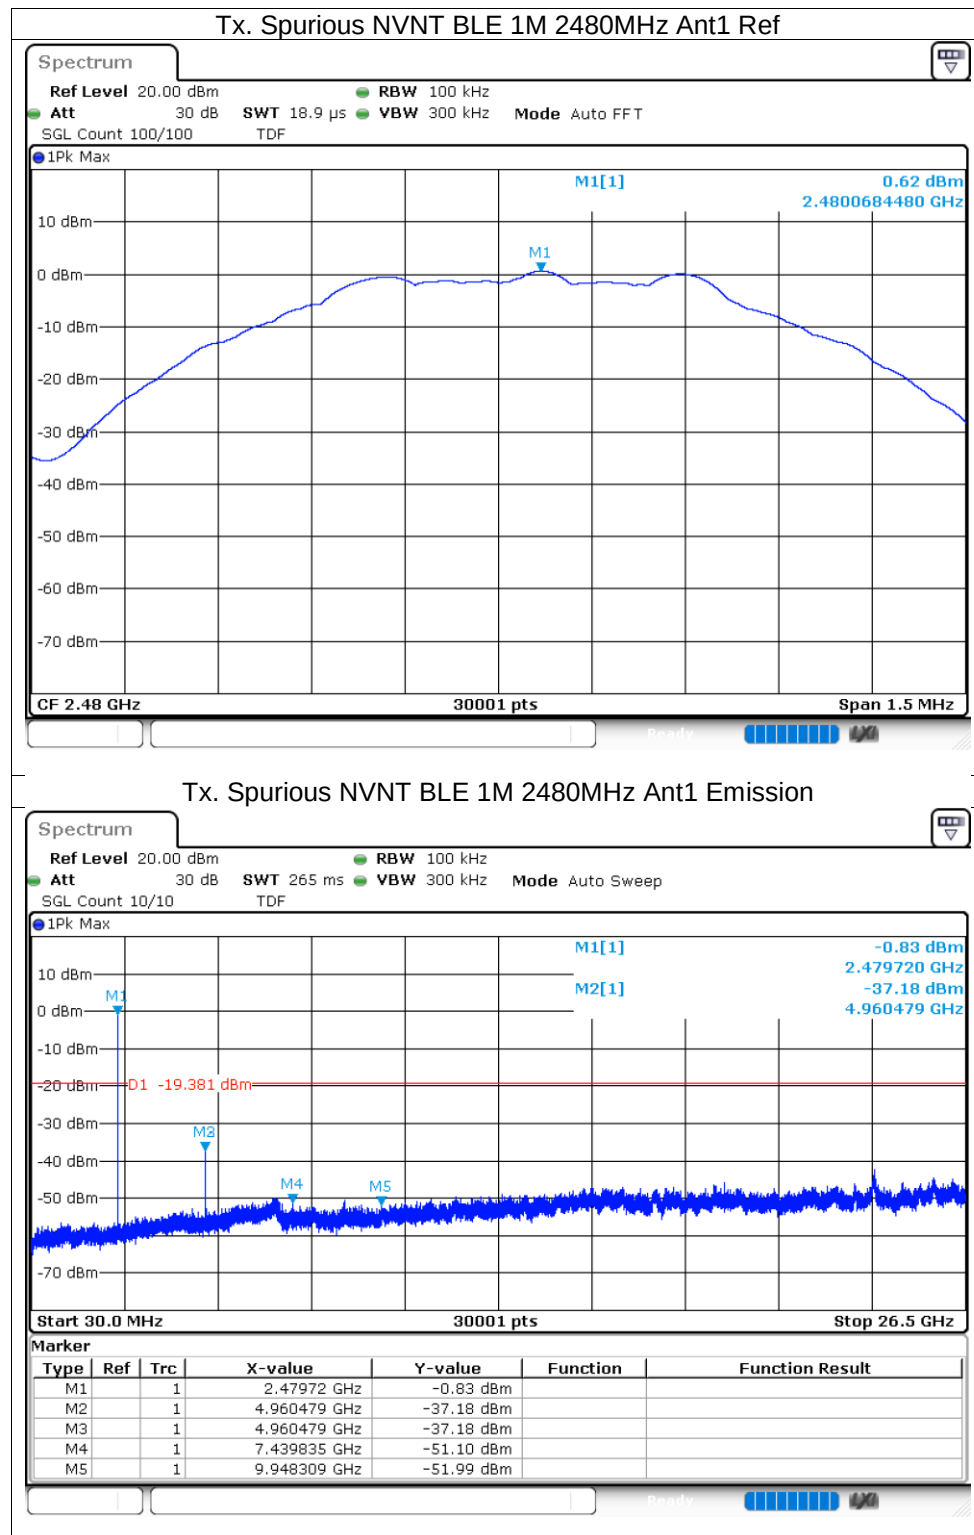

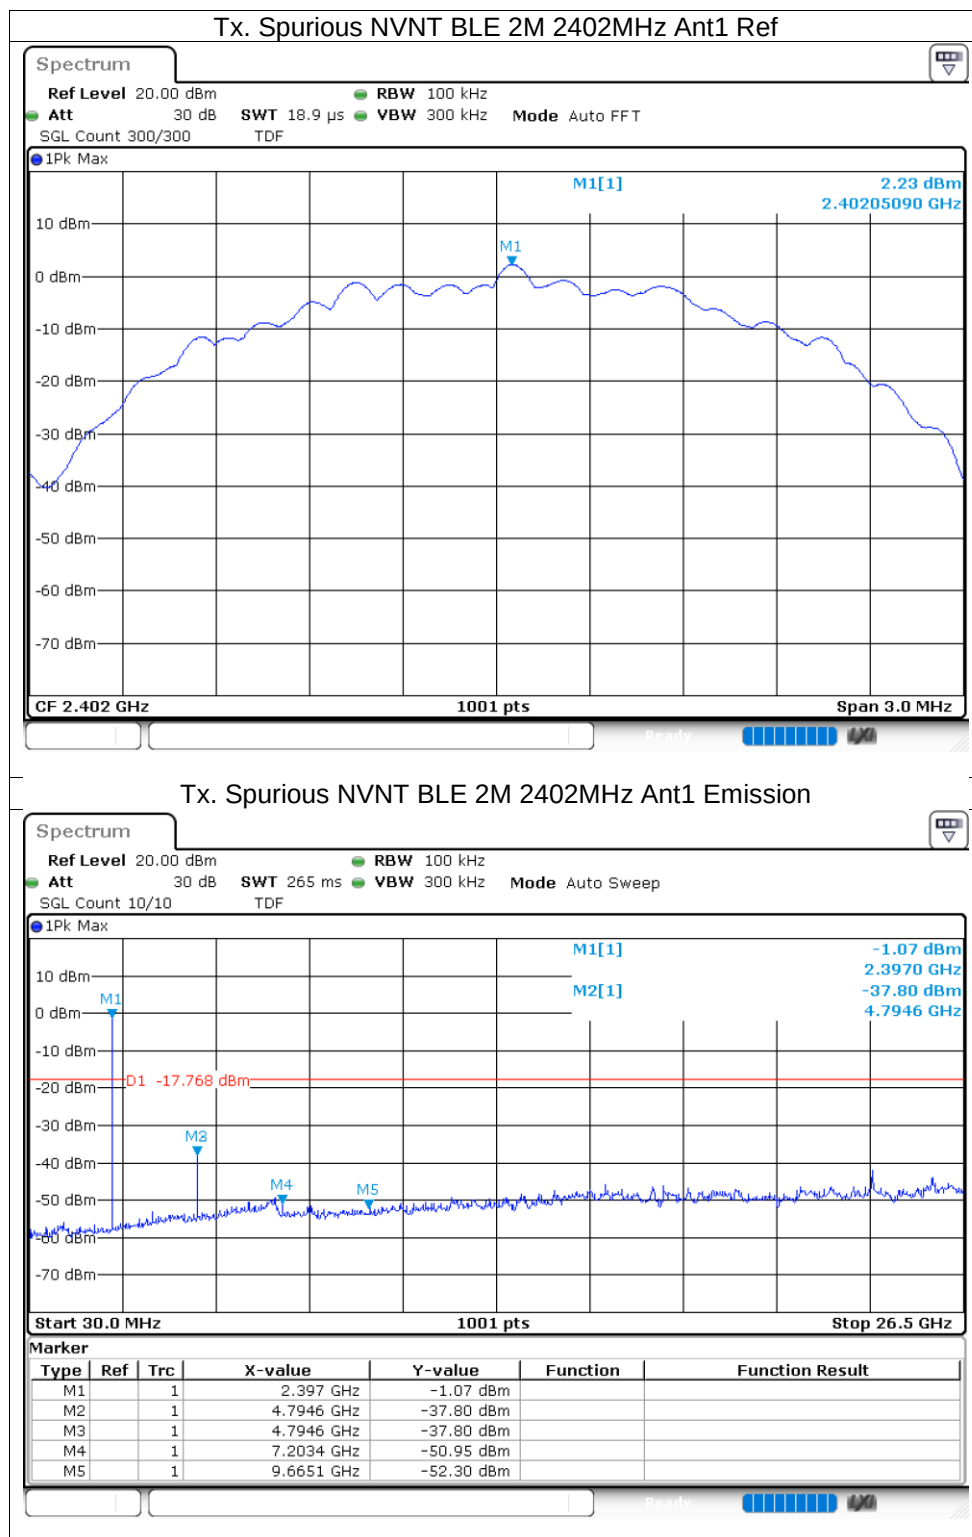


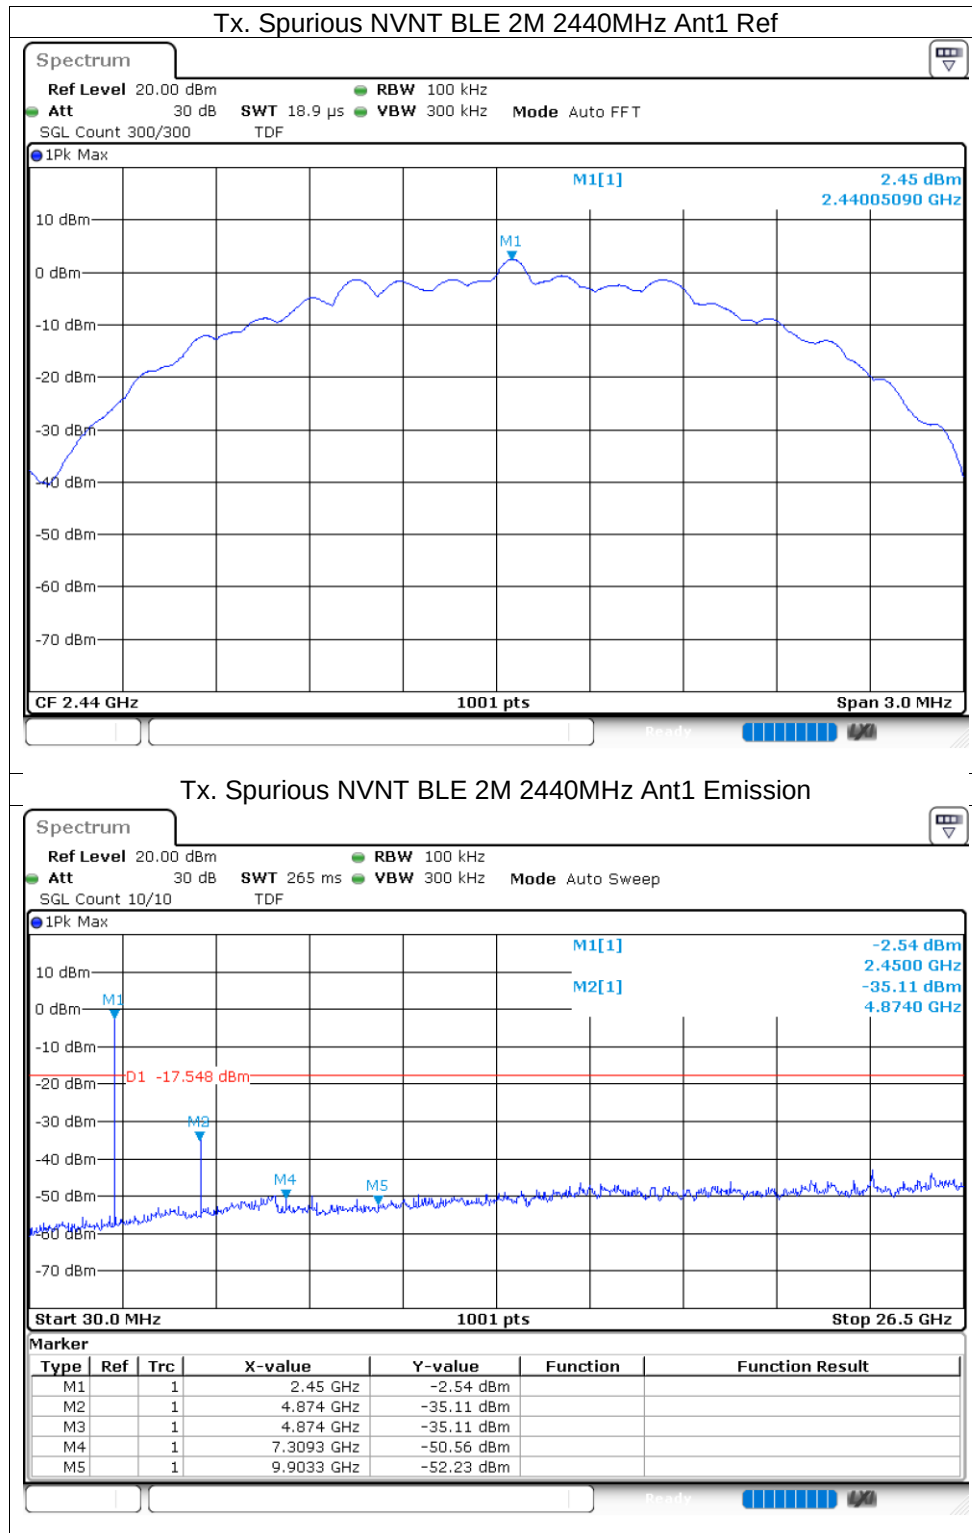

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

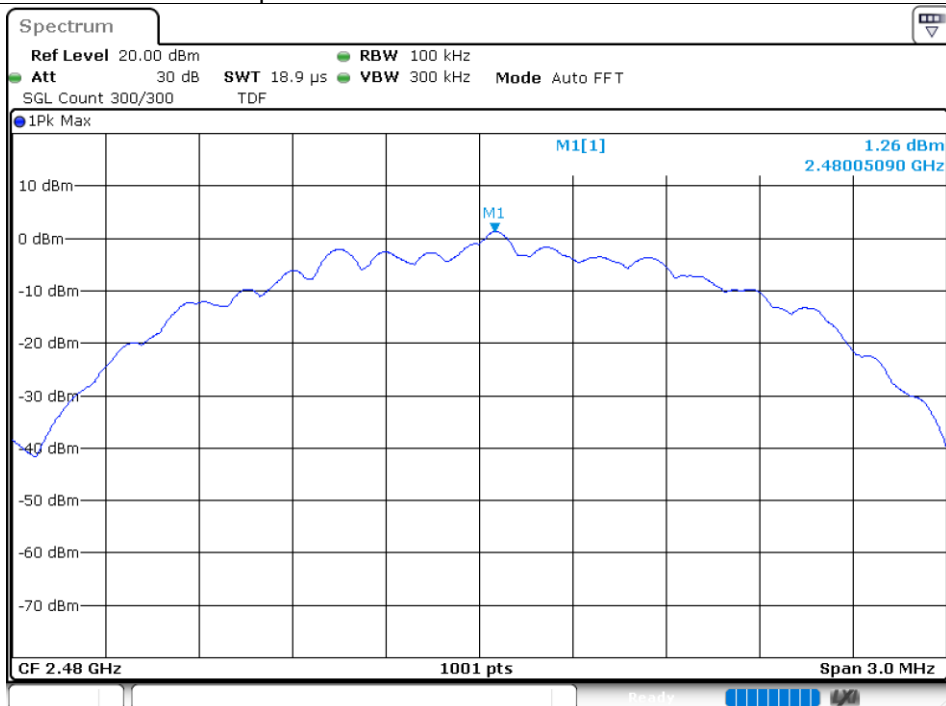


Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

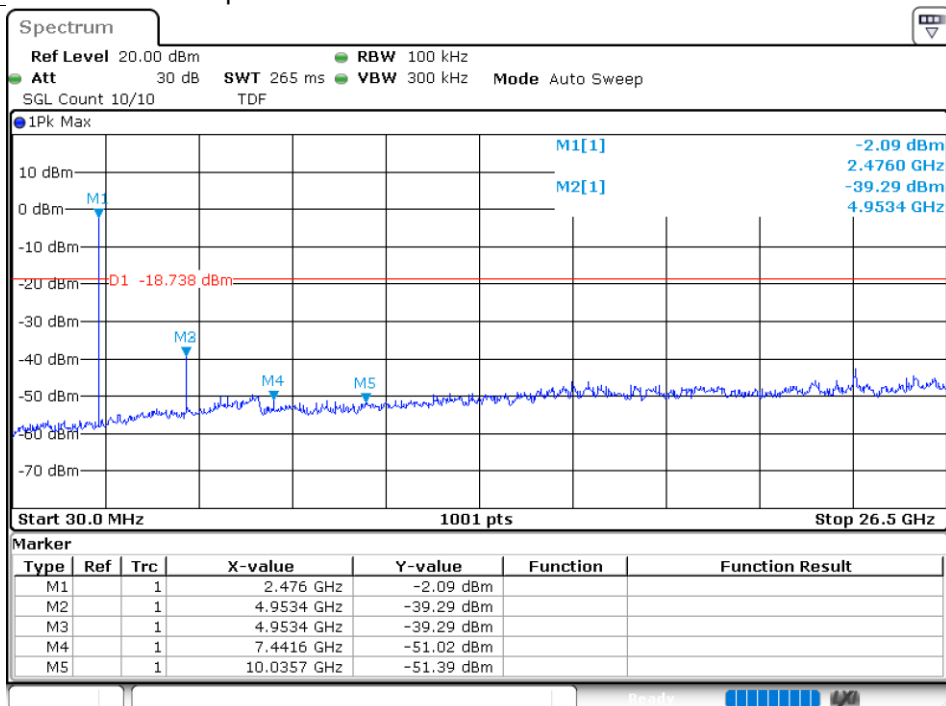



11.2 Right ear

11.2.1 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	86	0.65	0.47
NVNT	BLE 1M	2440	Ant1	86	0.65	0.47
NVNT	BLE 1M	2480	Ant1	86	0.65	0.47
NVNT	BLE 2M	2402	Ant1	43.84	3.58	0.92
NVNT	BLE 2M	2440	Ant1	43.61	3.6	0.93
NVNT	BLE 2M	2480	Ant1	43.6	3.61	0.93

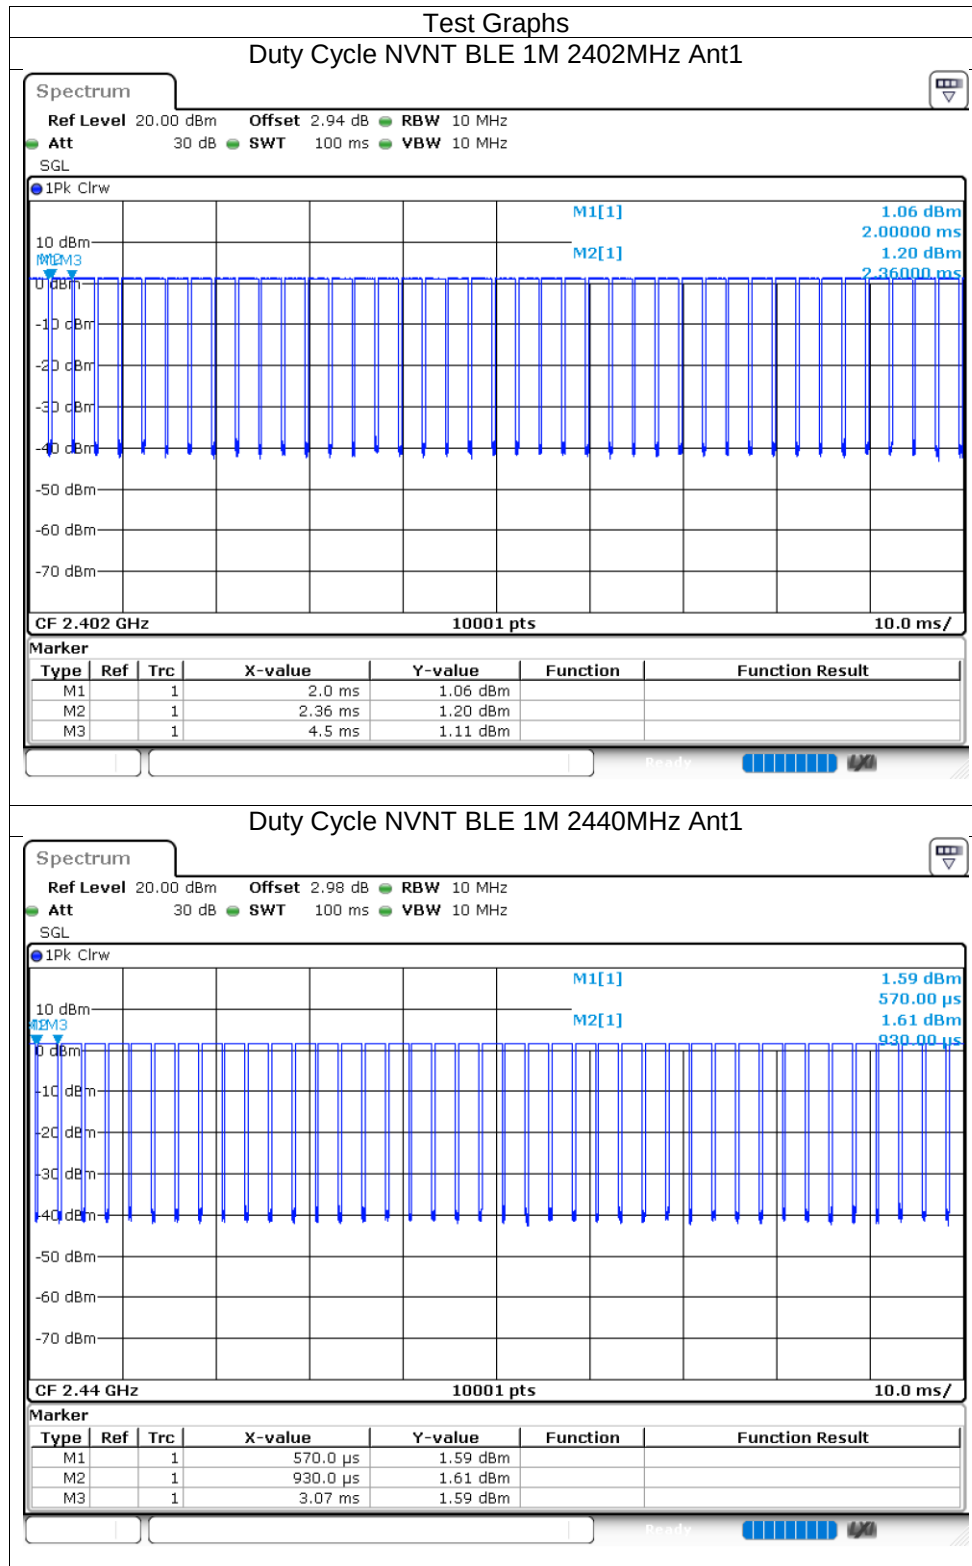


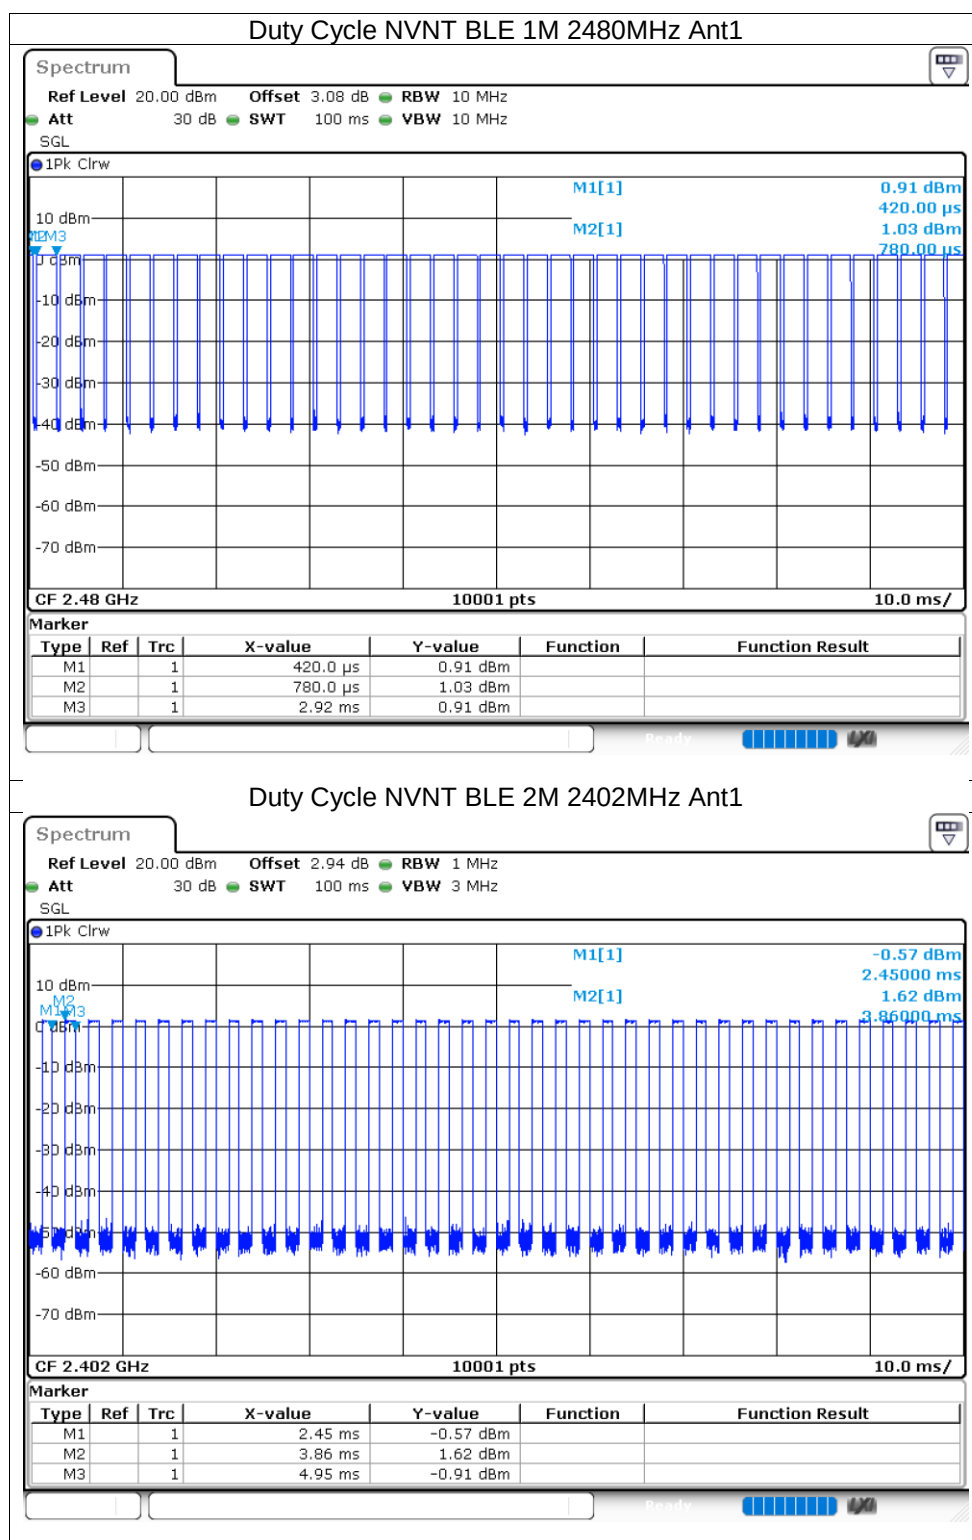


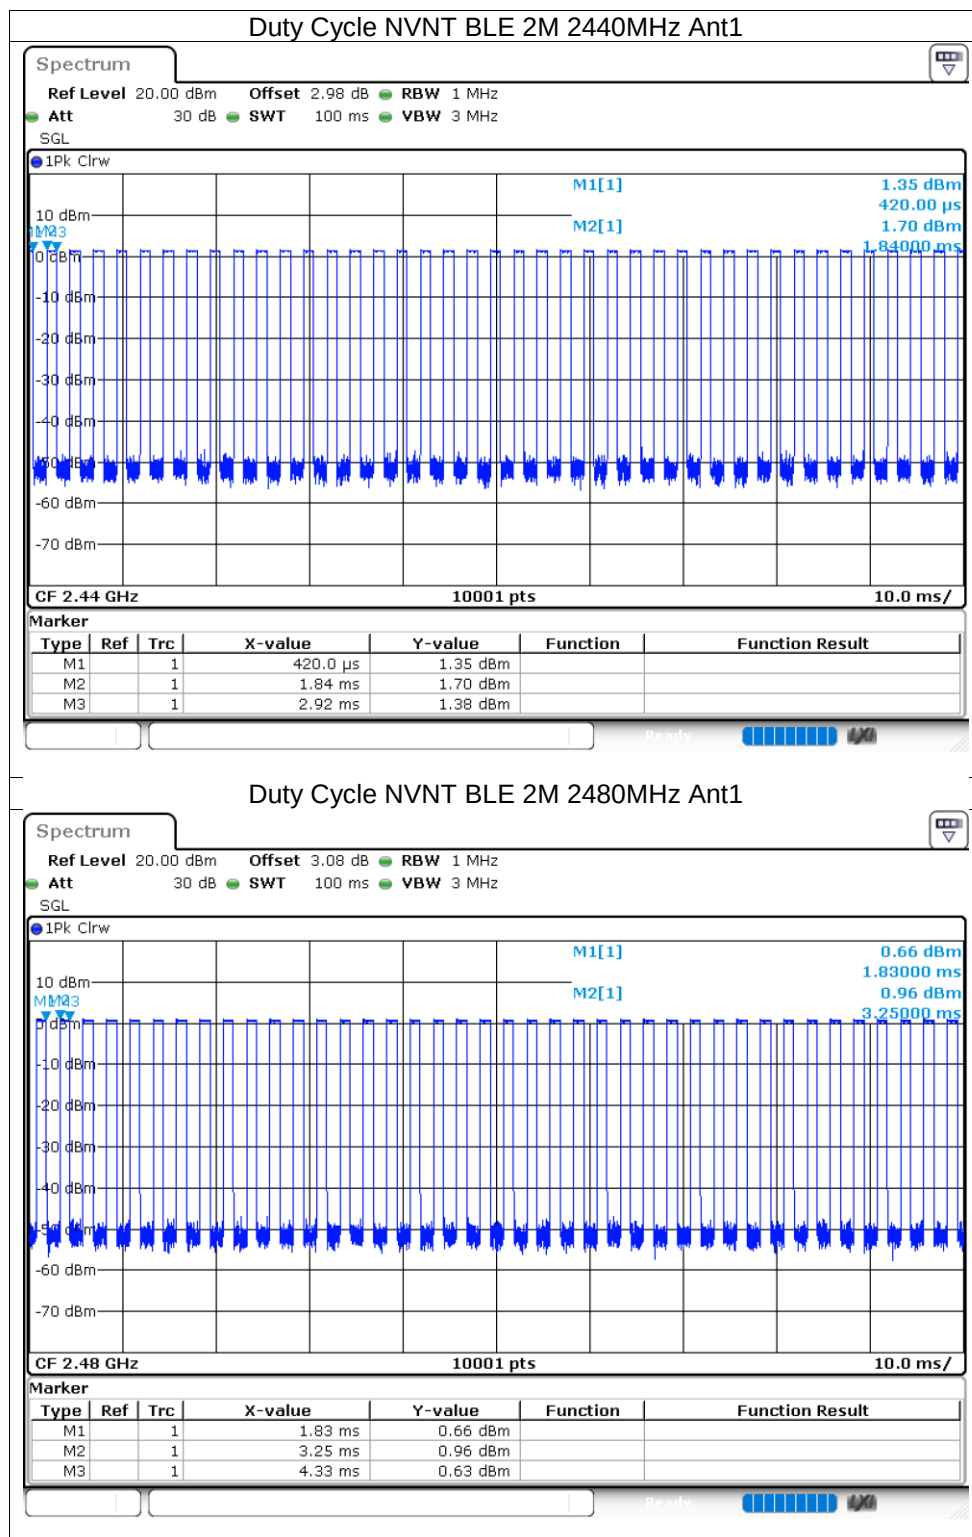


11.2.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.2	30	Pass
NVNT	BLE 1M	2440	Ant1	1.65	30	Pass
NVNT	BLE 1M	2480	Ant1	1.07	30	Pass
NVNT	BLE 2M	2402	Ant1	1.78	30	Pass
NVNT	BLE 2M	2440	Ant1	1.8	30	Pass
NVNT	BLE 2M	2480	Ant1	1.08	30	Pass

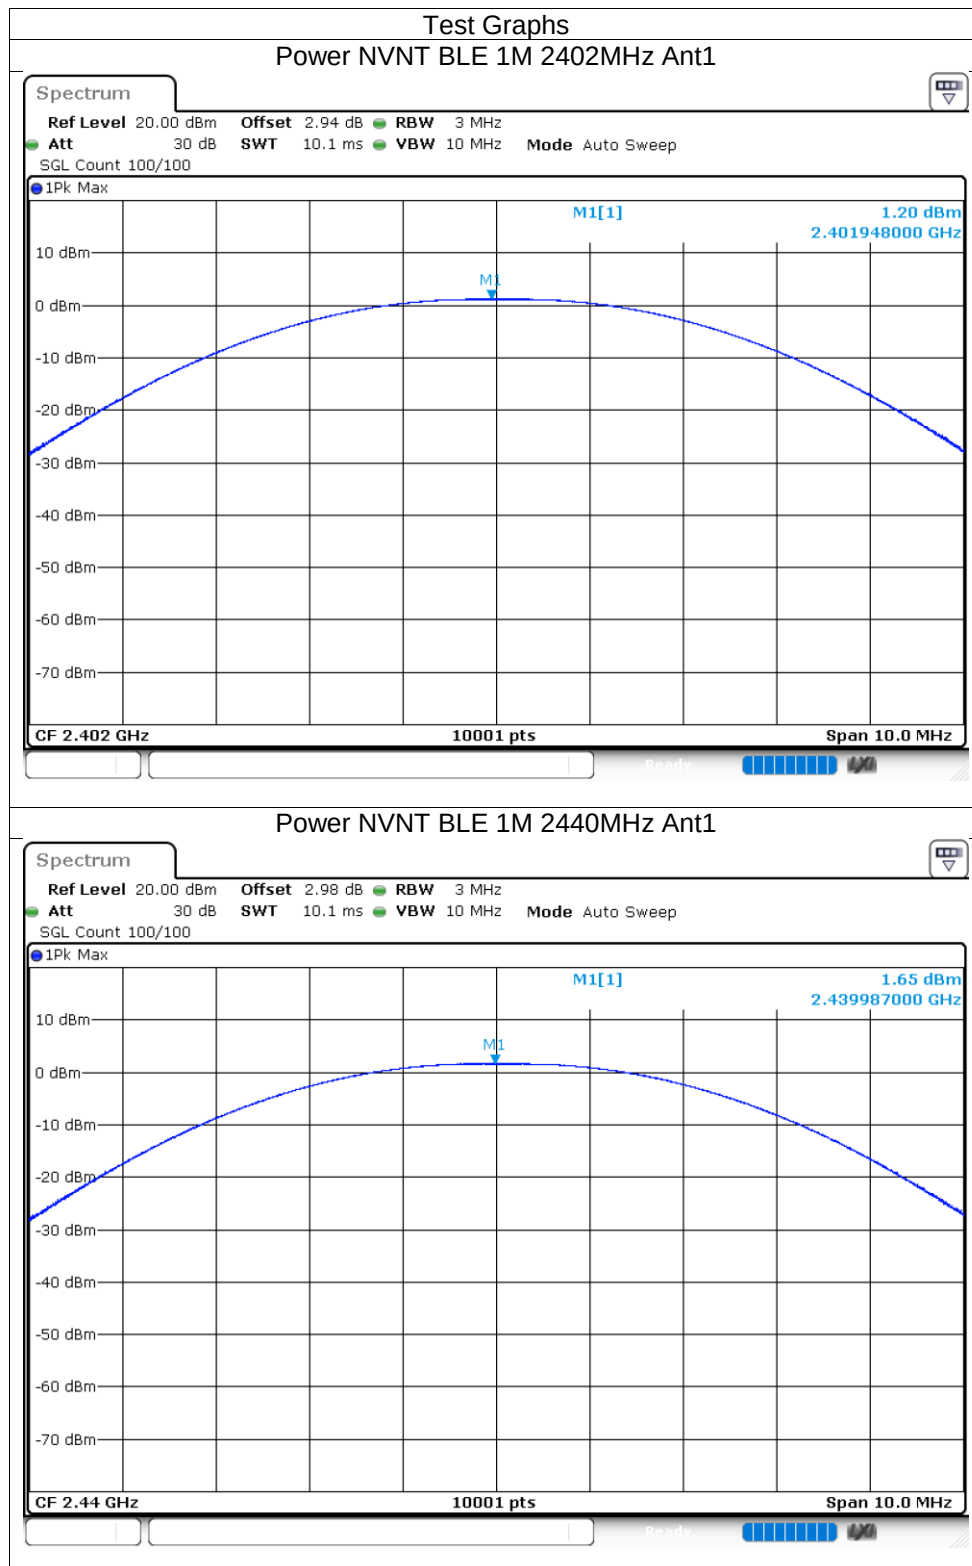


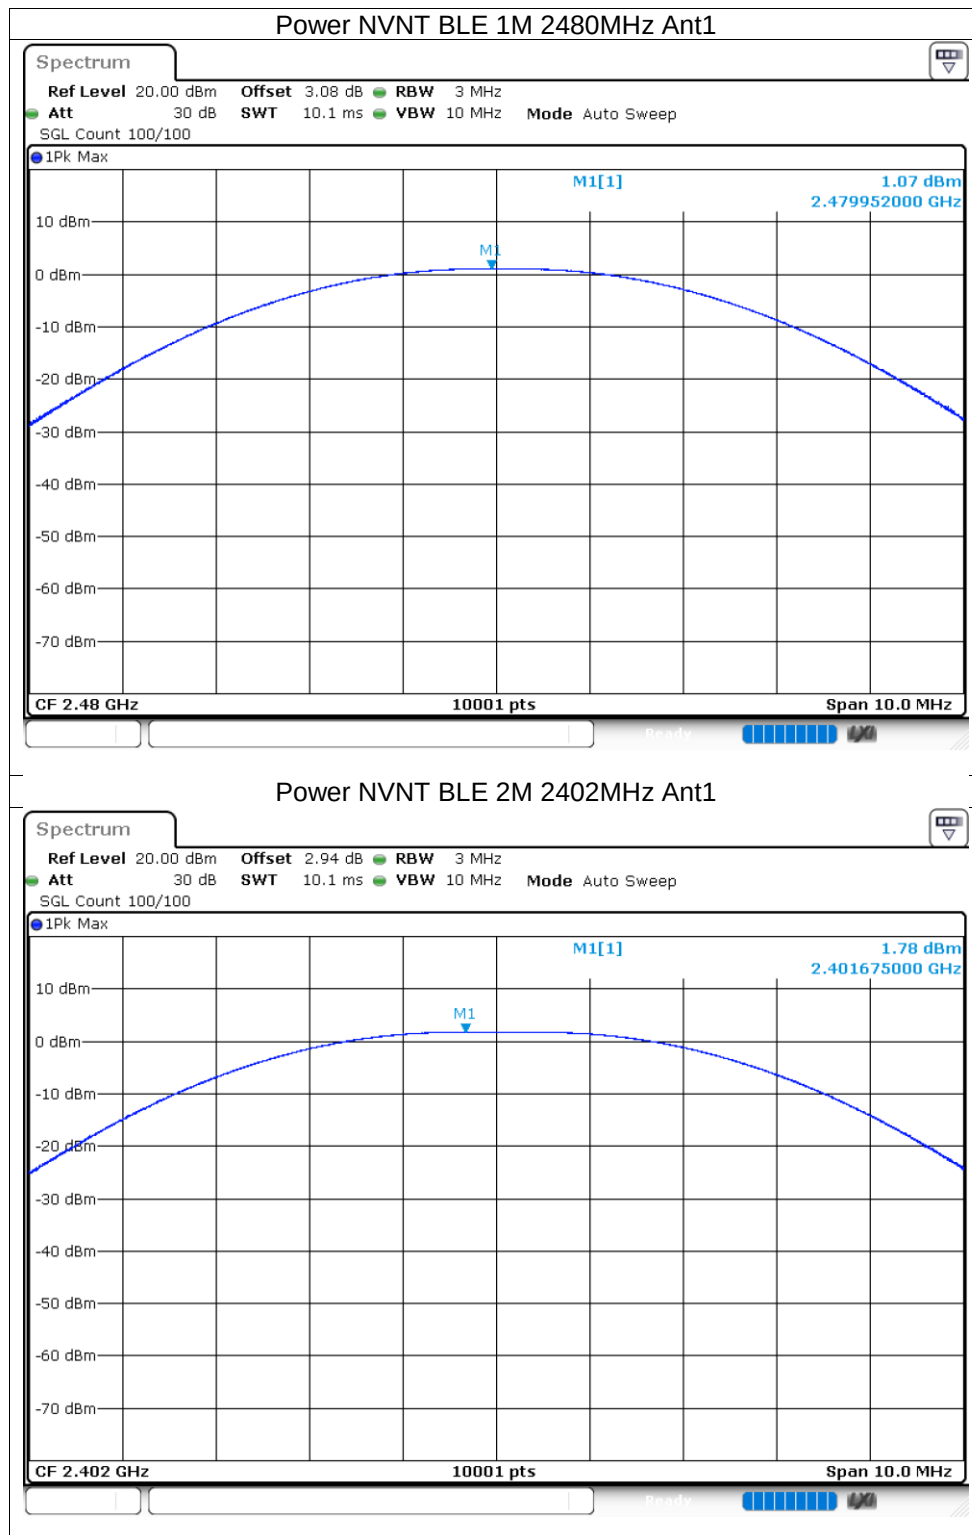


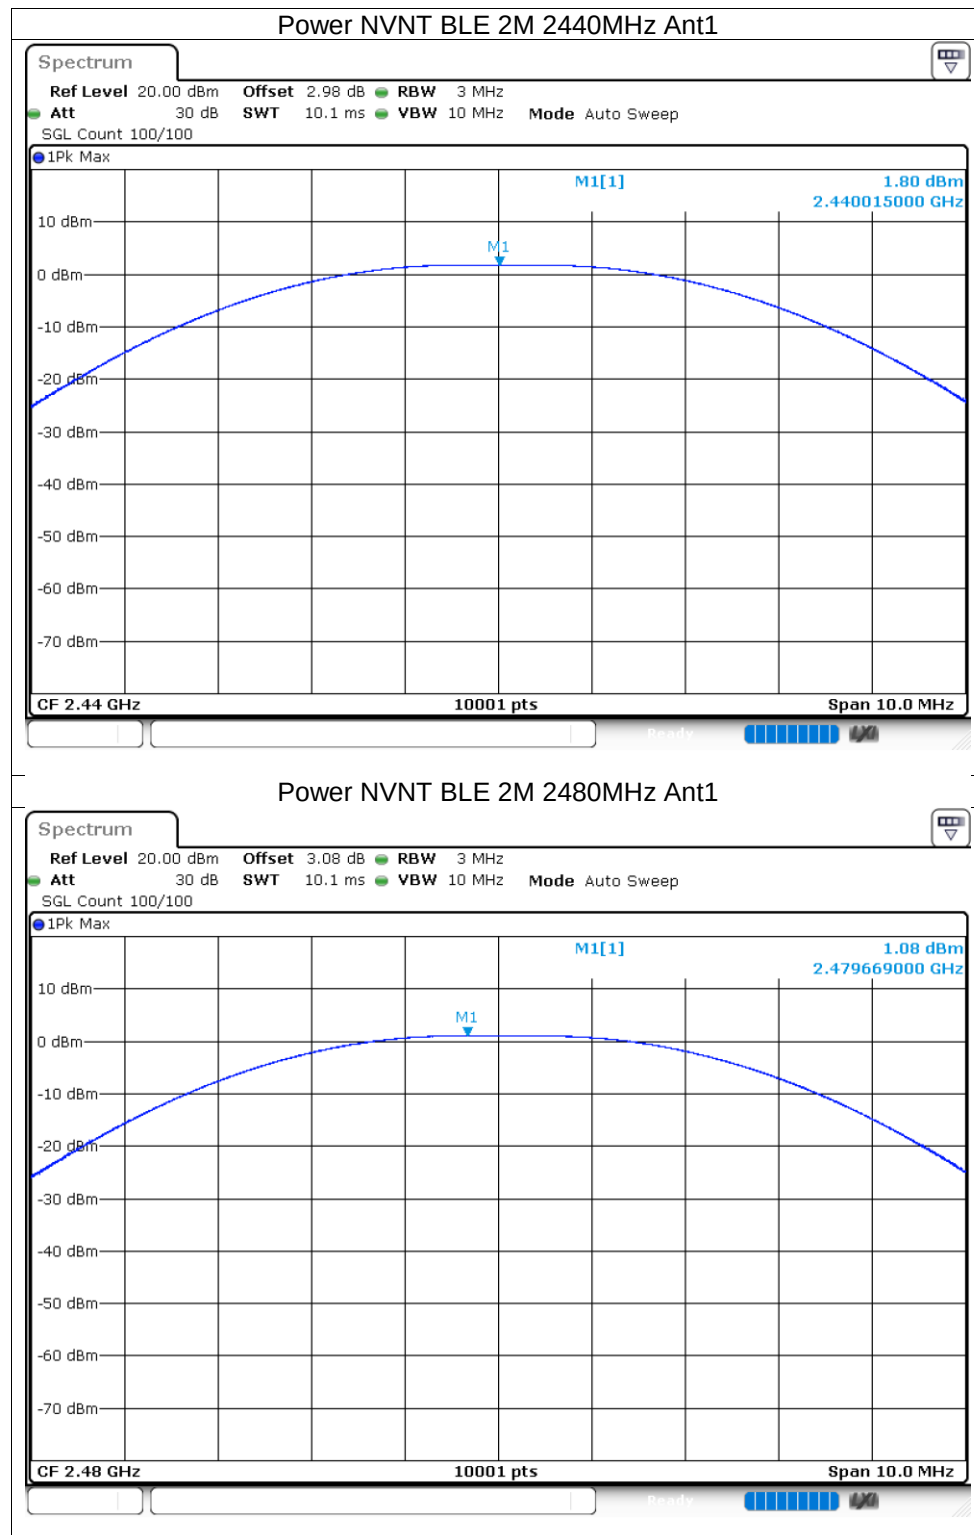


11.2.3-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.662	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.659	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.66	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.146	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.343	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.115	0.5	Pass

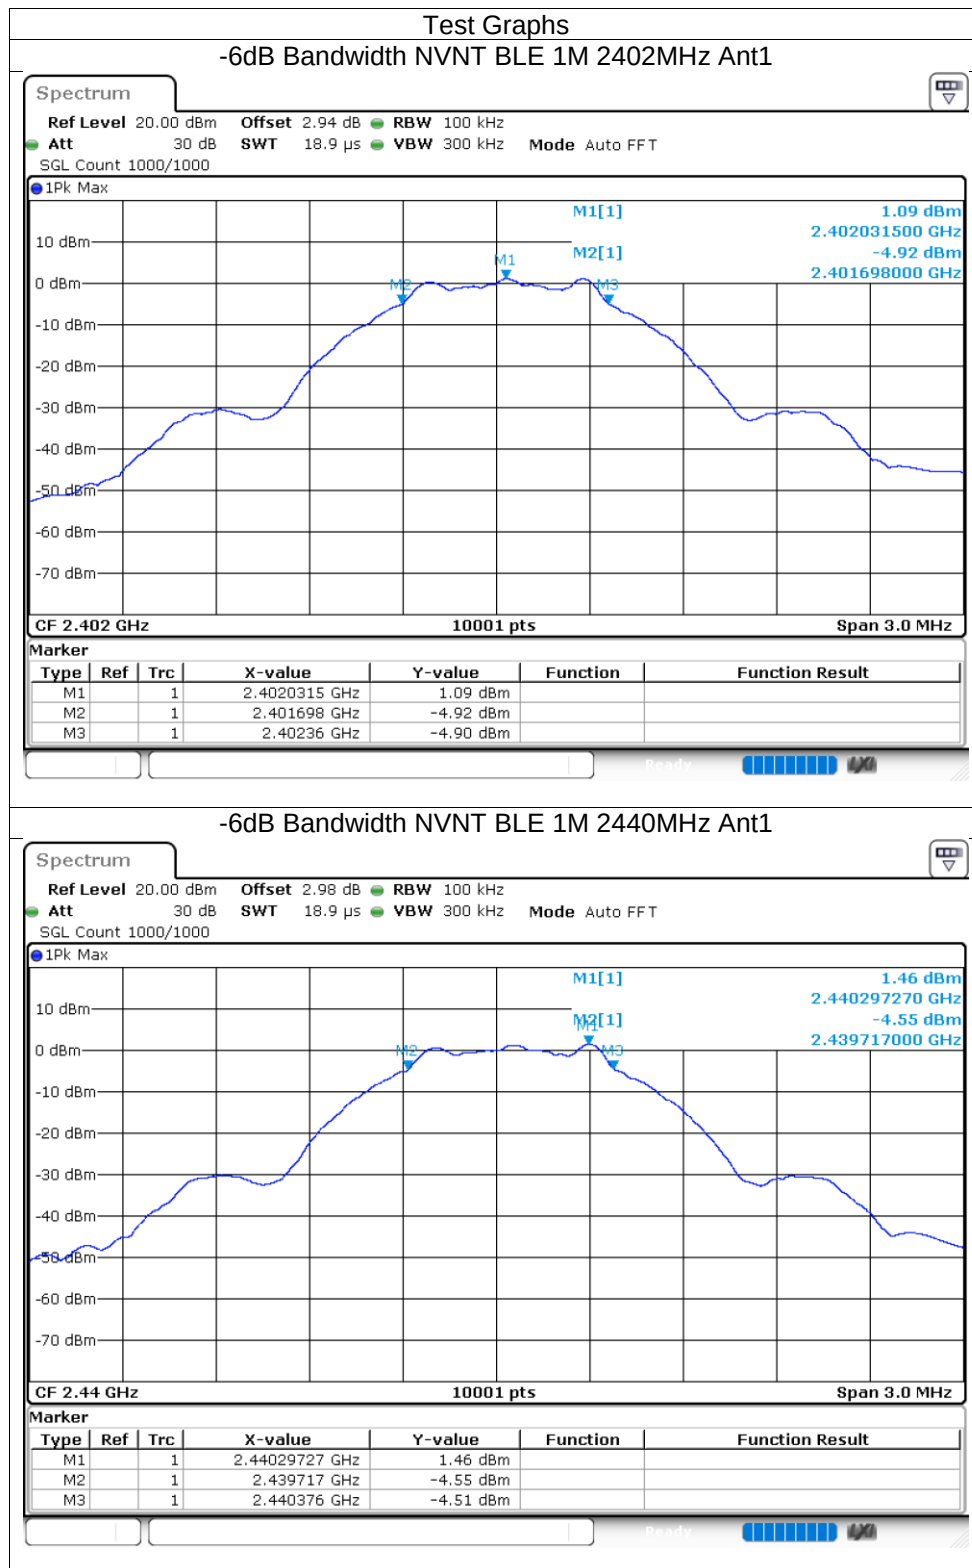


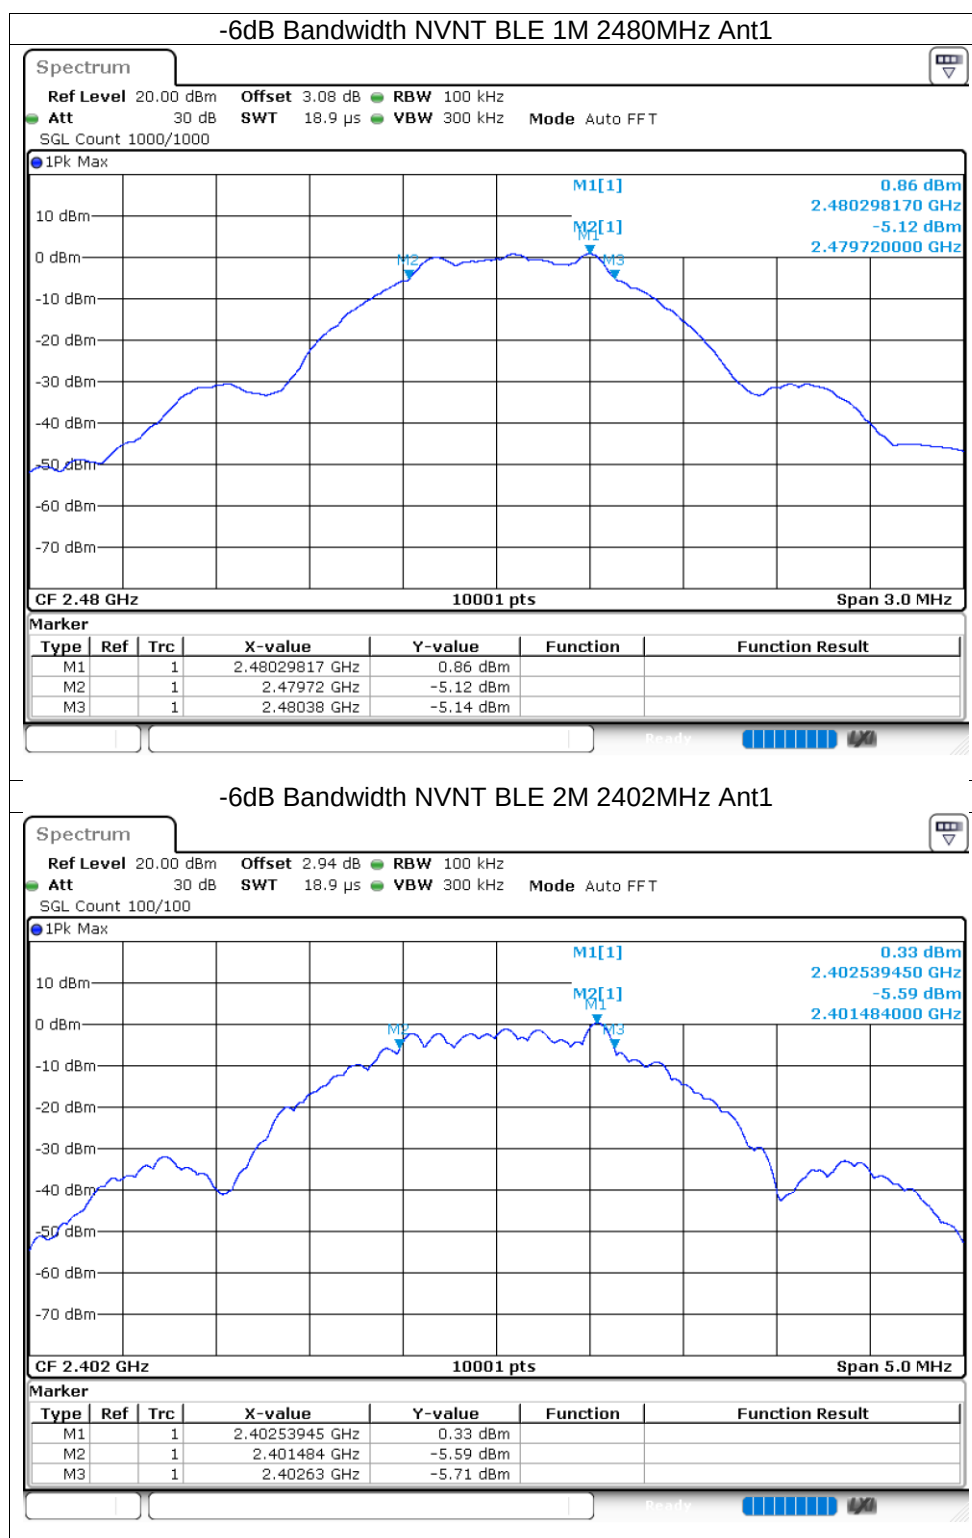


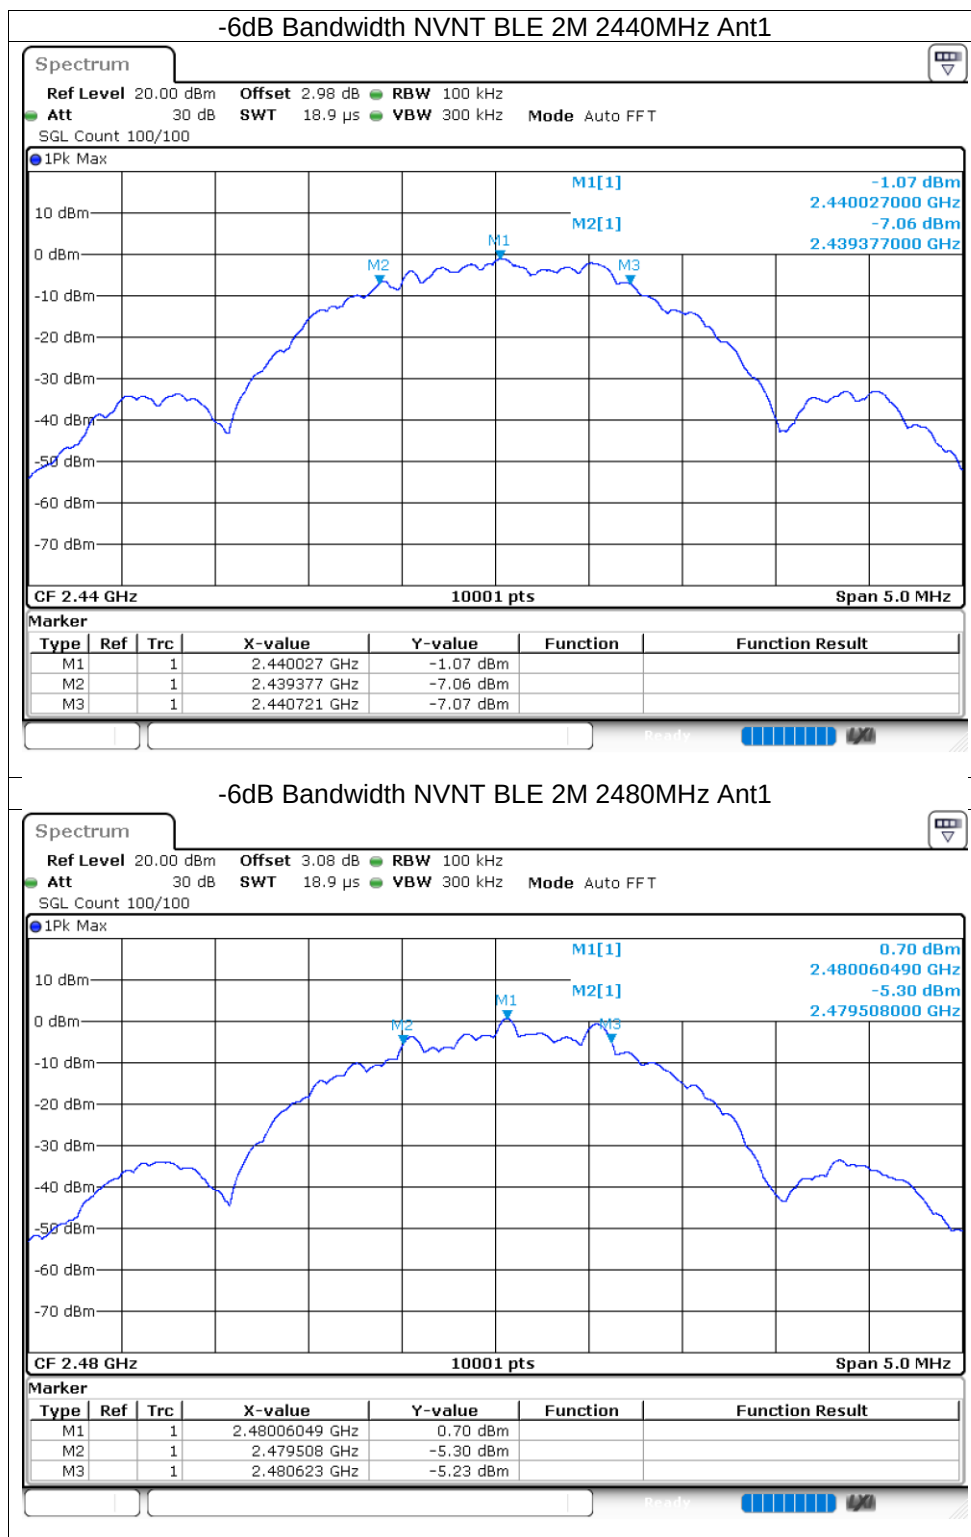


11.2.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-15.48	8	Pass
NVNT	BLE 1M	2440	Ant1	-15.09	8	Pass
NVNT	BLE 1M	2480	Ant1	-15.75	8	Pass
NVNT	BLE 2M	2402	Ant1	-16.78	8	Pass
NVNT	BLE 2M	2440	Ant1	-16.2	8	Pass
NVNT	BLE 2M	2480	Ant1	-16.87	8	Pass

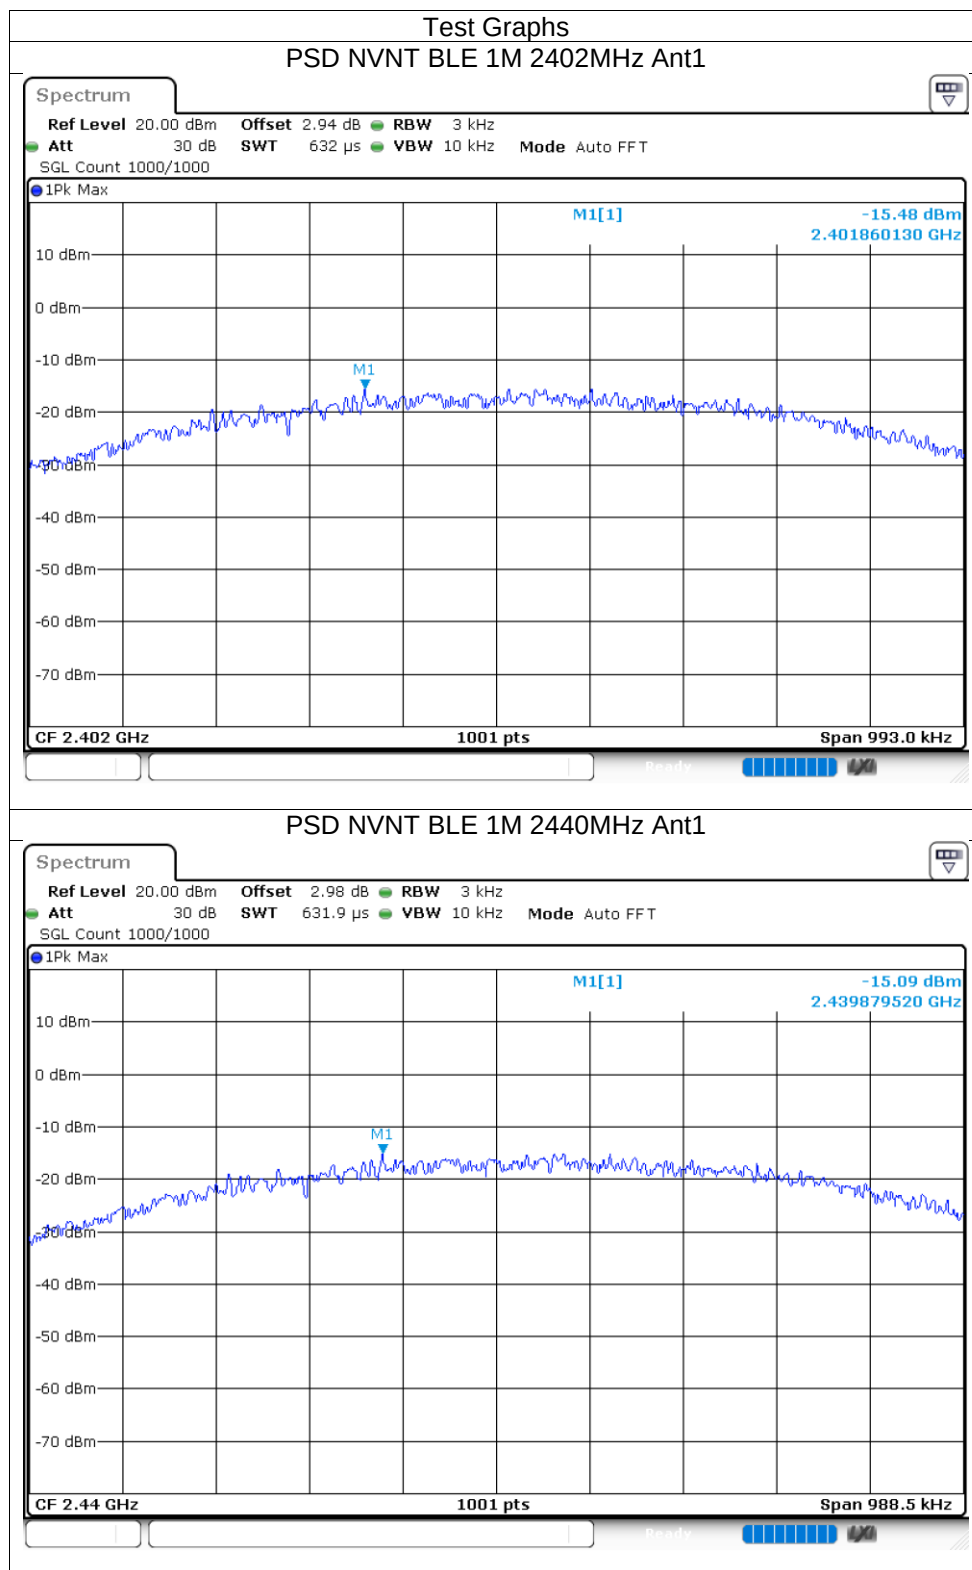


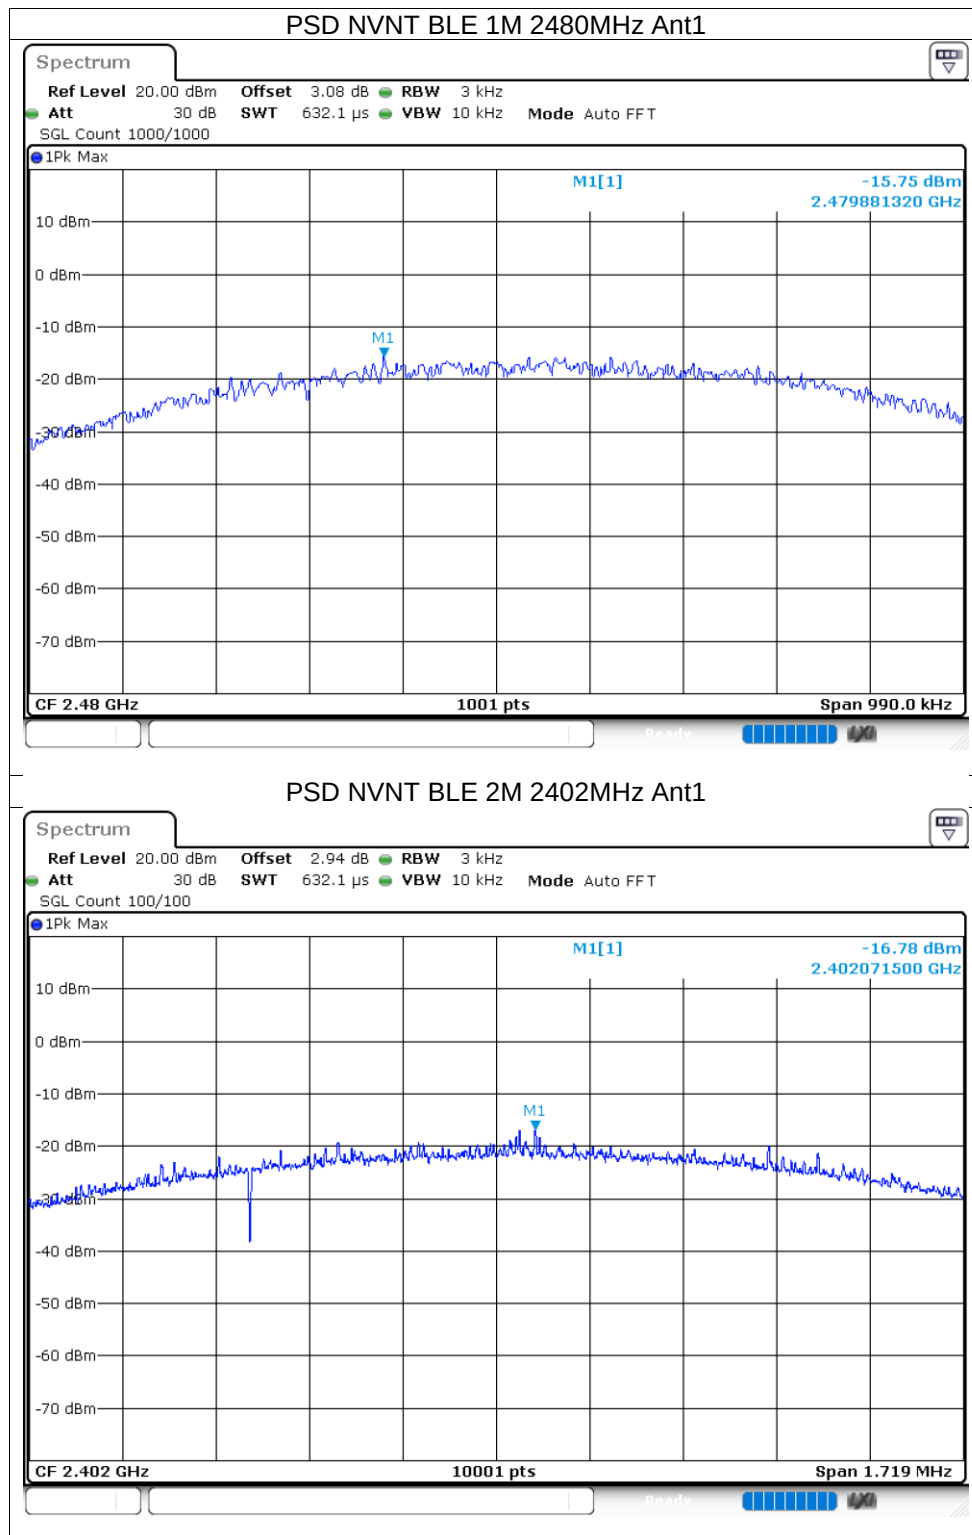


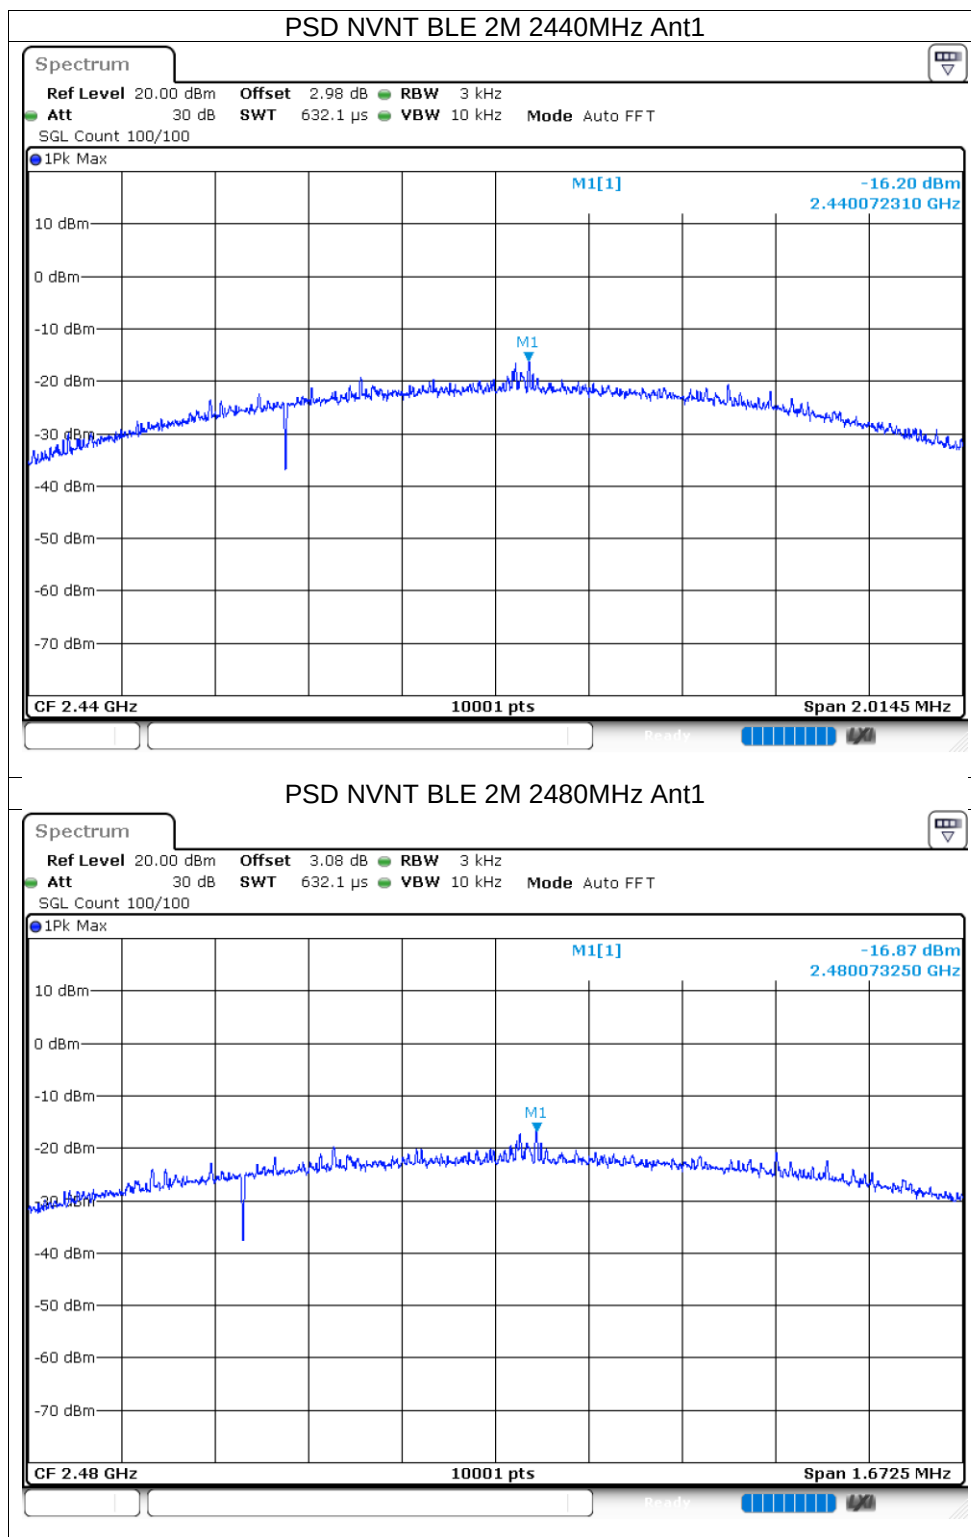



11.2.5 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-49.96	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.54	-20	Pass
NVNT	BLE 2M	2402	Ant1	-50.72	-20	Pass
NVNT	BLE 2M	2480	Ant1	-50.95	-20	Pass

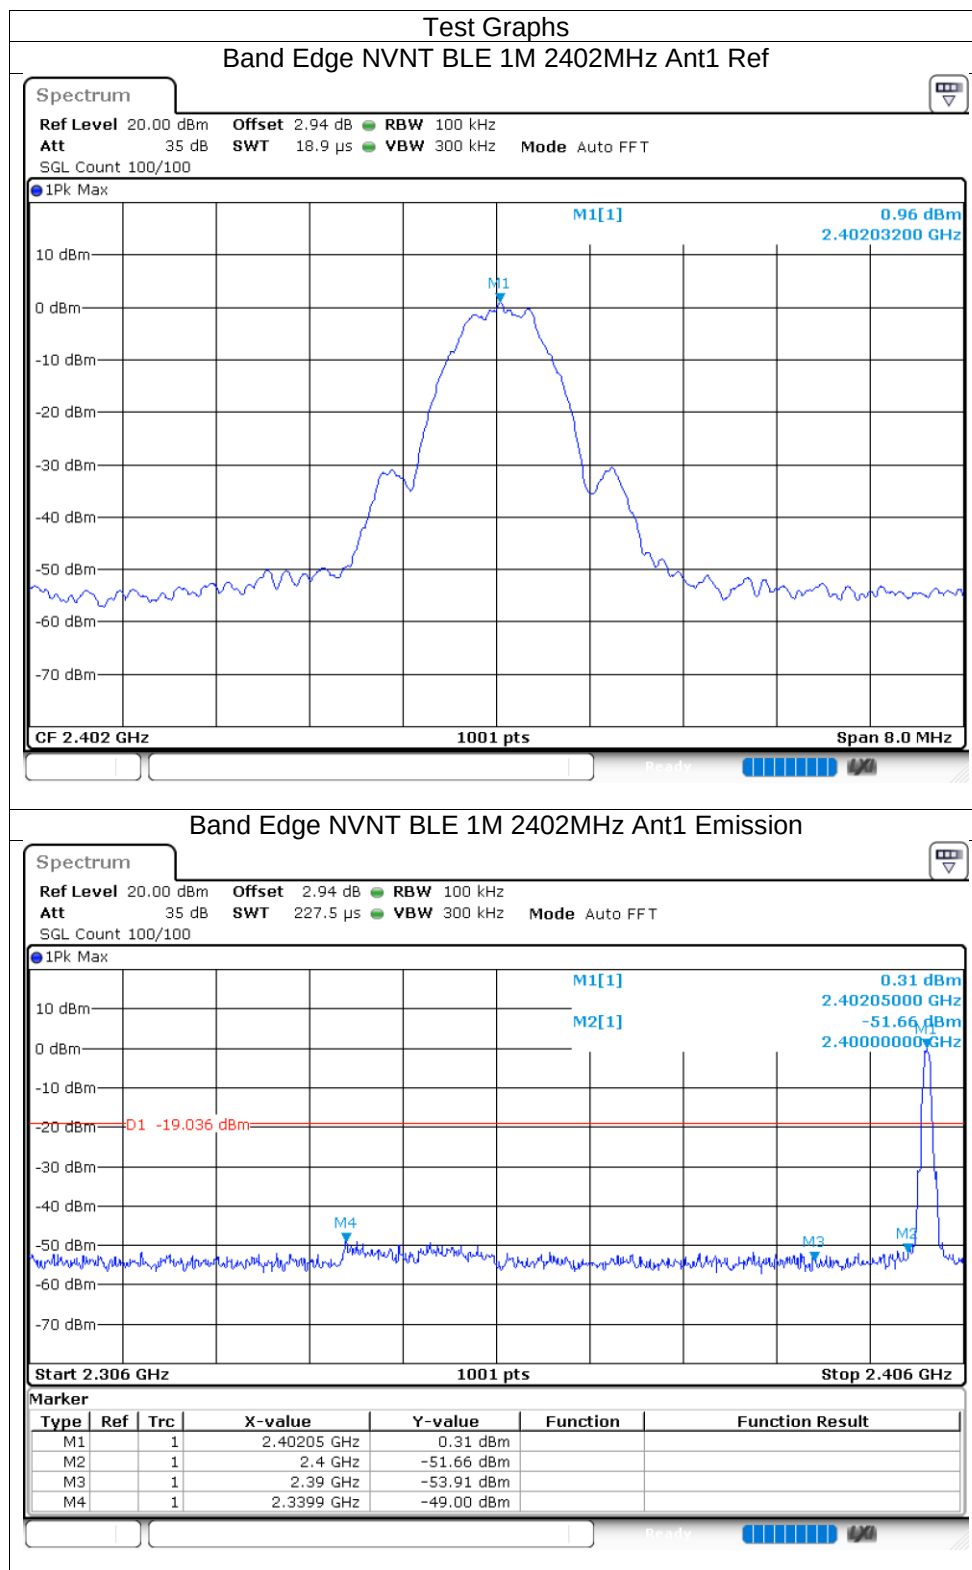

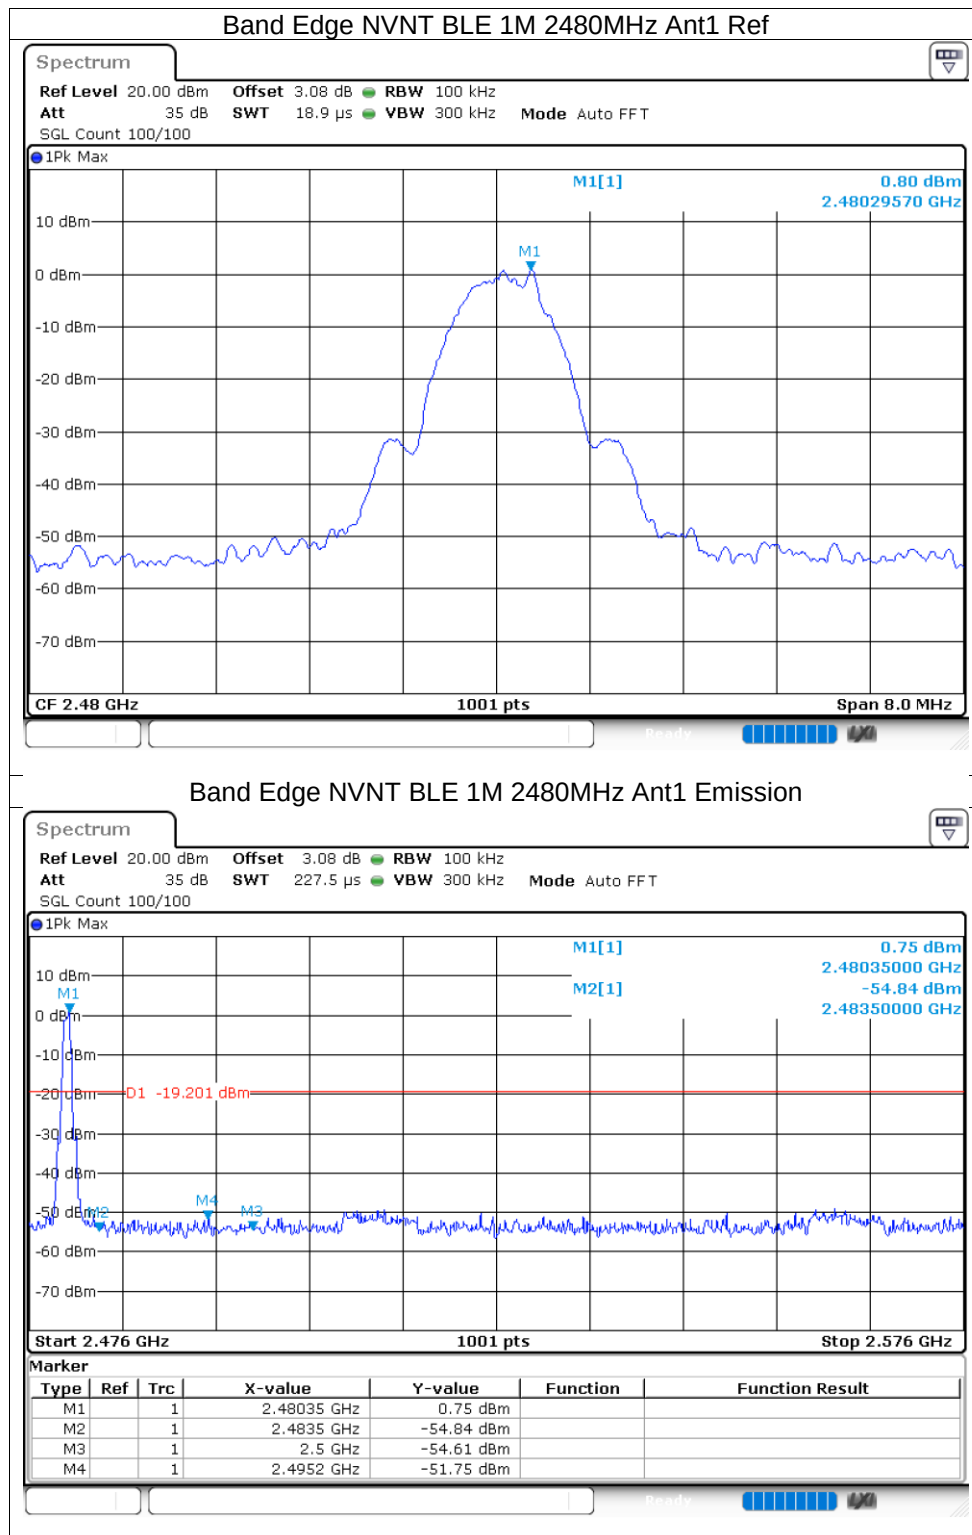


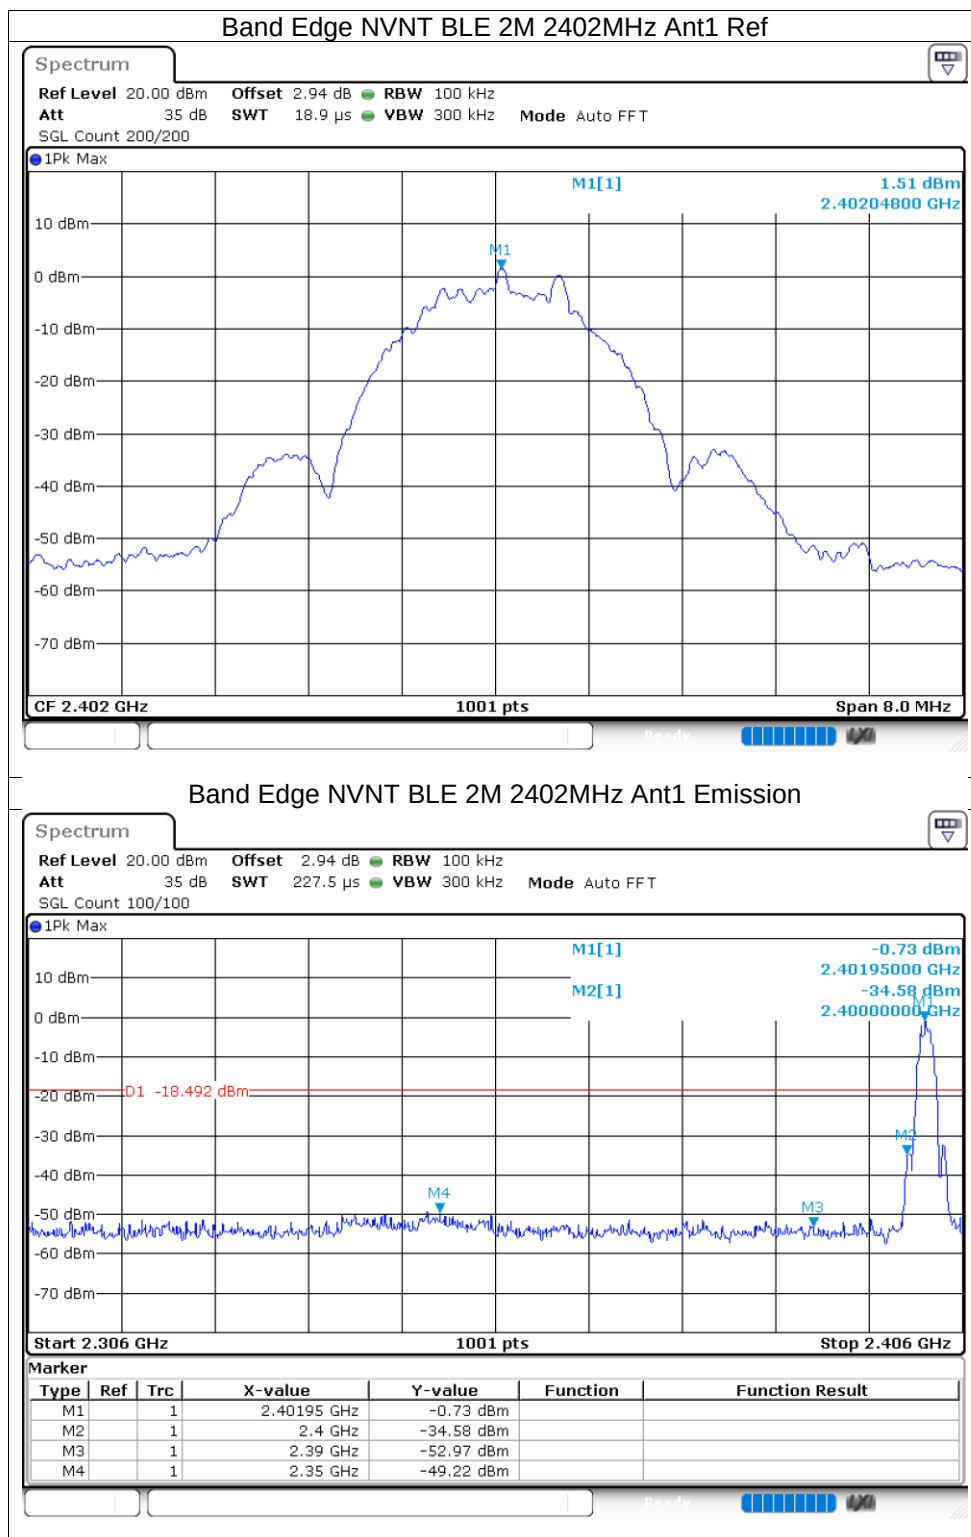


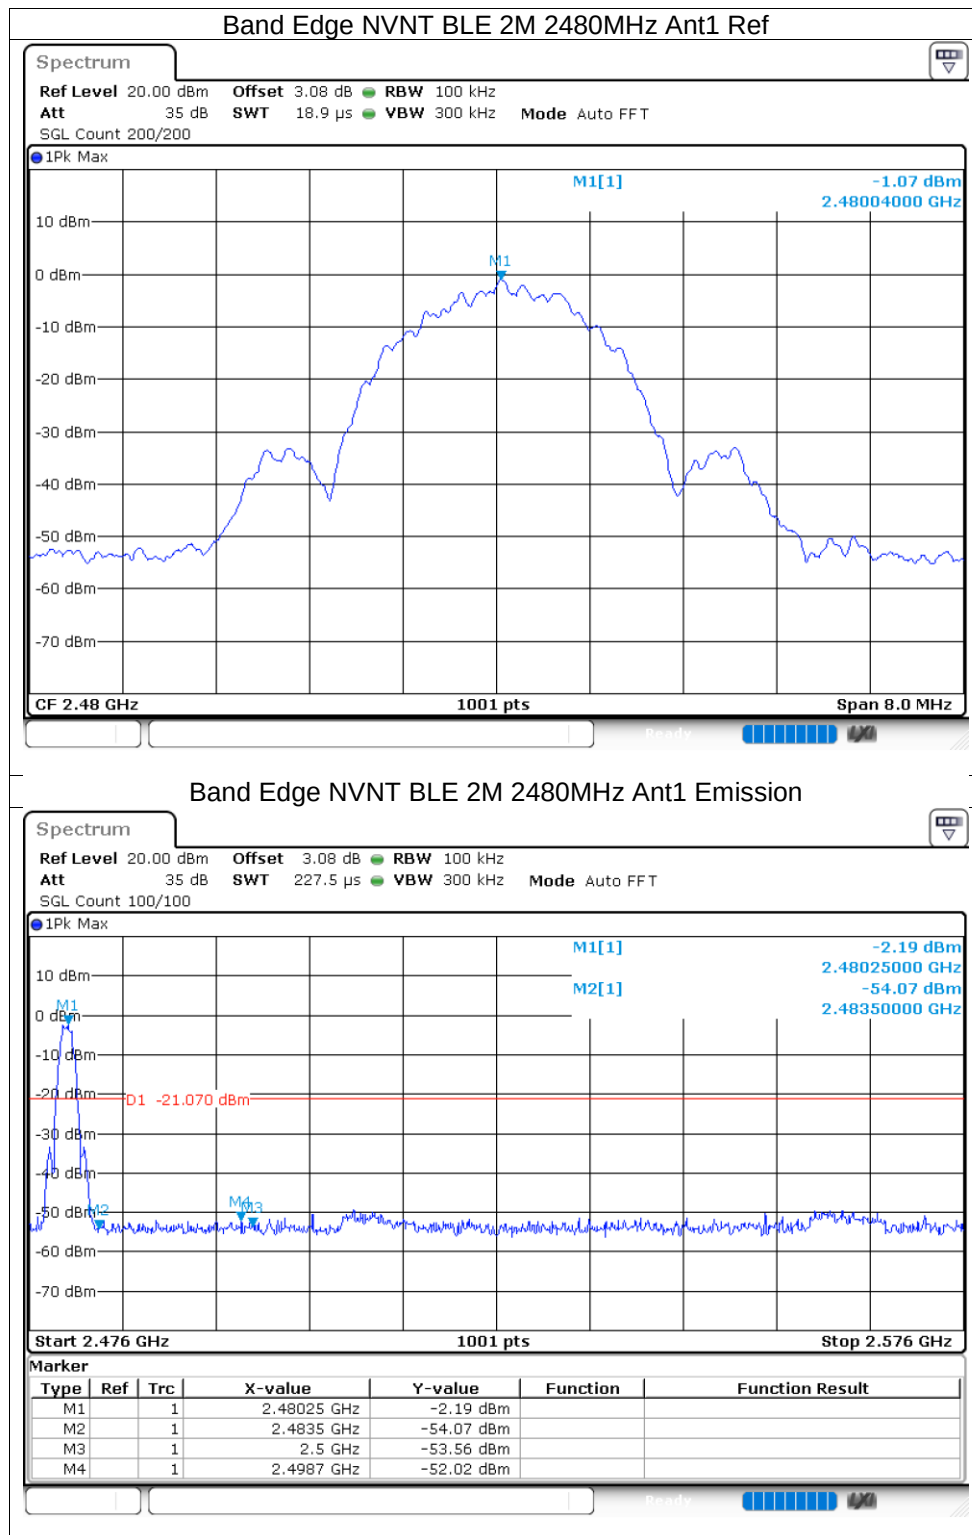



11.2.6 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-37.26	-20	Pass
NVNT	BLE 1M	2440	Ant1	-39.32	-20	Pass
NVNT	BLE 1M	2480	Ant1	-38.06	-20	Pass
NVNT	BLE 2M	2402	Ant1	-37.89	-20	Pass
NVNT	BLE 2M	2440	Ant1	-36.34	-20	Pass
NVNT	BLE 2M	2480	Ant1	-39.64	-20	Pass

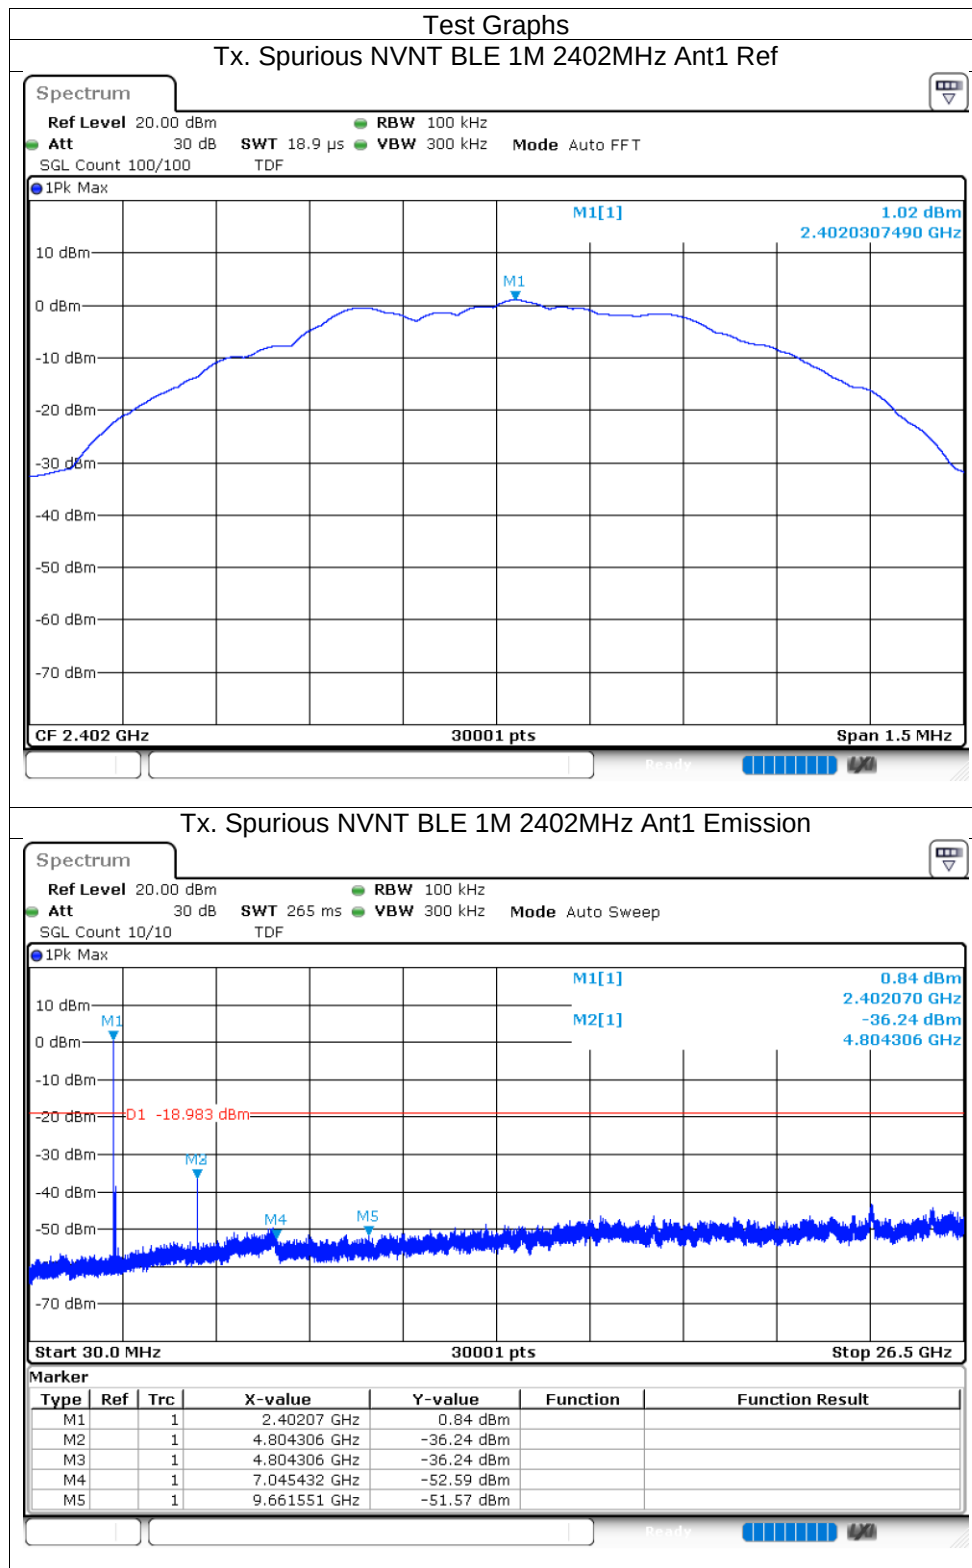


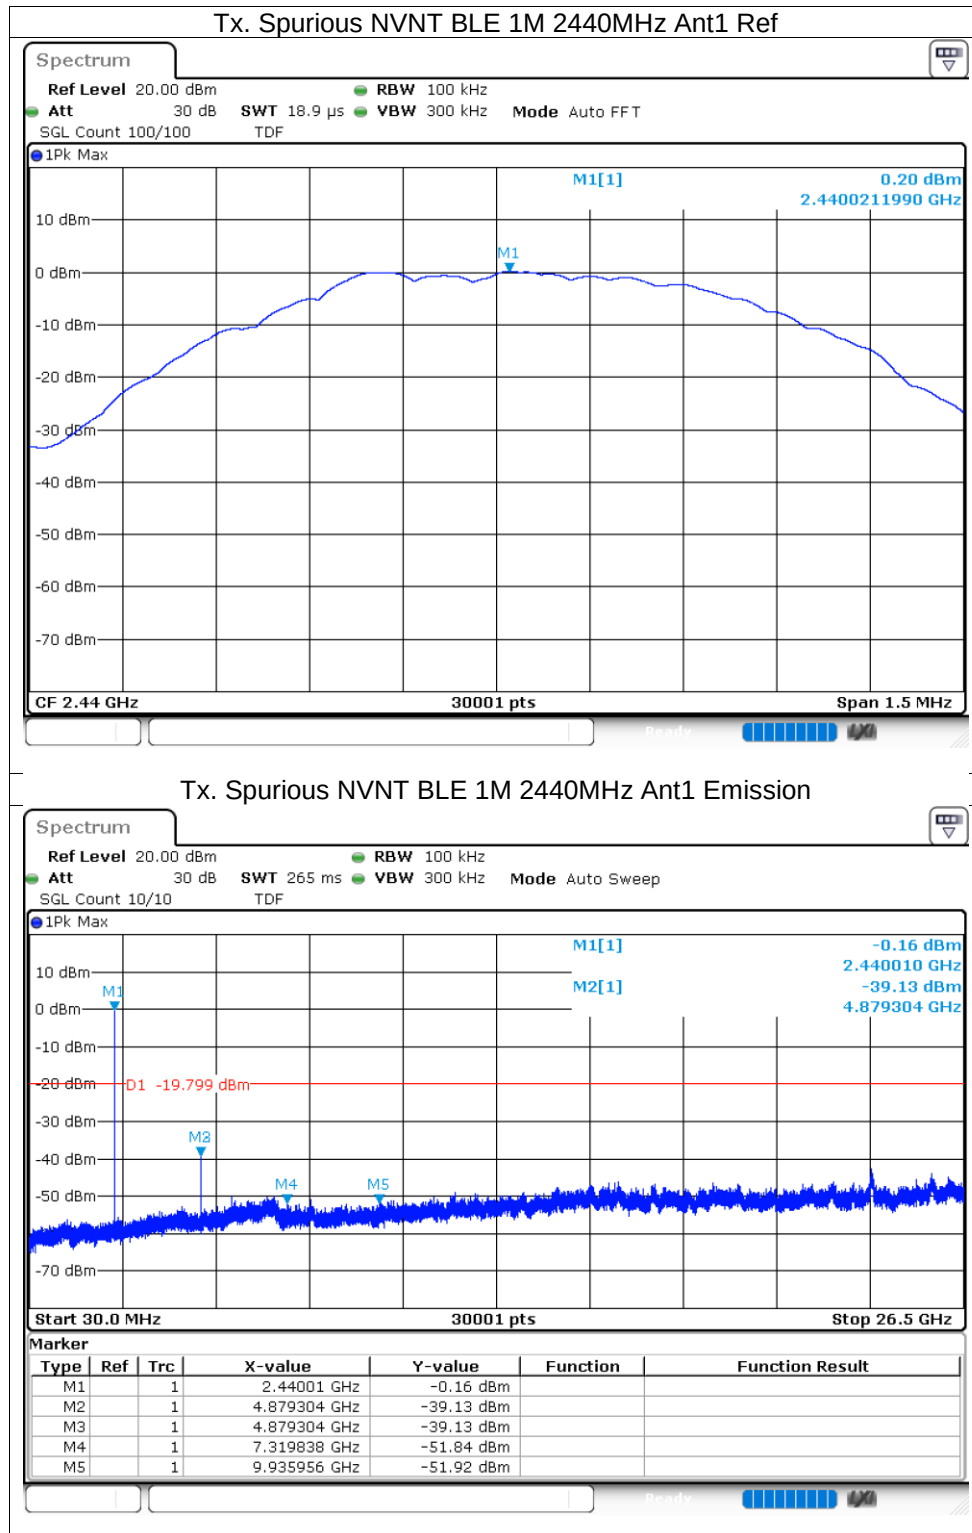

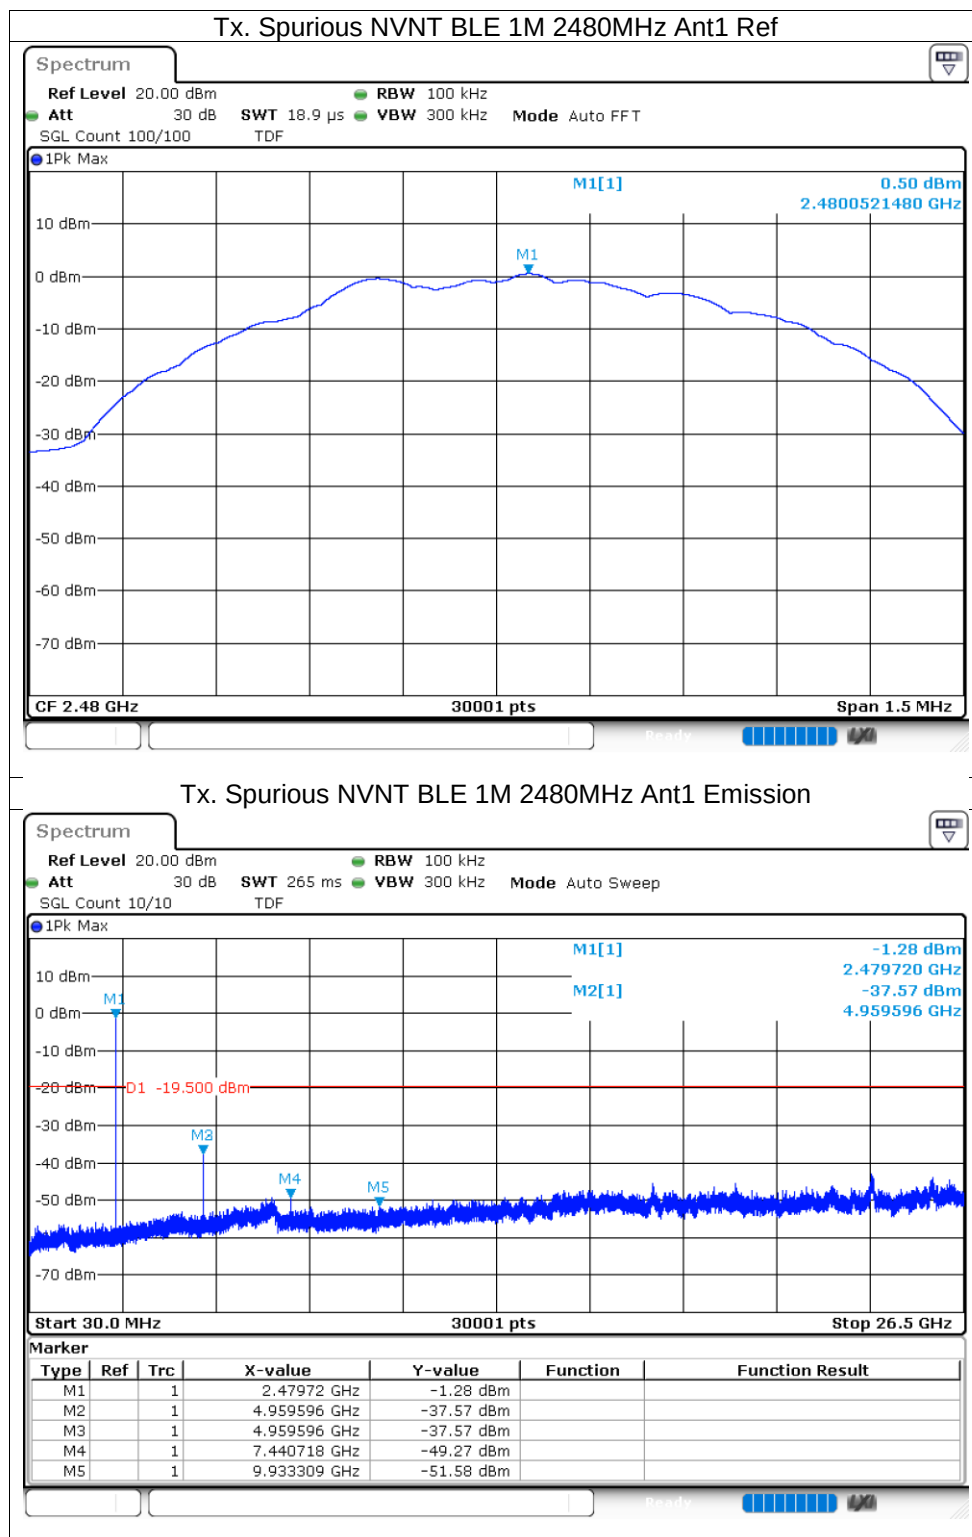

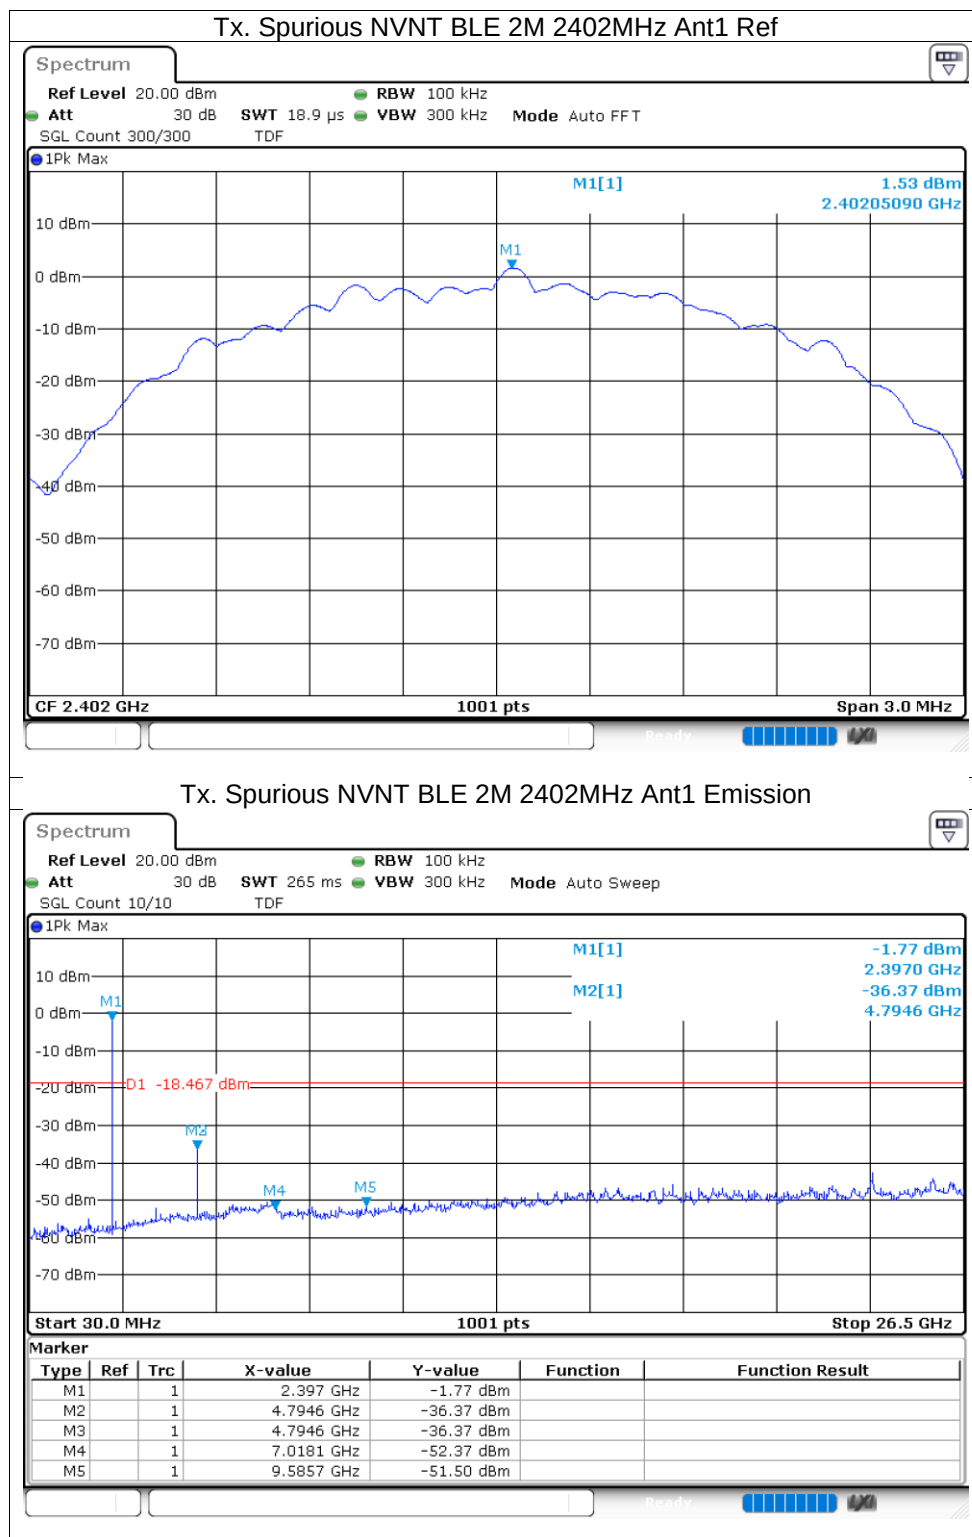

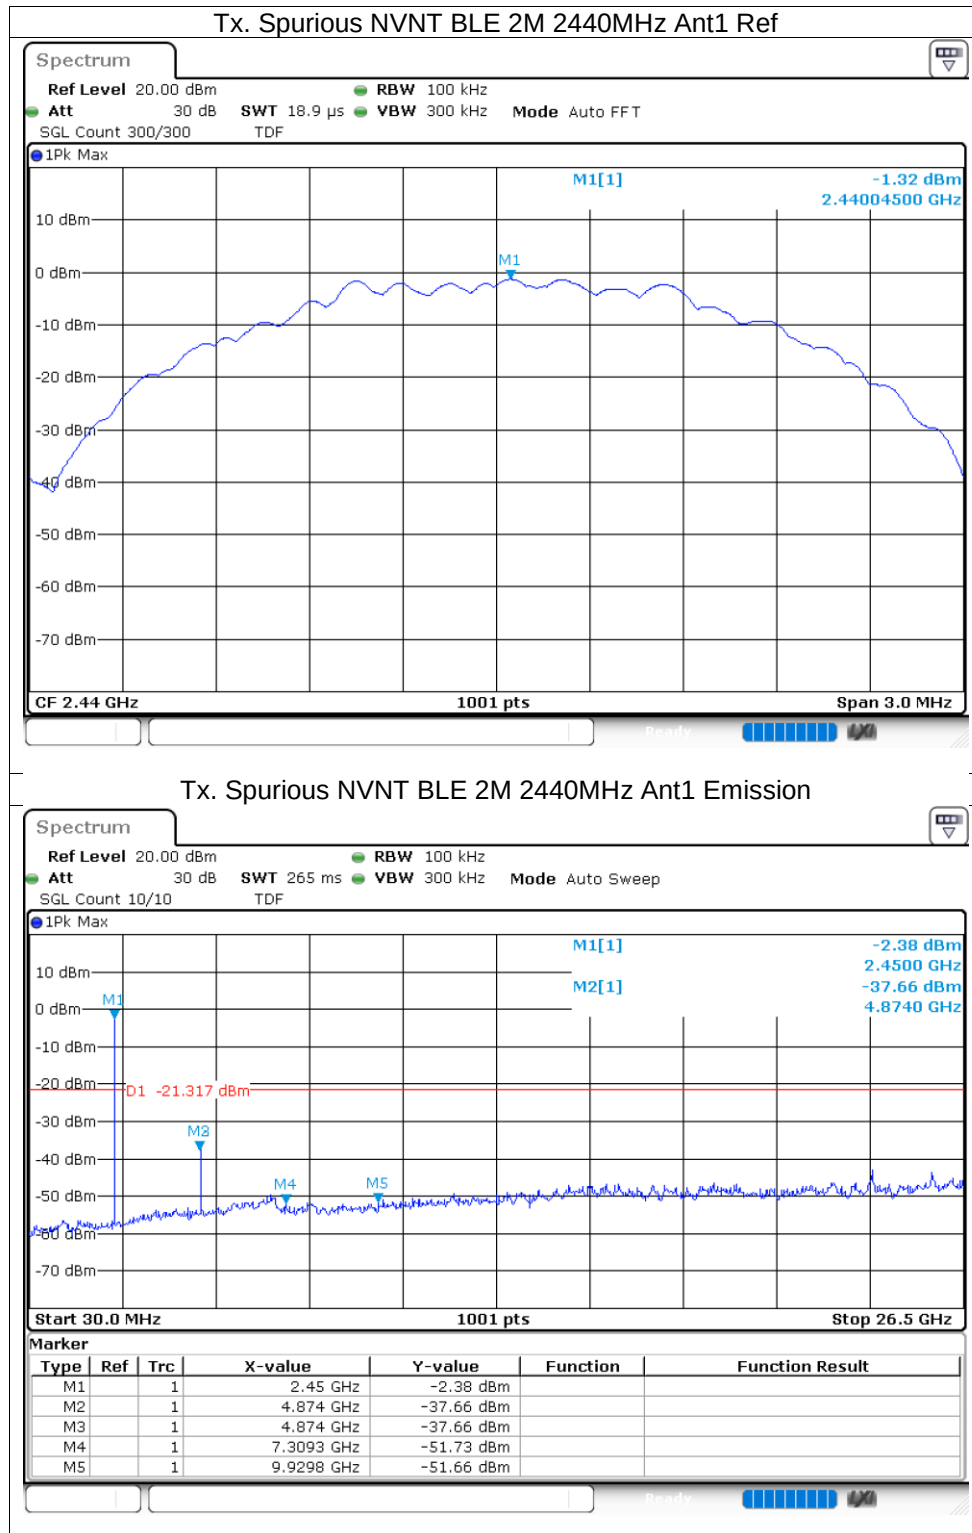

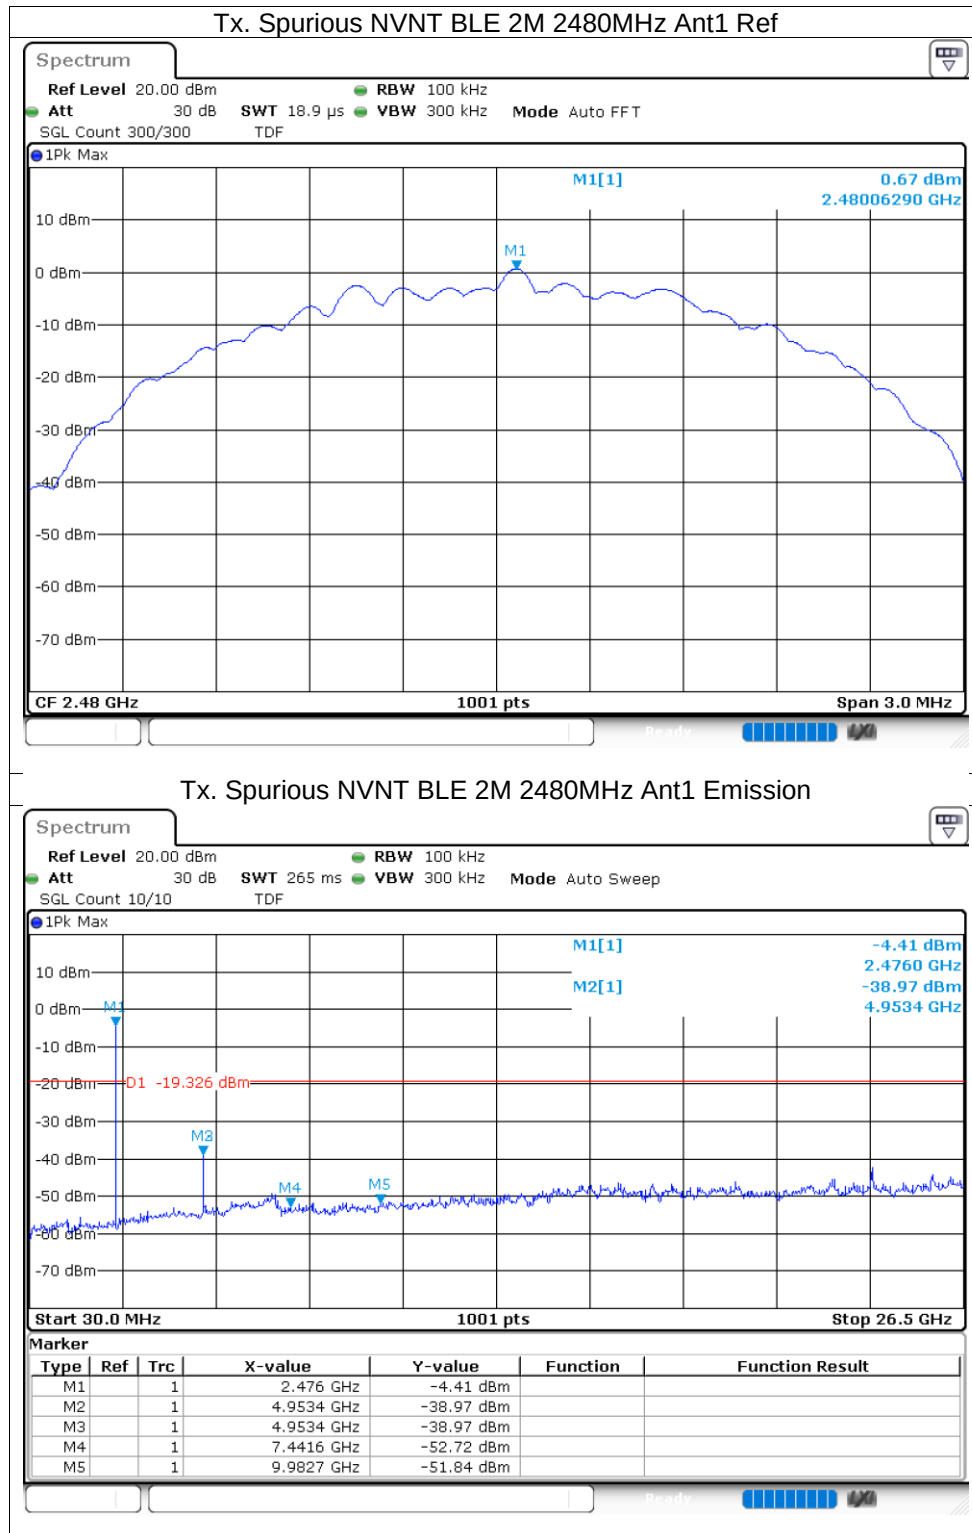

--- End of Report ---