






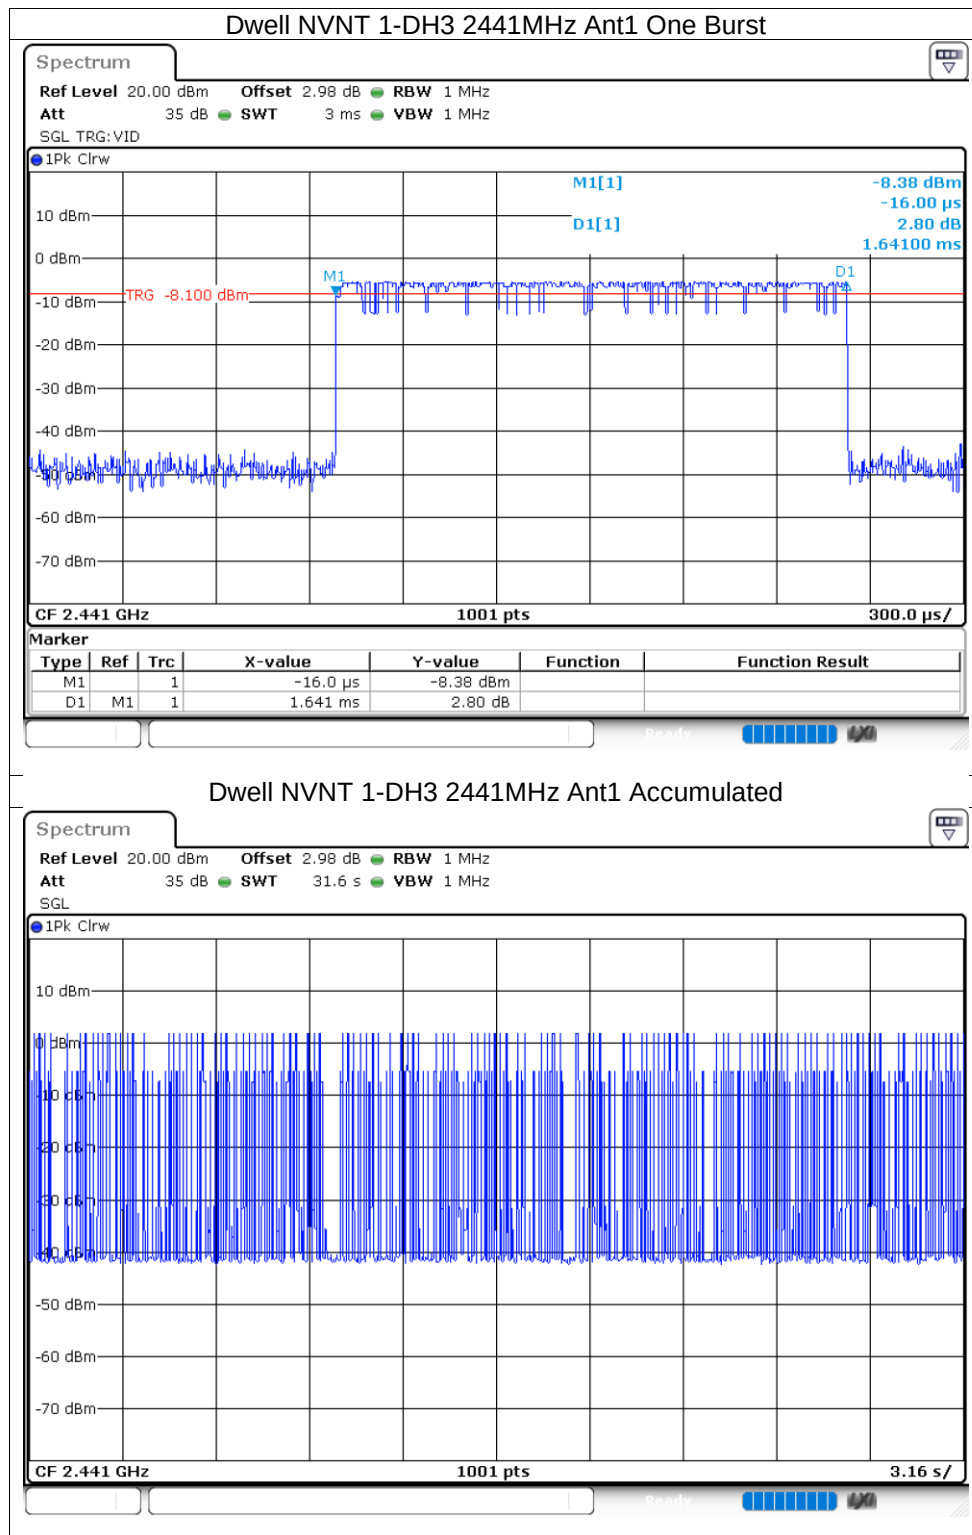


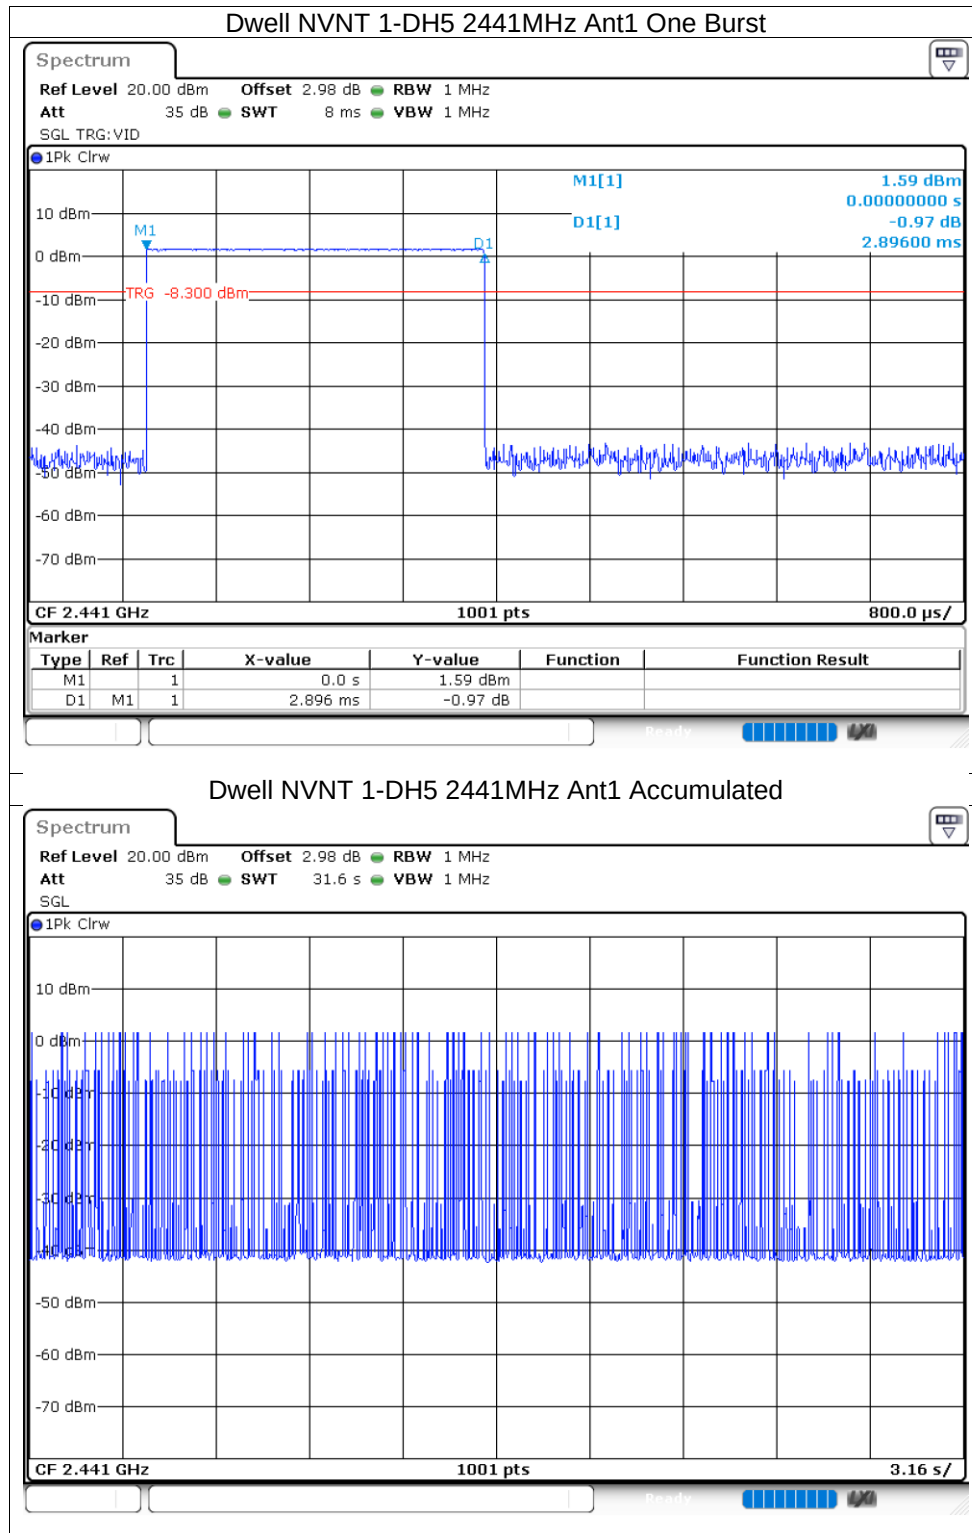


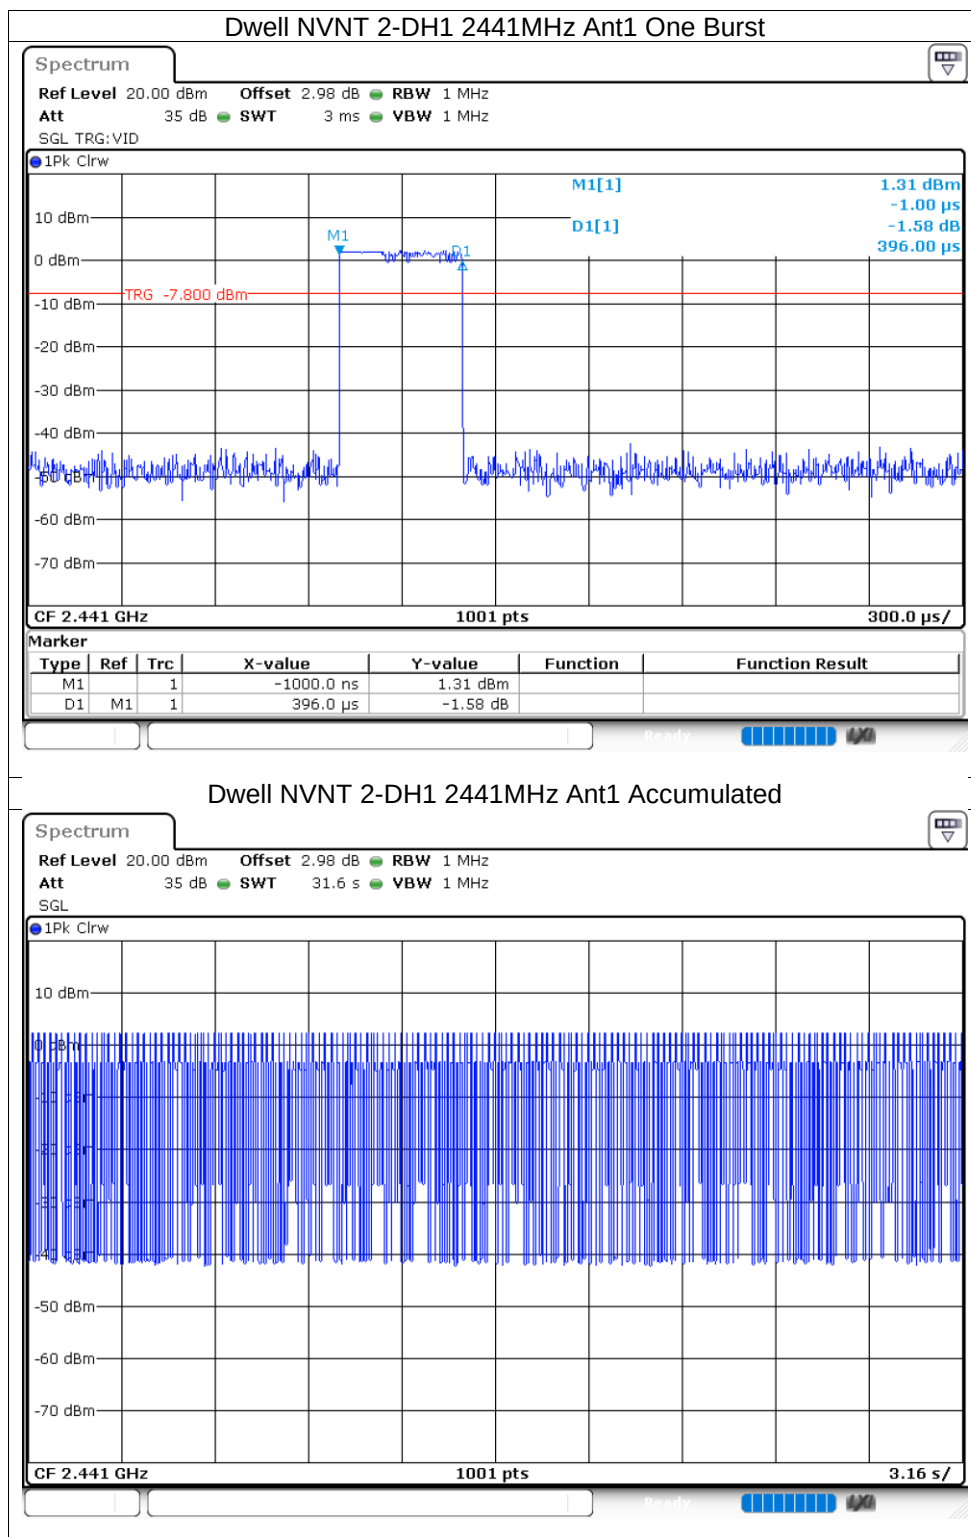


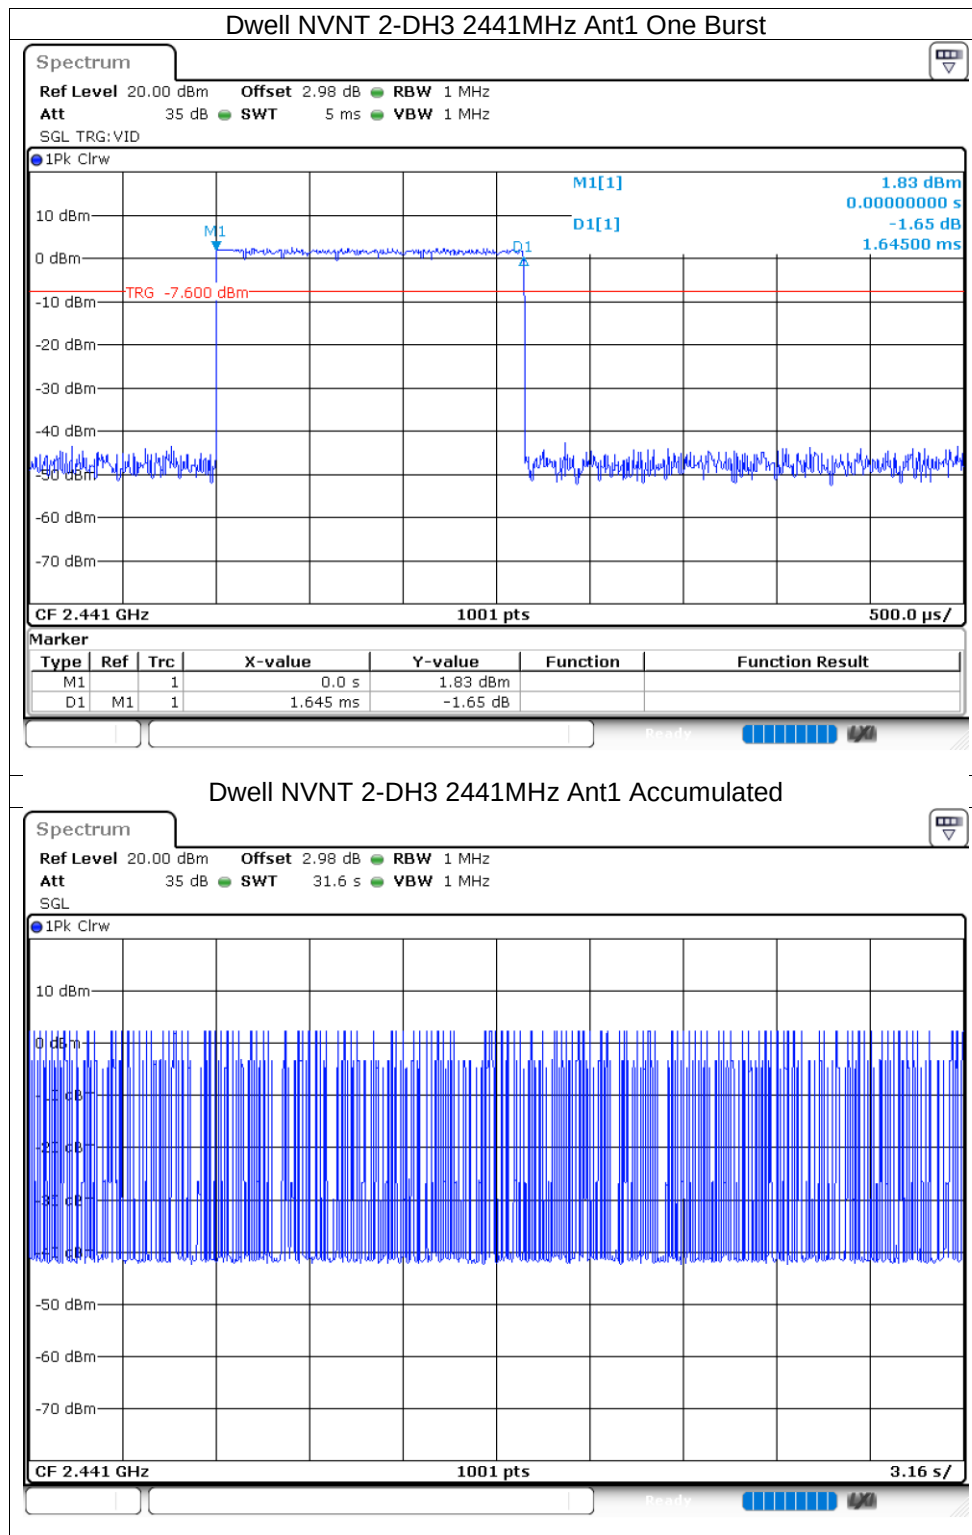

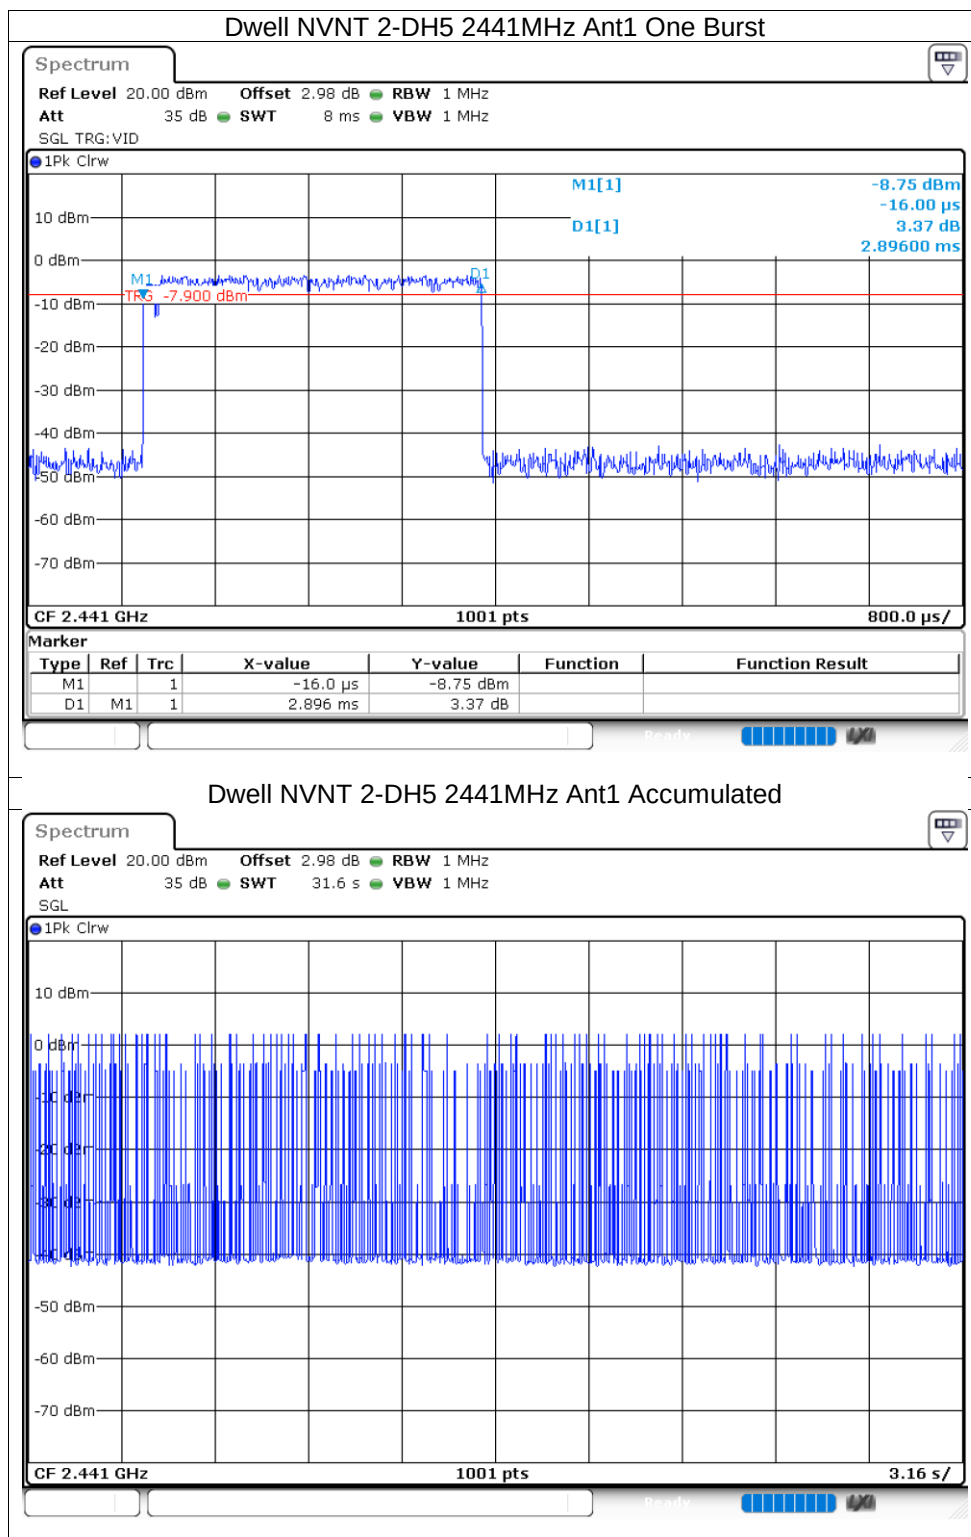

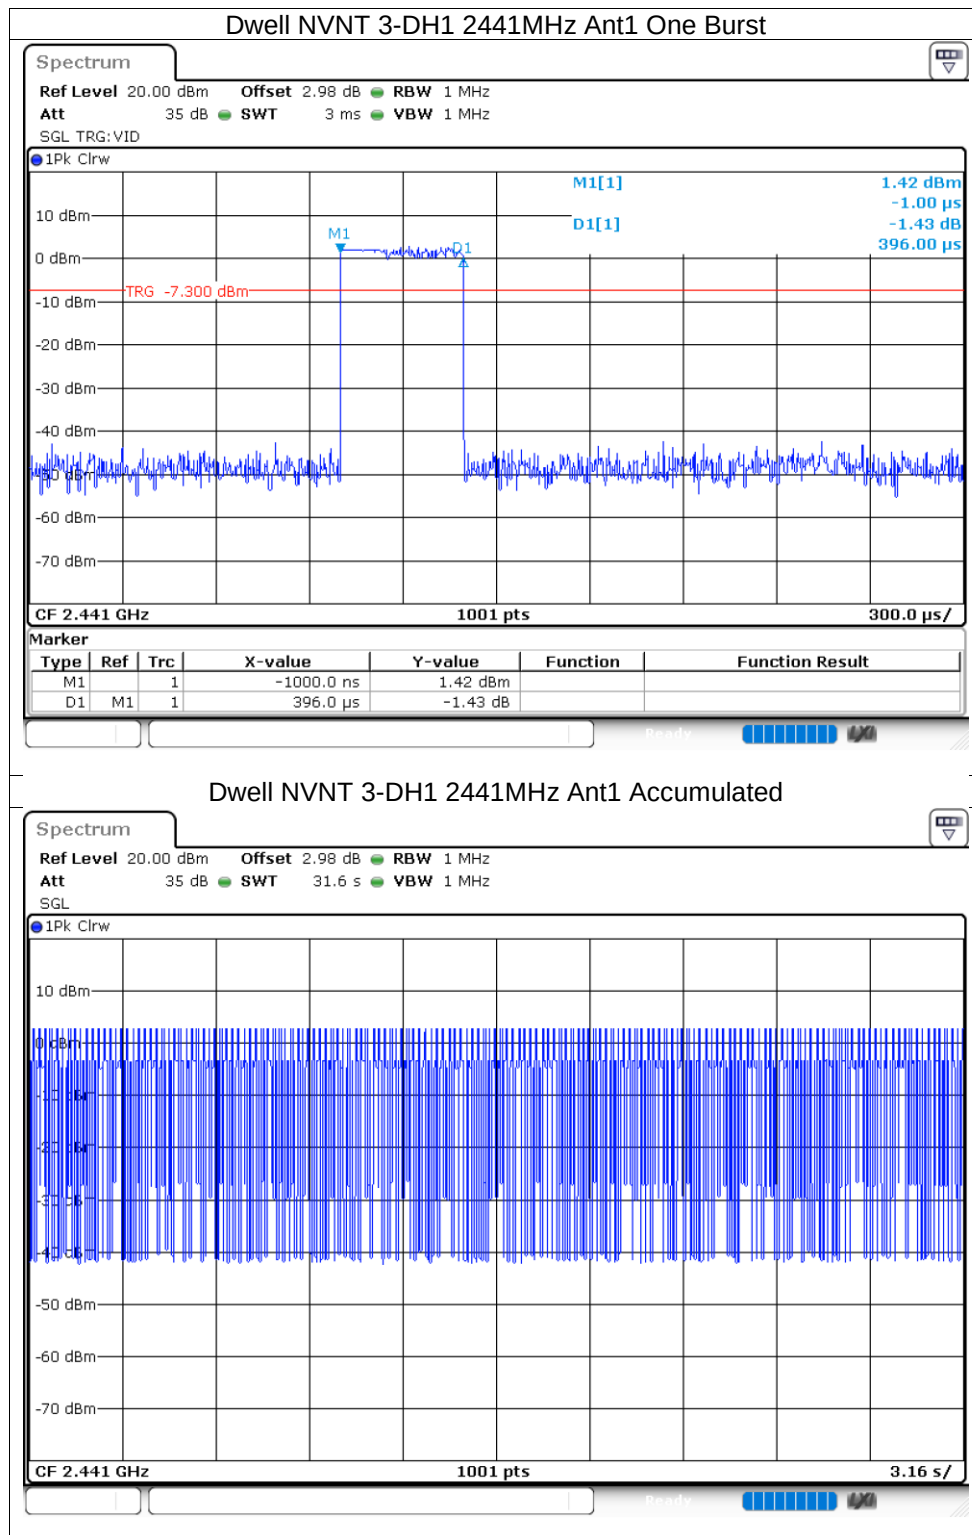


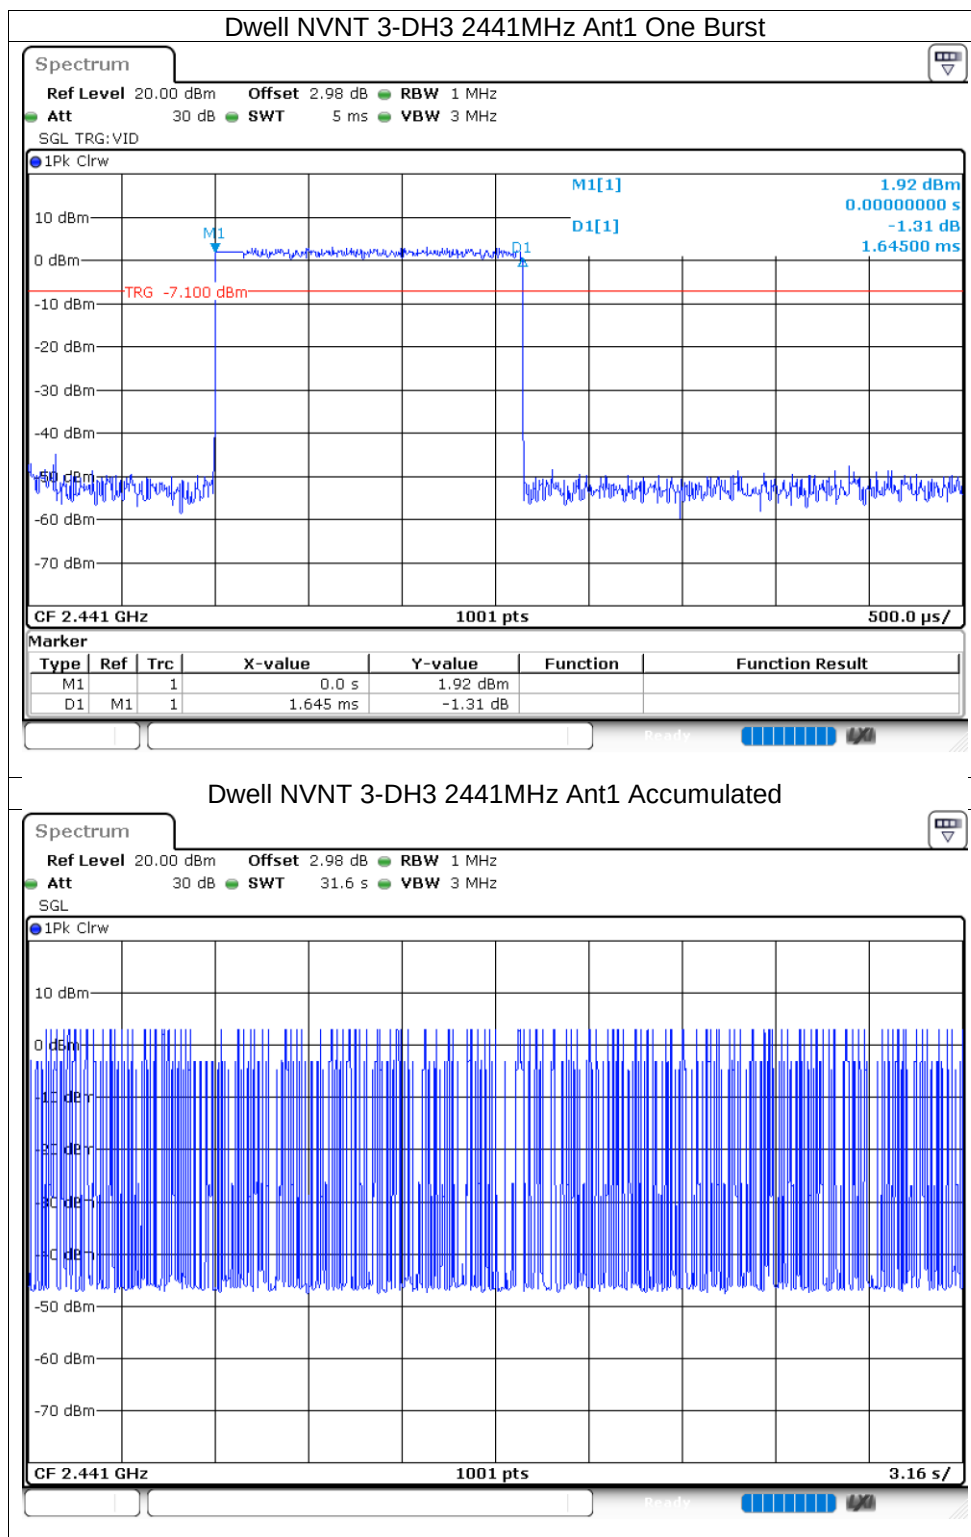


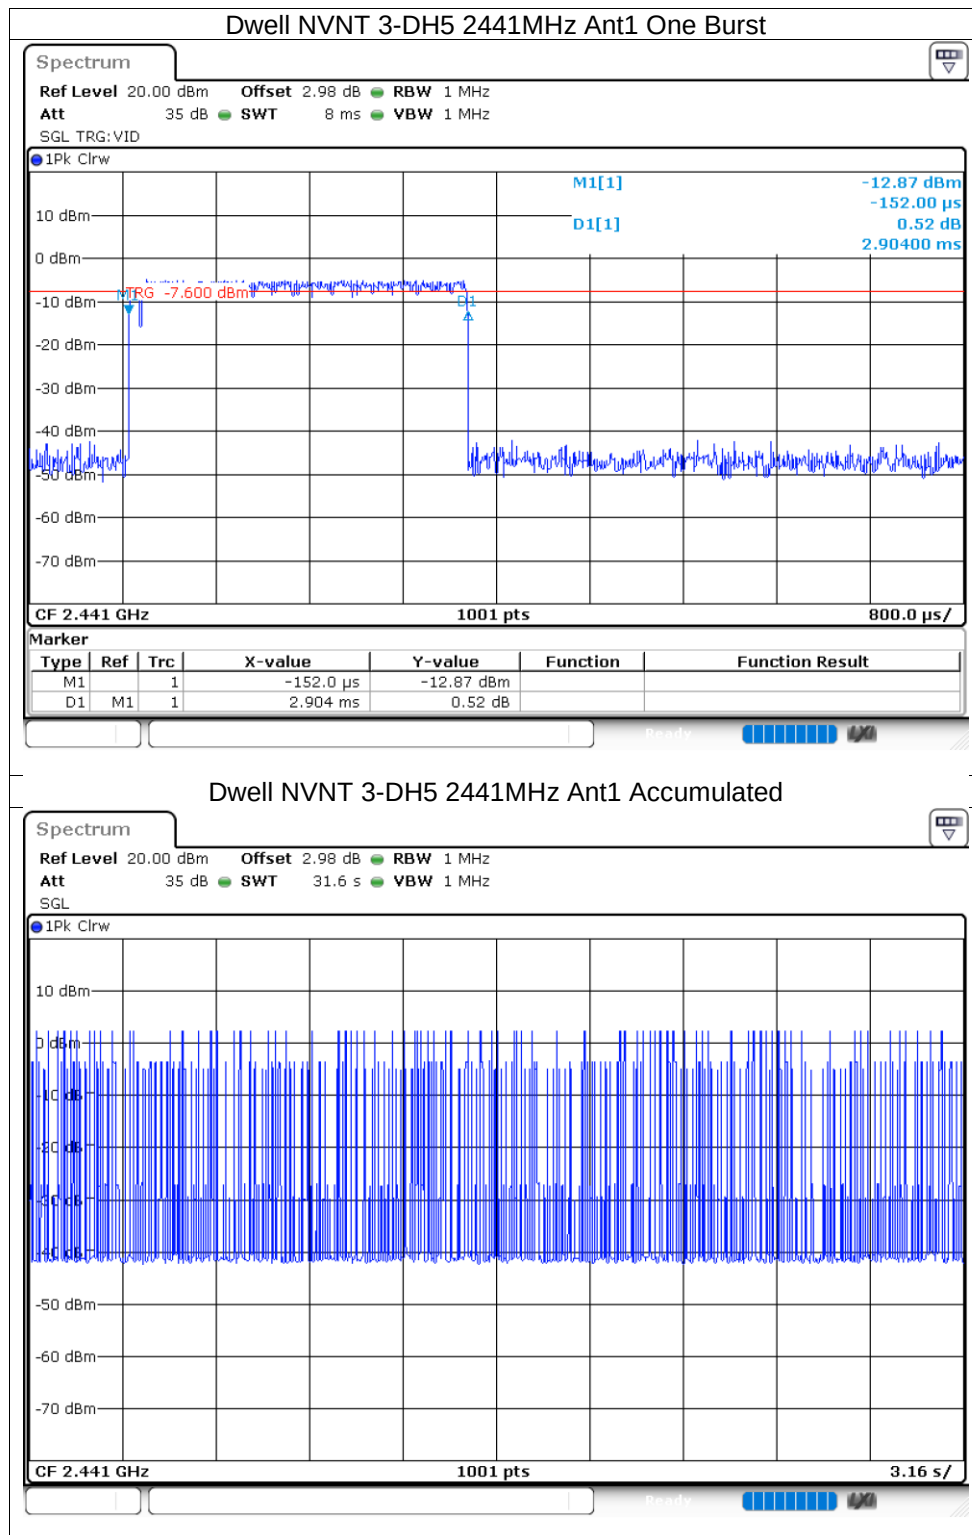



11.2.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	1.95	21	Pass
NVNT	1-DH5	2441	Ant1	1.04	21	Pass
NVNT	1-DH5	2480	Ant1	1.83	21	Pass
NVNT	2-DH5	2402	Ant1	3.14	21	Pass
NVNT	2-DH5	2441	Ant1	2.76	21	Pass
NVNT	2-DH5	2480	Ant1	2.41	21	Pass
NVNT	3-DH5	2402	Ant1	3.38	21	Pass
NVNT	3-DH5	2441	Ant1	3.01	21	Pass
NVNT	3-DH5	2480	Ant1	2.74	21	Pass

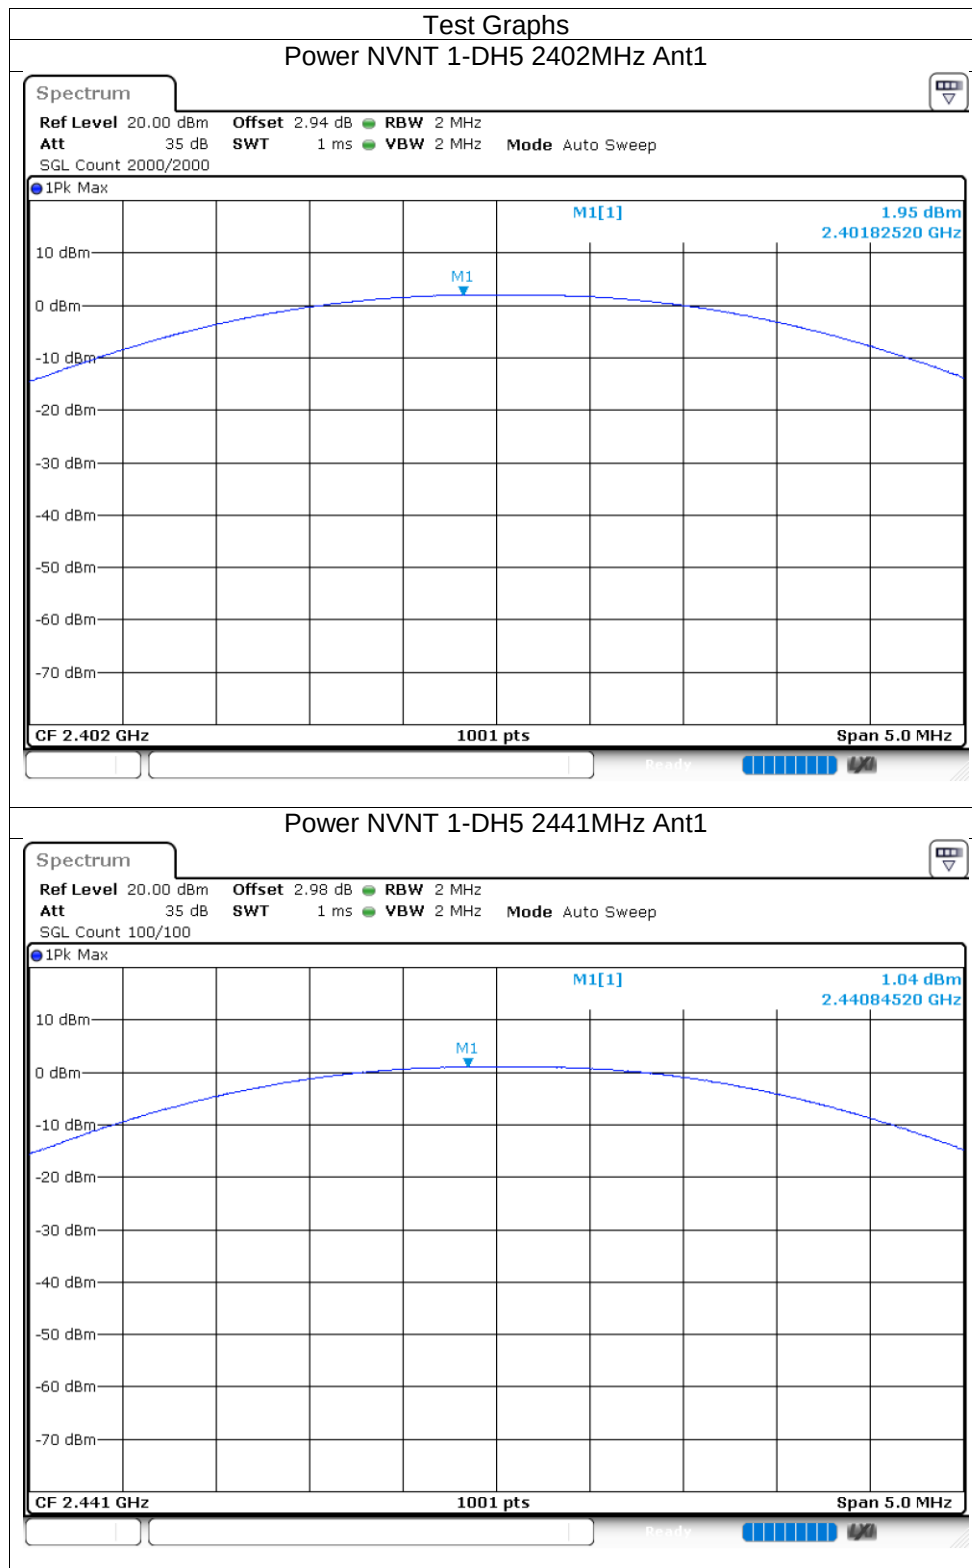

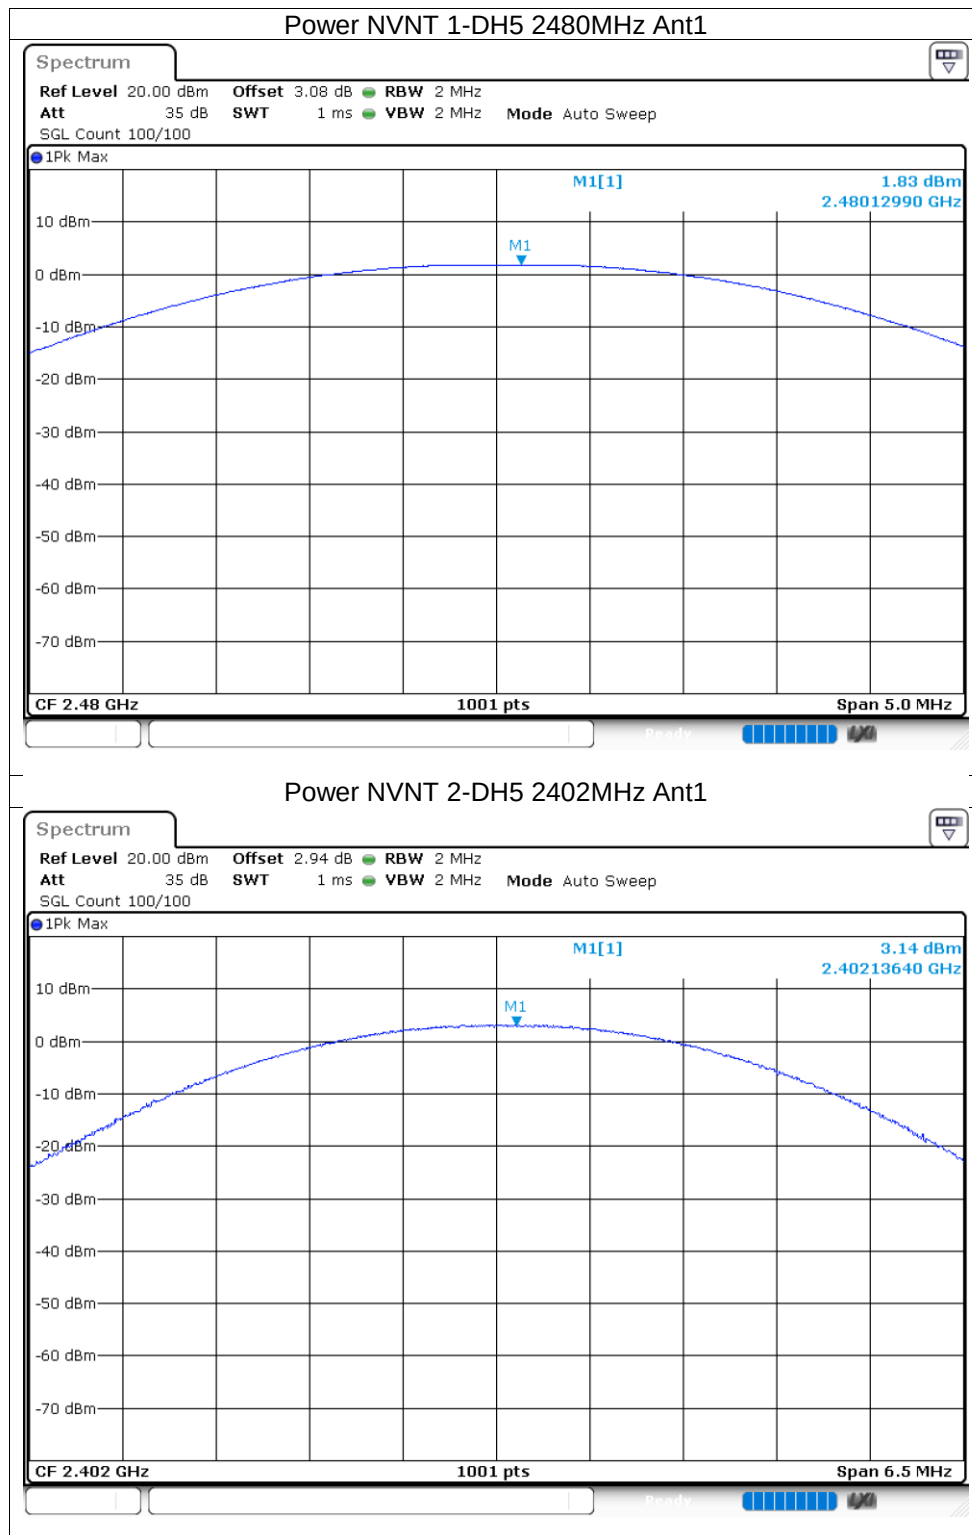

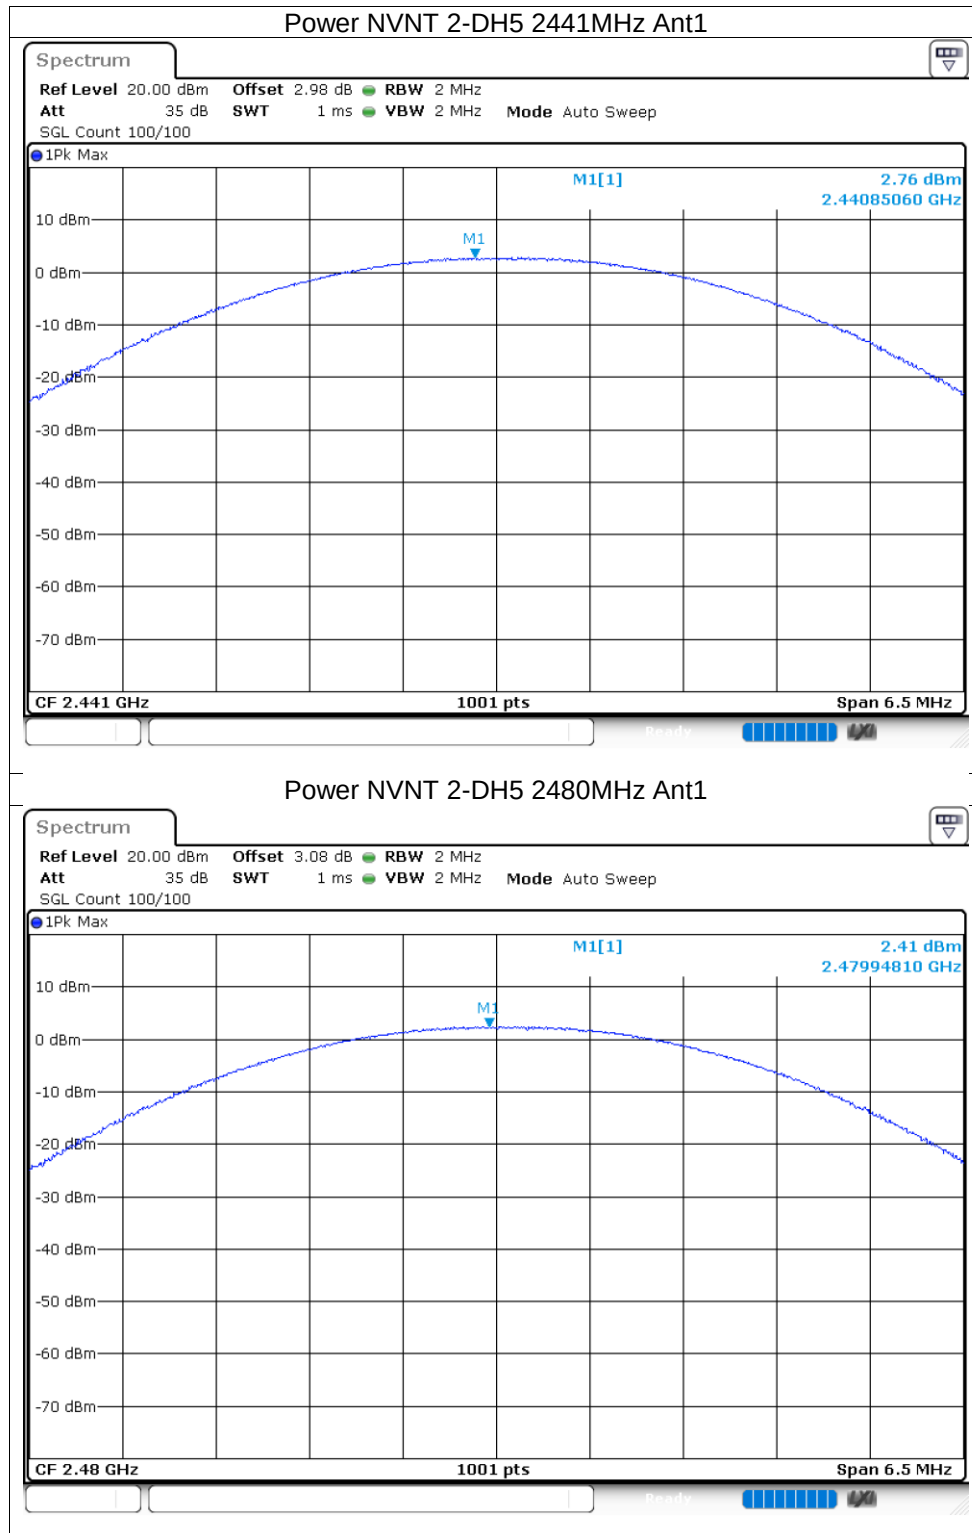


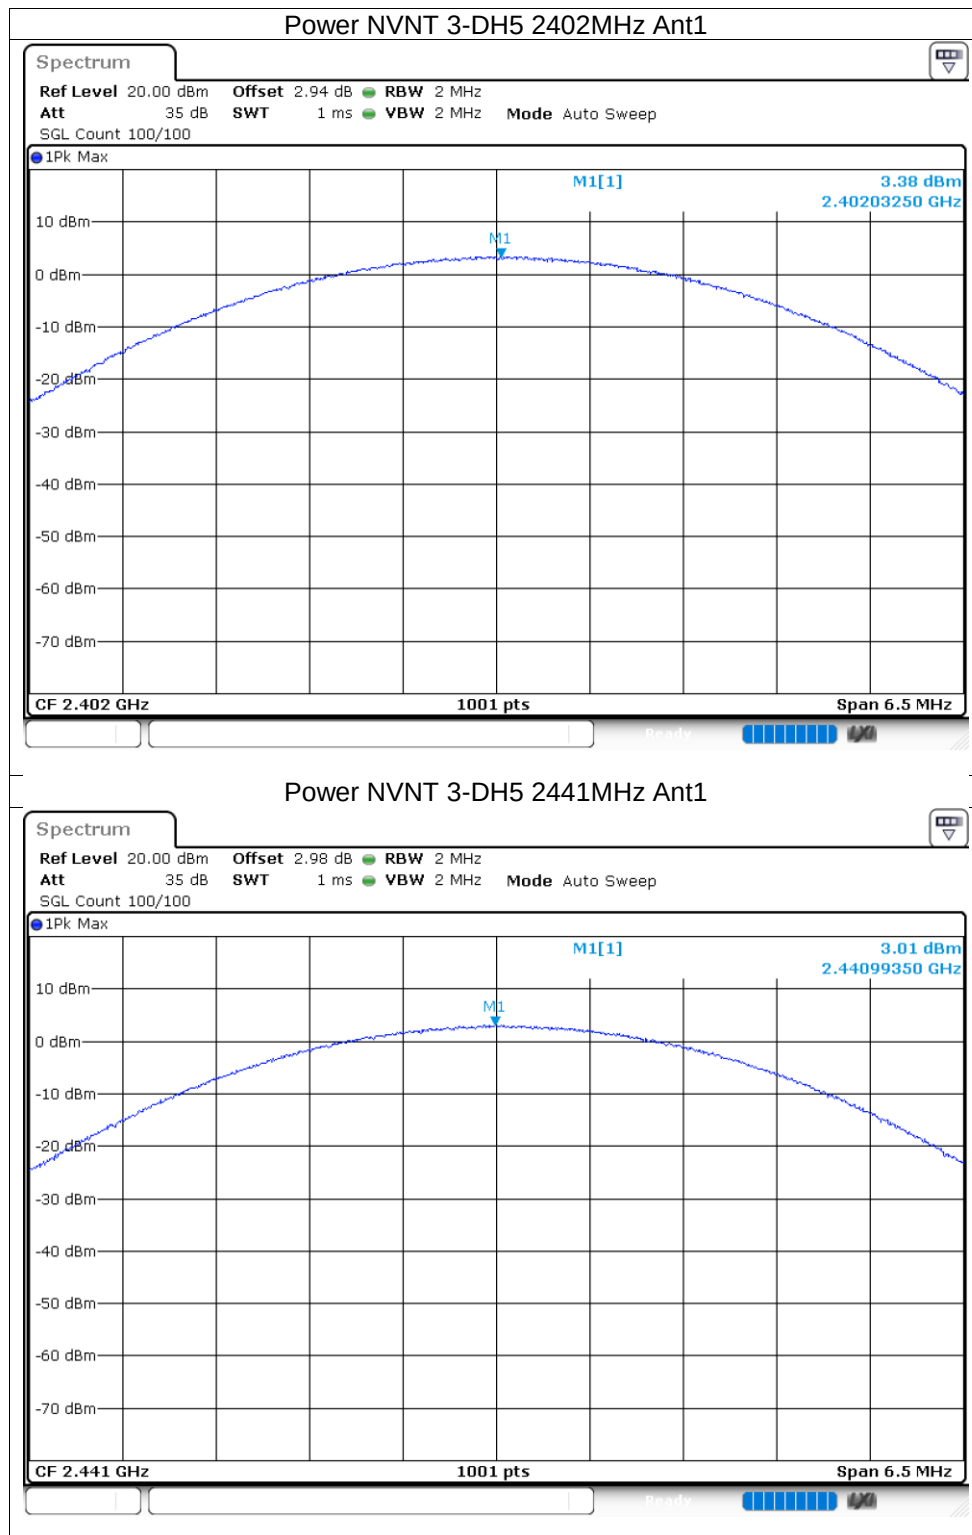


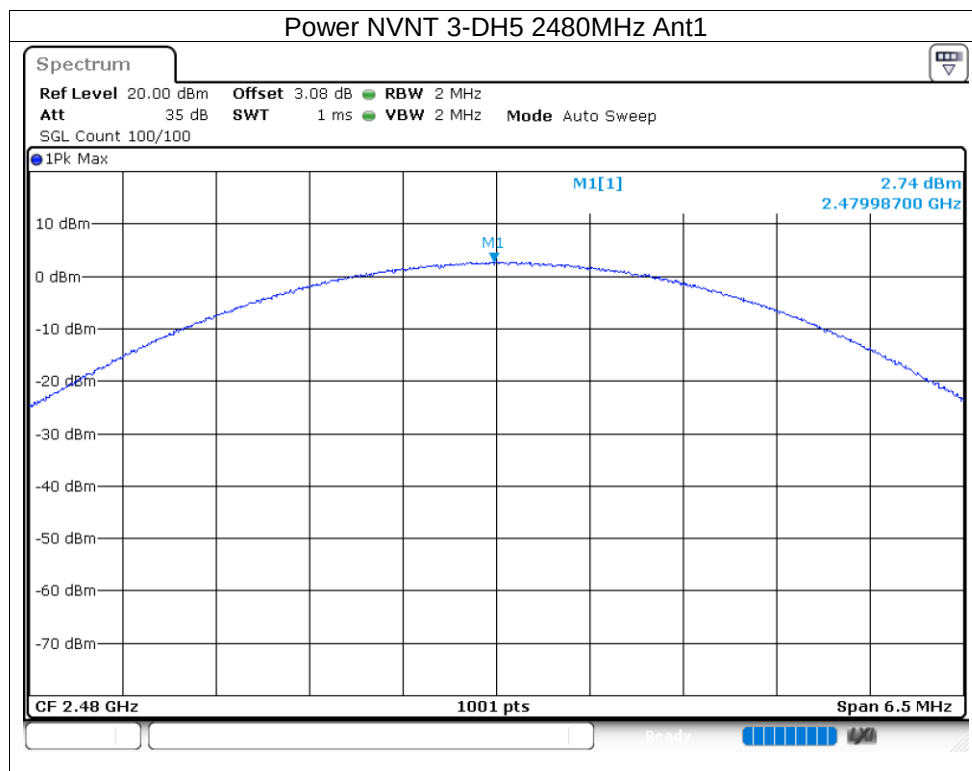



11.2.3 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.92	0	Pass
NVNT	1-DH5	2441	Ant1	0.94	0	Pass
NVNT	1-DH5	2480	Ant1	0.946	0	Pass
NVNT	2-DH5	2402	Ant1	1.28	0	Pass
NVNT	2-DH5	2441	Ant1	1.336	0	Pass
NVNT	2-DH5	2480	Ant1	1.282	0	Pass
NVNT	3-DH5	2402	Ant1	1.272	0	Pass
NVNT	3-DH5	2441	Ant1	1.3	0	Pass
NVNT	3-DH5	2480	Ant1	1.272	0	Pass

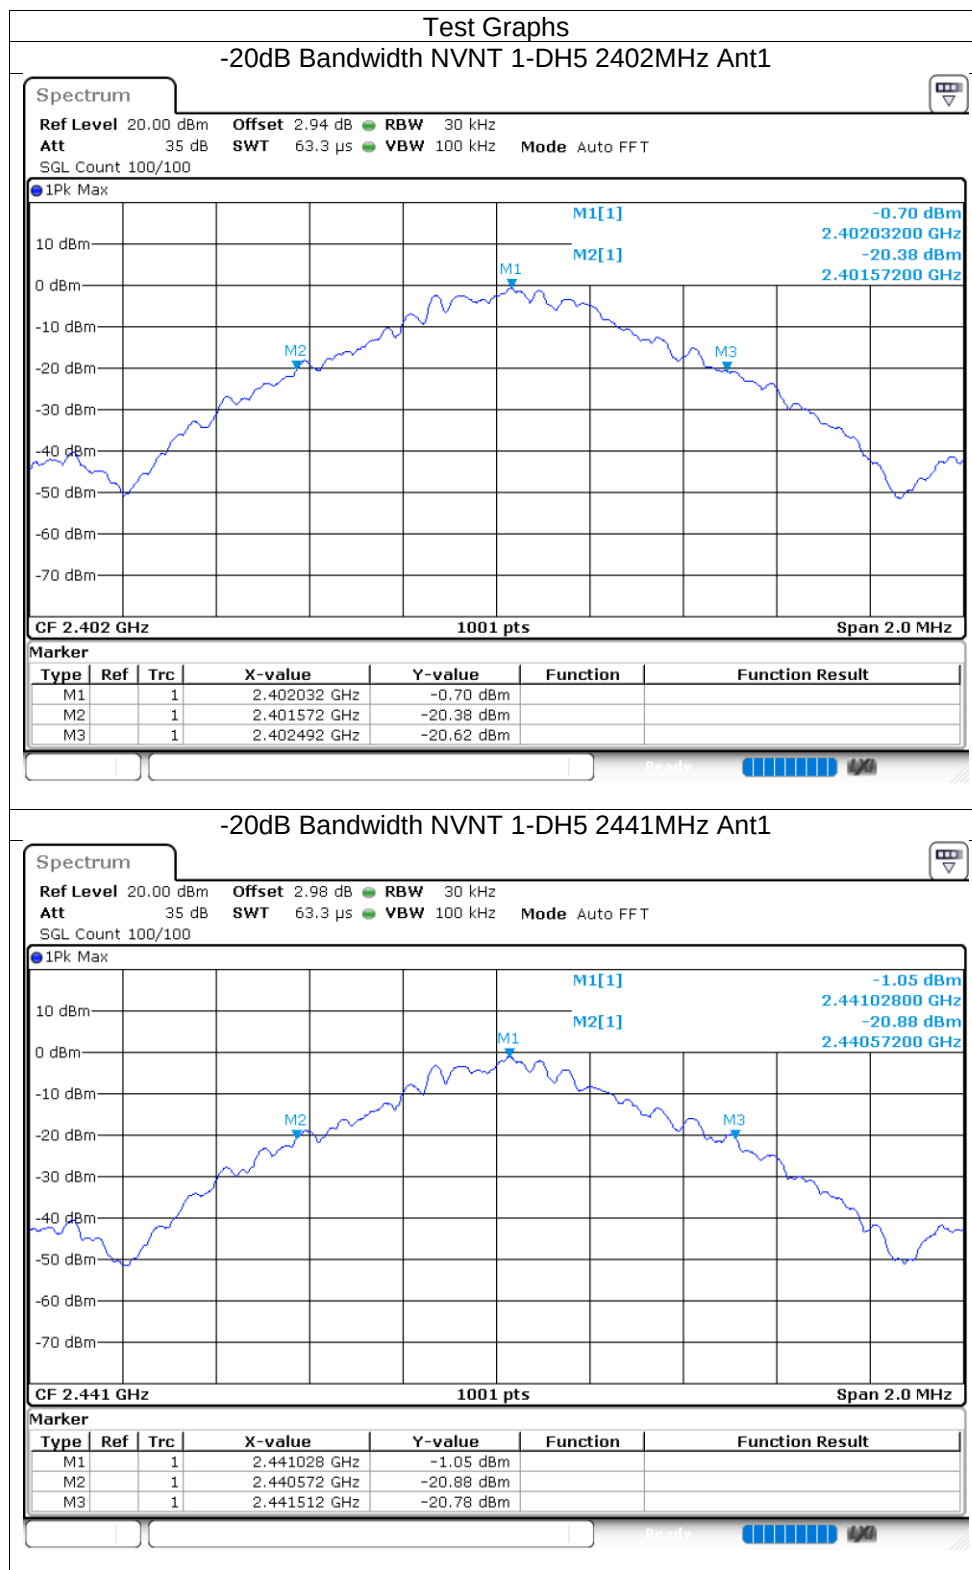

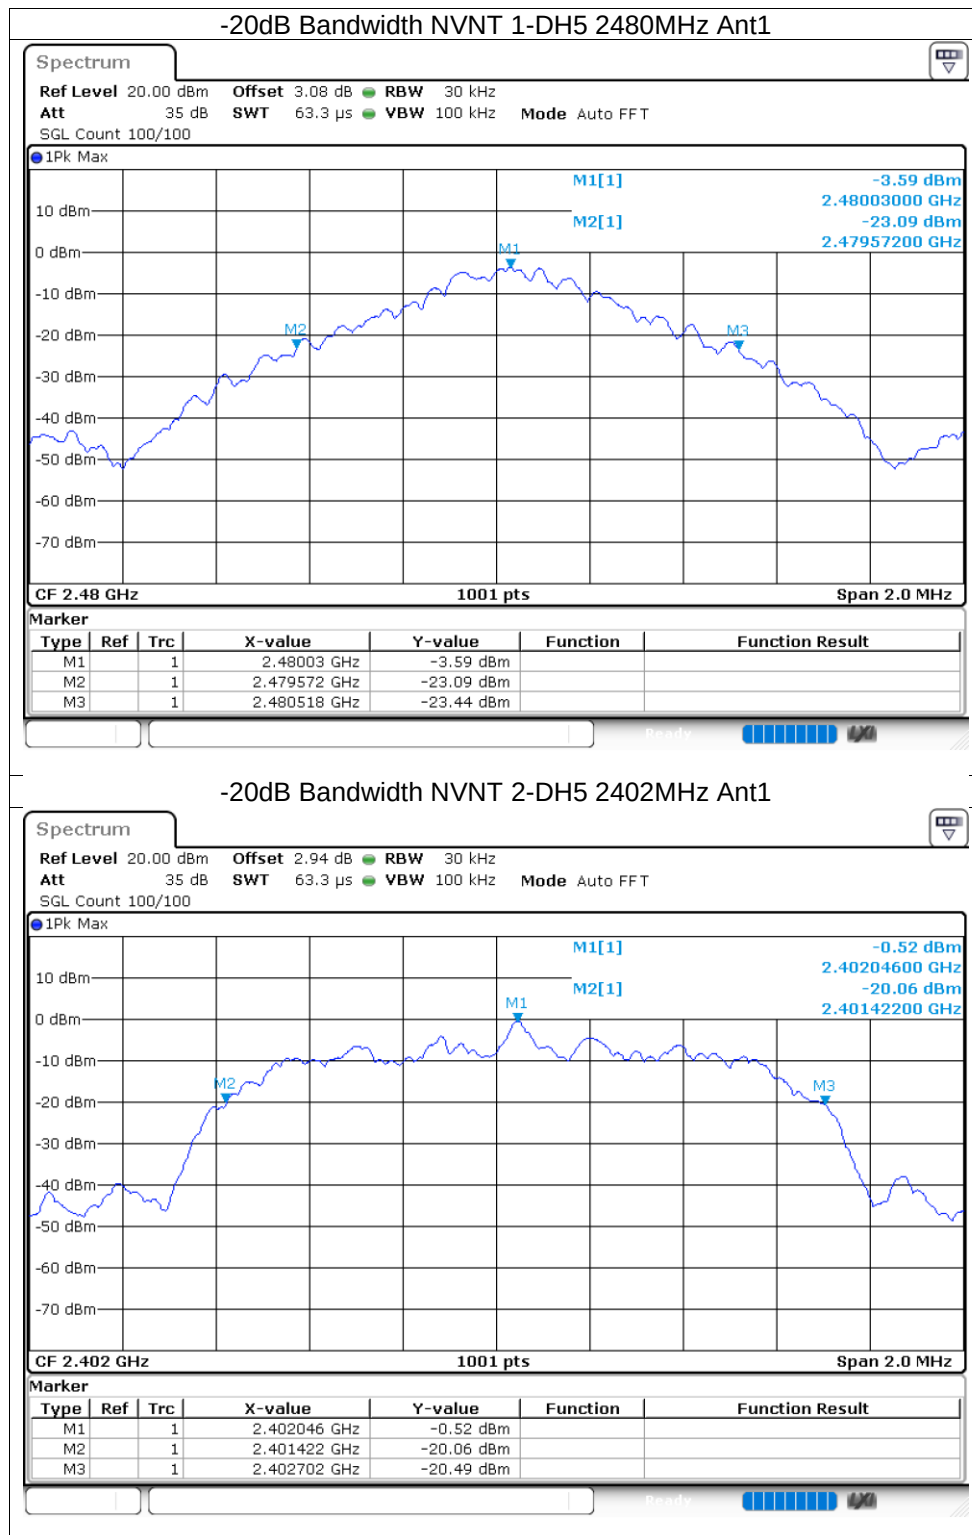

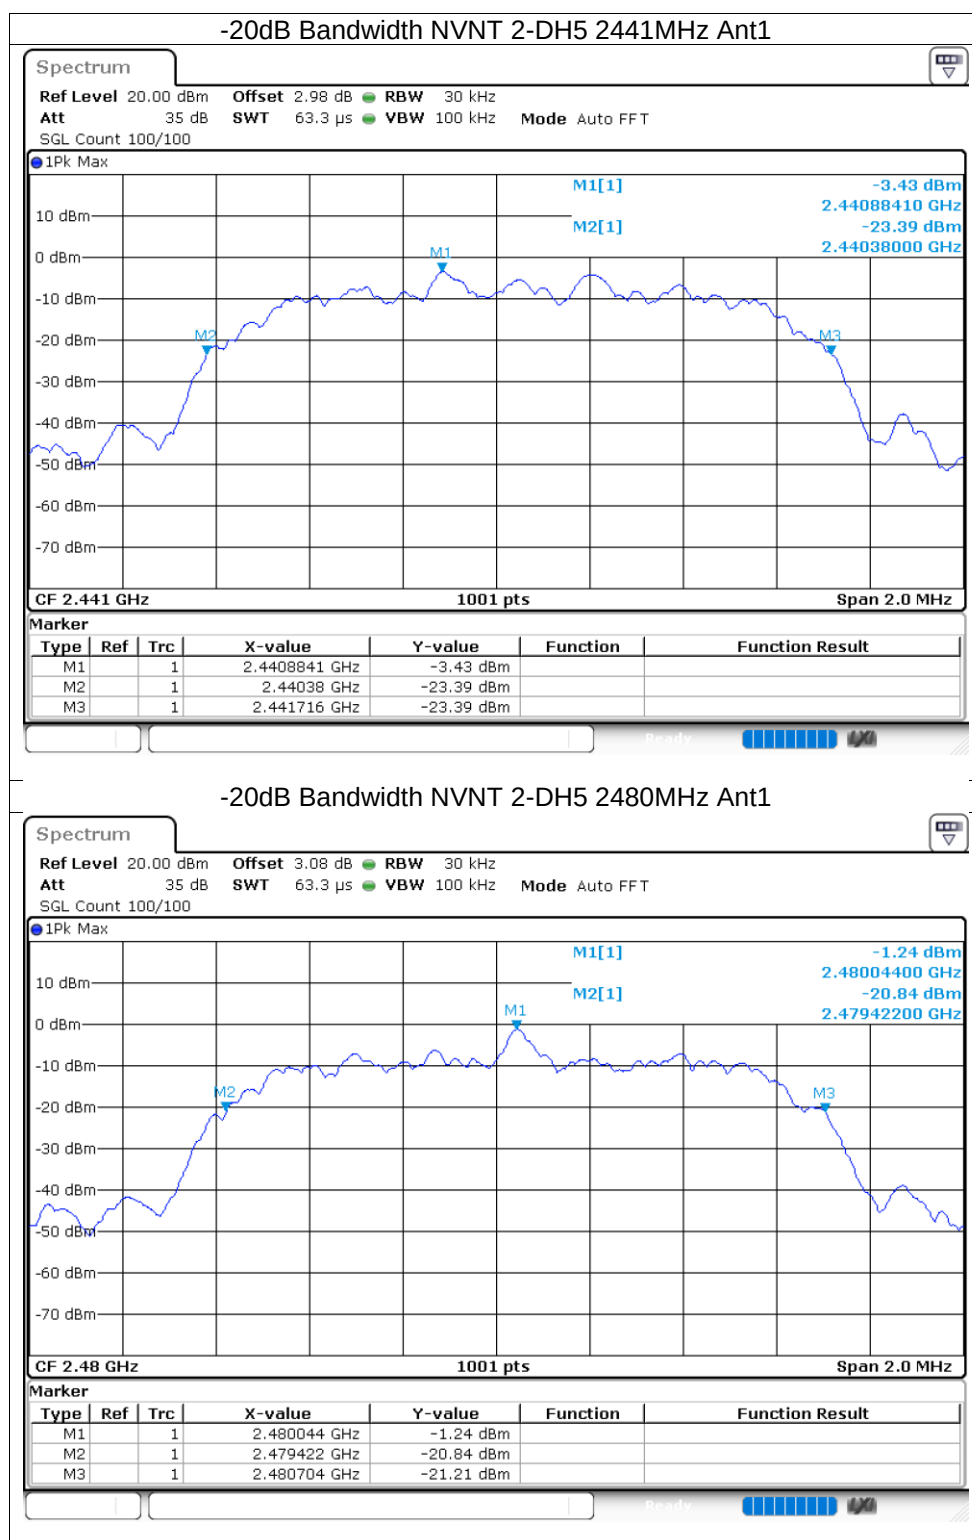


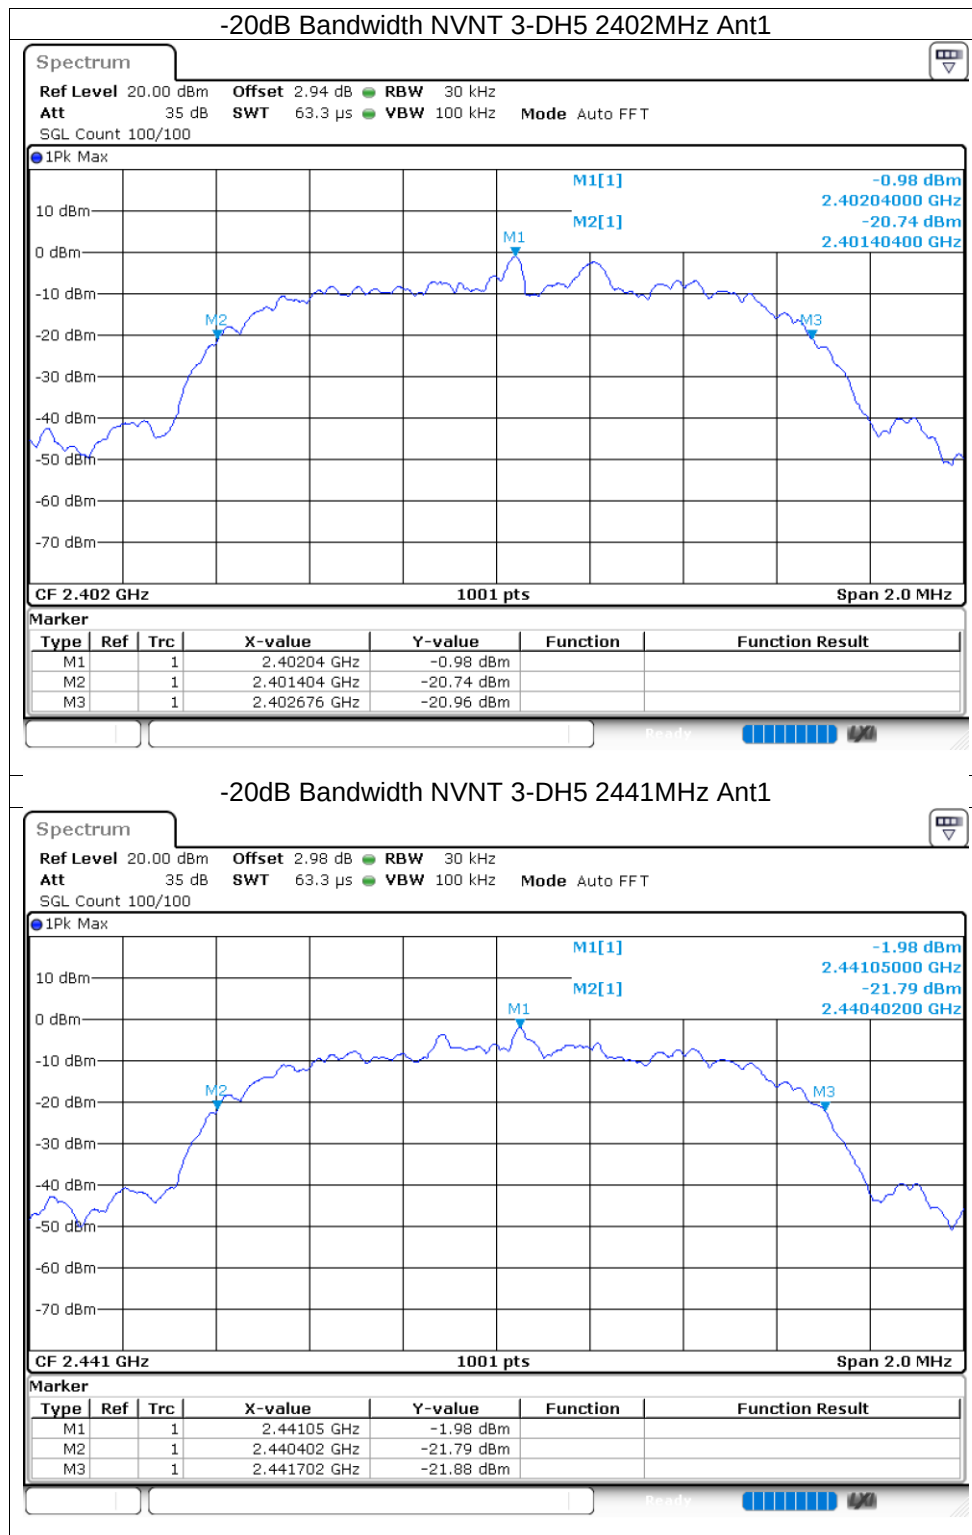


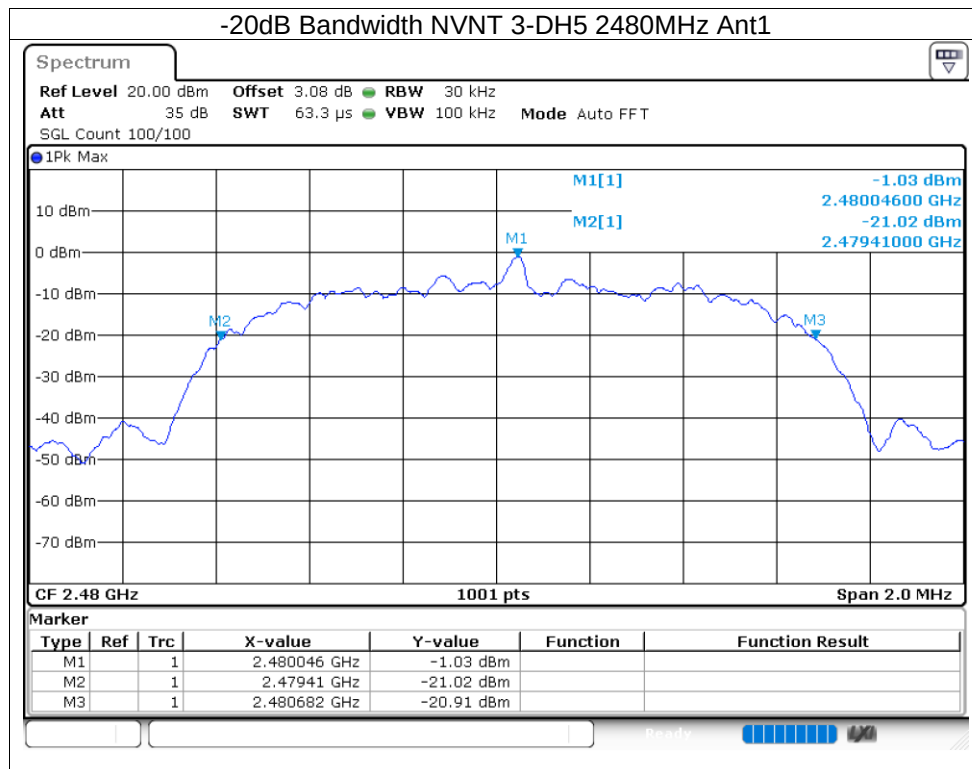



11.2.4 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.869
NVNT	1-DH5	2441	Ant1	0.885
NVNT	1-DH5	2480	Ant1	0.851
NVNT	2-DH5	2402	Ant1	1.171
NVNT	2-DH5	2441	Ant1	1.175
NVNT	2-DH5	2480	Ant1	1.193
NVNT	3-DH5	2402	Ant1	1.187
NVNT	3-DH5	2441	Ant1	1.191
NVNT	3-DH5	2480	Ant1	1.191

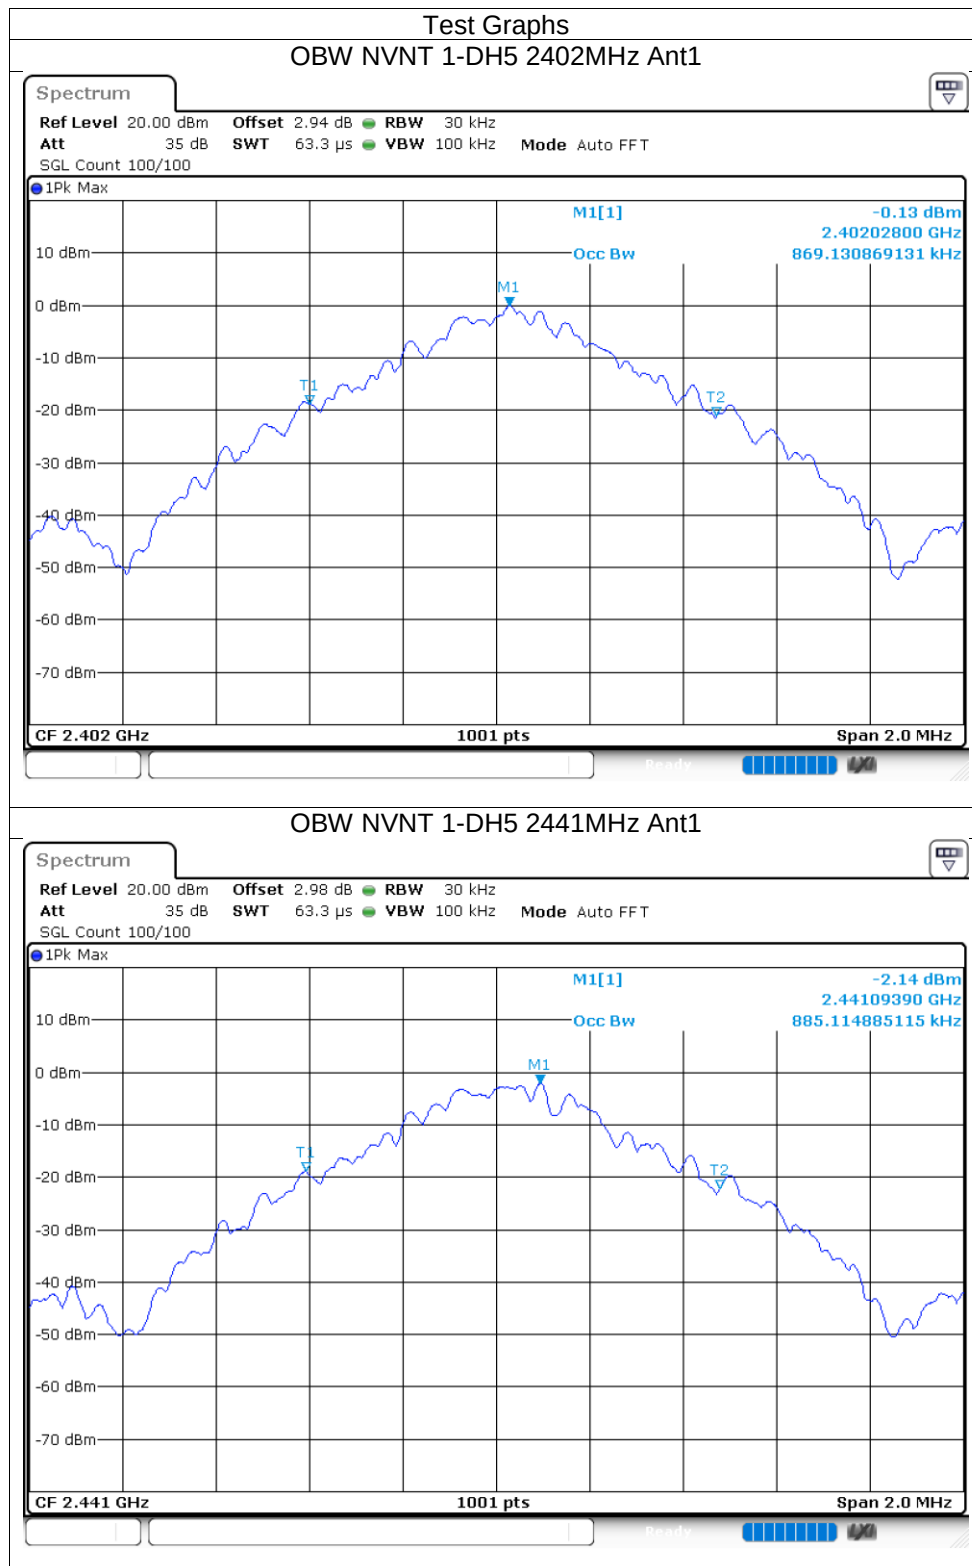

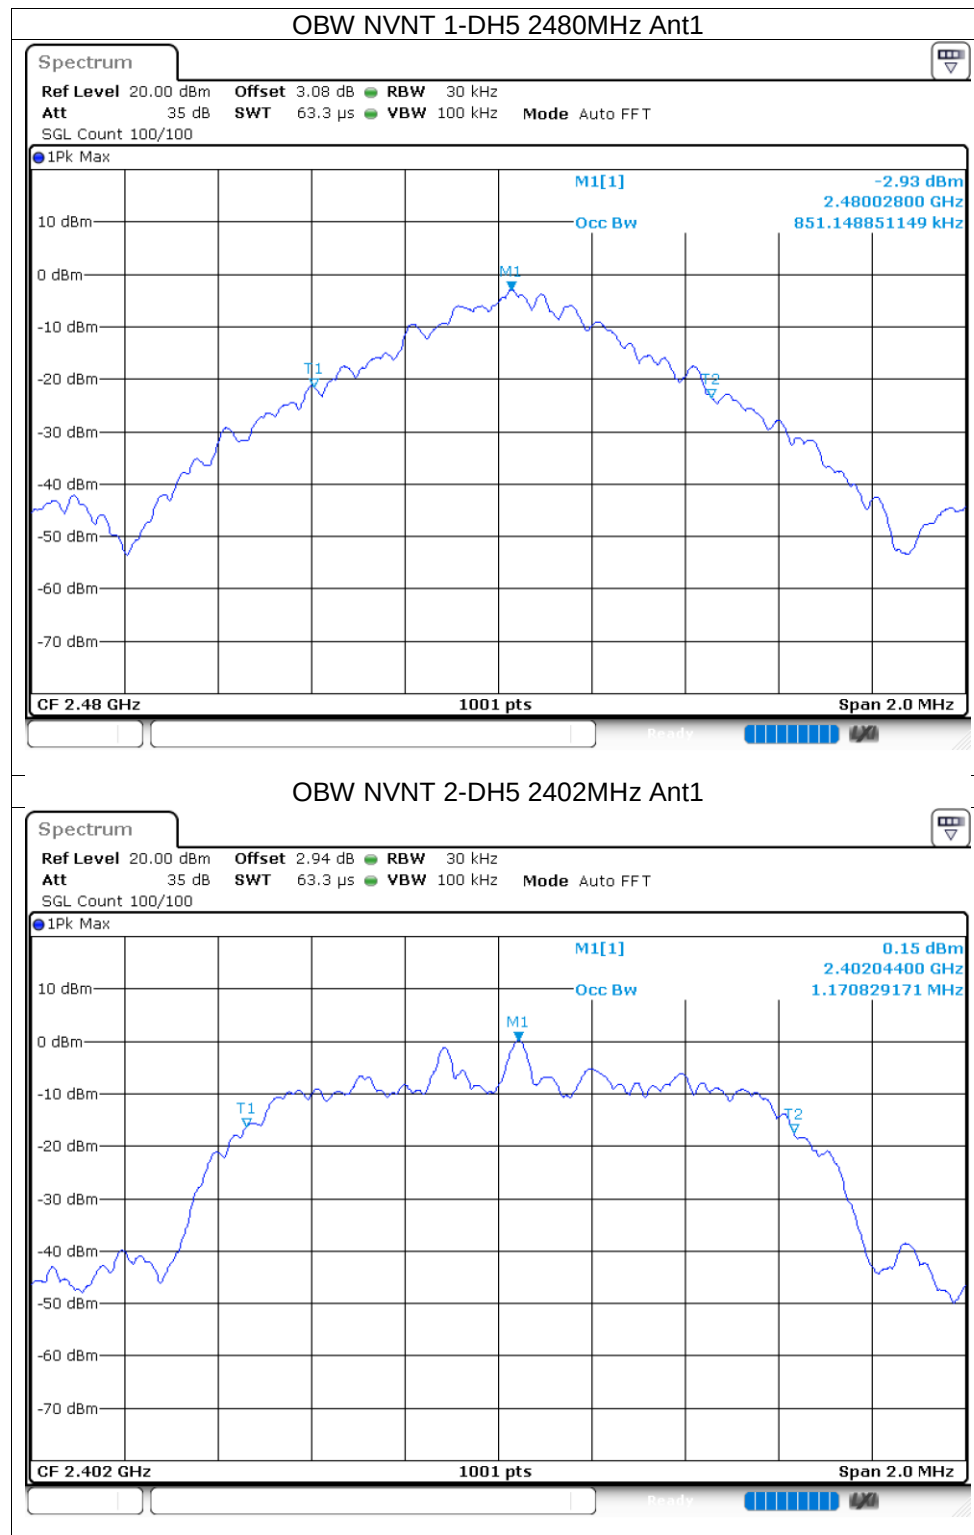

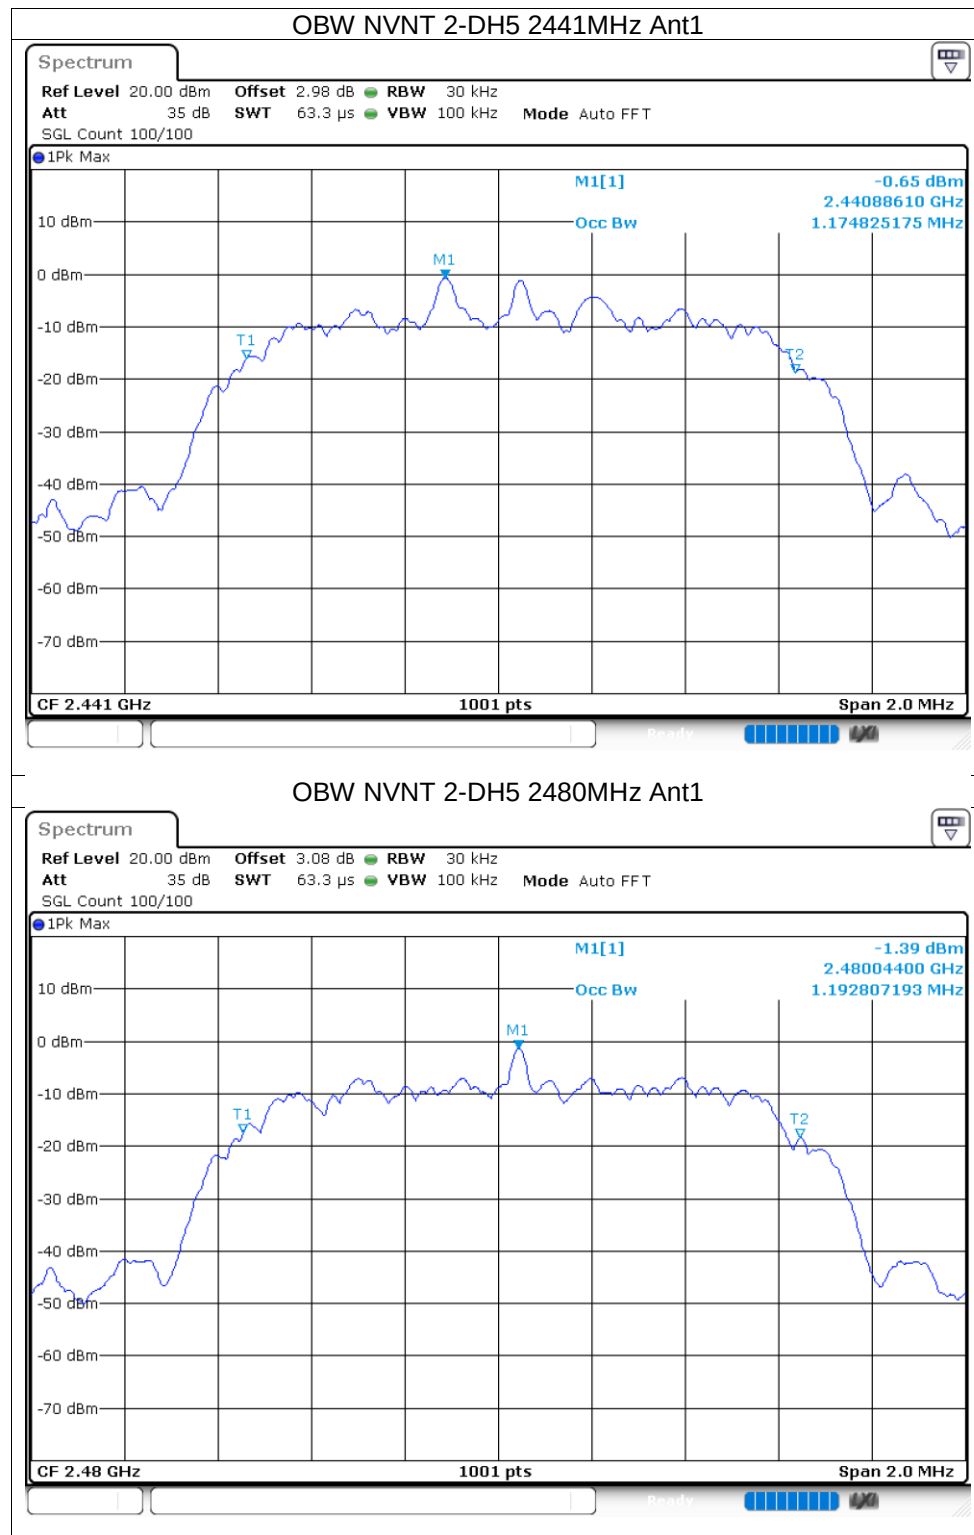


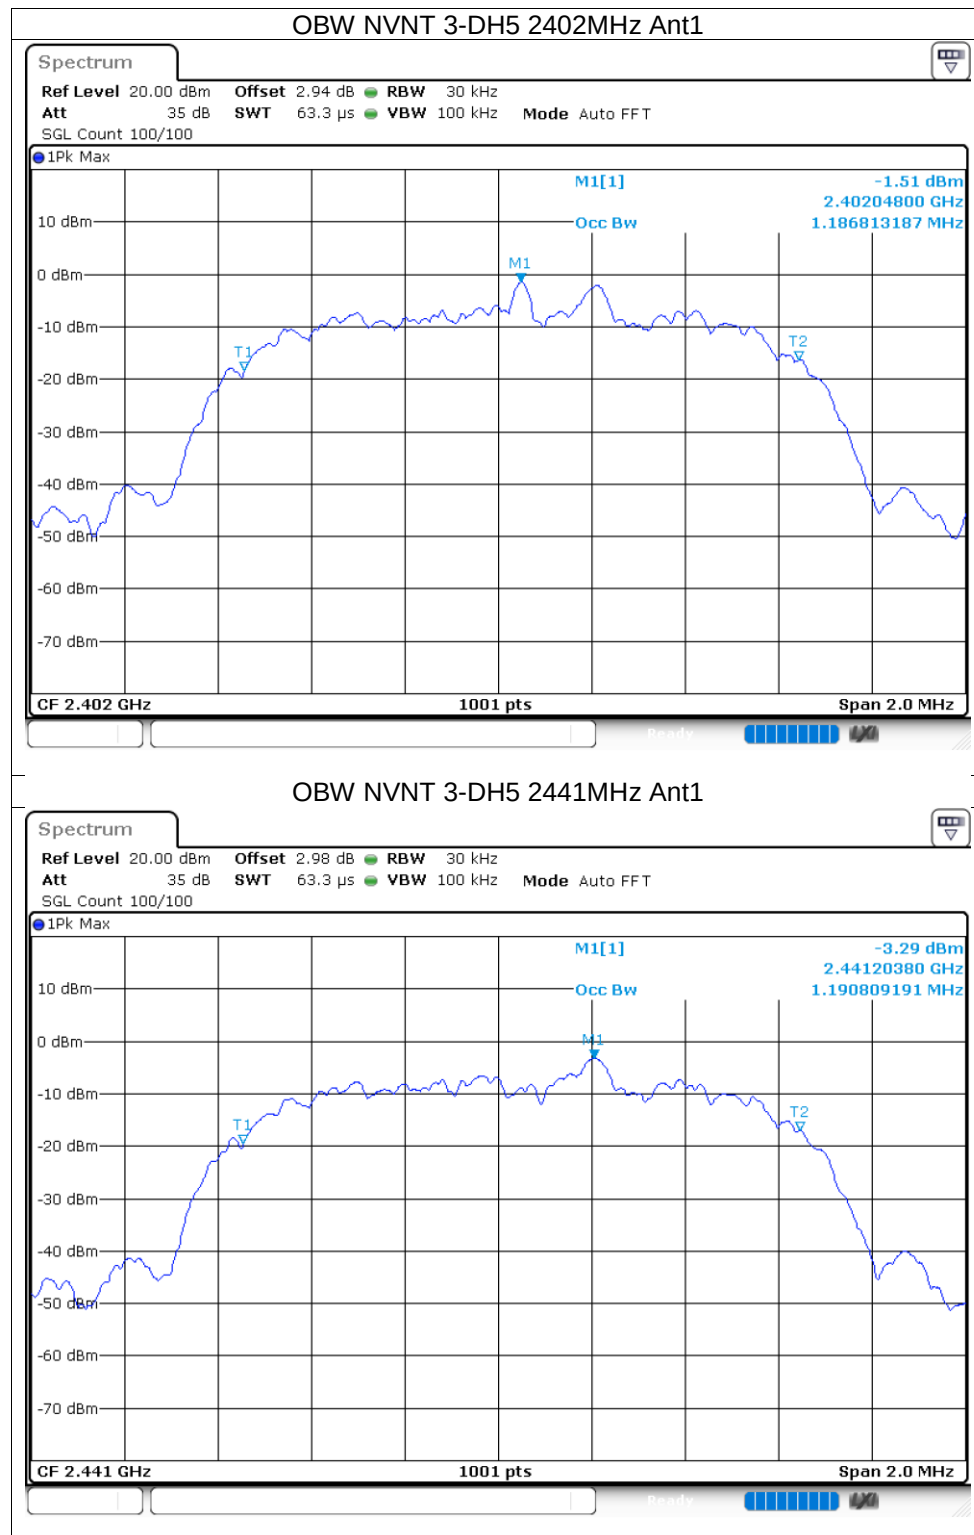


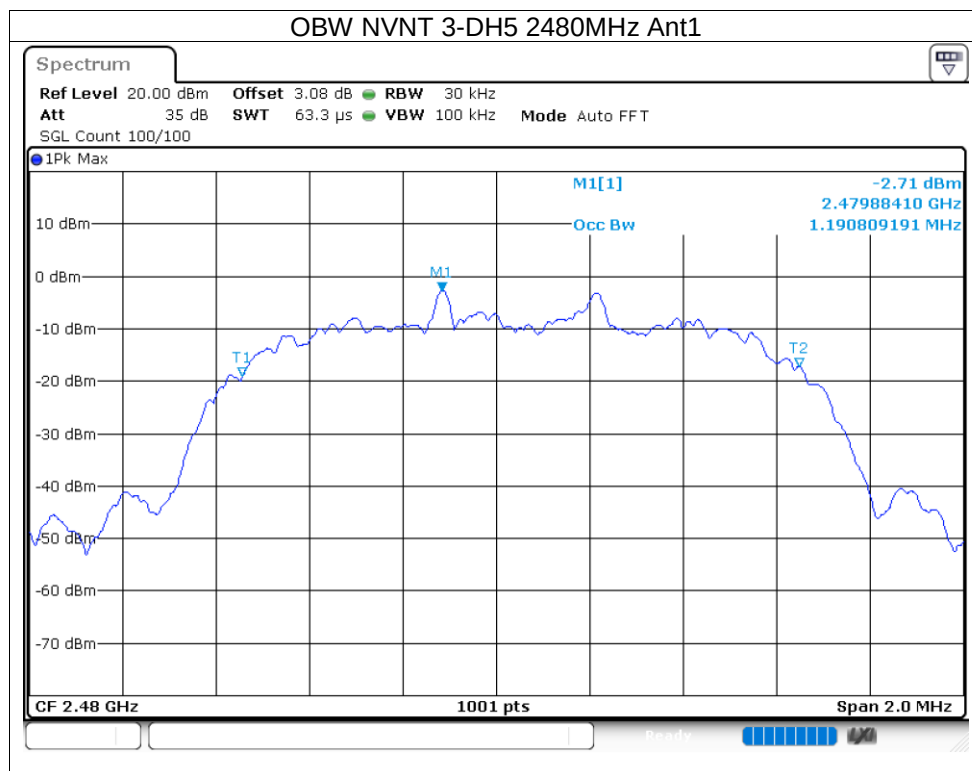



11.2.5 Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.044	2403.104	1.06	0.613	Pass
NVNT	1-DH5	Ant1	2441.104	2442.024	0.92	0.627	Pass
NVNT	1-DH5	Ant1	2479.106	2480.042	0.936	0.631	Pass
NVNT	2-DH5	Ant1	2402.042	2403.042	1	0.853	Pass
NVNT	2-DH5	Ant1	2441.127	2442.163	1.036	0.891	Pass
NVNT	2-DH5	Ant1	2479.127	2480.044	0.917	0.855	Pass
NVNT	3-DH5	Ant1	2402.042	2403.042	1	0.848	Pass
NVNT	3-DH5	Ant1	2441.038	2442.056	1.018	0.867	Pass
NVNT	3-DH5	Ant1	2479.042	2480.042	1	0.848	Pass

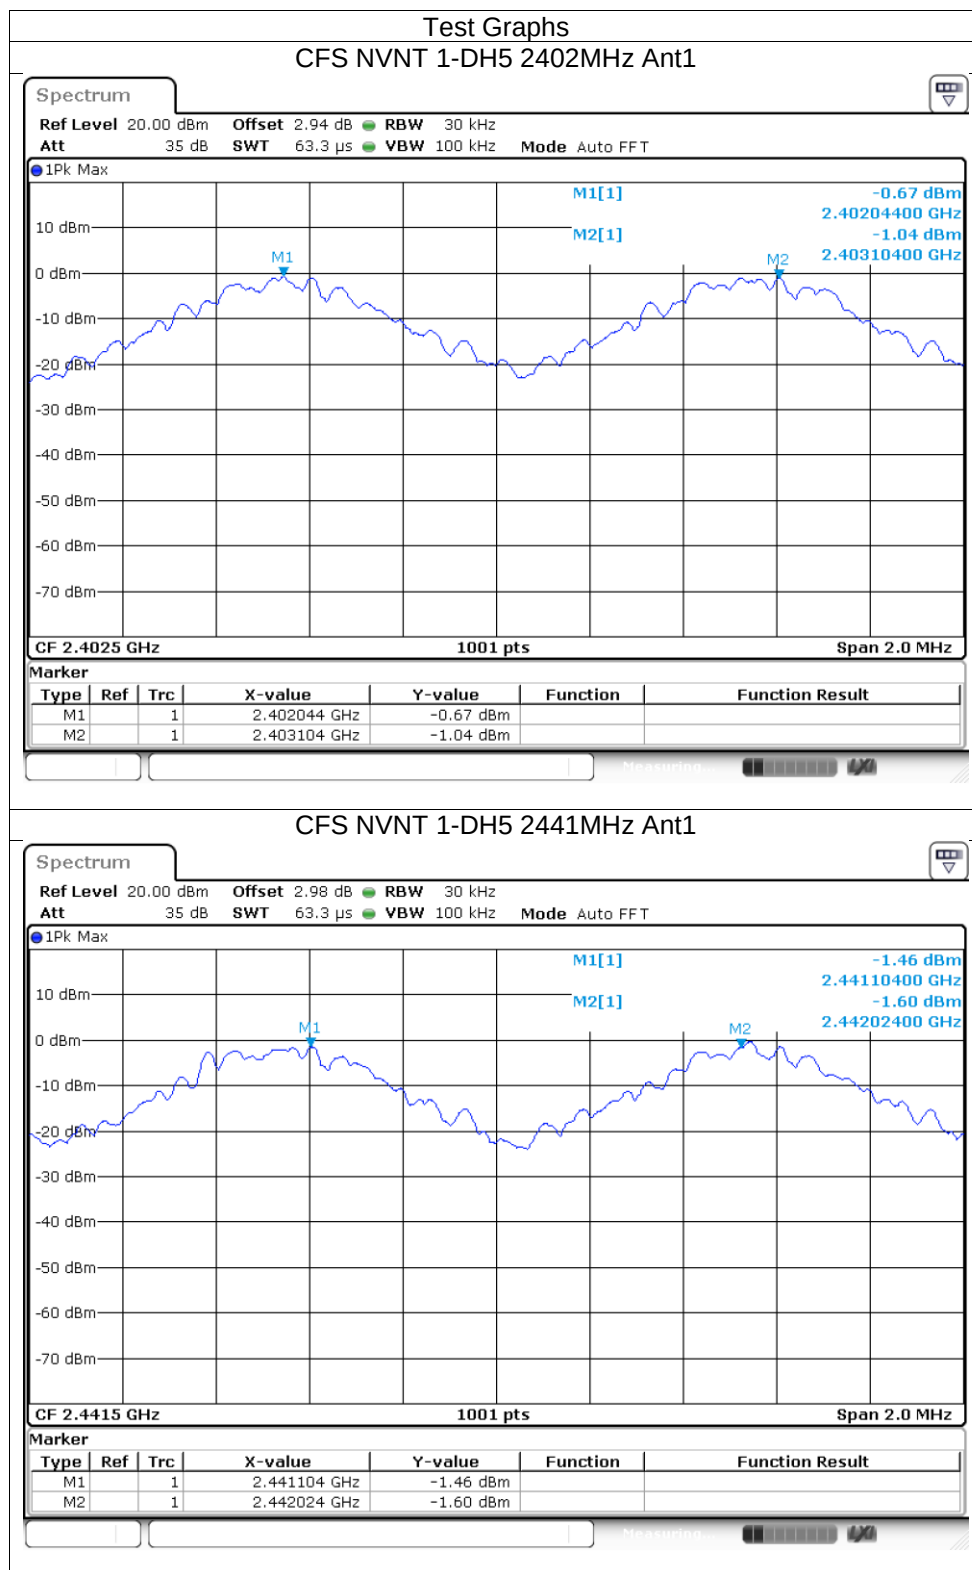

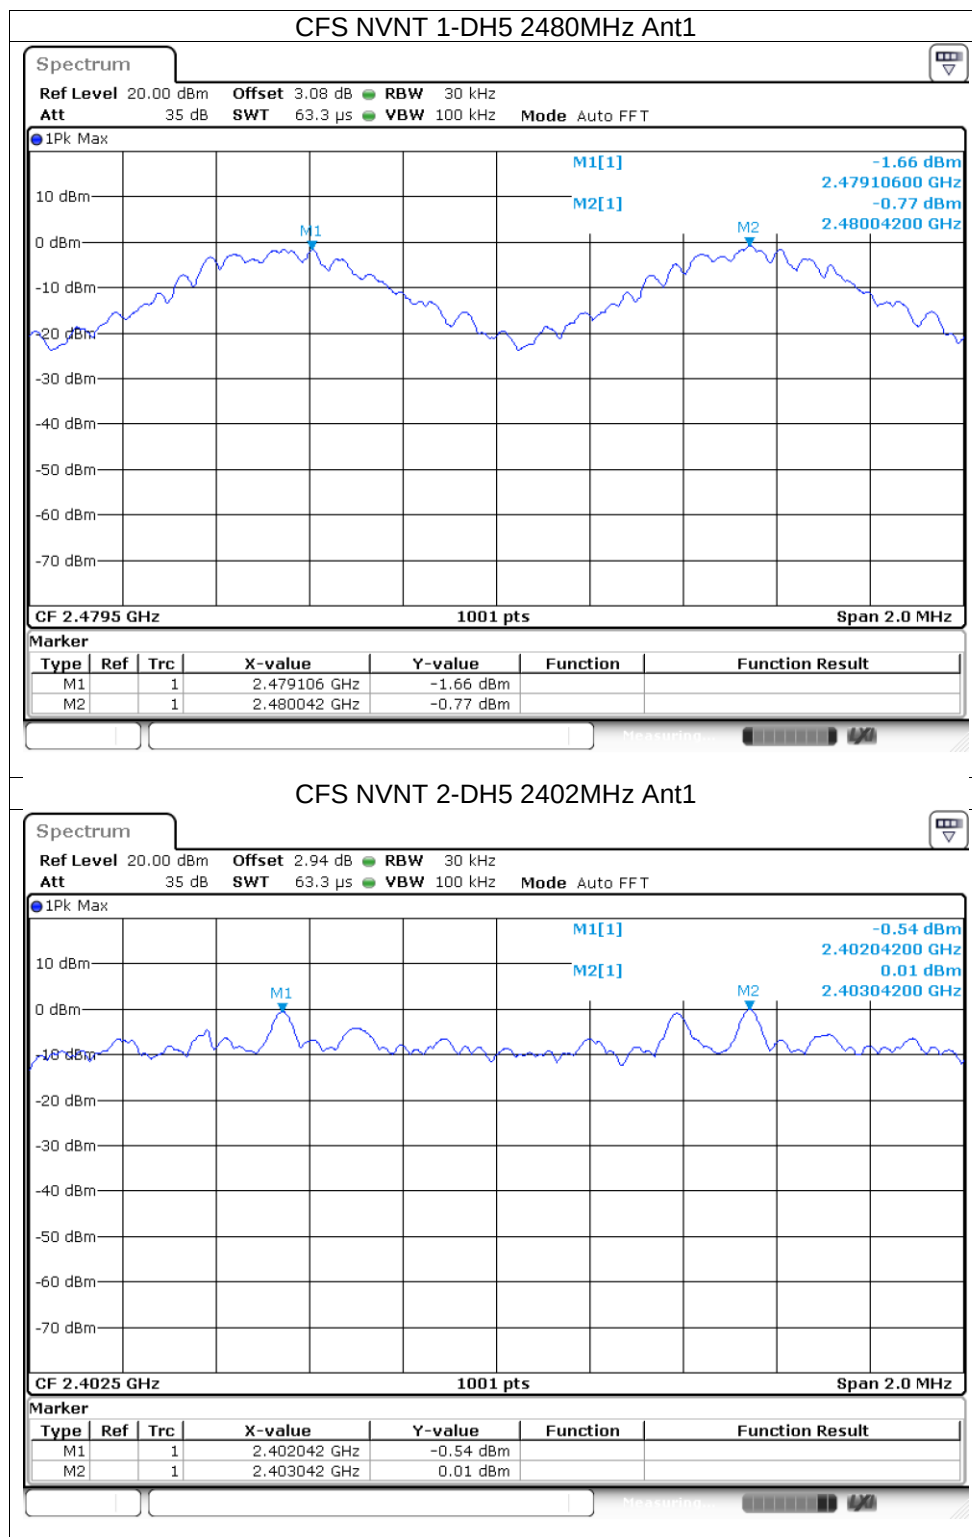

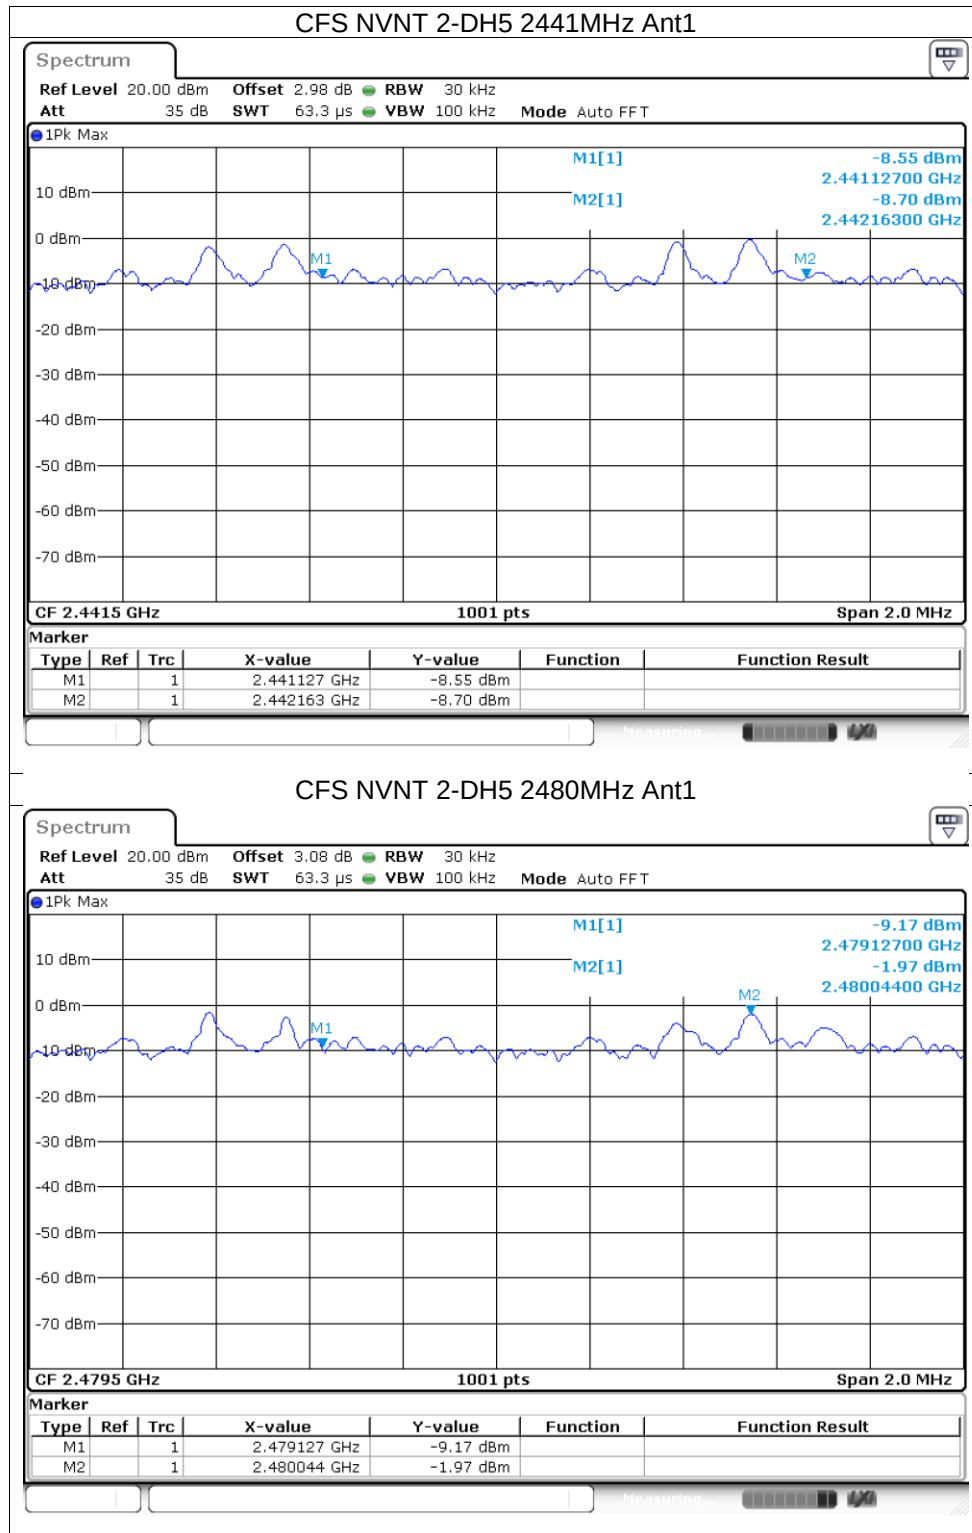


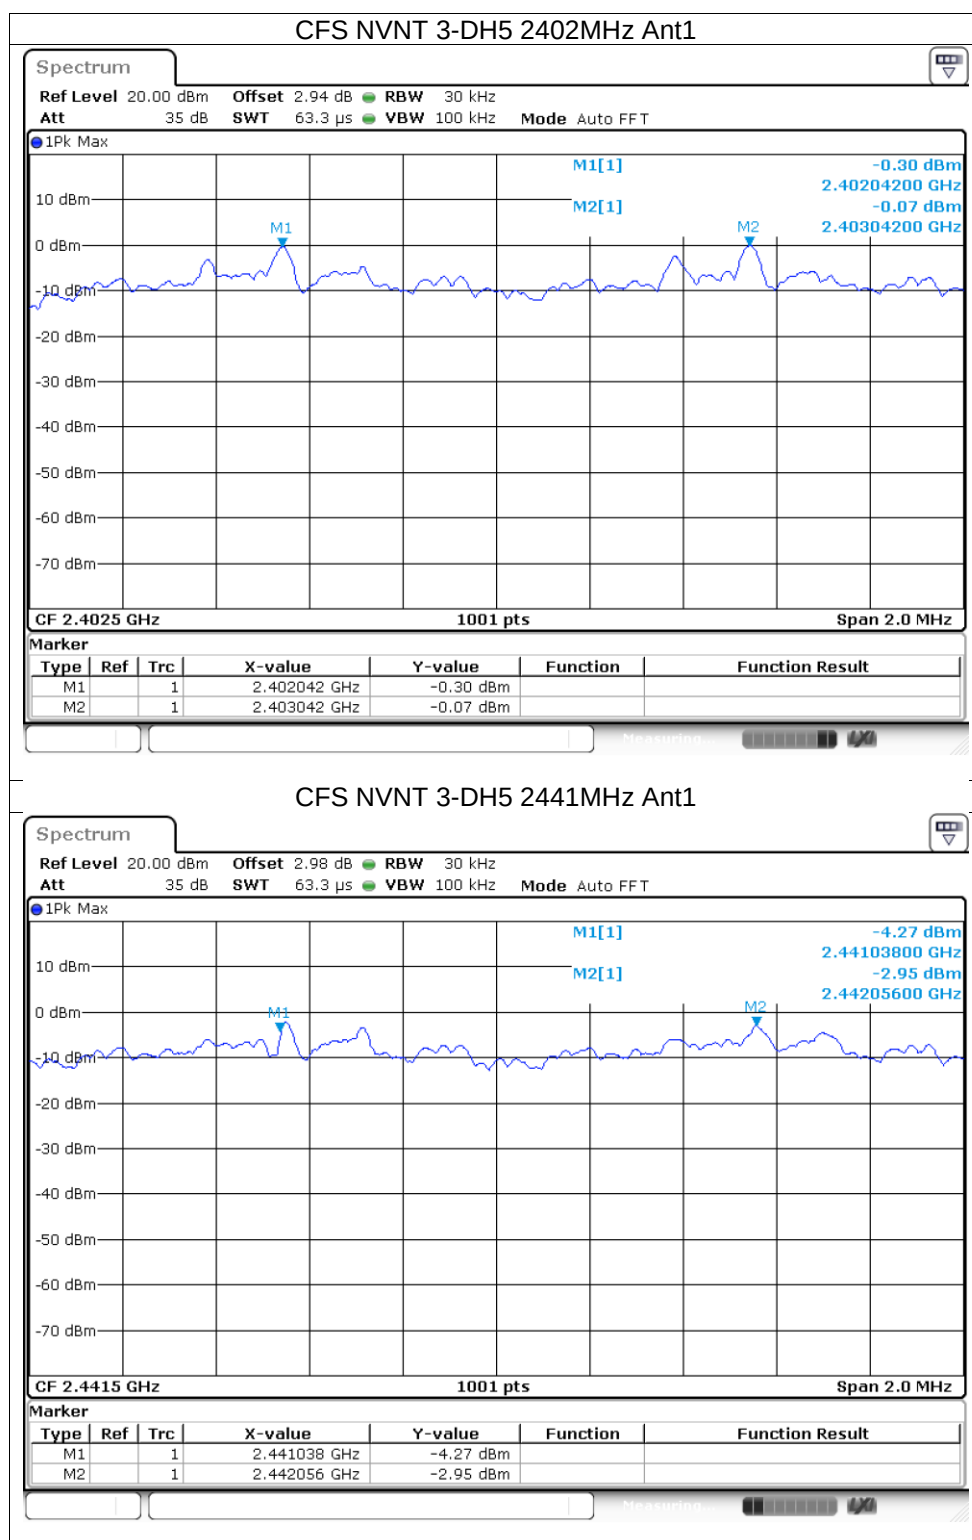


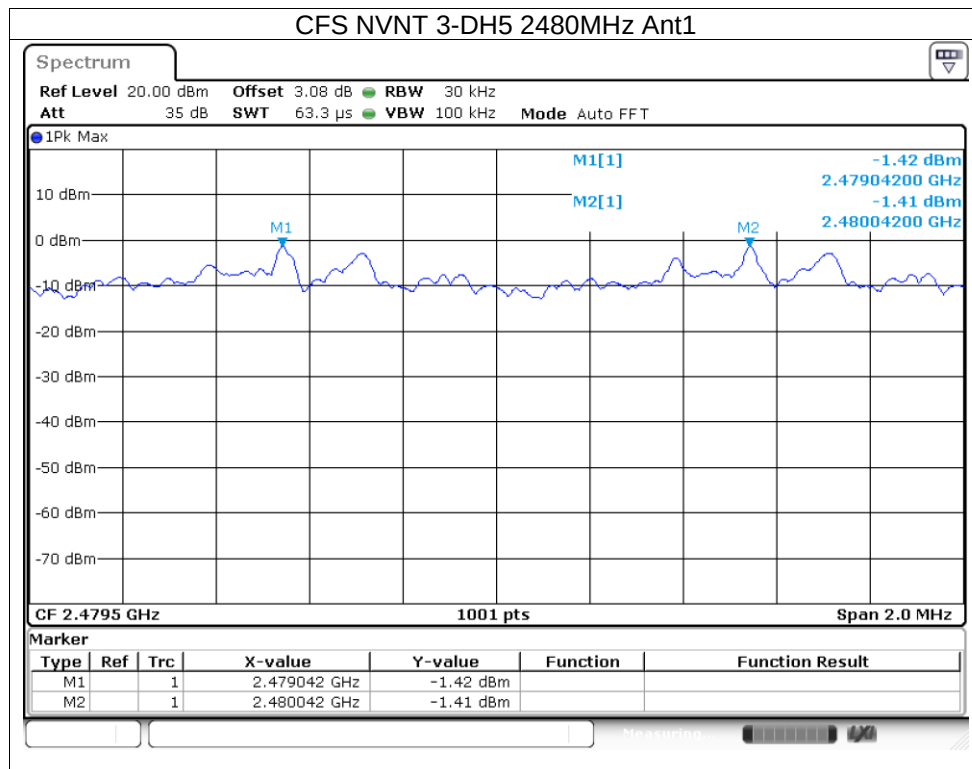

11.2.6 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

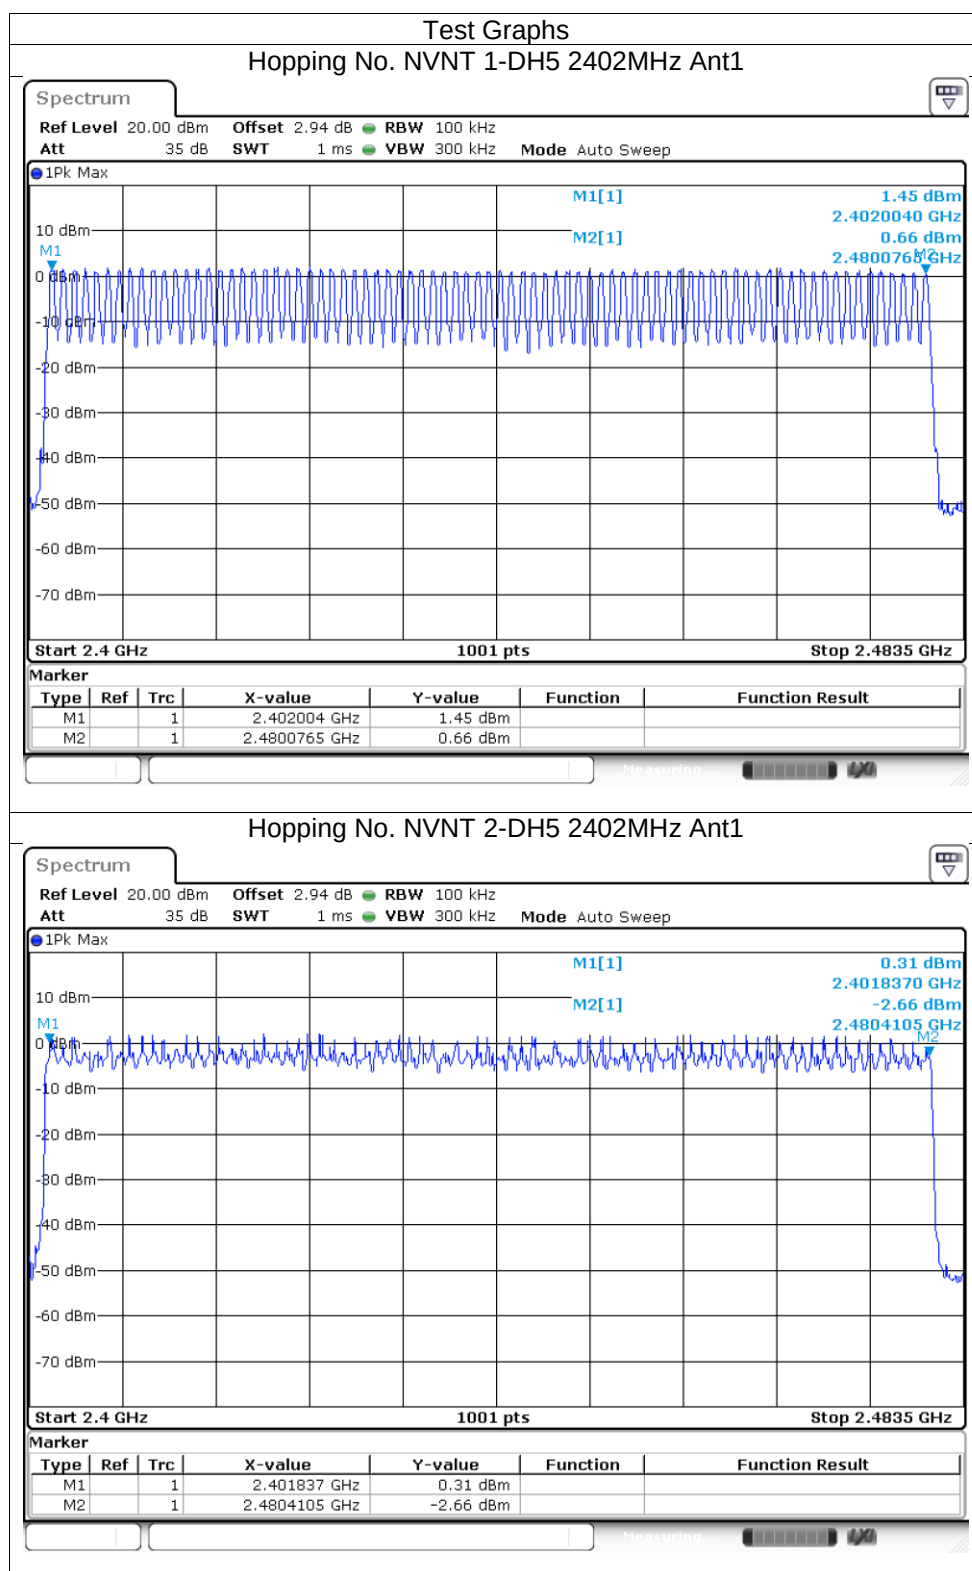


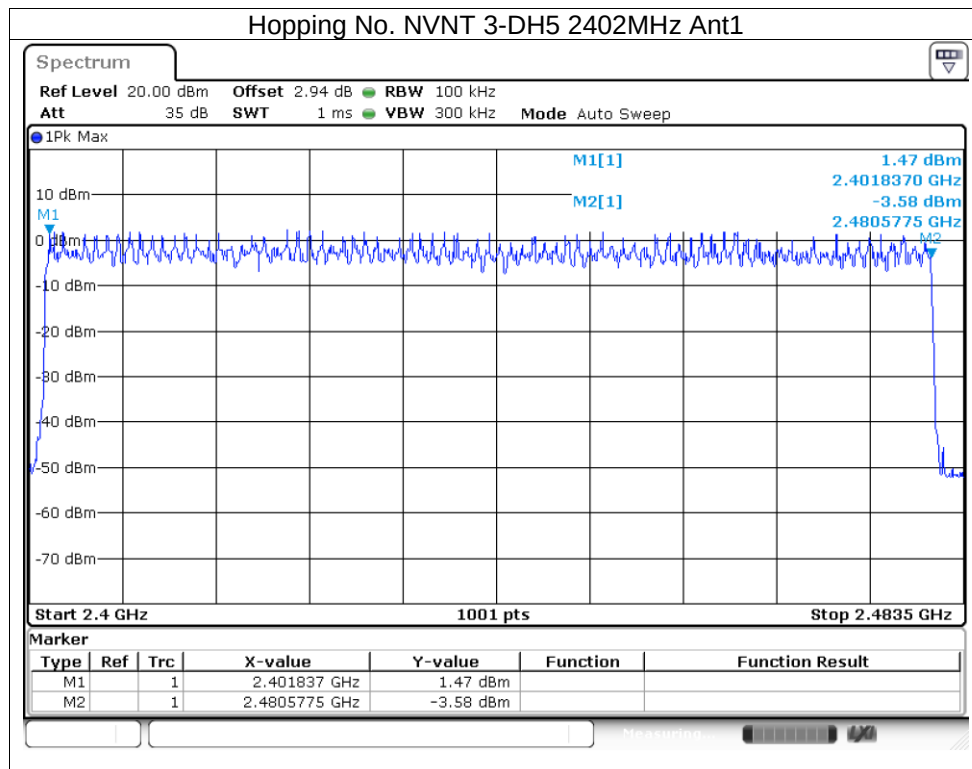



11.2.7 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-49.95	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-50.2	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-51.02	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-53.19	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-50.88	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-50.03	-20	Pass

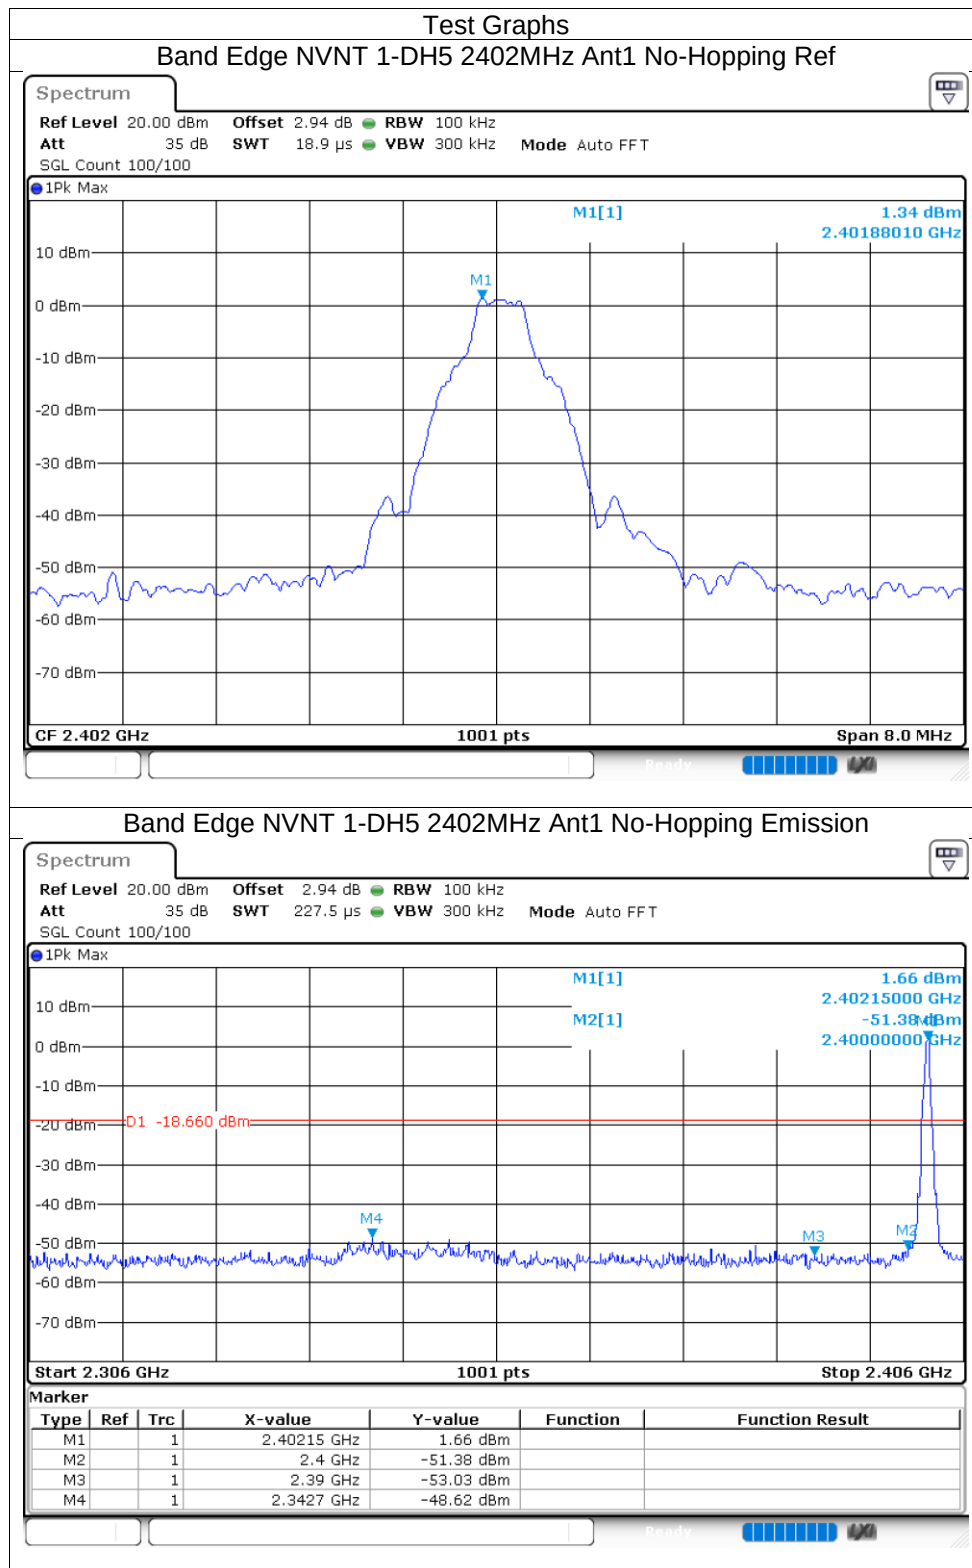


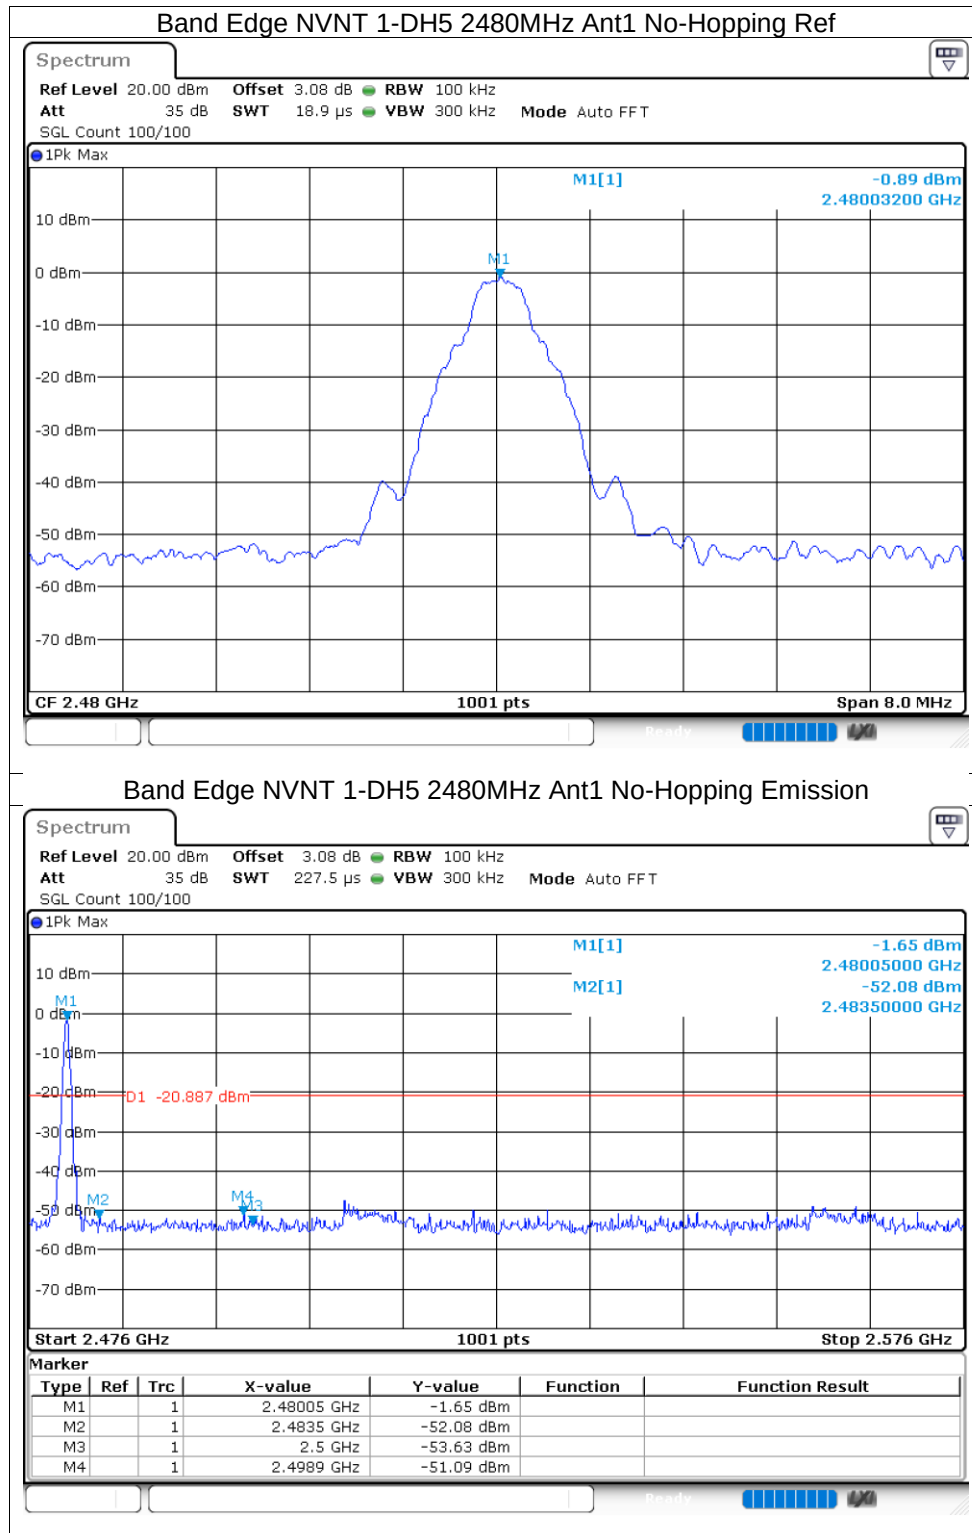

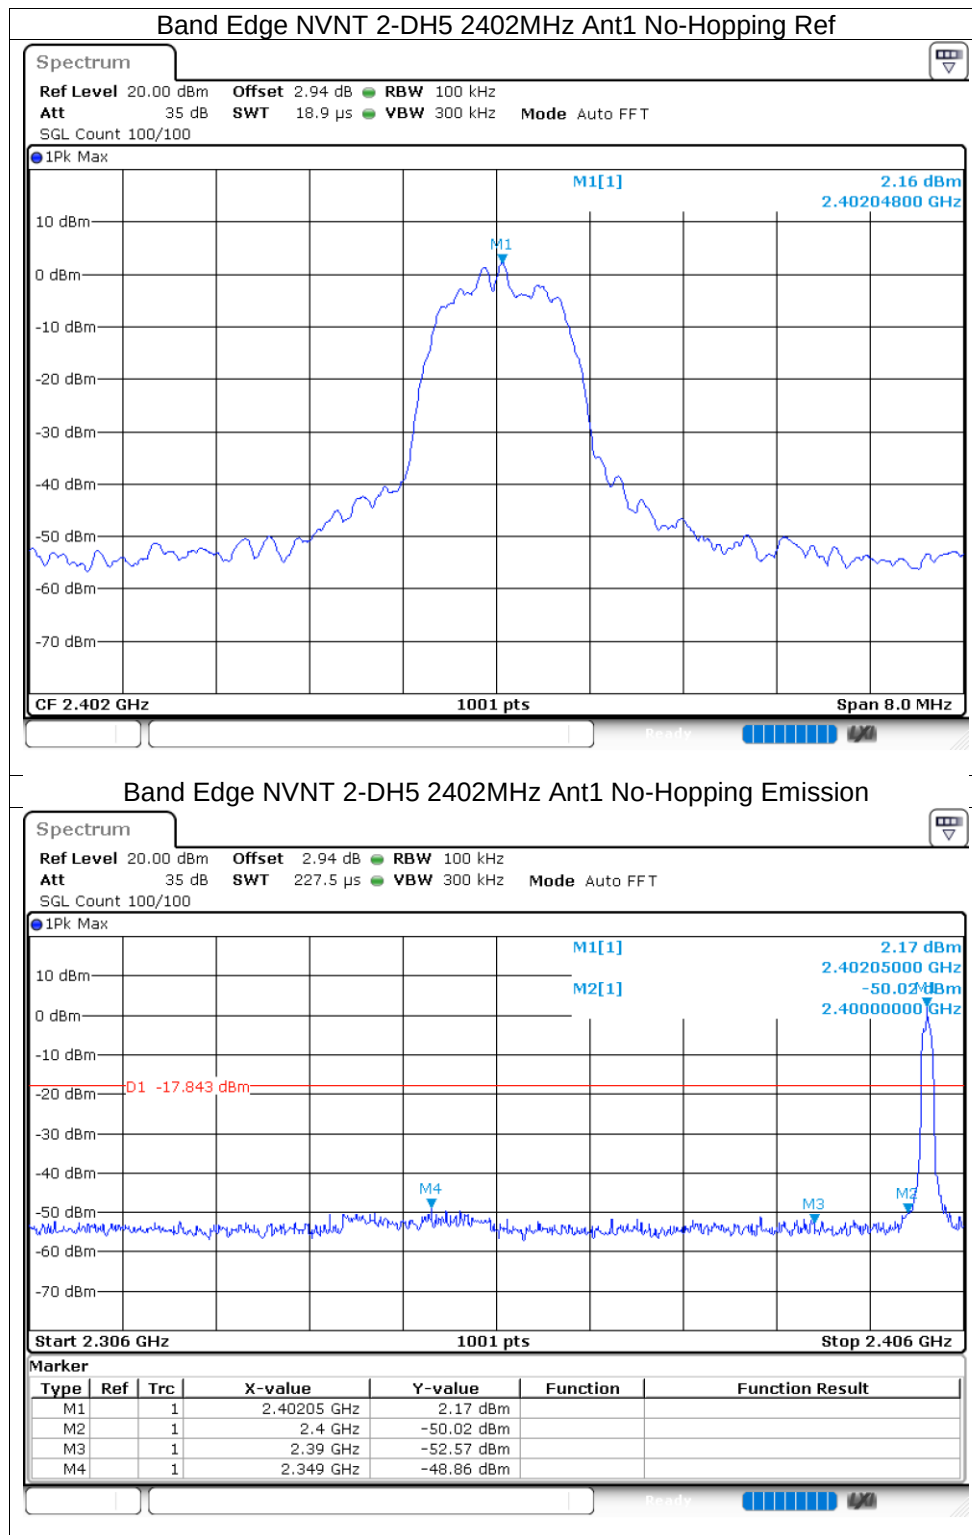

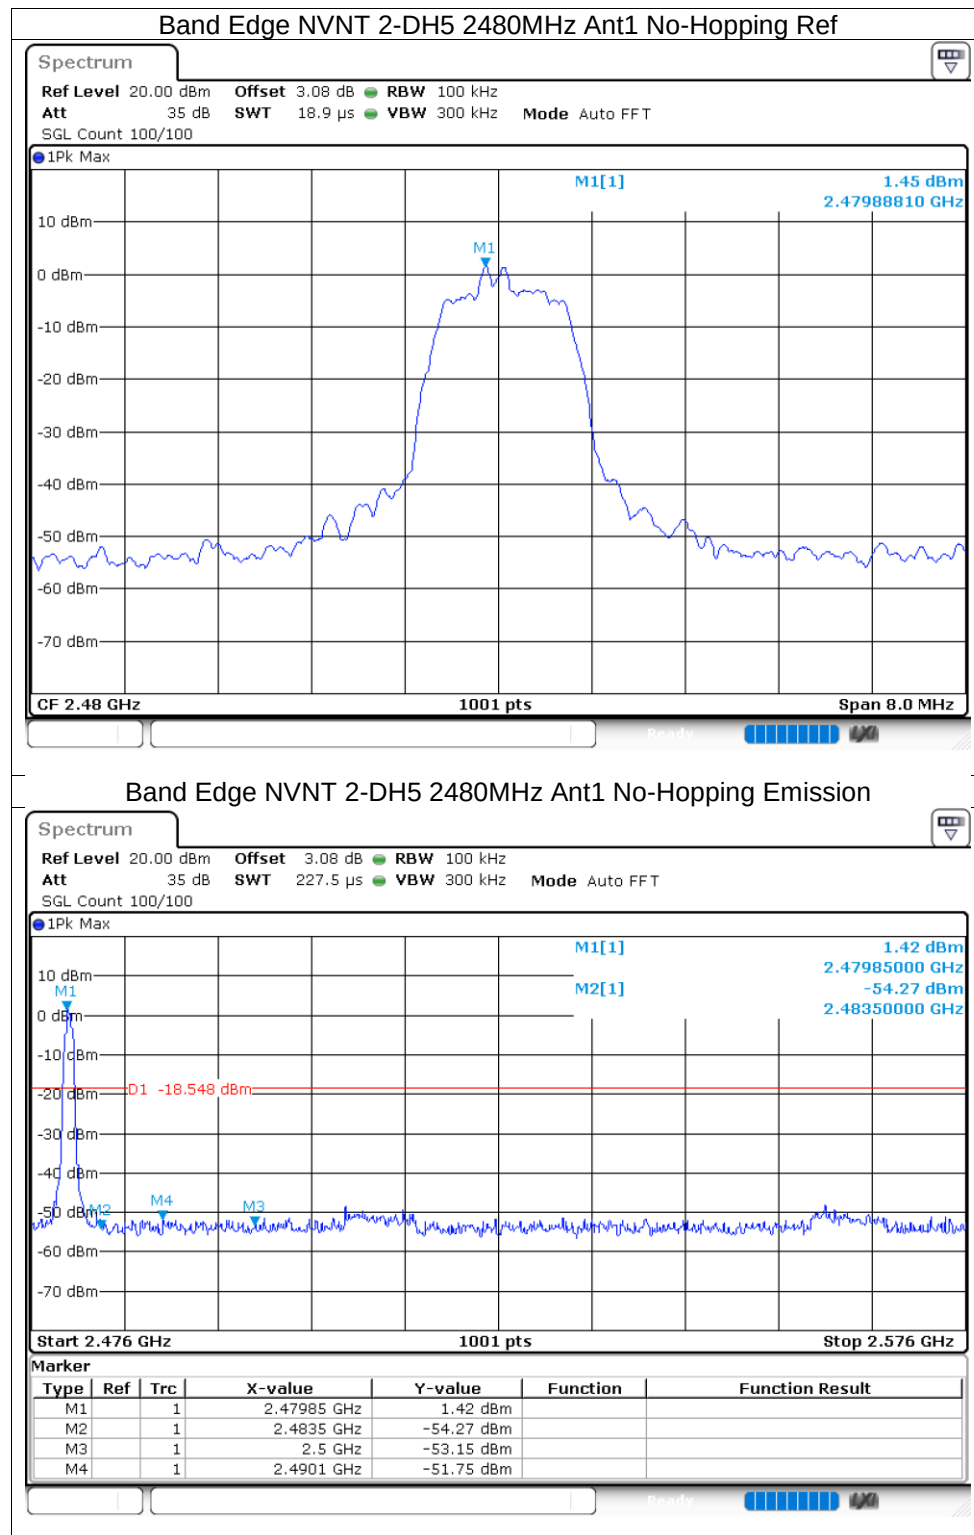


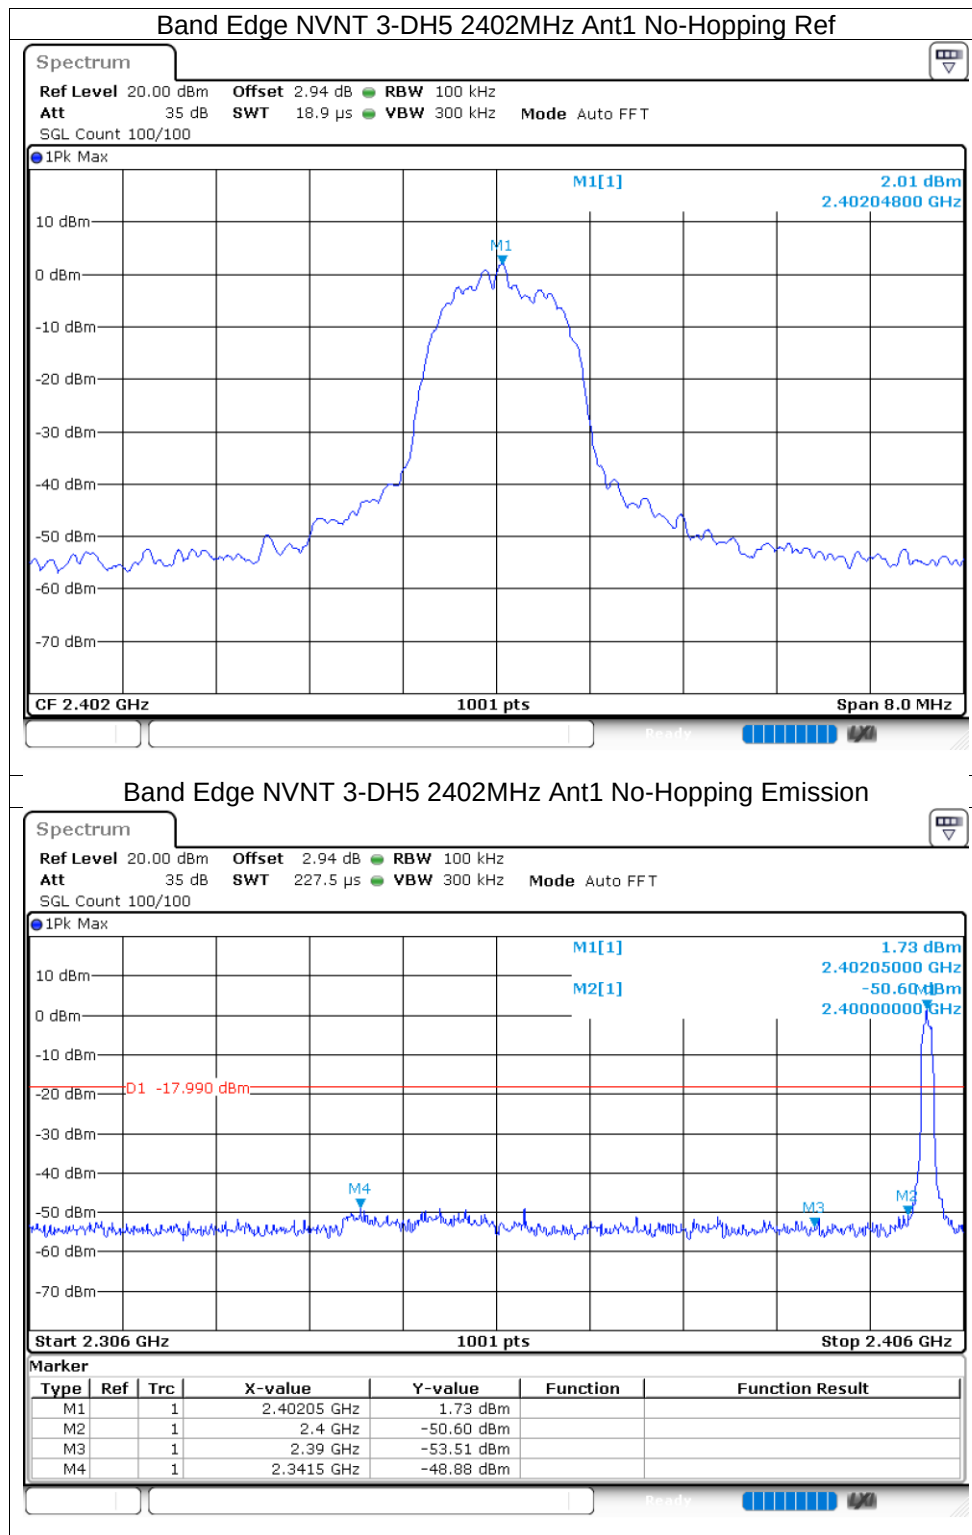


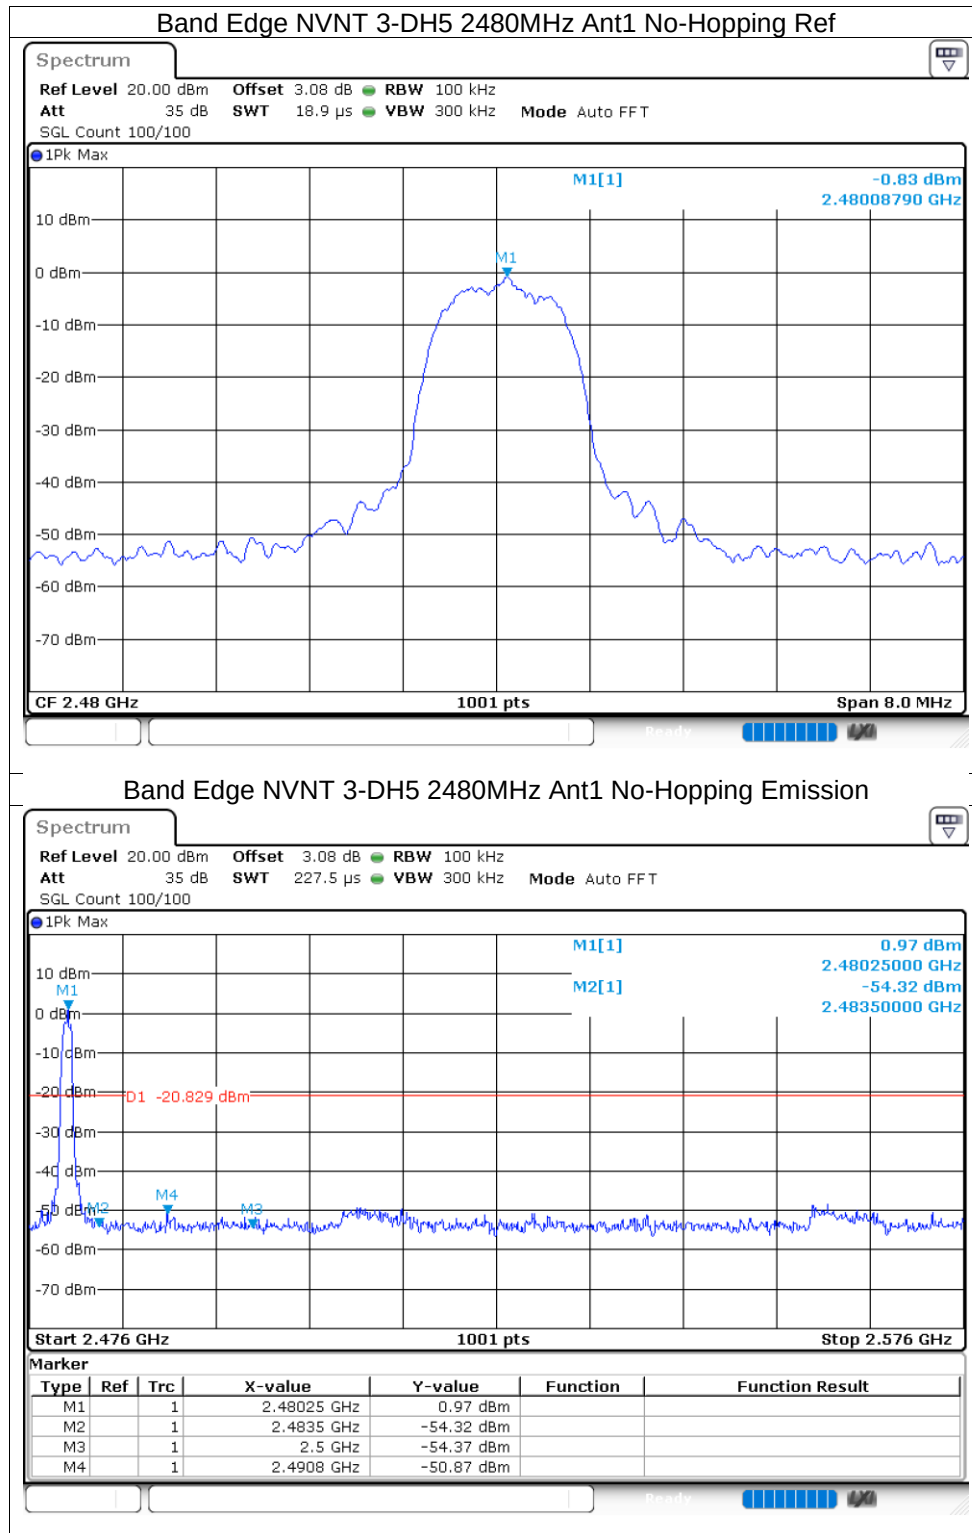


11.2.8 Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-49.88	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-51.19	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-49.57	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-51.83	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-50.55	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-51.05	-20	Pass

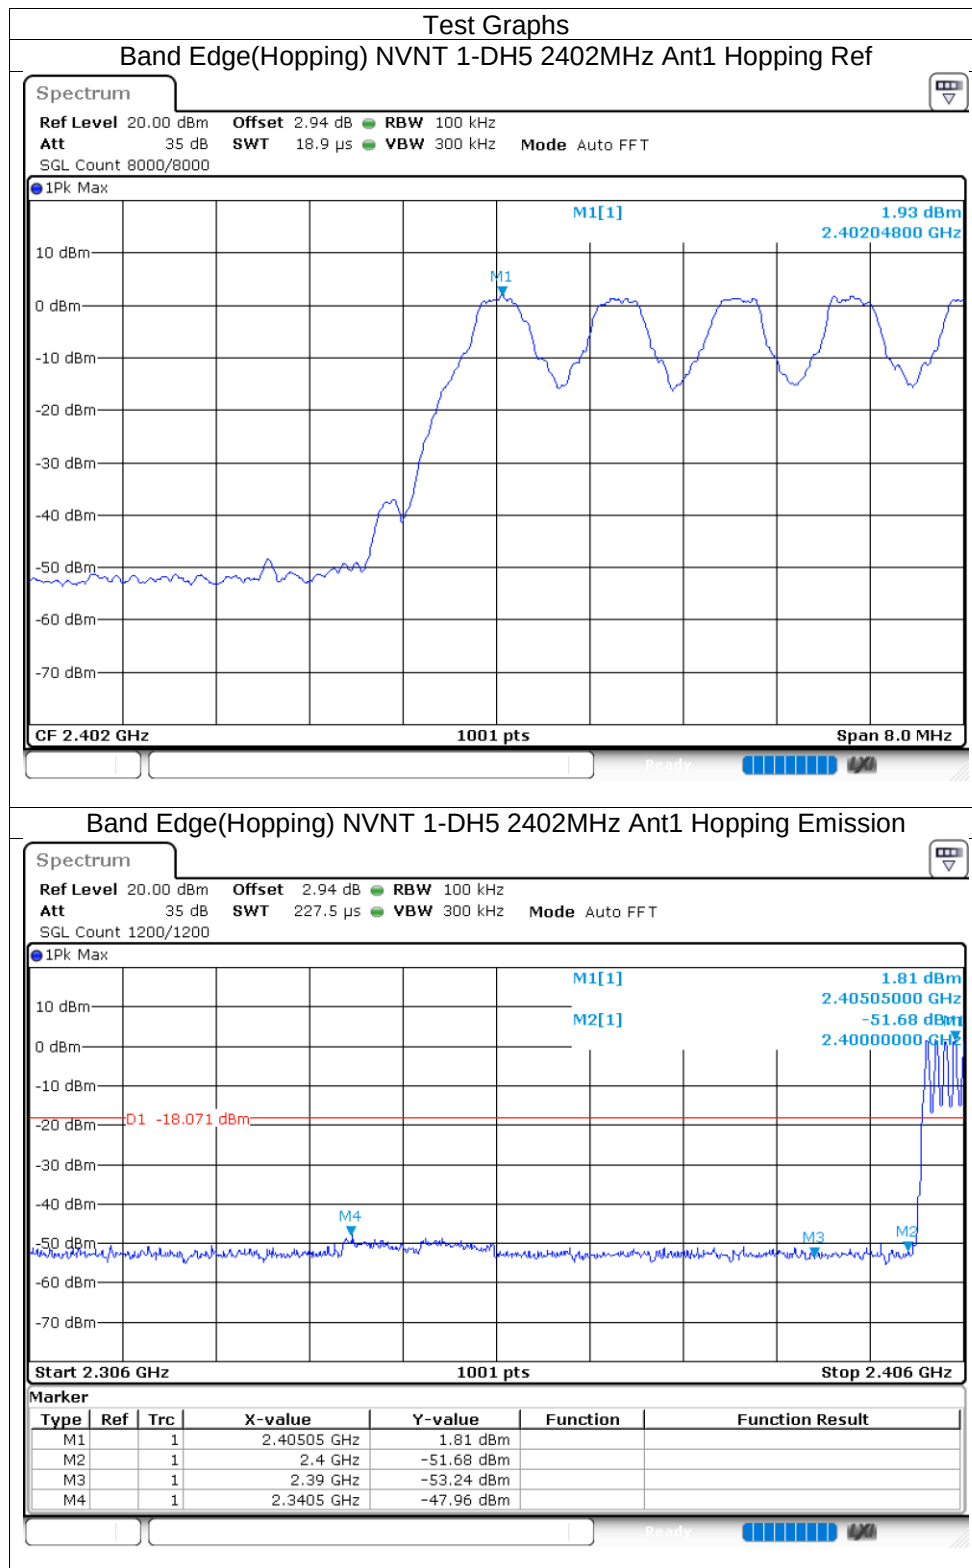

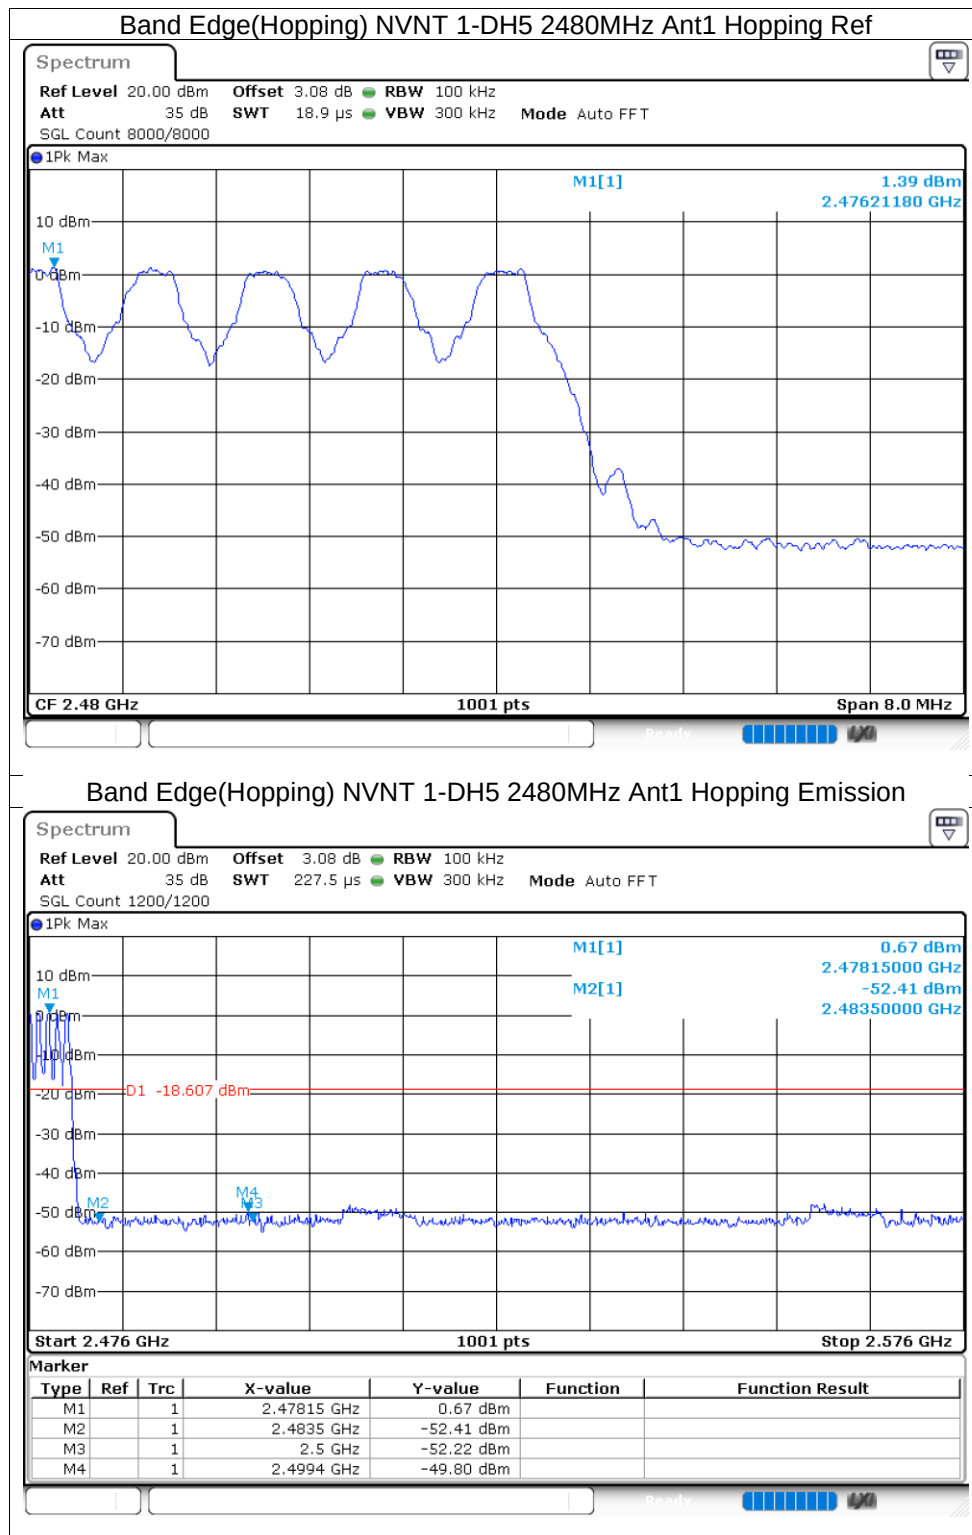


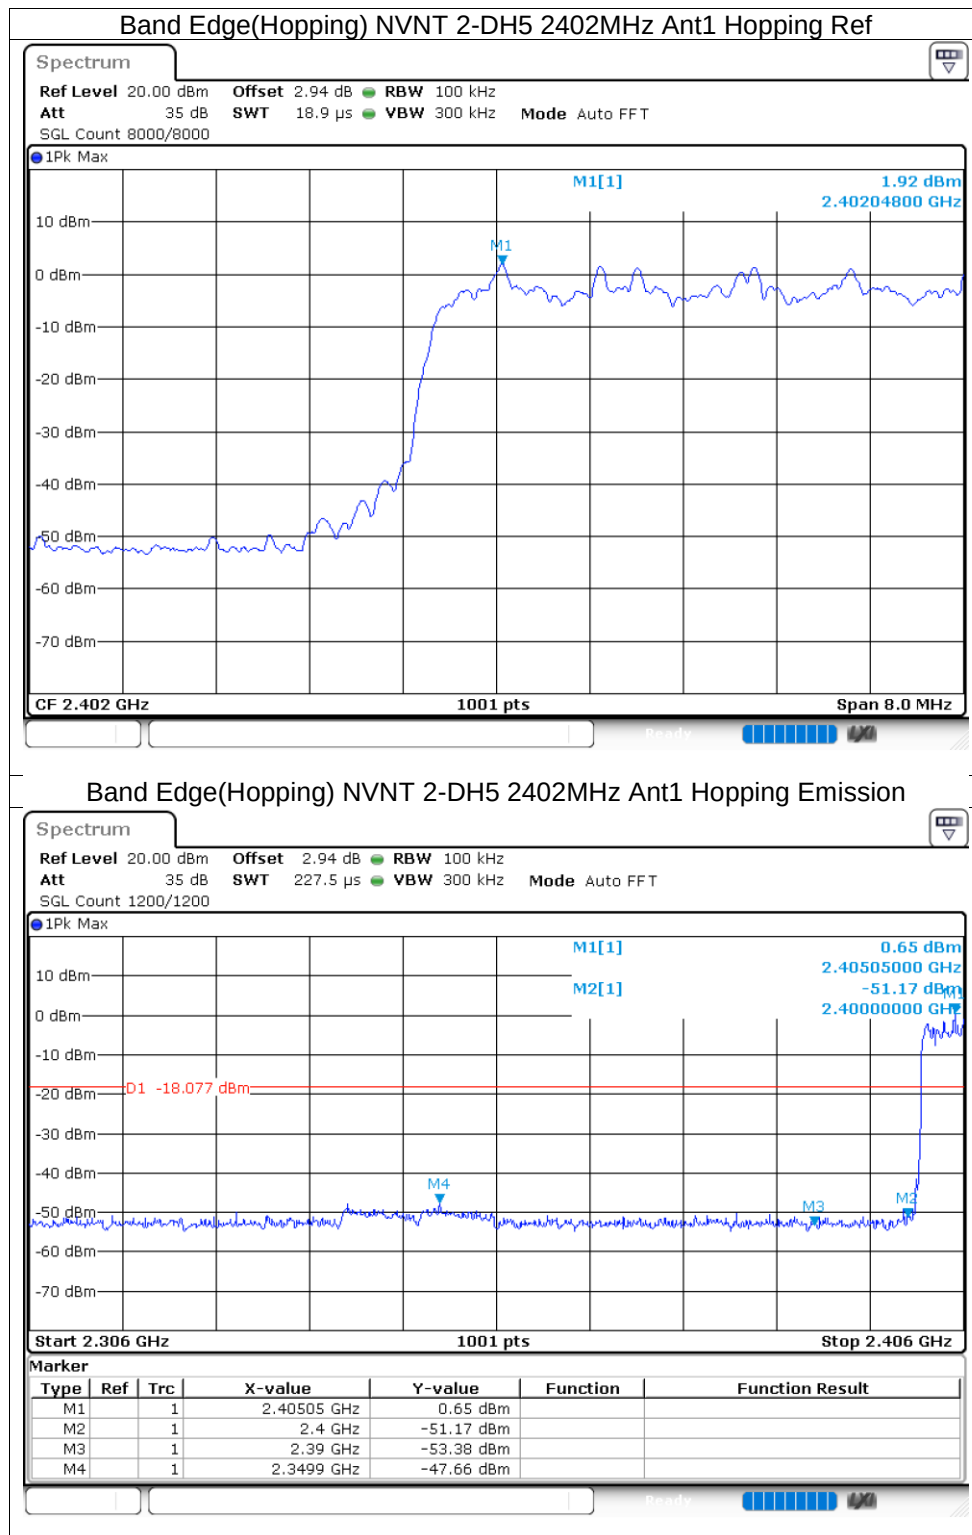



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

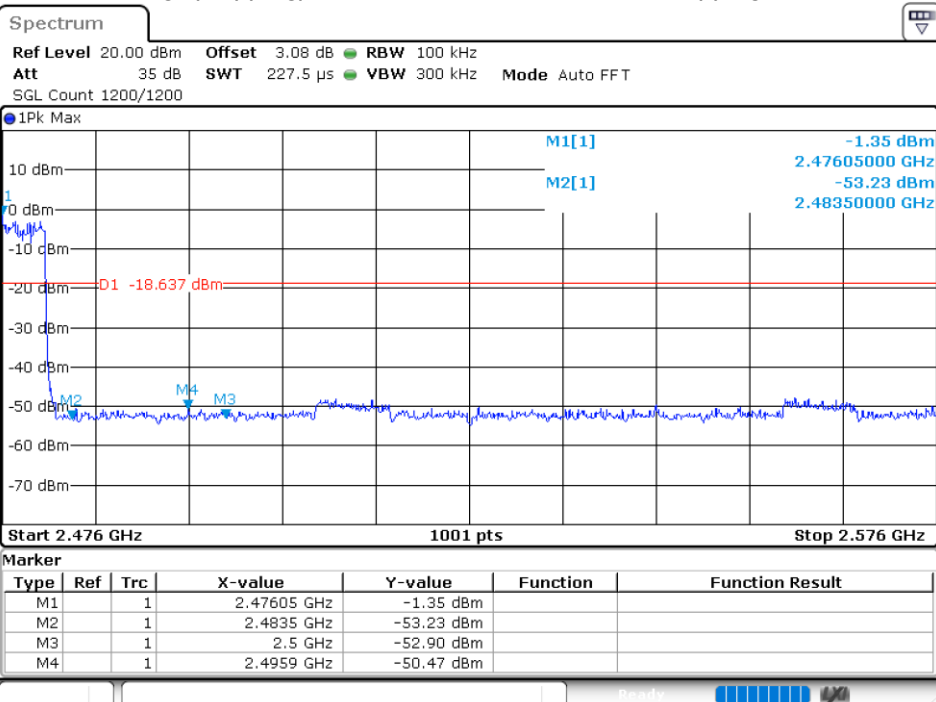

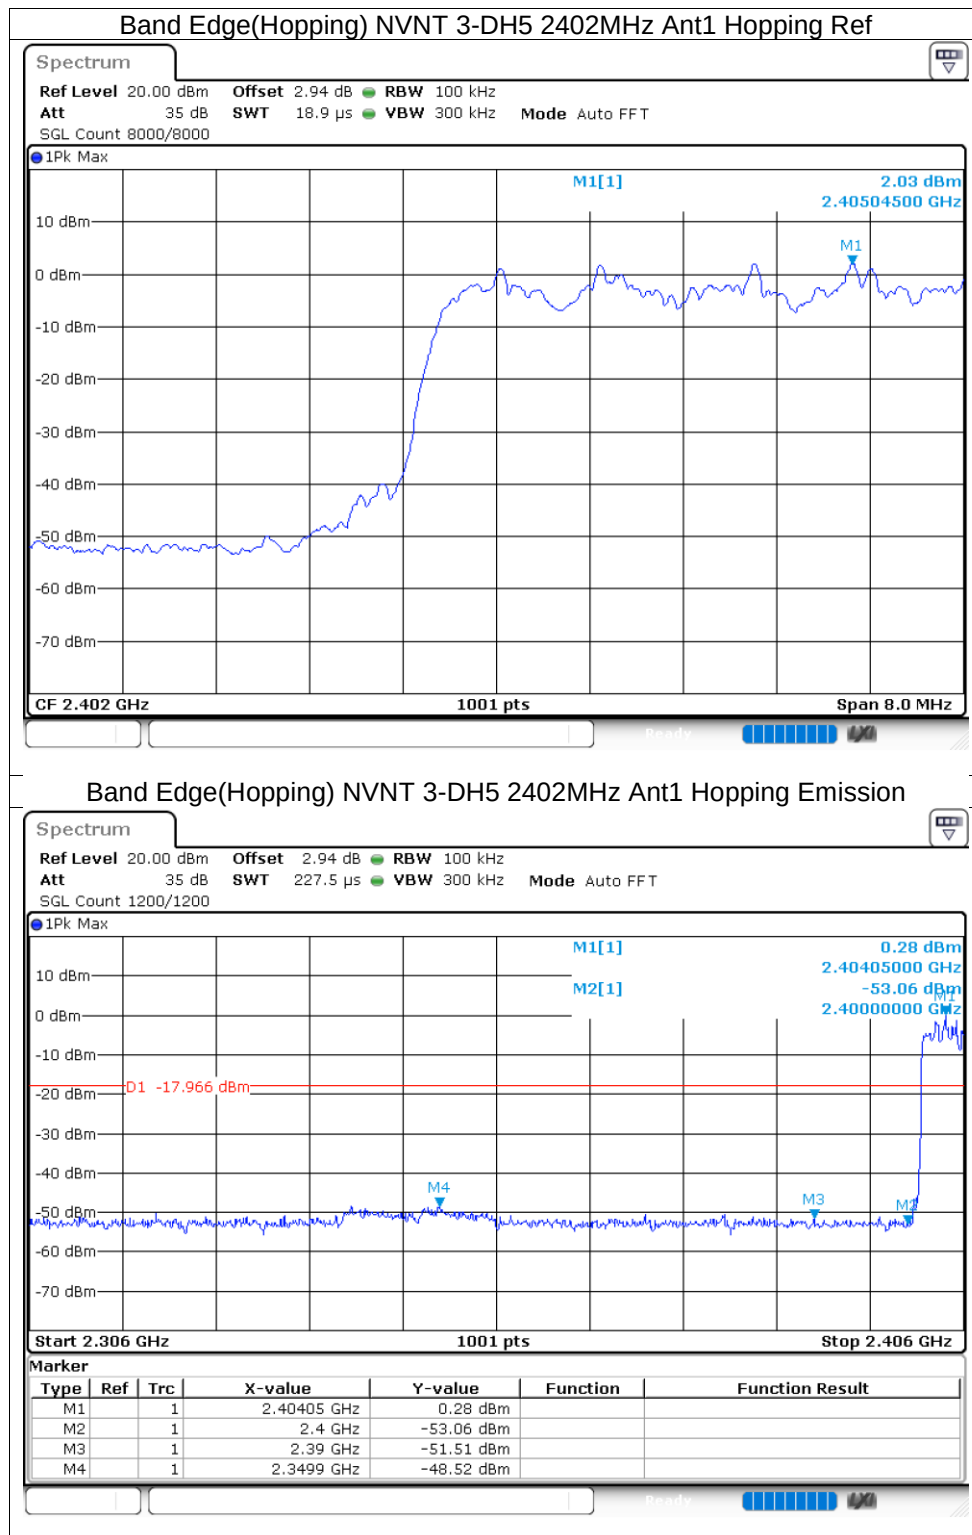

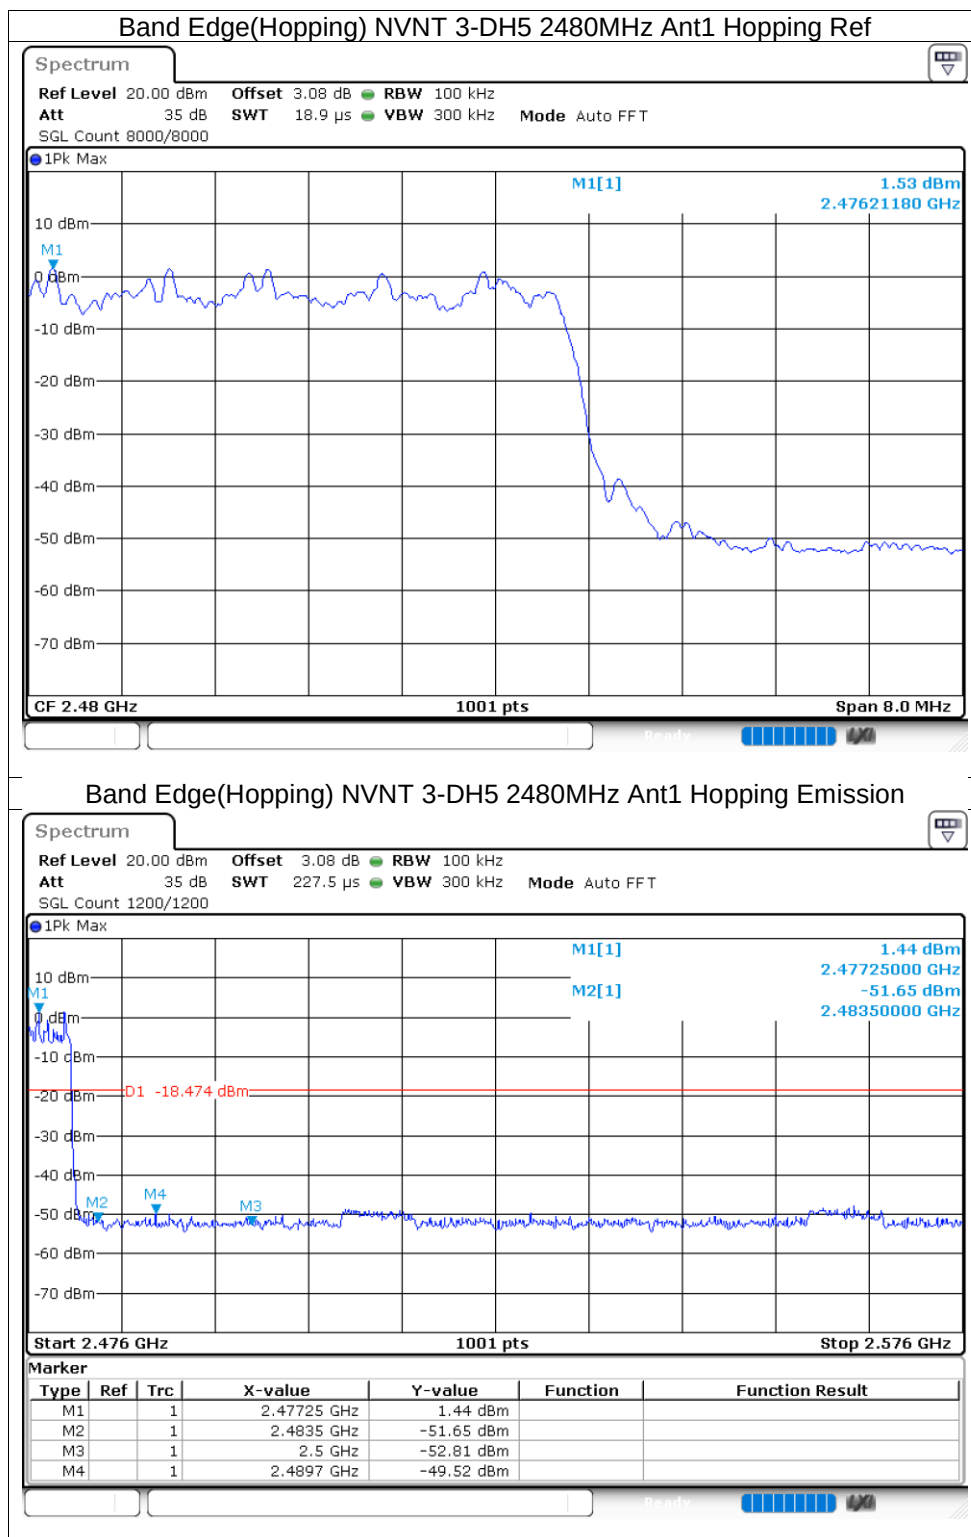

11.2.9 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-36.7	-20	Pass
NVNT	1-DH5	2441	Ant1	-39.64	-20	Pass
NVNT	1-DH5	2480	Ant1	-40.15	-20	Pass
NVNT	2-DH5	2402	Ant1	-38.13	-20	Pass
NVNT	2-DH5	2441	Ant1	-37.05	-20	Pass
NVNT	2-DH5	2480	Ant1	-35.7	-20	Pass
NVNT	3-DH5	2402	Ant1	-42.25	-20	Pass
NVNT	3-DH5	2441	Ant1	-41.17	-20	Pass
NVNT	3-DH5	2480	Ant1	-41.14	-20	Pass

