



**TEST REPORT****Product Name:** Cell phone Signal Booster**Brand Name:** N/A**Model:** CZ05N-LLCPA**Series Model:** N/A**FCC ID:** 2AMPBCZ05N-LLCPA**Applicant:** Foshan Lintratek Technology Co., Ltd.**Address:** Room 101, 8th Building, FanJiaJu business park, South Road SanYou, Chancheng District, Foshan, Guangdong, China**Manufacturer:** Foshan Lintratek Technology Co., Ltd.**Address:** Room 101, 8th Building, FanJiaJu business park, South Road SanYou, Chancheng District, Foshan, Guangdong, China**Standard(s) :** FCC CFR 47 PART 20.21**Date of Receipt:** Dec. 29, 2025**Date of Test:** Dec. 29, 2025~ Feb. 02, 2026**Issued Date:** Feb. 02, 2026**Issued By:** Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community,

Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Reviewed by:
Aalen.Ye**Approved by:**
Allen Wang

Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited. If there is a need to alter or revise this document, the right belongs to Guangdong Asia Hongke Test Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.

Guangdong Asia Hongke Test Technology LimitedB1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street,
Bao'an District, Shenzhen, Guangdong, China.

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1 Description of Device (EUT)	4
1.2 Support equipment List	5
1.3 External I/O Cable	5
1.4 Description of Test Facility	5
1.5 Statement of the Measurement Uncertainty	6
1.6 Measurement Uncertainty	6
1.7 Operation Band	6
2. TEST METHODOLOGY	7
2.1 EUT Configuration	7
2.2 General Test Procedures	7
3. SYSTEM TEST CONFIGURATION	8
3.1 Justification	8
3.2 EUT Exercise Software	8
3.3 Special Accessories	8
3.4 Block Diagram/Schematics	8
3.5 Equipment Modifications	8
3.6 Test Setup	8
4. SUMMARY OF TEST RESULTS	9
5. SUMMARY OF TEST EQUIPMENT	10
6. RADIO SPECTRUM MATTER TEST RESULTS (RF)	12
6.1 Authorized Frequency Band Verification	12
6.2 Maximum Power	18
6.3 Maximum Booster Gain Computation	33
6.4 Intermodulation Product	34
6.5 Out Of Band Emissions	45
6.6 Spurious Emissions At Antenna Terminals	67
6.7 Noise Limits	84
6.8 Uplink Inactivity	97
6.9 Variable Booster Gain	102
6.10 Occupied Bandwidth	108
6.11 Oscillation Detection	120
6.12 Radiated Spurious Emissions	138
7. TEST SETUP PHOTOGRAPHS OF EUT	142
8 EUT PHOTO	144

Report revise record

Report Version	Issued Date	Notes
M0	Feb. 02, 2026	Initial release

1.GENERAL INFORMATION

1.1 Description of Device (EUT)

Product Name:	Cell phone Signal Booster		
Model/Type reference:	CZ05N-LLCPA		
Serial Model:	N/A		
Power Supply:	DC 5V from AC ADAPTER or DC 12V from CAR CHARGER		
Adapter Information:	Model number:JSY-0520 INPUT: AC 100-240V~ 50/60Hz, 0.3A OUTPUT: DC5V=2000mA		
Car charger:	INPUT: DC12-30V output: DC5.0V=30000mA		
Hardware Version:	CZ_V1.3		
Software Version:	R-CZ-5P_V1.3		
Sample(s) Status:	AiTSZ-260303005-1(Normal sample) AiTSZ-260303005-2(Engineer sample)		
Operation frequency:	Frequency	Uplink (MHz)	Downlink (MHz)
	Cellular	824-849	869-894
	Broadband PCS	1850-1915	1930-1995
	AWS-1	1710-1755	2110-2155
	Low A-E Blocks	699-716	729-746
	700 MHz Upper C Block	777-787	746-756
Remark: The above DUT's information was declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

Mode	Frequency(MHz)	Antenna Gain(dBi)	Cable loss(dB)
UP LINK	824-849	0	0.5
	1850-1915	1.8	1
	1710-1755	1.8	1
	699-716	0	0.5
	777-787	0	0.5
DOWNLINK	869-894	0	/
	1930-1995	1.8	/
	2110-2155	1.8	/
	729-746	0	/
	746-756	0	/

Note:

#: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Shen Zhen SIMSUKIAN ELECTRONIC Technology co., Ltd	AC/DC Adapter	SSK0500200U1070-B	---	FCC SDoc

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Antenna Port	2	N/A
DC IN Port	1	N/A

1.4 Description of Test Facility

Test Laboratory:

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test	Measurement Uncertainty	Notes
Power Line Conducted Emission	9KHz~30MHz ± 1.20 dB	(1)
Radiated Emission	9KHz~30MHz ± 3.10 dB	(1)
Radiated Emission	30MHz~1GHz ± 3.75 dB	(1)
Radiated Emission	1GHz~18GHz ± 3.88 dB	(1)
Radiated Emission	18GHz~40GHz ± 3.88 dB	(1)
RF power, conducted	30MHz~6GHz ± 0.16 dB	(1)

The report uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty Multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%

1.7 Operation Band

Uplink Frequency(MHz)	Downlink Frequency(MHz)
824-849	869-894
1850-1915	1930-1995
1710-1755	2110-2155
699-716	729-746
777-787	746-756

2. TEST METHODOLOGY

All tests and measurements indicated in this document were performed in accordance with:

- 1) The Code of federal Regulations Title 47, Part 2, Part 22, Part 24, Part 27, Part 20.21;
- 2) ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services;
- 3) KDB 935210 D03 Signal Booster Measurements v04r04.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 General Test Procedures

2.2.1 Radiated spurious emissions

The EUT is placed on the turntable, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated spurious emissions measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2020

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a continuous transmits condition.

3.2 EUT Exercise Software

N/A

3.3 Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

N/A

3.6 Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Item	Standard	Result
Authorized Frequency Band Verification	Part 20.21(e)(3)	Pass
Maximum Power	Part 20.21(e)(8)(i)(D), Part 20.21(e)(8)(i)(B), Part 20.21(e)(4)	Pass
Maximum Booster Gain Computation	Part 20.21(e)(8)(i)(C)(2), Part 20.21(e)(8)(i)(B), Part 20.21(e)(4)	Pass
Intermodulation Product	Part 20.21(e)(8)(i)(F)	Pass
Out Of Band Emissions	Part 20.21(e)(8)(i)(E)	Pass
Spurious Emissions At Antenna Terminals	Part 2.1051	Pass
Noise Limits	Part 20.21(e)(8)(i)(A), Part 20.21(e)(8)(i)(H), Part 20.21(e)(4)	Pass
Uplink Inactivity	Part 20.21(e)(8)(i)(I), Part 20.21(e)(4)	Pass
Variable Booster Gain	Part 20.21(e)(8)(i)(C)(1), Part 20.21(e)(8)(i)(H)	Pass
Occupied Bandwidth	Part 2.1049	Pass
Oscillation Detection	Part 20.21(e)(8)(ii)(A), Part 20.21(e)(5)	Pass
Radiated Spurious Emissions	Part 2.1053	Pass
Spectrum block filtering test procedure	Part 20.21(e)(8)(i)(B), Part 20.21(e)(3)	N/A

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

5. SUMMARY OF TEST EQUIPMENT


Conducted Method Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
☒ 1	MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2025.11.24	2026.11.23
☒ 2	WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2025.11.24	2026.11.23
☒ 3	ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45094854	2025.11.24	2026.11.23
☒ 4	MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2025.11.24	2026.11.23
☒ 5	Analog signal generator	Agilent	E8257	MY51554256	2025.11.24	2026.11.23
☒ 6	Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2025.11.25	2026.11.24
☒ 7	Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2025.11.24	2026.11.23
☒ 8	RF Control Unit	TST	TST-Full	S01	/	/
☒ 9	RF Test software	TST	V2.0	/	/	/
☒ 10	10dB Attenuator	SU	SATT0810S2	N/A	2025.09.23	2026.09.22
☒ 11	20dB Attenuator	SU	SATT0810S2	N/A	2025.09.23	2026.09.22
☒ 12	30dB Attenuator	SU	SATT0810S2	N/A	2025.09.23	2026.09.22
☒ 13	5dB Attenuator	SU	SATT0810S2	N/A	2025.09.23	2026.09.22
☒ 14	Band Reject Filter Group	COM-MW	ZHPF6-M1000-18000	1121	2025.09.23	2026.09.22
☒ 15	Band Reject Filter Group	COM-MW	ZHPF6-L500-3000	1752	2025.09.23	2026.09.22
☒ 16	Band Reject Filter Group	COM-MW	ZHPF6-C3000-18000	174	2025.09.23	2026.09.22
☒ 17	Band Reject Filter Group	COM-MW	ZHPF6—M8000-18000	1331	2025.09.23	2026.09.22
☒ 18	Band Reject Filter Group	COM-MW	ZHPF6-M6500-18000	547	2025.09.23	2026.09.22

Radiation Method Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
☒ 1	EMI Measuring Receiver	R&S	ESR	101160	2025.09.23	2026.09.22
☒ 2	Low Noise Pre Amplifier	SCHWARZBECK	BBV 9745	00282	2025.09.23	2026.09.22
☒ 3	Low Noise Pre Amplifier	CESHENG	CSKJLNA231 016A	CSKJLNA23 1016A	2025.09.23	2026.09.22
☒ 4	Spectrum Analyzer	R&S	FSV40	101470	2025.09.23	2026.09.22
☒ 5	Passive Loop	ETS	6512	00165355	2024.08.29	2026.08.28
☒ 6	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9168	01434	2024.08.29	2027.08.28

☒ 7	Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	452	2024.08.29	2027.08.28
☒ 8	Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA91703 67	2024.08.28	2027.08.27
☒ 9	6dB Attenuator	JFW	50FPE-006	4360846-94 9-1	2025.09.23	2026.09.22
☒ 10	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A

6. RADIO SPECTRUM MATTER TEST RESULTS (RF)

6.1 Authorized Frequency Band Verification

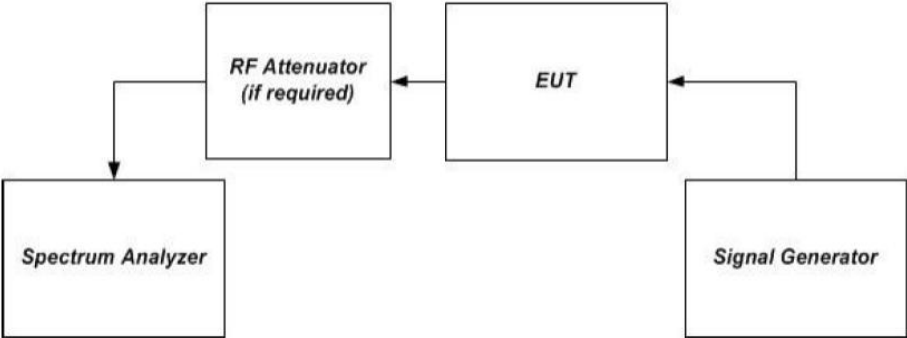Test Requirement:	This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In other words, the signal booster shall reject amplification of other signals outside of its pass band. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator (if required)] RA --> SA[Spectrum Analyzer] </pre>
Procedure:	- Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor) port connected to the spectrum analyzer. - Set the spectrum analyzer resolution bandwidth (RBW) for 100 kHz with the video bandwidth (VBW) ≥ 3 the RBW, using a PEAK detector with the MAX HOLD function. - Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1MHz. - Set the signal generator for CW mode and tune to the center frequency of the operational band under test. - Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer. - Slowly increase the signal generator power level until the output signal reaches the AGC operational level. - Reduce the signal generator power to a level that is 3 dB below the level noted above, then manually reset the EUT (e.g., cycle ac/dc power). - Reset the spectrum analyzer span to 2 the width of the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep 2 the width of the CMRS band using the sweep function. The AGC must be deactivated throughout the entire sweep. - Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on). - Capture the spectrum analyzer trace for inclusion in the test report. - Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

Atmospheric Pressure:	1010 mbar
-----------------------	-----------

Agilent Spectrum Analyzer - Swept SA

RF SQ Z AC INT REF ALIGN/AUTO 07:03:24 AM Jan 12, 2026

Center Freq 881.500000 MHz

PNO: Fast IF Gain: Low Trig: Free Run #Atten: 36 dB

Avg Type: Log-Pwr Avg/Hold: >100/100

TRACE 1 2 3 4 5
TYPE M M M M M M M M
DET P N N N N N N

Ref Offset 10 dB
Ref 36.00 dBm

Mkr3 882.95 MHz
-1.124 dBm

10 dB/div
Log

Center 881.50 MHz
#Res BW 100 kHz

Span 50.00 MHz
Sweep 4.800 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	869.00 MHz	-3.592 dBm			
2	N	1	f	894.00 MHz	-4.832 dBm			
3	N	1	f	882.95 MHz	-1.124 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq
881.500000 MHz


Start Freq
856.500000 MHz

Stop Freq
906.500000 MHz


CF Step
5.000000 MHz
Man

Freq Offset
0 Hz


UL1710-1755MHz

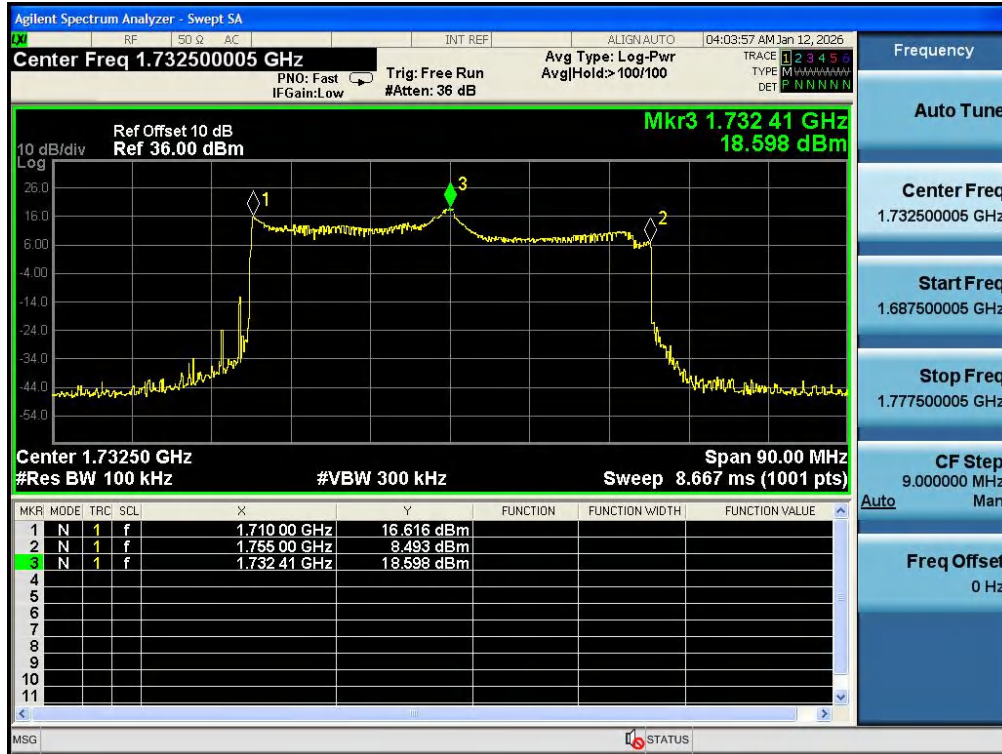


DL2110-2155MHz

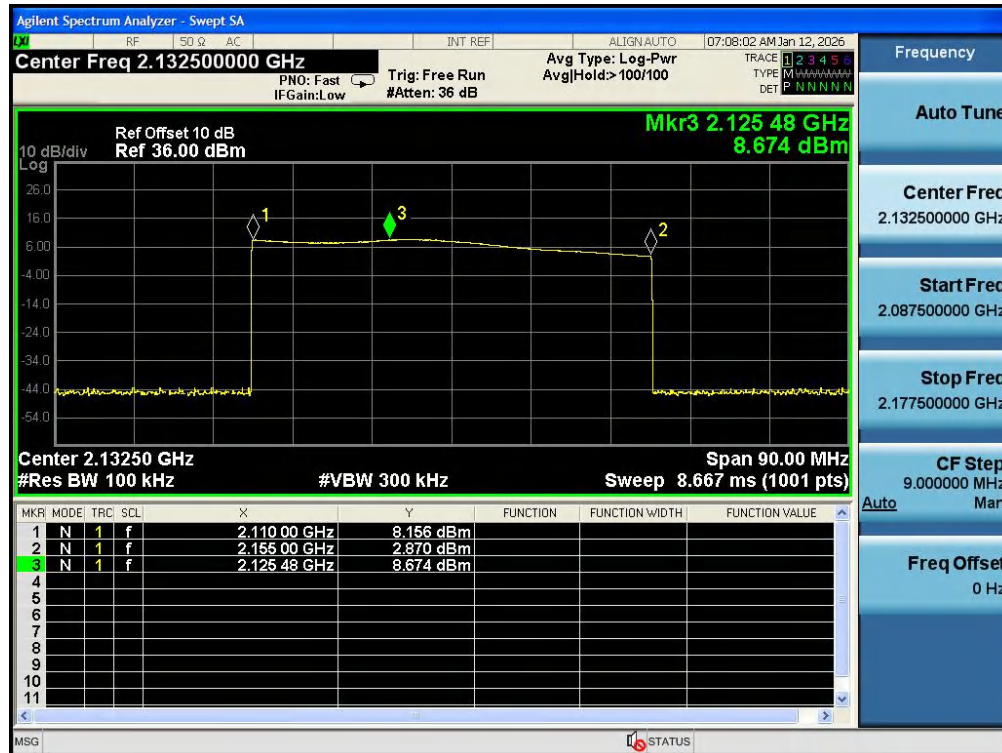


UL699-716MHz

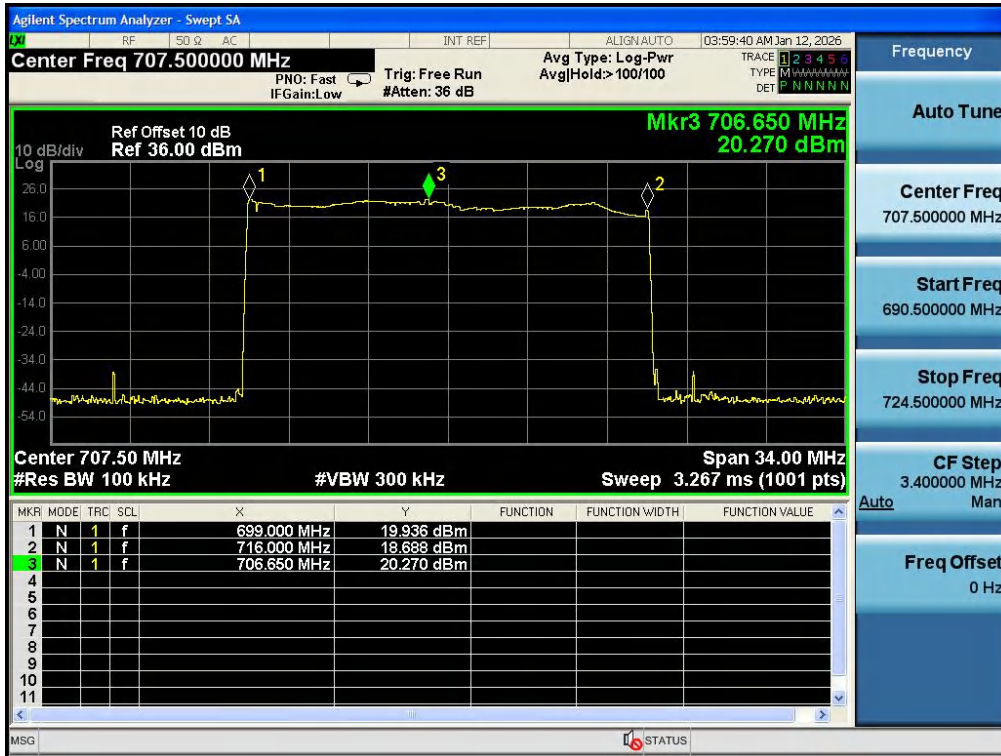


DL729-746MHz

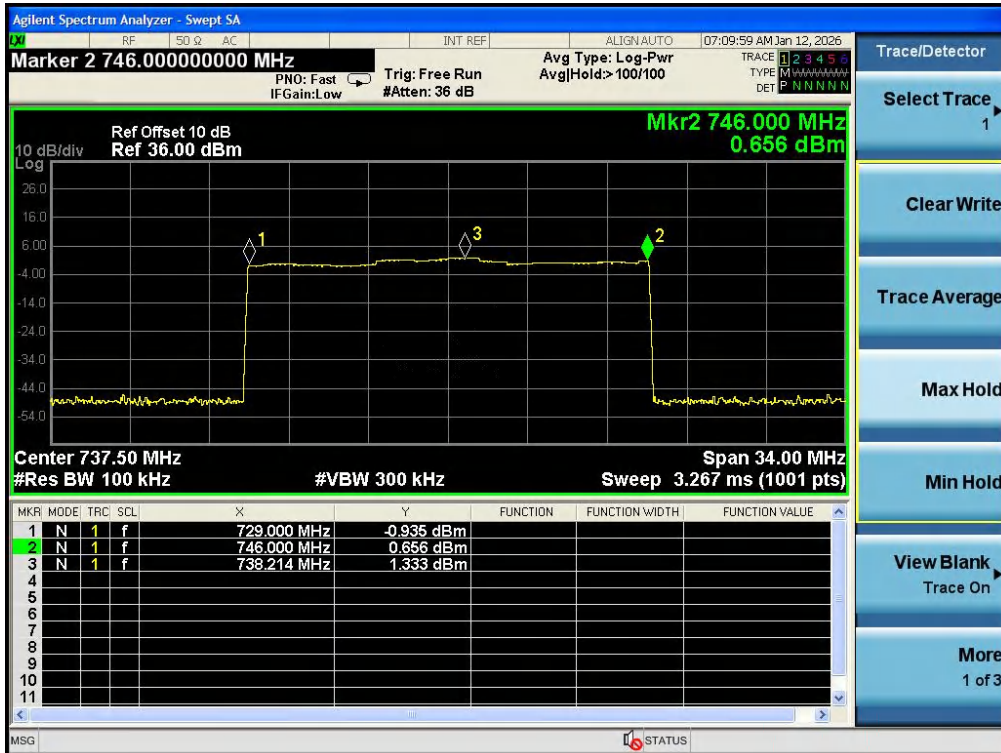

UL777-787MHz

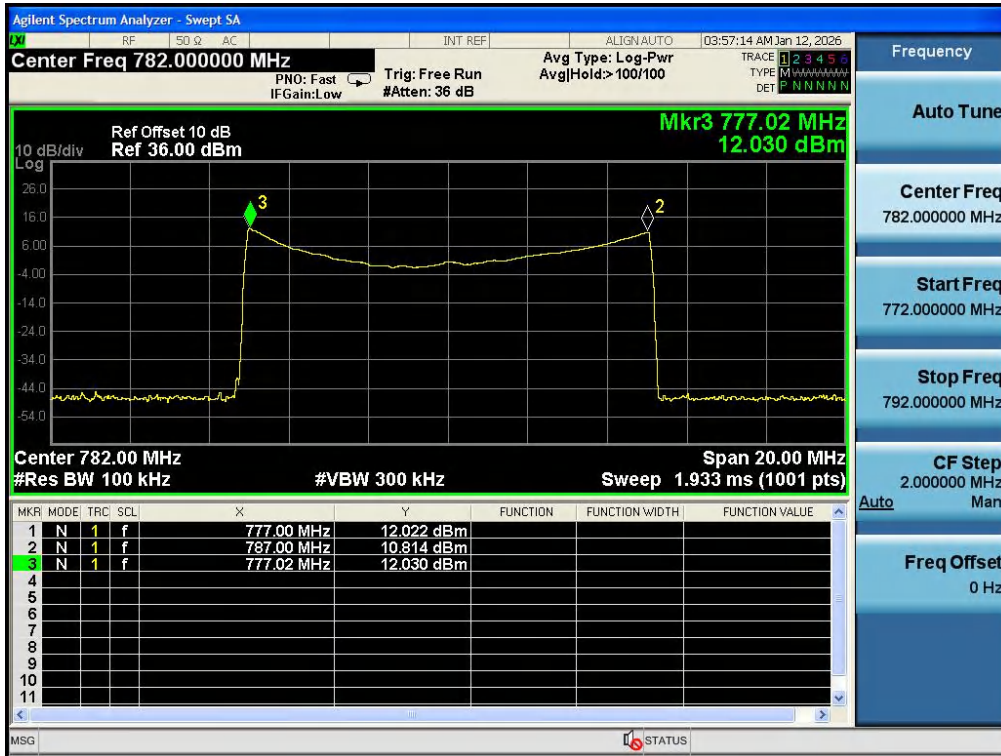


DL746-756MHz

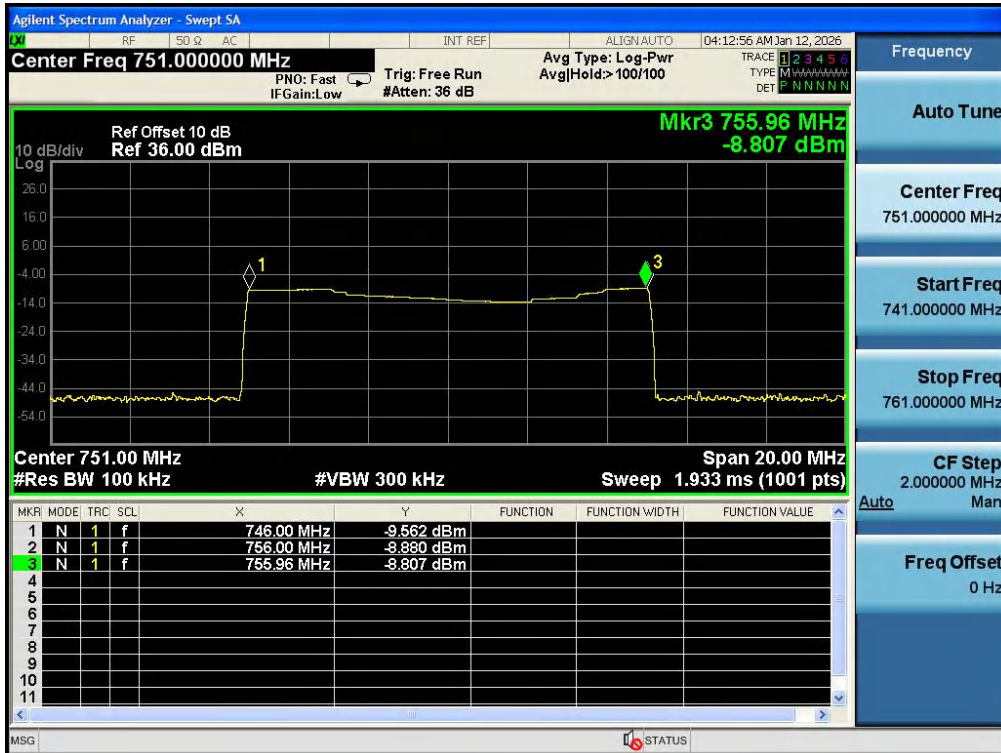


UL1850-1915MHz



DL1930-1995MHz

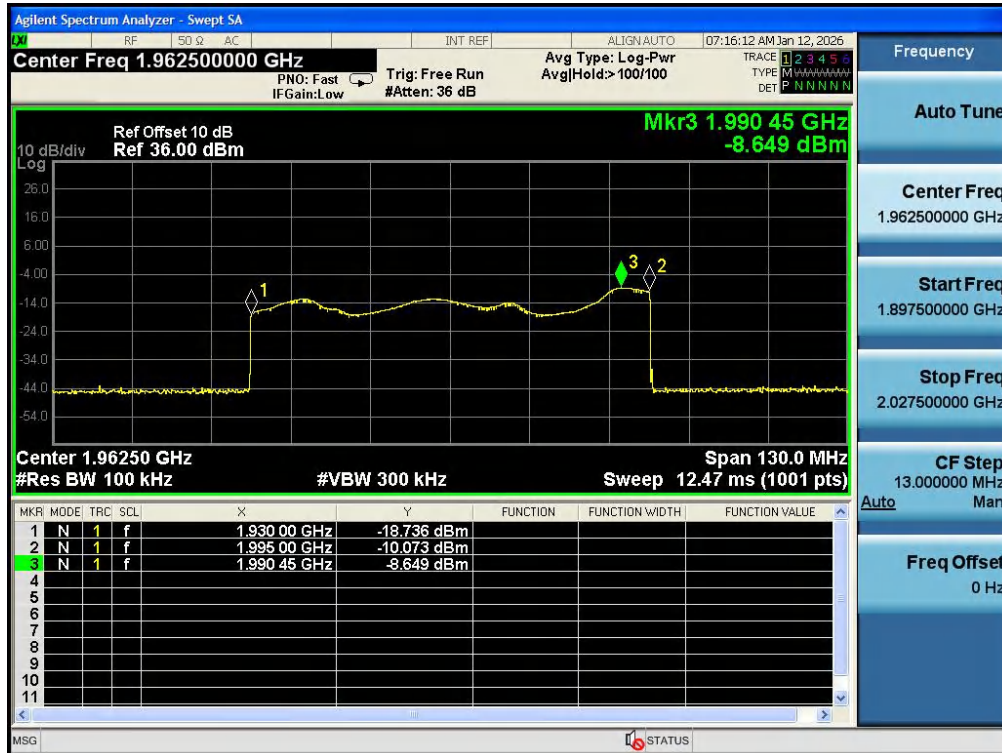

6.2 Maximum Power

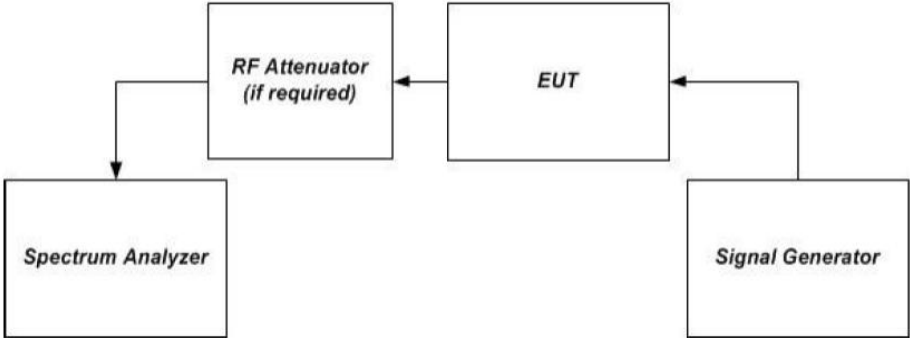Test Requirement:	The following procedures shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in §20.21(e)(8)(i)(D) and §20.21(e)(8)(i)(B) for Wideband Consumer Signal Boosters (i.e., a maximum uplink composite power level of 1 watt (30 dBm) conducted power and EIRP, a maximum downlink power level of 0.05 watt (17 dBm) conducted power and EIRP, and a conducted uplink power output that is at least 0.05 watt (17 dBm) for each band of operation). 1) Compliance to authorized EIRP limits must be shown using the highest gains from the list of antennas, cabling and coupling devices authorized by the manufacturer for use with the consumer booster. 2) In addition, the maximum power levels measured in this procedure will be utilized in calculating the maximum gain as described in the next section. 3) The frequency with the highest power level in each operational band as determined in section 7.1 is to be measured discretely by applying the following procedure utilizing the stated emission and power detector types independently. 4) Use a signal generator to create a pulsed CW signal with a pulse width of 570 µsec and a duty cycle of 12.5% and measure utilizing the burst power function of the measuring instrument. 5) Use a signal generator to create an AWGN signal with a 99% Occupied Bandwidth of 4.1 MHz and measure utilizing the channel or band power function of the measuring instrumentation. 6) All modes of operation must be verified to maintain operation at the maximum uplink and downlink test levels per device type as defined in section 5.4.
Limit:	Gain: Fixed Booster maximum gain shall not exceed 6.5 dB + 20Log10(Frequency) Where, Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz. Conducted Output Power: 17dBm<Puplink Pdownlink<17dBm. EIRP: Uplink<30dBm, Downlink<17dBm.
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator
(if required)] RA --> SA[Spectrum Analyzer] </pre>
Procedure:	a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor) port connected to the spectrum analyzer. b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz. c) Set the initial signal generator power to a level well below that which causes AGC activation. d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased). e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.

- f) Slowly increase the signal generator power to a level just below (and within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as P_{in} .
- g) Measure the output power, P_{out} , with the spectrum analyzer as follows.
 - 1) Set RBW=100kHz for AWGN signal type, or 300kHz for CW or GSM signal type.
 - 2) Set VBW $\geq 3 \times$ RBW.
 - 3) Select either the BURST POWER or CHANNEL POWER measurement mode, as required for each signal type. For AWGN, the channel power integration bandwidth shall be the 99% OBW of the 4.1 MHz signal.
 - 4) Select the power averaging (rms) detector.
 - 5) Affirm that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
NOTE—This requirement does not apply for BURST power measurement mode.
 - 6) Set sweep time = auto couple, or as necessary (but no less than auto couple value).
 - 7) Trace average at least 100 traces in power averaging (i.e., rms) mode.
 - 8) Record the measured power level P_{out} , with one set of results for the GSM or CW input stimulus, and another set of results for the AWGN input stimulus.
- h) Repeat step g) while increasing the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. If the booster has shut down at any point during the input power steps, it should be noted and step g) shall be repeated at an input level 1 dB less than that found to cause the shutdown. The test report shall include either a statement describing that the device complies at 10 dB above AGC or at the 5.5 power levels, or a table showing compliance at the additional input power(s) required.
- i) Repeat the entire procedure for each operational uplink and downlink frequency band supported by the booster.
- j) Provide tabulated results in the test report.

Max. Gain

Frequency(MHz)	Signal Type	Pre AGC Input Level (dBm)	Conducted Output Level (dBm)	Gain(dB)	Gain Limit (dB)
UL 824-849	CW	-40	23.43	63.43	64.94
	AWGN	-40	21.52	61.52	
UL1710-1755	CW	-47	23.32	70.32	71.27
	AWGN	-47	22.15	69.15	
UL699-716	CW	-40	21.78	61.78	63.49
	AWGN	-40	22.87	62.87	
UL777-787	CW	-40	23.21	63.21	64.36
	AWGN	-40	22.84	62.84	
UL1850-1915	CW	-49	21.68	70.68	71.99
	AWGN	-49	20.97	69.97	
DL 869-894	CW	-53	10.33	63.33	64.94
	AWGN	-53	8.88	61.88	
DL2110-2155	CW	-60	9.31	69.31	71.27
	AWGN	-60	9.01	69.01	
DL746-756	CW	-52	9.85	61.85	64.36
	AWGN	-52	9.00	61.00	
DL729-746	CW	-52	9.04	61.04	63.52
	AWGN	-52	8.70	60.70	
DL1930-1995	CW	-59	8.32	67.32	71.99
	AWGN	-59	7.71	66.71	

Remark: Fixed Booster maximum gain shall not exceed $6.5 \text{ dB} + 20 \text{ Log}_{10} (\text{Frequency})$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

Max. Input level


Frequency(MHz)	Signal Type	Max. Input Level (dBm)	Conducted Output Level (dBm)	Conducted Output Power Limit (dBm)	Conducted& EIRP Power Limit (dBm)
UL 824-849	CW	-40	23.45	>17dBm	<30dBm
	AWGN	-40	21.73		
UL1710-1755	CW	-47	23.61		
	AWGN	-47	22.32		
UL699-716	CW	-40	22.27		
	AWGN	-40	22.94		
UL777-787	CW	-40	23.48		
	AWGN	-40	22.85		
UL1850-1915	CW	-49	22.48		
	AWGN	-49	21.43		
DL 869-894	CW	-53	10.75	N/A	<17dBm
	AWGN	-53	8.95		
DL2110-2155	CW	-60	9.98		
	AWGN	-60	9.29		
DL746-756	CW	-52	10.12		
	AWGN	-52	9.73		
DL729-746	CW	-52	9.56		
	AWGN	-52	9.56		
DL1930-1995	CW	-59	8.96		
	AWGN	-59	8.20		

Max. Output level


Frequency(MHz)	Signal Type	Conducted Output Level (dBm)	Max Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Conducted Output Power Limit (dBm)	Conducted& EIRP Power Limit (dBm)
UL 824-849	CW	23.43	0	0.5	22.93	>17dBm	<30dBm
	AWGN	21.52	0	0.5	21.02		
UL1710-1755	CW	23.32	1.8	1	24.12		
	AWGN	22.15	1.8	1	22.95		
UL699-716	CW	21.78	0	0.5	21.28		
	AWGN	22.87	0	0.5	22.37		
UL777-787	CW	23.21	0	0.5	22.71		
	AWGN	22.84	0	0.5	22.34		
UL1850-1915	CW	21.68	1.8	1	22.48		
	AWGN	20.97	1.8	1	21.77		
DL 869-894	CW	10.33	0	0	10.33	N/A	<17dBm
	AWGN	8.88	0	0	8.88		
DL2110-2155	CW	9.31	1.8	0	11.11		
	AWGN	9.01	1.8	0	10.81		
DL746-756	CW	9.85	0	0	9.85		
	AWGN	9.00	0	0	9.00		
DL729-746	CW	9.04	0	0	9.04		
	AWGN	8.70	0	0	8.70		
DL1930-1995	CW	8.32	1.8	0	10.12		
	AWGN	7.71	1.8	0	9.51		

Remark: EIRP= Conducted Output Level+ Max Antenna Gain- Cable Loss


UL 824-849, AWGN

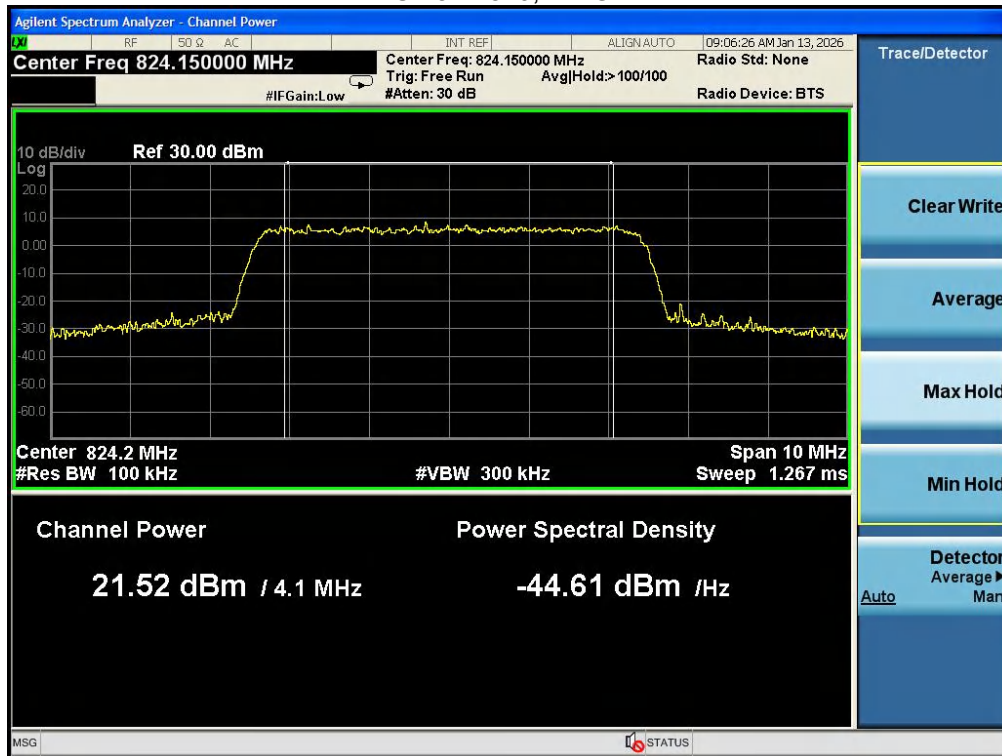


UL 824-849, CW

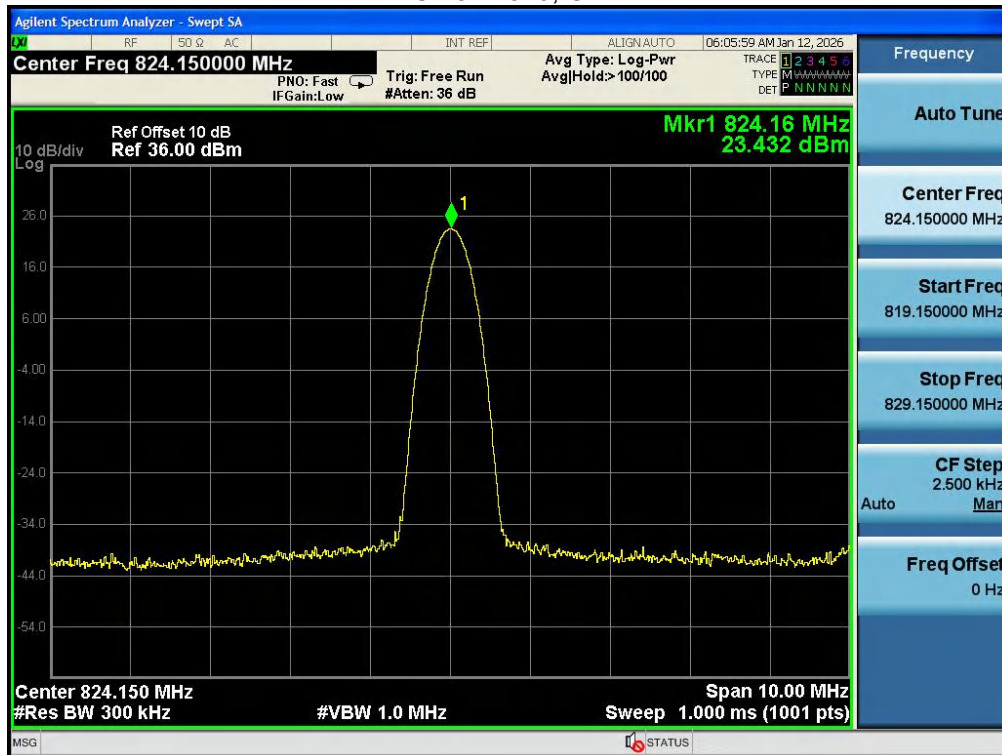


UL1710-1755, AWGN

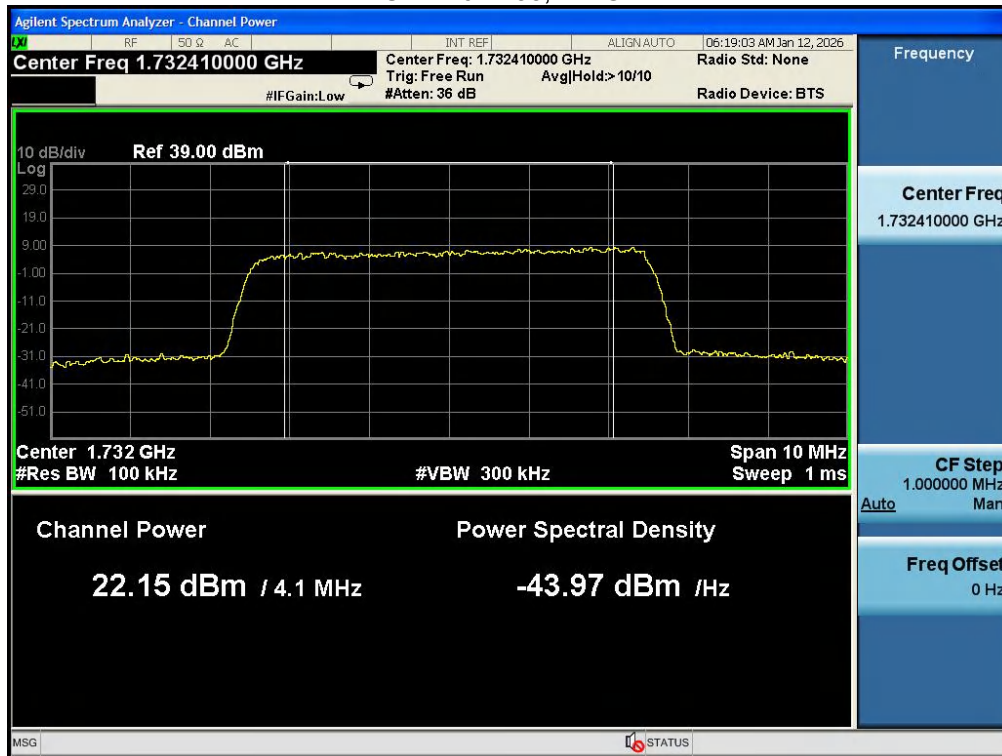


UL1710-1755, CW

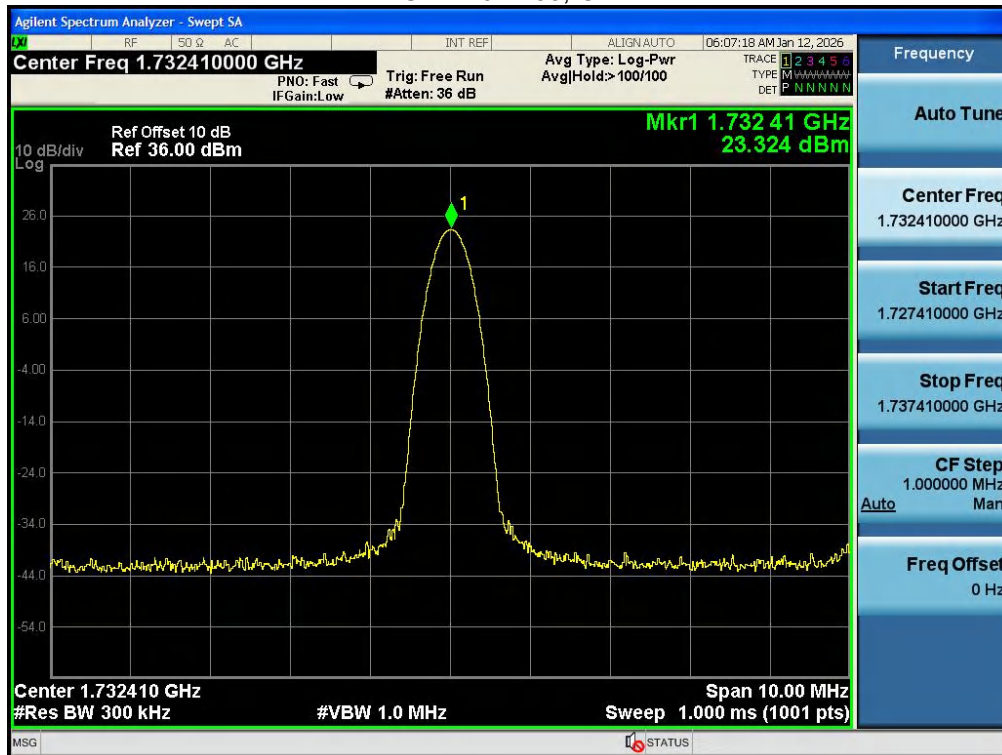


UL699-716, AWGN

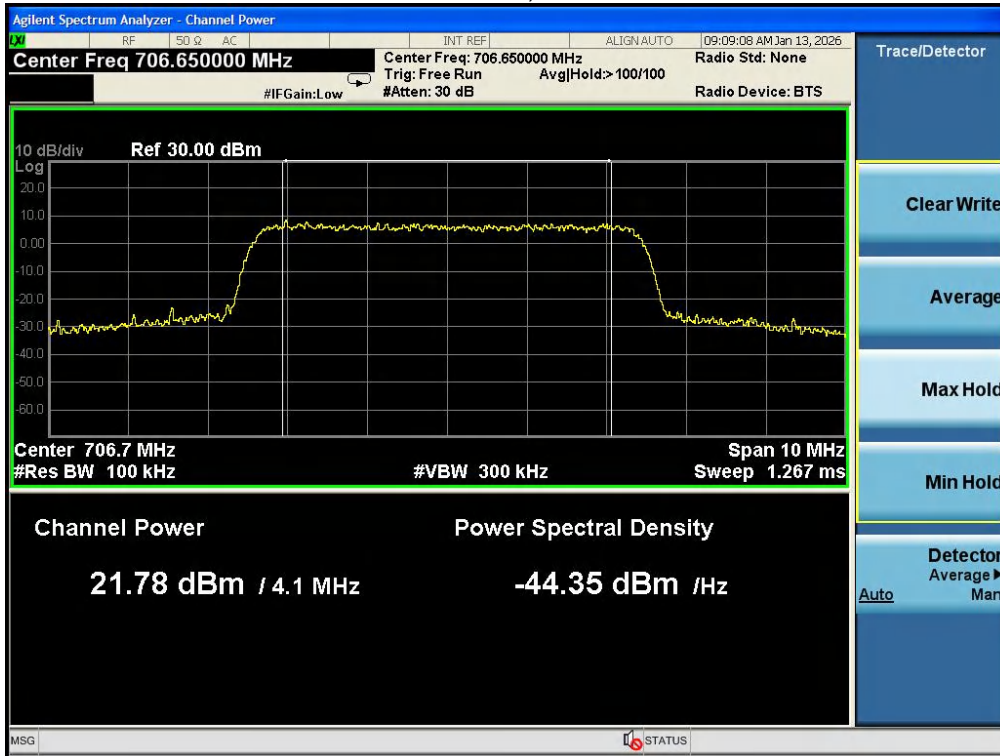


UL699-716, CW

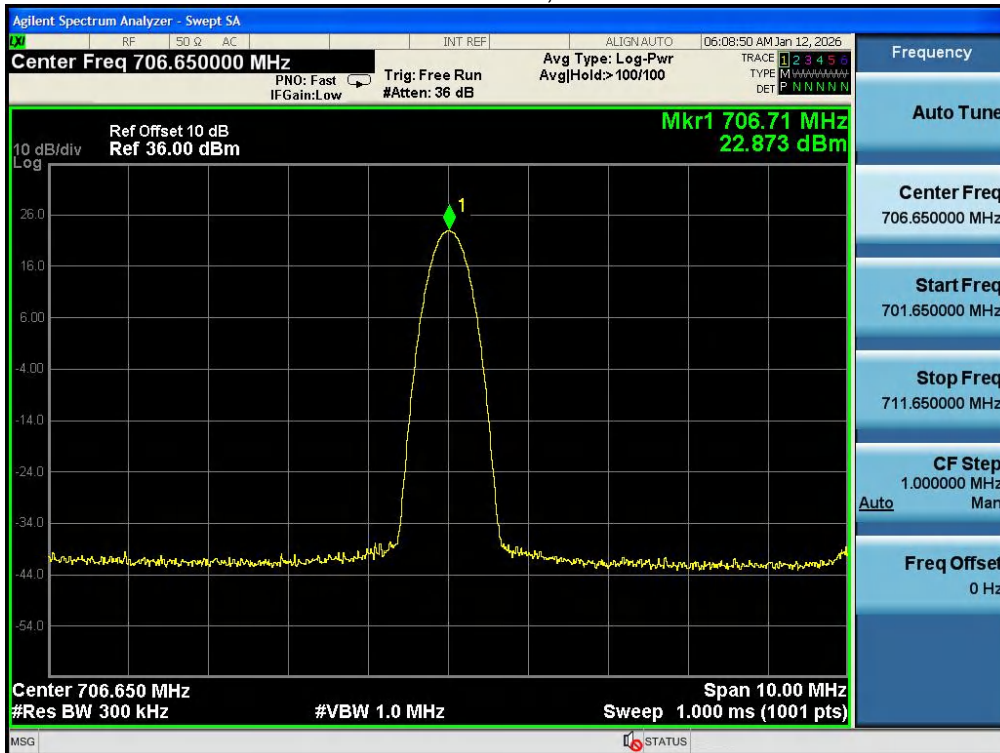


UL777-787, AWGN

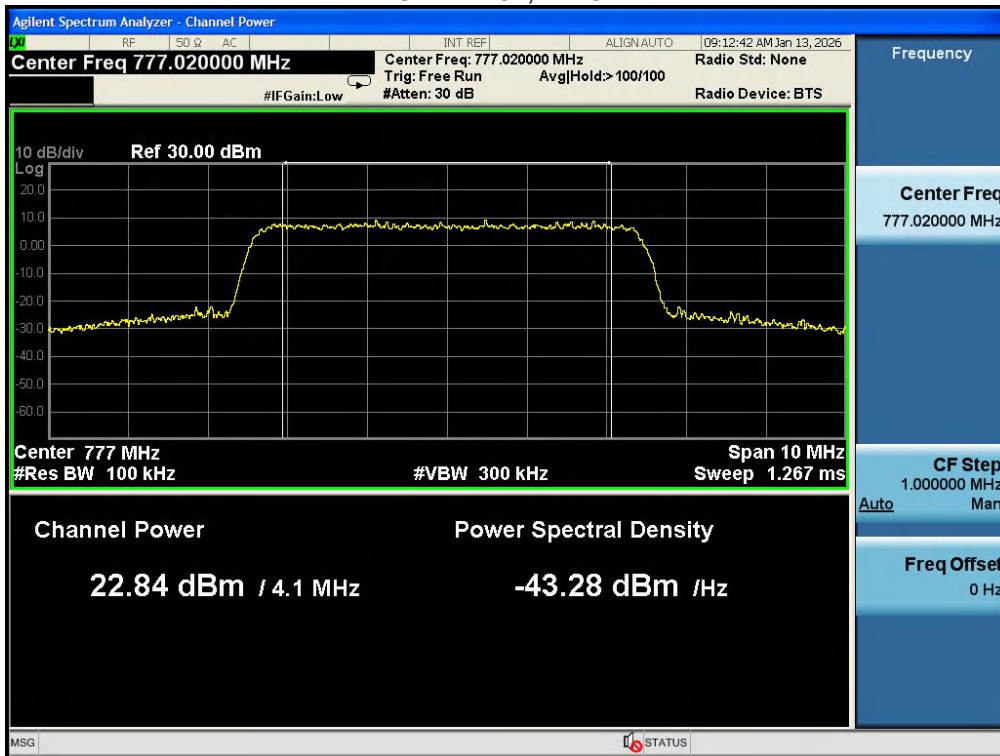


UL777-787, CW

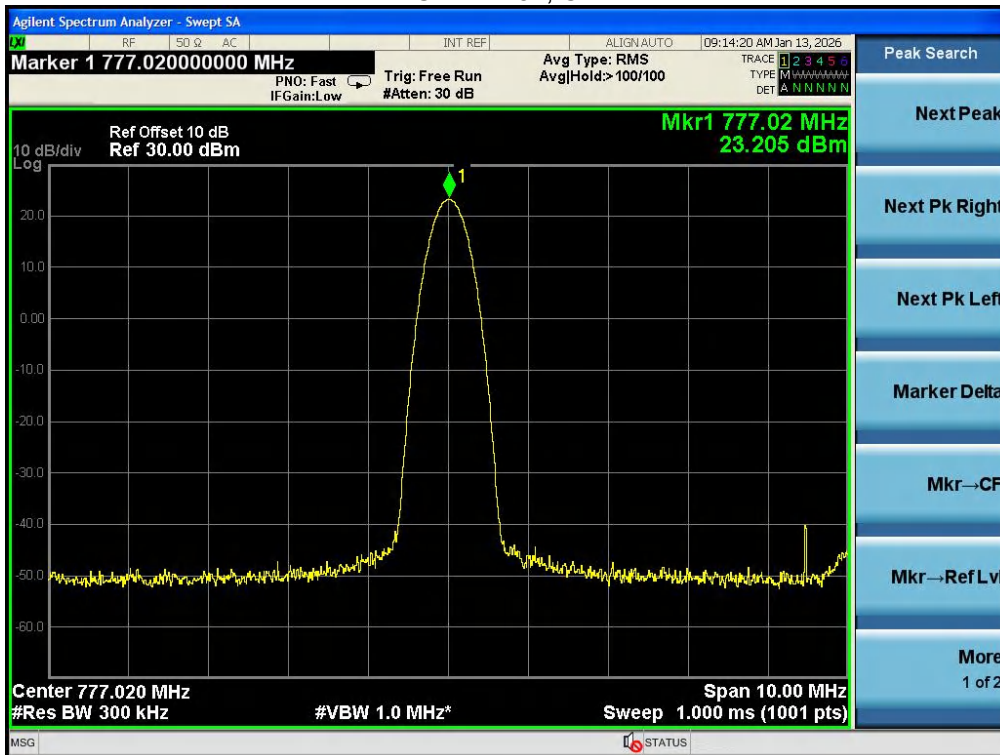


UL1850-1915, AWGN

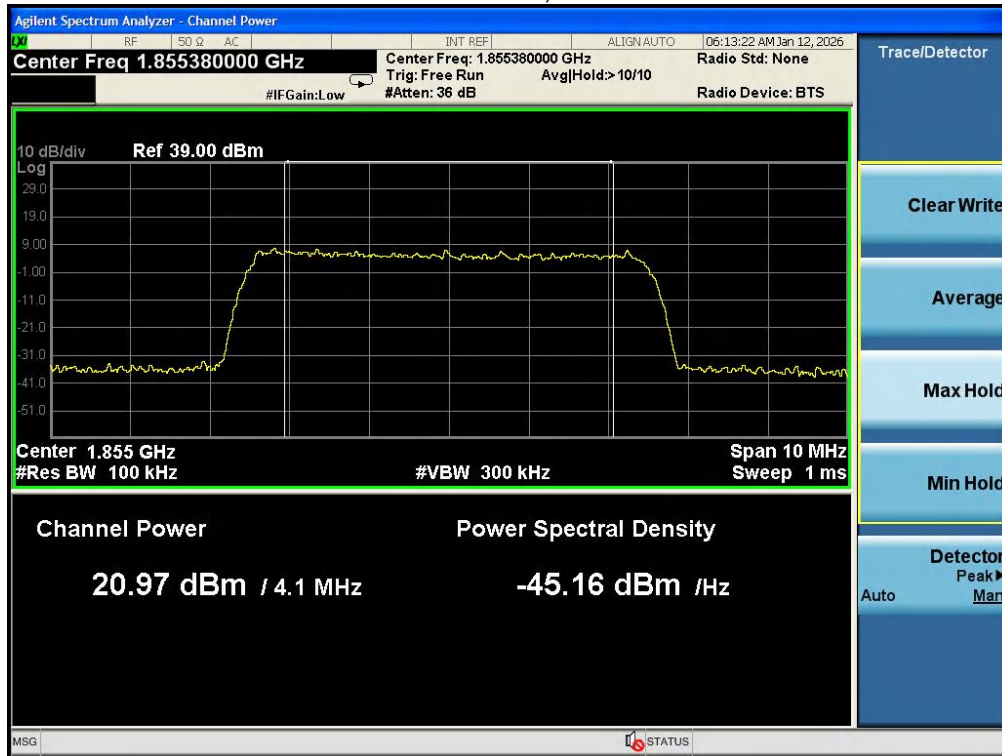


UL1850-1915, CW

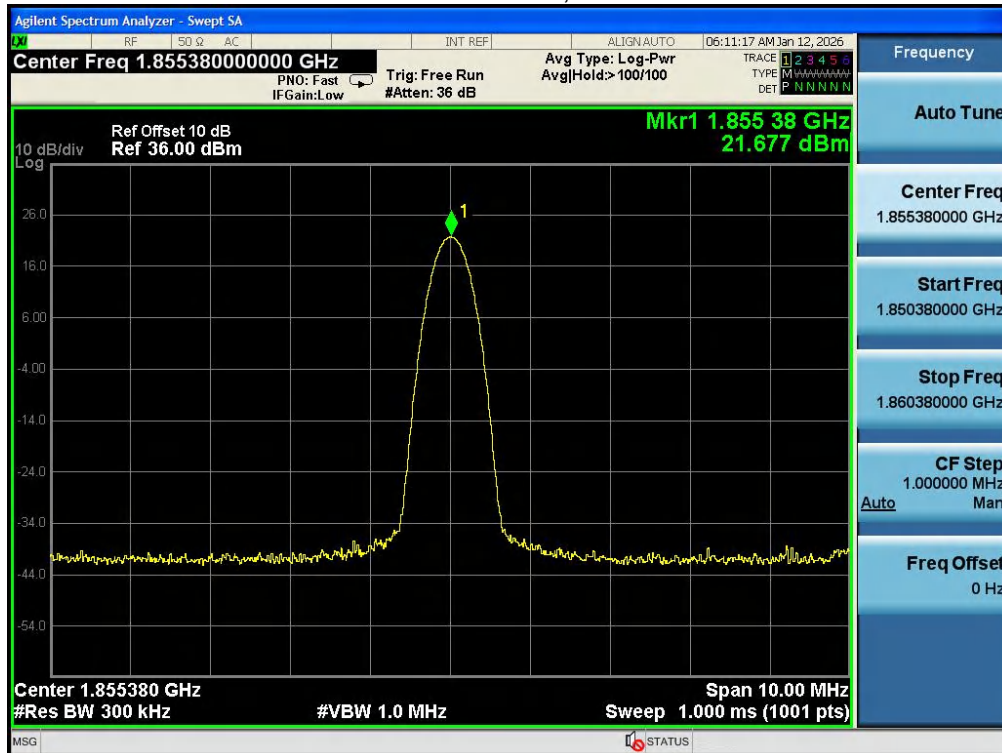


DL869-894, AWGN

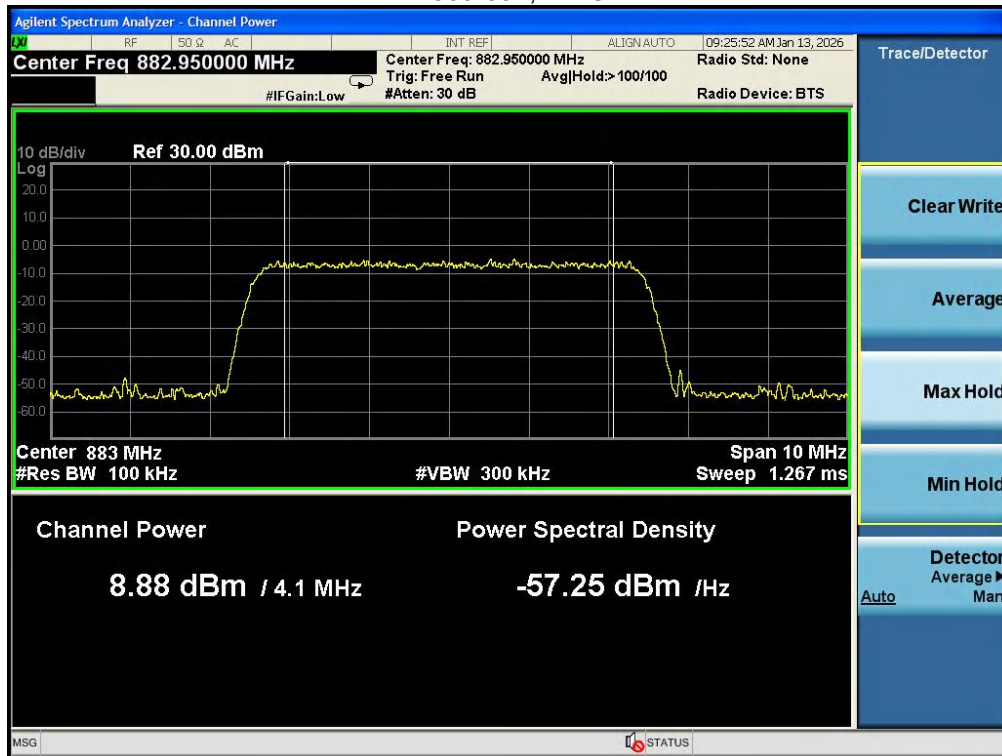


DL869-894, CW

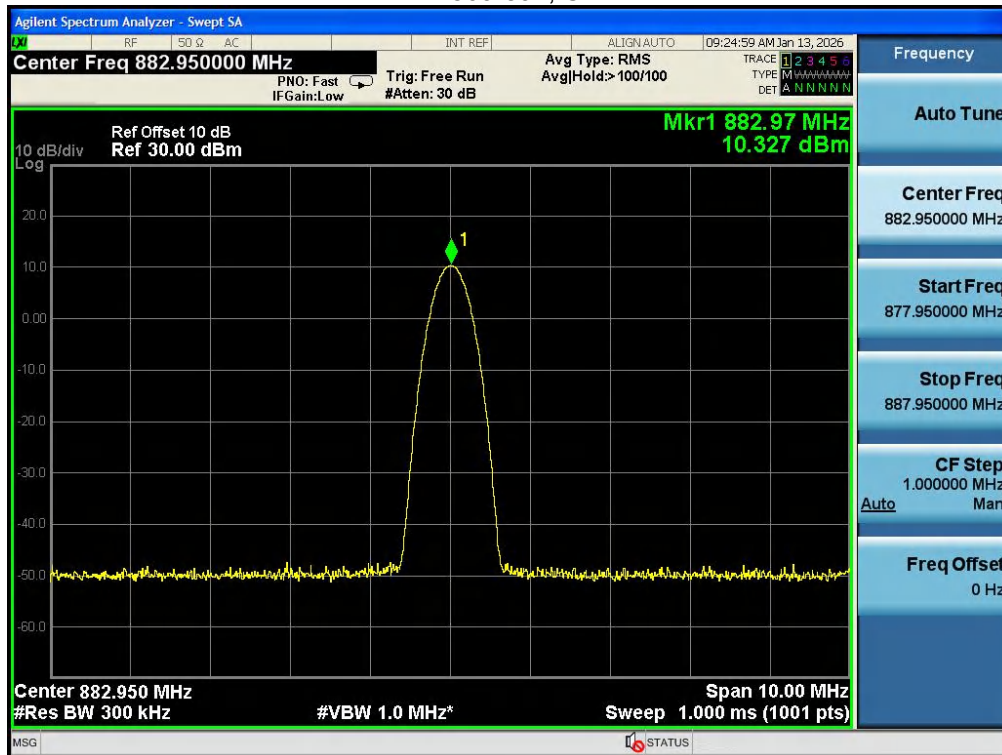


DL2110-2155, AWGN

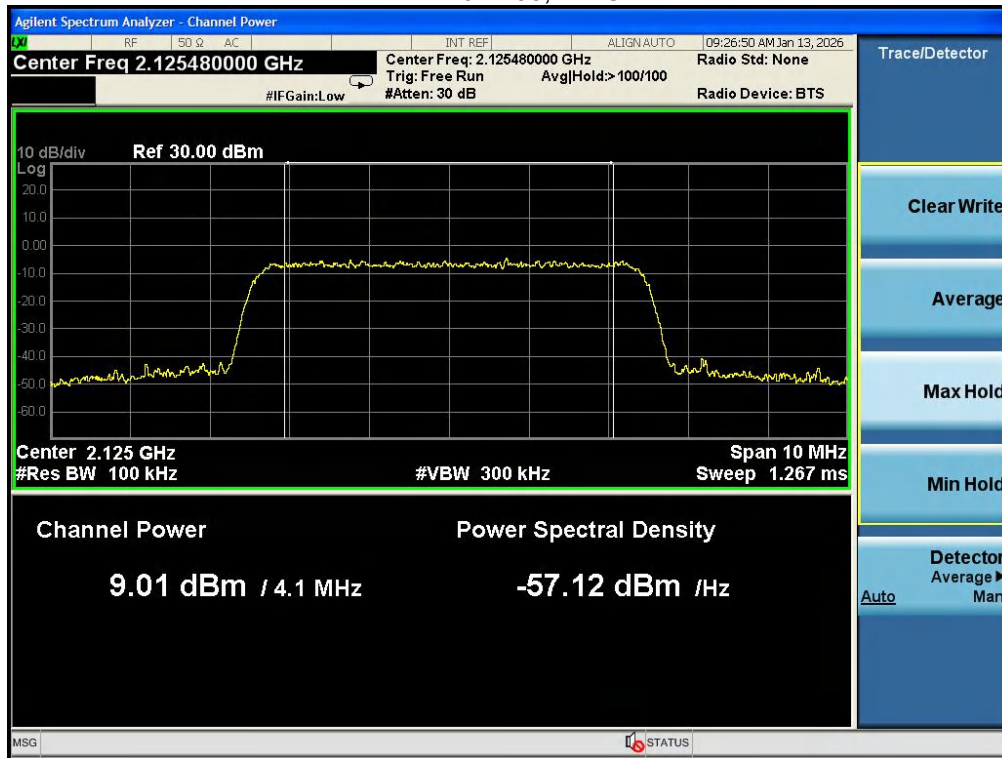

DL2110-2155, CW

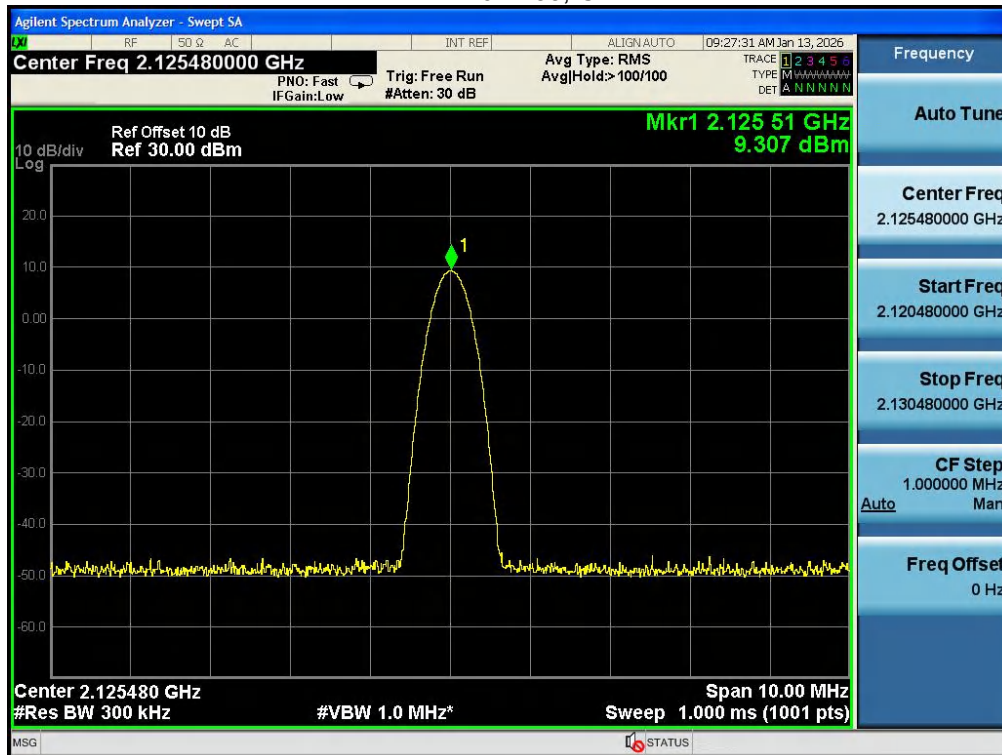

DL729-746, AWGN

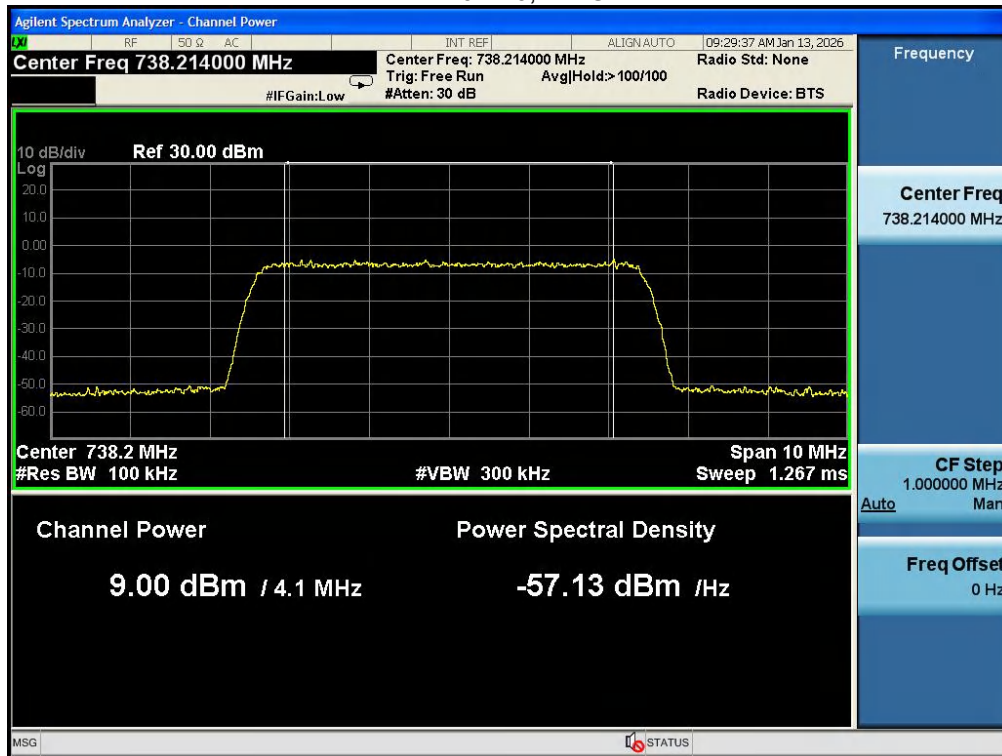

DL729-746, CW

