



WR11-U Module Datasheet

Version: 20250701

Online Version

Contents

1. Overview	2
1.1. Features	2
1.2. Scope of applications	3
2. Module interfaces	4
2.1. Dimensions and footprint	4
2.2. Pin definition	4
3. Electrical parameters	9
3.1. Absolute electrical parameters	9
3.2. Normal operating conditions	9
3.3. Power consumption during continuous transmission and reception	10
3.4. Operating current	11
4. RF parameters	13
4.1. Basic RF features	13
4.2. Transmitter (TX) performance	13
4.3. Receiver (RX) performance	15
5. Antenna information	17
5.1. Antenna type	17
5.2. Antenna interference reduction	17
6. Packing and production instructions	19
6.1. Mechanical dimensions	19
6.2. Recommended PCB footprint	21
6.3. Production instructions	23
6.4. Recommended oven temperature curve	25
6.5. Storage conditions	28
7. MOQ and packaging information	29
8. Appendix: Statement	30

WR11-U module is a Wi-Fi and Bluetooth Low Energy (LE) combo module developed by Tuya Smart. It consists of a highly integrated wireless RF chip RTL8711DAF and a few peripheral components, with built-in Wi-Fi and Bluetooth network protocol stacks and various library functions.

1. Overview

The module is built around a 32-bit low power MCU with 512 KB SRAM, built-in 4 MB flash memory, and various peripheral resources.

WR11-U is a real-time operating system (RTOS), integrated with all Wi-Fi MAC and TCP/IP libraries. All these resources can help you develop your own embedded Wi-Fi products.

1.1. Features

- Built-in low-power 32-bit CPU that also acts as an application processor.
- Clock rate of up to 345 MHz.
- Operating voltage range: $3.3 \pm 0.3V$.
- Peripherals: 14 general-purpose input/output (GPIO) pins, 1 universal asynchronous receiver/transmitter (UART), and 1 analog-to-digital converter (ADC) pin.
- Wi-Fi connectivity
- IEEE 802.11a/ b/g/n 1x1, 2.4 GHz and 5 GHz.
- Channels 1 to 14 at 2.4 GHz, and 36-177 at 5 GHz.
- Support security protocols, including WEP, WPA, WPA2, WPA2 PSK (AES), and WPA3.
- The maximum output power is +14 dBm for IEEE 802.11b and +18 dBm for 802.11a transmission.
- Support STA, AP, and STA + AP combo working modes. Except for UNII-2A/2C.
- Two pairing modes are supported, namely Wi-Fi Easy Connect (EZ mode) and access point (AP) mode. Both modes are suitable for pairing with Android and iOS devices.
- Onboard PCB antenna with a gain of 0.88 dBi at 2.4 GHz, and 1.53 dBi at 5 GHz.
- Operating temperature range: $-40^{\circ}C$ to $105^{\circ}C$.
- Bluetooth connectivity
- Support Bluetooth 5.0.
- Up to +8 dBm output power.

- Onboard PCB antenna with a gain of 0.88 dBi at 2.4 GHz, and sharing the same antenna with Wi-Fi.
- Operating temperature range: -40°C to 105°C .

1.2. Scope of applications


- Smart building
- Smart home and electrical appliance
- Smart socket and light
- Industrial wireless control
- Baby monitor
- IP camera
- Smart bus

2. Module interfaces

2.1. Dimensions and footprint

WR11-U has three rows of pins. The pin spacing is 1.4 mm on both sides and 1.8 mm at the bottom.

The WR11-U dimensions are 15.8 ± 0.35 mm (W) $\times$ 20.3 ± 0.35 mm (L) $\times$ 2.6 ± 0.15 mm (H). The following figure shows the dimensions and packaging design of the WR11-U module.

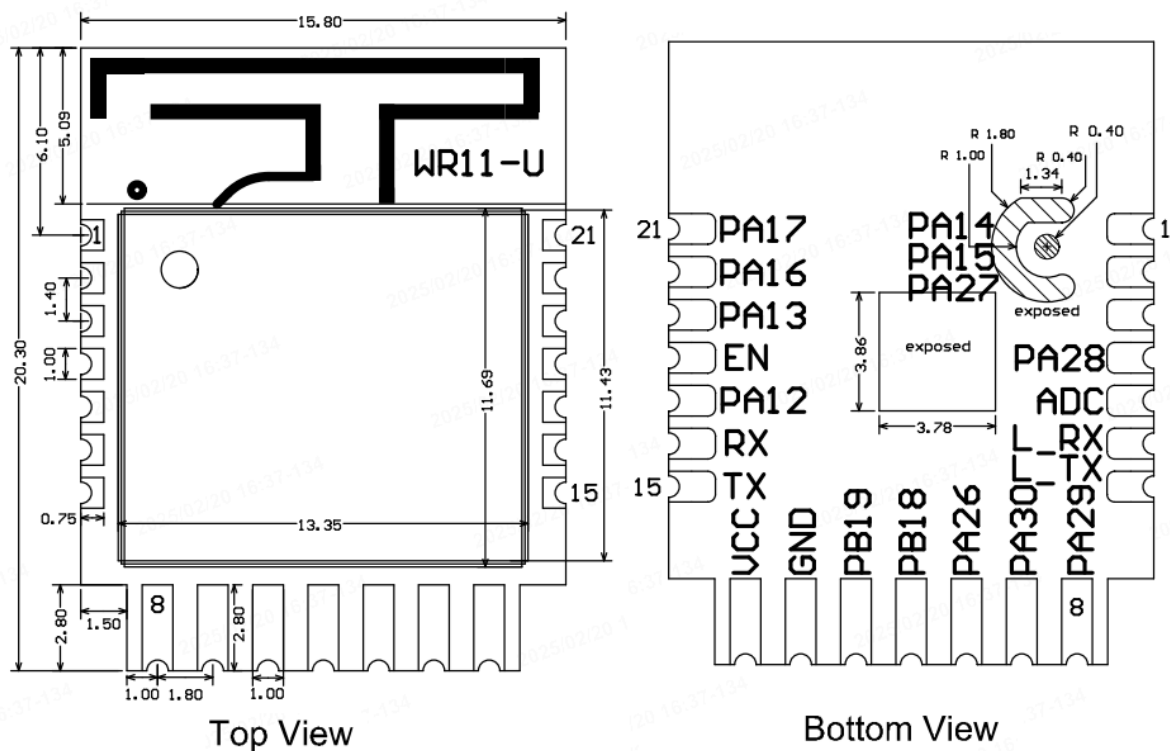

2.2. Pin definition

Pin	Symbol	I/O type	Feature
1	PA14	I/O	GPIOA_14. A normal GPIO that can be reused as SPI_SCK, corresponding to Pin 6 on the IC.

Pin	Symbol	I/O type	Feature
2	PA15	I/O	GPIOA_15. A normal GPIO that can be reused as SPI_MOSI, corresponding to Pin 7 on the IC.
3	PA27	I/O	GPIOA_27, which supports hardware PWM, corresponding to Pin 13 on the IC.
4	PA28	I/O	GPIOA_28, which supports hardware PWM, corresponding to Pin 14 on the IC.
5	ADC	I/O	GPIOB_17, with ADC feature and 0 to 3.3V input voltage range, corresponding to Pin 37 on the IC.
6	L_RX	I/O	GPIOB_4, which can be reused as the UART_Log_RXD pin to receive logs. It can be configured as a normal GPIO, corresponding to Pin 34 on the IC.

Pin	Symbol	I/O type	Feature
7	L_TX	I/O	GPIOB_5, which can be reused as the UART_Log_TXD pin to send logs. After pulling it low, it will enter Download Mode when powered on. It can be configured as a normal GPIO, corresponding to Pin 35 on the IC.
8	PA29	I/O	GPIOA_29, which supports hardware PWM, corresponding to Pin 15 on the IC.
9	PA30	I/O	GPIOA_30, which supports hardware PWM, corresponding to Pin 16 on the IC.
10	PA26	I/O	GPIOA_26, which supports hardware PWM, corresponding to Pin 12 on the IC.

Pin	Symbol	I/O type	Feature
11	PB18	I/O	GPIOB_18, which supports hardware PWM, corresponding to Pin 38 on the IC.
12	PB19	I/O	GPIOB_19, which supports hardware PWM, corresponding to Pin 39 on the IC.
13	GND	P	Ground pin.
14	VCC	P	Power supply pin (3.3V).
15	TX	I/O	GPIOB_20, which can be reused as the UART0_TXD pin for serial communication, corresponding to Pin 40 on the IC.
16	RX	I/O	GPIOB_21, which can be reused as the UART0_RXD pin for serial communication, corresponding to Pin 41 on the IC.
17	PA12	I/O	GPIOA_12, which can be reused as a normal GPIO pin, corresponding to Pin 3 on the IC.

Pin	Symbol	I/O type	Feature
18	EN	I/O	The enable pin that is active high. The module has pulled up the high level, and users can control this pin externally.
19	PA13	I/O	GPIOA_13, which can be reused as a normal GPIO pin, corresponding to Pin 5 on the IC.
20	PA16	I/O	GPIOA_16. A normal GPIO that can be reused as SPI_MISO, corresponding to Pin 8 on the IC.
21	PA17	I/O	GPIOA_17. A normal GPIO that can be reused as SPI_CS, corresponding to Pin 9 on the IC.

i

P indicates the power pin, and I/O indicates the input and output pin.

3. Electrical parameters

3.1. Absolute electrical parameters

Parameter	Description	Min value	Max value	Unit
T _s	Storage temperature	−40	125	°C
V _{BAT}	Supply voltage	3.0	3.6	V
Electrostatic discharge voltage (human body model)	T _{AMB} ≤ 25°C	-	2	kV
Electrostatic discharge voltage (machine model)	T _{AMB} ≤ 25°C	-	0.5	kV

3.2. Normal operating conditions

Parameter	Description	Min value	Typical value	Max value	Unit
T _a	Operating temperature	−40	-	105	°C
V _{BAT}	Supply voltage	3.0	3.3	3.6	V
V _{IL}	I/O low-level input	-	-	0.8	V
V _{IH}	I/O high-level input	2.0	-	-	V

Parameter	Description	Min value	Typical value	Max value	Unit
VOL	I/O low-level output	0	-	0.3	V
VOH	I/O high-level output	2.8	-	3.6	V
I _{max}	I/O drive current	-	-	12	mA

3.3. Power consumption during continuous transmission and reception

2.4 GHz transmission and reception

Operating status	Mode	Rate	Transmit/Receive power	Typical value	Unit
Transmit	802.11b	11 Mbit/s	+18 dBm	250	mA
Transmit	802.11g	54 Mbit/s	+17 dBm	180	mA
Transmit	802.11n-HT20	MCS7	+16 dBm	170	mA
Transmit	802.11n-HT40	MCS7	+16 dBm	150	mA
Receive	802.11b	11 Mbit/s	Continuous reception	40	mA
Receive	802.11g	54 Mbit/s	Continuous reception	42	mA
Receive	802.11n-HT20	MCS7	Continuous reception	40	mA
Receive	802.11n-HT40	MCS7	Continuous reception	43	mA

5 GHz transmission and reception

Operating status	Mode	Rate	Transmit/ Receive power	Typical value	Unit
Transmit	802.11a	54 Mbit/s	+15 dBm	300	mA
Transmit	802.11n- HT20	MCS7	+15 dBm	230	mA
Transmit	802.11n- HT40	MCS7	+14 dBm	220	mA
Receive	802.11a	54 Mbit/s	Continuous reception	41	mA
Receive	802.11n- HT20	MCS7	Continuous reception	42	mA
Receive	802.11n- HT40	MCS7	Continuous reception	42	mA

3.4. Operating current

Working mode	Status (Ta = 25°C)	Average value	Max (Typical) value	Unit
	The module is in EZ mode.			
Pairing in EZ mode	The network status indicator blinks quickly.	57	184	mA
	The module is in AP mode.			
Pairing in AP mode	The network status indicator blinks slowly.	203	392	mA

Working mode	Status (Ta = 25°C)	Average value	Max (Typical) value	Unit
Connected	The module is connected to the cloud. The network status indicator is steady on.	55	98	mA
Disconnected	The module is disconnected from the cloud. The network status indicator is steady off.	53	59	mA

4. RF parameters

4.1. Basic RF features

Parameter	Description
Operating frequency	2.412 GHz to 2.484 GHz(Ch1-11 for US/CA,Ch1-13 for EU/CN), 5.180-5.885 GHz
Wi-Fi standard	IEEE 802.11a/b/g/n (Ch1-11 for US/CA,Ch1-13 for EU/CN, and 36-177)
Bluetooth standard	Bluetooth LE 5.0
Data transmission rate	• 11b: 1, 2, 5.5, and 11 Mbit/s • 11a/g: 6, 9, 12, 18, 24, 36, 48, and 54 Mbit/s • 11n: HT20 MCS0-7, and HT40 MCS0-7 • Bluetooth 5.0: 1 Mbit/s /2 Mbit/s
Antenna type	Onboard PCB antenna with a gain of 0.88 dBi at 2.4 GHz, and 1.53 dBi at 5 GHz.

4.2. Receiver (RX) performance

RX sensitivity

Parameter	Min value	Typical value	Max value	Unit
PER < 8%, RX sensitivity, 802.11b DSSS mode, 11 Mbit/s	-	-91	-	dBm
PER < 10%, RX sensitivity, 802.11a/g OFDM mode, 54 Mbit/s	-	-75	-	dBm
PER < 10%, RX sensitivity, 802.11n OFDM mode, HT20-MCS7	-	-72	-	dBm
PER < 30.8%, RX sensitivity, Bluetooth 5.0, 1 Mbit/s	-	-98	-	dBm

Parameter	Min value	Typical value	Max value	Unit
PER < 30.8%, RX sensitivity, Bluetooth 5.0, 2 Mbit/s	-	-94	-	dBm

5. Antenna information



5.1. Antenna type

Only the PCB antenna applies.

5.2. Antenna interference reduction


When a PCB antenna is used on a Wi-Fi module, we recommend that the module antenna be at least 15 mm away from other metal components. This can optimize the Wi-Fi performance.


Make sure that the enclosure surrounding the antenna is not traced or filled with copper. Otherwise, the RF performance might be degraded. Layout principles: No substrate medium exists directly below or above the PCB antenna. The PCB antenna is away from the copper sheet. This can maximize the radiation effect of the antenna.

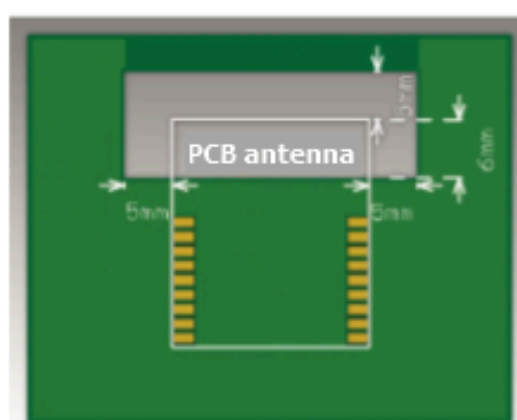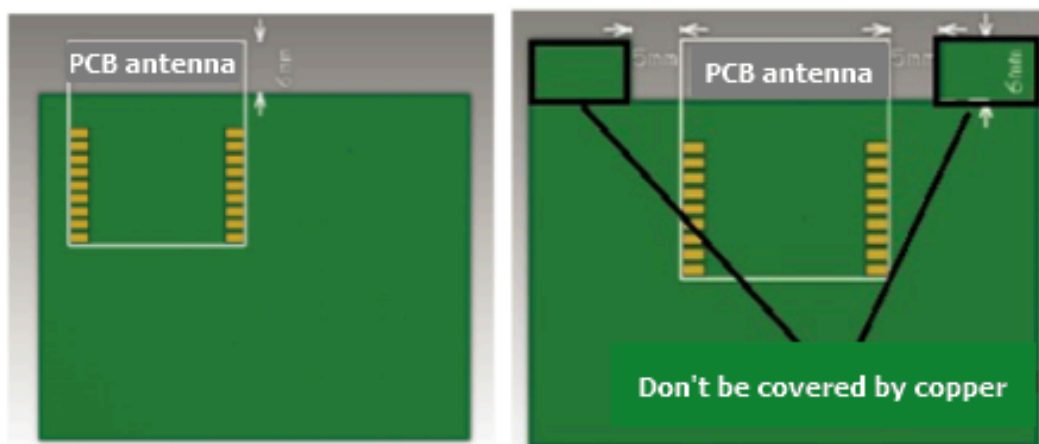


Refer to the **mechanical dimensions** below for the module's PCB onboard antenna area.

The WR11-U module's PCB dimensions are 15.8±0.35 mm (W) × 20.3±0.35 mm (L) × 1.0±0.1 mm (H). The figure below shows the mechanical dimensions of WR11-U.




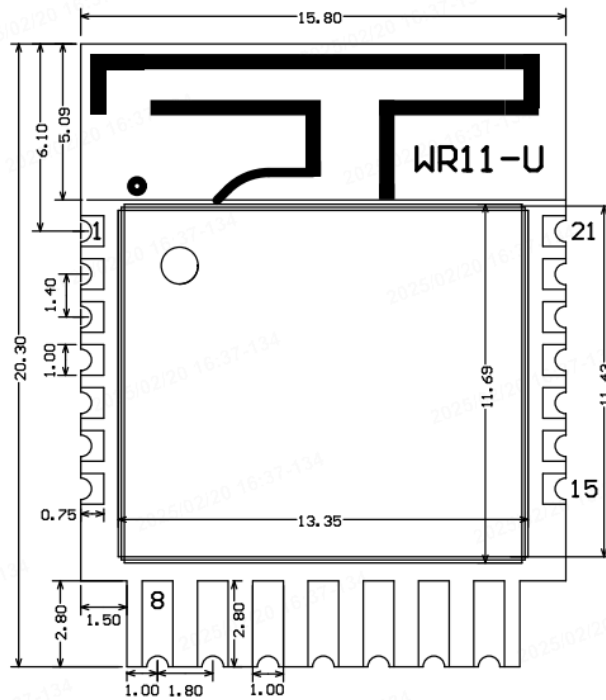

Top View

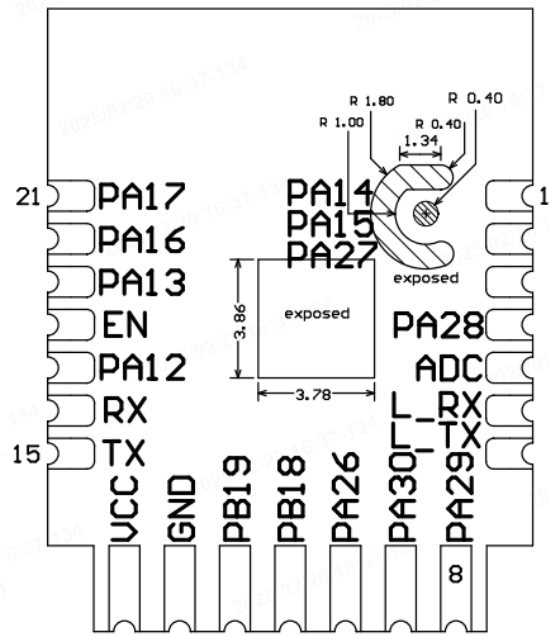

Bottom View

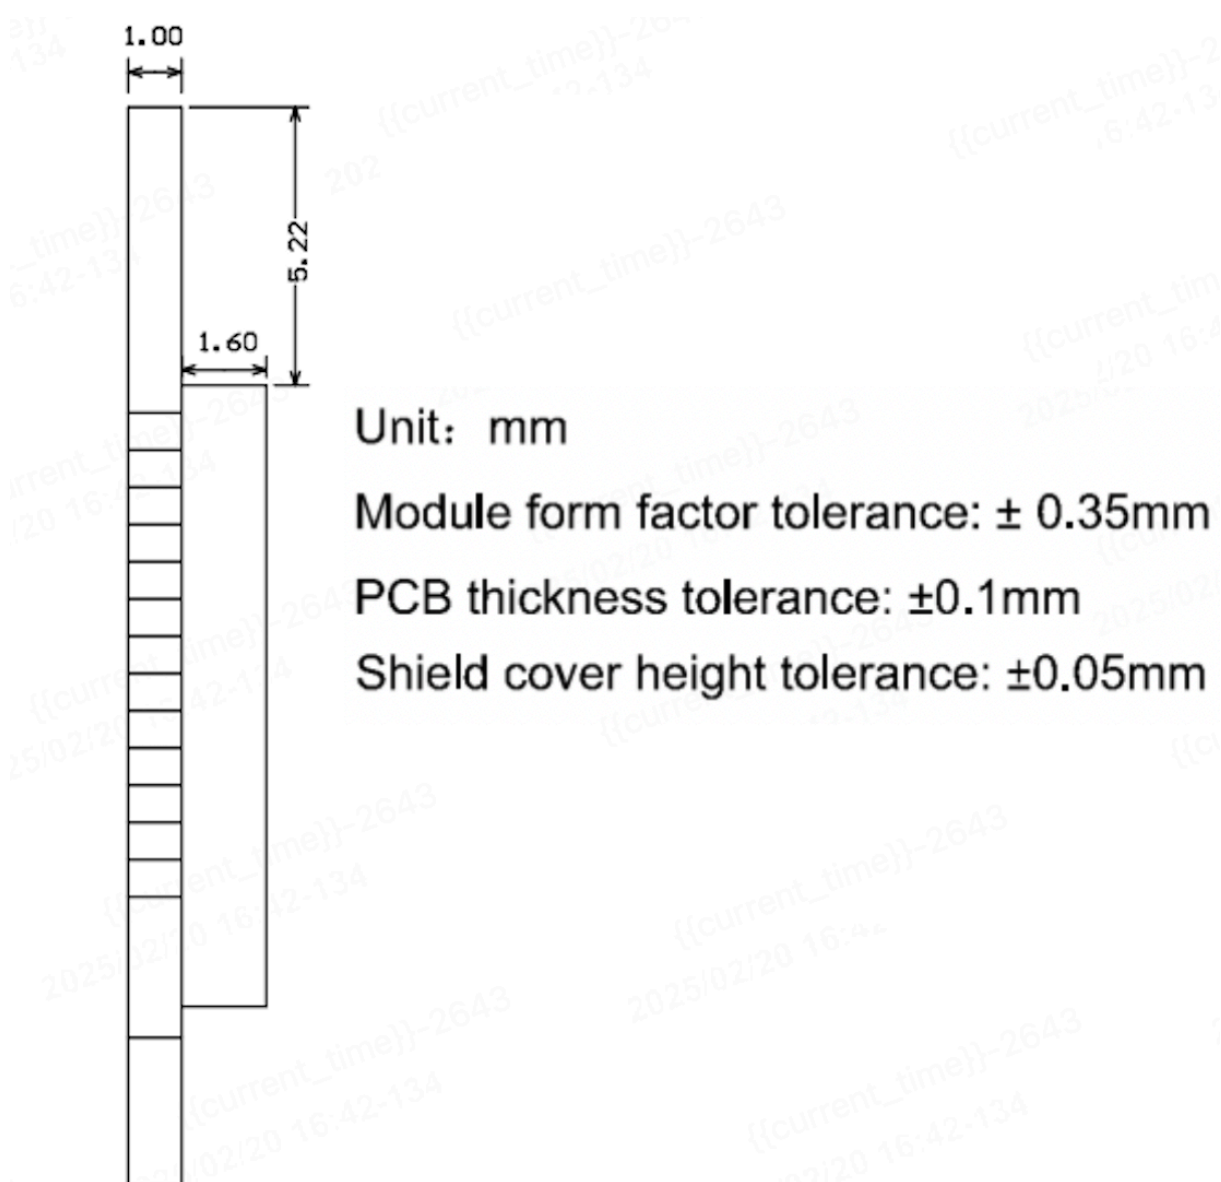

Side View


i

The default tolerance of the dimensions is $\pm 0.35\text{ mm}$. If you have special requirements for key dimensions, specify them in the datasheet after consultations.

6.2. Recommended PCB footprint

Pin configuration of the WR11-U module:

- Reflow soldering machine
- Thermal profiler
- Automated optical inspection (AOI) device
- Instruments or devices required for the wave soldering process:
- Wave soldering device
- Wave soldering fixture
- Constant-temperature soldering iron
- Tin bar, tin wire, and flux
- Thermal profiler
- Instruments or devices required for the baking process:
- Cabinet oven
- Electrostatic discharge (ESD) protection and heat-resistant trays
- ESD protection and heat-resistant gloves
- A delivered module must meet the following storage requirements:
- The moisture-proof bag must be placed in an environment where the temperature is below 40°C and the relative humidity is lower than 90%.
- The shelf life of a dry-packaged product is 12 months from the date when the product is packaged and sealed.
- A humidity indicator card (HIC) is put in the sealed package.

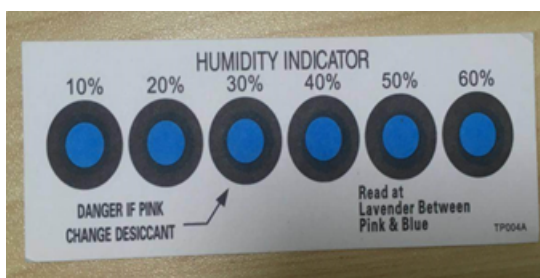

- The module needs to be baked in the following cases:
- The vacuum packaging bag is damaged before unpacking.
- After unpacking, no HIC is found in the packaging bag.
- After unpacking, the HIC indicates a humidity level of 10% or higher. In this case, the circle turns pink on the HIC.
- The total exposure time has lasted for over 168 hours since unpacking.
- More than 12 months have passed since the first sealing of the bag.
- The baking parameter settings are described below:


- Baking temperature: 40°C for reel packaging with relative humidity $\leq$ 5%. And 125°C for tray packaging with relative humidity $\leq$ 5% (use a heat-resistant tray, rather than a plastic container).
- Baking time: 168 hours for reel packaging and 12 hours for tray packaging.
- Temperature for triggering an alert: 50°C for reel packaging and 135°C for tray packaging.
- Production can begin after a module has cooled down to below 36°C under natural conditions.
- If a module remains unused for over 168 hours after being baked, it needs to be baked again.
- If a batch of modules is not baked after exposure for more than 168 hours, do not use wave soldering to solder them. Because these modules are level-3 moisture-sensitive devices, they are very likely to get damp when exposed beyond the allowable time. In this case, if they are soldered at high temperatures, device failure or poor soldering performance might occur.
- In the whole production process, take electrostatic discharge (ESD) protective measures.
- To guarantee the pass rate, we recommend that you use the SPI and AOI to monitor the quality of solder paste printing and mounting.

6.4. Recommended oven temperature curve

Select a proper soldering technique according to the process. For more information, refer to the recommended oven temperature curve of either reflow soldering or wave soldering. The set temperatures might deviate from the actual temperature measurements. All temperatures shown in this module datasheet are obtained through actual measurements.

Technique 1: SMT process (recommended oven temperature curve of reflow soldering)

Set the oven temperatures according to the following curve.

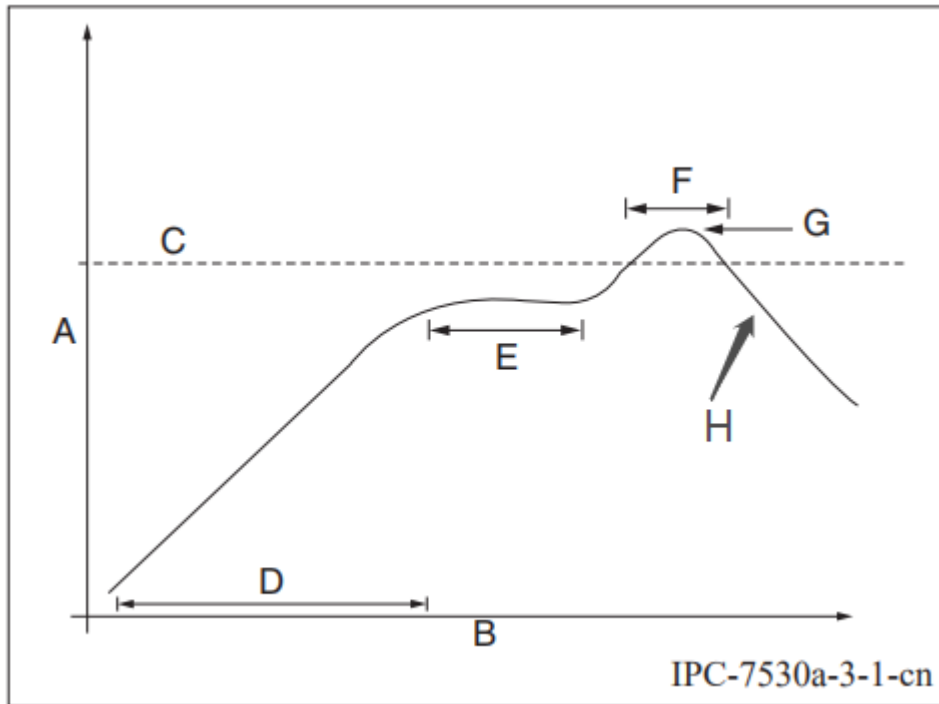

- A: temperature axis
- B: time axis
- C: alloy liquidus temperature from 217°C to 220°C
- D: ramp-up slope from 1°C/s to 3°C/s
- E: keep a constant temperature from 150°C to 200°C for a time period of 60s to 120s
- F: temperature above liquidus temperature for 50s to 70s
- G: peak temperature from 235°C to 245°C
- H: ramp-down slope from 1°C/s to 4°C/s


i

The curve above is based on solder paste SAC305. For more information about other solder pastes, see the recommended oven temperature curve in the specified solder paste specifications.

Technique 2: Wave soldering process (oven temperature curve of wave soldering)

Set the oven temperatures according to the following temperature curve of wave soldering. The peak temperature is 260°C±5°C.

DIP Type Product Pass Wavesolder Graph

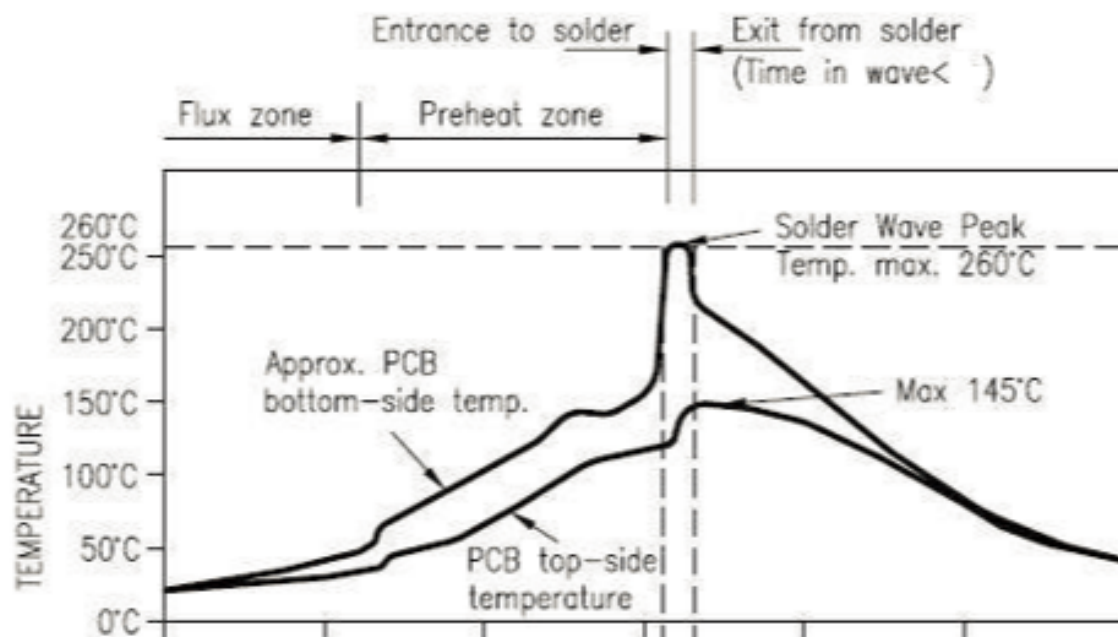

Suggestions on wave soldering		Suggestions on manual repair soldering	
Preheat temperature	80°C to 130°C	Soldering temperature	360°C ± 20°C
Preheat duration	75s to 100s	Soldering duration	Less than 3s/point
Contact duration at the peak	3s to 5s	N/A	N/A
Solder tank temperature	260°C ± 5°C	N/A	N/A
Ramp-up slope	≤ 2°C/s	N/A	N/A
Ramp-down slope	≤ 6°C/s	N/A	N/A

6.5. Storage conditions

	Caution This bag contains MOISTURE-SENSITIVE DEVICES	LEVEL 3 If blank, see adjacent bar code label
1. Calculated shelf life in sealed bag: 12 months at <40°C and <90% relative humidity (RH)		
2. Peak package body temperature: <u>260</u> °C If blank, see adjacent bar code label		
3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be		
a) Mounted within: <u>168</u> hours of factory conditions If blank, see adjacent bar code label ≤30°C/60% RH, or		
b) Stored per J-STD-033		
4. Devices require bake, before mounting, if:		
a) Humidity Indicator Card reads >10% for level 2a - 5a devices or >60% for level 2 devices when read at 23 ± 5°C		
b) 3a or 3b are not met		
5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure		
Bag Seal Date: <u>See Production Date</u> If blank, see adjacent bar code label		
Note: Level and body temperature defined by IPC/JEDEC J-STD-020		

7. MOQ and packaging information

Product model	MOQ (pcs)	Shipping packaging	Modules per reel	Reels per carton
WR11-U	4,400	Tape and reel	1,100	4

8. Appendix: Statement

Important Notice to OEM integrators

1. This module is limited to OEM installation ONLY.
2. This module is limited to installation in mobile or fixed applications, according to Part 2.1091(b).
3. The separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and different antenna configurations
4. For FCC Part 15.31 (h) and (k): The host manufacturer is responsible for additional testing to verify compliance as a composite system. When testing the host device for compliance with Part 15 Subpart B, the host manufacturer is required to show compliance with Part 15 Subpart B while the transmitter module(s) are installed and operating. The modules should be transmitting and the evaluation should confirm that the module's intentional emissions are compliant (i.e. fundamental and out of band emissions). The host manufacturer must verify that there are no additional unintentional emissions other than what is permitted in Part 15 Subpart B or emissions are complaint with the transmitter(s) rule(s). The Grantee will provide guidance to the host manufacturer for Part 15 B requirements if needed.

Important Note

Notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify to Tuya that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the TUYA, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

End Product Labeling When the module is installed in the host device, the FCC label must be visible through a window on the final device or it must be visible when an access panel, door or cover is easily re-moved. If not, a second label must be placed on the outside of the final device that contains the following text: "Contains FCC ID: 2ANDL-WR11U" . The FCC ID can be used only when all FCC compliance requirements are met.

Antenna Installation (1) The antenna must be installed such that 20 cm is maintained between the antenna and users, (2) The transmitter module may not be co-located with any other transmitter or antenna. (3) Only antennas of the same type and with equal or less gains as shown below may be used with this module. Other types of antennas and/or higher gain antennas may require additional authorization for operation.

Antenna type	BT/Wlan 2.4G	UNII-1	UNII-2	UNII-2C	UNII-3
PCB	0.88dBi	-0.34dBi	0.12dBi	1.53dBi	1.07dBi

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Manual Information to the End User The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Federal Communication Commission Interference Statement This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or

television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

List of applicable FCC rules This module has been tested and found to comply with part 15 requirements for Modular Approval. The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

This device is intended only for OEM integrators under the following conditions:
(For module device use)

1. The antenna must be installed such that 20 cm is maintained between the antenna and users, and
2. The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Radiation Exposure Statement This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.