# FCC TEST REPORT

**Test report**
**On Behalf of**
**Shenzhen Yingshixun Electronic Technology Co., Ltd.**
**For**
**Wireless Battery Camera**
**Model No.: BC21, BC23, BC25, BC31, BC35, BC38, BC41, BC45, BC46, BC51, BC55**

**FCC ID: 2ANJX-BC21**

| | |
|---|---|
| **Prepared for :** | **Shenzhen Yingshixun Electronic Technology Co., Ltd.**<br>**1201-A/1201-B, 12FL, BLD B2, Block B, Baoneng Technology Park, Gangtou Community, Bantian Subdistrict, Longgang District, Shenzhen, China** |
| **Prepared By :** | **Shenzhen HUAK Testing Technology Co., Ltd.**<br>**1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen, China** |

| | |
|---|---|
| **Date of Test:** | **Jan. 19, 2021 ~ Apr. 07, 2021** |
| **Date of Report:** | **Apr. 07, 2021** |
| **Report Number:** | **HK2101190210-E** |

# TEST RESULT CERTIFICATION

| | |
|---|---|
| **Applicant's name**.....: | Shenzhen Yingshixun Electronic Technology Co., Ltd. |
| Address.....: | 1201-A/1201-B, 12FL, BLD B2, Block B, Baoneng Technology Park, Gangtou Community, Bantian Subdistrict, Longgang District, Shenzhen, China |
| **Manufacture's Name** .....: | Shenzhen Yingshixun Electronic Technology Co., Ltd. |
| Address.....: | 1201-A/1201-B, 12FL, BLD B2, Block B, Baoneng Technology Park, Gangtou Community, Bantian Subdistrict, Longgang District, Shenzhen, China |

**Product description**

| | |
|---|---|
| Trade Mark: | N/A |
| Product name.....: | Wireless Battery Camera |
| Model and/or type reference : | BC21, BC23, BC25, BC31, BC35, BC38, BC41, BC45, BC46, BC51, BC55 |
| **Standards**.....: | FCC Rules and Regulations Part 15 Subpart C Section 15.247<br>ANSI C63.10: 2013 |

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test**..... :

| | |
|---|---|
| Date (s) of performance of tests..... : | Jan. 19, 2021 ~ Apr. 07, 2021 |
| Date of Issue ..... : | Apr. 07, 2021 |
| Test Result ..... : | **Pass** |

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)

# TABLE OF CONTENTS


1. TEST RESULT SUMMARY ..... 5
   1.1. TEST PROCEDURES AND RESULTS ..... 5
   1.2. TEST FACILITY ..... 5
   1.3. MEASUREMENT UNCERTAINTY ..... 6
2. EUT DESCRIPTION ..... 7
   2.1. GENERAL DESCRIPTION OF EUT ..... 7
   2.2. CARRIER FREQUENCY OF CHANNELS ..... 8
   2.3. OPERATION OF EUT DURING TESTING ..... 8
   2.4. DESCRIPTION OF TEST SETUP ..... 9
3. GENERA INFORMATION ..... 10
   3.1. TEST ENVIRONMENT AND MODE ..... 10
   3.2. DESCRIPTION OF SUPPORT UNITS ..... 11
4. TEST RESULTS AND MEASUREMENT DATA ..... 12
   4.1. CONDUCTED EMISSION ..... 12
   4.2. TEST RESULT ..... 14
   4.3. MAXIMUM CONDUCTED OUTPUT POWER ..... 16
   4.4. EMISSION BANDWIDTH ..... 18
   4.5. POWER SPECTRAL DENSITY ..... 23
   4.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT ..... 28
   4.7. RADIATED SPURIOUS EMISSION MEASUREMENT ..... 36
5. ANTENNA REQUIREMENT ..... 57
6. PHOTOGRAPH OF TEST ..... 58
7. PHOTOS OF THE EUT ..... 60

# ** Modifited History **

| Revison | Description | Issued Data | Remark |
|---|---|---|---|
| Revsion 1.0 | Initial Test Report Release | Apr. 07, 2021 | Jason Zhou |
| | | | |
| | | | |

# 1. TEST RESULT SUMMARY

## 1.1. TEST PROCEDURES AND RESULTS

| Requirement | CFR 47 Section | Result |
|---|---|---|
| Antenna requirement | §15.203/§15.247 (c) | PASS |
| AC Power Line Conducted Emission | §15.207 | PASS |
| Conducted Peak Output Power | §15.247 (b)(3) | PASS |
| 6dB Emission Bandwidth | §15.247 (a)(2) | PASS |
| Power Spectral Density | §15.247 (e) | PASS |
| Band Edge | 1§5.247(d) | PASS |
| Spurious Emission | §15.205/§15.209 | PASS |

***Note:***

*1. PASS: Test item meets the requirement.*

*2. Fail: Test item does not meet the requirement.*

*3. N/A: Test case does not apply to the test object.*

*4. The test result judgment is decided by the limit of test standard.*

## 1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen, China

## 1.3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|---|---|---|
| 1 | Conducted Emission | ±2.71dB |
| 2 | RF power, conducted | ±0.37dB |
| 3 | Spurious emissions, conducted | ±0.11dB |
| 4 | All emissions, radiated(<1G) | ±3.90dB |
| 5 | All emissions, radiated(>1G) | ±4.28dB |
| 6 | Temperature | ±0.1°C |
| 7 | Humidity | ±1.0% |

# 2. EUT DESCRIPTION

## 2.1. GENERAL DESCRIPTION OF EUT

| | |
|---|---|
| Equipment | Wireless Battery Camera |
| Model Name | BC21 |
| Serial No. | BC23, BC25, BC31, BC35, BC38, BC41, BC45, BC46, BC51, BC55 |
| Model Difference | All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample mode: BC21. |
| FCC ID | 2ANJX-BC21 |
| Antenna Type | Internal Antenna |
| Antenna Gain | 1dBi |
| Operation frequency | 802.11b/g/n 20: 2412~2462 MHz |
| Number of Channels | 802.11b/g/n20: 11CH |
| Modulation Type | CCK/OFDM/DBPSK/DAPSK |
| Power Source | DC 3.6V from battery or DC 5V from USB |
| Power Rating | DC 3.6V from battery or DC 5V from USB |

## 2.2. CARRIER FREQUENCY OF CHANNELS

| Channel List for 802.11b/802.11g/802.11n (HT20) | | | | | | | |
|---|---|---|---|---|---|---|---|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2412 | 04 | 2427 | 07 | 2442 | 10 | 2457 |
| 02 | 2417 | 05 | 2432 | 08 | 2447 | 11 | 2462 |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | | |

***Note:***

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2.3. OPERATION OF EUT DURING TESTING

Operating Mode
The mode is used: Transmitting mode for 802.11b/802.11g/802.11n (HT20)
Low Channel: 2412MHz
Middle Channel: 2437MHz
High Channel: 2462MHz

## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and radiation below 1GHz testing:




Operation of EUT during radiation above 1GHz testing:

Adapter information
Model: HW-059200CHQ
Input: 100-240V, 50-60Hz, 0.5A
Output: 5VDC, 2A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.

# 3. GENERA INFORMATION

## 3.1. TEST ENVIRONMENT AND MODE

| **Operating Environment:** | |
|---|---|
| Temperature: | 25.0 °C |
| Humidity: | 56 % RH |
| Atmospheric Pressure: | 1010 mbar |
| **Test Mode:** | |
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) |
| The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.For the full battery state and The output power to the maximum state. | |

| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows: | |
|---|---|
| **Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.** | |
| Mode | Data rate |
| 802.11b | 1Mbps |
| 802.11g | 6Mbps |
| 802.11n(HT20) | 6.5Mbps |
| **Final Test Mode:** | |
| Operation mode: | Keep the EUT in continuous transmitting with modulation |
| 1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.<br>2.According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations. | |

## 3.2. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|---|---|---|---|---|
| / | / | / | / | / |

***Note:***

*1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*

*2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

*3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*

# 4. TEST RESULTS AND MEASUREMENT DATA

## 4.1. CONDUCTED EMISSION

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.207 |
| **Test Method:** | ANSI C63.10:2013 |
| **Frequency Range:** | 150 kHz to 30 MHz |
| **Receiver setup:** | RBW=9 kHz, VBW=30 kHz, Sweep time=auto |
| **Limits:** | |

| Frequency range (MHz) | Limit (dBuV) | |
|---|---|---|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

**Test Setup:**

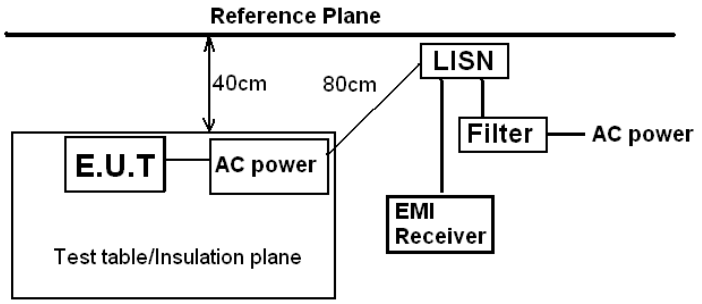


*Remark:*
*E.U.T: Equipment Under Test*
*LISN: Line Impedence Stabilization Network*
*Test table height=0.8m*

| | |
|---|---|
| **Test Mode:** | Charging + transmitting with modulation |
| **Test Procedure:** | 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.<br>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).<br>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. |
| **Test Result:** | PASS |

## Test Instruments

| Conducted Emission Shielding Room Test Site (843) | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Date** | **Calibration Due** |
| Receiver | R&S | ESCI 7 | HKE-010 | Jun. 18, 2020 | Jun. 17, 2021 |
| L.I.S.N. Artificial Mains Network | R&S | ENV216 | HKE-002 | Jun. 18, 2020 | Jun. 17, 2021 |
| LISN | R&S | ENV216 | HKE-059 | Jun. 18, 2020 | Jun. 17, 2021 |
| Conducted test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-081 | N/A | N/A |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## 4.2. TEST RESULT

Test Specification: Line

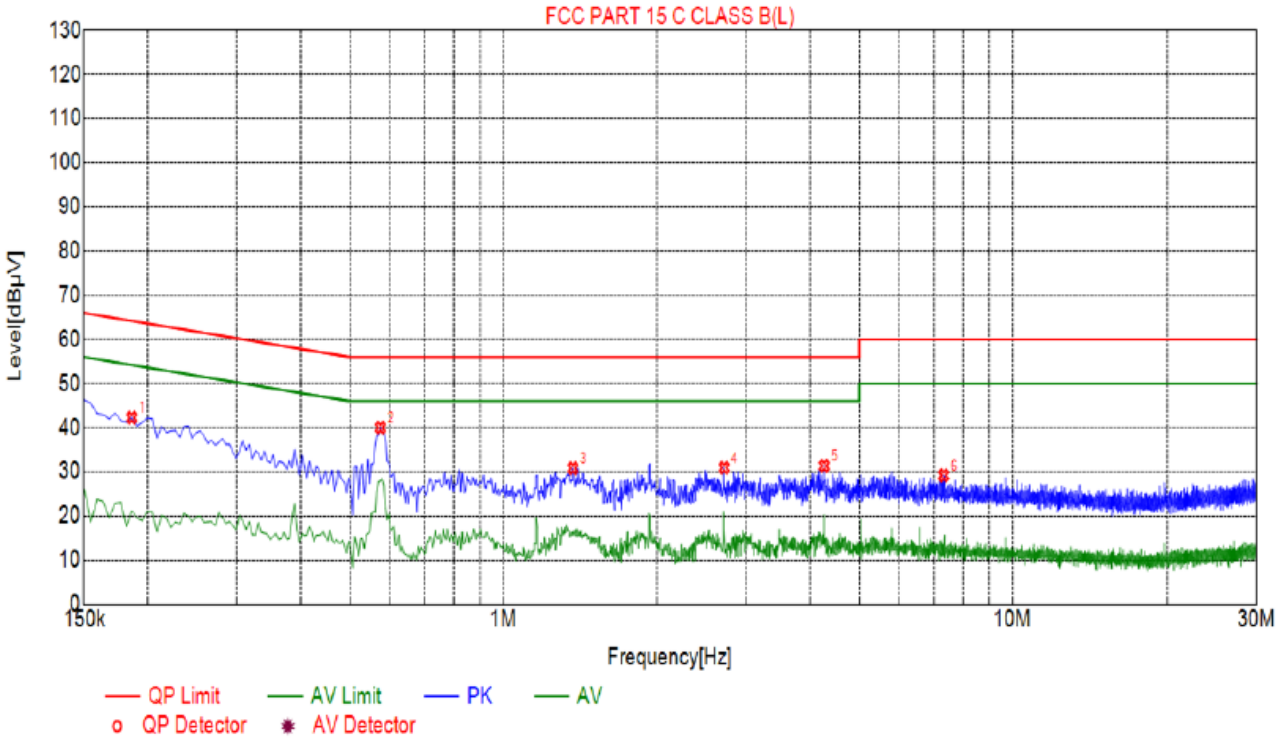


| Suspected List | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
| 1 | 0.1860 | 42.26 | 20.05 | 64.21 | 21.95 | 22.21 | PK | L |
| 2 | 0.5730 | 40.00 | 20.05 | 56.00 | 16.00 | 19.95 | PK | L |
| 3 | 1.3695 | 30.79 | 20.11 | 56.00 | 25.21 | 10.68 | PK | L |
| 4 | 2.7150 | 30.90 | 20.21 | 56.00 | 25.10 | 10.69 | PK | L |
| 5 | 4.2675 | 31.32 | 20.25 | 56.00 | 24.68 | 11.07 | PK | L |
| 6 | 7.3320 | 29.18 | 20.18 | 60.00 | 30.82 | 9.00 | PK | L |

Remark: Margin = Limit – Level
Correction factor = Cable lose + LISN insertion loss
Level=Test receiver reading + correction factor

***Notes:***

1. *An initial pre-scan was performed on the line and neutral lines with peak detector.*
2. *Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.*
3. *Final Level =Receiver Read level + LISN Factor + Cable Loss*
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

Test Specification: Neutral

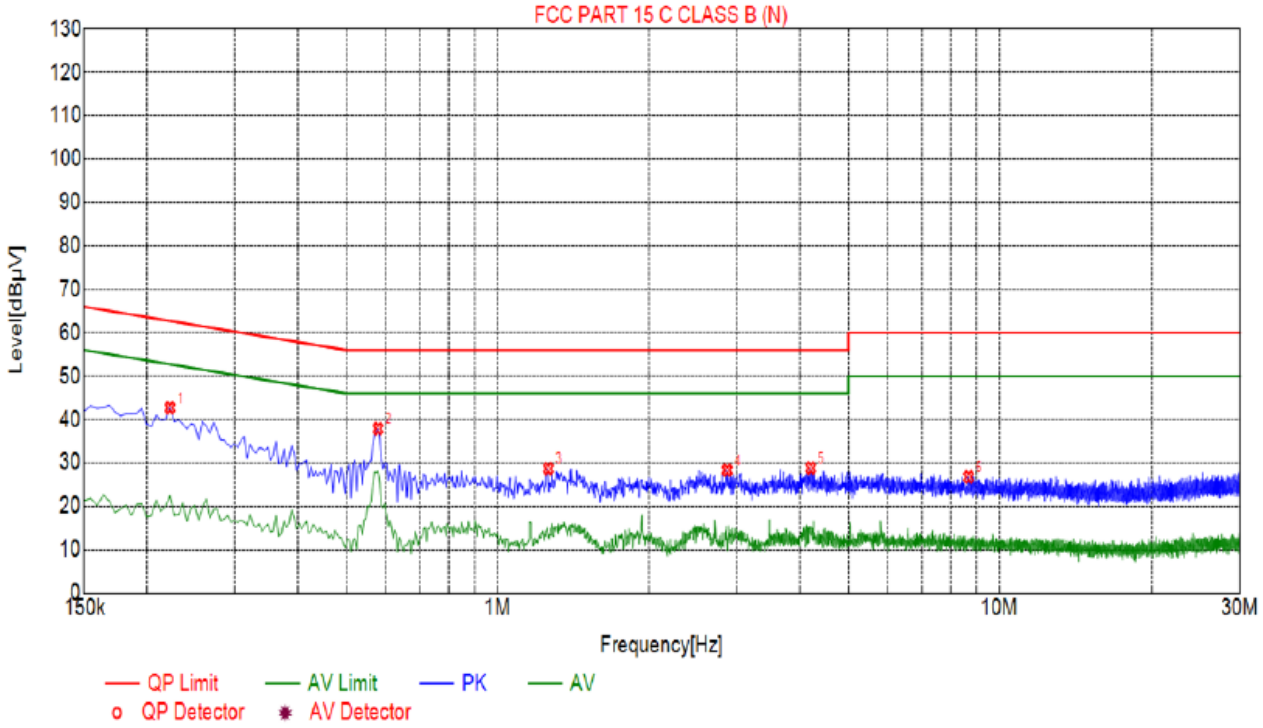


| Suspected List | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
| 1 | 0.2220 | 42.71 | 20.04 | 62.74 | 20.03 | 22.67 | PK | N |
| 2 | 0.5775 | 37.88 | 20.05 | 56.00 | 18.12 | 17.83 | PK | N |
| 3 | 1.2615 | 28.66 | 20.09 | 56.00 | 27.34 | 8.57 | PK | N |
| 4 | 2.8680 | 28.30 | 20.21 | 56.00 | 27.70 | 8.09 | PK | N |
| 5 | 4.2090 | 28.79 | 20.25 | 56.00 | 27.21 | 8.54 | PK | N |
| 6 | 8.6910 | 26.76 | 20.12 | 60.00 | 33.24 | 6.64 | PK | N |

Remark: Margin = Limit – Level
Correction factor = Cable lose + LISN insertion loss
Level=Test receiver reading + correction factor

***Notes:***

1. *An initial pre-scan was performed on the line and neutral lines with peak detector.*
2. *Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.*
3. *Final Level =Receiver Read level + LISN Factor + Cable Loss.*

*If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 4.3. MAXIMUM CONDUCTED OUTPUT POWER

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (b)(3) |
| **Test Method:** | KDB 558074 |
| **Limit:** | 30dBm |
| **Test Setup:** | 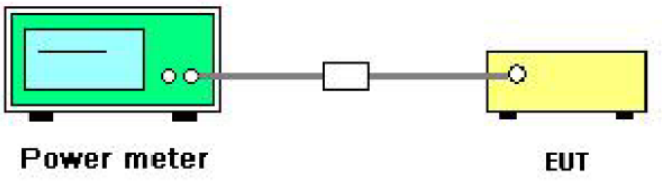 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 15.247 Meas Guidance v05r02.<br>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.<br>3. Set to the maximum power setting and enable the EUT transmit continuously.<br>4. Measure the Peak output power and record the results in the test report. |
| **Test Result:** | PASS |

### Test Instruments

| RF Test Room | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Date** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| Power meter | Agilent | E4419B | HKE-085 | Jun. 18, 2020 | Jun. 17, 2021 |
| Power Sensor | Agilent | E9300A | HKE-086 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Data

| TX 802.11b Mode | | | |
|---|---|---|---|
| Test Channe | Frequency | MaximumPeak Conducted Output Power | LIMIT |
| | (MHz) | (dBm) | dBm |
| CH01 | 2412 | 10.06 | 30 |
| CH06 | 2437 | 9.32 | 30 |
| CH11 | 2462 | 10.18 | 30 |
| **TX 802.11g Mode** | | | |
| CH01 | 2412 | 9.79 | 30 |
| CH06 | 2437 | 8.87 | 30 |
| CH11 | 2462 | 8.76 | 30 |
| **TX 802.11n20 Mode** | | | |
| CH01 | 2412 | 9.29 | 30 |
| CH06 | 2437 | 7.33 | 30 |
| CH11 | 2462 | 8.33 | 30 |

## 4.4. EMISSION BANDWIDTH

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (a)(2) |
| **Test Method:** | KDB 558074 |
| **Limit:** | >500kHz |
| **Test Setup:** | 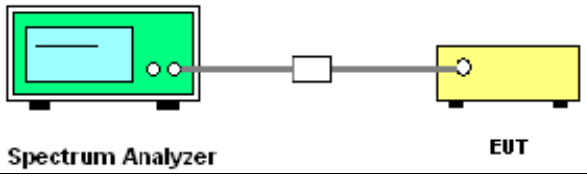 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02.<br>2. Set to the maximum power setting and enable the EUT transmit continuously.<br>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.<br>4. Measure and record the results in the test report. |
| **Test Result:** | PASS |

### Test Instruments

| RF Test Room | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Date** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test data

| Test channel | 6dB Emission Bandwidth (MHz) | | |
|---|---|---|---|
| | 802.11b | 802.11g | 802.11n(H20) |
| Lowest | 8.132 | 15.36 | 15.17 |
| Middle | 8.812 | 15.54 | 15.16 |
| Highest | 8.946 | 15.14 | 15.38 |
| Limit: | >500KHz | | |
| Test Result: | PASS | | |

**Test plots as follows:**

**802.11b Modulation**

Lowest channel

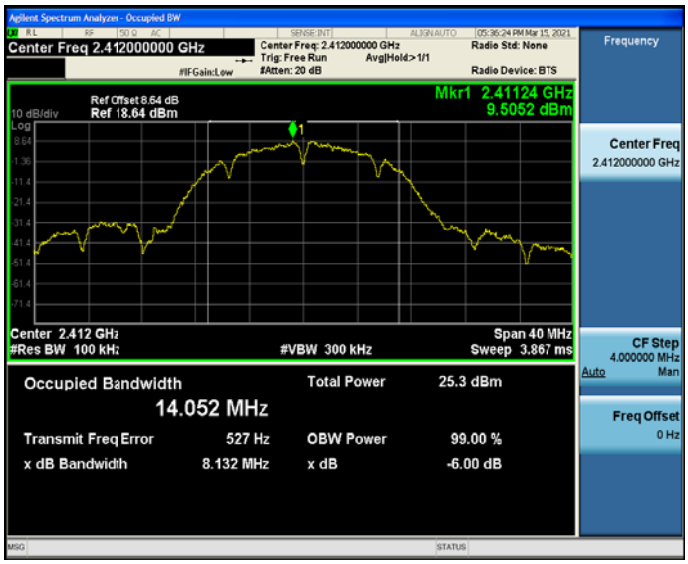


Middle channel

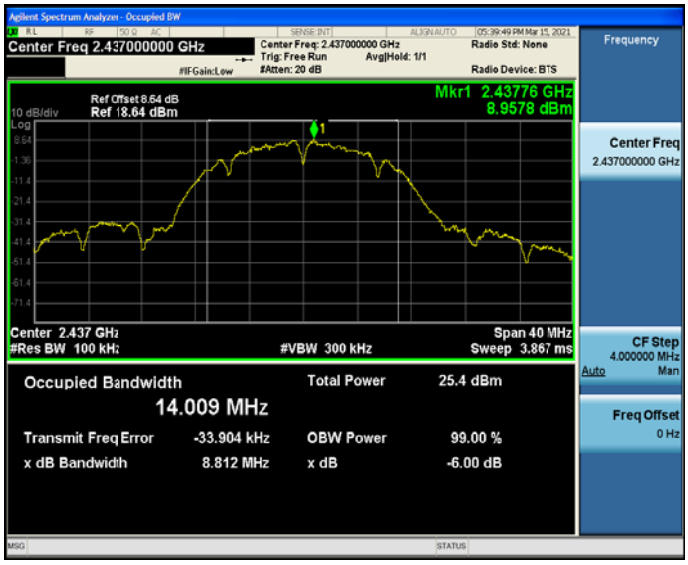


Highest channel

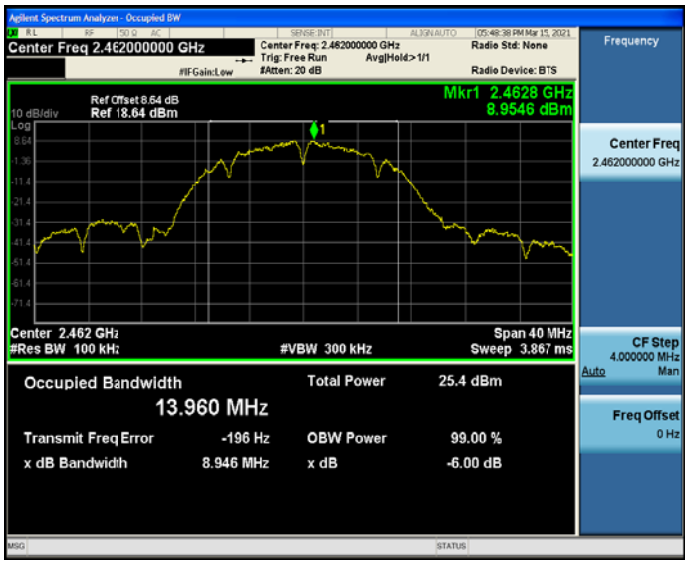

**802.11g Modulation**

Lowest channel

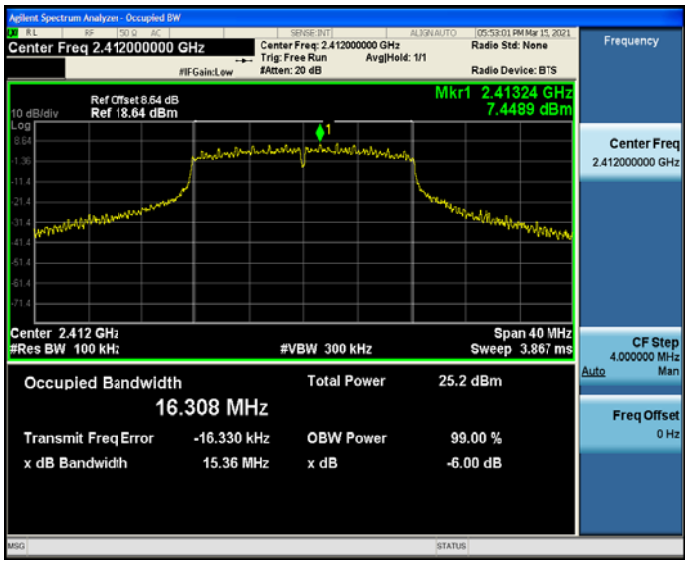


Middle channel

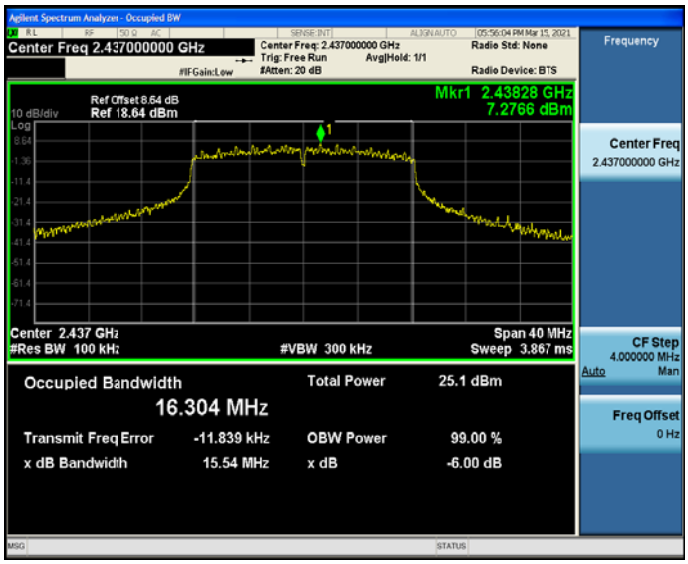


Highest channel

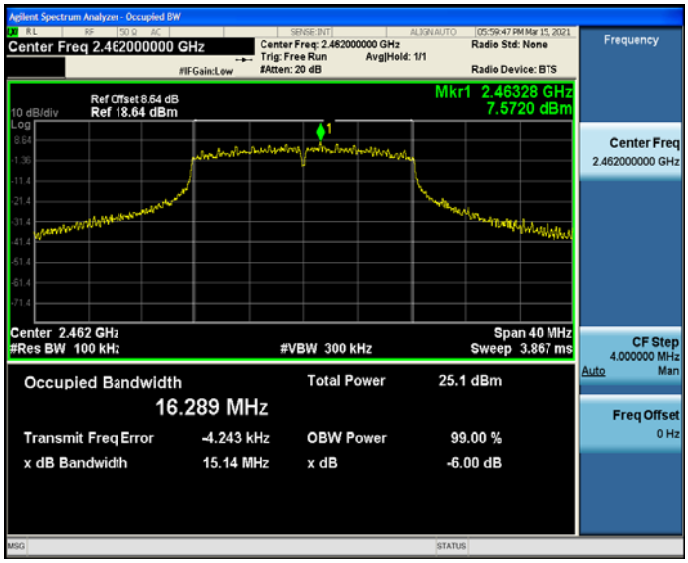

**802.11n (HT20) Modulation**

Lowest channel

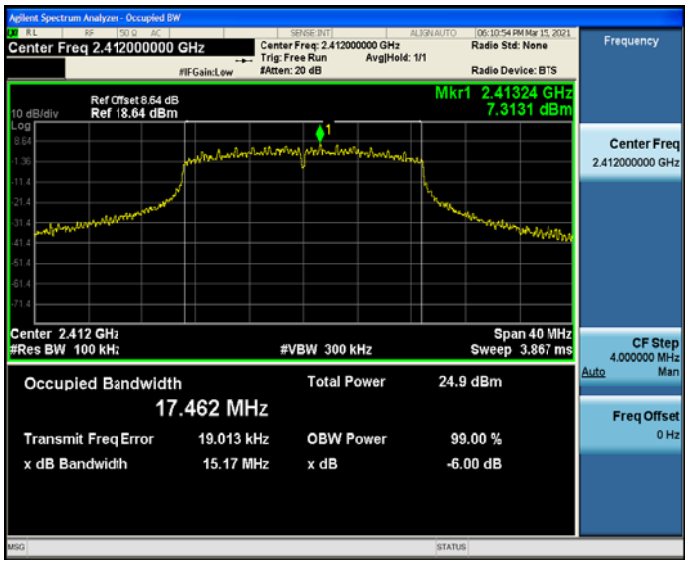


Middle channel

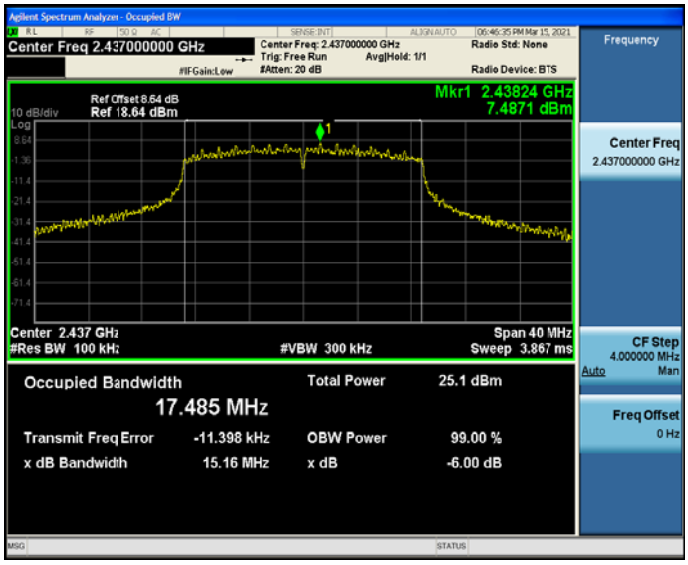


Highest channel

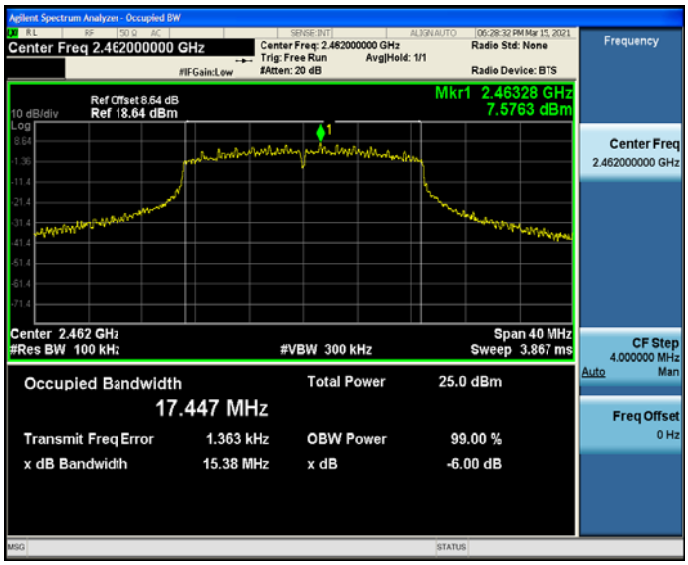

## 4.5. POWER SPECTRAL DENSITY

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (e) |
| **Test Method:** | KDB 558074 |
| **Limit:** | The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission. |
| **Test Setup:** | 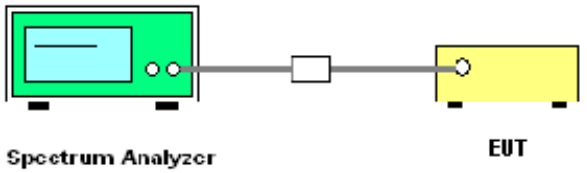 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB 558074 D01 15.247 Meas Guidance v05r02.<br>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.<br>3. Set to the maximum power setting and enable the EUT transmit continuously.<br>4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): 3 kHz ≤ RBW ≤ 100 kHz. Video bandwidth VBW ≥ 3 x RBW. Set the span to at least 1.5 times the OBW.<br>5. Detector = Peak, Sweep time = auto couple.<br>6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.<br>6. Measure and record the results in the test report. |
| **Test Result:** | PASS |

### Test Instruments

| RF Test Room | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Date** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF Cable (9KHz-26.5GHz) | Tonscend | 170660 | N/A | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF test software | Tonscend | JS1120-B Version 2.6 | HKE-083 | N/A | N/A |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test data

| EUT Set Mode | Channel | Result (dBm/30kHz) | Result (dBm/3kHz) |
|---|---|---|---|
| 802.11b | Lowest | 4.83 | -5.17 |
| | Middle | 5.03 | -4.97 |
| | Highest | 5.35 | -4.65 |
| 802.11g | Lowest | 3.56 | -6.44 |
| | Middle | 2.12 | -7.88 |
| | Highest | 2.16 | -7.84 |
| 802.11n(H20) | Lowest | 2.53 | -7.47 |
| | Middle | 2.64 | -7.36 |
| | Highest | 2.19 | -7.81 |
| PSD test result (dBm/3kHz)= PSD test result (dBm/30kHz)-10 | | | |
| Limit: 8dBm/3kHz | | | |
| Test Result: | PASS | | |

**Test plots as follows:**

**802.11b Modulation**

Lowest channel

Middle channel

Highest channel

**802.11g Modulation**

Lowest channel

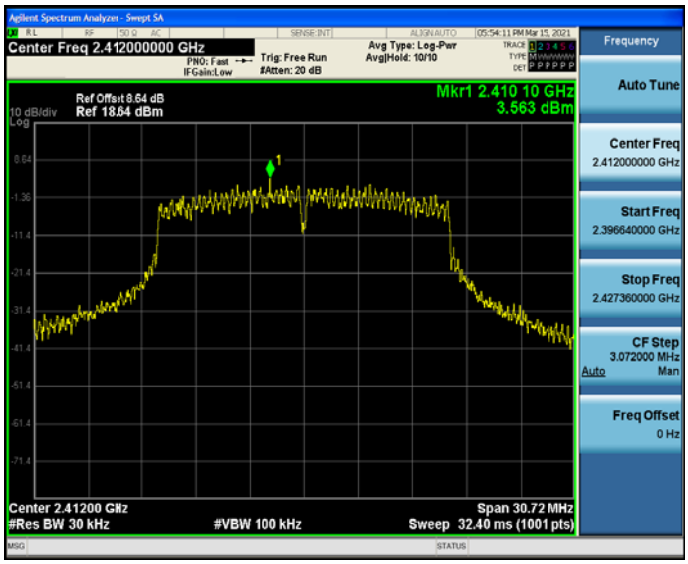


Middle channel

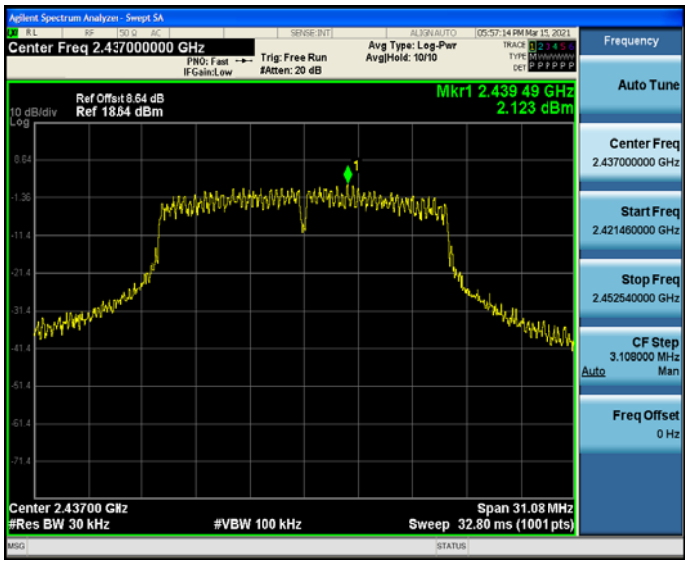


Highest channel

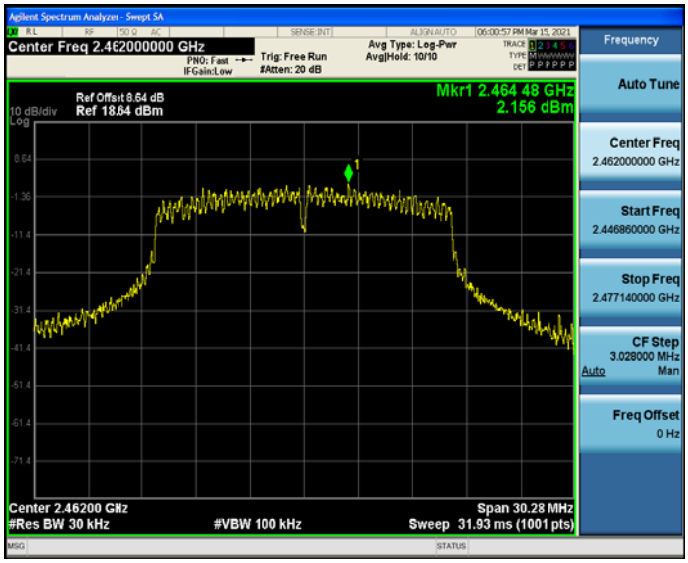

**802.11n (HT20) Modulation**

Lowest channel

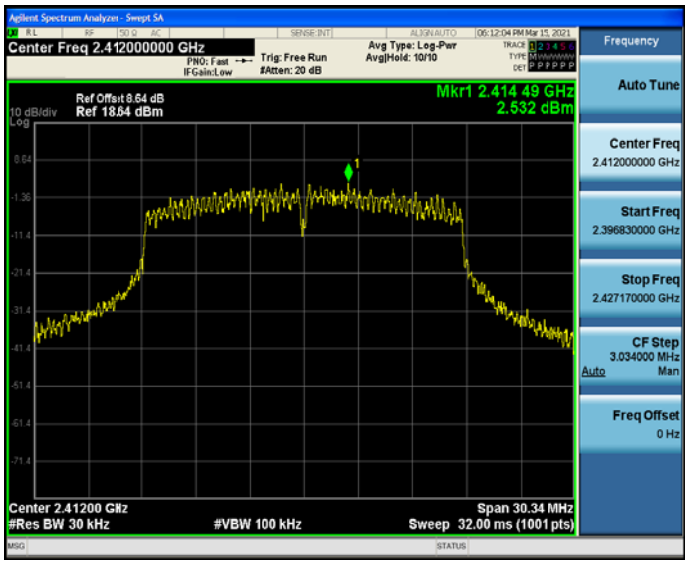


Middle channel

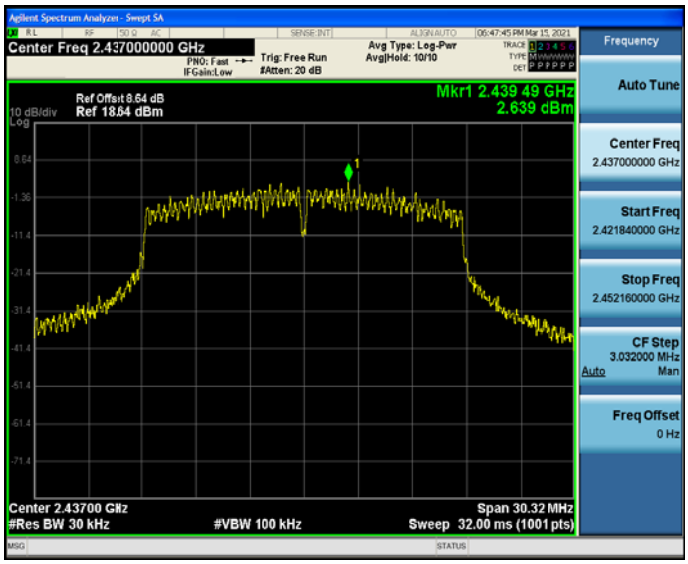


Highest channel

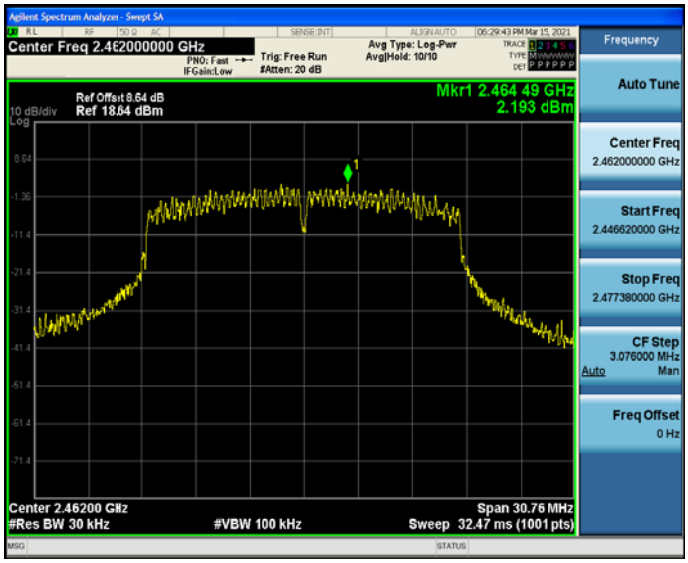

## 4.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (d) |
| **Test Method:** | KDB558074 |
| **Limit:** | In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). |
| **Test Setup:** | 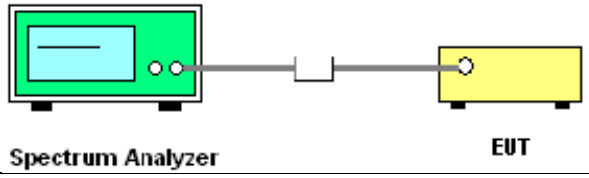 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02.<br>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.<br>3. Set to the maximum power setting and enable the EUT transmit continuously.<br>4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).<br>5. Measure and record the results in the test report.<br>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. |
| **Test Result:** | PASS |

## Test Instruments

| RF Test Room | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Date** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| High pass filter unit | Tonscend | JS0806-F | HKE-055 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF Cable (9KHz-26.5GHz) | Tonscend | 170660 | N/A | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF test software | Tonscend | JS1120-B Version 2.6 | HKE-083 | N/A | N/A |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Data

### 802.11b Modulation

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| | |
| Spurious Emission(2412MHz) | Spurious Emission(2462MHz) |
| 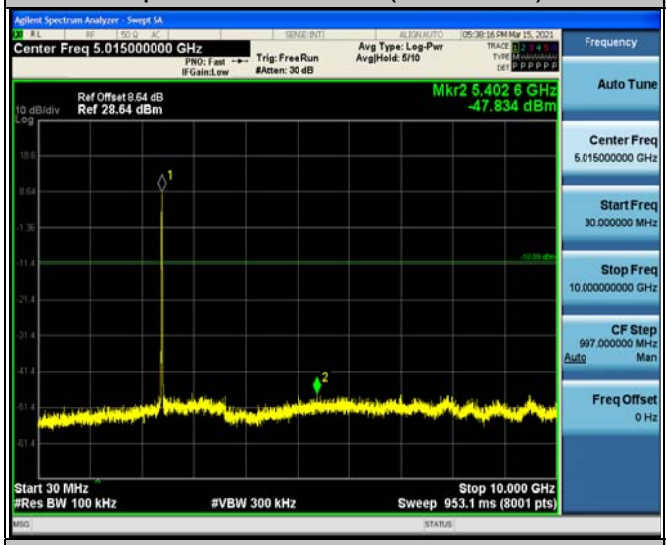 | 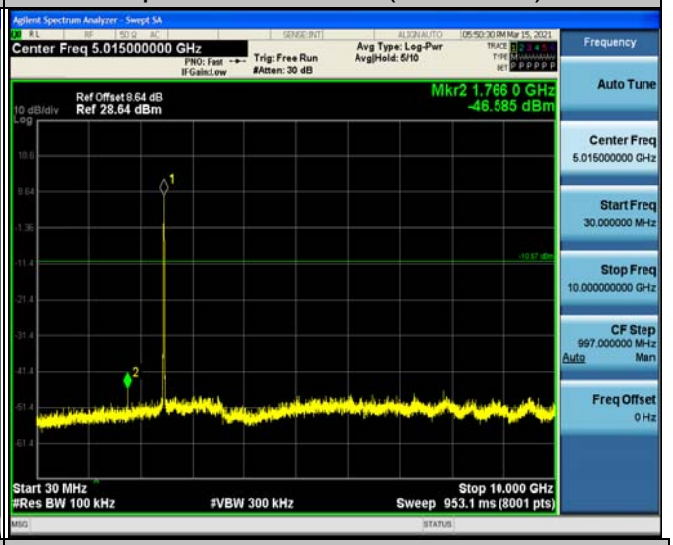 |
| | |

| Middle Channel |
| --- |
| Spurious Emission |

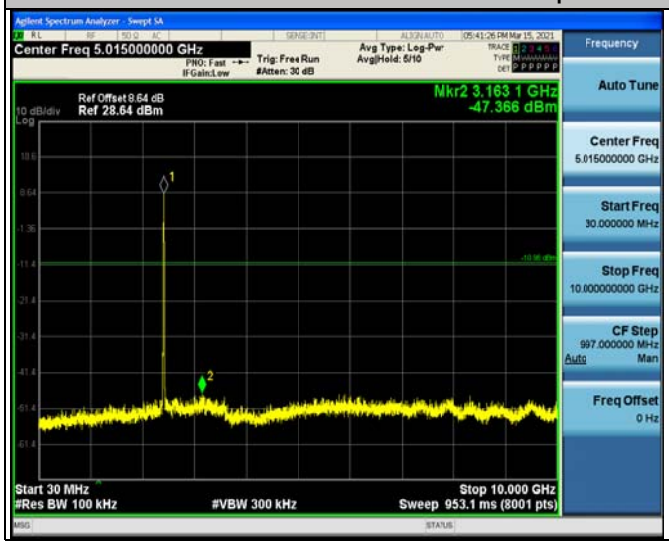

**802.11g Modulation**

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| 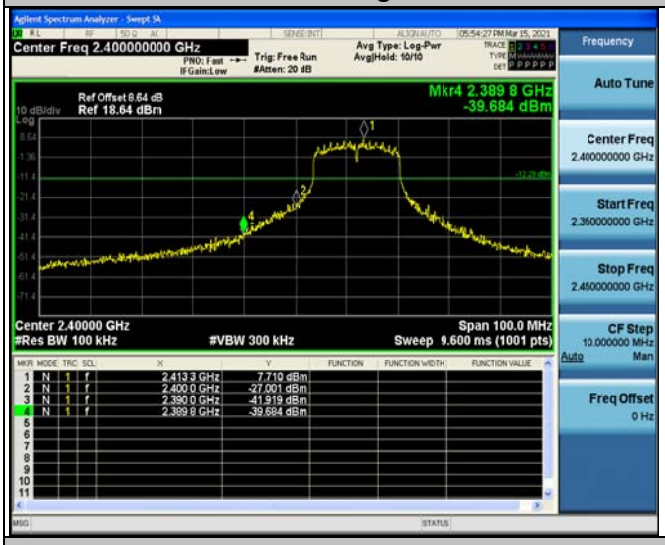 | |
| Spurious Emission(2412MHz) | Spurious Emission(2462MHz) |
| 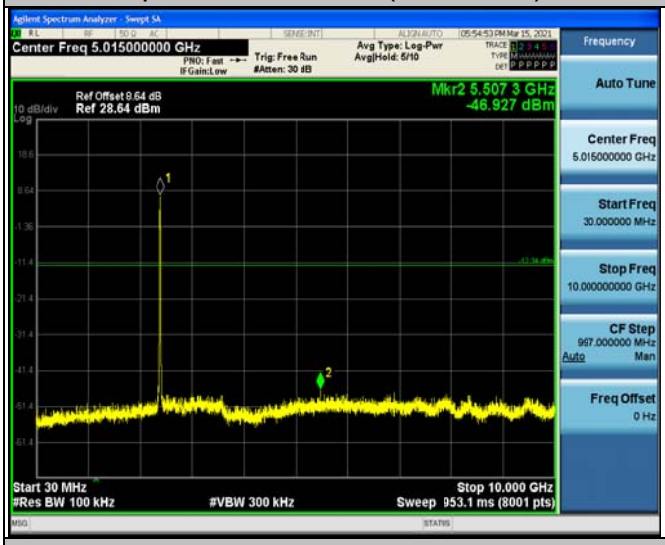 | 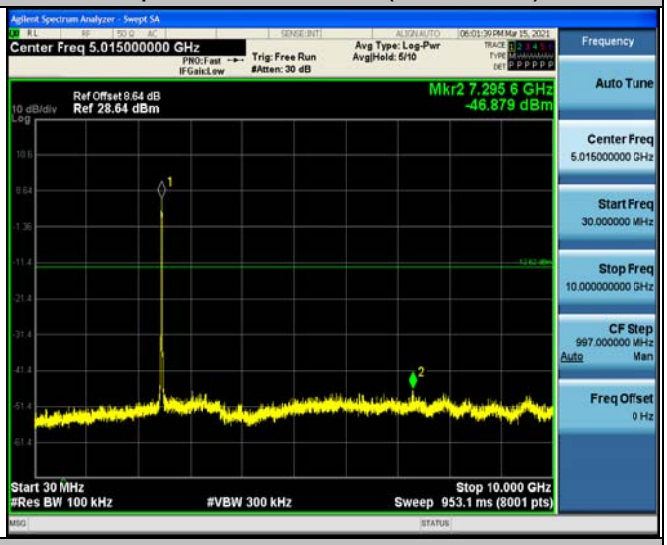 |
| | |

| Middle Channel |
| --- |
| Spurious Emission |

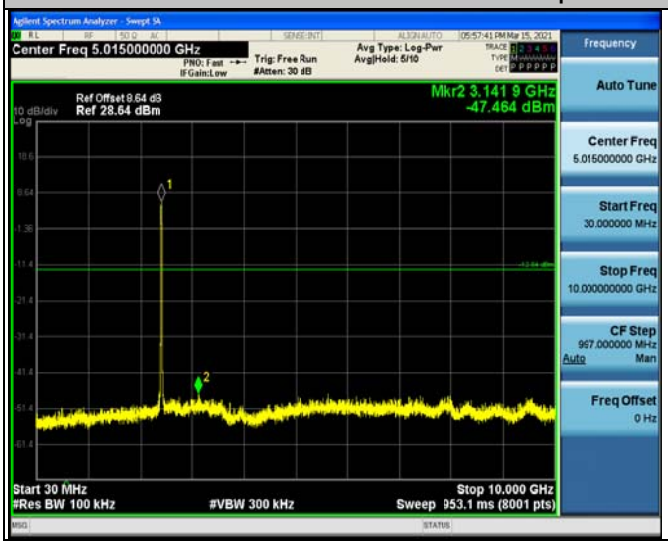

**802.11n (HT20) Modulation**

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| 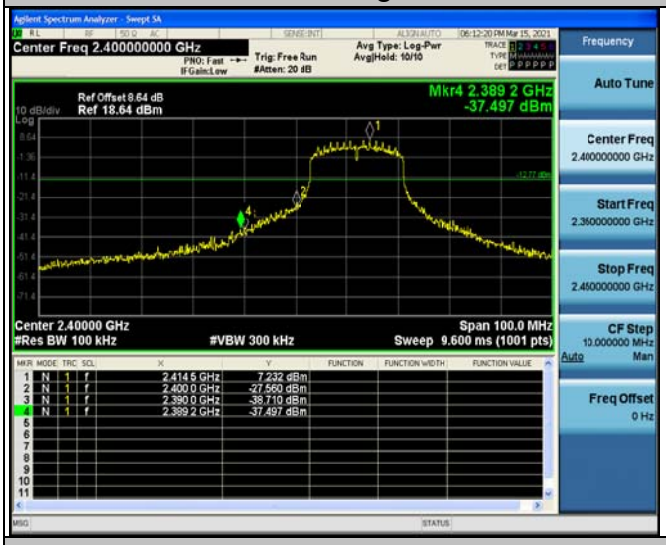 | |
| Spurious Emission(2412MHz) | Spurious Emission(2462MHz) |
| 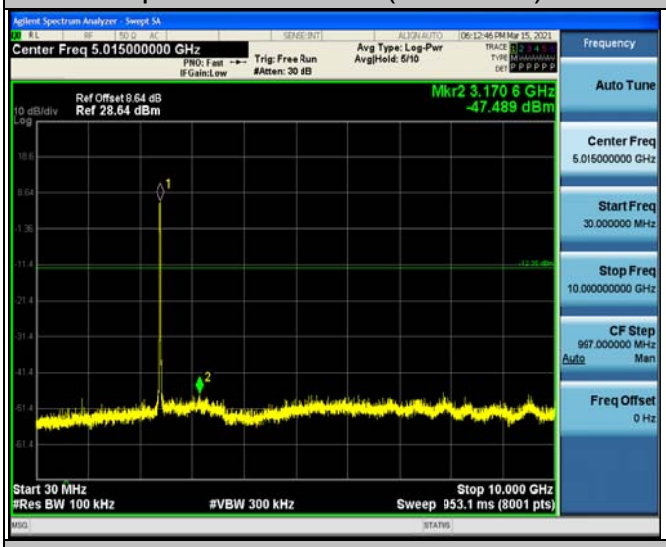 | 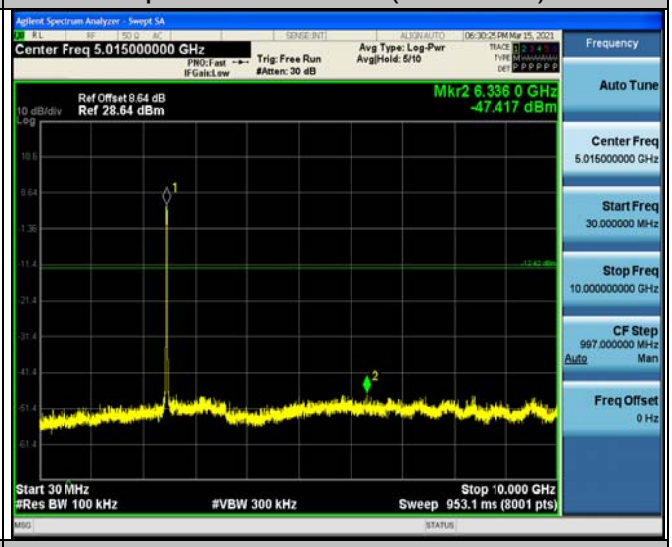 |
| | |

| Middle Channel |
| --- |
| Spurious Emission |

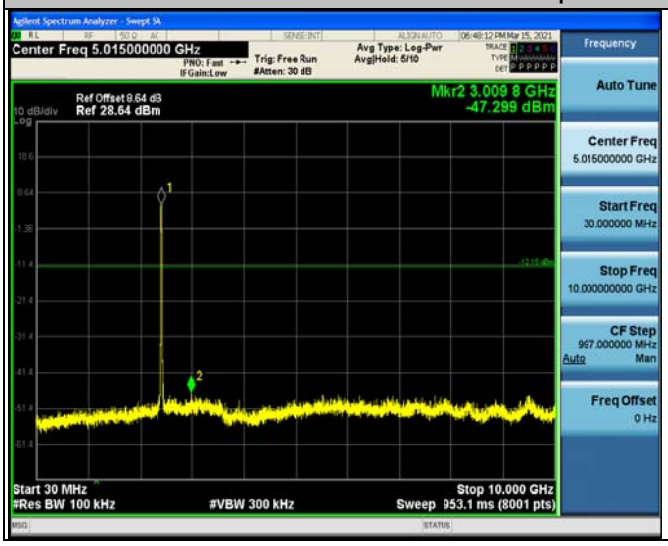

## 4.7. RADIATED SPURIOUS EMISSION MEASUREMENT

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.209 |
| **Test Method:** | ANSI C63.10: 2013 |
| **Frequency Range:** | 9 kHz to 25 GHz |
| **Measurement Distance:** | 3 m |
| **Antenna Polarization:** | Horizontal & Vertical |
| **Operation mode:** | Transmitting mode with modulation |

**Receiver Setup:**

| Frequency | Detector | RBW | VBW | Remark |
|---|---|---|---|---|
| 9kHz- 150kHz | Quasi-peak | 200Hz | 1kHz | Quasi-peak Value |
| 150kHz-30MHz | Quasi-peak | 9kHz | 30kHz | Quasi-peak Value |
| 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| | Peak | 1MHz | 10Hz | Average Value |

**Limit:**

| Frequency | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|---|---|---|
| 0.009-0.490 | 2400/F(KHz) | 300 |
| 0.490-1.705 | 24000/F(KHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

| Frequency | Field Strength (microvolts/meter) | Measurement Distance (meters) | Detector |
|---|---|---|---|
| Above 1GHz | 500 | 3 | Average |
| | 5000 | 3 | Peak |

**Test setup:**

For radiated emissions below 30MHz

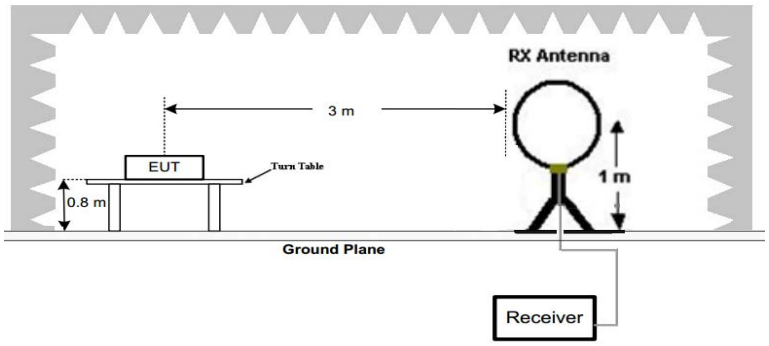


30MHz to 1GHz

| | |
|---|---|
| | 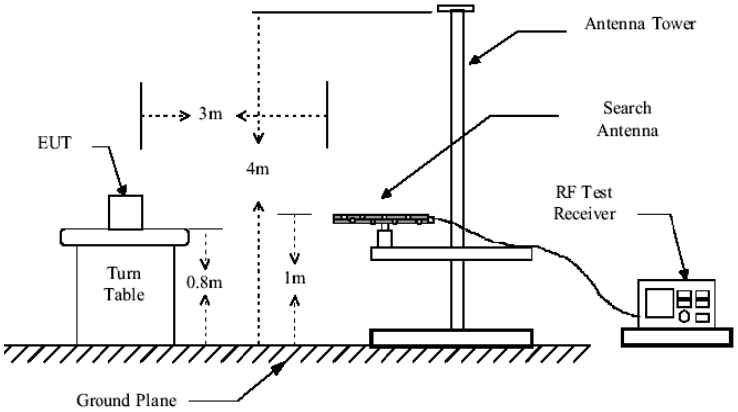 <br>Above 1GHz<br> 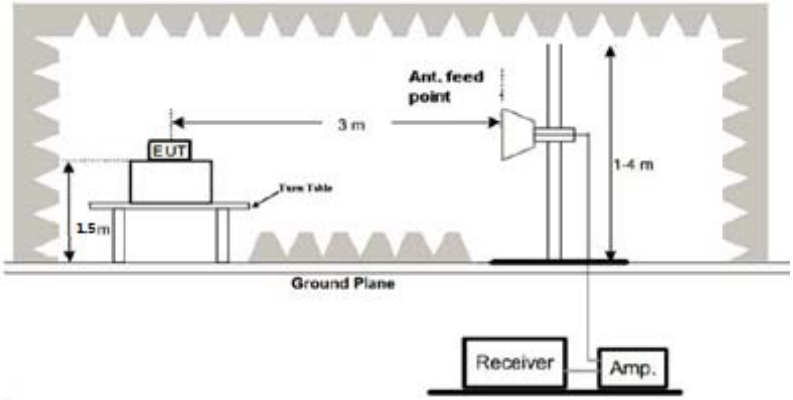 |
| **Test Procedure:** | 1. For the radiated emission test below 1GHz:<br>The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on thetop of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a highPASS filter are used for the test in order to get better signal level.<br>For the radiated emission test above 1GHz:<br>Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be |

| | |
|---|---|
| | restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.<br>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.<br>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detectoris 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, theemission measurement will be repeated using the quasi-peak detector and reported.<br>5. Use the following spectrum analyzer settings:<br>(1) Span shall wide enough to fully capture the emission being measured;<br>(2) Set RBW=100 kHz for f < 1 GHz; VBW ≥RBW; Sweep = auto; Detector function = peak;Trace = max hold;<br>(3) Set RBW = 1 MHz, VBW= 3MHz for f 1 GHz for peak measurement.<br>For average measurement:VBW = 10 Hz, when duty cycle is no less than 98 percent.VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimumtransmission duration over which the transmitter is on and is transmitting at its maximumpower control level for the tested mode of operation. |
| **Test results:** | PASS |

**Test Instruments**

| Radiated Emission Test Site (966) | | | | | |
|---|---|---|---|---|---|
| **Name of Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Date** | **Calibration Due** |
| Receiver | R&S | ESCI-7 | HKE-010 | Jun. 18, 2020 | Jun. 17, 2021 |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| Spectrum analyzer | R&S | FSP40 | HKE-025 | Jun. 18, 2020 | Jun. 17, 2021 |
| High gain antenna | Schwarzbeck | LB-180400KF | HKE-054 | Jun. 18, 2020 | Jun. 17, 2021 |
| Preamplifier | Schwarzbeck | BBV 9743 | HKE-006 | Jun. 18, 2020 | Jun. 17, 2021 |
| Preamplifier | EMCI | EMC051845SE | HKE-015 | Jun. 18, 2020 | Jun. 17, 2021 |
| Preamplifier | Agilent | 83051A | HKE-016 | Jun. 18, 2020 | Jun. 17, 2021 |
| Loop antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Jun. 18, 2020 | Jun. 17, 2021 |
| Broadband antenna | Schwarzbeck | VULB 9163 | HKE-012 | Jun. 18, 2020 | Jun. 17, 2021 |
| Horn antenna | Schwarzbeck | 9120D | HKE-013 | Jun. 18, 2020 | Jun. 17, 2021 |
| High pass filter unit | Tonscend | JS0806-F | HKE-055 | Jun. 18, 2020 | Jun. 17, 2021 |
| Antenna Mast | Keleto | CC-A-4M | N/A | N/A | N/A |
| Position controller | Taiwan MF | MF7802 | HKE-011 | Jun. 18, 2020 | Jun. 17, 2021 |
| Radiated test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-082 | N/A | N/A |
| RF cable | Times | 9kHz-1GHz | HKE-117 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| Horn Antenna | Schewarzbeck | BBHA 9170 | HKE-017 | Jun. 18, 2020 | Jun. 17, 2021 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Data

**All the test modes completed for test. only the worst result of (802.11b at 2412MHz) was reported as below:**

**Below 1GHz**

### Horizontal

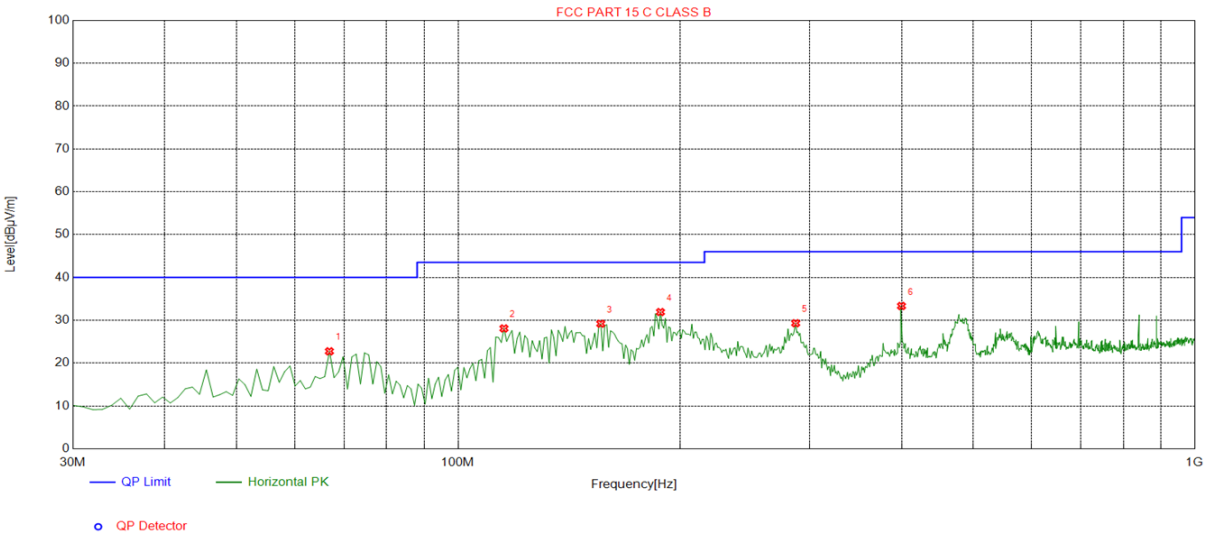


| Suspected List | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| NO. | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 66.8969 | -16.89 | 39.64 | 22.75 | 40.00 | 17.25 | 100 | 12 | Horizontal |
| 2 | 115.4454 | -16.34 | 44.43 | 28.09 | 43.50 | 15.41 | 100 | 149 | Horizontal |
| 3 | 156.2262 | -18.49 | 47.69 | 29.20 | 43.50 | 14.30 | 100 | 114 | Horizontal |
| 4 | 188.2683 | -16.16 | 48.08 | 31.92 | 43.50 | 11.58 | 100 | 98 | Horizontal |
| 5 | 287.3073 | -12.95 | 42.26 | 29.31 | 46.00 | 16.69 | 100 | 95 | Horizontal |
| 6 | 399.9399 | -10.41 | 43.74 | 33.33 | 46.00 | 12.67 | 100 | 277 | Horizontal |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

**Vertical**

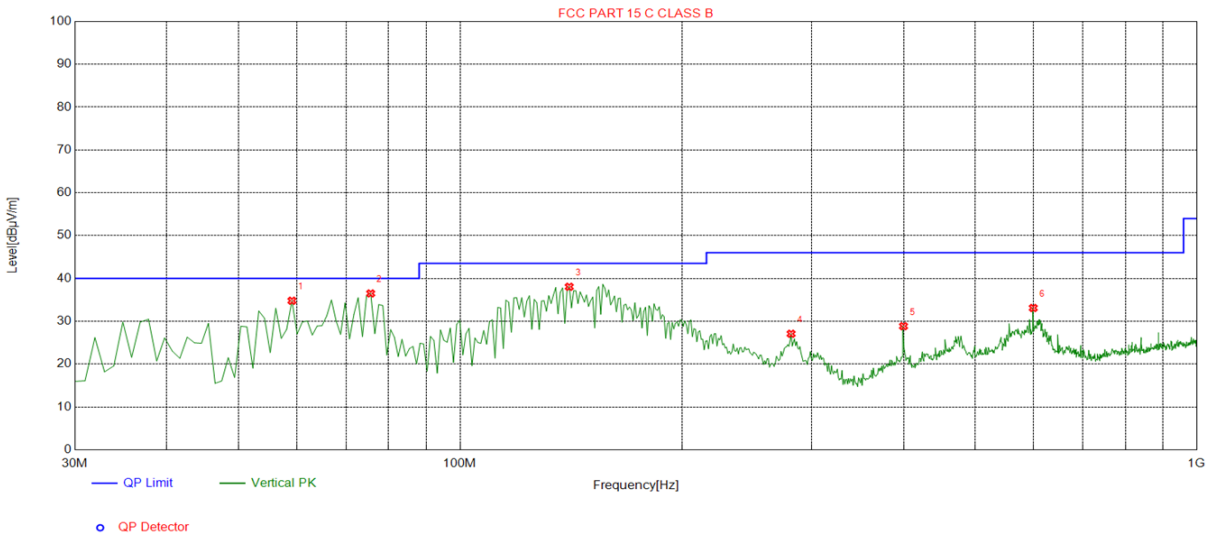


| Suspected List | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| NO. | Freq. [MHz] | Factor [dB] | Reading [dBµV/m] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 59.1291 | -15.03 | 49.82 | 34.79 | 40.00 | 5.21 | 100 | 27 | Vertical |
| 2 | 75.6356 | -18.68 | 55.17 | 36.49 | 40.00 | 3.51 | 100 | 56 | Vertical |
| 3 | 140.6907 | -19.16 | 57.21 | 38.05 | 43.50 | 5.45 | 100 | 158 | Vertical |
| 4 | 281.4815 | -13.19 | 40.27 | 27.08 | 46.00 | 18.92 | 100 | 313 | Vertical |
| 5 | 399.9399 | -10.41 | 39.26 | 28.85 | 46.00 | 17.15 | 100 | 335 | Vertical |
| 6 | 599.9600 | -6.11 | 39.21 | 33.10 | 46.00 | 12.90 | 100 | 316 | Vertical |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

## Harmonics and Spurious Emissions

### Frequency Range (9 kHz-30MHz)

| Frequency (MHz) | Level@3m (dBµV/m) | Limit@3m (dBµV/m) |
|---|---|---|
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |

***Note:*** *1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.*

*2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.*

## Above 1GHz

### RADIATED EMISSION TEST

LOW CH1 (802.11b Mode)/2412

Horizontal:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 59.85 | -3.64 | 56.21 | 74 | -17.79 | peak |
| 4824 | 42.79 | -3.64 | 39.15 | 54 | -14.85 | AVG |
| 7236 | 57.58 | -0.95 | 56.63 | 74 | -17.37 | peak |
| 7236 | 42.85 | -0.95 | 41.9 | 54 | -12.1 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 60.17 | -3.64 | 56.53 | 74 | -17.47 | peak |
| 4824 | 45.85 | -3.64 | 42.21 | 54 | -11.79 | AVG |
| 7236 | 55.96 | -0.95 | 55.01 | 74 | -18.99 | peak |
| 7236 | 43.98 | -0.95 | 43.03 | 54 | -10.97 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11b Mode)/2437

Horizontal:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4874 | 61.09 | -3.51 | 57.58 | 74 | -16.42 | peak |
| 4874 | 44.89 | -3.51 | 41.38 | 54 | -12.62 | AVG |
| 7311 | 58.01 | -0.82 | 57.19 | 74 | -16.81 | peak |
| 7311 | 41.87 | -0.82 | 41.05 | 54 | -12.95 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4874 | 58.25 | -3.51 | 54.74 | 74 | -19.26 | peak |
| 4874 | 44.37 | -3.51 | 40.86 | 54 | -13.14 | AVG |
| 7311 | 59.11 | -0.82 | 58.29 | 74 | -15.71 | peak |
| 7311 | 43.29 | -0.82 | 42.47 | 54 | -11.53 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH11 (802.11b Mode)/2462

Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 58.46 | -3.43 | 55.03 | 74 | -18.97 | peak |
| 4924 | 45.56 | -3.43 | 42.13 | 54 | -11.87 | AVG |
| 7386 | 57.48 | -0.75 | 56.73 | 74 | -17.27 | peak |
| 7386 | 42.85 | -0.75 | 42.1 | 54 | -11.9 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 57.57 | -3.43 | 54.14 | 74 | -19.86 | peak |
| 4924 | 45.17 | -3.43 | 41.74 | 54 | -12.26 | AVG |
| 7386 | 55.78 | -0.75 | 55.03 | 74 | -18.97 | peak |
| 7386 | 39.49 | -0.75 | 38.74 | 54 | -15.26 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Remark：
(1) Measuring frequencies from 1 GHz to the 25 GHz.
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes bandedge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified inprovision of 15.205, then the general radiated emission limits in 15.209 apply.
(4)The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHzfor measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, theAverage Detected is not need completed. For example: Top Channel at Fundamental73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4824 | 58.22 | -3.64 | 54.58 | 74 | -19.42 | peak |
| 4824 | 43.86 | -3.64 | 40.22 | 54 | -13.78 | AVG |
| 7236 | 55.15 | -0.95 | 54.2 | 74 | -19.8 | peak |
| 7236 | 41.92 | -0.95 | 40.97 | 54 | -13.03 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4824 | 58.54 | -3.64 | 54.9 | 74 | -19.1 | peak |
| 4824 | 45.42 | -3.64 | 41.78 | 54 | -12.22 | AVG |
| 7236 | 55.39 | -0.95 | 54.44 | 74 | -19.56 | peak |
| 7236 | 42.37 | -0.95 | 41.42 | 54 | -12.58 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11g Mode)/2437

Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 58.65 | -3.51 | 55.14 | 74 | -18.86 | peak |
| 4874 | 45.13 | -3.51 | 41.62 | 54 | -12.38 | AVG |
| 7311 | 56.34 | -0.82 | 55.52 | 74 | -18.48 | peak |
| 7311 | 40.36 | -0.82 | 39.54 | 54 | -14.46 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 57.81 | -3.51 | 54.3 | 74 | -19.7 | peak |
| 4874 | 46.93 | -3.51 | 43.42 | 54 | -10.58 | AVG |
| 7311 | 55.67 | -0.82 | 54.85 | 74 | -19.15 | peak |
| 7311 | 42.33 | -0.82 | 41.51 | 54 | -12.49 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH11 (802.11g Mode)/2462

Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 57.55 | -3.43 | 54.12 | 74 | -19.88 | peak |
| 4924 | 44.65 | -3.43 | 41.22 | 54 | -12.78 | AVG |
| 7386 | 54.84 | -0.75 | 54.09 | 74 | -19.91 | peak |
| 7386 | 40.92 | -0.75 | 40.17 | 54 | -13.83 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 57.31 | -3.43 | 53.88 | 74 | -20.12 | peak |
| 4924 | 43.12 | -3.43 | 39.69 | 54 | -14.31 | AVG |
| 7386 | 56.86 | -0.75 | 56.11 | 74 | -17.89 | peak |
| 7386 | 39.98 | -0.75 | 39.23 | 54 | -14.77 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Remark：
(1) Measuring frequencies from 1 GHz to the 25 GHz.
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes bandedge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified inprovision of 15.205, then the general radiated emission limits in 15.209 apply.
(4)The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHzfor measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, theAverage Detected is not need completed. For example: Top Channel at Fundamental73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4824 | 59.43 | -3.64 | 55.79 | 74 | -18.21 | peak |
| 4824 | 44.87 | -3.64 | 41.23 | 54 | -12.77 | AVG |
| 7236 | 54.22 | -0.95 | 53.27 | 74 | -20.73 | peak |
| 7236 | 41.87 | -0.95 | 40.92 | 54 | -13.08 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4824 | 59.53 | -3.64 | 55.89 | 74 | -18.11 | peak |
| 4824 | 45.08 | -3.64 | 41.44 | 54 | -12.56 | AVG |
| 7236 | 57.72 | -0.95 | 56.77 | 74 | -17.23 | peak |
| 7236 | 41.72 | -0.95 | 40.77 | 54 | -13.23 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4874 | 56.26 | -3.51 | 52.75 | 74.00 | -21.25 | peak |
| 4874 | 45.67 | -3.51 | 42.16 | 54.00 | -11.84 | AVG |
| 7311 | 54.61 | -0.82 | 53.79 | 74.00 | -20.21 | peak |
| 7311 | 44.24 | -0.82 | 43.42 | 54.00 | -10.58 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4874 | 59.12 | -3.51 | 55.61 | 74.00 | -18.39 | peak |
| 4874 | 43.75 | -3.51 | 40.24 | 54.00 | -13.76 | AVG |
| 7311 | 54.59 | -0.82 | 53.77 | 74.00 | -20.23 | peak |
| 7311 | 38.99 | -0.82 | 38.17 | 54.00 | -15.83 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 60.46 | -3.43 | 57.03 | 74 | -16.97 | peak |
| 4924 | 45.22 | -3.43 | 41.79 | 54 | -12.21 | AVG |
| 7386 | 55.87 | -0.75 | 55.12 | 74 | -18.88 | peak |
| 7386 | 41.18 | -0.75 | 40.43 | 54 | -13.57 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 60.26 | -3.43 | 56.83 | 74 | -17.17 | peak |
| 4924 | 44.53 | -3.43 | 41.1 | 54 | -12.9 | AVG |
| 7386 | 56.43 | -0.75 | 55.68 | 74 | -18.32 | peak |
| 7386 | 43.39 | -0.75 | 42.64 | 54 | -11.36 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

**Test Result of Radiated Spurious at Band edges**

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2310.00 | 58.96 | -5.81 | 53.15 | 74 | -20.85 | peak |
| 2310.00 | 45.85 | -5.81 | 40.04 | 54 | -13.96 | AVG |
| 2390.00 | 59.17 | -5.84 | 53.33 | 74 | -20.67 | peak |
| 2390.00 | 48.49 | -5.84 | 42.65 | 54 | -11.35 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2310.00 | 60.71 | -5.81 | 54.9 | 74 | -19.1 | peak |
| 2310.00 | 49.94 | -5.81 | 44.13 | 54 | -9.87 | AVG |
| 2390.00 | 63.45 | -5.84 | 57.61 | 74 | -16.39 | peak |
| 2390.00 | 46.89 | -5.84 | 41.05 | 54 | -12.95 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2462MHz)

Horizontal

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 59.85 | -5.81 | 54.04 | 74 | -19.96 | peak |
| 2483.50 | 48.09 | -5.81 | 42.28 | 54 | -11.72 | AVG |
| 2500.00 | 57.93 | -6.06 | 51.87 | 74 | -22.13 | peak |
| 2500.00 | 45.22 | -6.06 | 39.16 | 54 | -14.84 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 58.99 | -5.81 | 53.18 | 74 | -20.82 | peak |
| 2483.50 | 48.25 | -5.81 | 42.44 | 54 | -11.56 | AVG |
| 2500.00 | 59.83 | -6.06 | 53.77 | 74 | -20.23 | peak |
| 2500.00 | 49.54 | -6.06 | 43.48 | 54 | -10.52 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310.00 | 59.13 | -5.81 | 53.32 | 74 | -20.68 | peak |
| 2310.00 | 46.58 | -5.81 | 40.77 | 54 | -13.23 | AVG |
| 2390.00 | 61.04 | -5.84 | 55.2 | 74 | -18.8 | peak |
| 2390.00 | 46.84 | -5.84 | 41 | 54 | -13 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310.00 | 61.24 | -5.81 | 55.43 | 74 | -18.57 | peak |
| 2310.00 | 47.54 | -5.81 | 41.73 | 54 | -12.27 | AVG |
| 2390.00 | 61.87 | -5.84 | 56.03 | 74 | -17.97 | peak |
| 2390.00 | 47.51 | -5.84 | 41.67 | 54 | -12.33 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2462MHz)

Horizontal

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2483.50 | 59.33 | -5.65 | 53.68 | 74 | -20.32 | peak |
| 2483.50 | 47.72 | -5.65 | 42.07 | 54 | -11.93 | AVG |
| 2500.00 | 60.12 | -5.65 | 54.47 | 74 | -19.53 | peak |
| 2500.00 | 46.74 | -5.65 | 41.09 | 54 | -12.91 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2483.50 | 59.95 | -5.65 | 54.3 | 74 | -19.7 | peak |
| 2483.50 | 45.57 | -5.65 | 39.92 | 54 | -14.08 | AVG |
| 2500.00 | 59.69 | -5.65 | 54.04 | 74 | -19.96 | peak |
| 2500.00 | 44.45 | -5.65 | 38.8 | 54 | -15.2 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2310.00 | 59.16 | -5.81 | 53.35 | 74 | -20.65 | peak |
| 2310.00 | 44.94 | -5.81 | 39.13 | 54 | -14.87 | AVG |
| 2390.00 | 59.15 | -5.84 | 53.31 | 74 | -20.69 | peak |
| 2390.00 | 47.17 | -5.84 | 41.33 | 54 | -12.67 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2310.00 | 58.79 | -5.81 | 52.98 | 74 | -21.02 | peak |
| 2310.00 | 46.12 | -5.81 | 40.31 | 54 | -13.69 | AVG |
| 2390.00 | 60.38 | -5.84 | 54.54 | 74 | -19.46 | peak |
| 2390.00 | 47.53 | -5.84 | 41.69 | 54 | -12.31 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2462MHz)

Horizontal

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2483.50 | 58.93 | -5.65 | 53.28 | 74 | -20.72 | peak |
| 2483.50 | 45.01 | -5.65 | 39.36 | 54 | -14.64 | AVG |
| 2500.00 | 58.72 | -5.65 | 53.07 | 74 | -20.93 | peak |
| 2500.00 | 44.98 | -5.65 | 39.33 | 54 | -14.67 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2483.50 | 59.99 | -5.65 | 54.34 | 74 | -19.66 | peak |
| 2483.50 | 46.12 | -5.65 | 40.47 | 54 | -13.53 | AVG |
| 2500.00 | 60.03 | -5.65 | 54.38 | 74 | -19.62 | peak |
| 2500.00 | 42.54 | -5.65 | 36.89 | 54 | -17.11 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

# 5. ANTENNA REQUIREMENT

**Standard Applicable**
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed toensure that no antenna other than that furnished by the responsible party shall be used with the device.And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antennaexceeds 6dBi.

**Refer to statement below for compliance.**
The manufacturer may design the unit so that the user can replace a broken antenna, but the use of astandard antenna jack or electrical connector is prohibited. Further, this requirement does not apply tointentional radiators that must be professionally installed.

**Antenna Connected Construction**
The antenna used in this product is a Internal Antenna, need professional installation, It conforms to the standard requirements. The directional gains of antenna used for transmitting is 1dBi.

WIFI ANTENNA

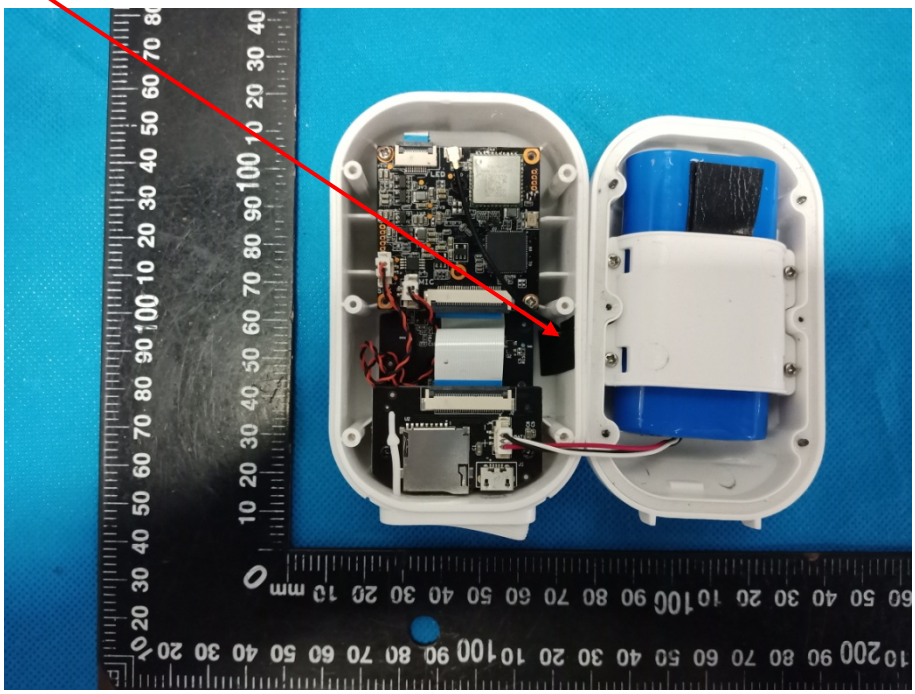

# 6. PHOTOGRAPH OF TEST

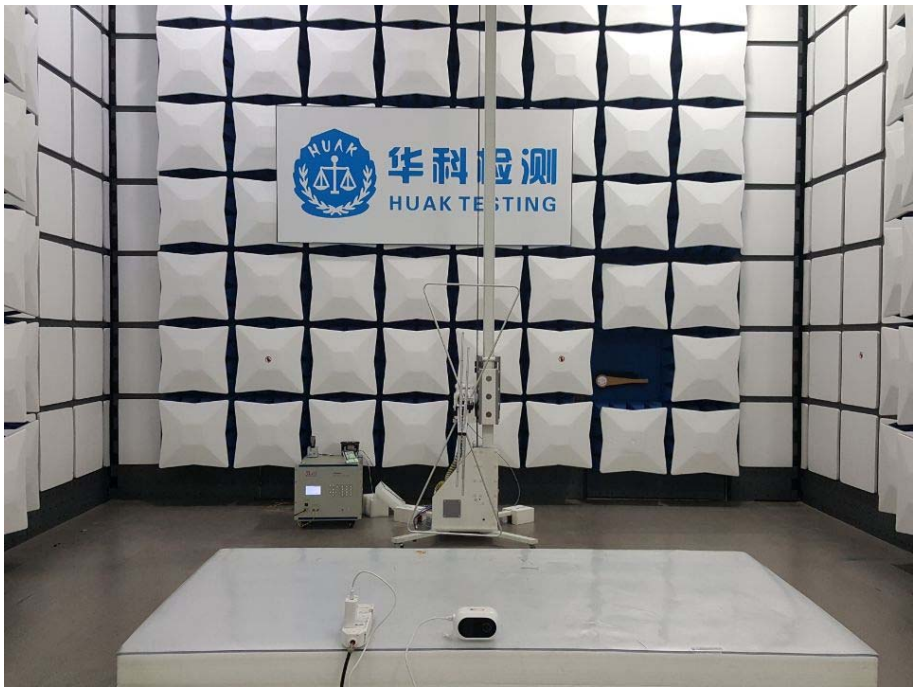

# 7. PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos.

---------End of test report---------