

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.70	PASS
EGPRS1900 1 Slot	661	1880	26.69	PASS
EGPRS1900 1 Slot	810	1909.8	25.87	PASS
EGPRS1900 2 Slot	512	1850.2	26.49	PASS
EGPRS1900 2 Slot	661	1880	25.61	PASS
EGPRS1900 2 Slot	810	1909.8	25.76	PASS
EGPRS1900 3 Slot	512	1850.2	22.88	PASS
EGPRS1900 3 Slot	661	1880	22.17	PASS
EGPRS1900 3 Slot	810	1909.8	21.68	PASS
EGPRS1900 4 Slot	512	1850.2	20.67	PASS
EGPRS1900 4 Slot	661	1880	20.61	PASS
EGPRS1900 4 Slot	810	1909.8	19.71	PASS
EGPRS850 1 Slot	128	824.2	25.14	PASS
EGPRS850 1 Slot	189	836.4	24.84	PASS
EGPRS850 1 Slot	251	848.8	25.10	PASS
EGPRS850 2 Slot	128	824.2	24.29	PASS
EGPRS850 2 Slot	189	836.4	23.93	PASS
EGPRS850 2 Slot	251	848.8	24.12	PASS
EGPRS850 3 Slot	128	824.2	21.55	PASS
EGPRS850 3 Slot	189	836.4	21.83	PASS
EGPRS850 3 Slot	251	848.8	21.86	PASS
EGPRS850 4 Slot	128	824.2	19.81	PASS
EGPRS850 4 Slot	189	836.4	19.87	PASS
EGPRS850 4 Slot	251	848.8	19.87	PASS
GPRS1900 1 Slot	512	1850.2	29.49	PASS
GPRS1900 1 Slot	661	1880	29.44	PASS
GPRS1900 1 Slot	810	1909.8	29.32	PASS
GPRS1900 2 Slot	512	1850.2	27.30	PASS
GPRS1900 2 Slot	661	1880	27.20	PASS
GPRS1900 2 Slot	810	1909.8	27.00	PASS
GPRS1900 3 Slot	512	1850.2	25.76	PASS
GPRS1900 3 Slot	661	1880	25.71	PASS
GPRS1900 3 Slot	810	1909.8	25.51	PASS
GPRS1900 4 Slot	512	1850.2	23.73	PASS
GPRS1900 4 Slot	661	1880	23.69	PASS
GPRS1900 4 Slot	810	1909.8	23.55	PASS
GPRS850 1 Slot	128	824.2	32.15	PASS
GPRS850 1 Slot	189	836.4	32.24	PASS
GPRS850 1 Slot	251	848.8	32.09	PASS
GPRS850 2 Slot	128	824.2	30.08	PASS
GPRS850 2 Slot	189	836.4	30.18	PASS

GPRS850 2 Slot	251	848.8	30.02	PASS
GPRS850 3 Slot	128	824.2	28.25	PASS
GPRS850 3 Slot	189	836.4	28.38	PASS
GPRS850 3 Slot	251	848.8	28.25	PASS
GPRS850 4 Slot	128	824.2	26.20	PASS
GPRS850 4 Slot	189	836.4	26.32	PASS
GPRS850 4 Slot	251	848.8	26.24	PASS
GSM1900	512	1850.2	29.43	PASS
GSM1900	661	1880	29.40	PASS
GSM1900	810	1909.8	29.28	PASS
GSM850	128	824.2	32.16	PASS
GSM850	189	836.4	32.30	PASS
GSM850	251	848.8	32.13	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.19	13	PASS
EGPRS1900	661	1880	6.60	13	PASS
EGPRS1900	810	1909.8	7.53	13	PASS
EGPRS850	128	824.2	10.38	13	PASS
EGPRS850	189	836.4	8.96	13	PASS
EGPRS850	251	848.8	9.18	13	PASS


EGPRS1900 Channel=661

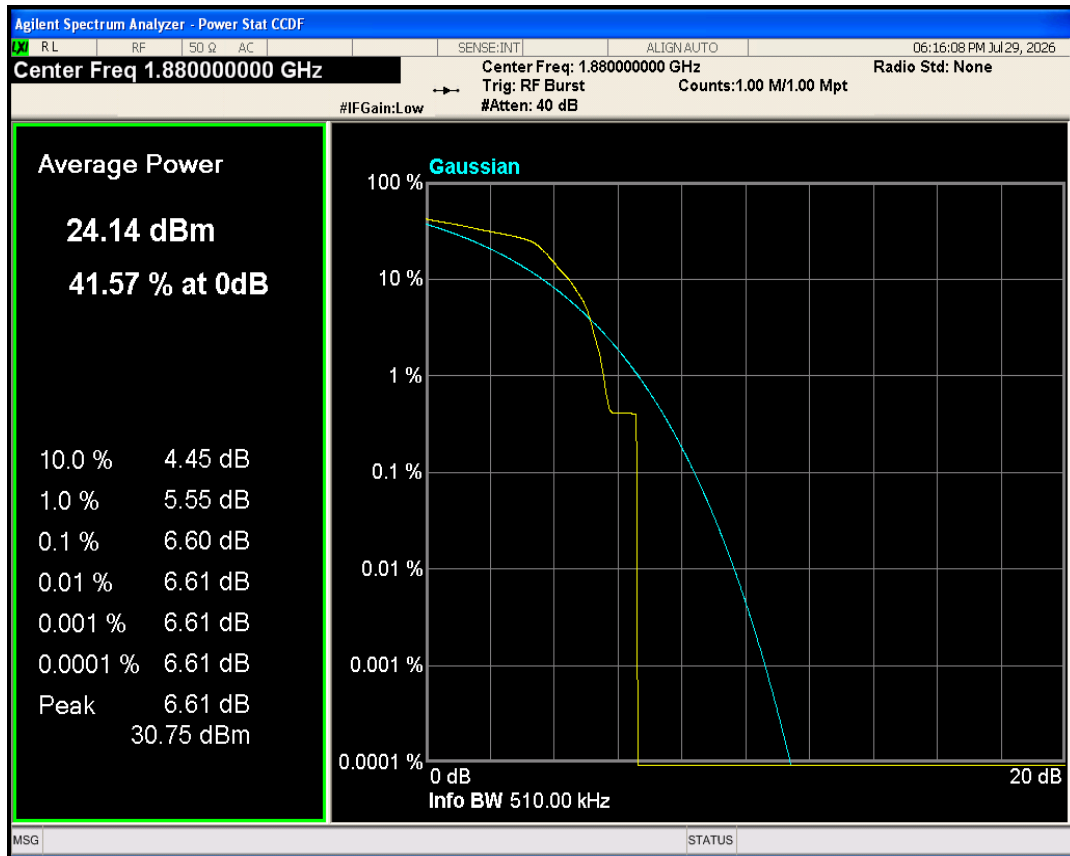


EGPRS1900 Channel=512

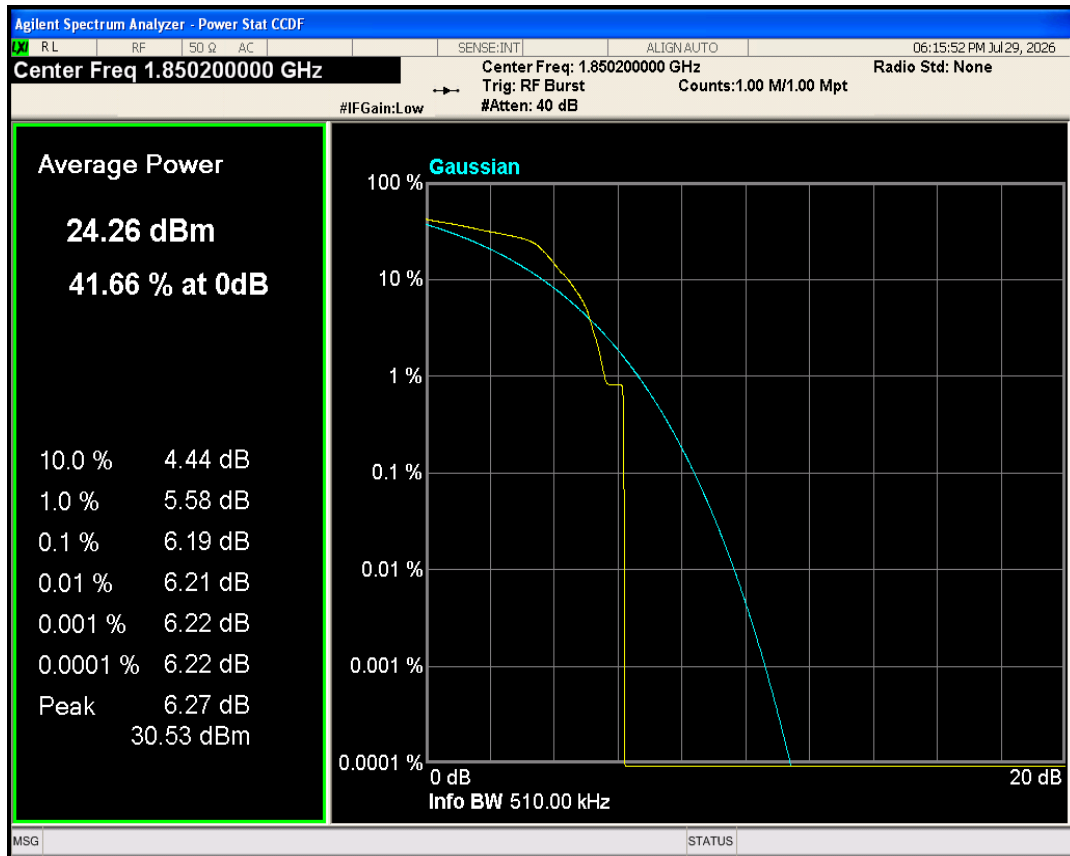


EGPRS1900 Channel=810

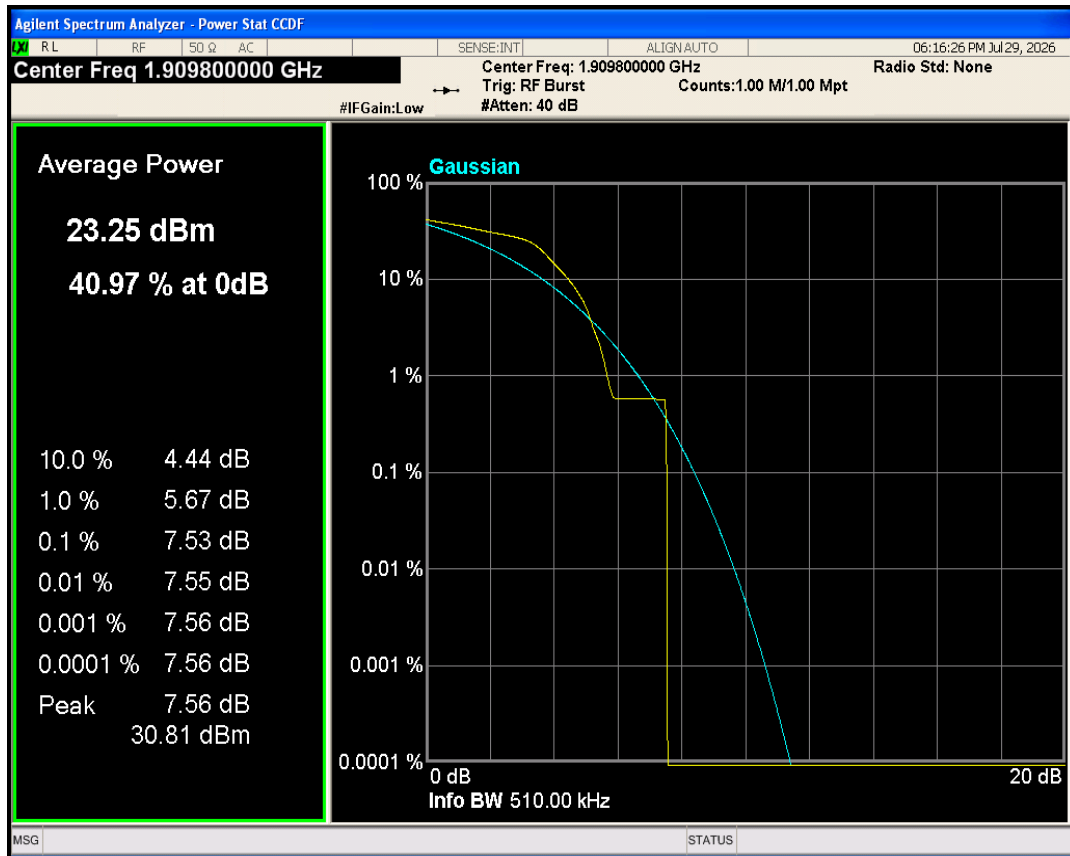


EGPRS850 Channel=128

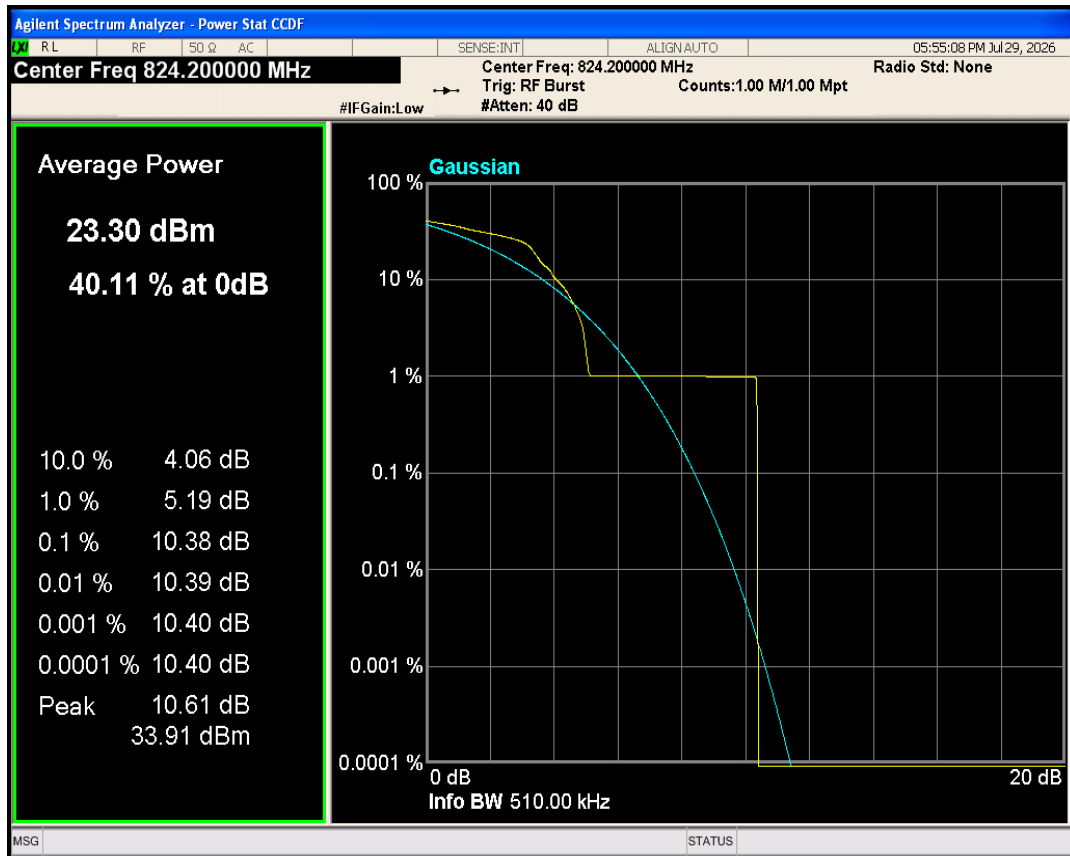

EGPRS850 Channel=251

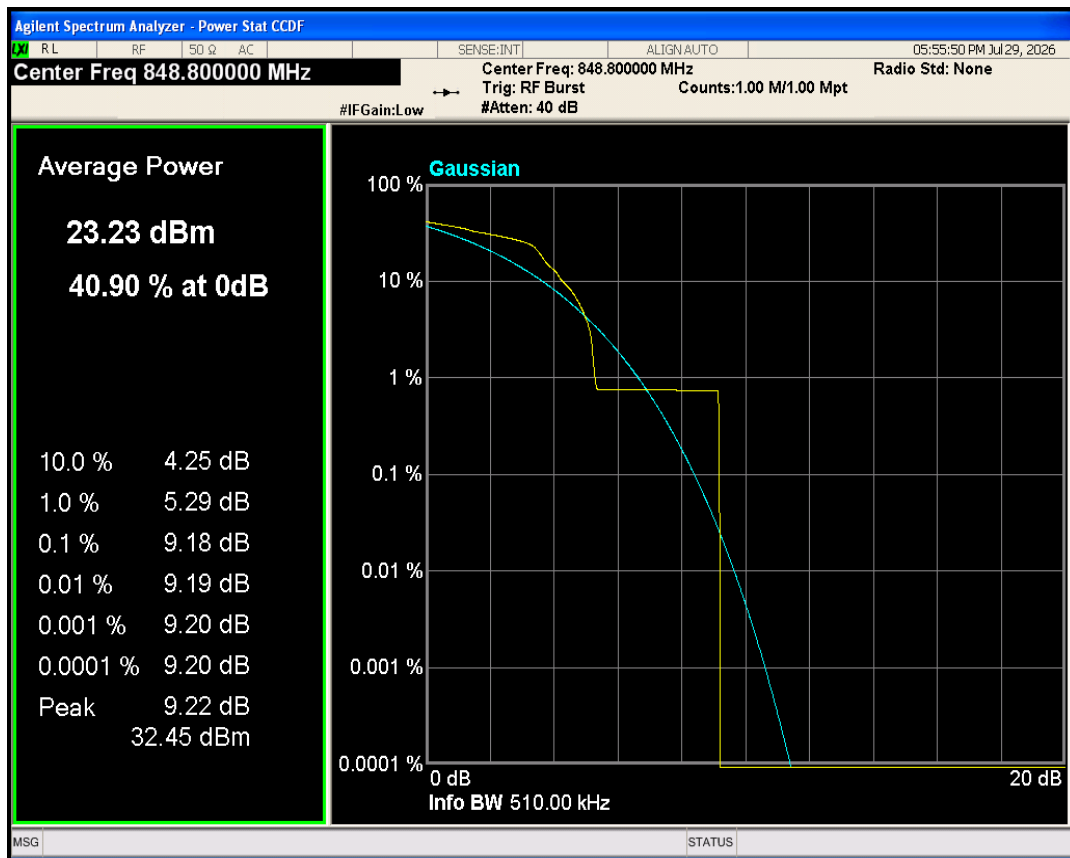


EGPRS850 Channel=189

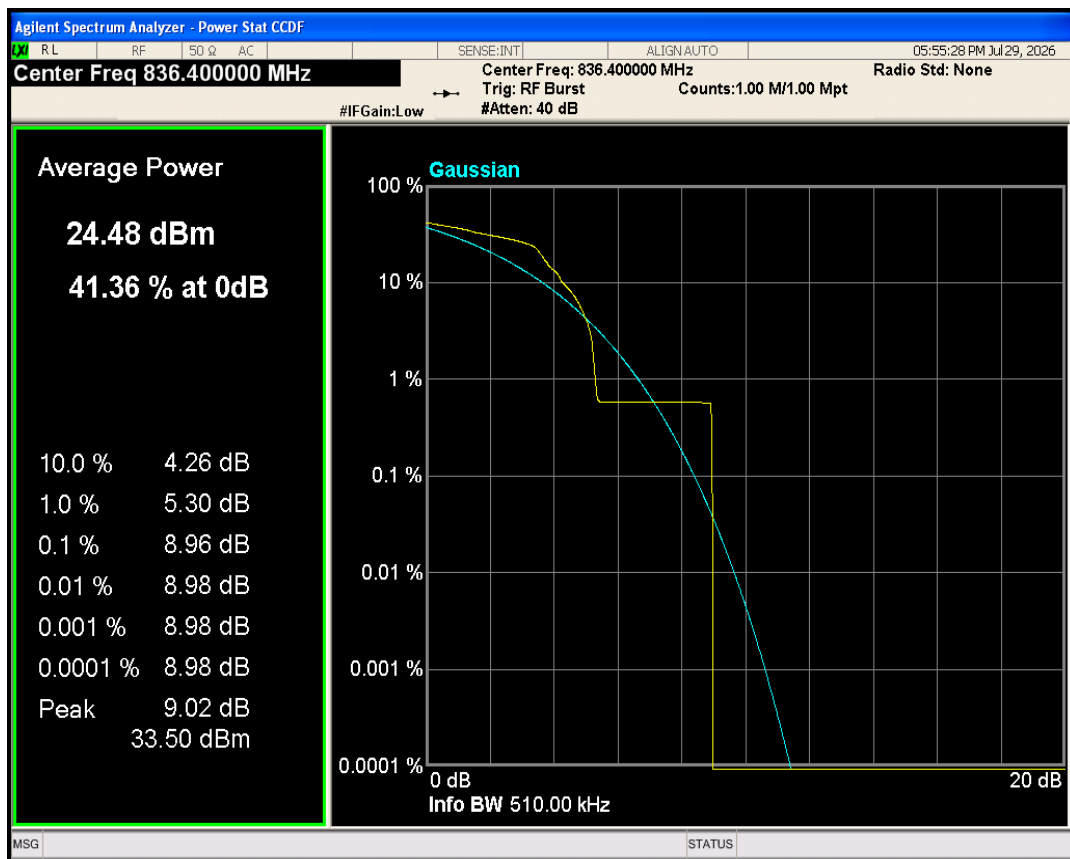


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	246.725	304.208	PASS
EGPRS1900	661	1880	247.946	300.802	PASS
EGPRS1900	810	1909.8	242.197	302.705	PASS
EGPRS850	128	824.2	243.227	298.513	PASS
EGPRS850	189	836.4	241.304	291.941	PASS
EGPRS850	251	848.8	251.665	315.465	PASS


EGPRS1900 Channel=512

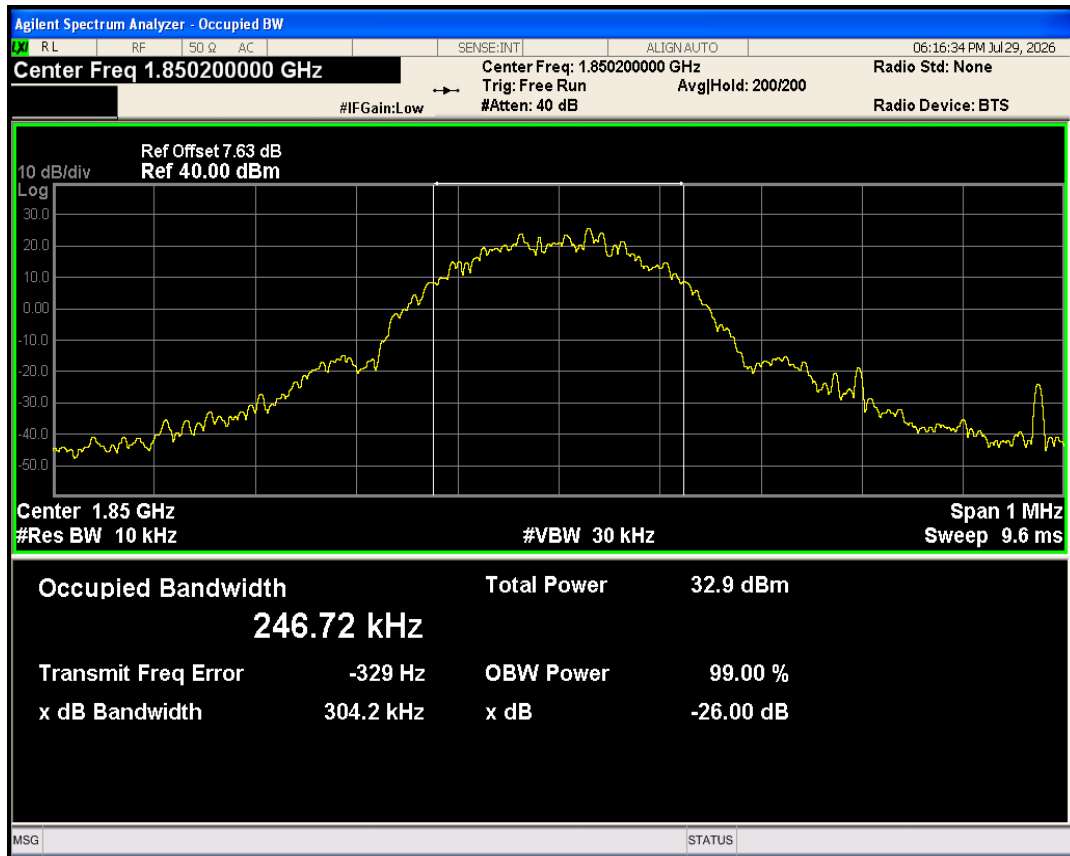


EGPRS1900 Channel=810

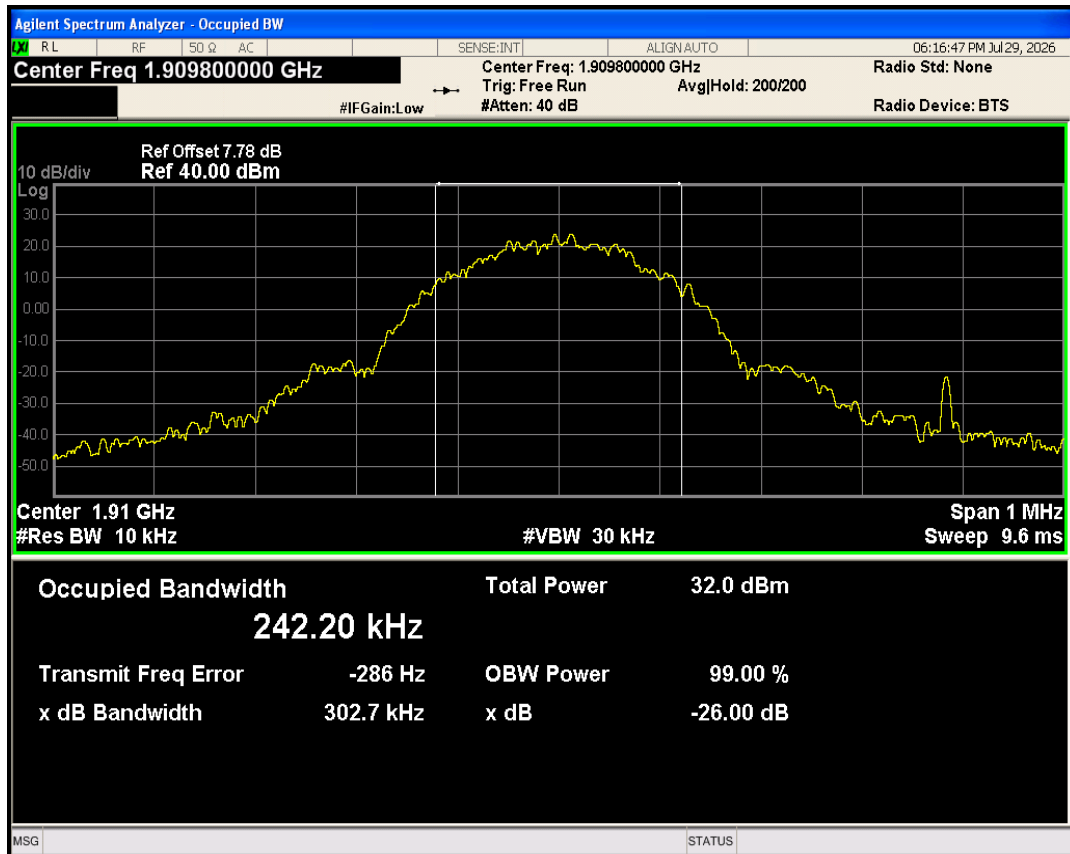


EGPRS1900 Channel=661

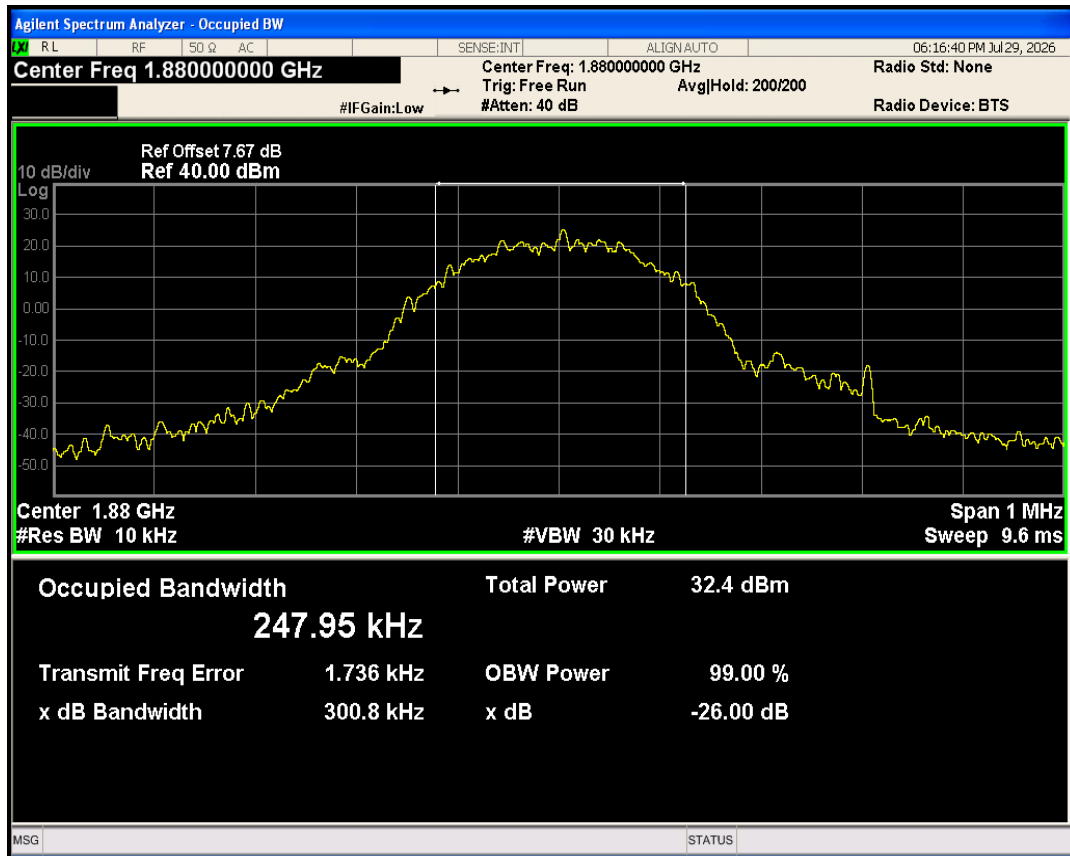


EGPRS850 Channel=128

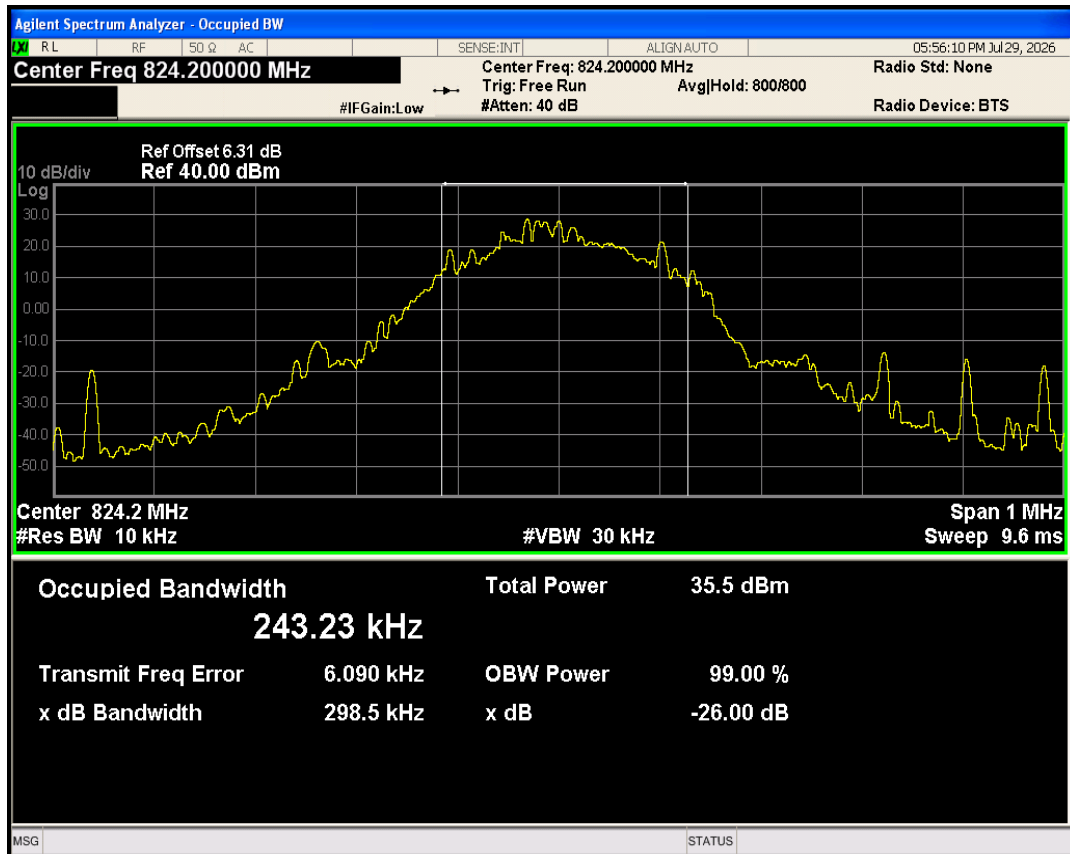

EGPRS850 Channel=251

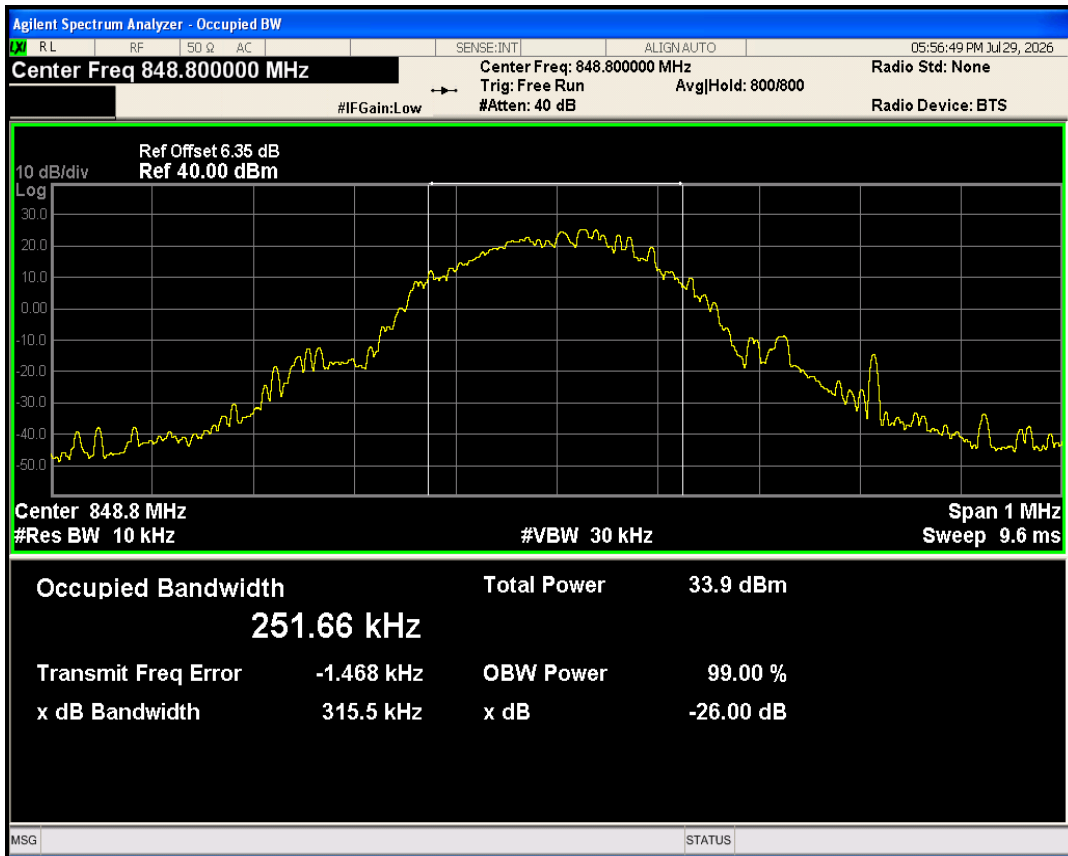


EGPRS850 Channel=189

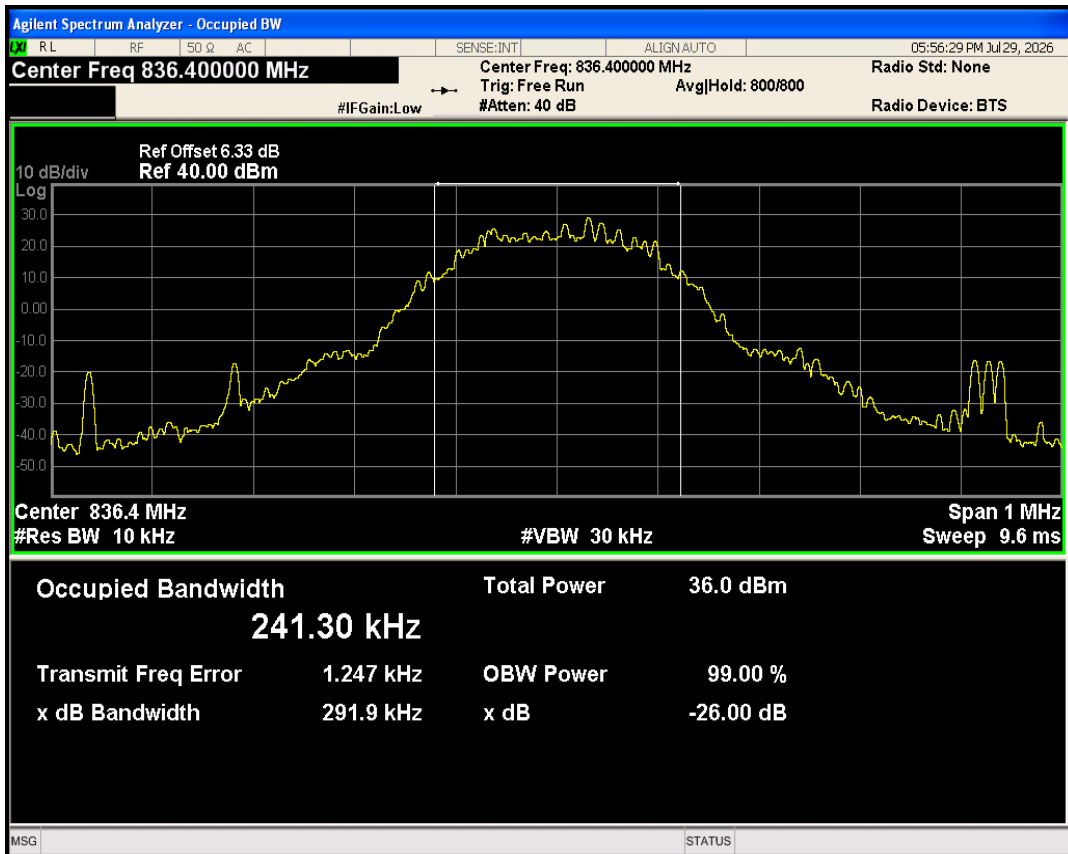


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.98	-34.63	-13	PASS
EGPRS1900	810	1909.8	1910.00	-35.58	-13	PASS
EGPRS850	128	824.2	824.00	-36.32	-13	PASS
EGPRS850	251	848.8	849.03	-35.65	-13	PASS


EGPRS1900 Channel=512

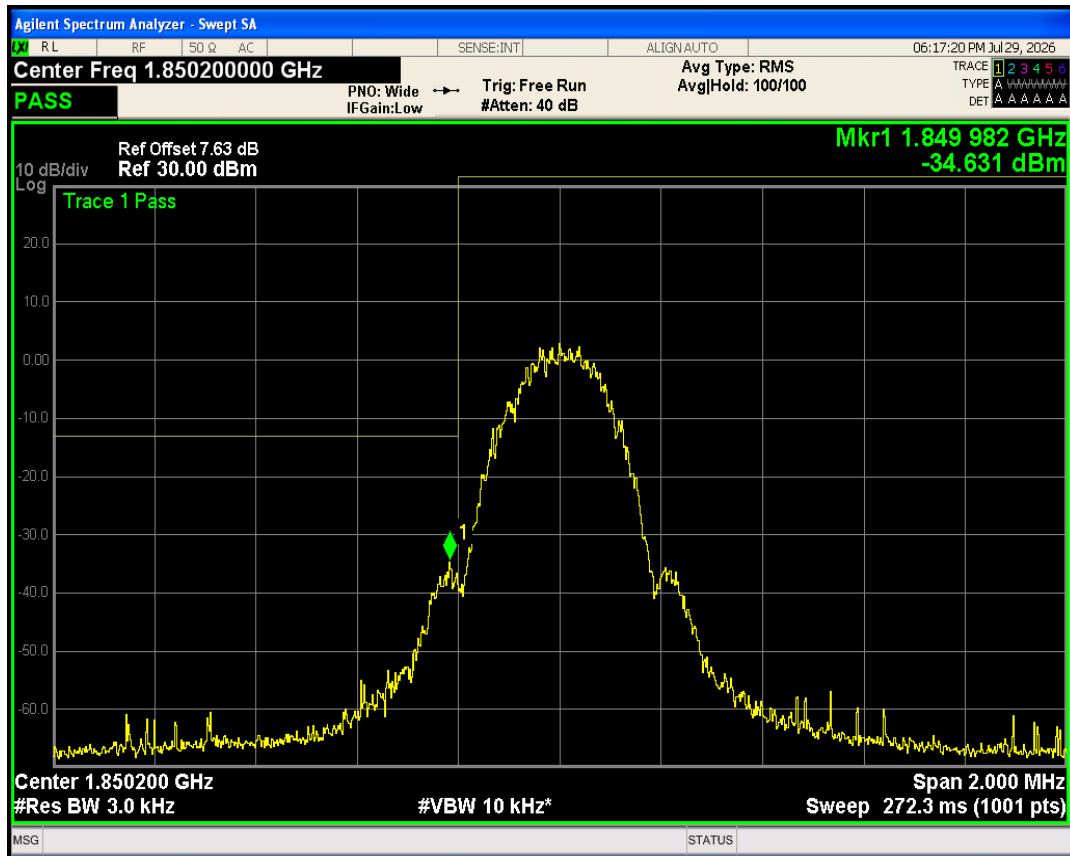


EGPRS1900 Channel=810

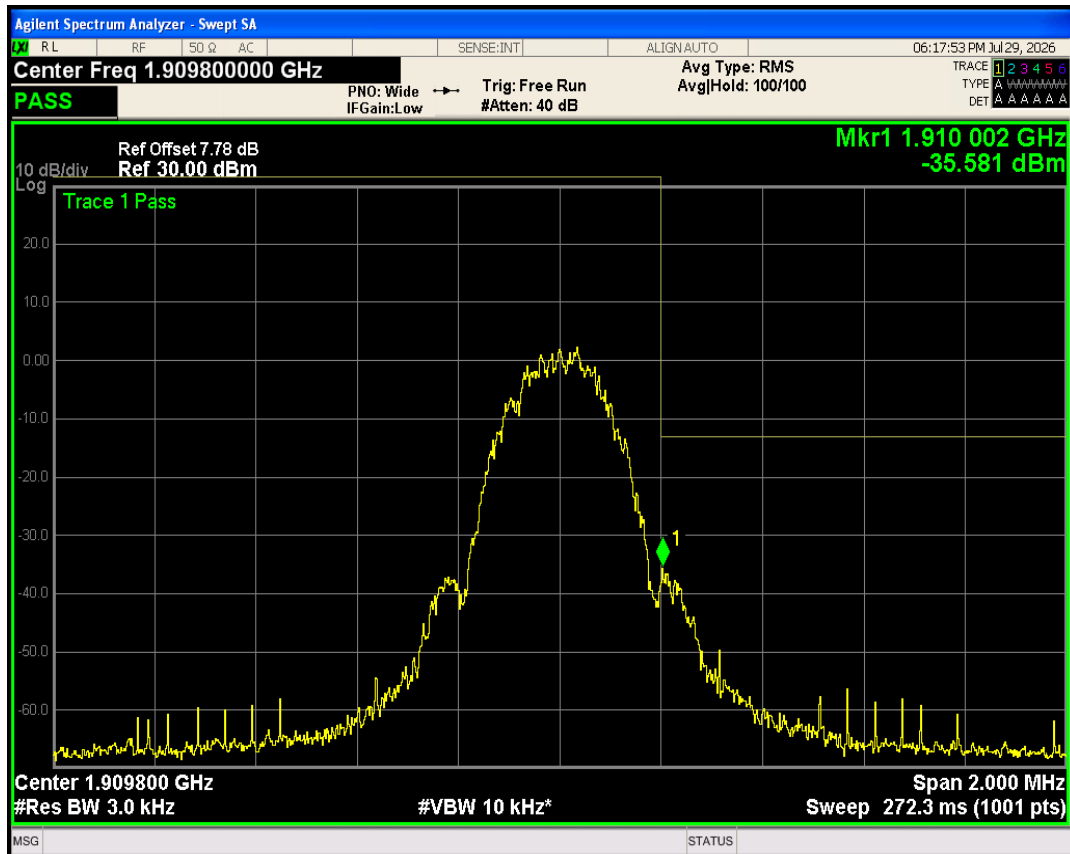

EGPRS850 Channel=251

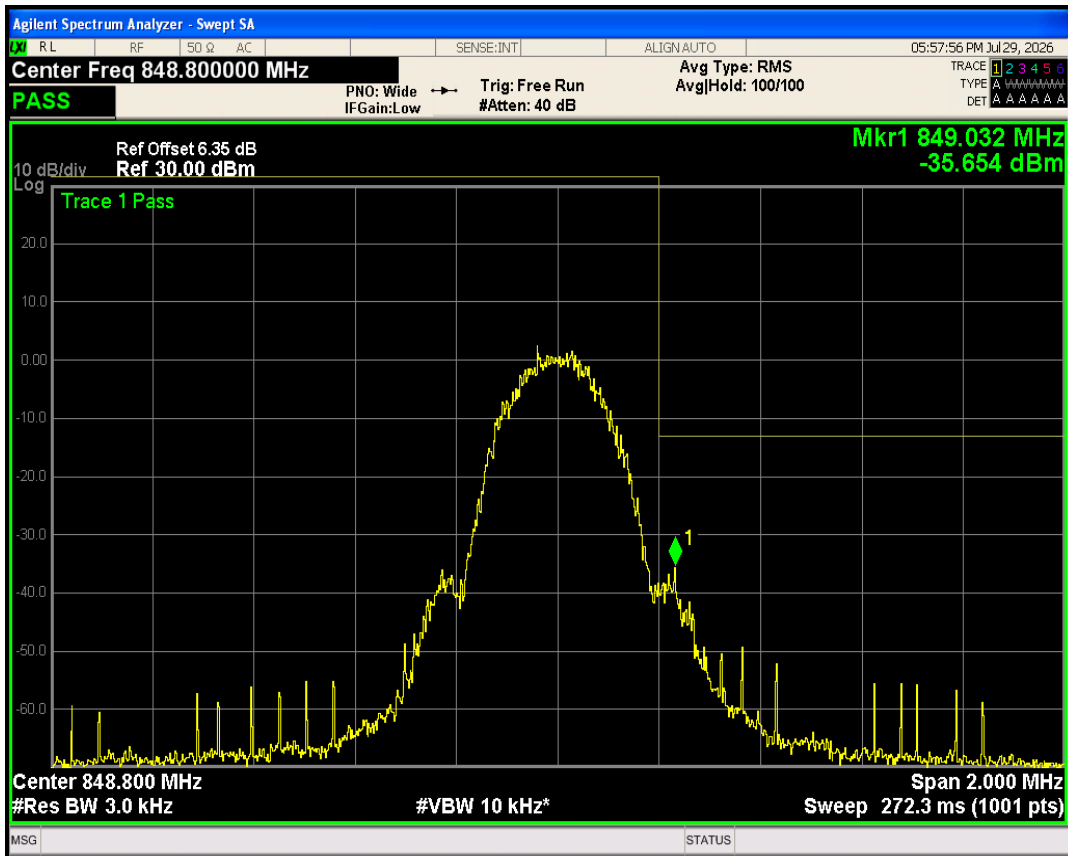


EGPRS850 Channel=128

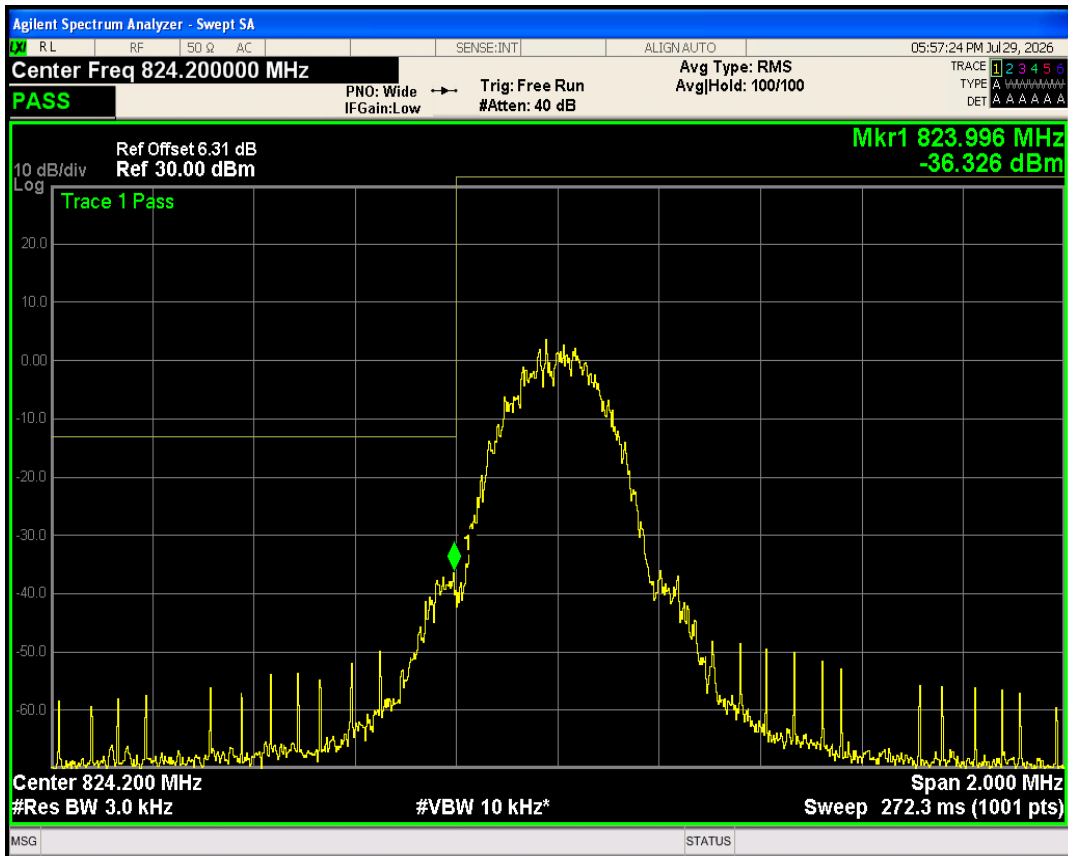


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25213.56	-19.26	-13	PASS
EGPRS1900	661	1880	25639.73	-19.25	-13	PASS
EGPRS1900	810	1909.8	25194.37	-19.27	-13	PASS
EGPRS850	128	824.2	25404.80	-21.70	-13	PASS
EGPRS850	189	836.4	25702.59	-20.71	-13	PASS
EGPRS850	251	848.8	25206.94	-21.41	-13	PASS


EGPRS1900 Channel=512

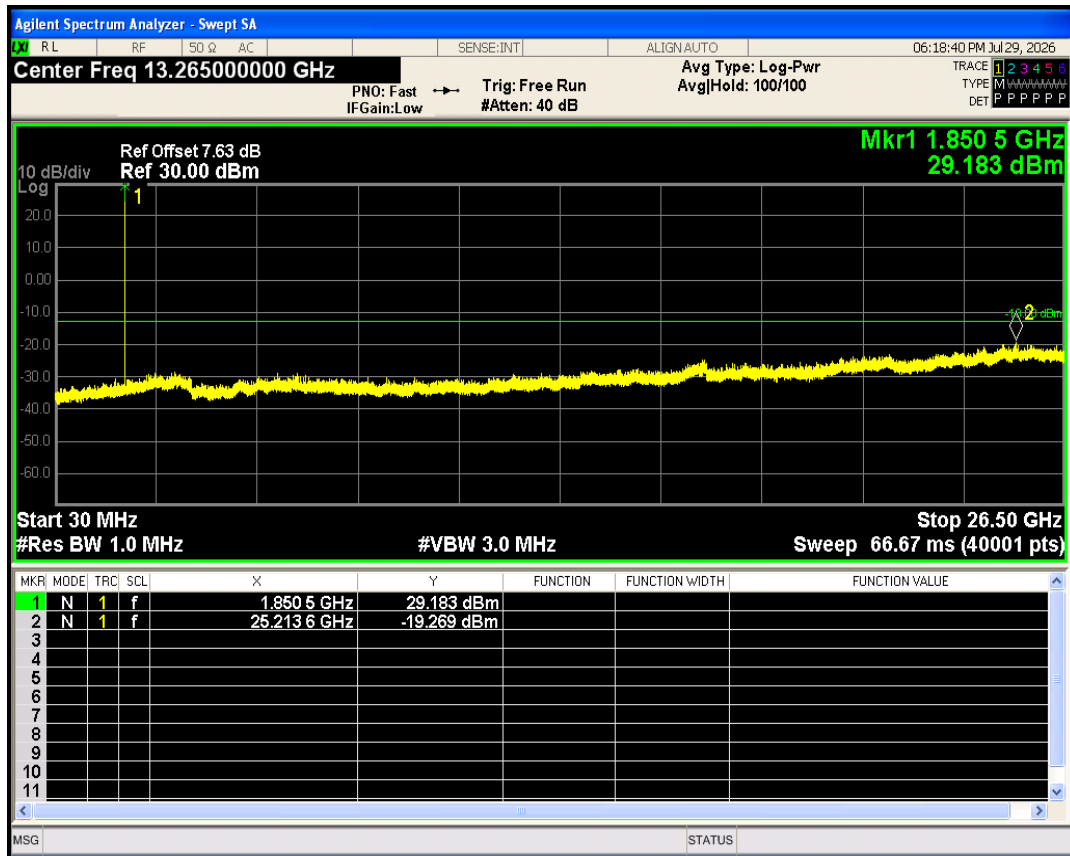


EGPRS1900 Channel=810

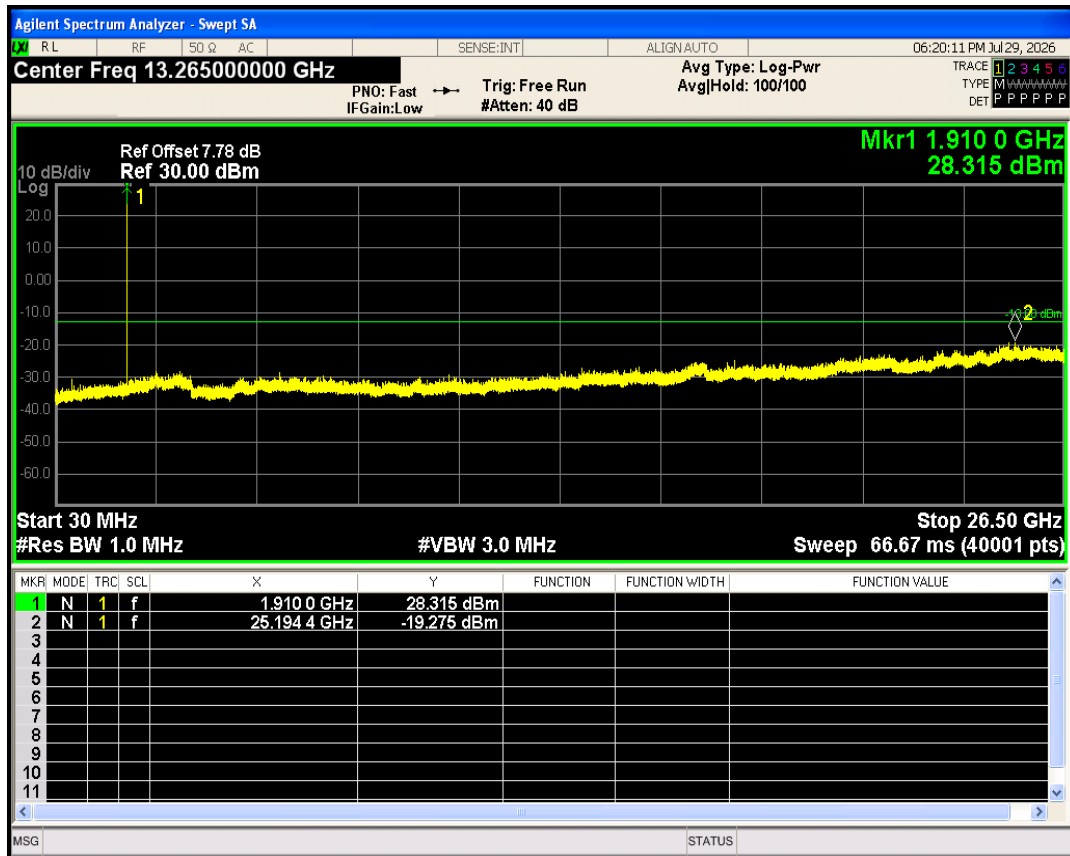


EGPRS1900 Channel=661

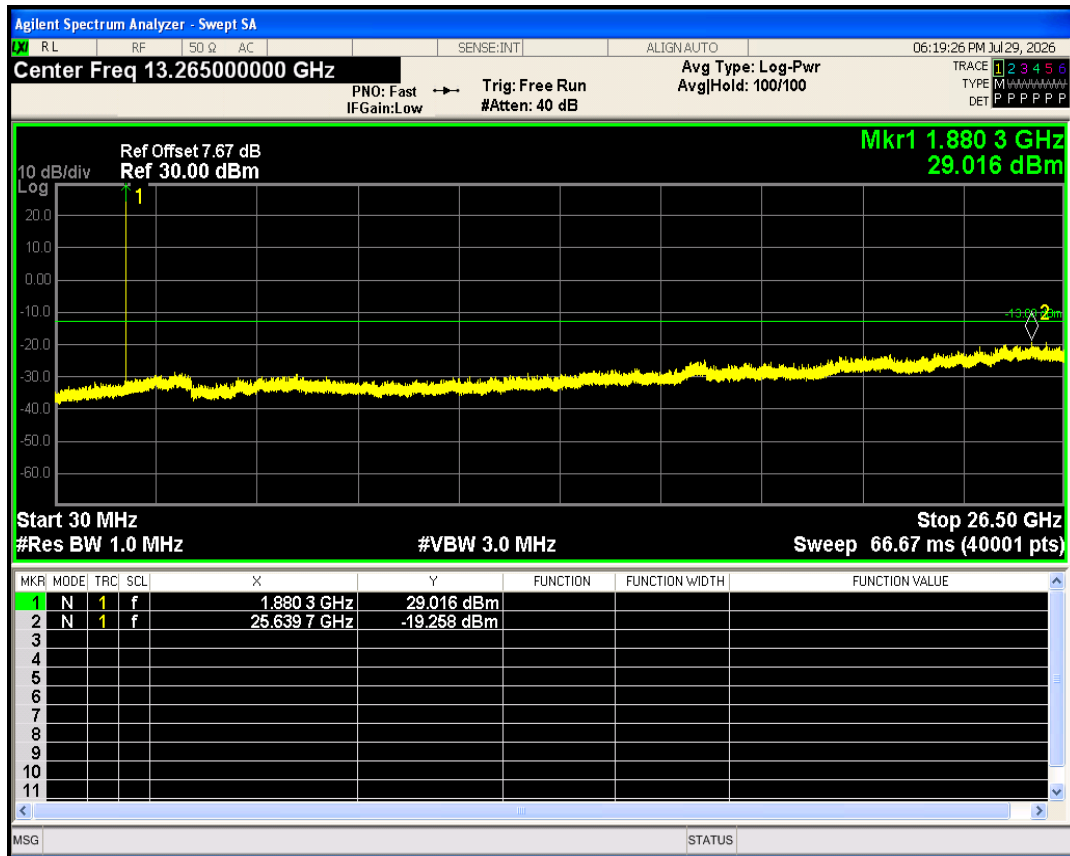


EGPRS850 Channel=189

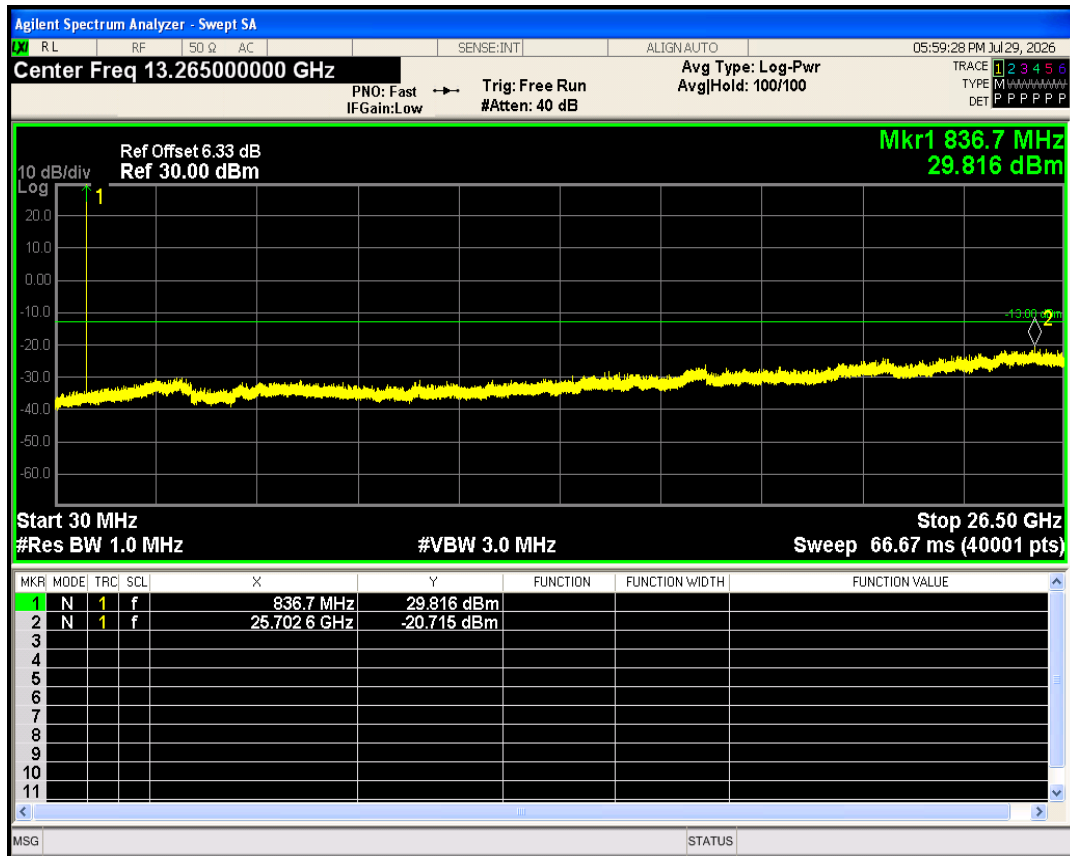

EGPRS850 Channel=128

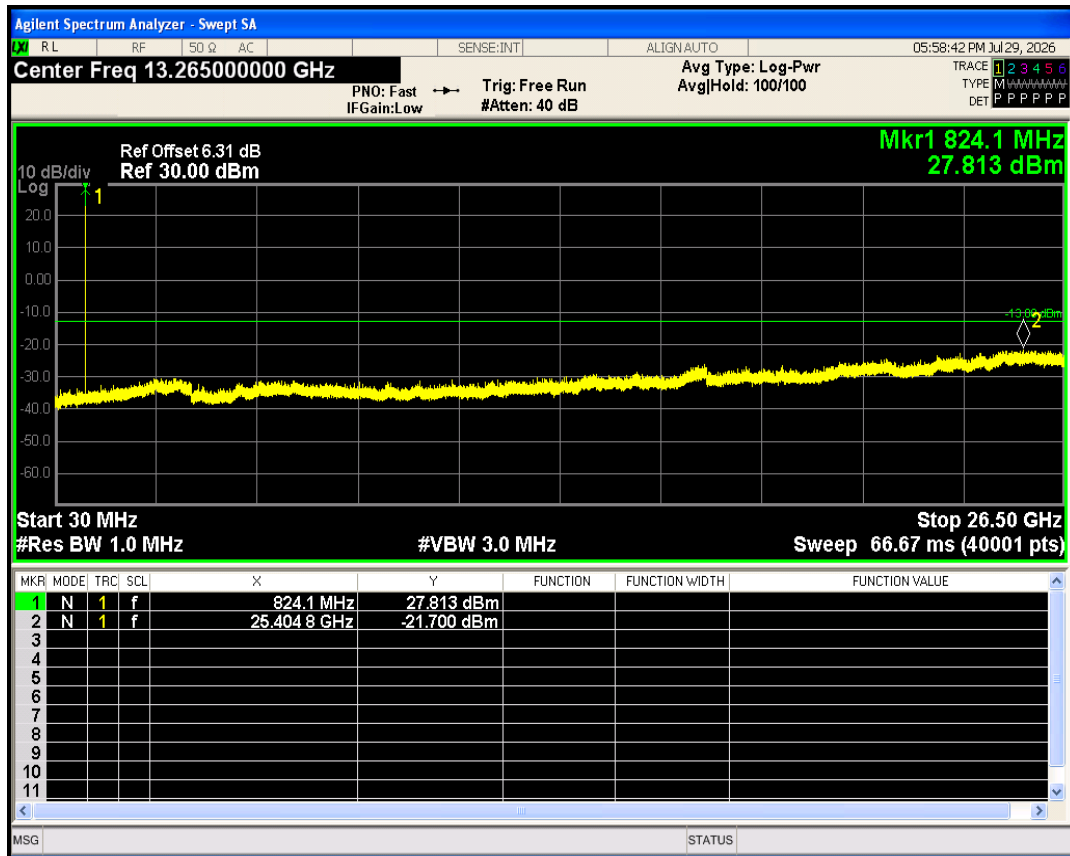


EGPRS850 Channel=251

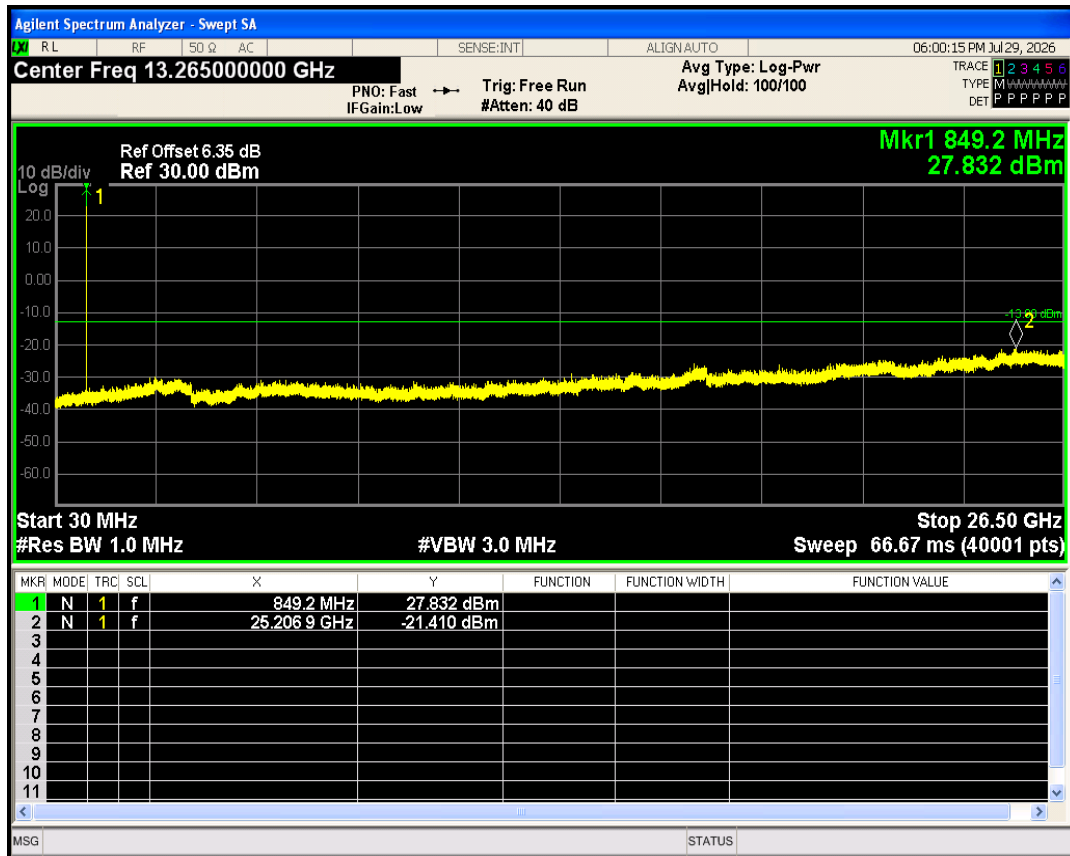


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.64	13	PASS
GPRS1900	661	1880	2.64	13	PASS
GPRS1900	810	1909.8	2.67	13	PASS
GPRS850	128	824.2	2.67	13	PASS
GPRS850	189	836.4	2.66	13	PASS
GPRS850	251	848.8	2.66	13	PASS


GPRS1900 Channel=512

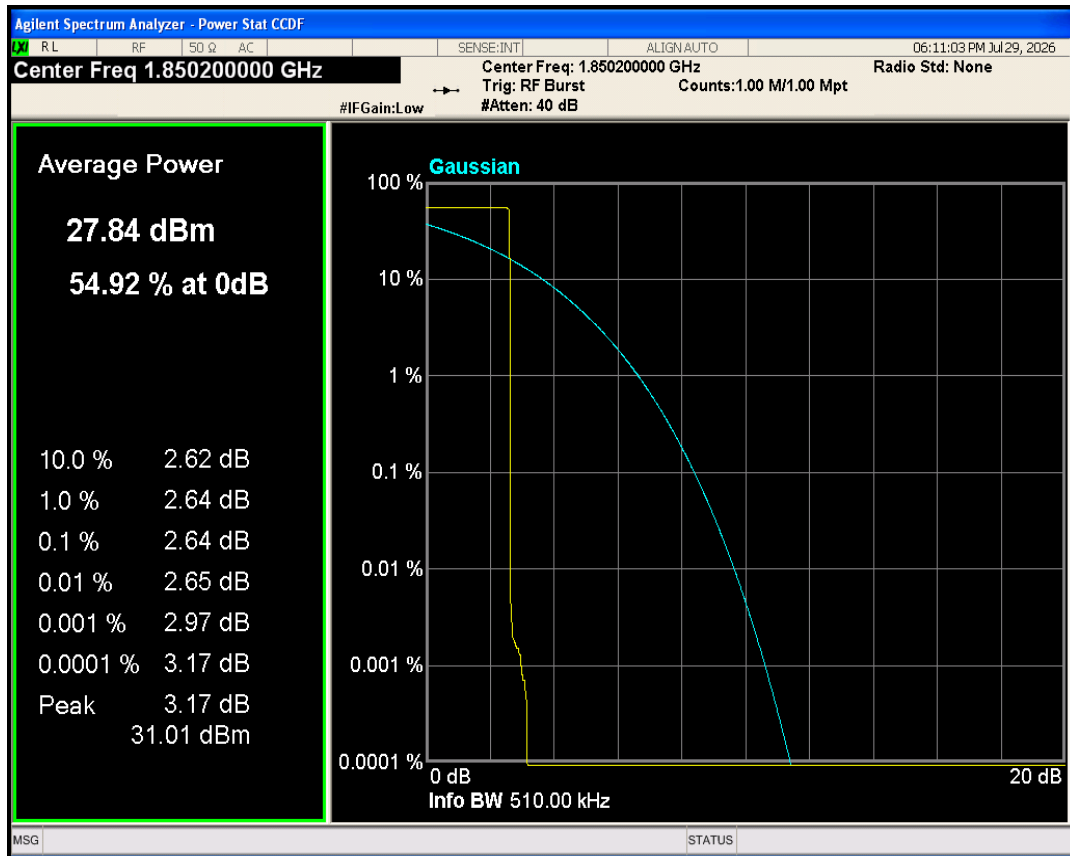


GPRS1900 Channel=810

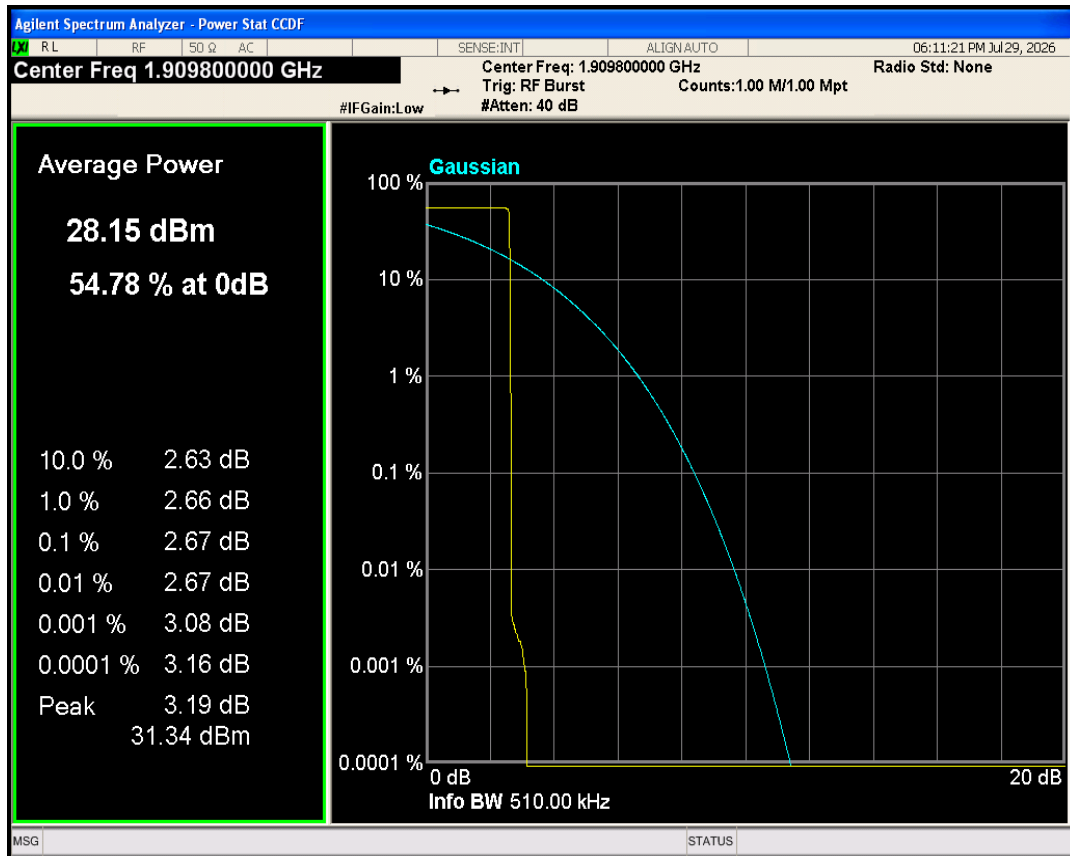


GPRS1900 Channel=661

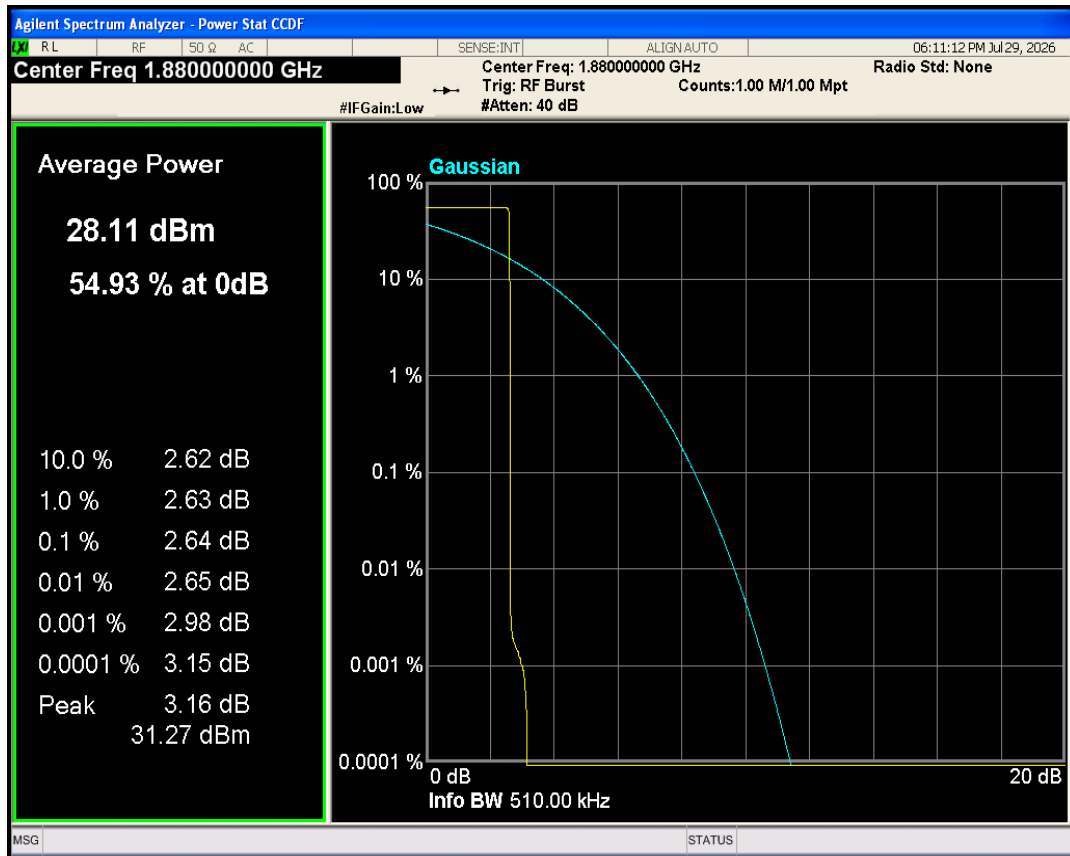


GPRS850 Channel=128

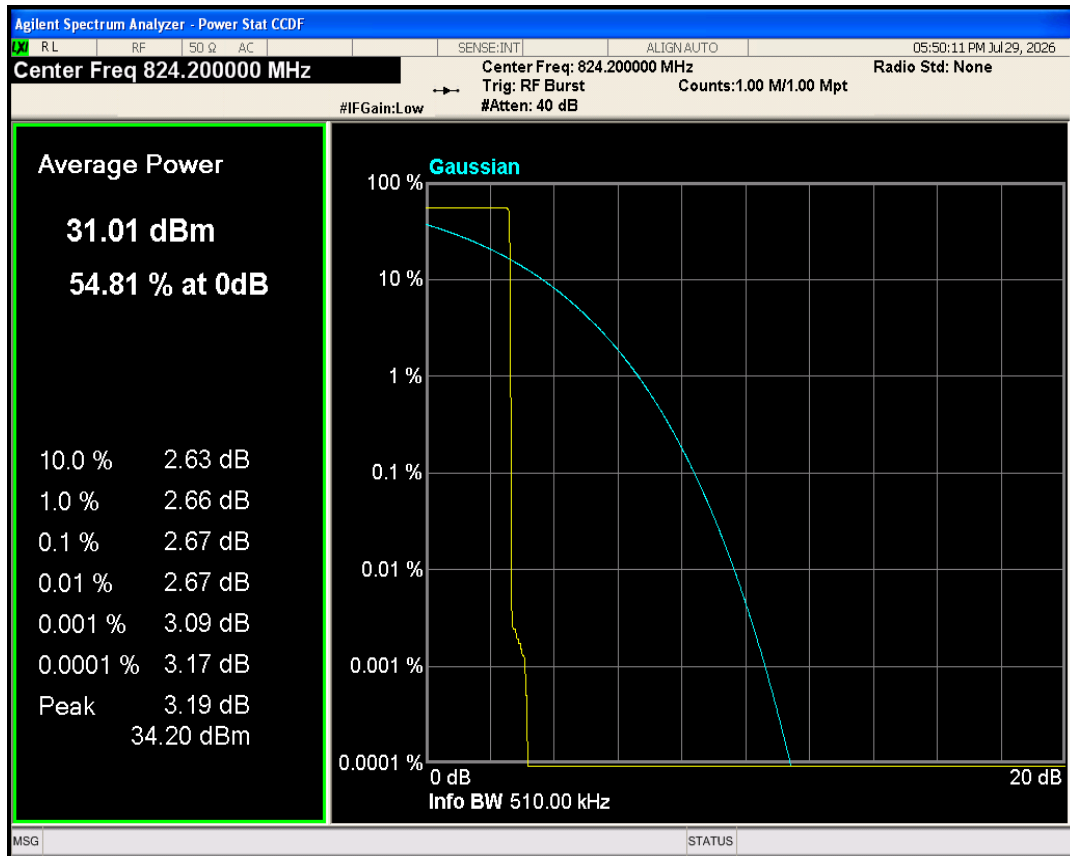

GPRS850 Channel=251

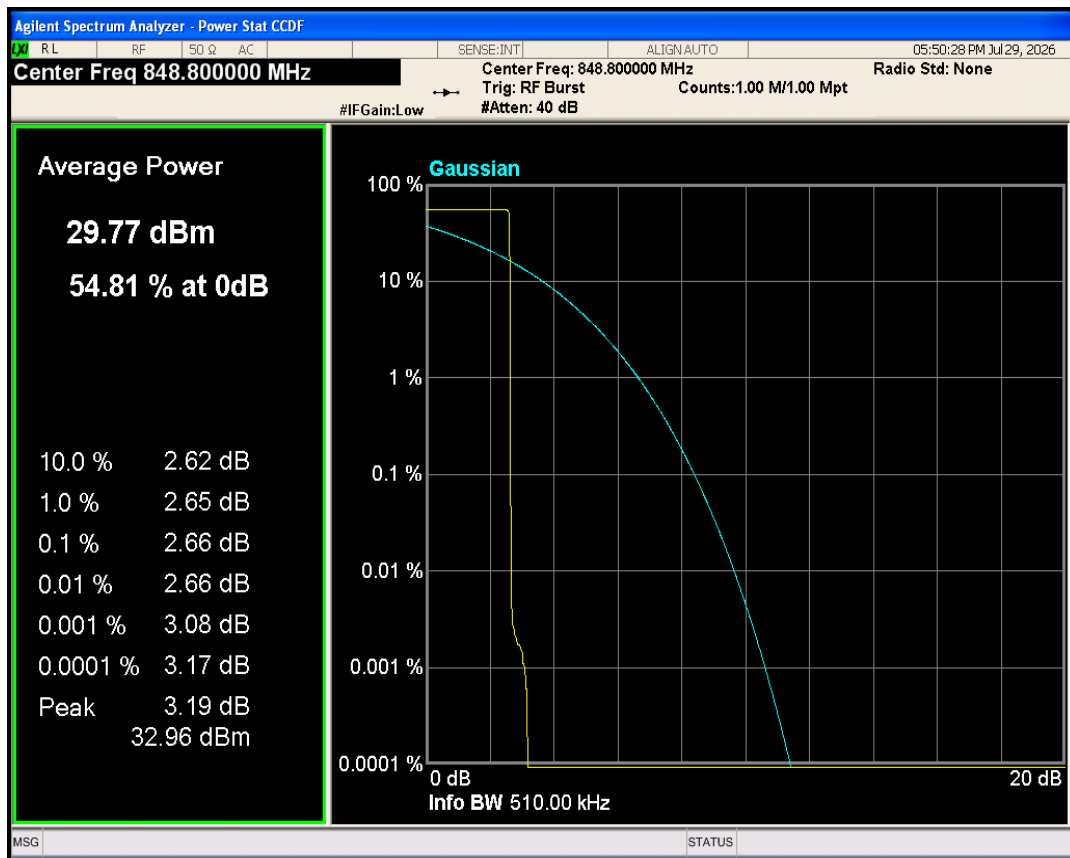


GPRS850 Channel=189

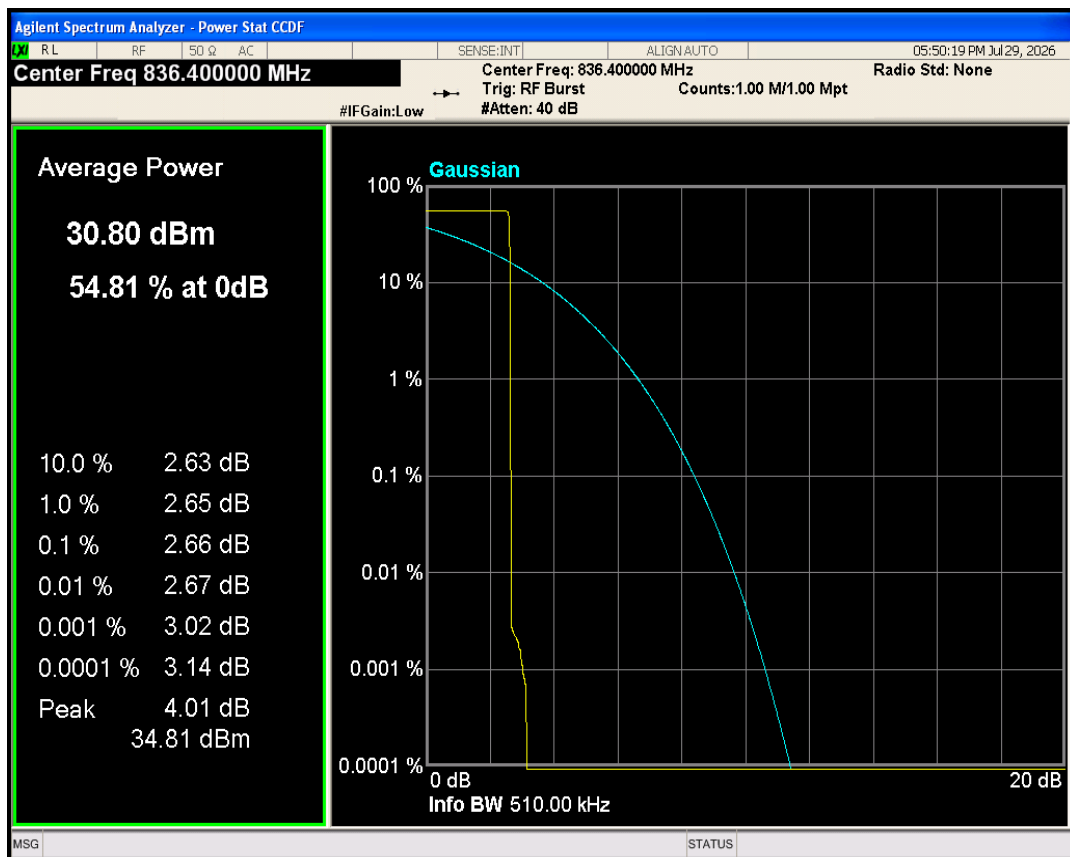


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	247.589	320.796	PASS
GPRS1900	661	1880	246.621	315.616	PASS
GPRS1900	810	1909.8	240.921	309.124	PASS
GPRS850	128	824.2	239.839	309.472	PASS
GPRS850	189	836.4	241.946	310.756	PASS
GPRS850	251	848.8	243.111	312.499	PASS


GPRS1900 Channel=661

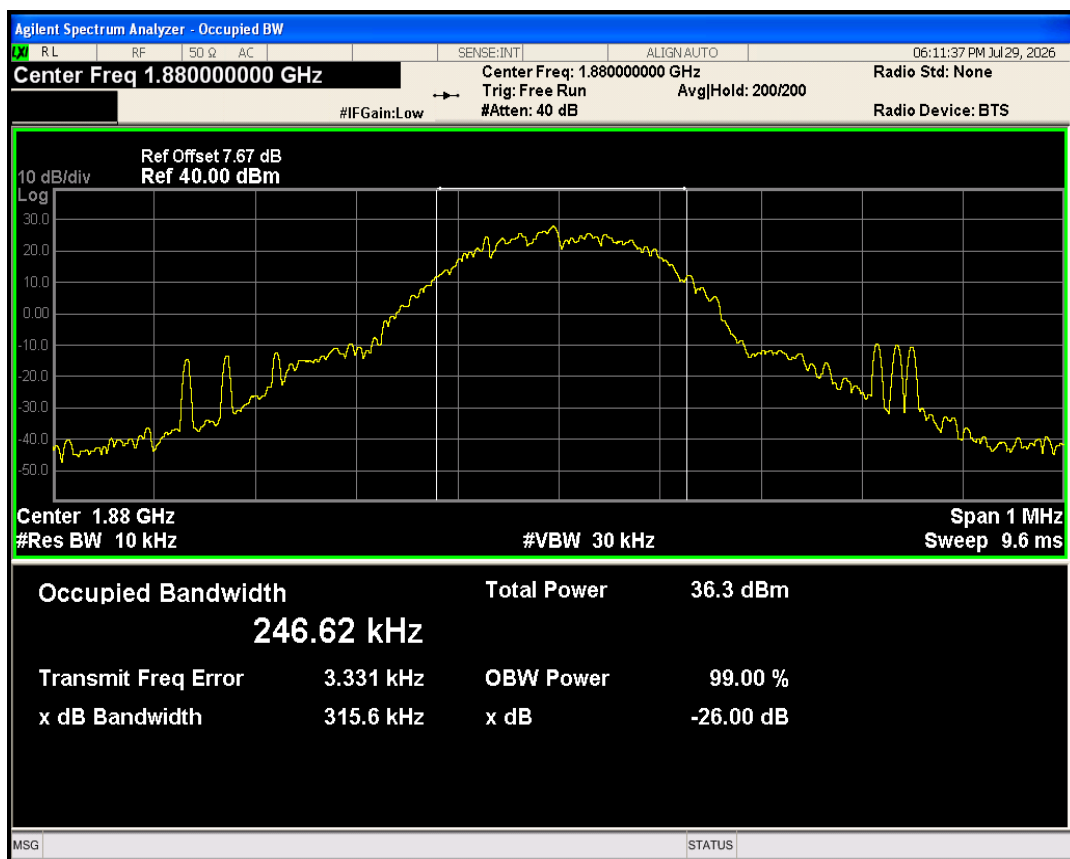


GPRS1900 Channel=512

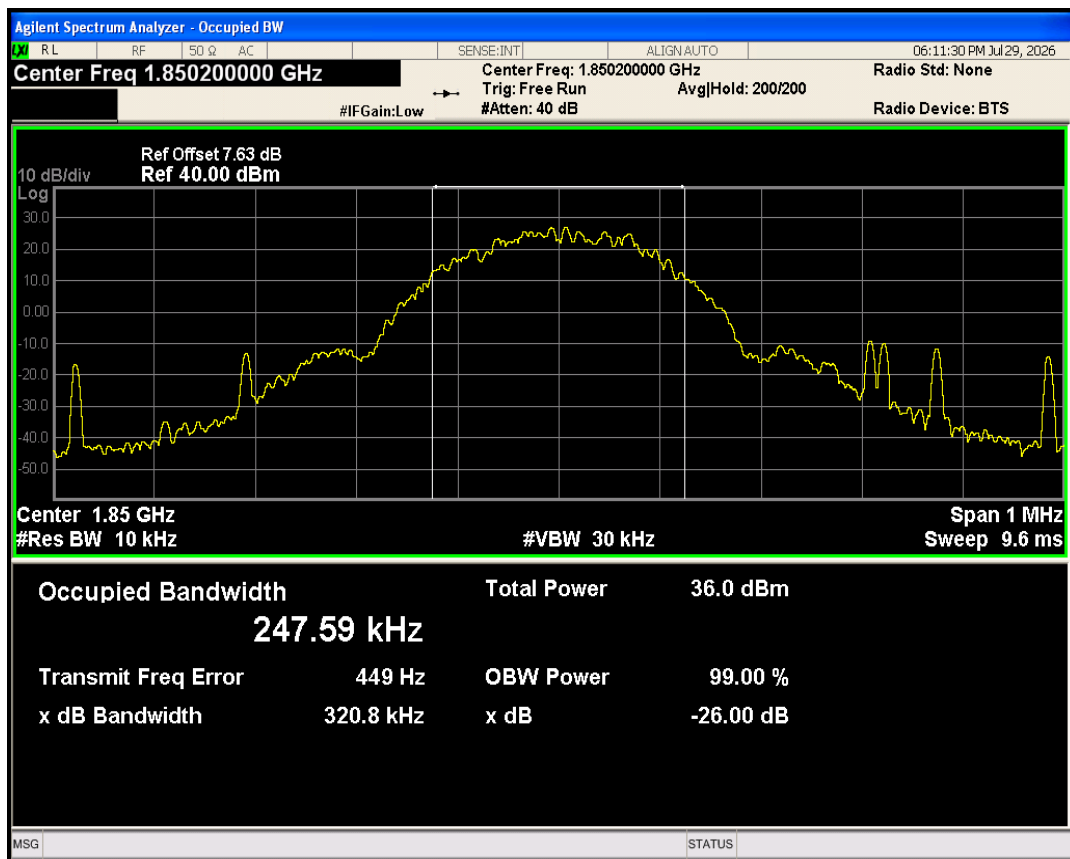


GPRS1900 Channel=810

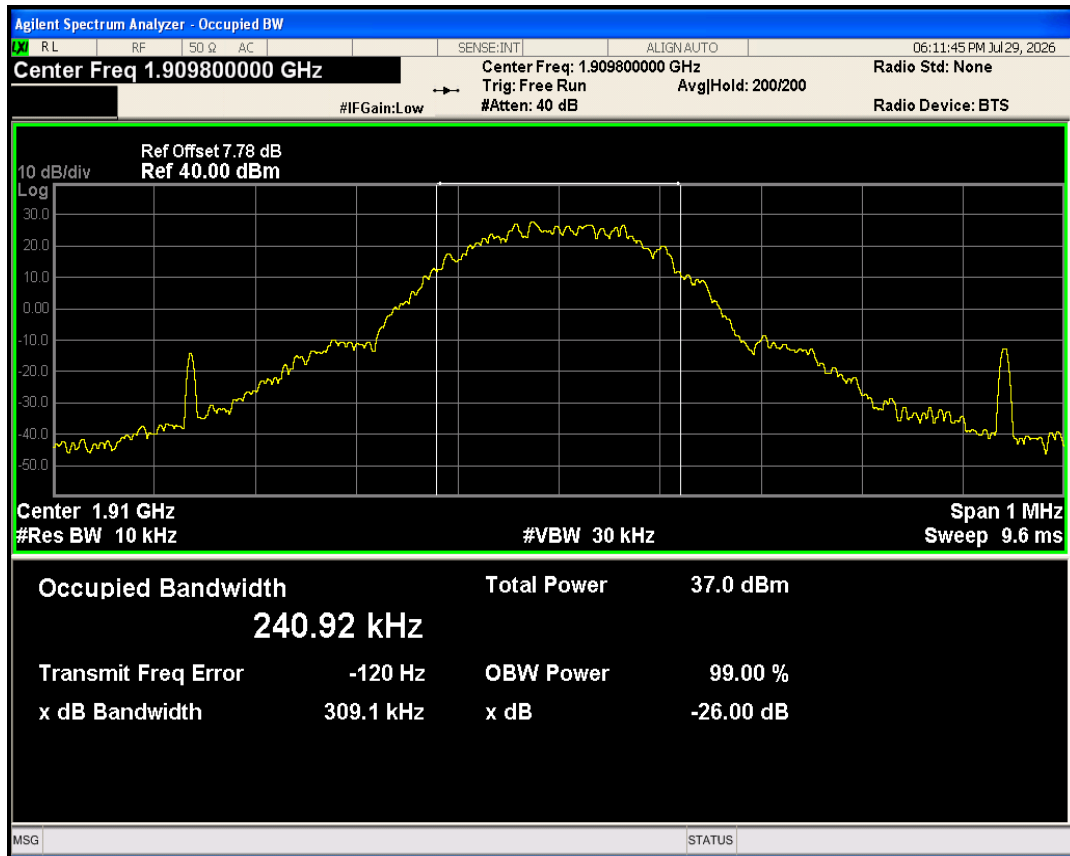


GPRS850 Channel=189

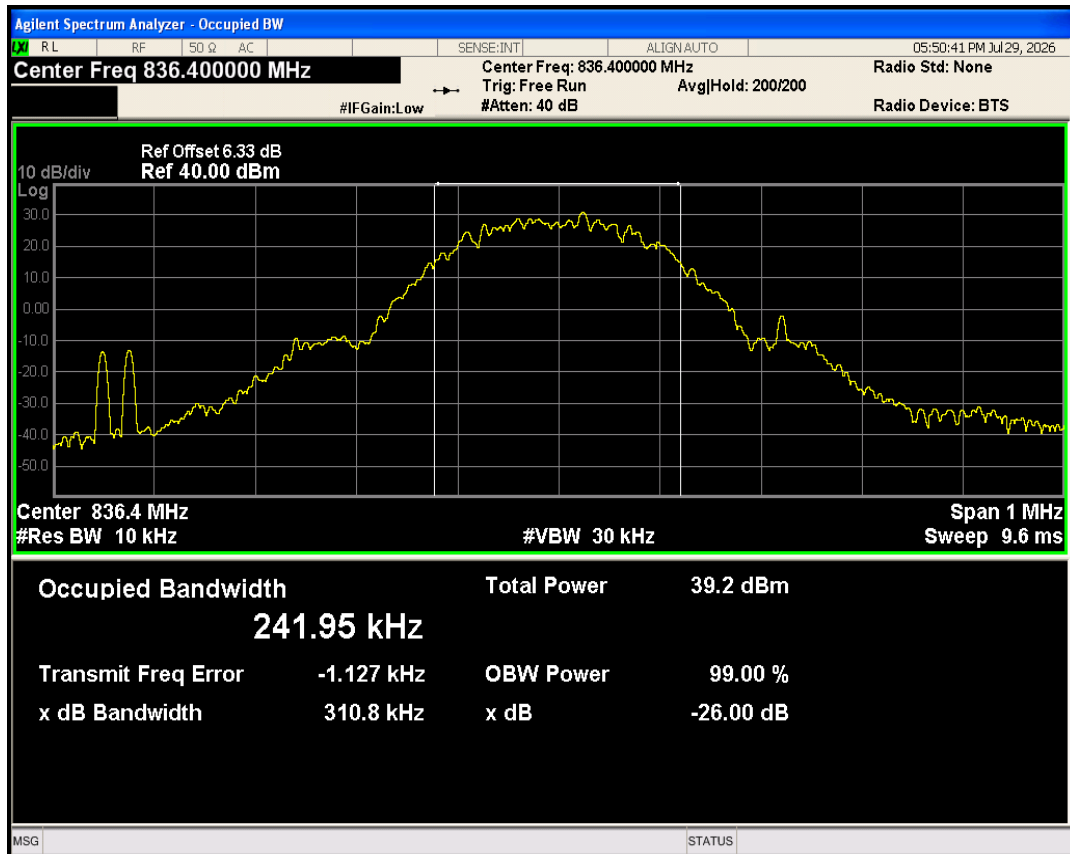

GPRS850 Channel=128

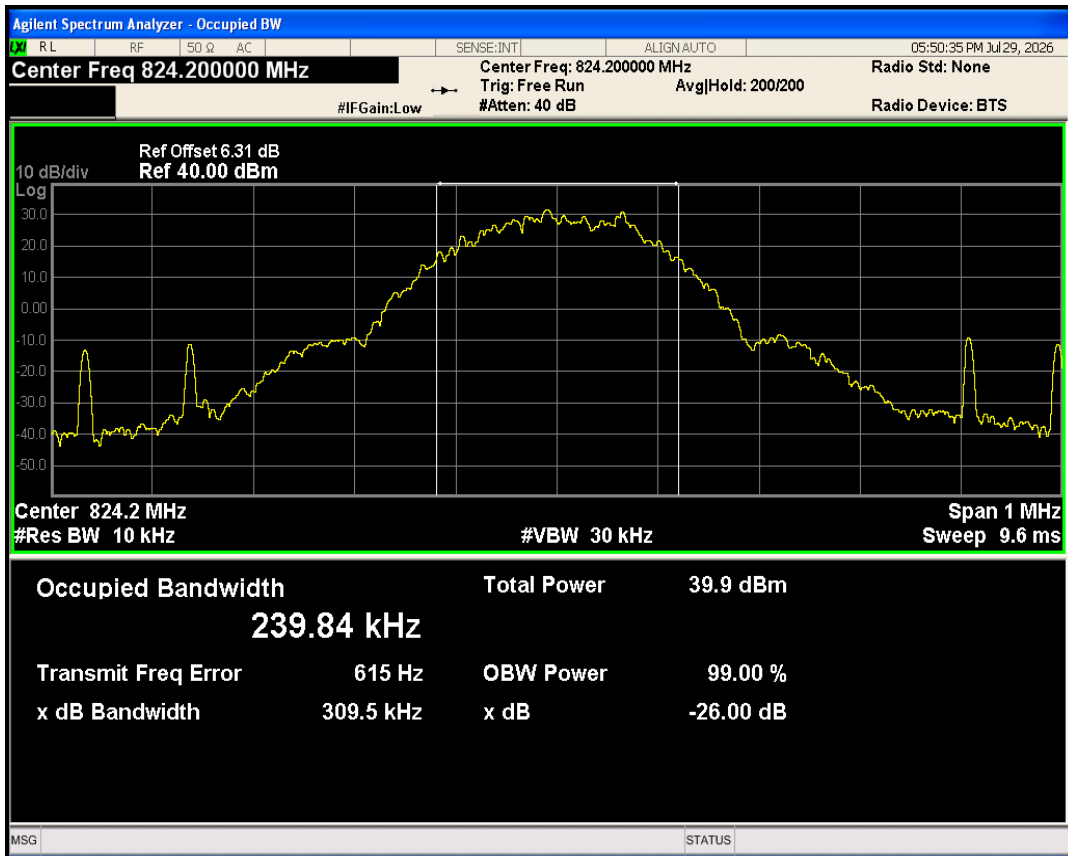


GPRS850 Channel=251

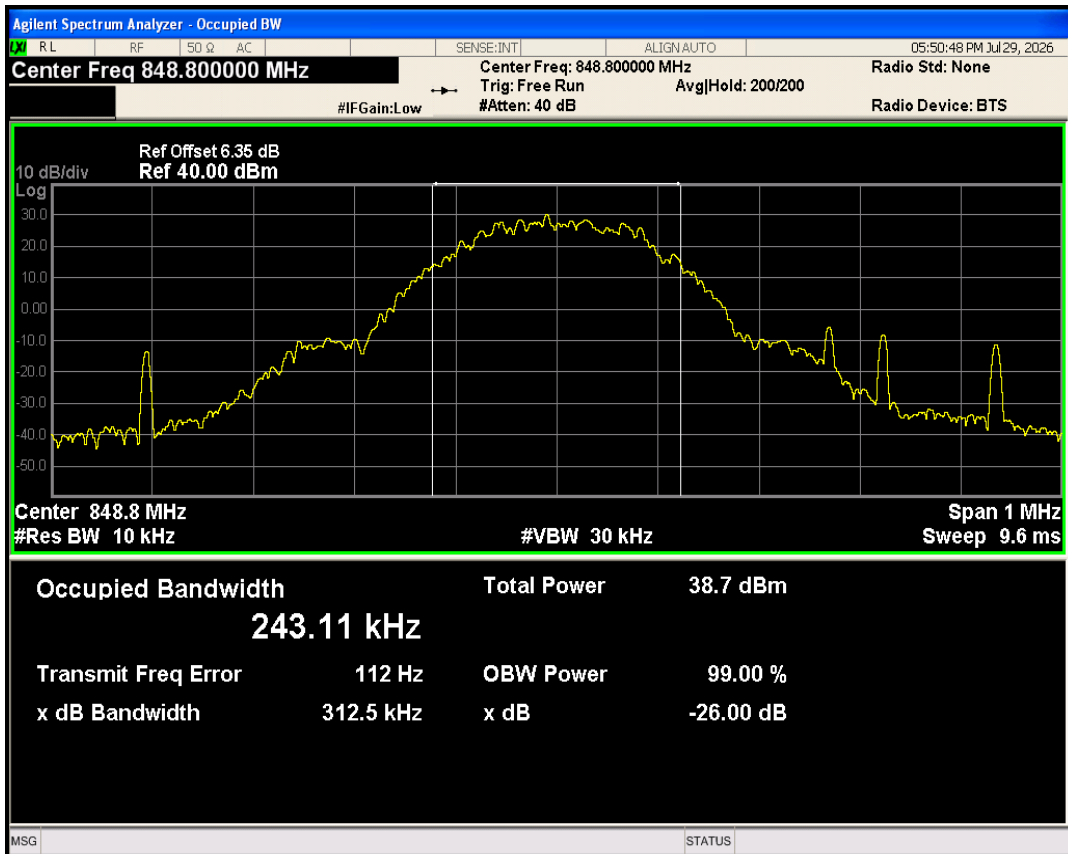


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-30.06	-13	PASS
GPRS1900	810	1909.8	1910.02	-30.55	-13	PASS
GPRS850	128	824.2	823.98	-27.97	-13	PASS
GPRS850	251	848.8	849.02	-28.29	-13	PASS


GPRS1900 Channel=810

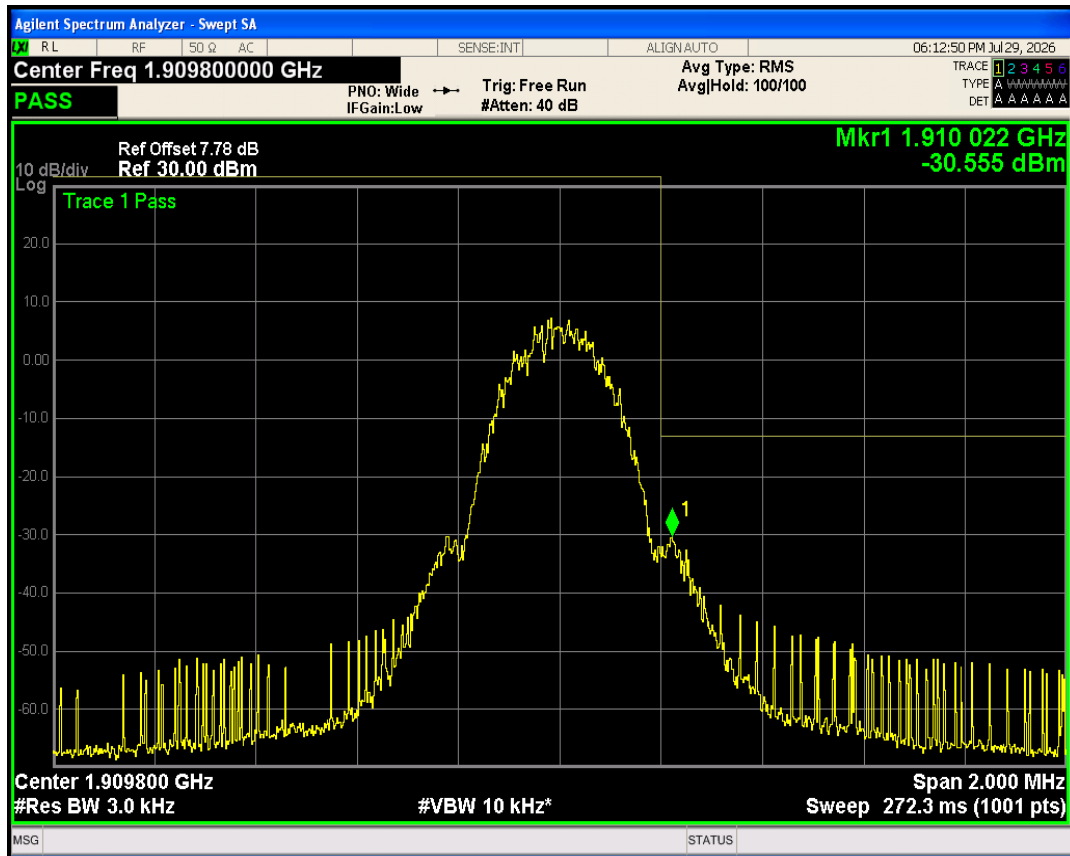


GPRS1900 Channel=512

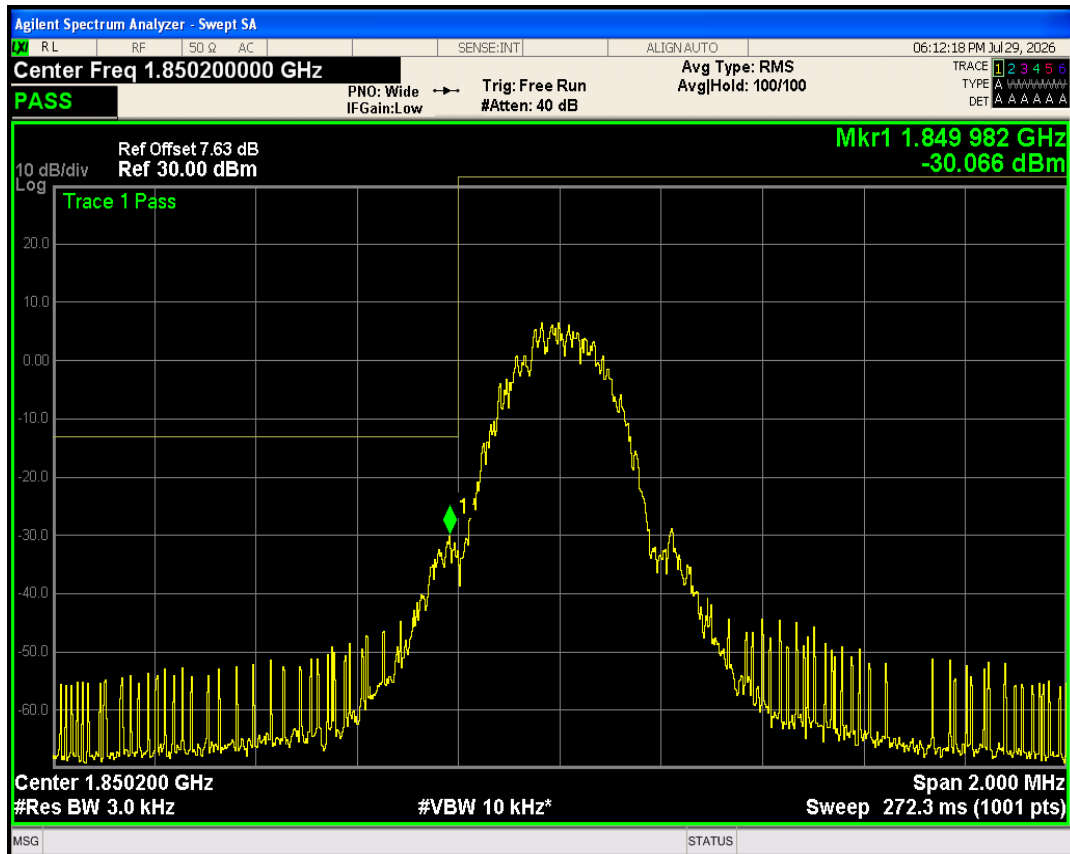

GPRS850 Channel=128

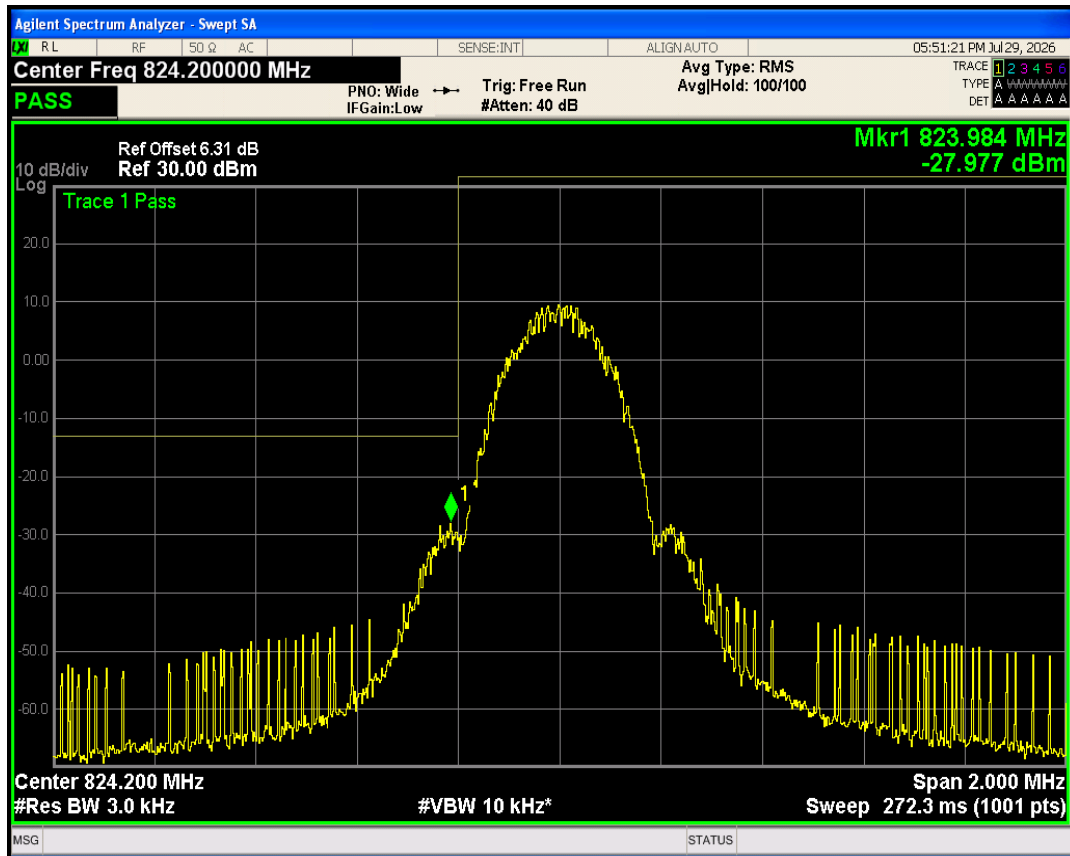


GPRS850 Channel=251

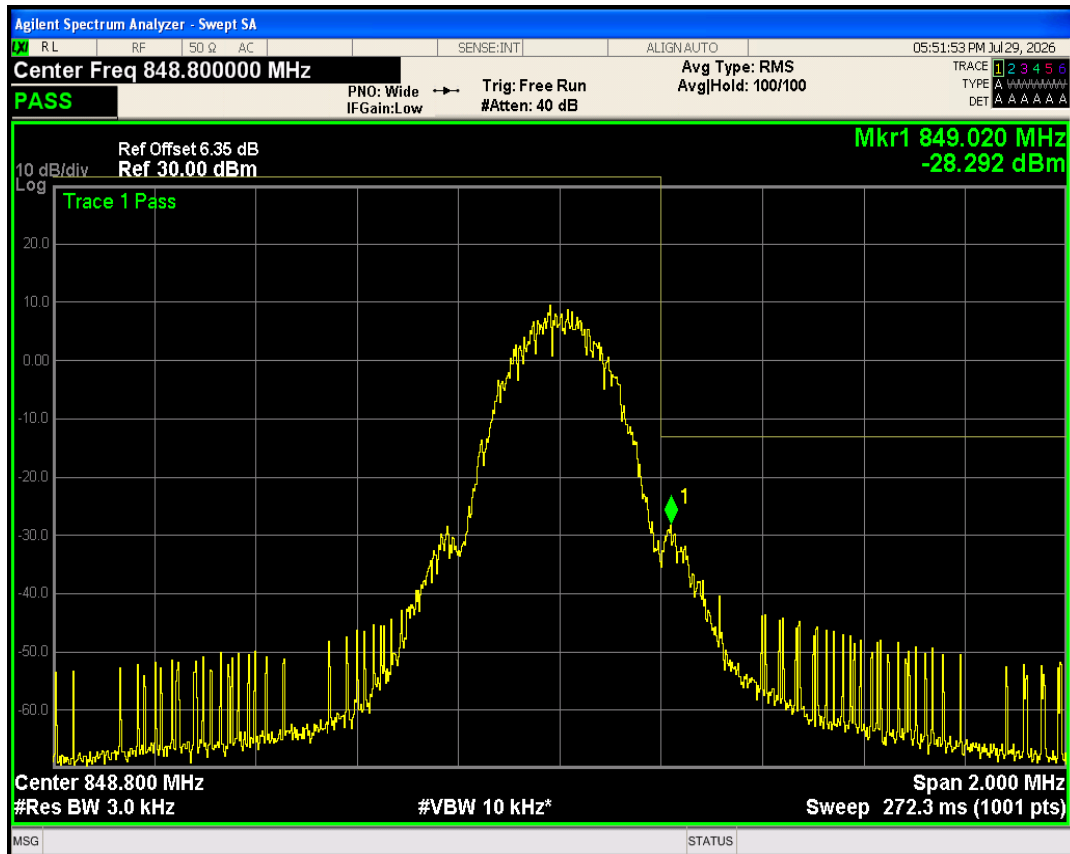


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25302.23	-19.84	-13	PASS
GPRS1900	661	1880	25649.65	-19.36	-13	PASS
GPRS1900	810	1909.8	25926.26	-19.80	-13	PASS
GPRS850	128	824.2	24861.51	-20.53	-13	PASS
GPRS850	189	836.4	24874.08	-21.28	-13	PASS
GPRS850	251	848.8	25262.53	-21.25	-13	PASS


GPRS1900 Channel=661

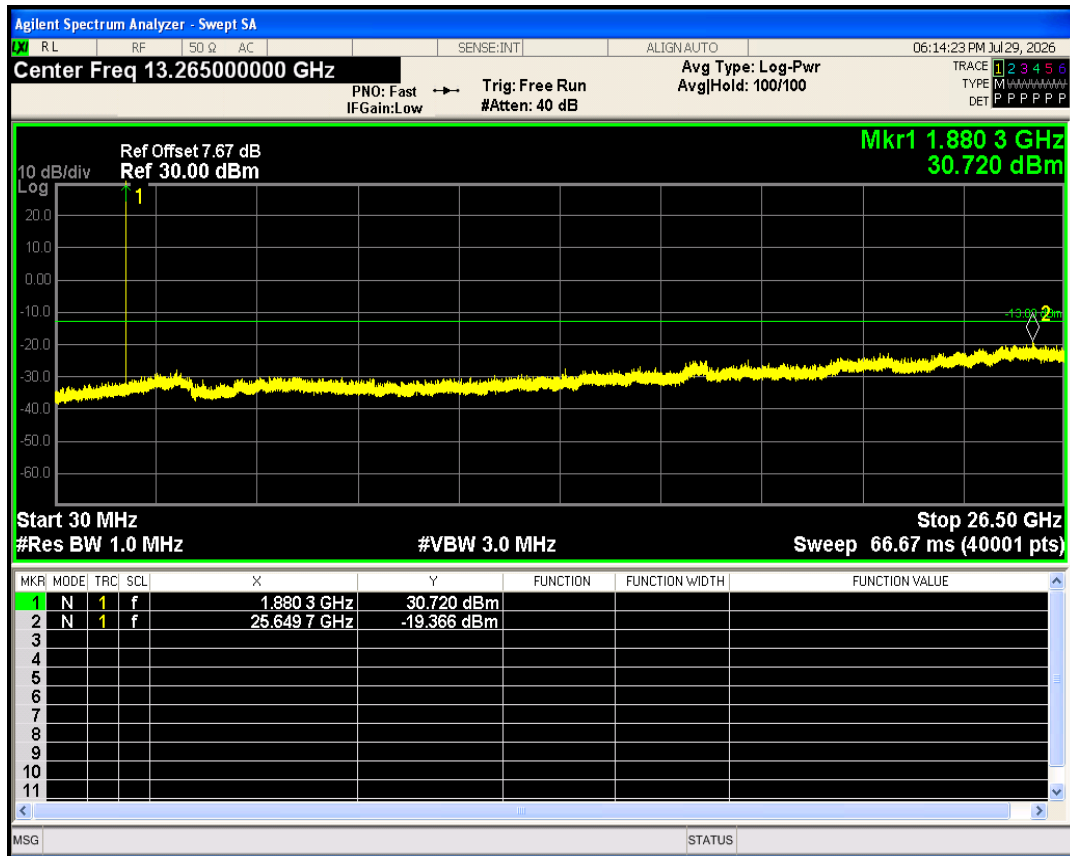


GPRS1900 Channel=512

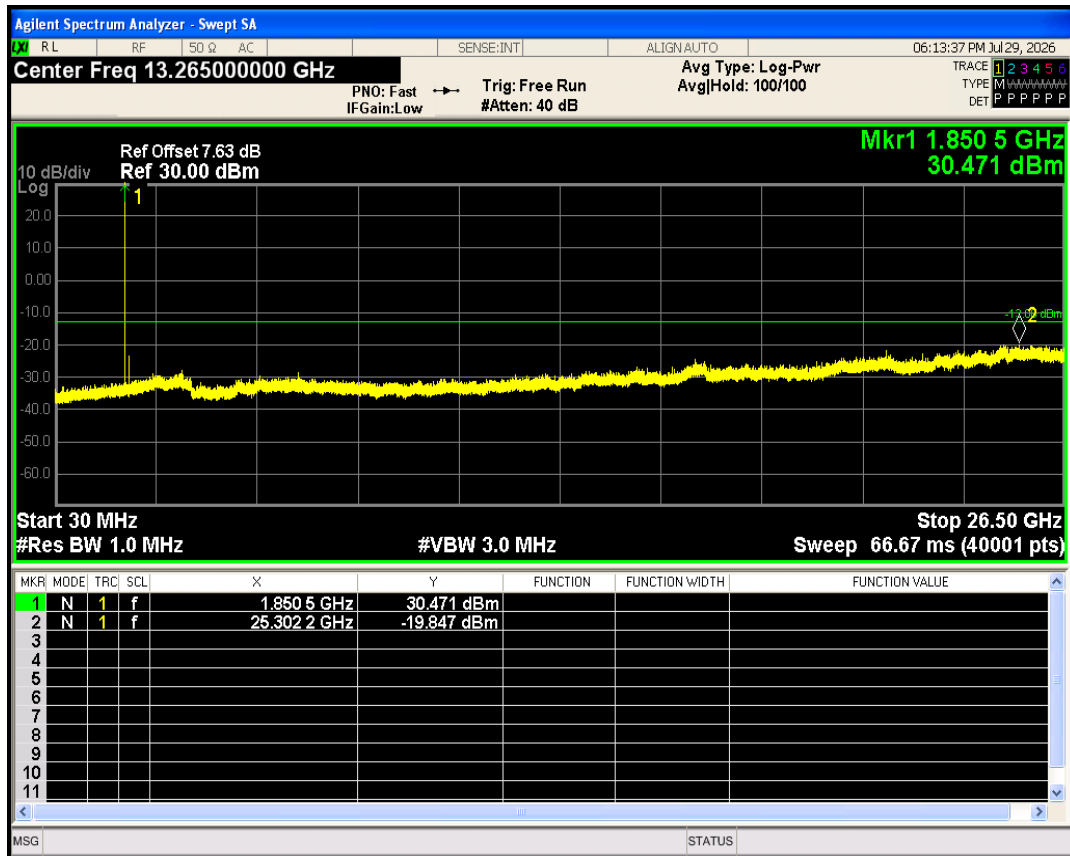


GPRS1900 Channel=810

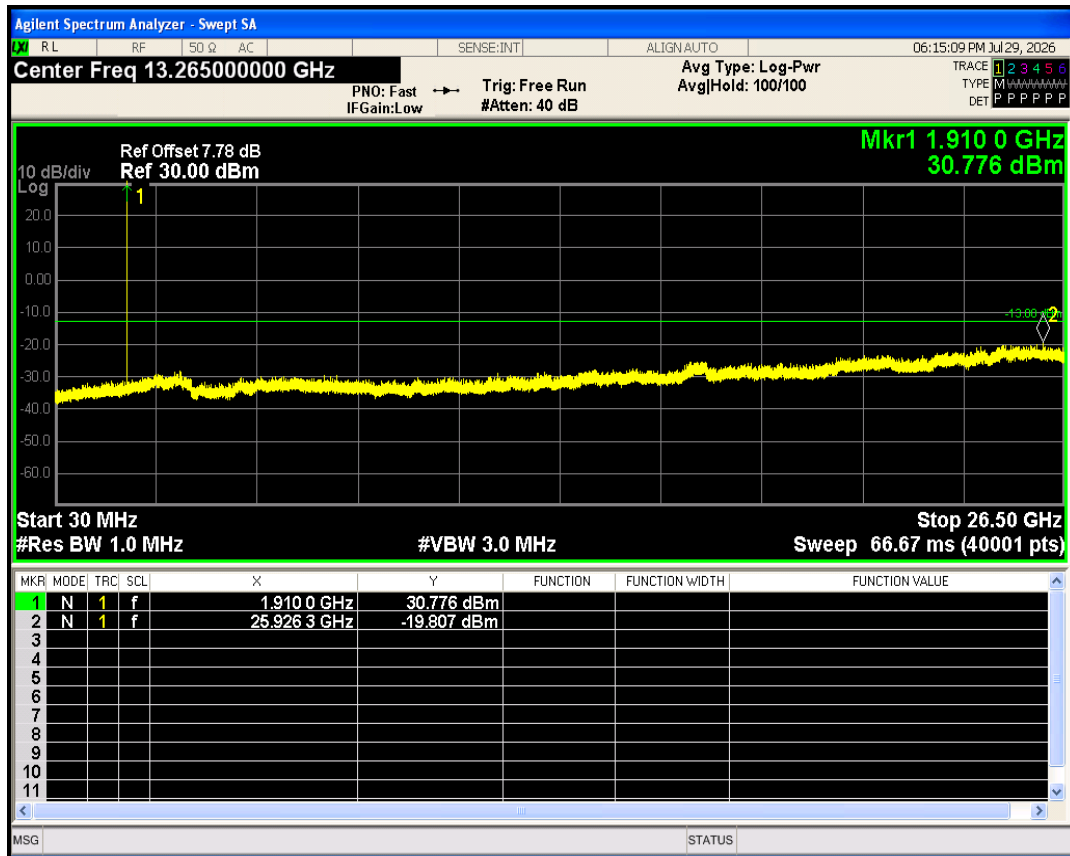


GPRS850 Channel=189

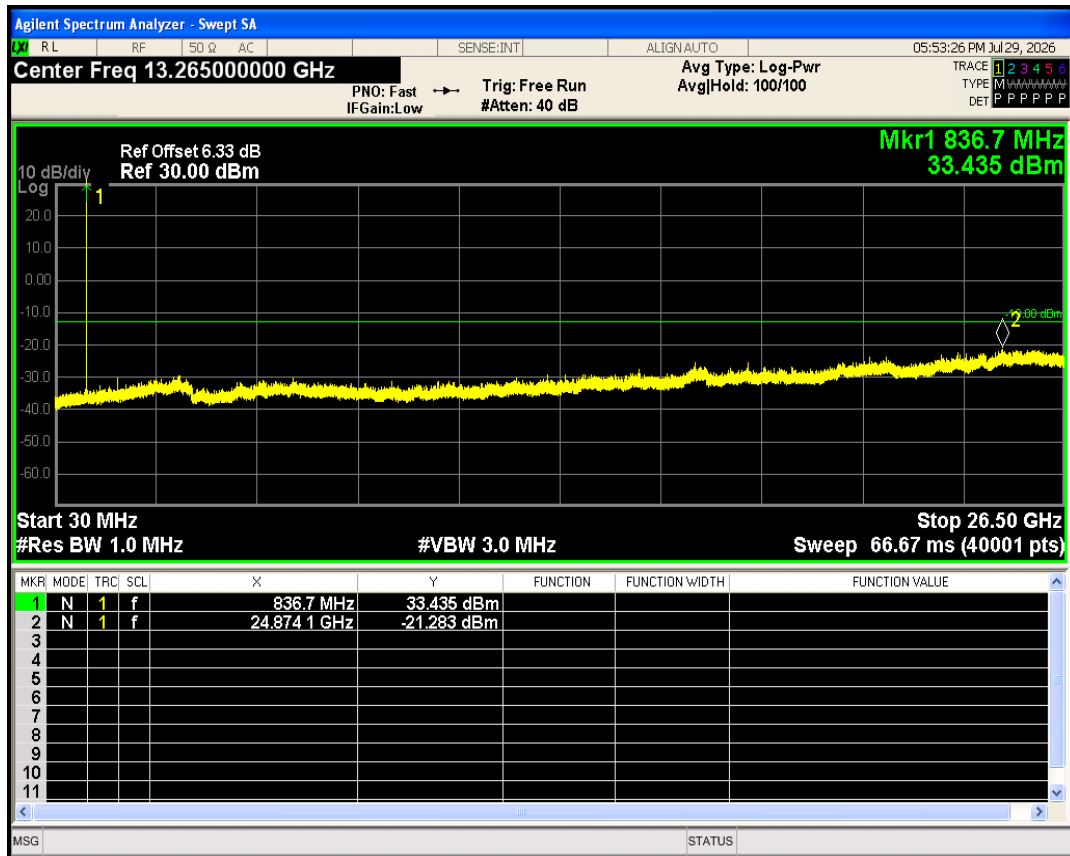

GPRS850 Channel=128

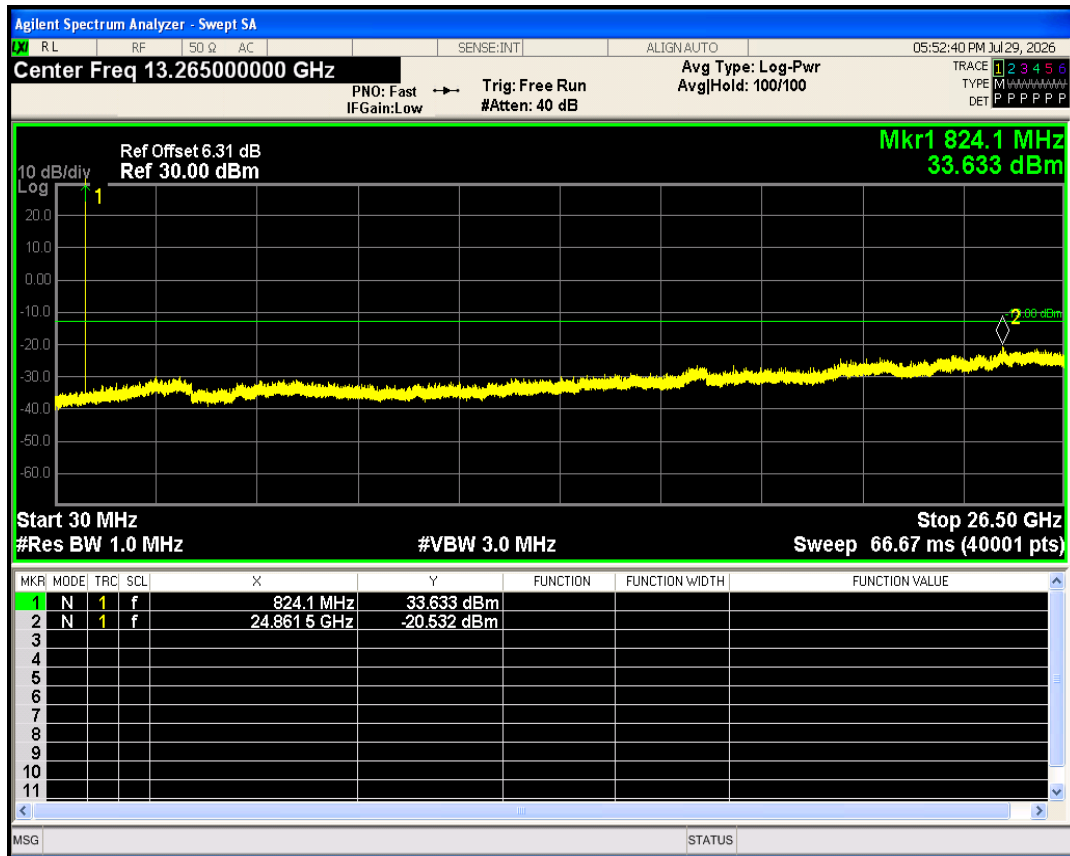


GPRS850 Channel=251

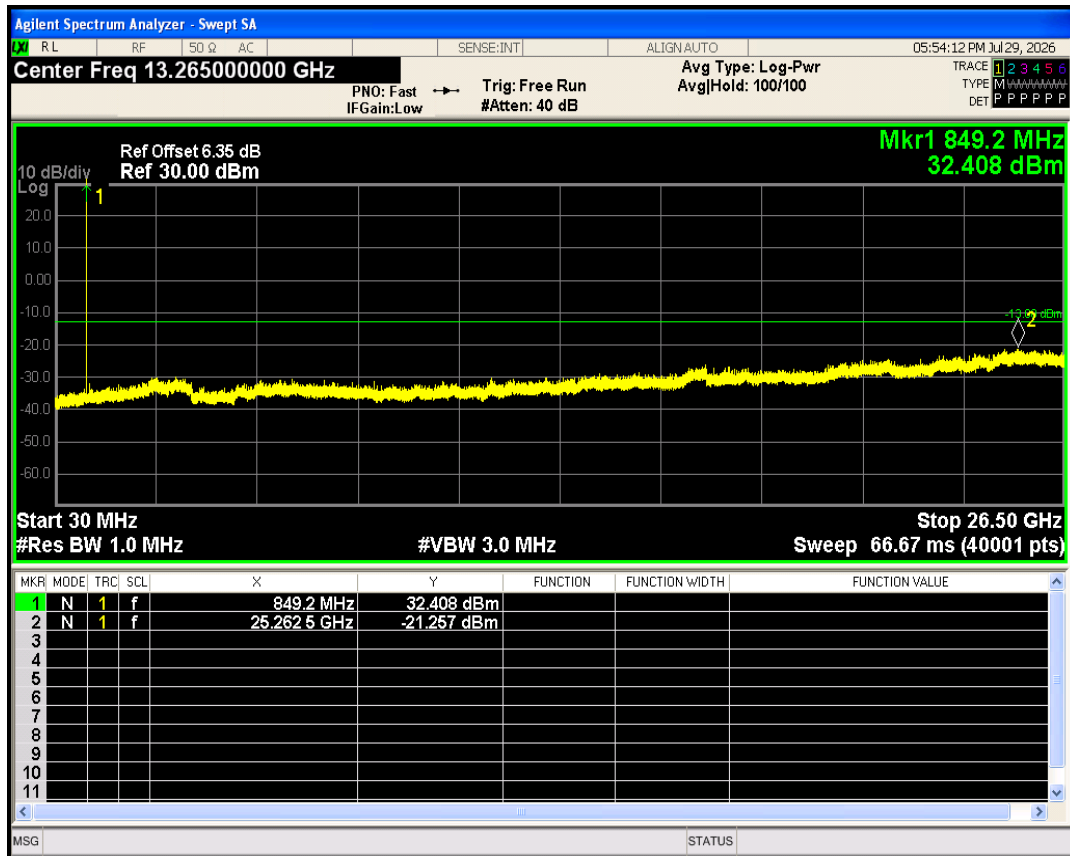


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.61	13	PASS
GSM1900	661	1880	2.61	13	PASS
GSM1900	810	1909.8	2.63	13	PASS
GSM850	128	824.2	2.63	13	PASS
GSM850	189	836.4	2.63	13	PASS
GSM850	251	848.8	2.62	13	PASS


GSM1900 Channel=661

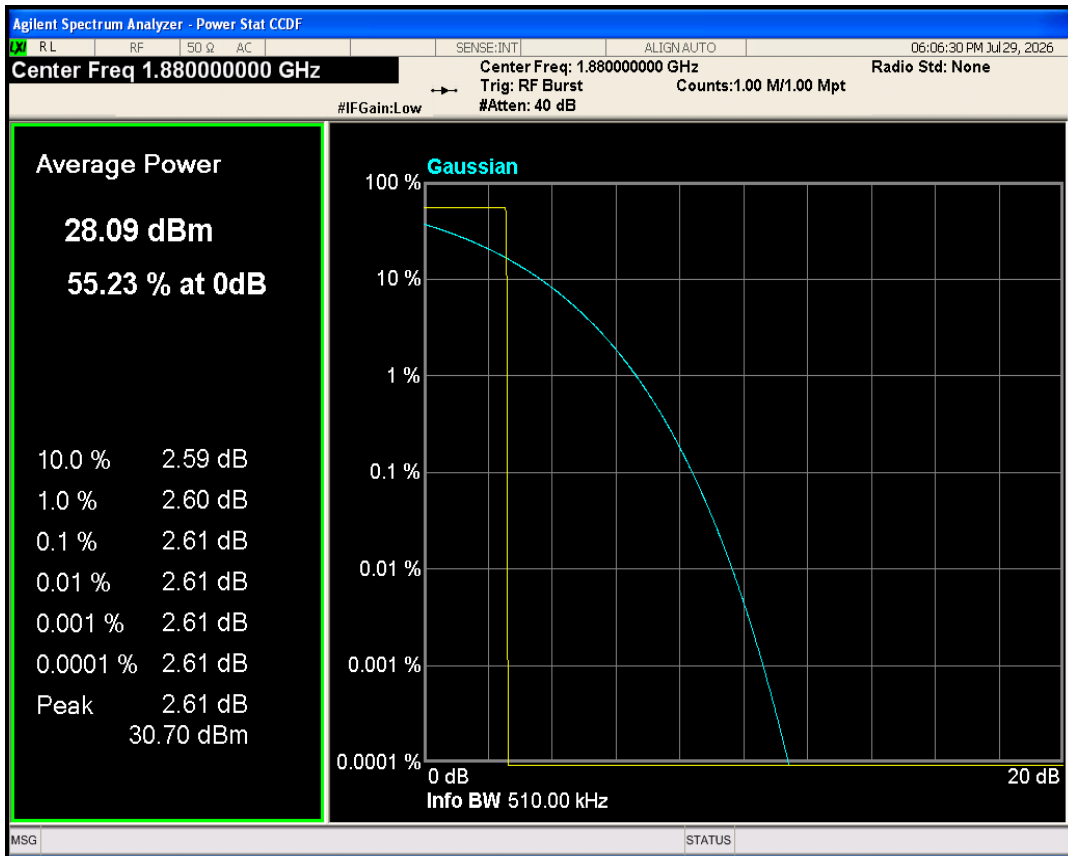


GSM1900 Channel=512

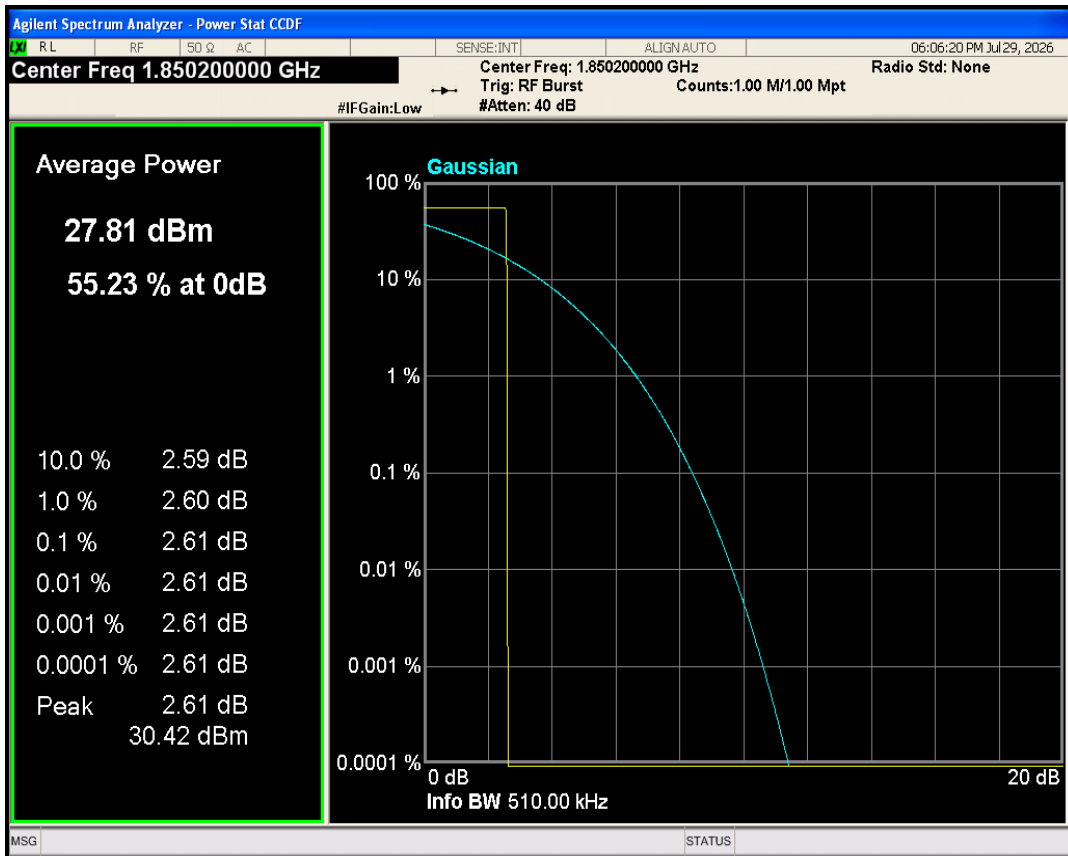


GSM1900 Channel=810

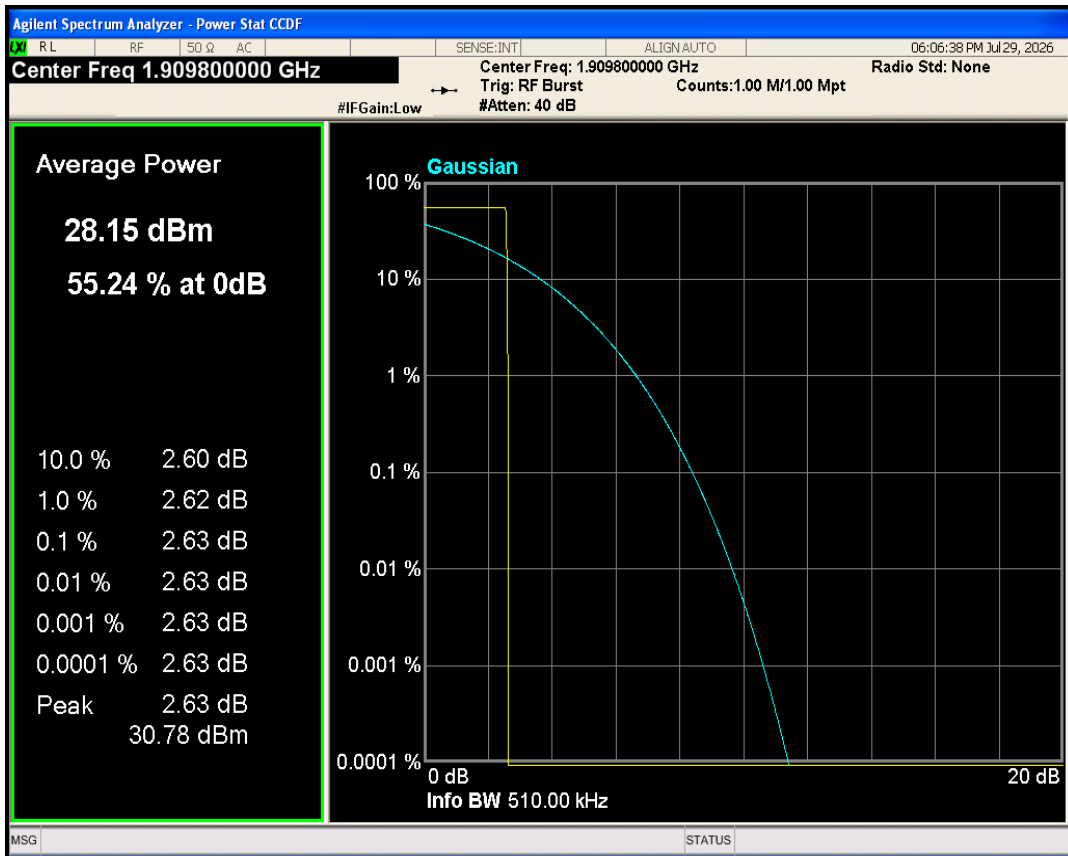


GSM850 Channel=128

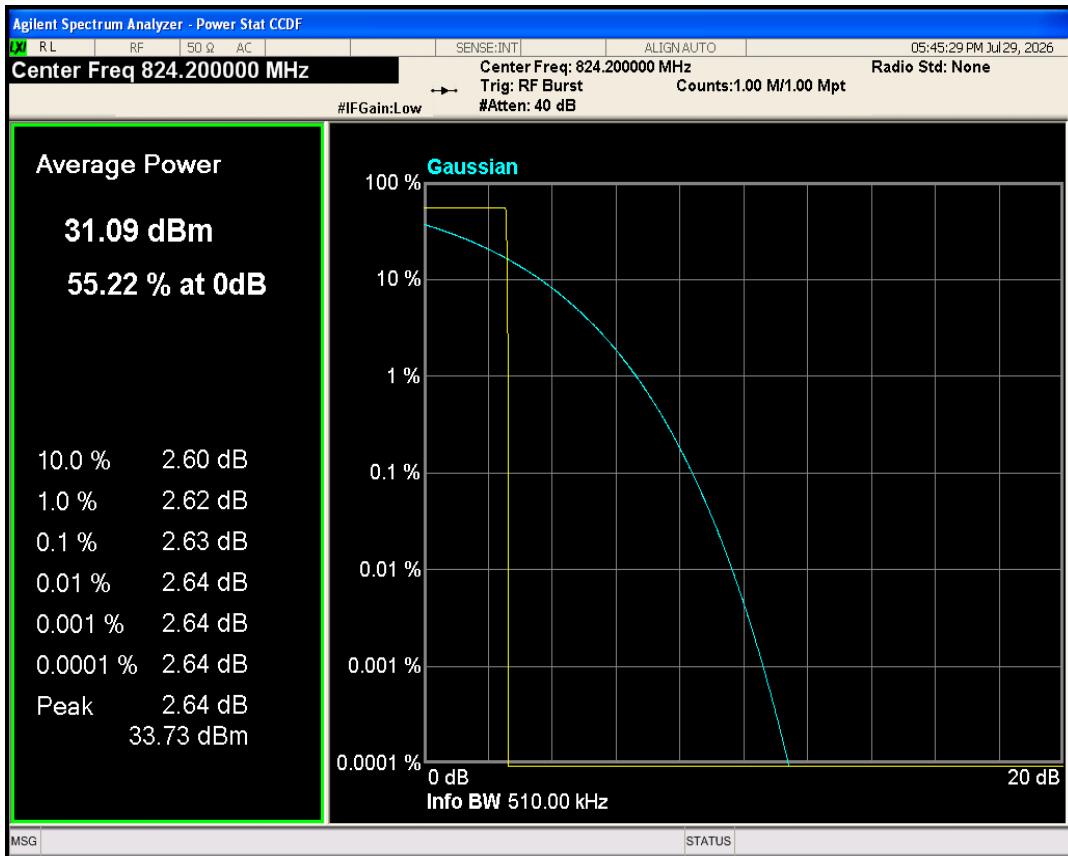

GSM850 Channel=251

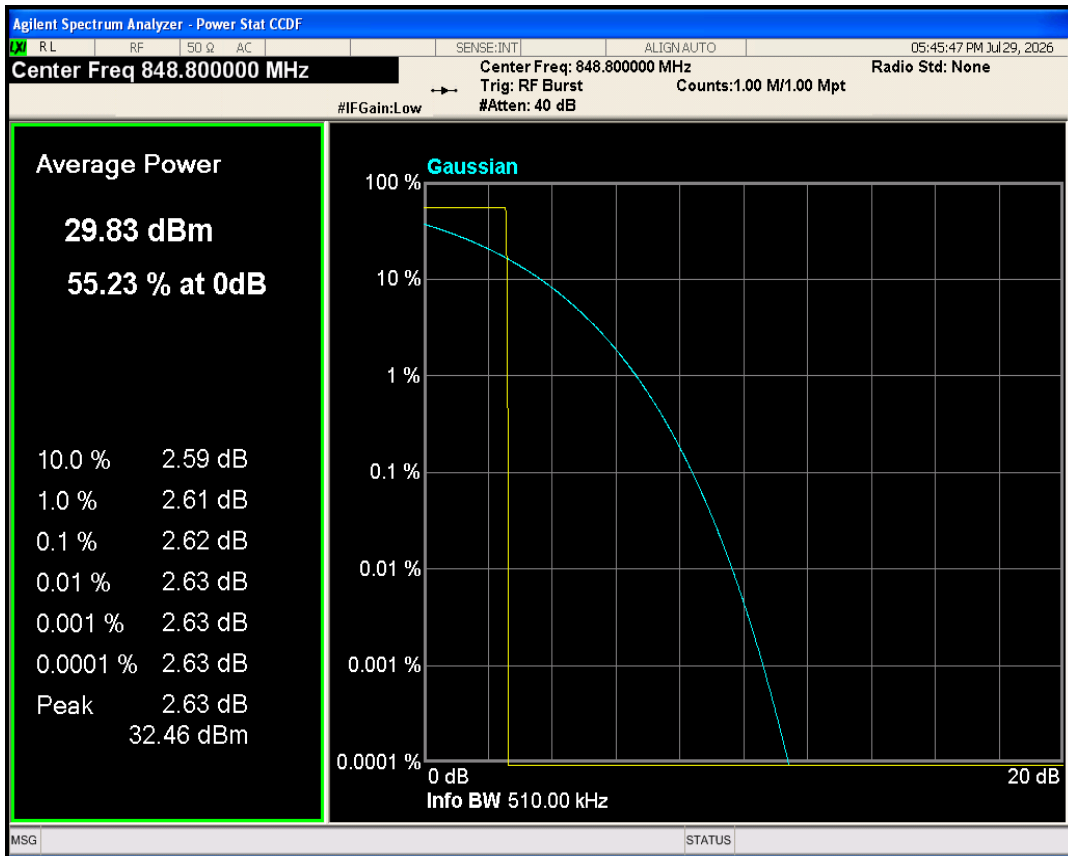


GSM850 Channel=189

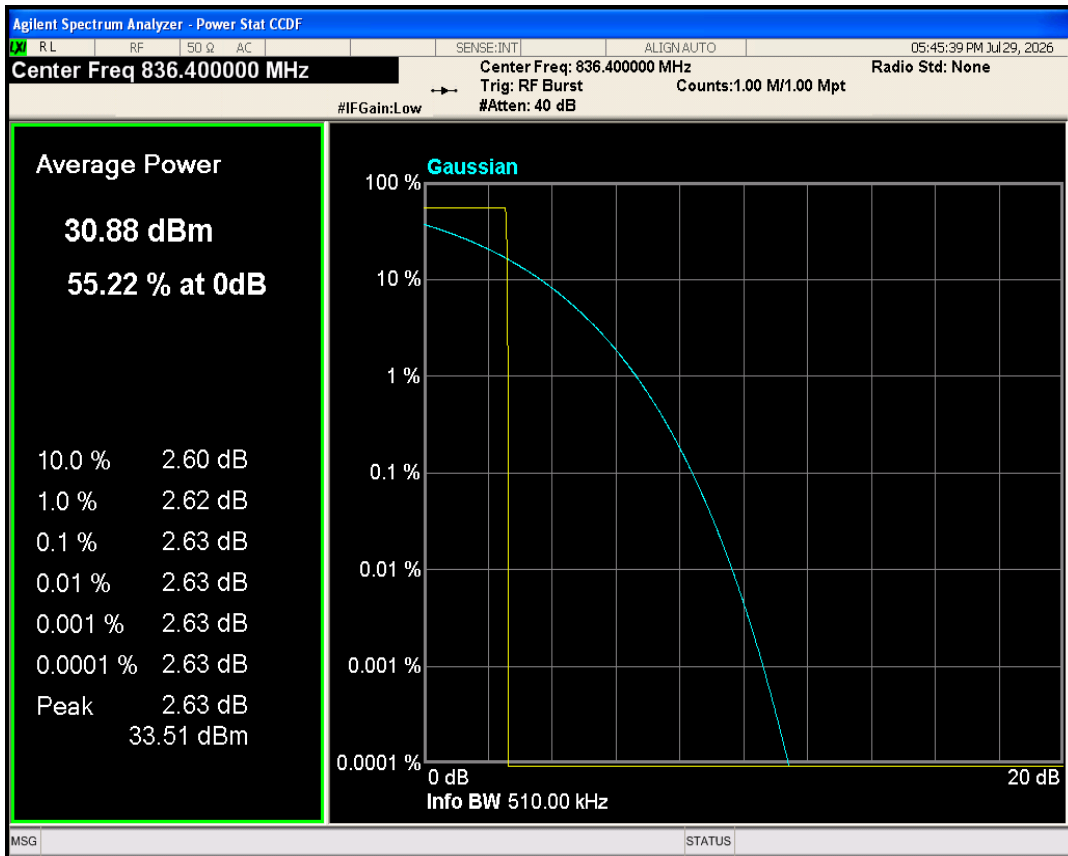


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	243.775	310.770	PASS
GSM1900	661	1880	246.264	317.734	PASS
GSM1900	810	1909.8	240.611	314.715	PASS
GSM850	128	824.2	246.378	319.625	PASS
GSM850	189	836.4	244.244	322.419	PASS
GSM850	251	848.8	245.300	312.386	PASS


GSM1900 Channel=661

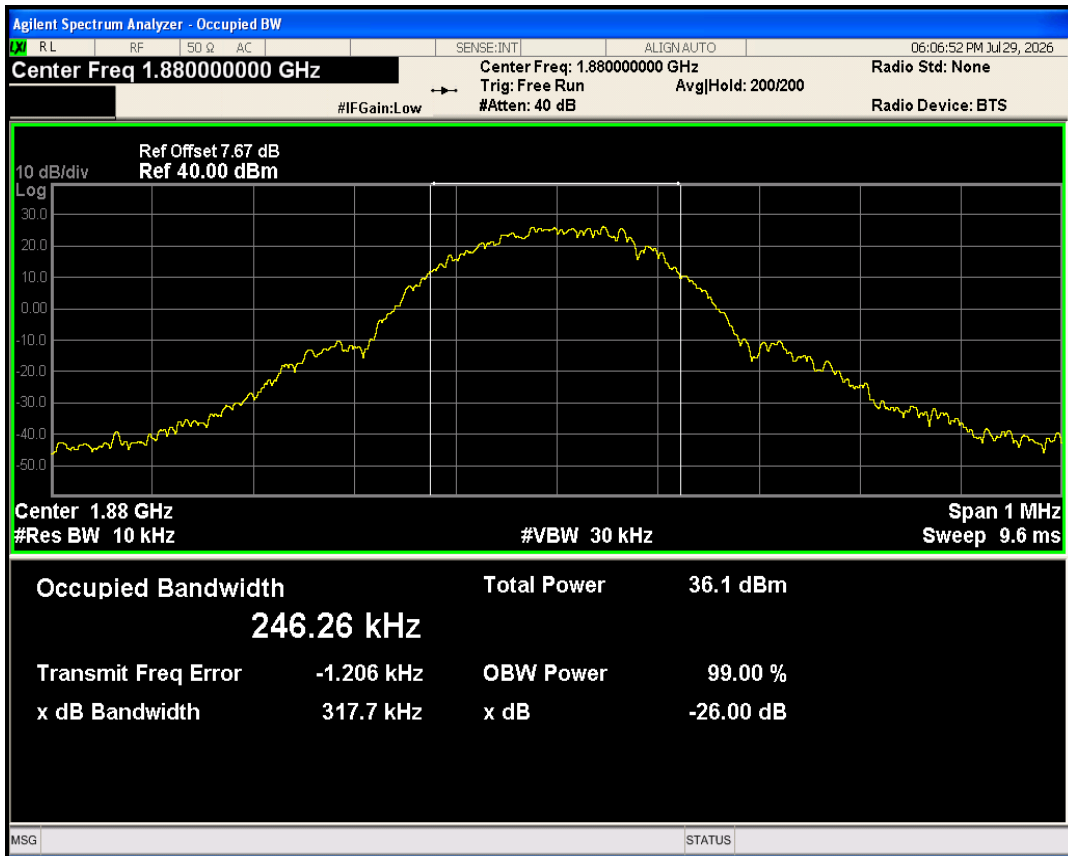


GSM1900 Channel=512

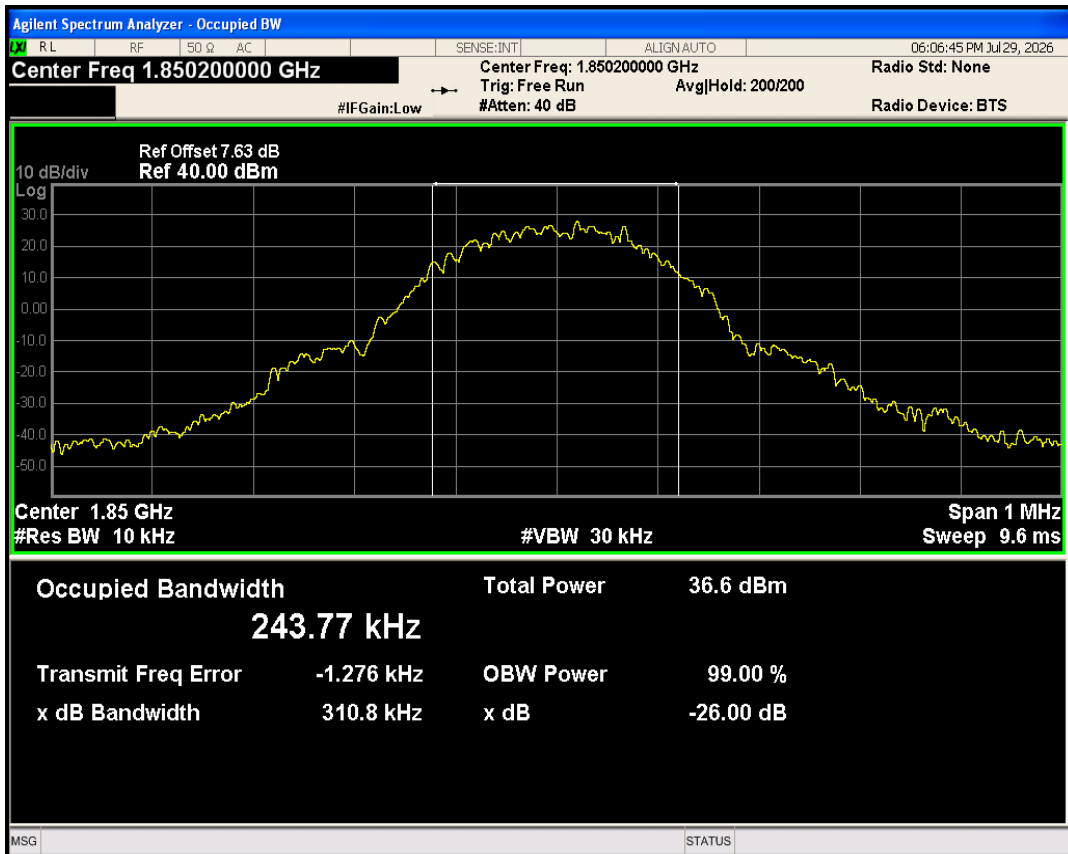


GSM1900 Channel=810

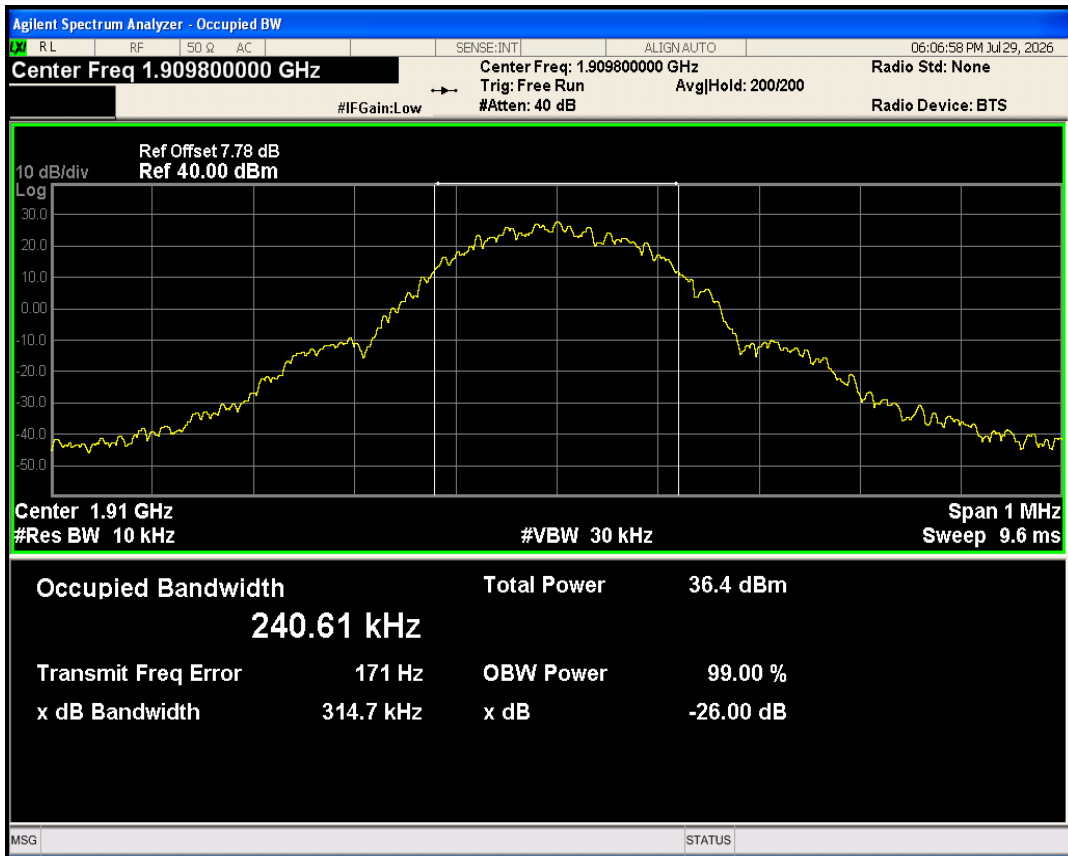


GSM850 Channel=128

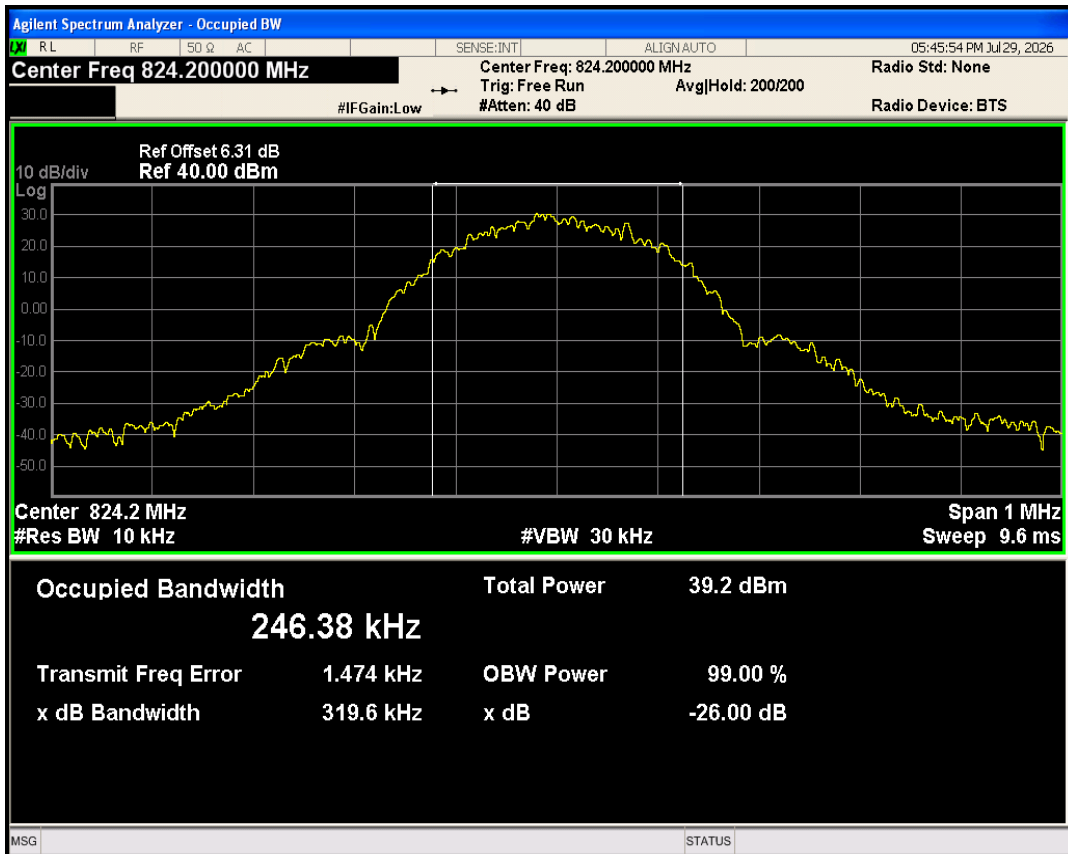

GSM850 Channel=251

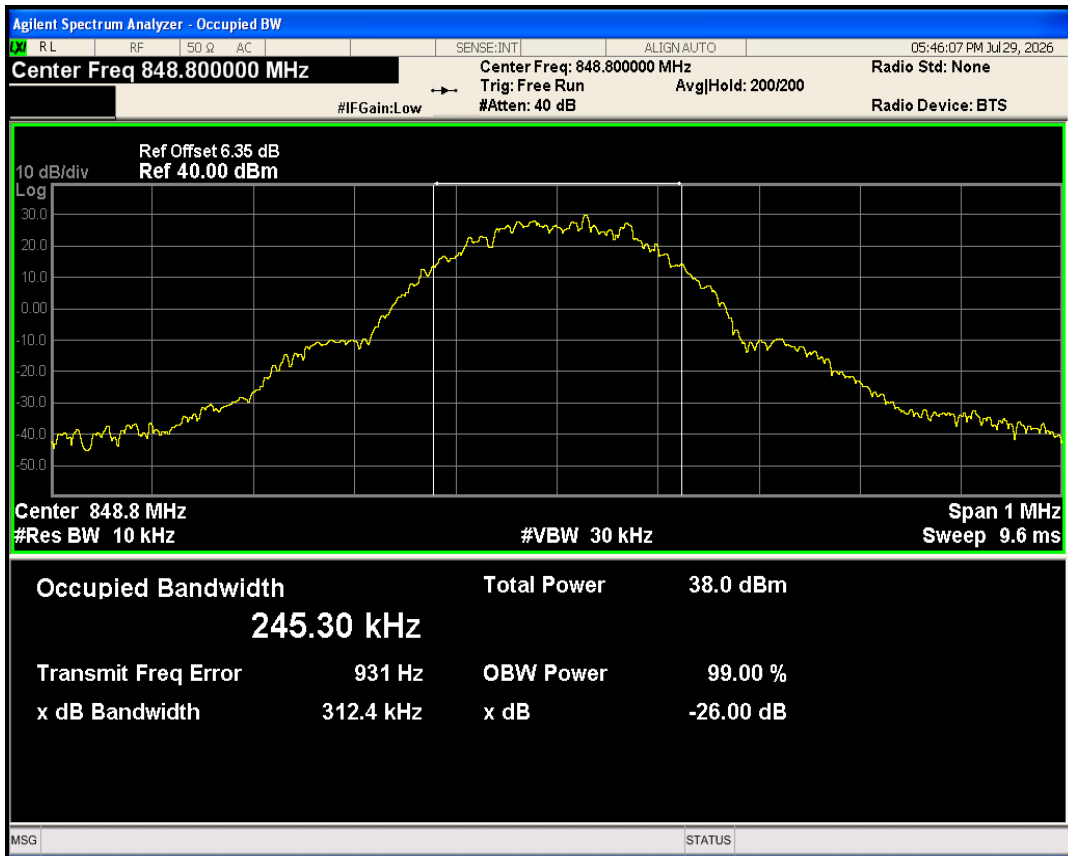


GSM850 Channel=189

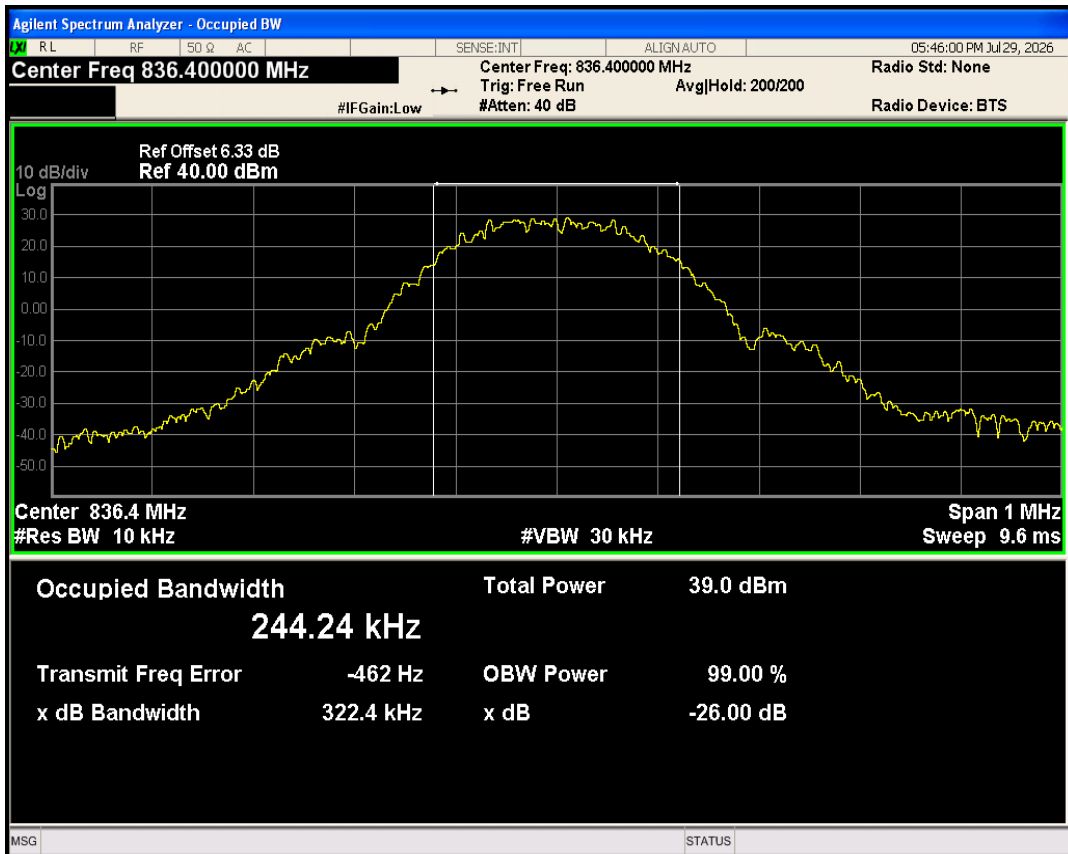


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-30.29	-13	PASS
GSM1900	810	1909.8	1910.02	-28.97	-13	PASS
GSM850	128	824.2	823.98	-27.83	-13	PASS
GSM850	251	848.8	849.02	-27.07	-13	PASS


GSM1900 Channel=512

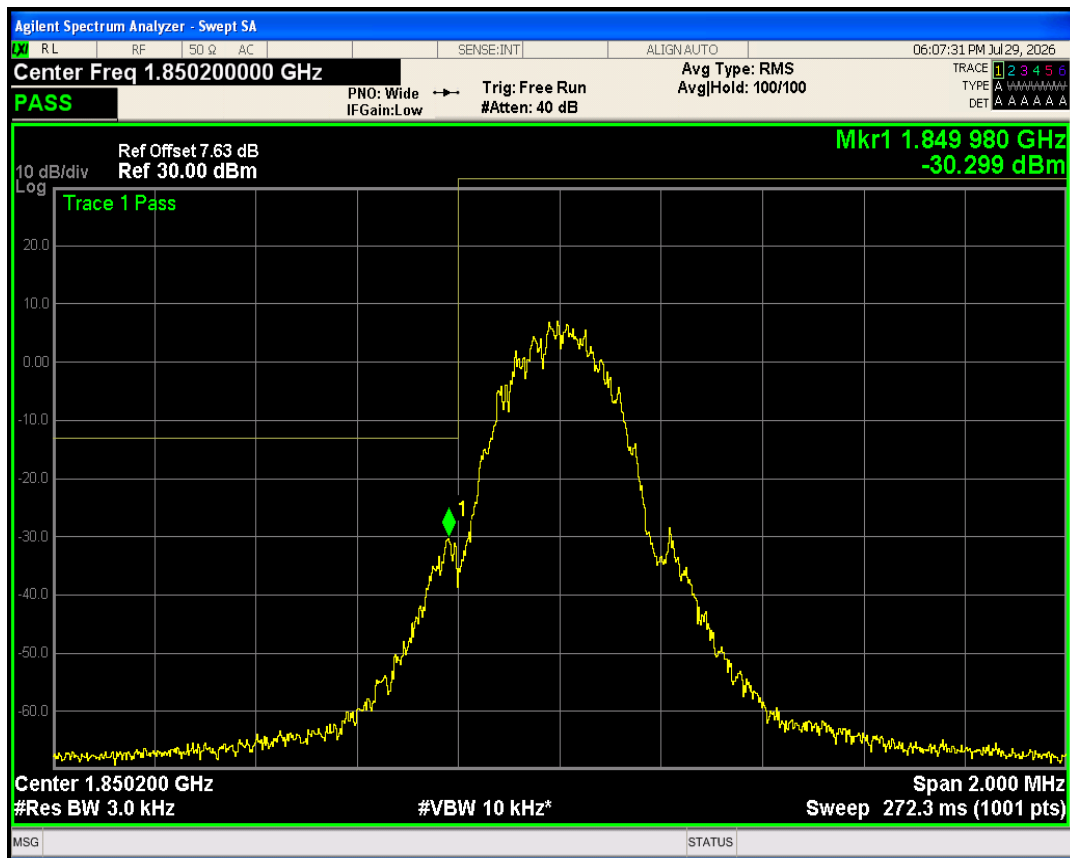


GSM1900 Channel=810

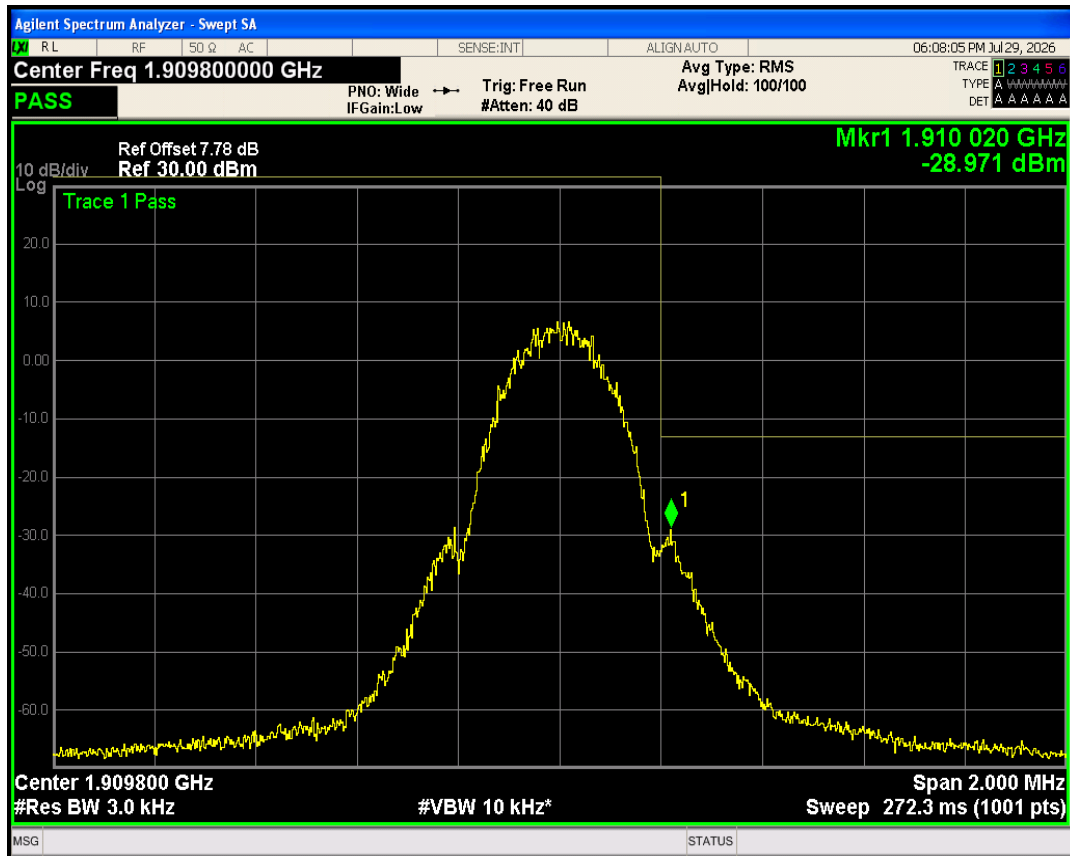

GSM850 Channel=251

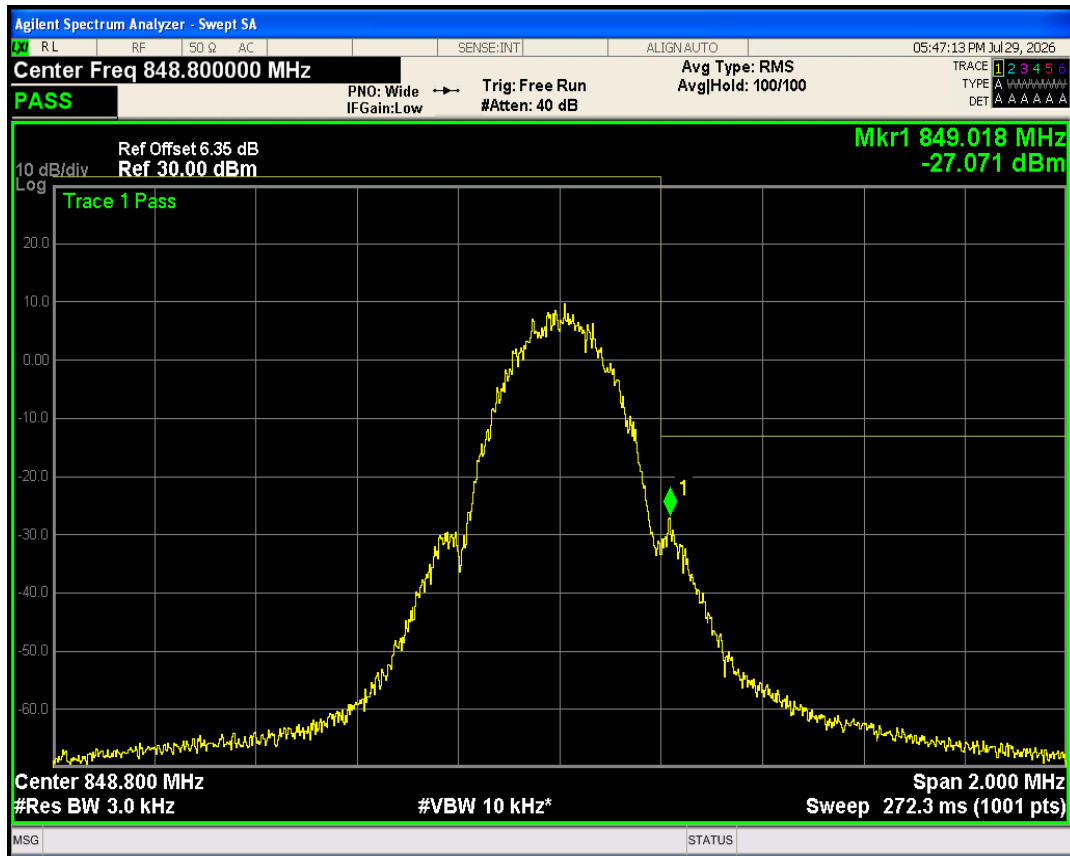


GSM850 Channel=128

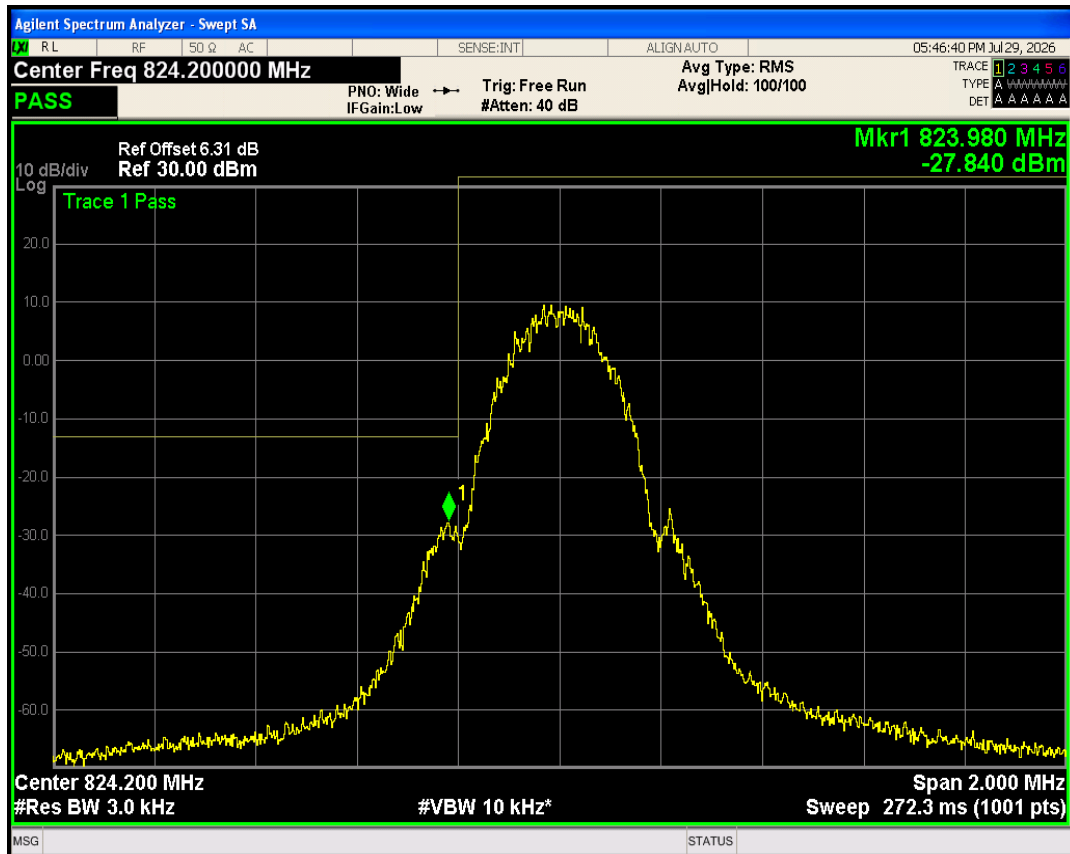


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25451.79	-19.81	-13	PASS
GSM1900	661	1880	25454.44	-19.89	-13	PASS
GSM1900	810	1909.8	25625.83	-19.96	-13	PASS
GSM850	128	824.2	26118.83	-21.26	-13	PASS
GSM850	189	836.4	24831.07	-21.68	-13	PASS
GSM850	251	848.8	25977.88	-21.28	-13	PASS


GSM1900 Channel=512

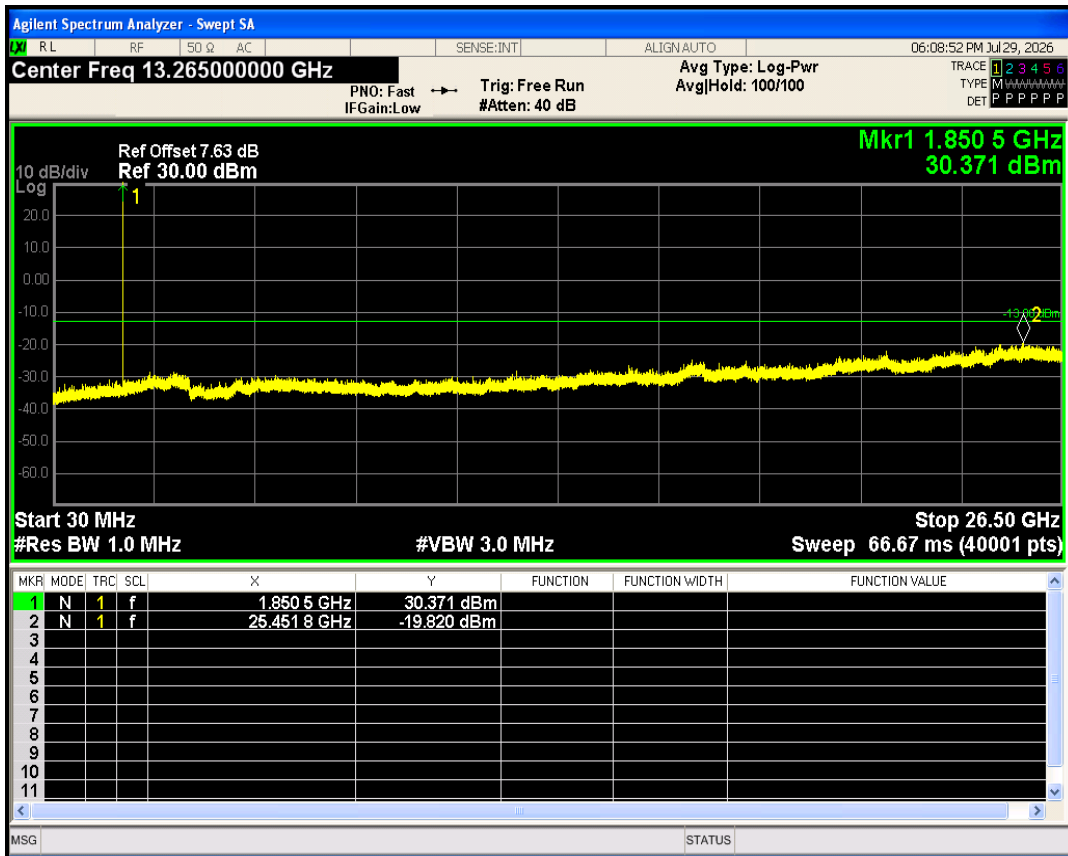


GSM1900 Channel=661

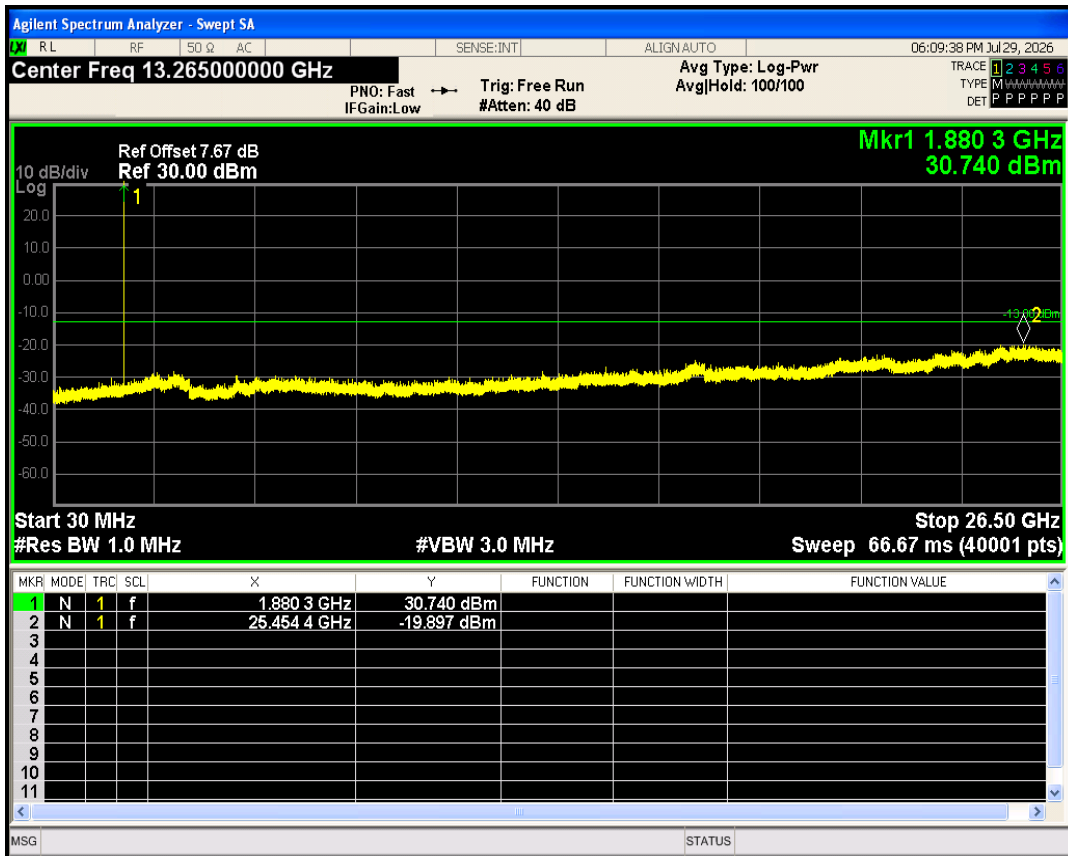


GSM1900 Channel=810

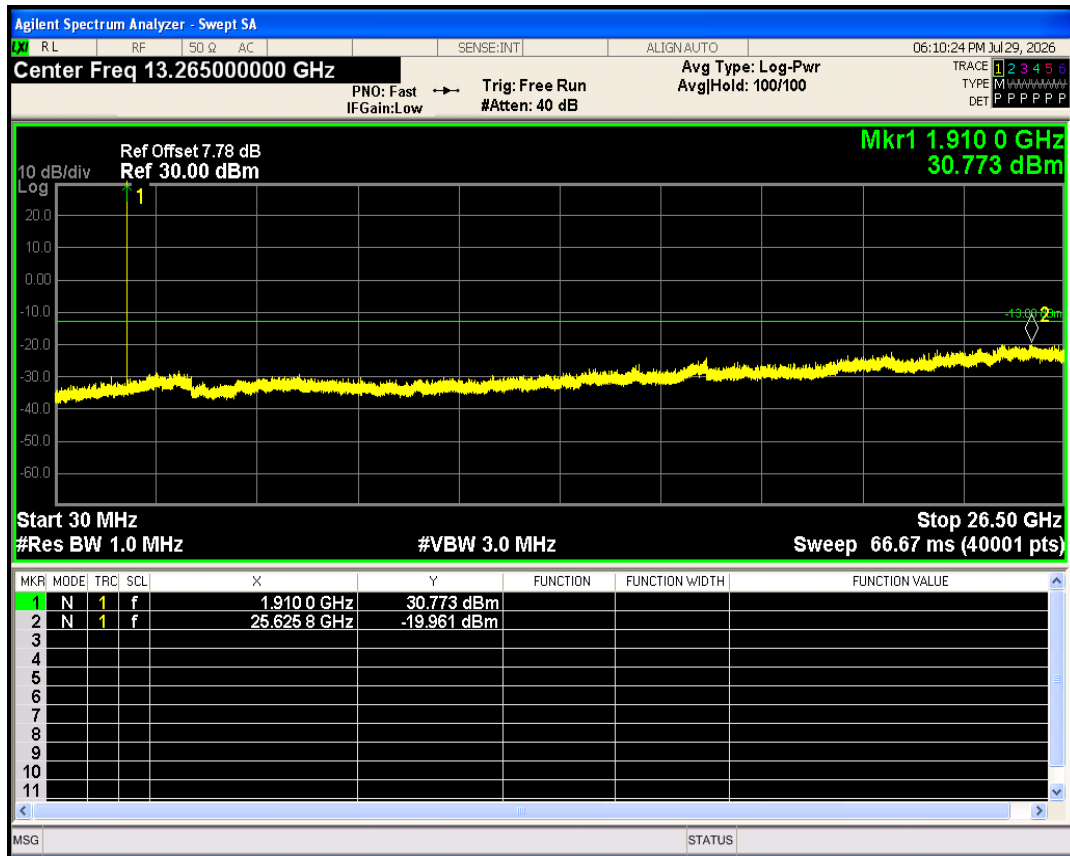

GSM850 Channel=189

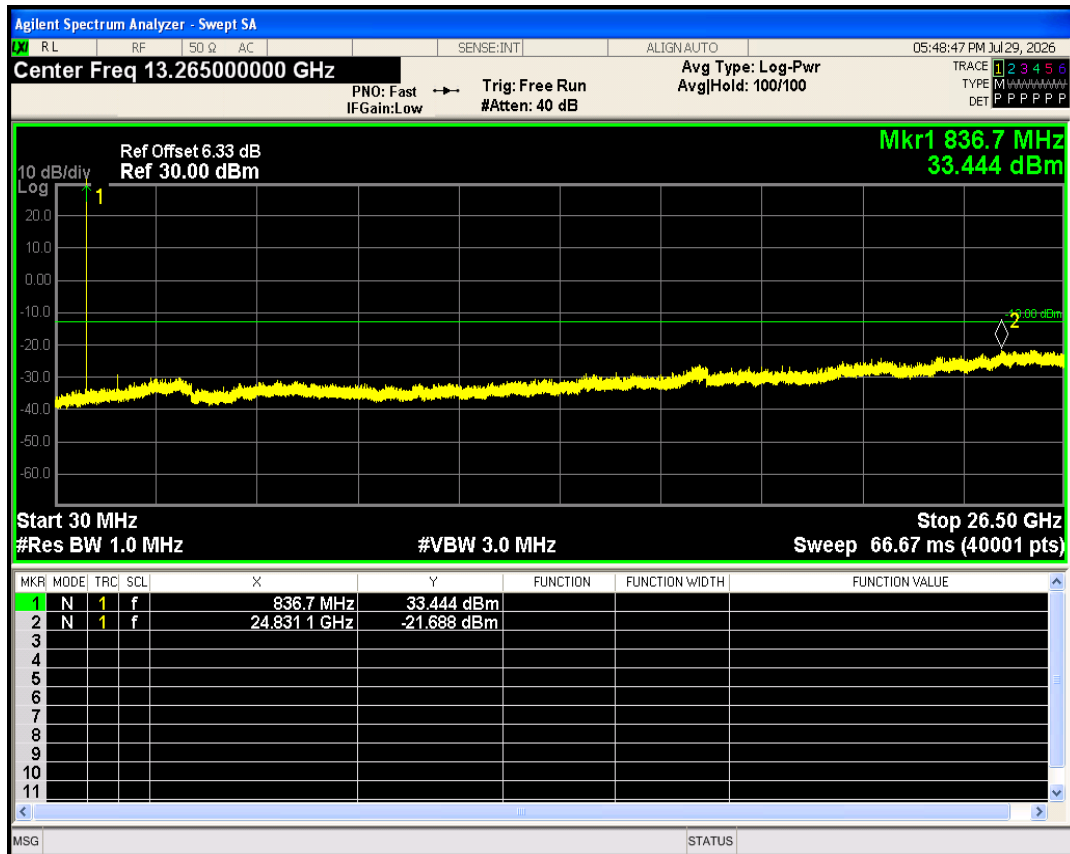

GSM850 Channel=128

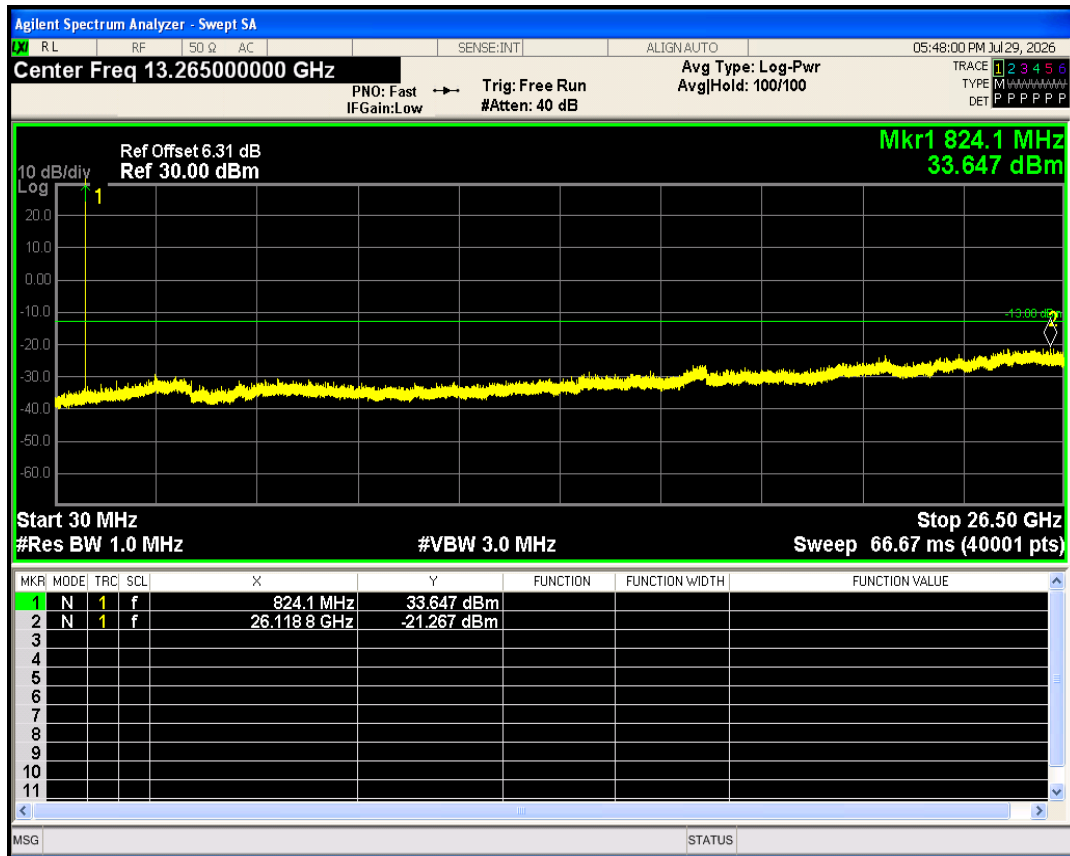

GSM850 Channel=251

