

## **FCC Appendix RF Test Data for LTE Band26(814-824)**

**FCC ID** : 2ANMU-C26MINI

**Company** : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY  
CO.,LTD

**EUT** : Smart phone

**Model Number** : C26 Mini

**Report No.** : ET-26094838E08

## 01 LTE CONDUCTED OUTPUT POWER (ERP)

| Condition | Band            | Bandwidth (MHz) | UL Channel | RB Size | RB Position | Modulation | Power (dBm) | Gain (dB) | ERP (dBm) | ERP (mW) | ERP Limit (mW) | Verdict |
|-----------|-----------------|-----------------|------------|---------|-------------|------------|-------------|-----------|-----------|----------|----------------|---------|
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | QPSK       | 23.31       | -0.89     | 20.27     | 106.41   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Mid        | QPSK       | 23.34       | -0.89     | 20.3      | 107.15   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | QPSK       | 23.27       | -0.89     | 20.23     | 105.44   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 3       | #0          | QPSK       | 22.71       | -0.89     | 19.67     | 92.68    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 3       | #Mid        | QPSK       | 22.72       | -0.89     | 19.68     | 92.90    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 3       | #Max        | QPSK       | 22.75       | -0.89     | 19.71     | 93.54    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | QPSK       | 21.7        | -0.89     | 18.66     | 73.45    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | 16QAM      | 22.94       | -0.89     | 19.9      | 97.72    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Mid        | 16QAM      | 22.92       | -0.89     | 19.88     | 97.27    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | 16QAM      | 22.92       | -0.89     | 19.88     | 97.27    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 3       | #0          | 16QAM      | 21.8        | -0.89     | 18.76     | 75.16    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 3       | #Mid        | 16QAM      | 21.68       | -0.89     | 18.64     | 73.11    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 3       | #Max        | 16QAM      | 21.71       | -0.89     | 18.67     | 73.62    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | 16QAM      | 21.16       | -0.89     | 18.12     | 64.86    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #0          | QPSK       | 23.09       | -0.89     | 20.05     | 101.16   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #Mid        | QPSK       | 23.13       | -0.89     | 20.09     | 102.09   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #Max        | QPSK       | 23.13       | -0.89     | 20.09     | 102.09   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 3       | #0          | QPSK       | 22.9        | -0.89     | 19.86     | 96.83    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 3       | #Mid        | QPSK       | 22.86       | -0.89     | 19.82     | 95.94    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 3       | #Max        | QPSK       | 22.89       | -0.89     | 19.85     | 96.61    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 6       | #0          | QPSK       | 21.87       | -0.89     | 18.83     | 76.38    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #0          | 16QAM      | 23.66       | -0.89     | 20.62     | 115.35   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #Mid        | 16QAM      | 23.67       | -0.89     | 20.63     | 115.61   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #Max        | 16QAM      | 23.68       | -0.89     | 20.64     | 115.88   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 3       | #0          | 16QAM      | 21.76       | -0.89     | 18.72     | 74.47    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 3       | #Mid        | 16QAM      | 21.81       | -0.89     | 18.77     | 75.34    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 3       | #Max        | 16QAM      | 21.77       | -0.89     | 18.73     | 74.64    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 6       | #0          | 16QAM      | 21.32       | -0.89     | 18.28     | 67.30    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 1       | #0          | QPSK       | 23.61       | -0.89     | 20.57     | 114.02   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 1       | #Mid        | QPSK       | 23.66       | -0.89     | 20.62     | 115.35   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 1       | #Max        | QPSK       | 23.6        | -0.89     | 20.56     | 113.76   | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 3       | #0          | QPSK       | 22.96       | -0.89     | 19.92     | 98.17    | 7000           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 3       | #Mid        | QPSK       | 22.76       | -         | 19.72     | 93.76    | 7000           | PASS    |


|      |                     |     |       |    |      |       |       |           |       |            |      |      |
|------|---------------------|-----|-------|----|------|-------|-------|-----------|-------|------------|------|------|
|      | 4-824)              |     |       |    |      |       |       | 0.89      |       |            |      |      |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 3  | #Max | QPSK  | 22.69 | -<br>0.89 | 19.65 | 92.26      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6  | #0   | QPSK  | 21.84 | -<br>0.89 | 18.8  | 75.86      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1  | #0   | 16QAM | 23.14 | -<br>0.89 | 20.1  | 102.3<br>3 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1  | #Mid | 16QAM | 23.19 | -<br>0.89 | 20.15 | 103.5<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1  | #Max | 16QAM | 23.21 | -<br>0.89 | 20.17 | 103.9<br>9 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 3  | #0   | 16QAM | 21.85 | -<br>0.89 | 18.81 | 76.03      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 3  | #Mid | 16QAM | 21.85 | -<br>0.89 | 18.81 | 76.03      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 3  | #Max | 16QAM | 21.82 | -<br>0.89 | 18.78 | 75.51      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6  | #0   | 16QAM | 21.43 | -<br>0.89 | 18.39 | 69.02      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | QPSK  | 23.41 | -<br>0.89 | 20.37 | 108.8<br>9 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Mid | QPSK  | 23.35 | -<br>0.89 | 20.31 | 107.4<br>0 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | QPSK  | 23.36 | -<br>0.89 | 20.32 | 107.6<br>5 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 8  | #0   | QPSK  | 21.7  | -<br>0.89 | 18.66 | 73.45      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 8  | #Mid | QPSK  | 21.75 | -<br>0.89 | 18.71 | 74.30      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 8  | #Max | QPSK  | 21.81 | -<br>0.89 | 18.77 | 75.34      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | QPSK  | 21.82 | -<br>0.89 | 18.78 | 75.51      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | 16QAM | 22.29 | -<br>0.89 | 19.25 | 84.14      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Mid | 16QAM | 22.5  | -<br>0.89 | 19.46 | 88.31      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | 16QAM | 22.36 | -<br>0.89 | 19.32 | 85.51      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 8  | #0   | 16QAM | 21.08 | -<br>0.89 | 18.04 | 63.68      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 8  | #Mid | 16QAM | 21.05 | -<br>0.89 | 18.01 | 63.24      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 8  | #Max | 16QAM | 21.11 | -<br>0.89 | 18.07 | 64.12      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | 16QAM | 21.26 | -<br>0.89 | 18.22 | 66.37      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 1  | #0   | QPSK  | 23.05 | -<br>0.89 | 20.01 | 100.2<br>3 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 1  | #Mid | QPSK  | 23.11 | -<br>0.89 | 20.07 | 101.6<br>2 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 1  | #Max | QPSK  | 23.13 | -<br>0.89 | 20.09 | 102.0<br>9 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 8  | #0   | QPSK  | 21.87 | -<br>0.89 | 18.83 | 76.38      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 8  | #Mid | QPSK  | 21.96 | -<br>0.89 | 18.92 | 77.98      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 8  | #Max | QPSK  | 21.99 | -<br>0.89 | 18.95 | 78.52      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 15 | #0   | QPSK  | 21.93 | -<br>0.89 | 18.89 | 77.45      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 1  | #0   | 16QAM | 23.61 | -<br>0.89 | 20.57 | 114.0<br>2 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 1  | #Mid | 16QAM | 23.67 | -<br>0.89 | 20.63 | 115.6<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 1  | #Max | 16QAM | 23.66 | -<br>0.89 | 20.62 | 115.3<br>5 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 8  | #0   | 16QAM | 21.27 | -<br>0.89 | 18.23 | 66.53      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 8  | #Mid | 16QAM | 21.22 | -<br>0.89 | 18.18 | 65.77      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26740 | 8  | #Max | 16QAM | 21.25 | -         | 18.21 | 66.22      | 7000 | PASS |

|      |                     |   |       |    |      |       |       |           |       |            |      |      |
|------|---------------------|---|-------|----|------|-------|-------|-----------|-------|------------|------|------|
|      | 4-824)              |   |       |    |      |       | 0.89  |           |       |            |      |      |
| NVNT | Band26(81<br>4-824) | 3 | 26740 | 15 | #0   | 16QAM | 21.38 | -<br>0.89 | 18.34 | 68.23      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | QPSK  | 23.65 | -<br>0.89 | 20.61 | 115.0<br>8 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Mid | QPSK  | 23.64 | -<br>0.89 | 20.6  | 114.8<br>2 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | QPSK  | 23.55 | -<br>0.89 | 20.51 | 112.4<br>6 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 8  | #0   | QPSK  | 21.79 | -<br>0.89 | 18.75 | 74.99      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 8  | #Mid | QPSK  | 21.8  | -<br>0.89 | 18.76 | 75.16      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 8  | #Max | QPSK  | 21.72 | -<br>0.89 | 18.68 | 73.79      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | QPSK  | 21.78 | -<br>0.89 | 18.74 | 74.82      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | 16QAM | 23.19 | -<br>0.89 | 20.15 | 103.5<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Mid | 16QAM | 23.19 | -<br>0.89 | 20.15 | 103.5<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | 16QAM | 23.17 | -<br>0.89 | 20.13 | 103.0<br>4 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 8  | #0   | 16QAM | 21.38 | -<br>0.89 | 18.34 | 68.23      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 8  | #Mid | 16QAM | 21.11 | -<br>0.89 | 18.07 | 64.12      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 8  | #Max | 16QAM | 21.31 | -<br>0.89 | 18.27 | 67.14      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | 16QAM | 21.33 | -<br>0.89 | 18.29 | 67.45      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | QPSK  | 23.17 | -<br>0.89 | 20.13 | 103.0<br>4 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Mid | QPSK  | 23.15 | -<br>0.89 | 20.11 | 102.5<br>7 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | QPSK  | 23.24 | -<br>0.89 | 20.2  | 104.7<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 12 | #0   | QPSK  | 21.7  | -<br>0.89 | 18.66 | 73.45      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 12 | #Mid | QPSK  | 21.69 | -<br>0.89 | 18.65 | 73.28      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 12 | #Max | QPSK  | 21.74 | -<br>0.89 | 18.7  | 74.13      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | QPSK  | 21.67 | -<br>0.89 | 18.63 | 72.95      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | 16QAM | 22.62 | -<br>0.89 | 19.58 | 90.78      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Mid | 16QAM | 22.68 | -<br>0.89 | 19.64 | 92.04      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | 16QAM | 22.68 | -<br>0.89 | 19.64 | 92.04      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 12 | #0   | 16QAM | 21.17 | -<br>0.89 | 18.13 | 65.01      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 12 | #Mid | 16QAM | 21.2  | -<br>0.89 | 18.16 | 65.46      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 12 | #Max | 16QAM | 21.18 | -<br>0.89 | 18.14 | 65.16      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | 16QAM | 21.32 | -<br>0.89 | 18.28 | 67.30      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 1  | #0   | QPSK  | 23.33 | -<br>0.89 | 20.29 | 106.9<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 1  | #Mid | QPSK  | 23.34 | -<br>0.89 | 20.3  | 107.1<br>5 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 1  | #Max | QPSK  | 23.43 | -<br>0.89 | 20.39 | 109.4<br>0 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 12 | #0   | QPSK  | 21.69 | -<br>0.89 | 18.65 | 73.28      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 12 | #Mid | QPSK  | 21.97 | -<br>0.89 | 18.93 | 78.16      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 12 | #Max | QPSK  | 21.84 | -<br>0.89 | 18.8  | 75.86      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26740 | 25 | #0   | QPSK  | 21.83 | -         | 18.79 | 75.68      | 7000 | PASS |


|      |                     |    |       |    |      |       |       |           |       |            |      |      |
|------|---------------------|----|-------|----|------|-------|-------|-----------|-------|------------|------|------|
|      | 4-824)              |    |       |    |      |       | 0.89  |           |       |            |      |      |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 1  | #0   | 16QAM | 22.93 | -<br>0.89 | 19.89 | 97.50      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 1  | #Mid | 16QAM | 22.95 | -<br>0.89 | 19.91 | 97.95      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 1  | #Max | 16QAM | 23.03 | -<br>0.89 | 19.99 | 99.77      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 12 | #0   | 16QAM | 21.2  | -<br>0.89 | 18.16 | 65.46      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 12 | #Mid | 16QAM | 21.29 | -<br>0.89 | 18.25 | 66.83      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 12 | #Max | 16QAM | 21.38 | -<br>0.89 | 18.34 | 68.23      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26740 | 25 | #0   | 16QAM | 21.15 | -<br>0.89 | 18.11 | 64.71      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 1  | #0   | QPSK  | 23.27 | -<br>0.89 | 20.23 | 105.4<br>4 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 1  | #Mid | QPSK  | 23.19 | -<br>0.89 | 20.15 | 103.5<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 1  | #Max | QPSK  | 23.24 | -<br>0.89 | 20.2  | 104.7<br>1 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 12 | #0   | QPSK  | 21.82 | -<br>0.89 | 18.78 | 75.51      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 12 | #Mid | QPSK  | 21.86 | -<br>0.89 | 18.82 | 76.21      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 12 | #Max | QPSK  | 21.9  | -<br>0.89 | 18.86 | 76.91      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 25 | #0   | QPSK  | 21.85 | -<br>0.89 | 18.81 | 76.03      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 1  | #0   | 16QAM | 22.28 | -<br>0.89 | 19.24 | 83.95      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 1  | #Mid | 16QAM | 22.33 | -<br>0.89 | 19.29 | 84.92      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 1  | #Max | 16QAM | 22.41 | -<br>0.89 | 19.37 | 86.50      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 12 | #0   | 16QAM | 21.37 | -<br>0.89 | 18.33 | 68.08      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 12 | #Mid | 16QAM | 21.31 | -<br>0.89 | 18.27 | 67.14      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 12 | #Max | 16QAM | 21.29 | -<br>0.89 | 18.25 | 66.83      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 5  | 26765 | 25 | #0   | 16QAM | 21.23 | -<br>0.89 | 18.19 | 65.92      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | QPSK  | 23.54 | -<br>0.89 | 20.5  | 112.2<br>0 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Mid | QPSK  | 23.61 | -<br>0.89 | 20.57 | 114.0<br>2 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | QPSK  | 23.64 | -<br>0.89 | 20.6  | 114.8<br>2 | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 25 | #0   | QPSK  | 22.18 | -<br>0.89 | 19.14 | 82.04      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 25 | #Mid | QPSK  | 22.36 | -<br>0.89 | 19.32 | 85.51      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 25 | #Max | QPSK  | 22.41 | -<br>0.89 | 19.37 | 86.50      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | QPSK  | 22.3  | -<br>0.89 | 19.26 | 84.33      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | 16QAM | 22.46 | -<br>0.89 | 19.42 | 87.50      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Mid | 16QAM | 22.49 | -<br>0.89 | 19.45 | 88.10      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | 16QAM | 22.5  | -<br>0.89 | 19.46 | 88.31      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 25 | #0   | 16QAM | 21.73 | -<br>0.89 | 18.69 | 73.96      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 25 | #Mid | 16QAM | 21.79 | -<br>0.89 | 18.75 | 74.99      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 25 | #Max | 16QAM | 21.81 | -<br>0.89 | 18.77 | 75.34      | 7000 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | 16QAM | 21.86 | -<br>0.89 | 18.82 | 76.21      | 7000 | PASS |

### 03 LTE PEAK-TO-AVERAGE RATIO


| Condition | Band            | Bandwidth (MHz) | UL Channel | RB Size | RB Position | Modulation | Result (dB) | high Limit (dB) | Verdict |
|-----------|-----------------|-----------------|------------|---------|-------------|------------|-------------|-----------------|---------|
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | QPSK       | 5.06        | 13              | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | 16QAM      | 5.61        | 13              | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #0          | QPSK       | 5.56        | 13              | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 1       | #0          | 16QAM      | 6.48        | 13              | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 1       | #0          | QPSK       | 5.32        | 13              | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 1       | #0          | 16QAM      | 5.93        | 13              | PASS    |
| NVNT      | Band26(814-824) | 3               | 26705      | 1       | #0          | QPSK       | 4.93        | 13              | PASS    |
| NVNT      | Band26(814-824) | 3               | 26705      | 1       | #0          | 16QAM      | 6.11        | 13              | PASS    |
| NVNT      | Band26(814-824) | 3               | 26740      | 1       | #0          | QPSK       | 5.60        | 13              | PASS    |
| NVNT      | Band26(814-824) | 3               | 26740      | 1       | #0          | 16QAM      | 5.94        | 13              | PASS    |
| NVNT      | Band26(814-824) | 3               | 26775      | 1       | #0          | QPSK       | 5.37        | 13              | PASS    |
| NVNT      | Band26(814-824) | 3               | 26775      | 1       | #0          | 16QAM      | 5.95        | 13              | PASS    |
| NVNT      | Band26(814-824) | 5               | 26715      | 1       | #0          | QPSK       | 5.17        | 13              | PASS    |
| NVNT      | Band26(814-824) | 5               | 26715      | 1       | #0          | 16QAM      | 5.80        | 13              | PASS    |
| NVNT      | Band26(814-824) | 5               | 26740      | 1       | #0          | QPSK       | 5.22        | 13              | PASS    |
| NVNT      | Band26(814-824) | 5               | 26740      | 1       | #0          | 16QAM      | 5.71        | 13              | PASS    |
| NVNT      | Band26(814-824) | 5               | 26765      | 1       | #0          | QPSK       | 5.68        | 13              | PASS    |
| NVNT      | Band26(814-824) | 5               | 26765      | 1       | #0          | 16QAM      | 6.38        | 13              | PASS    |
| NVNT      | Band26(814-824) | 10              | 26740      | 1       | #0          | QPSK       | 5.08        | 13              | PASS    |
| NVNT      | Band26(814-824) | 10              | 26740      | 1       | #0          | 16QAM      | 5.79        | 13              | PASS    |

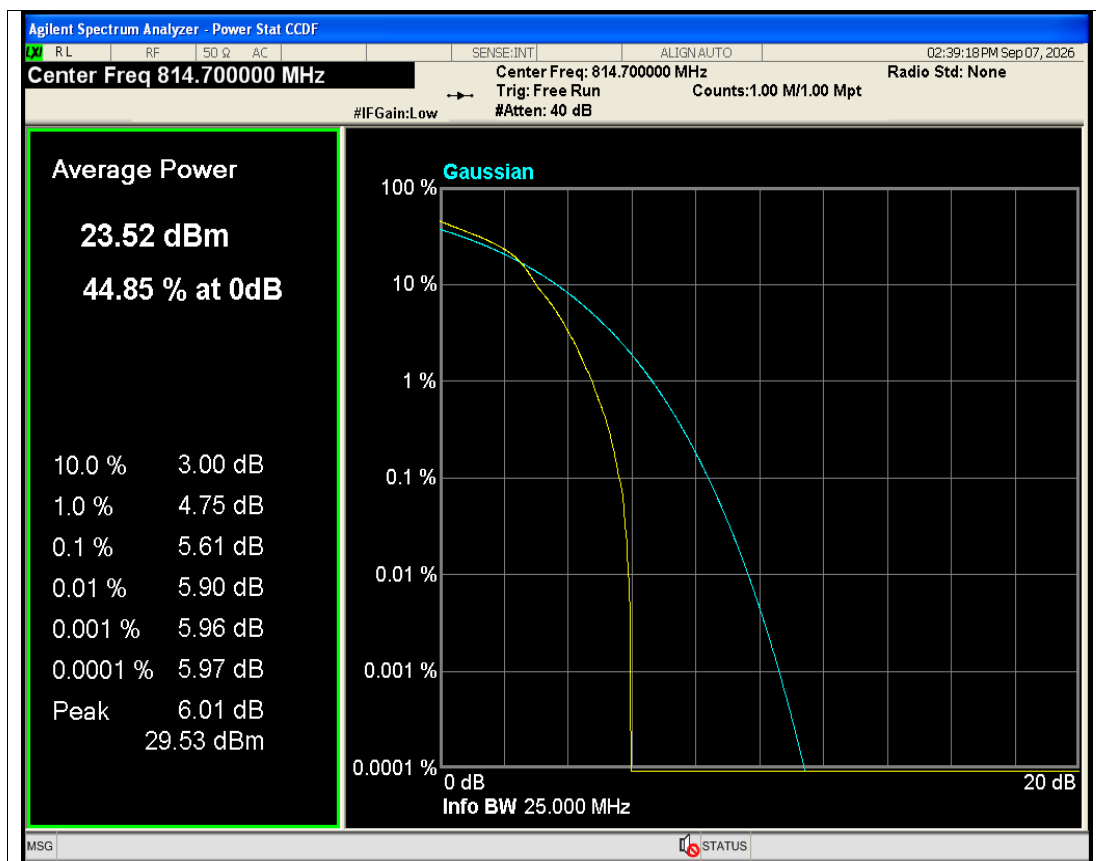


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#0 NVNT

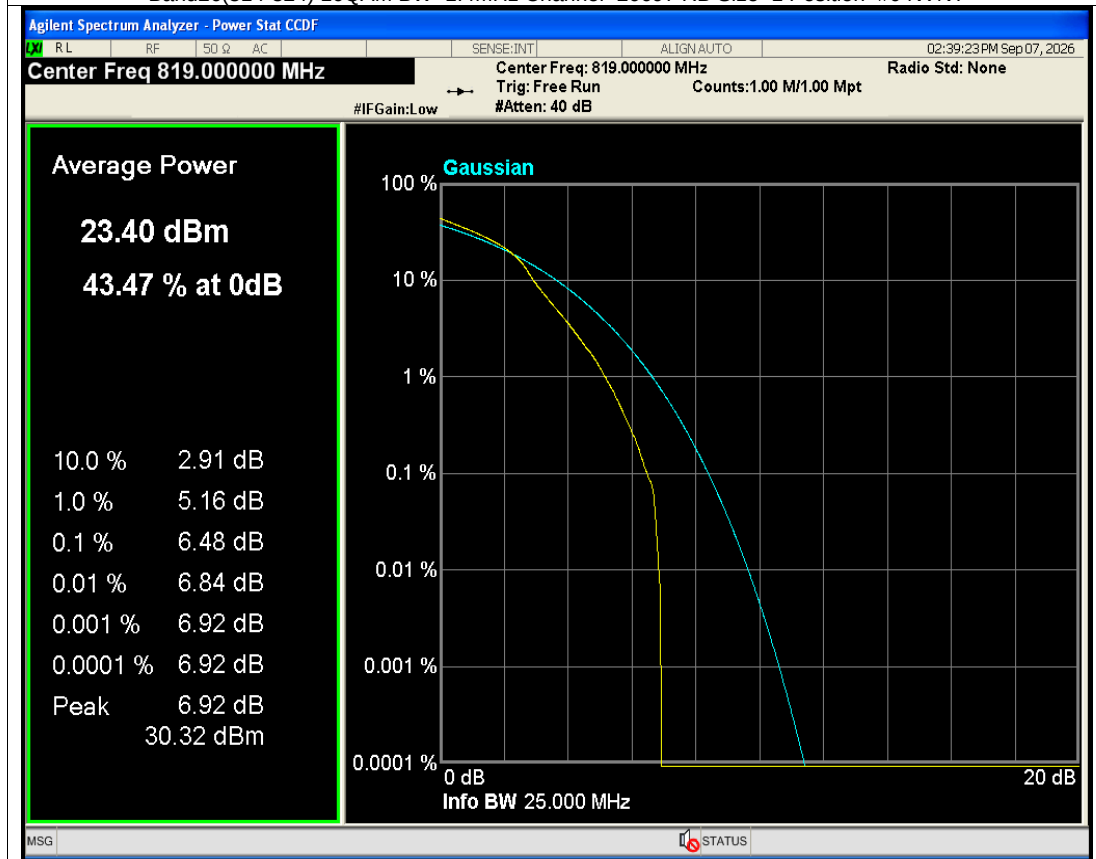


Band26(814-824) 16QAM BW=1.4MHz Channel=26740 RB Size=1 Position=#0 NVNT

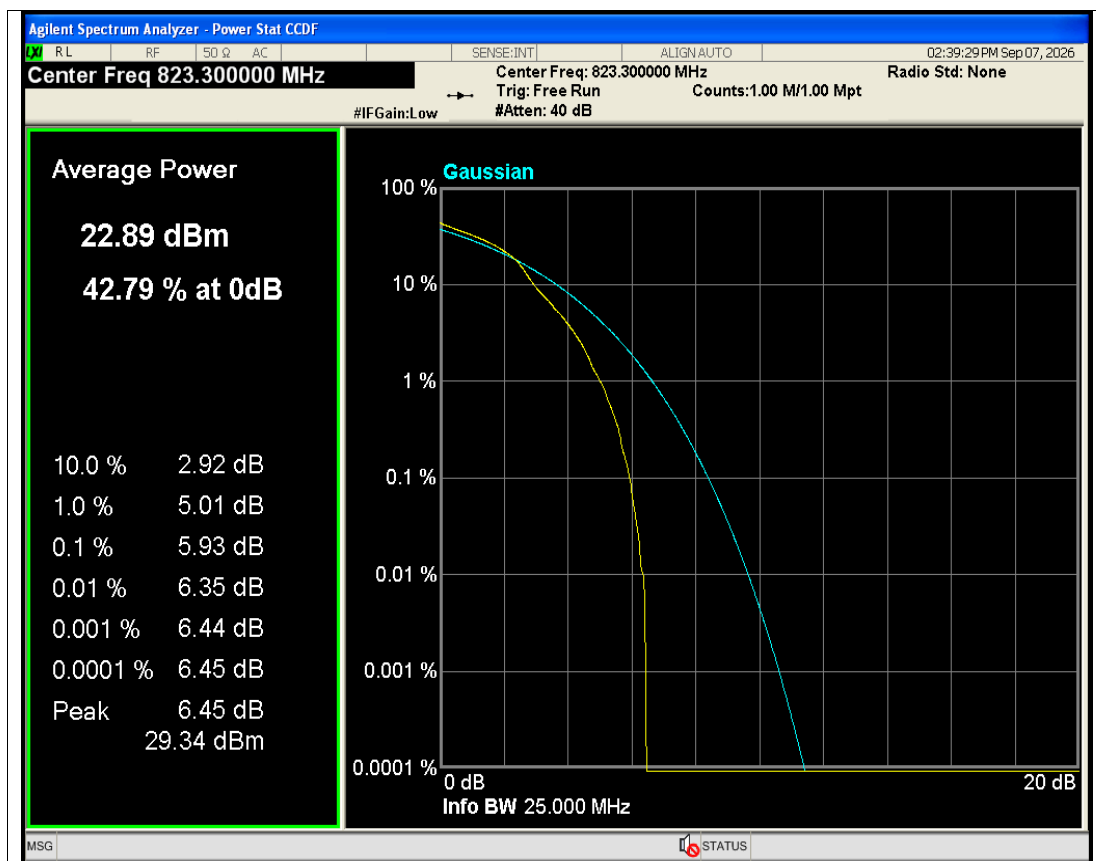


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#0 NVNT

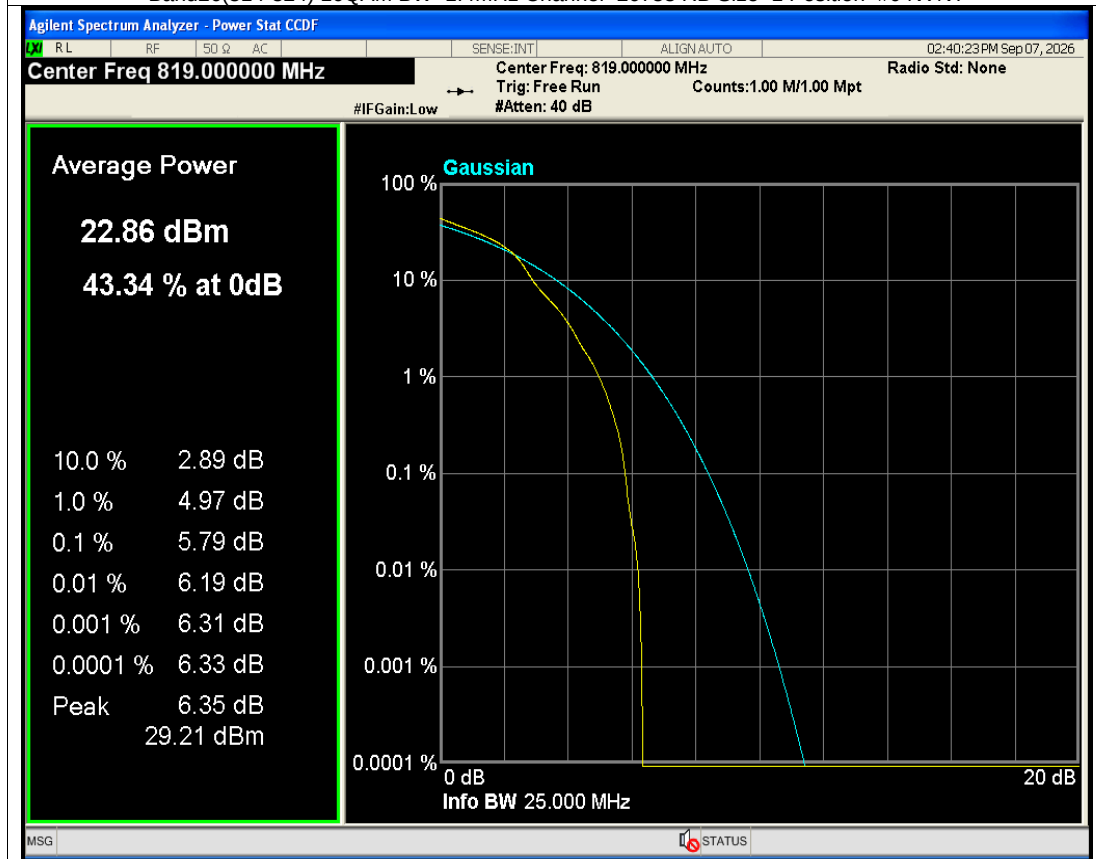


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#0 NVNT

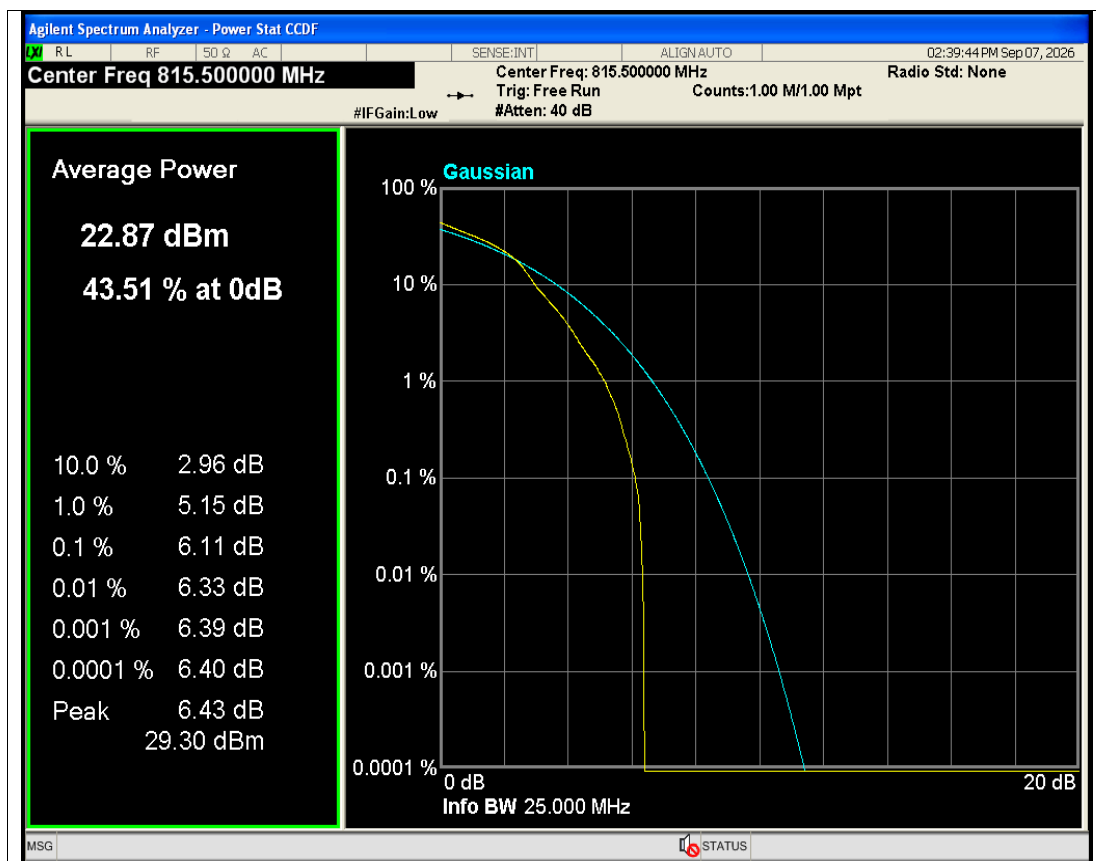


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#0 NVNT

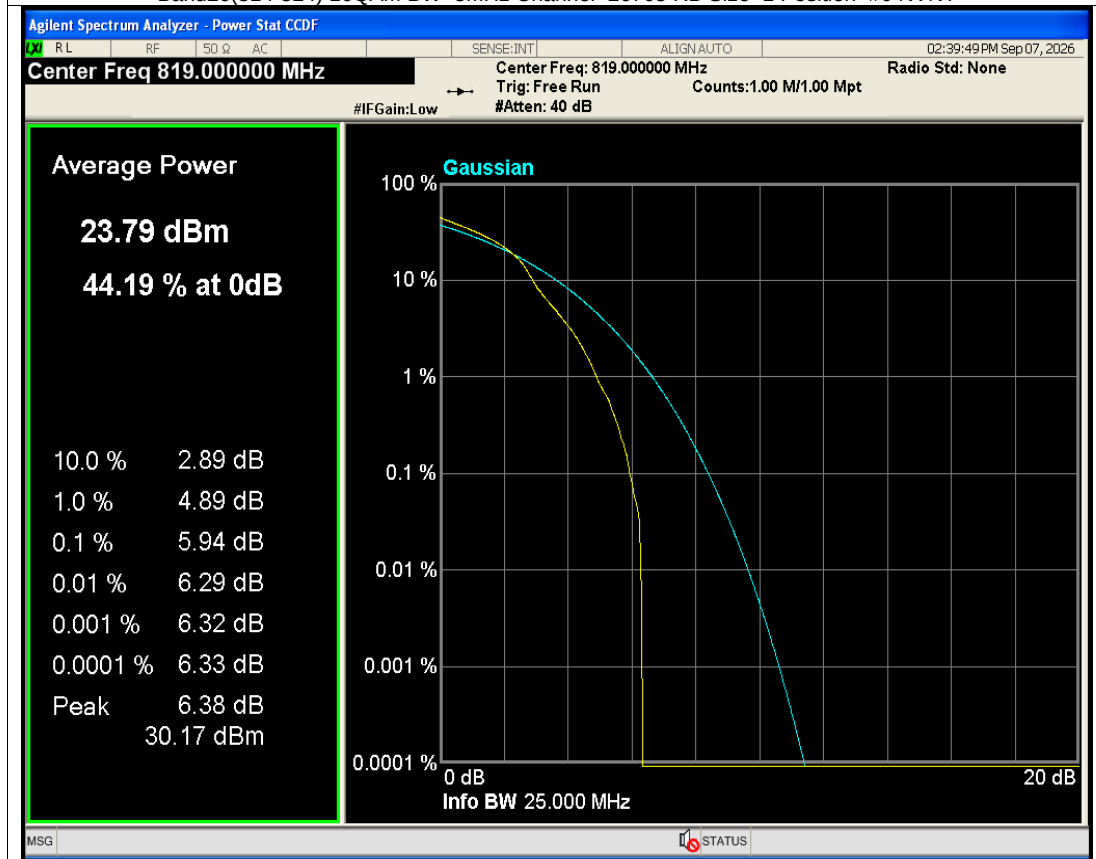


Band26(814-824) 16QAM BW=3MHz Channel=26740 RB Size=1 Position=#0 NVNT

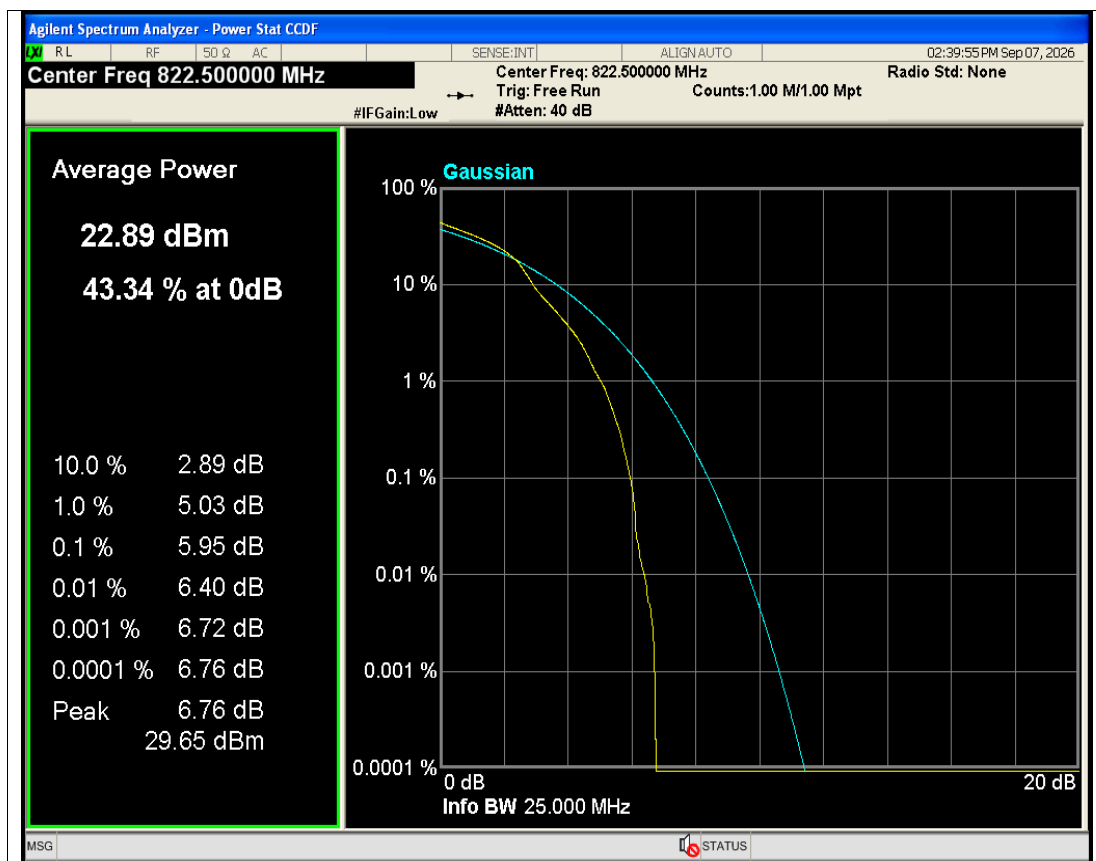


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#0 NVNT

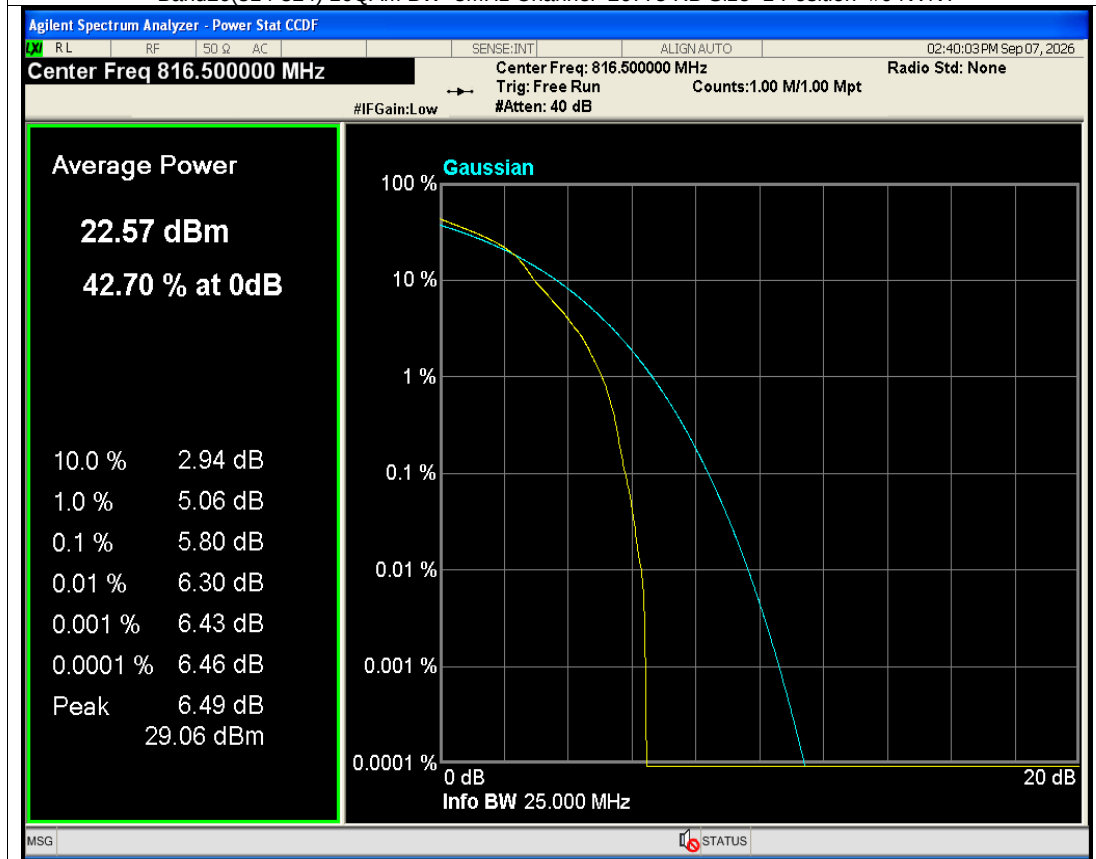


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#0 NVNT

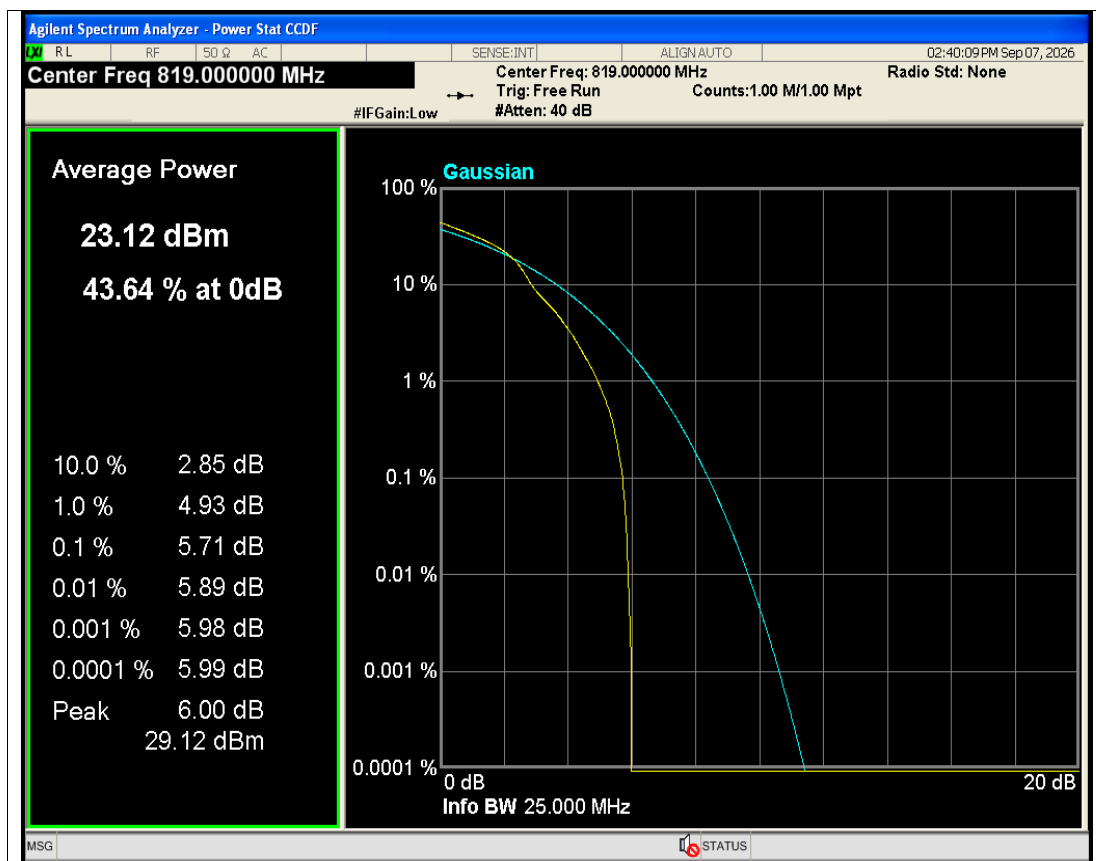


Band26(814-824) 16QAM BW=5MHz Channel=26740 RB Size=1 Position=#0 NVNT

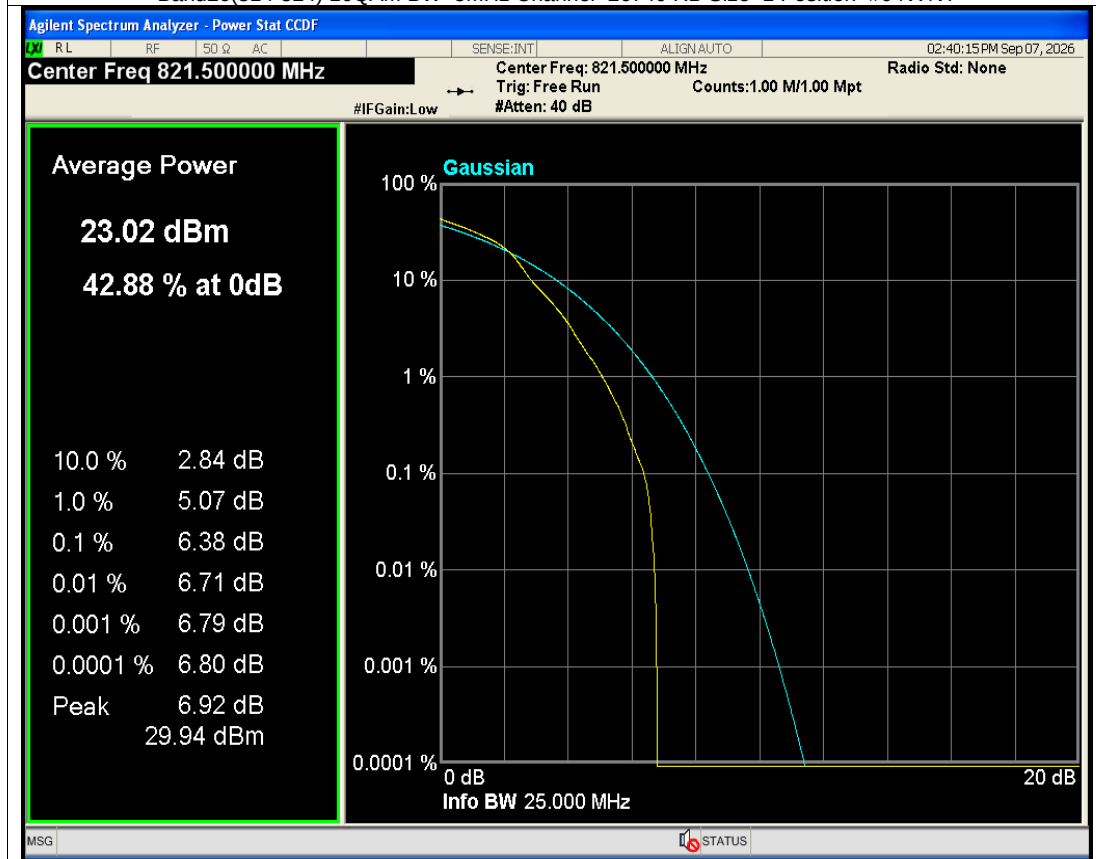


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#0 NVNT

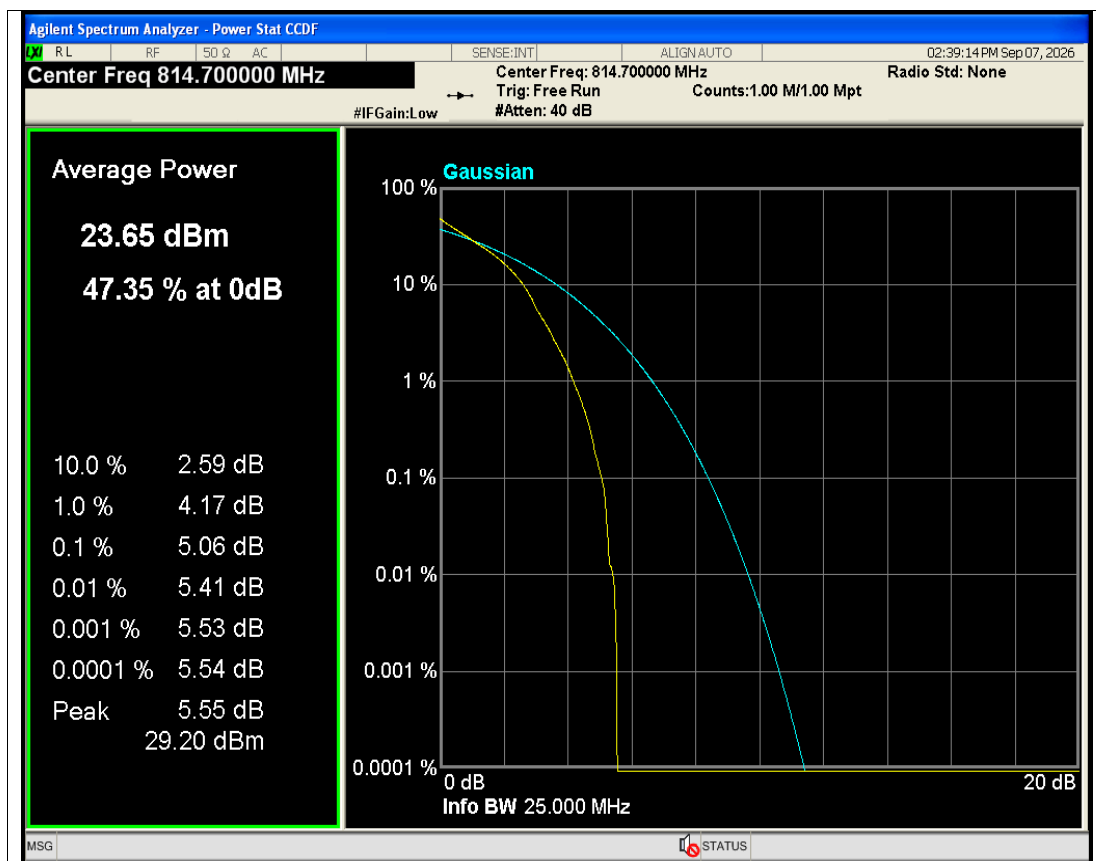


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#0 NVNT

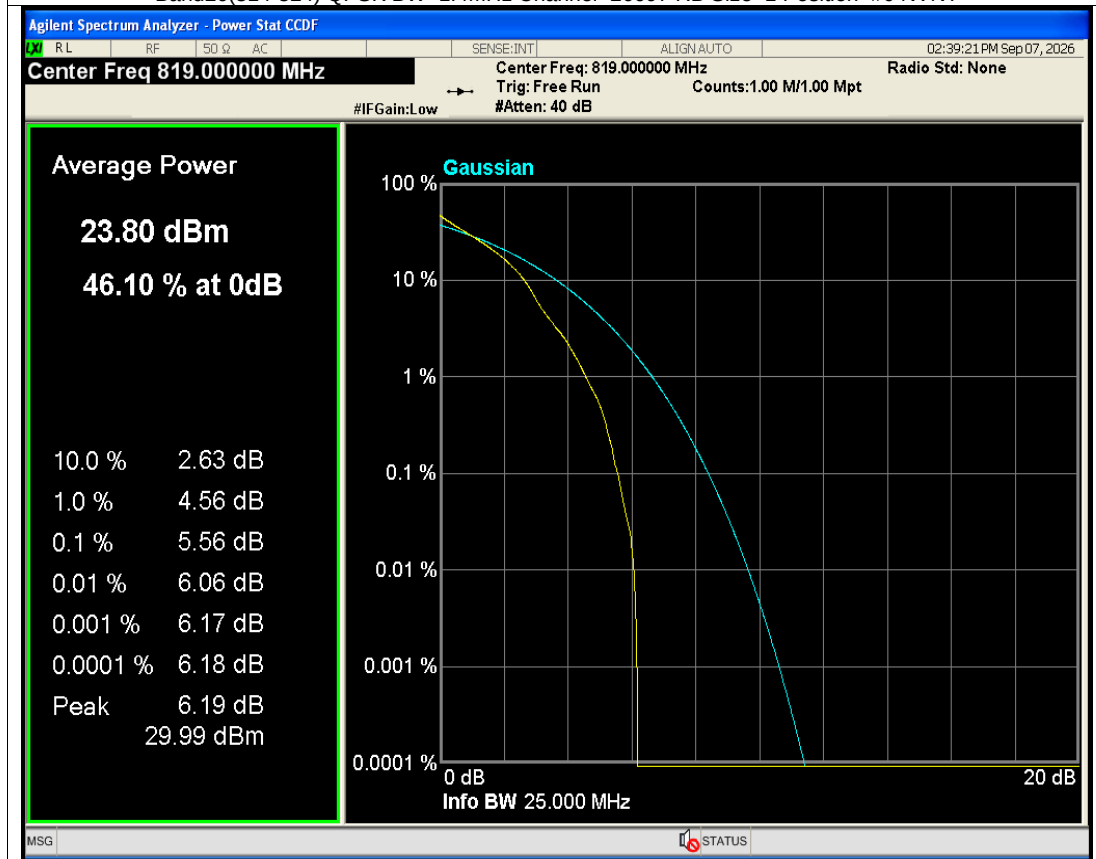


Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=1 Position=#0 NVNT

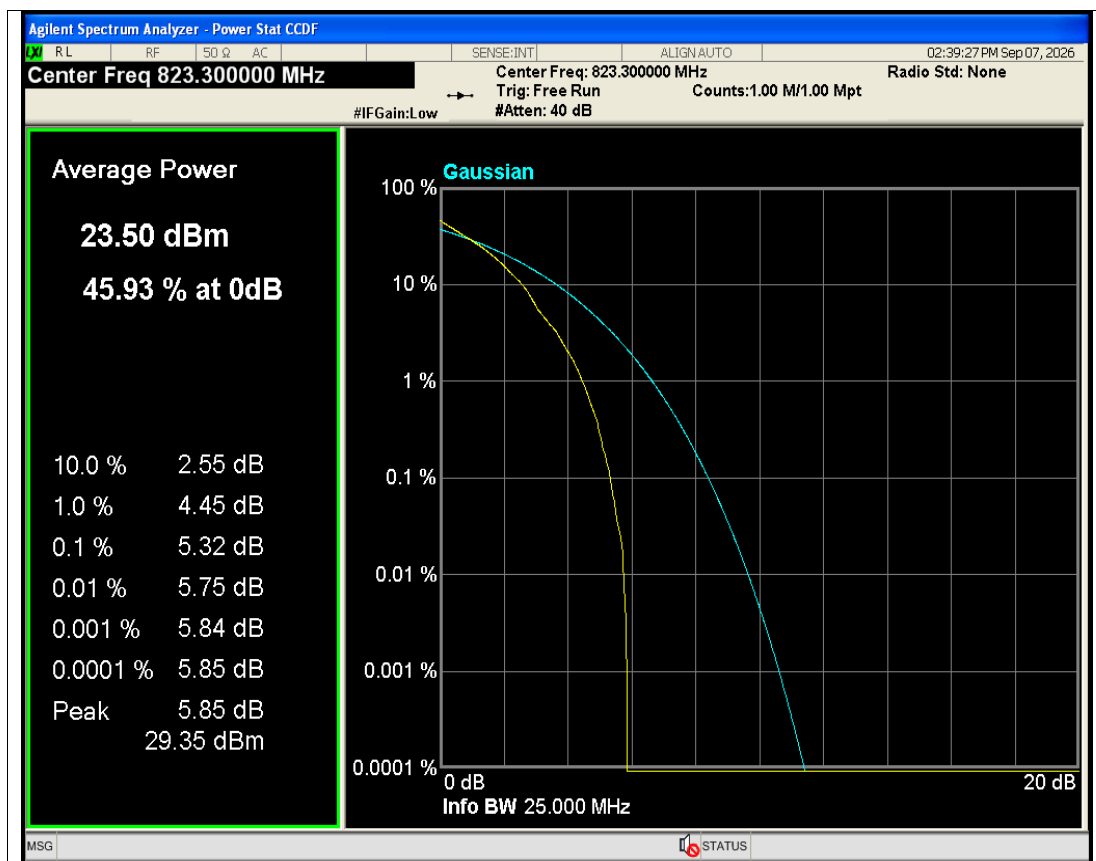


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#0 NVNT

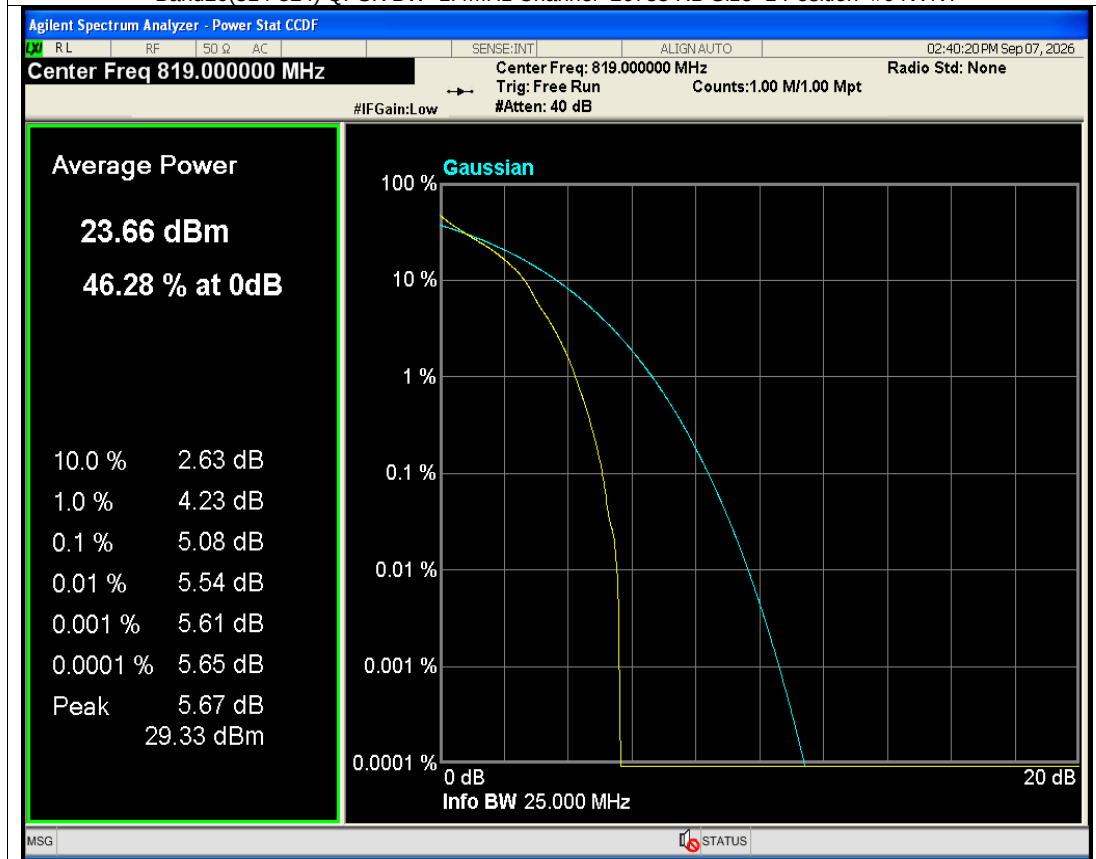


Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=1 Position=#0 NVNT

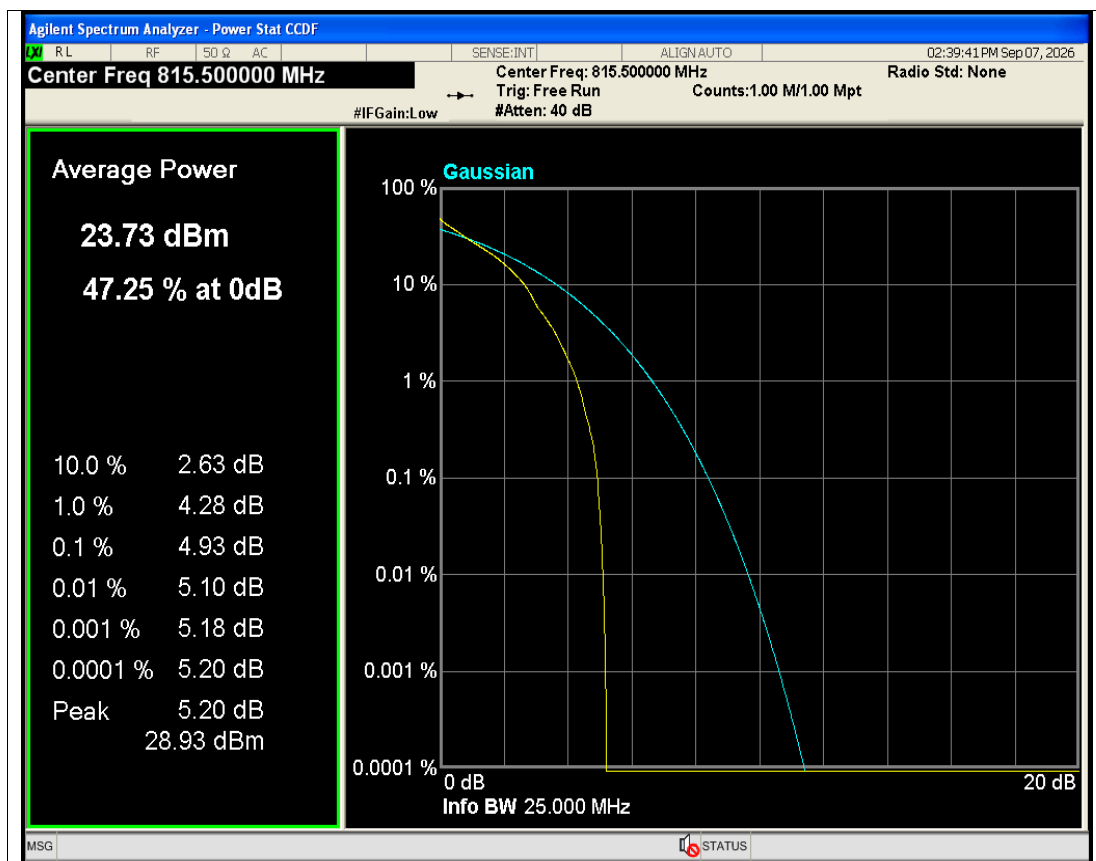


Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=1 Position=#0 NVNT

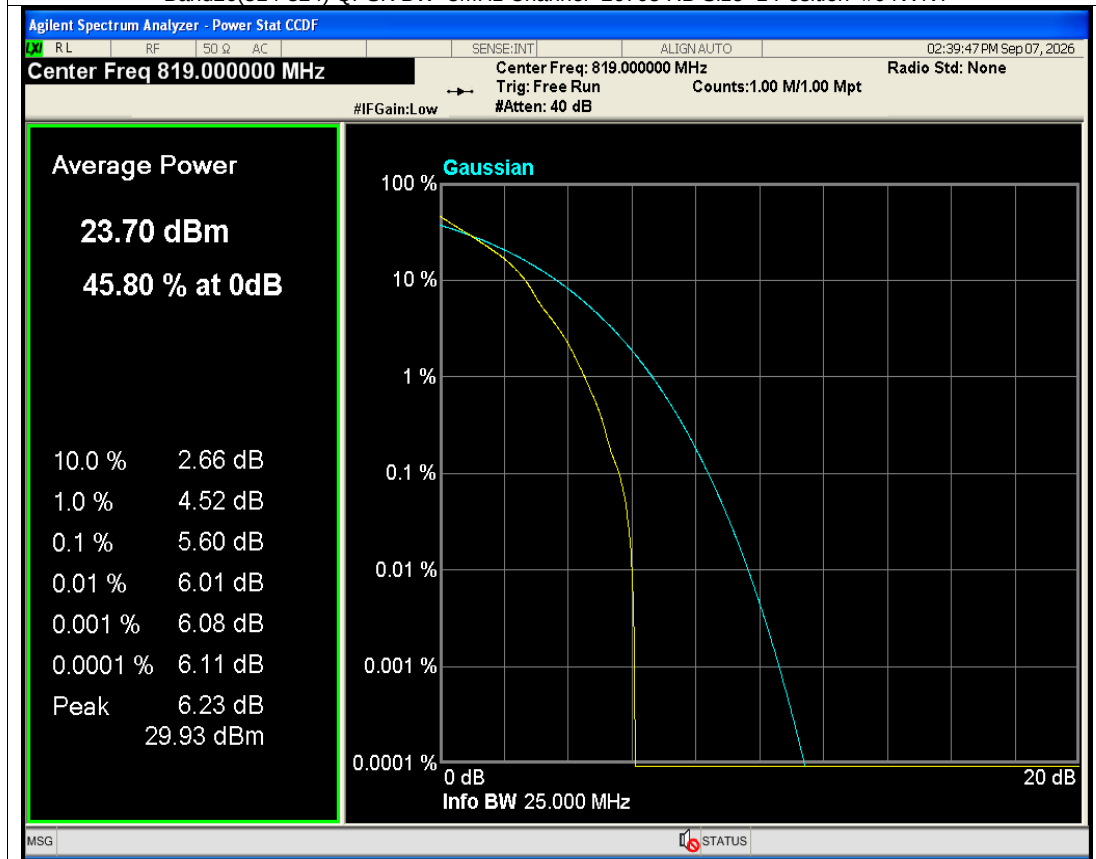


Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=1 Position=#0 NVNT

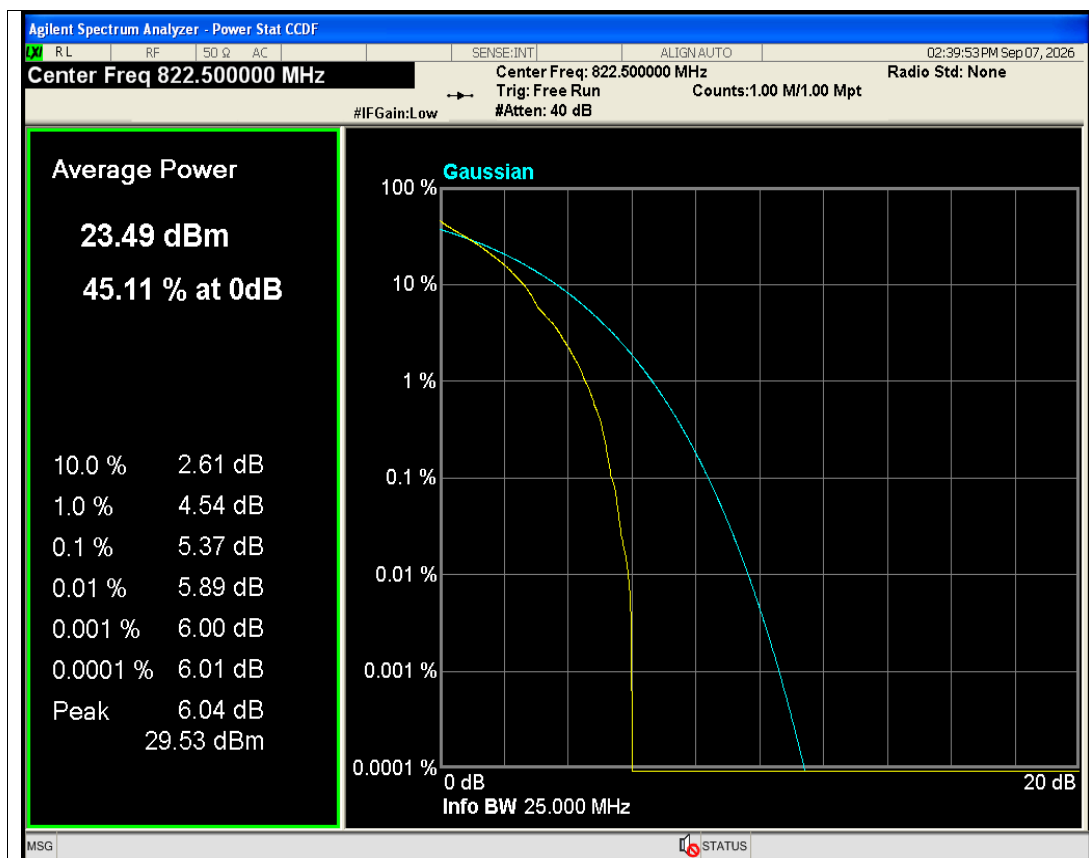


Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=1 Position=#0 NVNT

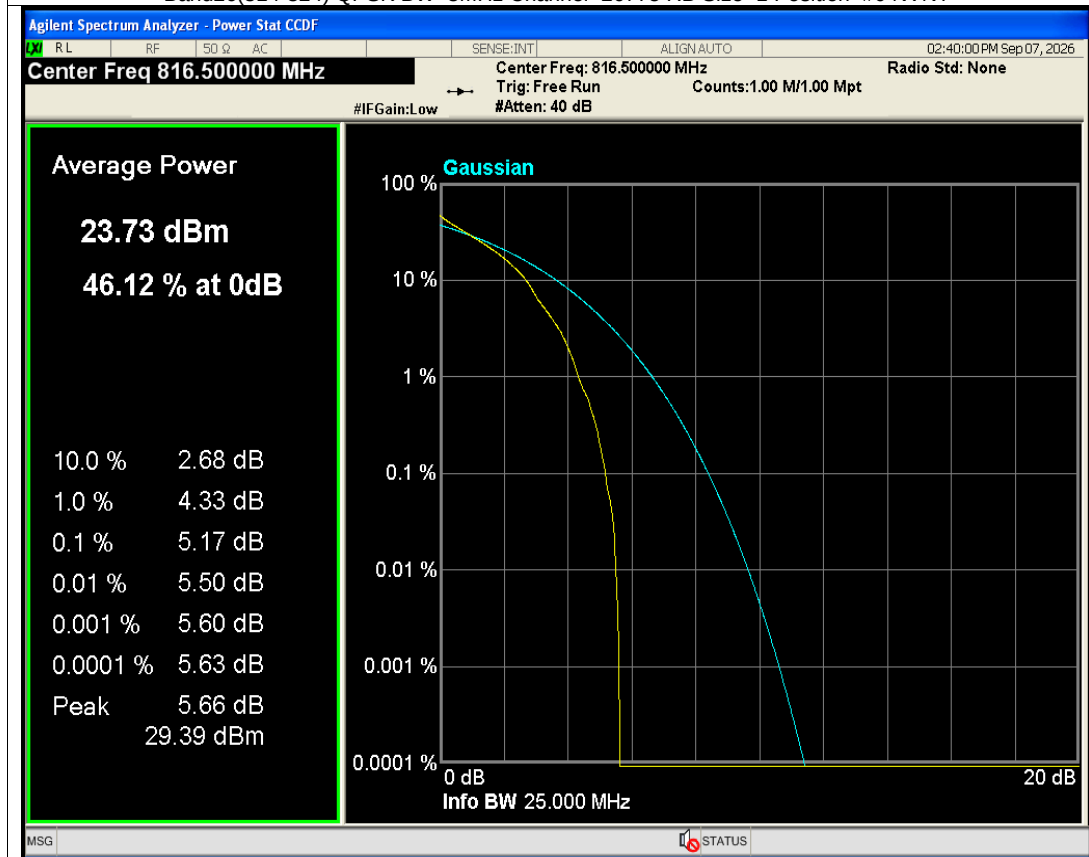

Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=1 Position=#0 NVNT

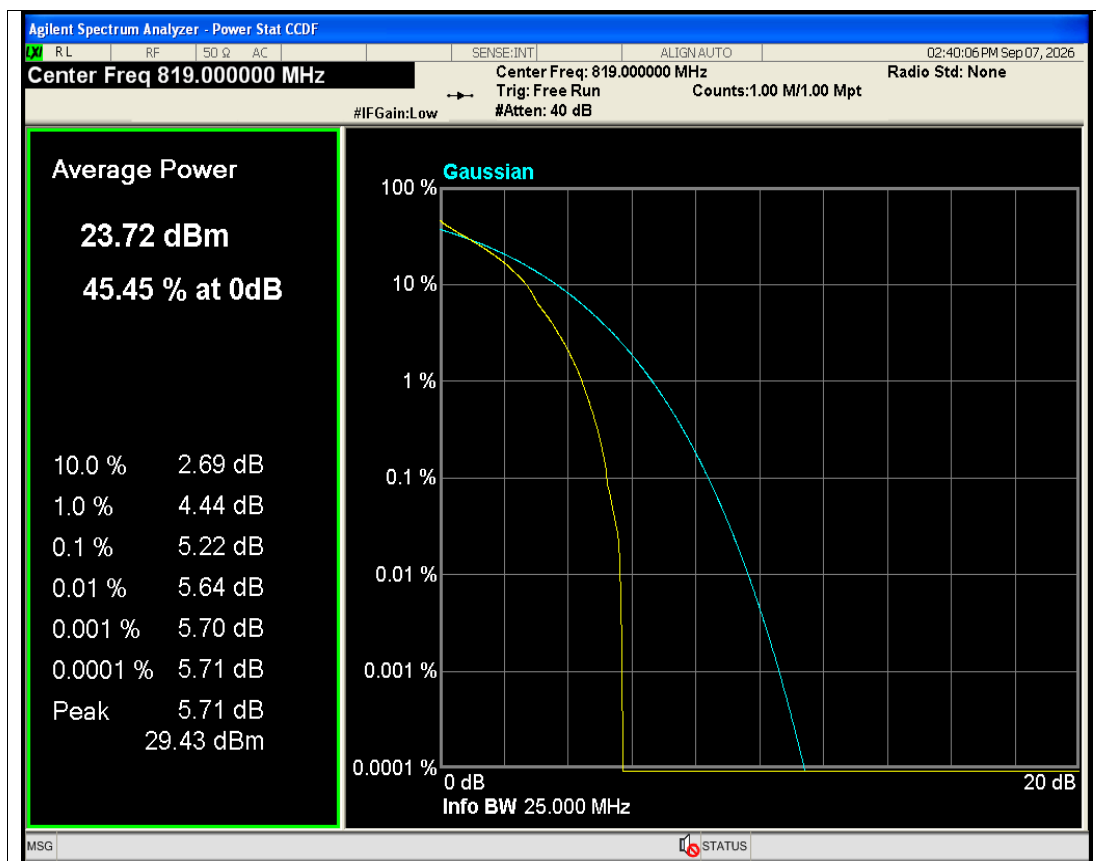


Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=1 Position=#0 NVNT

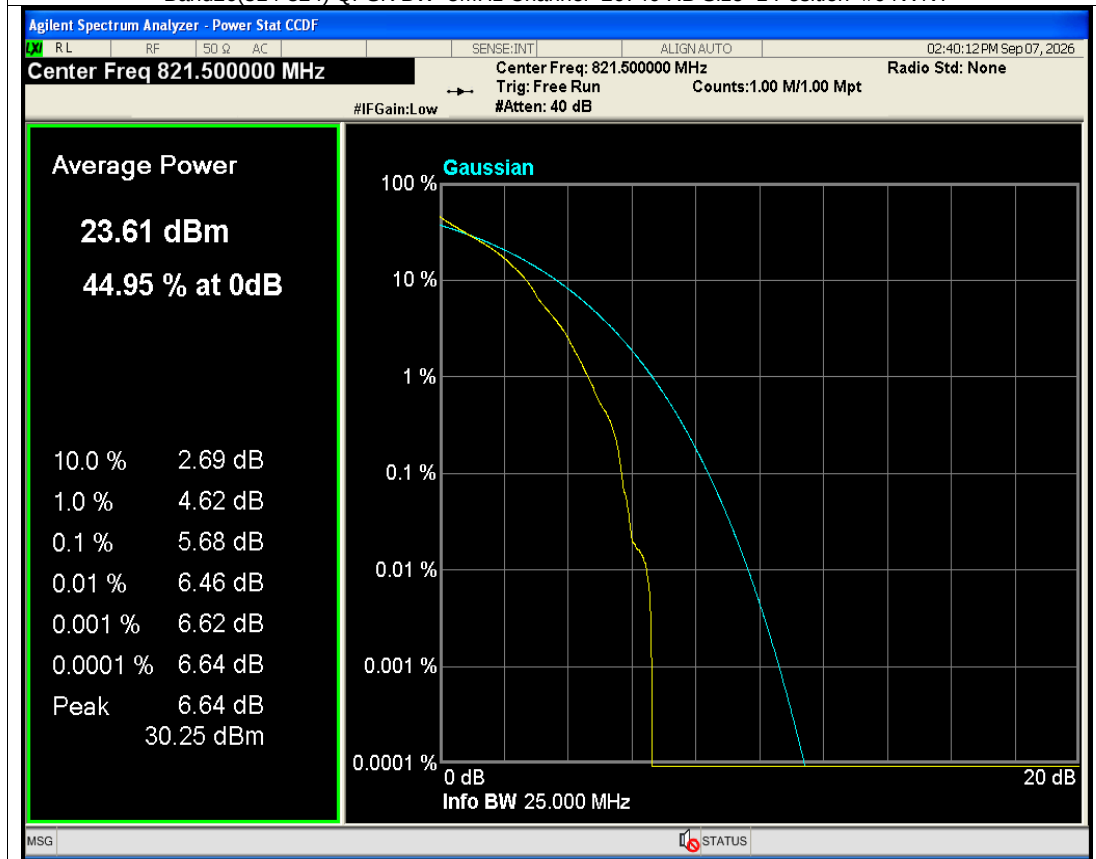


Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=1 Position=#0 NVNT

## 04 LTE OCCUPIED BANDWIDTH


| Condition | Band            | Bandwidth (MHz) | UL Channel | RB Size | RB Position | Modulation | 99% OBW (MHz) | -26dB EBW (MHz) | Verdict |
|-----------|-----------------|-----------------|------------|---------|-------------|------------|---------------|-----------------|---------|
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | QPSK       | 1.088         | 1.250           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | 16QAM      | 1.104         | 1.251           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 6       | #0          | QPSK       | 1.097         | 1.245           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26740      | 6       | #0          | 16QAM      | 1.091         | 1.249           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 6       | #0          | QPSK       | 1.100         | 1.245           | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26783      | 6       | #0          | 16QAM      | 1.097         | 1.251           | PASS    |
| NVNT      | Band26(814-824) | 3               | 26705      | 15      | #0          | QPSK       | 2.708         | 3.022           | PASS    |
| NVNT      | Band26(814-824) | 3               | 26705      | 15      | #0          | 16QAM      | 2.719         | 3.015           | PASS    |
| NVNT      | Band26(814-824) | 3               | 26740      | 15      | #0          | QPSK       | 2.709         | 3.004           | PASS    |
| NVNT      | Band26(814-824) | 3               | 26740      | 15      | #0          | 16QAM      | 2.713         | 3.051           | PASS    |
| NVNT      | Band26(814-824) | 3               | 26775      | 15      | #0          | QPSK       | 2.710         | 3.048           | PASS    |
| NVNT      | Band26(814-824) | 3               | 26775      | 15      | #0          | 16QAM      | 2.712         | 3.035           | PASS    |
| NVNT      | Band26(814-824) | 5               | 26715      | 25      | #0          | QPSK       | 4.527         | 4.972           | PASS    |
| NVNT      | Band26(814-824) | 5               | 26715      | 25      | #0          | 16QAM      | 4.522         | 4.946           | PASS    |
| NVNT      | Band26(814-824) | 5               | 26740      | 25      | #0          | QPSK       | 4.516         | 4.977           | PASS    |
| NVNT      | Band26(814-824) | 5               | 26740      | 25      | #0          | 16QAM      | 4.510         | 4.971           | PASS    |
| NVNT      | Band26(814-824) | 5               | 26765      | 25      | #0          | QPSK       | 4.509         | 4.959           | PASS    |
| NVNT      | Band26(814-824) | 5               | 26765      | 25      | #0          | 16QAM      | 4.525         | 4.935           | PASS    |
| NVNT      | Band26(814-824) | 10              | 26740      | 50      | #0          | QPSK       | 9.008         | 9.890           | PASS    |
| NVNT      | Band26(814-824) | 10              | 26740      | 50      | #0          | 16QAM      | 9.011         | 9.966           | PASS    |

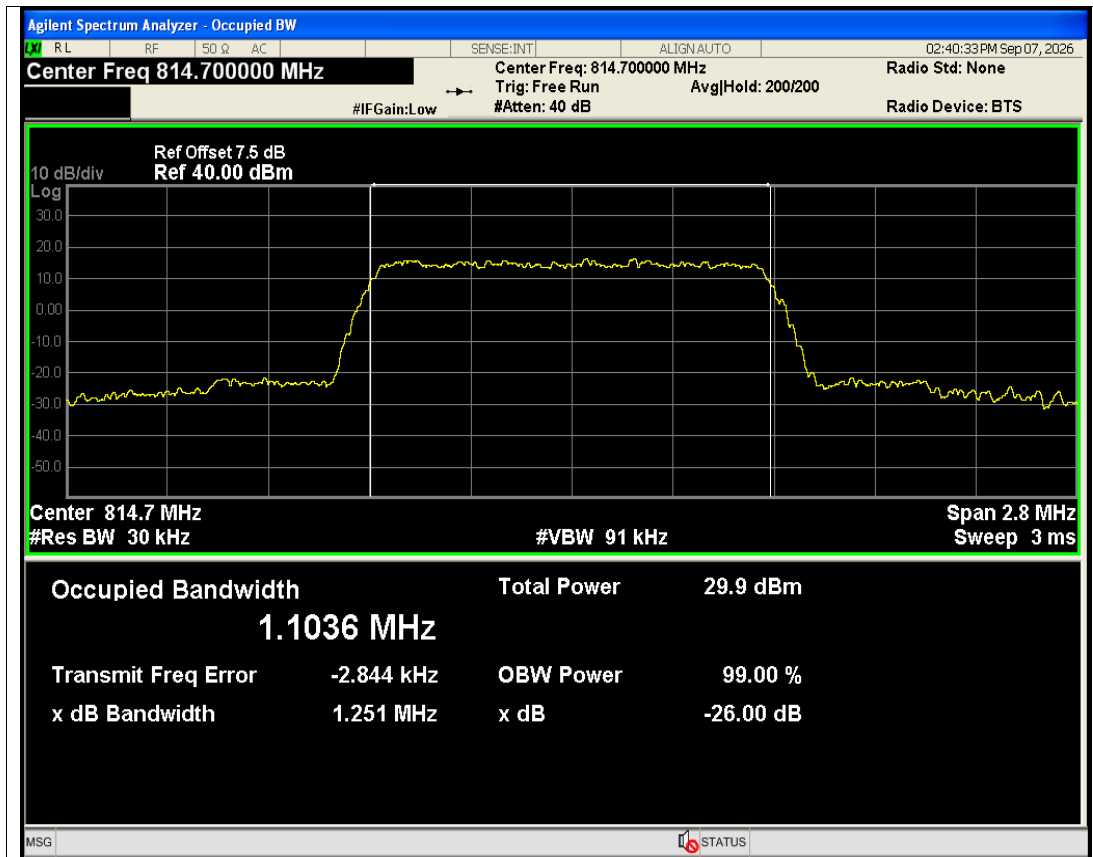


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=6 Position=#0 NVNT

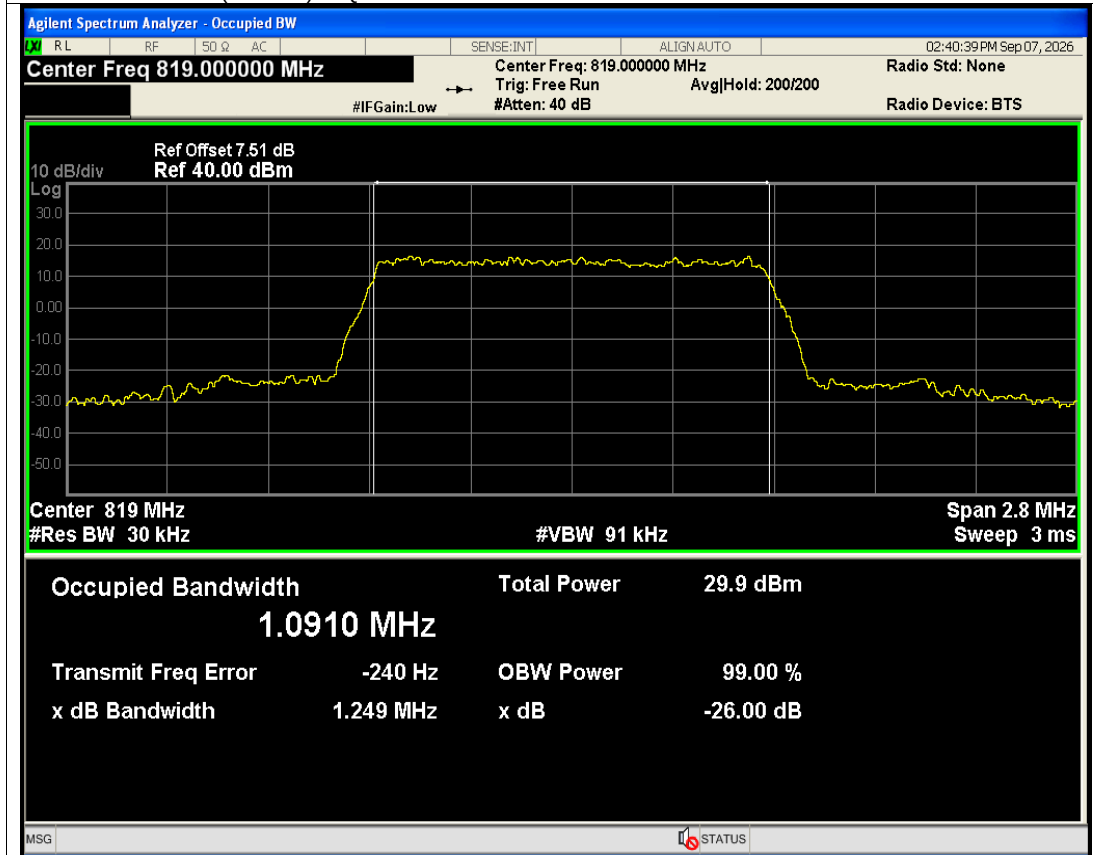


Band26(814-824) 16QAM BW=1.4MHz Channel=26740 RB Size=6 Position=#0 NVNT

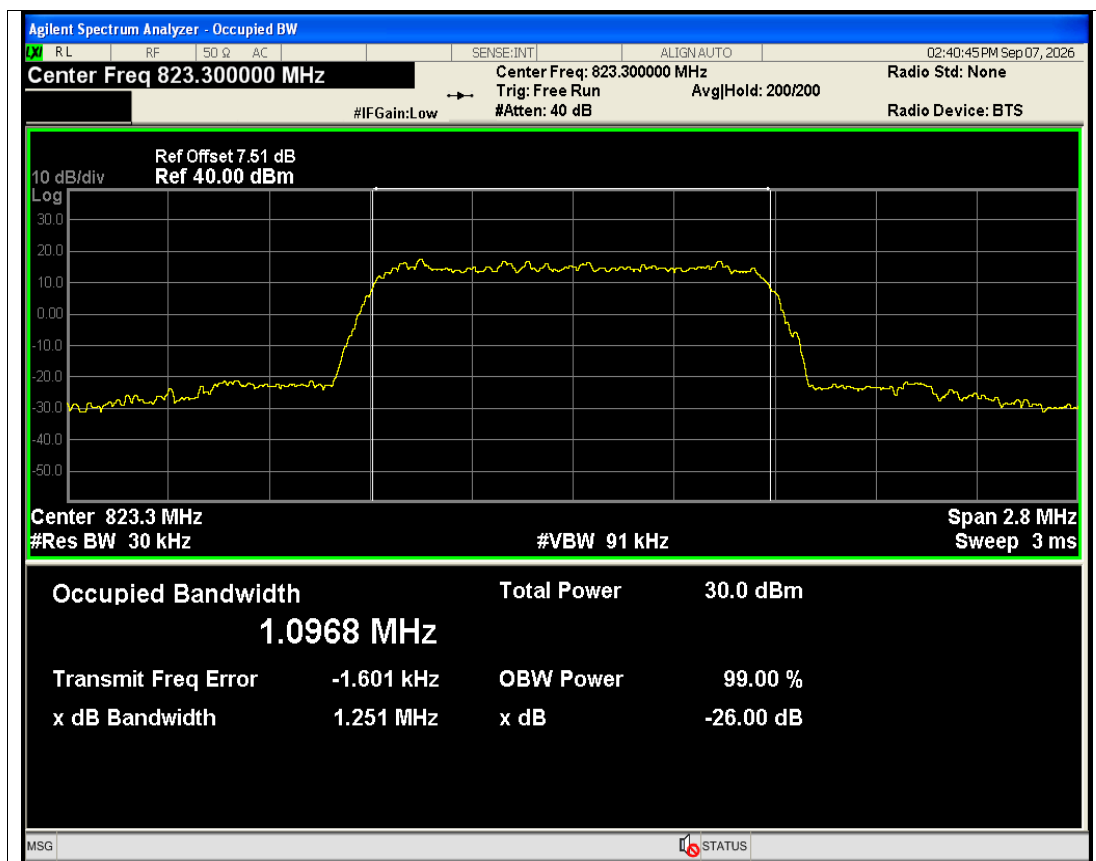


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=6 Position=#0 NVNT

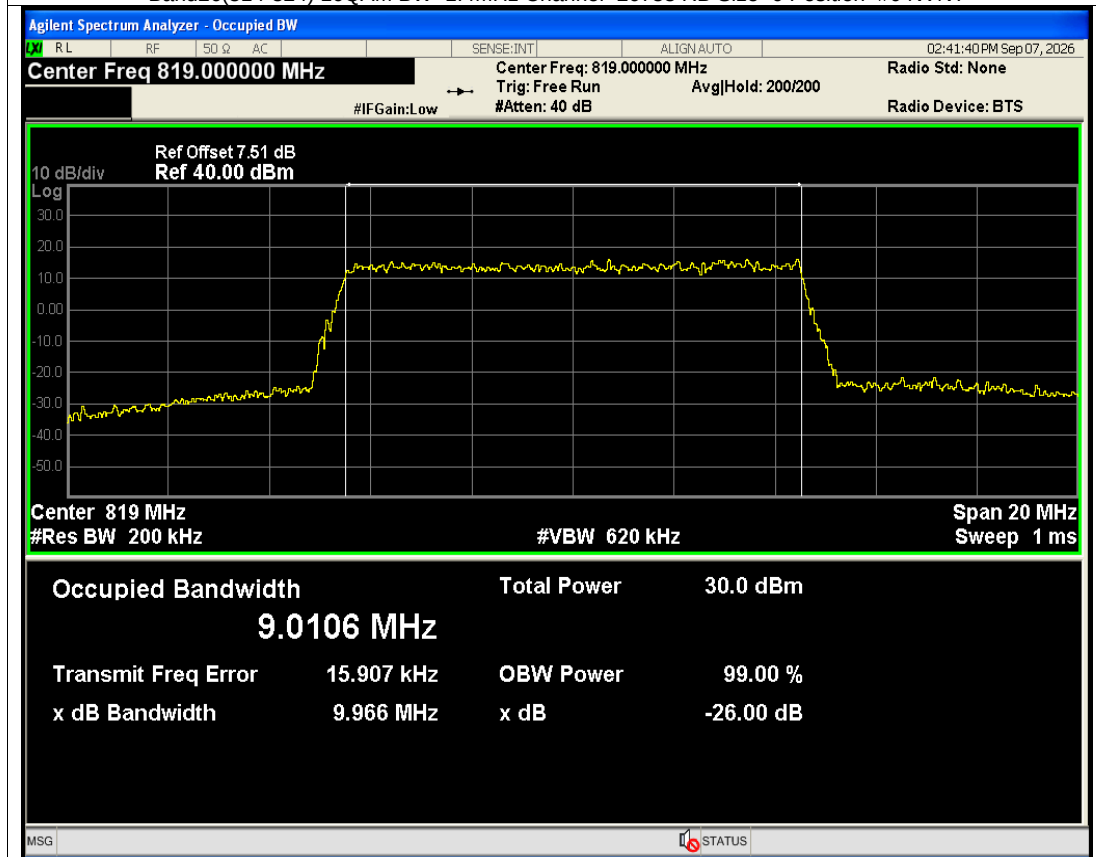


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=50 Position=#0 NVNT

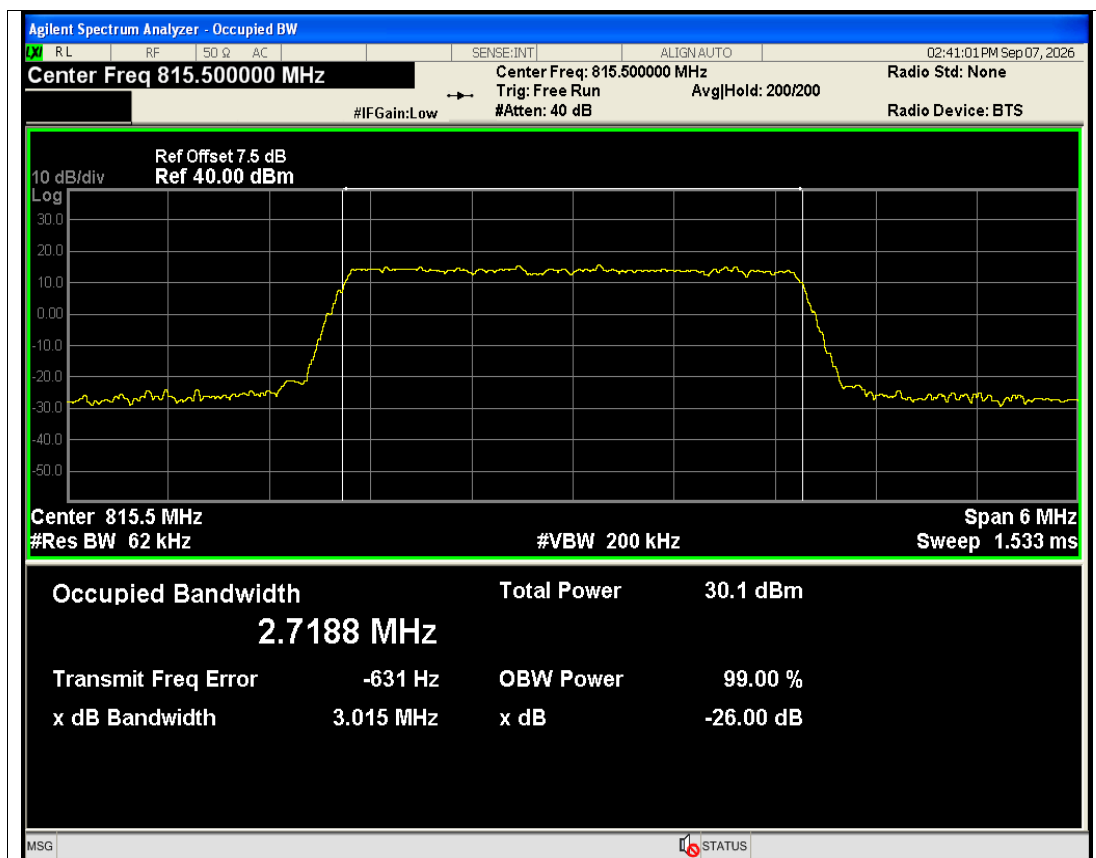


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=15 Position=#0 NVNT

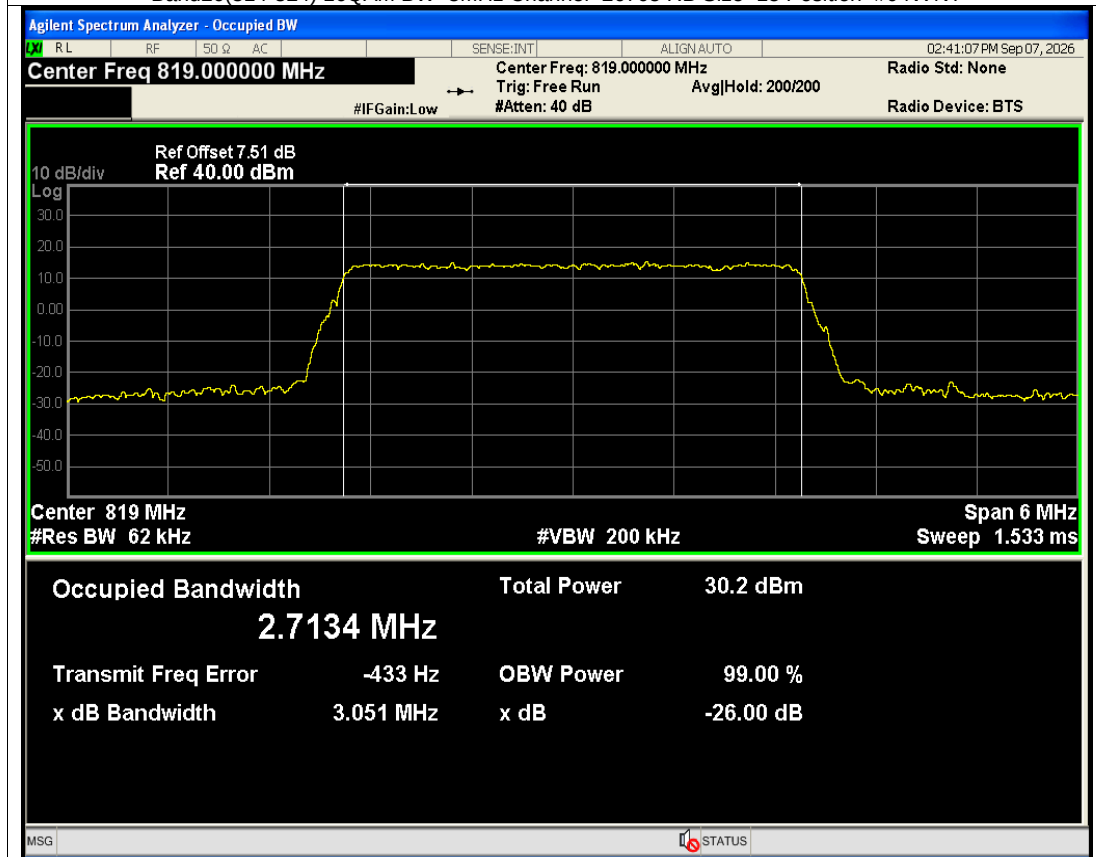


Band26(814-824) 16QAM BW=3MHz Channel=26740 RB Size=15 Position=#0 NVNT

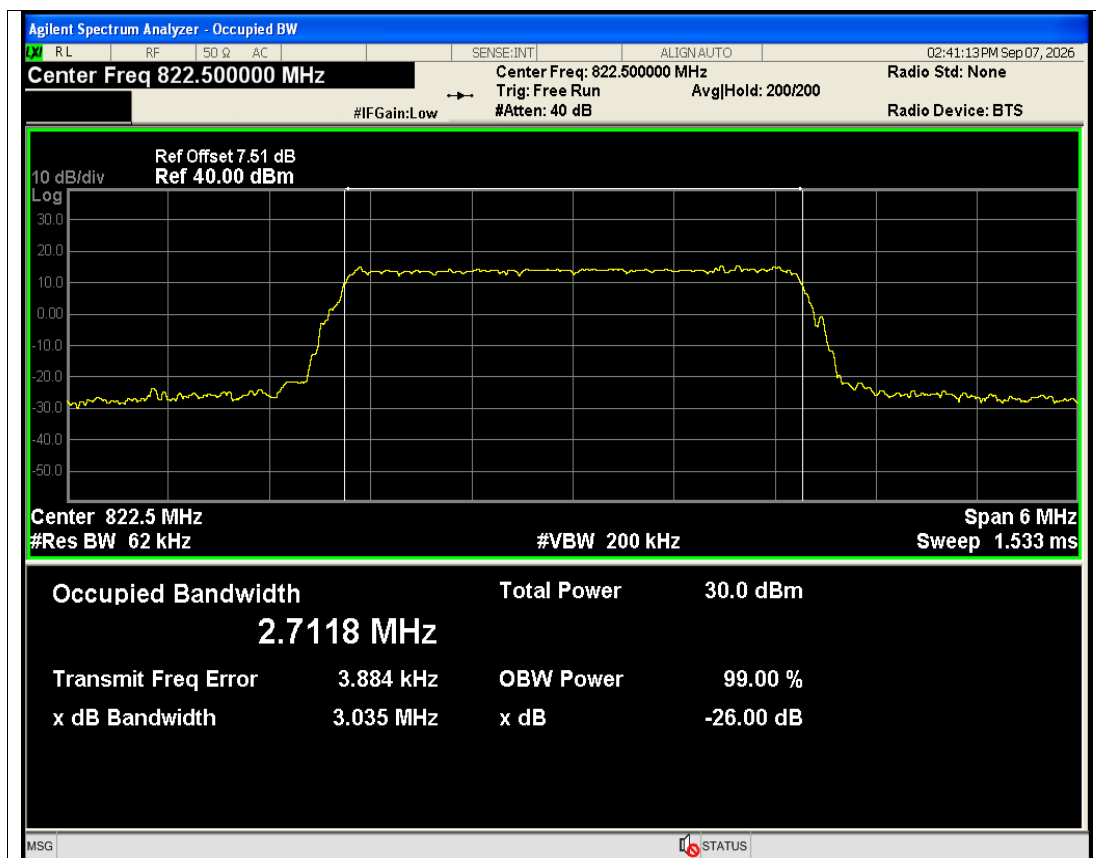


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=15 Position=#0 NVNT

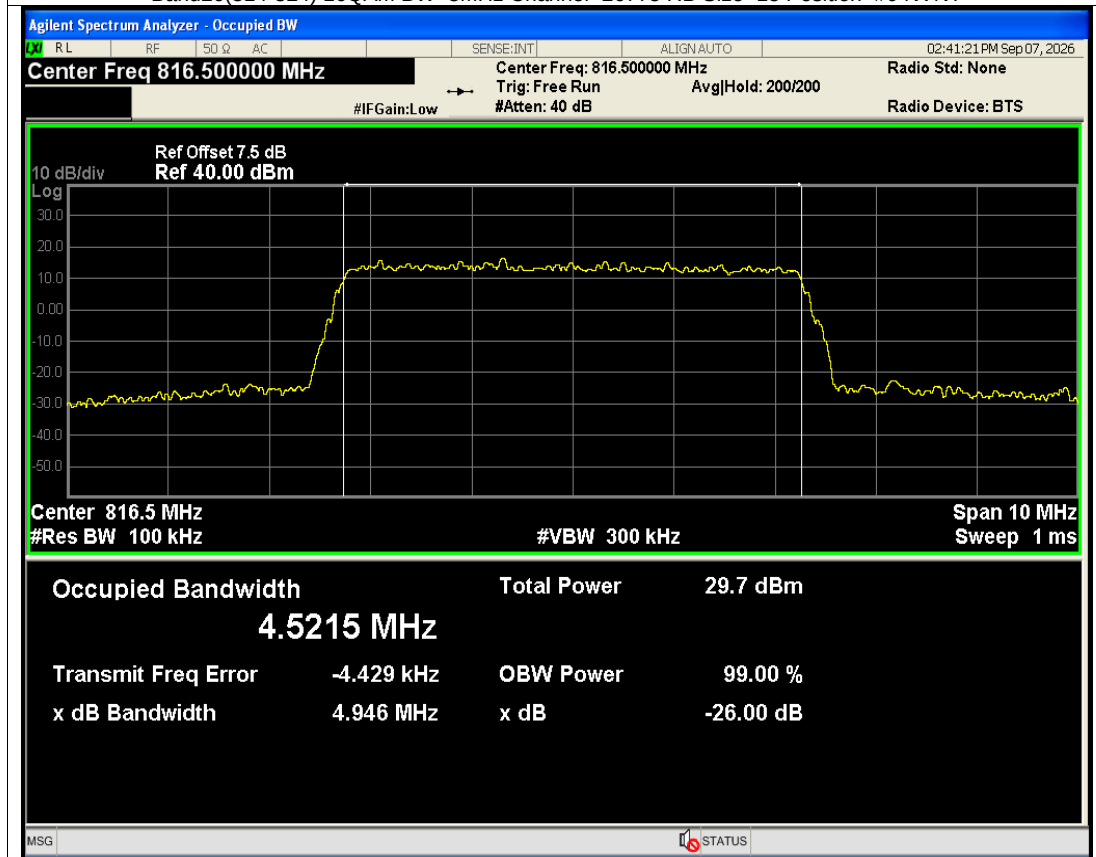


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=25 Position=#0 NVNT

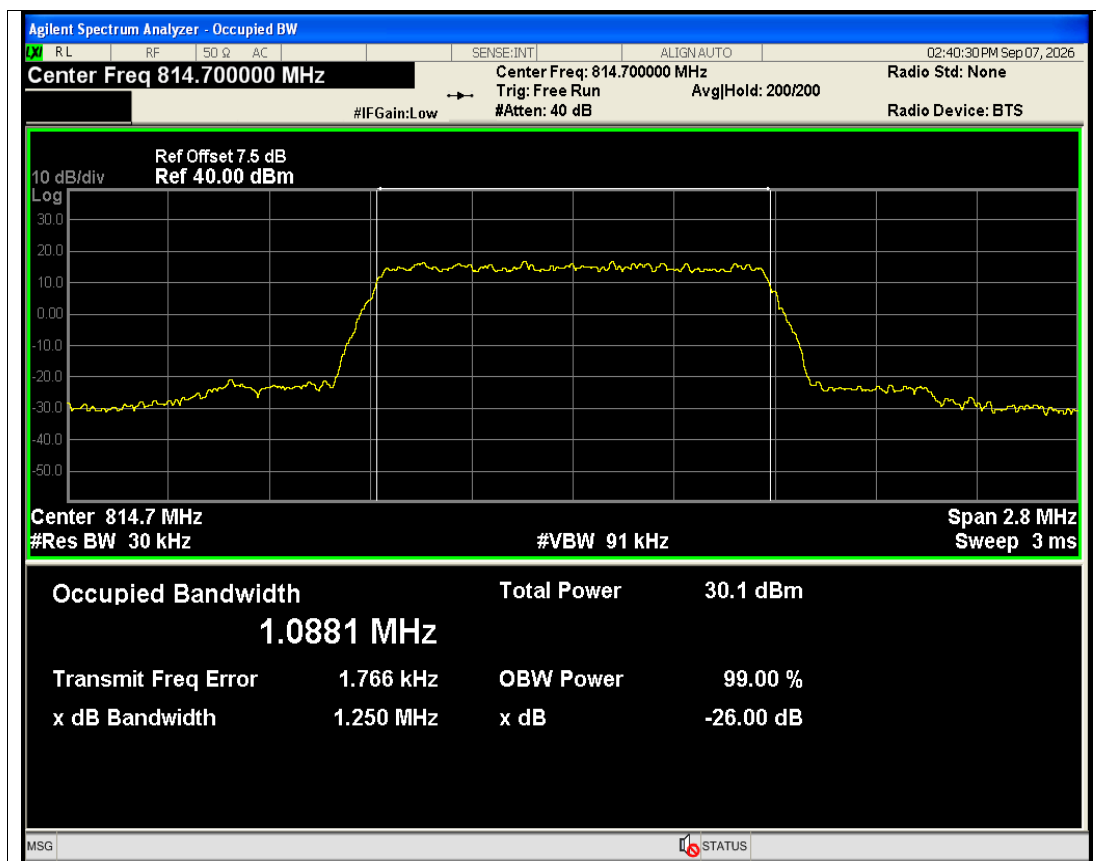


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0 NVNT

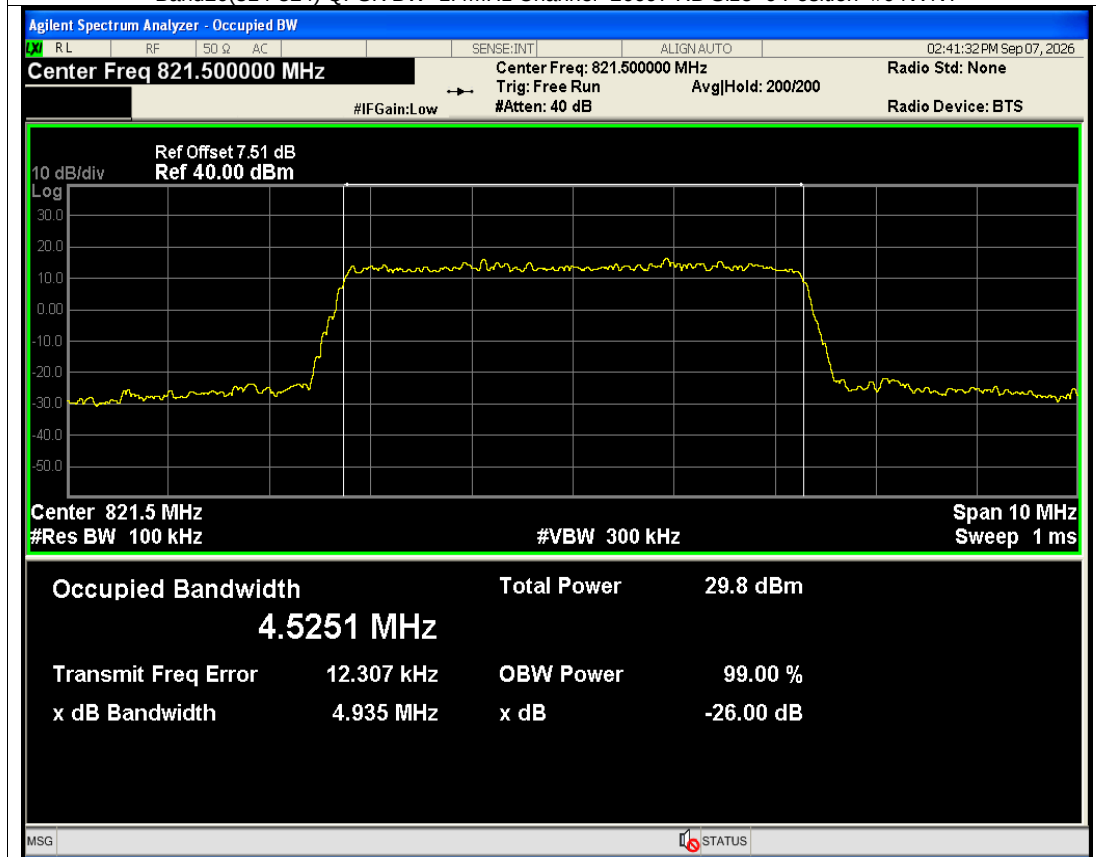


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=25 Position=#0 NVNT

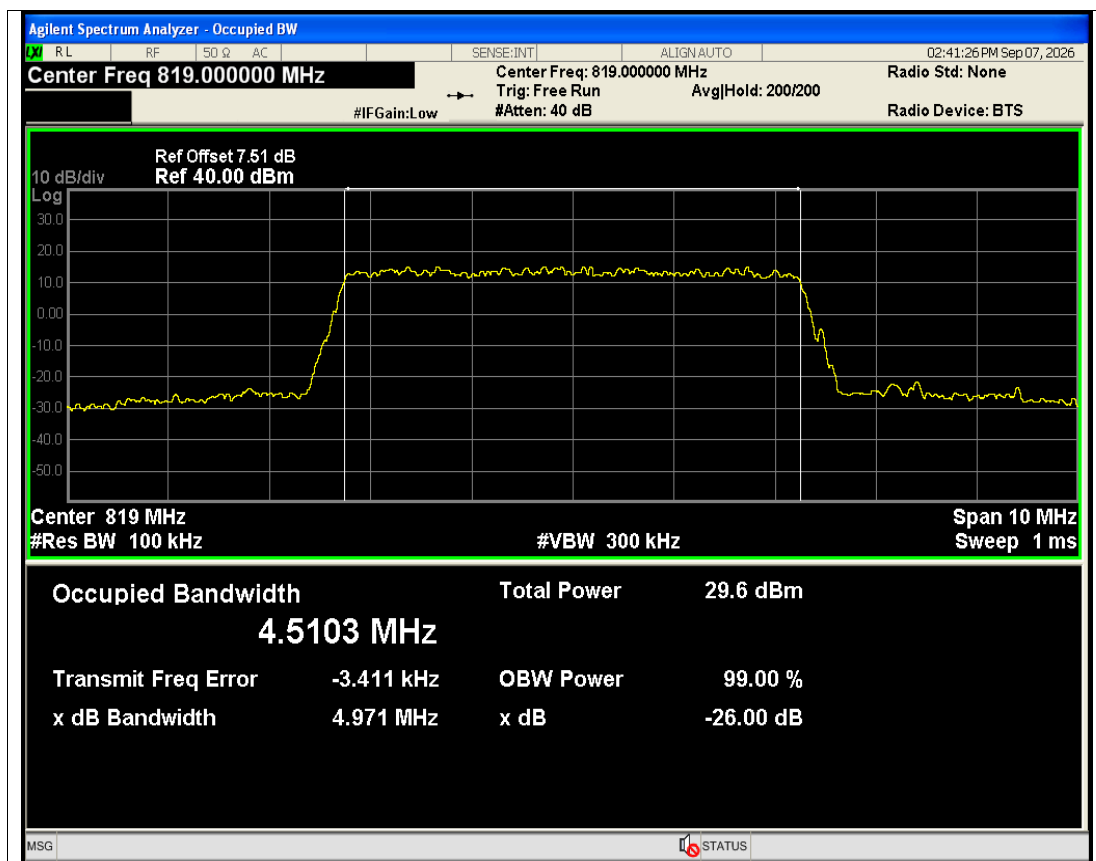


Band26(814-824) 16QAM BW=5MHz Channel=26740 RB Size=25 Position=#0 NVNT

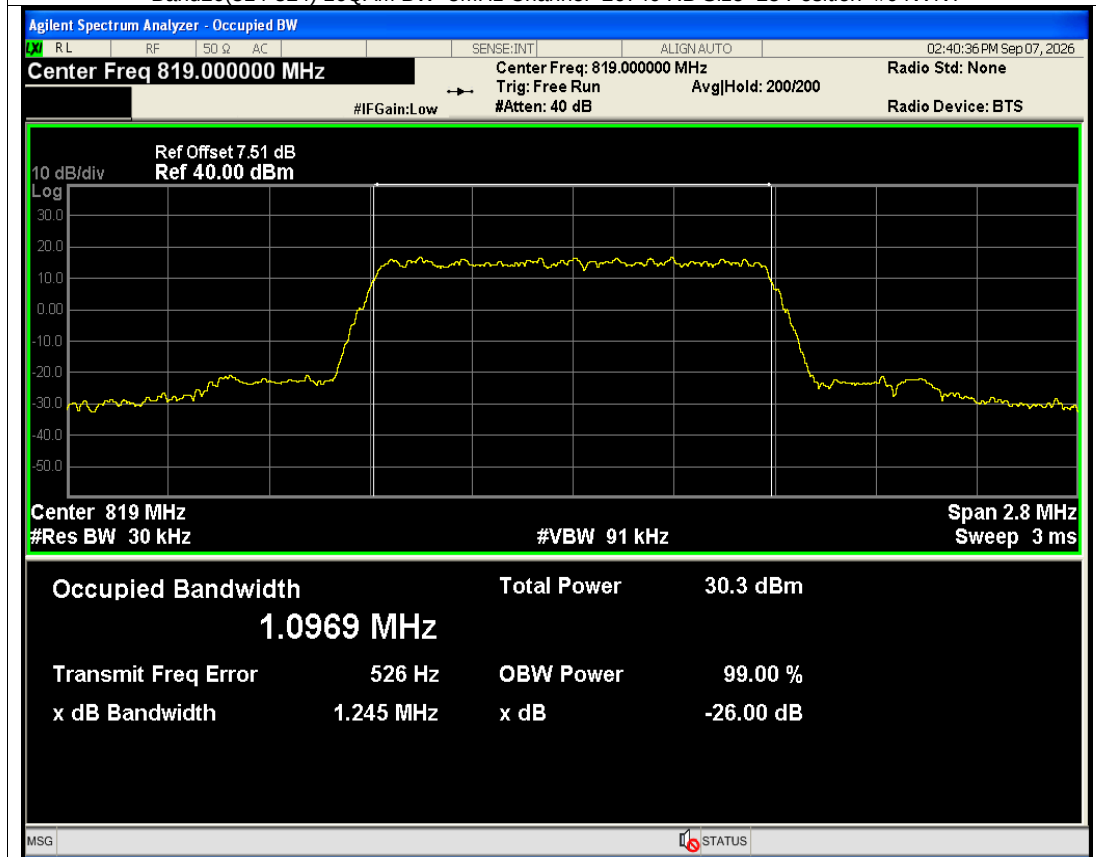


Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=6 Position=#0 NVNT

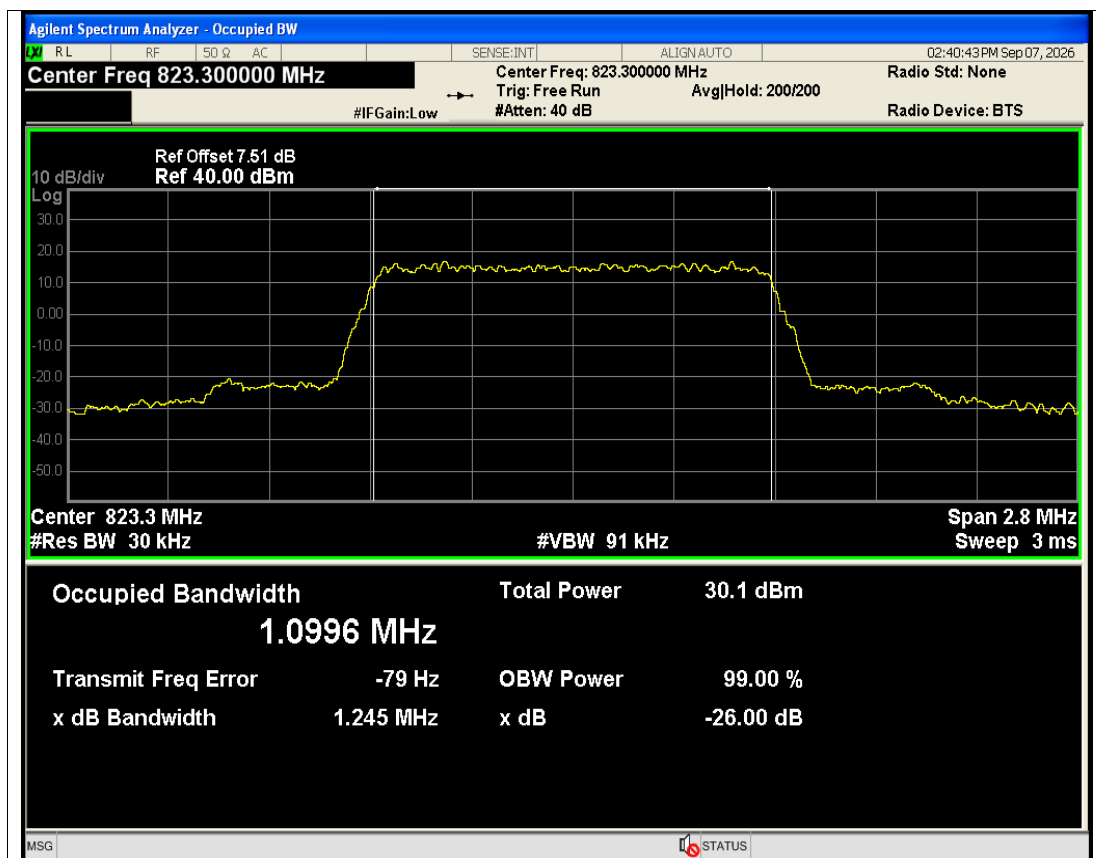


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0 NVNT

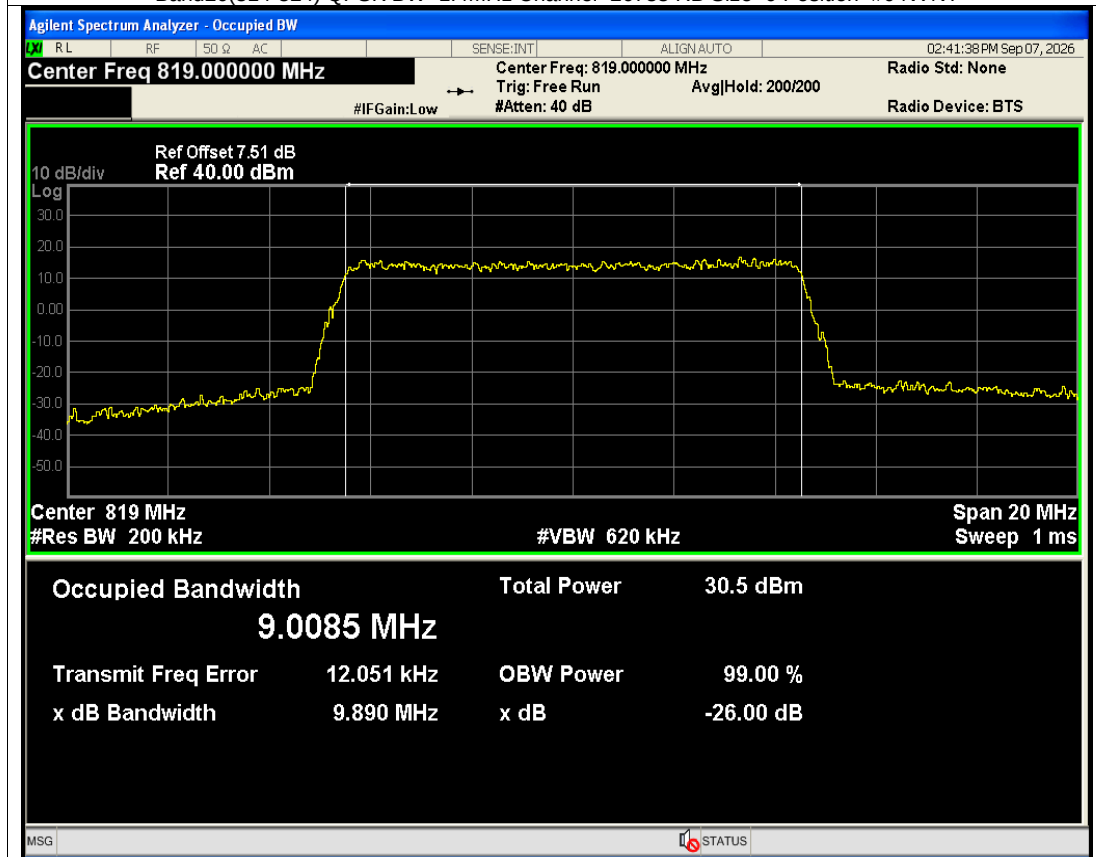


Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0 NVNT

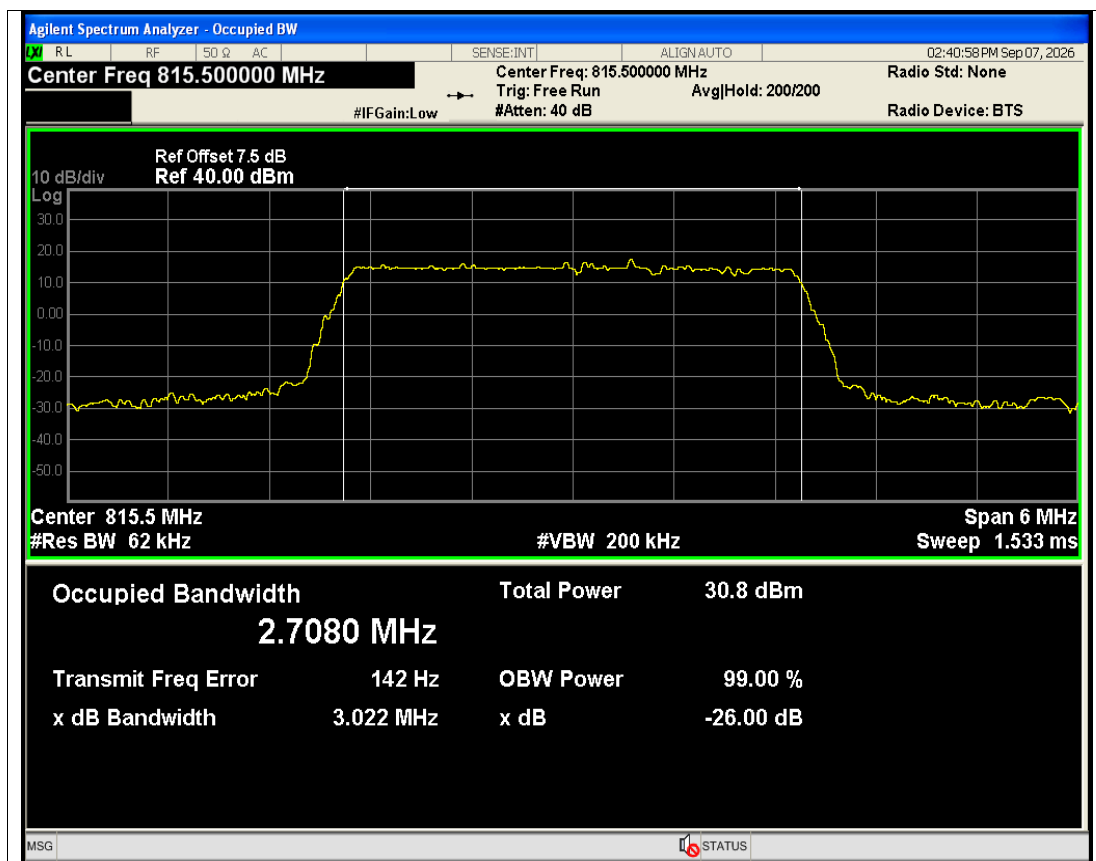


Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0 NVNT

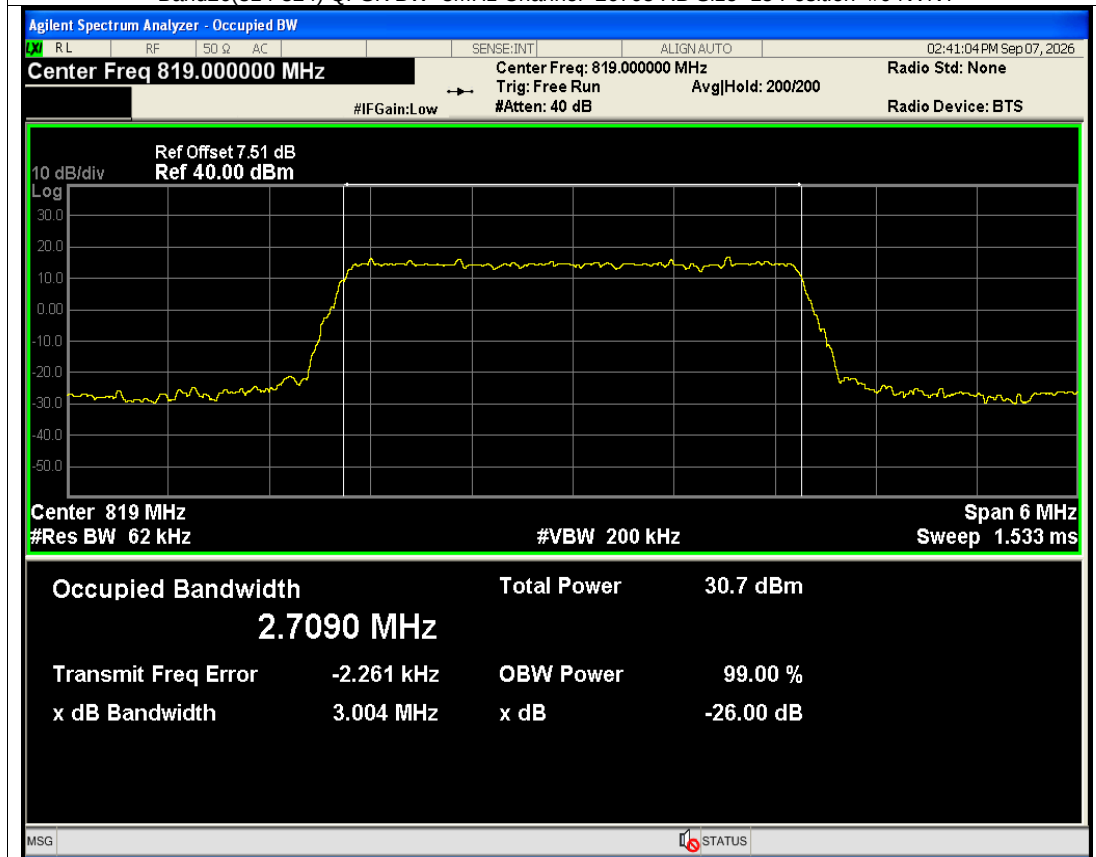


Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=15 Position=#0 NVNT

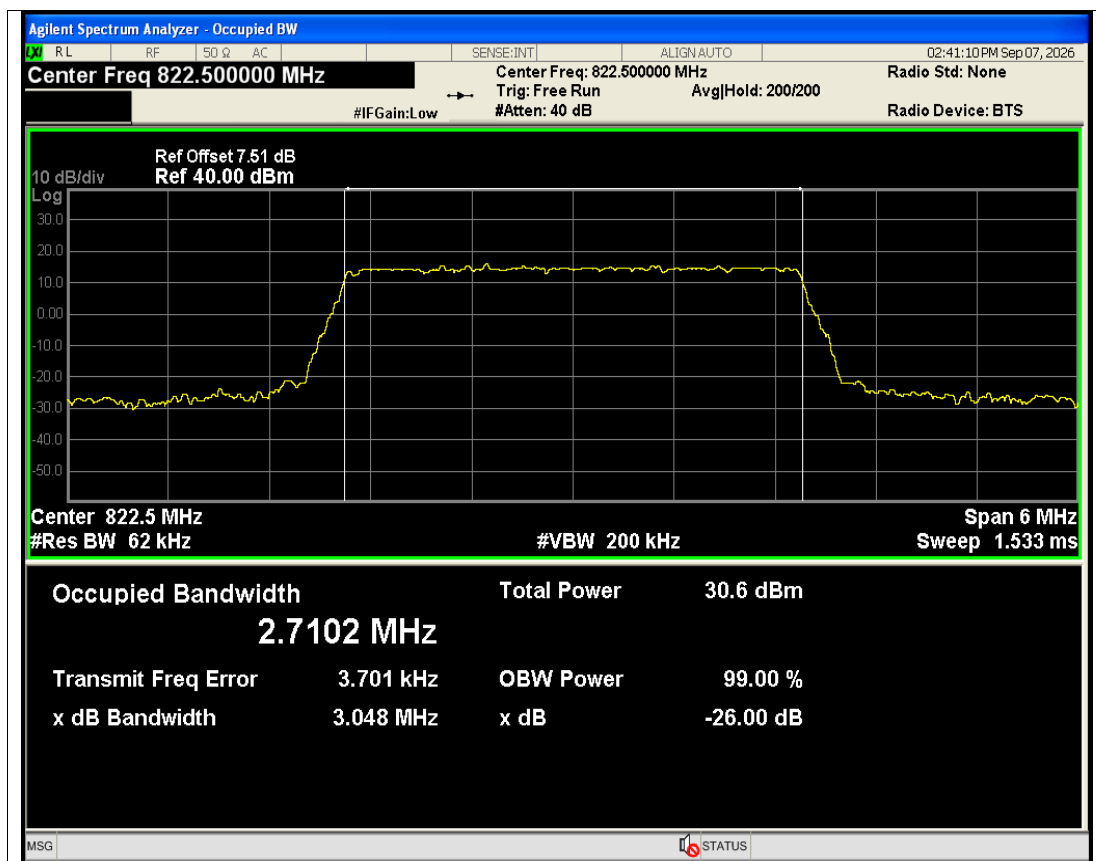


Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0 NVNT

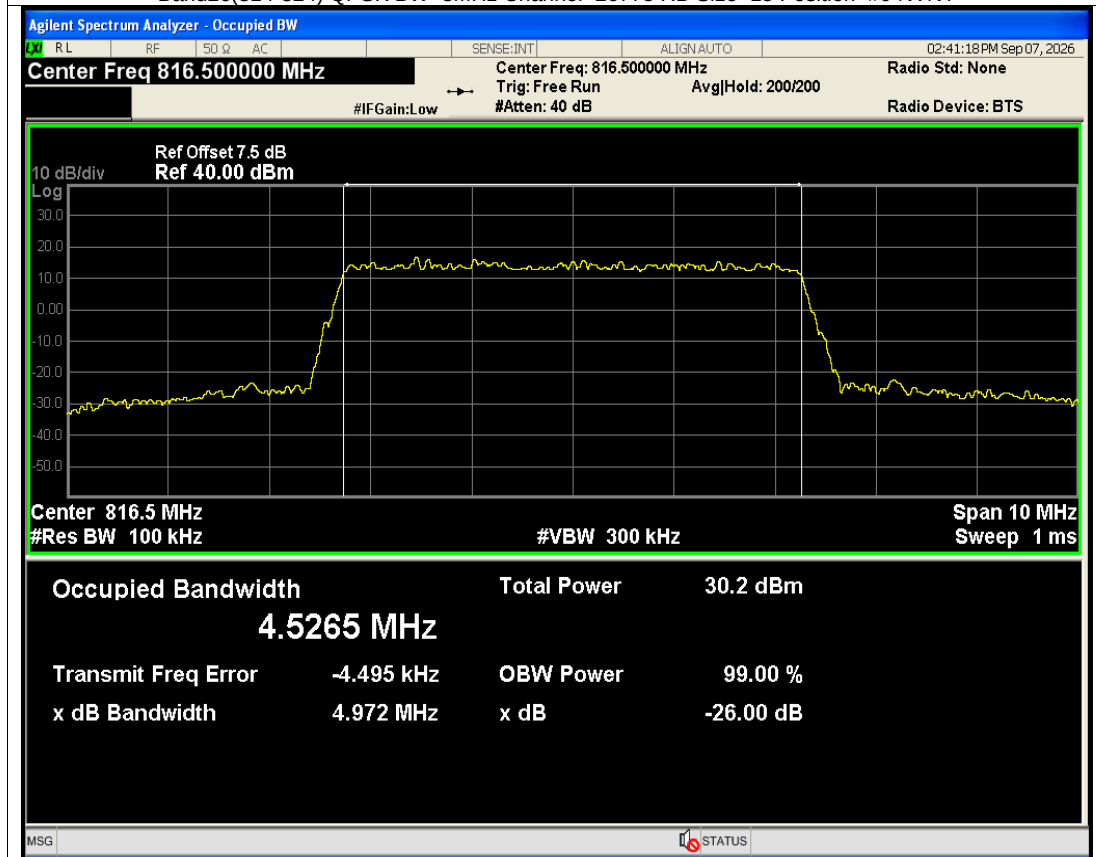

Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0 NVNT

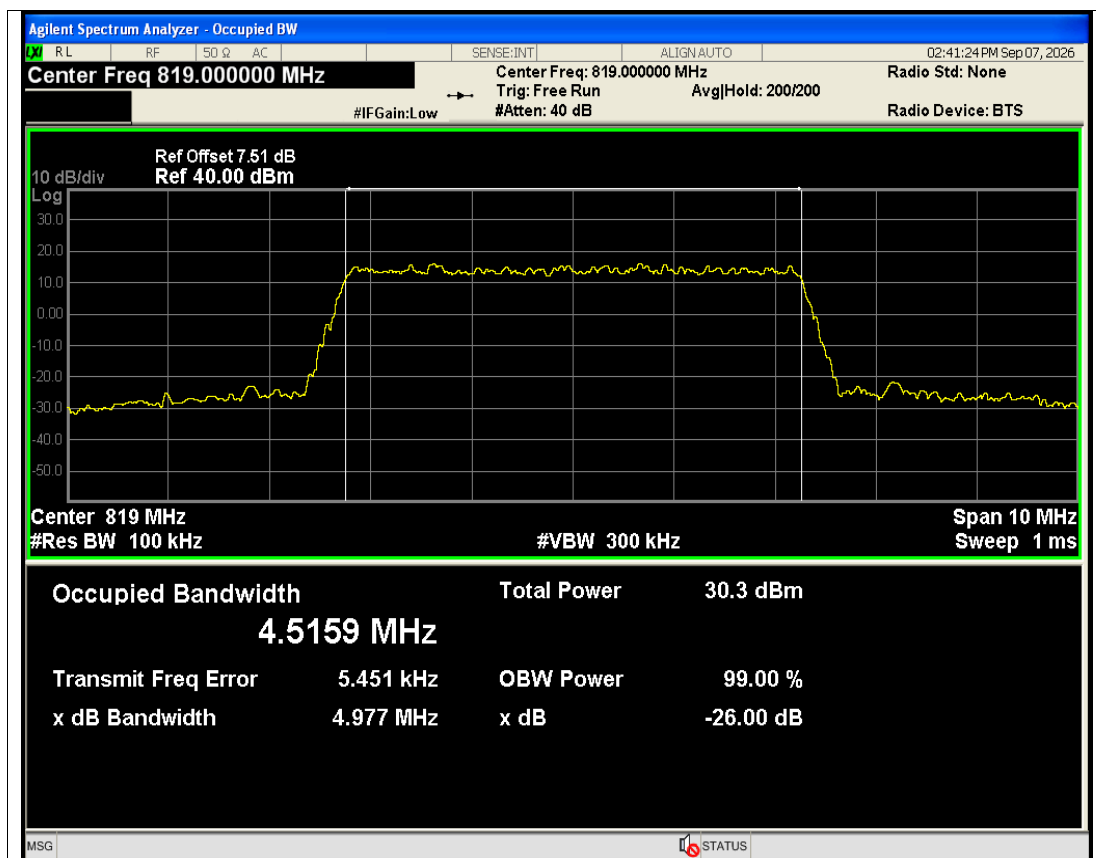

Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=25 Position=#0 NVNT

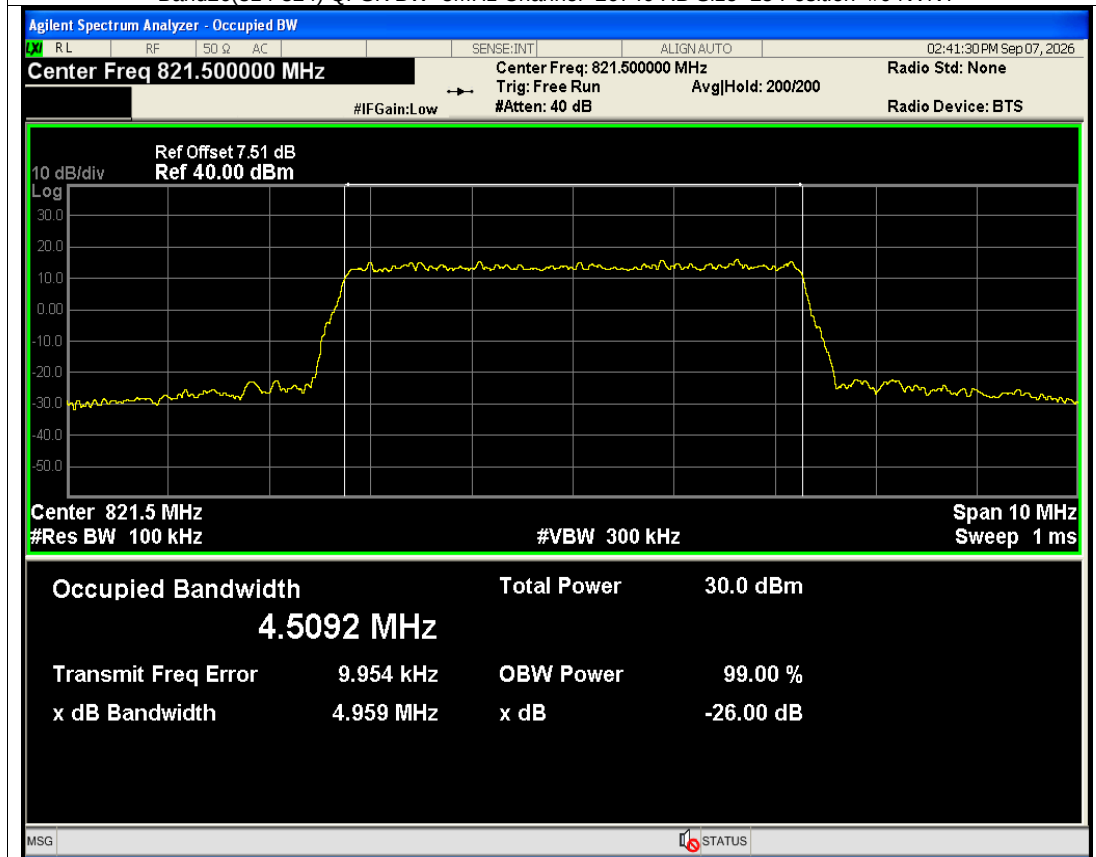

Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0 NVNT

## 05 LTE BAND EDGE

| Condition | Band            | Bandwidth (MHz) | UL Channel | RB Size | RB Position | Modulation | Range                  | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|-----------|-----------------|-----------------|------------|---------|-------------|------------|------------------------|-----------------|------------------|-------------|---------|
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | QPSK       | 813.3 MHz_813.9625 MHz | 813.96          | -22.69           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | QPSK       | 813.9625 MHz_814 MHz   | 814.00          | -40.70           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | QPSK       | 815.4 MHz_815.4375 MHz | 815.40          | -65.41           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | QPSK       | 815.4375 MHz_816.1 MHz | 816.07          | -37.42           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | QPSK       | 813.3 MHz_813.9625 MHz | 813.32          | -38.85           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | QPSK       | 813.9625 MHz_814 MHz   | 814.00          | -65.21           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | QPSK       | 815.4 MHz_815.4375 MHz | 815.40          | -41.23           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | QPSK       | 815.4375 MHz_816.1 MHz | 815.44          | -23.05           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | QPSK       | 813.3 MHz_813.9625 MHz | 813.90          | -26.49           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | QPSK       | 813.9625 MHz_814 MHz   | 813.98          | -45.16           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | QPSK       | 815.4 MHz_815.4375 MHz | 815.42          | -47.08           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | QPSK       | 815.4375 MHz_816.1 MHz | 815.56          | -26.94           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | 16QAM      | 813.3 MHz_813.9625 MHz | 813.96          | -22.17           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | 16QAM      | 813.9625 MHz_814 MHz   | 814.00          | -41.77           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | 16QAM      | 815.4 MHz_815.4375 MHz | 815.42          | -64.30           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #0          | 16QAM      | 815.4375 MHz_816.1 MHz | 816.07          | -35.42           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | 16QAM      | 813.3 MHz_813.9625 MHz | 813.32          | -36.35           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | 16QAM      | 813.9625 MHz_814 MHz   | 813.98          | -62.92           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | 16QAM      | 815.4 MHz_815.4375 MHz | 815.40          | -42.63           | -20         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 1       | #Max        | 16QAM      | 815.4375 MHz_816.1 MHz | 815.45          | -22.97           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | 16QAM      | 813.3 MHz_813.9625 MHz | 813.84          | -26.17           | -13         | PASS    |
| NVNT      | Band26(814-824) | 1.4             | 26697      | 6       | #0          | 16QAM      | 813.9625 MHz_814 MHz   | 813.99          | -47.12           | -20         | PASS    |

|      |                     |     |       |   |      |       |                               |            |            |     |      |
|------|---------------------|-----|-------|---|------|-------|-------------------------------|------------|------------|-----|------|
| NVNT | Band26(81<br>4-824) | 1.4 | 26697 | 6 | #0   | 16QAM | 815.4<br>MHz_815.43<br>75 MHz | 815.4<br>3 | -<br>45.54 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26697 | 6 | #0   | 16QAM | 815.4375<br>MHz_816.1<br>MHz  | 815.4<br>9 | -<br>26.36 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | QPSK  | 821.9<br>MHz_822.56<br>25 MHz | 822.5<br>6 | -<br>24.93 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | QPSK  | 822.5625<br>MHz_822.6<br>MHz  | 822.5<br>9 | -<br>41.75 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>1 | -<br>65.89 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | QPSK  | 824.0375<br>MHz_824.7<br>MHz  | 824.6<br>6 | -<br>35.75 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | QPSK  | 821.9<br>MHz_822.56<br>25 MHz | 821.9<br>9 | -<br>37.65 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | QPSK  | 822.5625<br>MHz_822.6<br>MHz  | 822.5<br>9 | -<br>65.41 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>41.91 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | QPSK  | 824.0375<br>MHz_824.7<br>MHz  | 824.0<br>4 | -<br>24.86 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | QPSK  | 821.9<br>MHz_822.56<br>25 MHz | 822.5<br>0 | -<br>25.76 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | QPSK  | 822.5625<br>MHz_822.6<br>MHz  | 822.5<br>8 | -<br>44.08 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>3 | -<br>46.04 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | QPSK  | 824.0375<br>MHz_824.7<br>MHz  | 824.0<br>4 | -<br>25.69 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | 16QAM | 821.9<br>MHz_822.56<br>25 MHz | 822.5<br>6 | -<br>24.23 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | 16QAM | 822.5625<br>MHz_822.6<br>MHz  | 822.5<br>9 | -<br>43.75 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>3 | -<br>65.54 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #0   | 16QAM | 824.0375<br>MHz_824.7<br>MHz  | 824.6<br>3 | -<br>34.34 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | 16QAM | 821.9<br>MHz_822.56<br>25 MHz | 821.9<br>0 | -<br>36.38 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | 16QAM | 822.5625<br>MHz_822.6<br>MHz  | 822.5<br>8 | -<br>65.33 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>1 | -<br>43.72 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 1 | #Max | 16QAM | 824.0375<br>MHz_824.7<br>MHz  | 824.0<br>4 | -<br>24.65 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | 16QAM | 821.9<br>MHz_822.56<br>25 MHz | 822.5<br>5 | -<br>26.13 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | 16QAM | 822.5625<br>MHz_822.6<br>MHz  | 822.5<br>8 | -<br>45.63 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6 | #0   | 16QAM | 824                           | 824.0      | -          | -20 | PASS |

|      |                     |     |       |    |      |       |                               |            |            |     |      |
|------|---------------------|-----|-------|----|------|-------|-------------------------------|------------|------------|-----|------|
|      | 4-824)              |     |       |    |      |       | MHz_824.03<br>75 MHz          | 3          | 46.26      |     |      |
| NVNT | Band26(81<br>4-824) | 1.4 | 26783 | 6  | #0   | 16QAM | 824.0375<br>MHz_824.7<br>MHz  | 824.0<br>4 | -<br>26.30 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | QPSK  | 812.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>13.60 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | QPSK  | 813.9625<br>MHz_814<br>MHz    | 814.0<br>0 | -<br>31.82 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | QPSK  | 817<br>MHz_817.03<br>75 MHz   | 817.0<br>0 | -<br>45.17 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | QPSK  | 817.0375<br>MHz_818.5<br>MHz  | 817.0<br>4 | -<br>26.97 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | QPSK  | 812.5<br>MHz_813.96<br>25 MHz | 813.9<br>4 | -<br>27.64 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | QPSK  | 813.9625<br>MHz_814<br>MHz    | 814.0<br>0 | -<br>42.41 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | QPSK  | 817<br>MHz_817.03<br>75 MHz   | 817.0<br>0 | -<br>30.82 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | QPSK  | 817.0375<br>MHz_818.5<br>MHz  | 817.0<br>4 | -<br>15.89 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | QPSK  | 812.5<br>MHz_813.96<br>25 MHz | 813.9<br>5 | -<br>23.89 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | QPSK  | 813.9625<br>MHz_814<br>MHz    | 813.9<br>9 | -<br>40.29 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | QPSK  | 817<br>MHz_817.03<br>75 MHz   | 817.0<br>0 | -<br>39.36 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | QPSK  | 817.0375<br>MHz_818.5<br>MHz  | 817.0<br>4 | -<br>23.31 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | 16QAM | 812.5<br>MHz_813.96<br>25 MHz | 813.9<br>5 | -<br>14.98 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | 16QAM | 813.9625<br>MHz_814<br>MHz    | 814.0<br>0 | -<br>30.39 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | 16QAM | 817<br>MHz_817.03<br>75 MHz   | 817.0<br>0 | -<br>43.85 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #0   | 16QAM | 817.0375<br>MHz_818.5<br>MHz  | 817.0<br>4 | -<br>26.37 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | 16QAM | 812.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>25.26 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | 16QAM | 813.9625<br>MHz_814<br>MHz    | 814.0<br>0 | -<br>40.77 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | 16QAM | 817<br>MHz_817.03<br>75 MHz   | 817.0<br>1 | -<br>30.72 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 1  | #Max | 16QAM | 817.0375<br>MHz_818.5<br>MHz  | 817.0<br>4 | -<br>13.69 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | 16QAM | 812.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>23.24 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | 16QAM | 813.9625<br>MHz_814<br>MHz    | 814.0<br>0 | -<br>41.32 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3   | 26705 | 15 | #0   | 16QAM | 817<br>MHz_817.03             | 817.0<br>1 | -<br>43.22 | -20 | PASS |


|      |                     |   |       |    |      |       |                               |            |            |     |      |
|------|---------------------|---|-------|----|------|-------|-------------------------------|------------|------------|-----|------|
|      |                     |   |       |    |      |       | 75 MHz                        |            |            |     |      |
| NVNT | Band26(81<br>4-824) | 3 | 26705 | 15 | #0   | 16QAM | 817.0375<br>MHz_818.5<br>MHz  | 817.0<br>4 | -<br>24.72 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | QPSK  | 819.5<br>MHz_820.96<br>25 MHz | 820.9<br>6 | -<br>14.15 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | QPSK  | 820.9625<br>MHz_821<br>MHz    | 820.9<br>9 | -<br>31.99 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>43.12 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | QPSK  | 824.0375<br>MHz_825.5<br>MHz  | 824.0<br>4 | -<br>27.15 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | QPSK  | 819.5<br>MHz_820.96<br>25 MHz | 820.9<br>6 | -<br>25.93 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | QPSK  | 820.9625<br>MHz_821<br>MHz    | 821.0<br>0 | -<br>43.86 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>32.11 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | QPSK  | 824.0375<br>MHz_825.5<br>MHz  | 824.0<br>4 | -<br>13.24 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | QPSK  | 819.5<br>MHz_820.96<br>25 MHz | 820.9<br>6 | -<br>24.09 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | QPSK  | 820.9625<br>MHz_821<br>MHz    | 821.0<br>0 | -<br>42.34 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>40.30 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | QPSK  | 824.0375<br>MHz_825.5<br>MHz  | 824.0<br>4 | -<br>23.92 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | 16QAM | 819.5<br>MHz_820.96<br>25 MHz | 820.9<br>6 | -<br>14.54 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | 16QAM | 820.9625<br>MHz_821<br>MHz    | 821.0<br>0 | -<br>29.87 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>43.97 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #0   | 16QAM | 824.0375<br>MHz_825.5<br>MHz  | 824.0<br>4 | -<br>27.02 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | 16QAM | 819.5<br>MHz_820.96<br>25 MHz | 820.9<br>6 | -<br>27.33 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | 16QAM | 820.9625<br>MHz_821<br>MHz    | 821.0<br>0 | -<br>44.32 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>32.00 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 1  | #Max | 16QAM | 824.0375<br>MHz_825.5<br>MHz  | 824.0<br>5 | -<br>14.77 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | 16QAM | 819.5<br>MHz_820.96<br>25 MHz | 820.9<br>5 | -<br>23.84 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | 16QAM | 820.9625<br>MHz_821<br>MHz    | 821.0<br>0 | -<br>40.82 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>42.69 | -20 | PASS |

|      |                     |   |       |    |      |       |                               |            |            |     |      |
|------|---------------------|---|-------|----|------|-------|-------------------------------|------------|------------|-----|------|
| NVNT | Band26(81<br>4-824) | 3 | 26775 | 15 | #0   | 16QAM | 824.0375<br>MHz_825.5<br>MHz  | 824.0<br>4 | -<br>24.16 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | QPSK  | 811.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>20.02 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | QPSK  | 813.9625<br>MHz_814<br>MHz    | 813.9<br>9 | -<br>39.42 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | QPSK  | 819<br>MHz_819.03<br>75 MHz   | 819.0<br>1 | -<br>57.29 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | QPSK  | 819.0375<br>MHz_821.5<br>MHz  | 819.0<br>4 | -<br>38.68 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | QPSK  | 811.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>38.12 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | QPSK  | 813.9625<br>MHz_814<br>MHz    | 813.9<br>9 | -<br>55.55 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | QPSK  | 819<br>MHz_819.03<br>75 MHz   | 819.0<br>0 | -<br>39.81 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | QPSK  | 819.0375<br>MHz_821.5<br>MHz  | 819.0<br>4 | -<br>21.50 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | QPSK  | 811.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>29.56 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | QPSK  | 813.9625<br>MHz_814<br>MHz    | 814.0<br>0 | -<br>49.23 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | QPSK  | 819<br>MHz_819.03<br>75 MHz   | 819.0<br>1 | -<br>48.97 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | QPSK  | 819.0375<br>MHz_821.5<br>MHz  | 819.0<br>4 | -<br>29.49 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | 16QAM | 811.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>21.17 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | 16QAM | 813.9625<br>MHz_814<br>MHz    | 813.9<br>9 | -<br>38.87 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | 16QAM | 819<br>MHz_819.03<br>75 MHz   | 819.0<br>1 | -<br>56.09 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #0   | 16QAM | 819.0375<br>MHz_821.5<br>MHz  | 819.0<br>5 | -<br>39.62 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | 16QAM | 811.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>37.30 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | 16QAM | 813.9625<br>MHz_814<br>MHz    | 813.9<br>9 | -<br>56.13 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | 16QAM | 819<br>MHz_819.03<br>75 MHz   | 819.0<br>0 | -<br>40.92 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 1  | #Max | 16QAM | 819.0375<br>MHz_821.5<br>MHz  | 819.0<br>4 | -<br>21.03 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | 16QAM | 811.5<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>29.47 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | 16QAM | 813.9625<br>MHz_814<br>MHz    | 813.9<br>9 | -<br>50.15 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | 16QAM | 819<br>MHz_819.03<br>75 MHz   | 819.0<br>1 | -<br>50.39 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26715 | 25 | #0   | 16QAM | 819.0375                      | 819.0      | -          | -13 | PASS |


|      |                     |   |       |    |      |       |                               |            |            |     |      |
|------|---------------------|---|-------|----|------|-------|-------------------------------|------------|------------|-----|------|
|      | 4-824)              |   |       |    |      |       | MHz_821.5<br>MHz              | 4          | 31.33      |     |      |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | QPSK  | 816.5<br>MHz_818.96<br>25 MHz | 818.9<br>6 | -<br>21.58 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | QPSK  | 818.9625<br>MHz_819<br>MHz    | 819.0<br>0 | -<br>39.68 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>56.11 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | QPSK  | 824.0375<br>MHz_826.5<br>MHz  | 824.0<br>4 | -<br>39.74 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | QPSK  | 816.5<br>MHz_818.96<br>25 MHz | 818.9<br>6 | -<br>39.78 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | QPSK  | 818.9625<br>MHz_819<br>MHz    | 818.9<br>9 | -<br>57.56 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>0 | -<br>40.20 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | QPSK  | 824.0375<br>MHz_826.5<br>MHz  | 824.0<br>4 | -<br>22.32 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | QPSK  | 816.5<br>MHz_818.96<br>25 MHz | 818.9<br>5 | -<br>30.70 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | QPSK  | 818.9625<br>MHz_819<br>MHz    | 818.9<br>9 | -<br>46.72 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>1 | -<br>49.00 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | QPSK  | 824.0375<br>MHz_826.5<br>MHz  | 824.0<br>4 | -<br>29.47 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | 16QAM | 816.5<br>MHz_818.96<br>25 MHz | 818.9<br>6 | -<br>21.68 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | 16QAM | 818.9625<br>MHz_819<br>MHz    | 818.9<br>9 | -<br>39.34 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>1 | -<br>55.00 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #0   | 16QAM | 824.0375<br>MHz_826.5<br>MHz  | 824.0<br>4 | -<br>37.24 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | 16QAM | 816.5<br>MHz_818.96<br>25 MHz | 818.9<br>6 | -<br>38.92 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | 16QAM | 818.9625<br>MHz_819<br>MHz    | 818.9<br>9 | -<br>55.99 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>1 | -<br>37.78 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 1  | #Max | 16QAM | 824.0375<br>MHz_826.5<br>MHz  | 824.0<br>4 | -<br>22.42 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | 16QAM | 816.5<br>MHz_818.96<br>25 MHz | 818.9<br>6 | -<br>29.66 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | 16QAM | 818.9625<br>MHz_819<br>MHz    | 818.9<br>9 | -<br>47.85 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz   | 824.0<br>1 | -<br>48.80 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 5 | 26765 | 25 | #0   | 16QAM | 824.0375<br>MHz_826.5         | 824.0<br>4 | -<br>29.00 | -13 | PASS |

|      |                     |    |       |    |      |       |                             |            |            |     |      |
|------|---------------------|----|-------|----|------|-------|-----------------------------|------------|------------|-----|------|
|      |                     |    |       |    |      |       | MHz                         |            |            |     |      |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | QPSK  | 809<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>25.26 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | QPSK  | 813.9625<br>MHz_814<br>MHz  | 814.0<br>0 | -<br>45.25 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz | 824.0<br>1 | -<br>62.66 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | QPSK  | 824.0375<br>MHz_829<br>MHz  | 824.0<br>5 | -<br>44.46 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | QPSK  | 809<br>MHz_813.96<br>25 MHz | 813.9<br>4 | -<br>42.80 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | QPSK  | 813.9625<br>MHz_814<br>MHz  | 813.9<br>9 | -<br>59.79 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | QPSK  | 824<br>MHz_824.03<br>75 MHz | 824.0<br>1 | -<br>42.30 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | QPSK  | 824.0375<br>MHz_829<br>MHz  | 824.0<br>4 | -<br>27.36 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | QPSK  | 809<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>34.80 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | QPSK  | 813.9625<br>MHz_814<br>MHz  | 813.9<br>7 | -<br>54.13 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | QPSK  | 824<br>MHz_824.03<br>75 MHz | 824.0<br>0 | -<br>53.18 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | QPSK  | 824.0375<br>MHz_829<br>MHz  | 824.0<br>5 | -<br>33.08 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | 16QAM | 809<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>26.12 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | 16QAM | 813.9625<br>MHz_814<br>MHz  | 814.0<br>0 | -<br>45.11 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz | 824.0<br>0 | -<br>63.75 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #0   | 16QAM | 824.0375<br>MHz_829<br>MHz  | 824.0<br>5 | -<br>44.36 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | 16QAM | 809<br>MHz_813.96<br>25 MHz | 813.9<br>3 | -<br>42.71 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | 16QAM | 813.9625<br>MHz_814<br>MHz  | 814.0<br>0 | -<br>59.36 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | 16QAM | 824<br>MHz_824.03<br>75 MHz | 824.0<br>0 | -<br>41.33 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 1  | #Max | 16QAM | 824.0375<br>MHz_829<br>MHz  | 824.0<br>5 | -<br>25.84 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | 16QAM | 809<br>MHz_813.96<br>25 MHz | 813.9<br>6 | -<br>35.04 | -13 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | 16QAM | 813.9625<br>MHz_814<br>MHz  | 813.9<br>8 | -<br>53.13 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | 16QAM | 824<br>MHz_824.03<br>75 MHz | 824.0<br>0 | -<br>50.54 | -20 | PASS |
| NVNT | Band26(81<br>4-824) | 10 | 26740 | 50 | #0   | 16QAM | 824.0375<br>MHz_829<br>MHz  | 824.0<br>6 | -<br>33.10 | -13 | PASS |




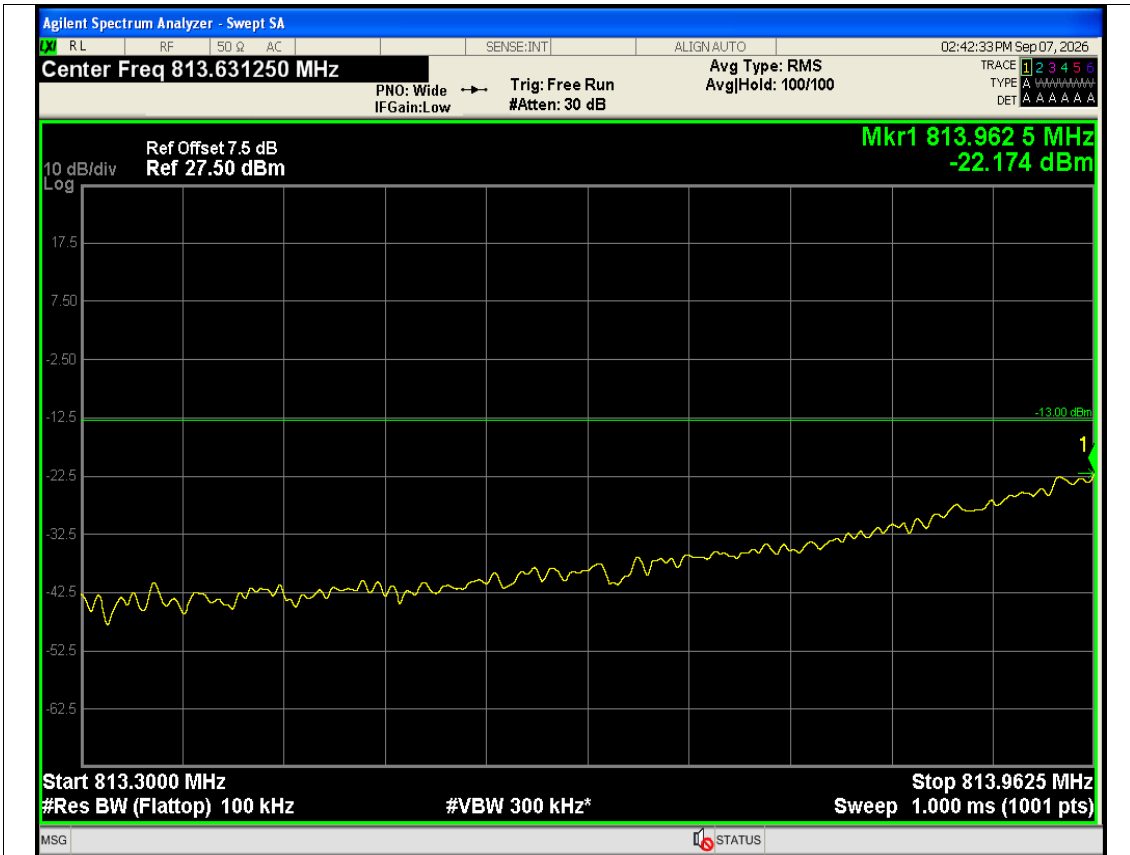


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#0 813.3 MHz 813.9625 MHz NVNT

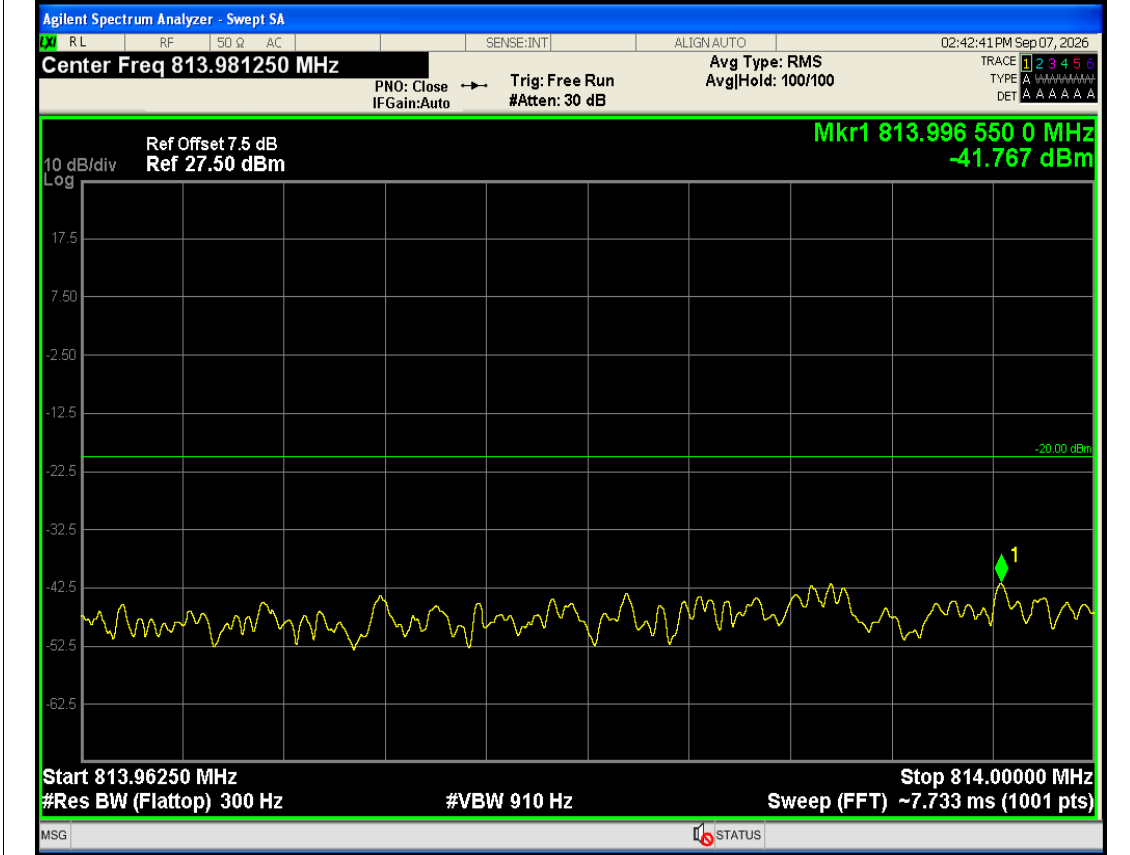


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#0 813.9625 MHz 814 MHz NVNT

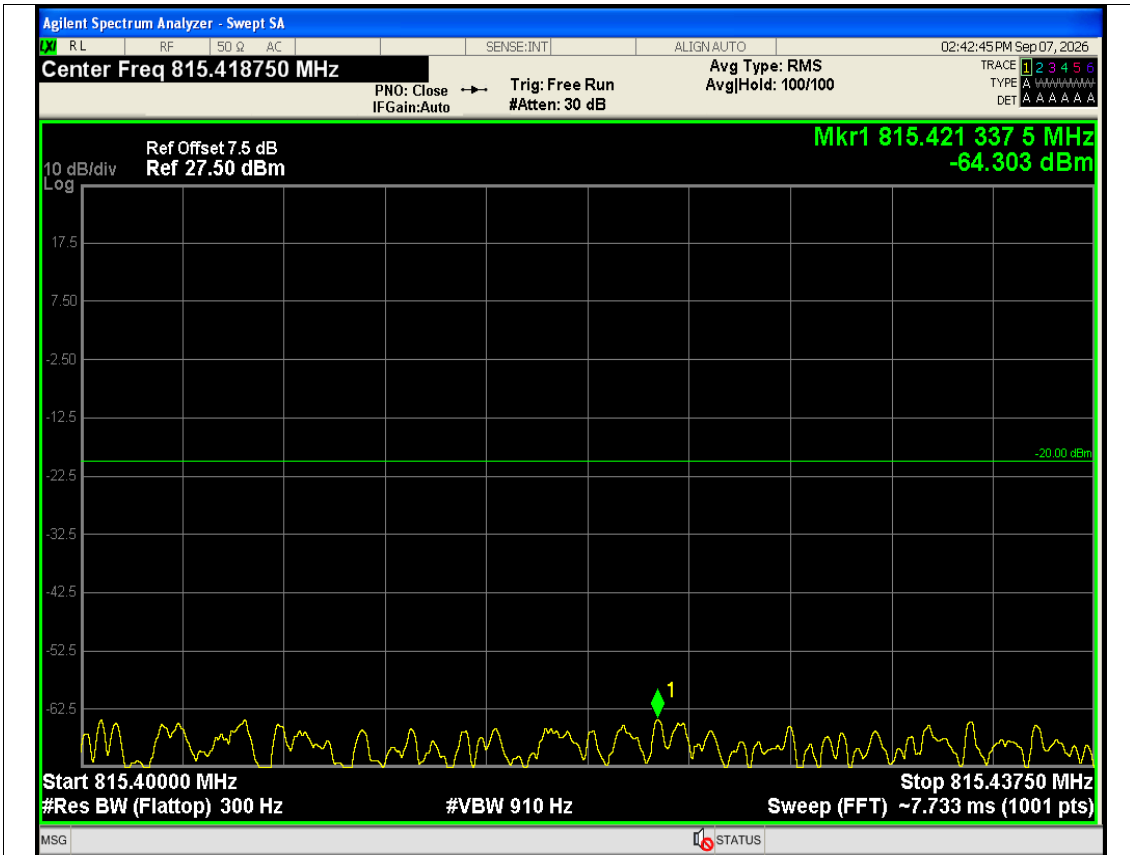


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#0 815.4 MHz 815.4375 MHz NVNT

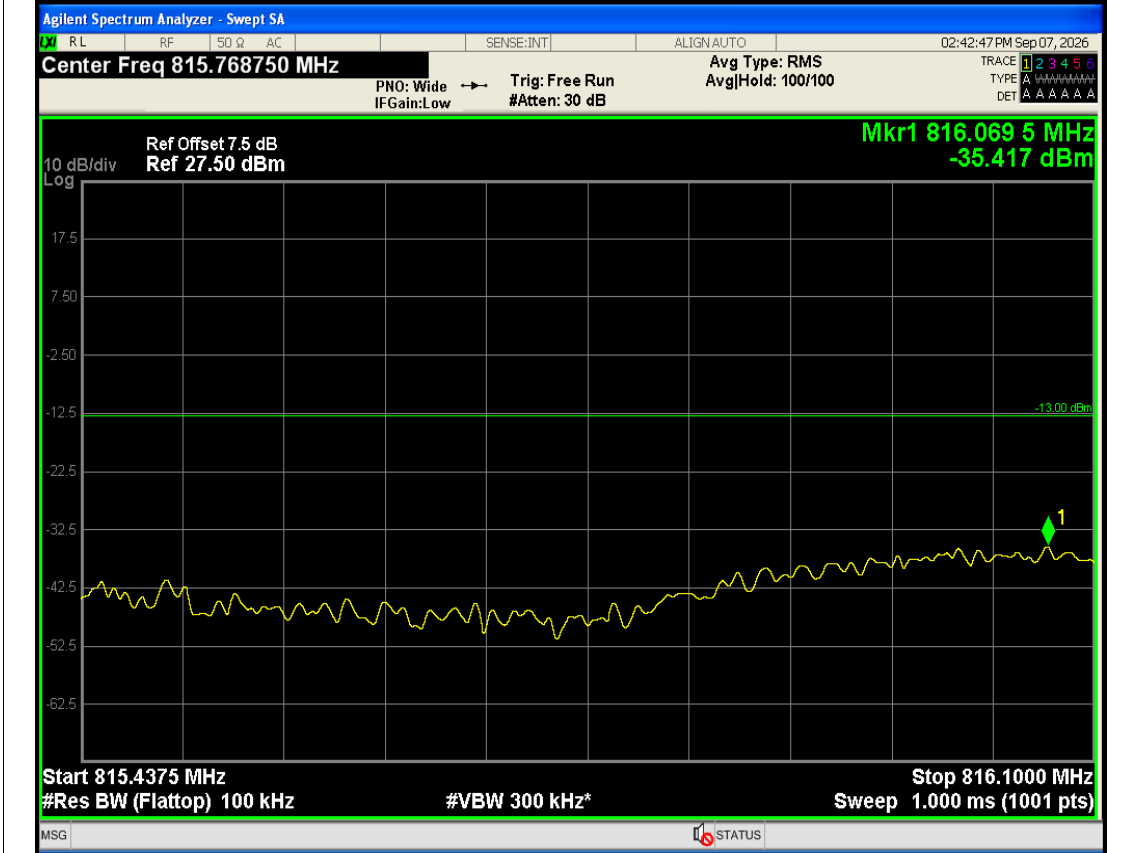


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#0 815.4375 MHz 816.1 MHz NVNT

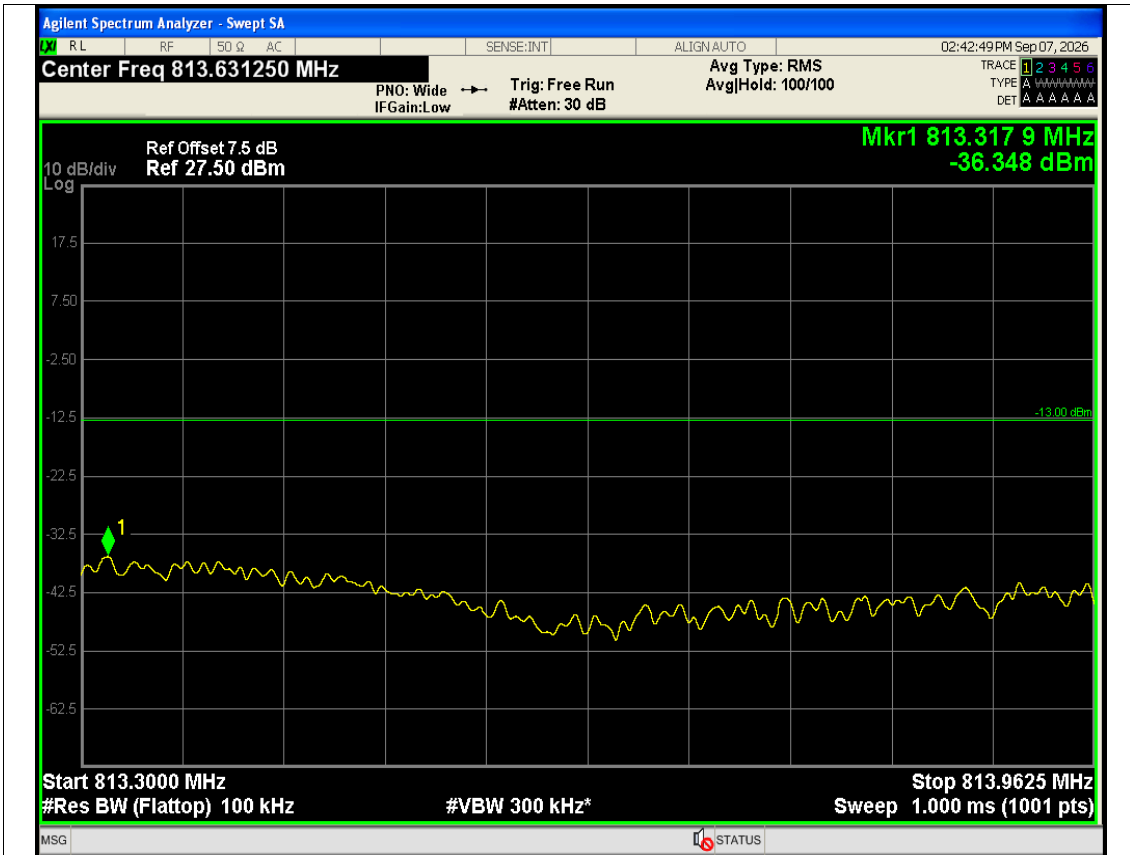


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 813.3 MHz 813.9625 MHz NVNT

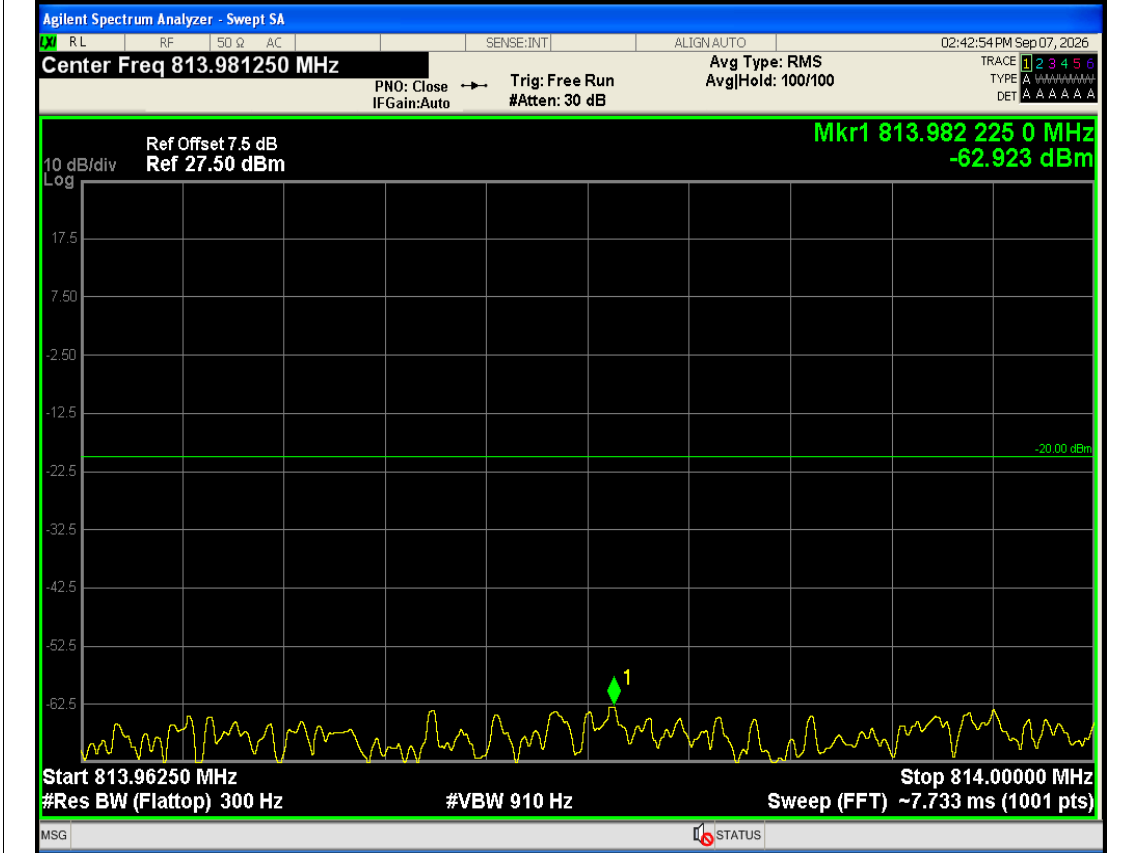


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 813.9625 MHz 814 MHz NVNT

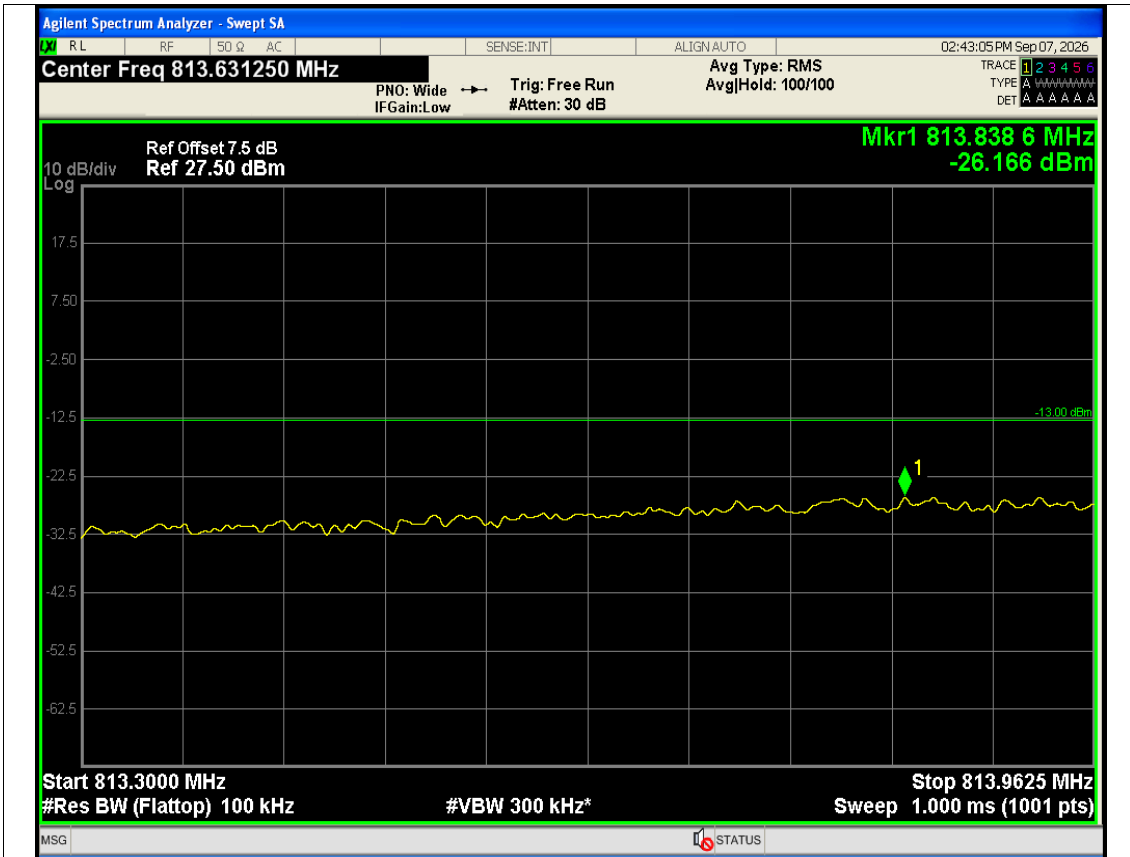


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=6 Position=#0 813.3 MHz 813.9625 MHz NVNT

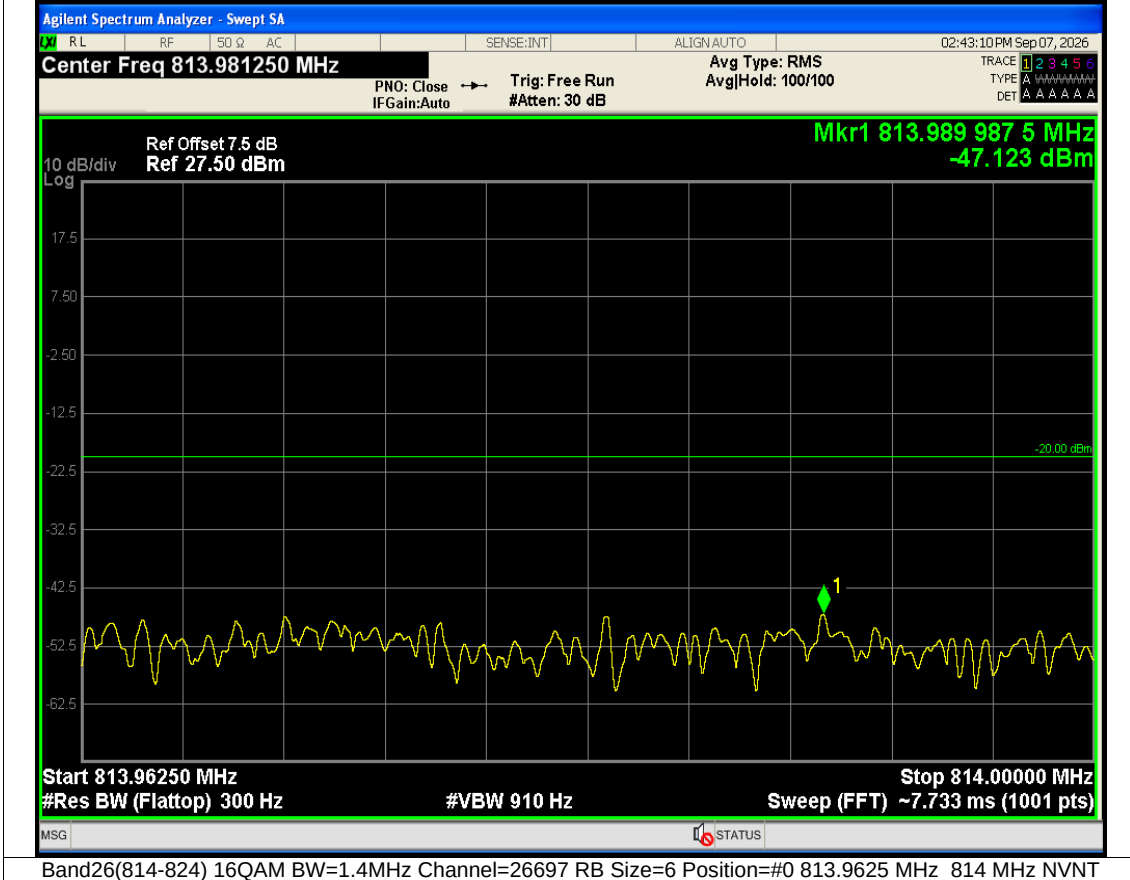


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=6 Position=#0 813.9625 MHz 814 MHz NVNT

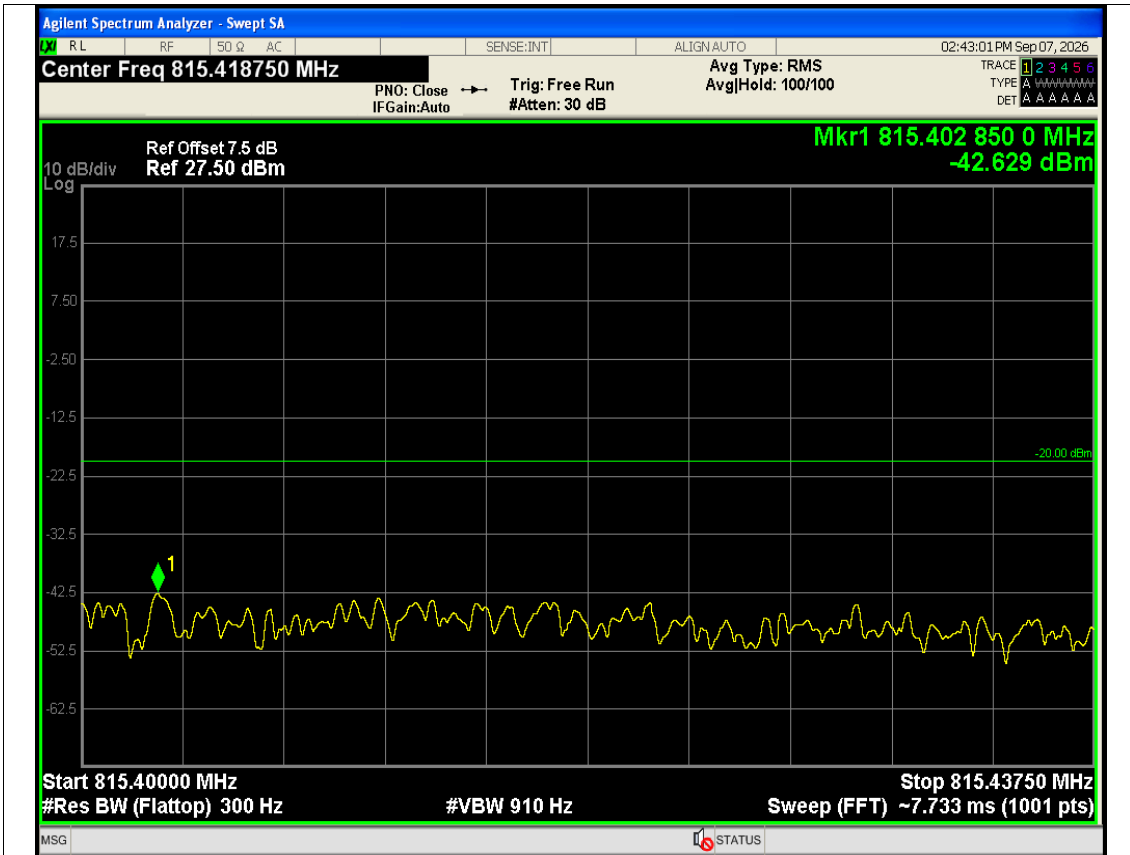


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 815.4 MHz 815.4375 MHz NVNT

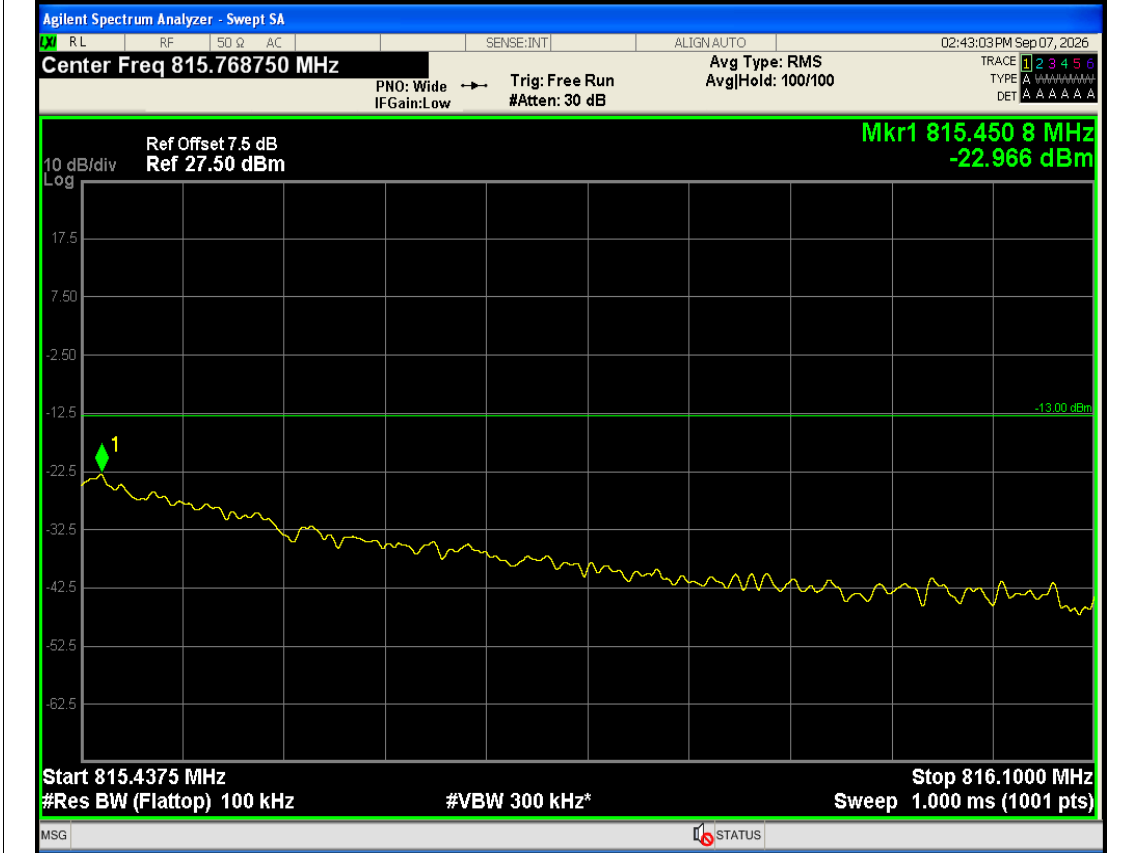


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 815.4375 MHz 816.1 MHz NVNT

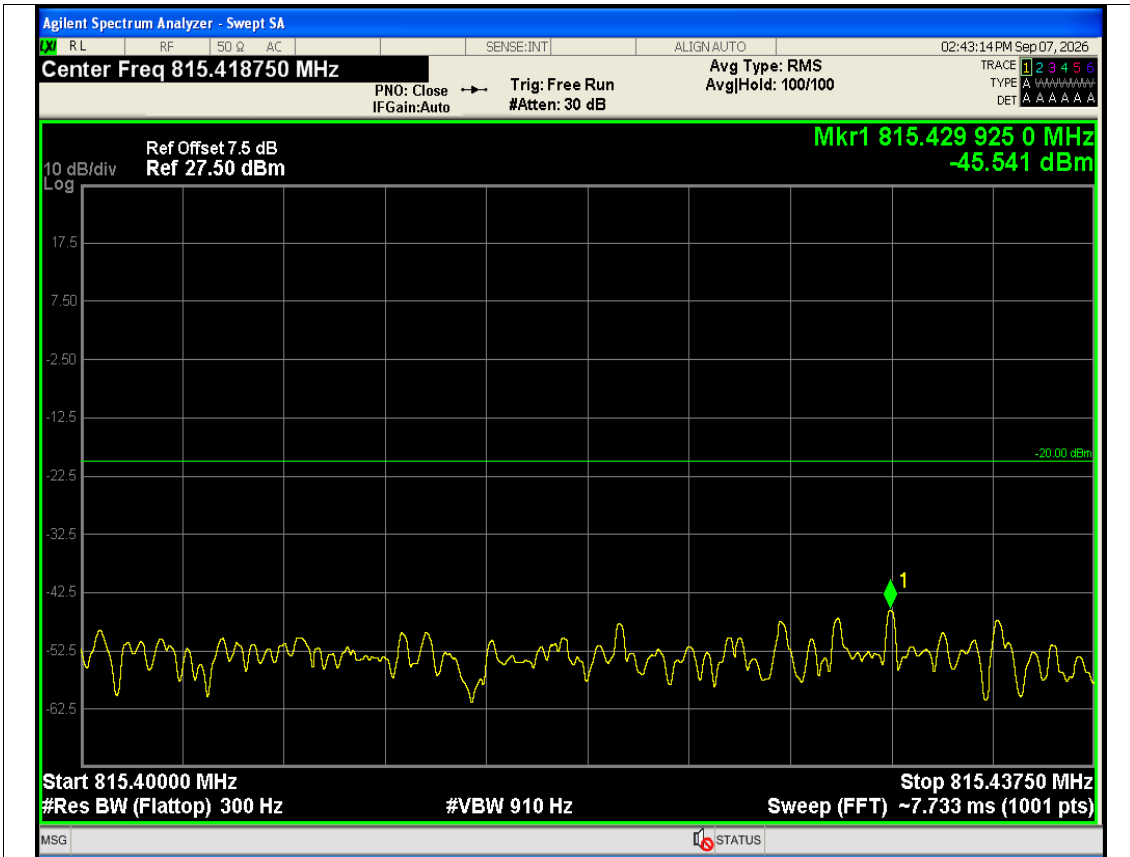


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=6 Position=#0 815.4 MHz 815.4375 MHz NVNT

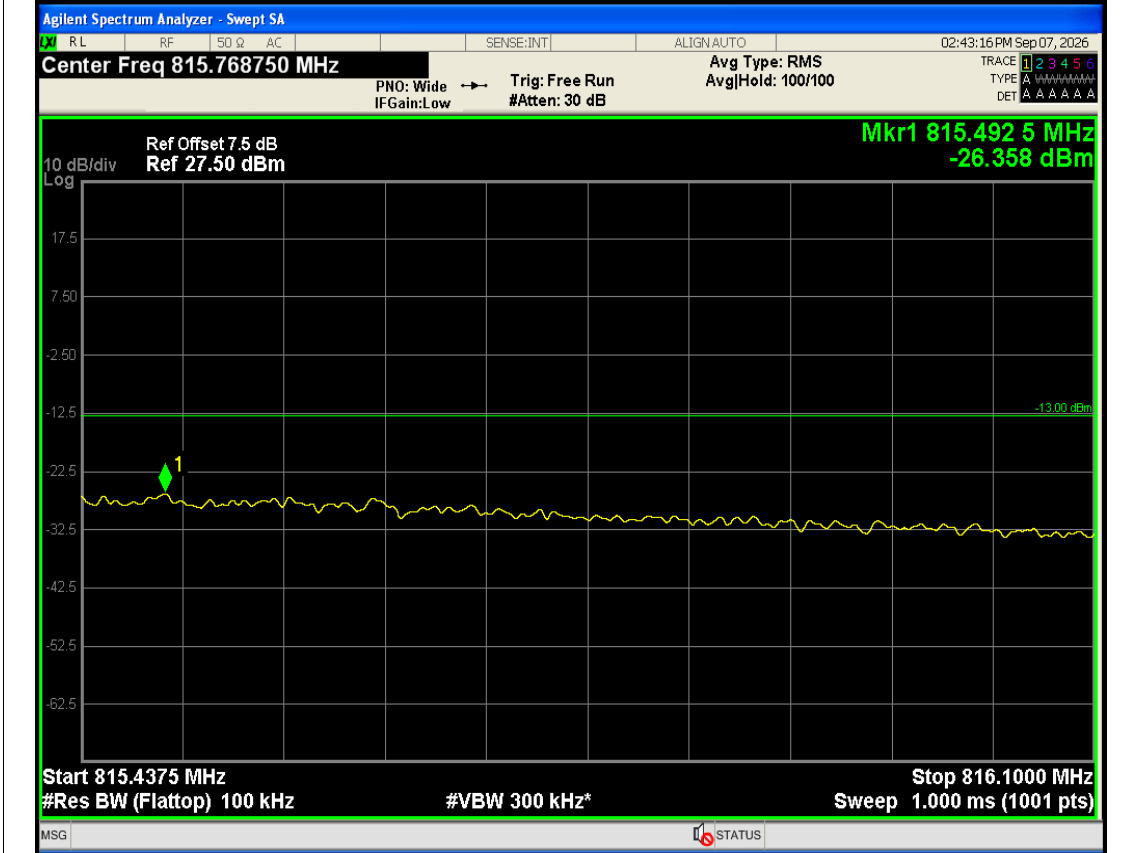


Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=6 Position=#0 815.4375 MHz 816.1 MHz NVNT

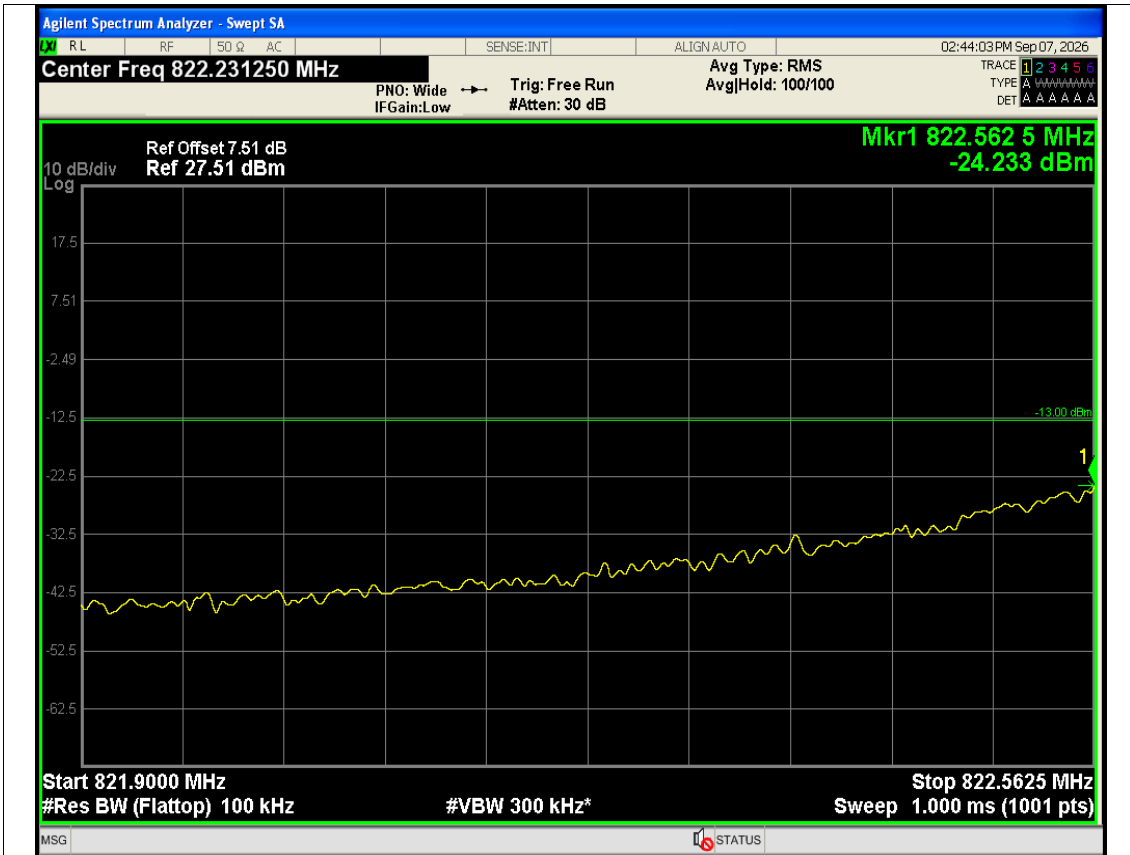


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#0 821.9 MHz\_ 822.5625 MHz NVNT

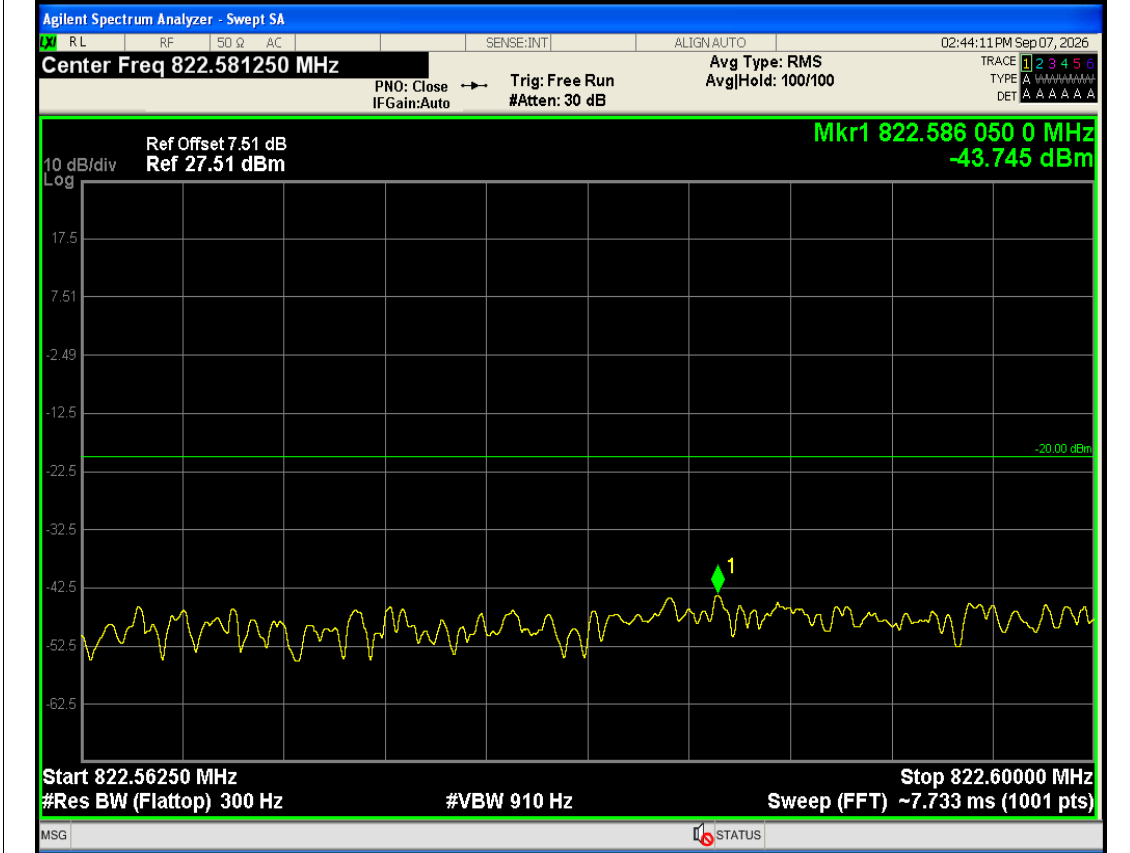


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#0 822.5625 MHz\_ 822.6 MHz NVNT

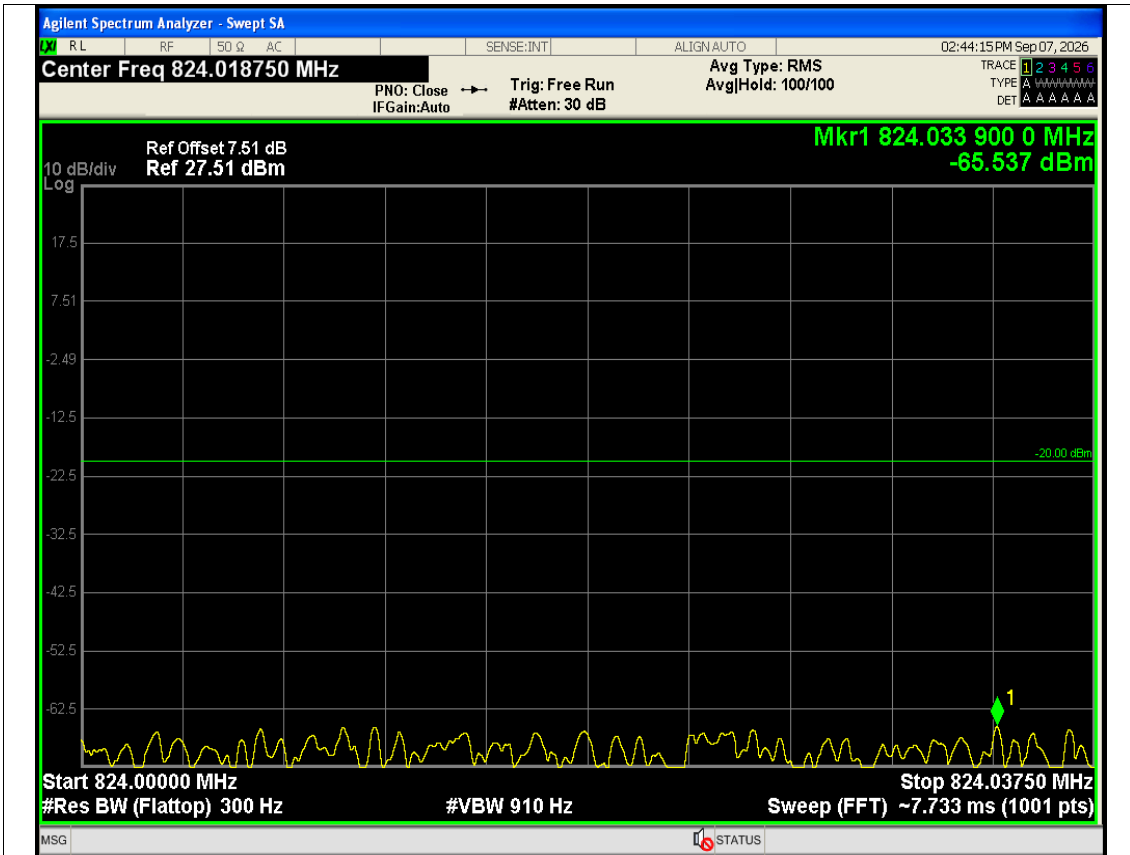


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#0 824 MHz\_ 824.0375 MHz NVNT

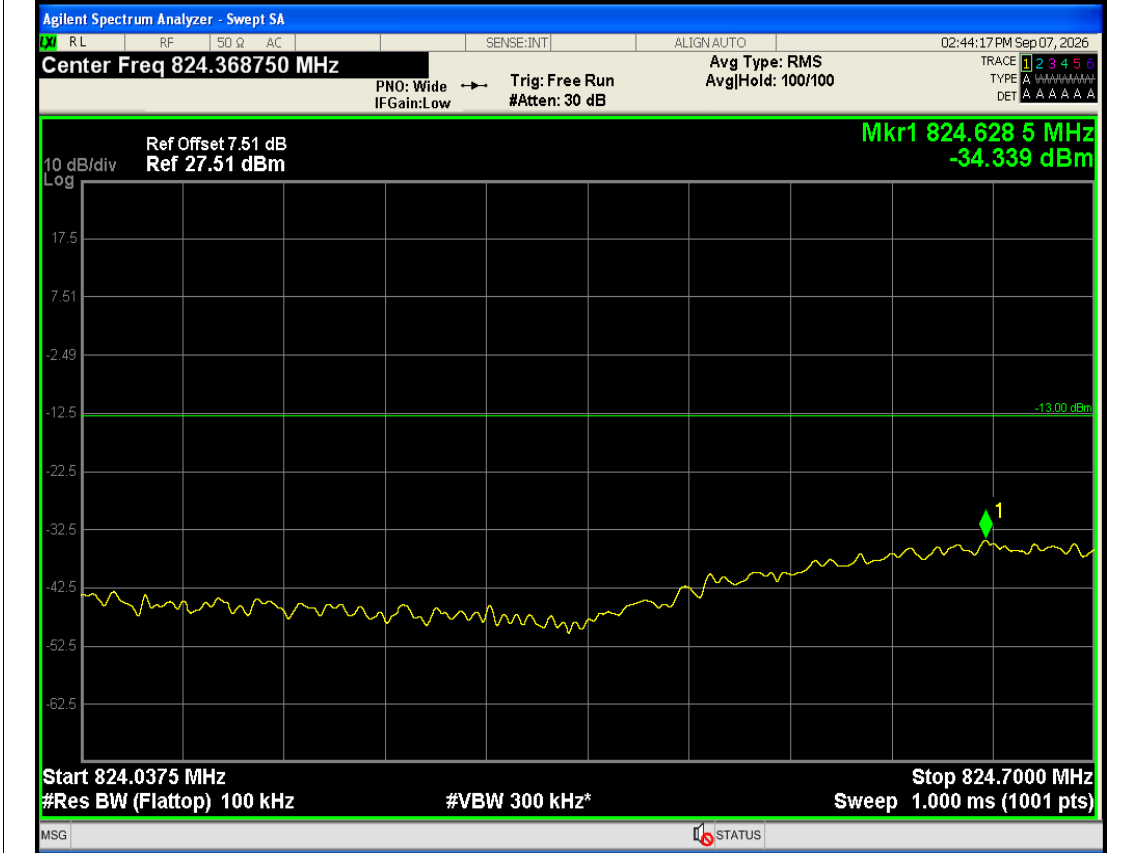


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#0 824.0375 MHz\_ 824.7 MHz NVNT

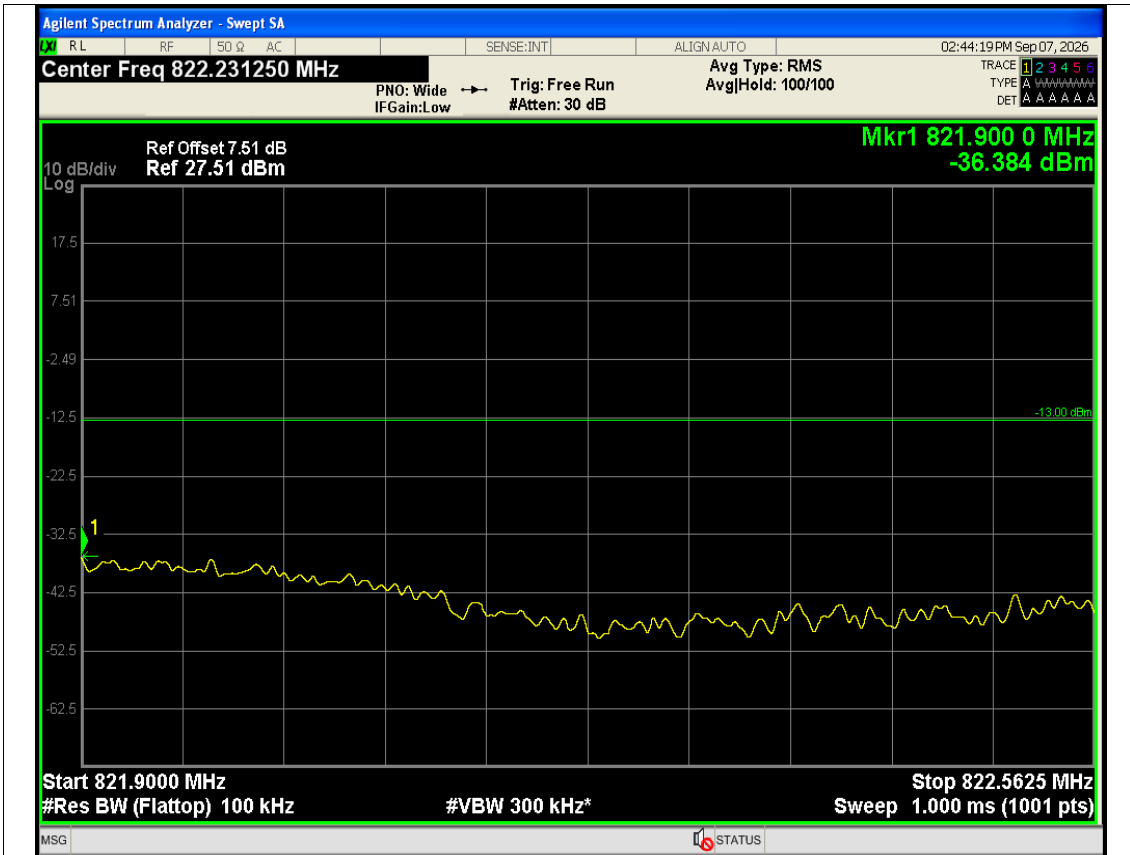

Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 821.9 MHz 822.5625 MHz NVNT

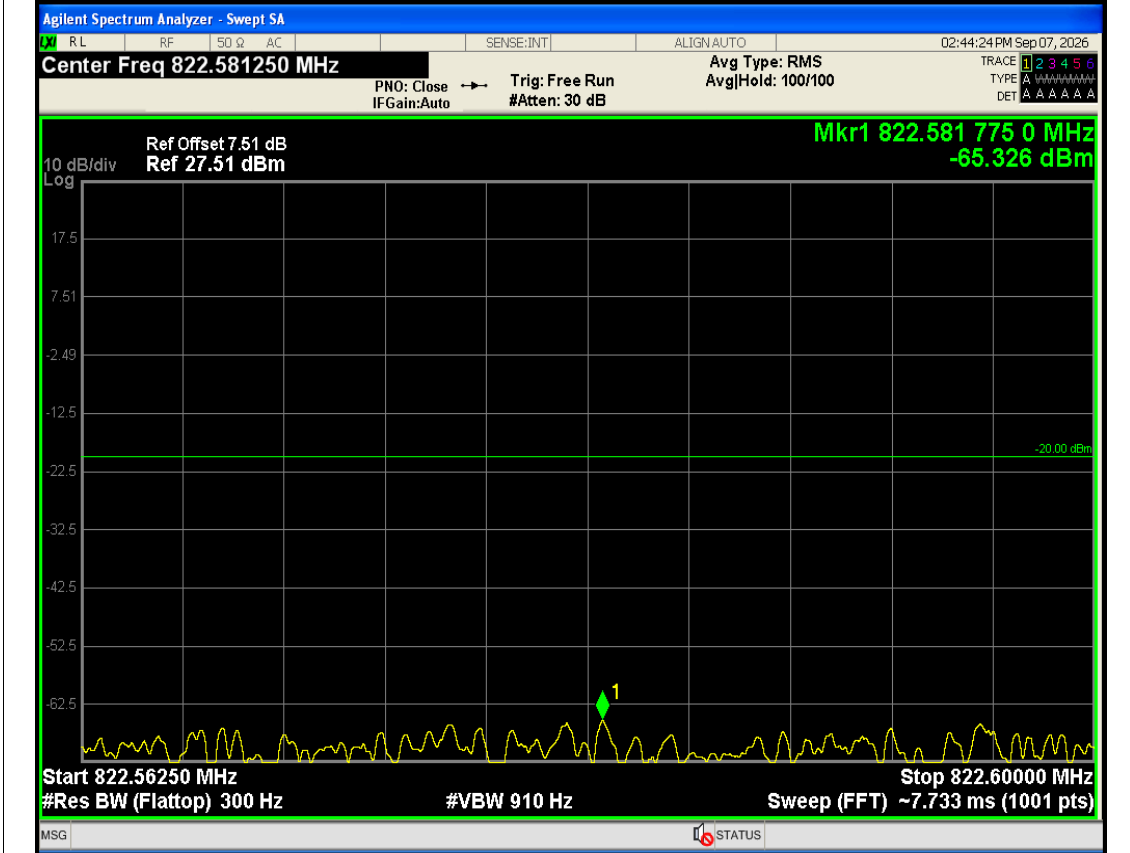


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 822.5625 MHz 822.6 MHz NVNT

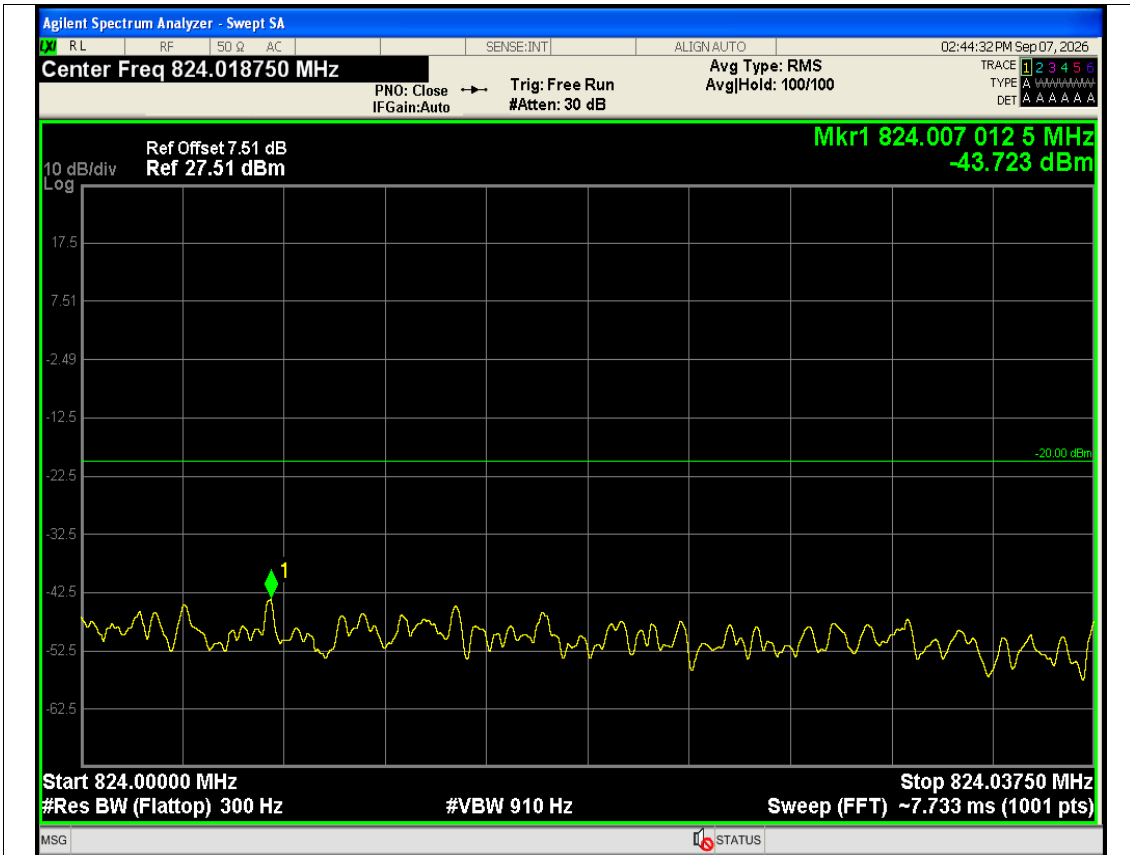


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 824 MHz 824.0375 MHz NVNT




Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 824.0375 MHz 824.7 MHz NVNT

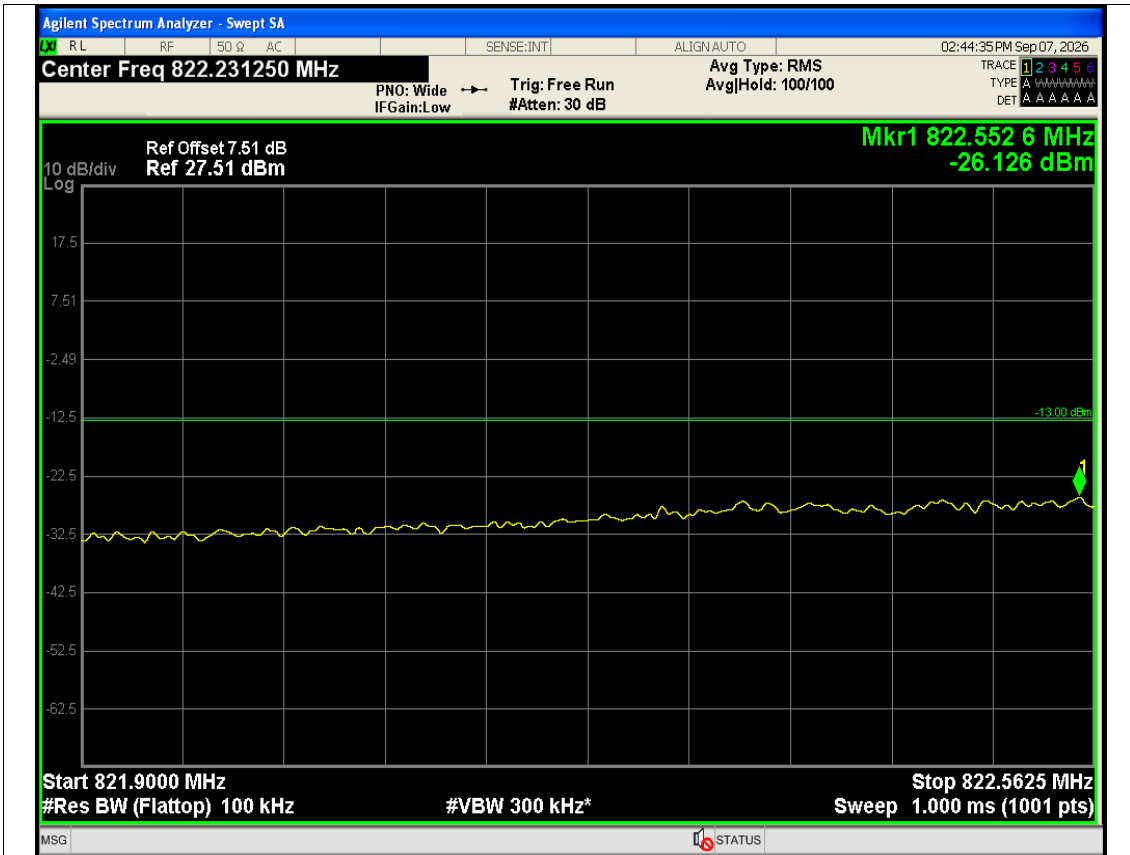


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=6 Position=#0 821.9 MHz\_ 822.5625 MHz NVNT

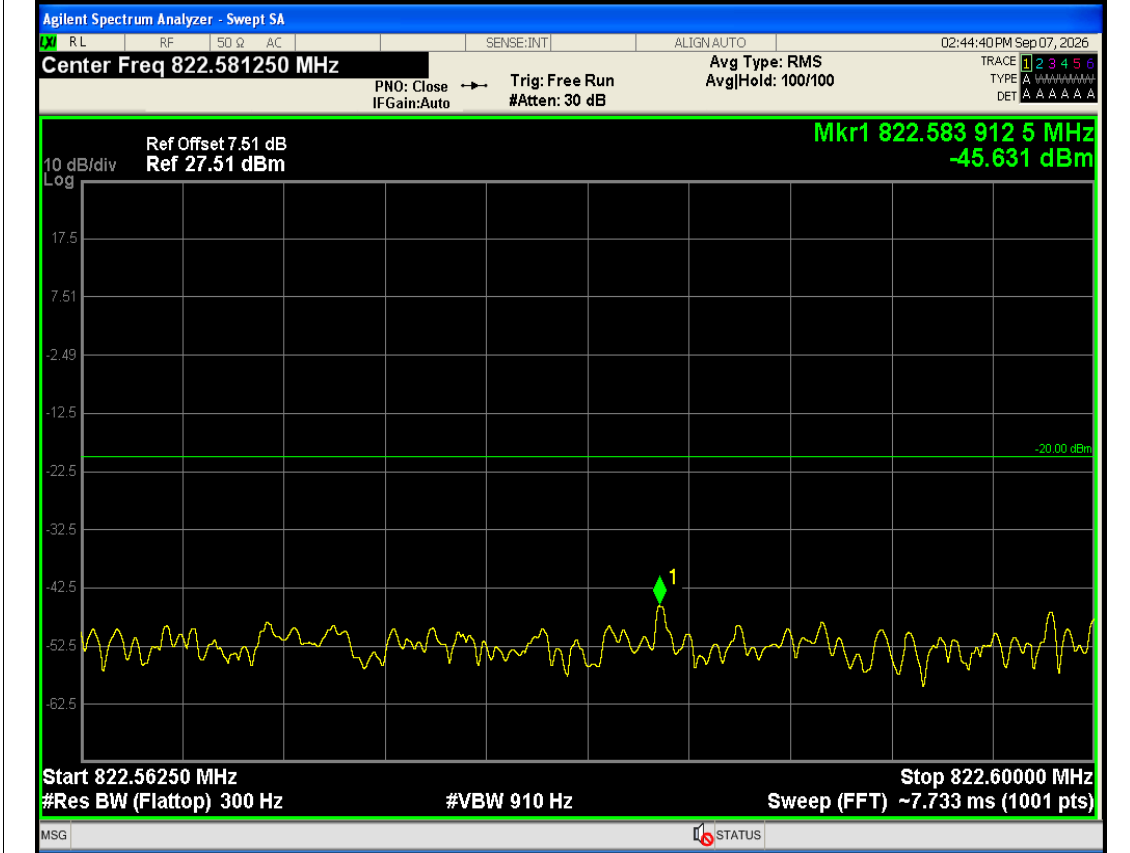


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=6 Position=#0 822.5625 MHz\_ 822.6 MHz NVNT

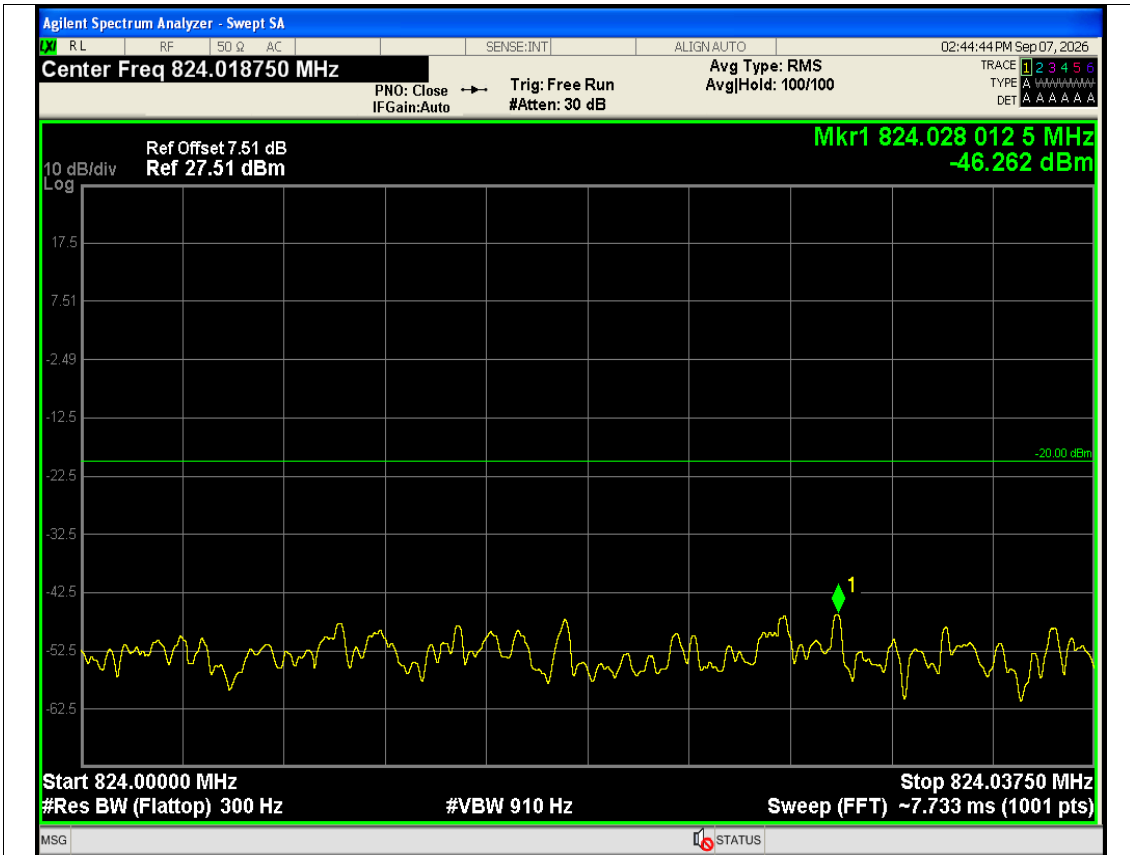


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=6 Position=#0 824 MHz 824.0375 MHz NVNT

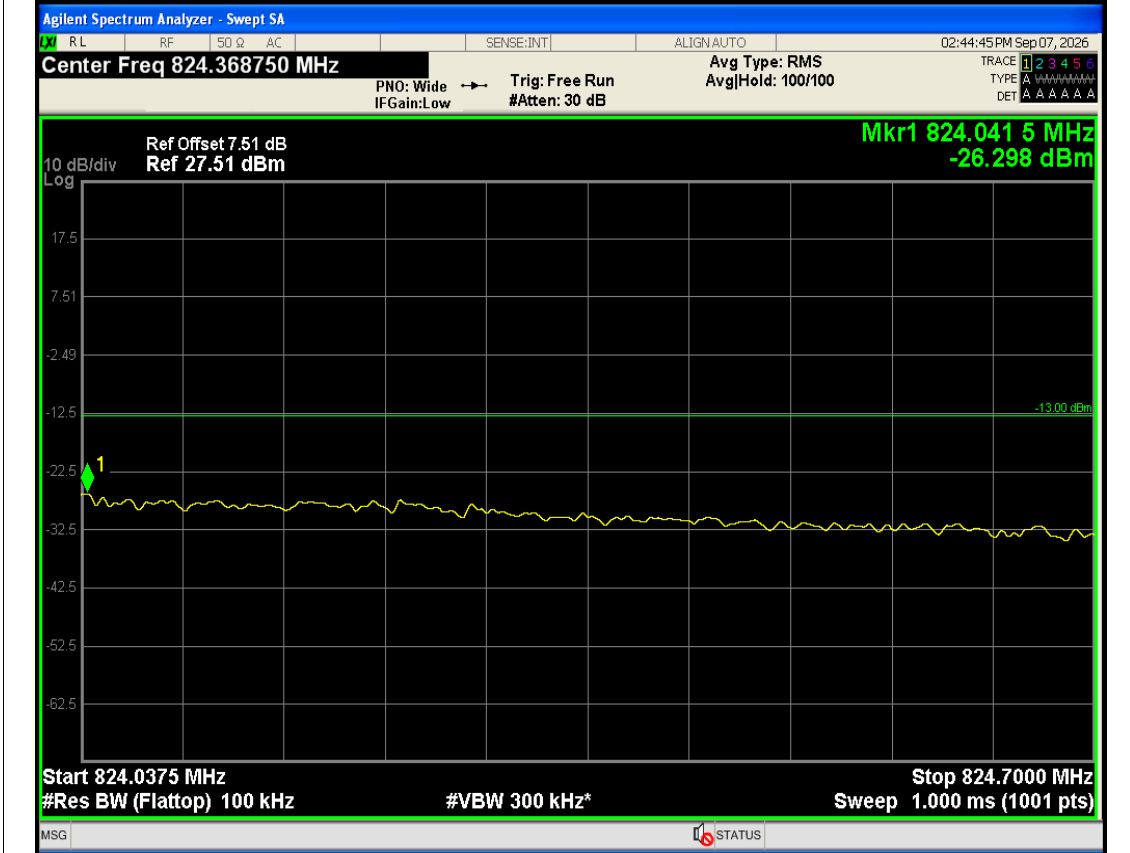


Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=6 Position=#0 824.0375 MHz 824.7 MHz NVNT

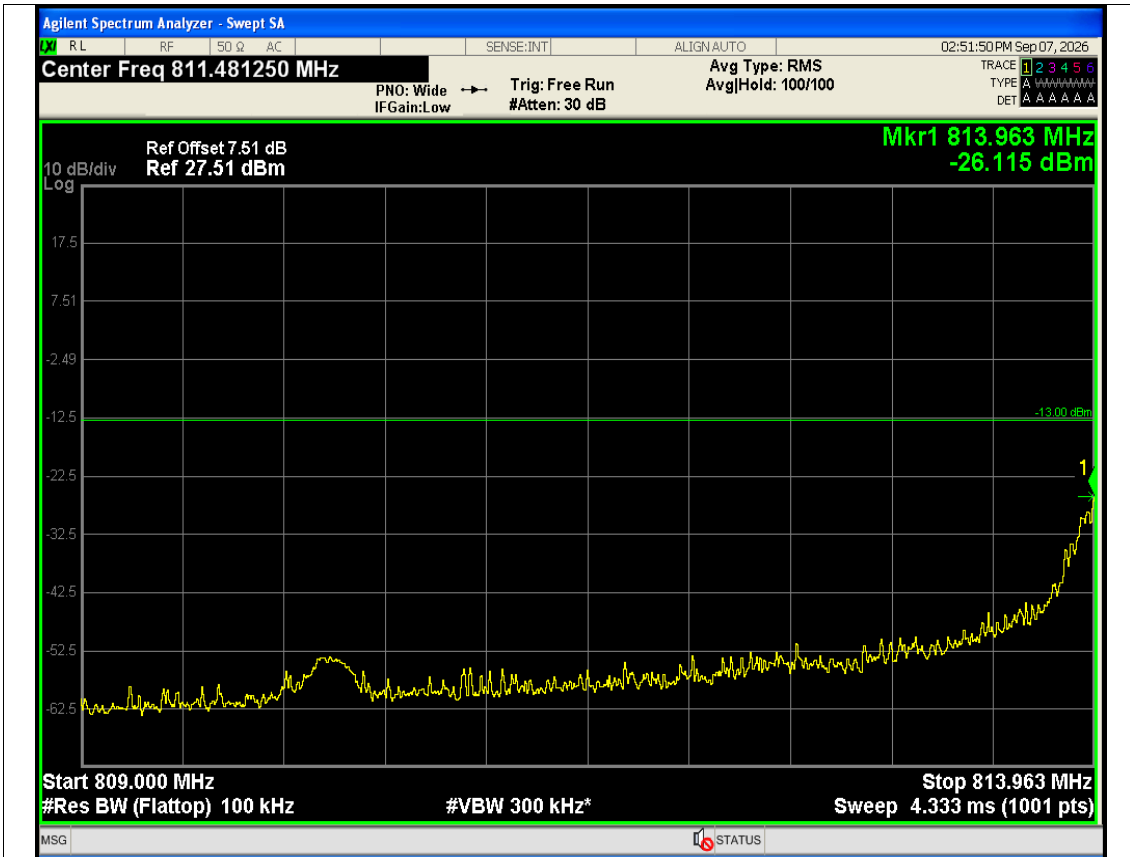


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#0 809 MHz 813.9625 MHz NVNT

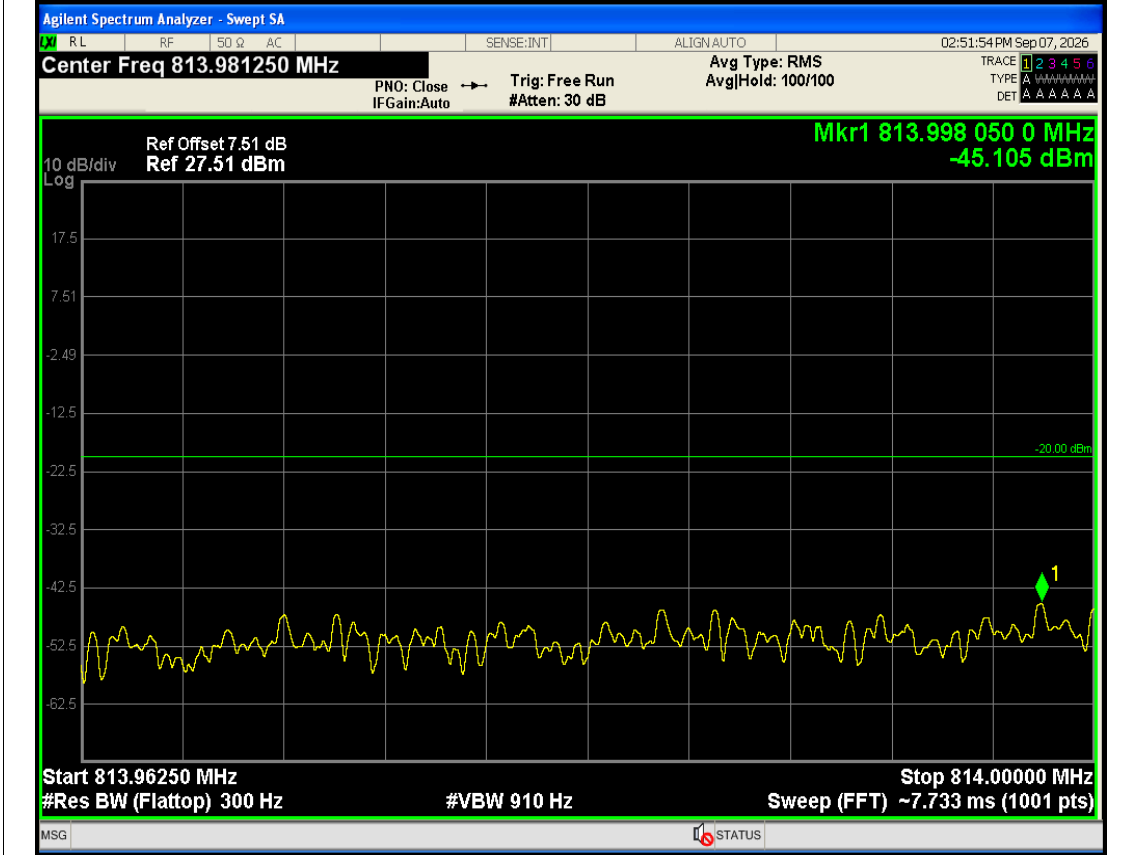


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#0 813.9625 MHz 814 MHz NVNT

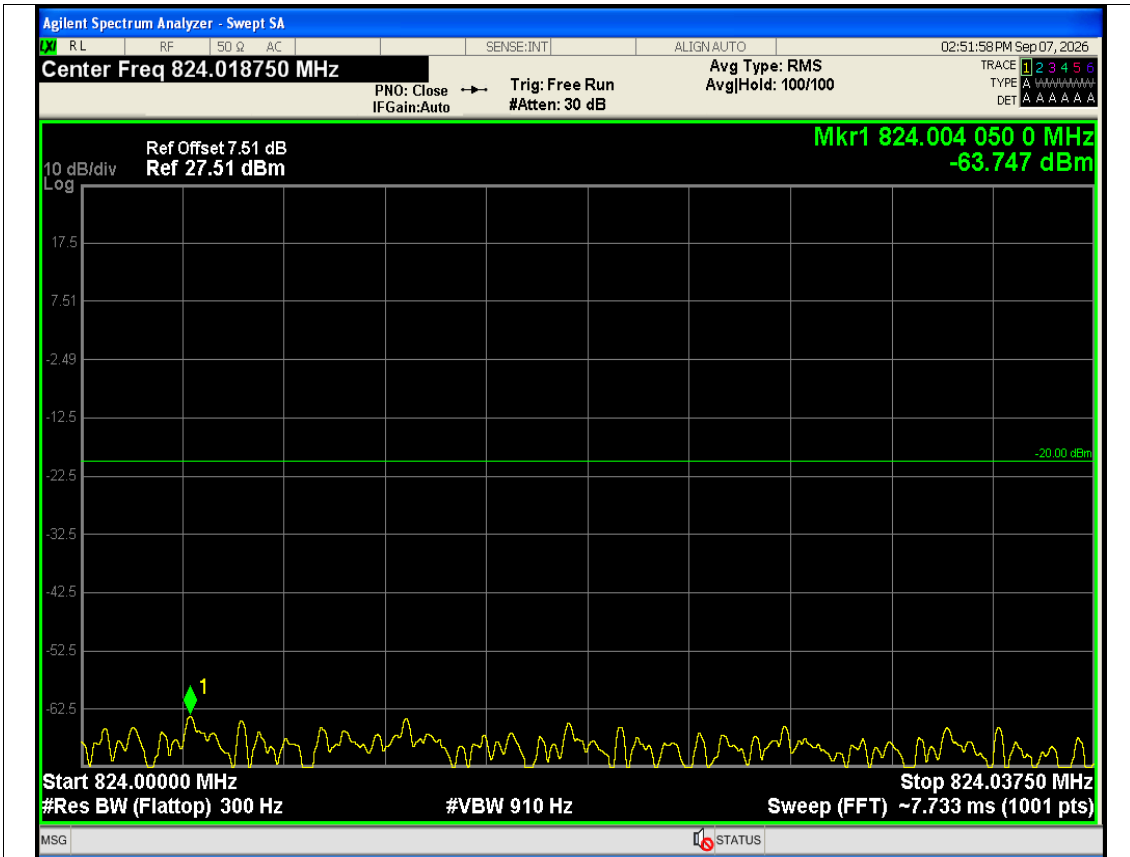


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#0 824 MHz 824.0375 MHz NVNT

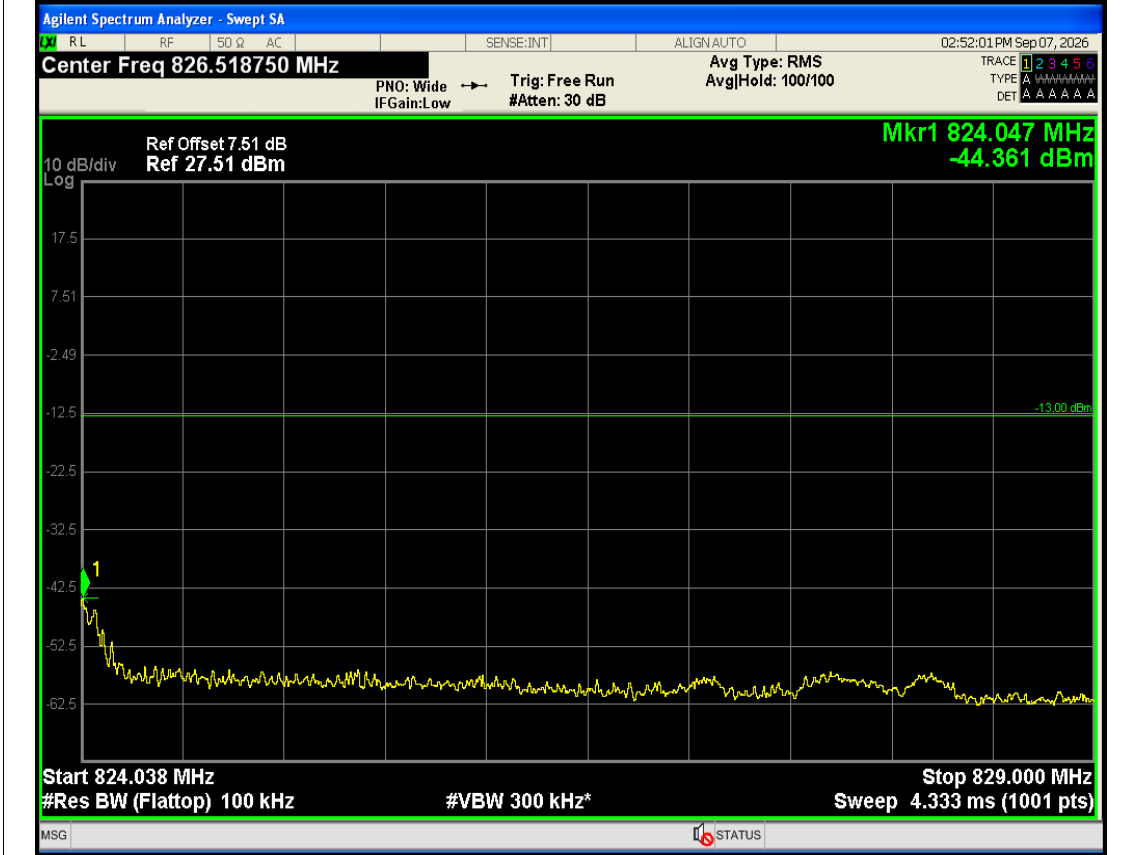


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#0 824.0375 MHz 829 MHz NVNT

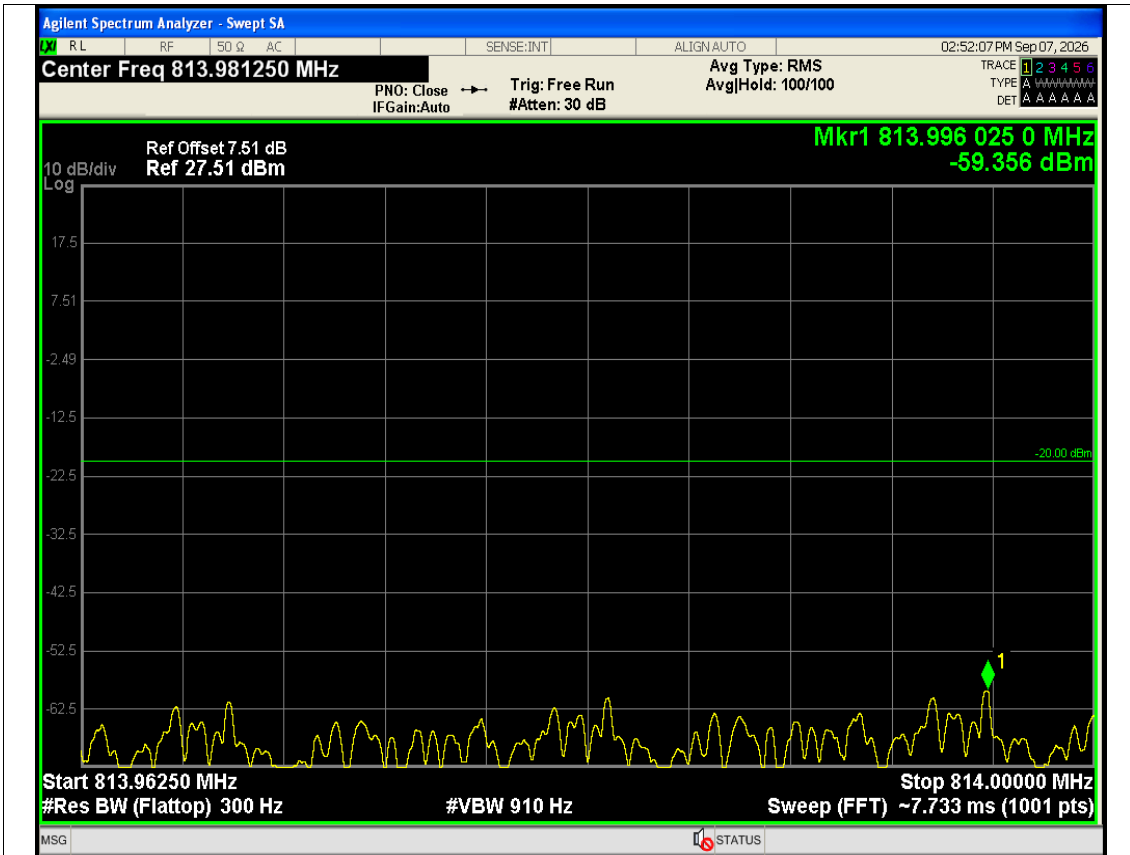


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#Max 813.9625 MHz\_ 814 MHz NVNT

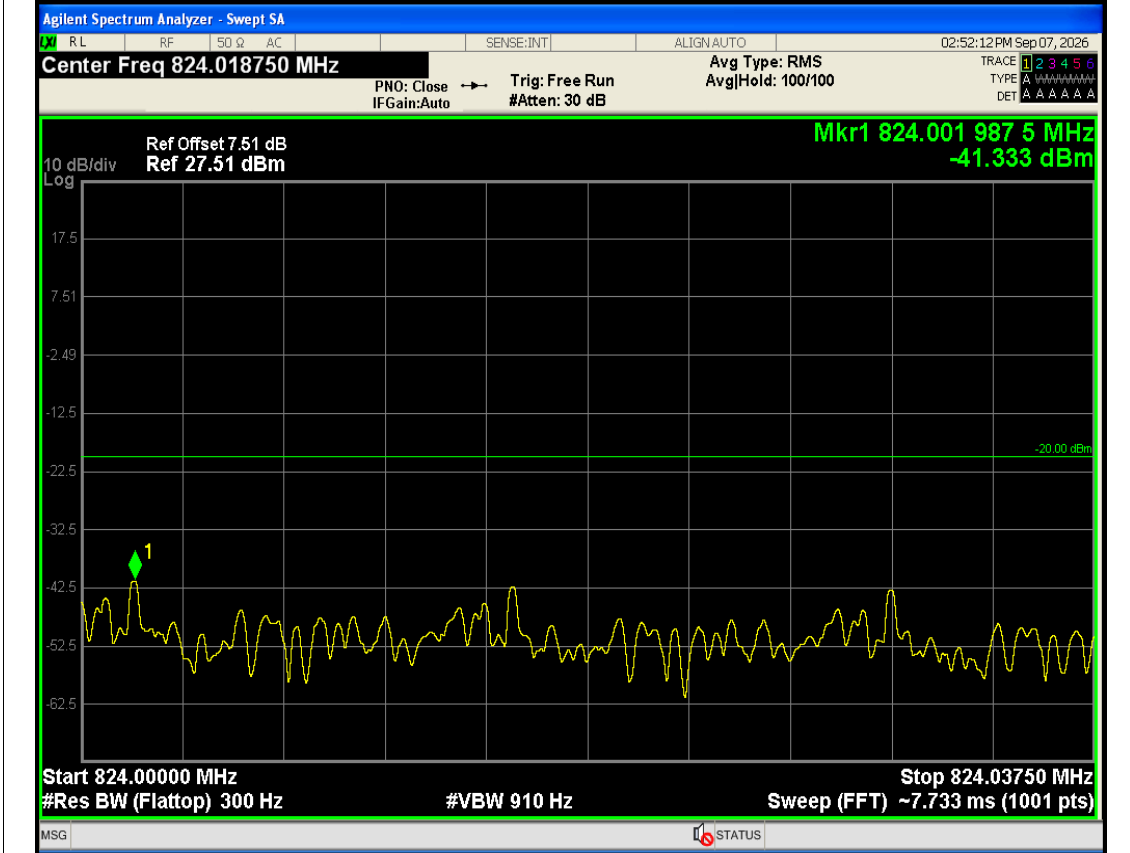


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#Max 824 MHz\_ 824.0375 MHz NVNT

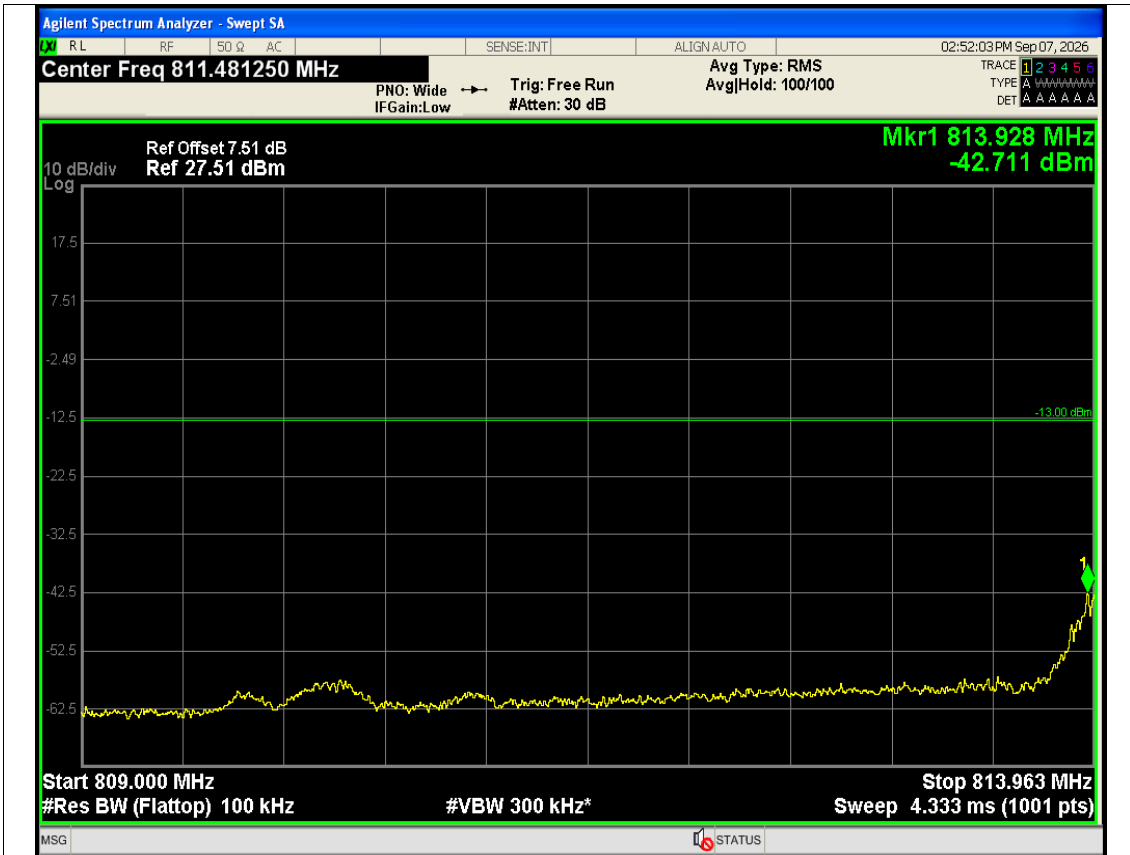


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#Max 809 MHz 813.9625 MHz NVNT

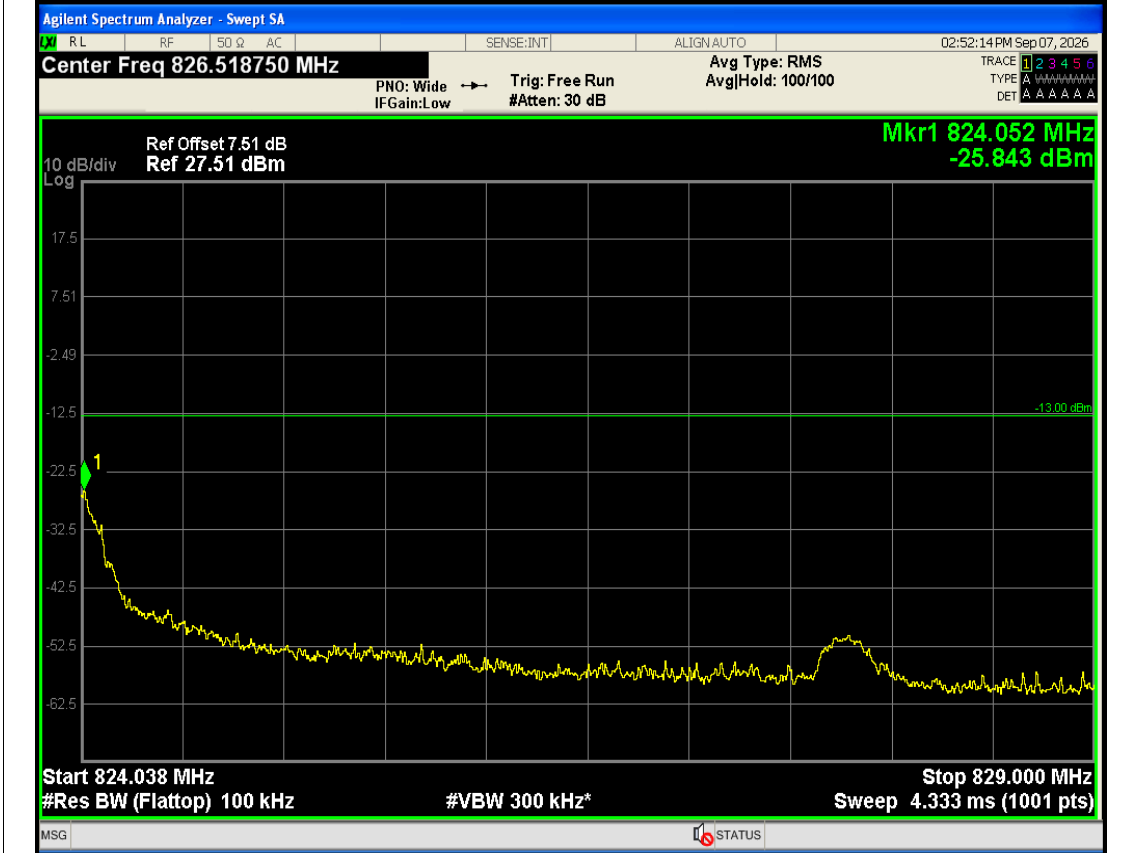


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=1 Position=#Max 824.0375 MHz 829 MHz NVNT

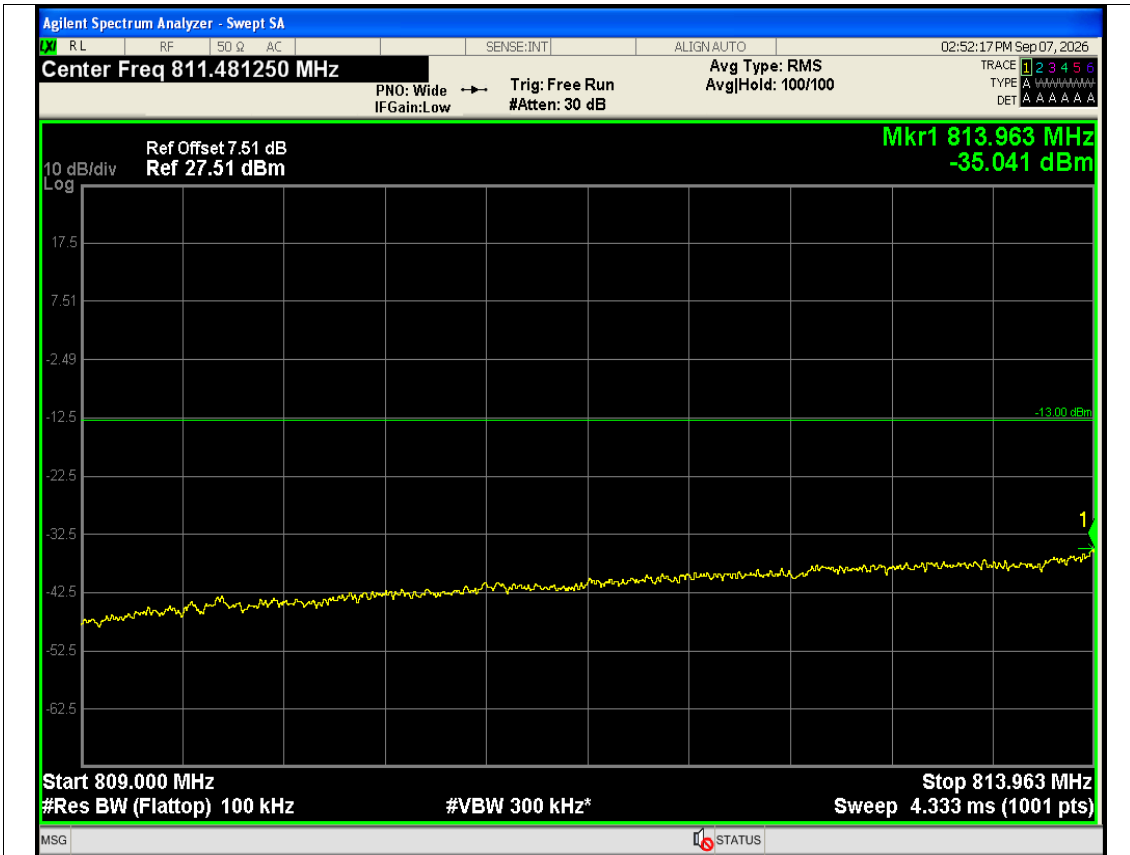


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=50 Position=#0 809 MHz 813.9625 MHz NVNT

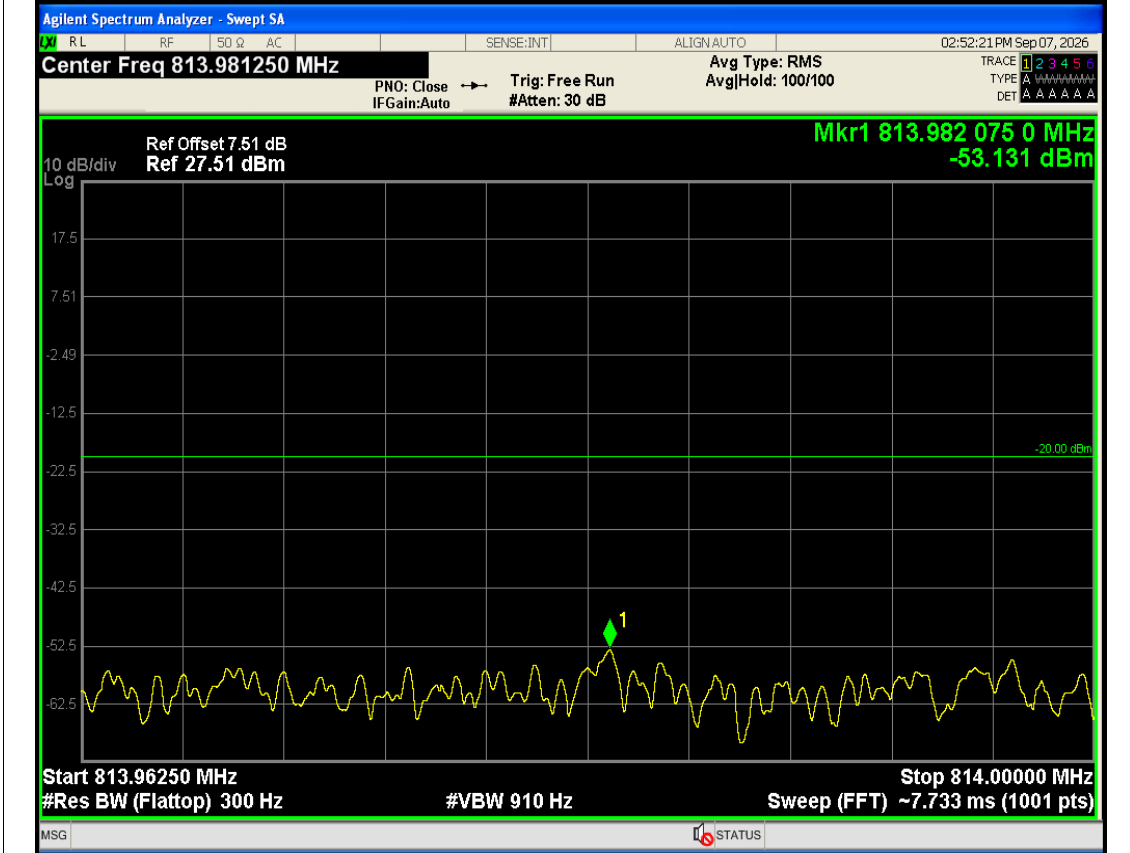


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=50 Position=#0 813.9625 MHz 814 MHz NVNT

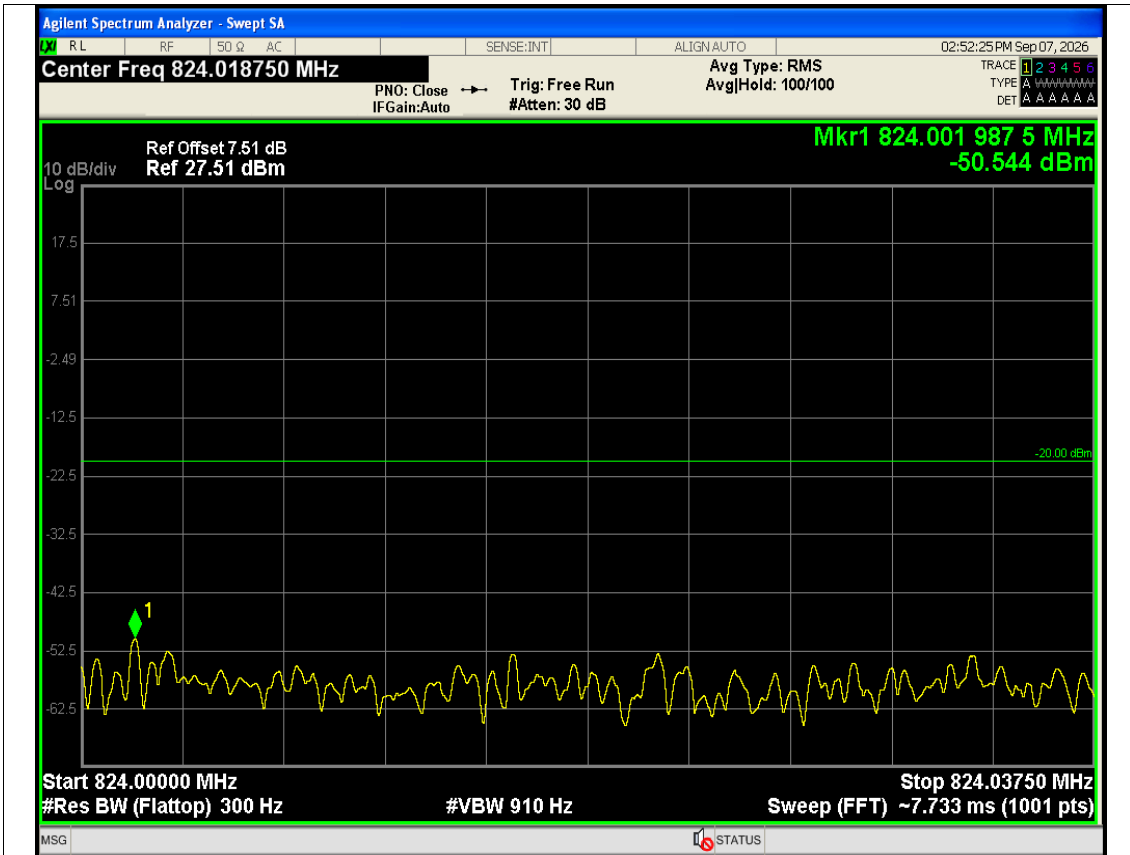


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=50 Position=#0 824 MHz 824.0375 MHz NVNT

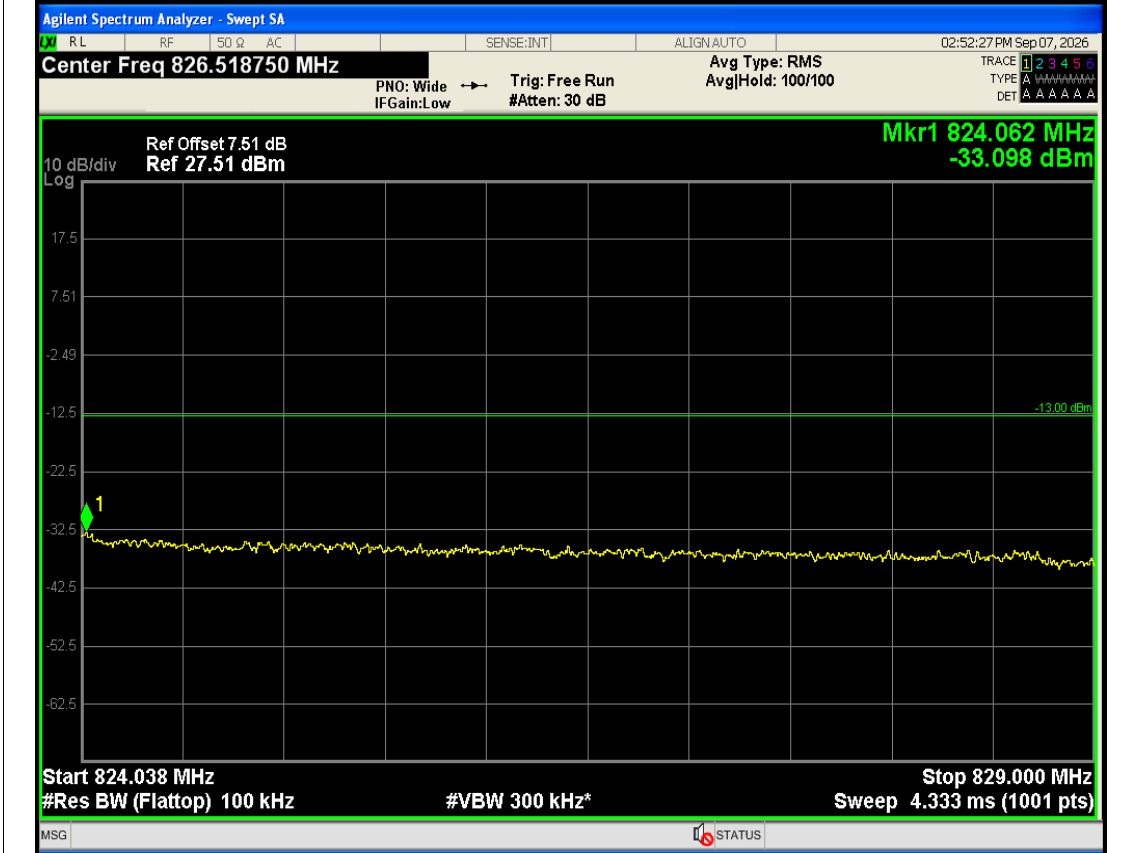


Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=50 Position=#0 824.0375 MHz 829 MHz NVNT

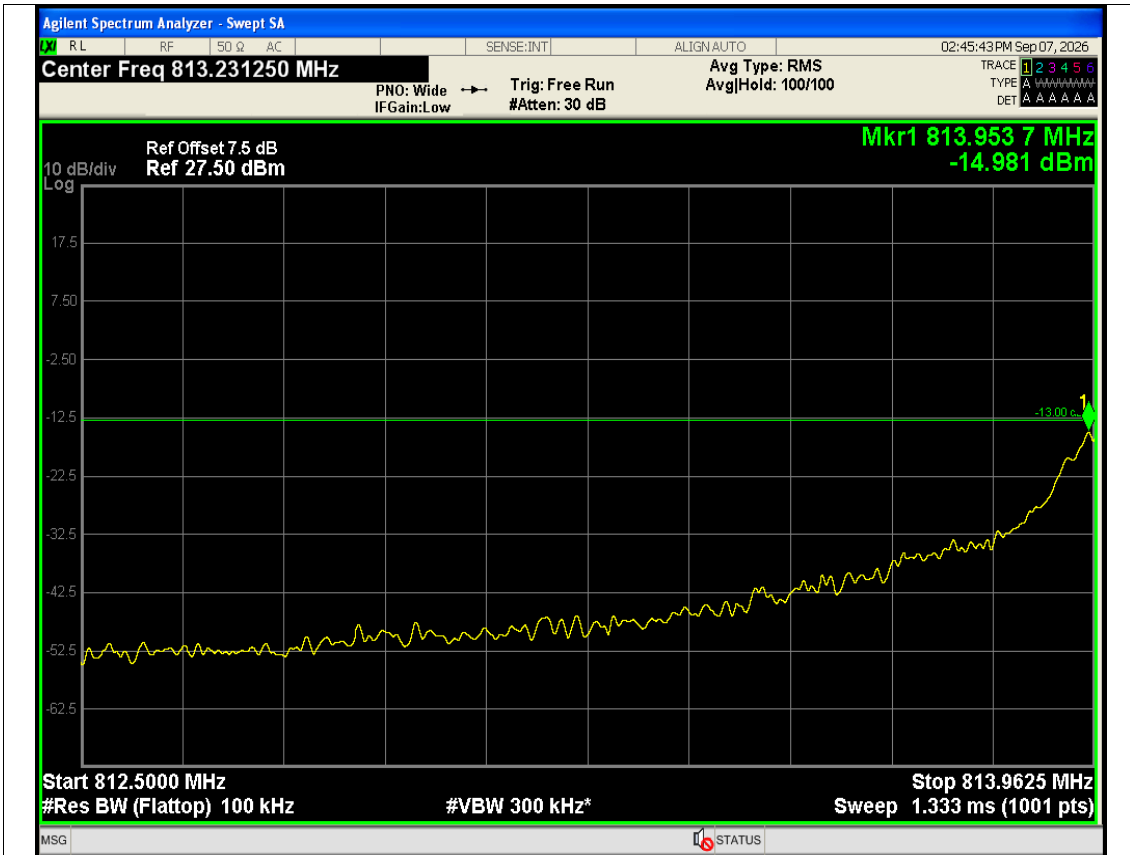


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#0 812.5 MHz 813.9625 MHz NVNT

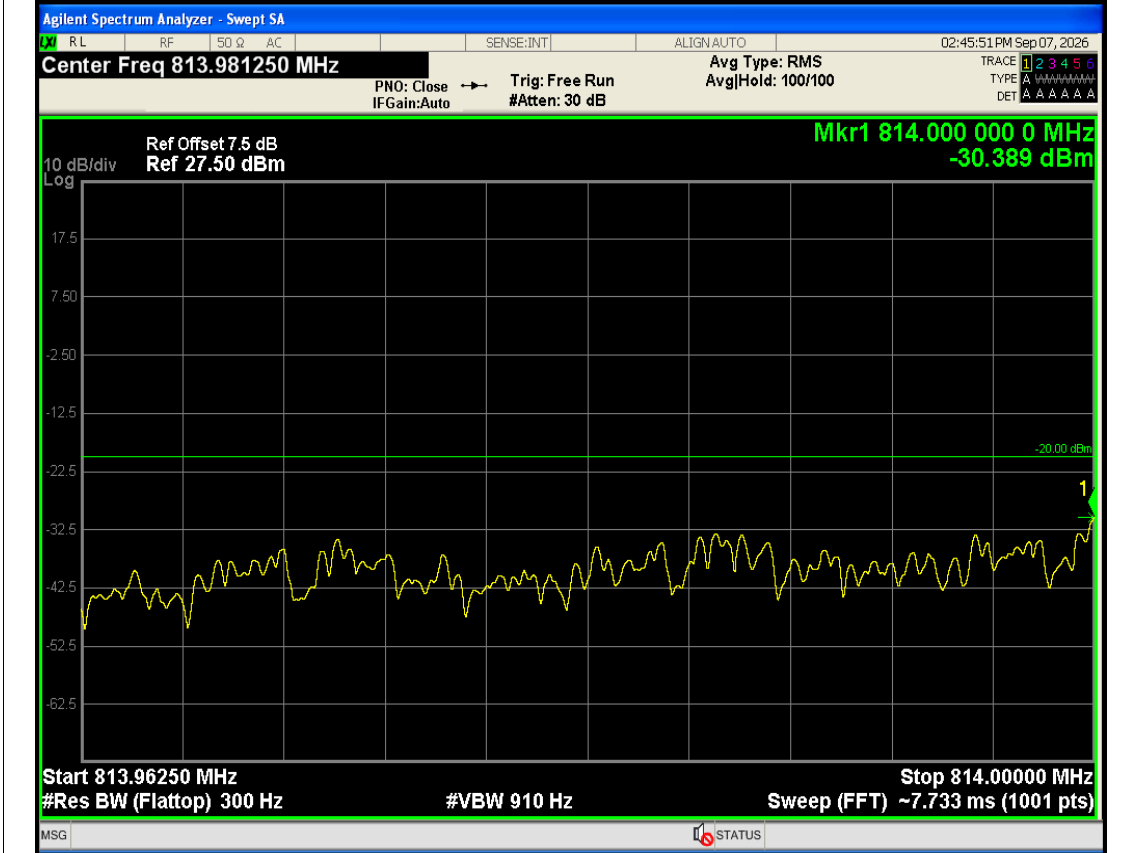


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#0 813.9625 MHz 814 MHz NVNT

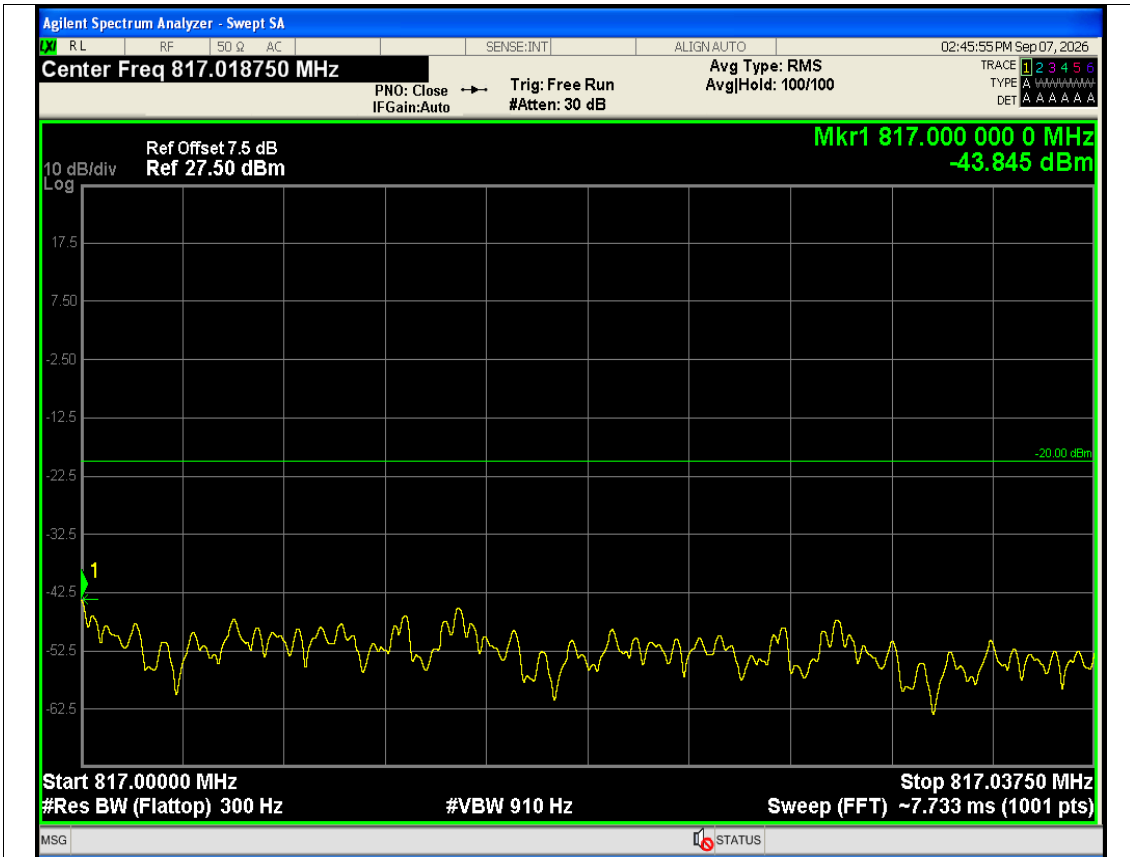


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#0 817 MHz 817.0375 MHz NVNT

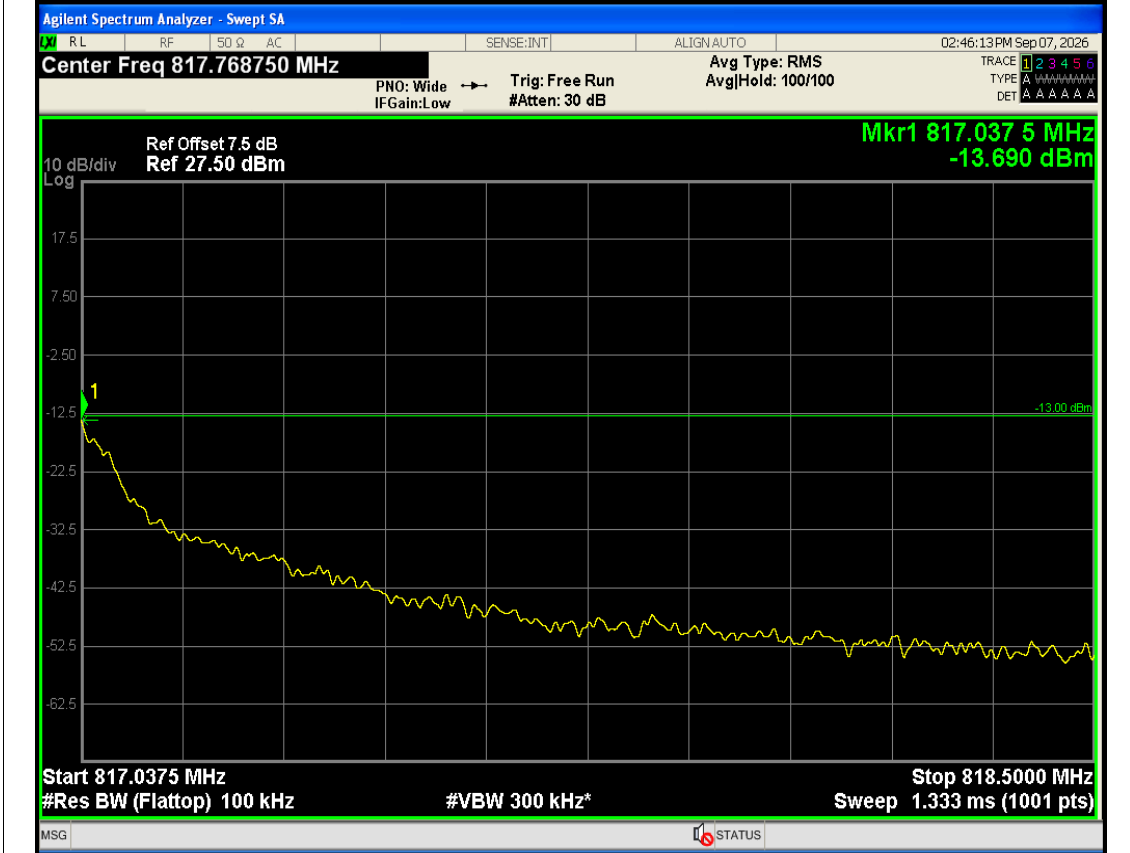


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#Max 817.0375 MHz 818.5 MHz NVNT

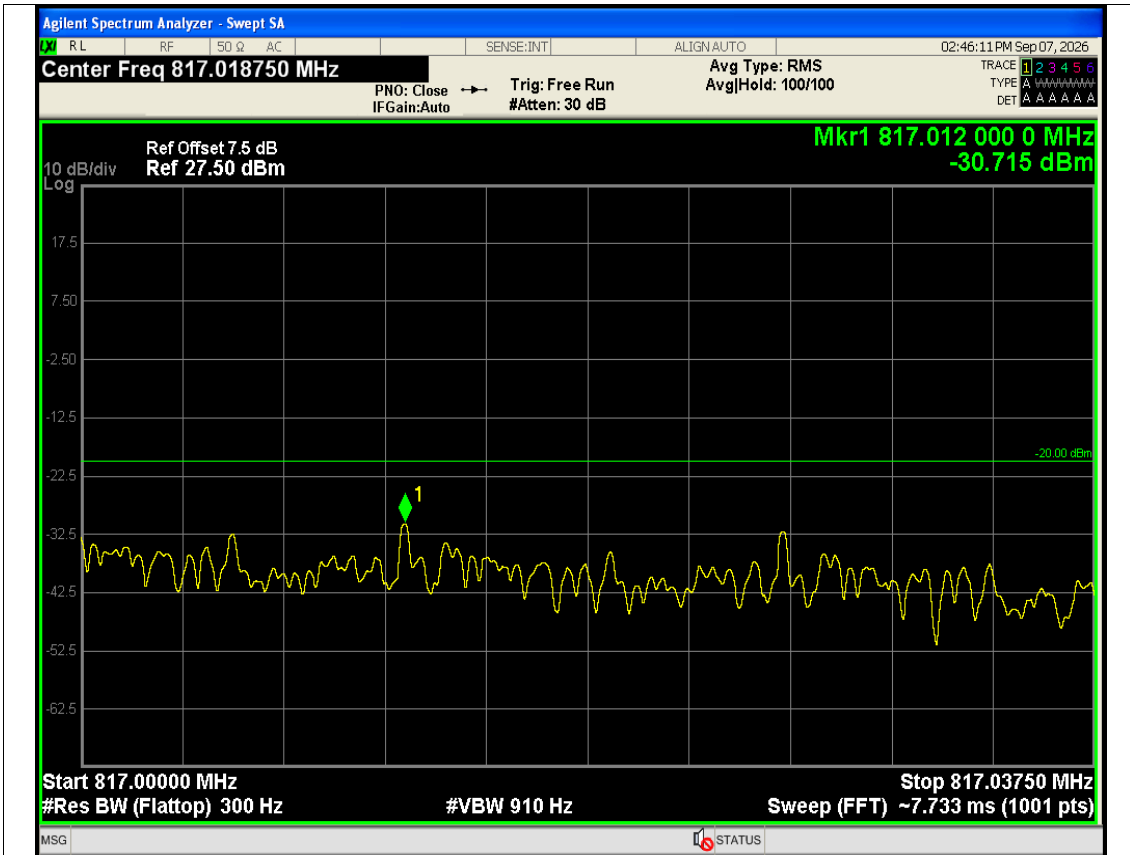


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#Max 817 MHz 817.0375 MHz NVNT

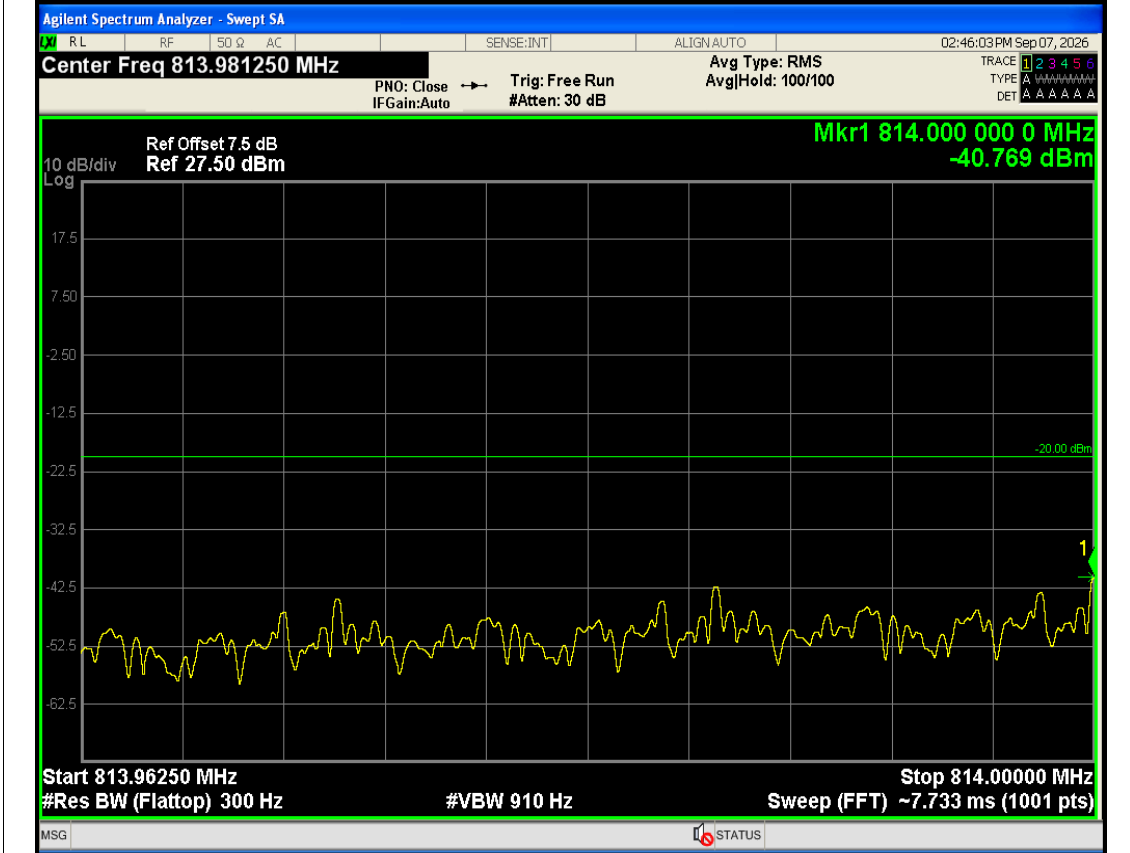


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#Max 813.9625 MHz 814 MHz NVNT

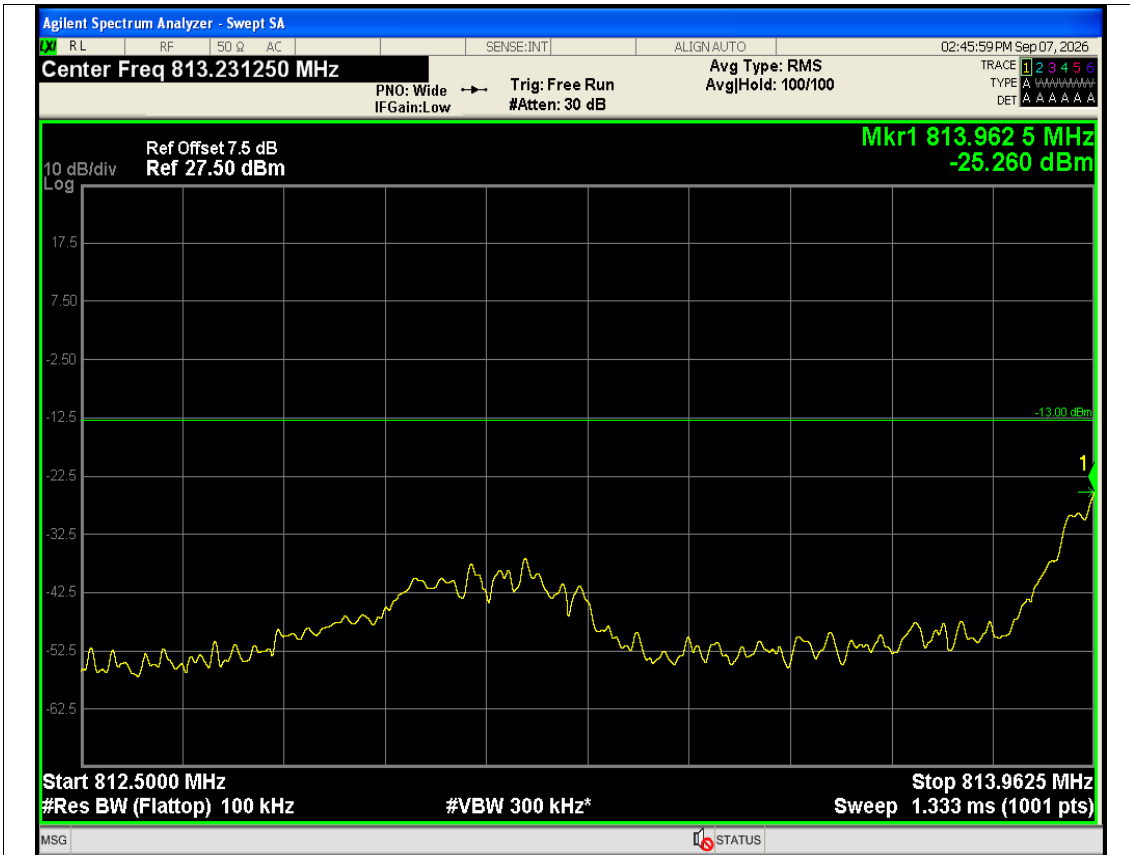


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#Max 812.5 MHz 813.9625 MHz NVNT

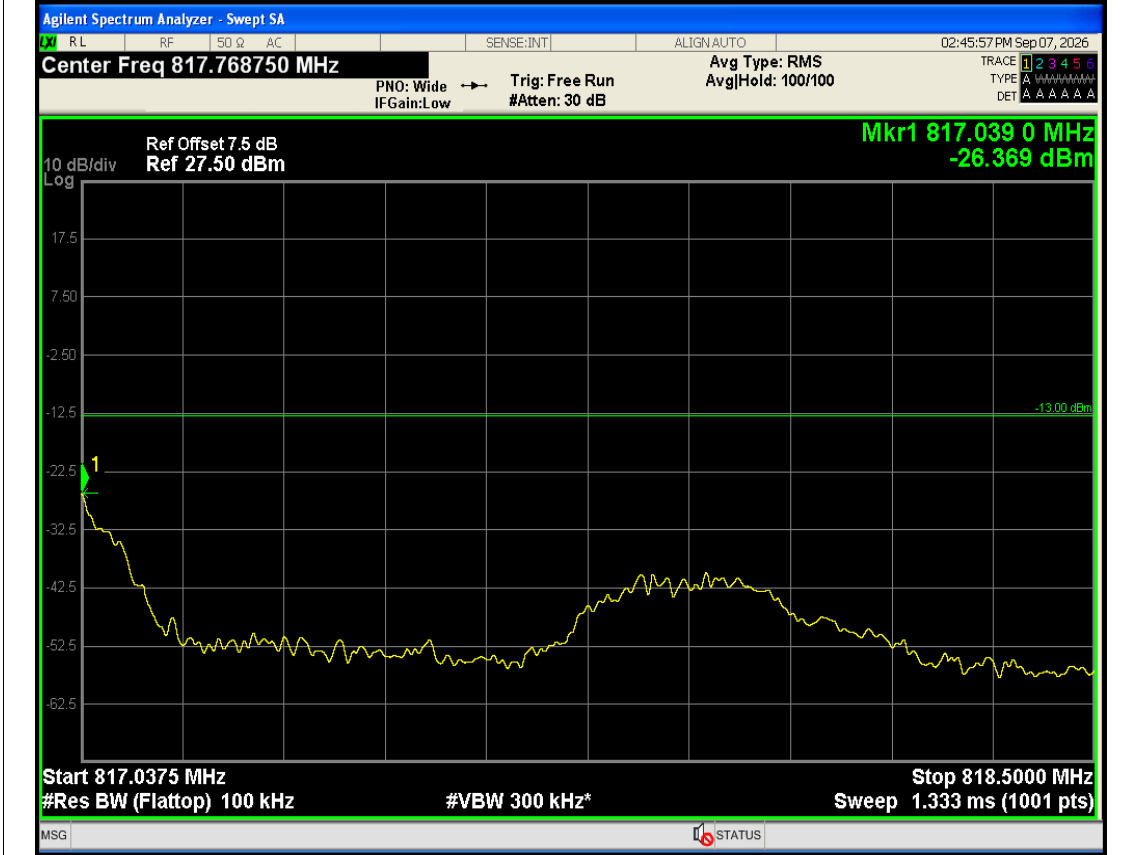


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=1 Position=#0 817.0375 MHz 818.5 MHz NVNT

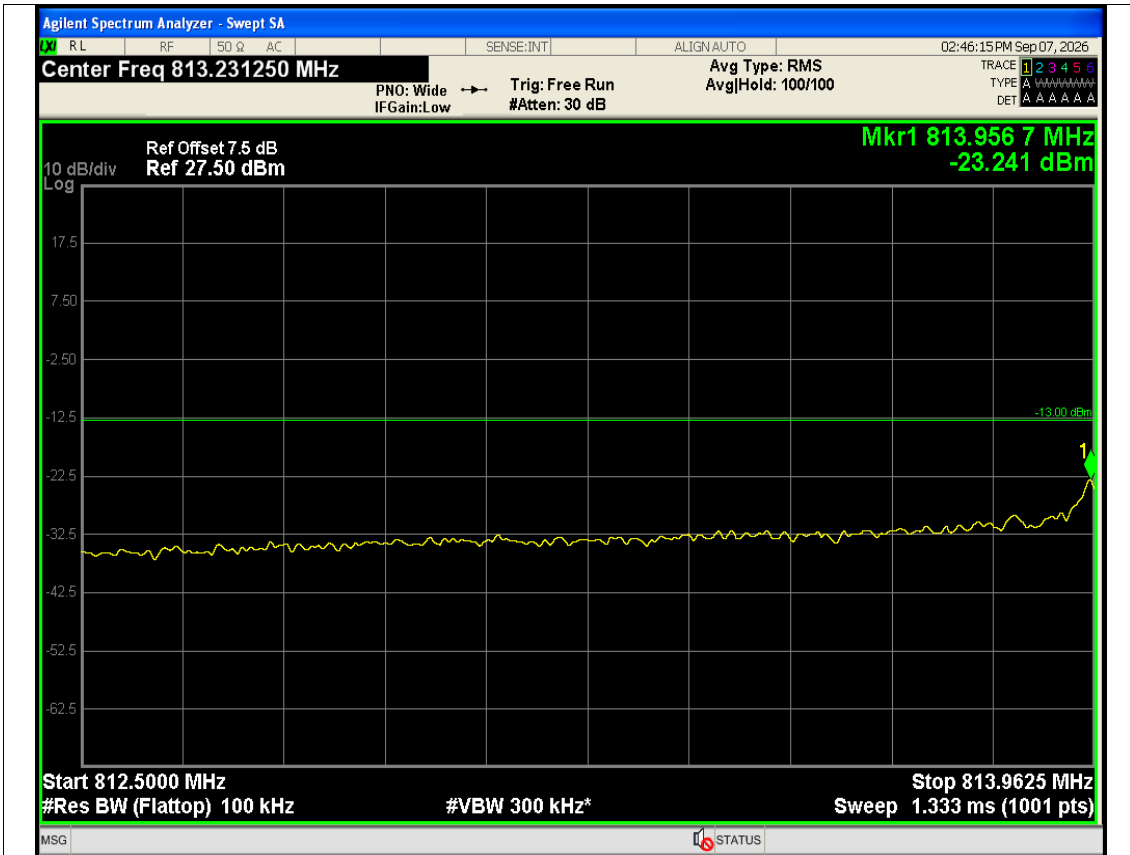


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=15 Position=#0 812.5 MHz 813.9625 MHz NVNT

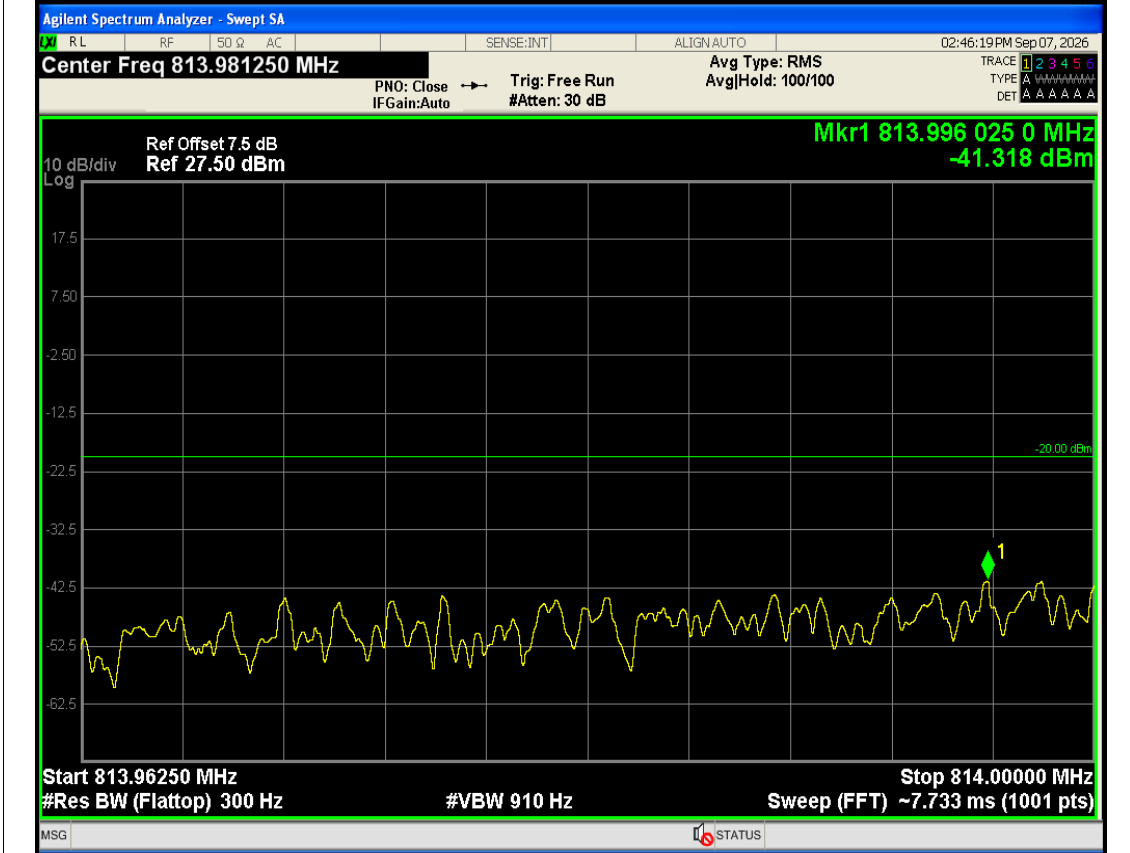


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=15 Position=#0 813.9625 MHz 814 MHz NVNT

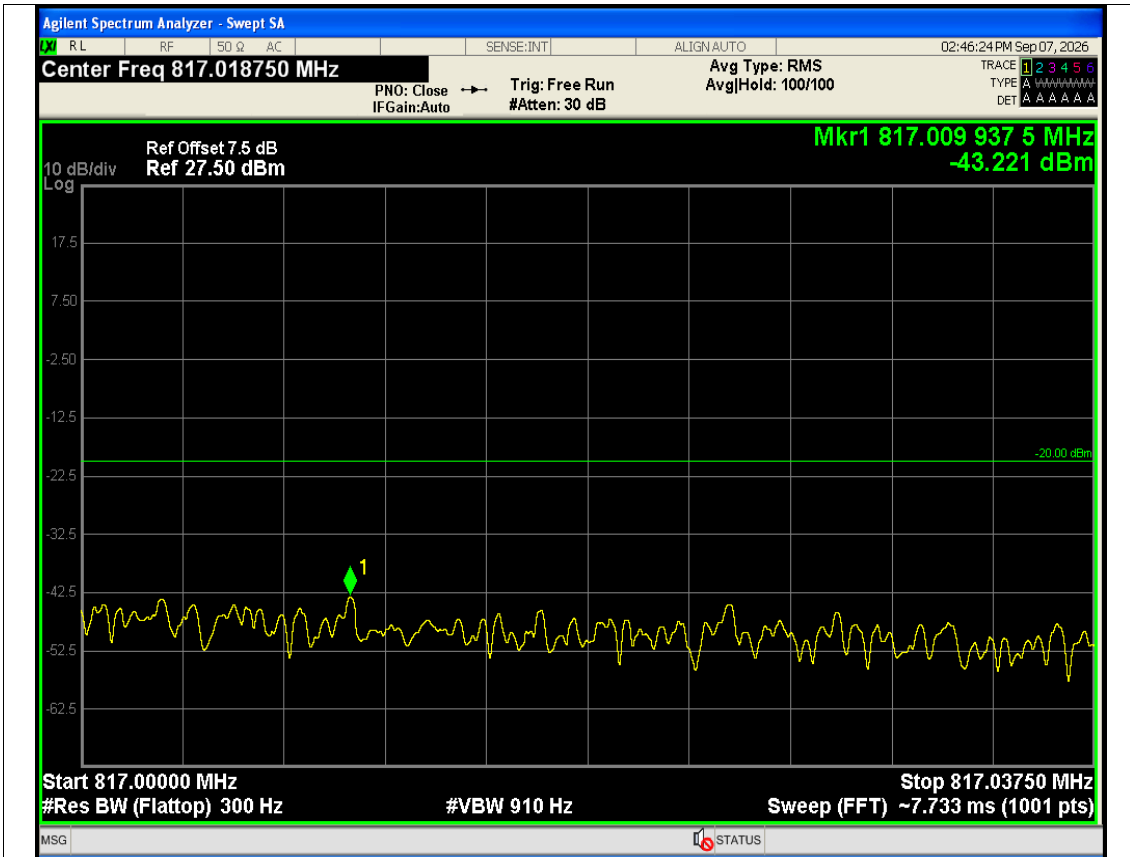


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=15 Position=#0 817 MHz 817.0375 MHz NVNT

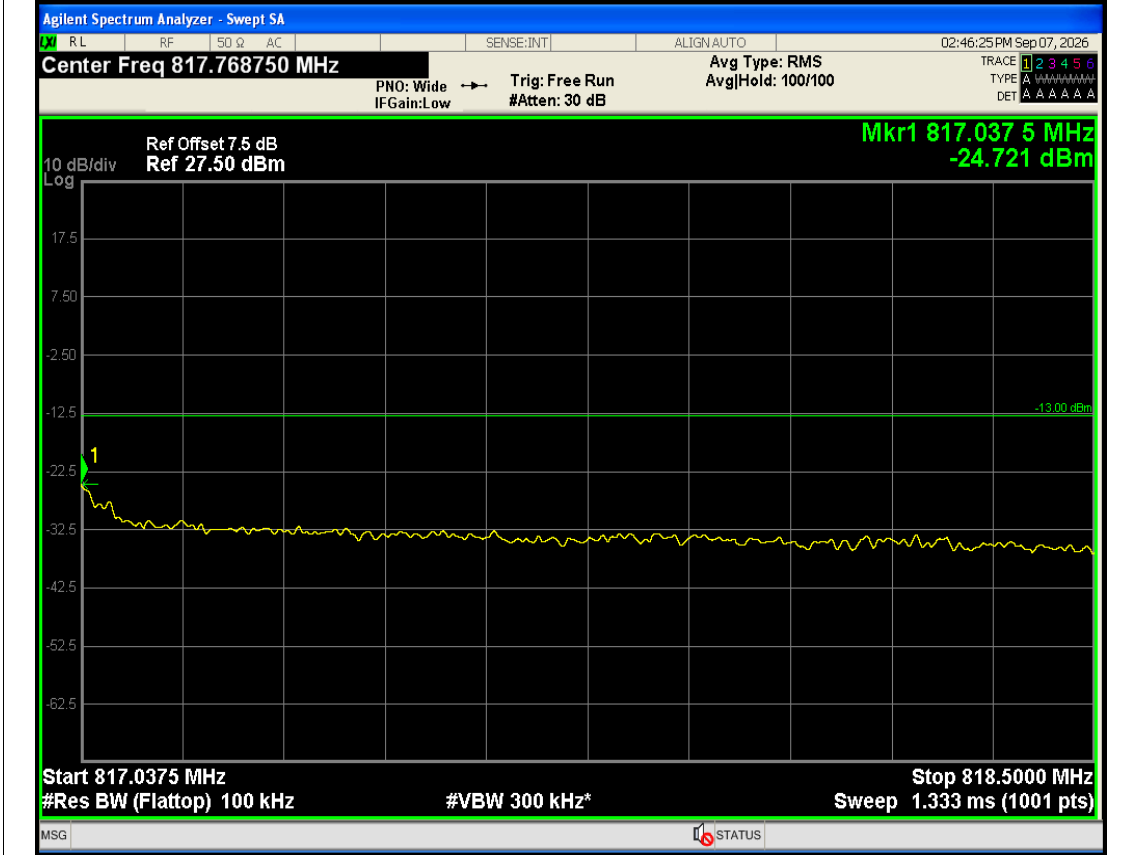


Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=15 Position=#0 817.0375 MHz 818.5 MHz NVNT

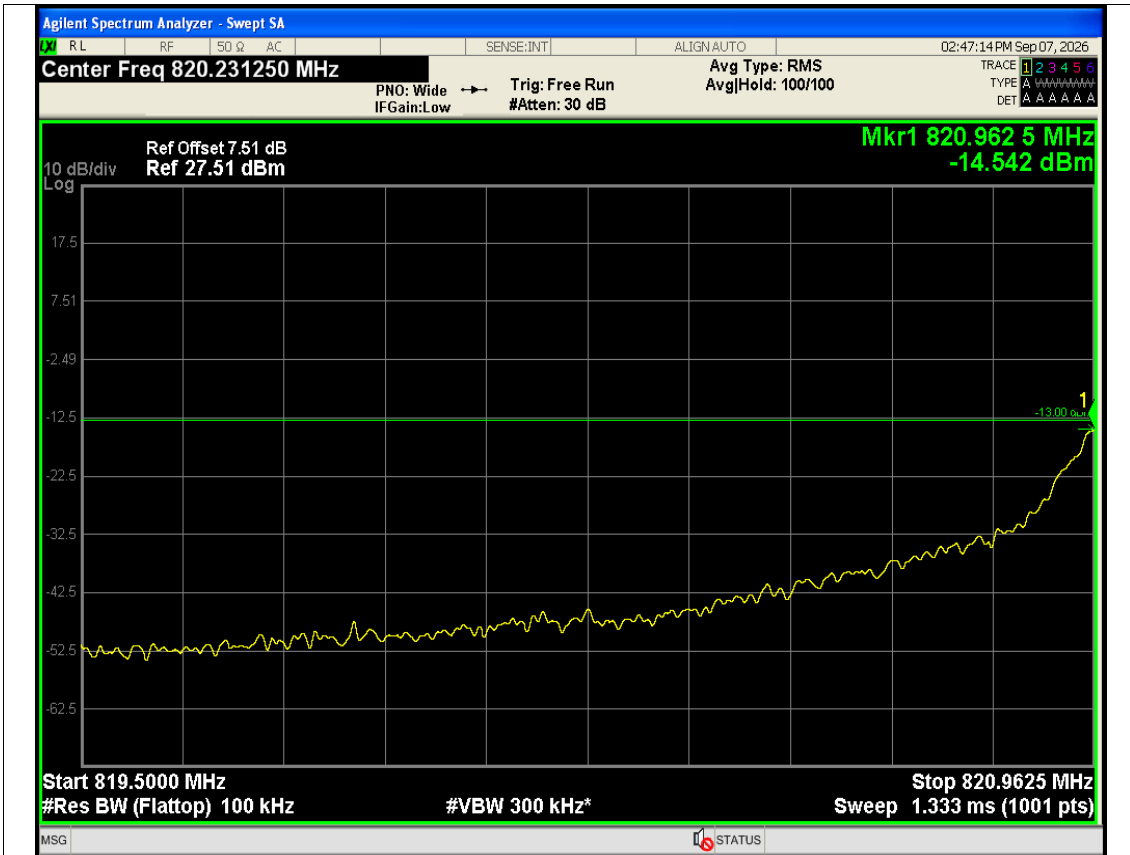


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#0 819.5 MHz 820.9625 MHz NVNT

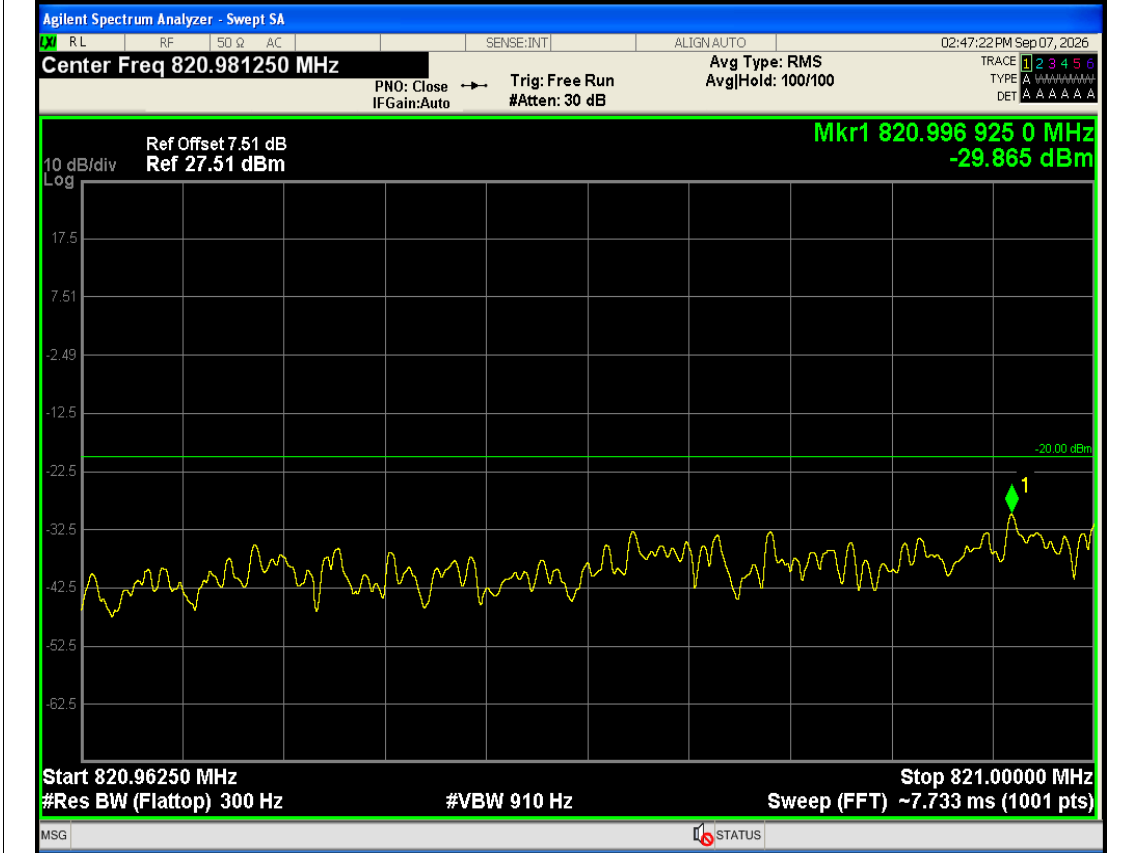

Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#0 820.9625 MHz 821 MHz NVNT

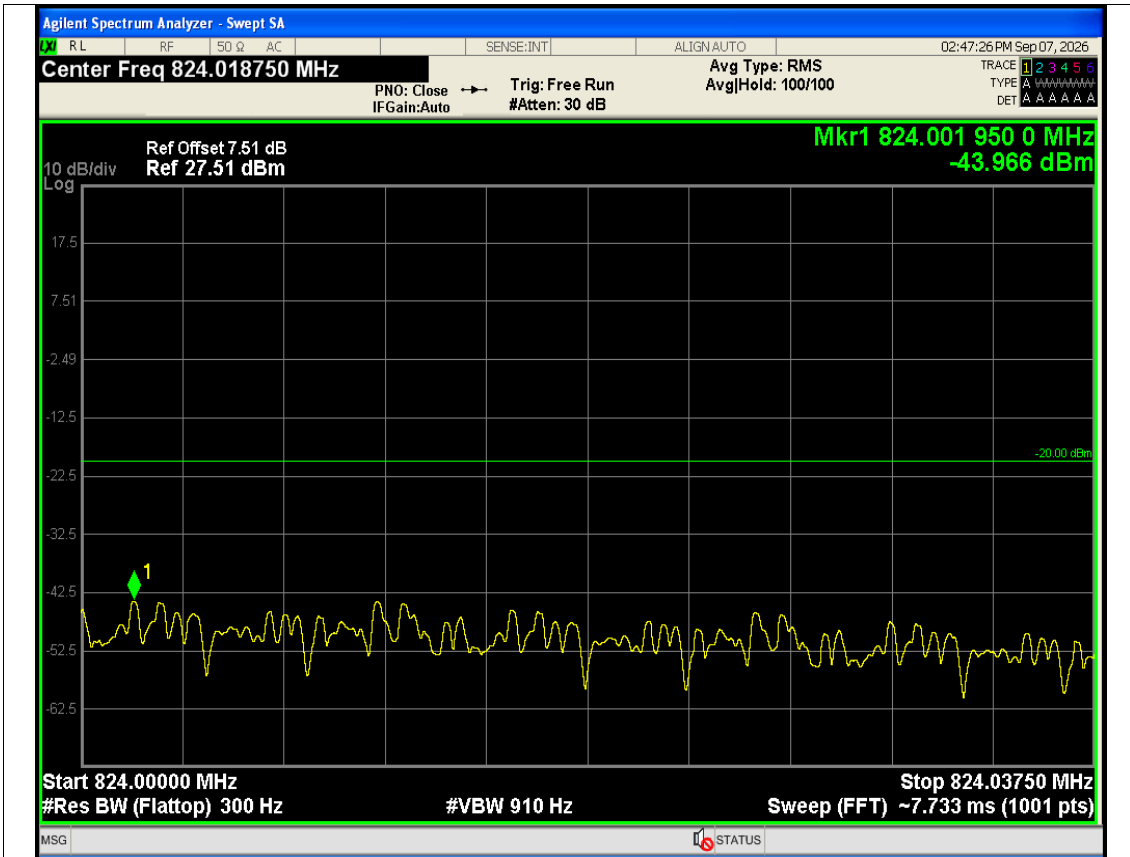


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#0 824 MHz 824.0375 MHz NVNT

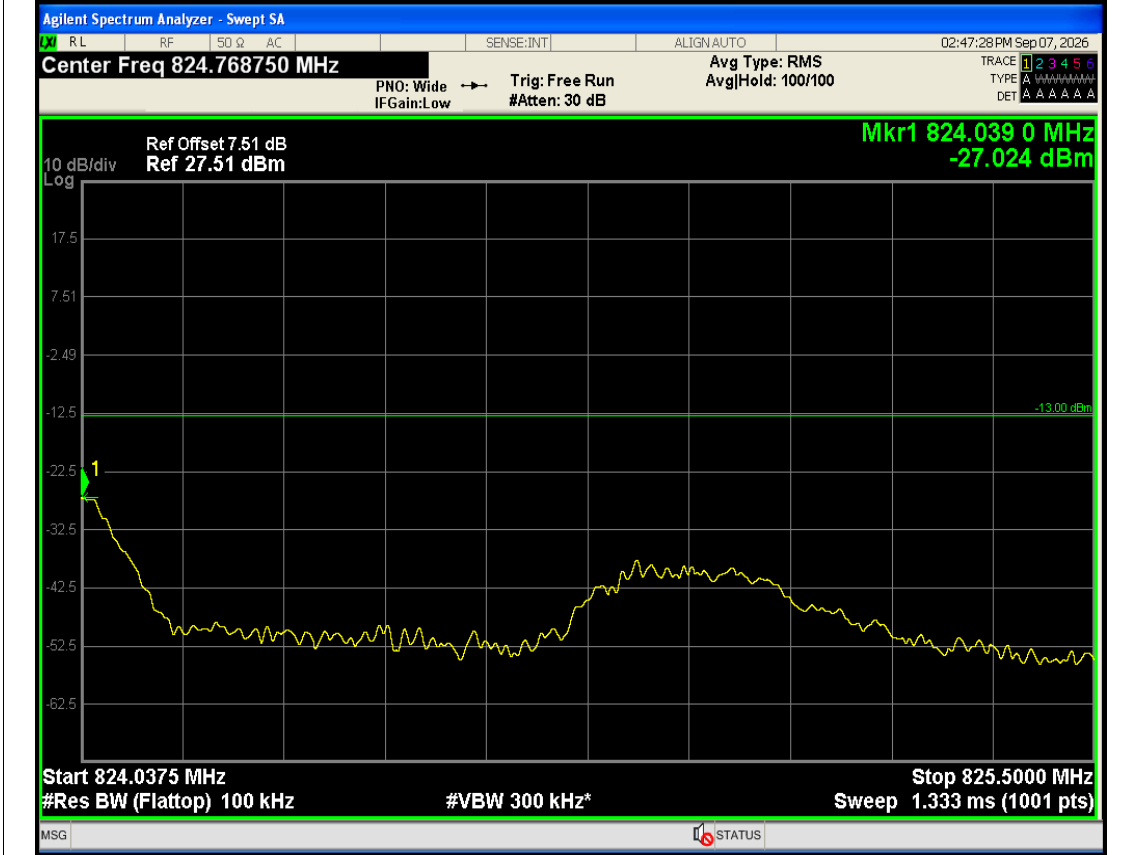


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#0 824.0375 MHz 825.5 MHz NVNT




Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#Max 819.5 MHz 820.9625 MHz NVNT

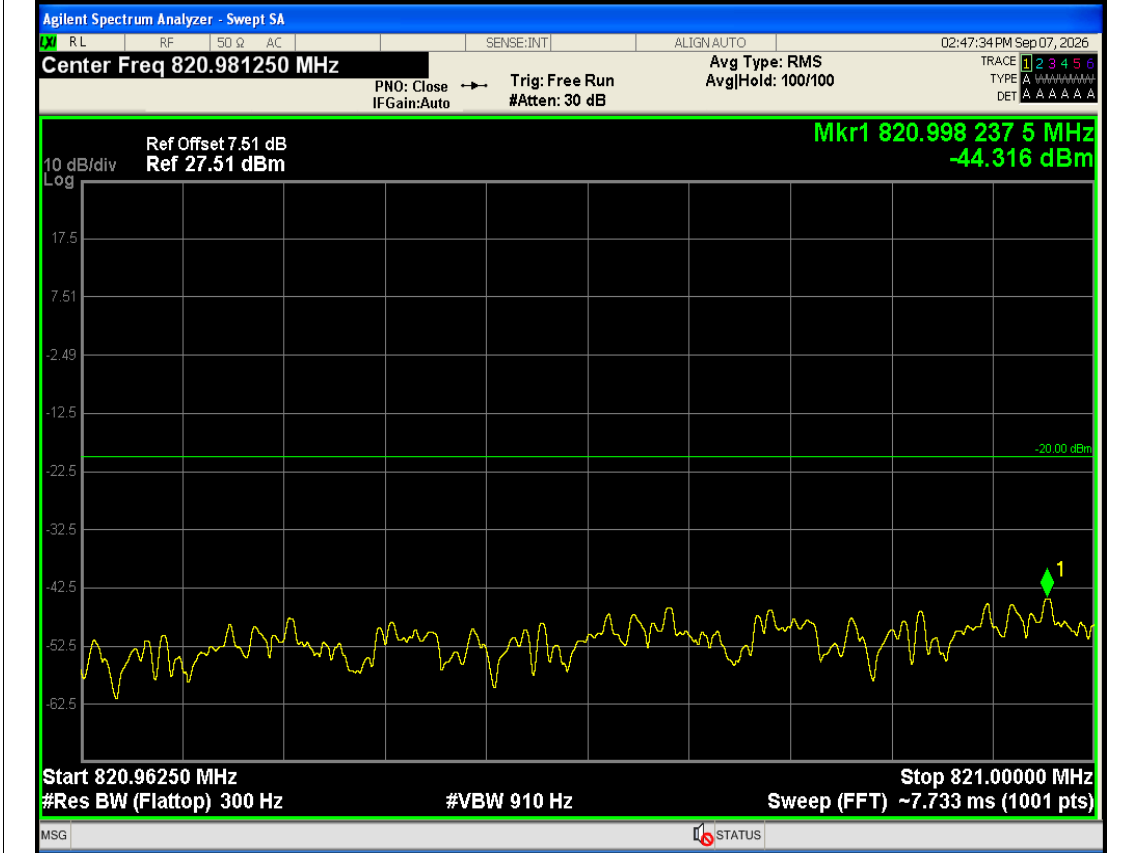


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#Max 820.9625 MHz 821 MHz NVNT

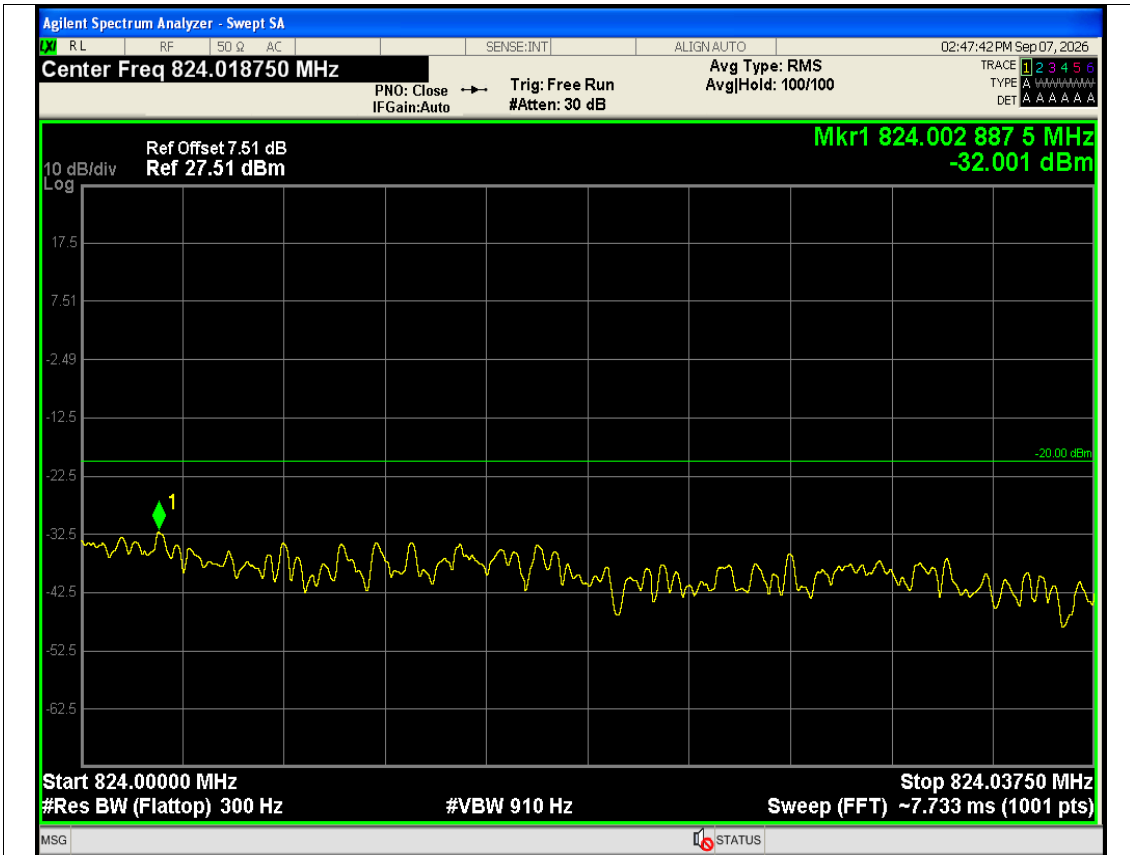


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#Max 824 MHz 824.0375 MHz NVNT

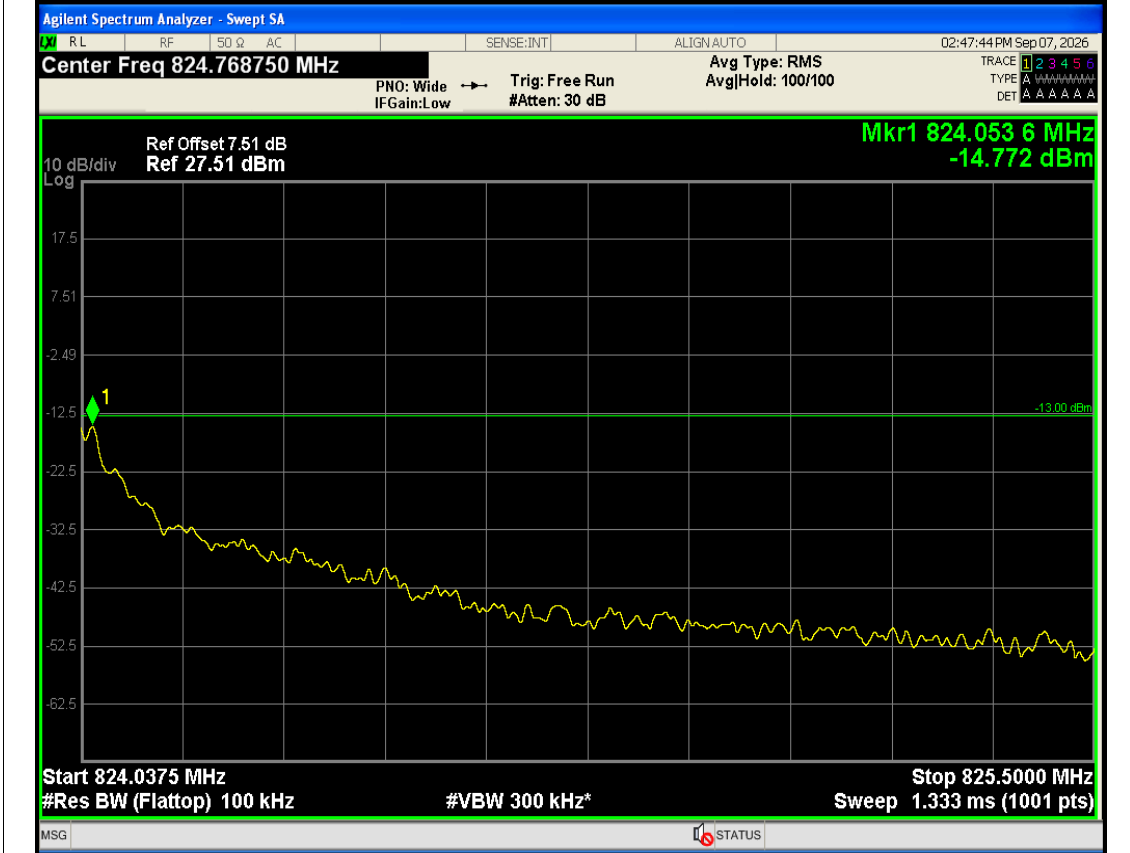


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=1 Position=#Max 824.0375 MHz 825.5 MHz NVNT

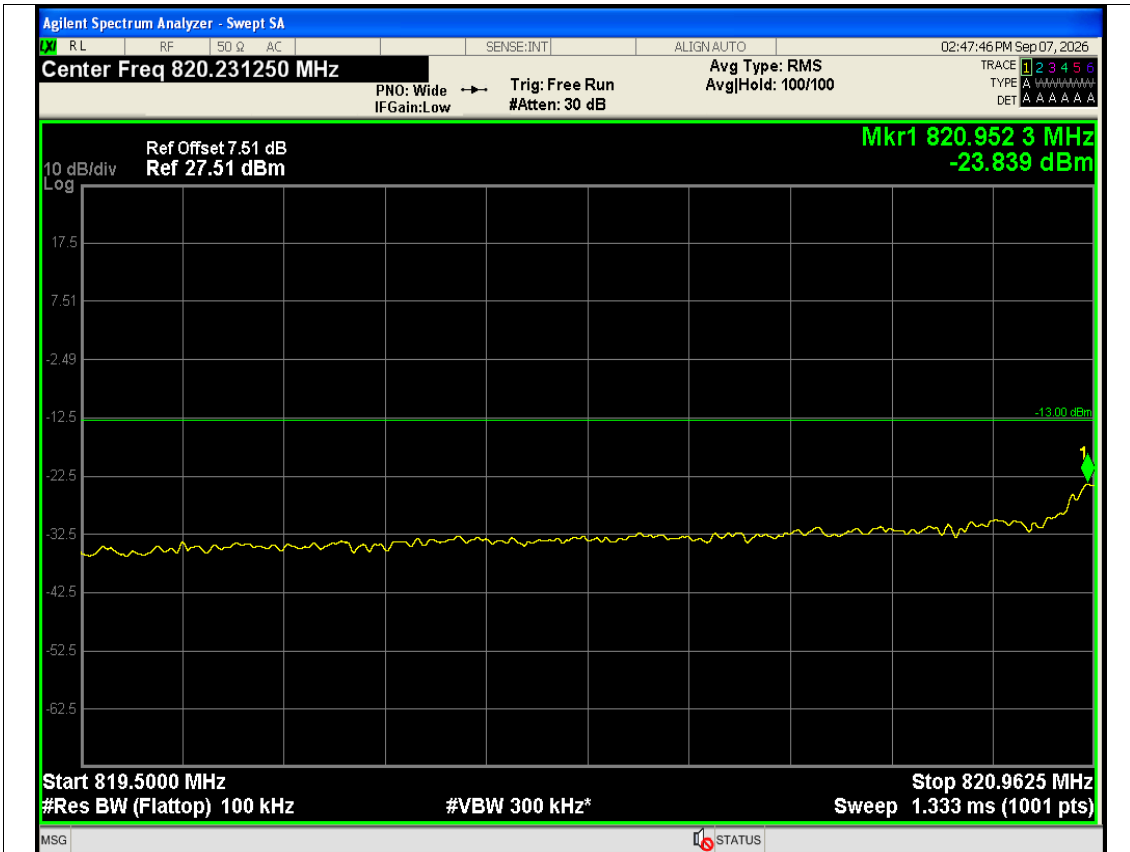


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=15 Position=#0 819.5 MHz 820.9625 MHz NVNT

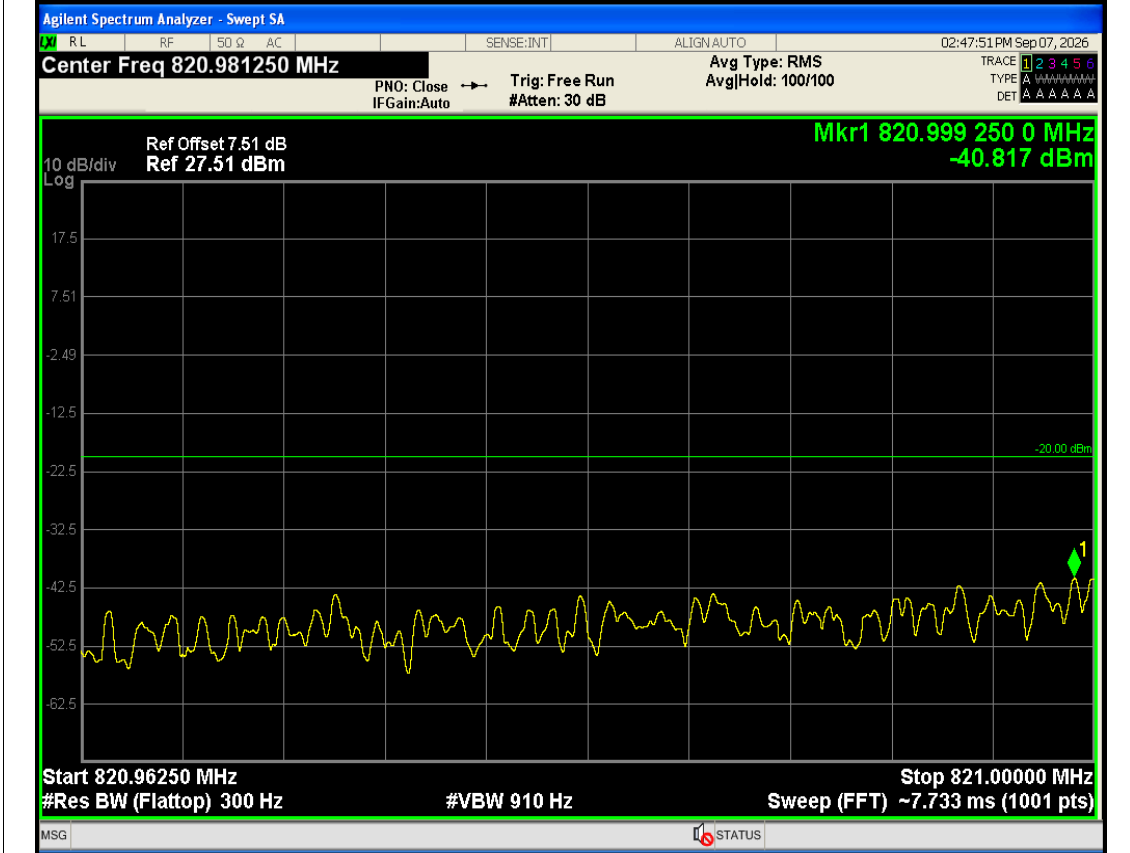


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=15 Position=#0 820.9625 MHz 821 MHz NVNT

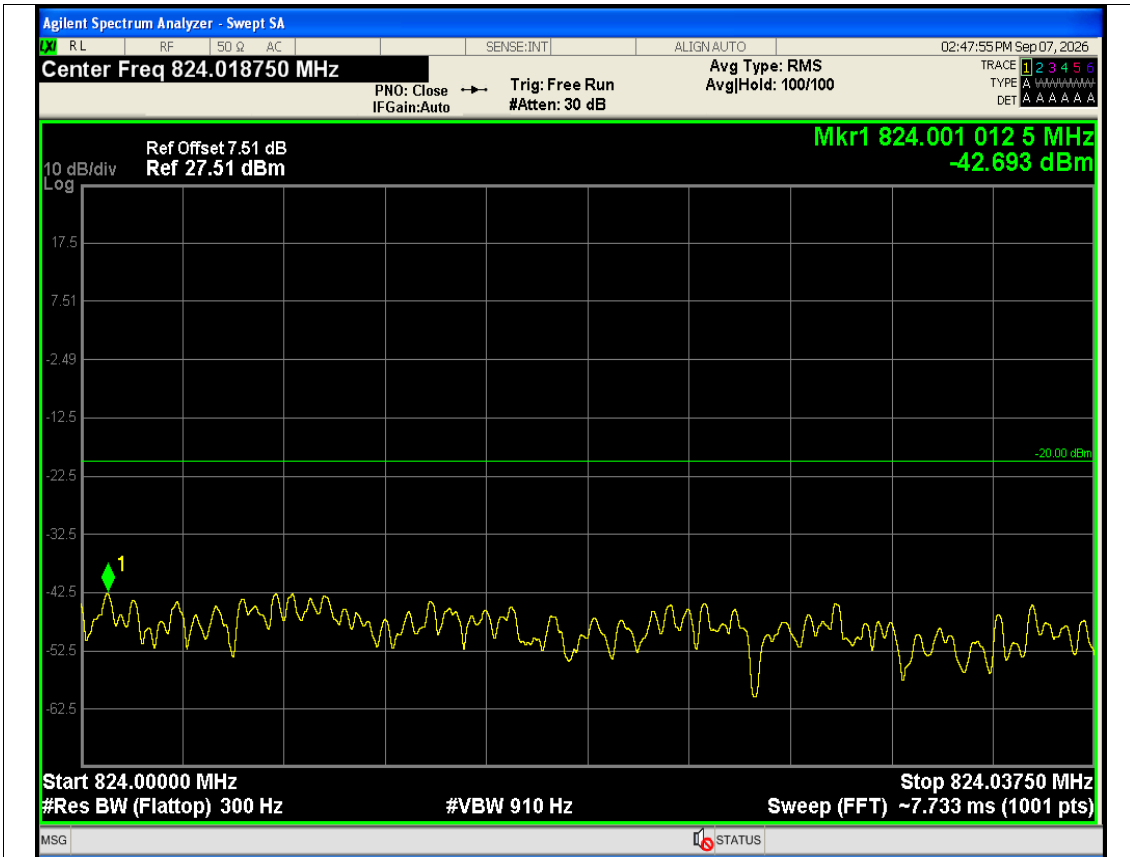


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=15 Position=#0 824 MHz 824.0375 MHz NVNT

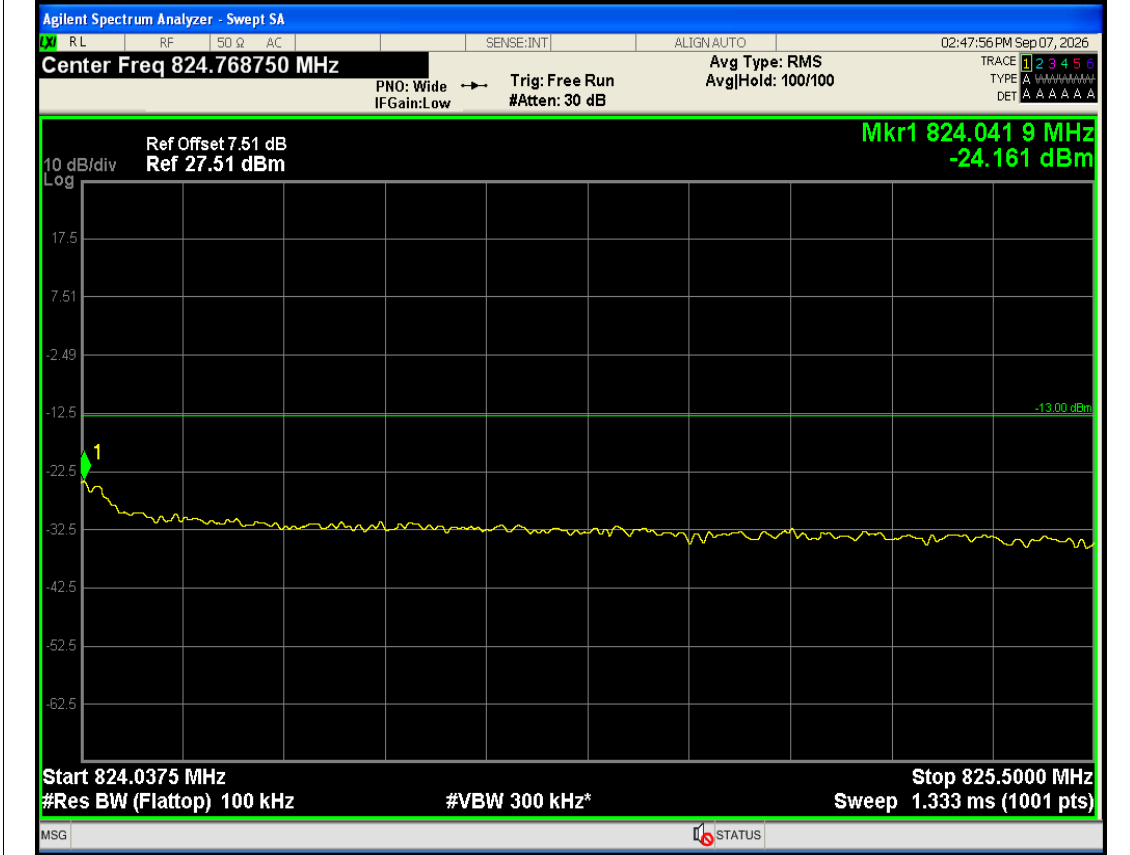


Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=15 Position=#0 824.0375 MHz 825.5 MHz NVNT

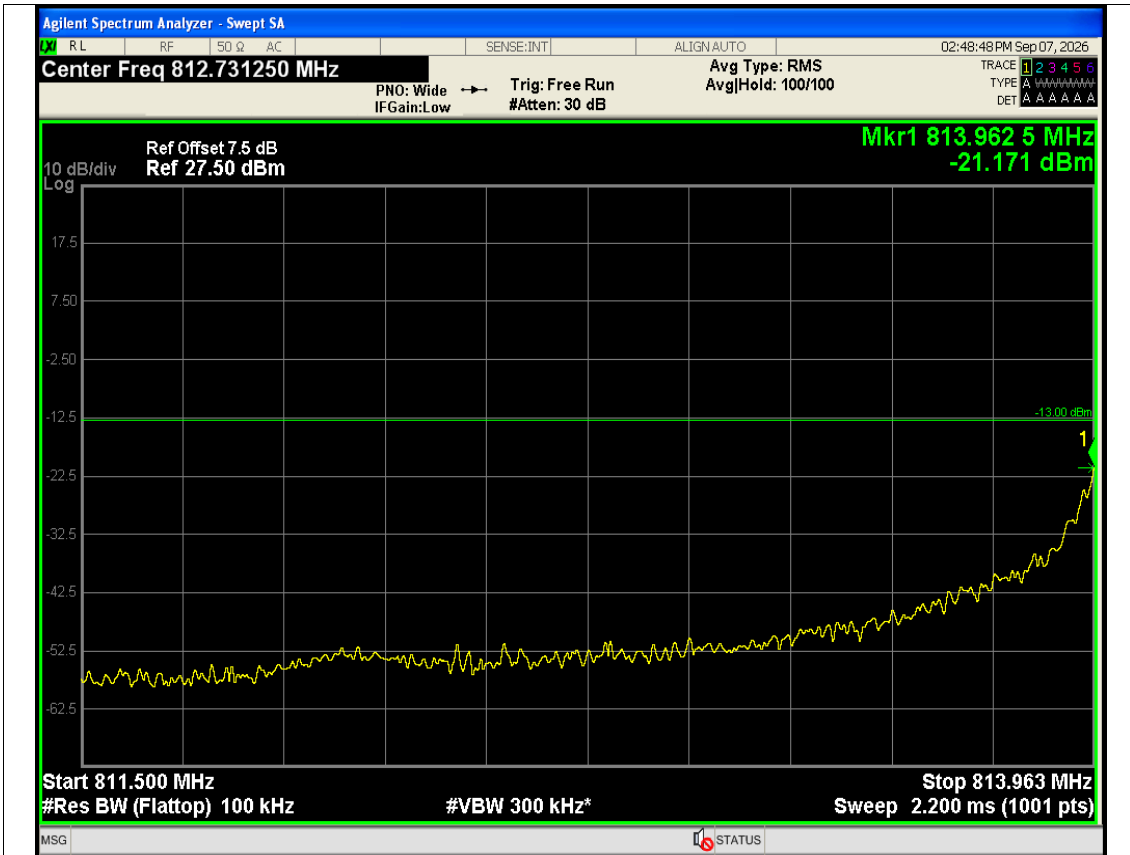


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#0 811.5 MHz 813.9625 MHz NVNT

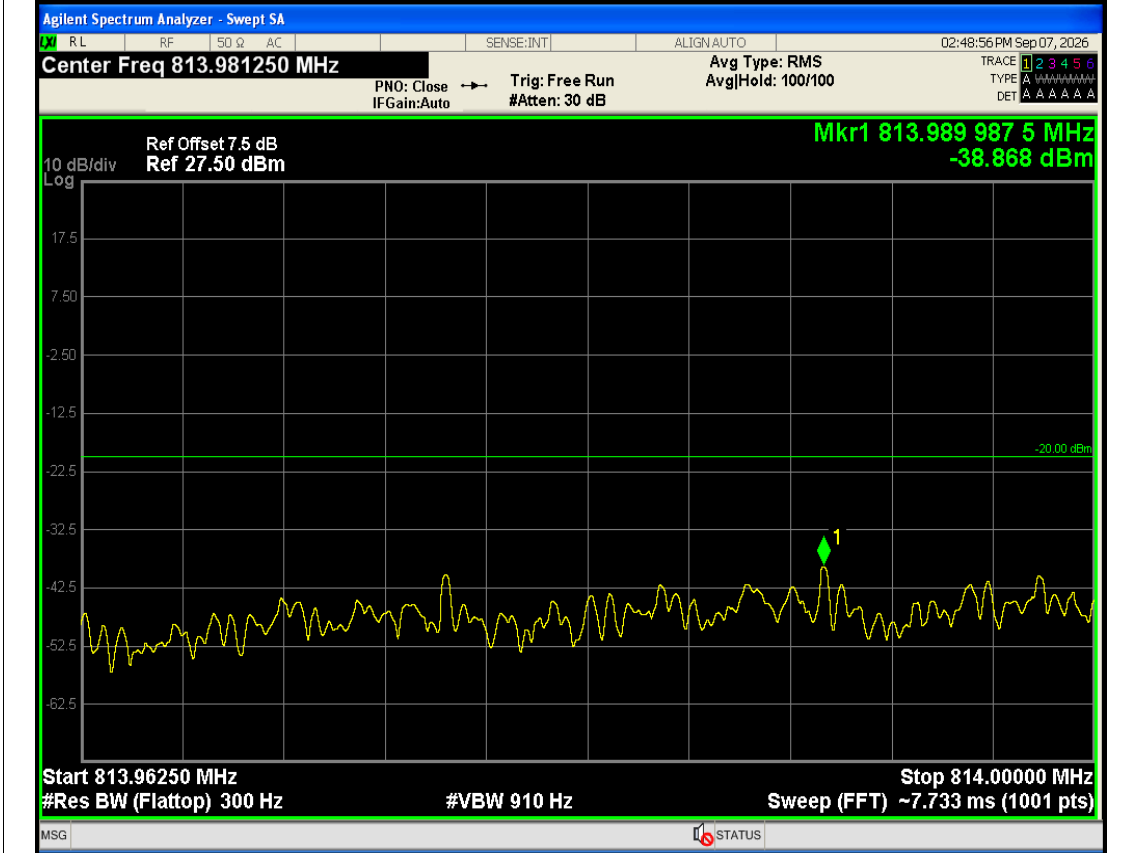


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#0 813.9625 MHz 814 MHz NVNT

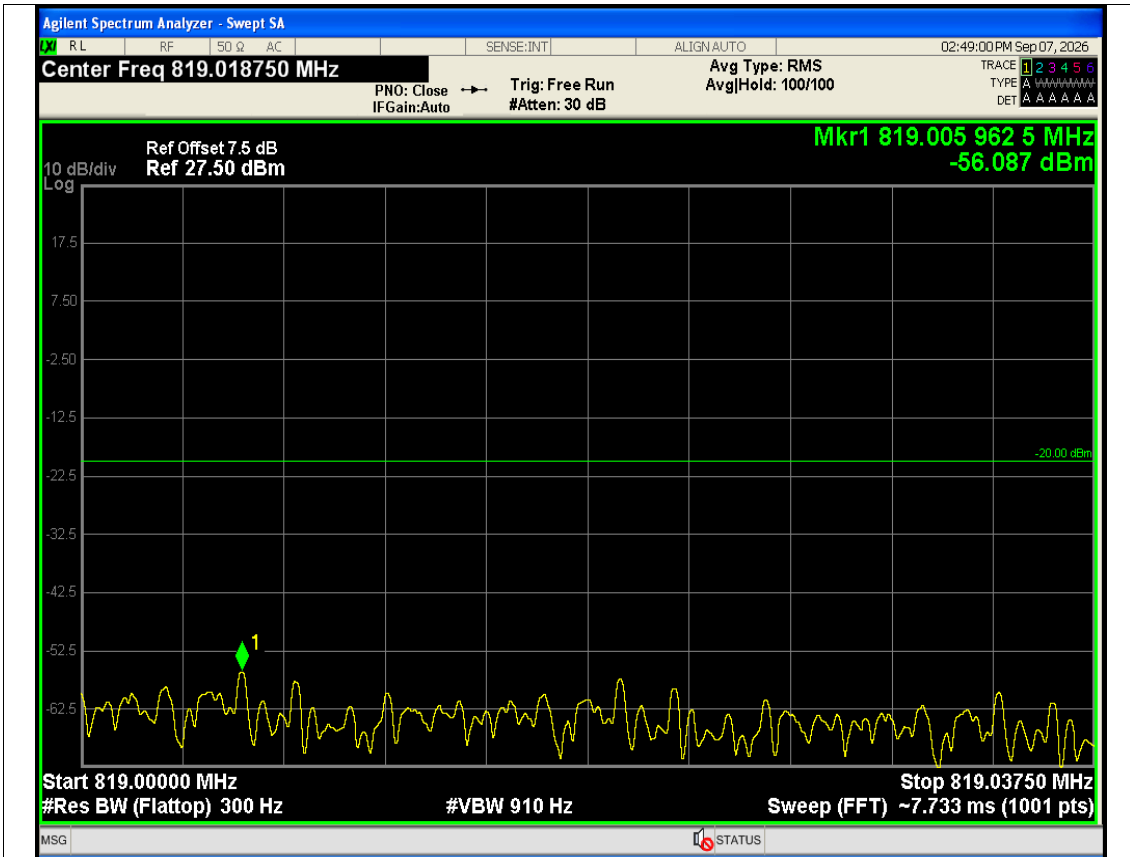


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#0 819 MHz 819.0375 MHz NVNT

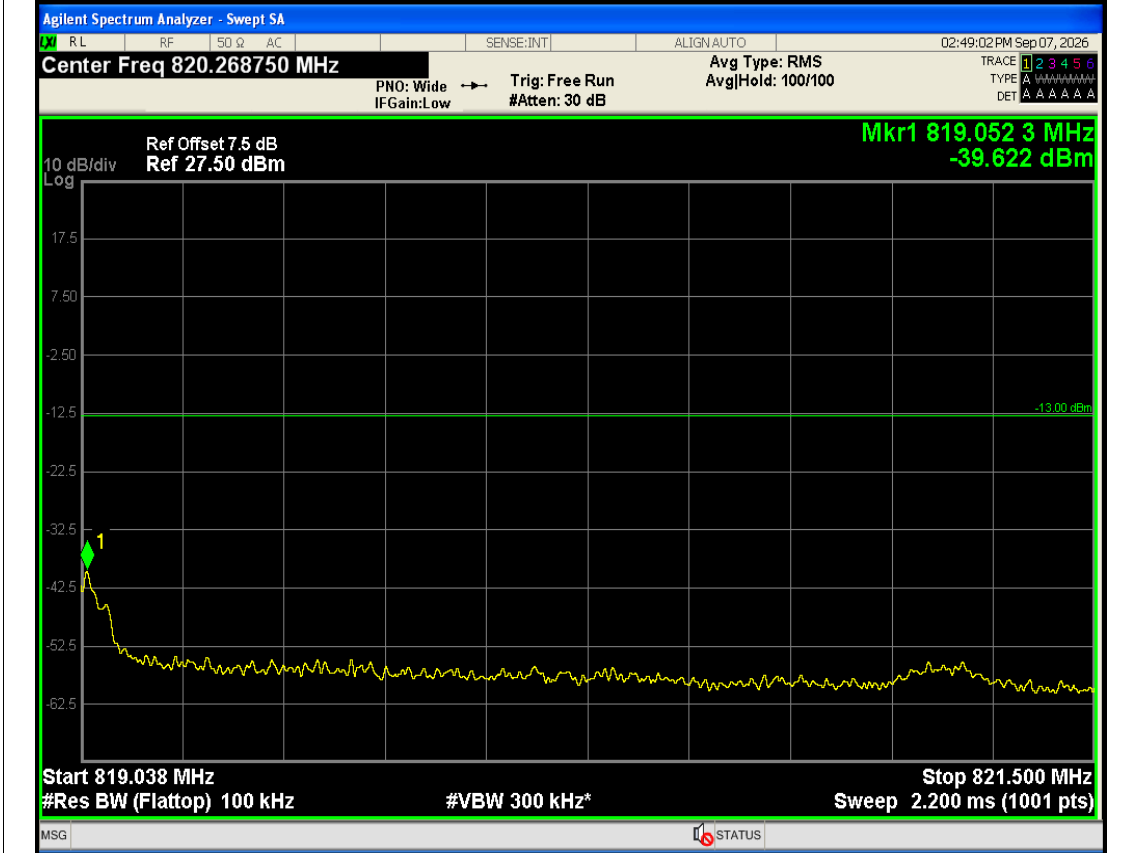


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#0 819.0375 MHz 821.5 MHz NVNT

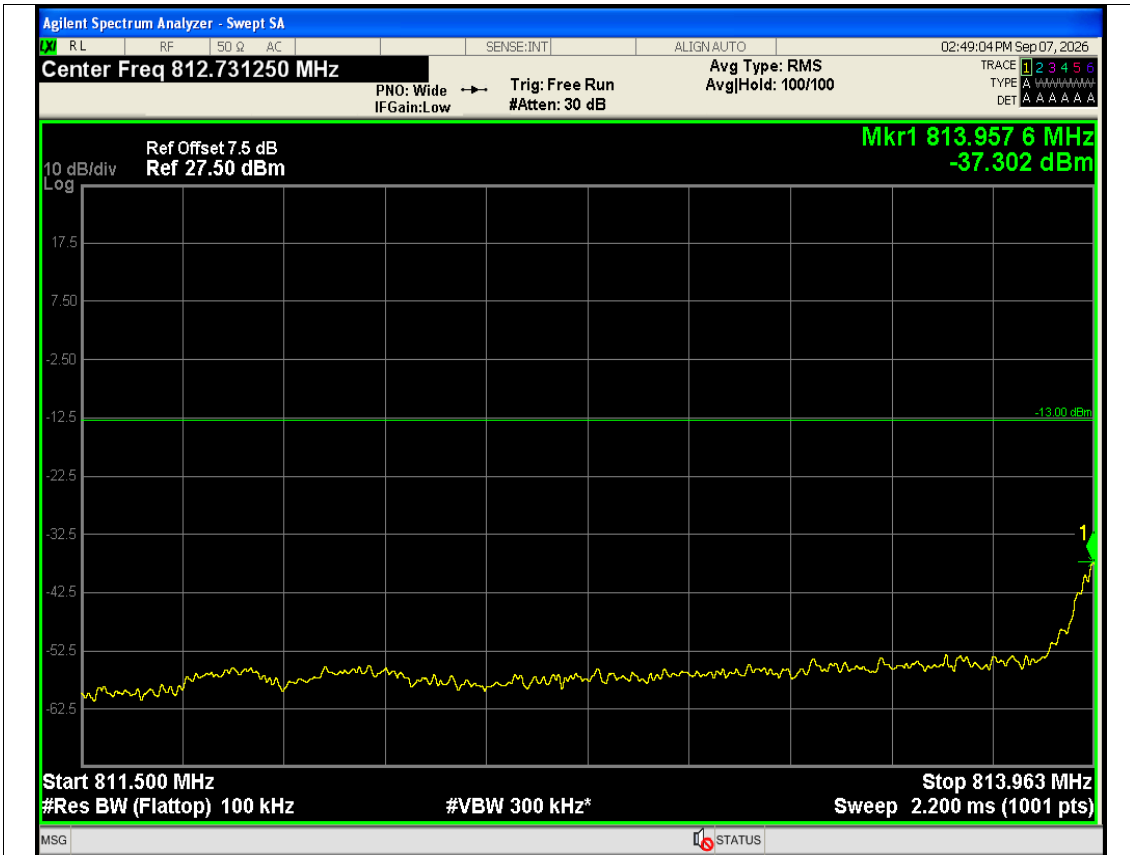


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#Max 811.5 MHz 813.9625 MHz NVNT

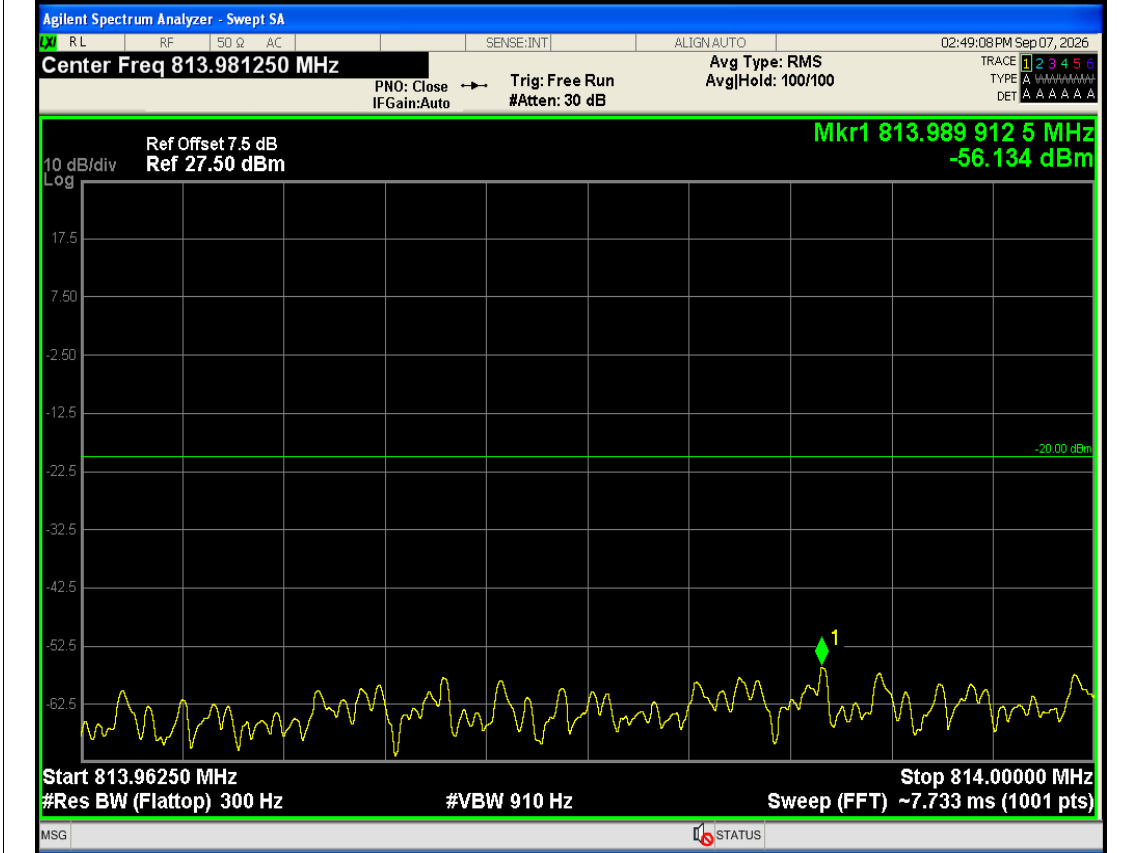


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#Max 813.9625 MHz 814 MHz NVNT

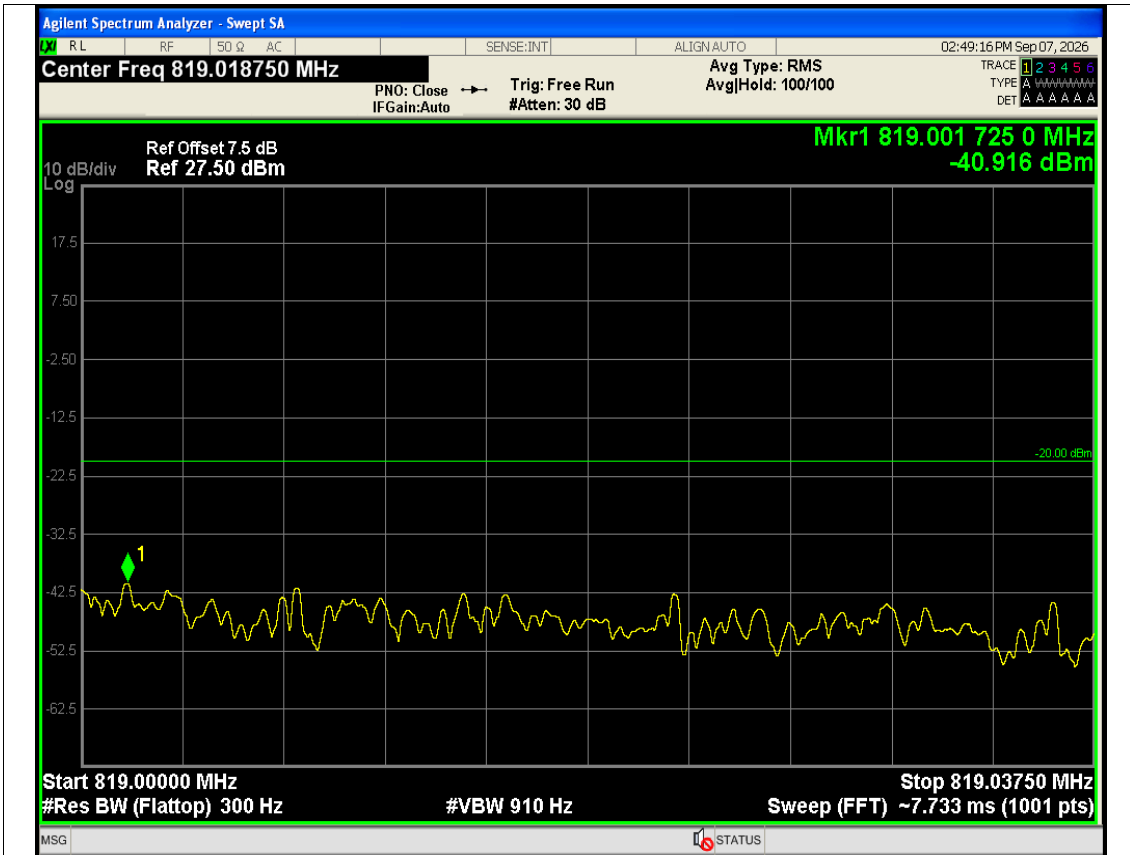


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#Max 819 MHz 819.0375 MHz NVNT

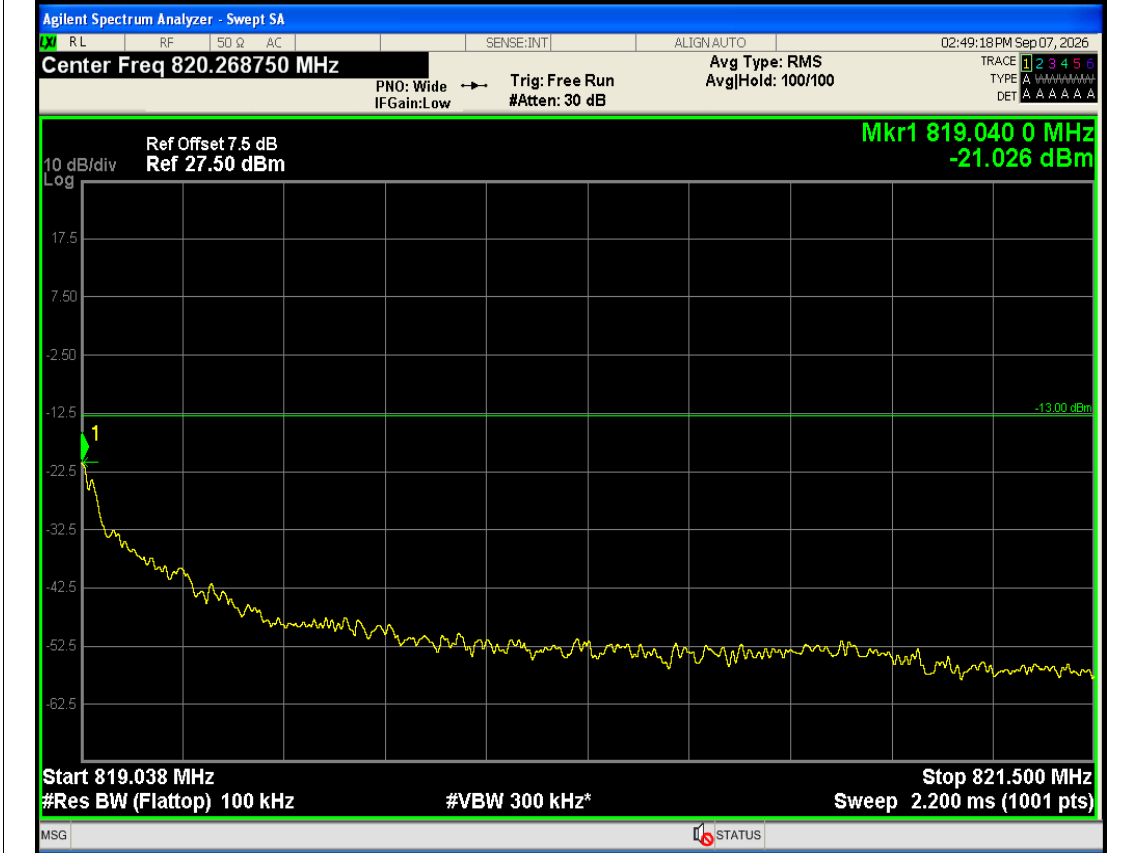


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=1 Position=#Max 819.0375 MHz 821.5 MHz NVNT

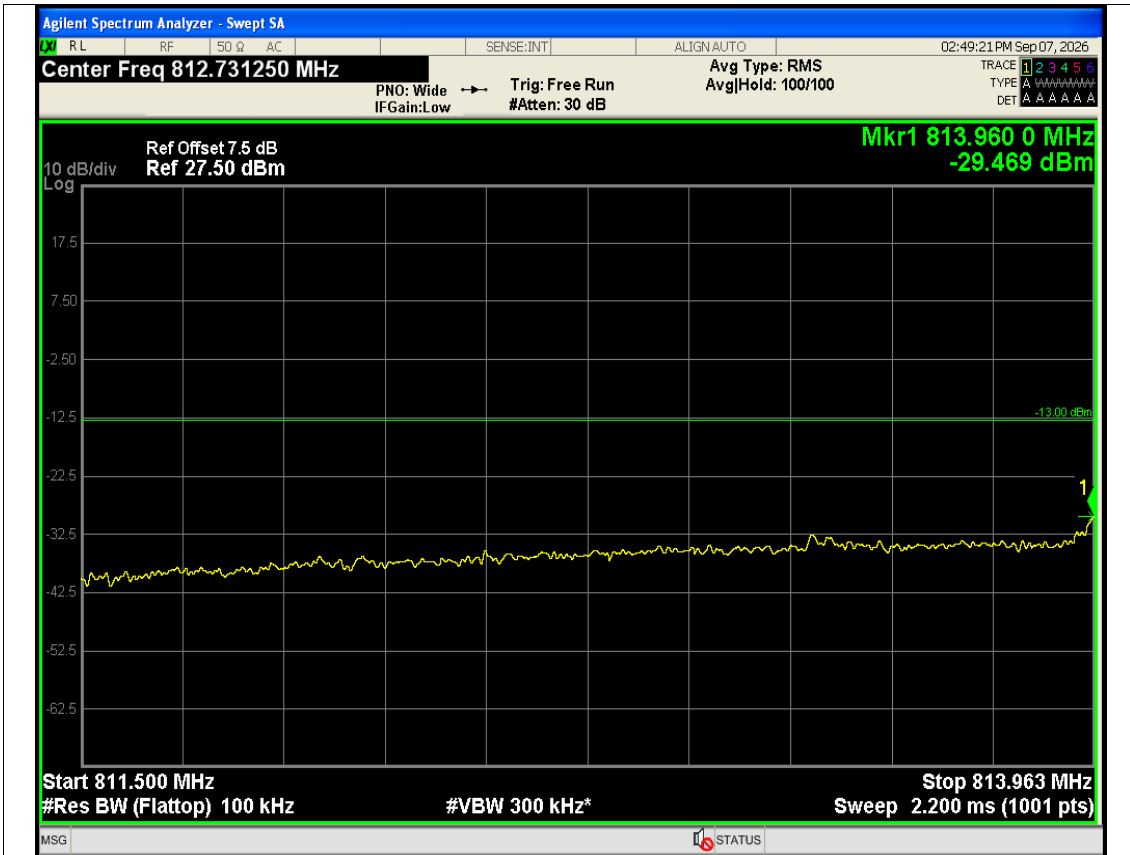


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=25 Position=#0 811.5 MHz 813.9625 MHz NVNT

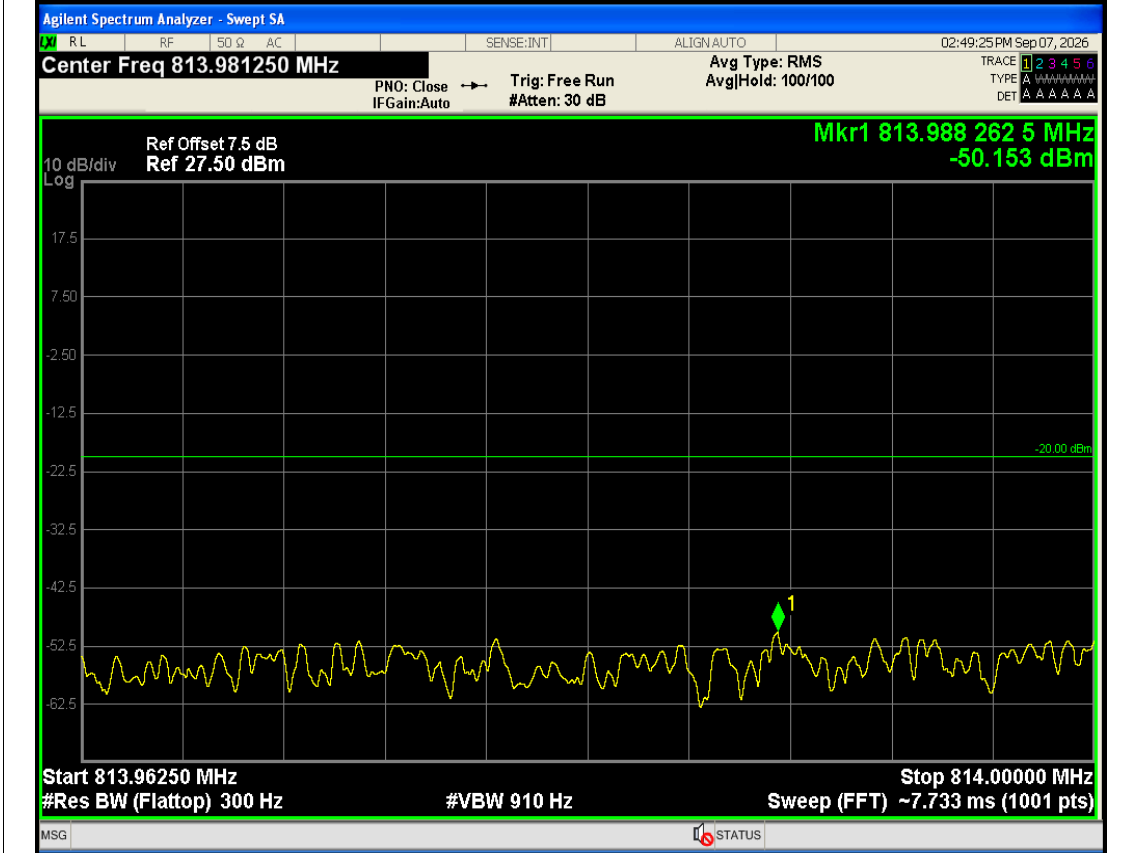

Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=25 Position=#0 813.9625 MHz 814 MHz NVNT

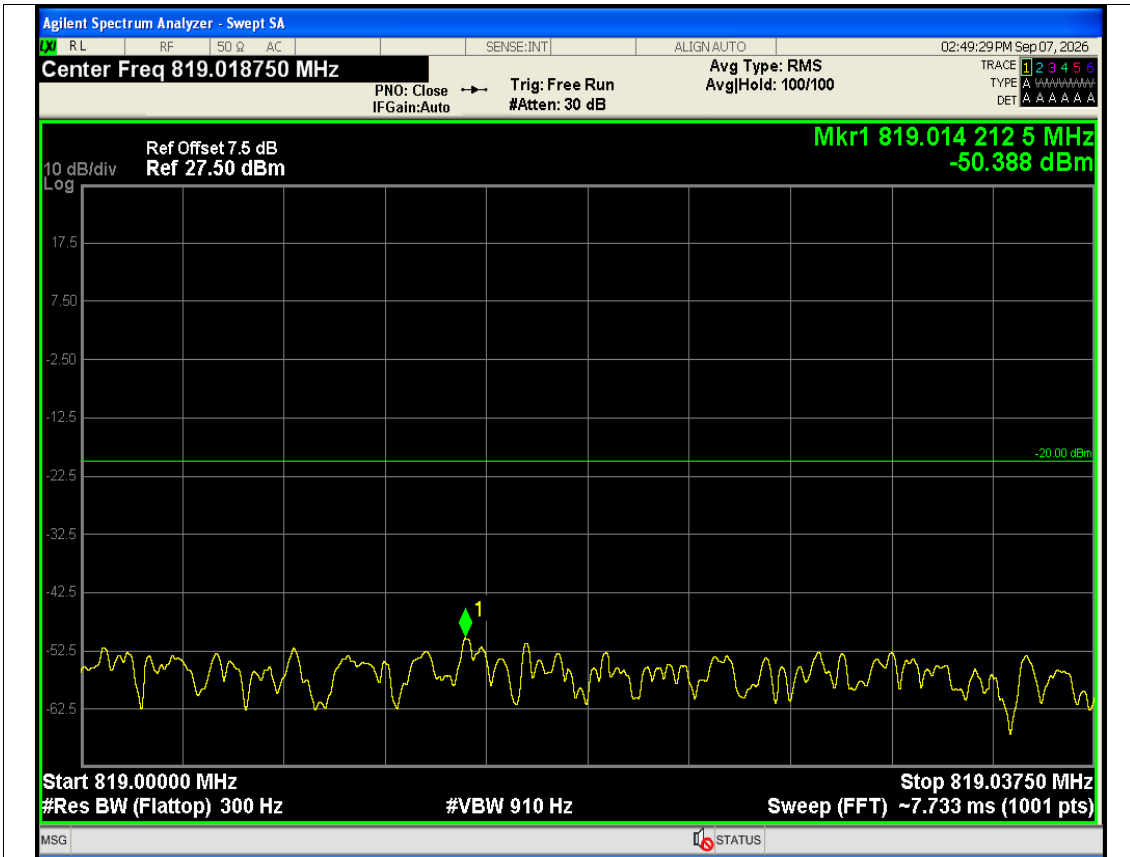


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=25 Position=#0 819 MHz 819.0375 MHz NVNT

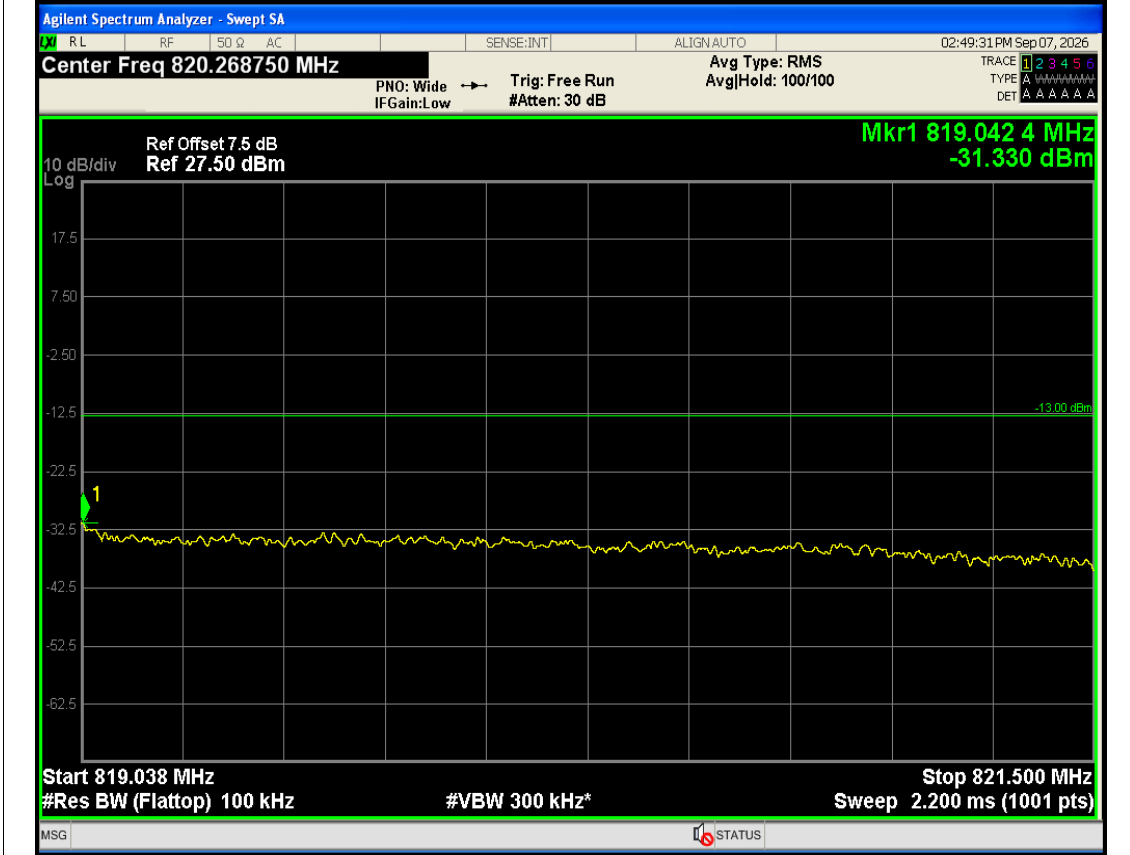


Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=25 Position=#0 819.0375 MHz 821.5 MHz NVNT




Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#0 816.5 MHz 818.9625 MHz NVNT

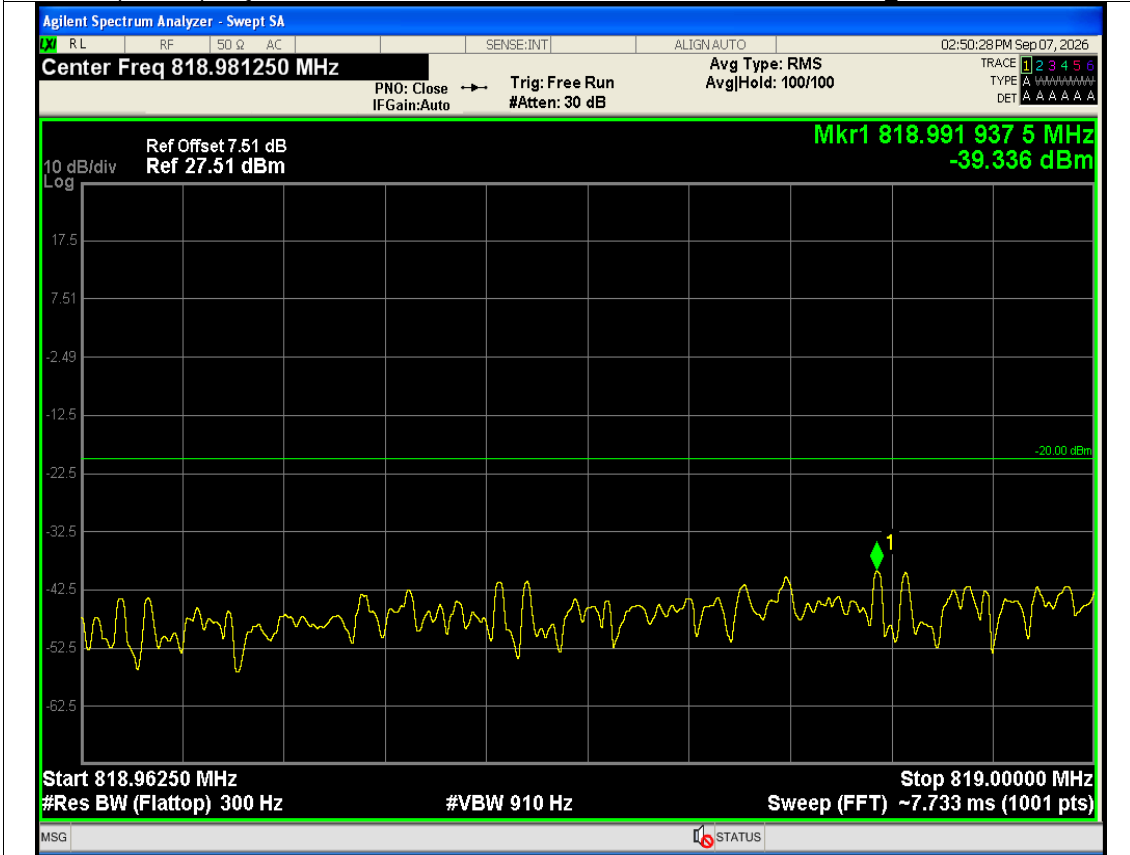


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#0 818.9625 MHz 819 MHz NVNT

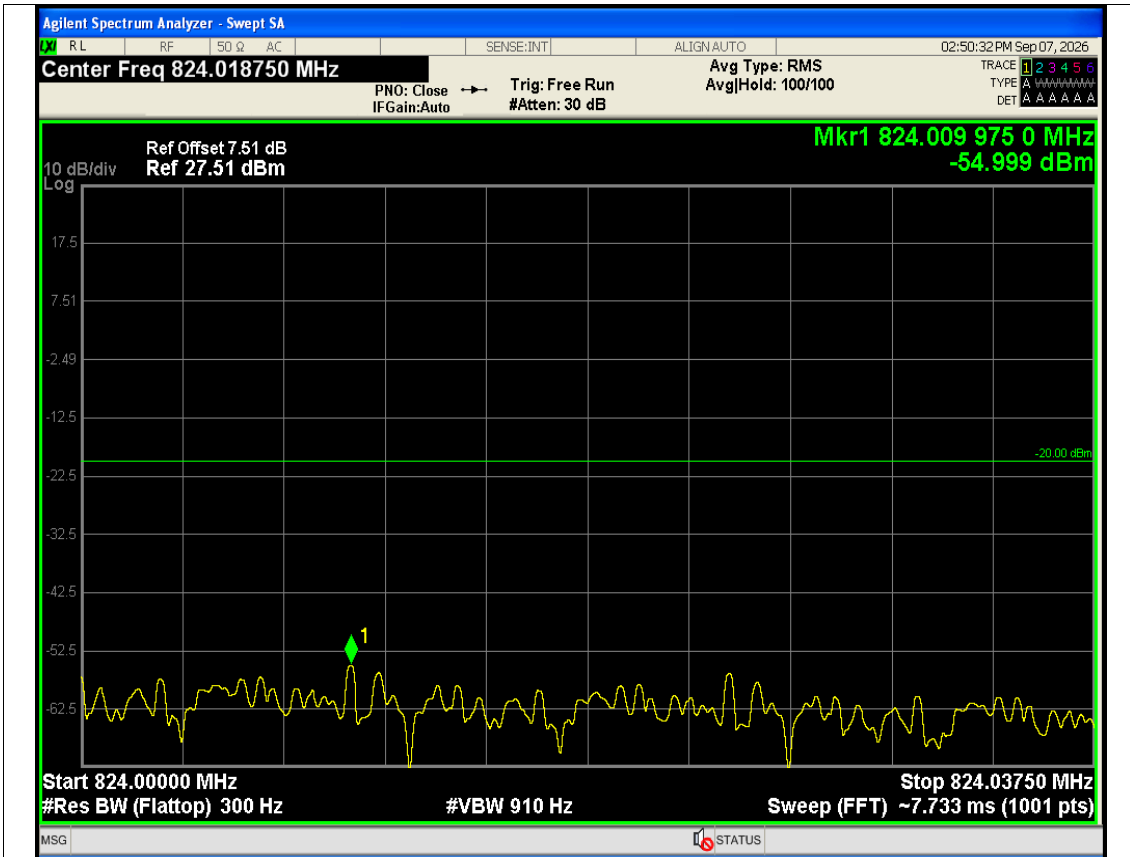


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#0 824 MHz 824.0375 MHz NVNT

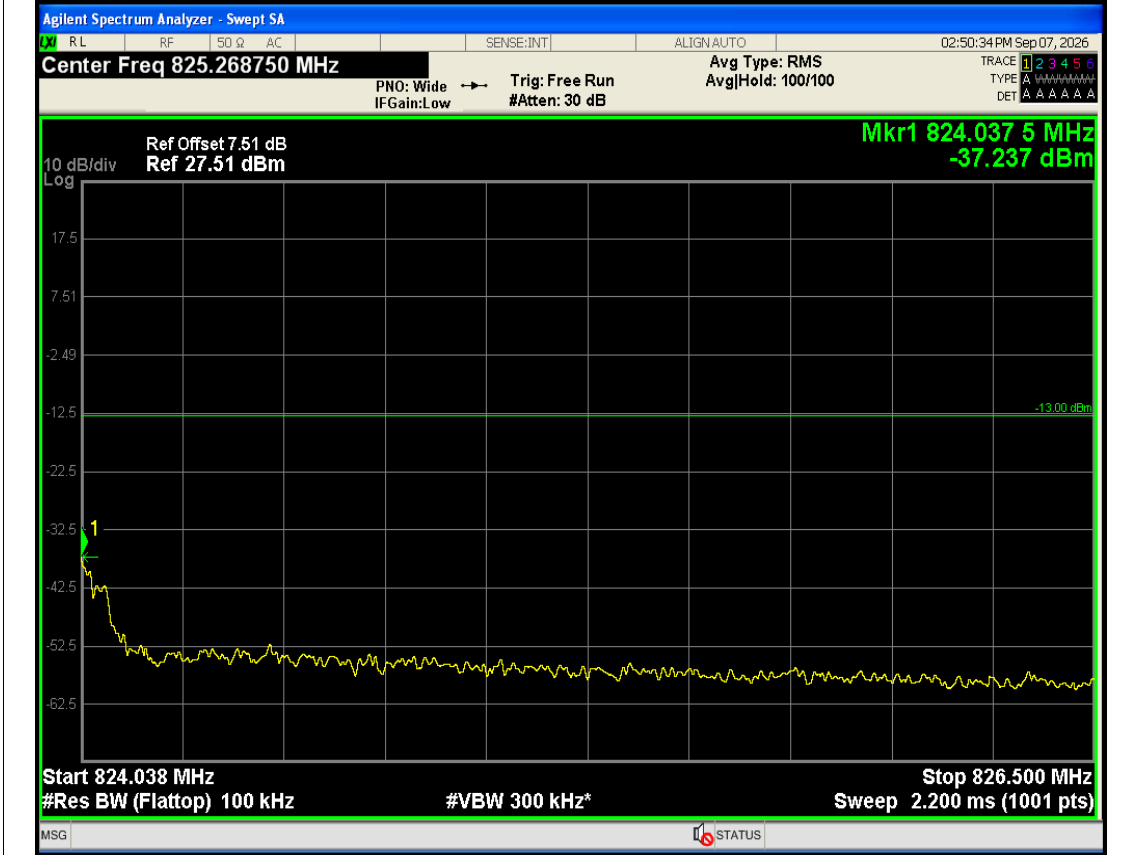


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#0 824.0375 MHz 826.5 MHz NVNT

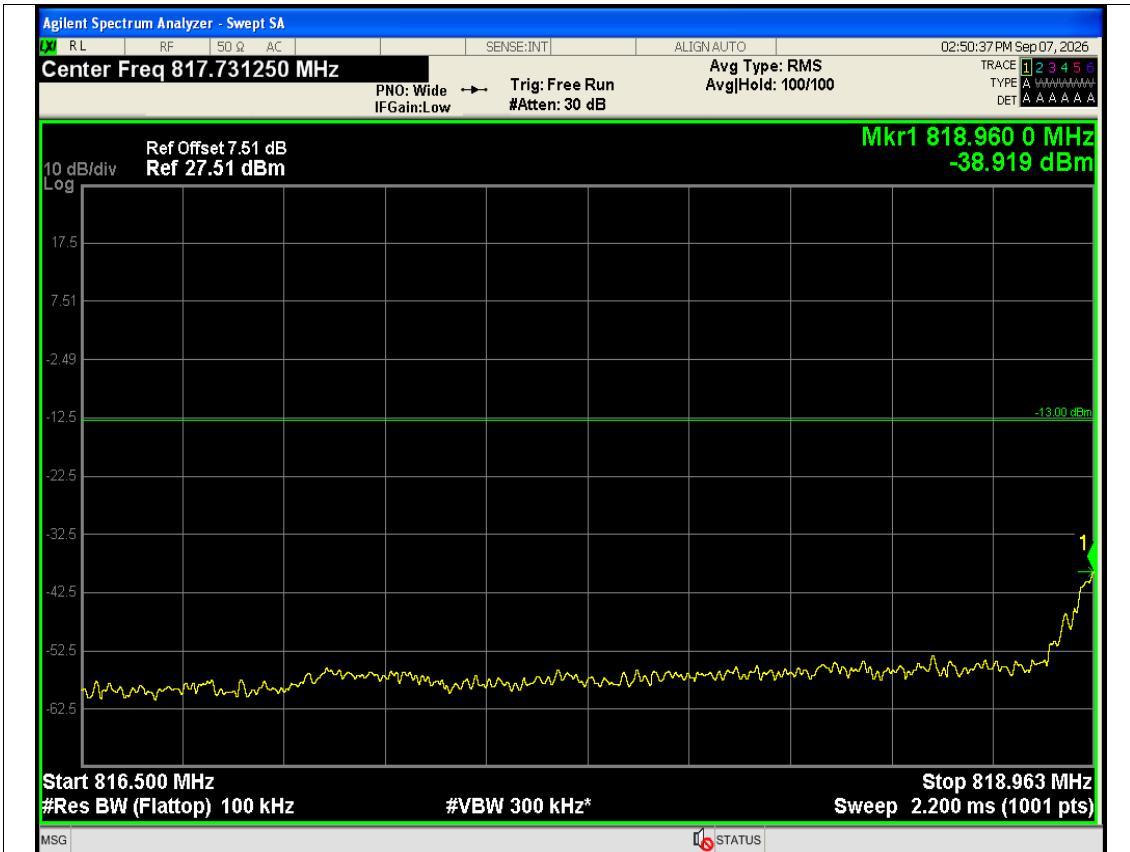


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#Max 816.5 MHz 818.9625 MHz NVNT

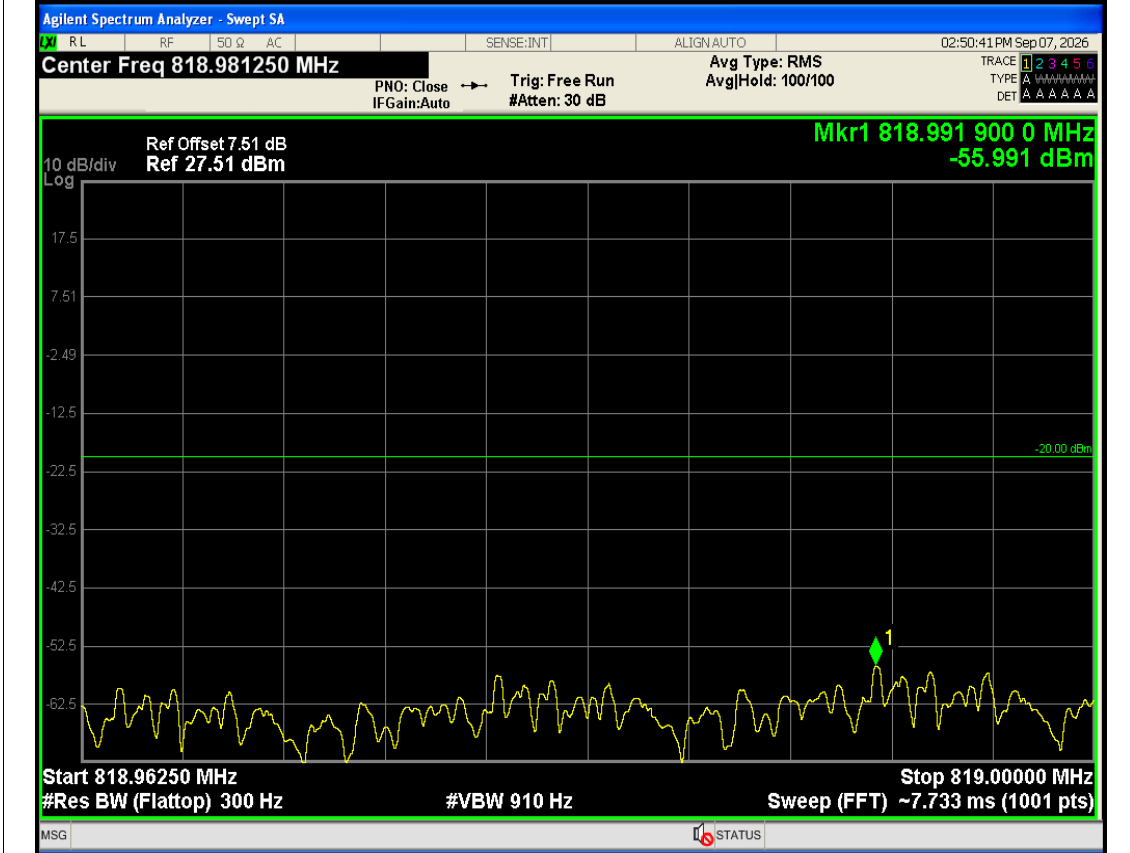


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#Max 818.9625 MHz 819 MHz NVNT

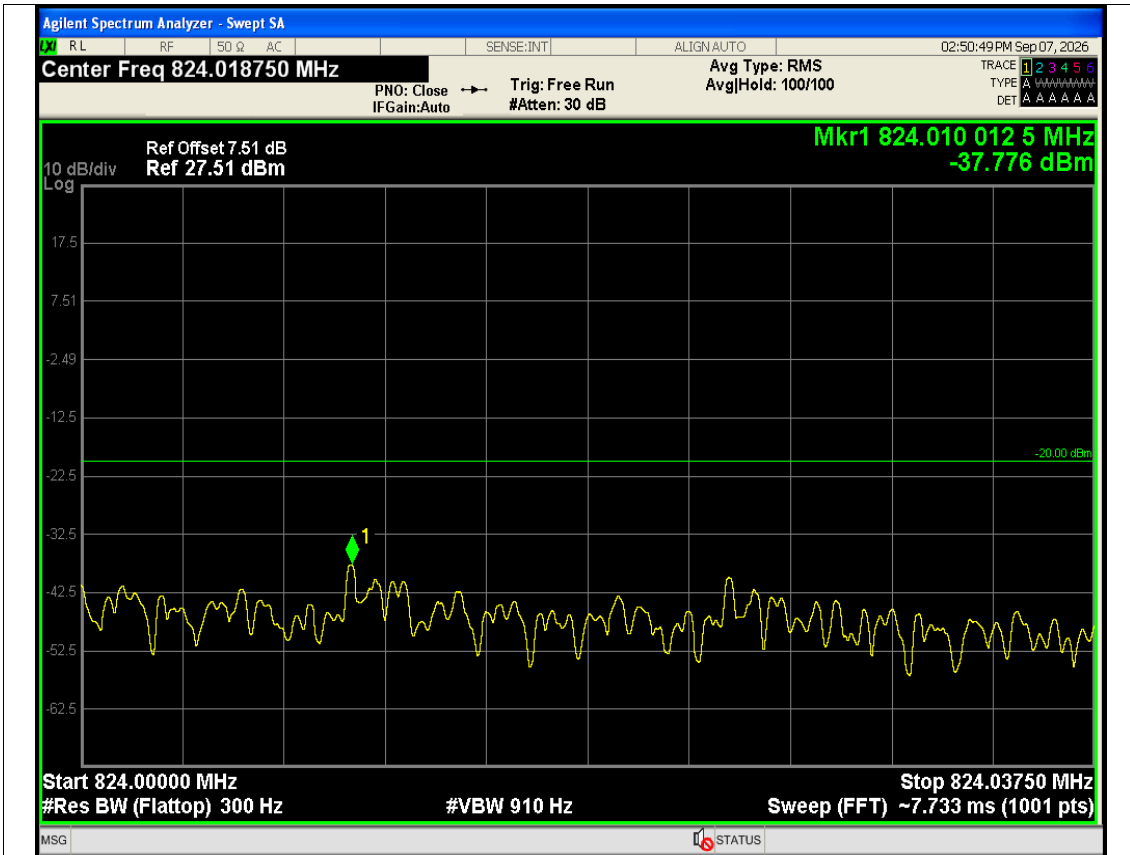


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#Max 824 MHz 824.0375 MHz NVNT

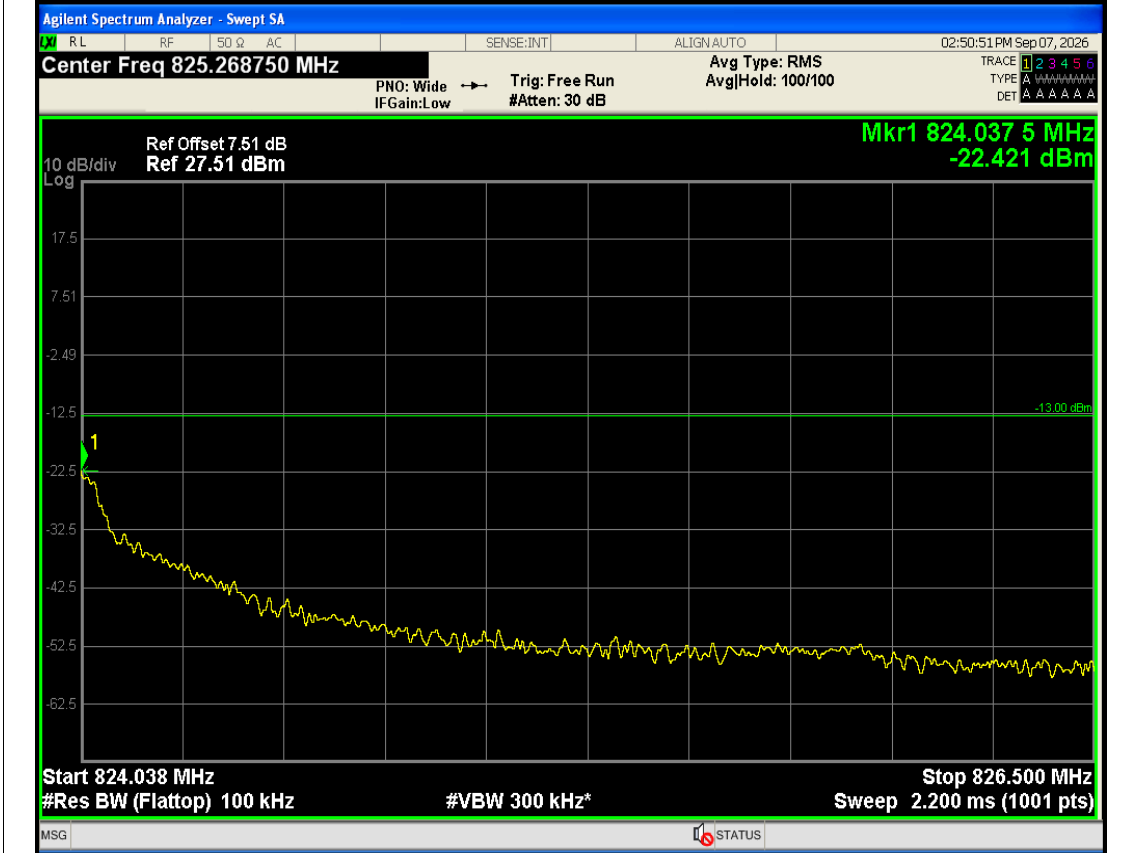


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=1 Position=#Max 824.0375 MHz 826.5 MHz NVNT

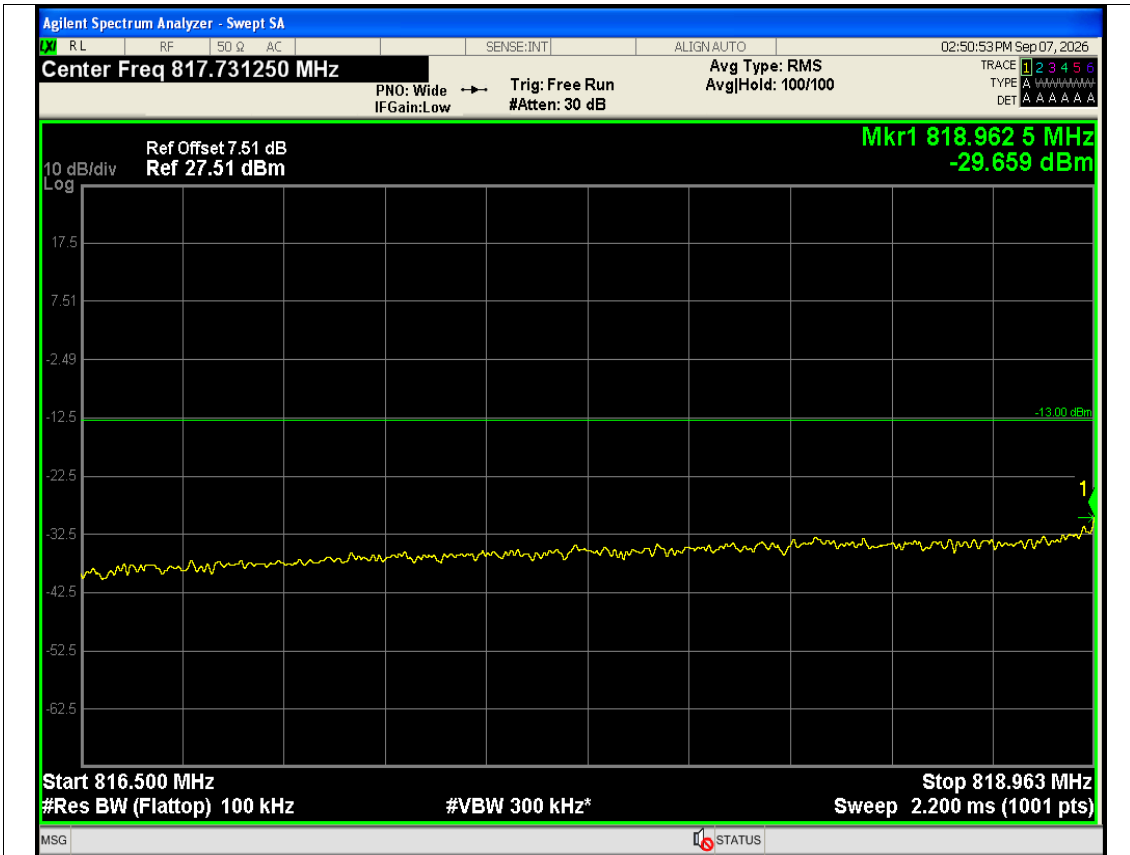


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=25 Position=#0 816.5 MHz 818.9625 MHz NVNT

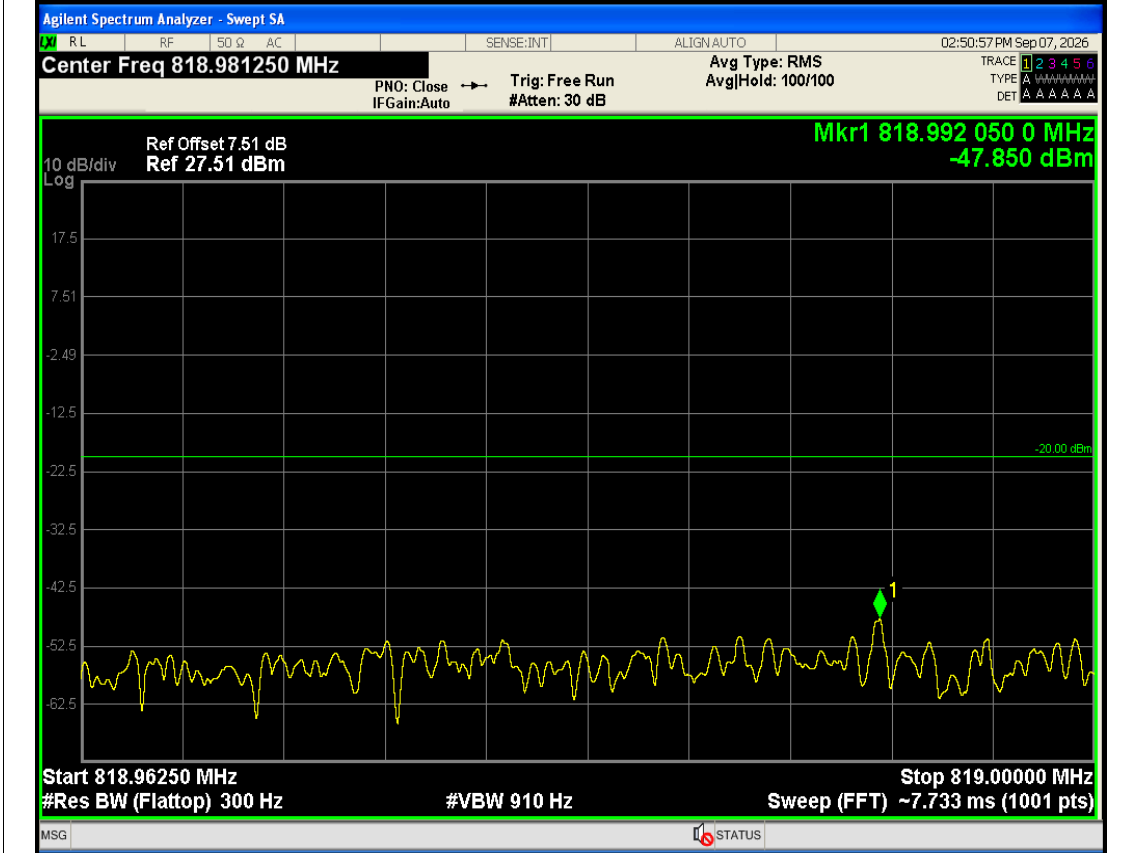

Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=25 Position=#0 818.9625 MHz 819 MHz NVNT

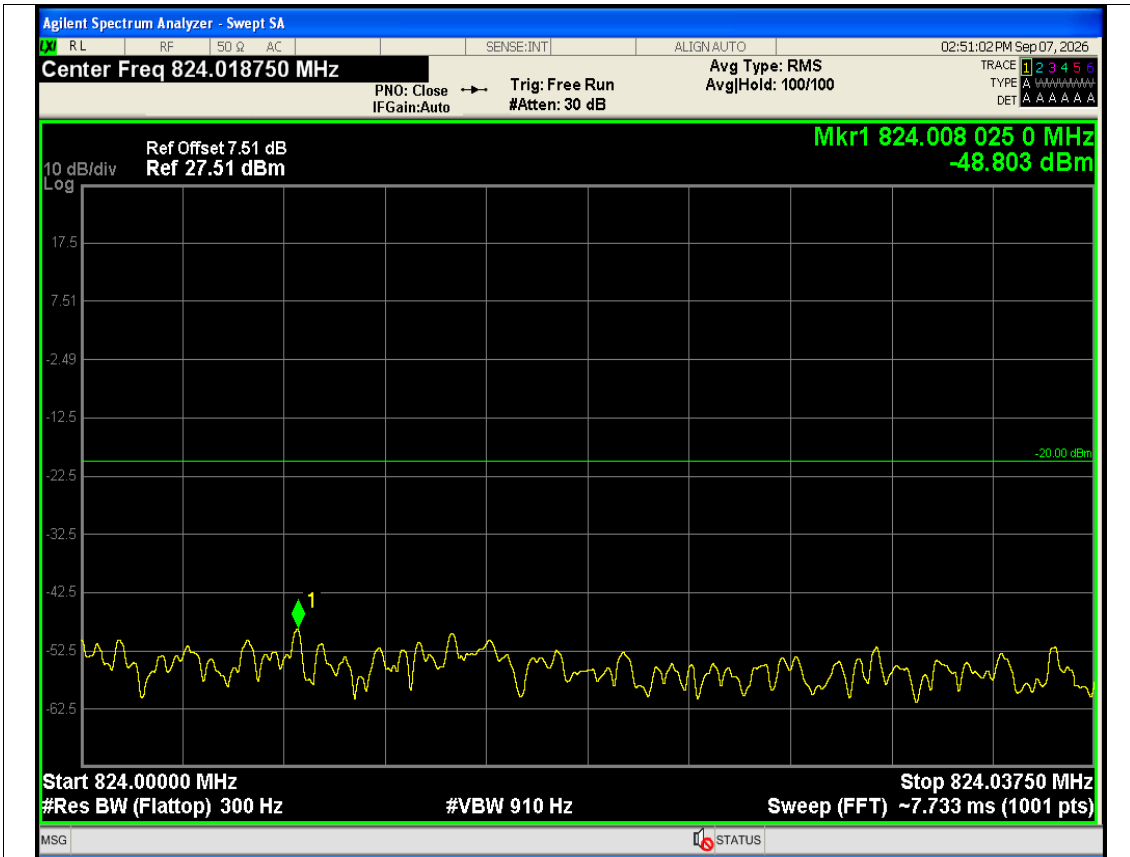


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=25 Position=#0 824 MHz 824.0375 MHz NVNT

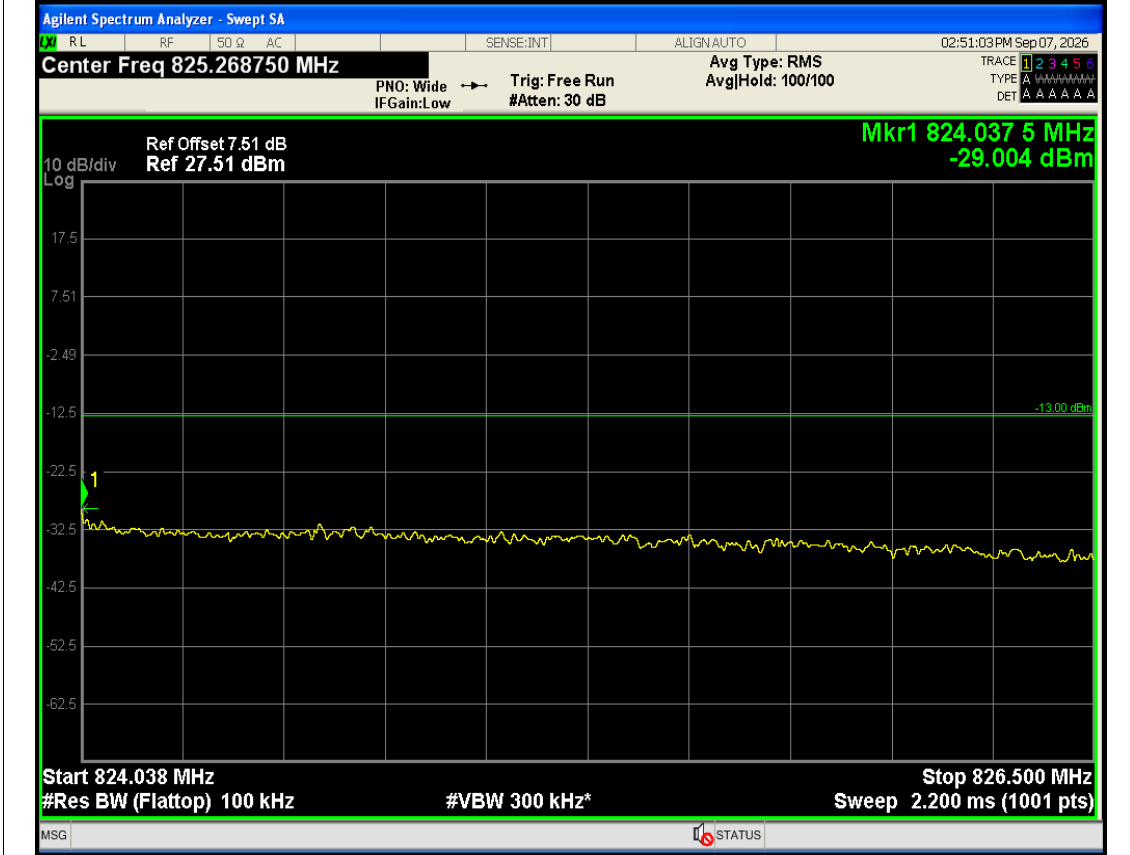


Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=25 Position=#0 824.0375 MHz 826.5 MHz NVNT




Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#0 813.3 MHz 813.9625 MHz NVNT

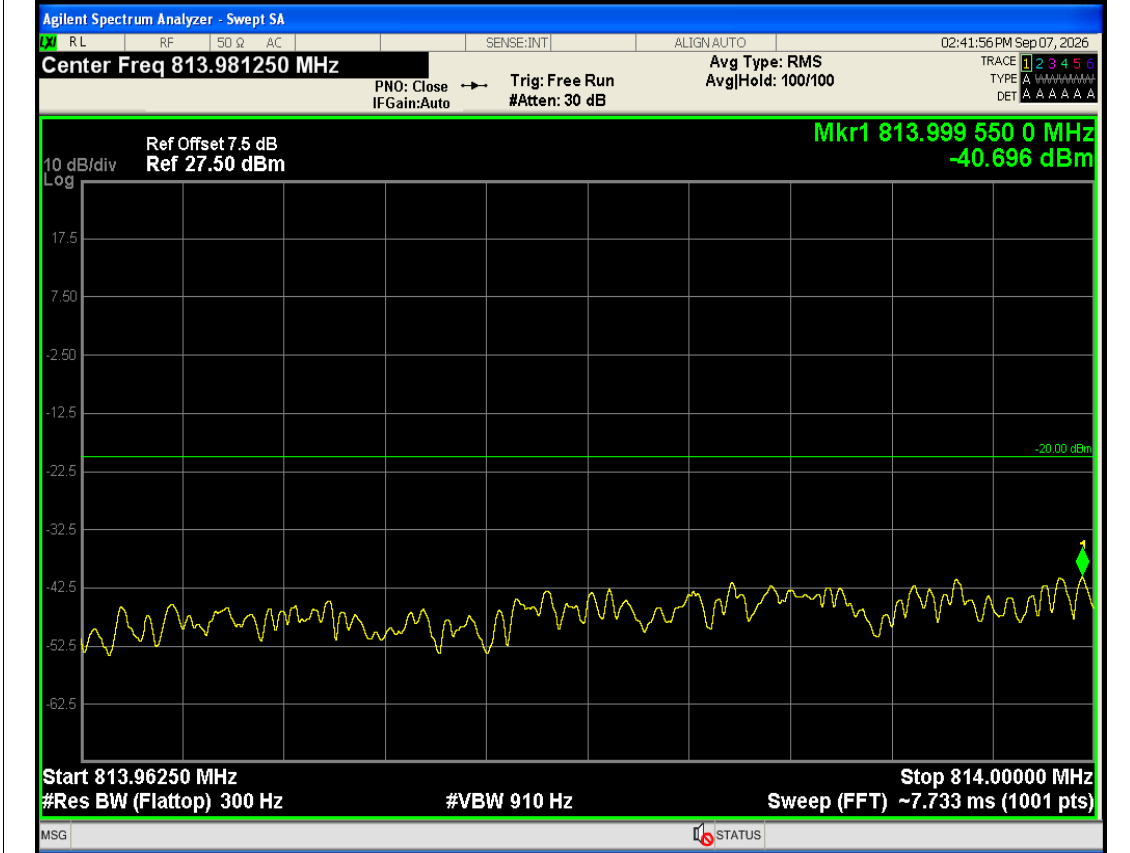


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#0 813.9625 MHz 814 MHz NVNT

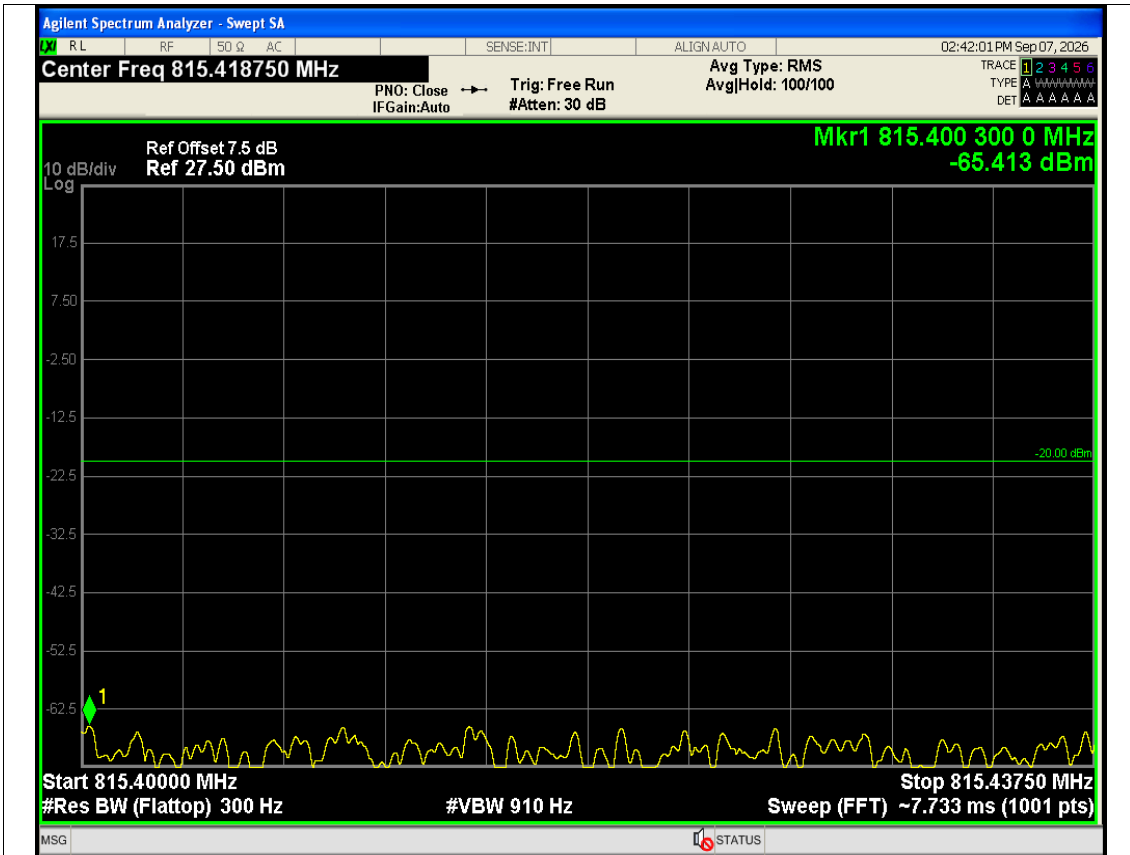


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#0 815.4 MHz 815.4375 MHz NVNT

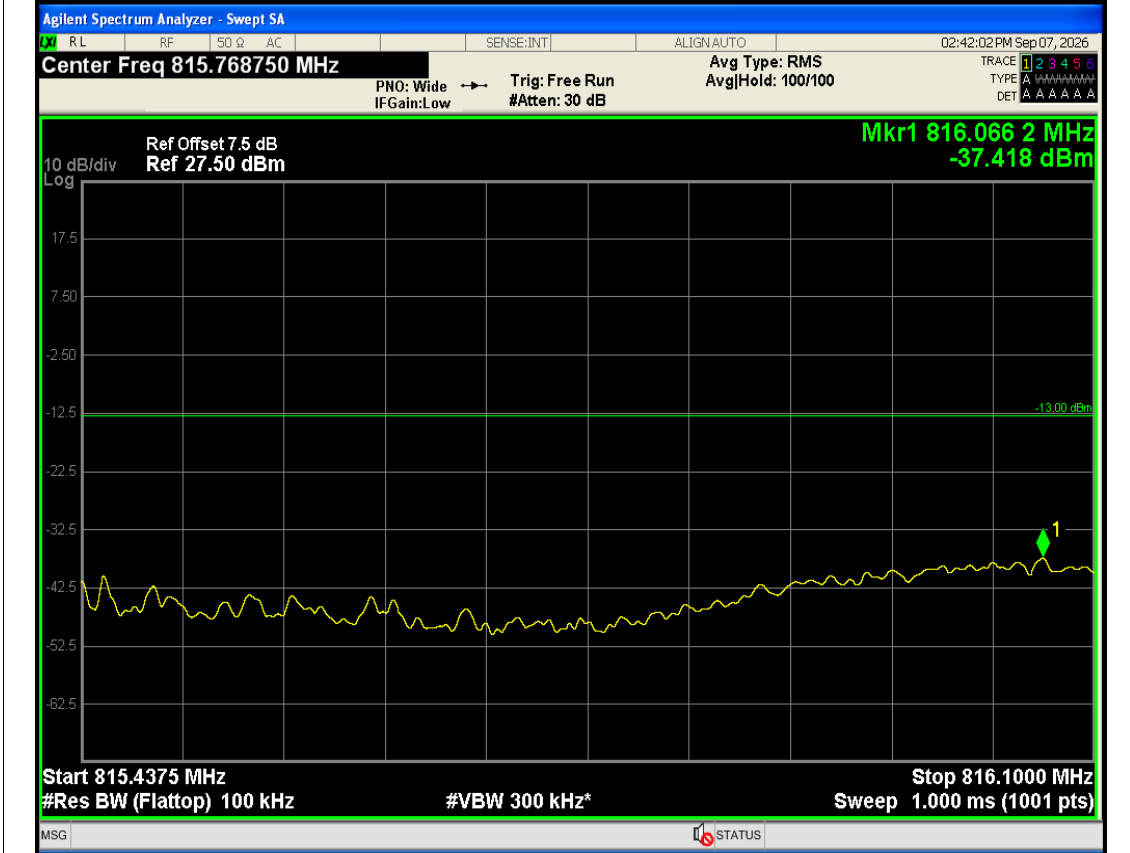


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#0 815.4375 MHz 816.1 MHz NVNT

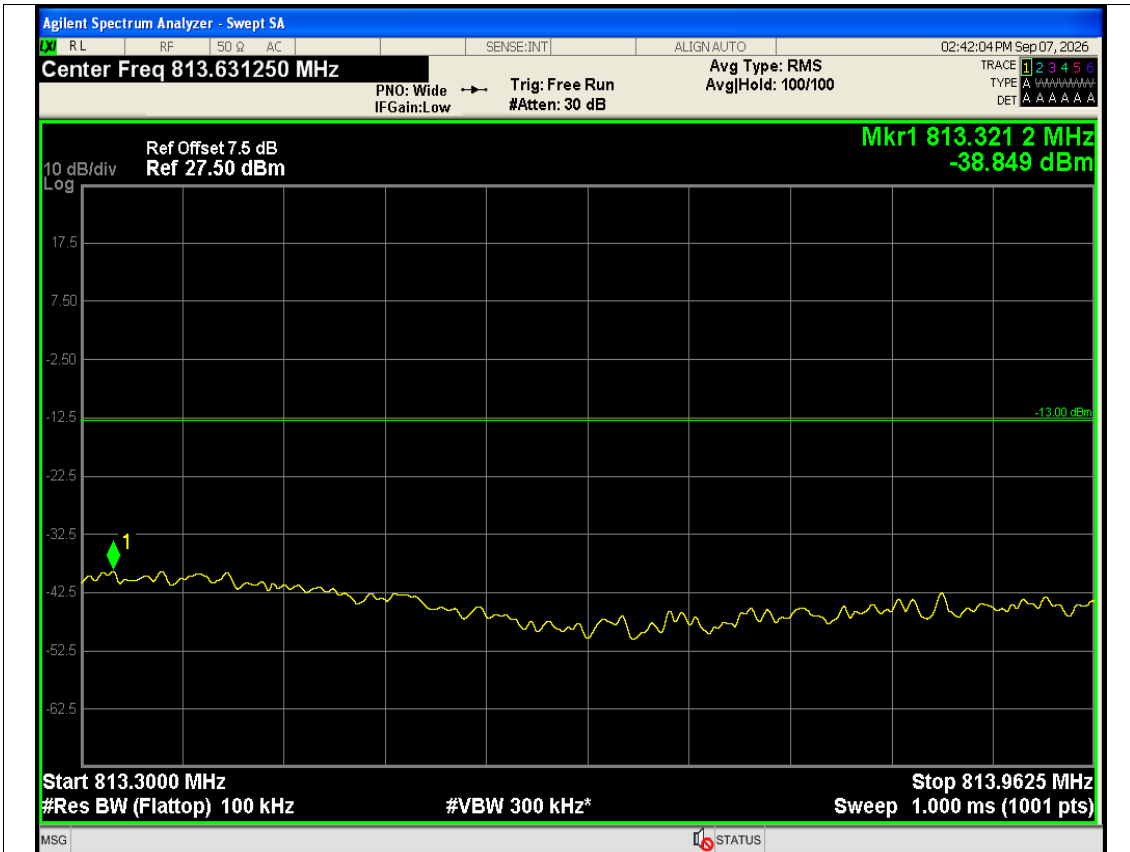


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 813.3 MHz\_ 813.9625 MHz NVNT

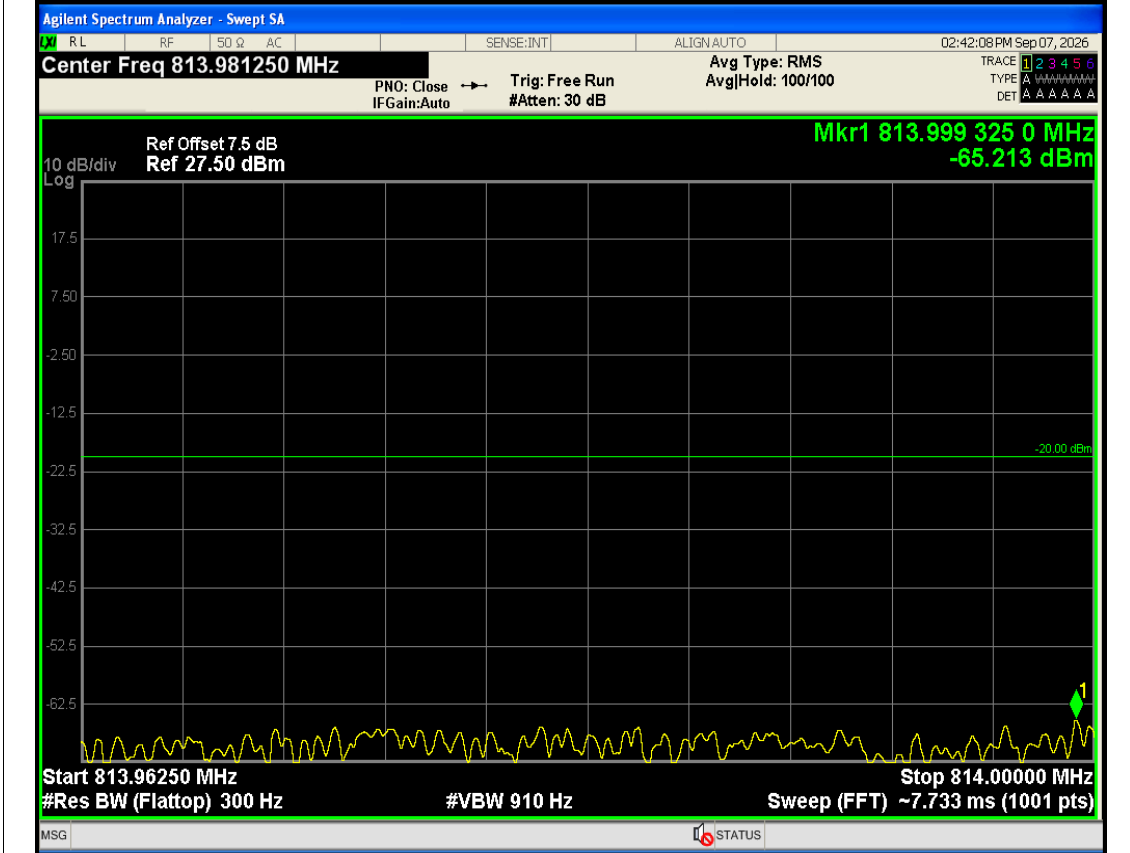


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 813.9625 MHz\_ 814 MHz NVNT

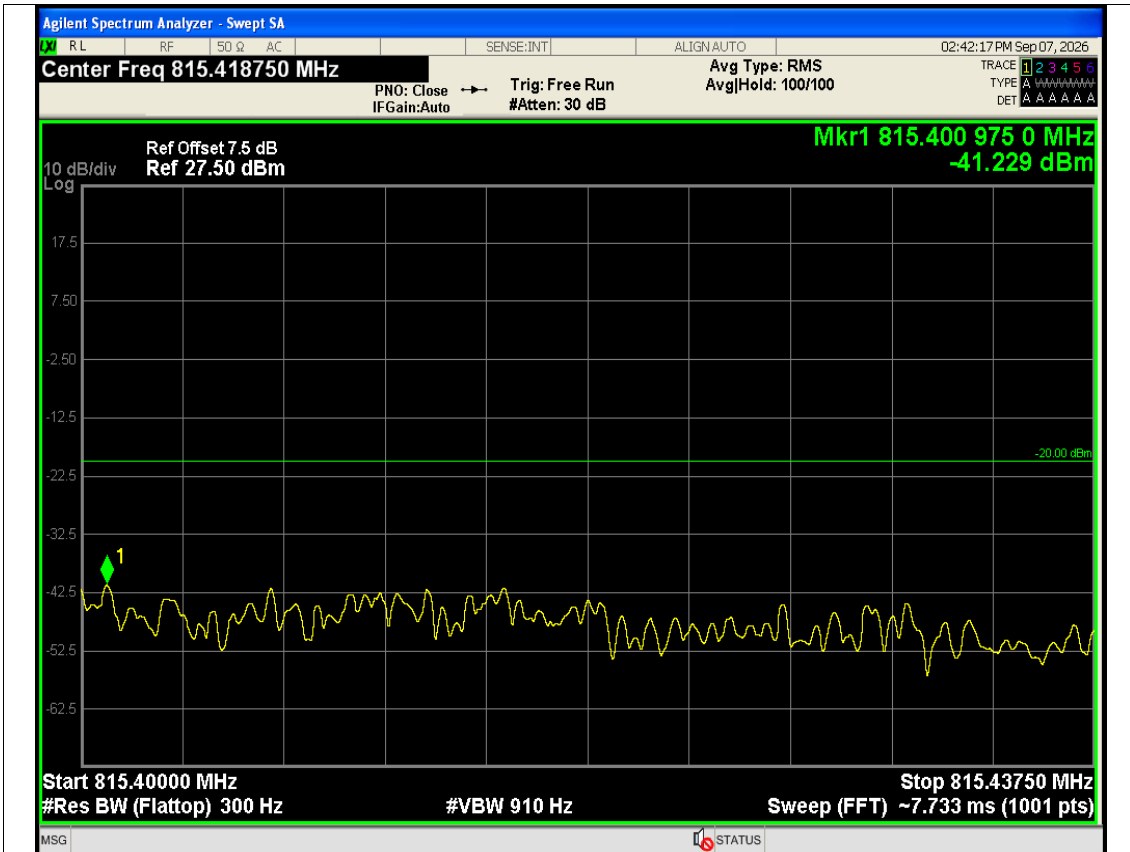


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 815.4 MHz 815.4375 MHz NVNT

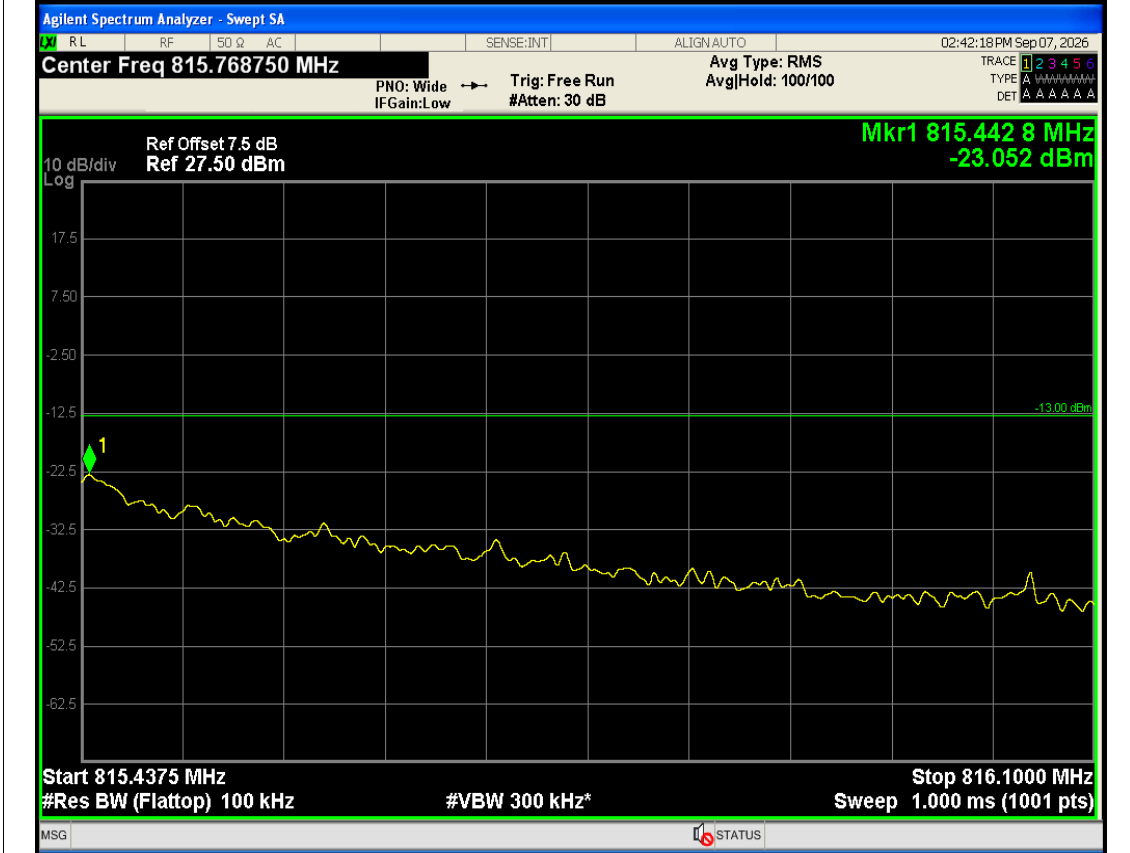


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=1 Position=#Max 815.4375 MHz 816.1 MHz NVNT

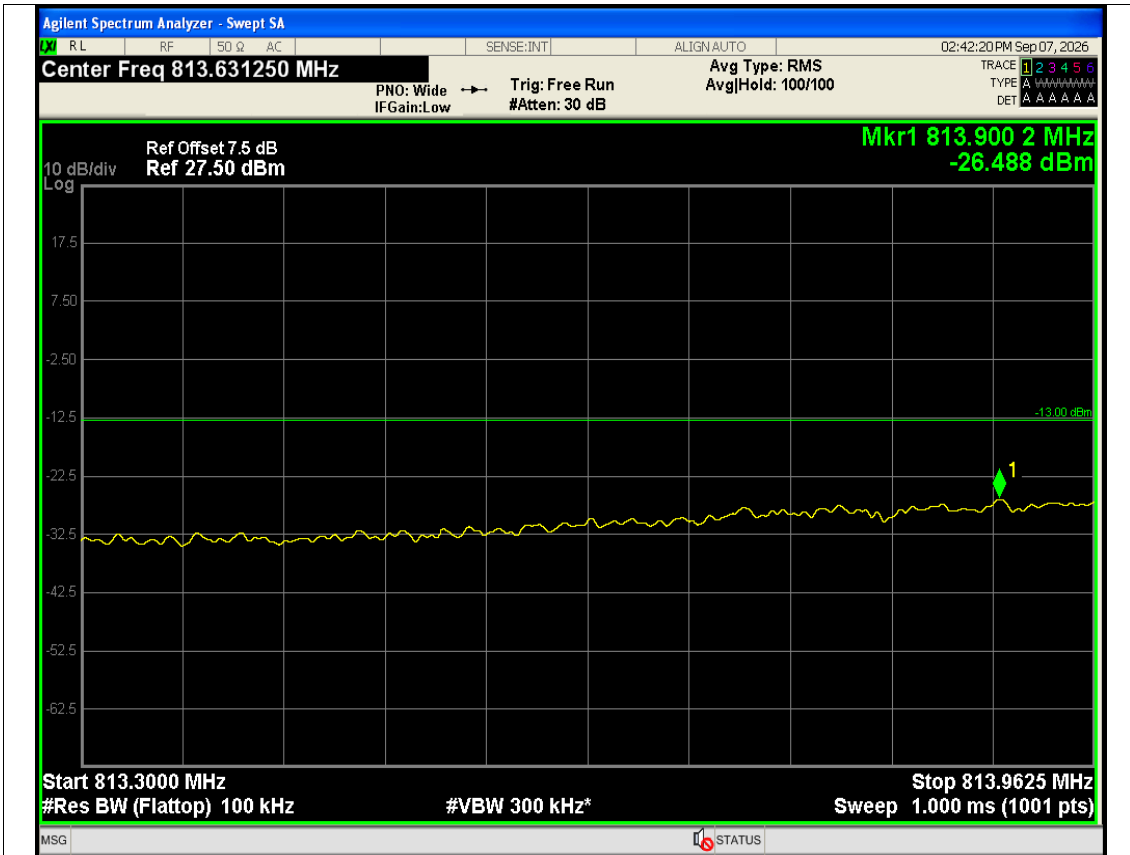


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0 813.3 MHz 813.9625 MHz NVNT

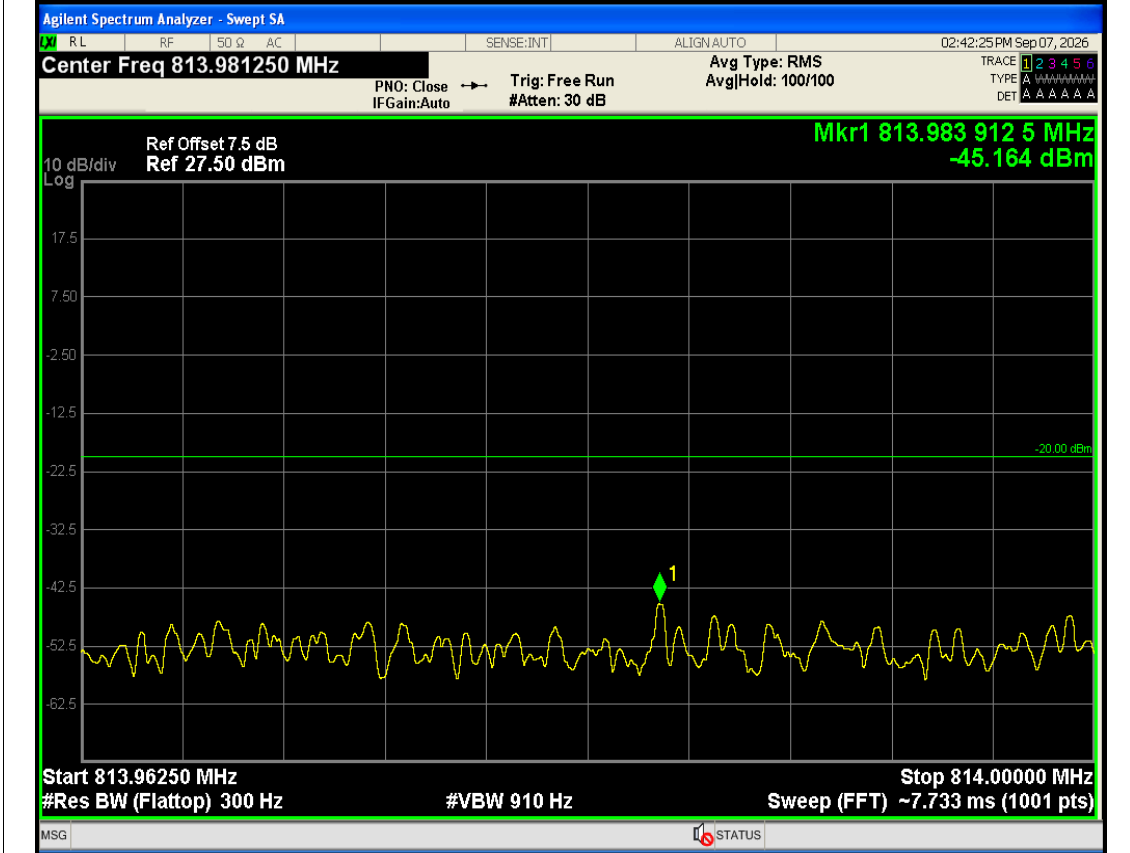

Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0 813.9625 MHz 814 MHz NVNT

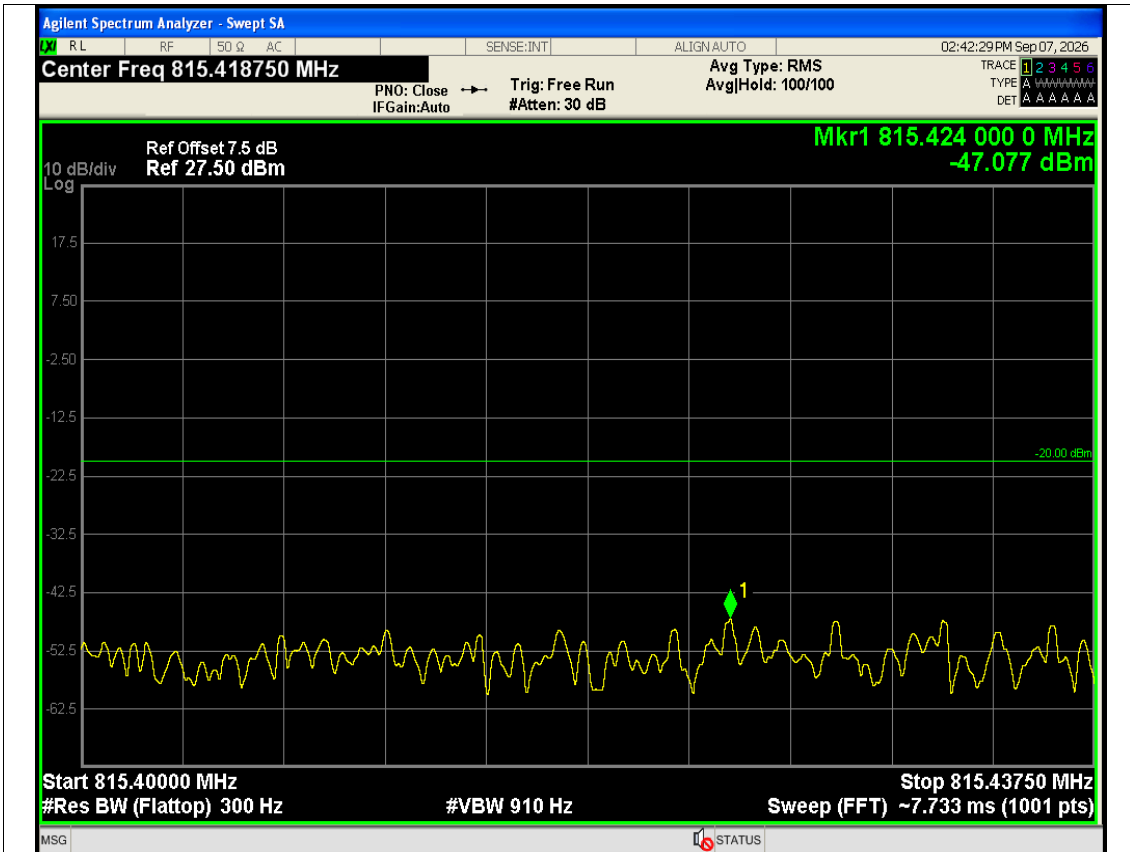


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0 815.4 MHz 815.4375 MHz NVNT

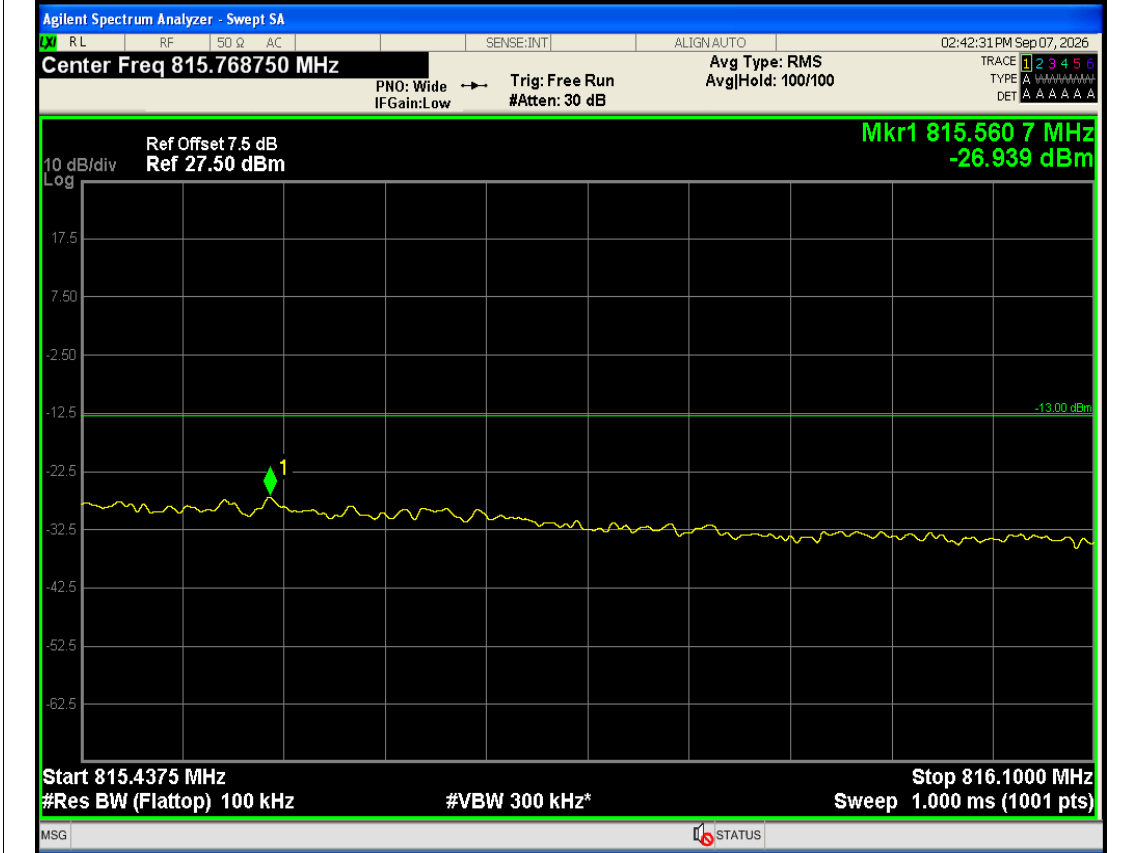


Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0 815.4375 MHz 816.1 MHz NVNT




Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#0 821.9 MHz 822.5625 MHz NVNT

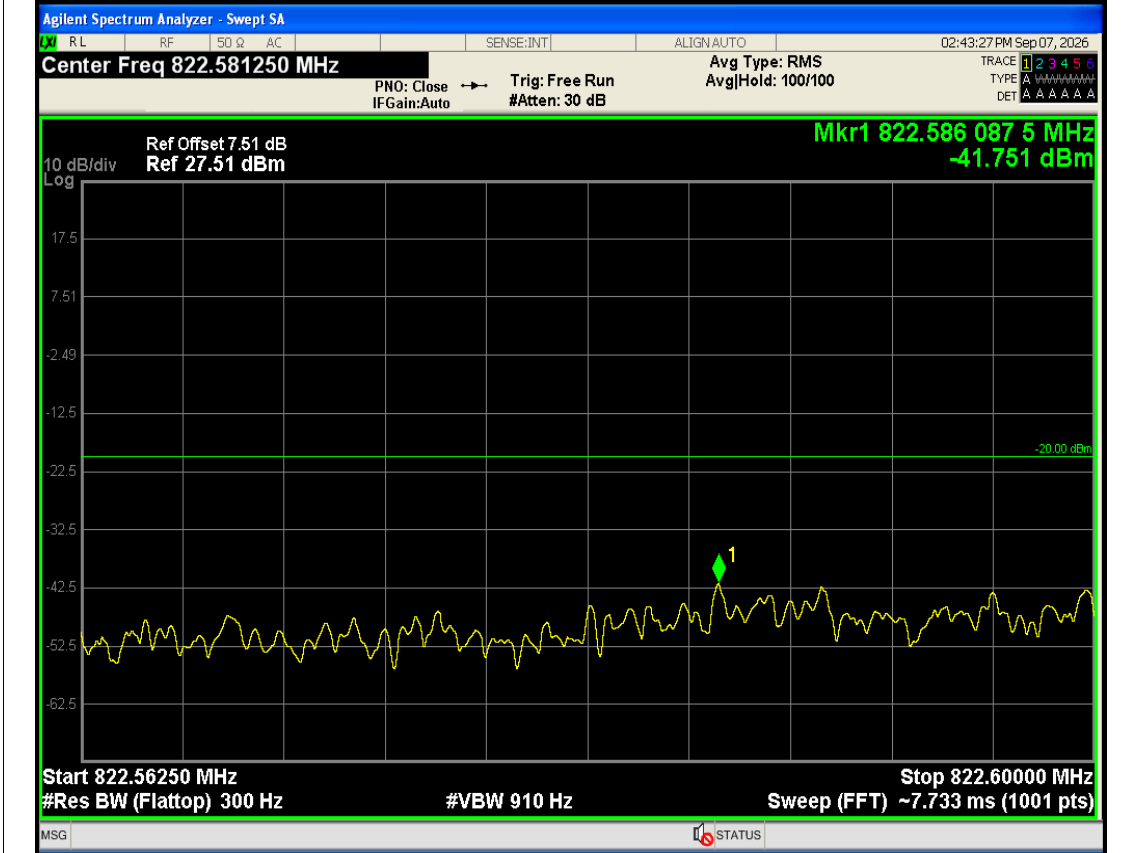

Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#0 822.5625 MHz 822.6 MHz NVNT

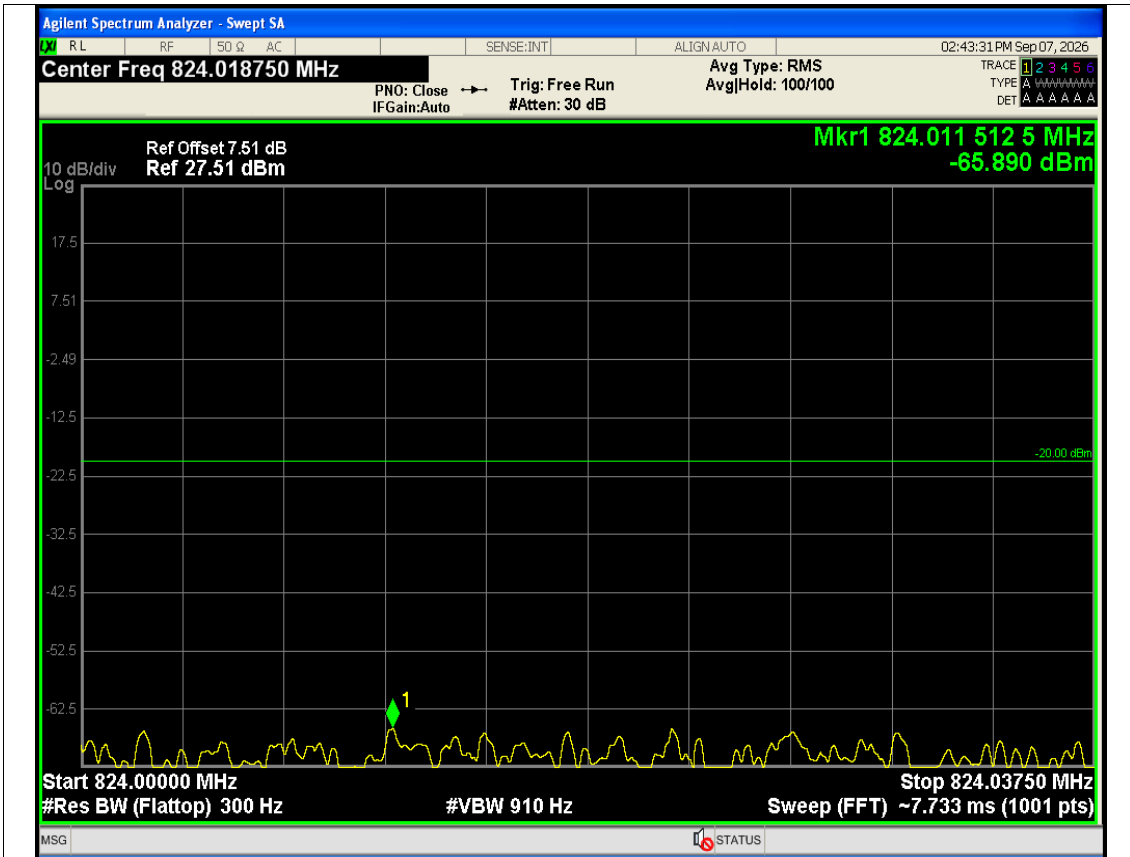


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#0 824 MHz 824.0375 MHz NVNT

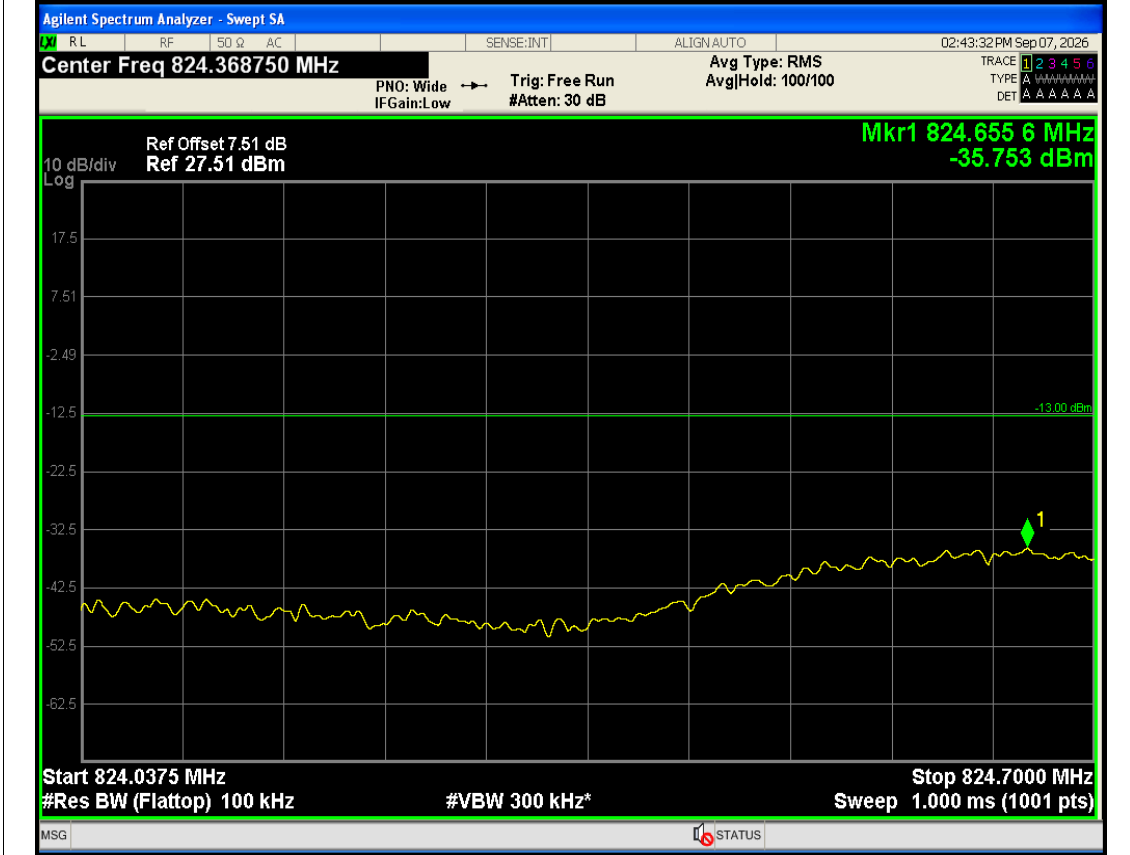


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#0 824.0375 MHz 824.7 MHz NVNT




Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 821.9 MHz 822.5625 MHz NVNT

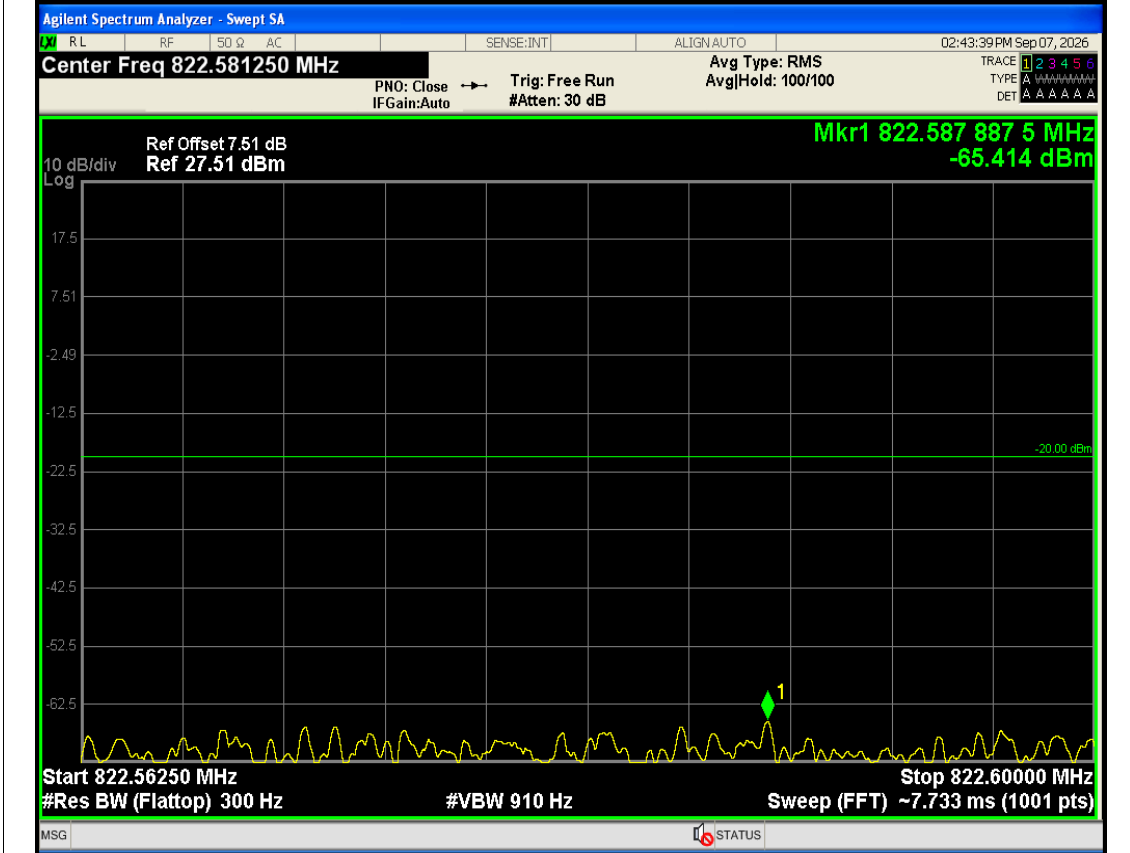


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 822.5625 MHz 822.6 MHz NVNT

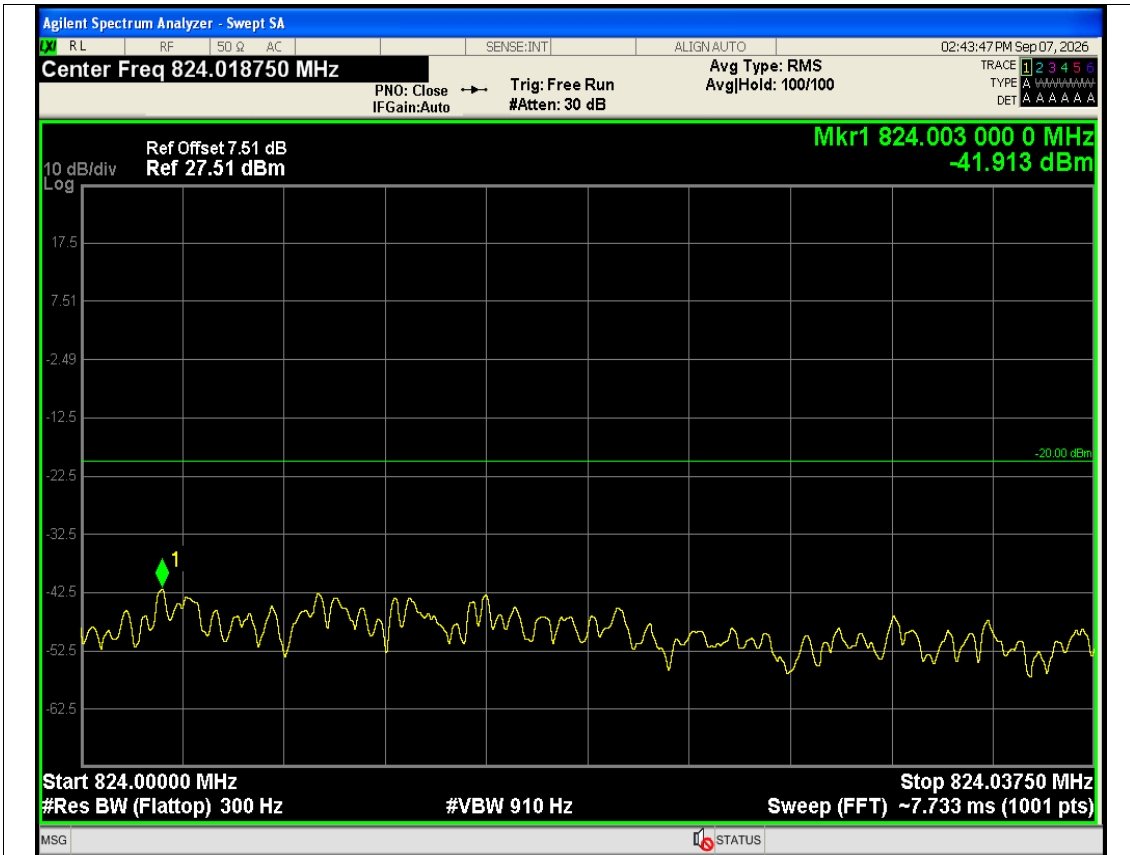


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 824 MHz 824.0375 MHz NVNT

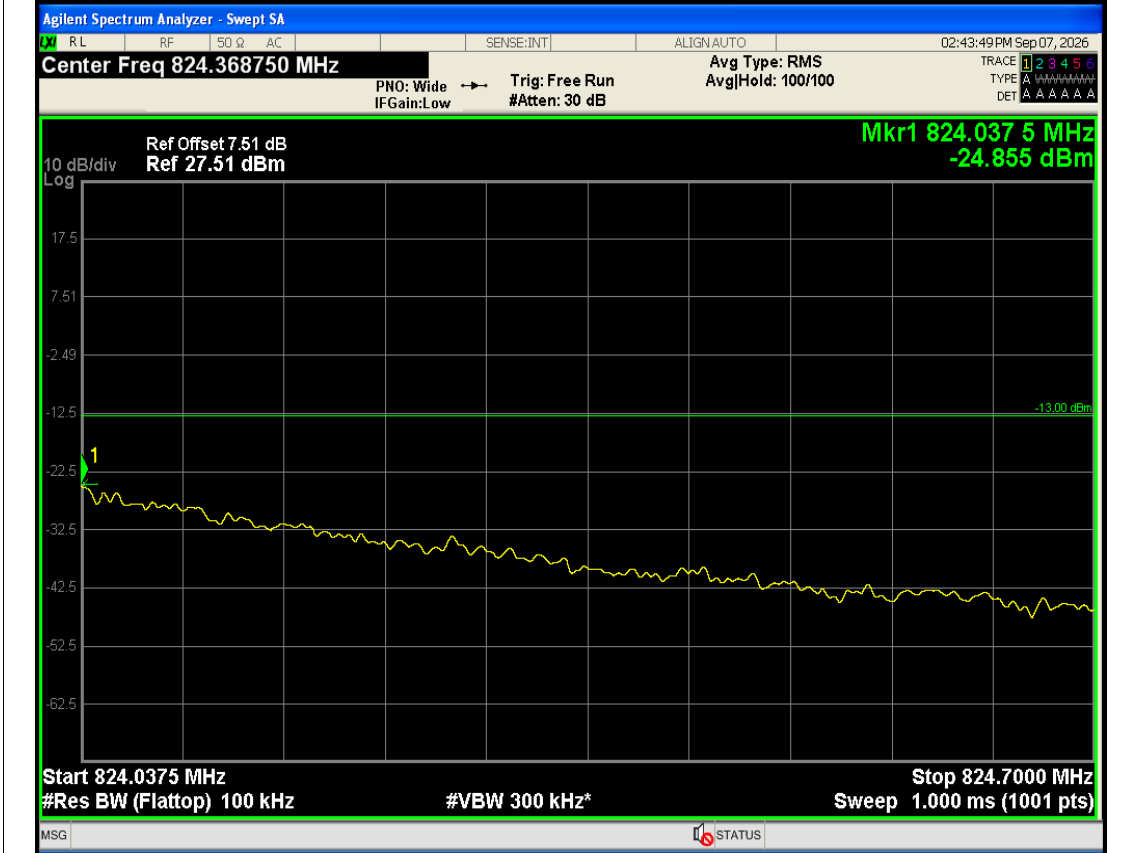


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=1 Position=#Max 824.0375 MHz 824.7 MHz NVNT

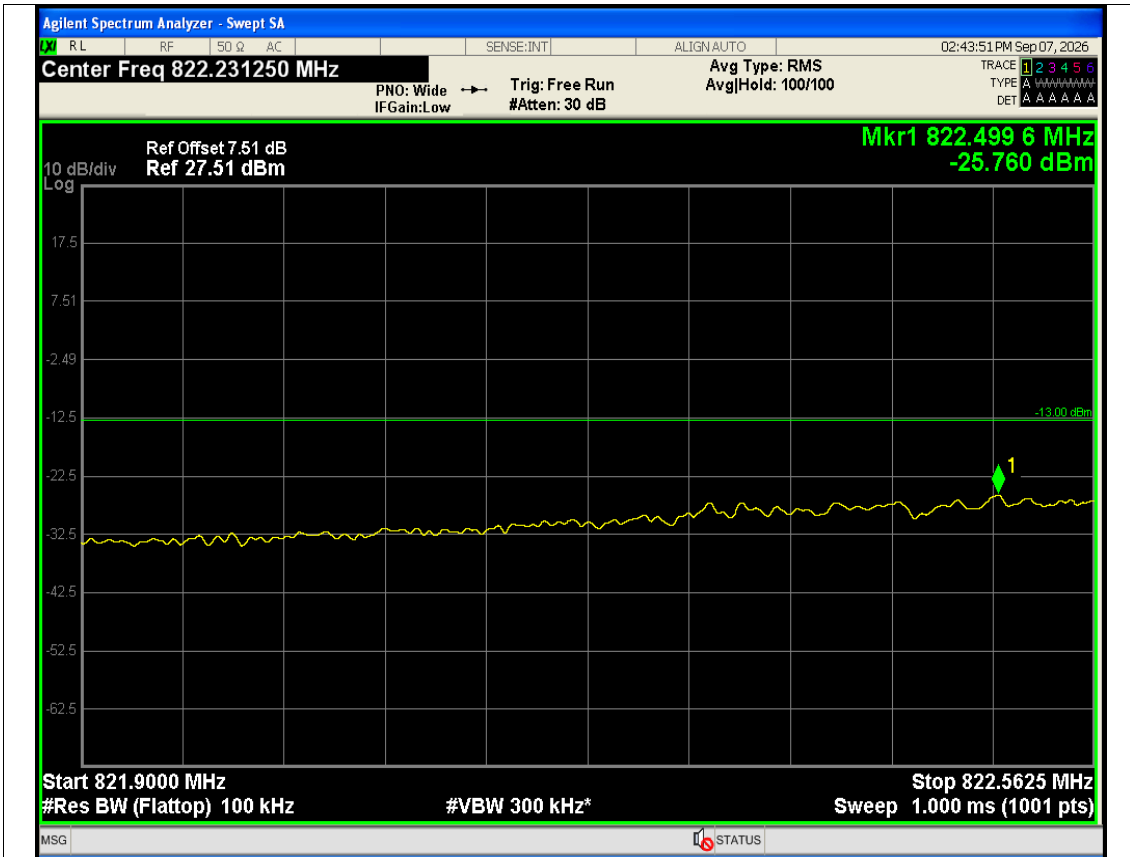


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0 821.9 MHz 822.5625 MHz NVNT

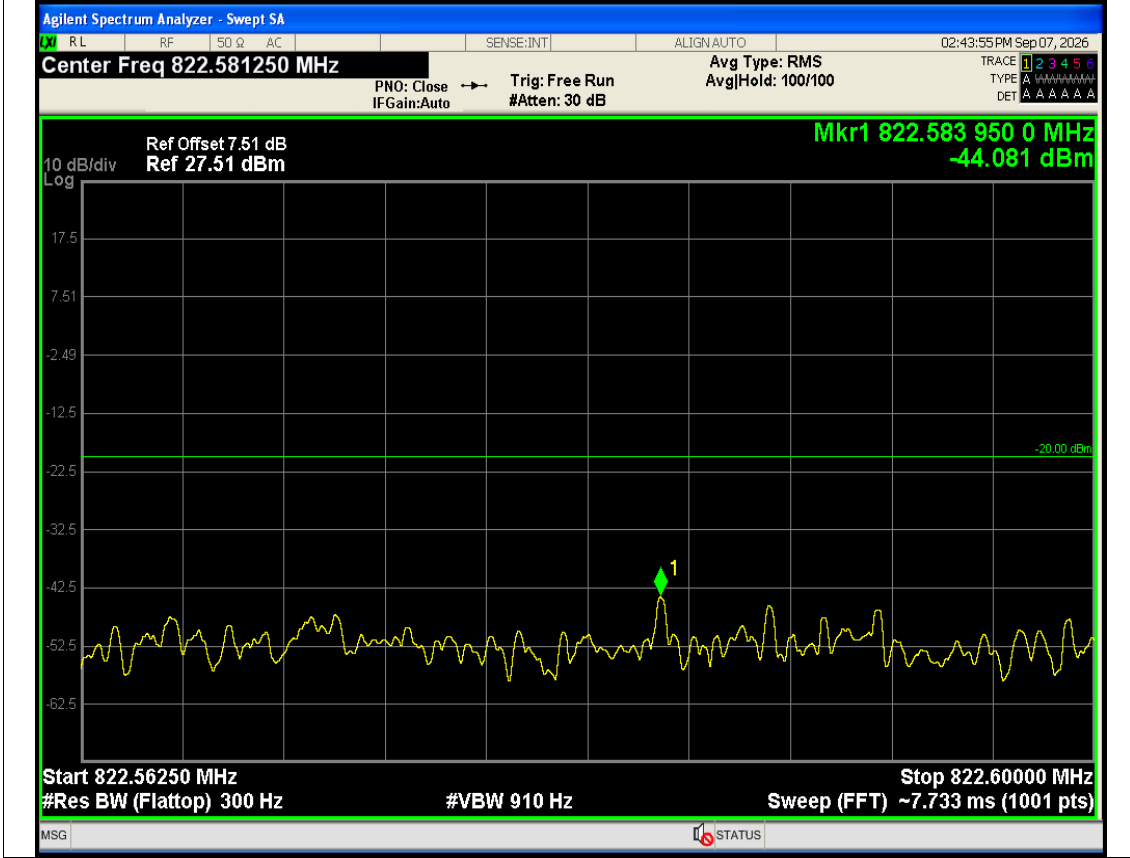

Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0 822.5625 MHz 822.6 MHz NVNT

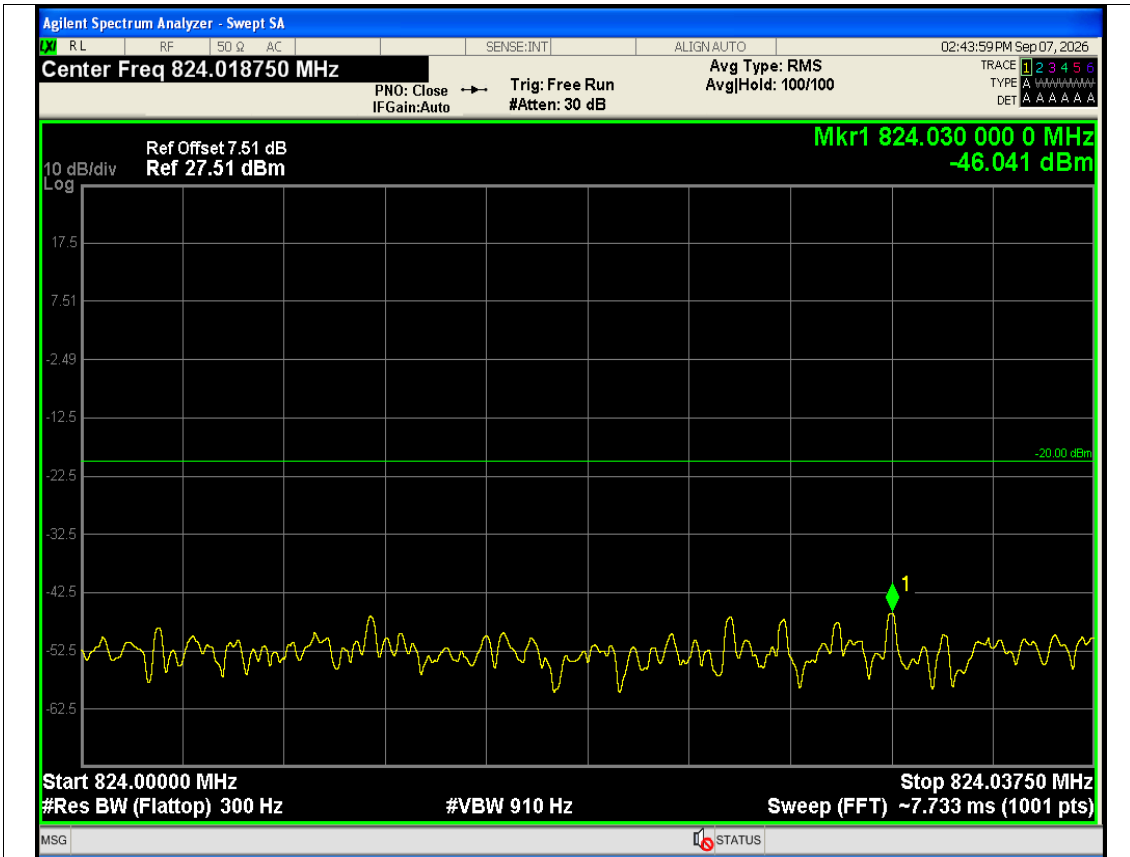


Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0 824 MHz 824.0375 MHz NVNT

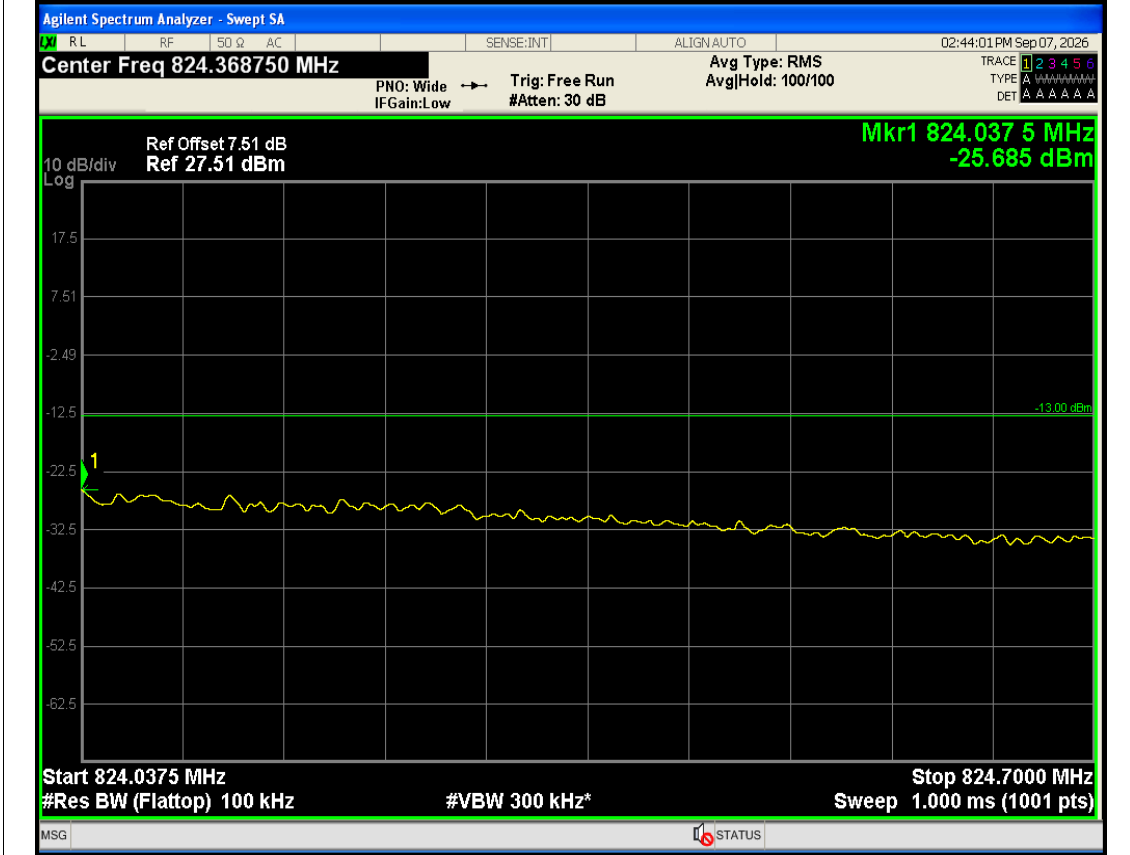

Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0 824.0375 MHz 824.7 MHz NVNT



Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=1 Position=#0 809 MHz 813.9625 MHz NVNT

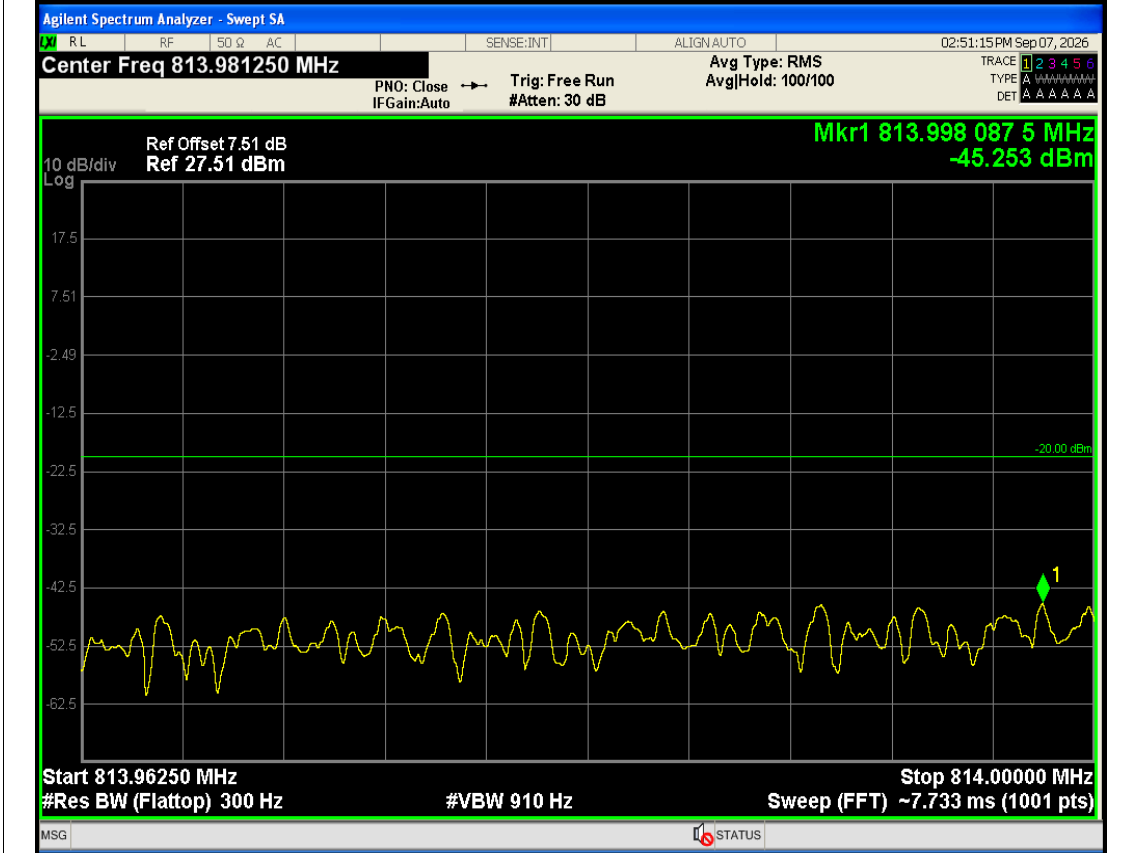

Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=1 Position=#0 813.9625 MHz 814 MHz NVNT