

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	25.19	PASS
EGPRS1900 1 Slot	661	1880	25.30	PASS
EGPRS1900 1 Slot	810	1909.8	24.94	PASS
EGPRS1900 2 Slot	512	1850.2	24.28	PASS
EGPRS1900 2 Slot	661	1880	24.58	PASS
EGPRS1900 2 Slot	810	1909.8	24.51	PASS
EGPRS1900 3 Slot	512	1850.2	21.71	PASS
EGPRS1900 3 Slot	661	1880	22.13	PASS
EGPRS1900 3 Slot	810	1909.8	21.84	PASS
EGPRS1900 4 Slot	512	1850.2	20.15	PASS
EGPRS1900 4 Slot	661	1880	20.57	PASS
EGPRS1900 4 Slot	810	1909.8	20.23	PASS
EGPRS850 1 Slot	128	824.2	26.52	PASS
EGPRS850 1 Slot	189	836.4	26.67	PASS
EGPRS850 1 Slot	251	848.8	26.90	PASS
EGPRS850 2 Slot	128	824.2	25.45	PASS
EGPRS850 2 Slot	189	836.4	25.35	PASS
EGPRS850 2 Slot	251	848.8	25.65	PASS
EGPRS850 3 Slot	128	824.2	23.24	PASS
EGPRS850 3 Slot	189	836.4	23.25	PASS
EGPRS850 3 Slot	251	848.8	23.79	PASS
EGPRS850 4 Slot	128	824.2	22.45	PASS
EGPRS850 4 Slot	189	836.4	22.63	PASS
EGPRS850 4 Slot	251	848.8	22.46	PASS
GPRS1900 1 Slot	512	1850.2	28.77	PASS
GPRS1900 1 Slot	661	1880	28.84	PASS
GPRS1900 1 Slot	810	1909.8	28.71	PASS
GPRS1900 2 Slot	512	1850.2	27.81	PASS
GPRS1900 2 Slot	661	1880	27.91	PASS
GPRS1900 2 Slot	810	1909.8	27.78	PASS
GPRS1900 3 Slot	512	1850.2	25.80	PASS
GPRS1900 3 Slot	661	1880	25.92	PASS
GPRS1900 3 Slot	810	1909.8	25.82	PASS
GPRS1900 4 Slot	512	1850.2	24.72	PASS
GPRS1900 4 Slot	661	1880	24.87	PASS
GPRS1900 4 Slot	810	1909.8	24.77	PASS
GPRS850 1 Slot	128	824.2	32.42	PASS
GPRS850 1 Slot	189	836.4	32.38	PASS
GPRS850 1 Slot	251	848.8	32.07	PASS
GPRS850 2 Slot	128	824.2	31.46	PASS
GPRS850 2 Slot	189	836.4	31.41	PASS

GPRS850 2 Slot	251	848.8	31.11	PASS
GPRS850 3 Slot	128	824.2	29.39	PASS
GPRS850 3 Slot	189	836.4	29.36	PASS
GPRS850 3 Slot	251	848.8	29.10	PASS
GPRS850 4 Slot	128	824.2	28.24	PASS
GPRS850 4 Slot	189	836.4	28.23	PASS
GPRS850 4 Slot	251	848.8	28.00	PASS
GSM1900	512	1850.2	28.79	PASS
GSM1900	661	1880	28.86	PASS
GSM1900	810	1909.8	28.75	PASS
GSM850	128	824.2	32.45	PASS
GSM850	189	836.4	32.41	PASS
GSM850	251	848.8	32.11	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.54	13	PASS
EGPRS1900	661	1880	6.12	13	PASS
EGPRS1900	810	1909.8	6.34	13	PASS
EGPRS850	128	824.2	8.93	13	PASS
EGPRS850	189	836.4	8.34	13	PASS
EGPRS850	251	848.8	7.71	13	PASS


EGPRS1900 Channel=512

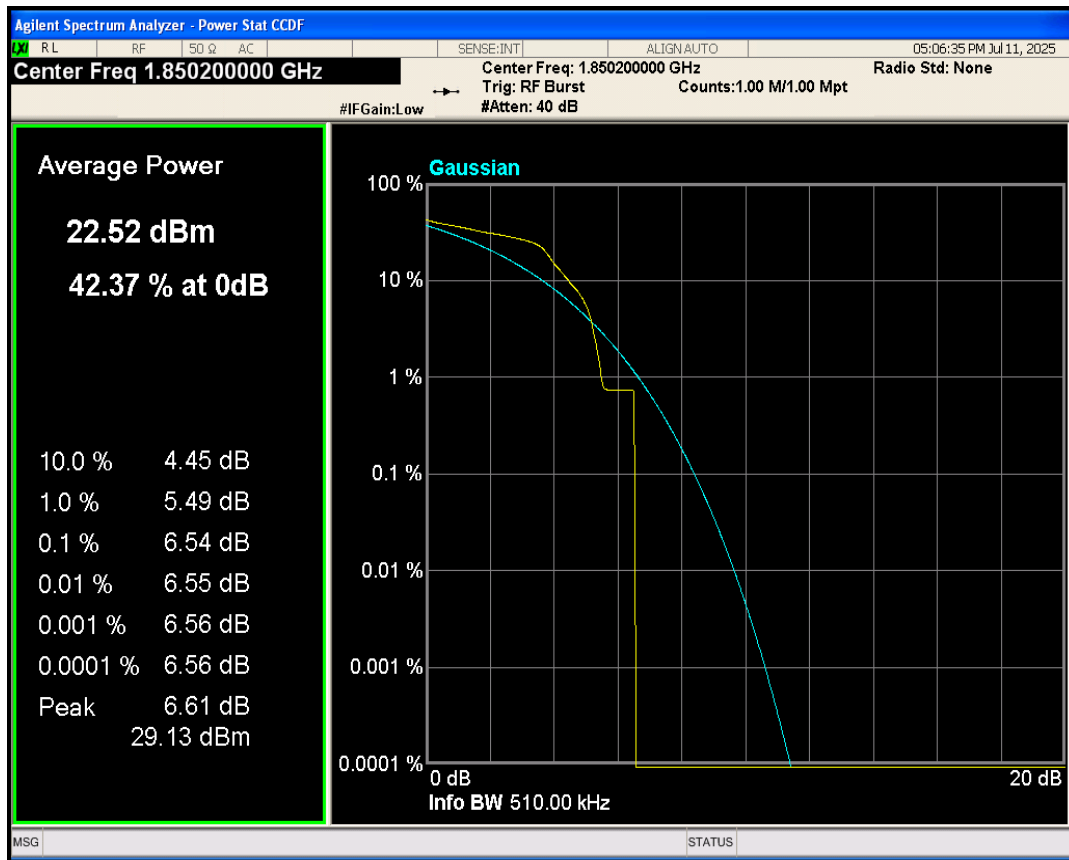


EGPRS1900 Channel=661

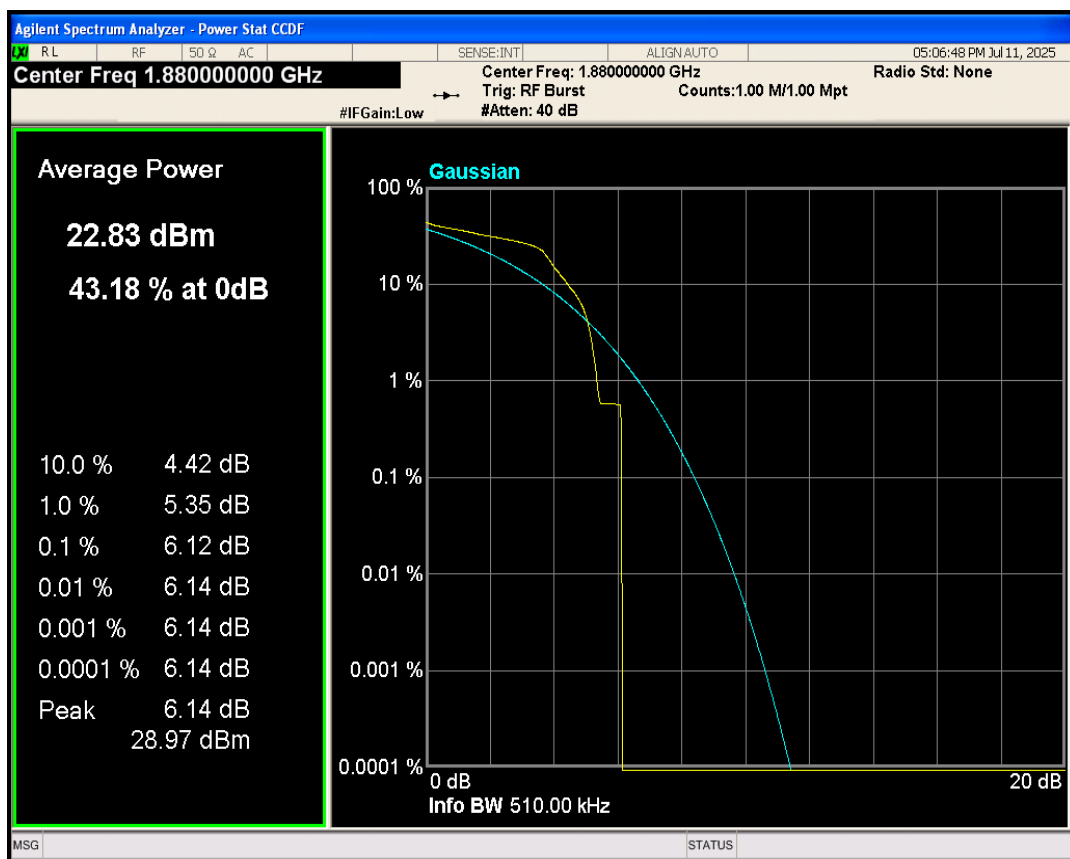


EGPRS1900 Channel=810

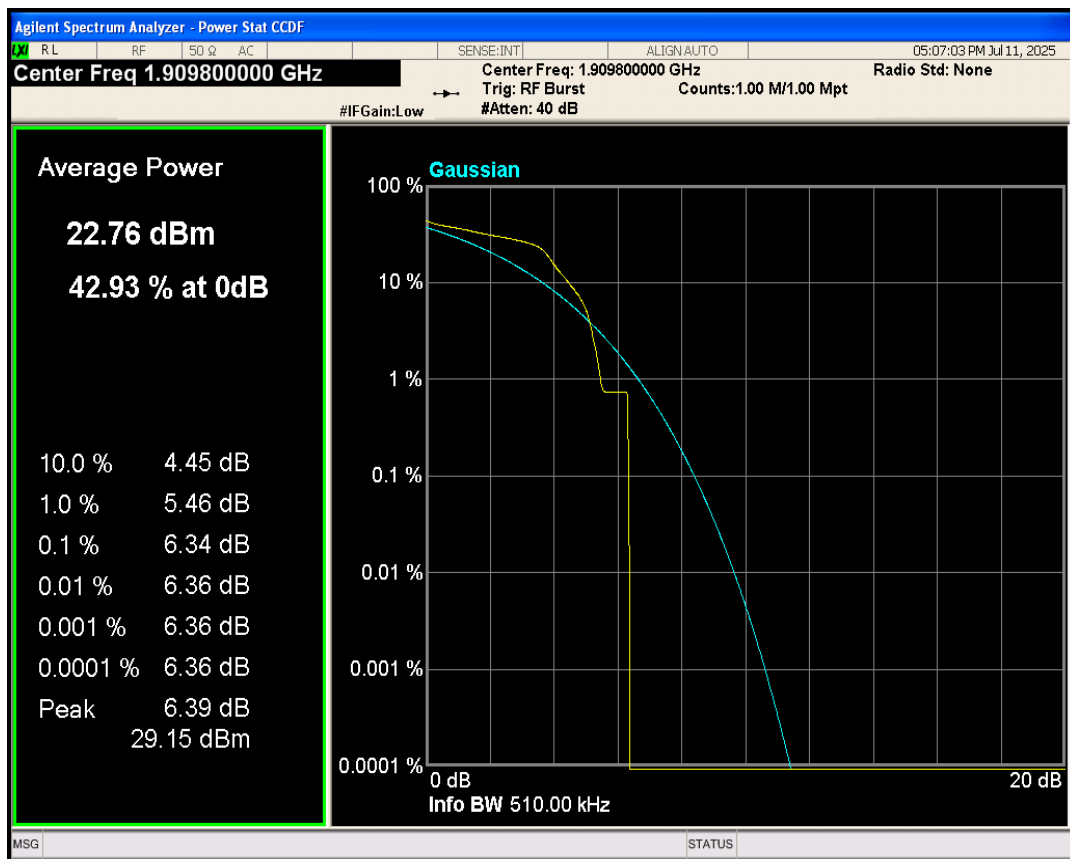


EGPRS850 Channel=128

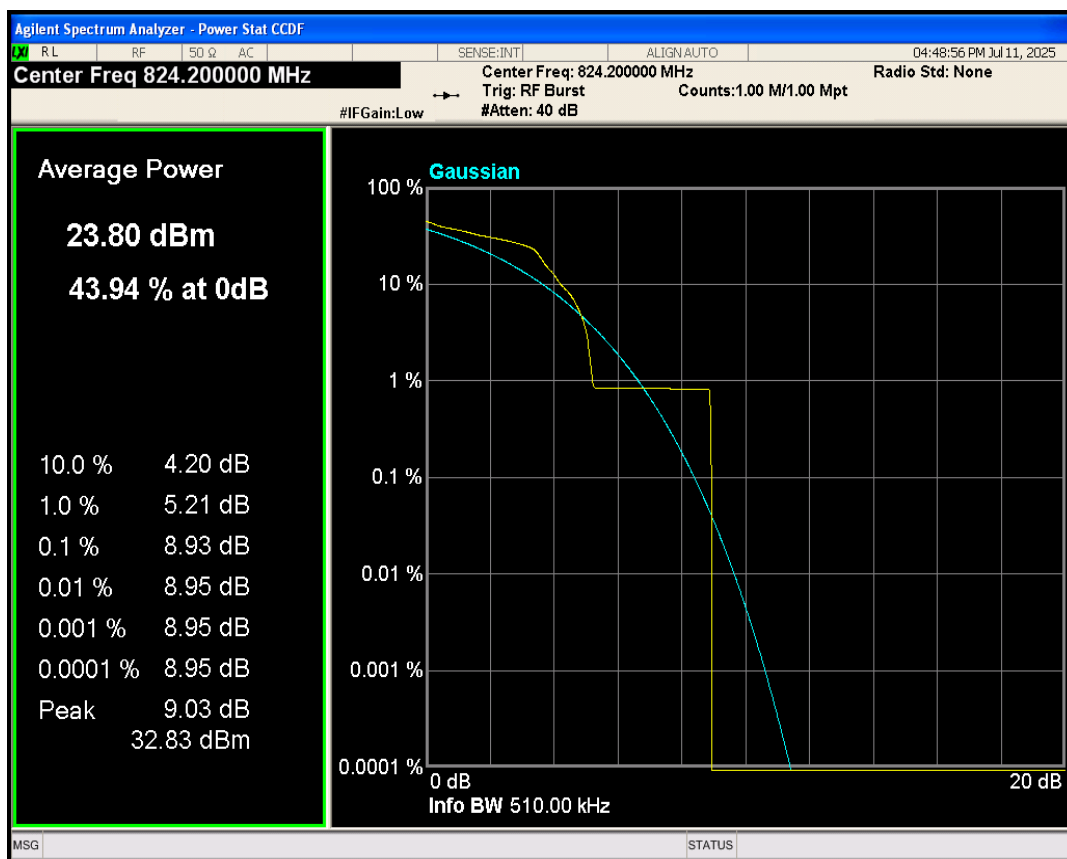

EGPRS850 Channel=189

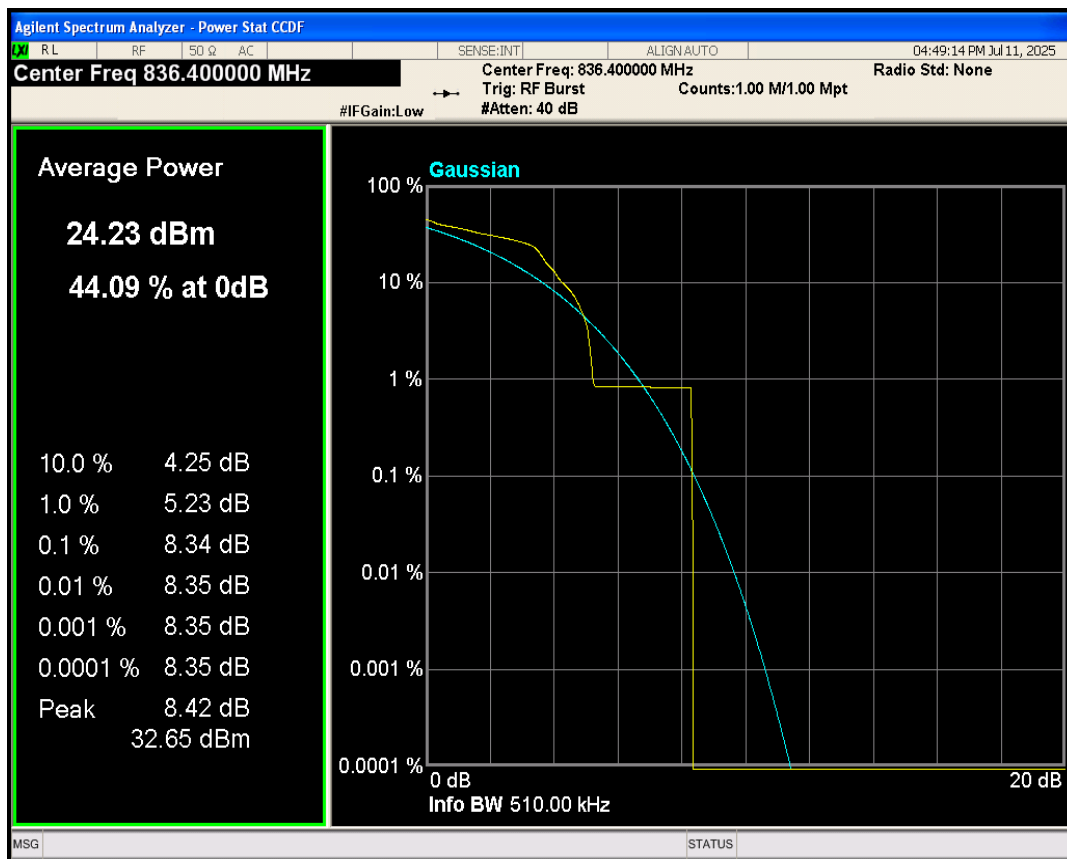


EGPRS850 Channel=251

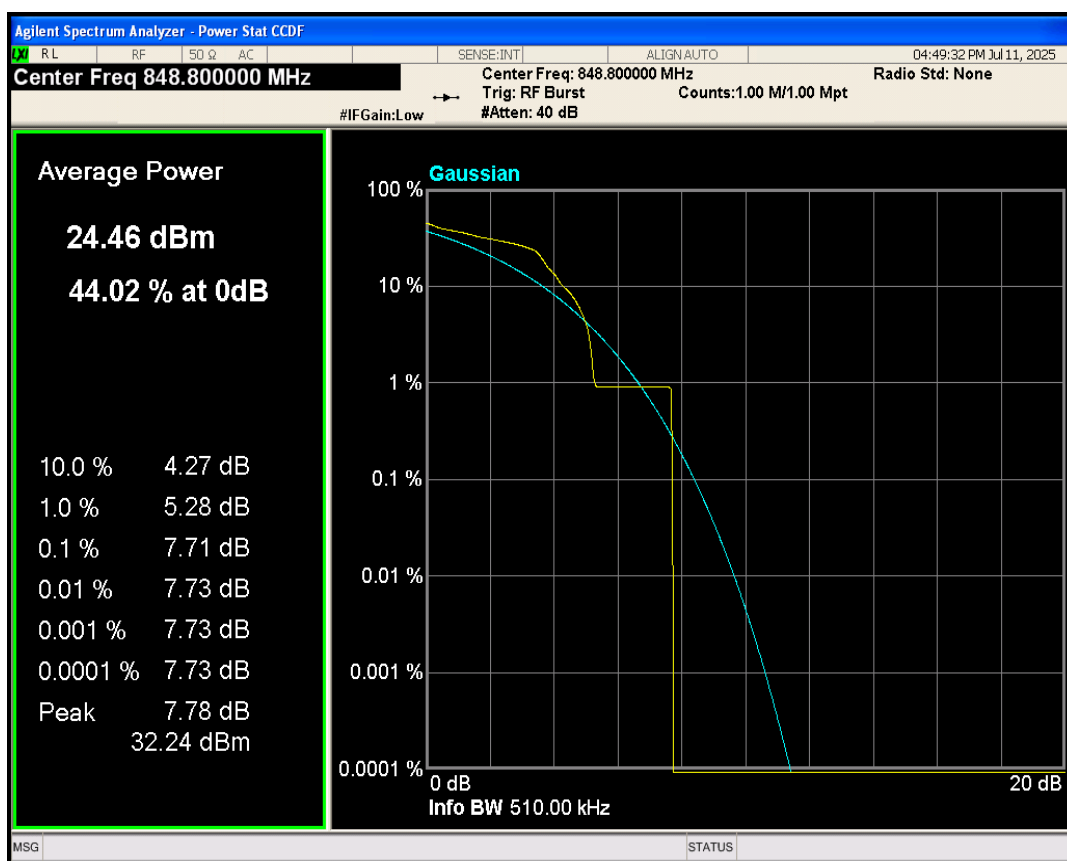


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	245.672	301.509	PASS
EGPRS1900	661	1880	243.417	310.959	PASS
EGPRS1900	810	1909.8	244.282	309.286	PASS
EGPRS850	128	824.2	249.800	309.204	PASS
EGPRS850	189	836.4	251.712	309.609	PASS
EGPRS850	251	848.8	246.403	306.479	PASS


EGPRS1900 Channel=512

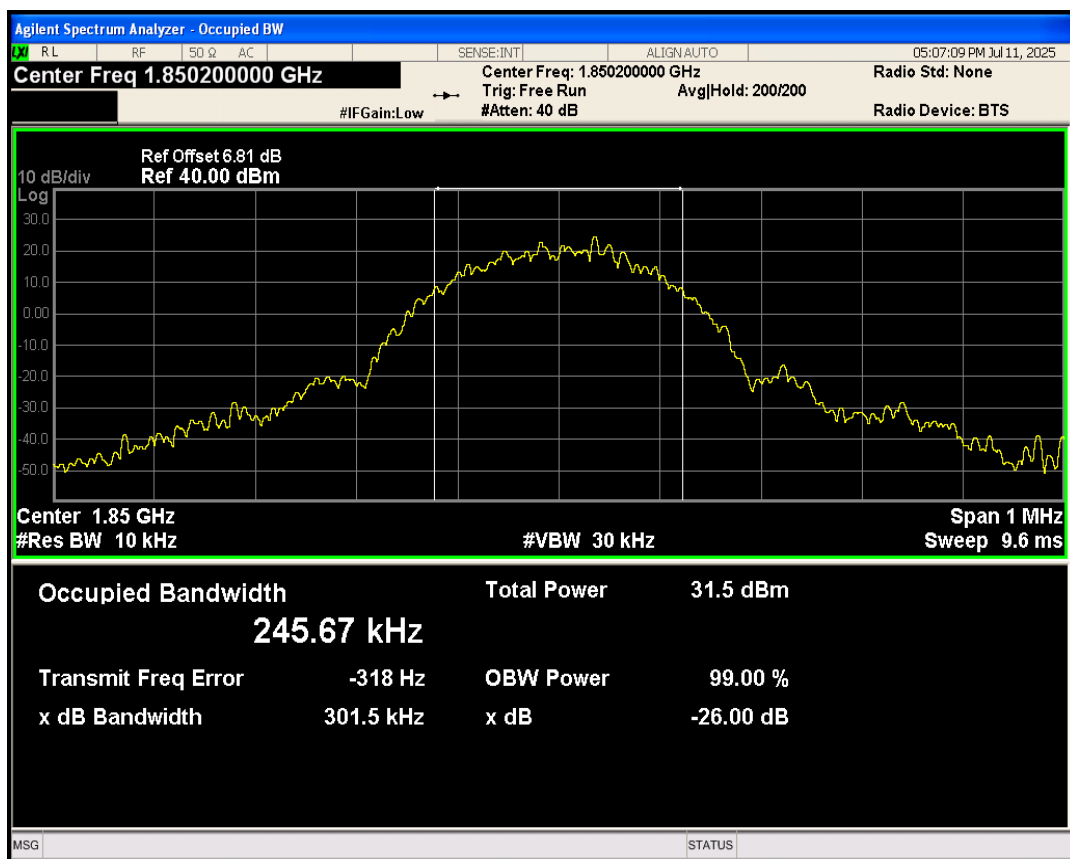


EGPRS1900 Channel=661

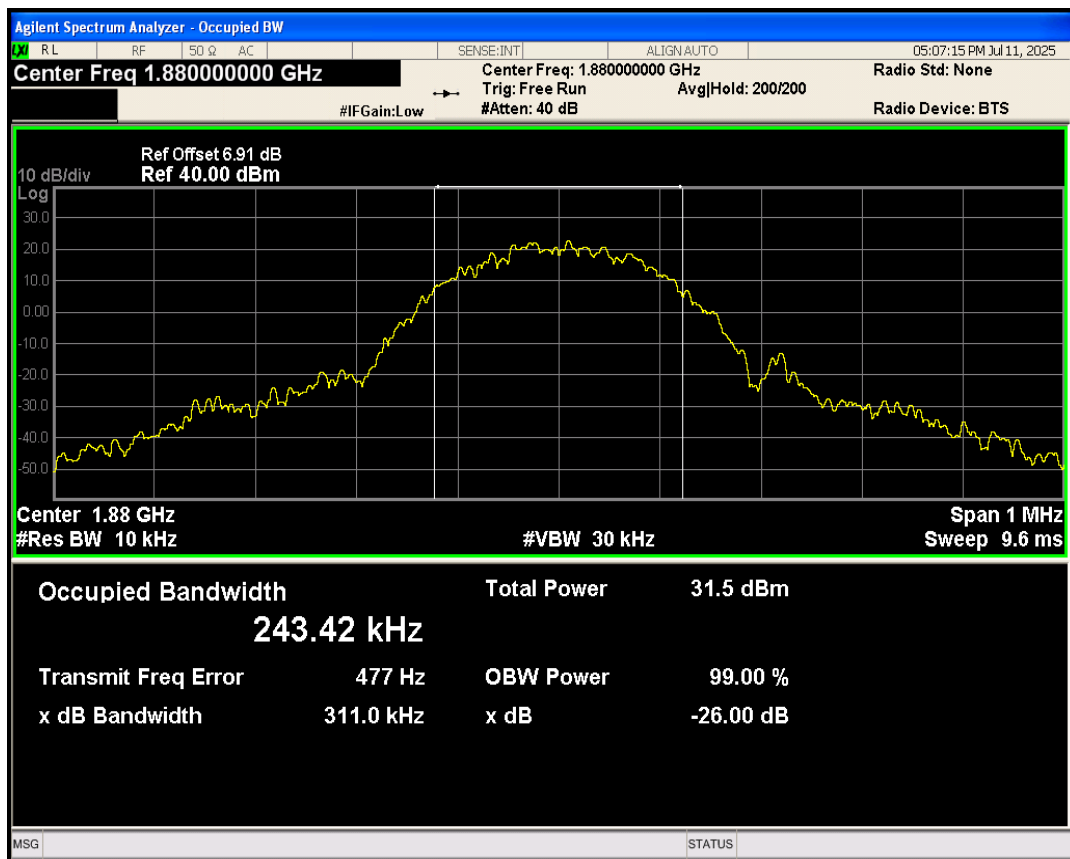


EGPRS1900 Channel=810

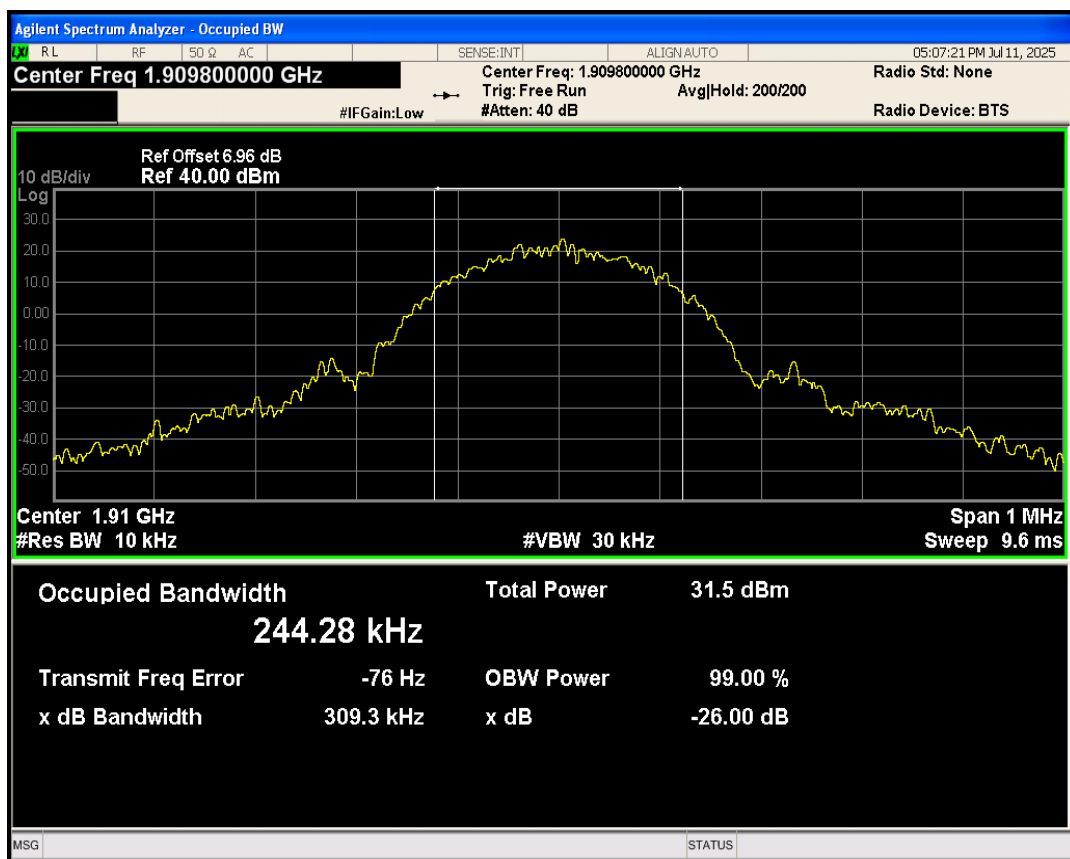


EGPRS850 Channel=128

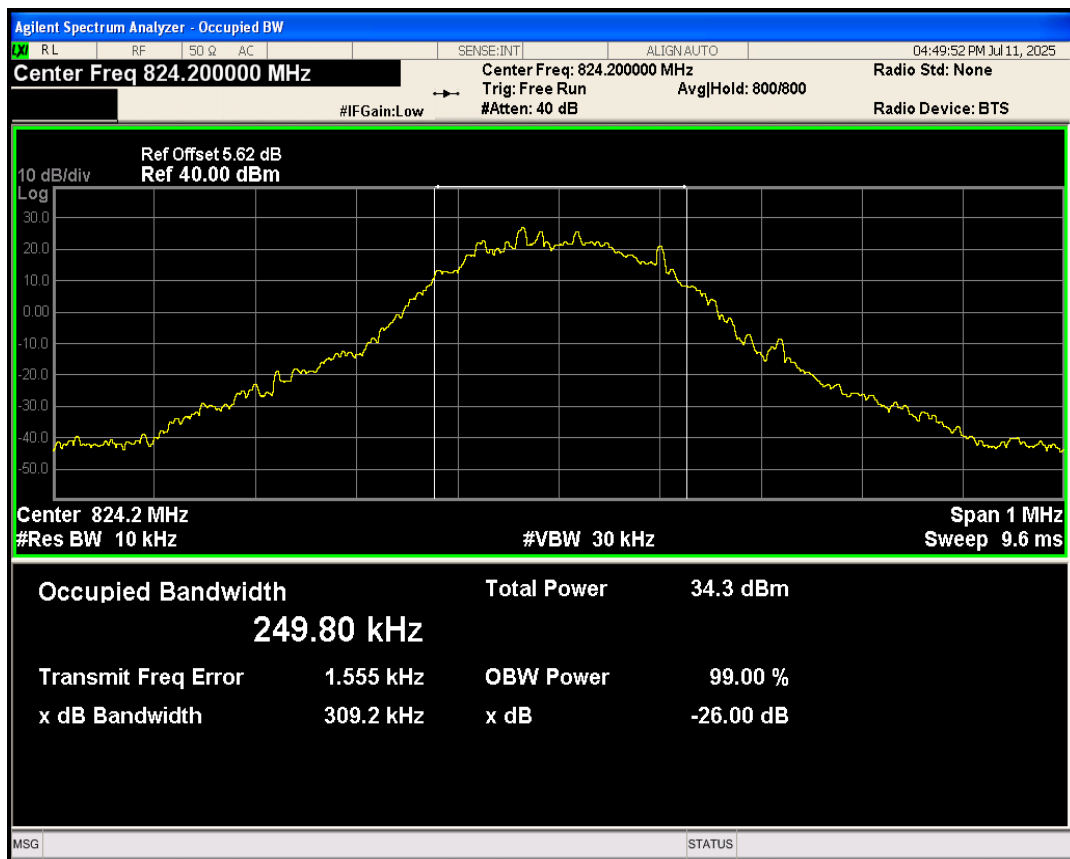

EGPRS850 Channel=189

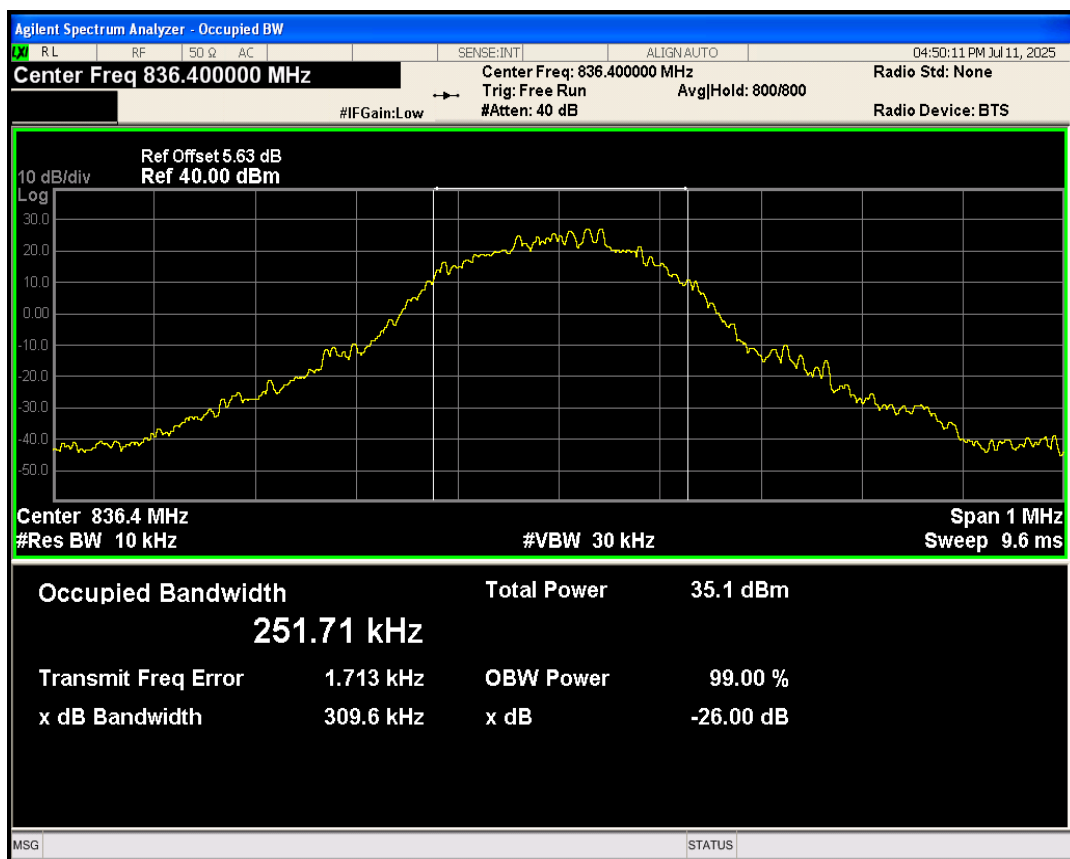


EGPRS850 Channel=251

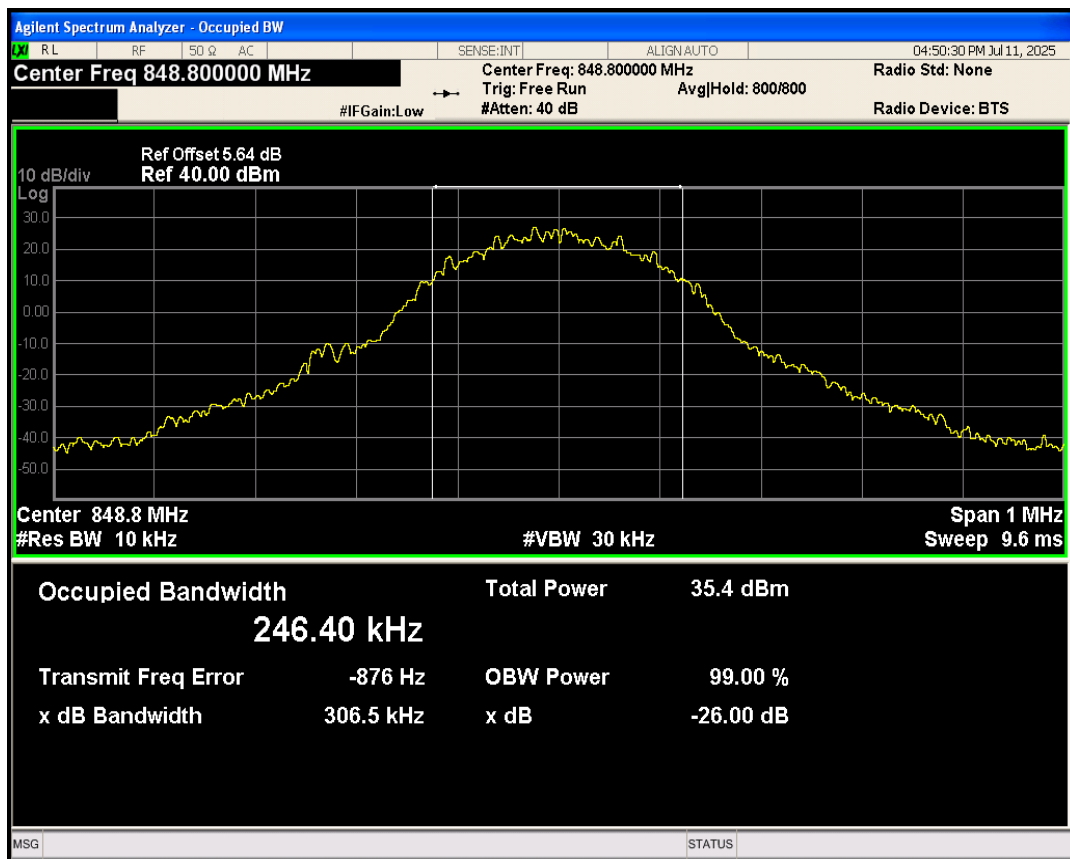


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.98	-38.29	-13	PASS
EGPRS1900	810	1909.8	1910.03	-38.65	-13	PASS
EGPRS850	128	824.2	823.99	-34.60	-13	PASS
EGPRS850	251	848.8	849.02	-35.02	-13	PASS


EGPRS1900 Channel=512

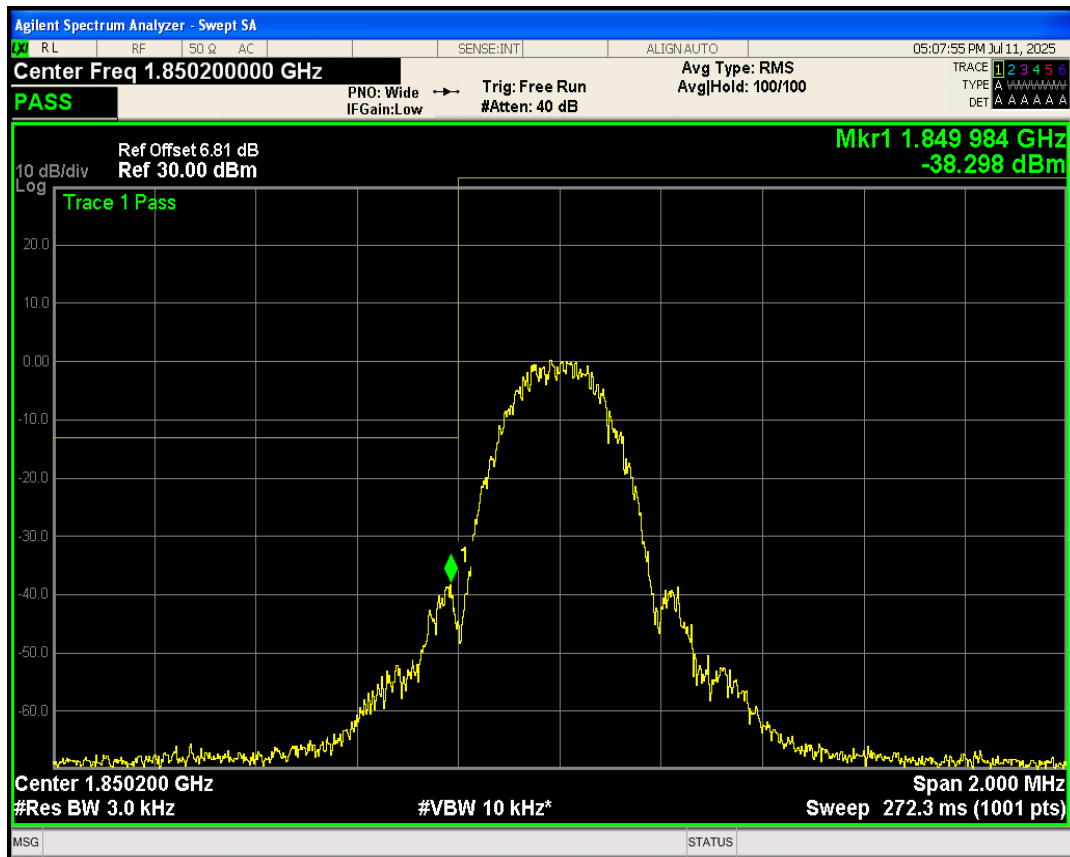


EGPRS1900 Channel=810

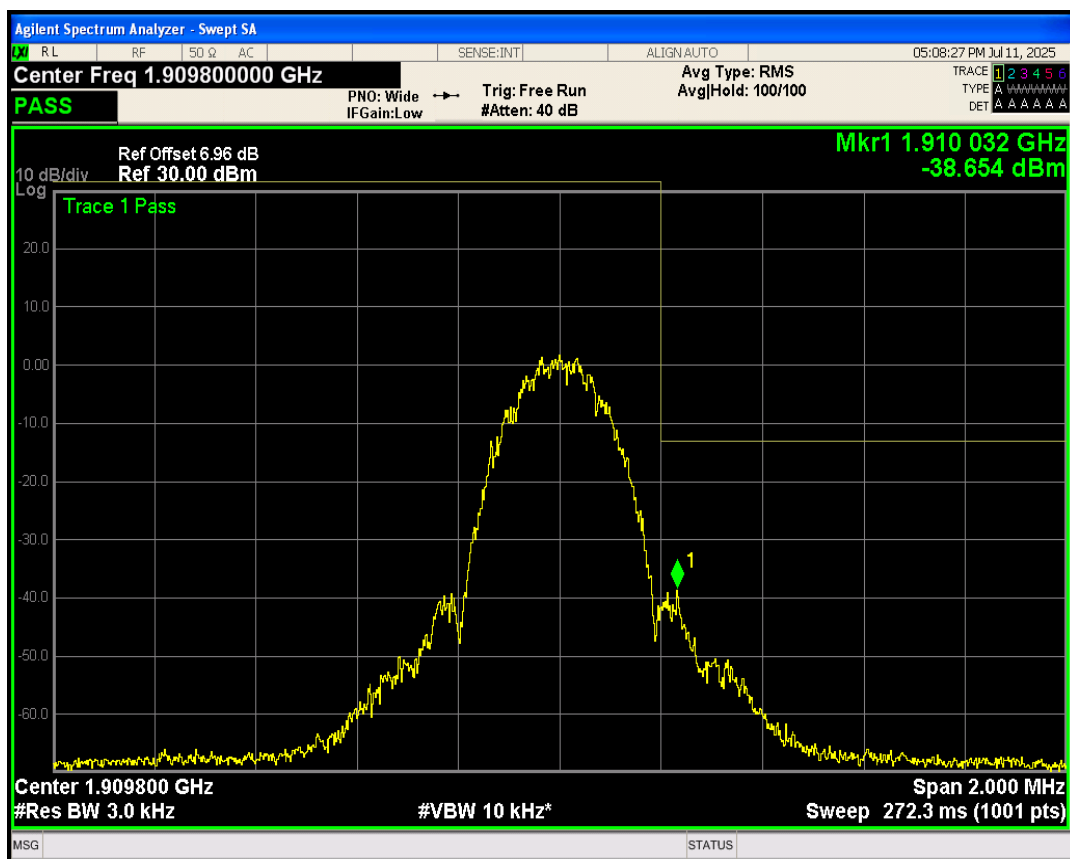

EGPRS850 Channel=128

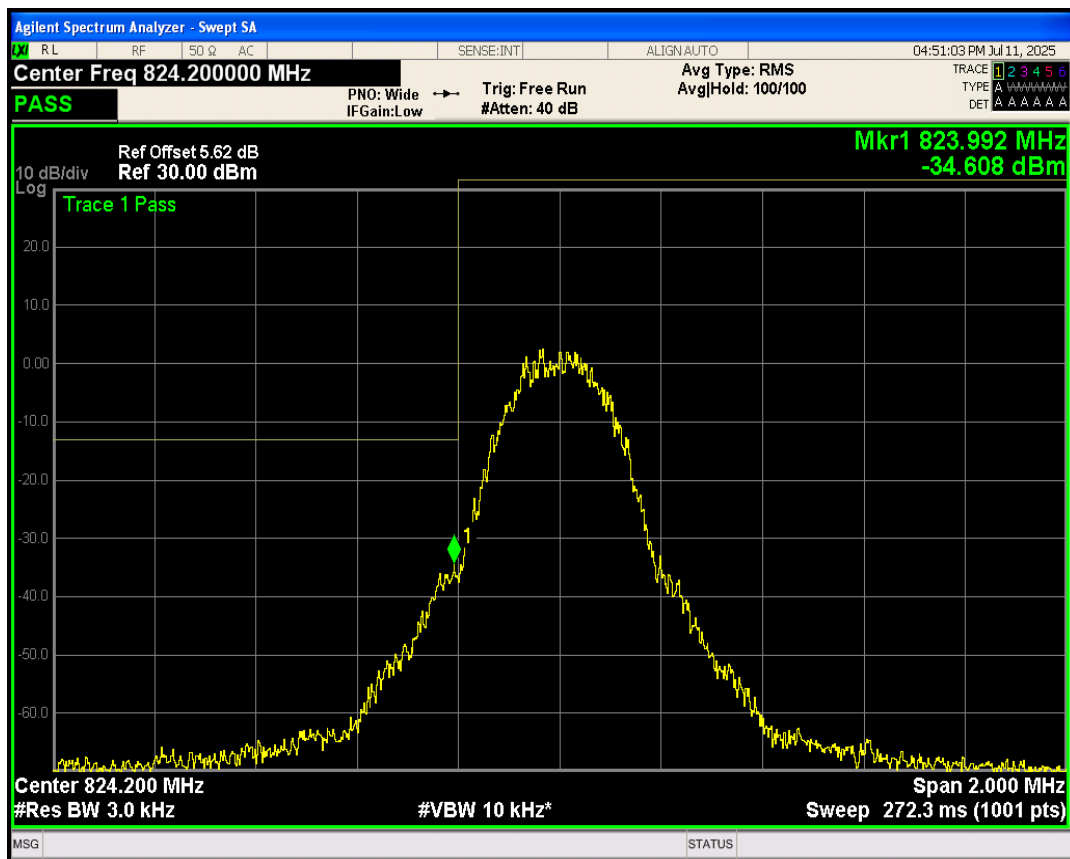


EGPRS850 Channel=251

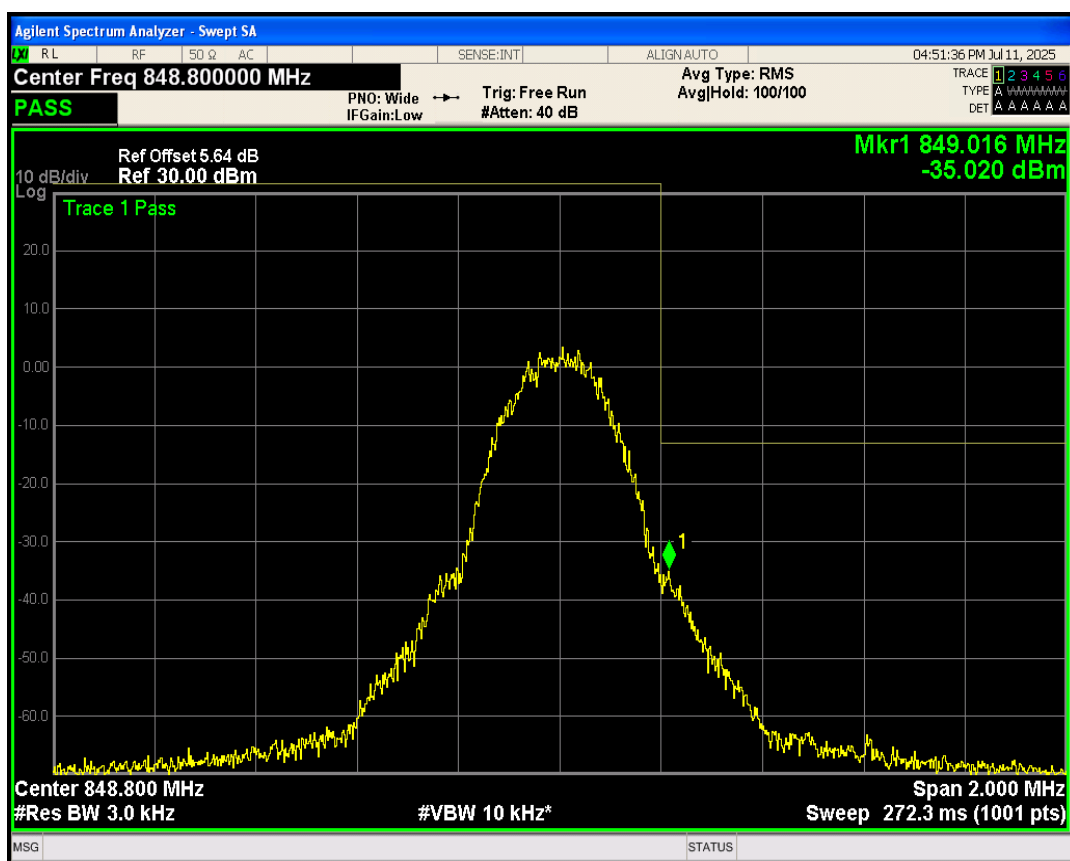


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25191.72	-20.64	-13	PASS
EGPRS1900	661	1880	25474.29	-20.51	-13	PASS
EGPRS1900	810	1909.8	24934.30	-20.36	-13	PASS
EGPRS850	128	824.2	24944.23	-21.02	-13	PASS
EGPRS850	189	836.4	25828.32	-21.98	-13	PASS
EGPRS850	251	848.8	25490.83	-21.94	-13	PASS


EGPRS1900 Channel=512

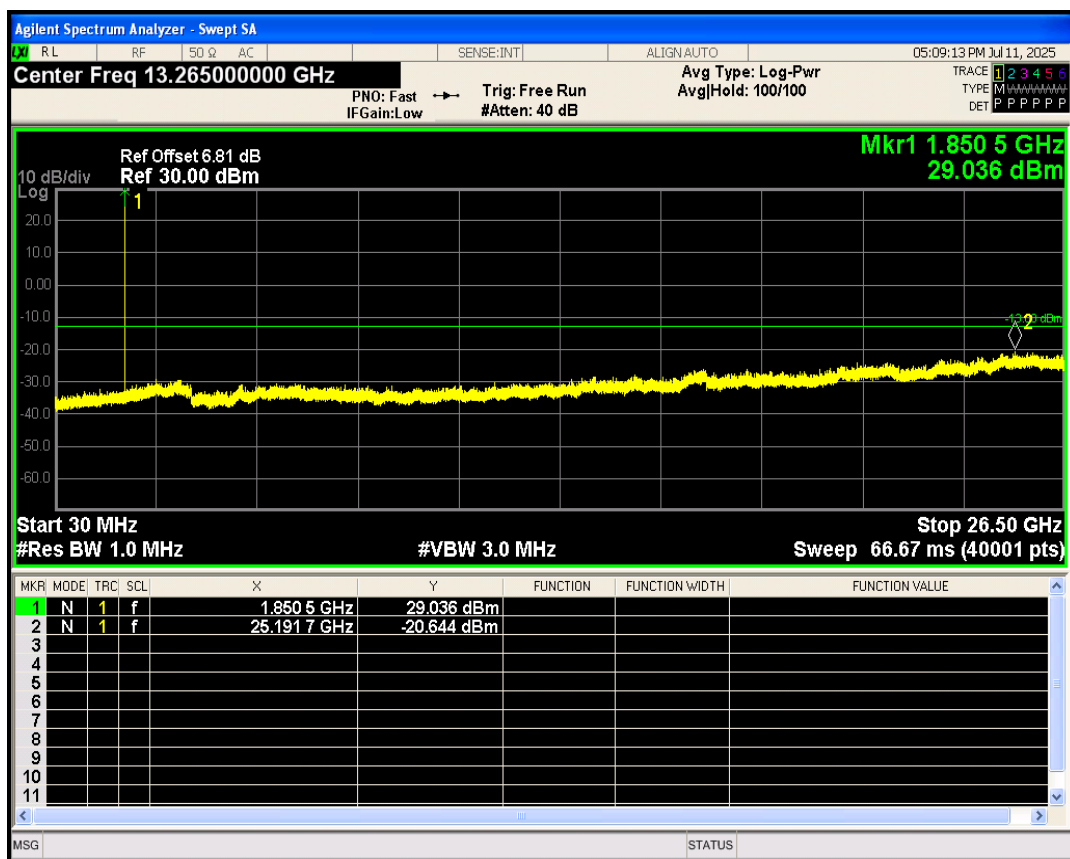


EGPRS1900 Channel=661

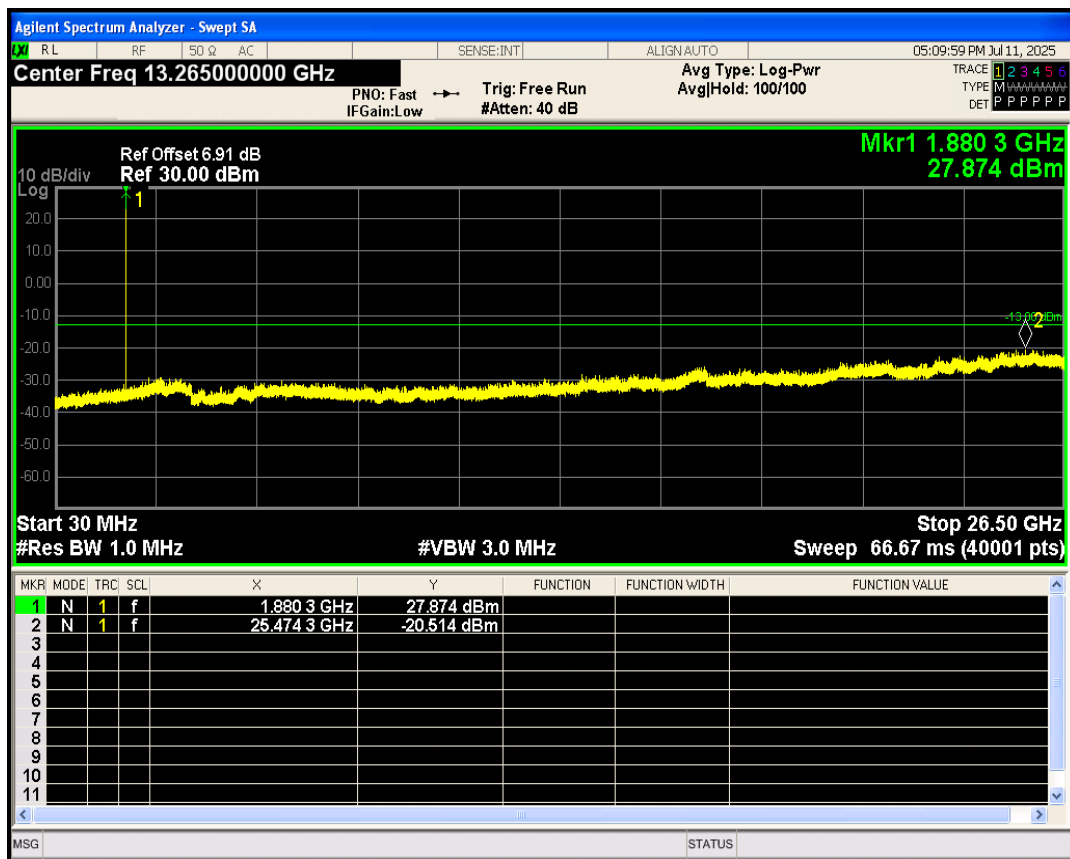


EGPRS1900 Channel=810

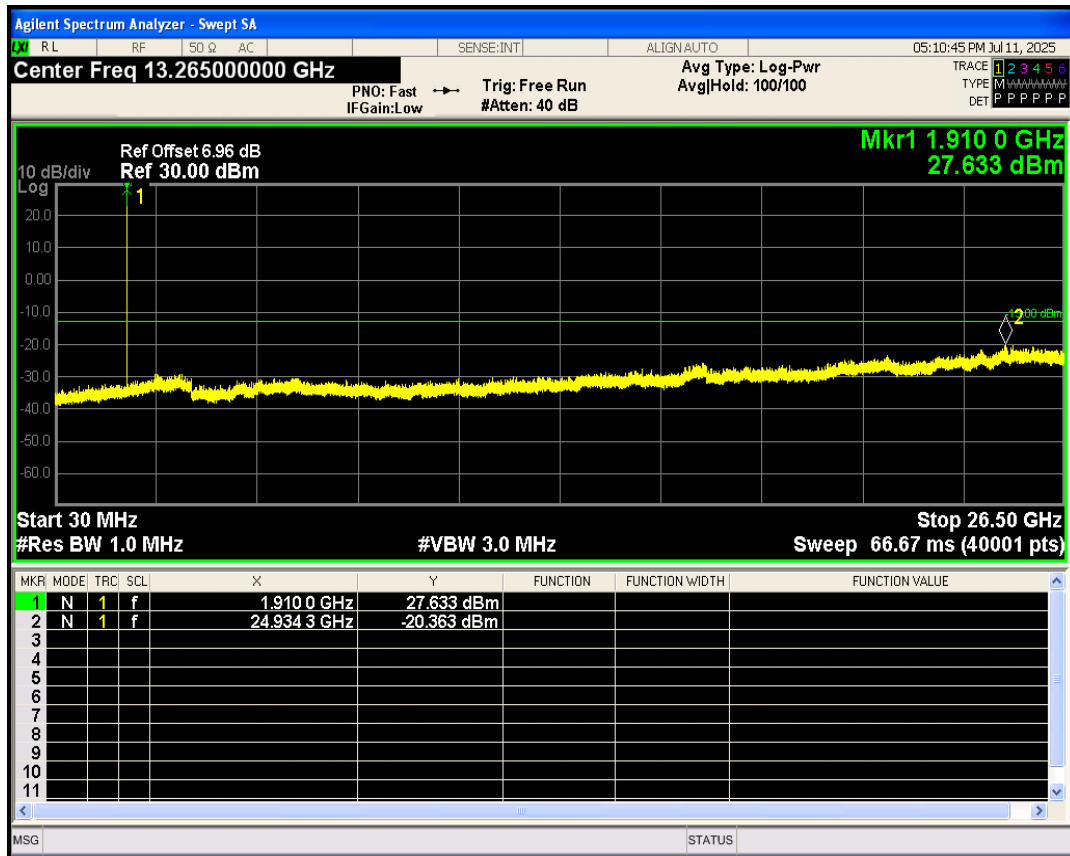


EGPRS850 Channel=128

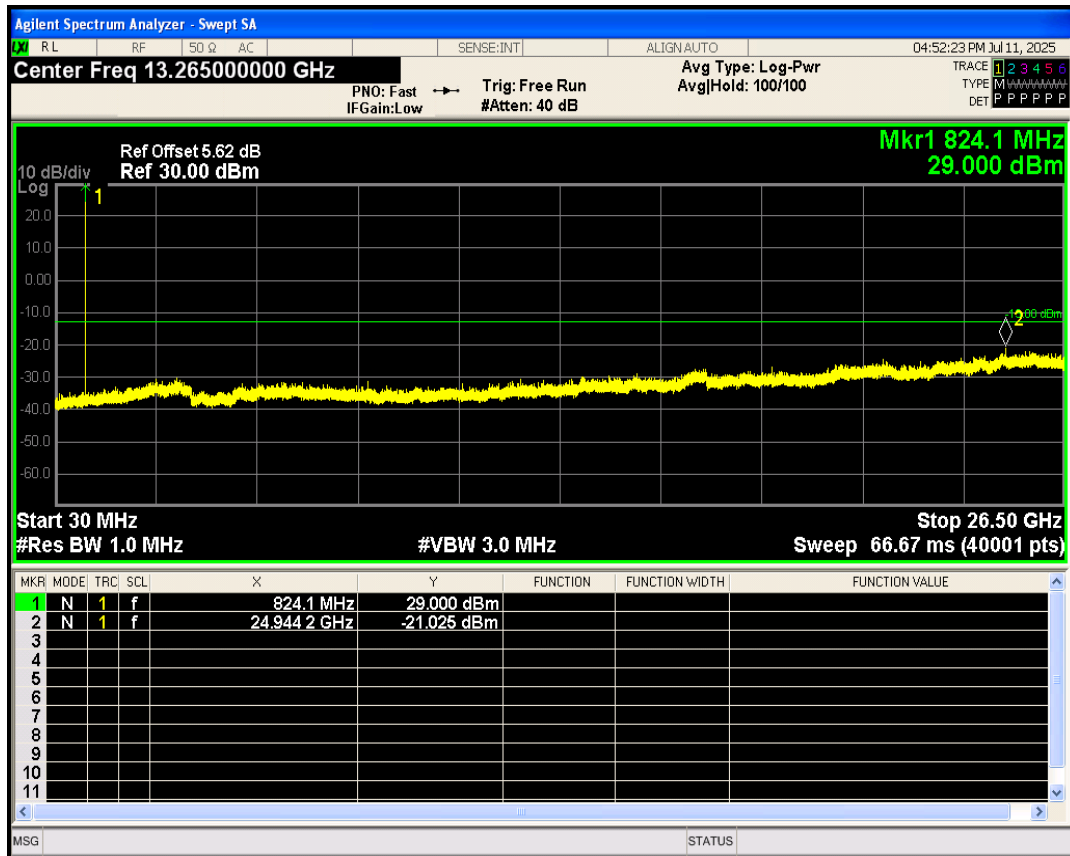

EGPRS850 Channel=189

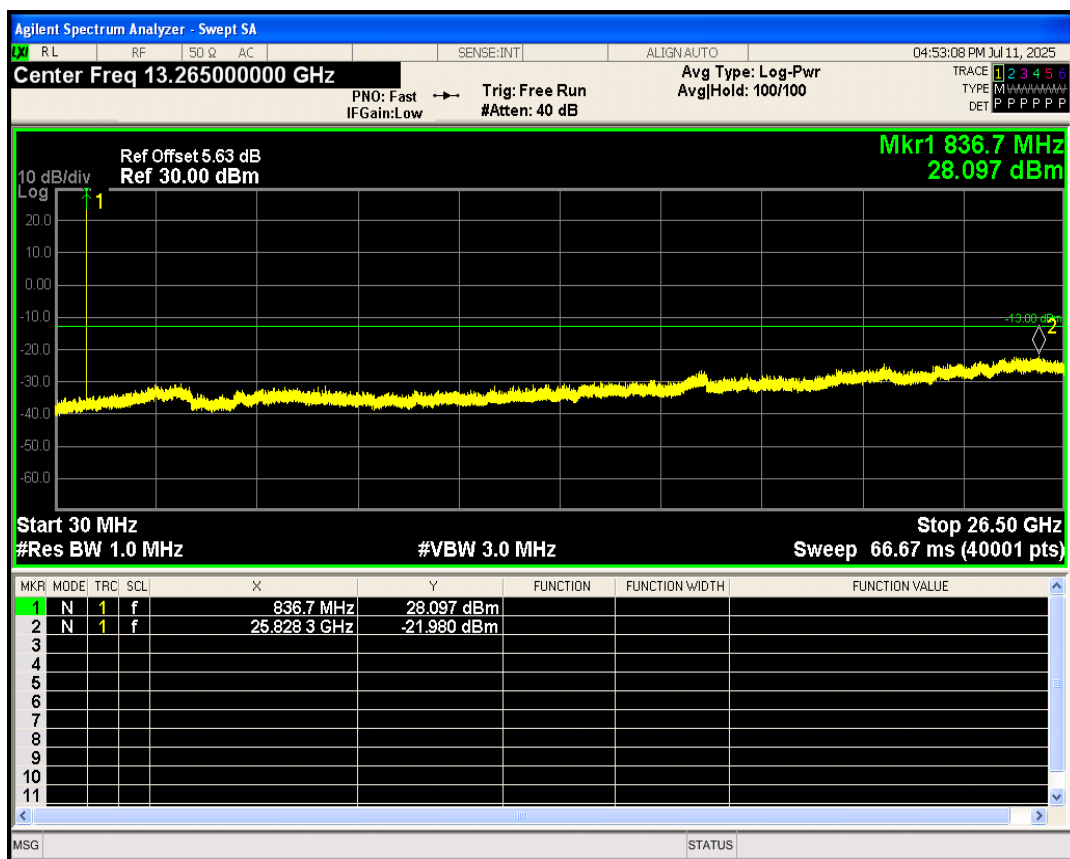


EGPRS850 Channel=251

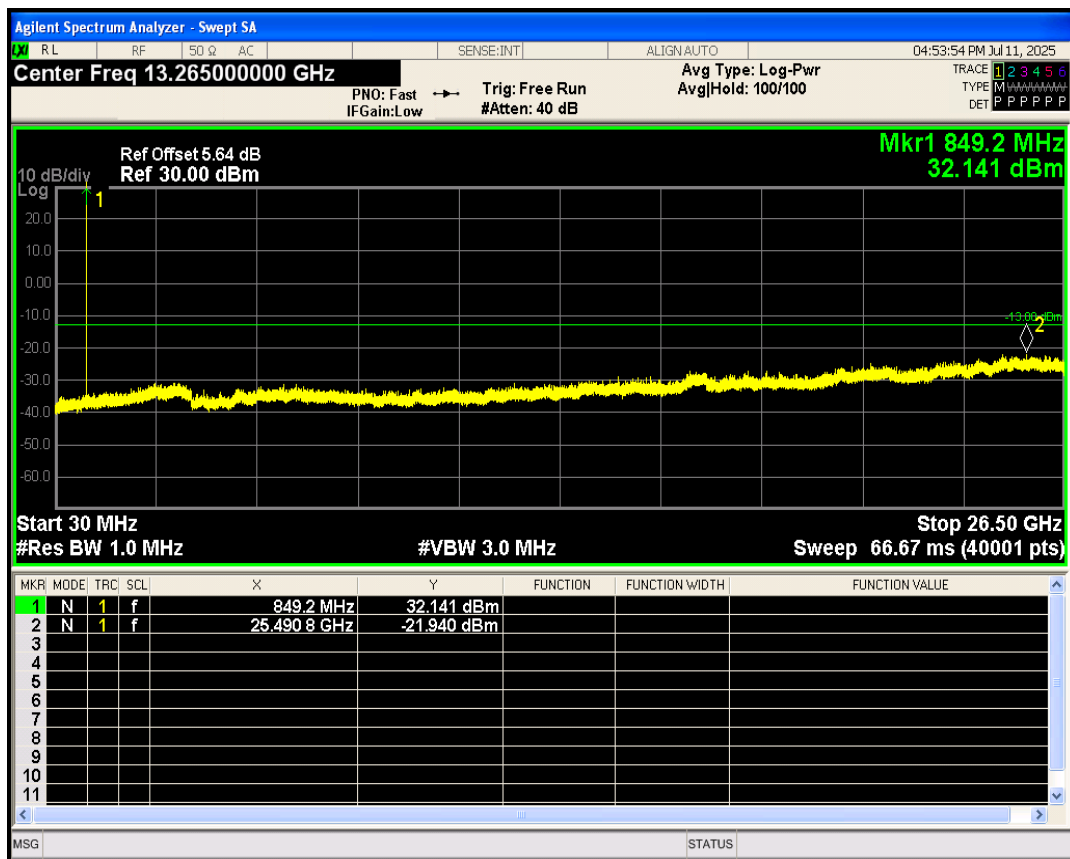


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.65	13	PASS
GPRS1900	661	1880	2.66	13	PASS
GPRS1900	810	1909.8	2.66	13	PASS
GPRS850	128	824.2	2.66	13	PASS
GPRS850	189	836.4	2.66	13	PASS
GPRS850	251	848.8	2.67	13	PASS


GPRS1900 Channel=512

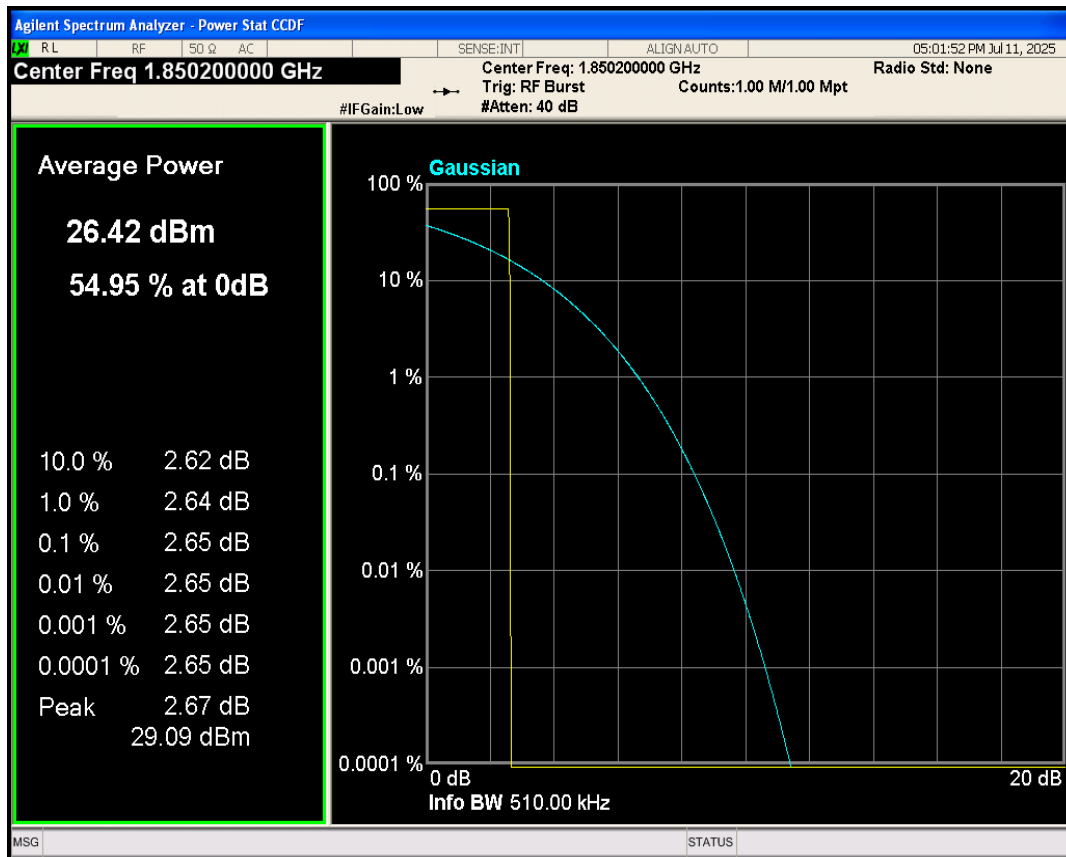


GPRS1900 Channel=661

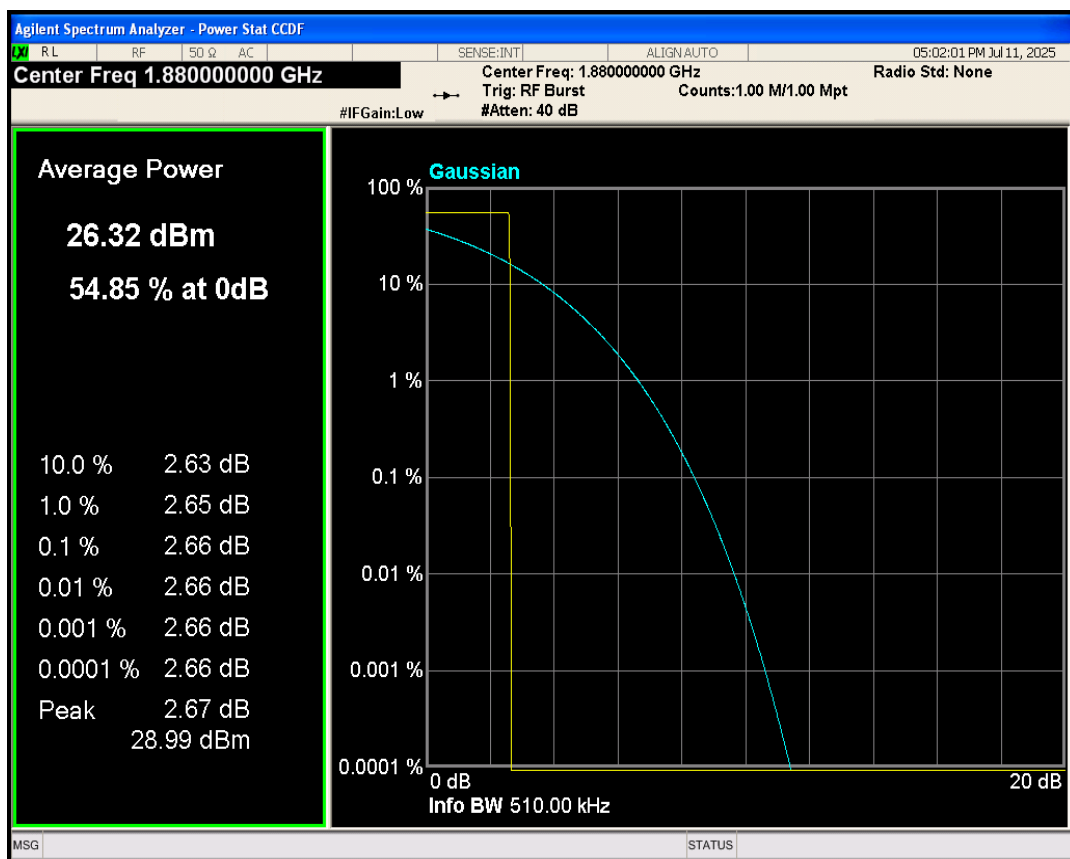


GPRS1900 Channel=810

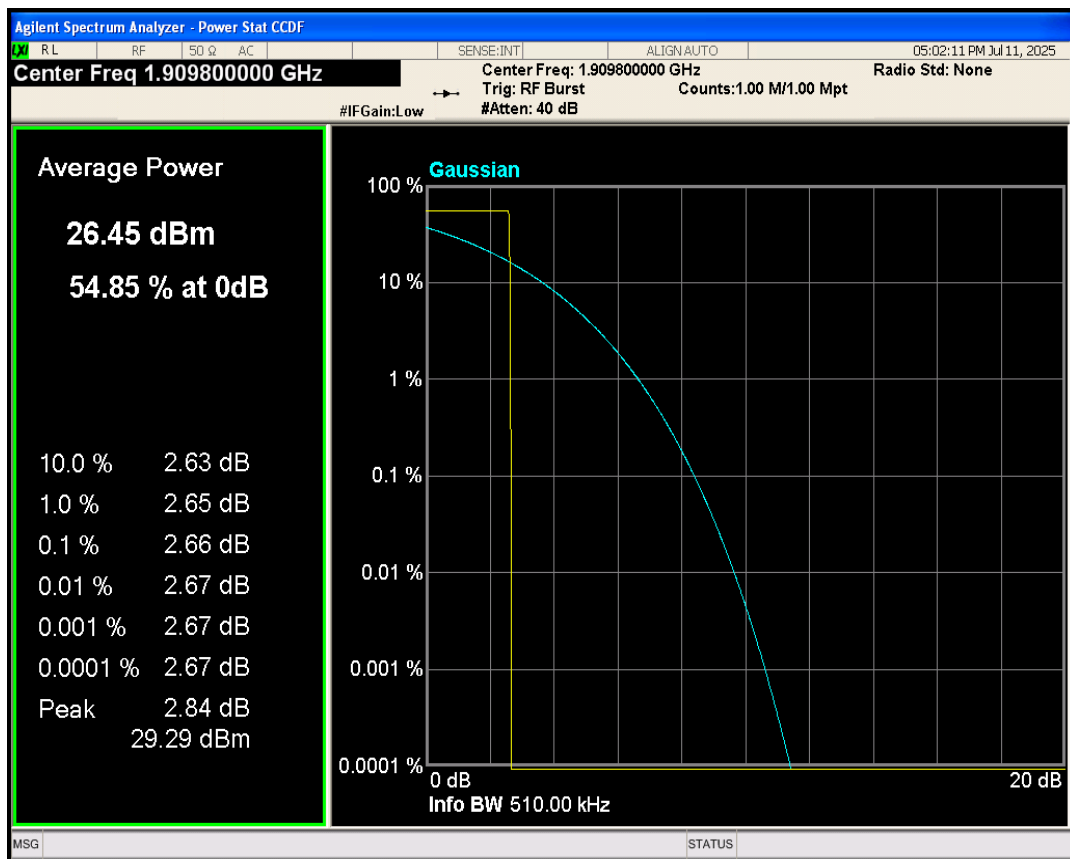


GPRS850 Channel=128

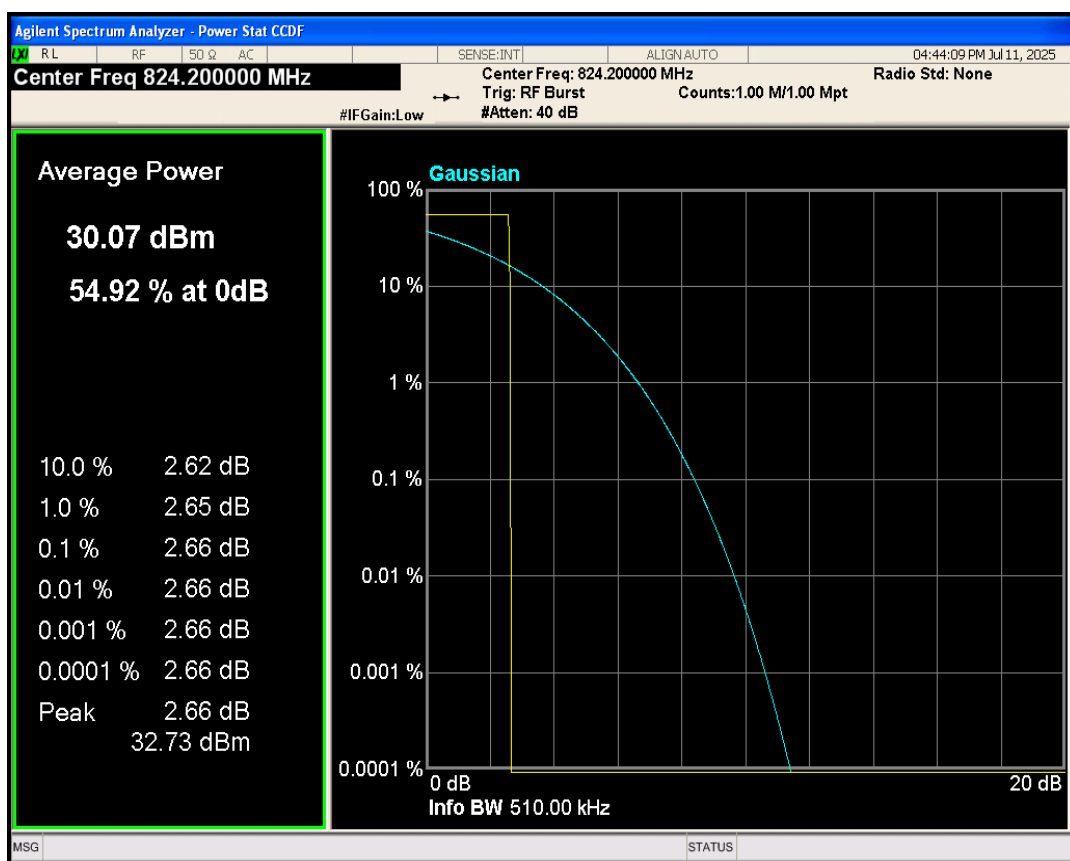

GPRS850 Channel=189

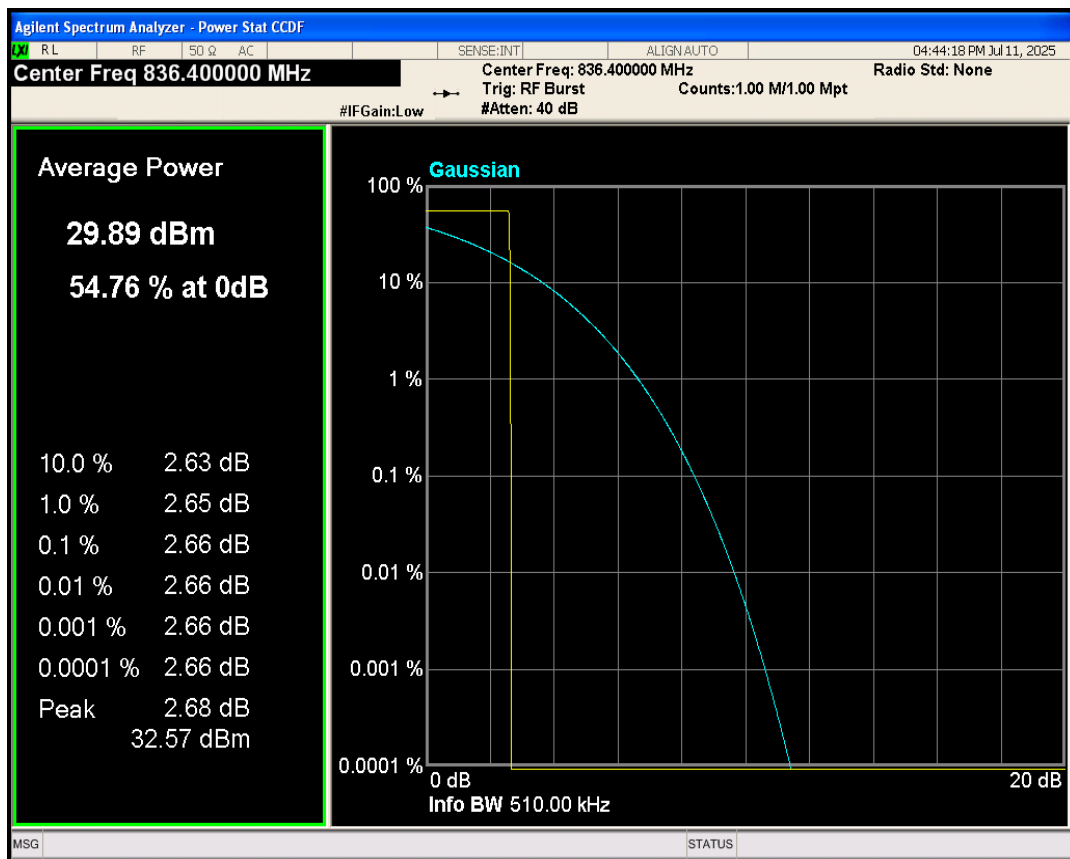


GPRS850 Channel=251

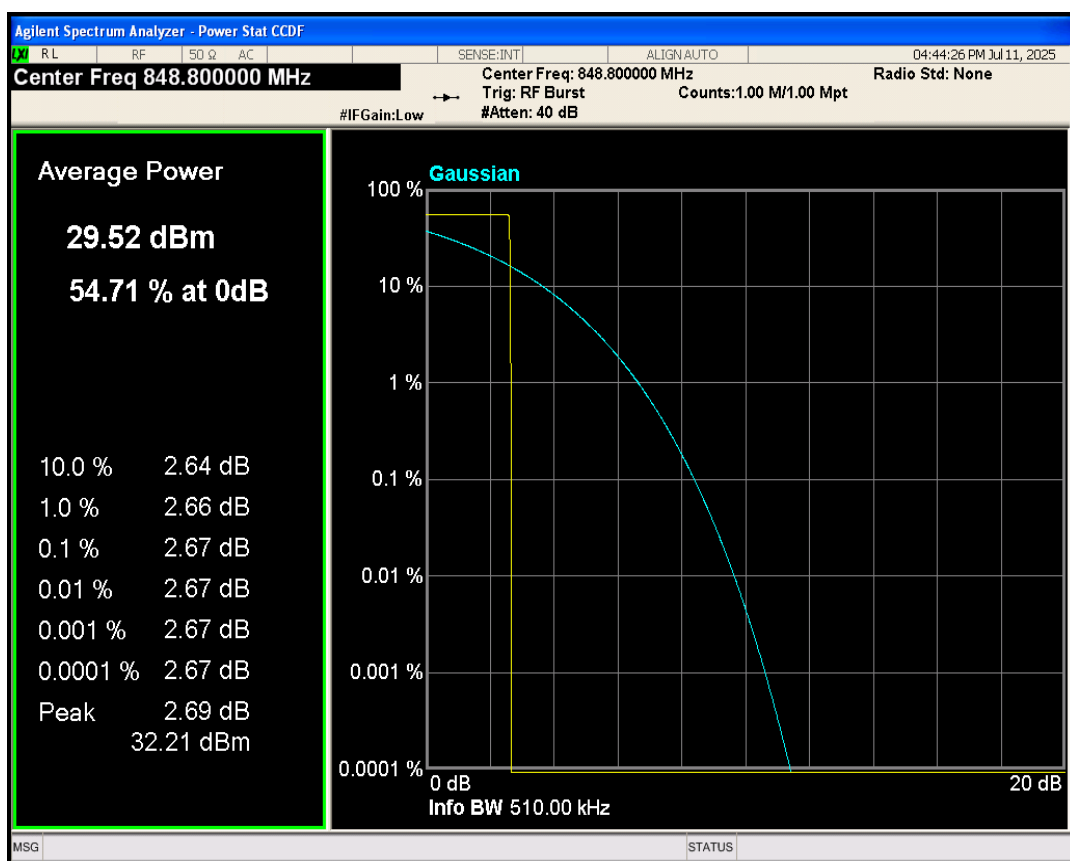


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	244.486	311.899	PASS
GPRS1900	661	1880	239.944	312.183	PASS
GPRS1900	810	1909.8	247.637	313.188	PASS
GPRS850	128	824.2	245.038	317.475	PASS
GPRS850	189	836.4	240.457	313.499	PASS
GPRS850	251	848.8	244.701	311.491	PASS


GPRS1900 Channel=512

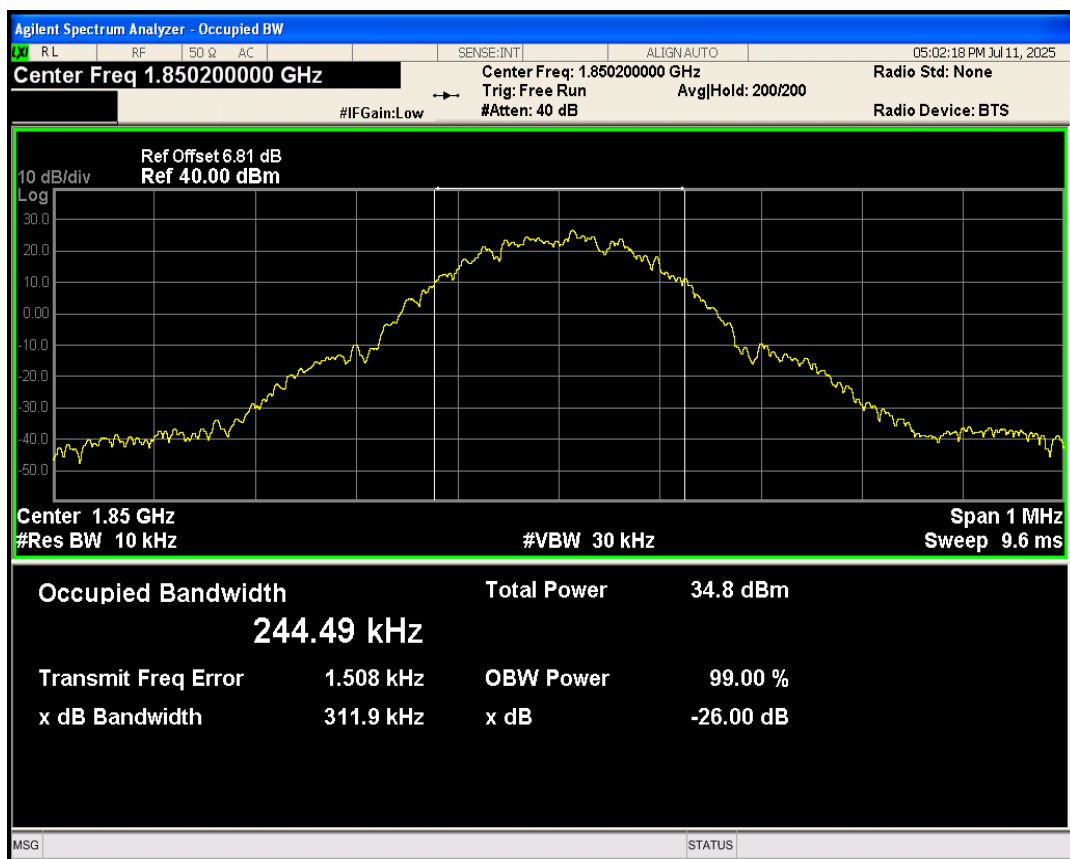


GPRS1900 Channel=661

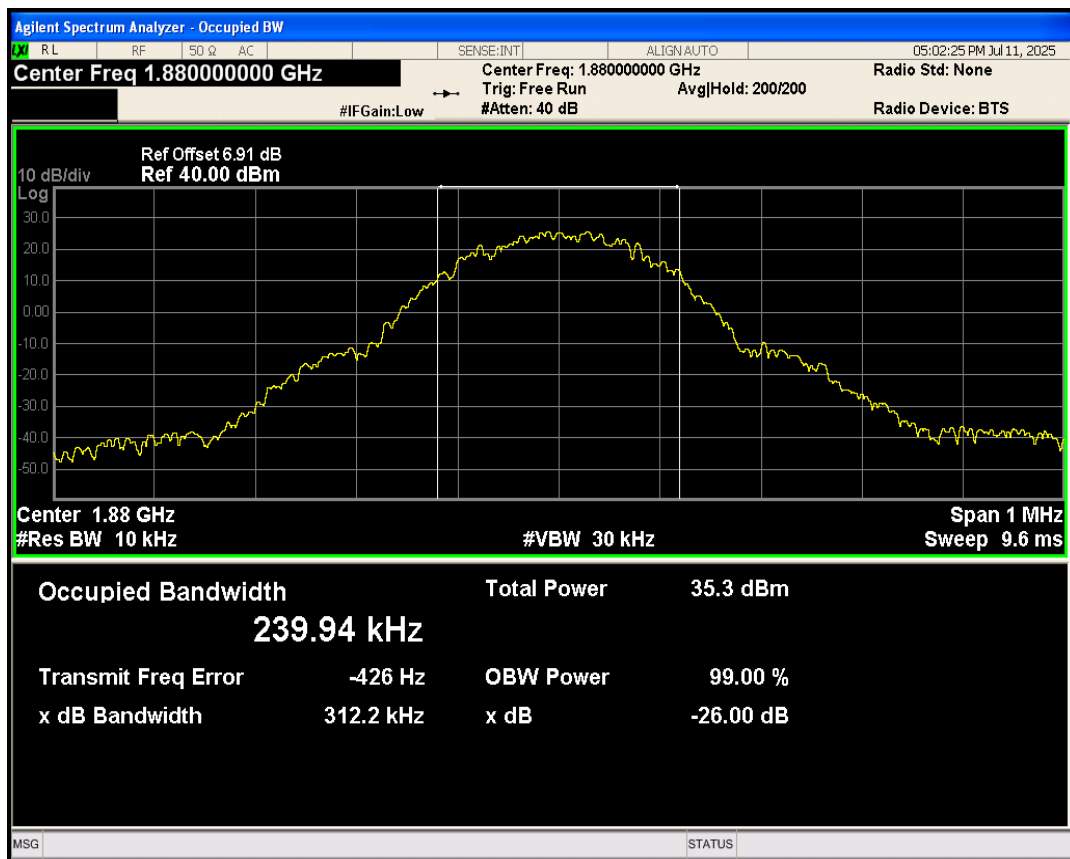


GPRS1900 Channel=810

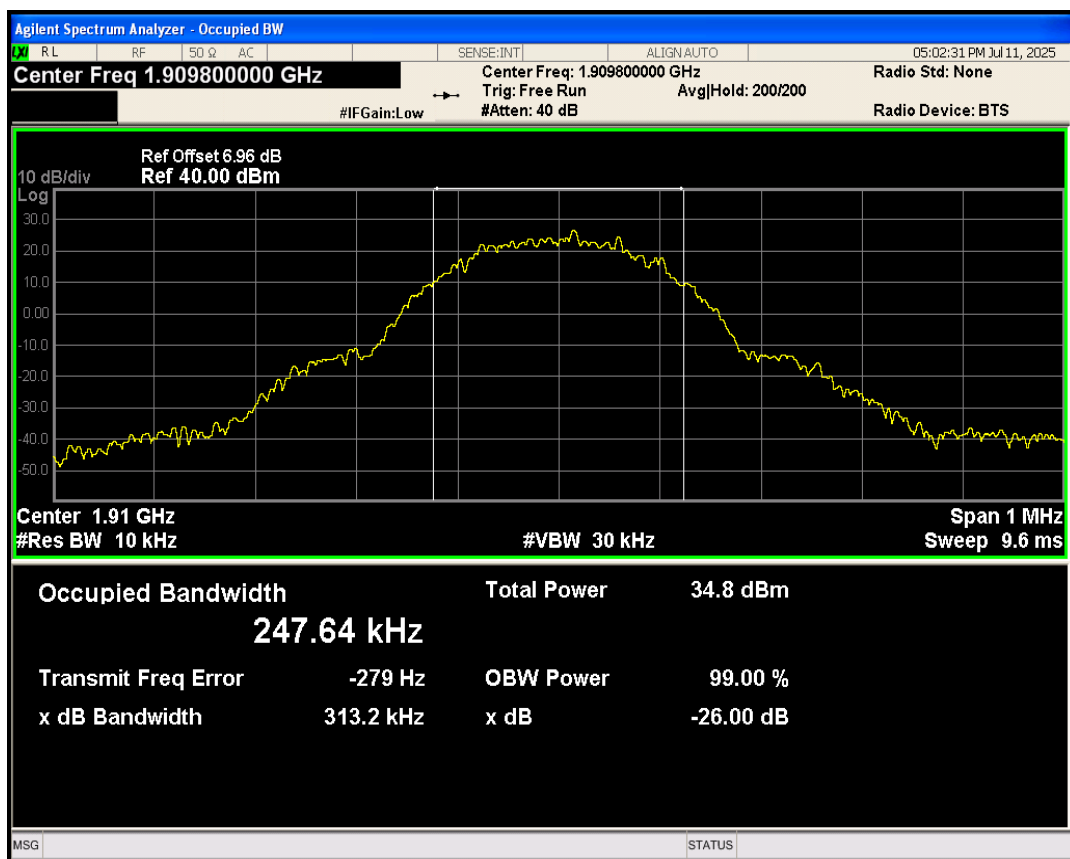


GPRS850 Channel=128

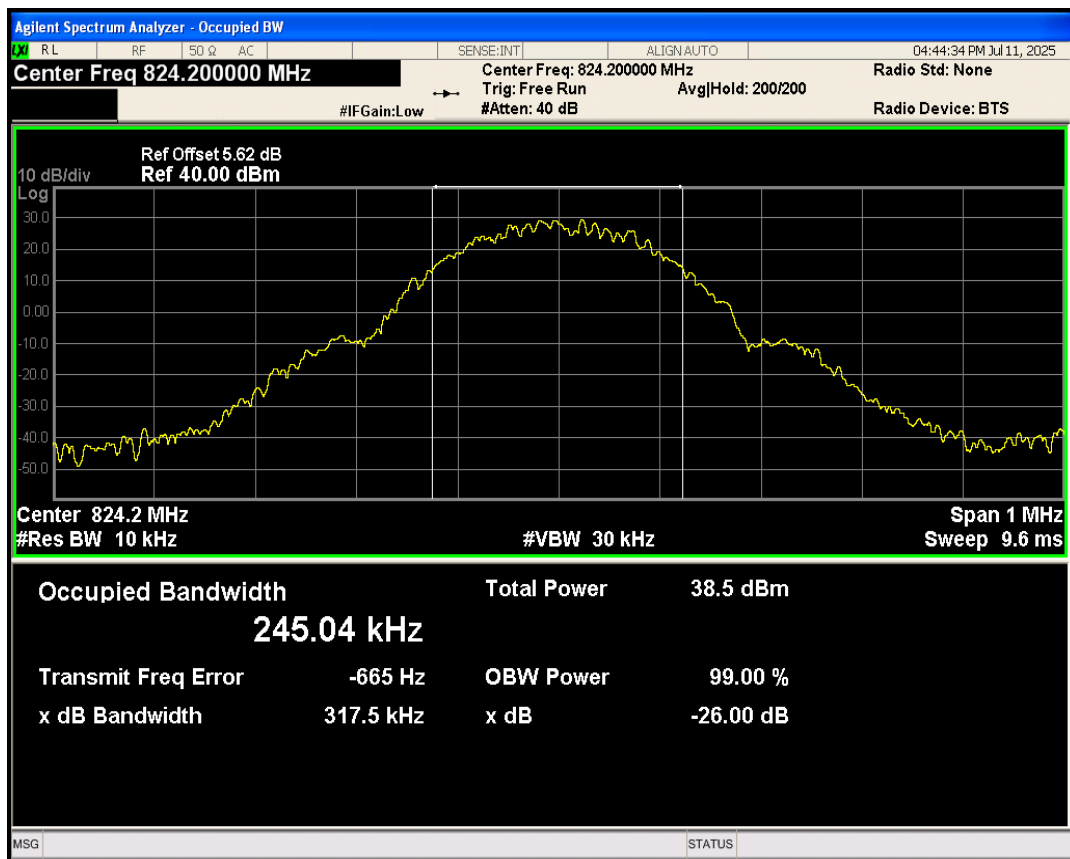

GPRS850 Channel=189

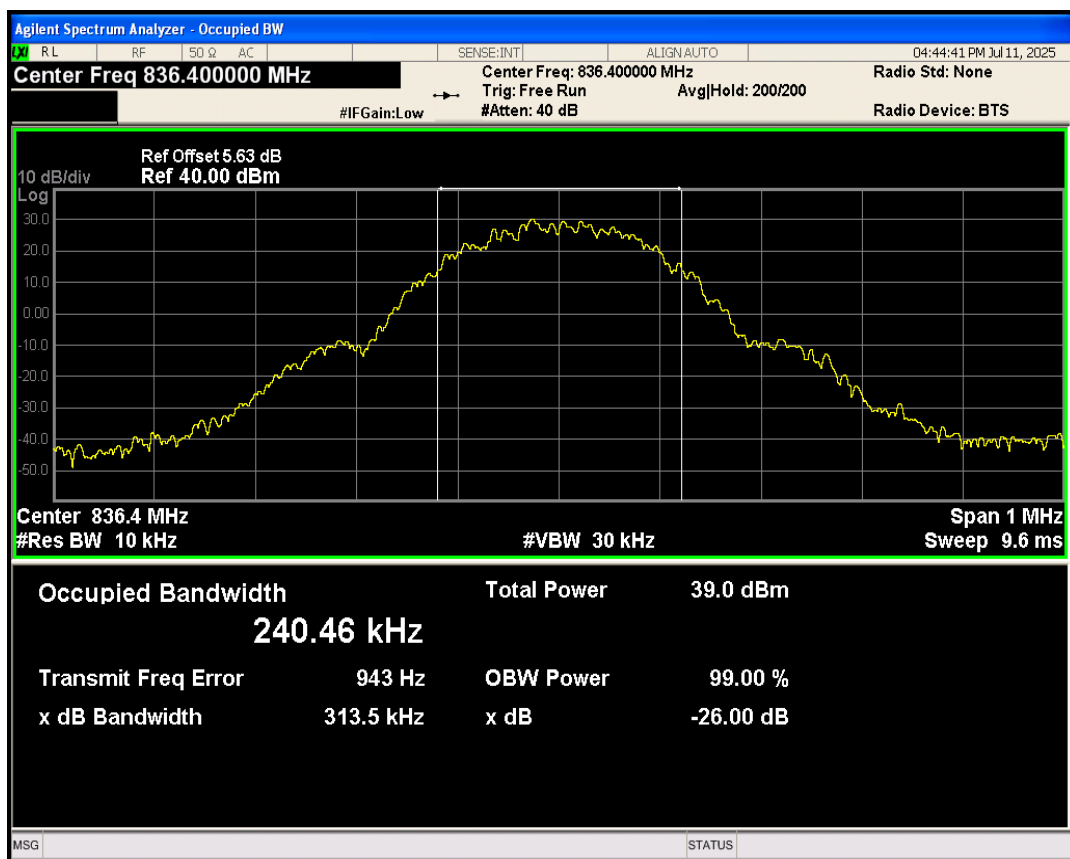


GPRS850 Channel=251

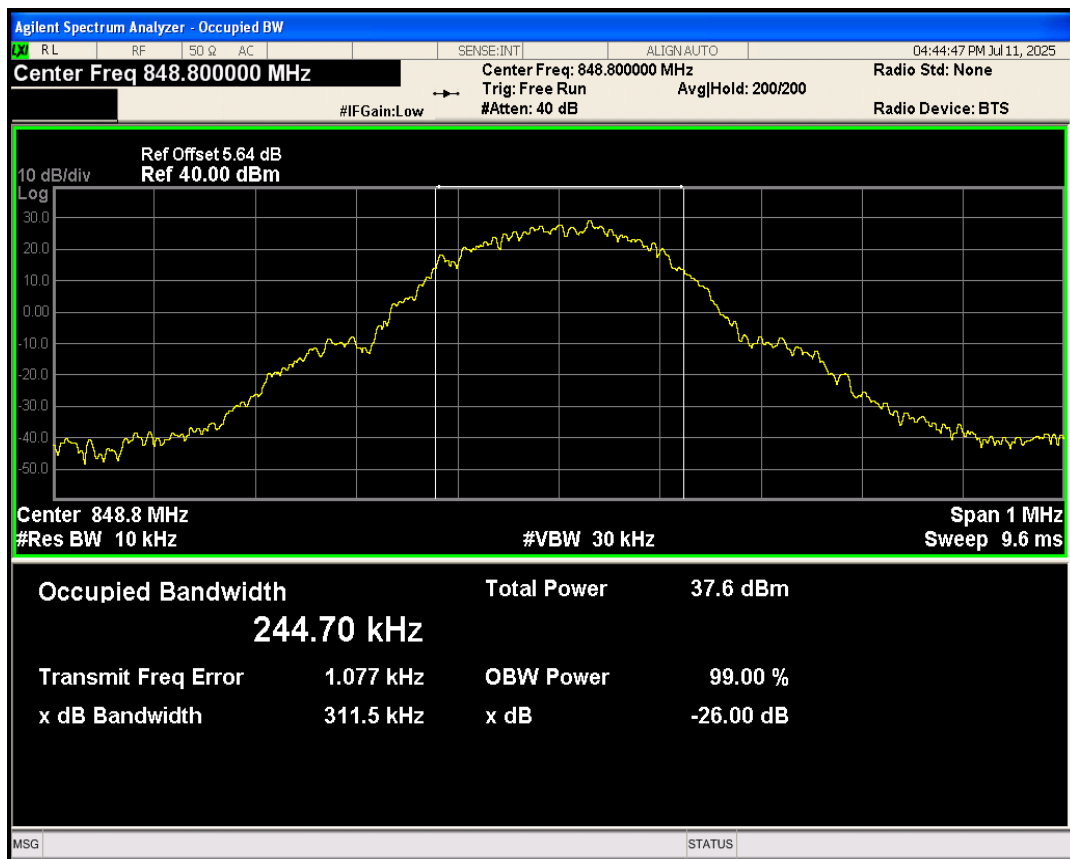


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.99	-31.43	-13	PASS
GPRS1900	810	1909.8	1910.02	-32.18	-13	PASS
GPRS850	128	824.2	823.98	-27.68	-13	PASS
GPRS850	251	848.8	849.02	-28.68	-13	PASS


GPRS1900 Channel=512

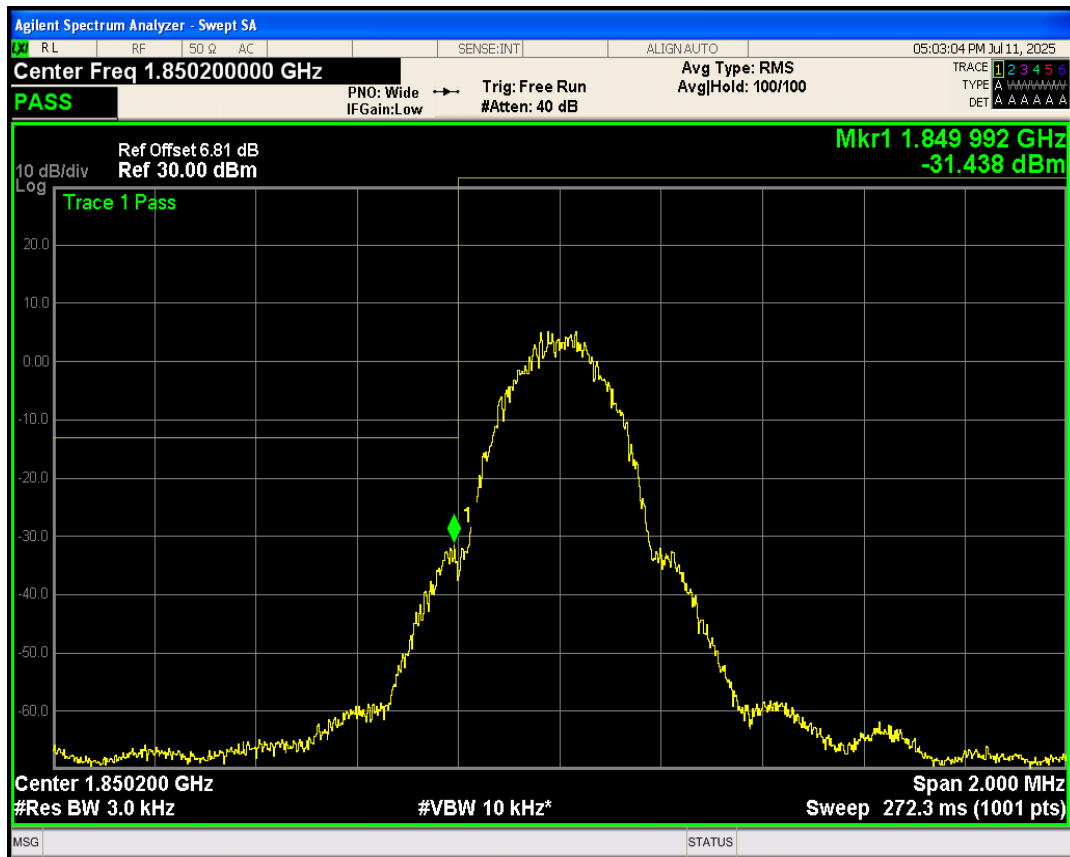


GPRS1900 Channel=810

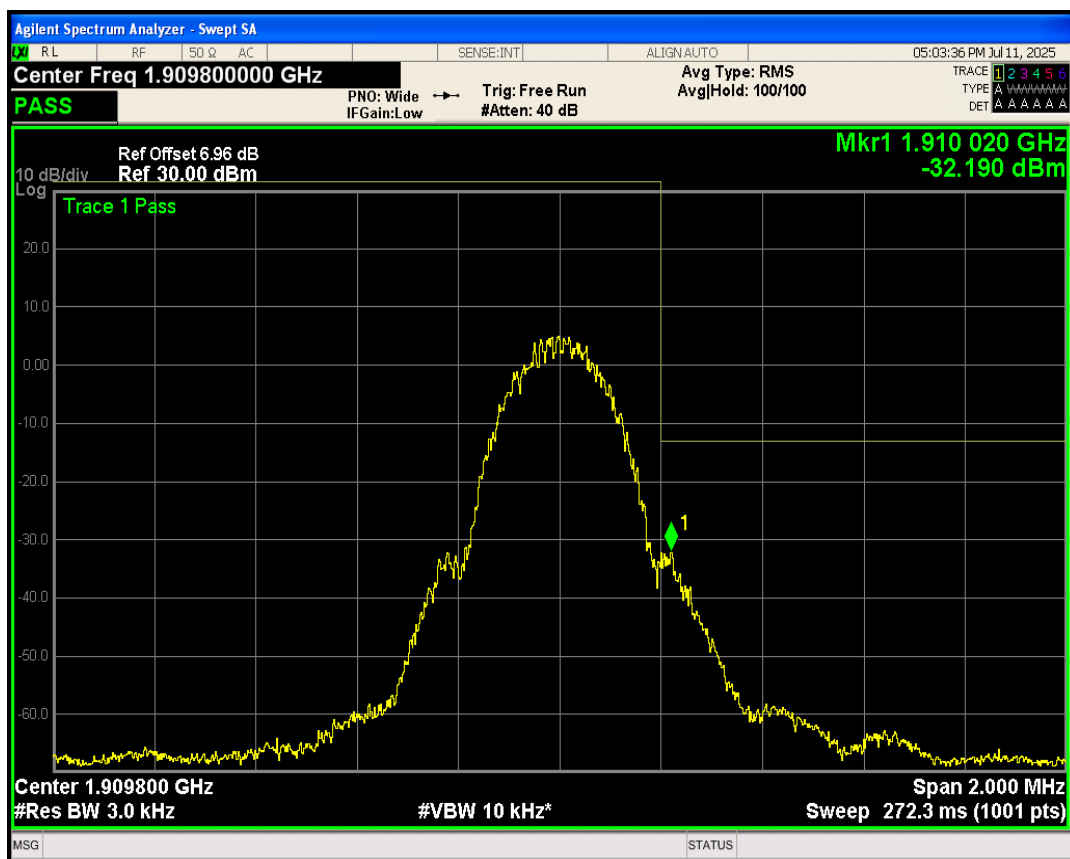

GPRS850 Channel=128

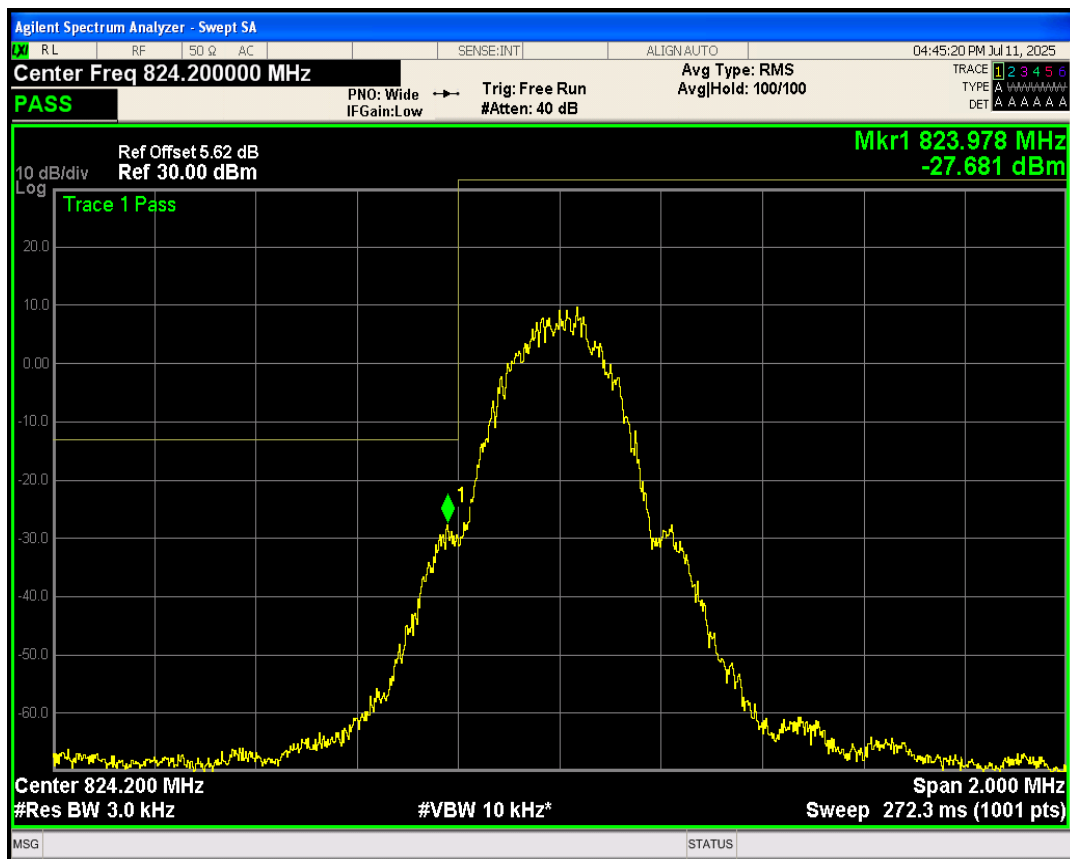


GPRS850 Channel=251

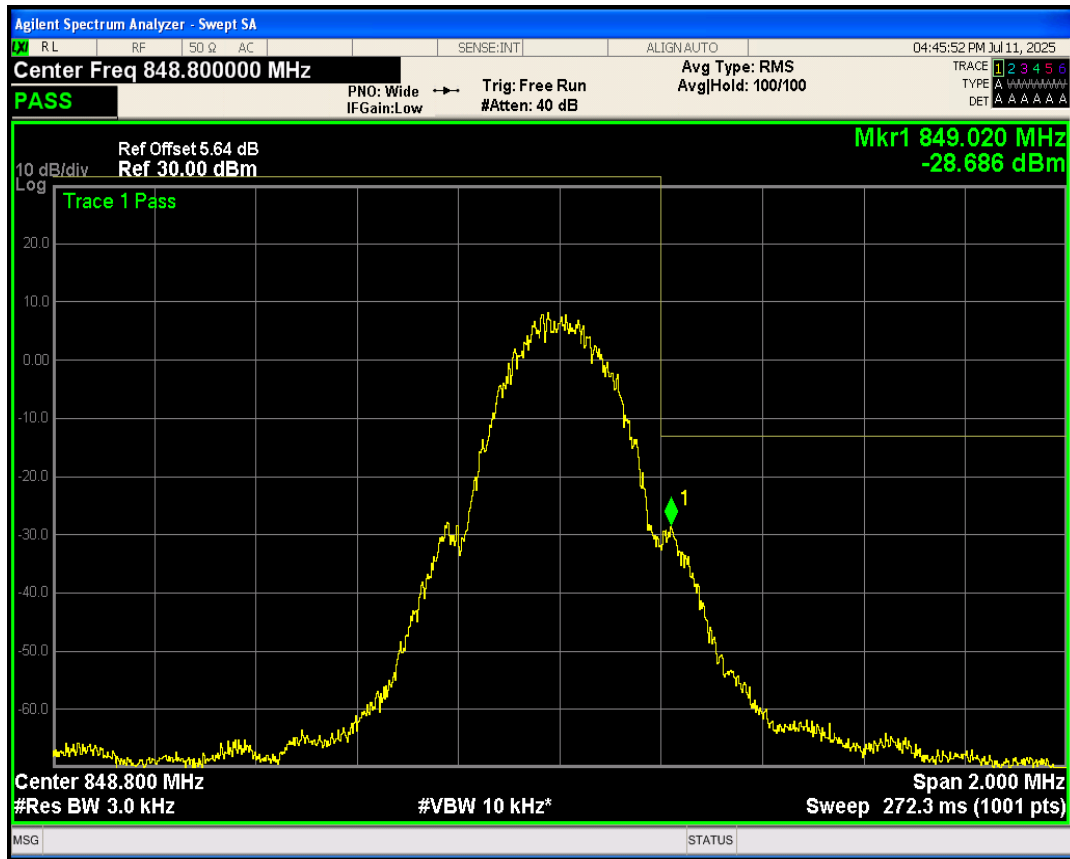


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25967.29	-20.18	-13	PASS
GPRS1900	661	1880	25676.12	-19.88	-13	PASS
GPRS1900	810	1909.8	25727.74	-19.77	-13	PASS
GPRS850	128	824.2	25675.46	-21.80	-13	PASS
GPRS850	189	836.4	25659.58	-22.01	-13	PASS
GPRS850	251	848.8	24918.42	-22.21	-13	PASS


GPRS1900 Channel=512

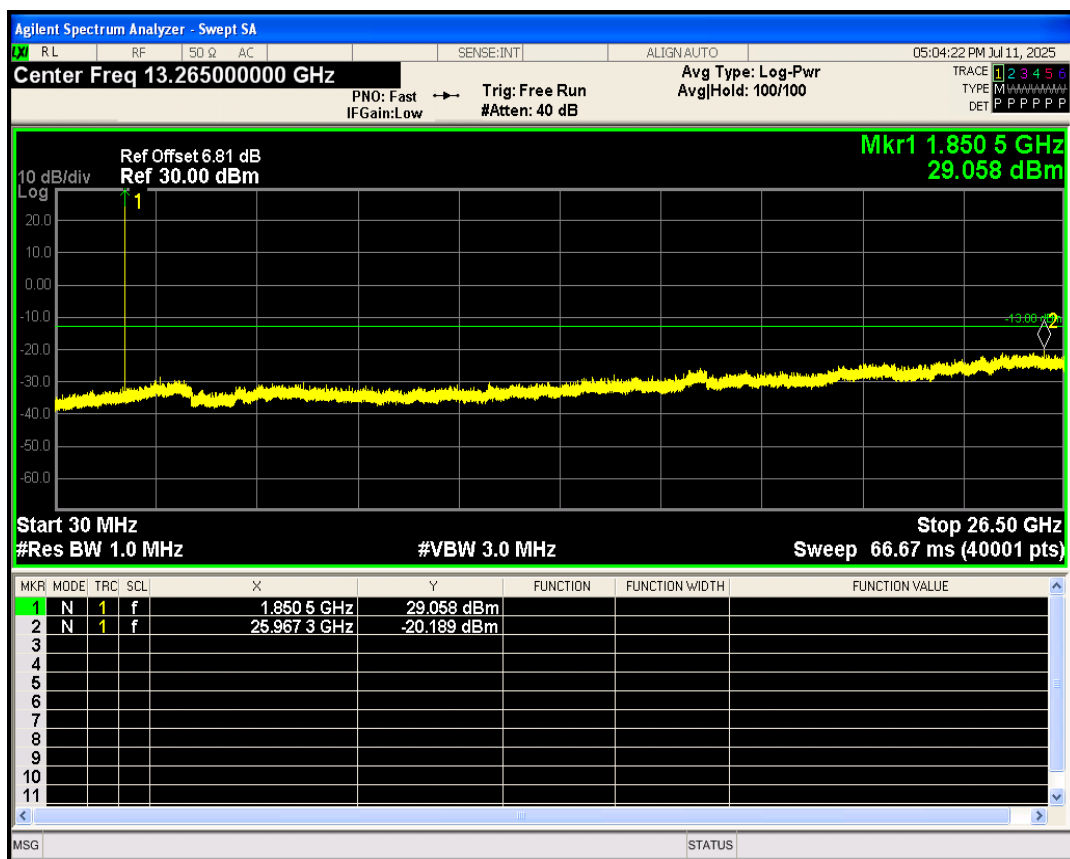


GPRS1900 Channel=661

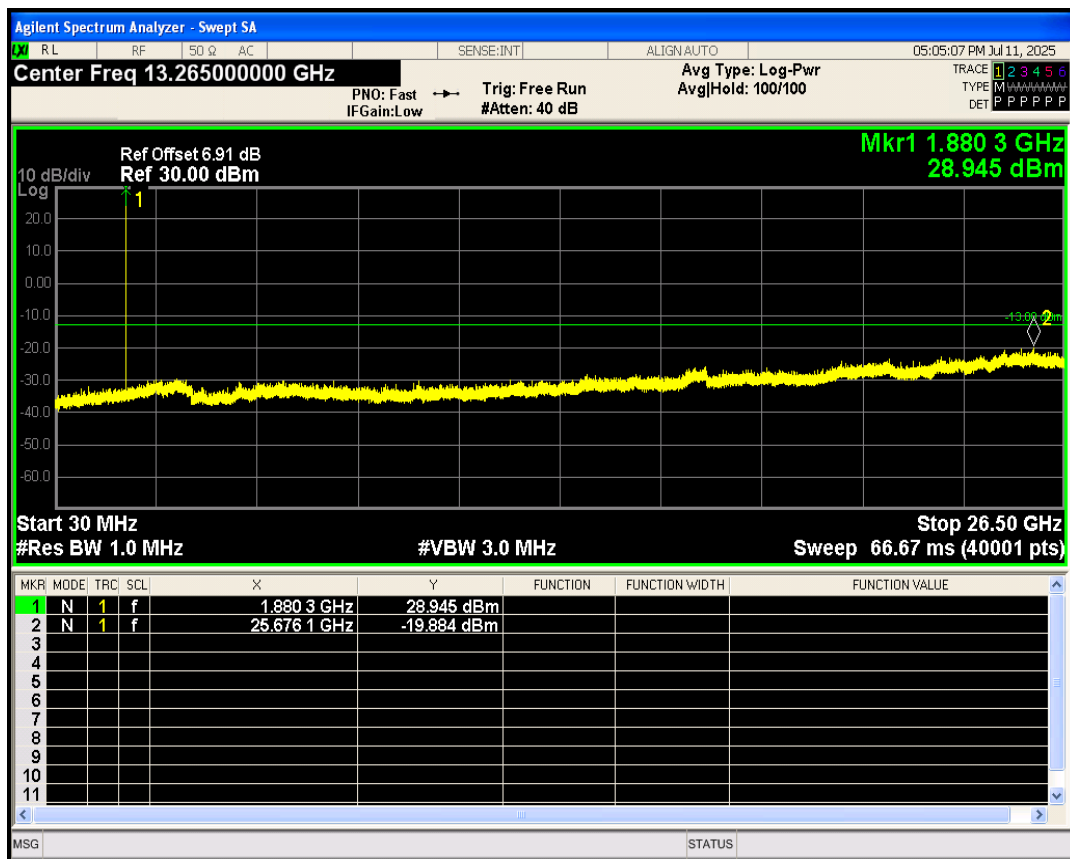


GPRS1900 Channel=810

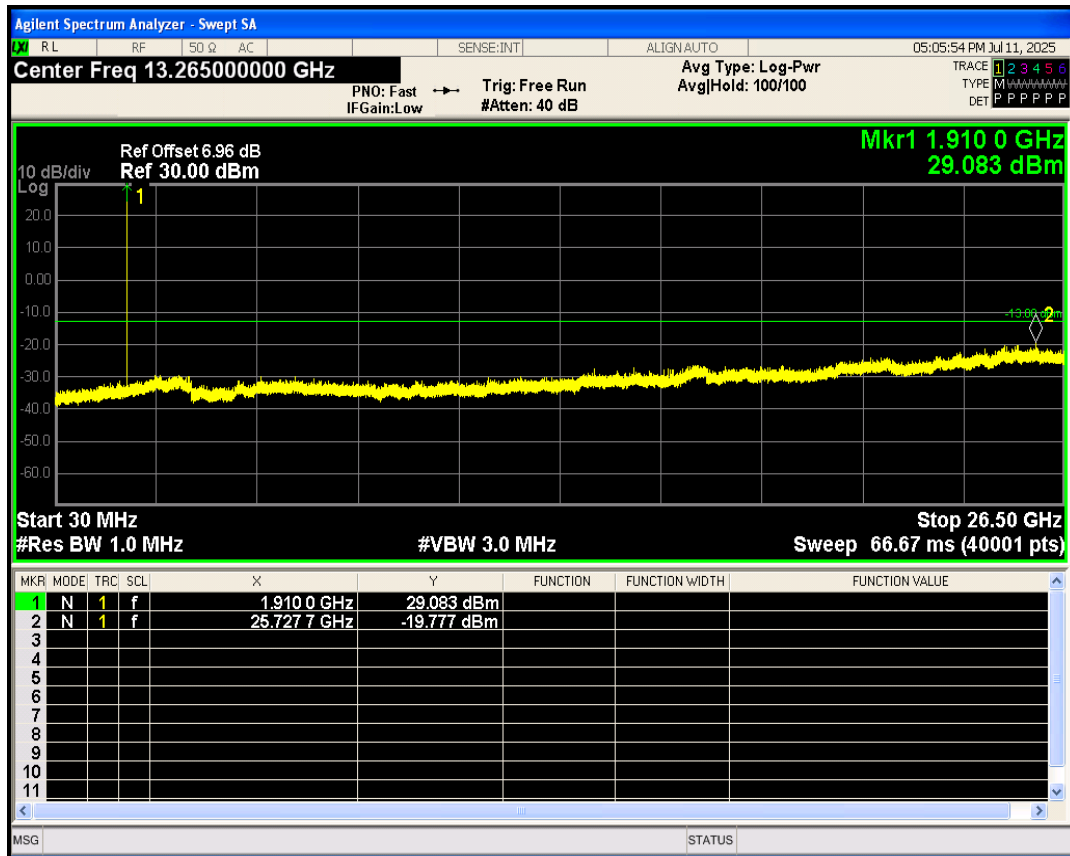


GPRS850 Channel=128

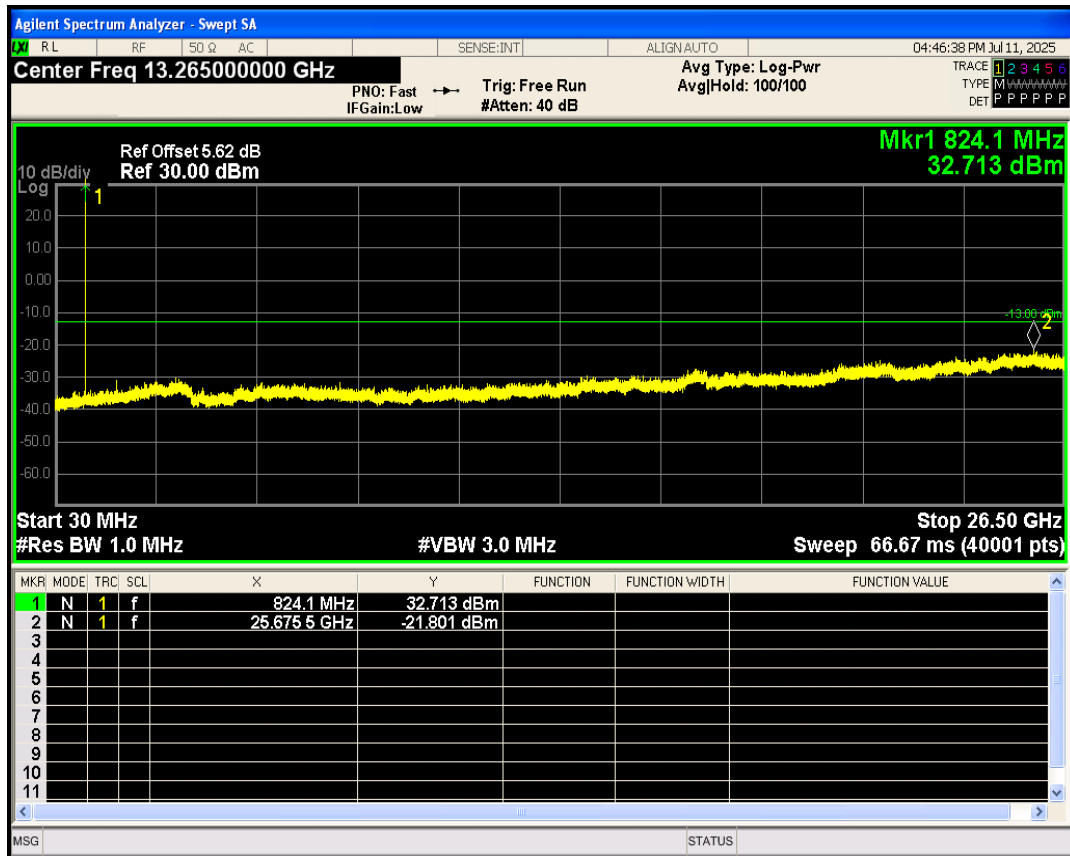

GPRS850 Channel=189

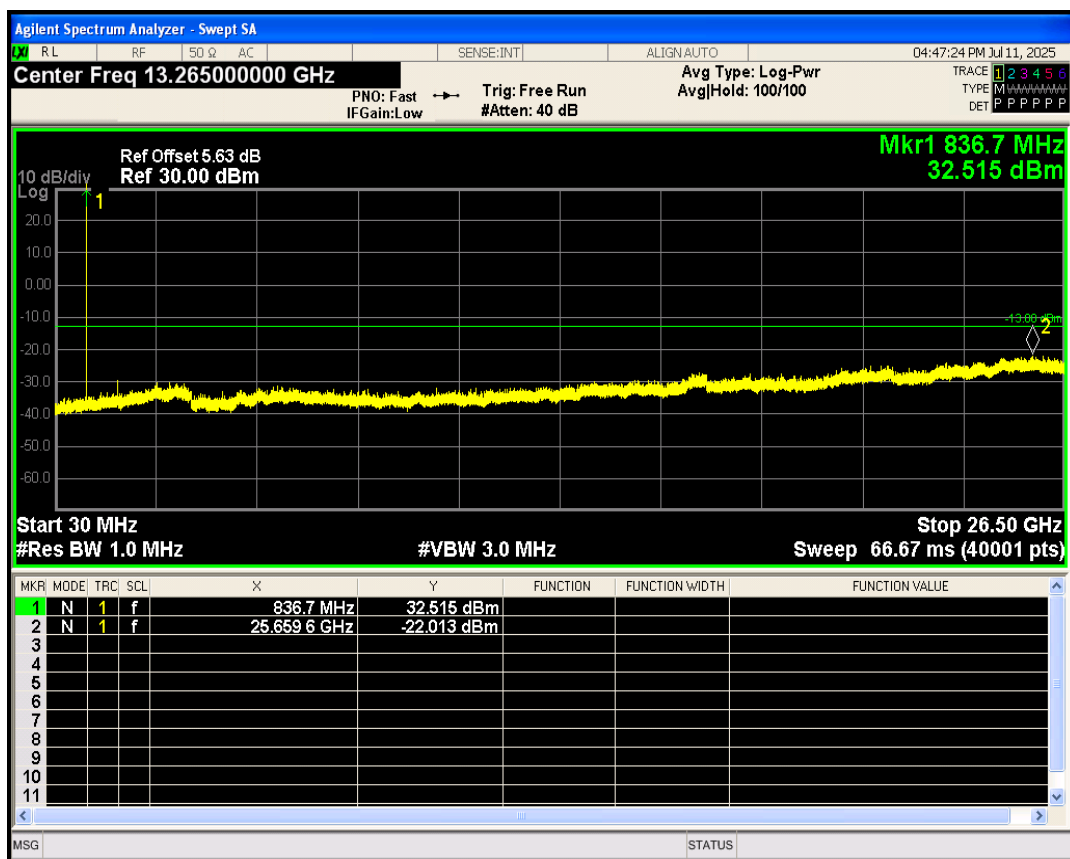


GPRS850 Channel=251

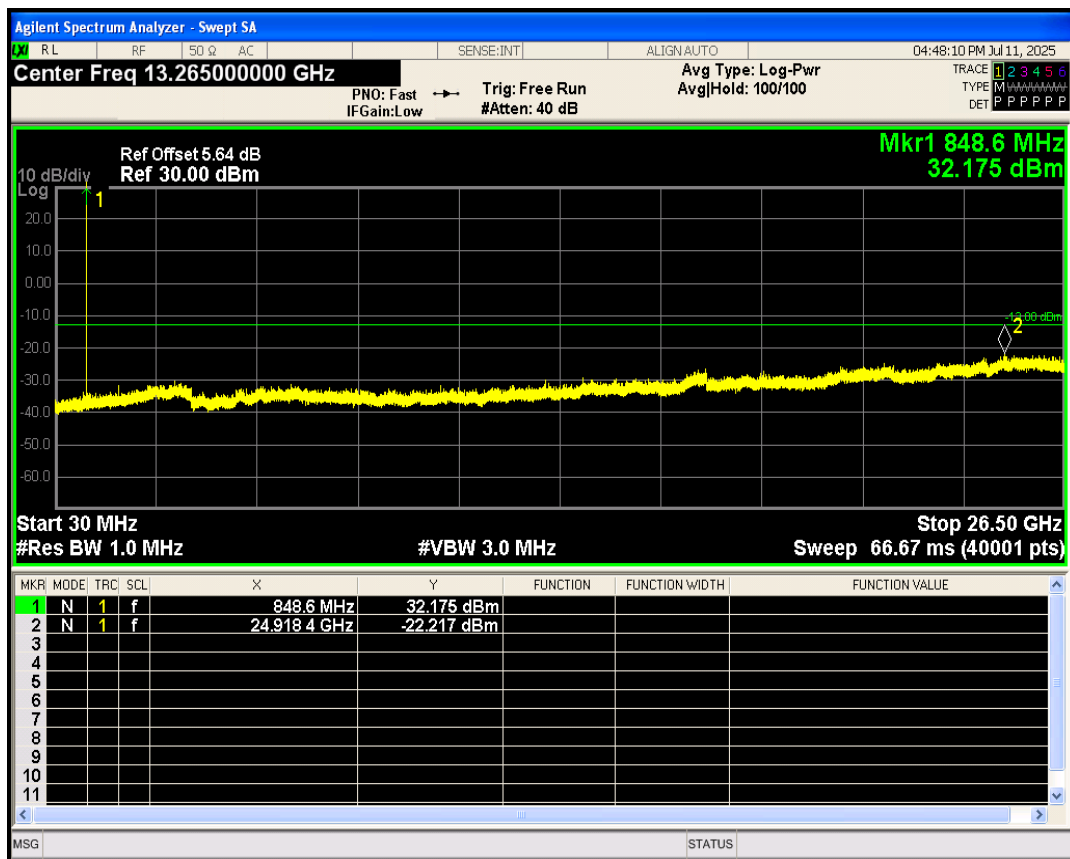


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.61	13	PASS
GSM1900	661	1880	2.61	13	PASS
GSM1900	810	1909.8	2.62	13	PASS
GSM850	128	824.2	2.63	13	PASS
GSM850	189	836.4	2.62	13	PASS
GSM850	251	848.8	2.62	13	PASS


GSM1900 Channel=512

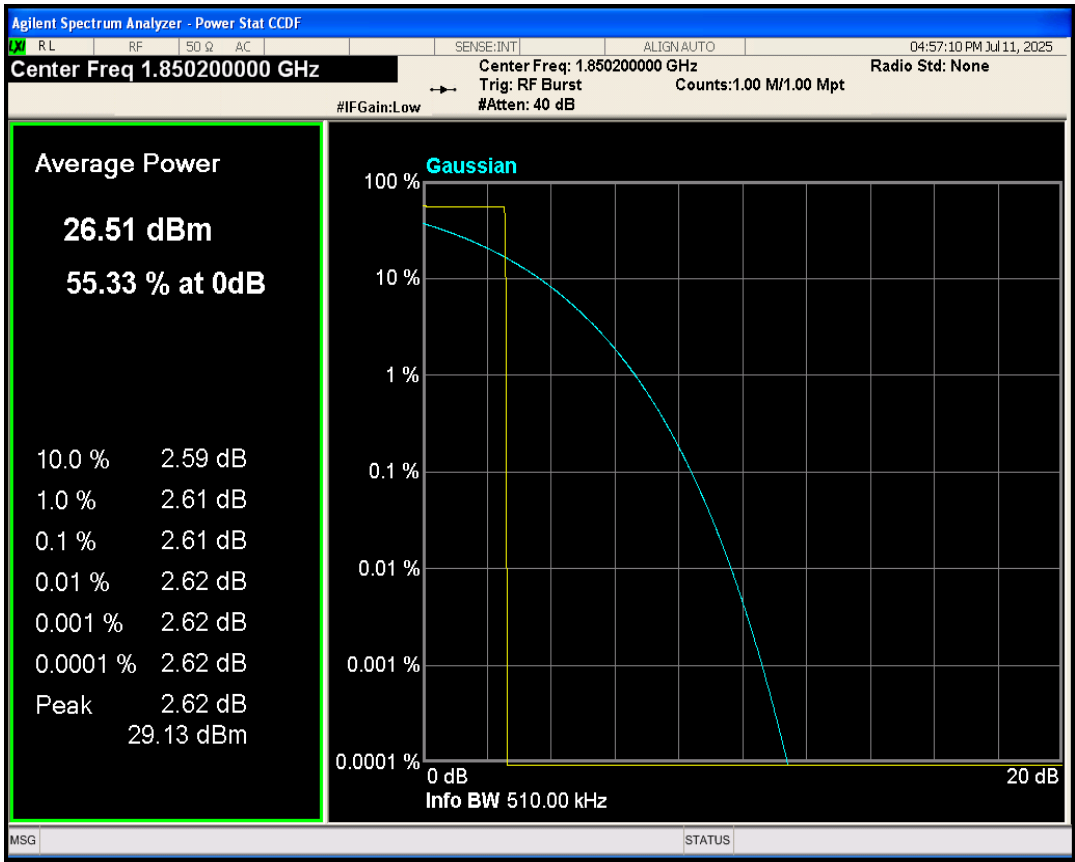


GSM1900 Channel=661

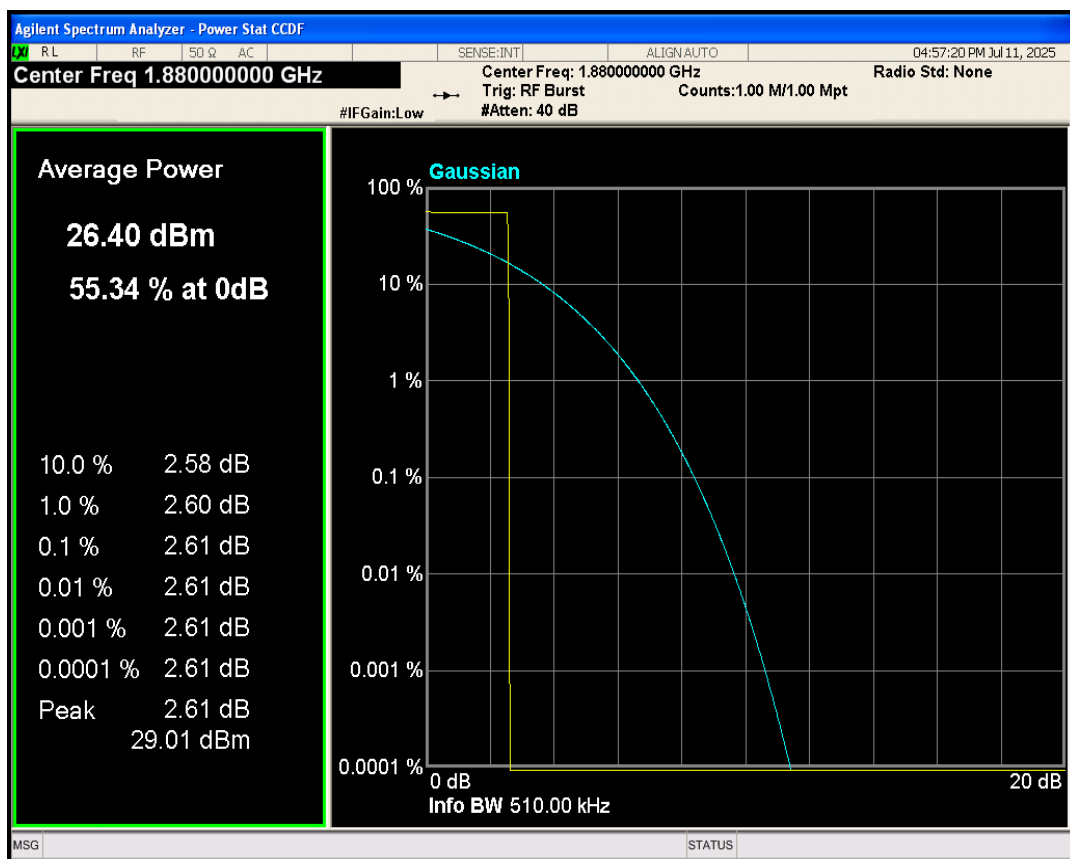


GSM1900 Channel=810

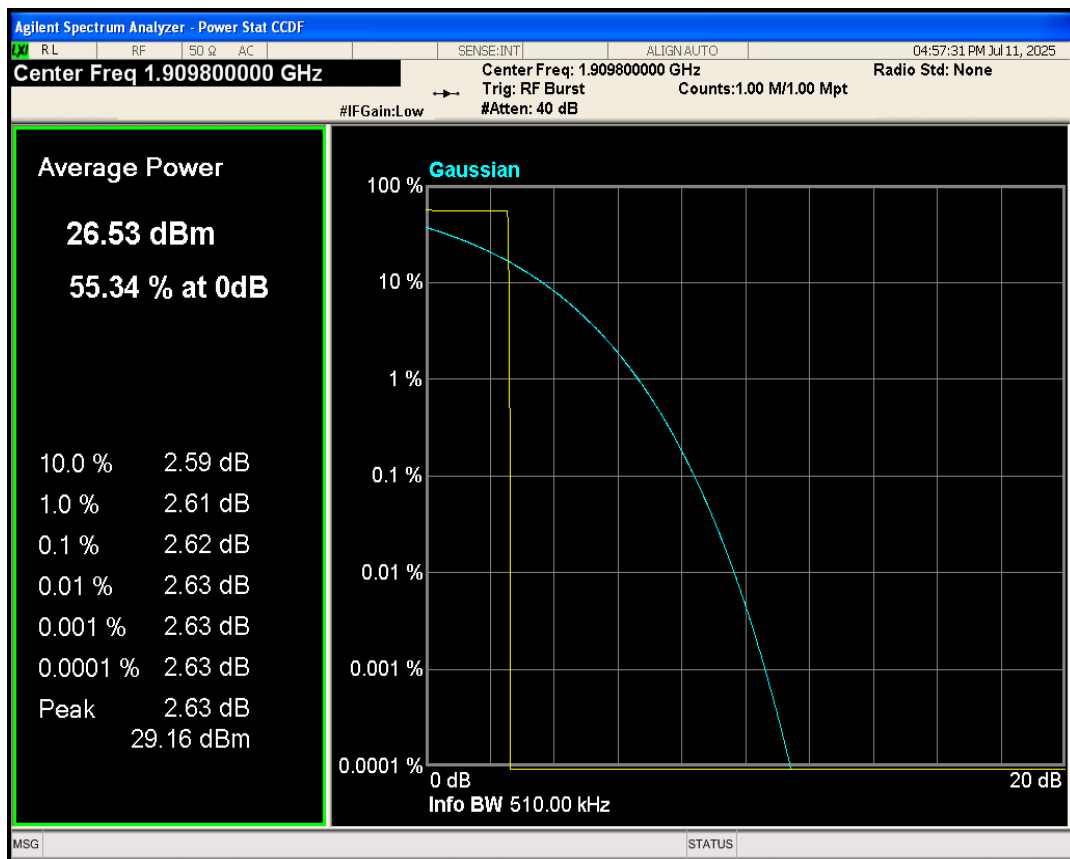


GSM850 Channel=128

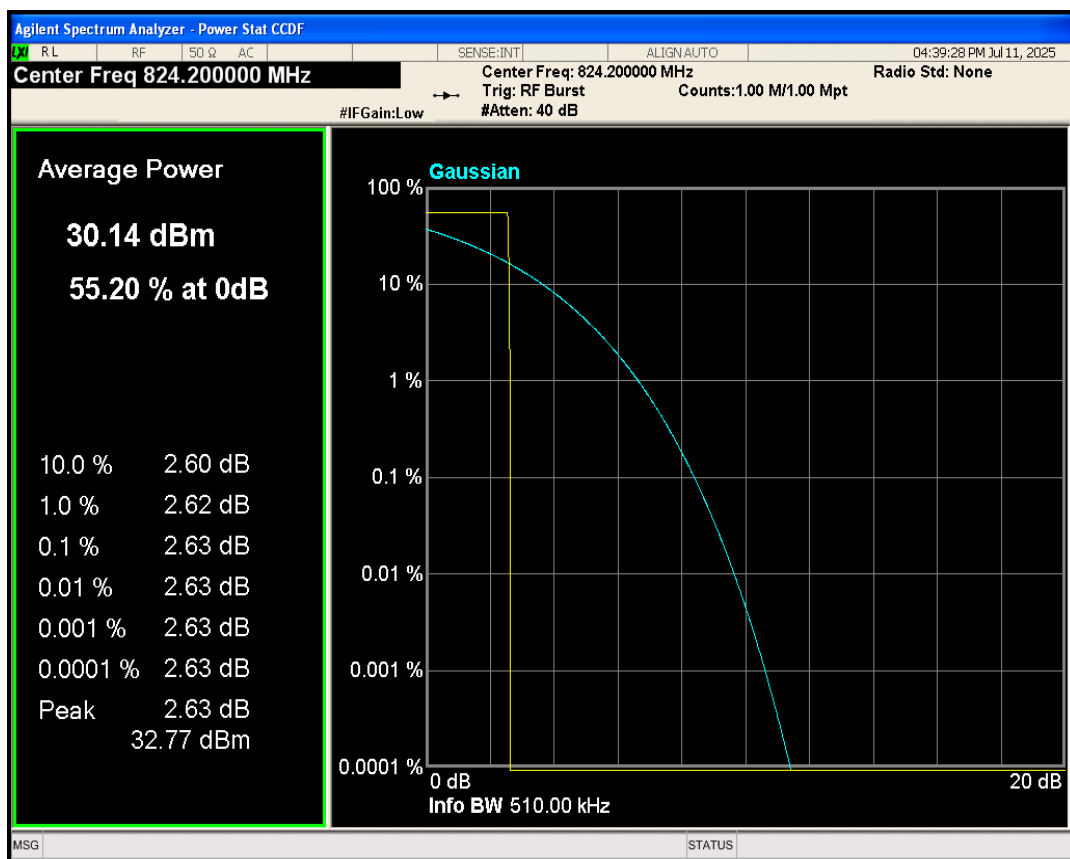

GSM850 Channel=189

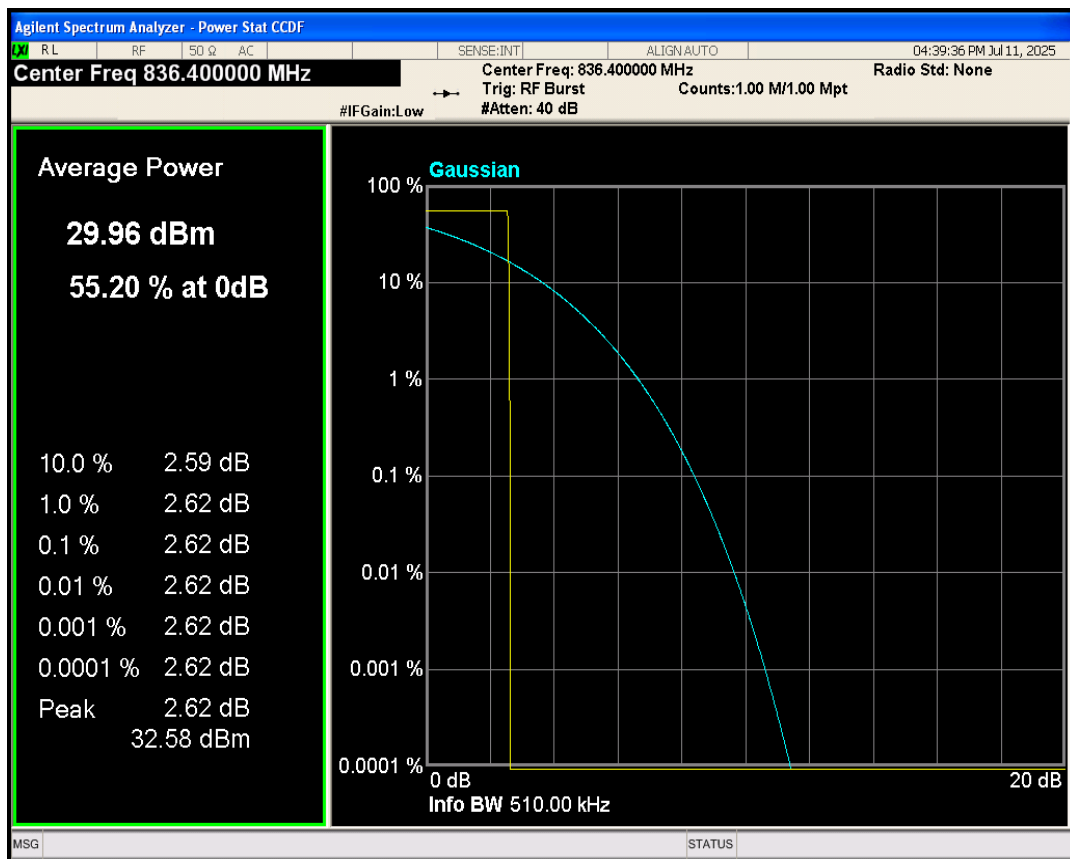


GSM850 Channel=251

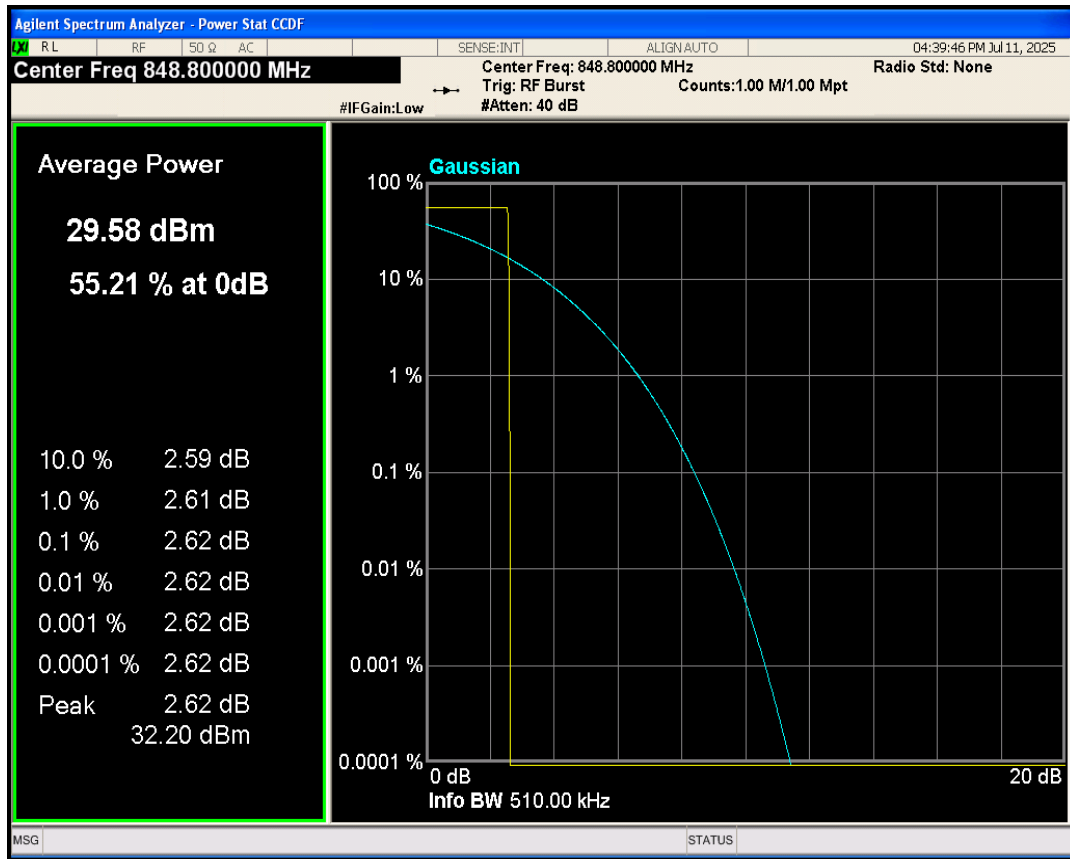


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	241.932	298.019	PASS
GSM1900	661	1880	241.360	303.280	PASS
GSM1900	810	1909.8	241.925	311.881	PASS
GSM850	128	824.2	240.611	296.957	PASS
GSM850	189	836.4	243.863	323.423	PASS
GSM850	251	848.8	244.572	305.827	PASS


GSM1900 Channel=512

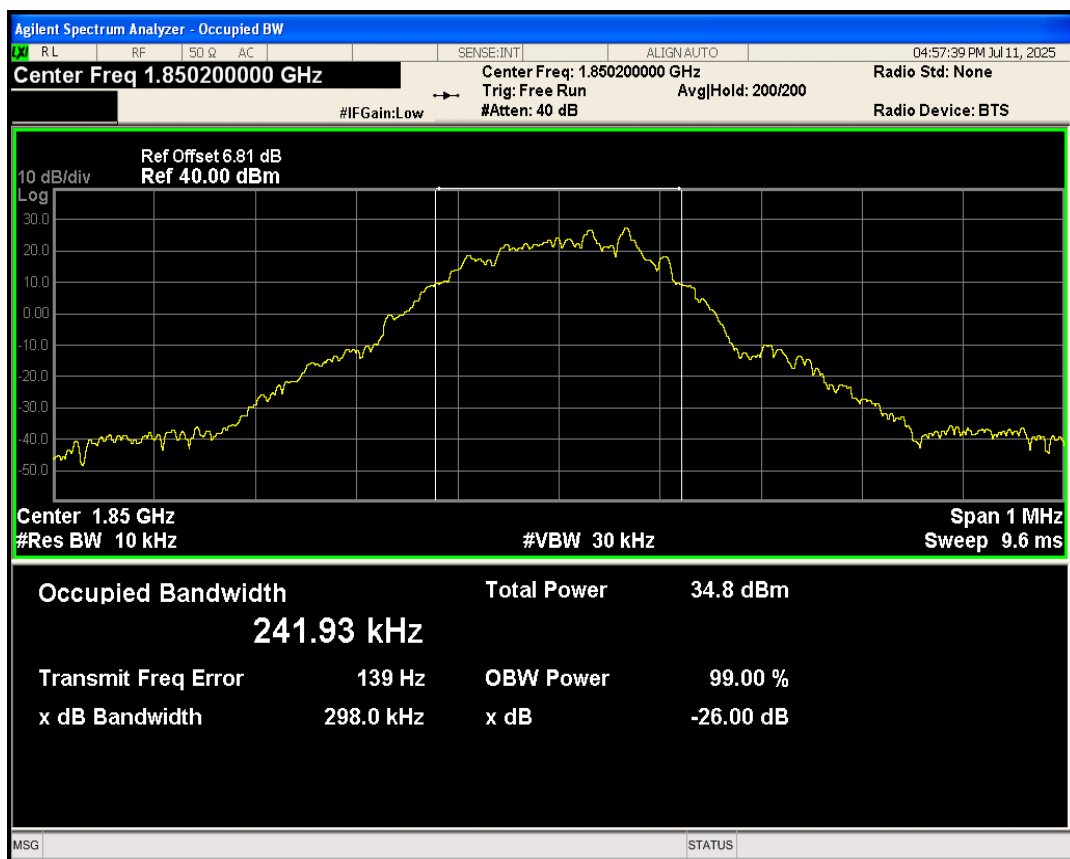


GSM1900 Channel=661

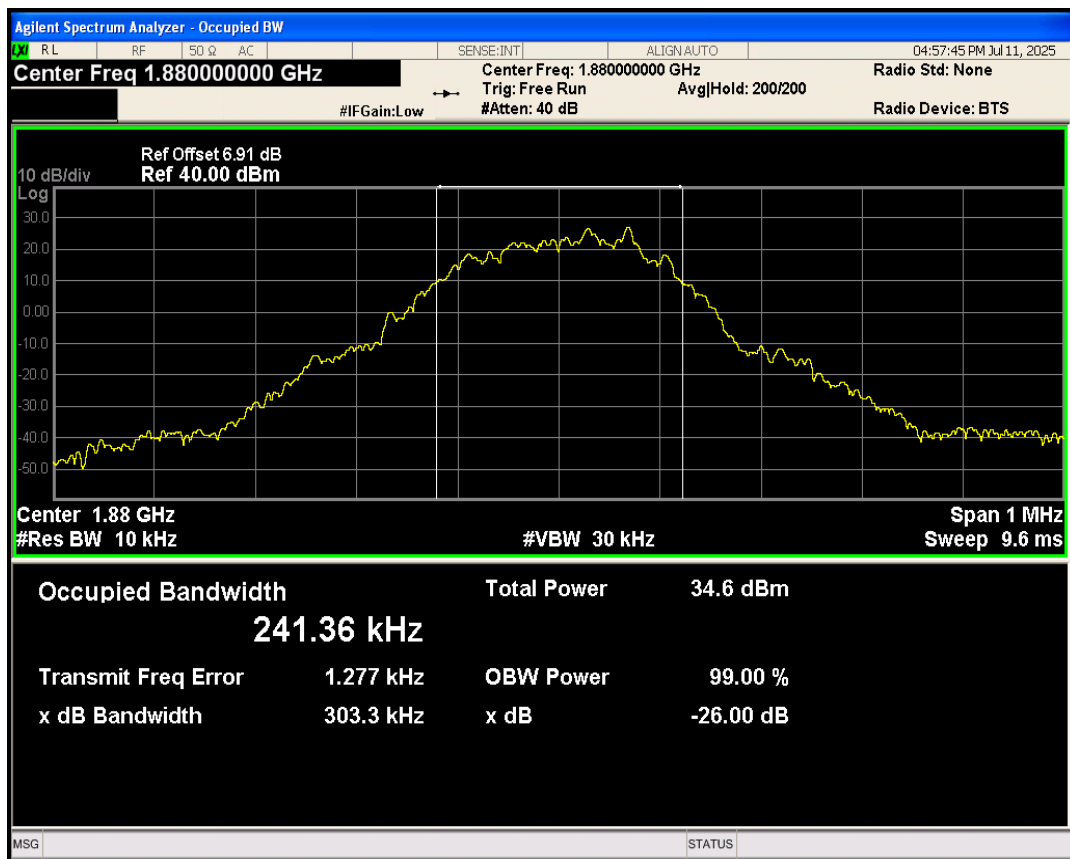


GSM1900 Channel=810

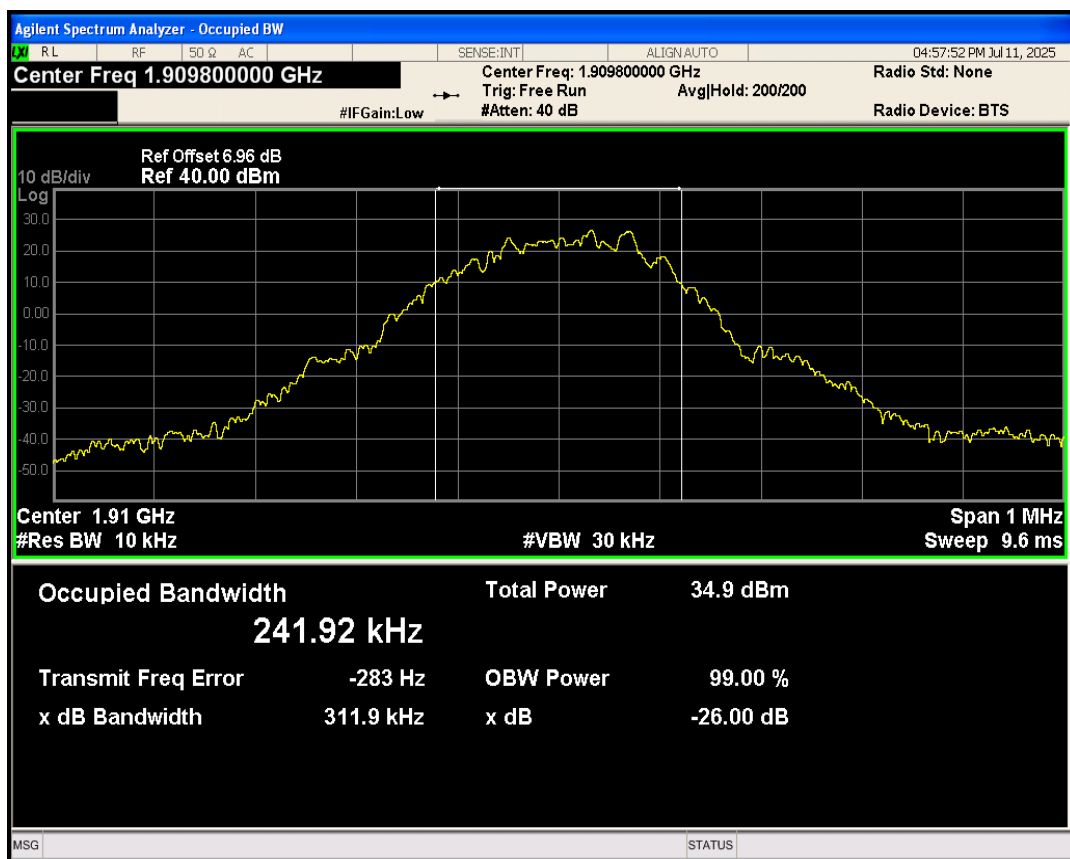


GSM850 Channel=128

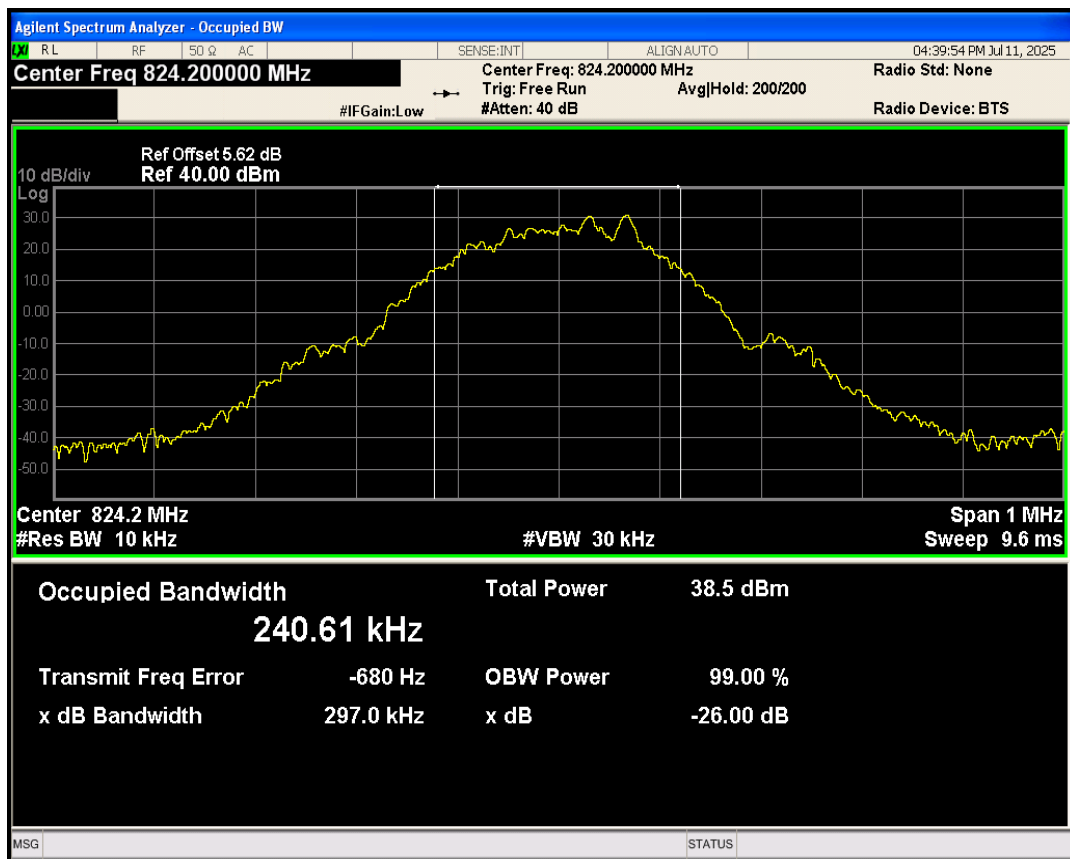

GSM850 Channel=189

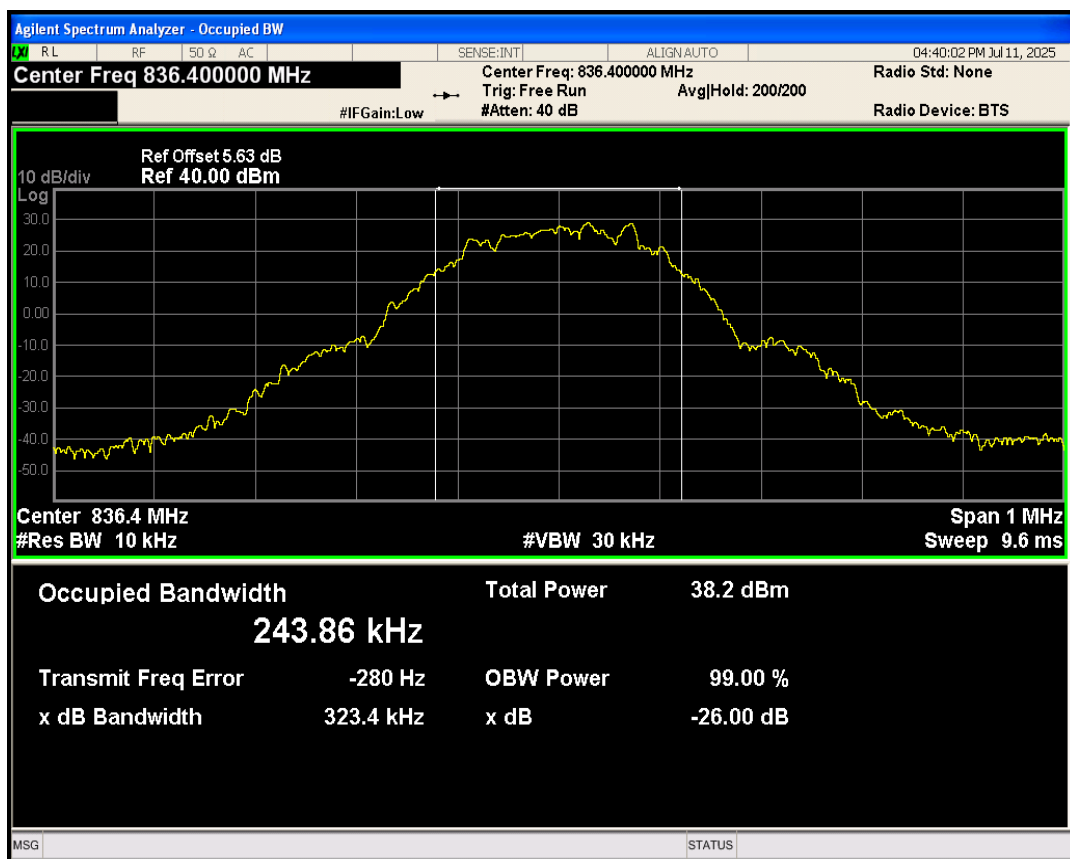

GSM850 Channel=251

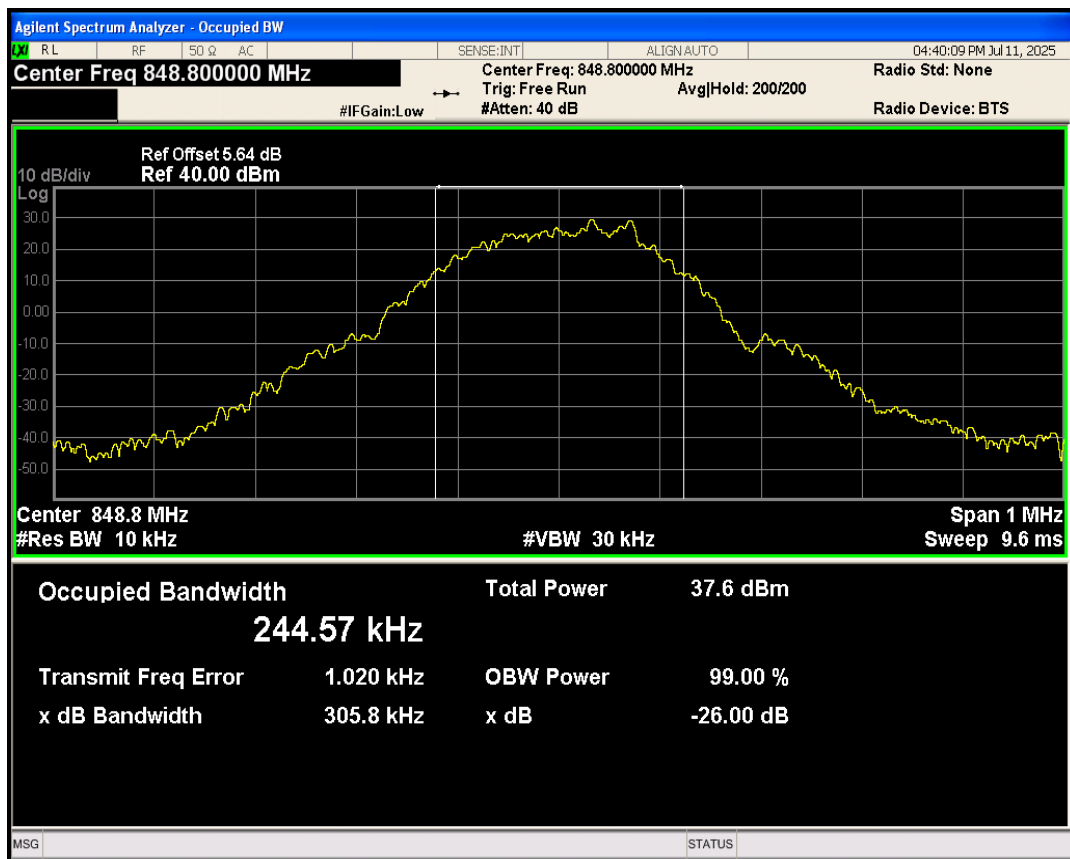

05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1850.00	-27.34	-13	PASS
GSM1900	810	1909.8	1910.02	-30.61	-13	PASS
GSM850	128	824.2	824.00	-24.43	-13	PASS
GSM850	251	848.8	849.02	-26.64	-13	PASS

GSM1900 Channel=512




GSM1900 Channel=810



GSM850 Channel=128




GSM850 Channel=251

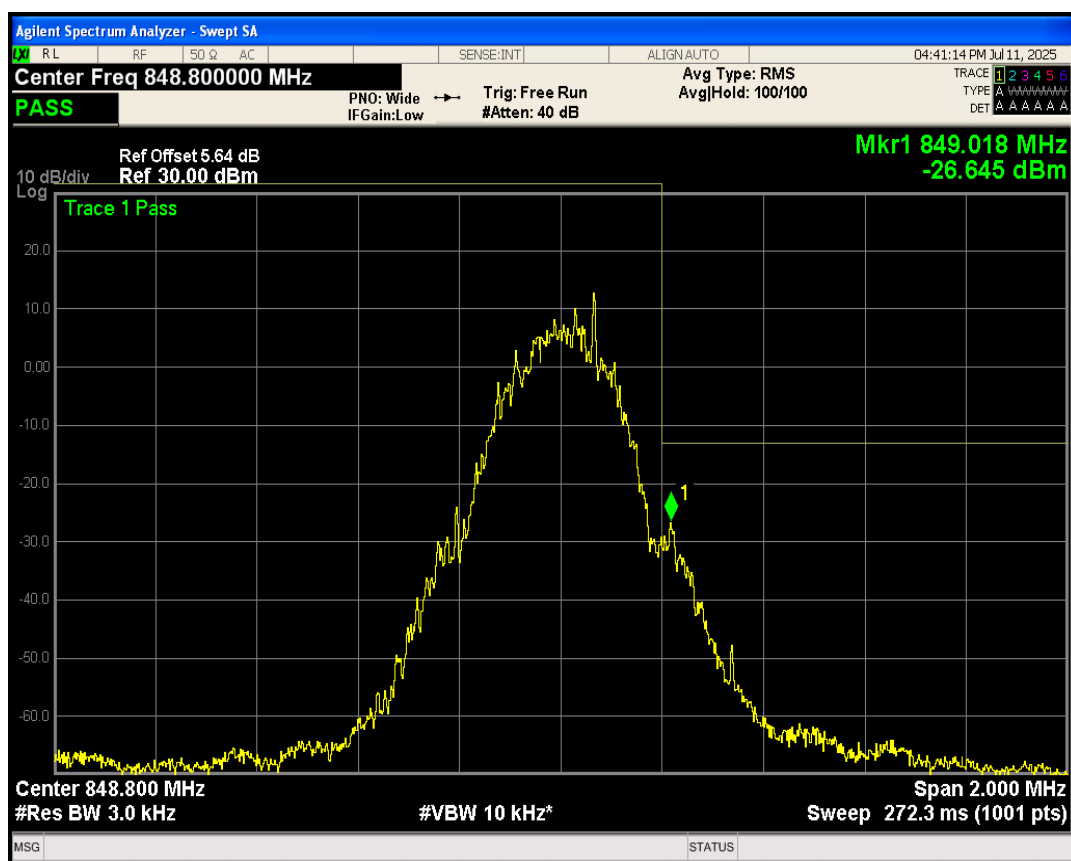


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25254.59	-20.12	-13	PASS
GSM1900	661	1880	24915.77	-20.74	-13	PASS
GSM1900	810	1909.8	26254.49	-20.87	-13	PASS
GSM850	128	824.2	25255.91	-21.83	-13	PASS
GSM850	189	836.4	24877.39	-21.66	-13	PASS
GSM850	251	848.8	25306.20	-22.02	-13	PASS


GSM1900 Channel=512

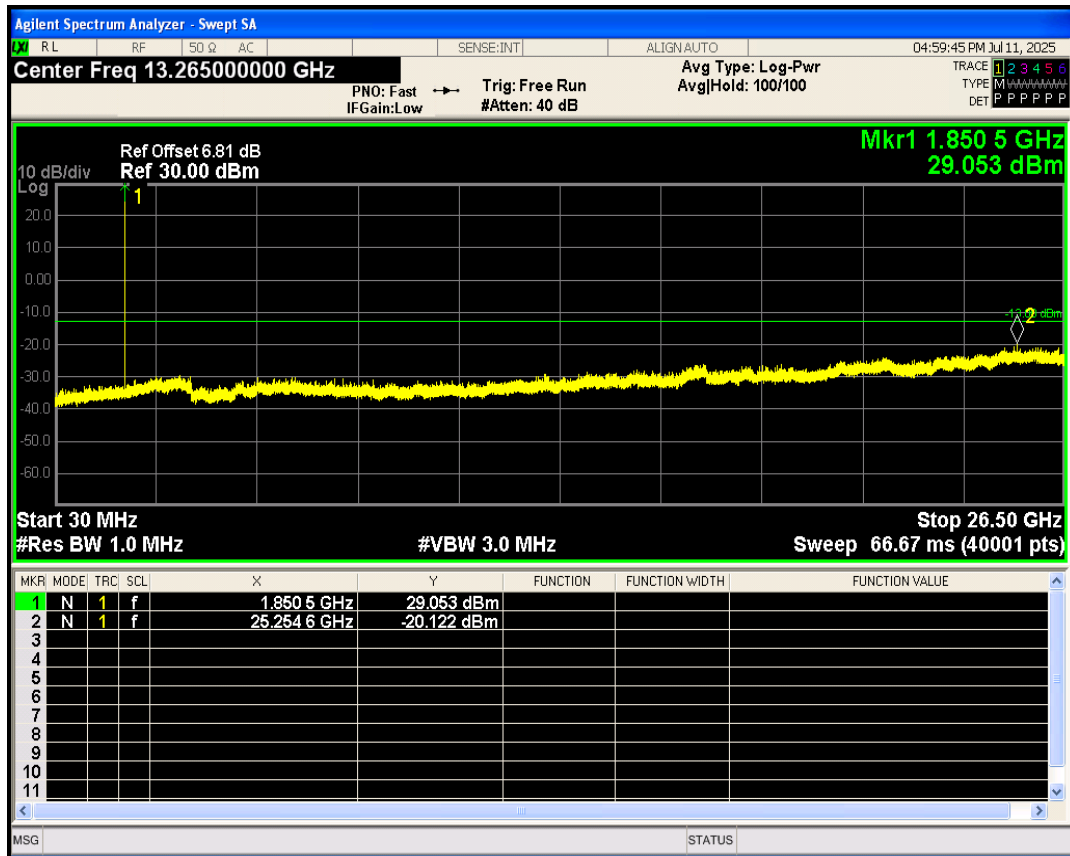


GSM1900 Channel=661

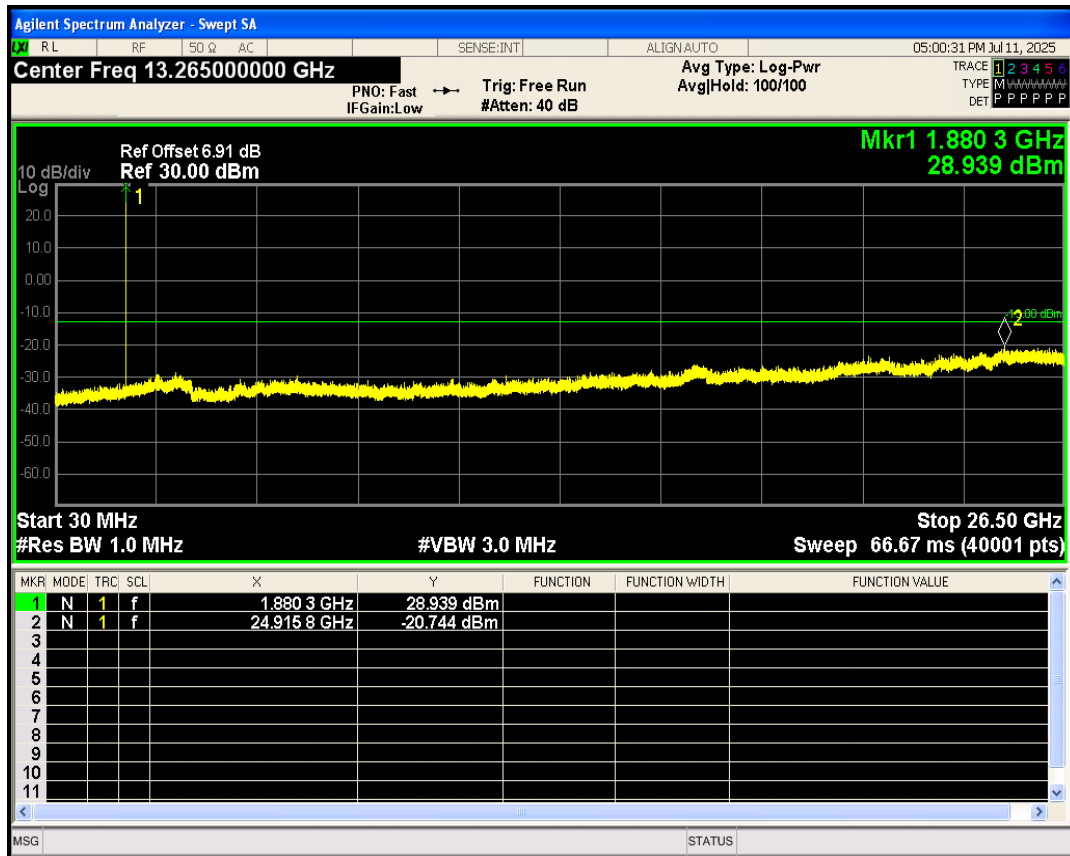


GSM1900 Channel=810

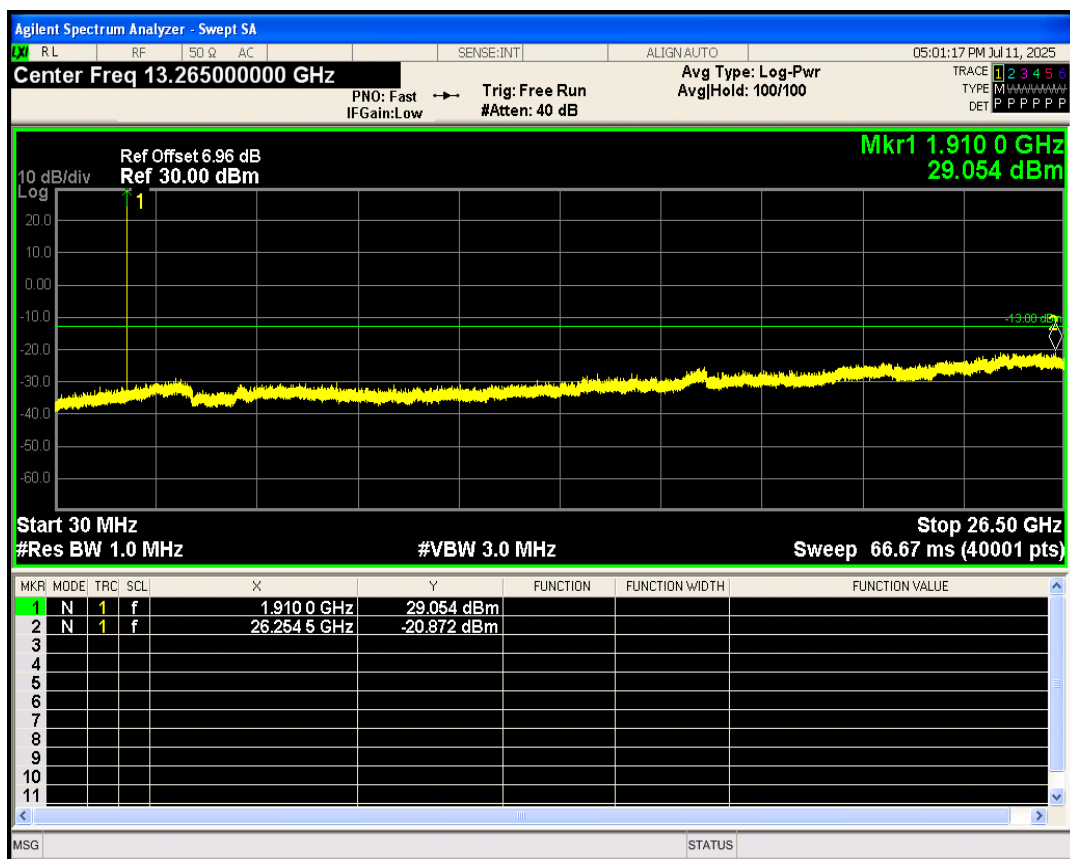

GSM850 Channel=128

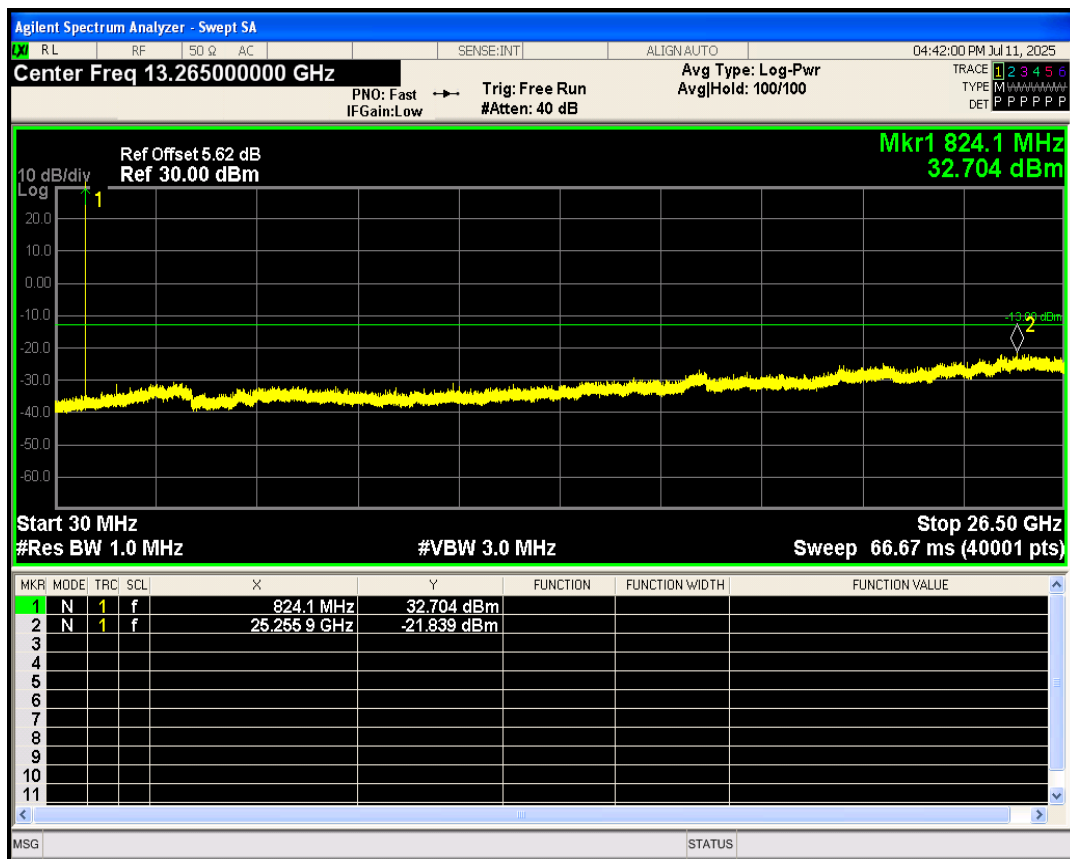

GSM850 Channel=189

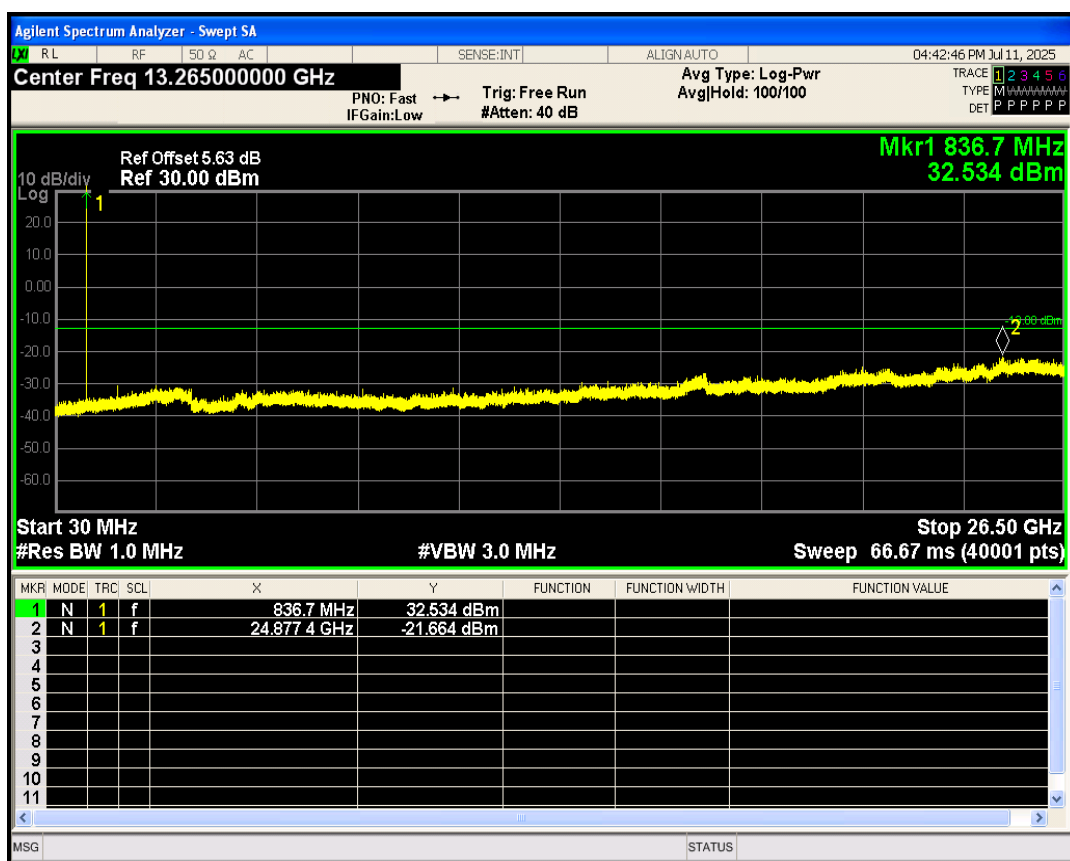

GSM850 Channel=251

