Band2	5	19175	25	#0	QPSK	4.494	4.873	PASS
Band2	5	19175	25	#0	QAM16	4.506	4.909	PASS
Band2	10	18650	50	#0	QPSK	8.979	9.694	PASS
Band2	10	18650	50	#0	QAM16	8.962	9.580	PASS
Band2	10	18900	50	#0	QPSK	8.972	9.633	PASS
Band2	10	18900	50	#0	QAM16	8.974	9.621	PASS
Band2	10	19150	50	#0	QPSK	8.950	9.602	PASS
Band2	10	19150	50	#0	QAM16	8.939	9.581	PASS
Band2	15	18675	75	#0	QPSK	13.411	14.450	PASS
Band2	15	18675	75	#0	QAM16	13.437	14.409	PASS
Band2	15	18900	75	#0	QPSK	13.418	14.417	PASS
Band2	15	18900	75	#0	QAM16	13.414	14.392	PASS
Band2	15	19125	75	#0	QPSK	13.400	14.411	PASS
Band2	15	19125	75	#0	QAM16	13.416	14.355	PASS
Band2	20	18700	100	#0	QPSK	17.995	19.173	PASS
Band2	20	18700	100	#0	QAM16	18.002	19.166	PASS
Band2	20	18900	100	#0	QPSK	17.838	19.005	PASS
Band2	20	18900	100	#0	QAM16	17.844	19.103	PASS
Band2	20	19100	100	#0	QPSK	17.954	19.060	PASS
Band2	20	19100	100	#0	QAM16	17.917	19.160	PASS

Band2 QPSK BW=1.4MHz Channel=18607 RB Size=6 Position=#0

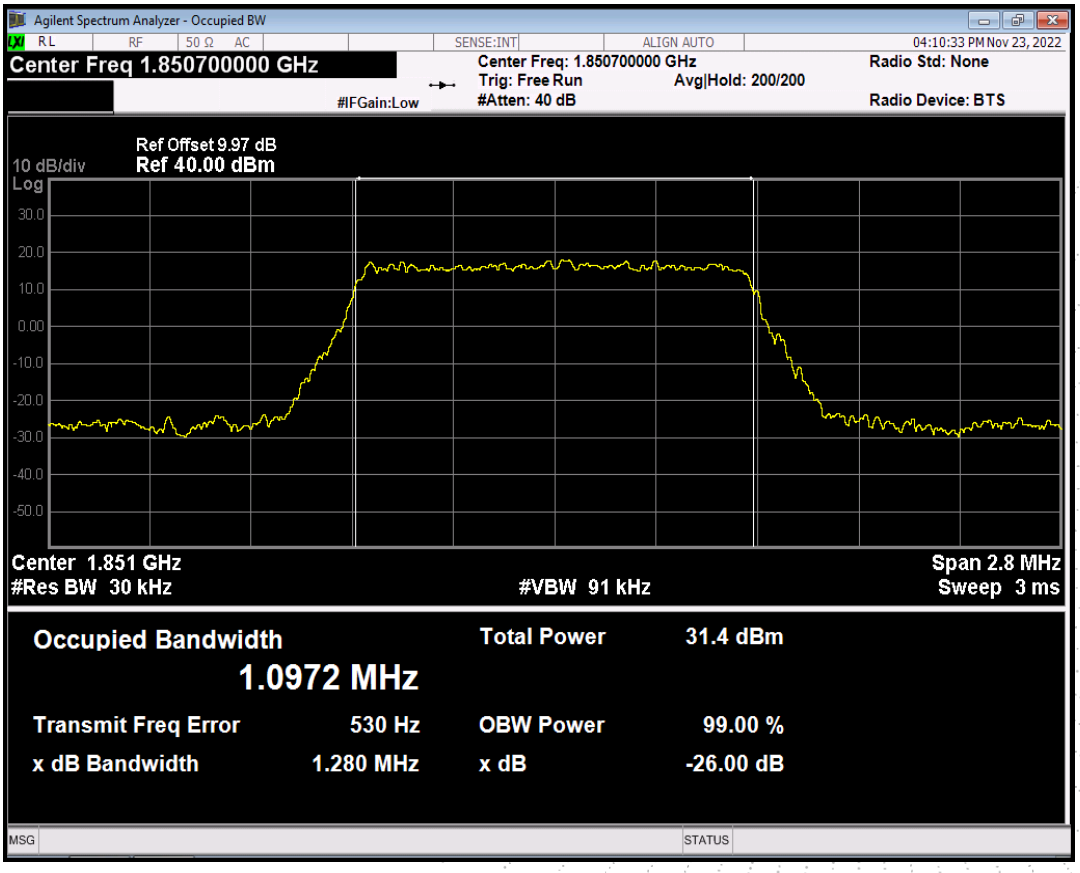

Band2 QAM16 BW=1.4MHz Channel=18607 RB Size=6 Position=#0

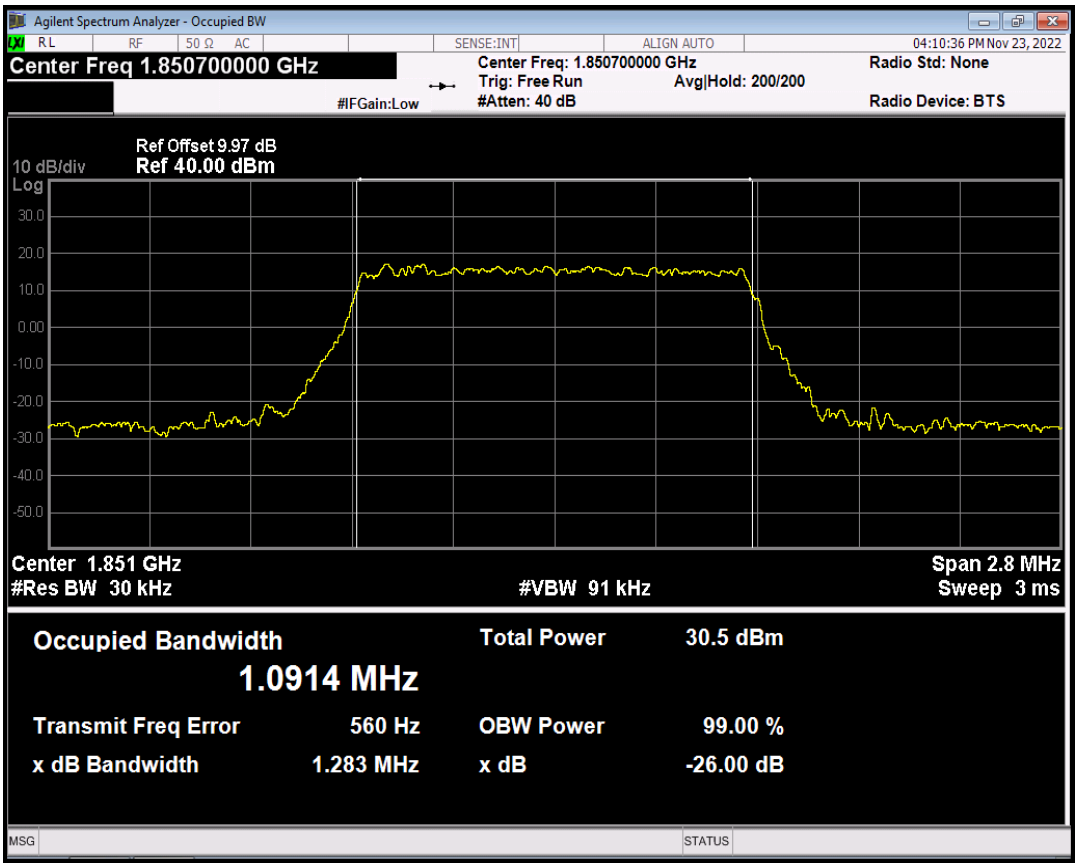

Band2 QPSK BW=1.4MHz Channel=18900 RB Size=6 Position=#0

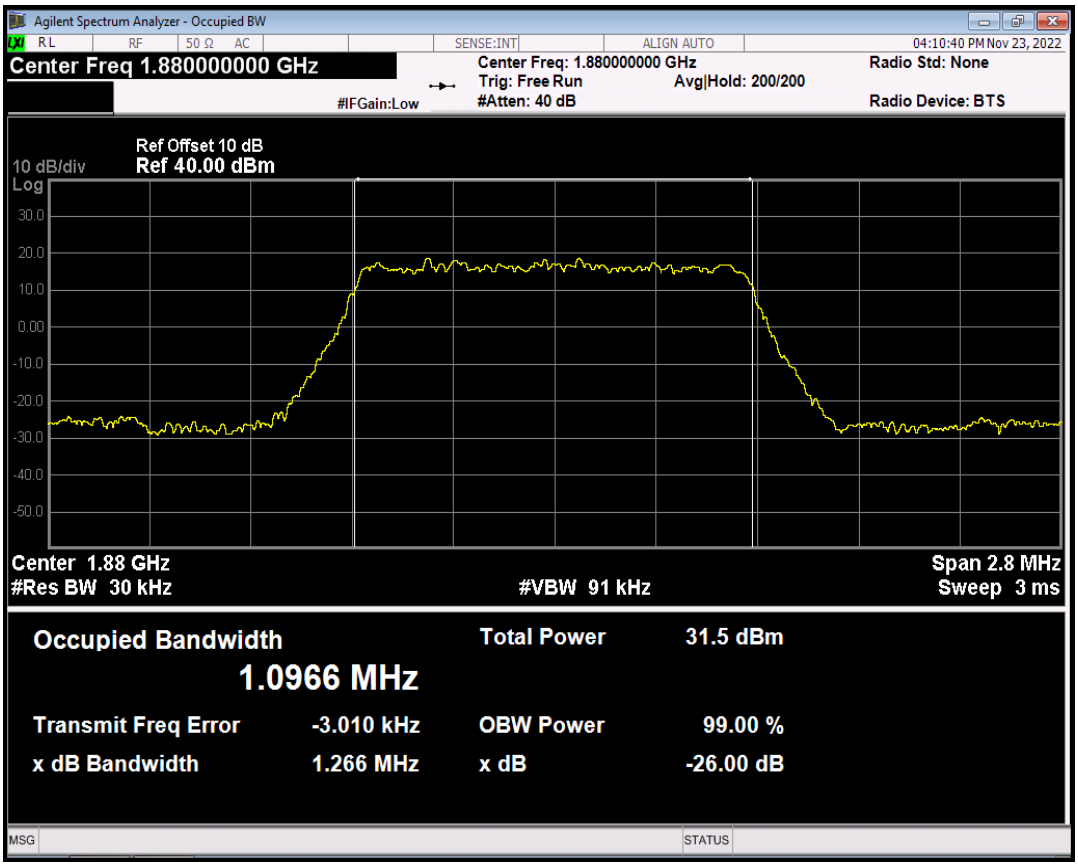

Band2 QAM16 BW=1.4MHz Channel=18900 RB Size=6 Position=#0

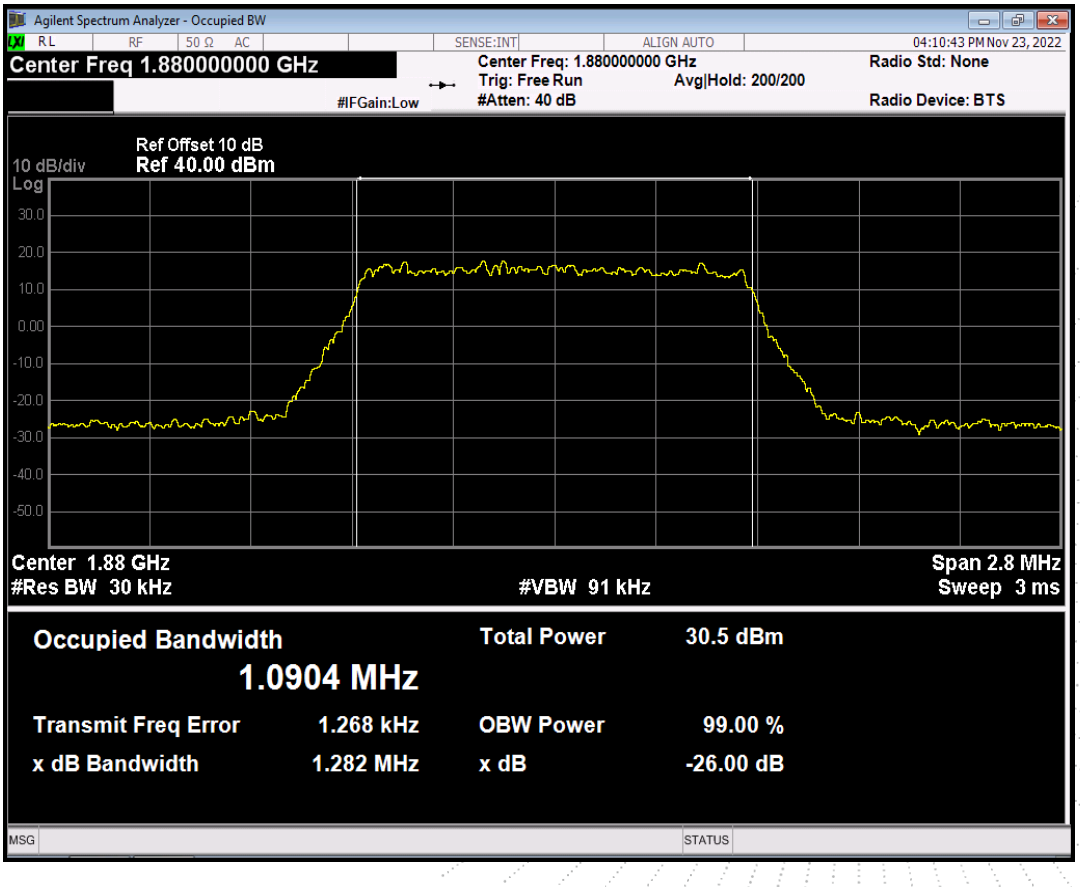

Band2 QPSK BW=1.4MHz Channel=19193 RB Size=6 Position=#0

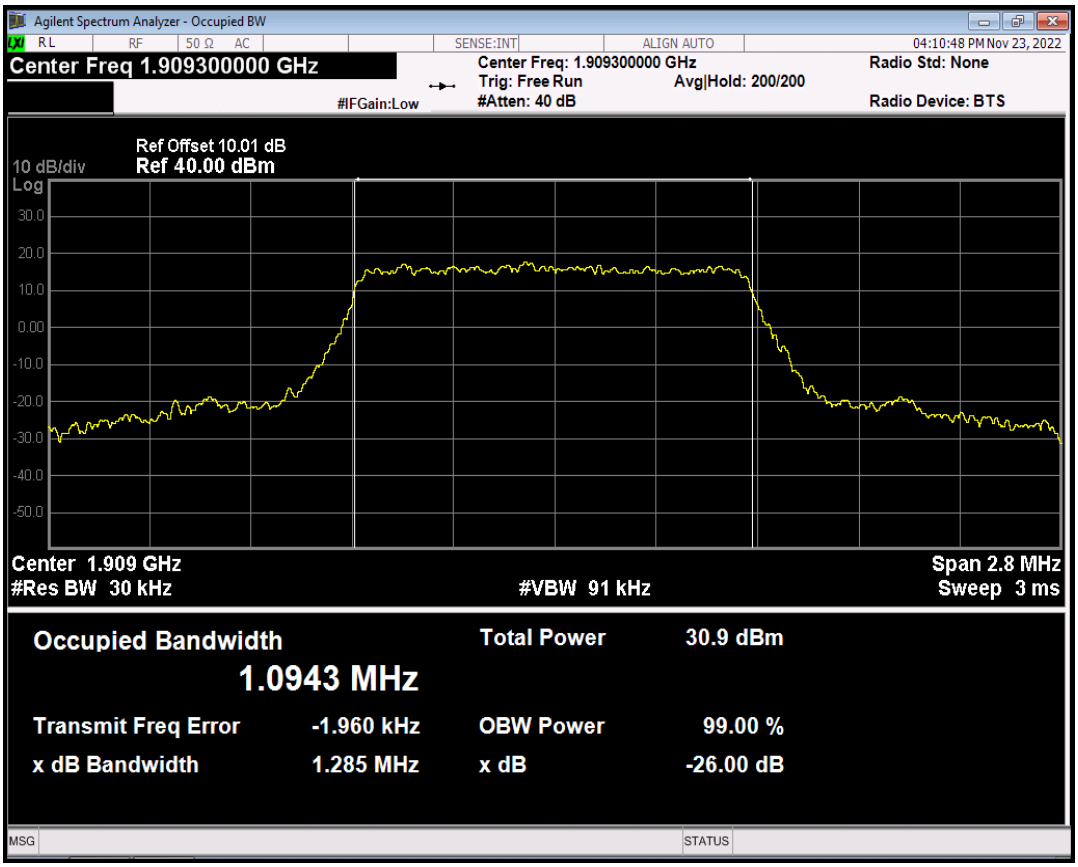

Band2 QAM16 BW=1.4MHz Channel=19193 RB Size=6 Position=#0

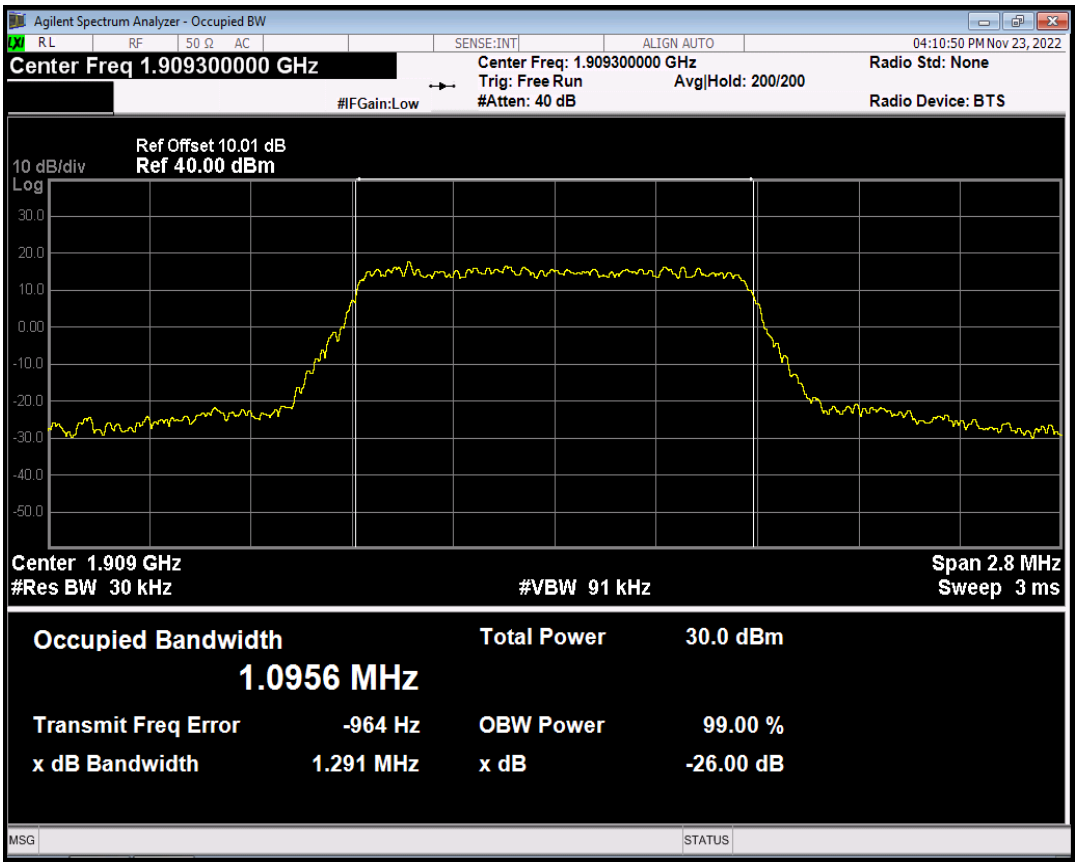

Band2 QPSK BW=3MHz Channel=18615 RB Size=15 Position=#0

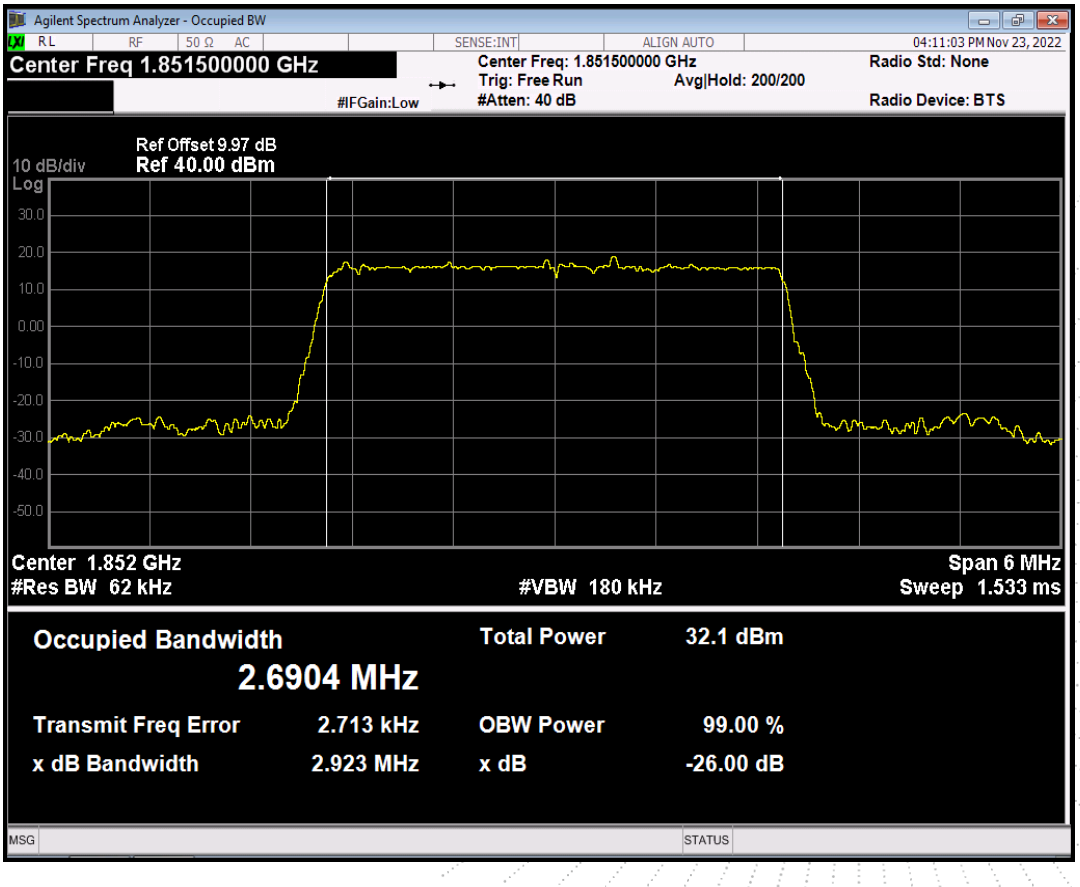

Band2 QAM16 BW=3MHz Channel=18615 RB Size=15 Position=#0

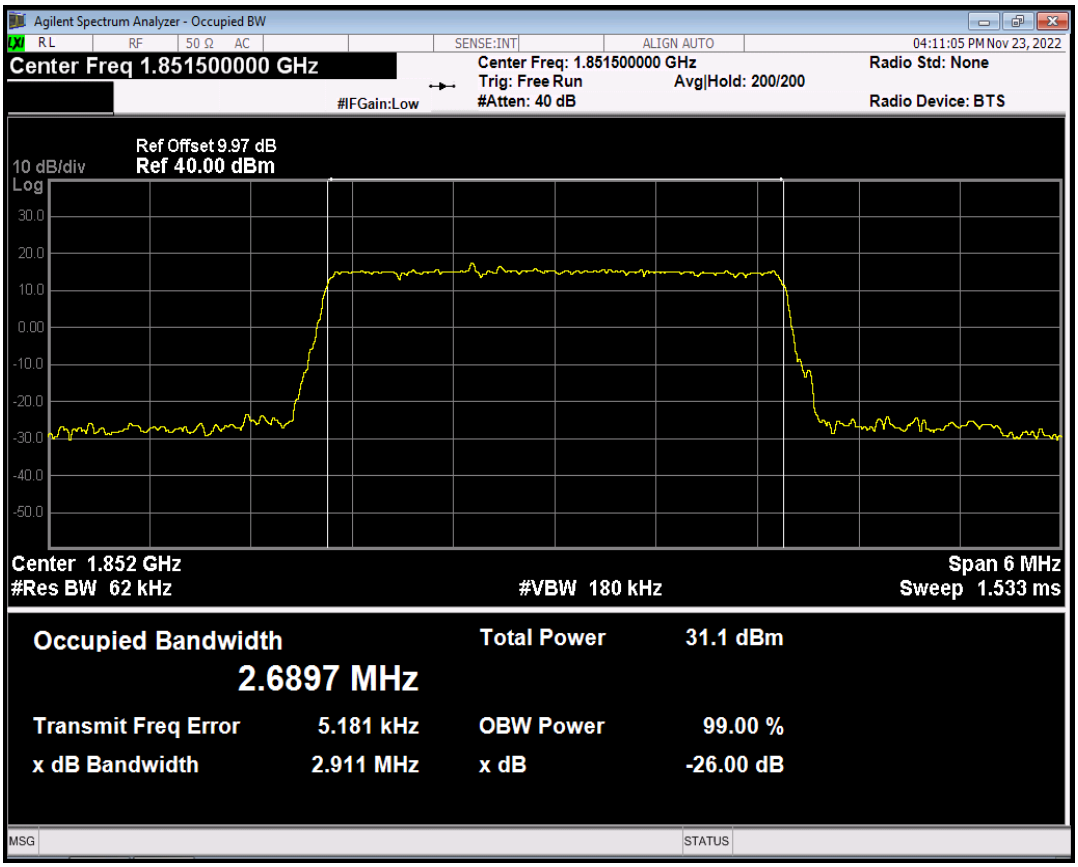

Band2 QPSK BW=3MHz Channel=18900 RB Size=15 Position=#0

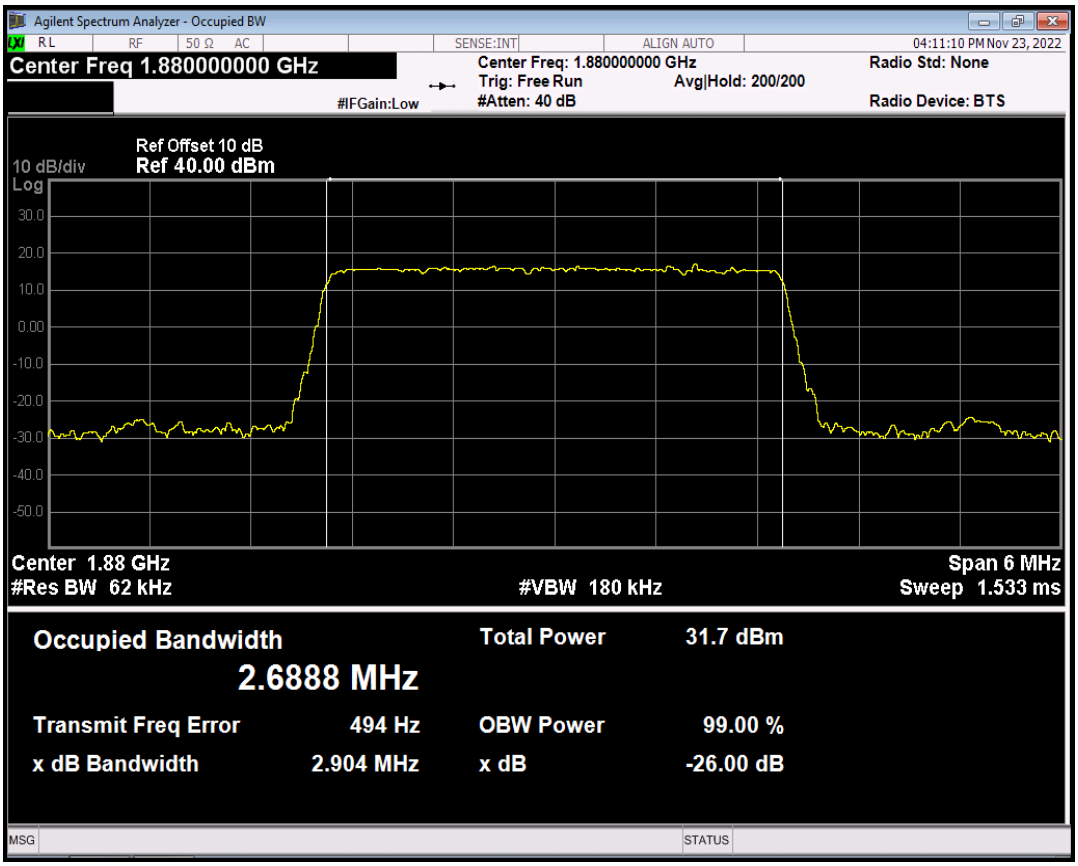

Band2 QAM16 BW=3MHz Channel=18900 RB Size=15 Position=#0

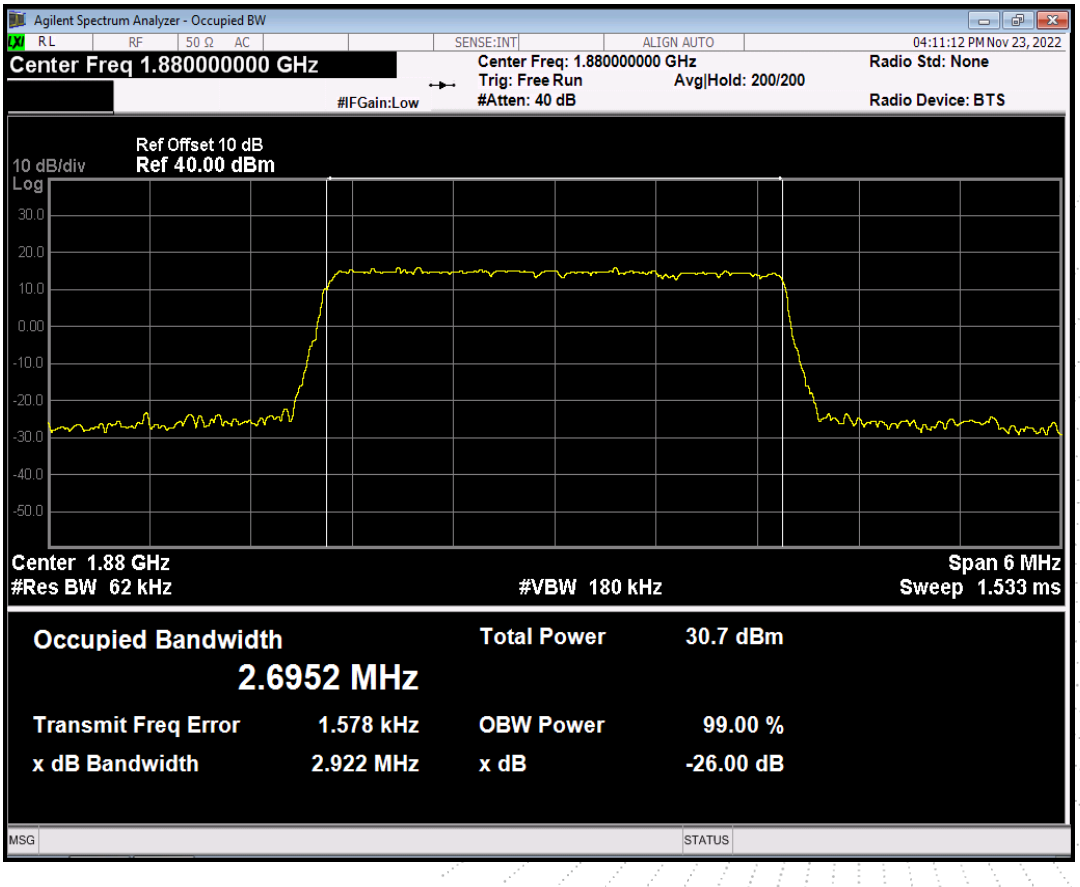

Band2 QPSK BW=3MHz Channel=19185 RB Size=15 Position=#0

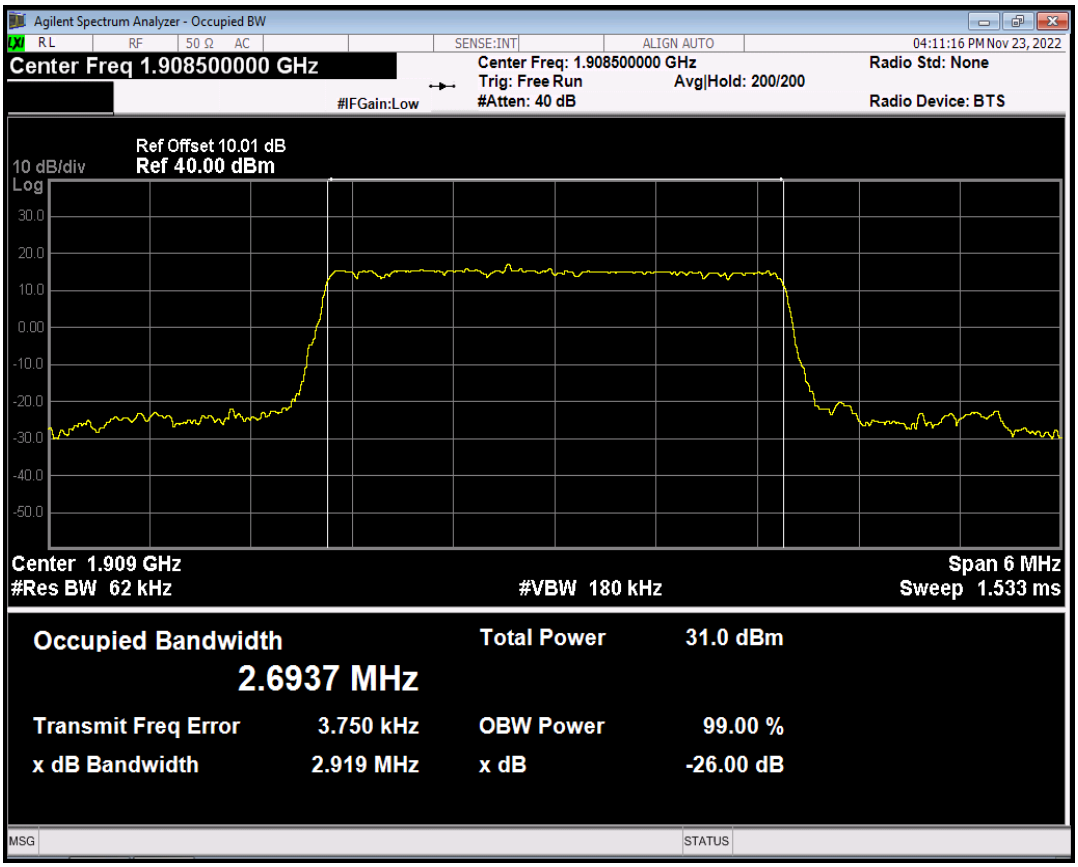

Band2 QAM16 BW=3MHz Channel=19185 RB Size=15 Position=#0

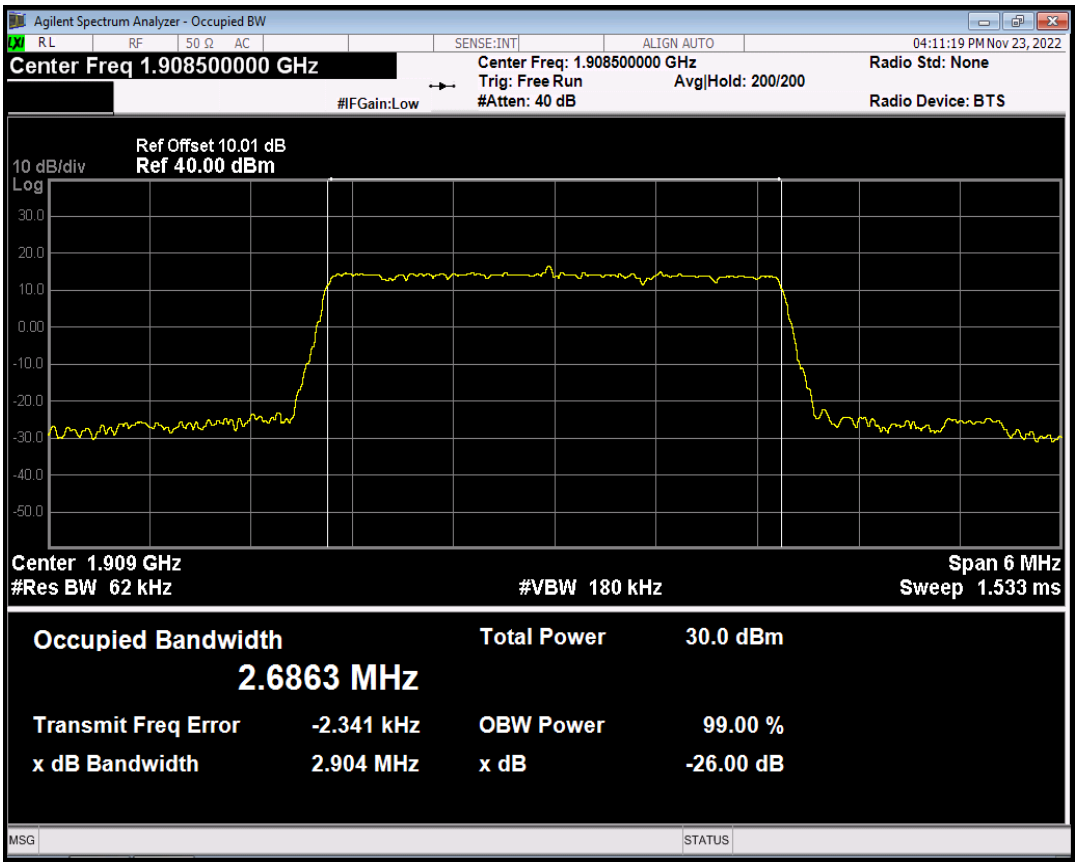

Band2 QPSK BW=5MHz Channel=18625 RB Size=25 Position=#0

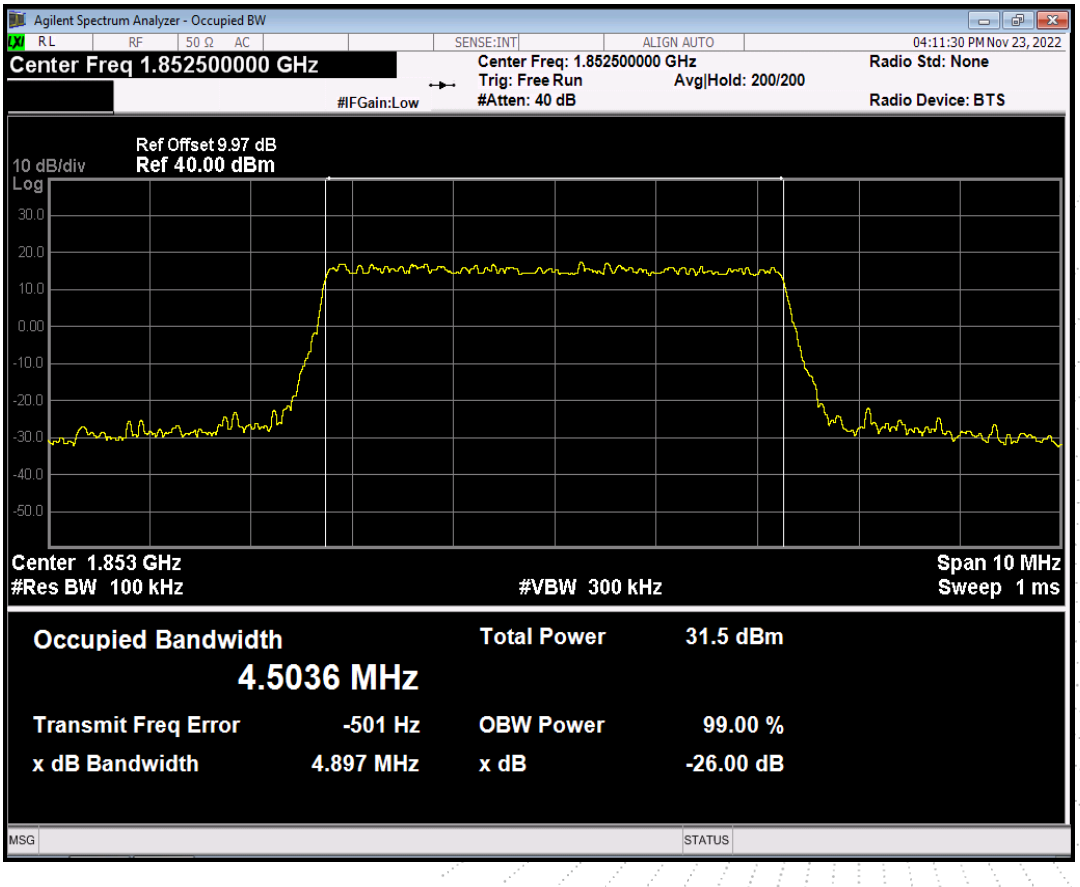

Band2 QAM16 BW=5MHz Channel=18625 RB Size=25 Position=#0

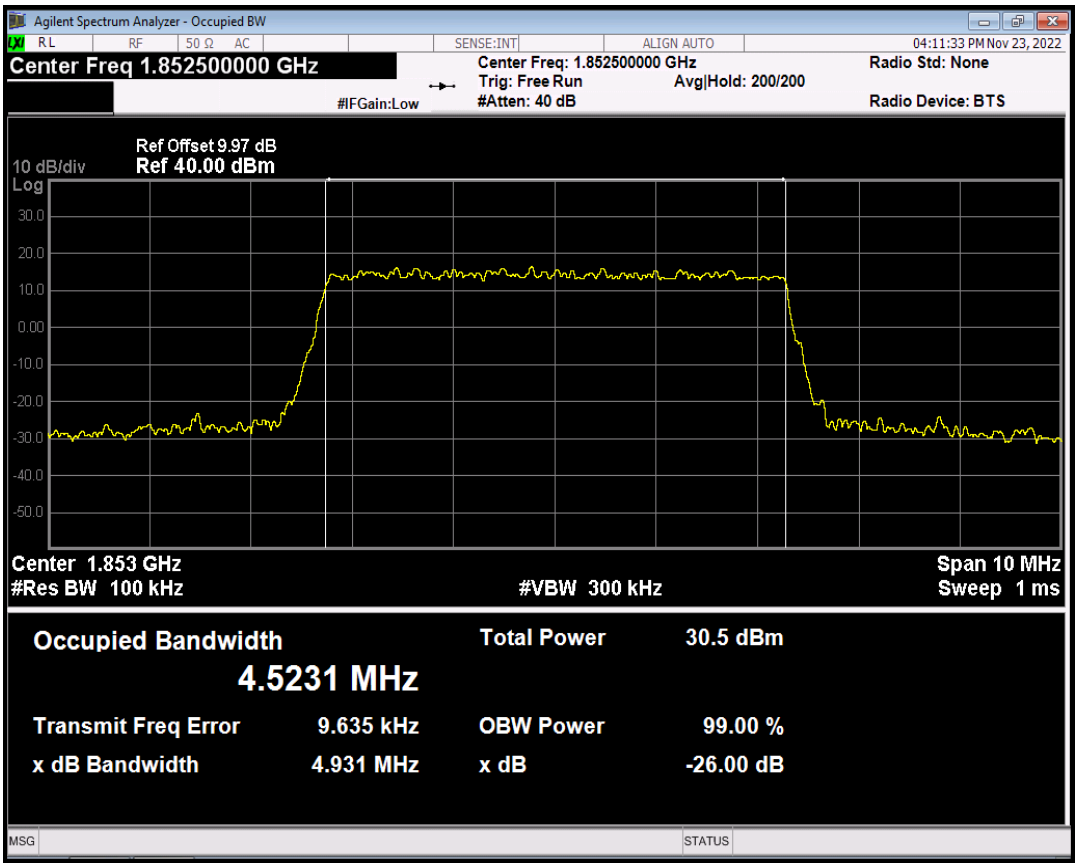

Band2 QPSK BW=5MHz Channel=18900 RB Size=25 Position=#0

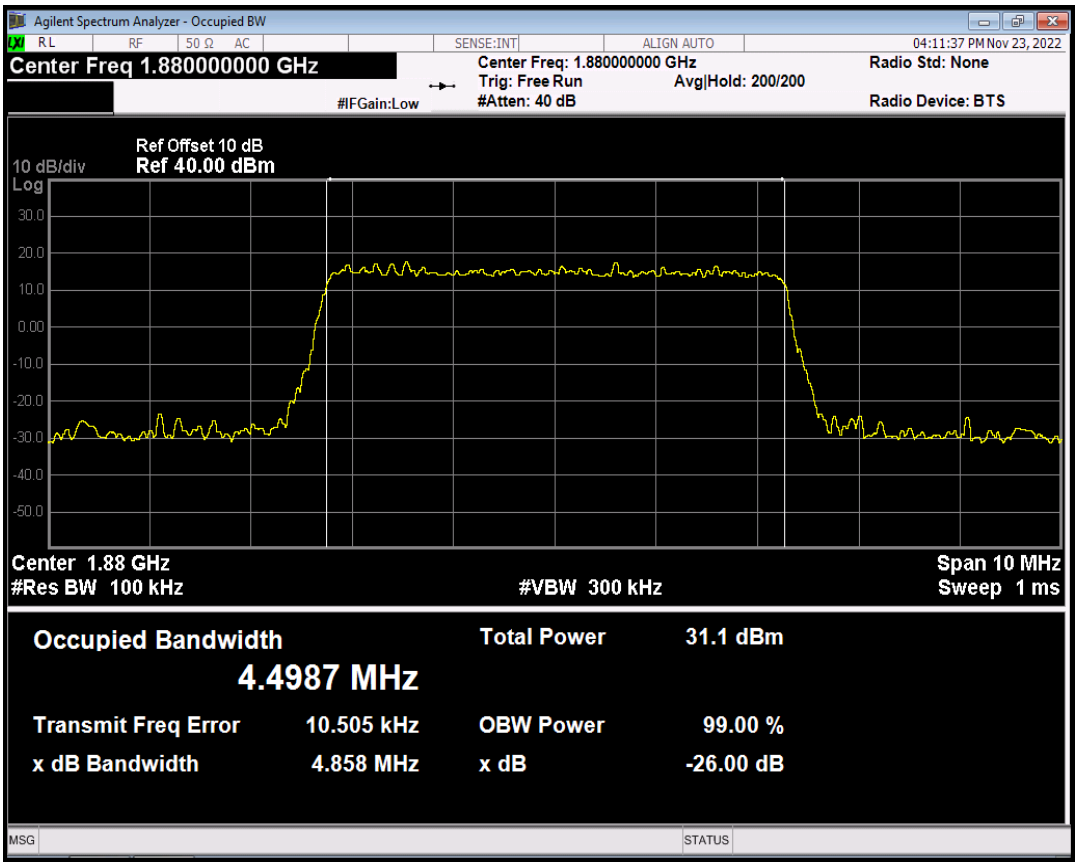

Band2 QAM16 BW=5MHz Channel=18900 RB Size=25 Position=#0

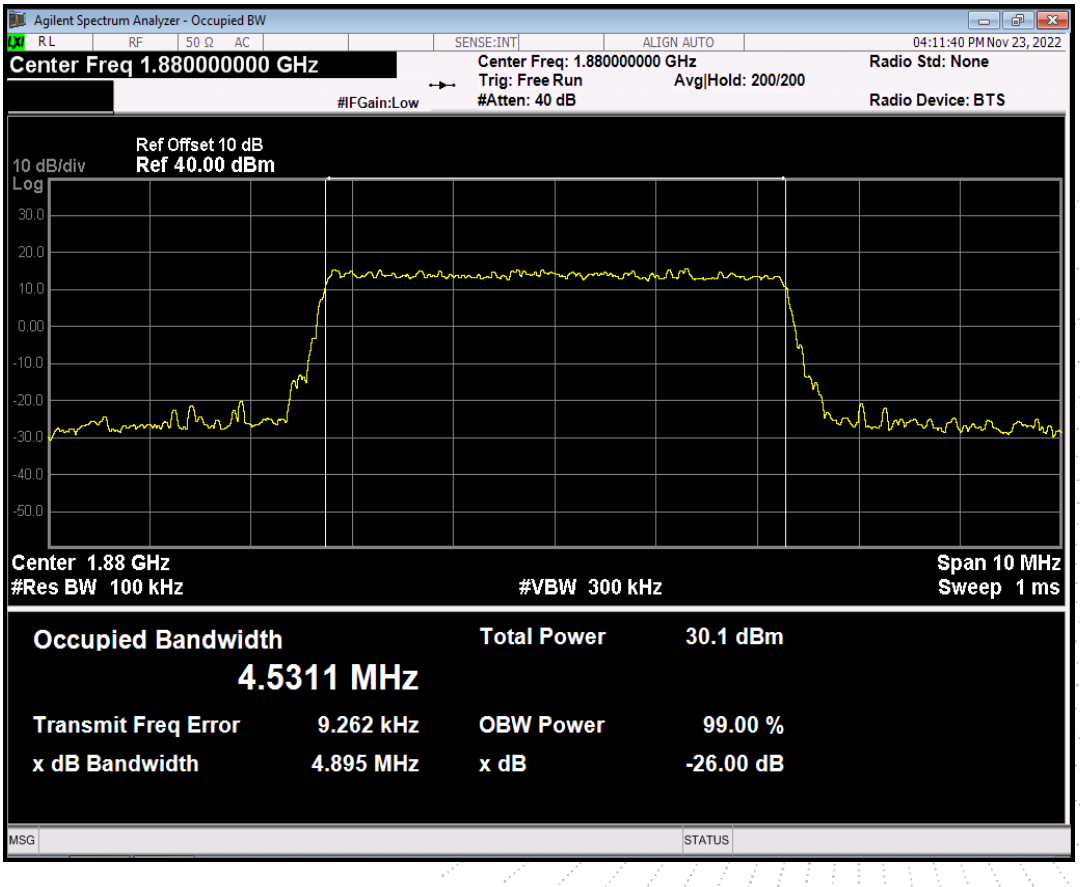

Band2 QPSK BW=5MHz Channel=19175 RB Size=25 Position=#0

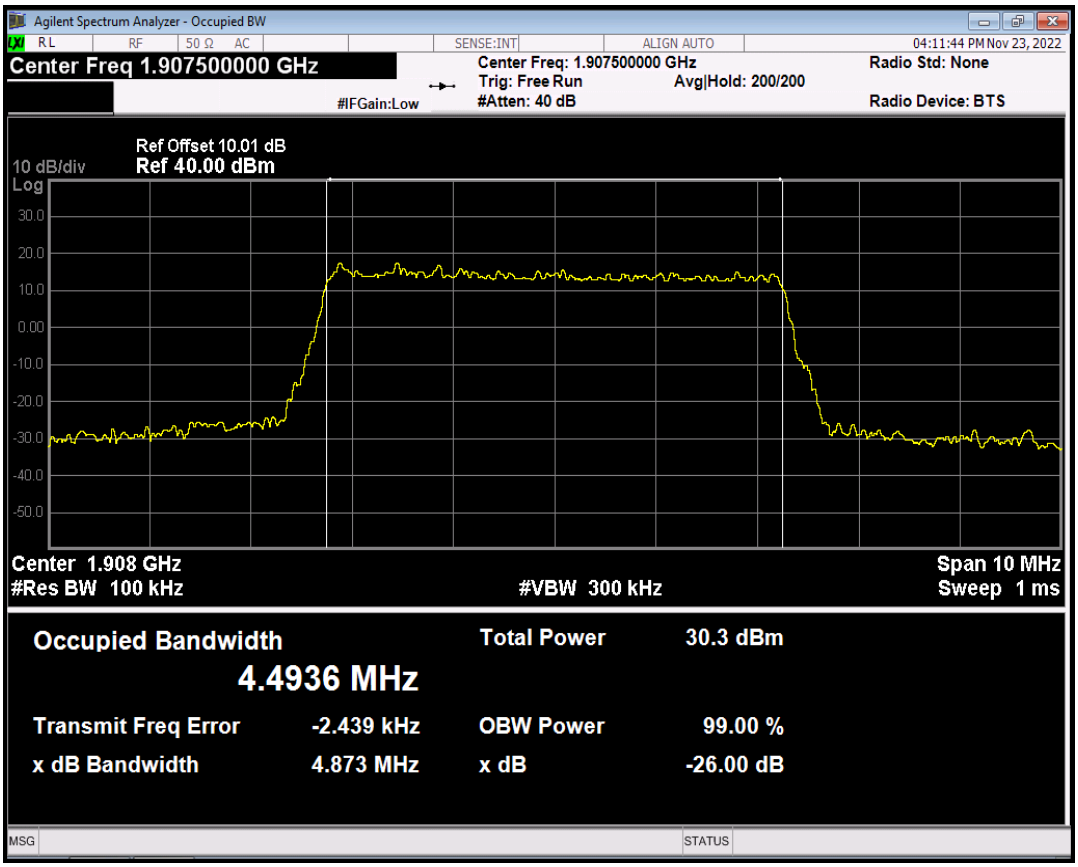

Band2 QAM16 BW=5MHz Channel=19175 RB Size=25 Position=#0

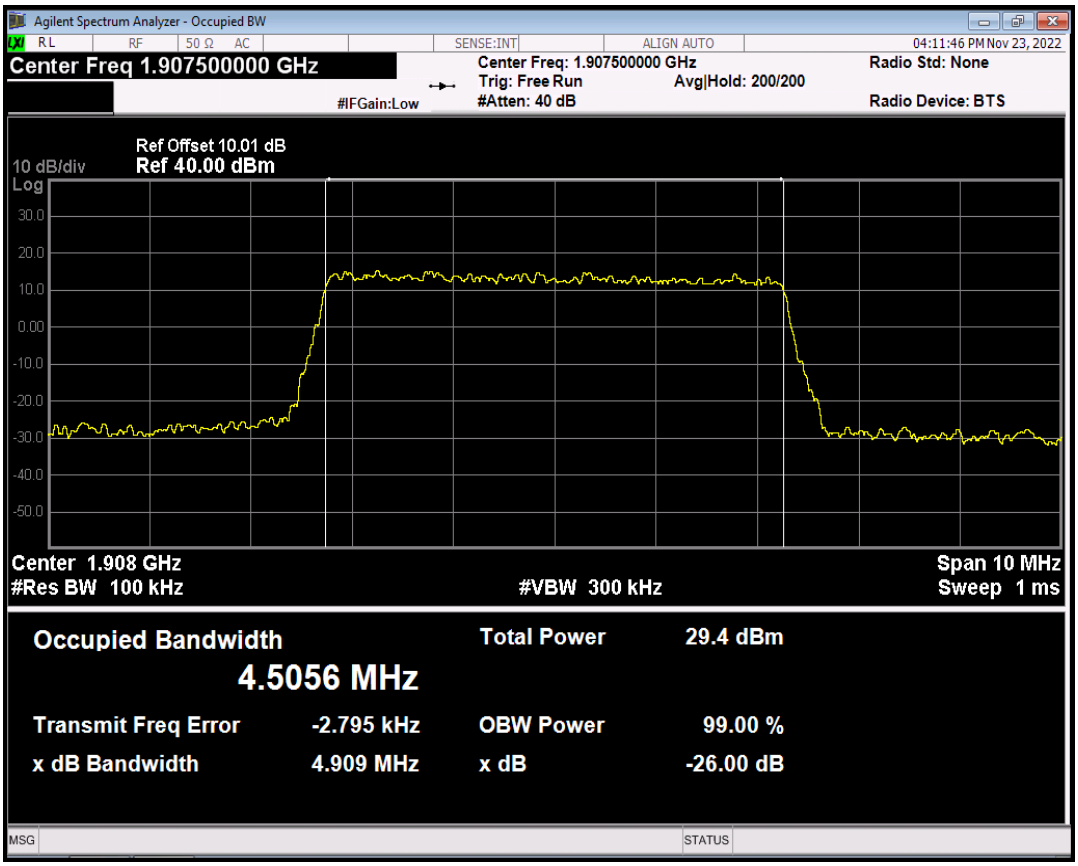

Band2 QPSK BW=10MHz Channel=18650 RB Size=50 Position=#0

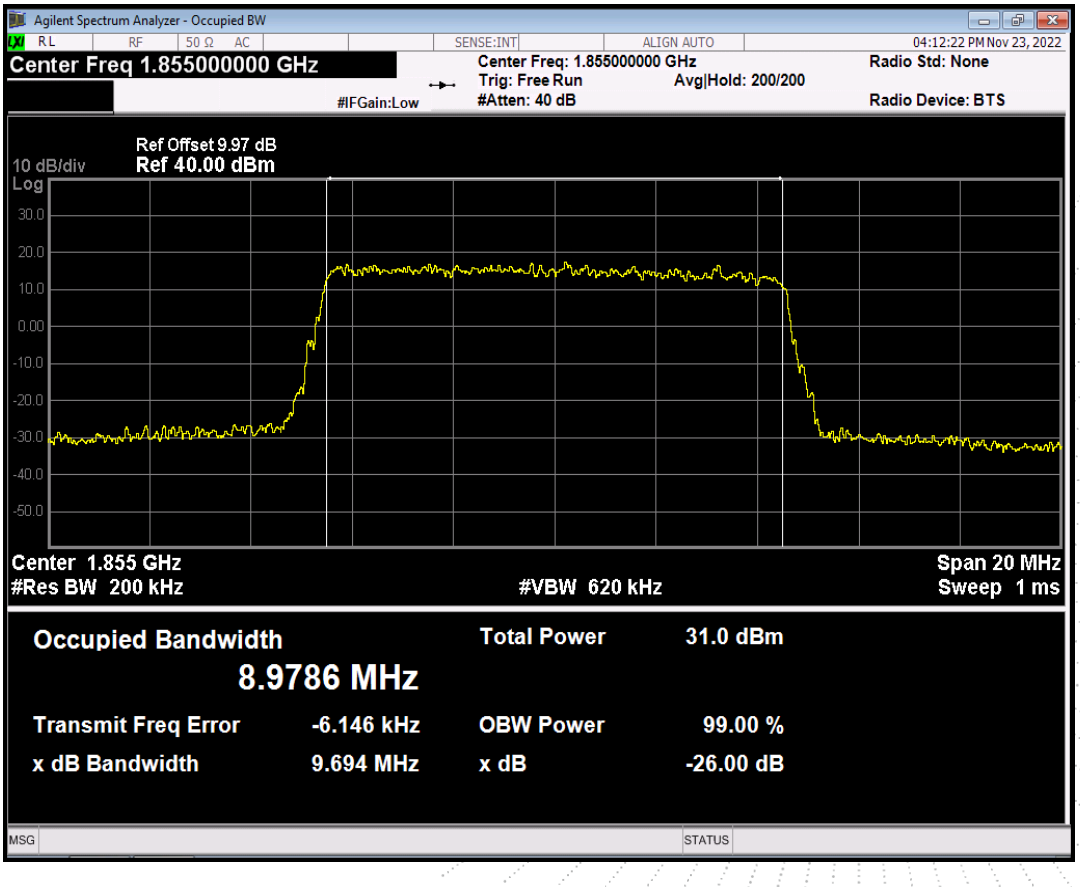

Band2 QAM16 BW=10MHz Channel=18650 RB Size=50 Position=#0

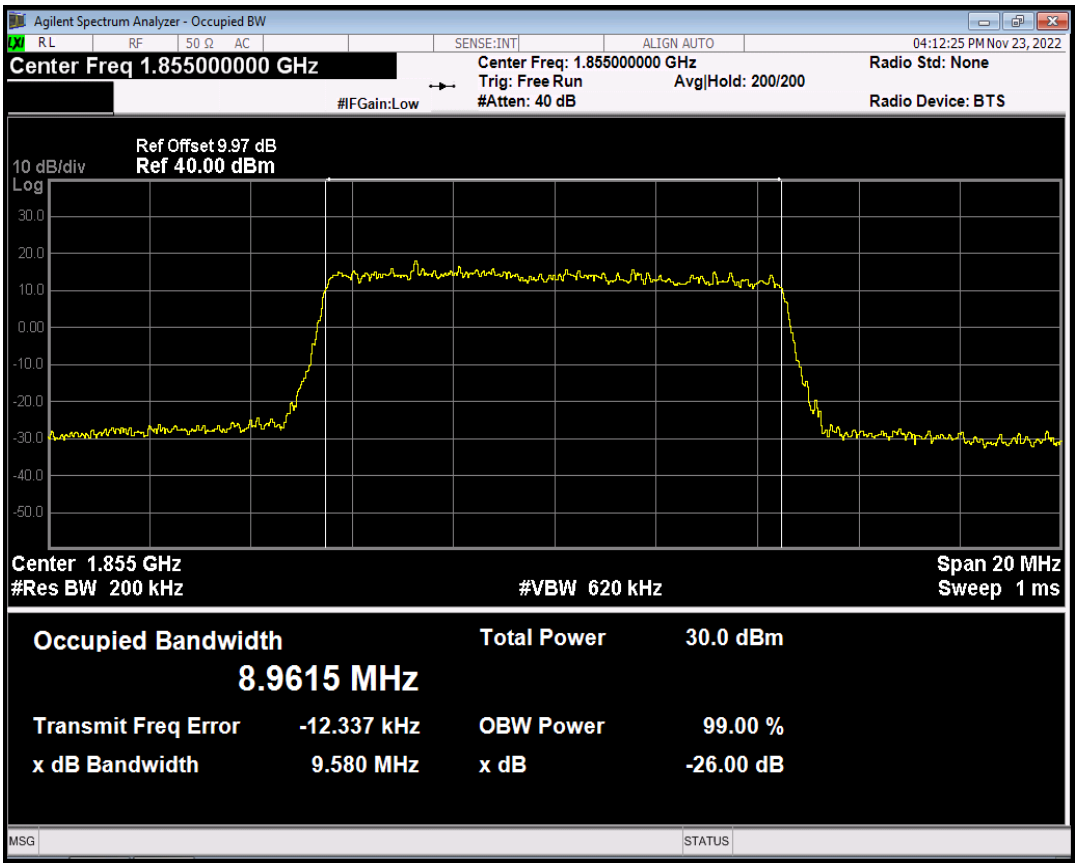

Band2 QPSK BW=10MHz Channel=18900 RB Size=50 Position=#0

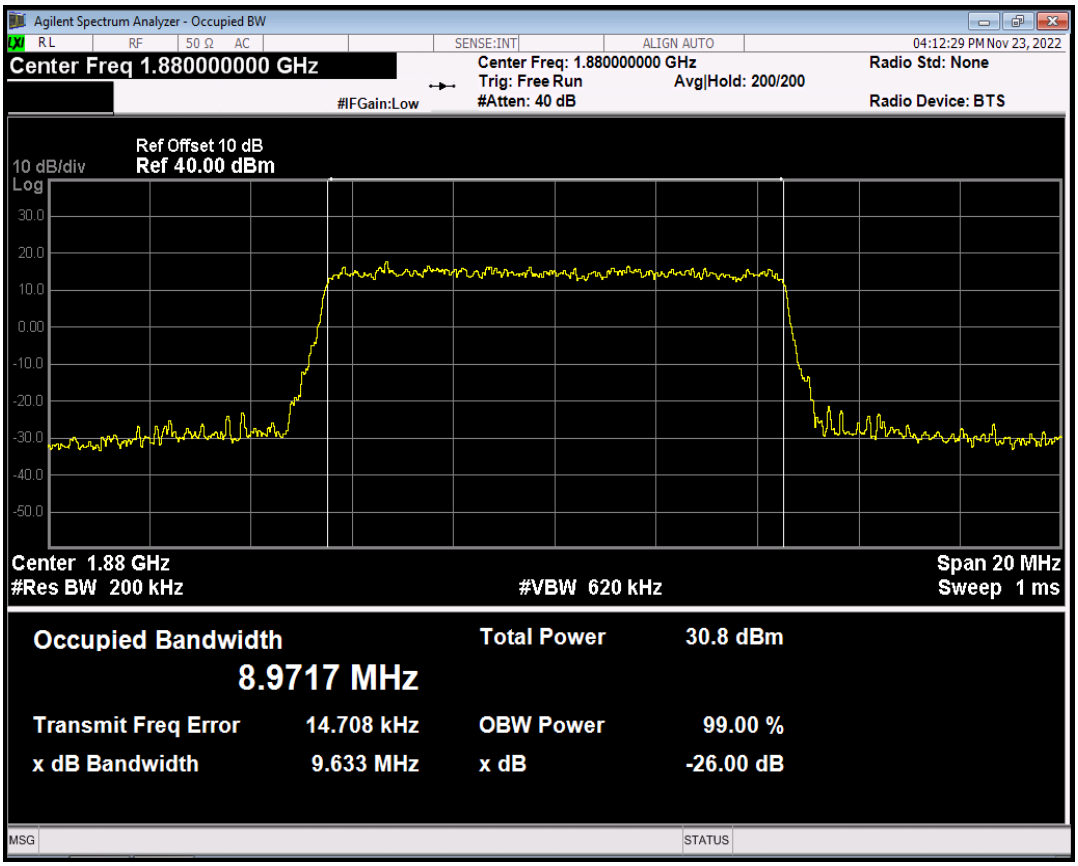

Band2 QAM16 BW=10MHz Channel=18900 RB Size=50 Position=#0

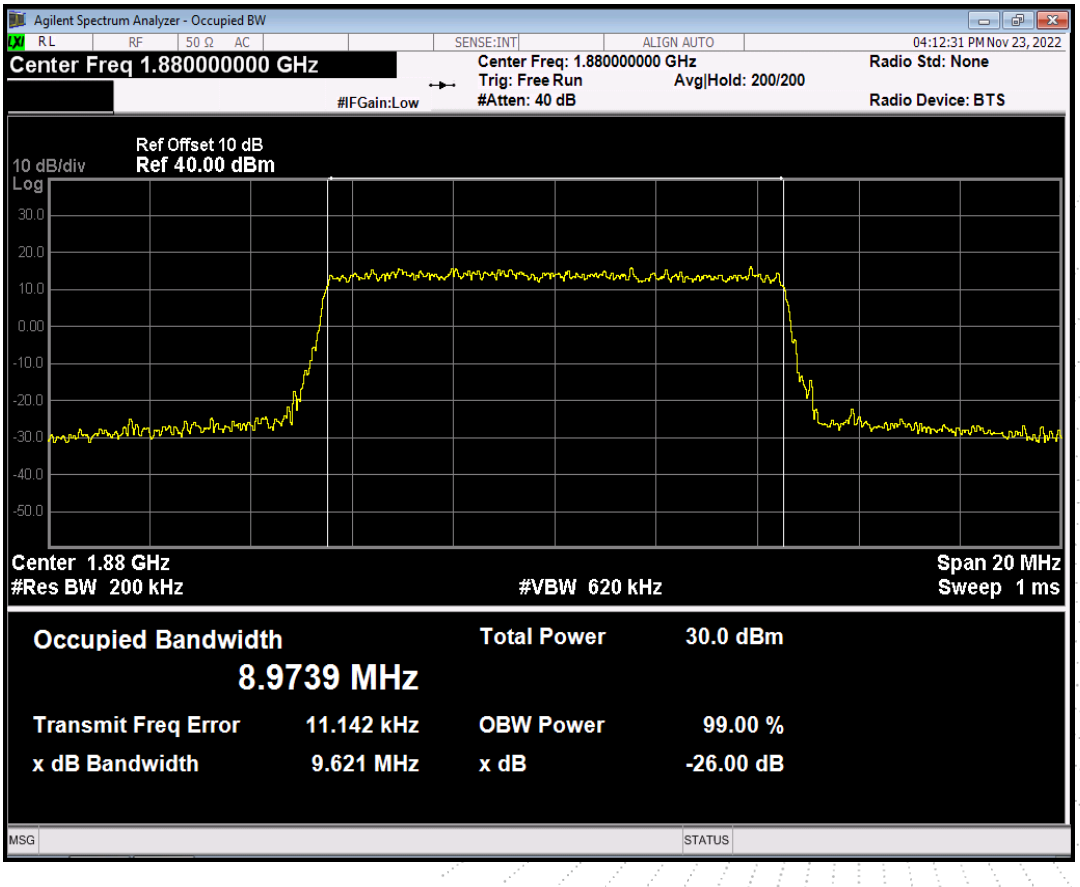

Band2 QPSK BW=10MHz Channel=19150 RB Size=50 Position=#0

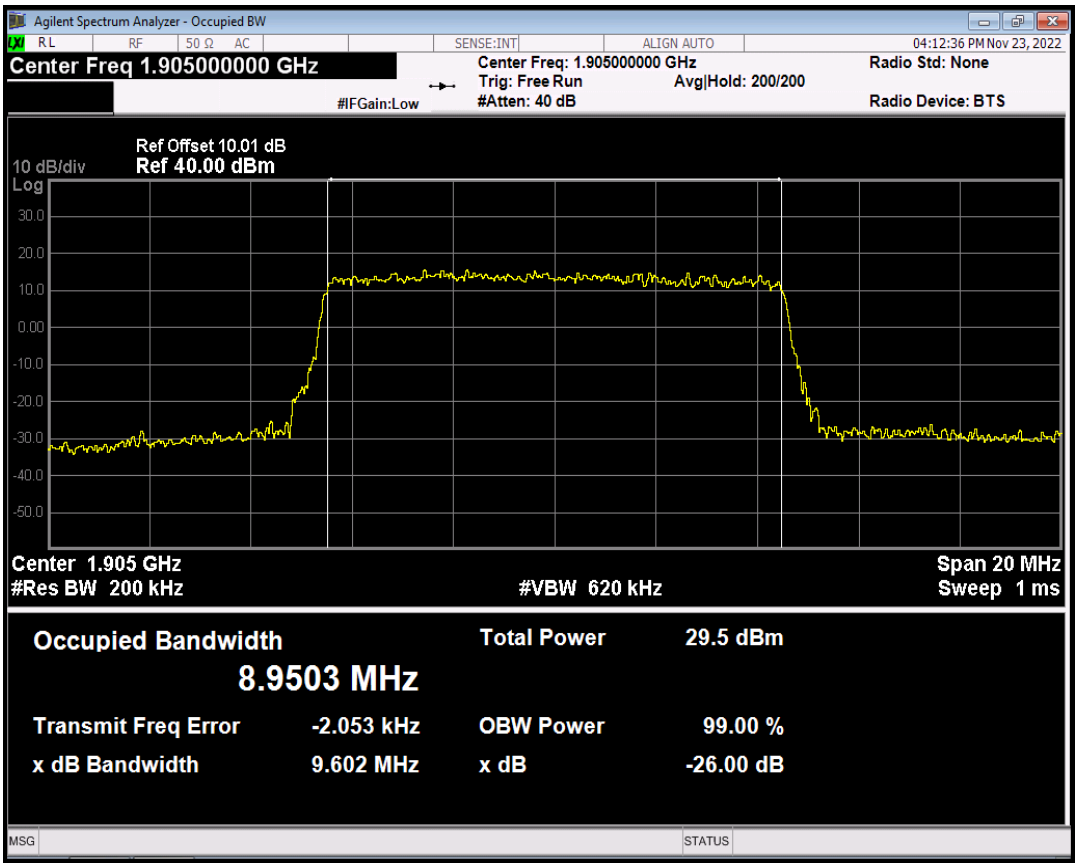

Band2 QAM16 BW=10MHz Channel=19150 RB Size=50 Position=#0

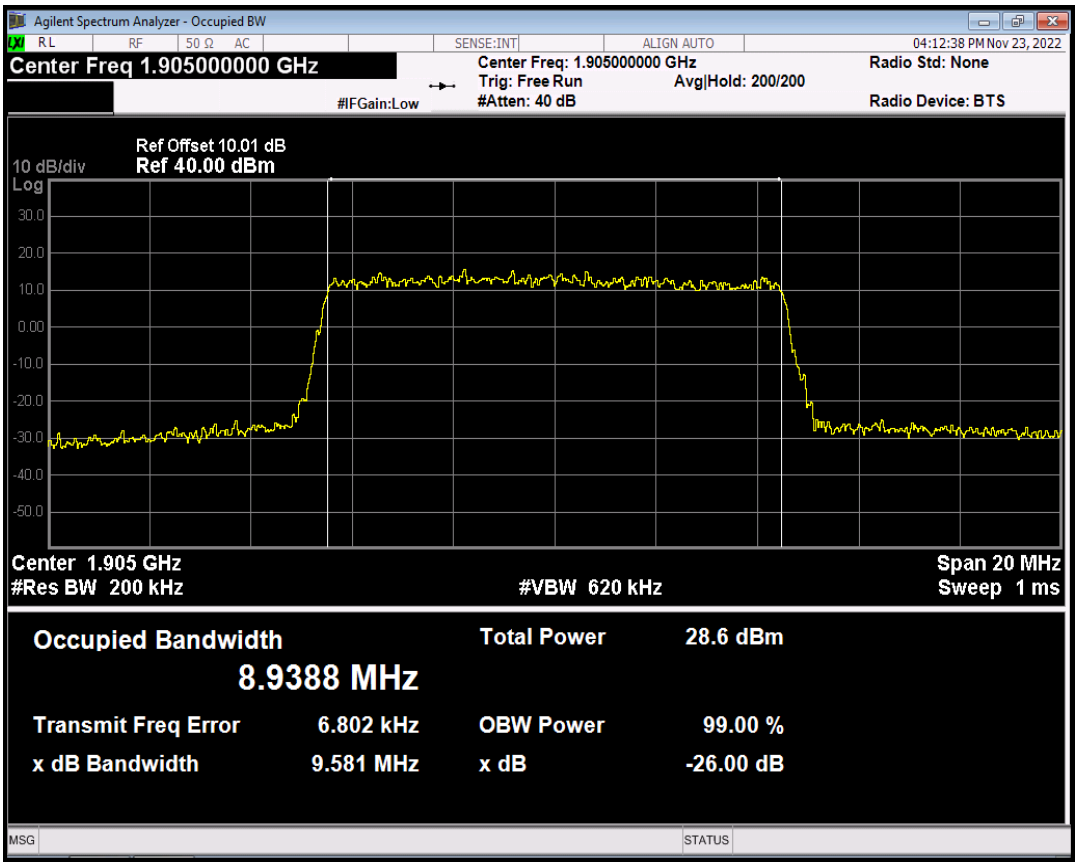

Band2 QPSK BW=15MHz Channel=18675 RB Size=75 Position=#0

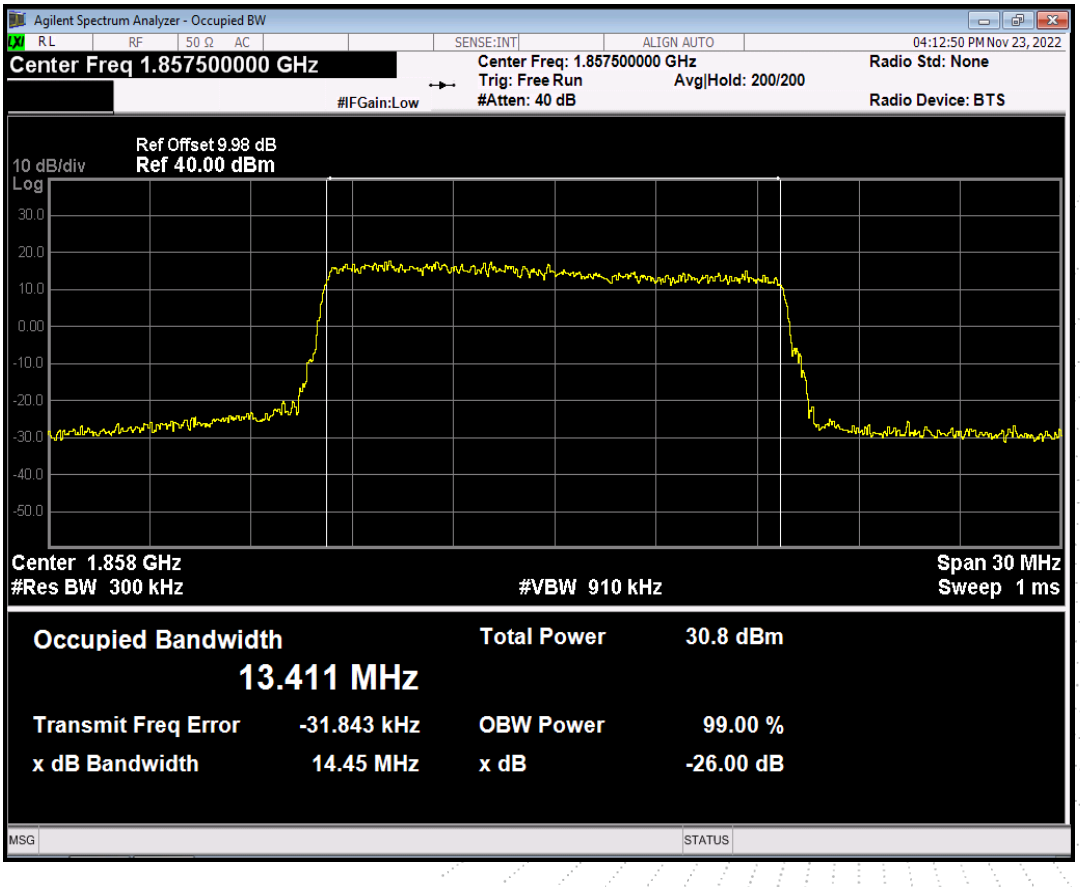

Band2 QAM16 BW=15MHz Channel=18675 RB Size=75 Position=#0

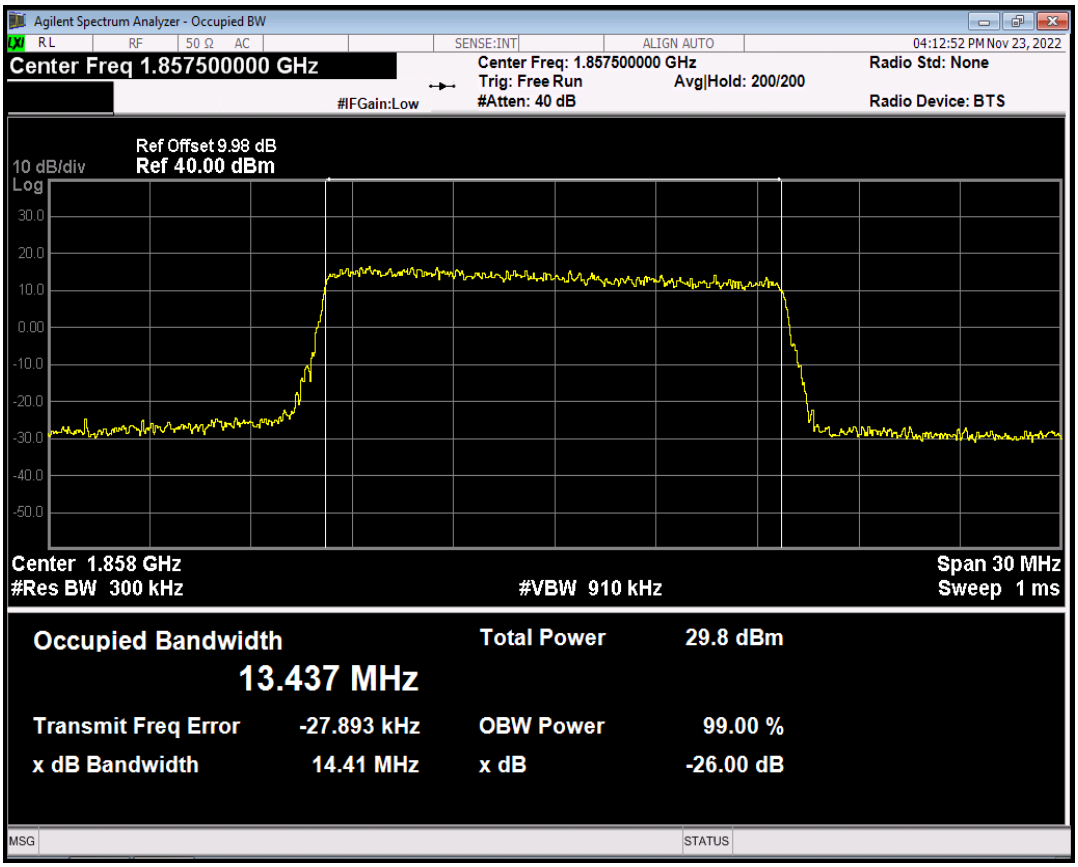

Band2 QPSK BW=15MHz Channel=18900 RB Size=75 Position=#0

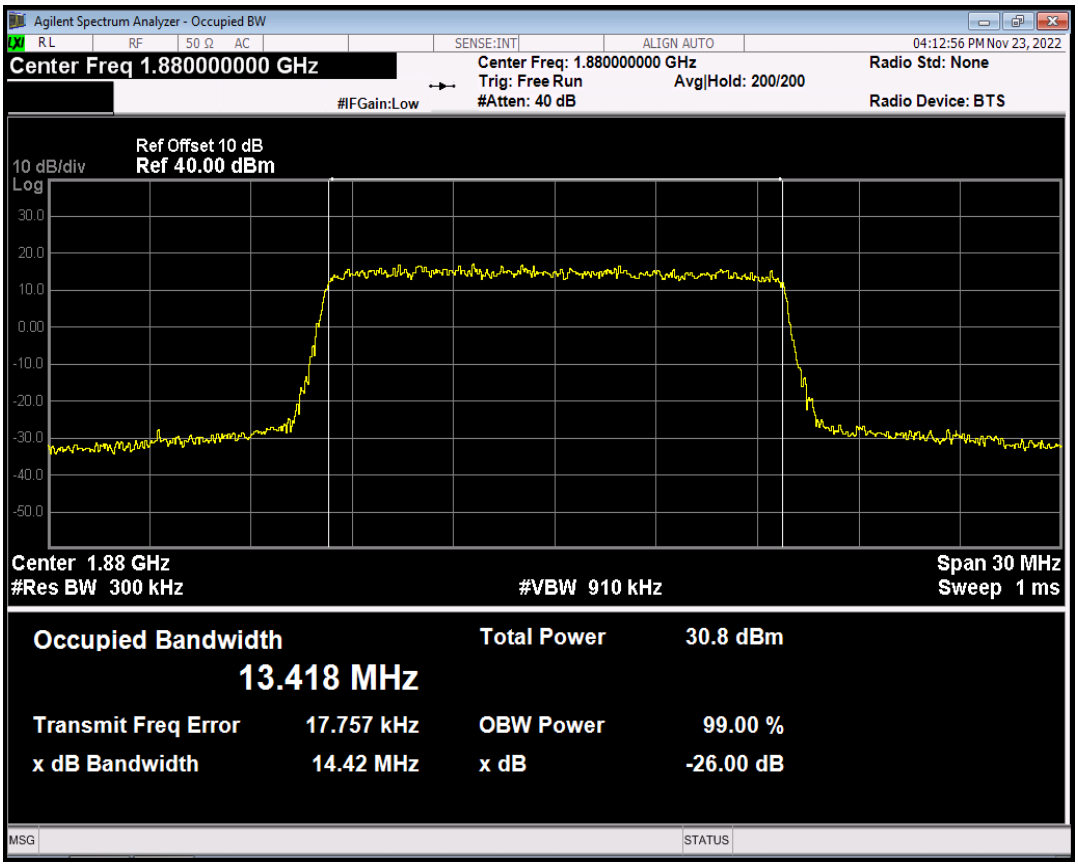

Band2 QAM16 BW=15MHz Channel=18900 RB Size=75 Position=#0

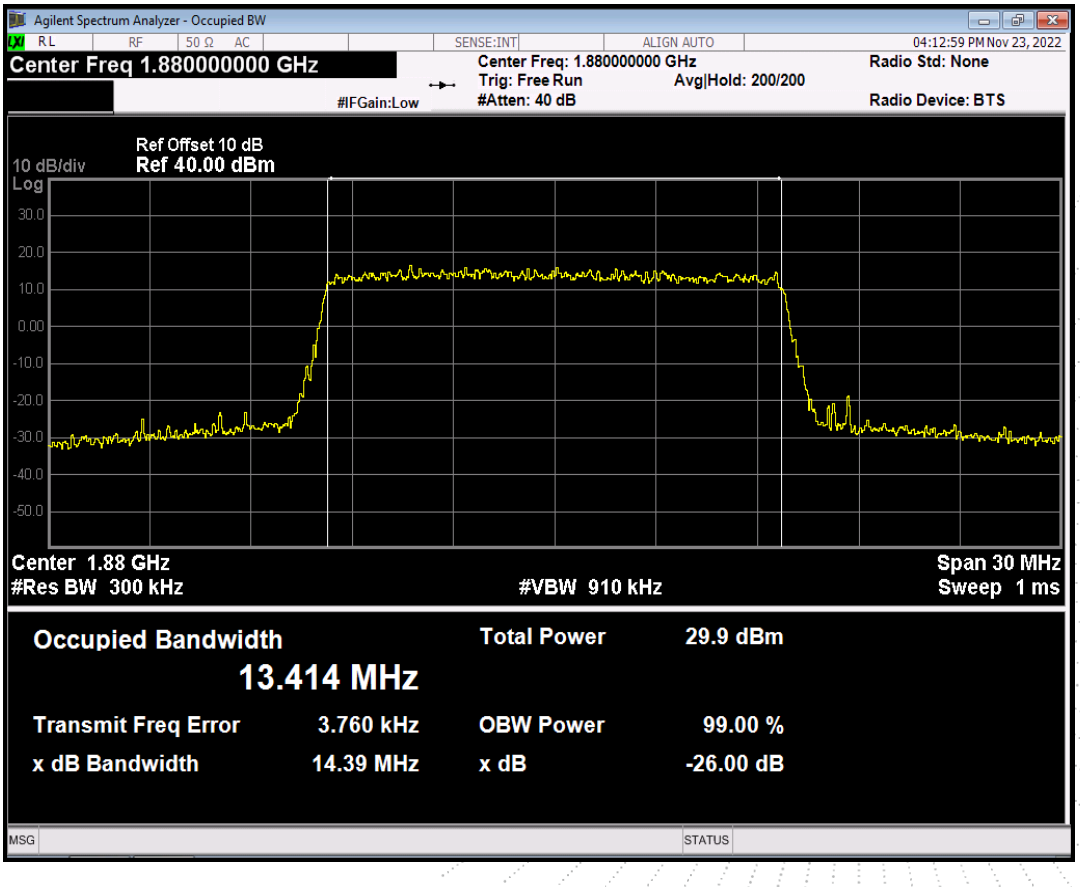

Band2 QPSK BW=15MHz Channel=19125 RB Size=75 Position=#0

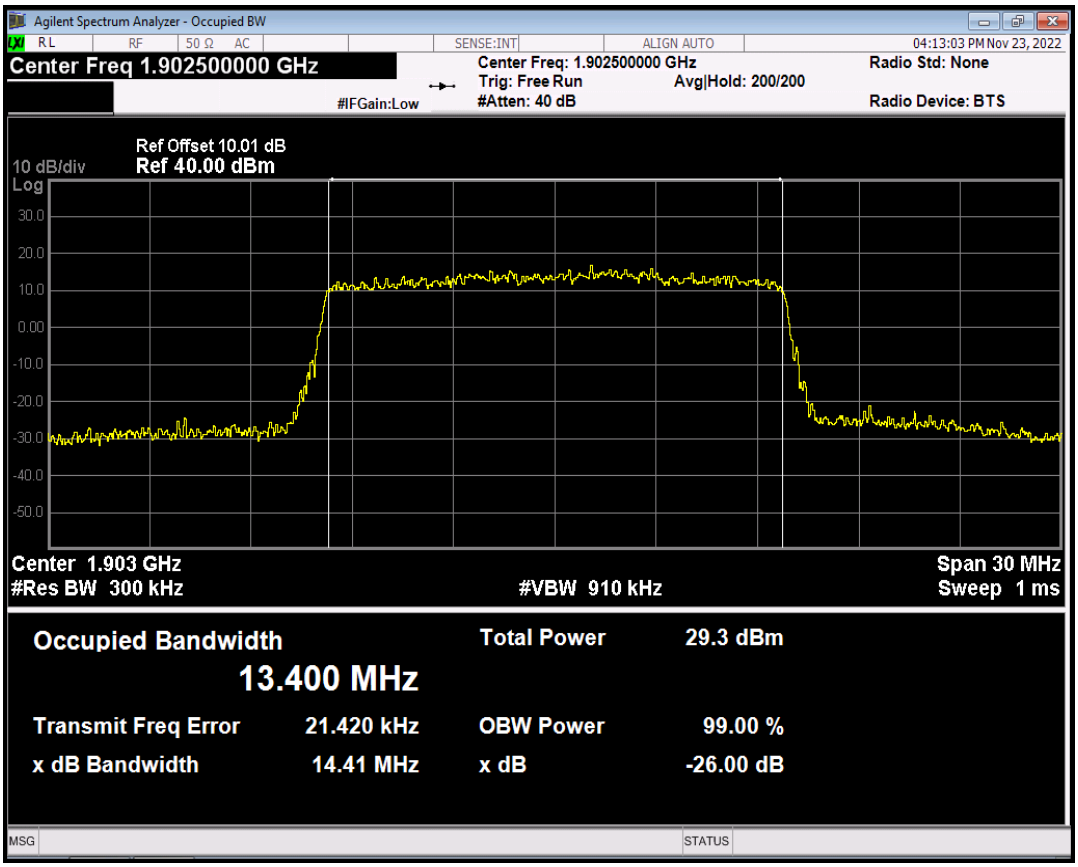

Band2 QAM16 BW=15MHz Channel=19125 RB Size=75 Position=#0

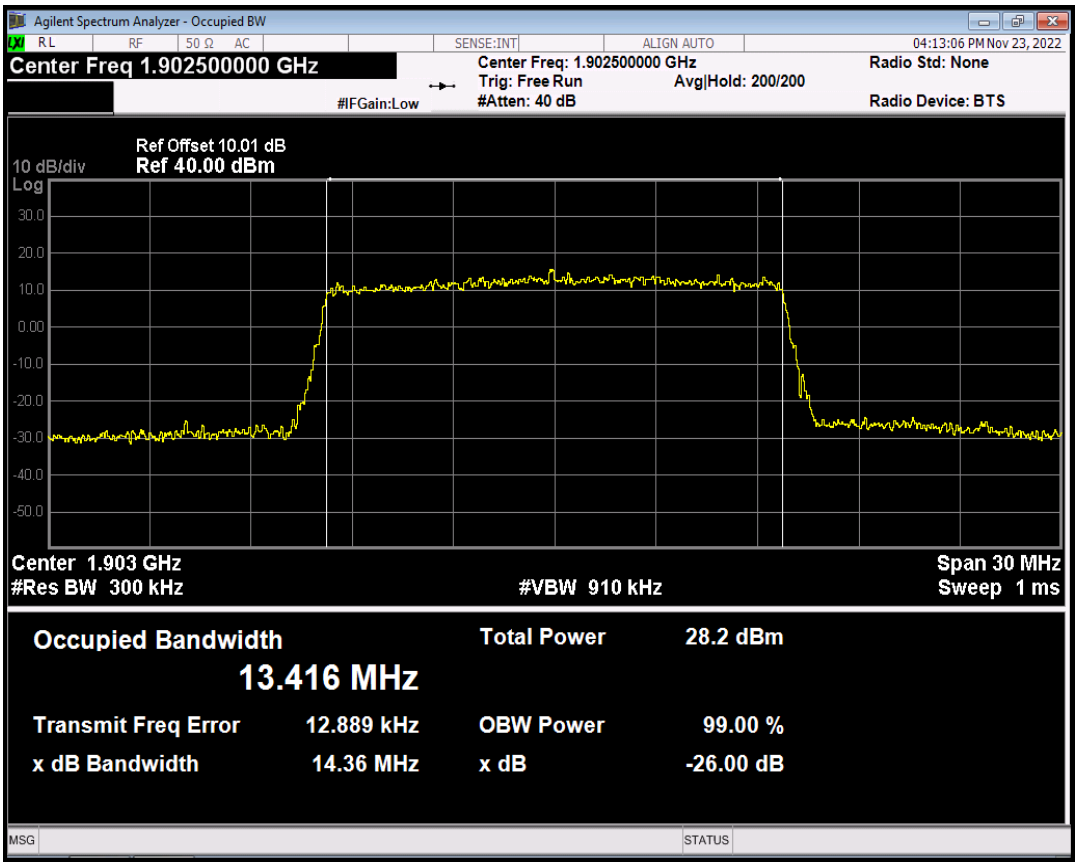

Band2 QPSK BW=20MHz Channel=18700 RB Size=100 Position=#0

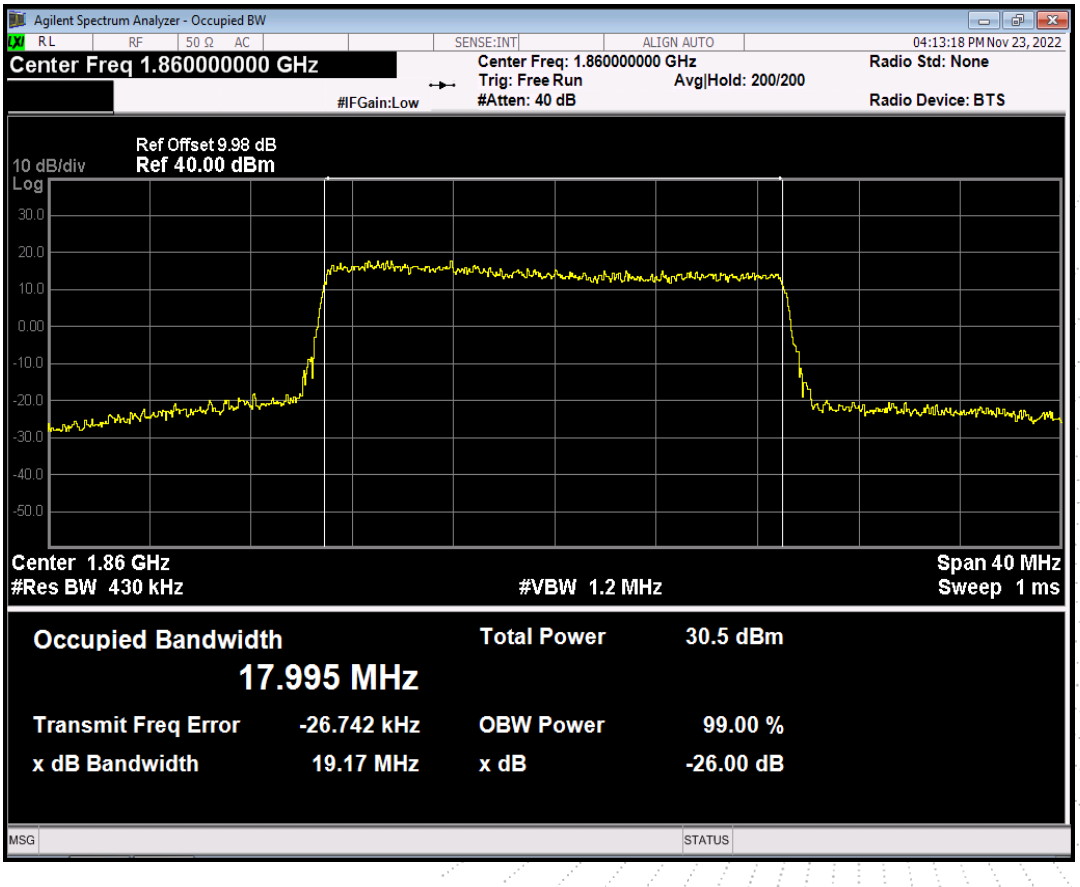

Band2 QAM16 BW=20MHz Channel=18700 RB Size=100 Position=#0

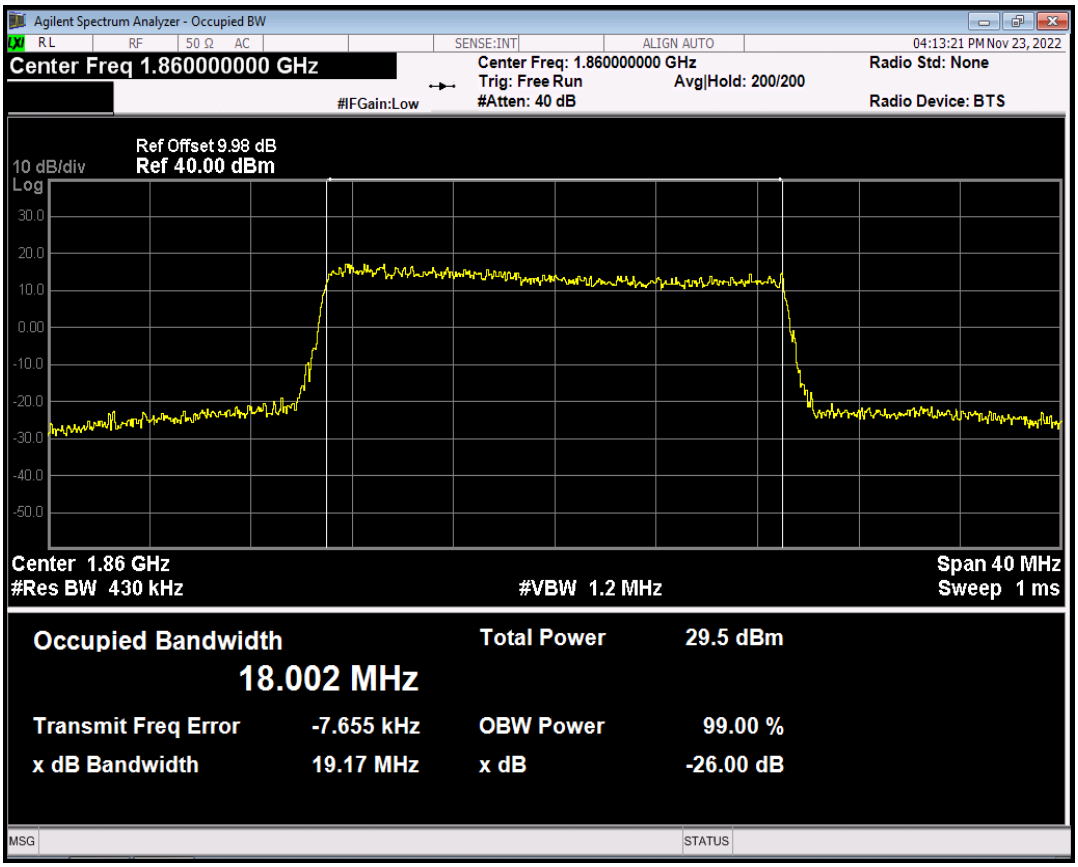

Band2 QPSK BW=20MHz Channel=18900 RB Size=100 Position=#0

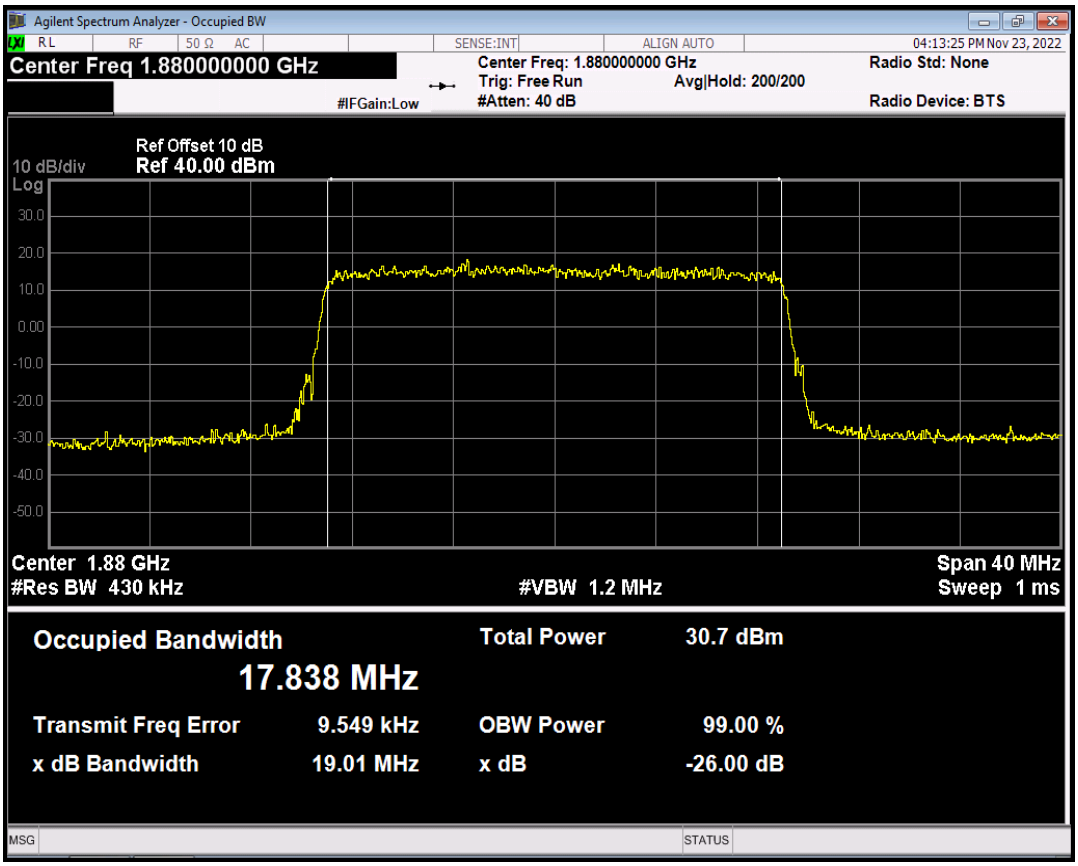

Band2 QAM16 BW=20MHz Channel=18900 RB Size=100 Position=#0

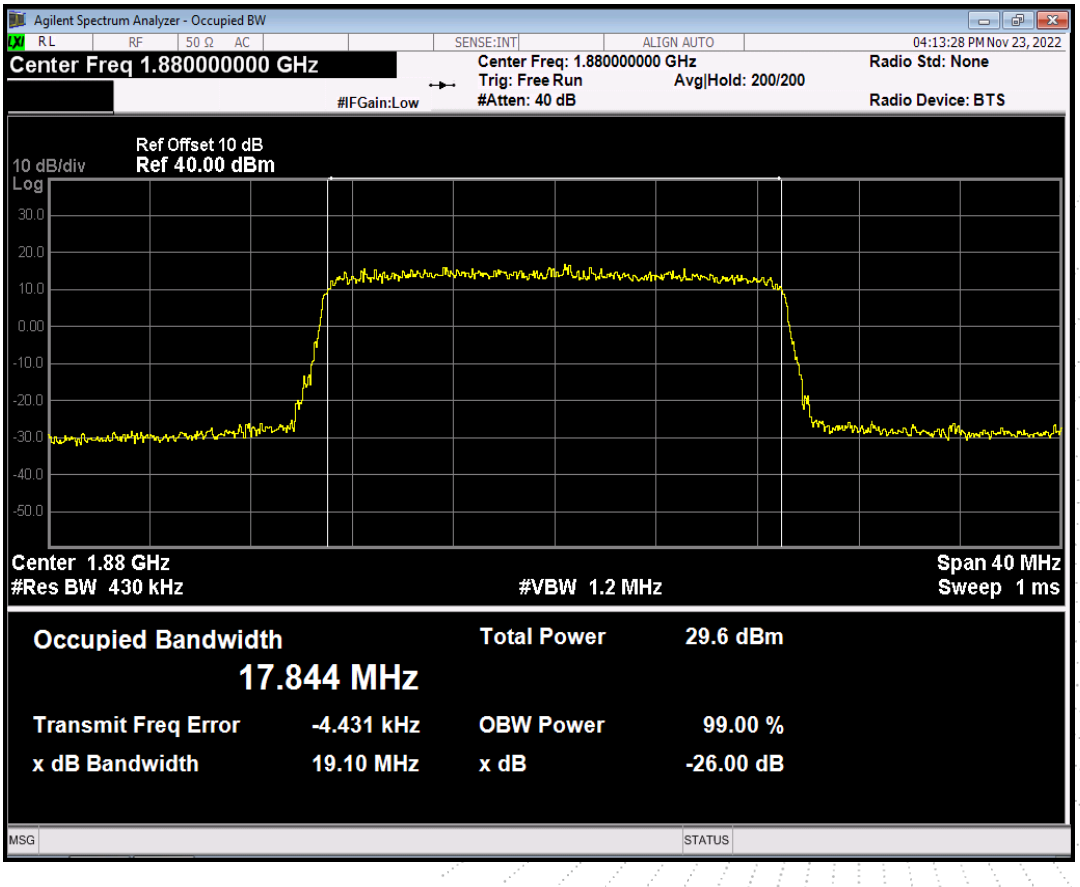

Band2 QPSK BW=20MHz Channel=19100 RB Size=100 Position=#0

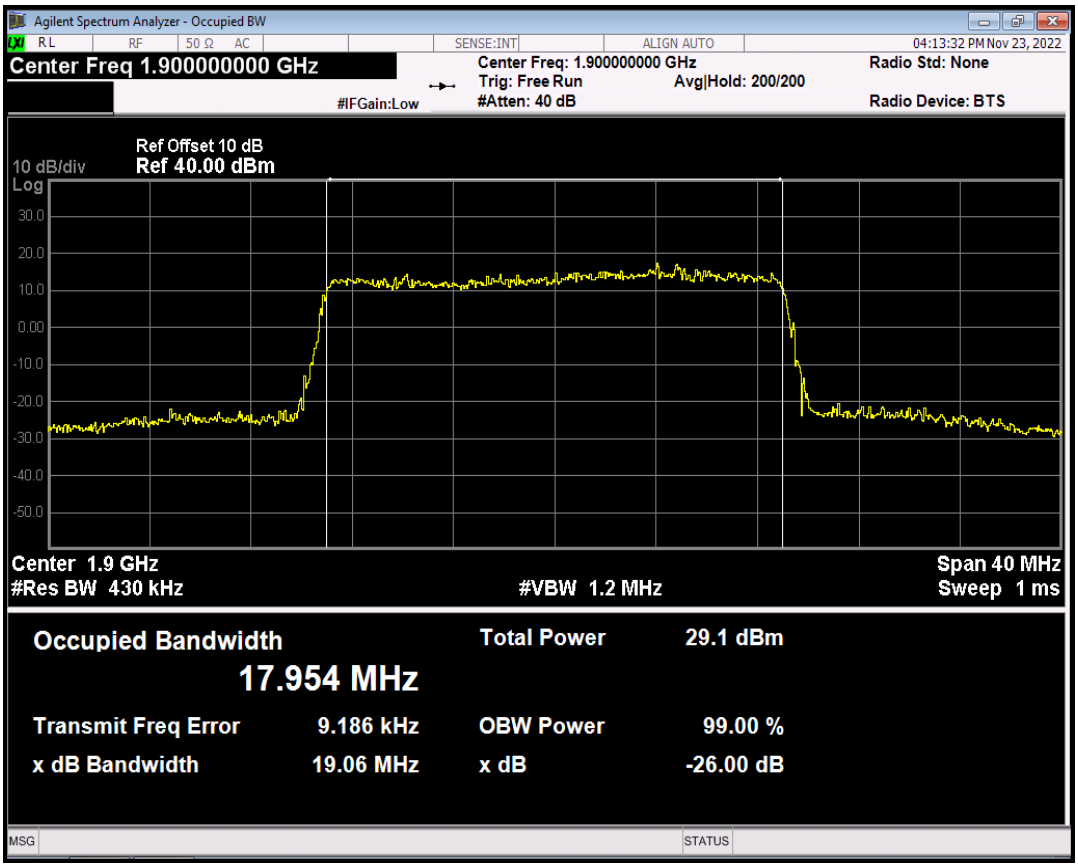

Band2 QAM16 BW=20MHz Channel=19100 RB Size=100 Position=#0

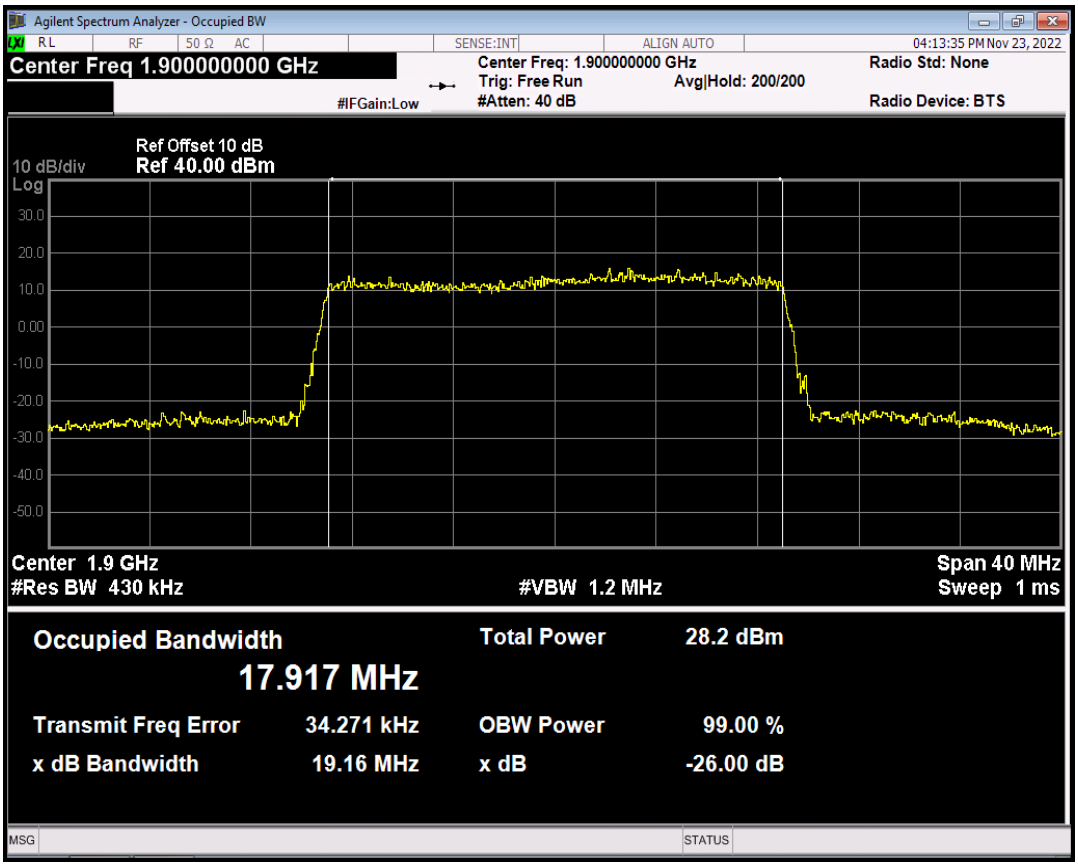

Appendix 5. Band edge

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band2	1.4	18607	6	#0	QPSK	1850.00	-31.09	-13	PASS
Band2	1.4	18607	6	#0	QAM16	1850.00	-31.29	-13	PASS
Band2	1.4	19193	6	#0	QPSK	1910.01	-28.96	-13	PASS
Band2	1.4	19193	6	#0	QAM16	1910.00	-31.03	-13	PASS
Band2	3	18615	15	#0	QPSK	1850.00	-33.41	-13	PASS
Band2	3	18615	15	#0	QAM16	1850.00	-33.43	-13	PASS
Band2	3	19185	15	#0	QPSK	1910.02	-32.80	-13	PASS
Band2	3	19185	15	#0	QAM16	1910.02	-34.53	-13	PASS
Band2	5	18625	25	#0	QPSK	1850.00	-31.46	-13	PASS
Band2	5	18625	25	#0	QAM16	1850.00	-32.37	-13	PASS
Band2	5	19175	25	#0	QPSK	1910.00	-34.92	-13	PASS
Band2	5	19175	25	#0	QAM16	1910.03	-34.73	-13	PASS
Band2	10	18650	50	#0	QPSK	1849.94	-35.21	-13	PASS
Band2	10	18650	50	#0	QAM16	1850.00	-35.83	-13	PASS
Band2	10	19150	50	#0	QPSK	1910.00	-37.13	-13	PASS
Band2	10	19150	50	#0	QAM16	1910.00	-37.36	-13	PASS

Band2	15	18675	75	#0	QPSK	1849.94	-32.92	-13	PASS
Band2	15	18675	75	#0	QAM16	1849.22	-35.49	-13	PASS
Band2	15	19125	75	#0	QPSK	1910.00	-34.87	-13	PASS
Band2	15	19125	75	#0	QAM16	1911.98	-35.73	-13	PASS
Band2	20	18700	100	#0	QPSK	1849.28	-30.77	-13	PASS
Band2	20	18700	100	#0	QAM16	1849.96	-32.77	-13	PASS
Band2	20	19100	100	#0	QPSK	1910.24	-33.16	-13	PASS
Band2	20	19100	100	#0	QAM16	1913.12	-34.95	-13	PASS

Band2 QPSK BW=1.4MHz Channel=18607 RB Size=6 Position=#0

Band2 QAM16 BW=1.4MHz Channel=18607 RB Size=6 Position=#0

Band2 QPSK BW=1.4MHz Channel=19193 RB Size=6 Position=#0

Band2 QAM16 BW=1.4MHz Channel=19193 RB Size=6 Position=#0

Band2 QPSK BW=3MHz Channel=18615 RB Size=15 Position=#0

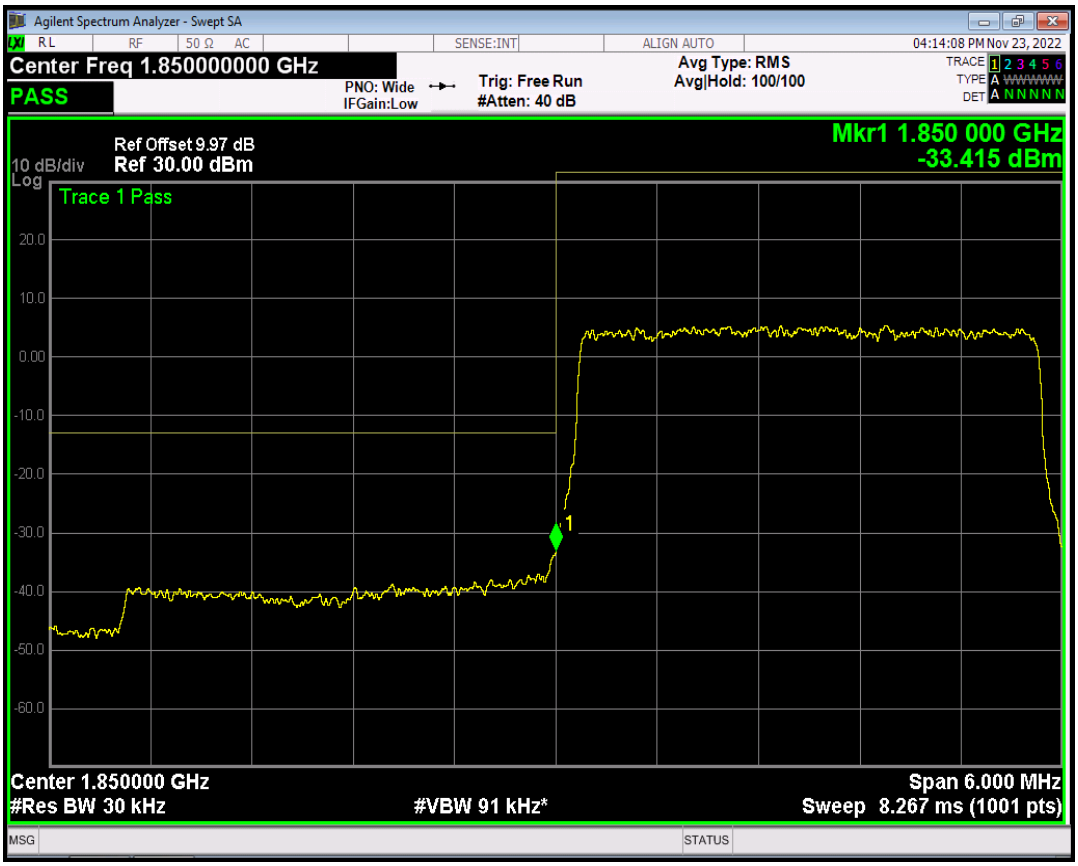

Band2 QAM16 BW=3MHz Channel=18615 RB Size=15 Position=#0

Band2 QPSK BW=3MHz Channel=19185 RB Size=15 Position=#0

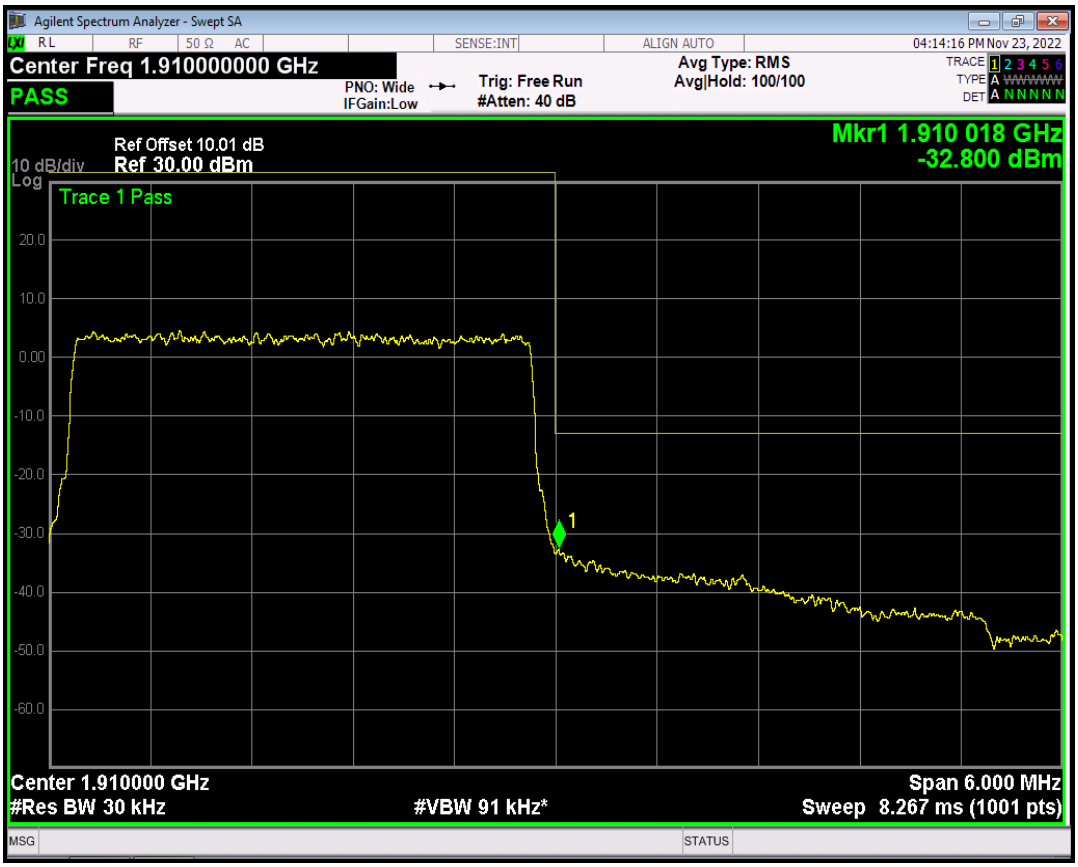

Band2 QAM16 BW=3MHz Channel=19185 RB Size=15 Position=#0

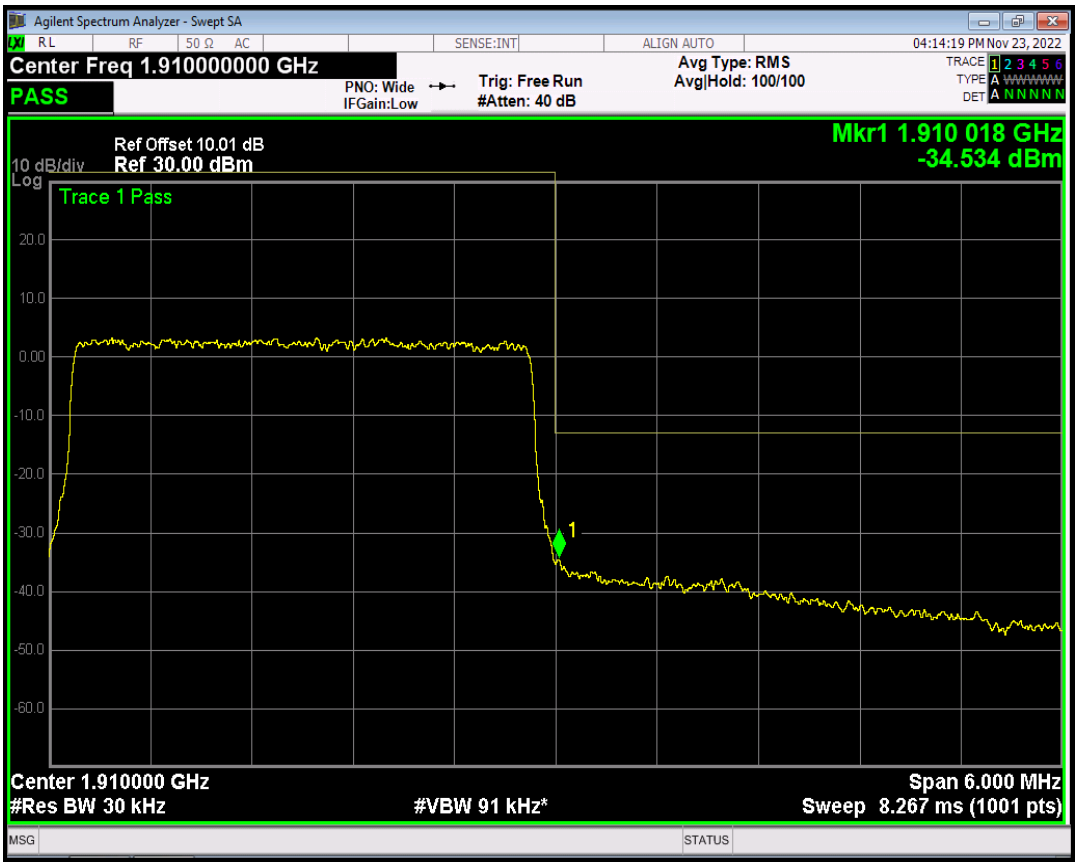

Band2 QPSK BW=5MHz Channel=18625 RB Size=25 Position=#0

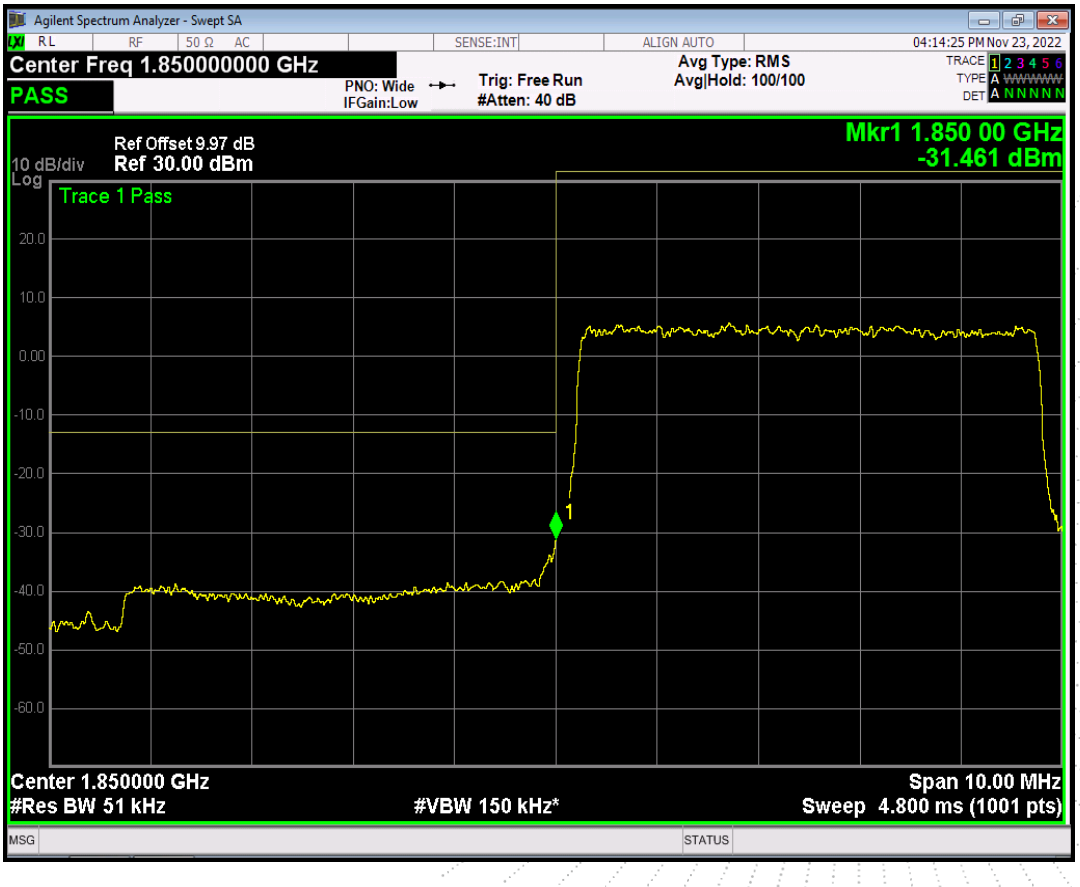

Band2 QAM16 BW=5MHz Channel=18625 RB Size=25 Position=#0

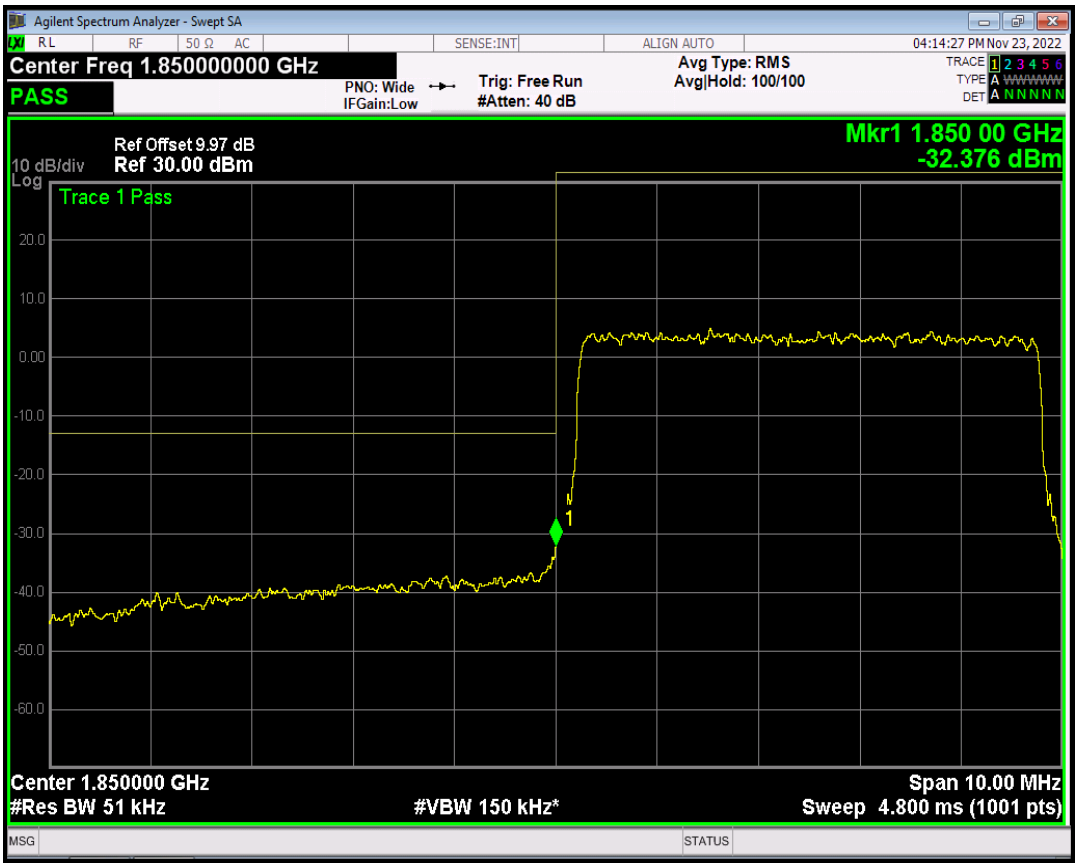

Band2 QPSK BW=5MHz Channel=19175 RB Size=25 Position=#0

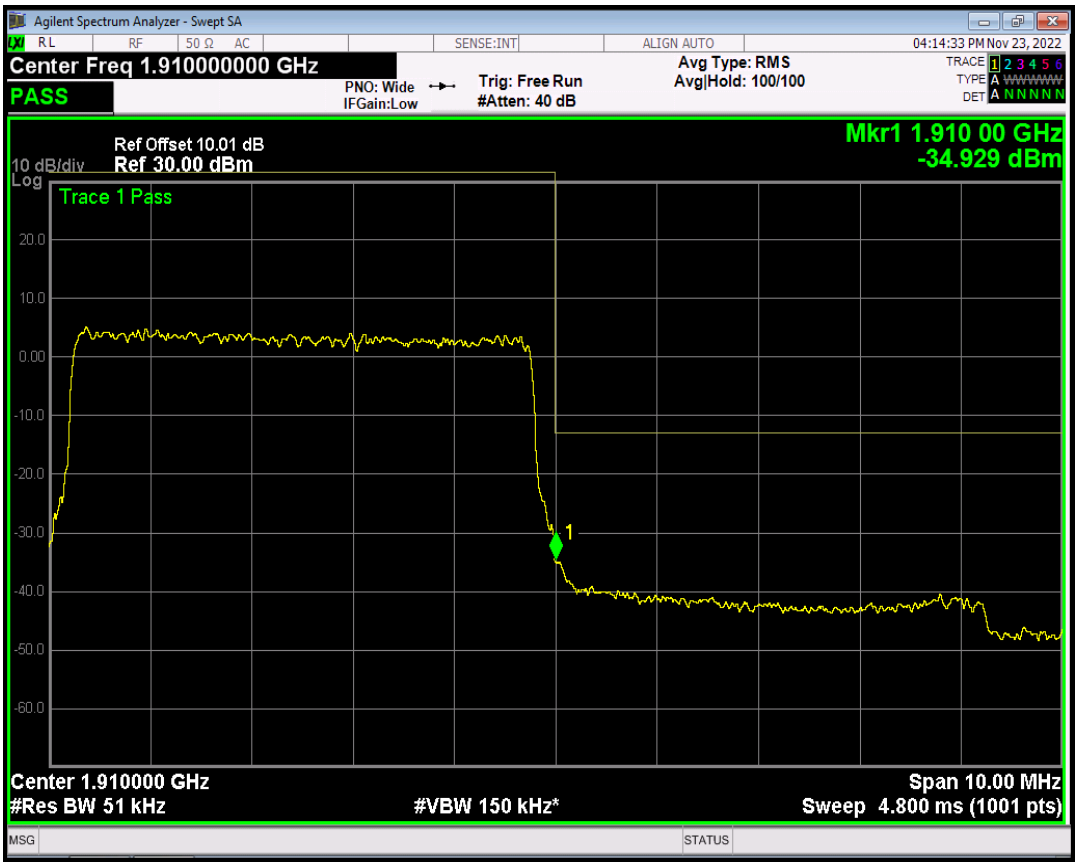

Band2 QAM16 BW=5MHz Channel=19175 RB Size=25 Position=#0

Band2 QPSK BW=10MHz Channel=18650 RB Size=50 Position=#0

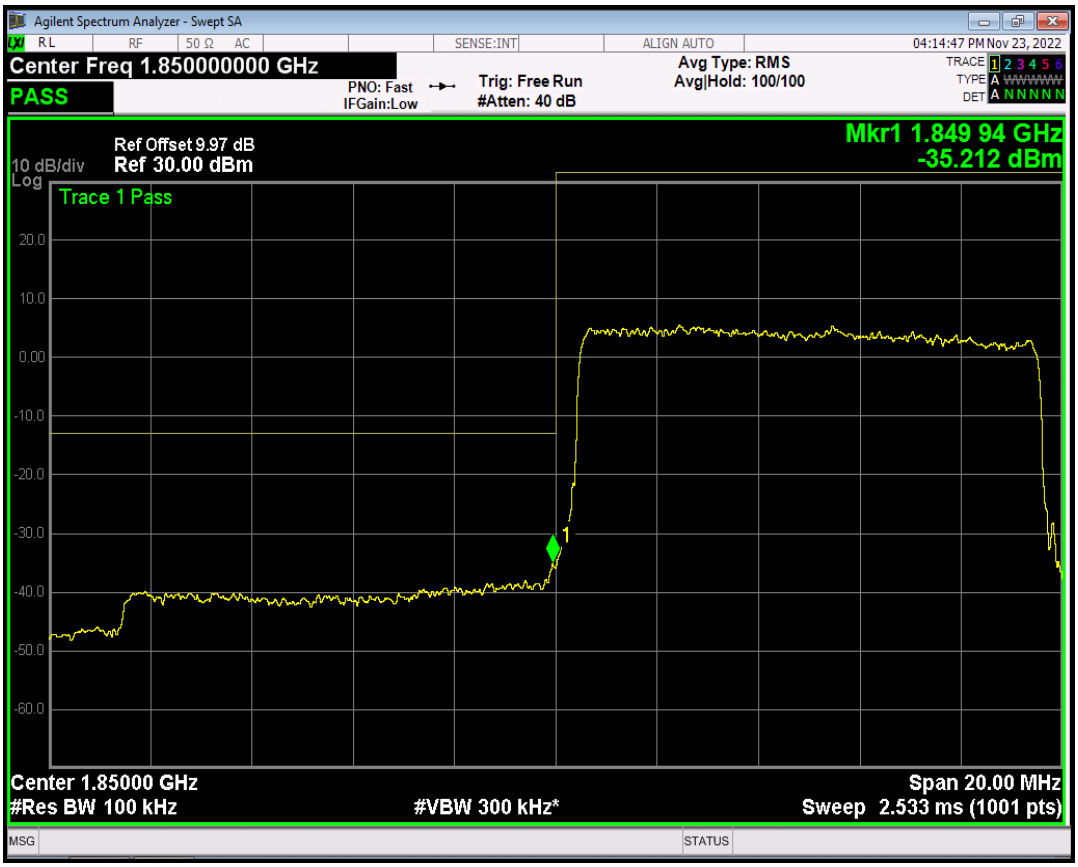

Band2 QAM16 BW=10MHz Channel=18650 RB Size=50 Position=#0

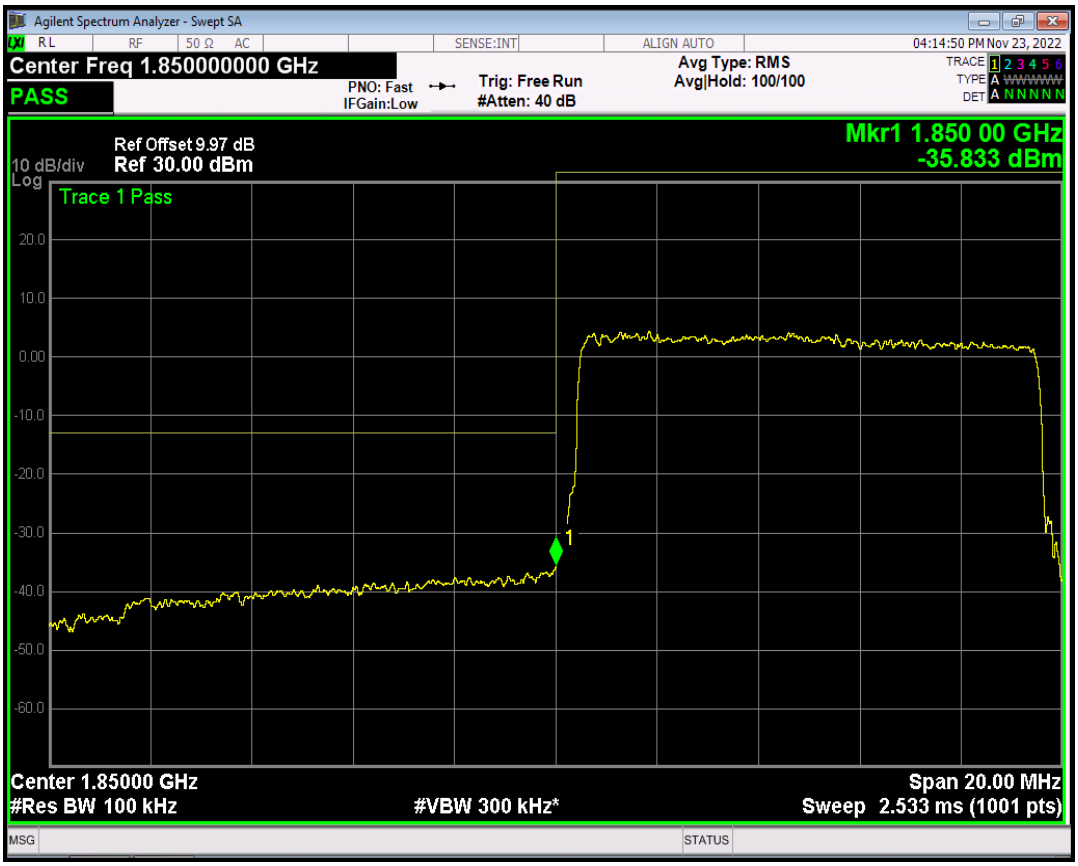

Band2 QPSK BW=10MHz Channel=19150 RB Size=50 Position=#0

Band2 QAM16 BW=10MHz Channel=19150 RB Size=50 Position=#0

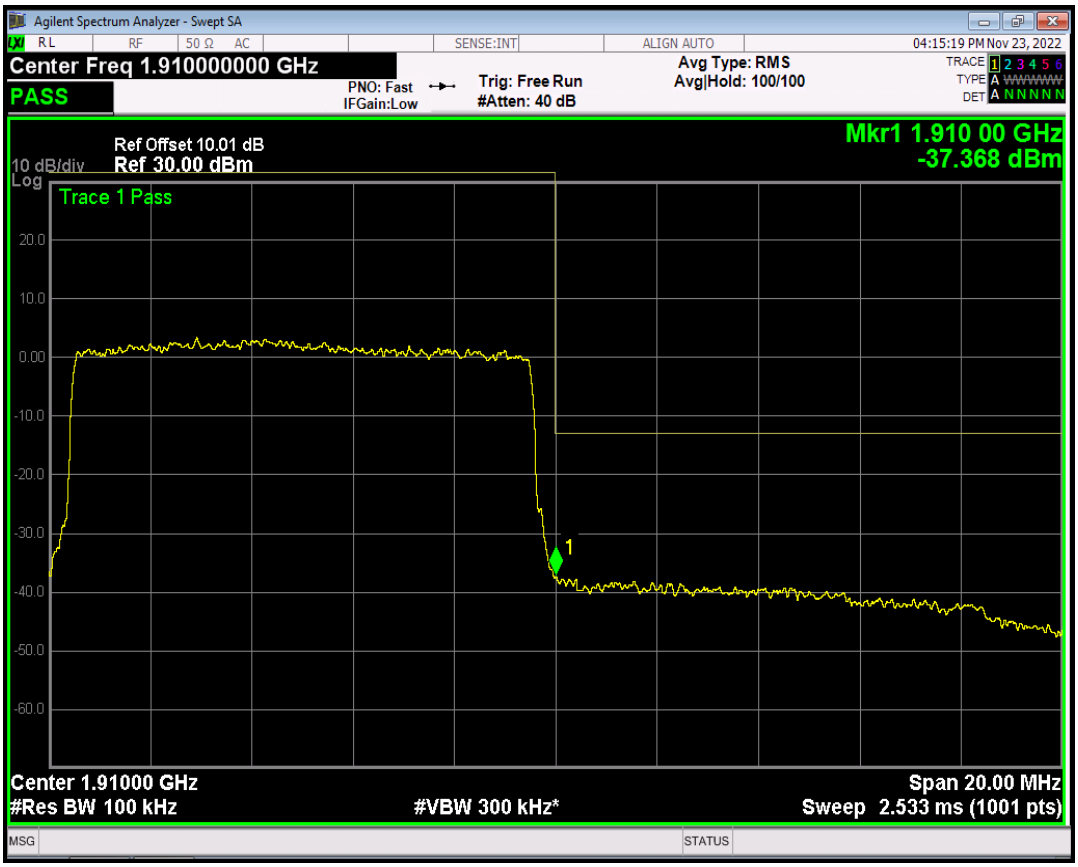

Band2 QPSK BW=15MHz Channel=18675 RB Size=75 Position=#0

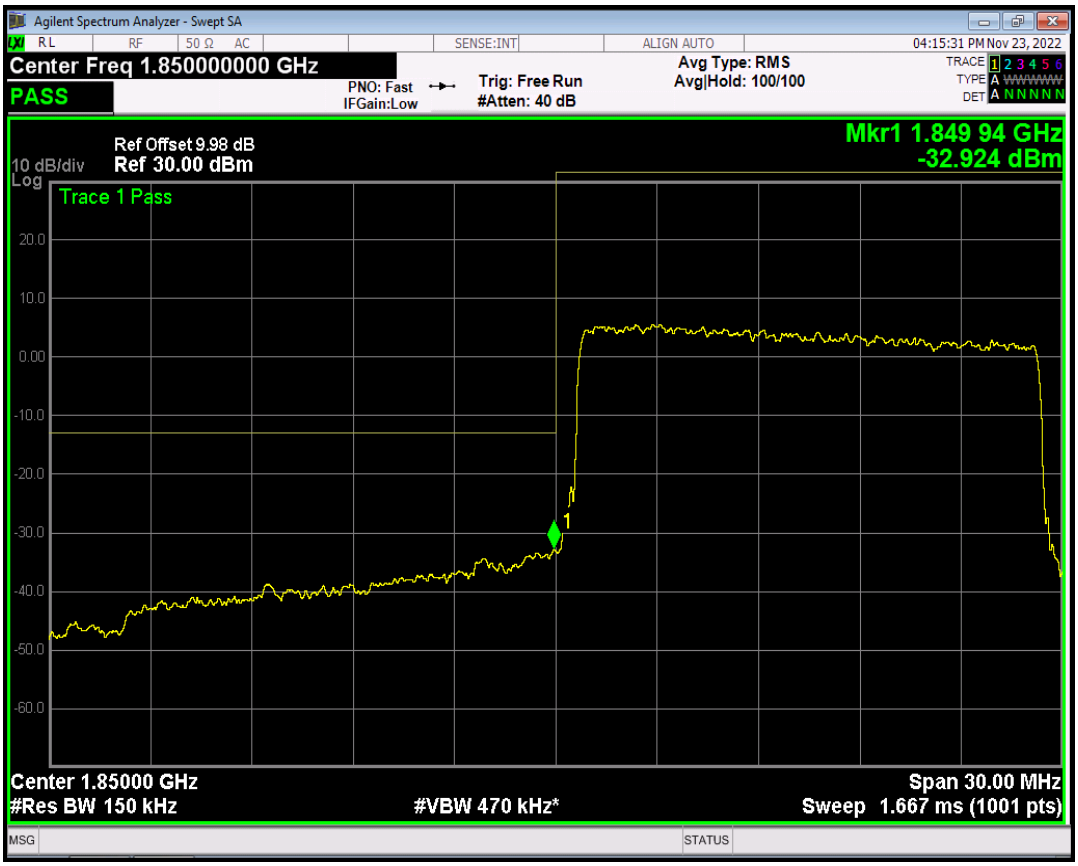

Band2 QAM16 BW=15MHz Channel=18675 RB Size=75 Position=#0

Band2 QPSK BW=15MHz Channel=19125 RB Size=75 Position=#0

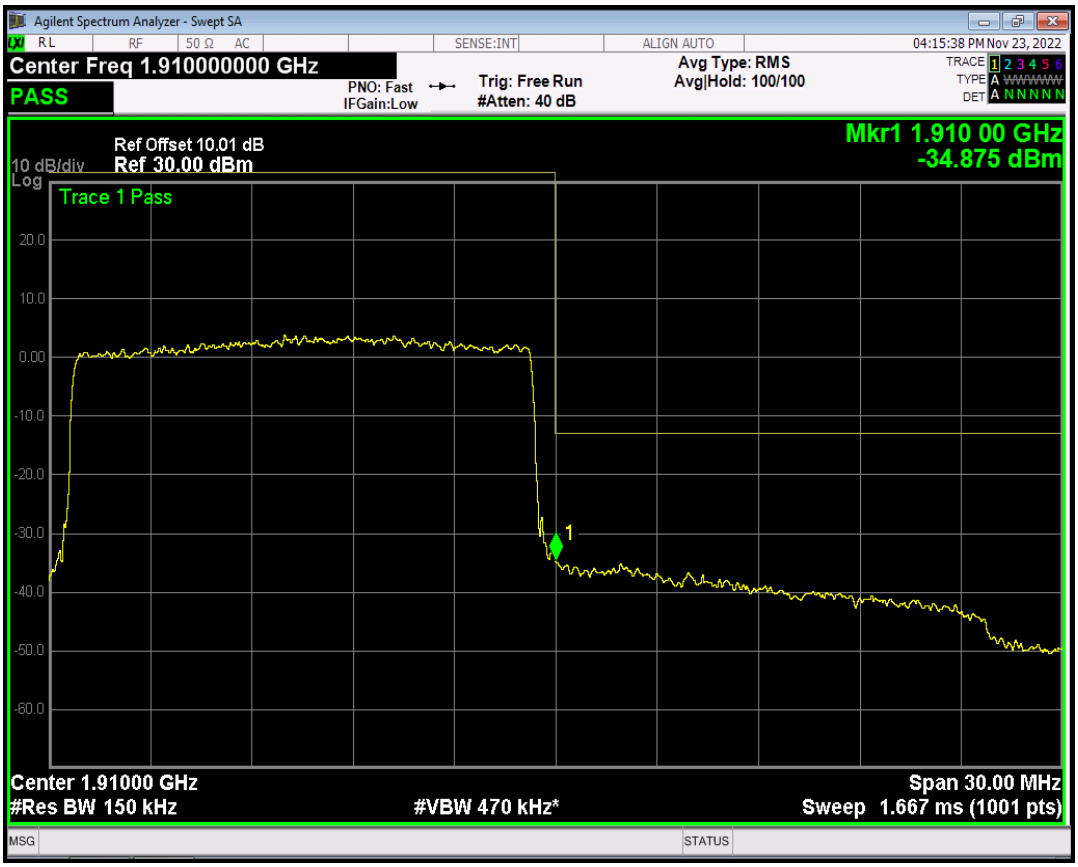

Band2 QAM16 BW=15MHz Channel=19125 RB Size=75 Position=#0

Band2 QPSK BW=20MHz Channel=18700 RB Size=100 Position=#0

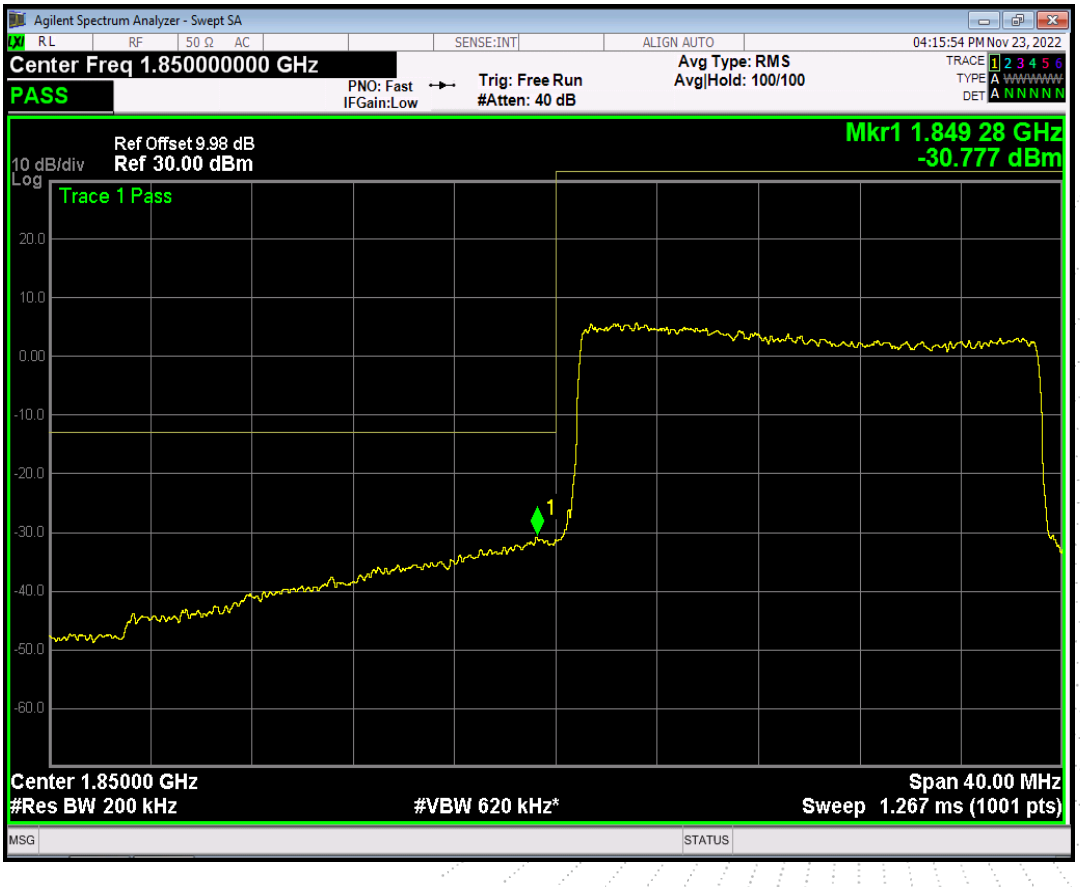

Band2 QAM16 BW=20MHz Channel=18700 RB Size=100 Position=#0

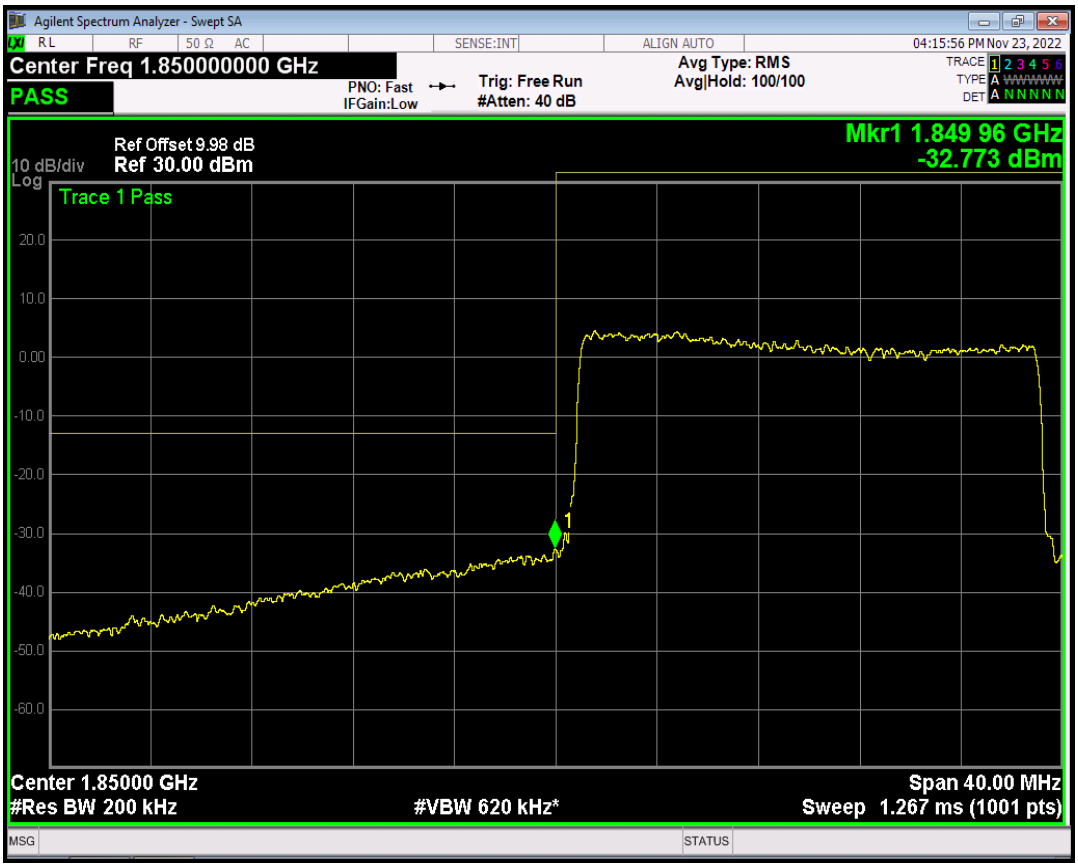

Band2 QPSK BW=20MHz Channel=19100 RB Size=100 Position=#0

Band2 QAM16 BW=20MHz Channel=19100 RB Size=100 Position=#0

Appendix 6. Out-of-band emissions

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
Band2	1.4	18607	6	#0	QPSK	2447.20	-29.80	-13	PASS
Band2	1.4	18607	6	#0	QAM16	2446.53	-27.68	-13	PASS
Band2	1.4	18900	6	#0	QPSK	2446.30	-24.18	-13	PASS
Band2	1.4	18900	6	#0	QAM16	2446.98	-27.89	-13	PASS
Band2	1.4	19193	6	#0	QPSK	2447.20	-23.08	-13	PASS
Band2	1.4	19193	6	#0	QAM16	2448.33	-27.02	-13	PASS
Band2	3	18615	15	#0	QPSK	2444.50	-25.81	-13	PASS
Band2	3	18615	15	#0	QAM16	5186.58	-33.42	-13	PASS
Band2	3	18900	15	#0	QPSK	2446.75	-22.72	-13	PASS
Band2	3	18900	15	#0	QAM16	2446.98	-25.61	-13	PASS
Band2	3	19185	15	#0	QPSK	2447.20	-26.18	-13	PASS
Band2	3	19185	15	#0	QAM16	2443.83	-23.73	-13	PASS
Band2	5	18625	25	#0	QPSK	2455.53	-28.32	-13	PASS
Band2	5	18625	25	#0	QAM16	2445.40	-30.74	-13	PASS
Band2	5	18900	25	#0	QPSK	2445.63	-26.34	-13	PASS
Band2	5	18900	25	#0	QAM16	2445.63	-27.60	-13	PASS
Band2	5	19175	25	#0	QPSK	2449.45	-29.55	-13	PASS
Band2	5	19175	25	#0	QAM16	2454.63	-27.45	-13	PASS
Band2	10	18650	50	#0	QPSK	2445.40	-25.62	-13	PASS
Band2	10	18650	50	#0	QAM16	5566.60	-39.34	-13	PASS
Band2	10	18900	50	#0	QPSK	2444.28	-33.18	-13	PASS
Band2	10	18900	50	#0	QAM16	2445.63	-24.67	-13	PASS
Band2	10	19150	50	#0	QPSK	2455.30	-28.84	-13	PASS
Band2	10	19150	50	#0	QAM16	2455.30	-28.74	-13	PASS
Band2	15	18675	75	#0	QPSK	2446.53	-29.35	-13	PASS
Band2	15	18675	75	#0	QAM16	2454.40	-26.63	-13	PASS
Band2	15	18900	75	#0	QPSK	5707.68	-39.35	-13	PASS
Band2	15	18900	75	#0	QAM16	2446.08	-31.15	-13	PASS
Band2	15	19125	75	#0	QPSK	2454.63	-27.49	-13	PASS
Band2	15	19125	75	#0	QAM16	2446.30	-26.69	-13	PASS
Band2	20	18700	100	#0	QPSK	2446.08	-28.23	-13	PASS
Band2	20	18700	100	#0	QAM16	2447.20	-29.87	-13	PASS
Band2	20	18900	100	#0	QPSK	2448.33	-34.24	-13	PASS
Band2	20	18900	100	#0	QAM16	2448.33	-26.25	-13	PASS
Band2	20	19100	100	#0	QPSK	2454.18	-27.20	-13	PASS
Band2	20	19100	100	#0	QAM16	2454.40	-27.37	-13	PASS

Band2 QPSK BW=1.4MHz Channel=18607 RB Size=6 Position=#0

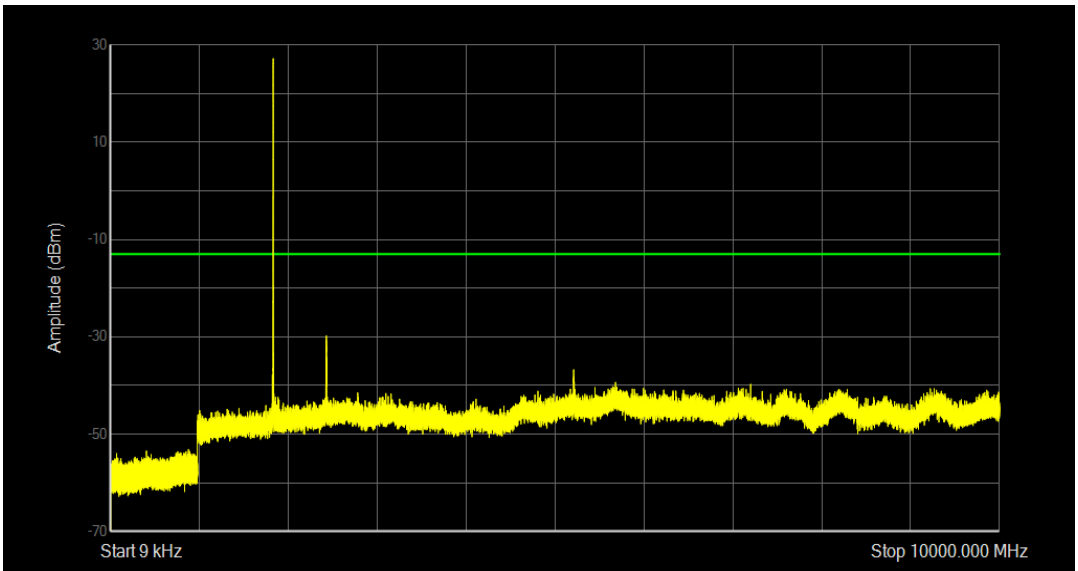

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009	-49.23	-13
2	0.15	30	10	0.60148125	-44.57	-13
3	30	1000	100	900.25975	-53.14	-13
4	1000	10000	1000	2447.2	-29.8	-13

Band2 QAM16 BW=1.4MHz Channel=18607 RB Size=6 Position=#0

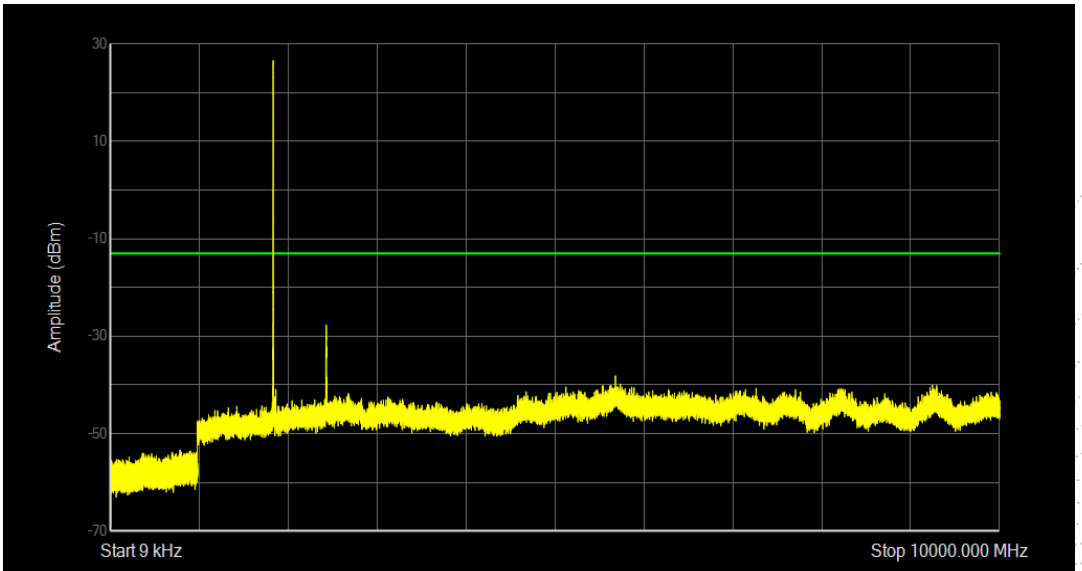

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009497025	-49.23	-13
2	0.15	30	10	0.60148125	-44.77	-13
3	30	1000	100	804.03575	-53.34	-13
4	1000	10000	1000	2446.525	-27.68	-13

Band2 QPSK BW=1.4MHz Channel=18900 RB Size=6 Position=#0

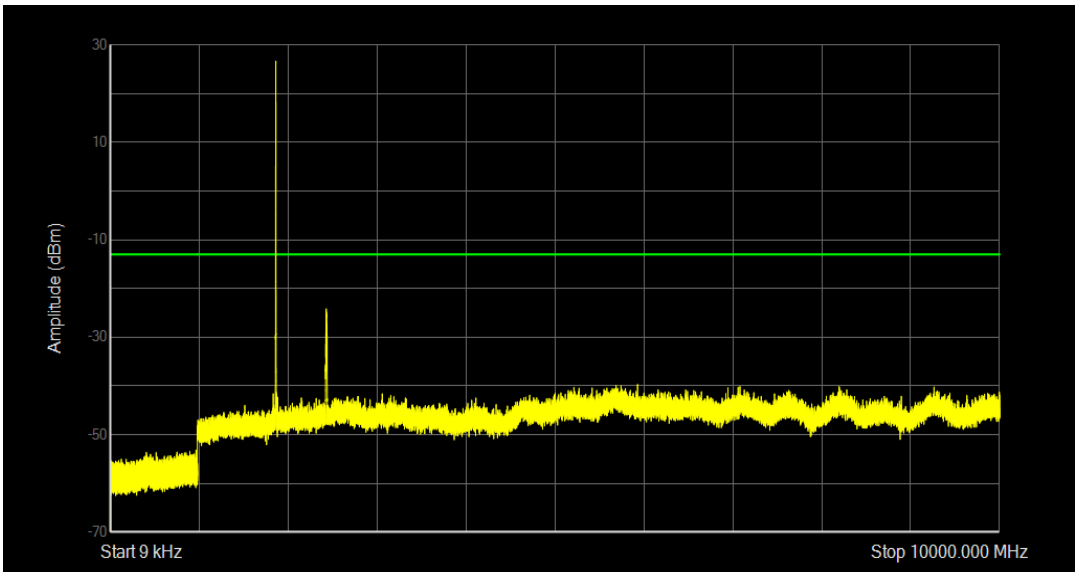

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.010681425	-49.77	-13
2	0.15	30	10	0.60297375	-44.48	-13
3	30	1000	100	985.7895	-53.18	-13
4	1000	10000	1000	2446.3	-24.18	-13

Band2 QAM16 BW=1.4MHz Channel=18900 RB Size=6 Position=#0

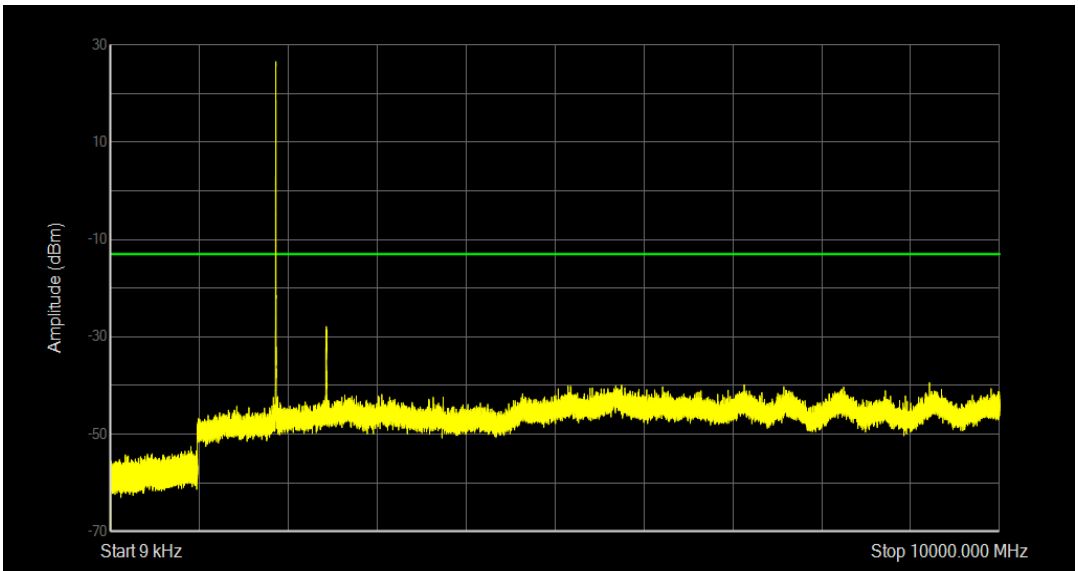

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.013931475	-49.14	-13
2	0.15	30	10	0.606705	-43.79	-13
3	30	1000	100	928.026	-52.57	-13
4	1000	10000	1000	2446.975	-27.89	-13

Band2 QPSK BW=1.4MHz Channel=19193 RB Size=6 Position=#0

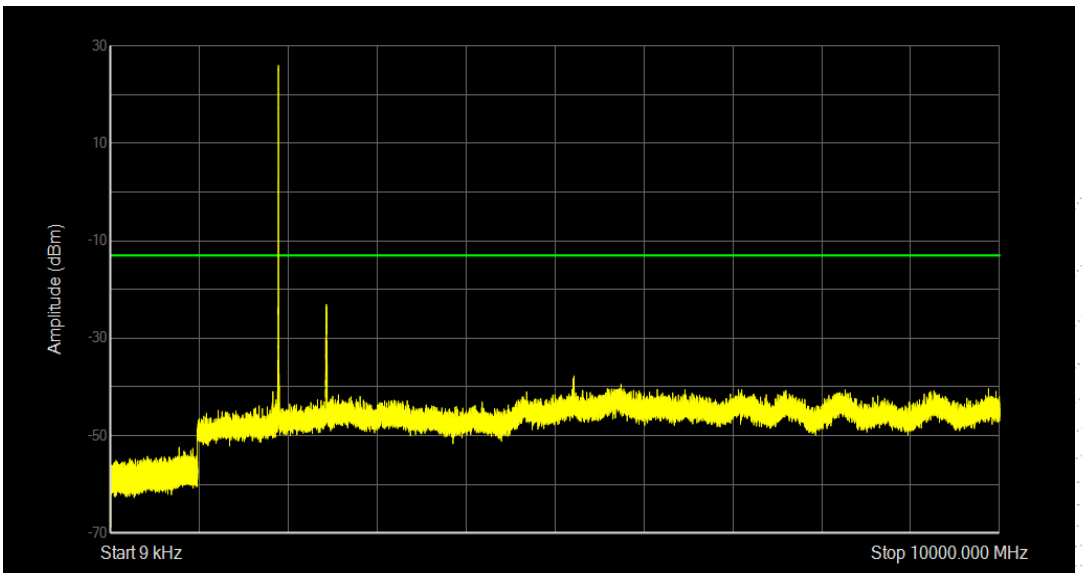

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01144635	-50.57	-13
2	0.15	30	10	0.61491375	-43.97	-13
3	30	1000	100	796.4455	-52.41	-13
4	1000	10000	1000	2447.2	-23.08	-13

Band2 QAM16 BW=1.4MHz Channel=19193 RB Size=6 Position=#0

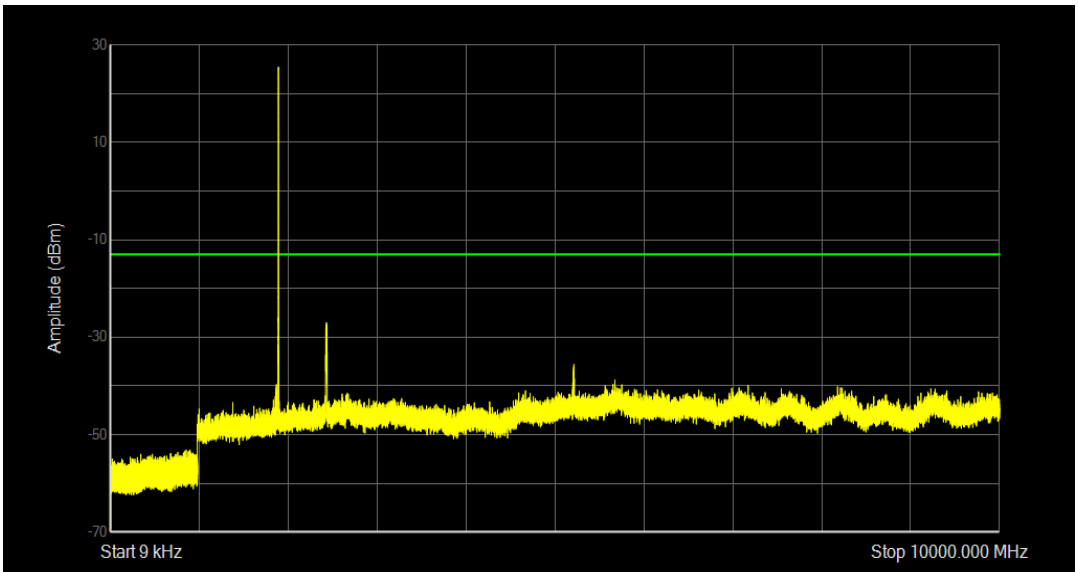

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01055805	-49.44	-13
2	0.15	30	10	0.600735	-45.73	-13
3	30	1000	100	918.05925	-53.16	-13
4	1000	10000	1000	2448.325	-27.02	-13

Band2 QPSK BW=3MHz Channel=18615 RB Size=15 Position=#0

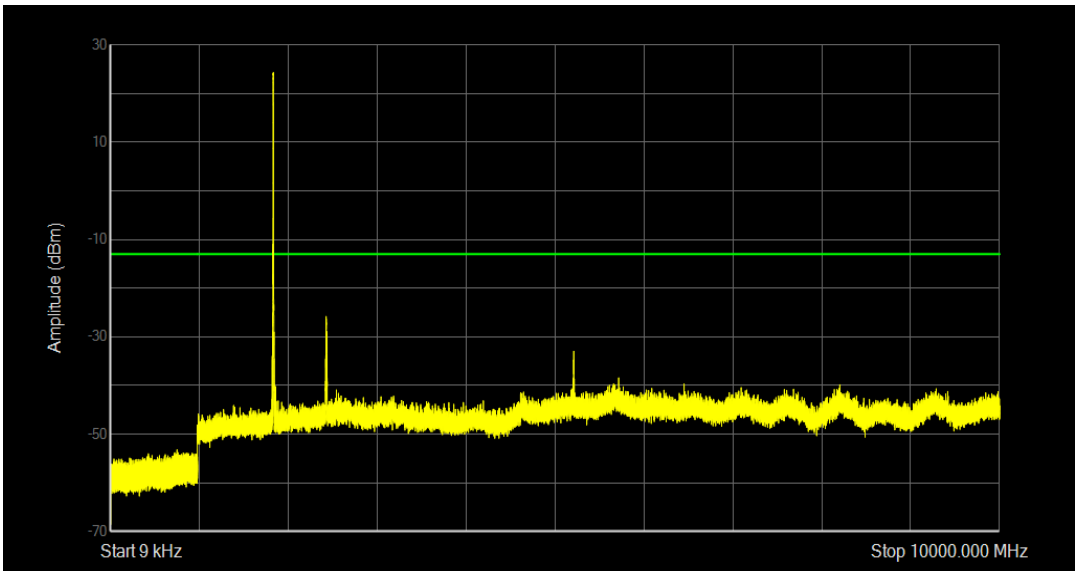

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009616875	-50.78	-13
2	0.15	30	10	0.600735	-45.51	-13
3	30	1000	100	772.75325	-53.21	-13
4	1000	10000	1000	2444.5	-25.81	-13

Band2 QAM16 BW=3MHz Channel=18615 RB Size=15 Position=#0

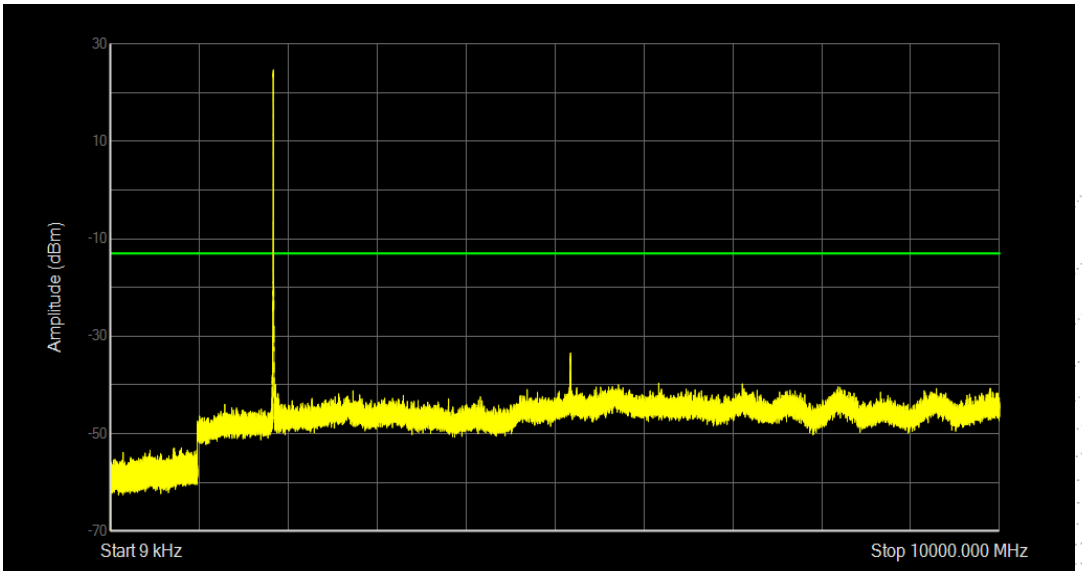

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0095358	-49.1	-13
2	0.15	30	10	0.60372	-44.49	-13
3	30	1000	100	741.7375	-52.94	-13
4	1000	10000	1000	5186.575	-33.42	-13

Band2 QPSK BW=3MHz Channel=18900 RB Size=15 Position=#0

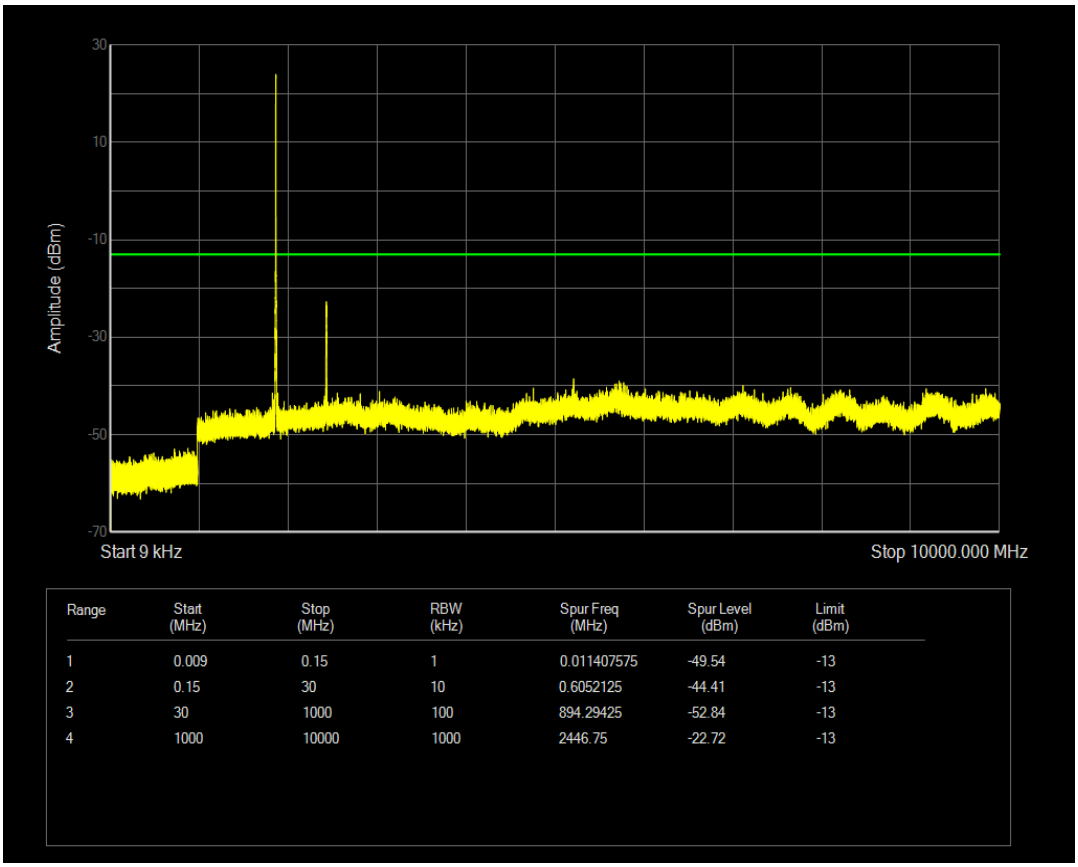

Band2 QAM16 BW=3MHz Channel=18900 RB Size=15 Position=#0

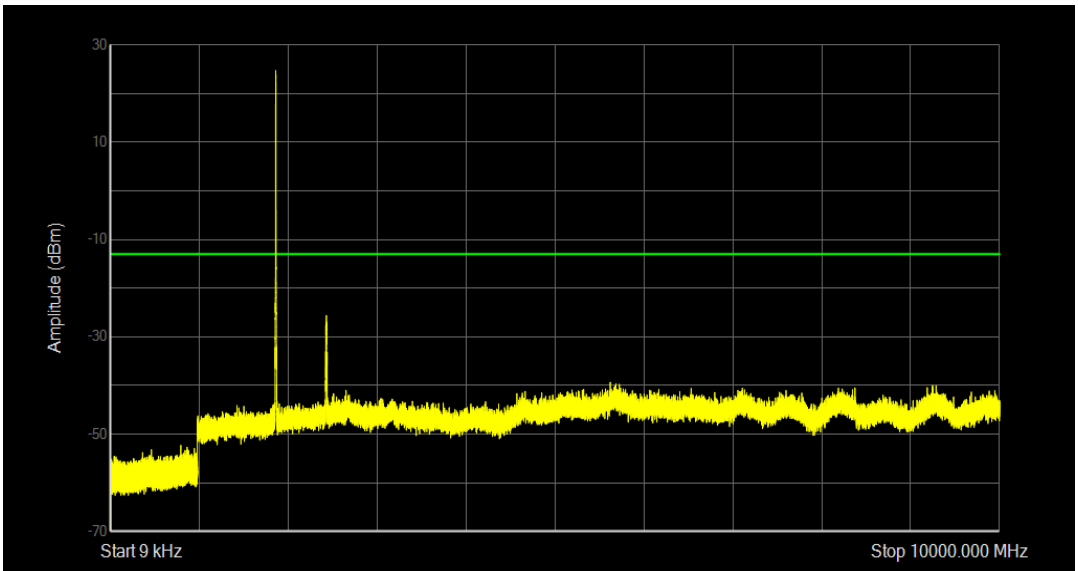

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009920025	-48.82	-13
2	0.15	30	10	0.60595875	-44.17	-13
3	30	1000	100	815.118	-52.31	-13
4	1000	10000	1000	2446.975	-25.61	-13

Band2 QPSK BW=3MHz Channel=19185 RB Size=15 Position=#0

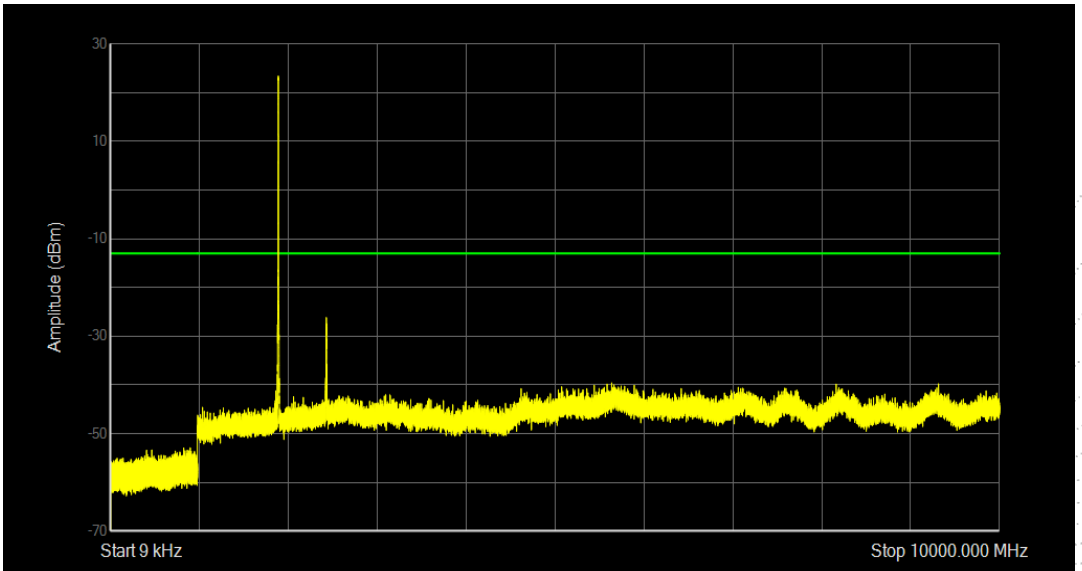

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009	-49.55	-13
2	0.15	30	10	0.618645	-45.07	-13
3	30	1000	100	920.7995	-52.91	-13
4	1000	10000	1000	2447.2	-26.18	-13

Band2 QAM16 BW=3MHz Channel=19185 RB Size=15 Position=#0

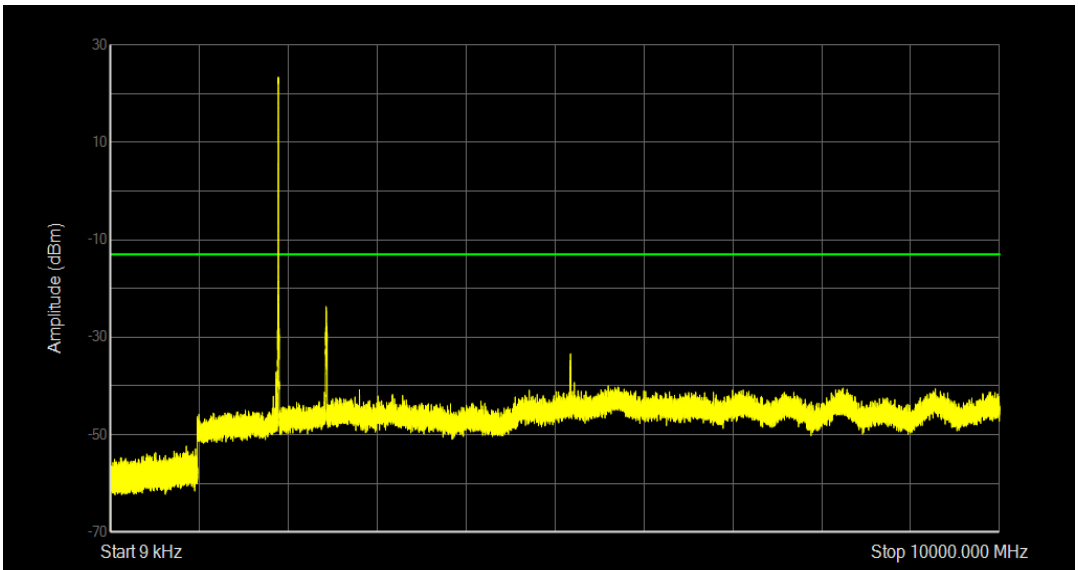

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009564	-49.26	-13
2	0.15	30	10	0.60595875	-44.68	-13
3	30	1000	100	877.004	-52.38	-13
4	1000	10000	1000	2443.825	-23.73	-13

Band2 QPSK BW=5MHz Channel=18625 RB Size=25 Position=#0

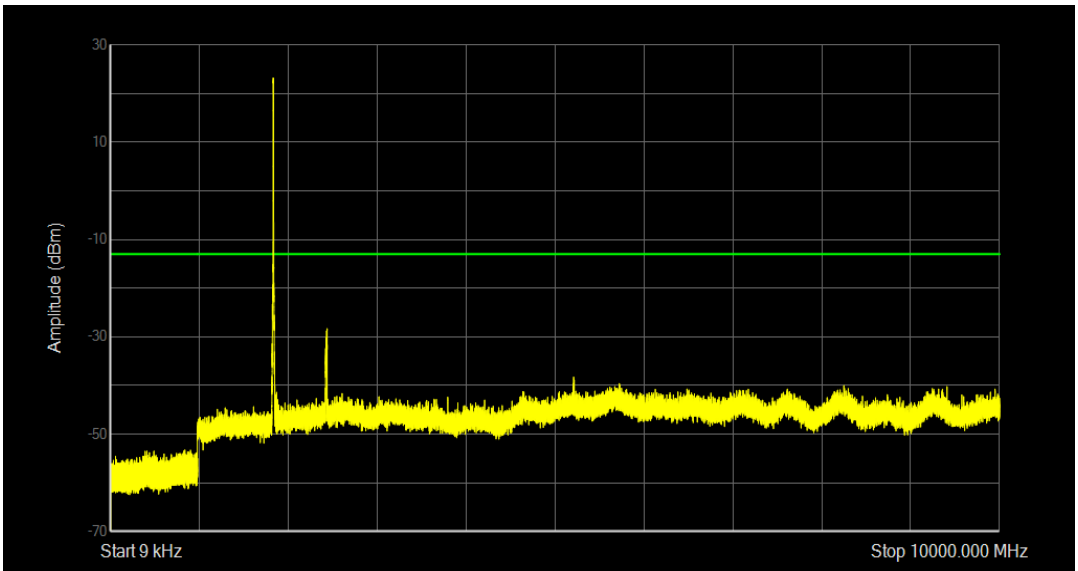

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009207975	-47.96	-13
2	0.15	30	10	0.62163	-45.92	-13
3	30	1000	100	859.76225	-53.25	-13
4	1000	10000	1000	2455.525	-28.32	-13

Band2 QAM16 BW=5MHz Channel=18625 RB Size=25 Position=#0

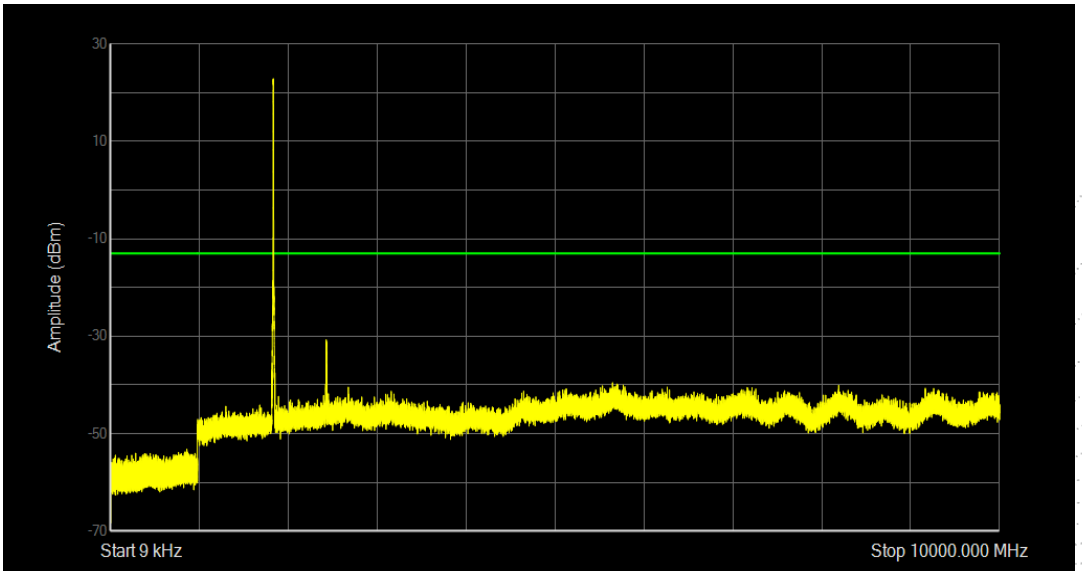

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009045825	-47.4	-13
2	0.15	30	10	0.60297375	-44.99	-13
3	30	1000	100	882.242	-53.22	-13
4	1000	10000	1000	2445.4	-30.74	-13

Band2 QPSK BW=5MHz Channel=18900 RB Size=25 Position=#0

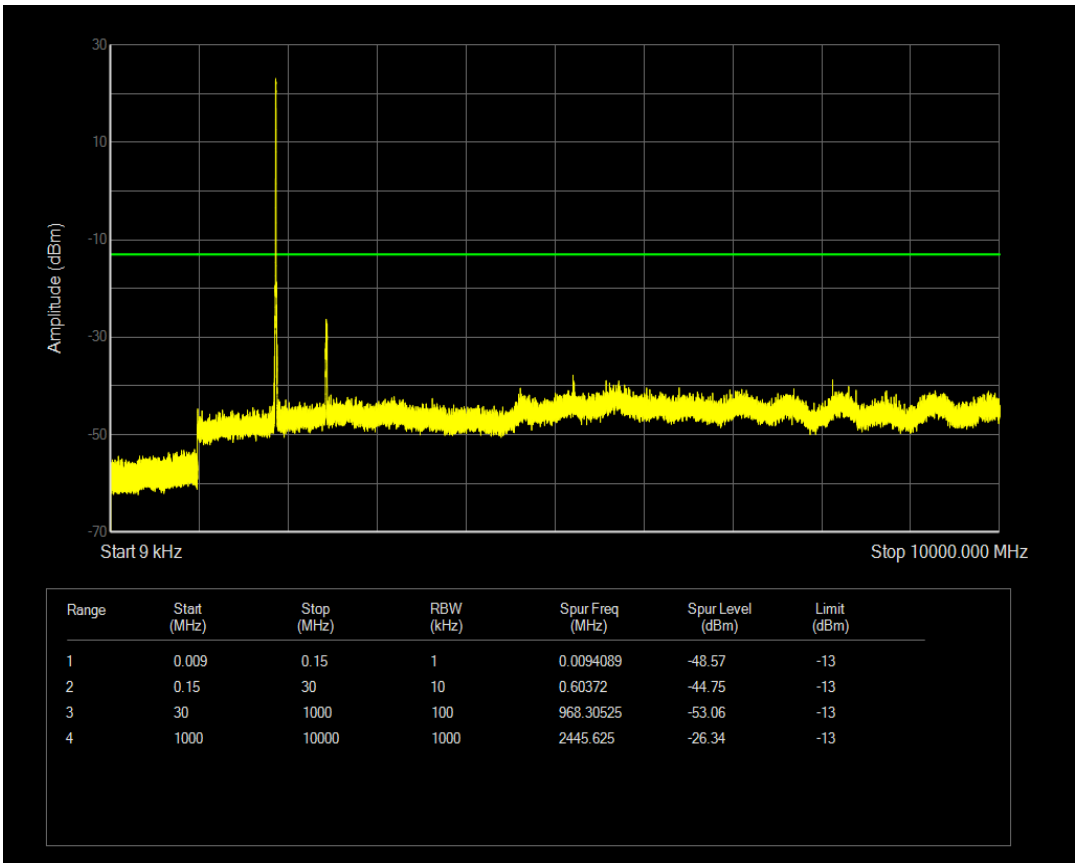

Band2 QAM16 BW=5MHz Channel=18900 RB Size=25 Position=#0

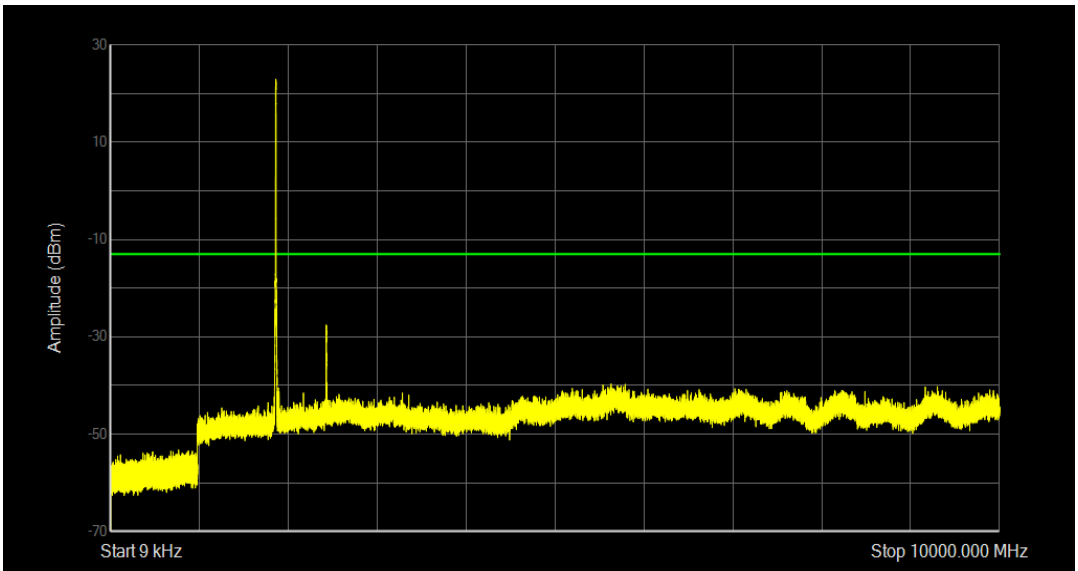

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009	-49.61	-13
2	0.15	30	10	0.606705	-44.03	-13
3	30	1000	100	789.58275	-53.25	-13
4	1000	10000	1000	2445.625	-27.6	-13

Band2 QPSK BW=5MHz Channel=19175 RB Size=25 Position=#0

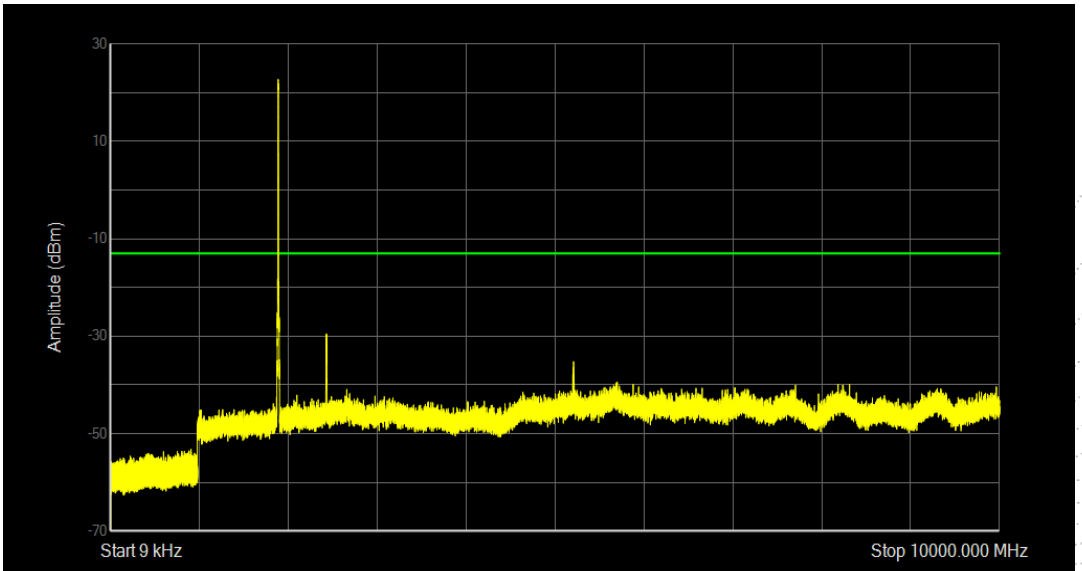

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0094653	-49.73	-13
2	0.15	30	10	0.618645	-44.83	-13
3	30	1000	100	929.74775	-53.19	-13
4	1000	10000	1000	2449.45	-29.55	-13

Band2 QAM16 BW=5MHz Channel=19175 RB Size=25 Position=#0

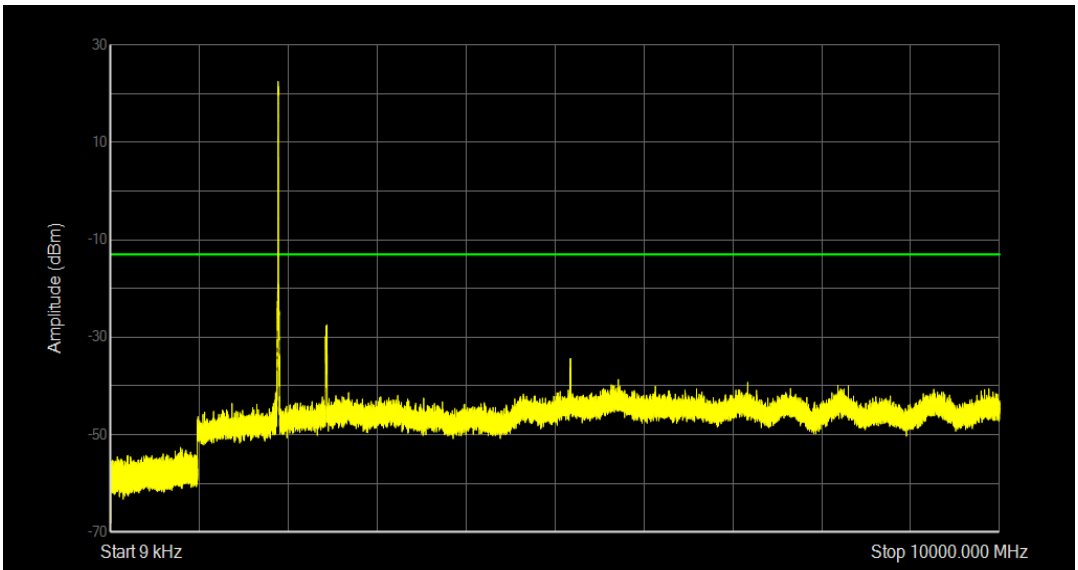

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009423	-50.81	-13
2	0.15	30	10	0.60372	-44.73	-13
3	30	1000	100	811.335	-52.63	-13
4	1000	10000	1000	2454.625	-27.45	-13

Band2 QPSK BW=10MHz Channel=18650 RB Size=50 Position=#0

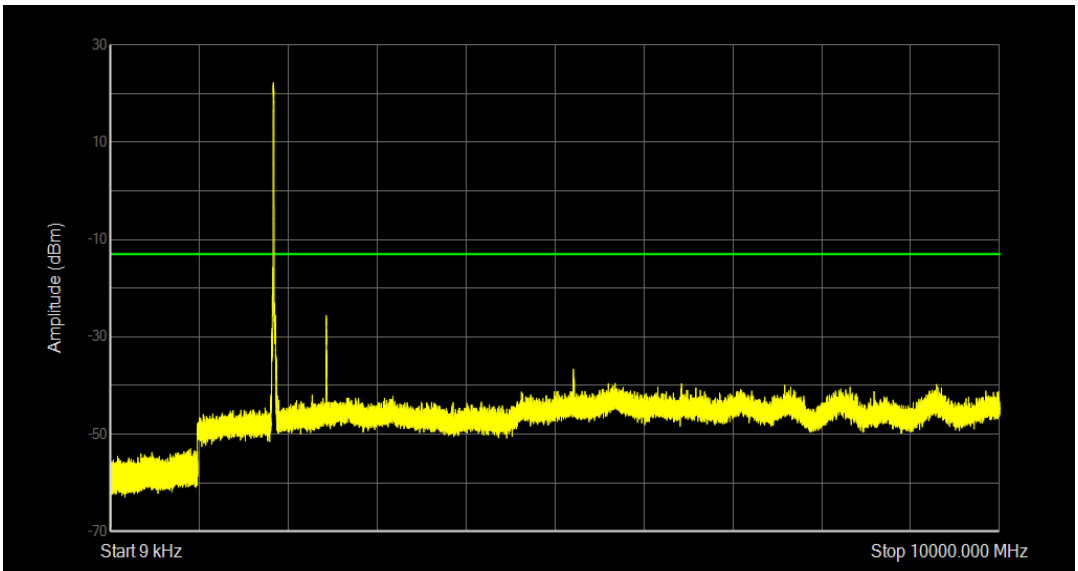

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01181295	-49.11	-13
2	0.15	30	10	0.618645	-44.45	-13
3	30	1000	100	923.2245	-53.04	-13
4	1000	10000	1000	2445.4	-25.62	-13

Band2 QAM16 BW=10MHz Channel=18650 RB Size=50 Position=#0

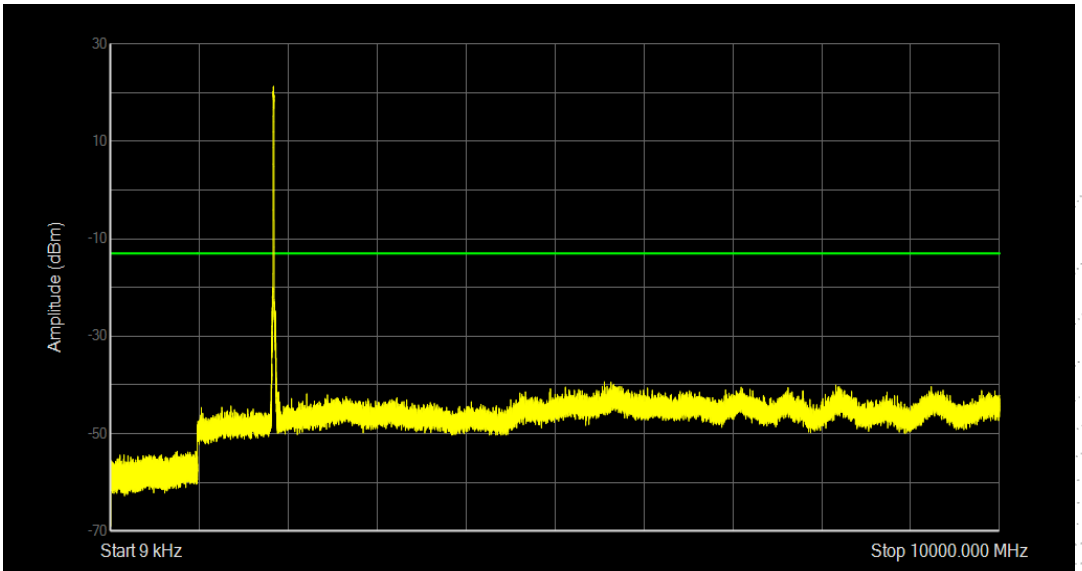

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009	-49.13	-13
2	0.15	30	10	0.60372	-46.71	-13
3	30	1000	100	775.154	-53.63	-13
4	1000	10000	1000	5566.6	-39.34	-13

Band2 QPSK BW=10MHz Channel=18900 RB Size=50 Position=#0

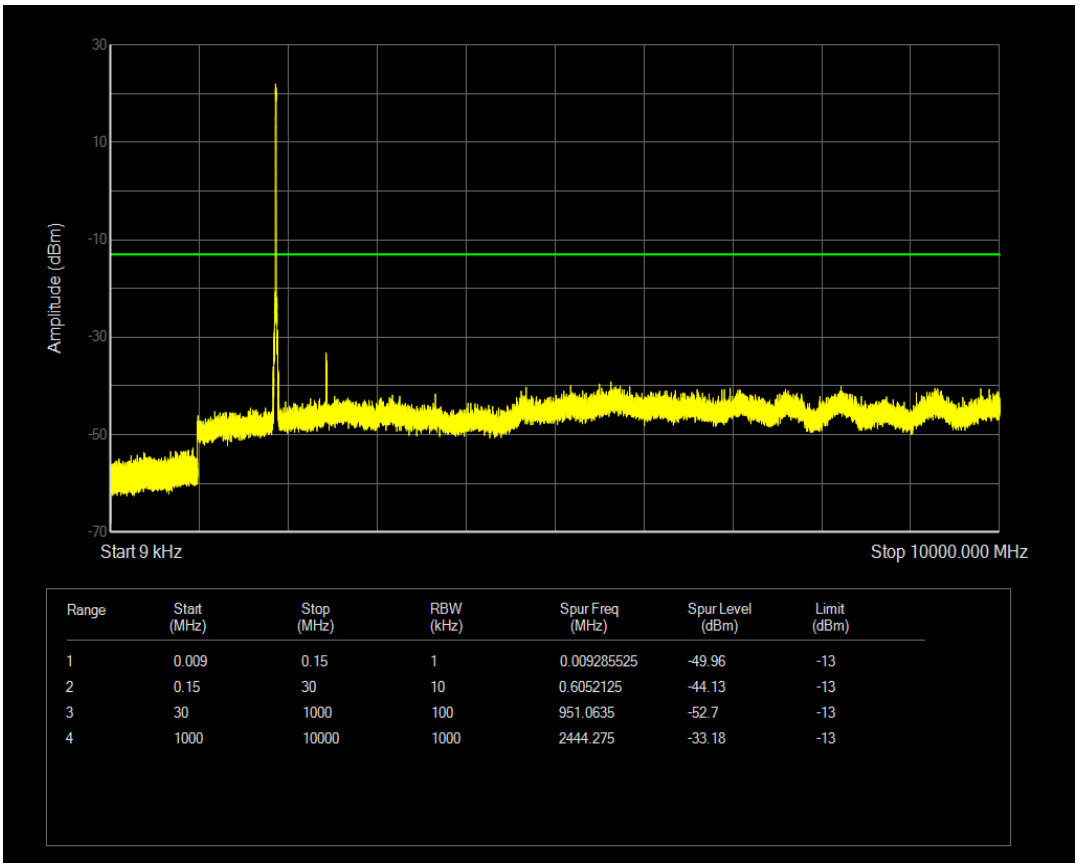

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009285525	-49.96	-13
2	0.15	30	10	0.6052125	-44.13	-13
3	30	1000	100	951.0635	-52.7	-13
4	1000	10000	1000	2444.275	-33.18	-13

Band2 QAM16 BW=10MHz Channel=18900 RB Size=50 Position=#0

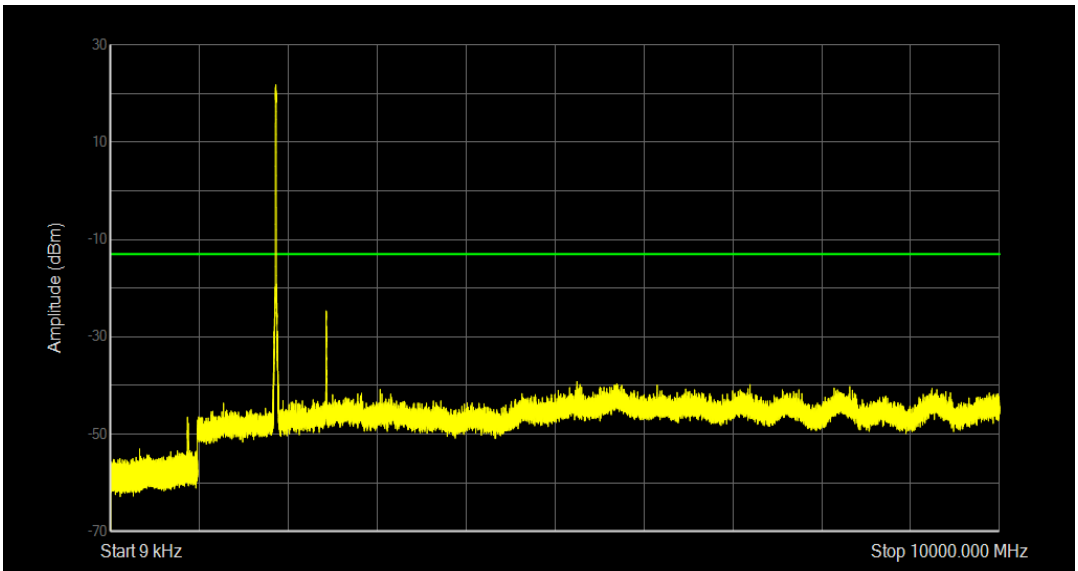

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009	-49.21	-13
2	0.15	30	10	0.60446625	-44.05	-13
3	30	1000	100	889.6625	-46.5	-13
4	1000	10000	1000	2445.625	-24.67	-13

Band2 QPSK BW=10MHz Channel=19150 RB Size=50 Position=#0

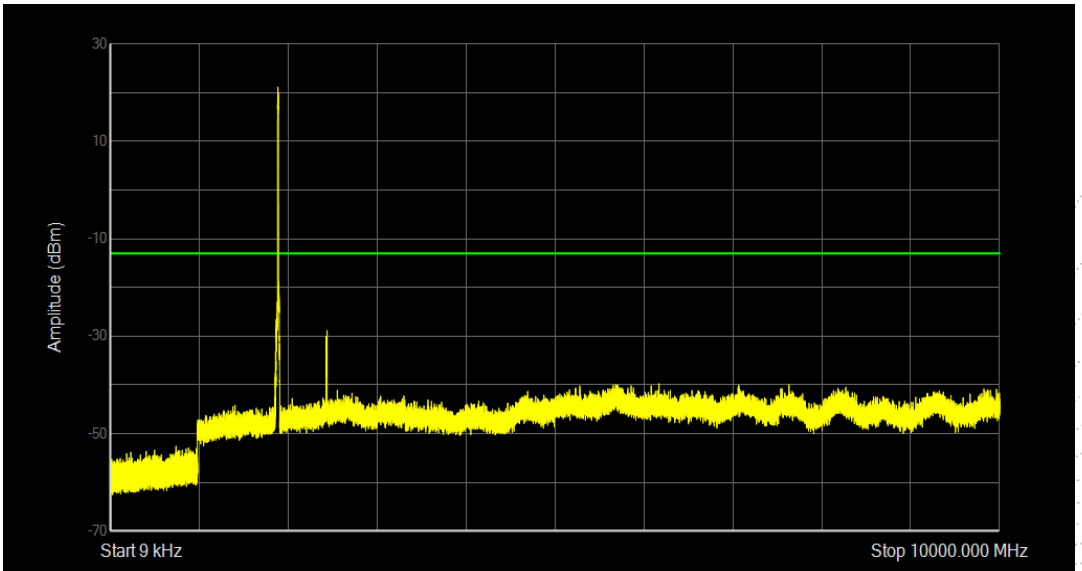

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.011760075	-49.46	-13
2	0.15	30	10	0.6052125	-44.47	-13
3	30	1000	100	760.96775	-52.61	-13
4	1000	10000	1000	2455.3	-28.84	-13

Band2 QAM16 BW=10MHz Channel=19150 RB Size=50 Position=#0

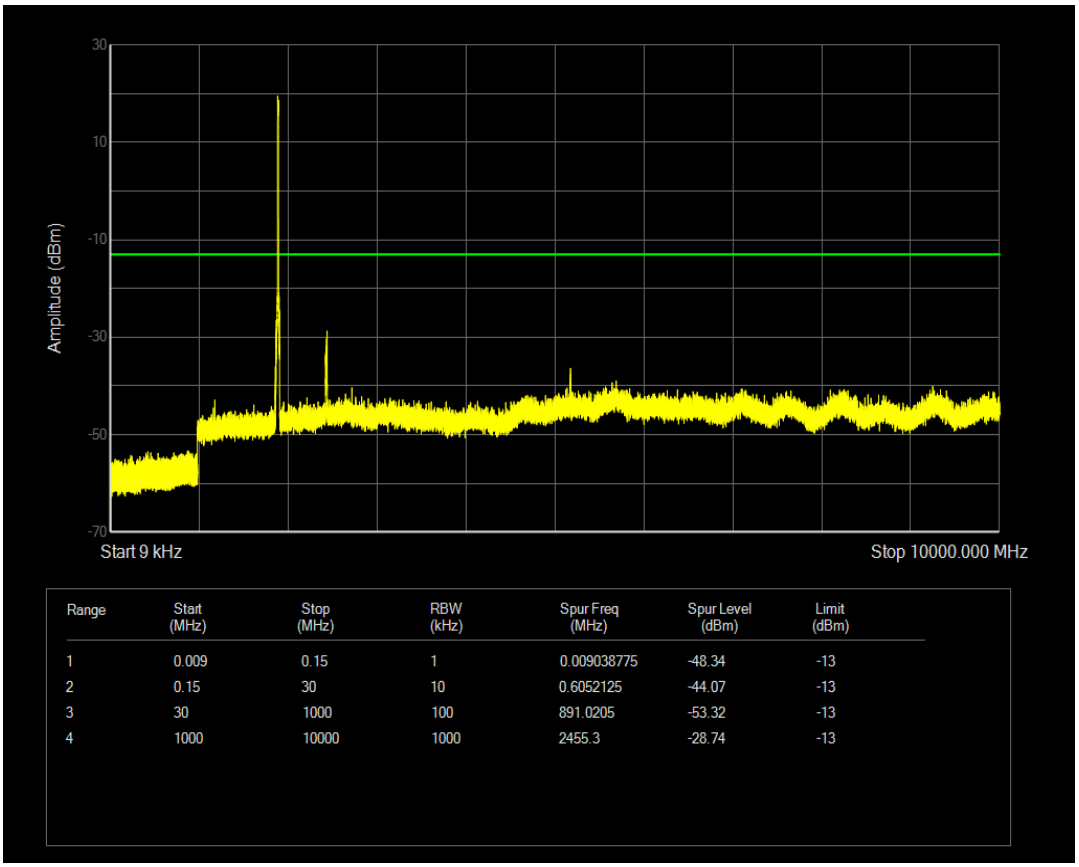

Band2 QPSK BW=15MHz Channel=18675 RB Size=75 Position=#0

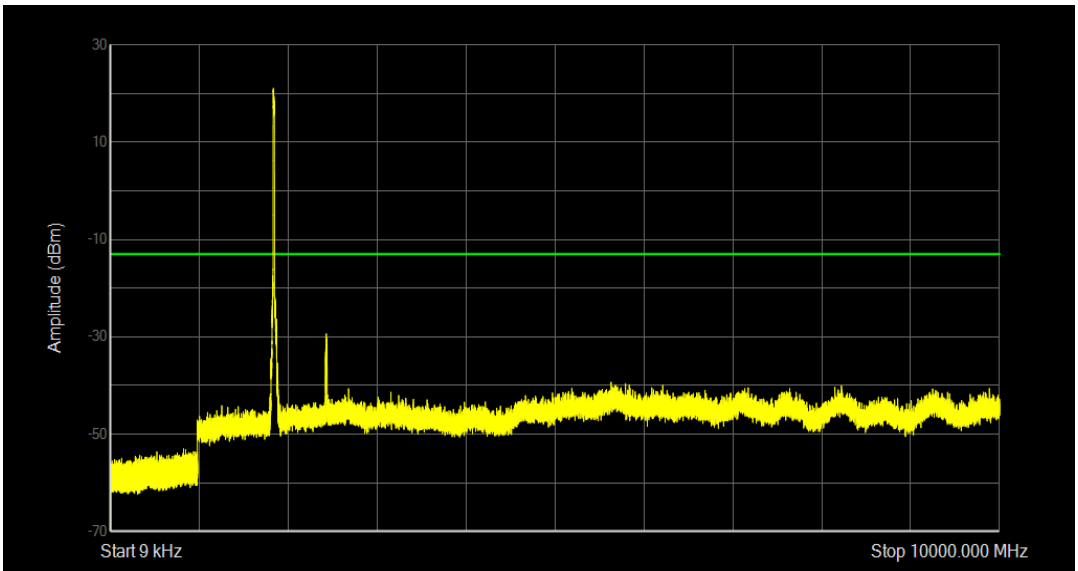

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.00916215	-48.88	-13
2	0.15	30	10	0.6201375	-44.96	-13
3	30	1000	100	845.964	-53.02	-13
4	1000	10000	1000	2446.525	-29.35	-13

Band2 QAM16 BW=15MHz Channel=18675 RB Size=75 Position=#0

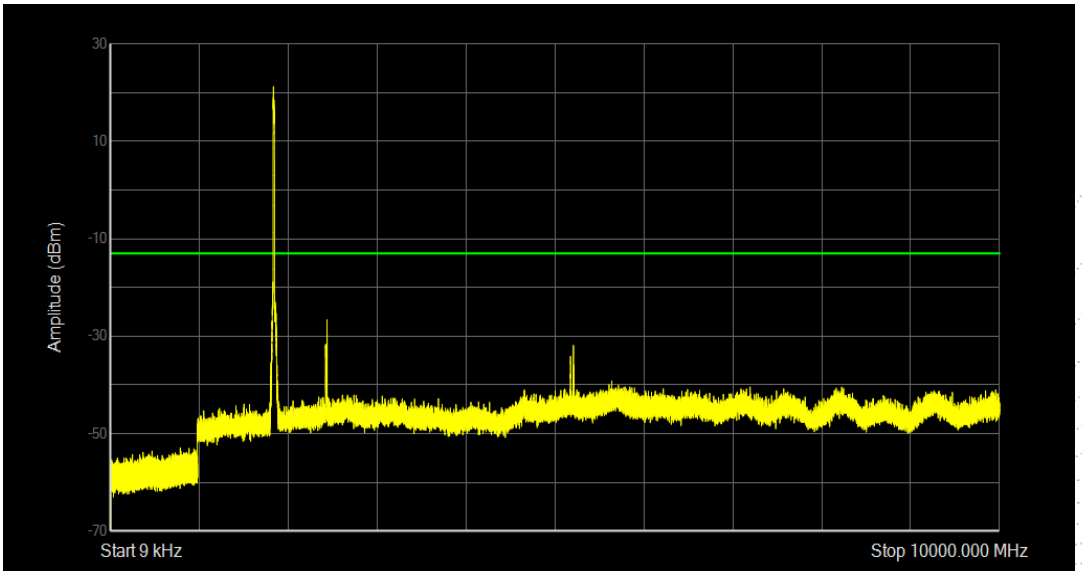

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.010815375	-47.75	-13
2	0.15	30	10	0.60372	-44.78	-13
3	30	1000	100	809.2495	-52.91	-13
4	1000	10000	1000	2454.4	-26.63	-13

Band2 QPSK BW=15MHz Channel=18900 RB Size=75 Position=#0

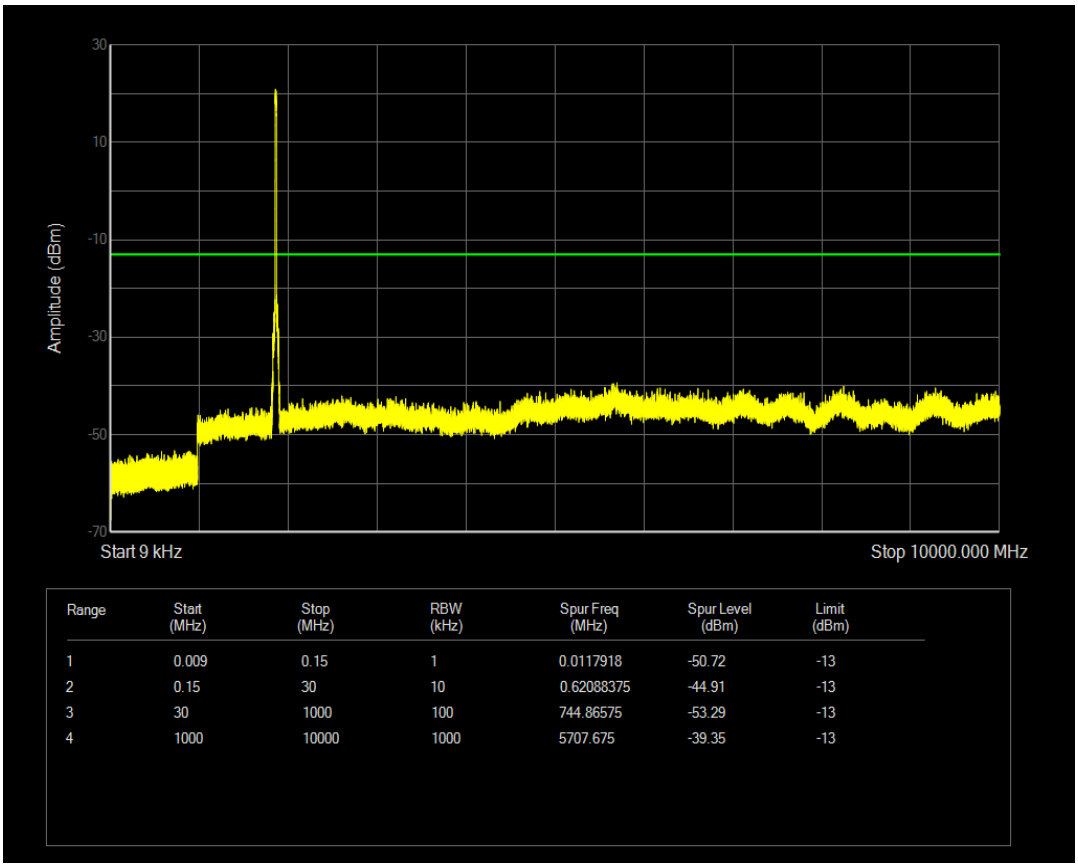

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0117918	-50.72	-13
2	0.15	30	10	0.62088375	-44.91	-13
3	30	1000	100	744.86575	-53.29	-13
4	1000	10000	1000	5707.675	-39.35	-13

Band2 QAM16 BW=15MHz Channel=18900 RB Size=75 Position=#0

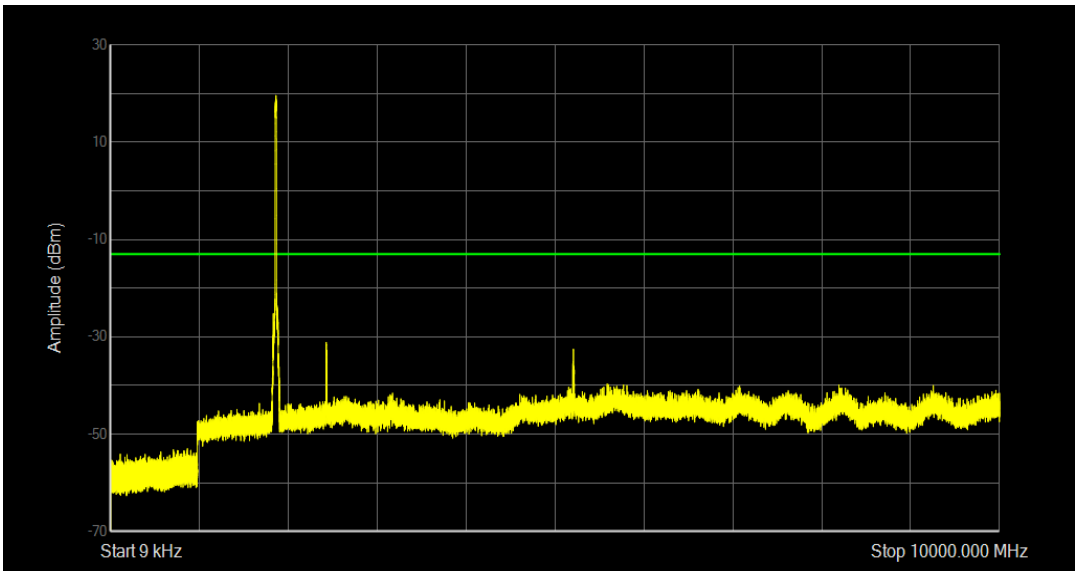

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0092679	-48.7	-13
2	0.15	30	10	0.6081975	-44.25	-13
3	30	1000	100	888.644	-52.98	-13
4	1000	10000	1000	2446.075	-31.15	-13

Band2 QPSK BW=15MHz Channel=19125 RB Size=75 Position=#0

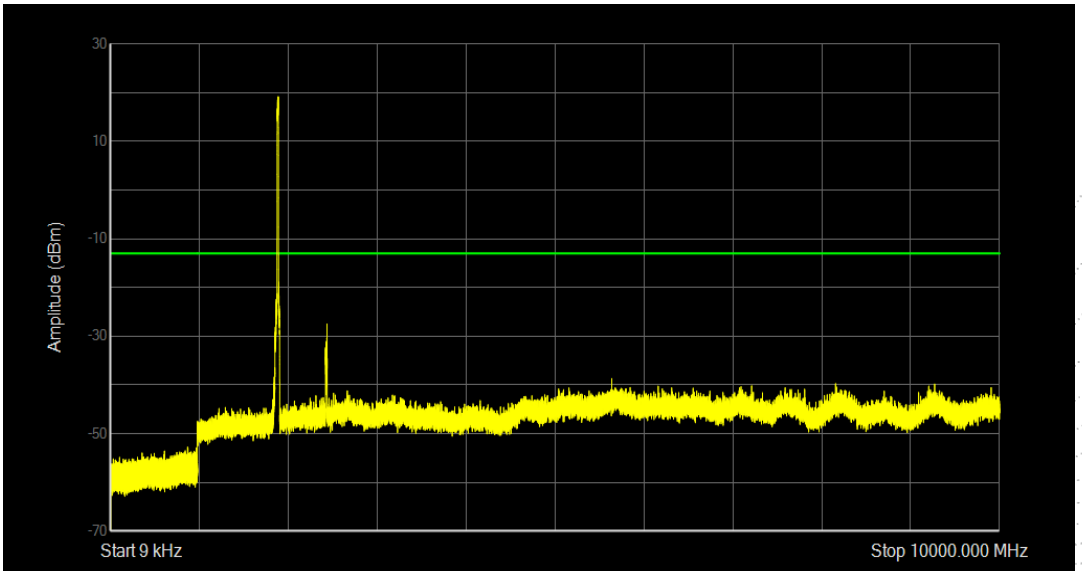

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009412425	-48.01	-13
2	0.15	30	10	0.60148125	-45.4	-13
3	30	1000	100	890.681	-52.78	-13
4	1000	10000	1000	2454.625	-27.49	-13

Band2 QAM16 BW=15MHz Channel=19125 RB Size=75 Position=#0

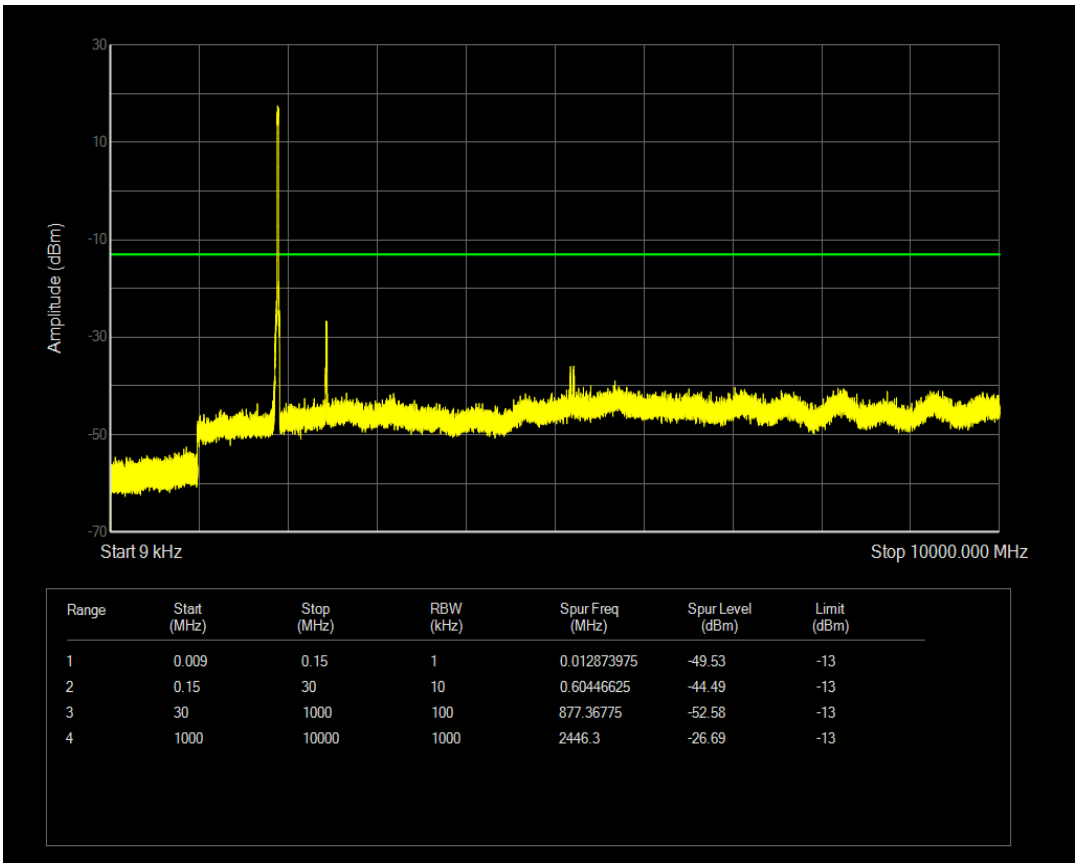

Band2 QPSK BW=20MHz Channel=18700 RB Size=100 Position=#0

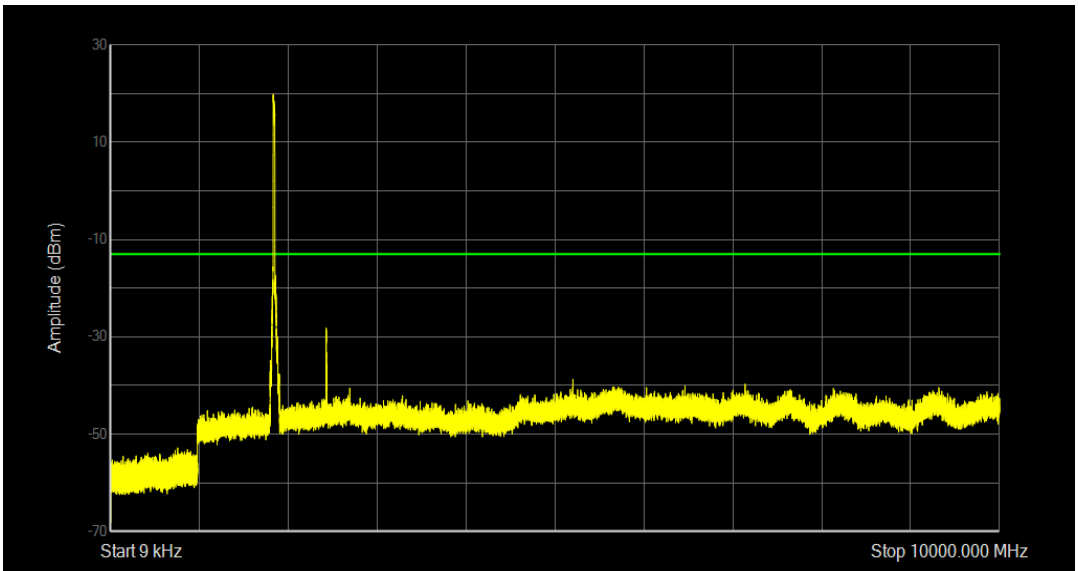

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009645075	-49.21	-13
2	0.15	30	10	0.61640625	-43.87	-13
3	30	1000	100	780.1495	-52.85	-13
4	1000	10000	1000	2446.075	-28.23	-13

Band2 QAM16 BW=20MHz Channel=18700 RB Size=100 Position=#0

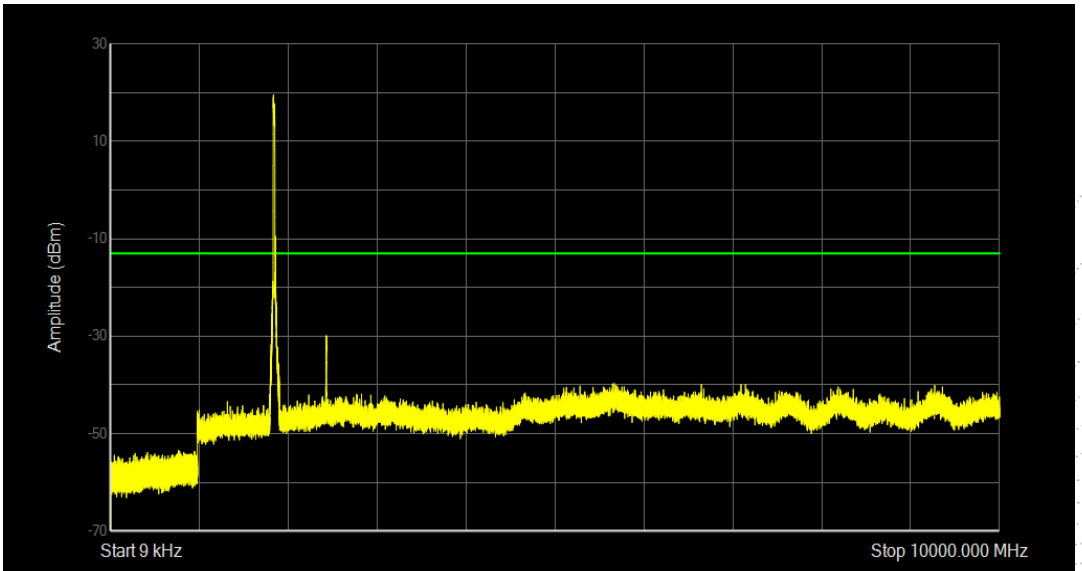

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.009	-49.38	-13
2	0.15	30	10	0.6201375	-44.93	-13
3	30	1000	100	786.406	-53.44	-13
4	1000	10000	1000	2447.2	-29.87	-13

Band2 QPSK BW=20MHz Channel=18900 RB Size=100 Position=#0

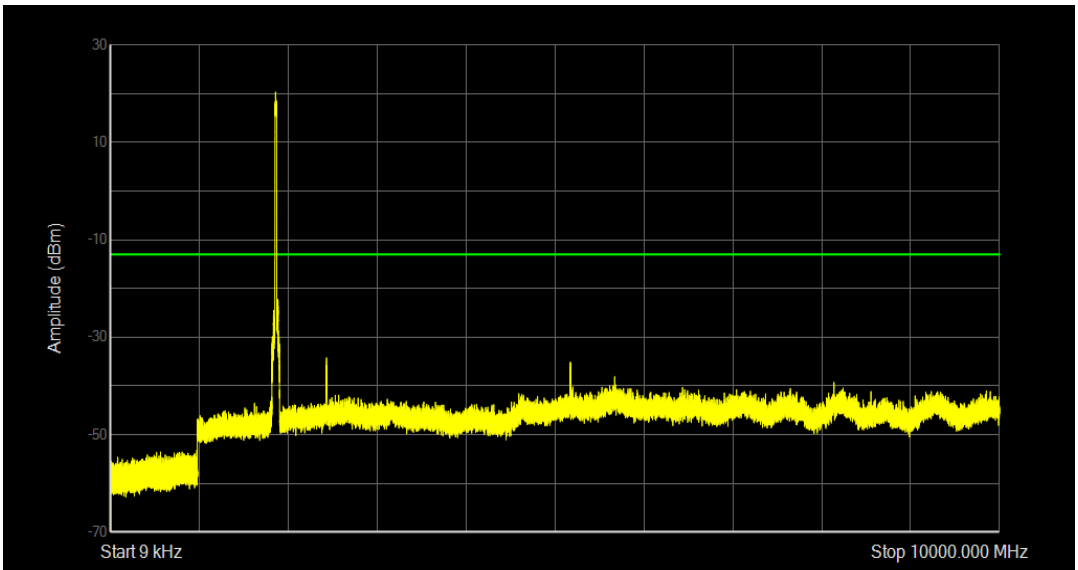

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0101985	-49.38	-13
2	0.15	30	10	0.60297375	-44.65	-13
3	30	1000	100	994.25275	-53.22	-13
4	1000	10000	1000	2448.325	-34.24	-13

Band2 QAM16 BW=20MHz Channel=18900 RB Size=100 Position=#0

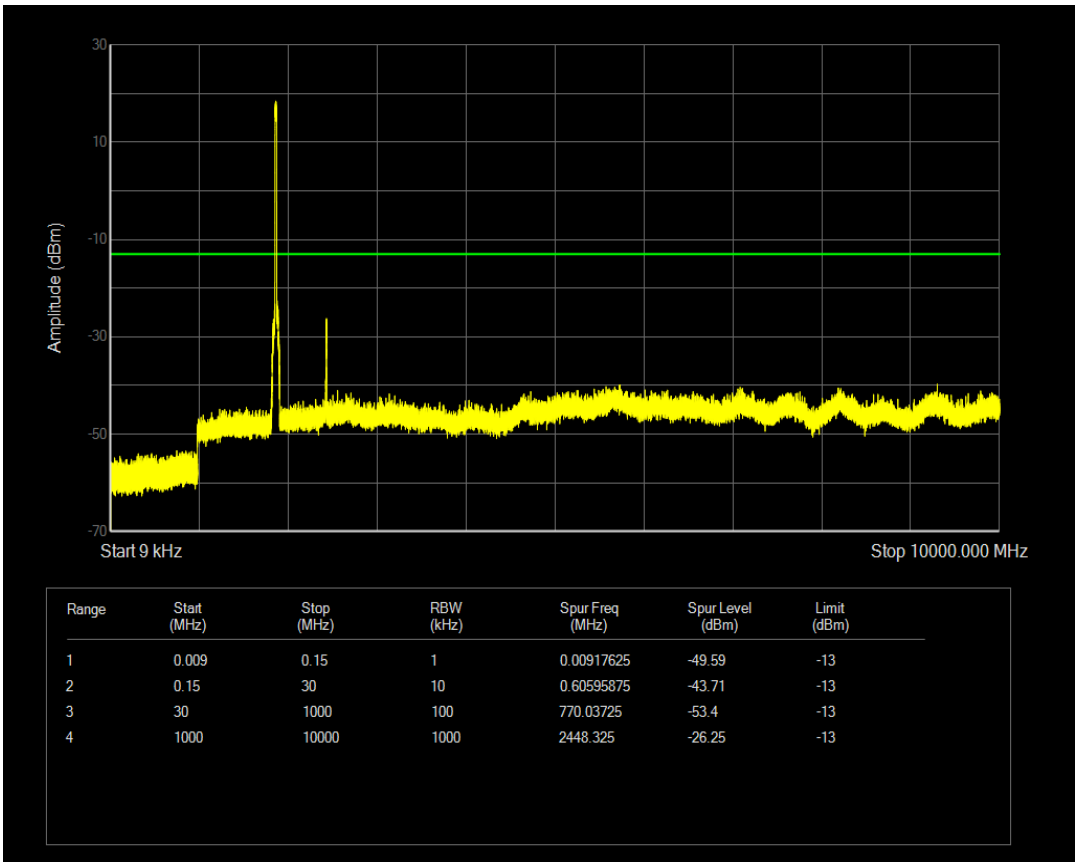

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.00917625	-49.59	-13
2	0.15	30	10	0.60595875	-43.71	-13
3	30	1000	100	770.03725	-53.4	-13
4	1000	10000	1000	2448.325	-26.25	-13

Band2 QPSK BW=20MHz Channel=19100 RB Size=100 Position=#0

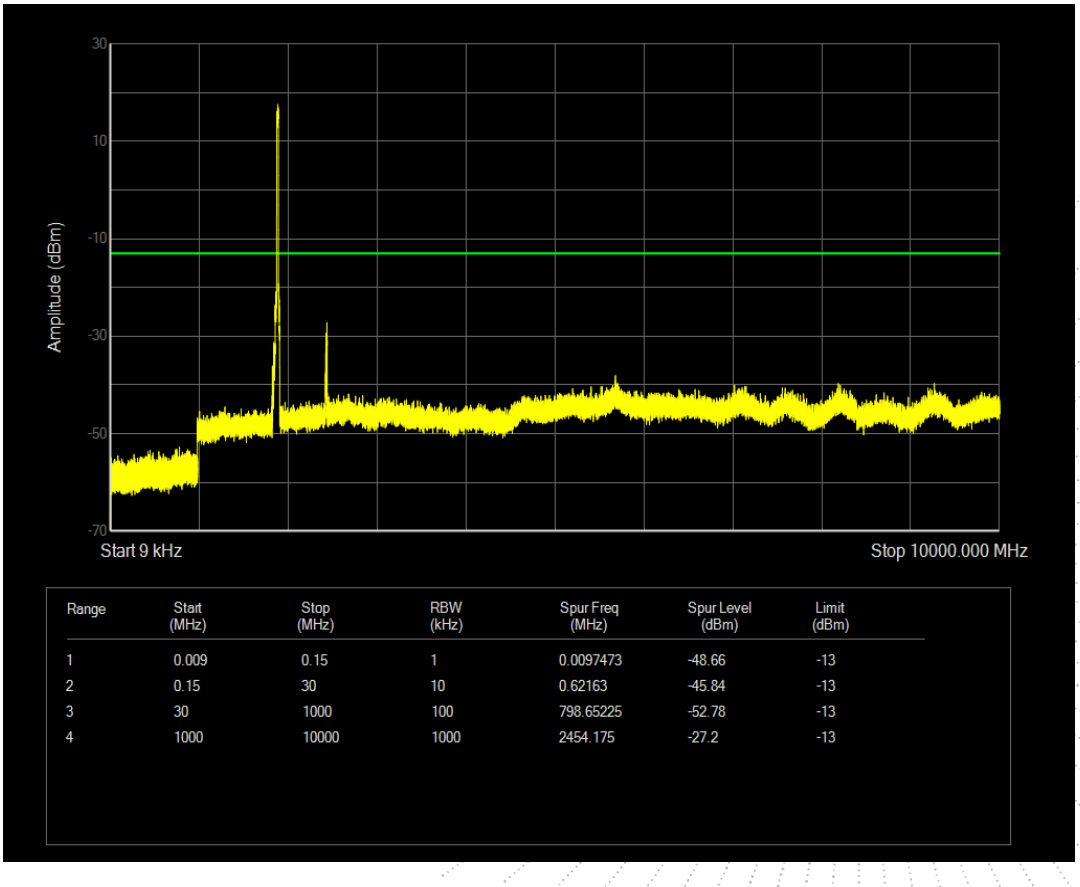

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.0097473	-48.66	-13
2	0.15	30	10	0.62163	-45.84	-13
3	30	1000	100	798.65225	-52.78	-13
4	1000	10000	1000	2454.175	-27.2	-13

Band2 QAM16 BW=20MHz Channel=19100 RB Size=100 Position=#0

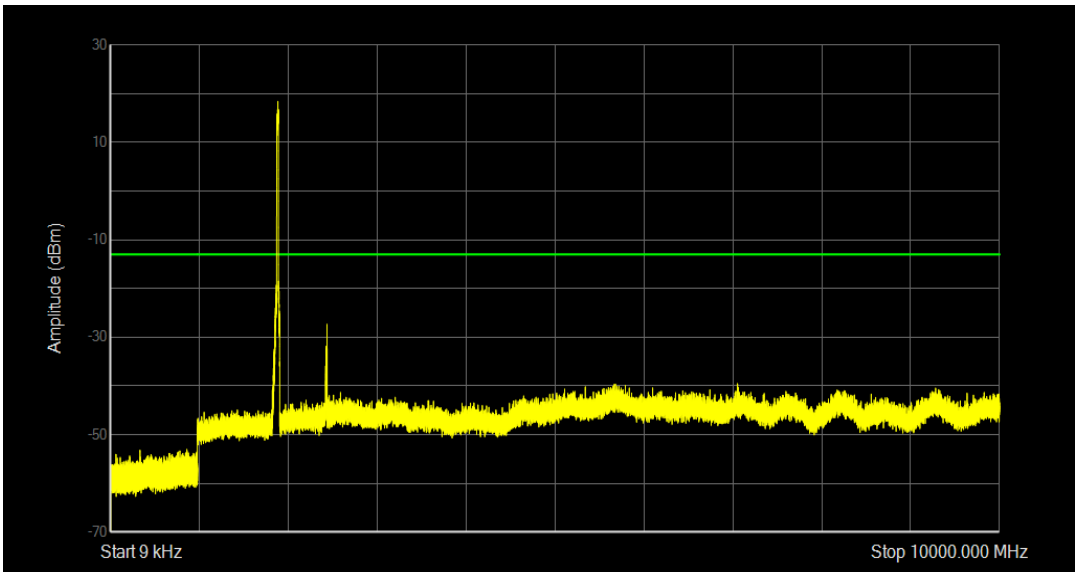

Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	0.009	0.15	1	0.01002225	-48.72	-13
2	0.15	30	10	0.6052125	-43.98	-13
3	30	1000	100	882.75125	-53.07	-13
4	1000	10000	1000	2454.4	-27.37	-13