

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	25.19	PASS
EGPRS1900 1 Slot	661	1880	25.71	PASS
EGPRS1900 1 Slot	810	1909.8	26.41	PASS
EGPRS1900 2 Slot	512	1850.2	24.27	PASS
EGPRS1900 2 Slot	661	1880	24.78	PASS
EGPRS1900 2 Slot	810	1909.8	25.55	PASS
EGPRS1900 3 Slot	512	1850.2	22.68	PASS
EGPRS1900 3 Slot	661	1880	23.01	PASS
EGPRS1900 3 Slot	810	1909.8	24.16	PASS
EGPRS1900 4 Slot	512	1850.2	21.52	PASS
EGPRS1900 4 Slot	661	1880	22.01	PASS
EGPRS1900 4 Slot	810	1909.8	22.63	PASS
EGPRS850 1 Slot	128	824.2	27.21	PASS
EGPRS850 1 Slot	189	836.4	27.35	PASS
EGPRS850 1 Slot	251	848.8	27.62	PASS
EGPRS850 2 Slot	128	824.2	26.10	PASS
EGPRS850 2 Slot	189	836.4	26.12	PASS
EGPRS850 2 Slot	251	848.8	25.98	PASS
EGPRS850 3 Slot	128	824.2	23.92	PASS
EGPRS850 3 Slot	189	836.4	23.96	PASS
EGPRS850 3 Slot	251	848.8	24.06	PASS
EGPRS850 4 Slot	128	824.2	22.90	PASS
EGPRS850 4 Slot	189	836.4	22.41	PASS
EGPRS850 4 Slot	251	848.8	23.13	PASS
GPRS1900 1 Slot	512	1850.2	28.14	PASS
GPRS1900 1 Slot	661	1880	28.90	PASS
GPRS1900 1 Slot	810	1909.8	29.30	PASS
GPRS1900 2 Slot	512	1850.2	27.68	PASS
GPRS1900 2 Slot	661	1880	28.43	PASS
GPRS1900 2 Slot	810	1909.8	28.90	PASS
GPRS1900 3 Slot	512	1850.2	26.18	PASS
GPRS1900 3 Slot	661	1880	27.00	PASS
GPRS1900 3 Slot	810	1909.8	27.54	PASS
GPRS1900 4 Slot	512	1850.2	25.10	PASS
GPRS1900 4 Slot	661	1880	25.96	PASS
GPRS1900 4 Slot	810	1909.8	26.51	PASS
GPRS850 1 Slot	128	824.2	32.53	PASS
GPRS850 1 Slot	189	836.4	32.47	PASS
GPRS850 1 Slot	251	848.8	32.41	PASS
GPRS850 2 Slot	128	824.2	31.82	PASS
GPRS850 2 Slot	189	836.4	31.79	PASS

GPRS850 2 Slot	251	848.8	31.77	PASS
GPRS850 3 Slot	128	824.2	30.26	PASS
GPRS850 3 Slot	189	836.4	30.20	PASS
GPRS850 3 Slot	251	848.8	30.23	PASS
GPRS850 4 Slot	128	824.2	29.31	PASS
GPRS850 4 Slot	189	836.4	29.23	PASS
GPRS850 4 Slot	251	848.8	29.24	PASS
GSM1900	512	1850.2	28.18	PASS
GSM1900	661	1880	28.95	PASS
GSM1900	810	1909.8	29.34	PASS
GSM850	128	824.2	32.52	PASS
GSM850	189	836.4	32.50	PASS
GSM850	251	848.8	32.45	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	5.60	13	PASS
EGPRS1900	661	1880	5.59	13	PASS
EGPRS1900	810	1909.8	5.43	13	PASS
EGPRS850	128	824.2	7.89	13	PASS
EGPRS850	189	836.4	7.71	13	PASS
EGPRS850	251	848.8	7.44	13	PASS


EGPRS1900 Channel=512

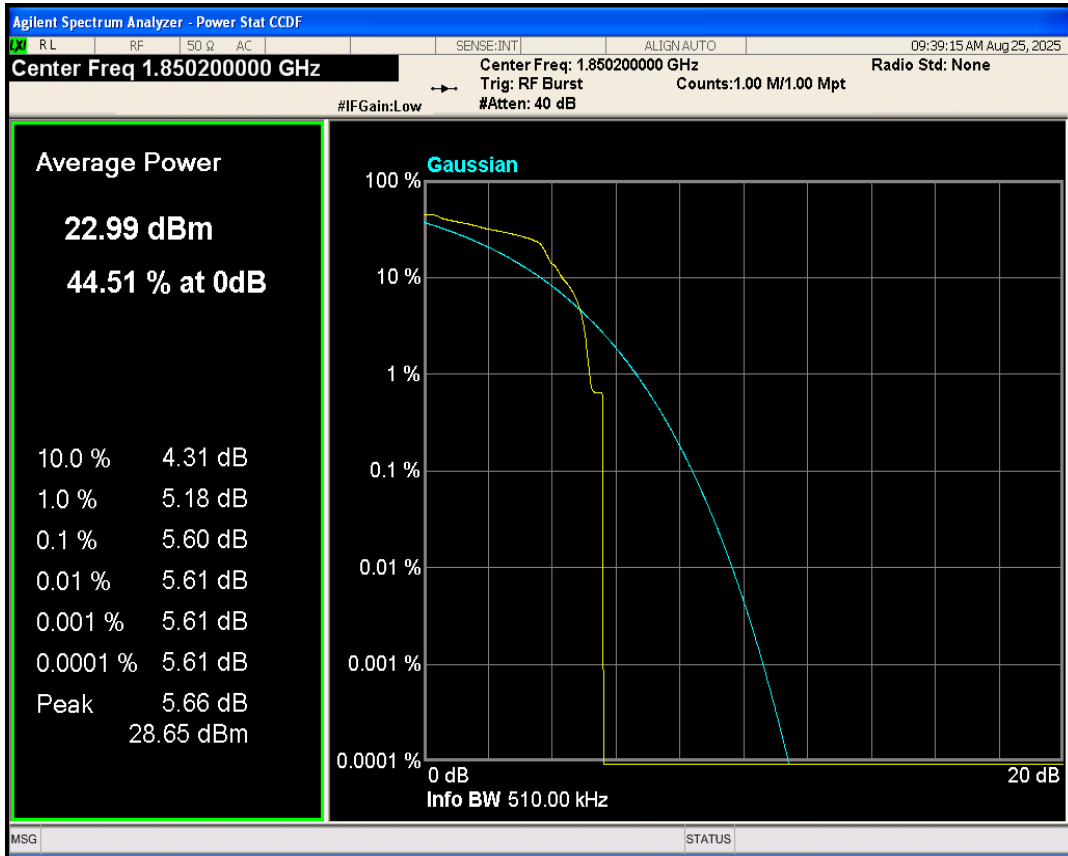


EGPRS1900 Channel=661

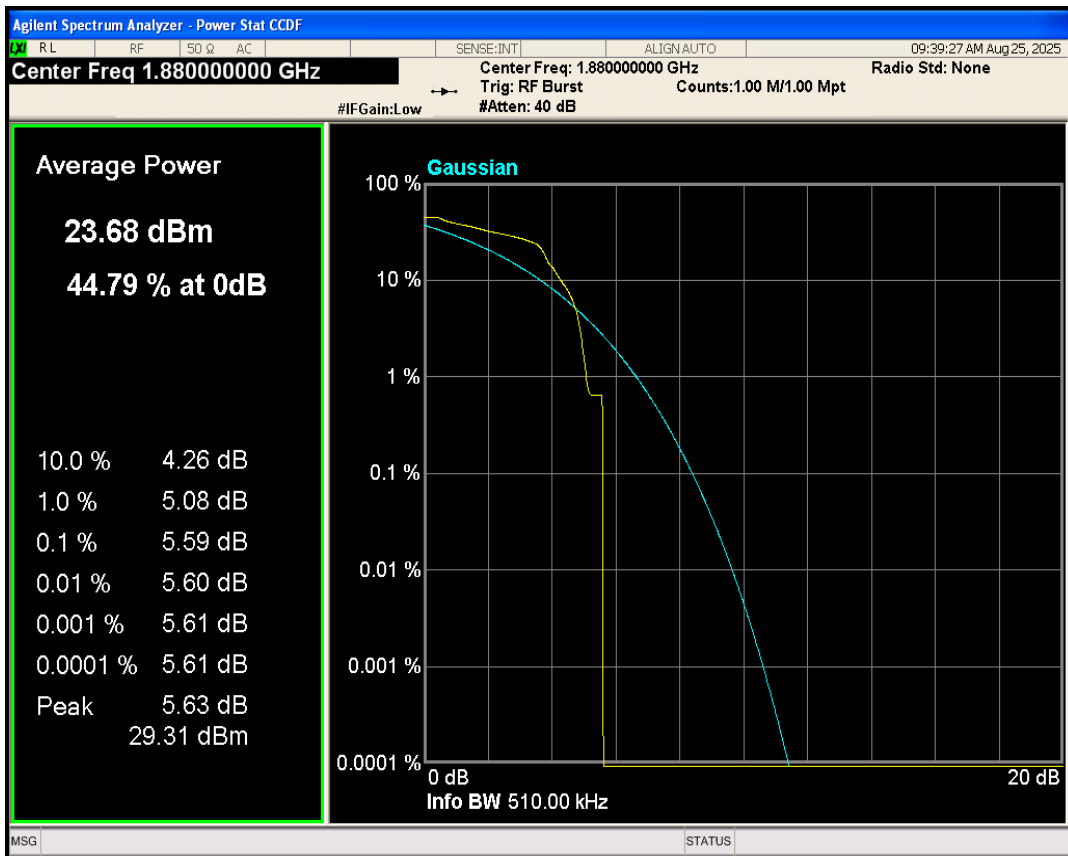


EGPRS1900 Channel=810

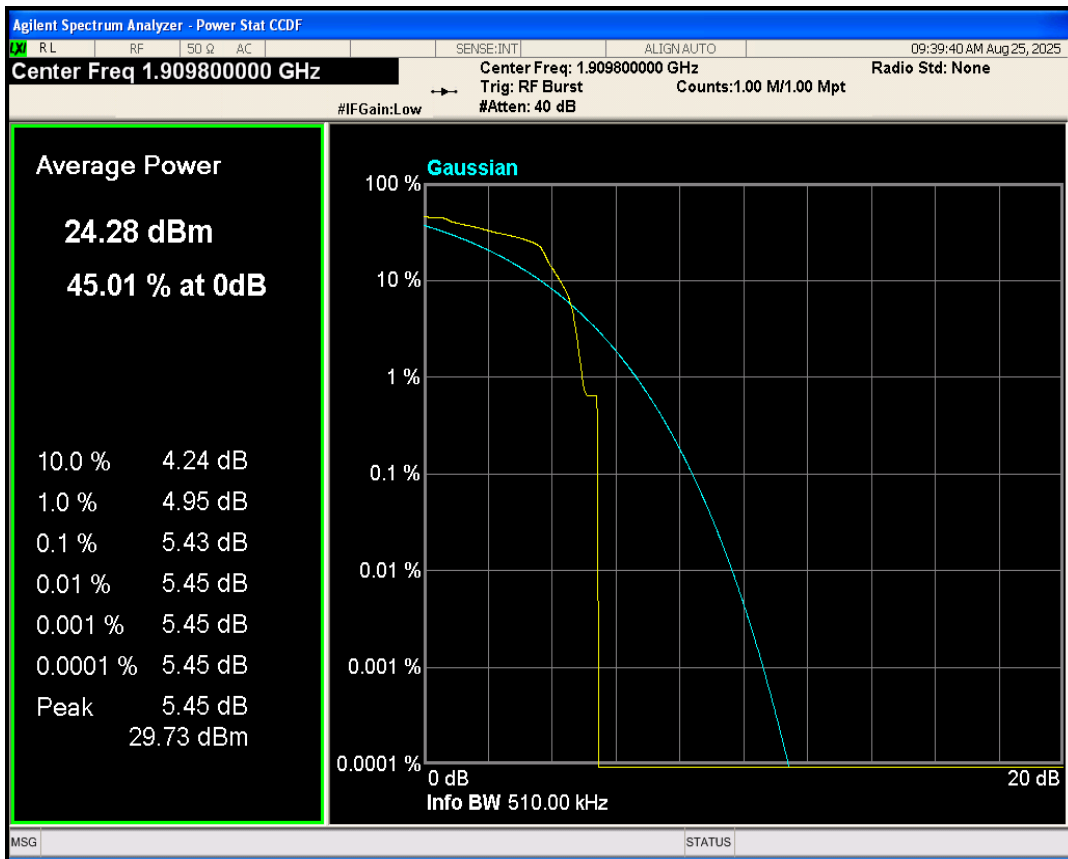


EGPRS850 Channel=128

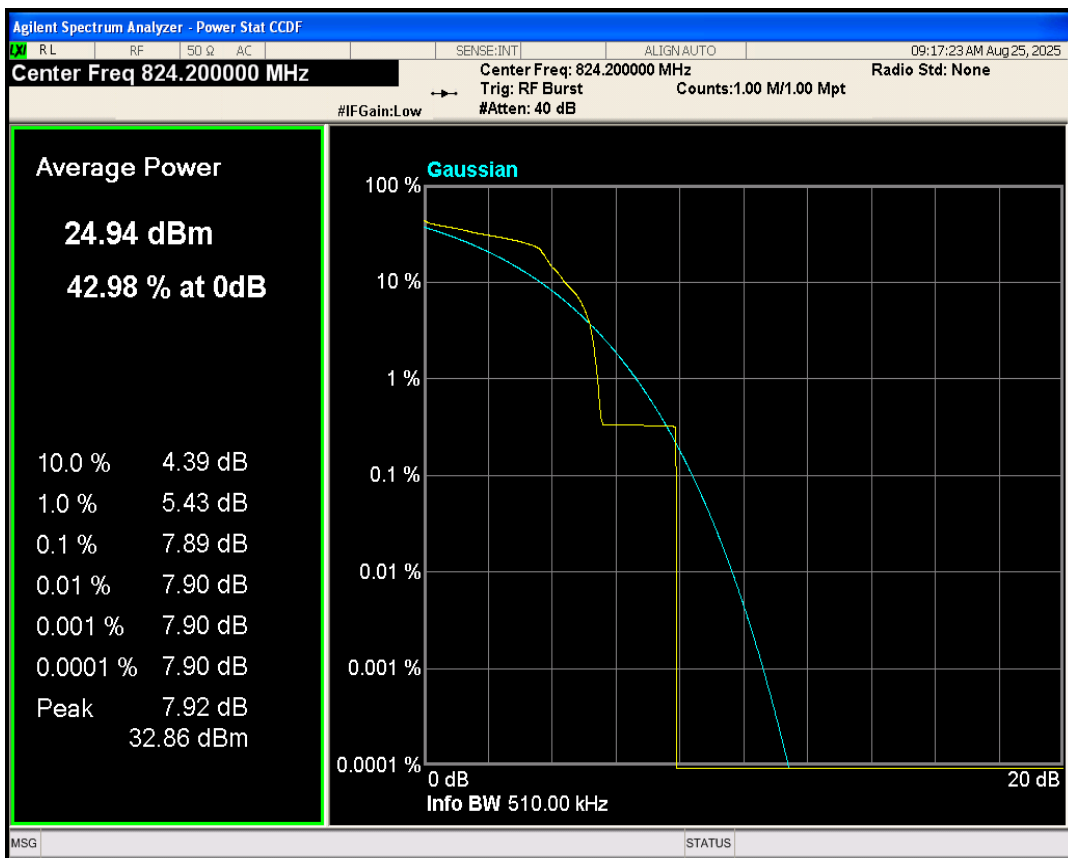

EGPRS850 Channel=189

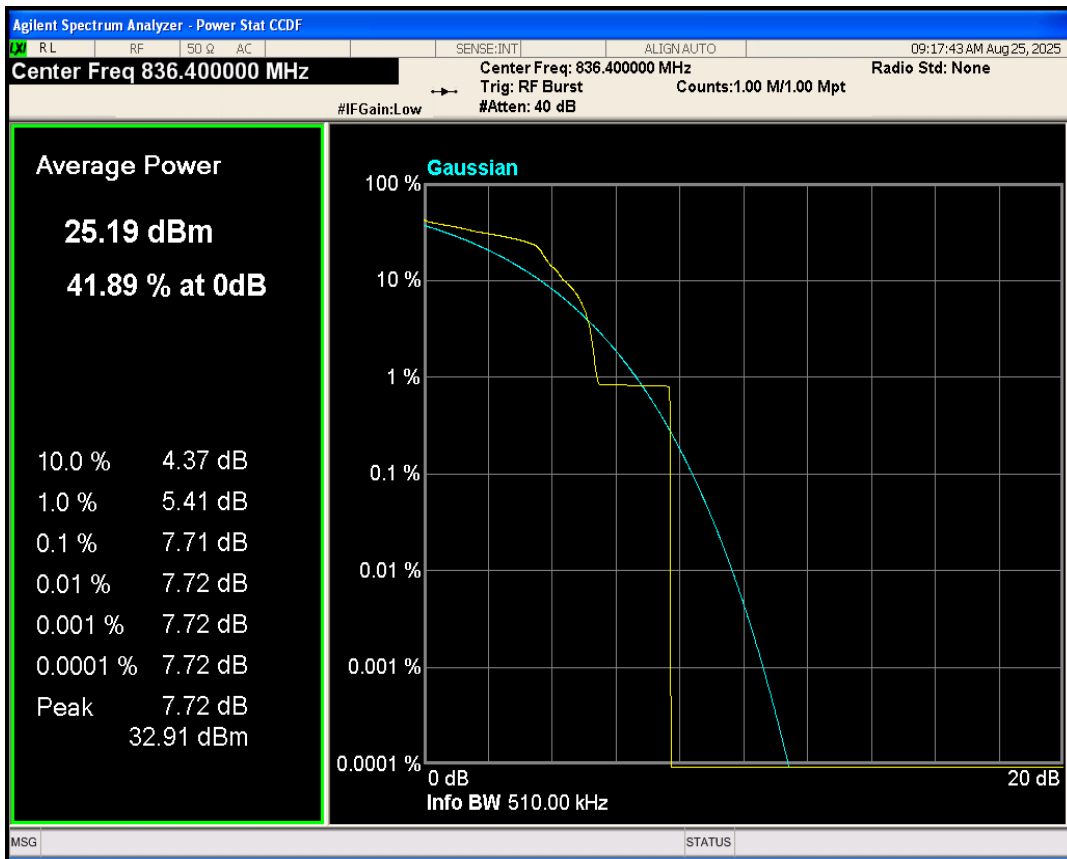


EGPRS850 Channel=251

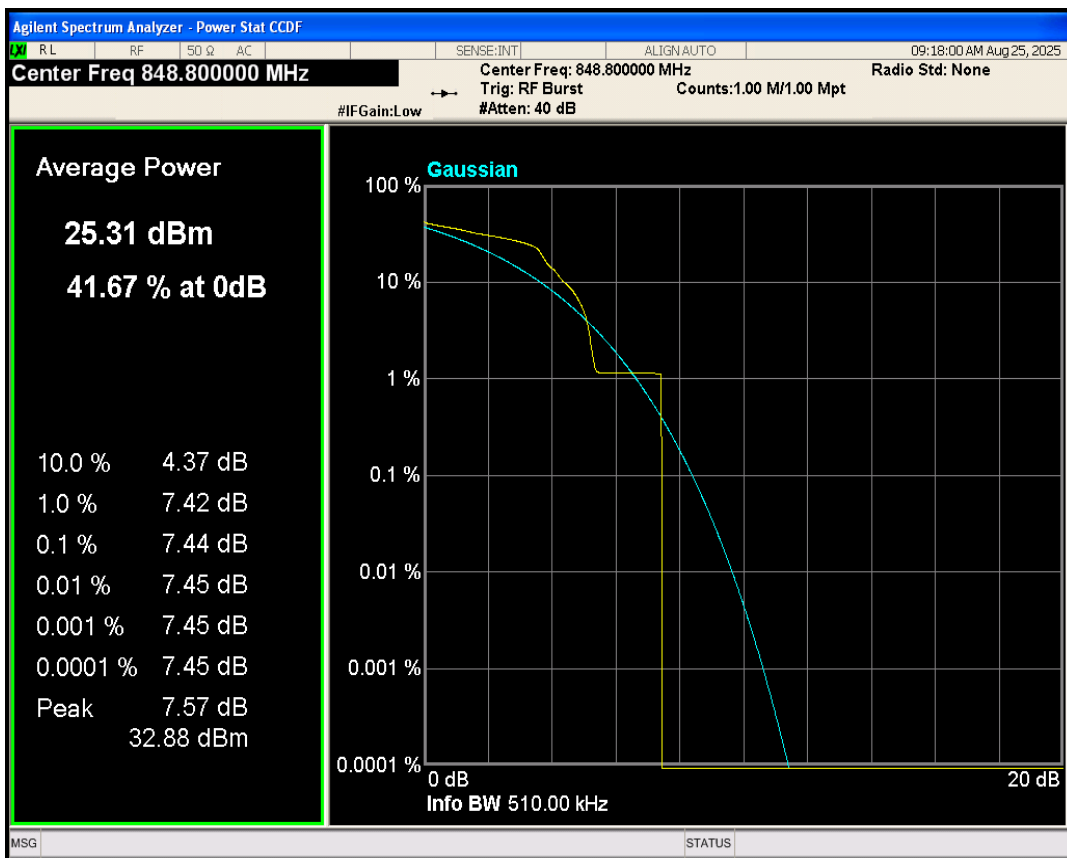


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	250.956	313.230	PASS
EGPRS1900	661	1880	254.027	320.888	PASS
EGPRS1900	810	1909.8	257.735	336.925	PASS
EGPRS850	128	824.2	243.587	301.830	PASS
EGPRS850	189	836.4	252.526	314.015	PASS
EGPRS850	251	848.8	245.823	308.235	PASS


EGPRS1900 Channel=512

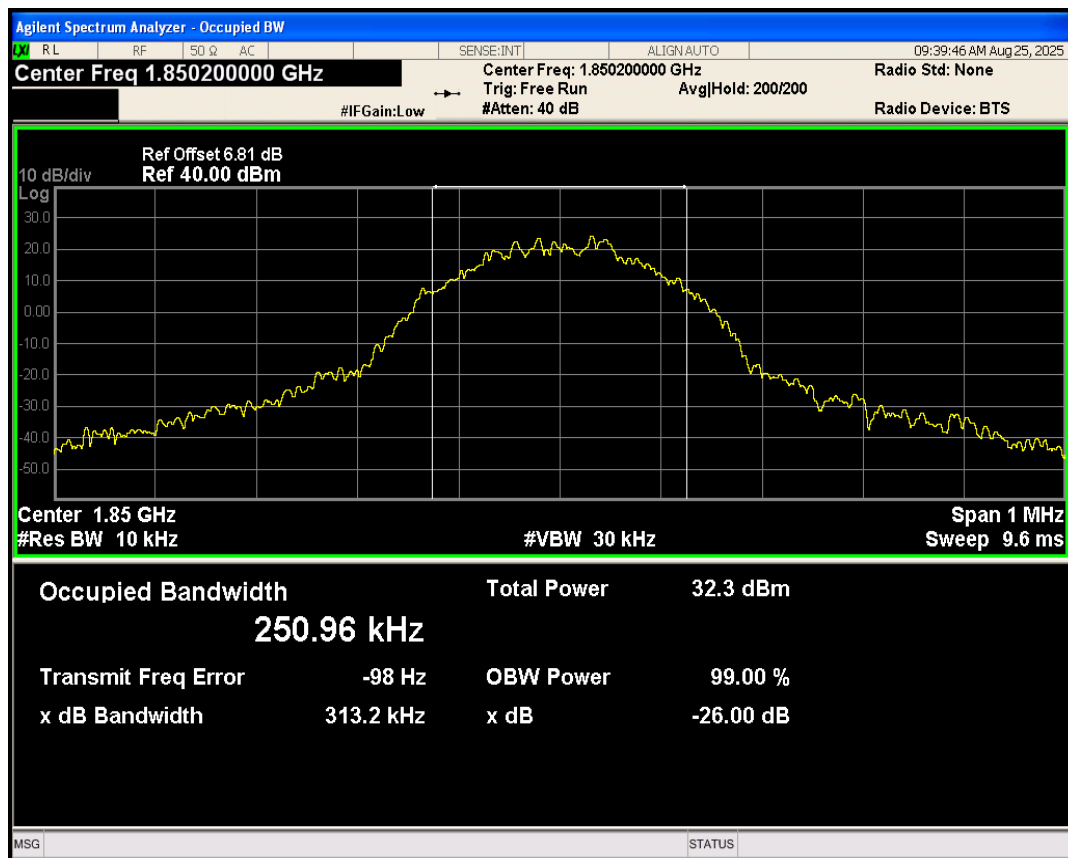


EGPRS1900 Channel=661

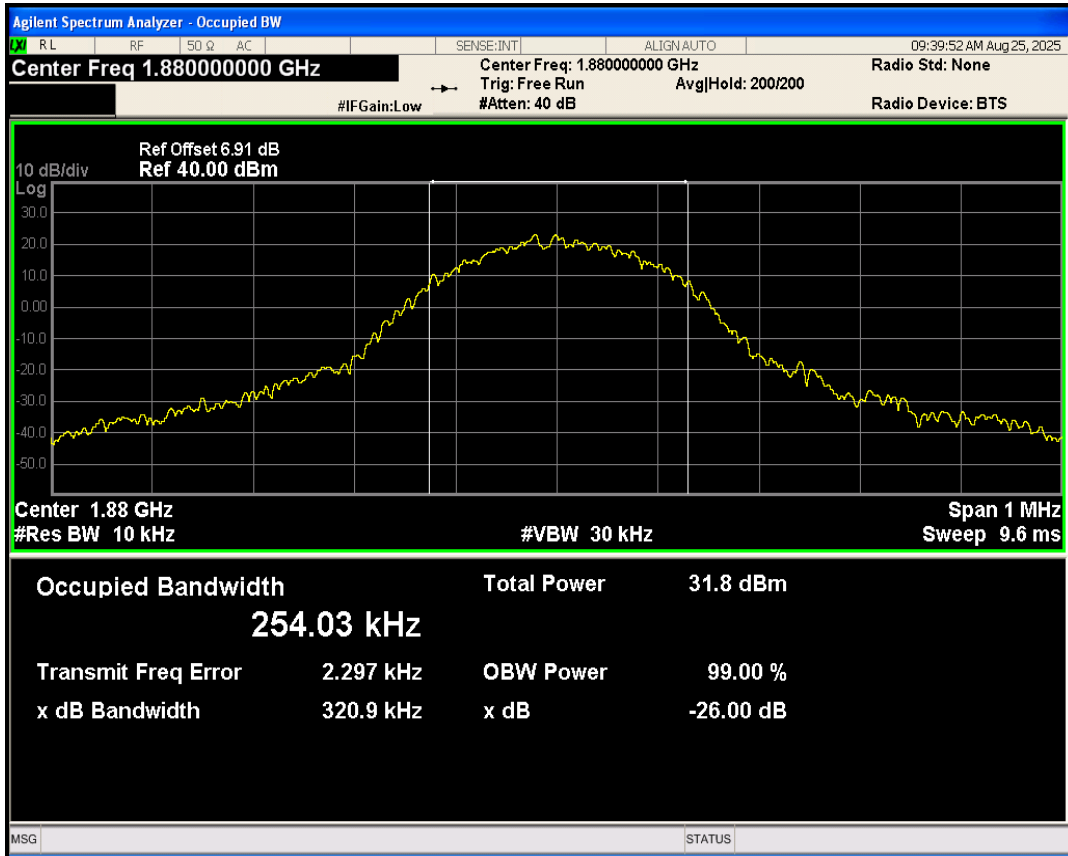


EGPRS1900 Channel=810

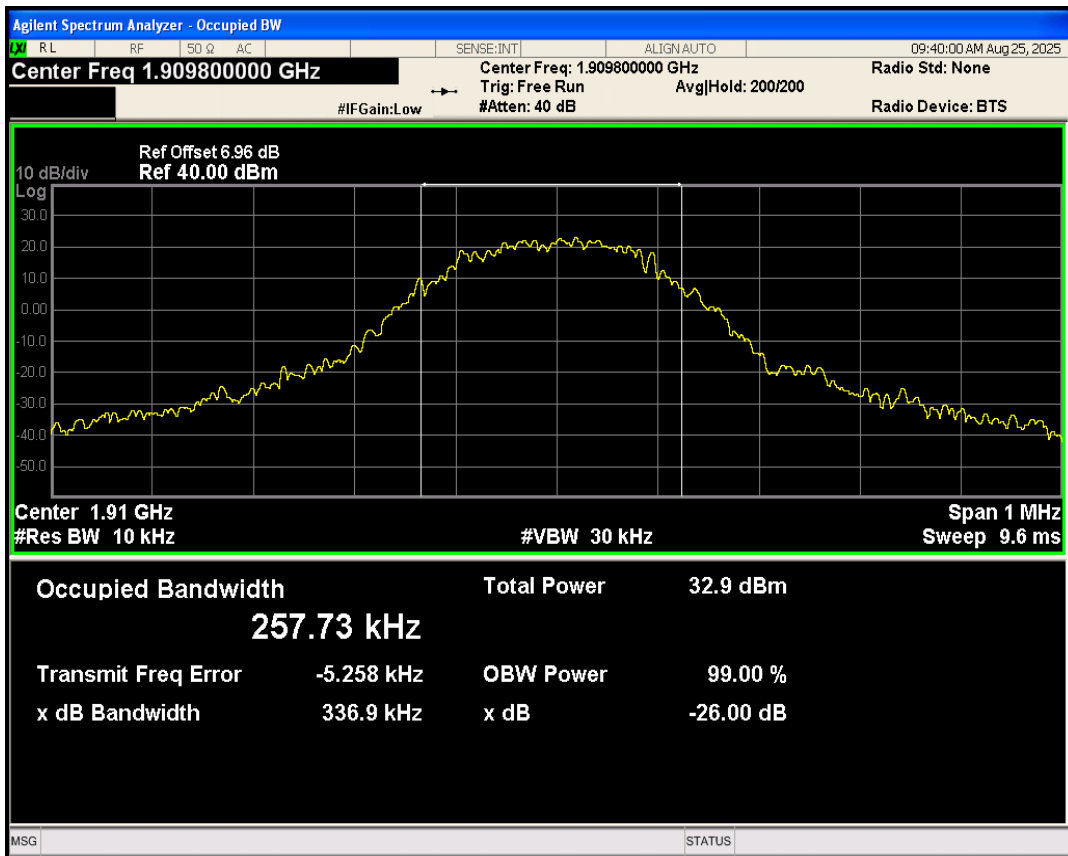


EGPRS850 Channel=128

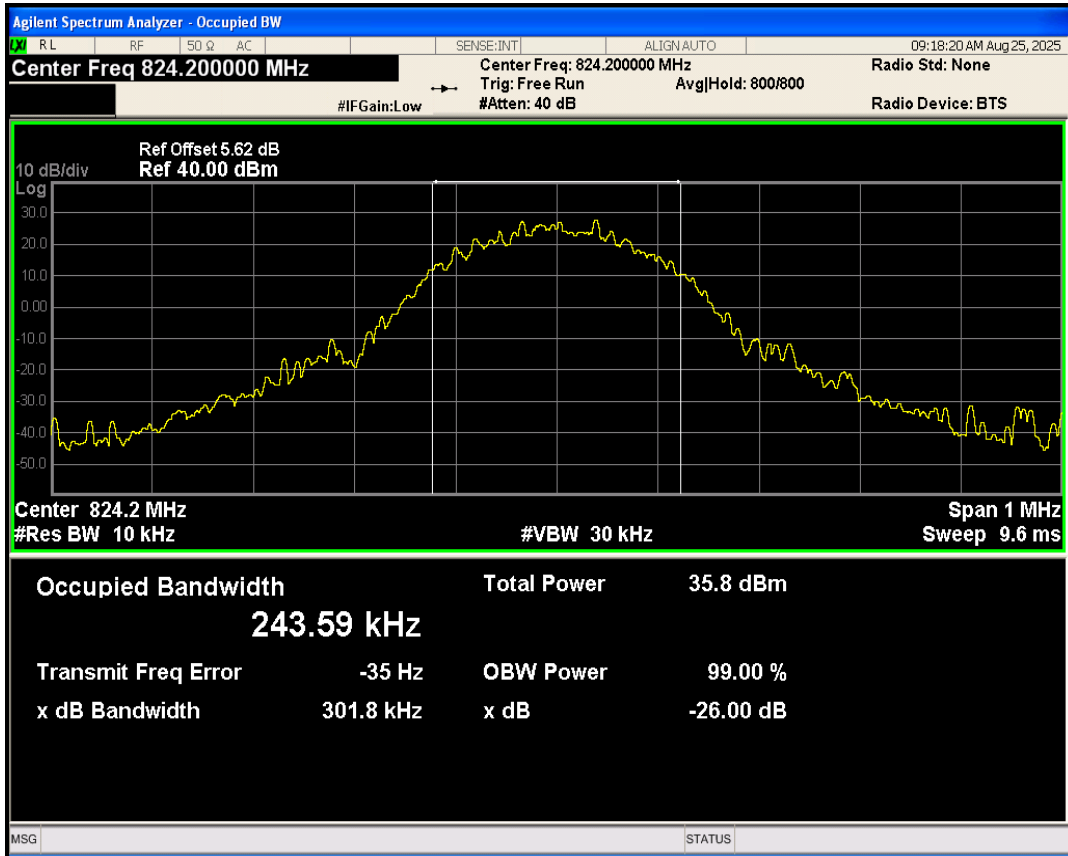

EGPRS850 Channel=189

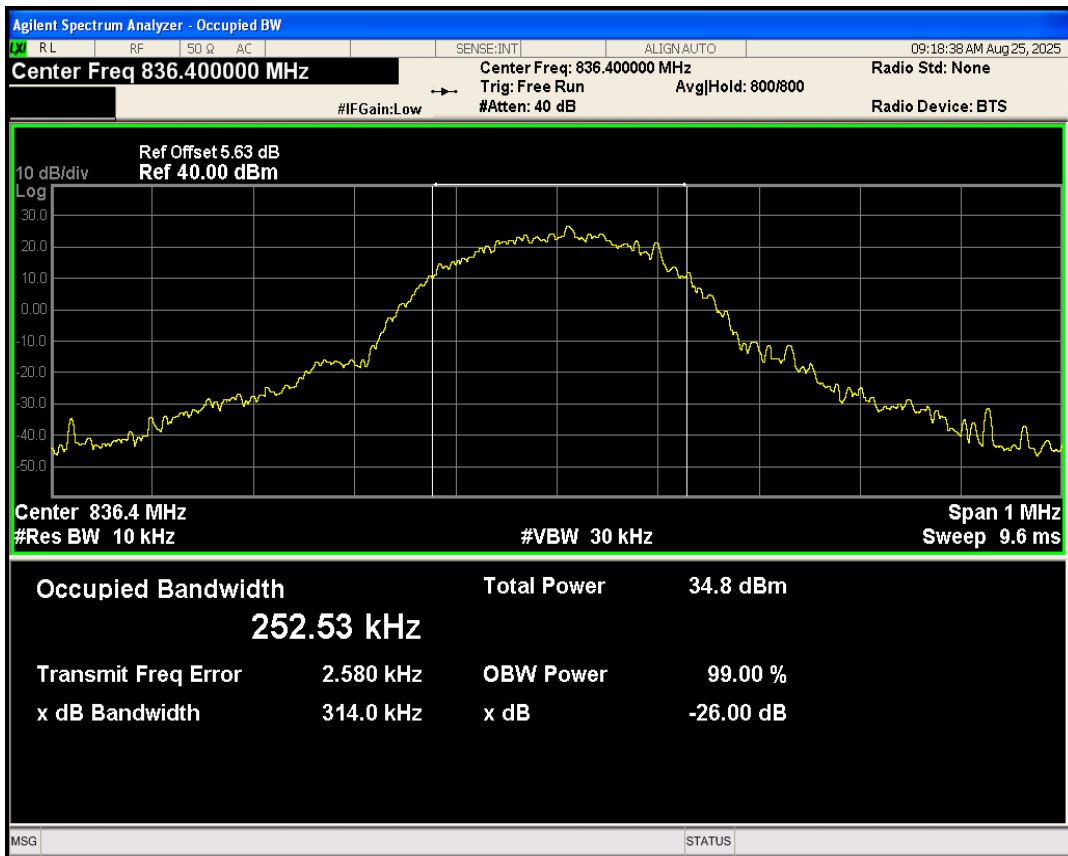


EGPRS850 Channel=251

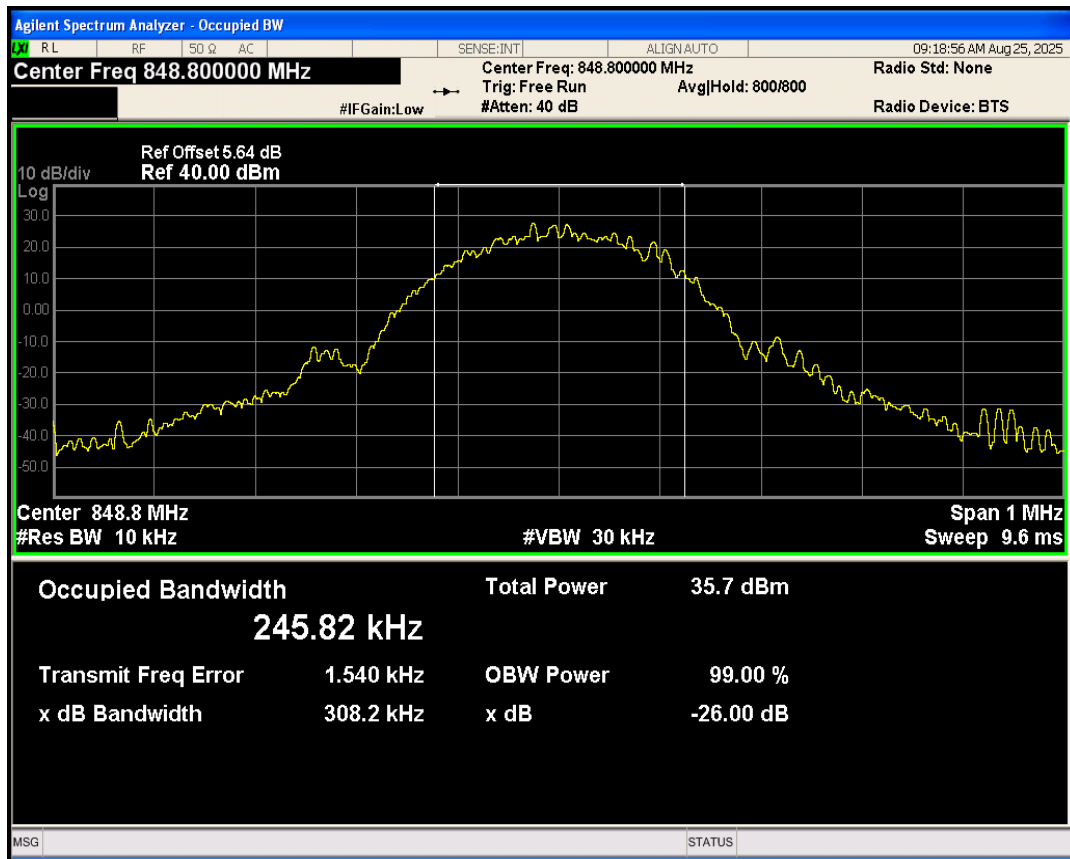


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.97	-38.64	-13	PASS
EGPRS1900	810	1909.8	1910.01	-33.85	-13	PASS
EGPRS850	128	824.2	823.96	-36.14	-13	PASS
EGPRS850	251	848.8	849.01	-34.02	-13	PASS


EGPRS1900 Channel=512

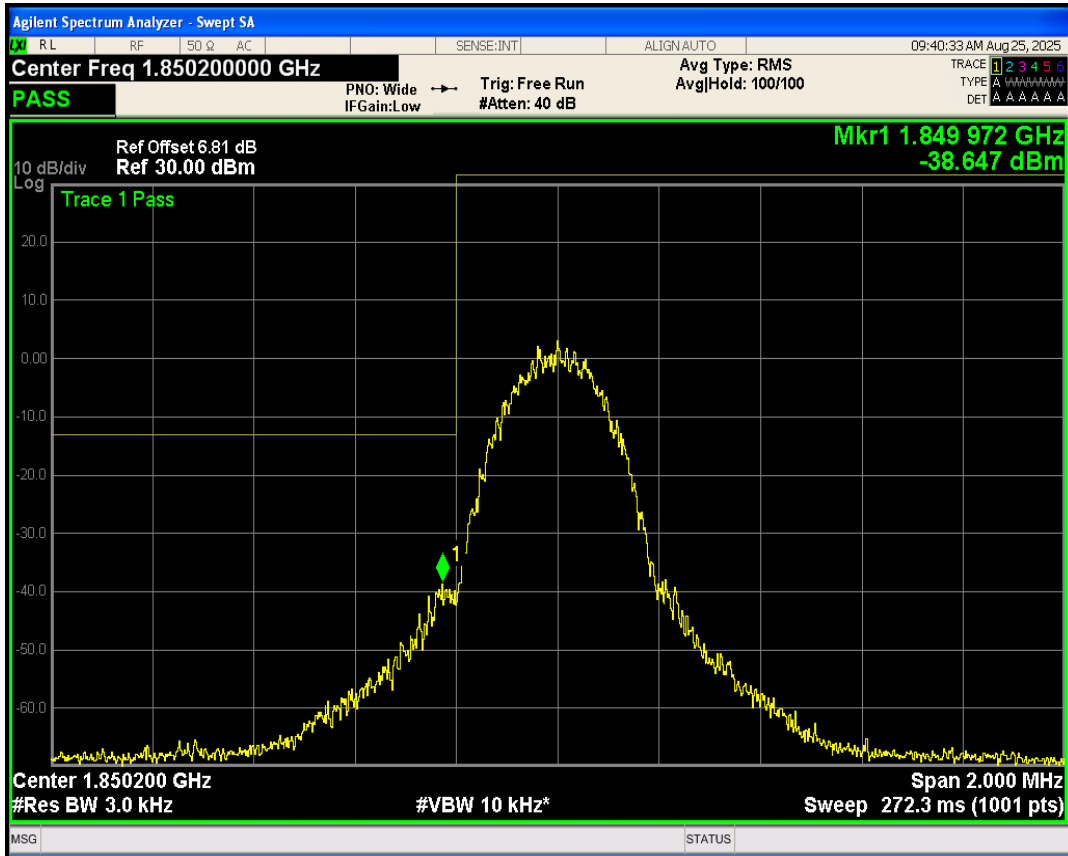


EGPRS1900 Channel=810

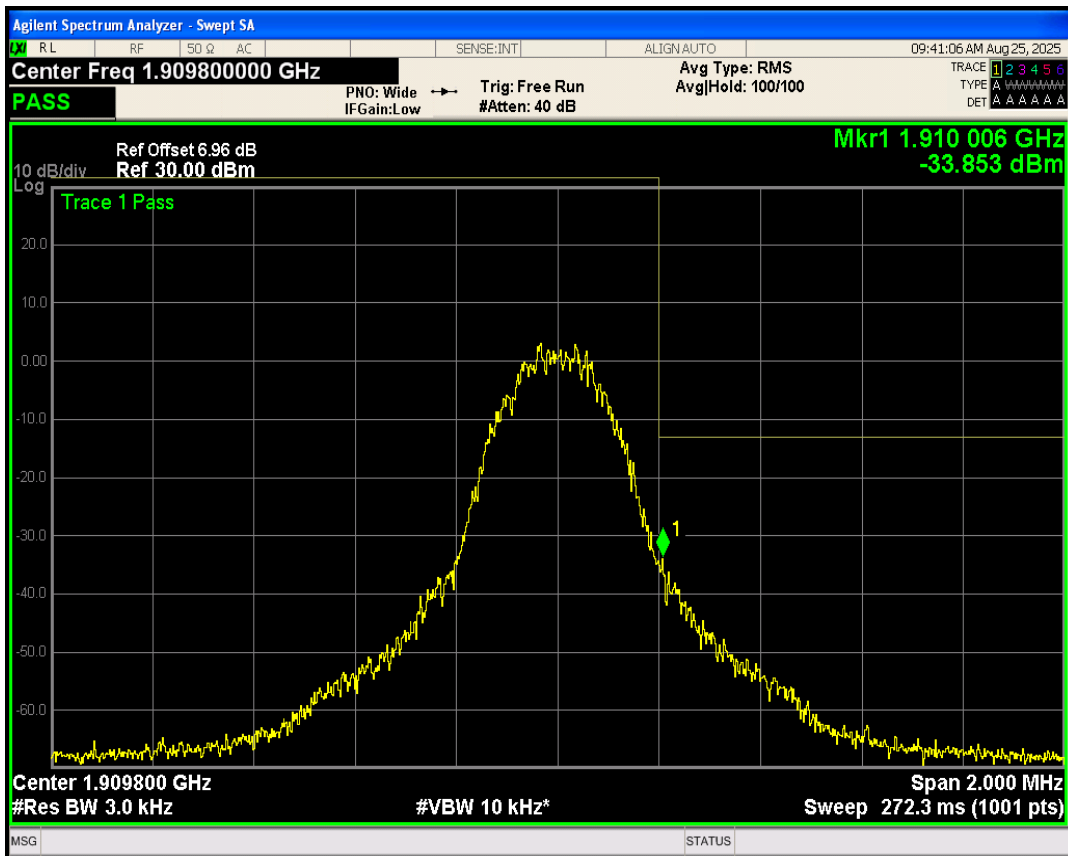

EGPRS850 Channel=128

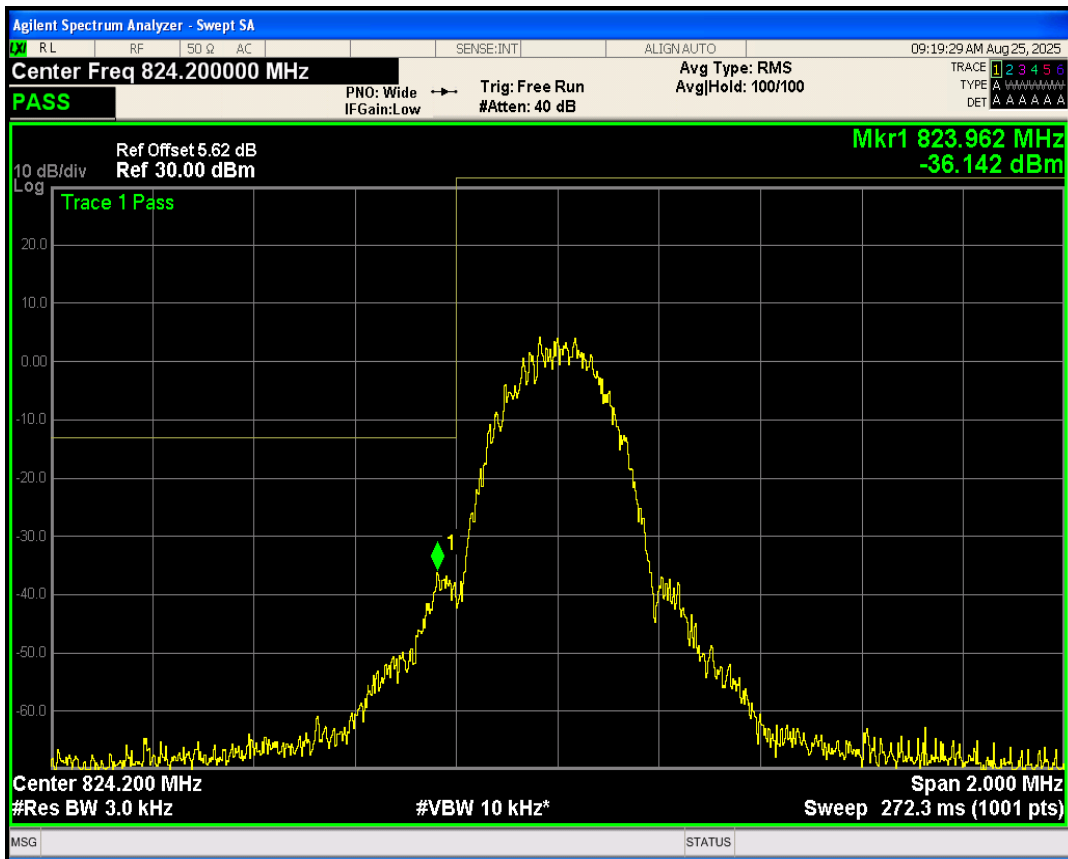


EGPRS850 Channel=251

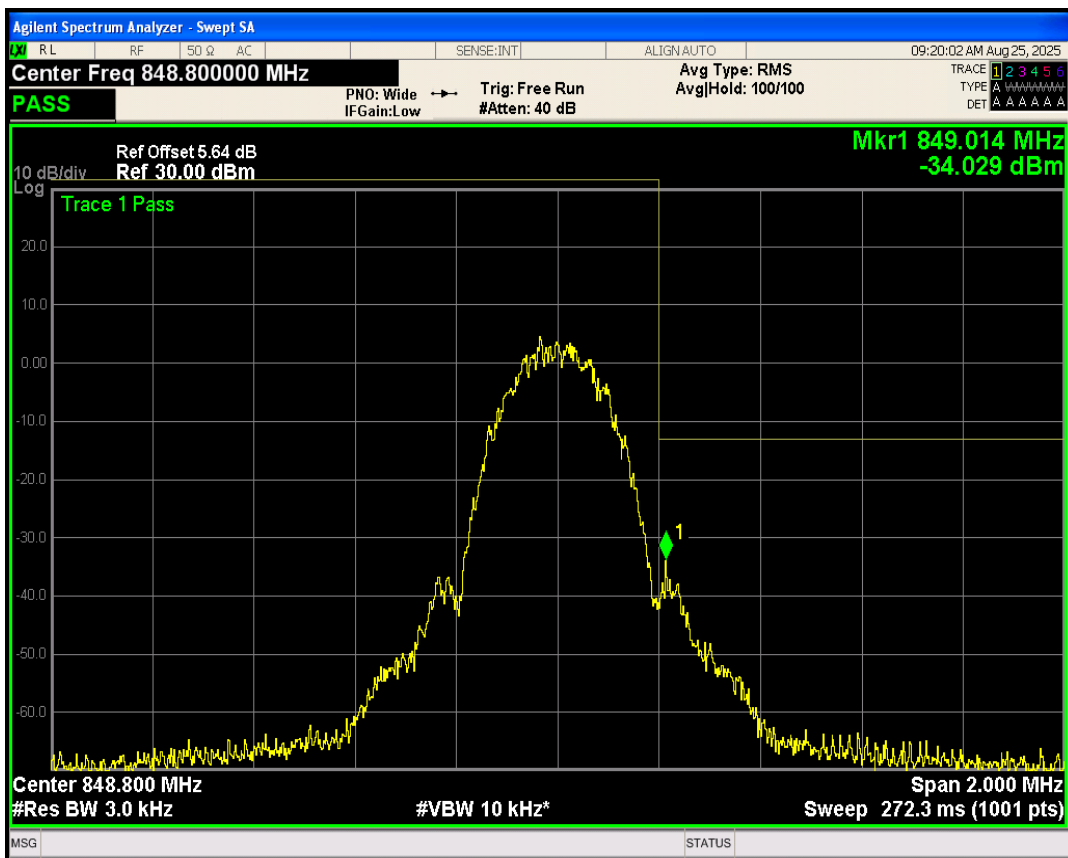


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	24900.55	-20.76	-13	PASS
EGPRS1900	661	1880	25660.90	-20.21	-13	PASS
EGPRS1900	810	1909.8	25213.56	-20.29	-13	PASS
EGPRS850	128	824.2	24852.24	-21.02	-13	PASS
EGPRS850	189	836.4	25675.46	-21.12	-13	PASS
EGPRS850	251	848.8	24901.21	-21.08	-13	PASS


EGPRS1900 Channel=512

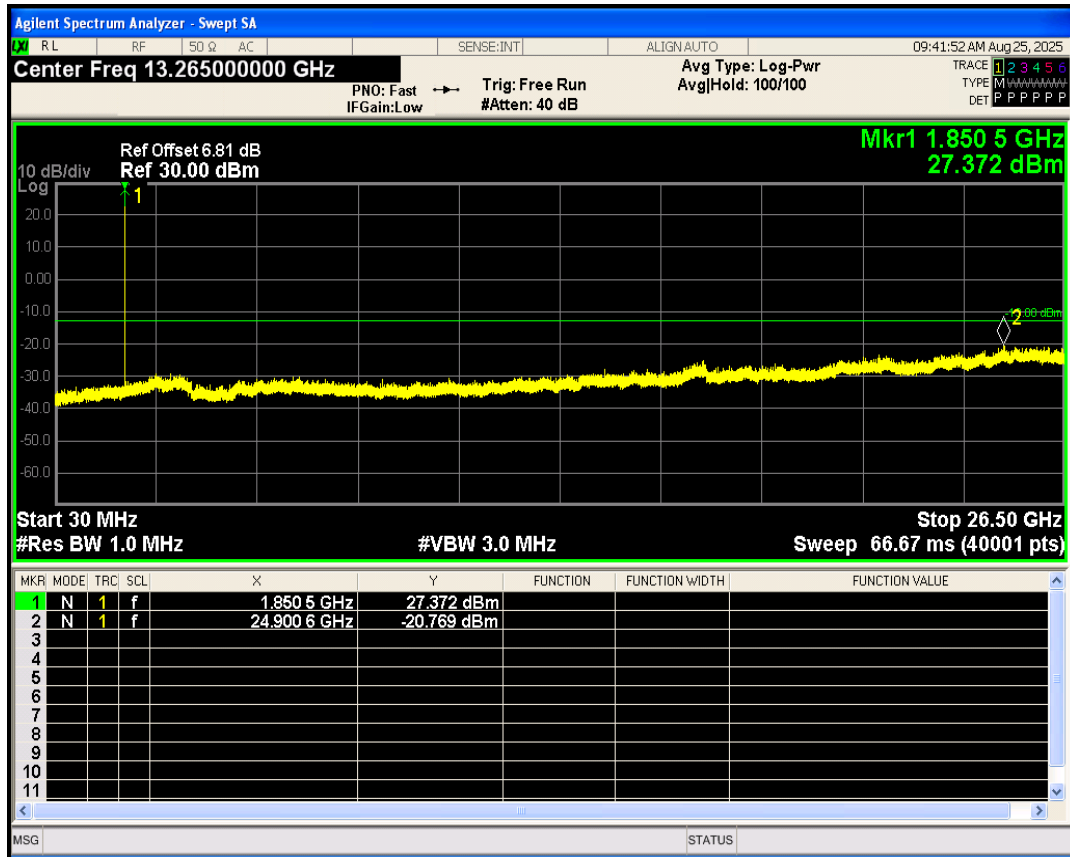


EGPRS1900 Channel=661

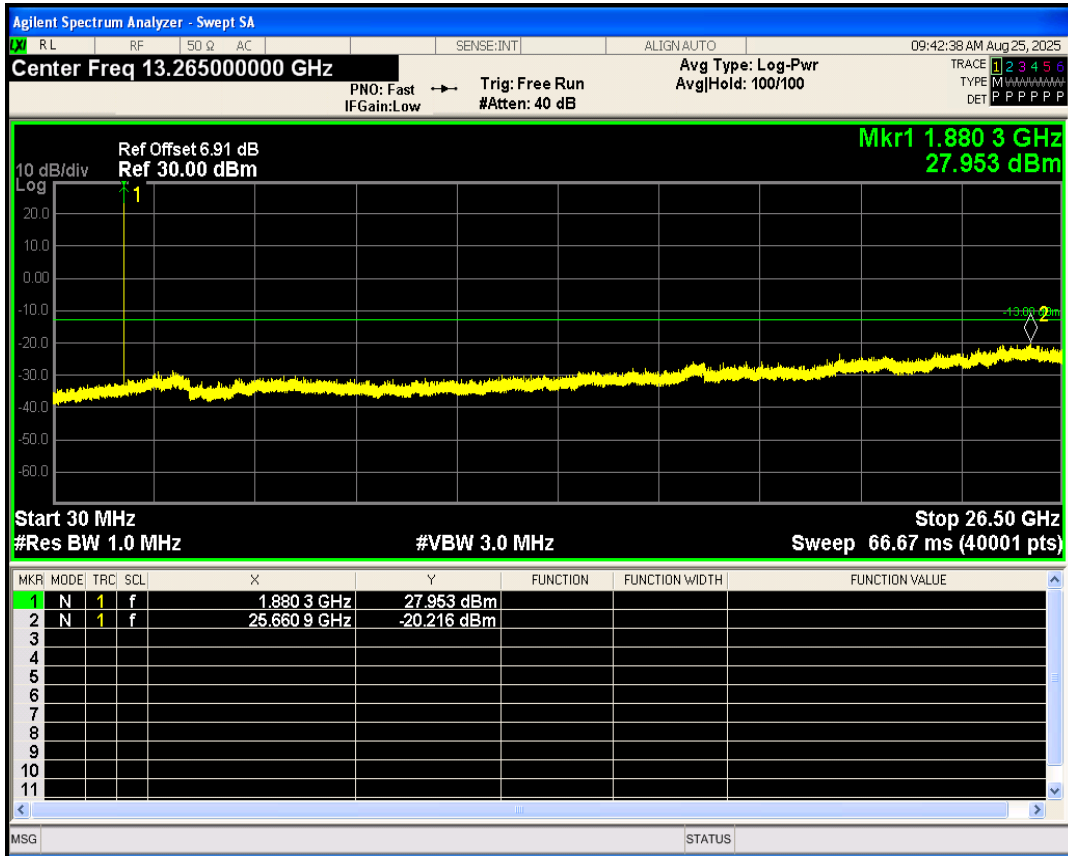


EGPRS1900 Channel=810

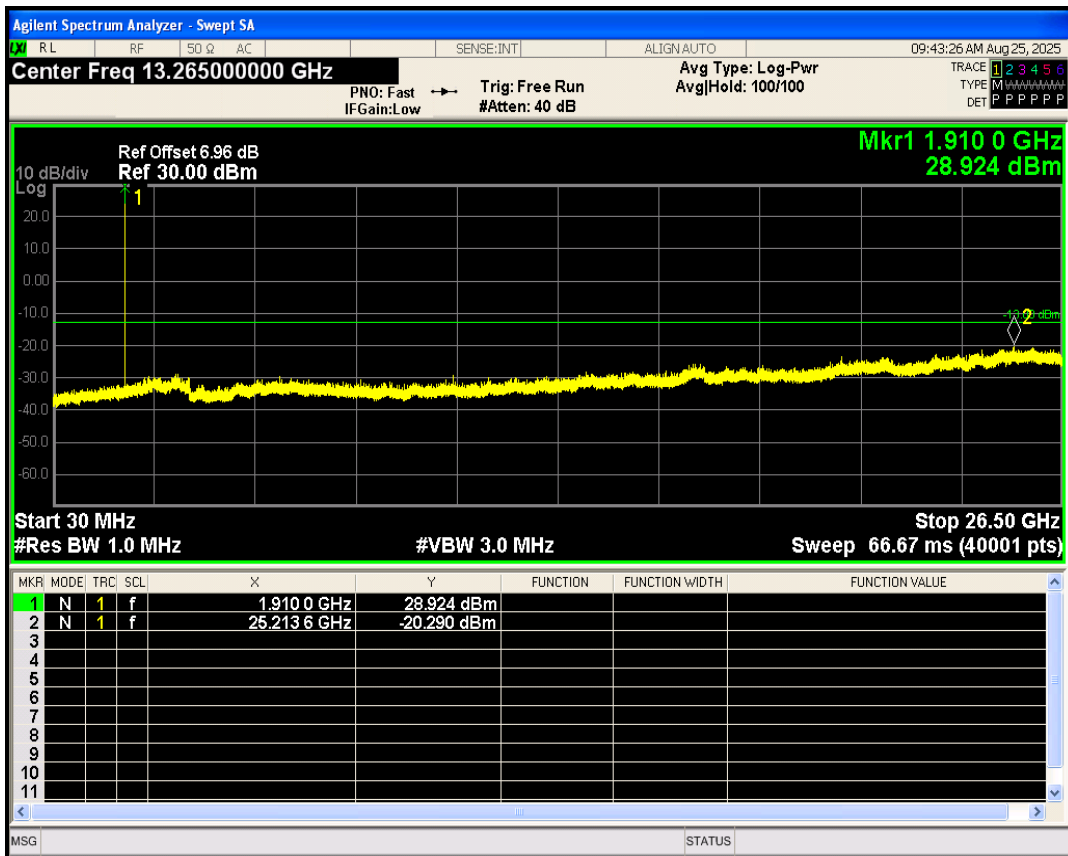


EGPRS850 Channel=128

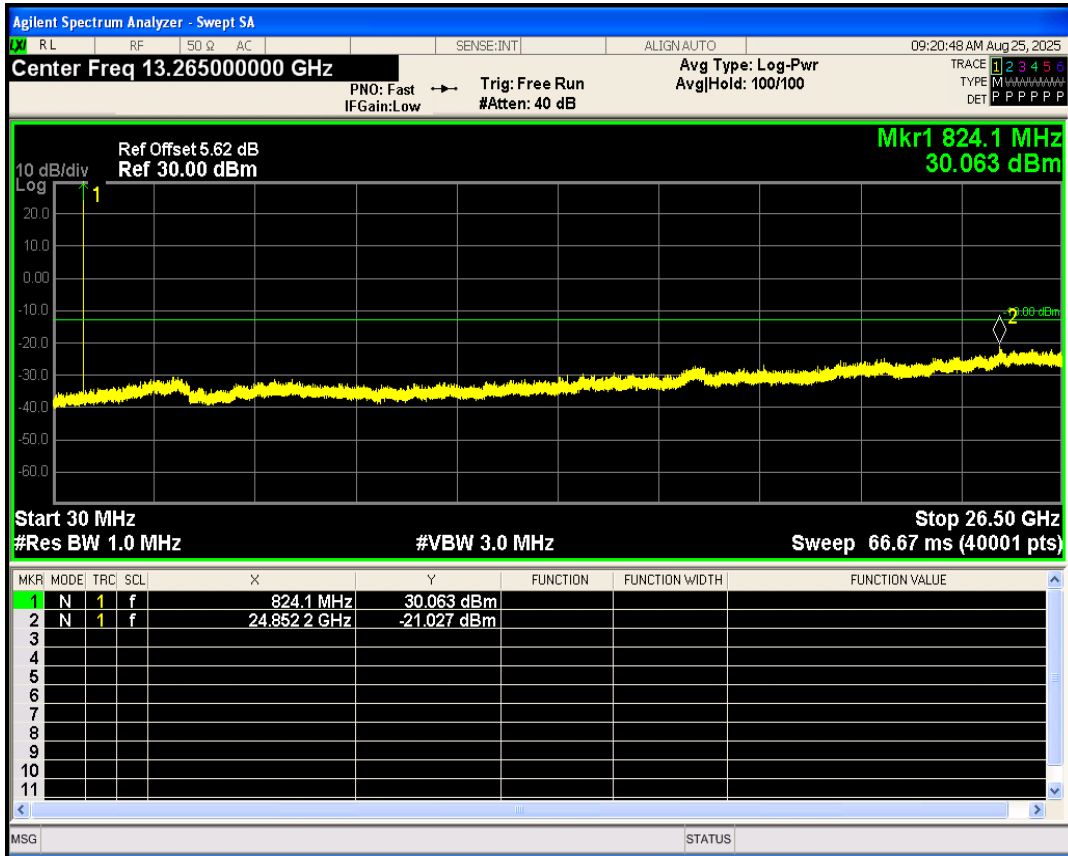

EGPRS850 Channel=189

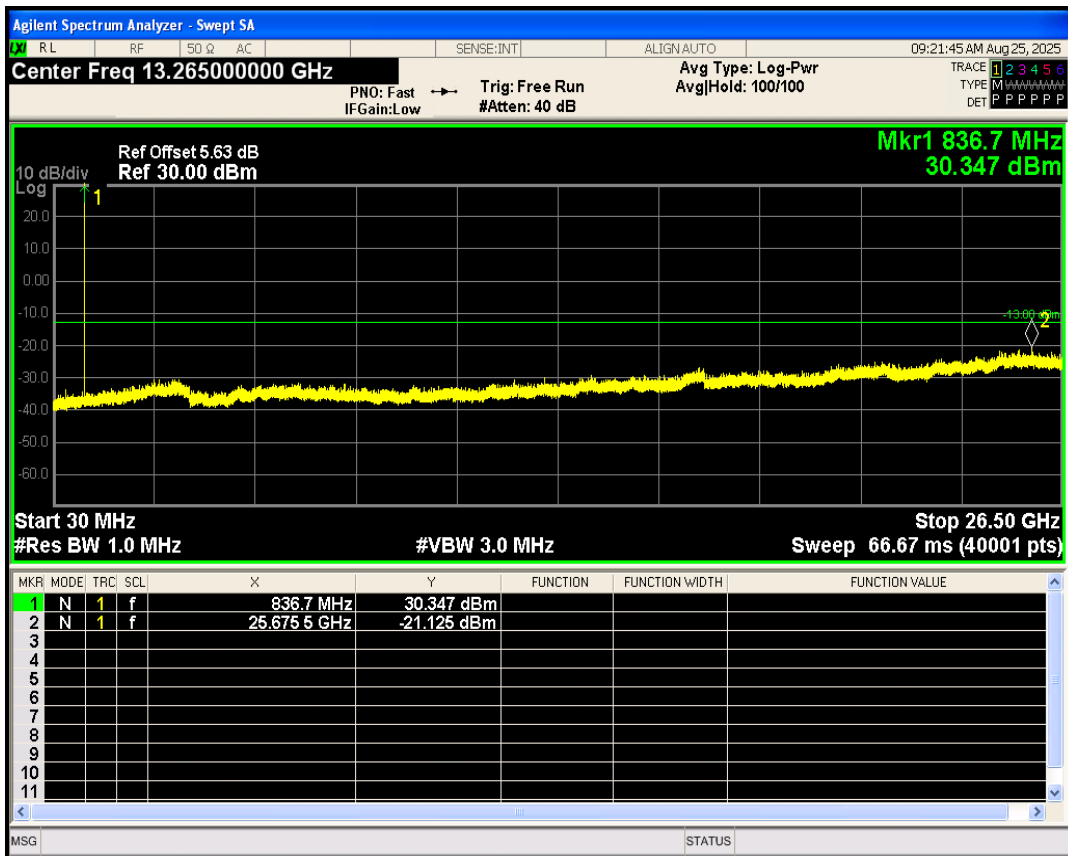


EGPRS850 Channel=251

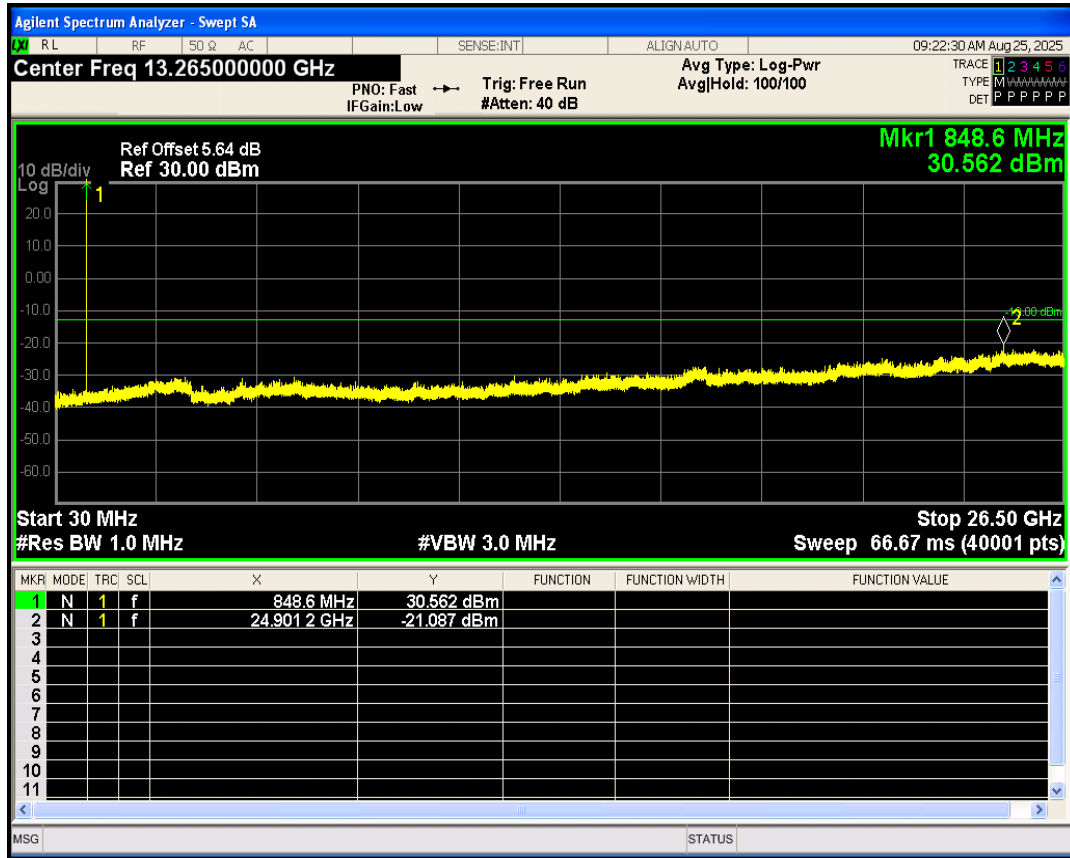


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.65	13	PASS
GPRS1900	661	1880	2.66	13	PASS
GPRS1900	810	1909.8	2.67	13	PASS
GPRS850	128	824.2	2.64	13	PASS
GPRS850	189	836.4	2.64	13	PASS
GPRS850	251	848.8	2.64	13	PASS


GPRS1900 Channel=512

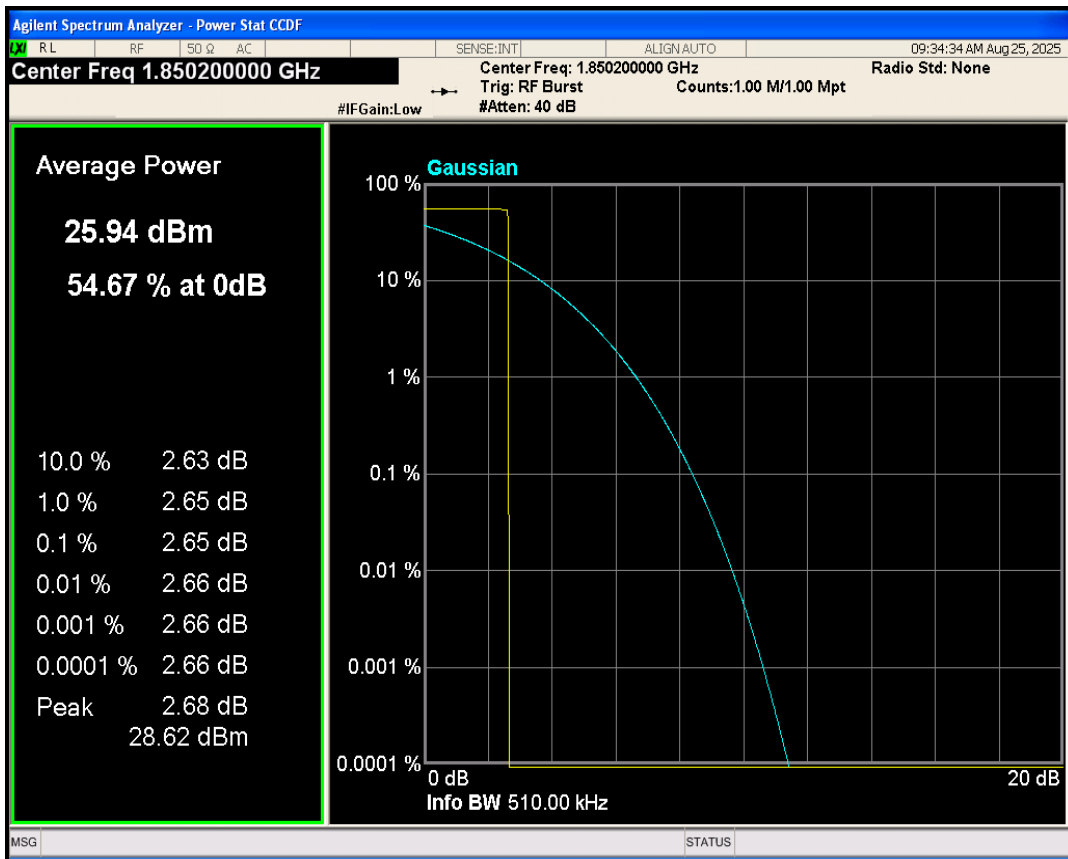


GPRS1900 Channel=661

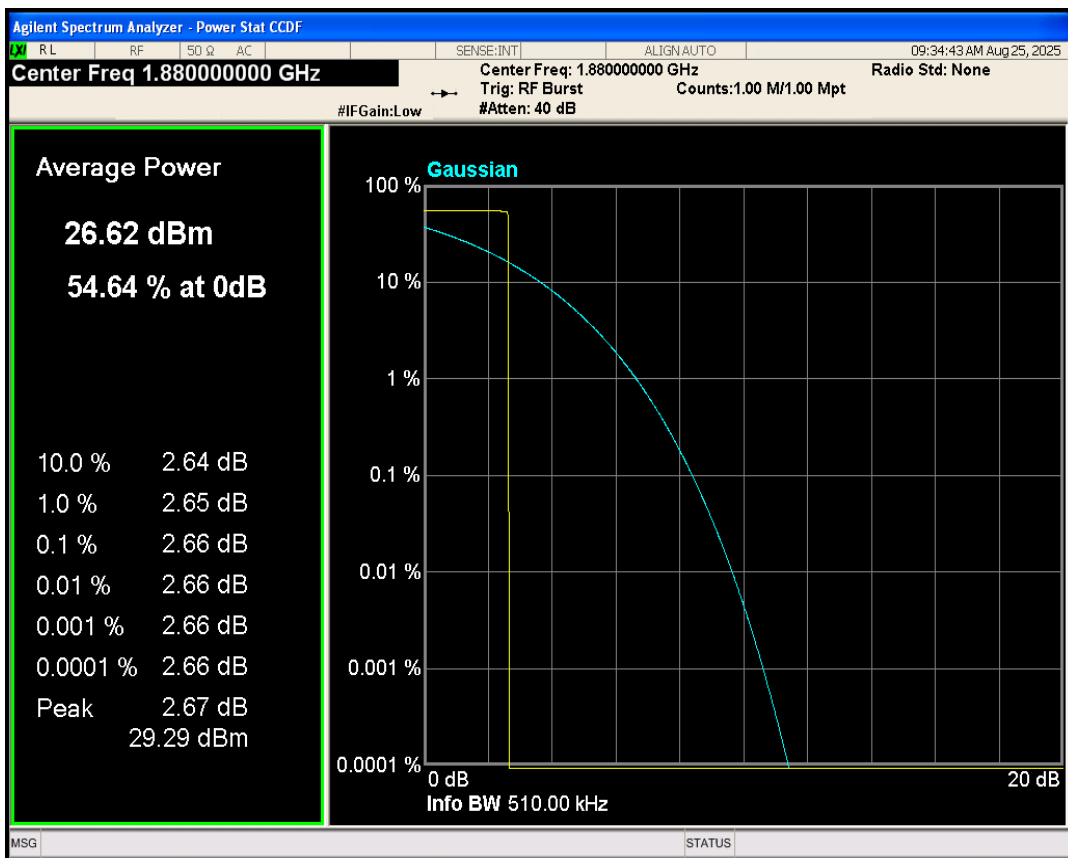


GPRS1900 Channel=810

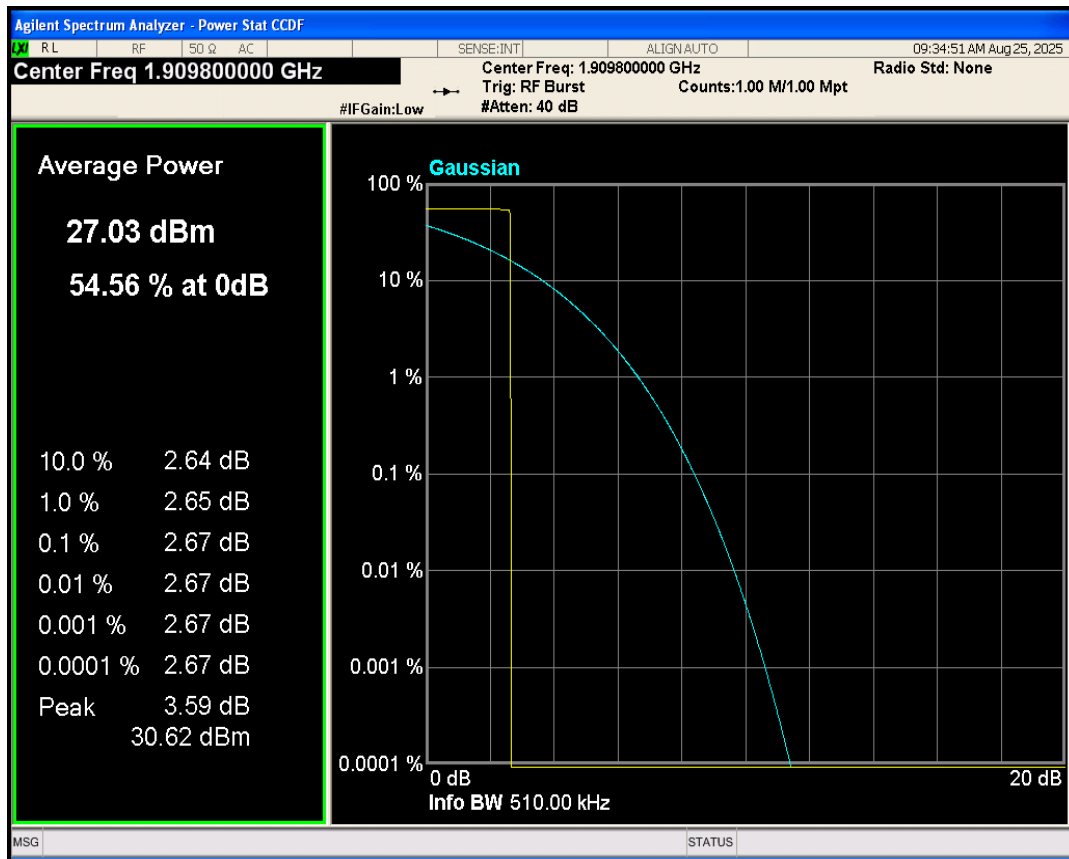


GPRS850 Channel=128

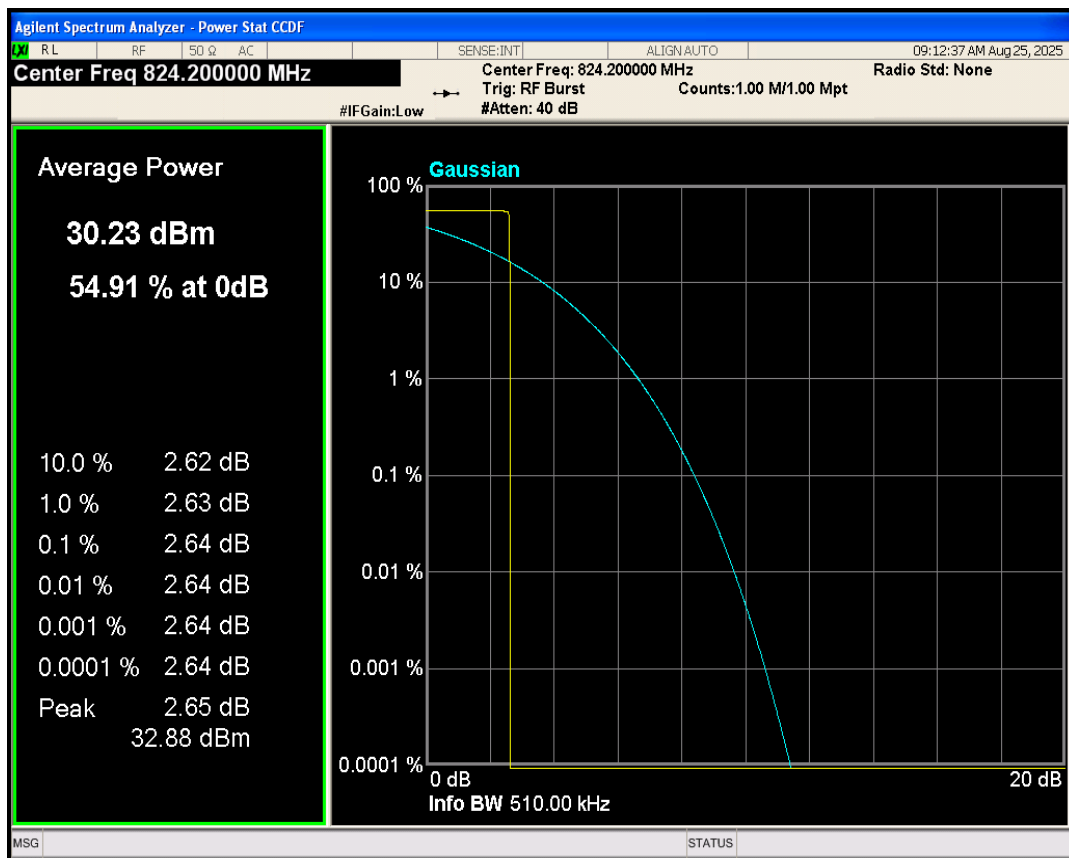

GPRS850 Channel=189

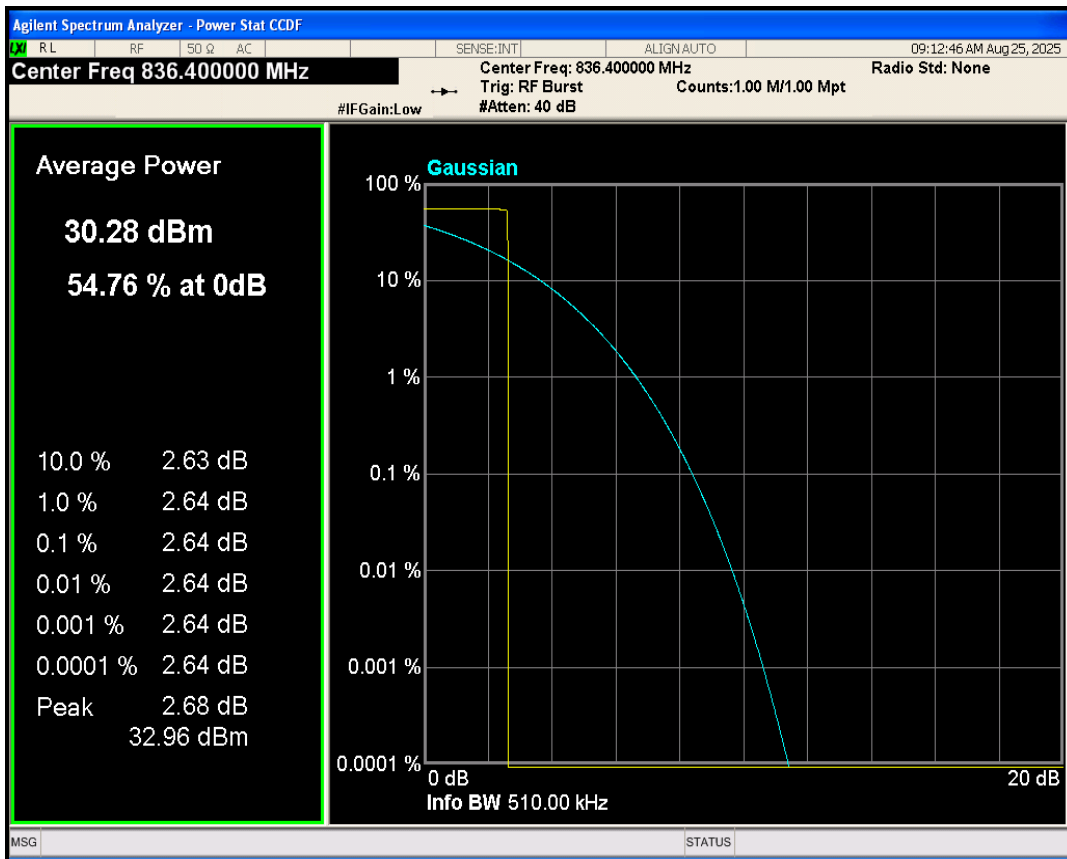


GPRS850 Channel=251

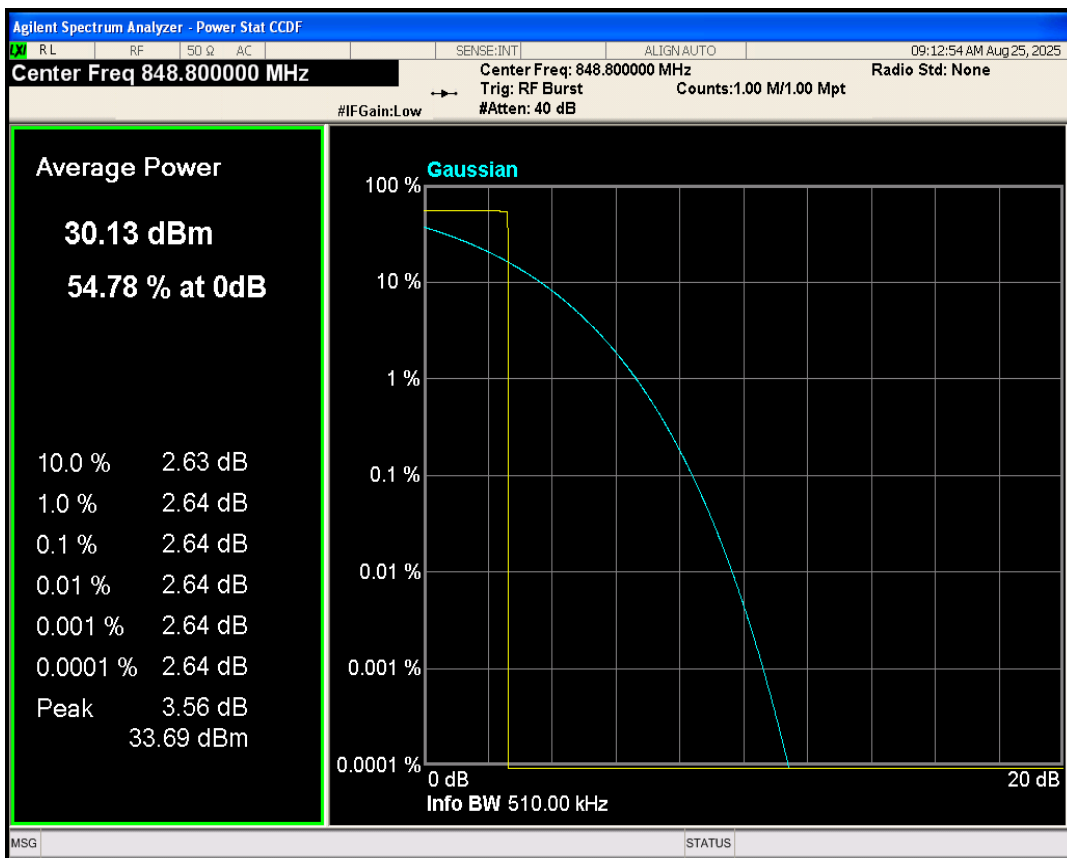


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	241.492	316.813	PASS
GPRS1900	661	1880	245.869	312.479	PASS
GPRS1900	810	1909.8	238.946	304.531	PASS
GPRS850	128	824.2	243.486	320.060	PASS
GPRS850	189	836.4	244.349	314.736	PASS
GPRS850	251	848.8	240.038	314.992	PASS


GPRS1900 Channel=512

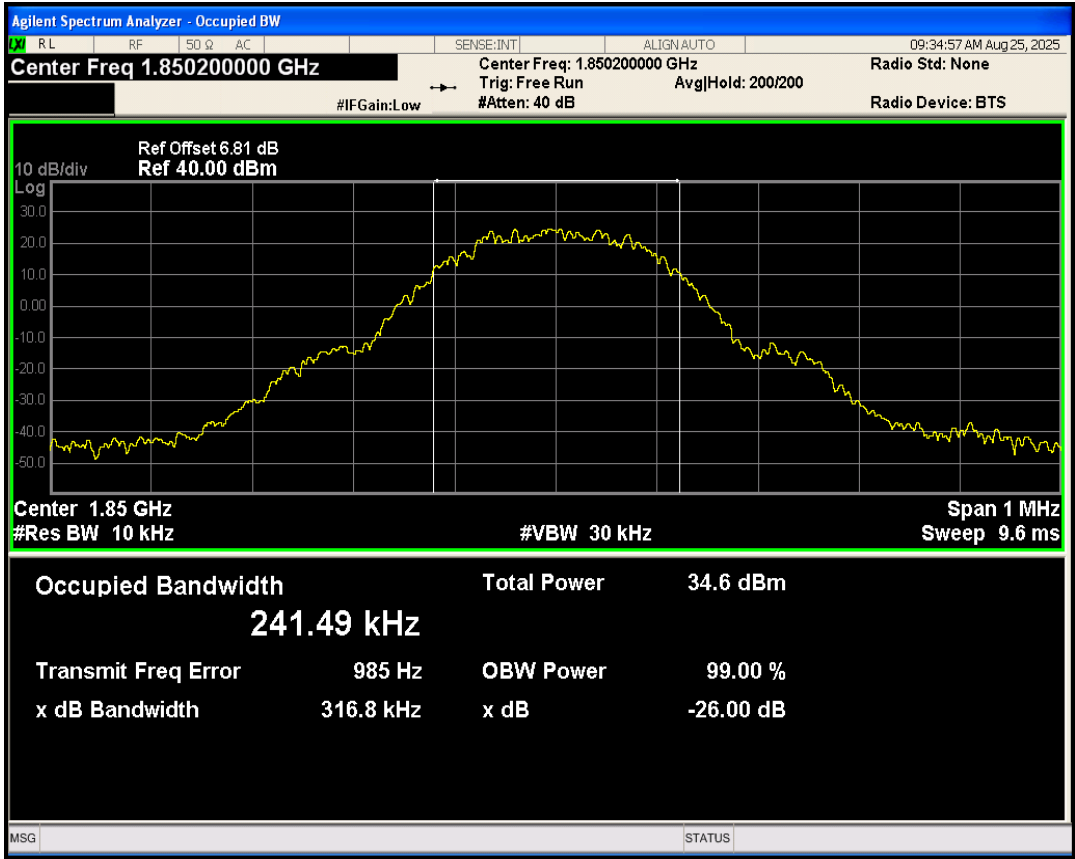


GPRS1900 Channel=661

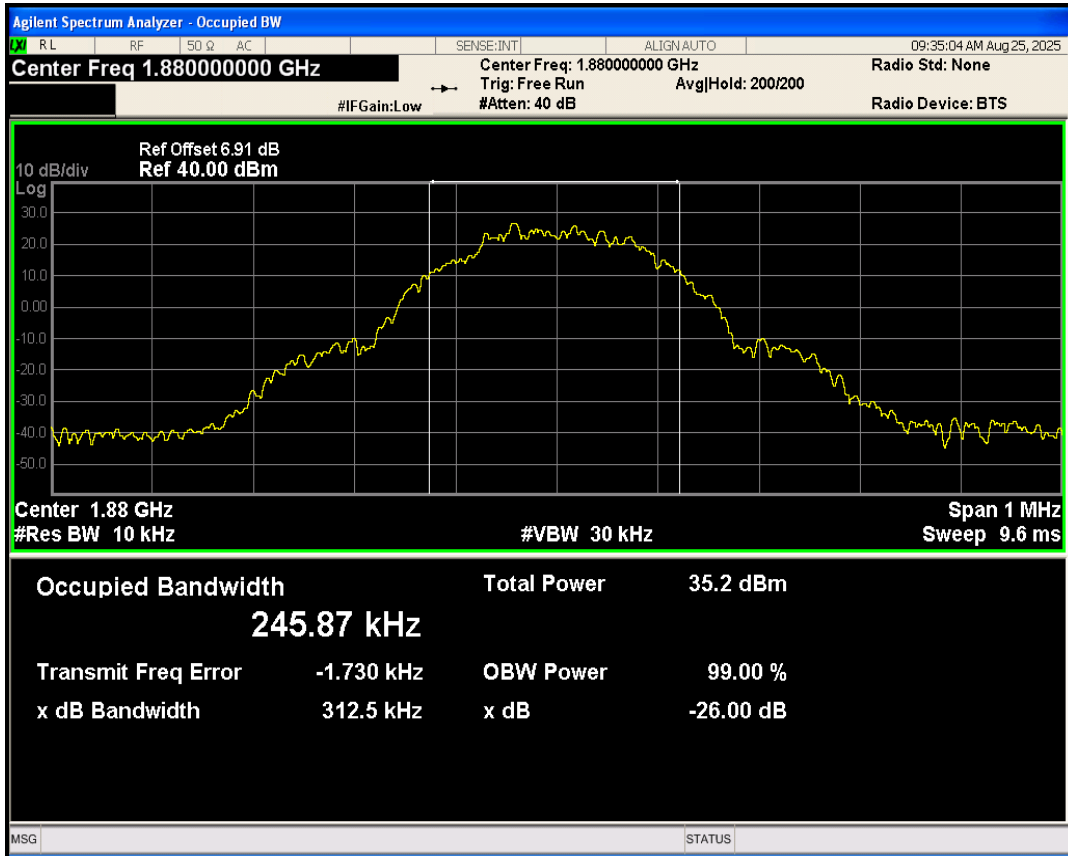


GPRS1900 Channel=810

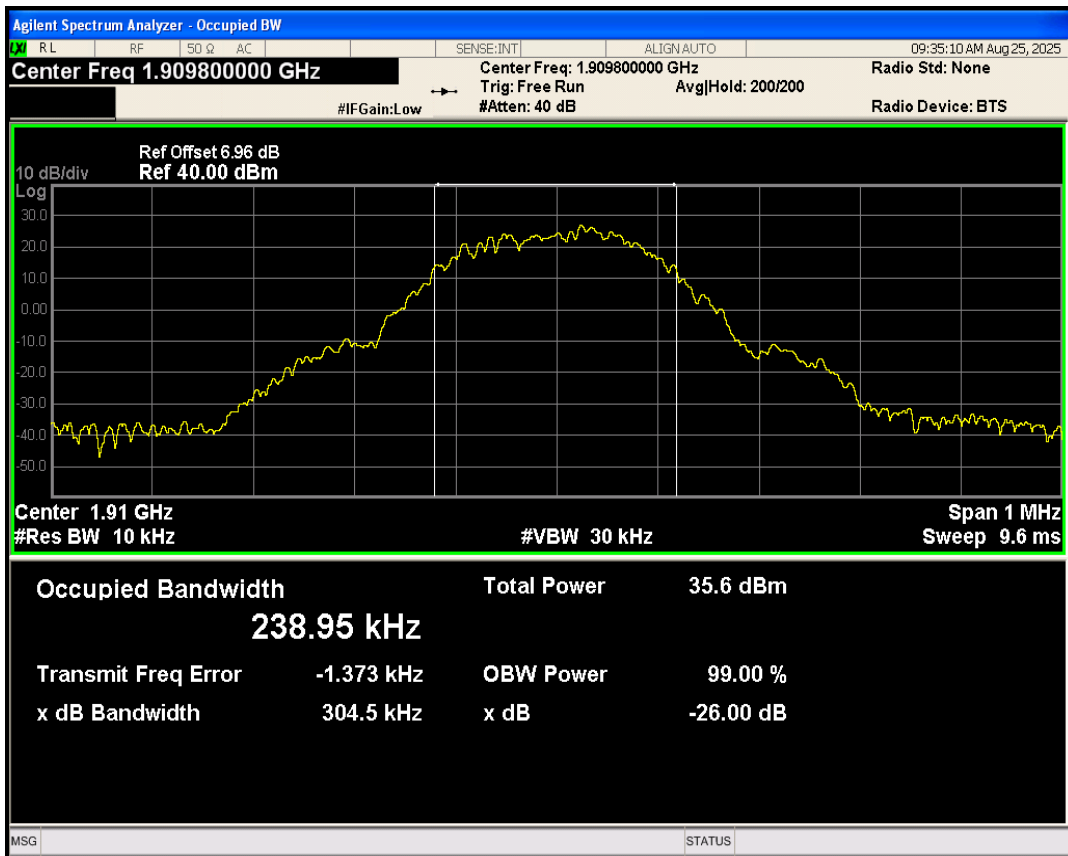


GPRS850 Channel=128

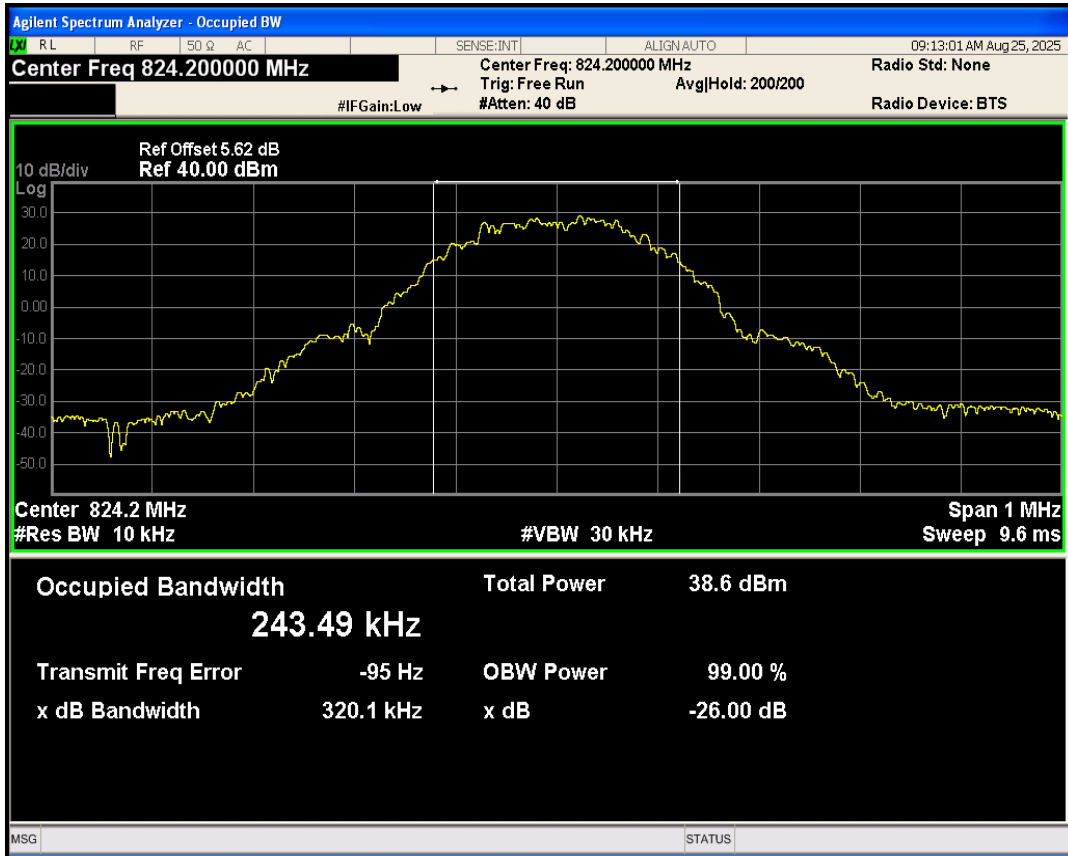

GPRS850 Channel=189

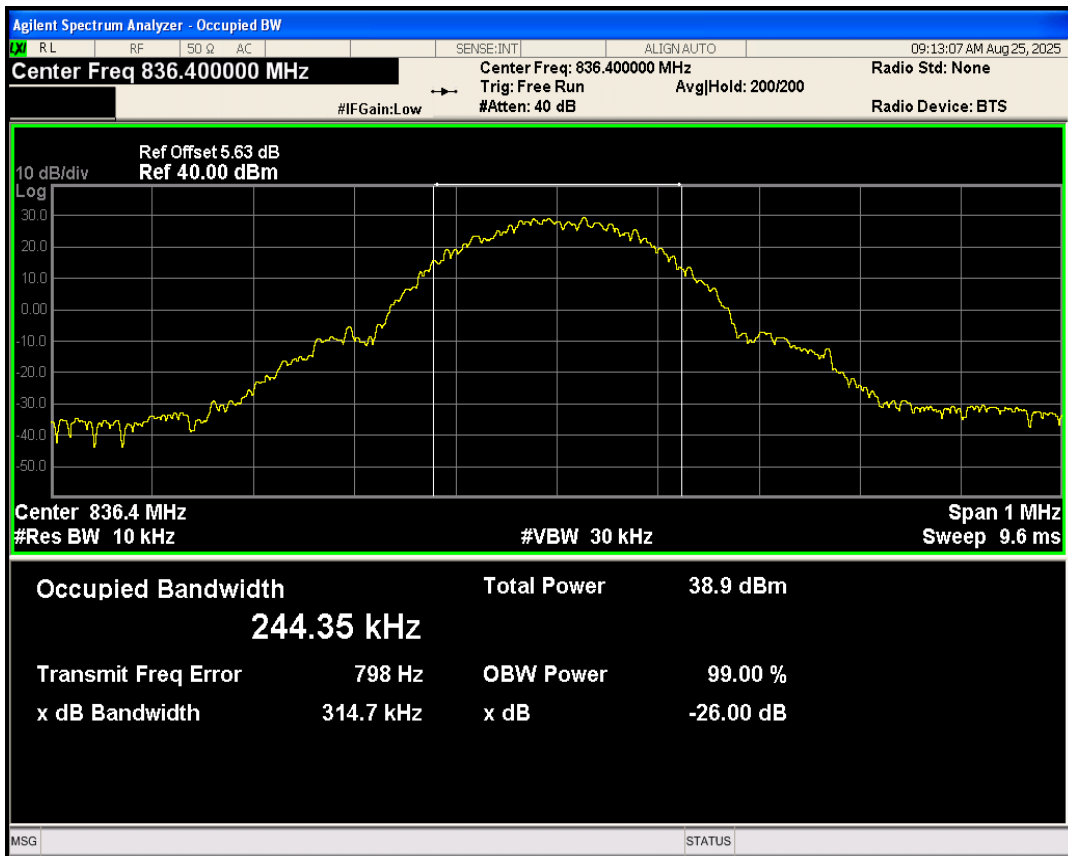


GPRS850 Channel=251

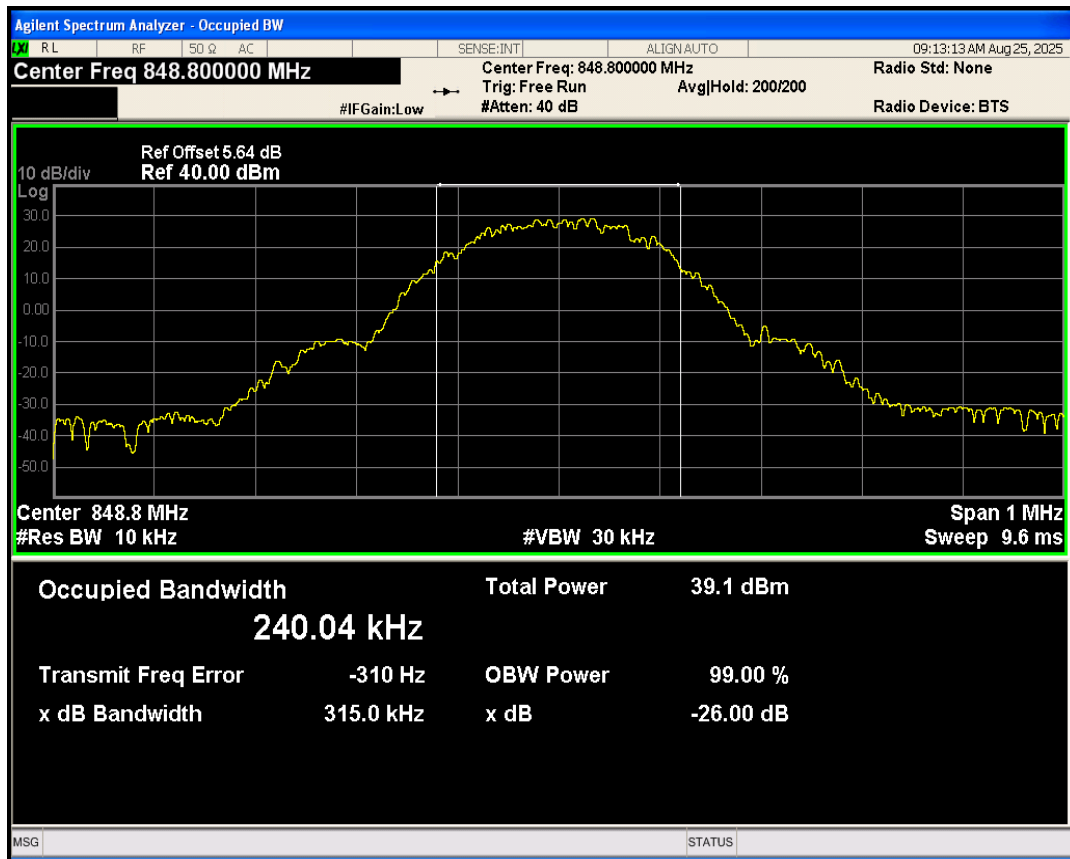


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-32.81	-13	PASS
GPRS1900	810	1909.8	1910.01	-31.78	-13	PASS
GPRS850	128	824.2	823.98	-28.29	-13	PASS
GPRS850	251	848.8	849.02	-27.09	-13	PASS


GPRS1900 Channel=512

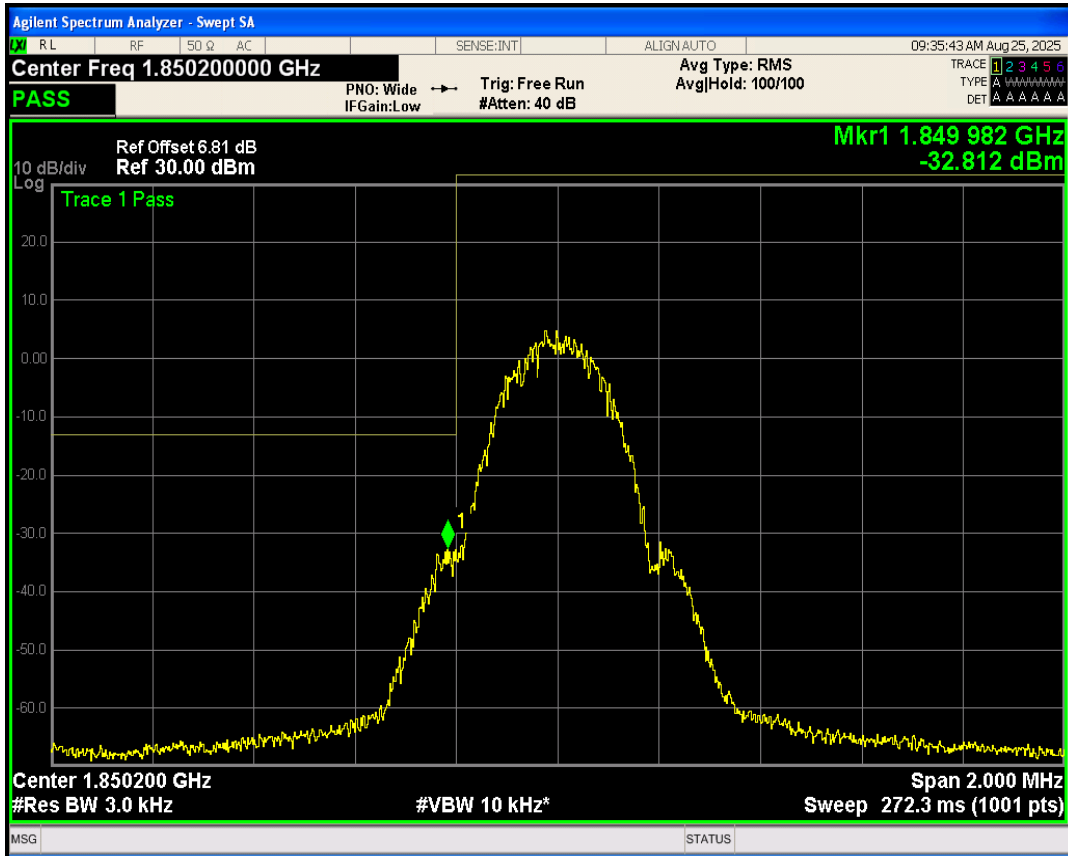


GPRS1900 Channel=810

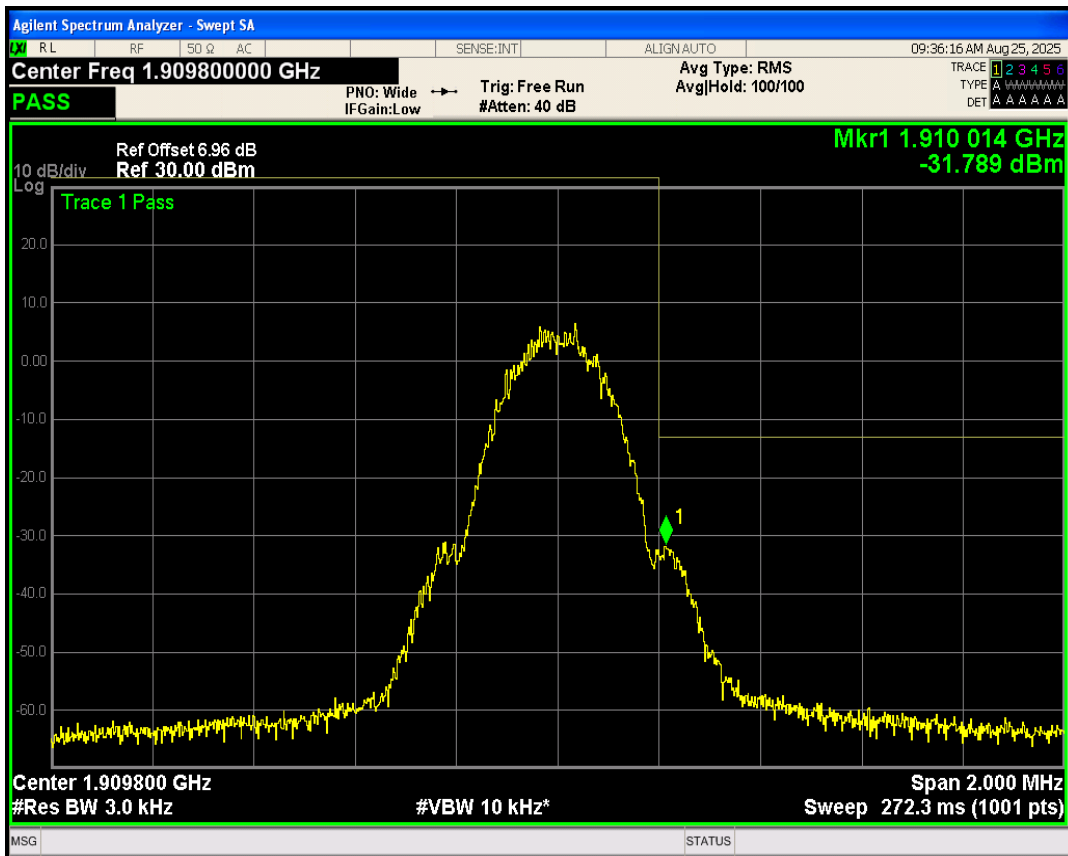

GPRS850 Channel=128

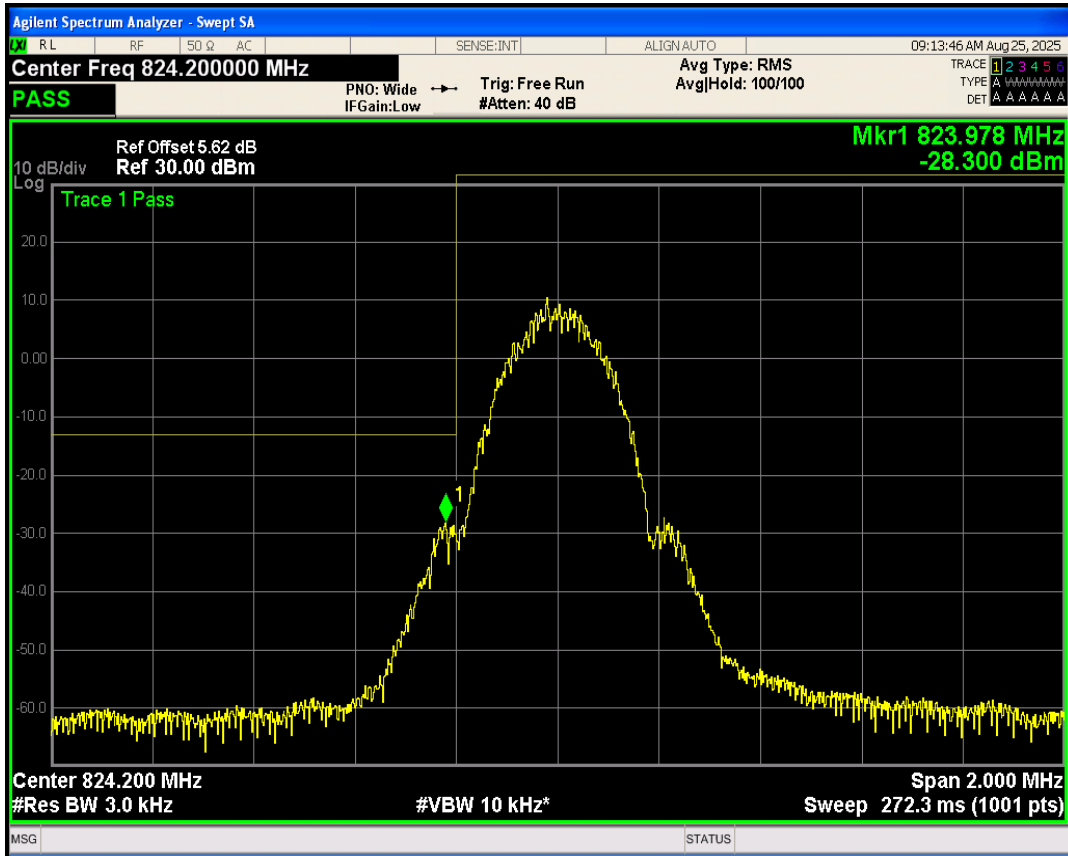


GPRS850 Channel=251

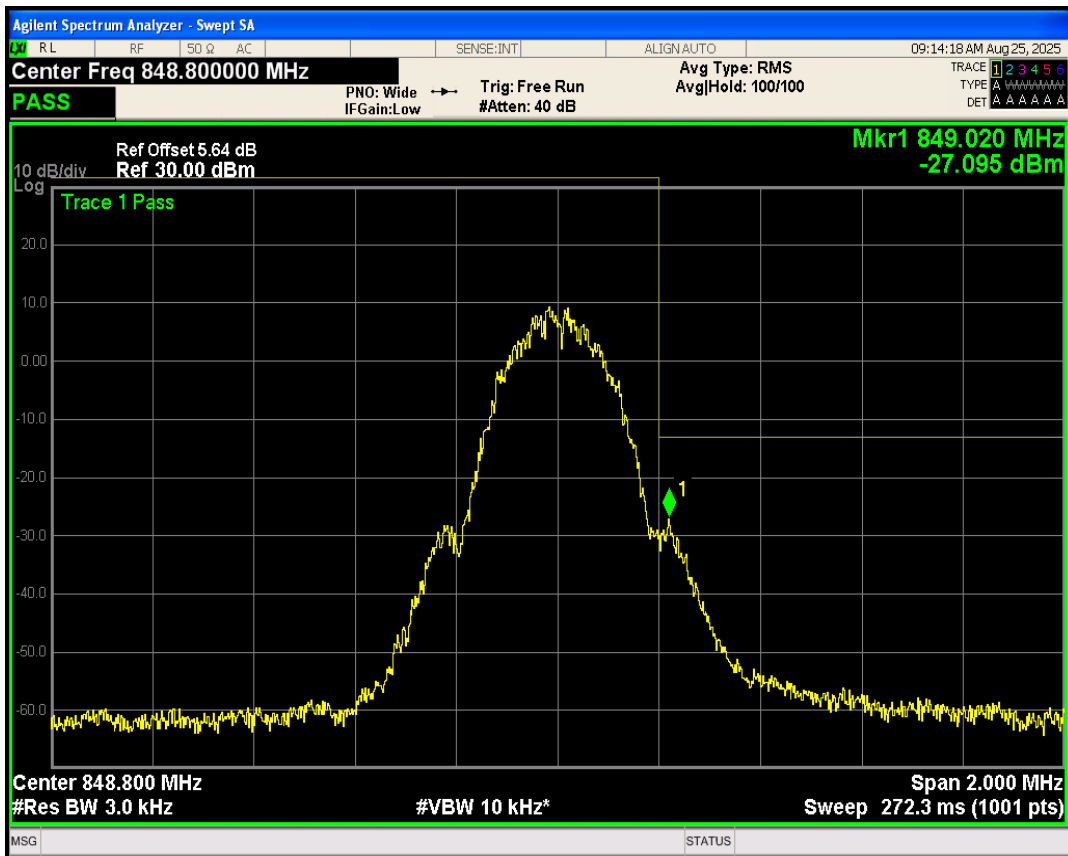


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	26013.61	-20.13	-13	PASS
GPRS1900	661	1880	25472.30	-20.58	-13	PASS
GPRS1900	810	1909.8	25462.38	-20.42	-13	PASS
GPRS850	128	824.2	24730.48	-22.05	-13	PASS
GPRS850	189	836.4	24905.84	-21.86	-13	PASS
GPRS850	251	848.8	25587.45	-21.75	-13	PASS


GPRS1900 Channel=512

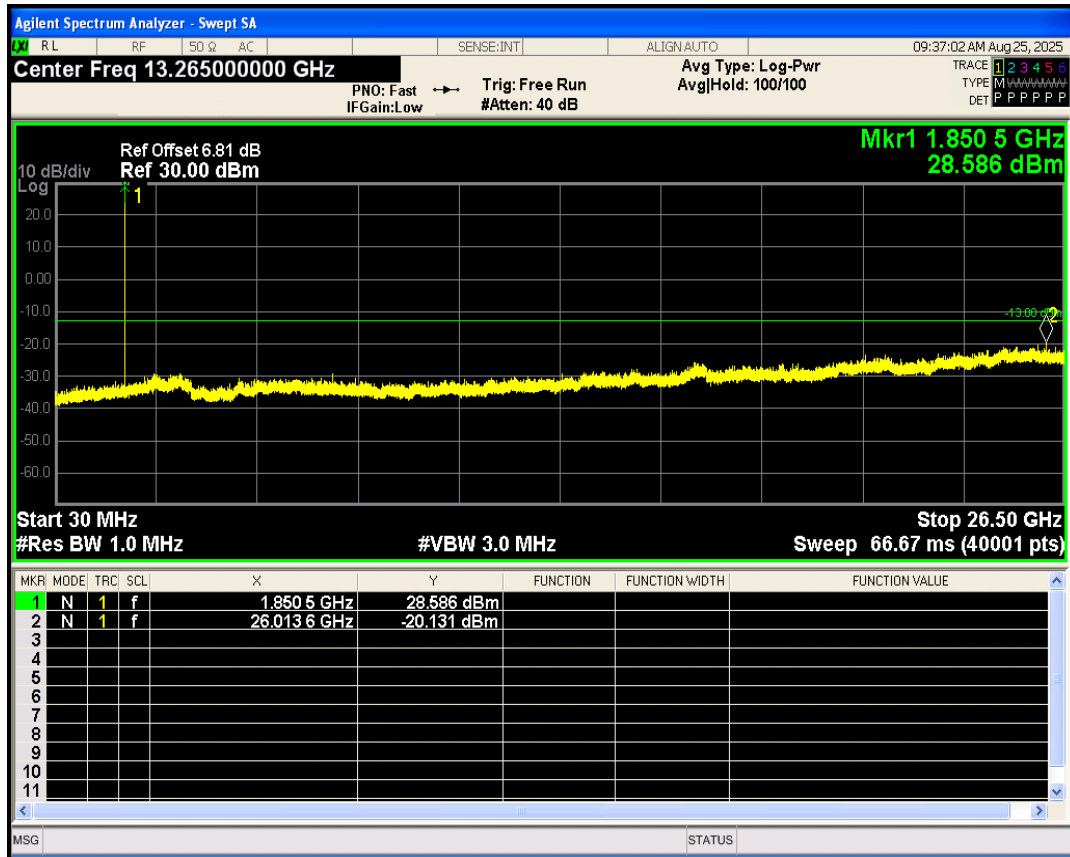


GPRS1900 Channel=661

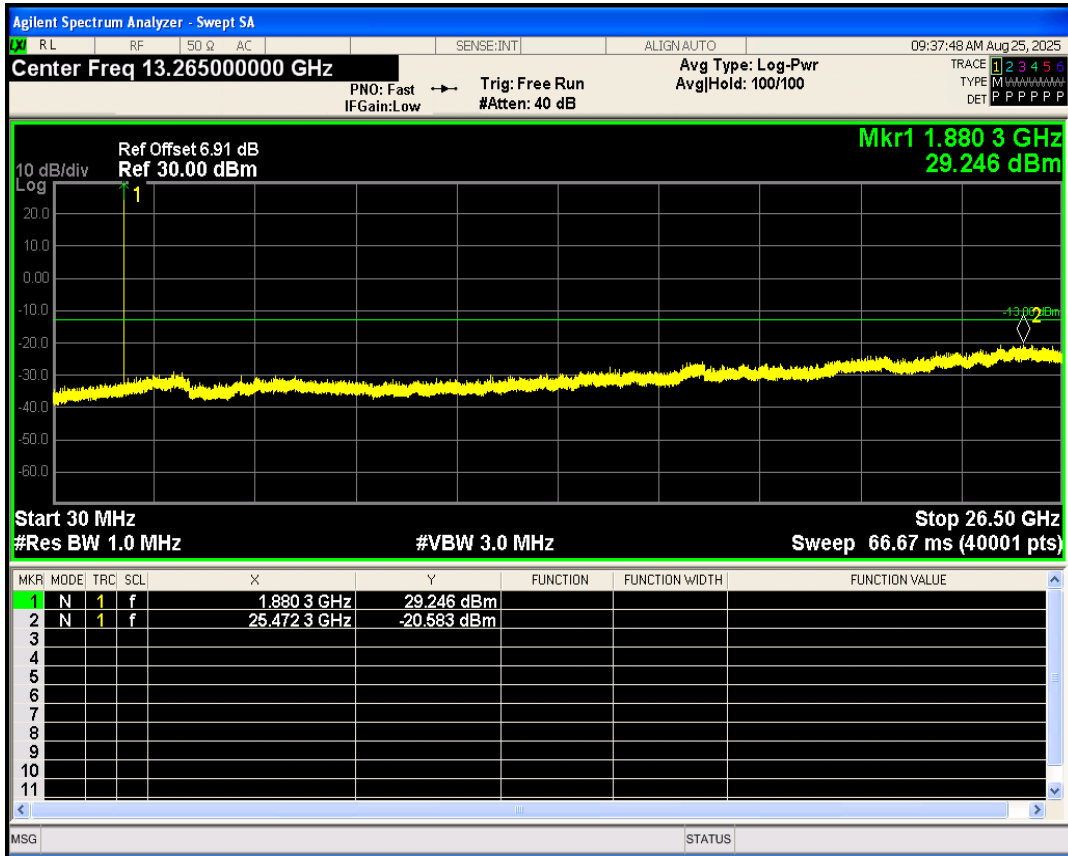


GPRS1900 Channel=810

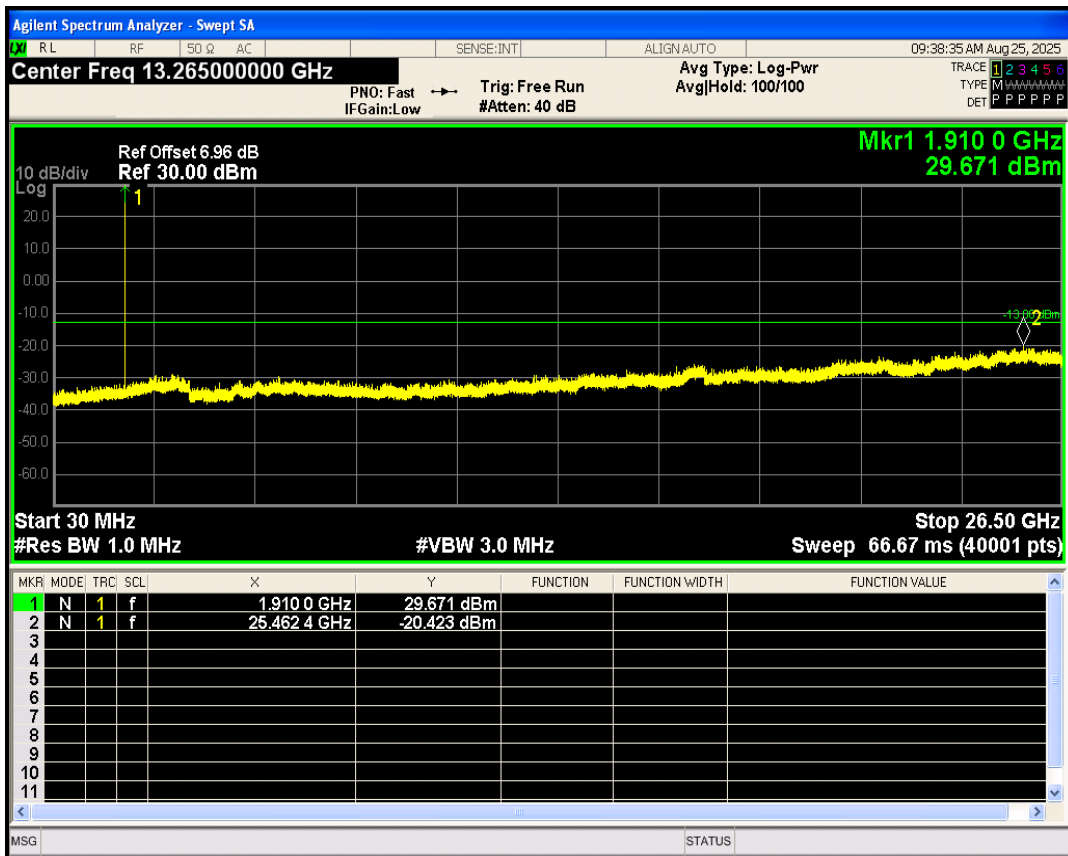


GPRS850 Channel=128

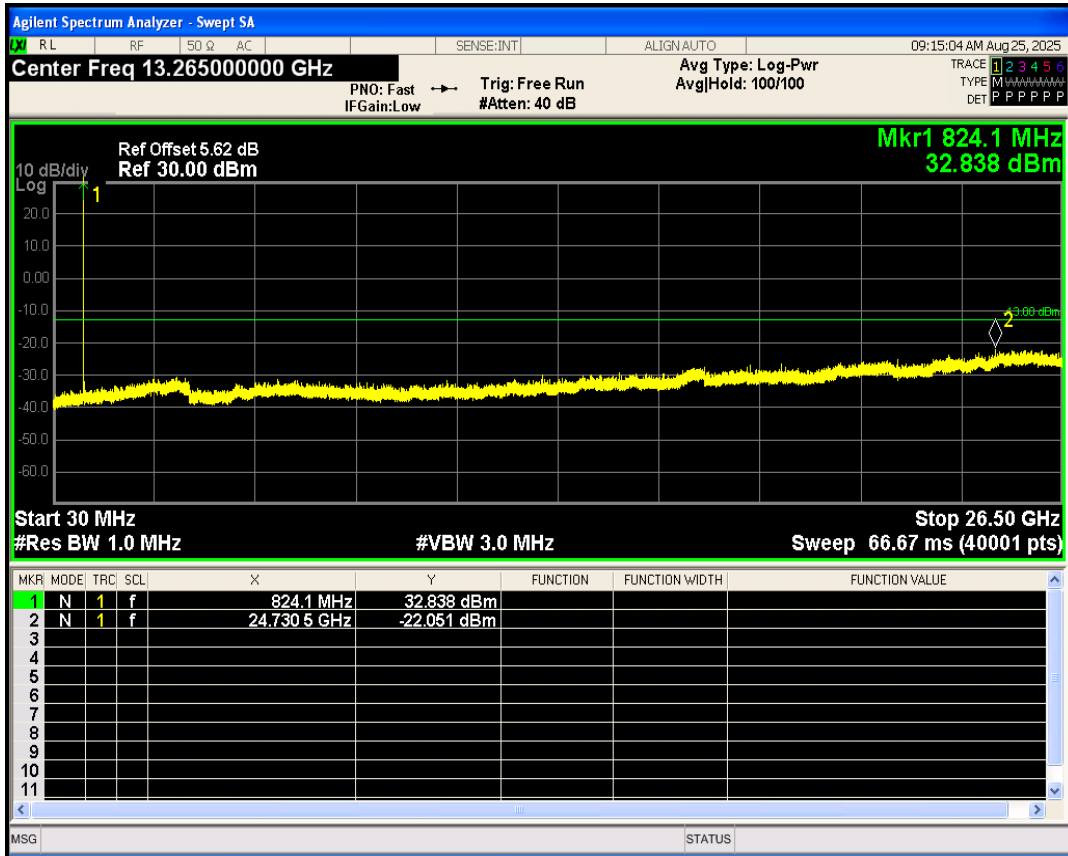

GPRS850 Channel=189

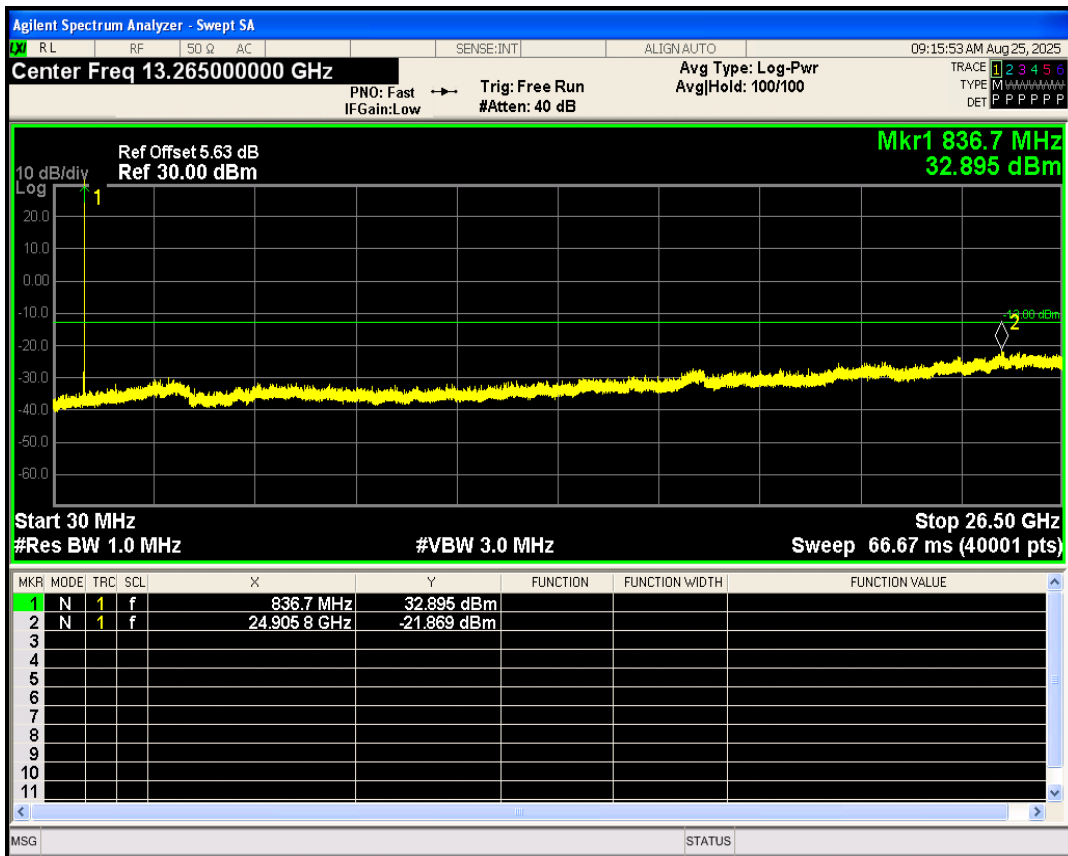


GPRS850 Channel=251

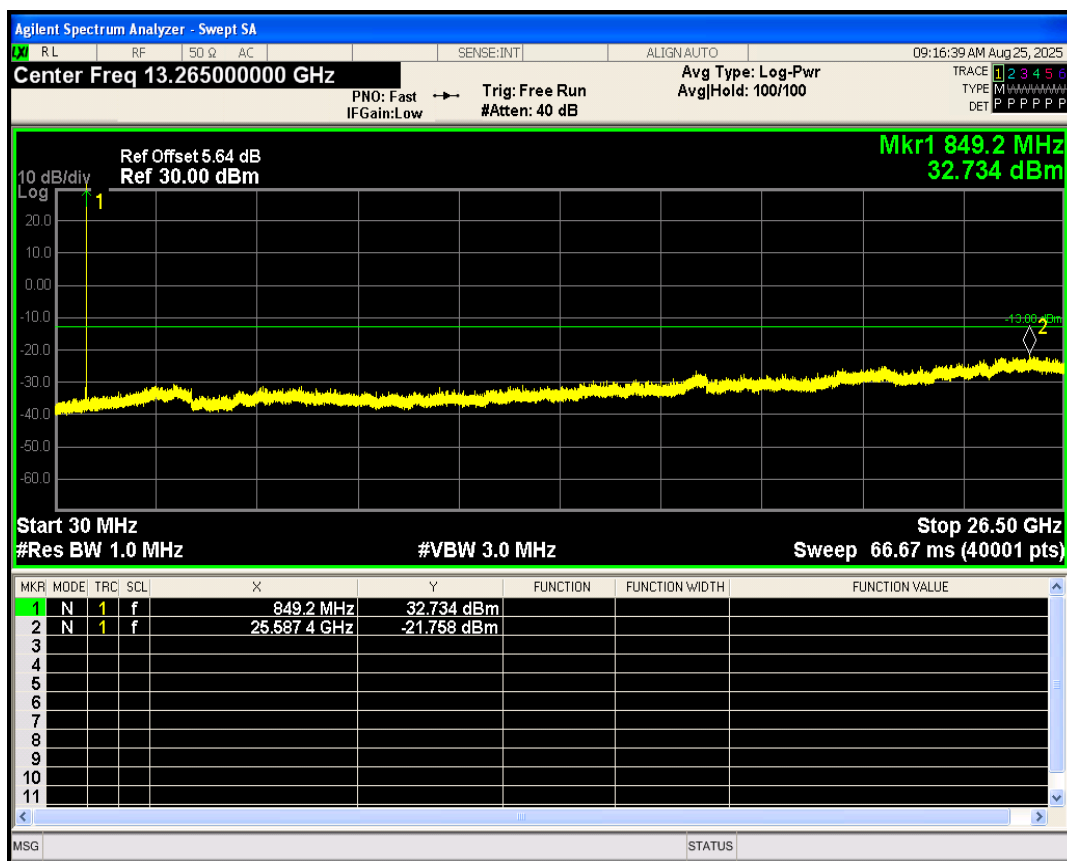


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.62	13	PASS
GSM1900	661	1880	2.62	13	PASS
GSM1900	810	1909.8	2.63	13	PASS
GSM850	128	824.2	2.61	13	PASS
GSM850	189	836.4	2.60	13	PASS
GSM850	251	848.8	2.61	13	PASS


GSM1900 Channel=512

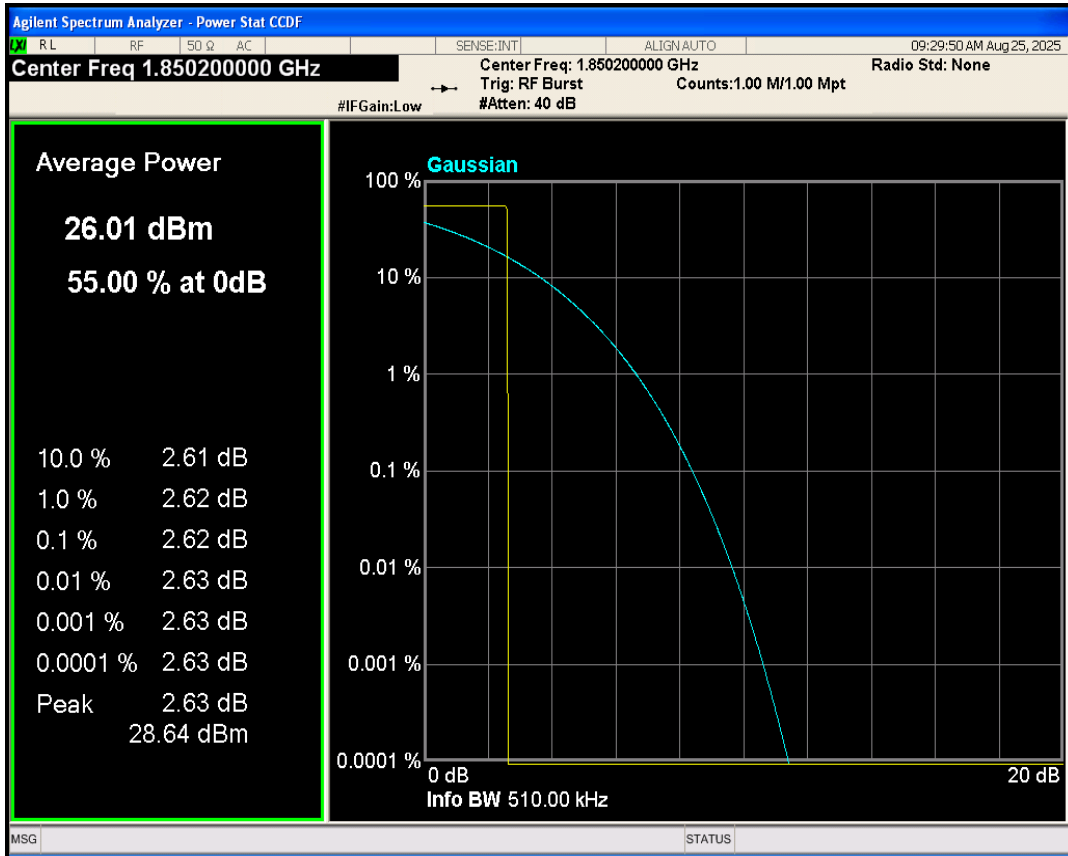


GSM1900 Channel=661

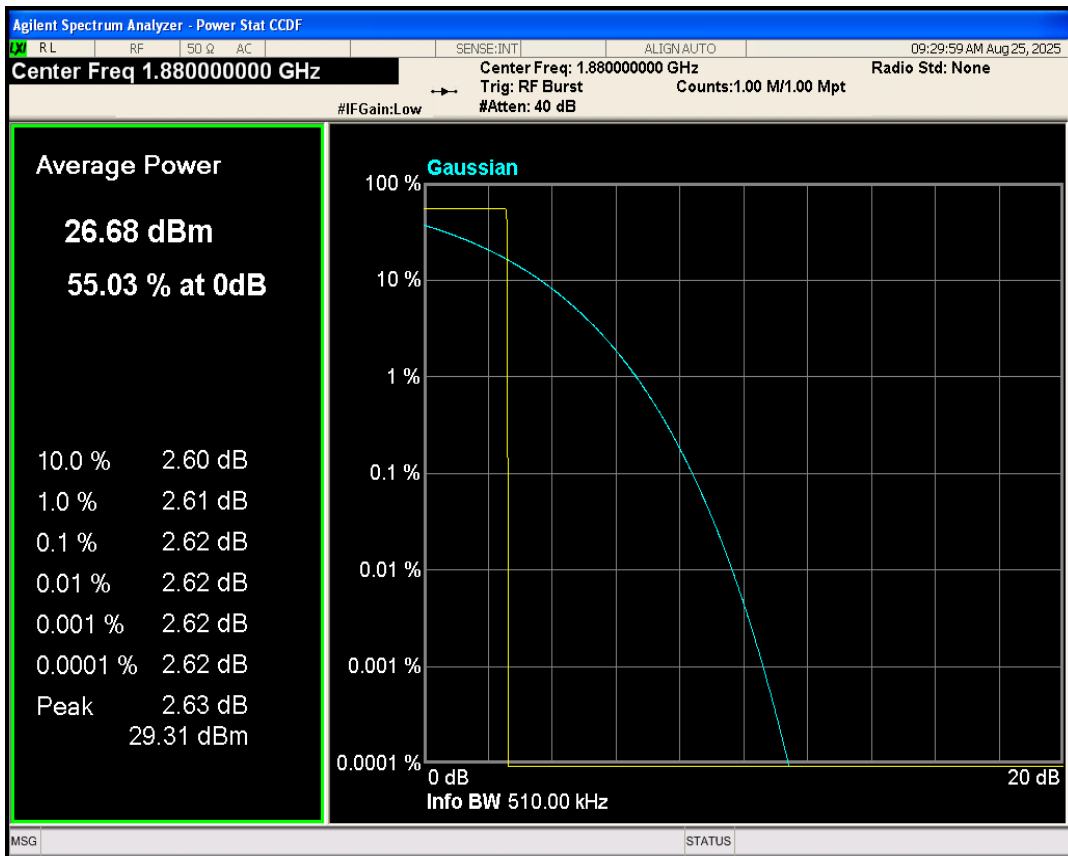


GSM1900 Channel=810

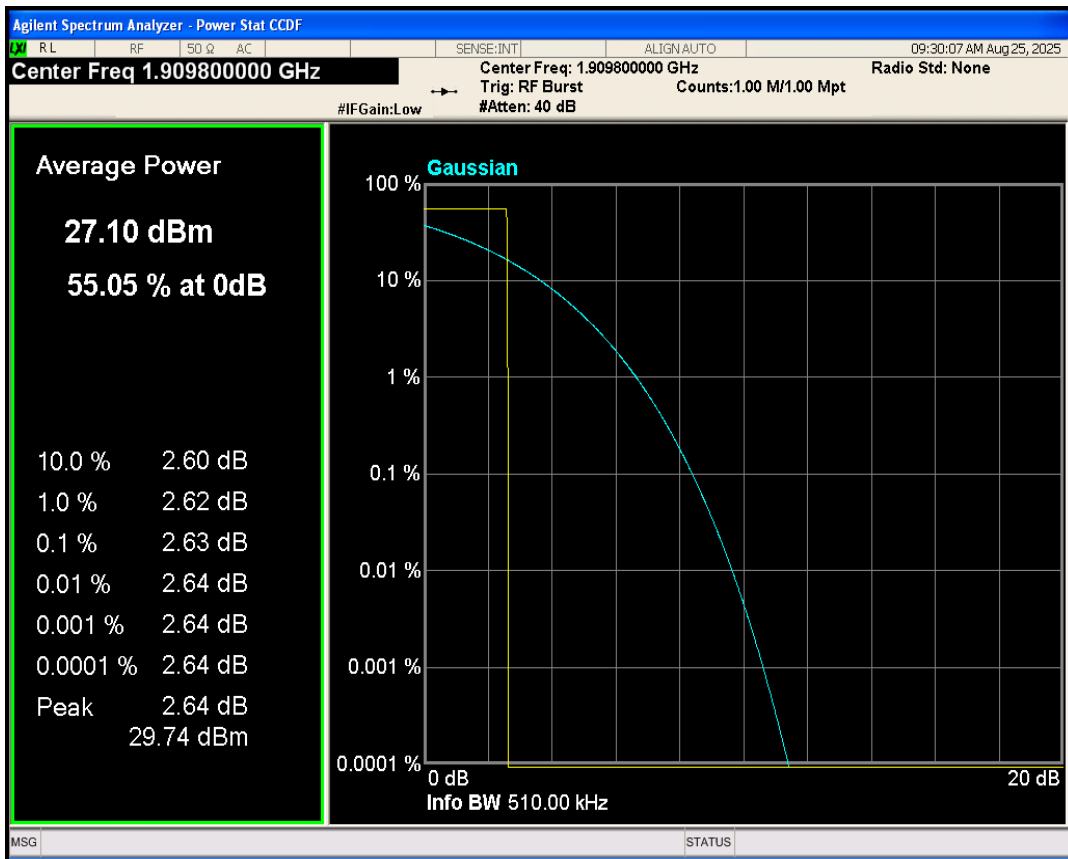


GSM850 Channel=128

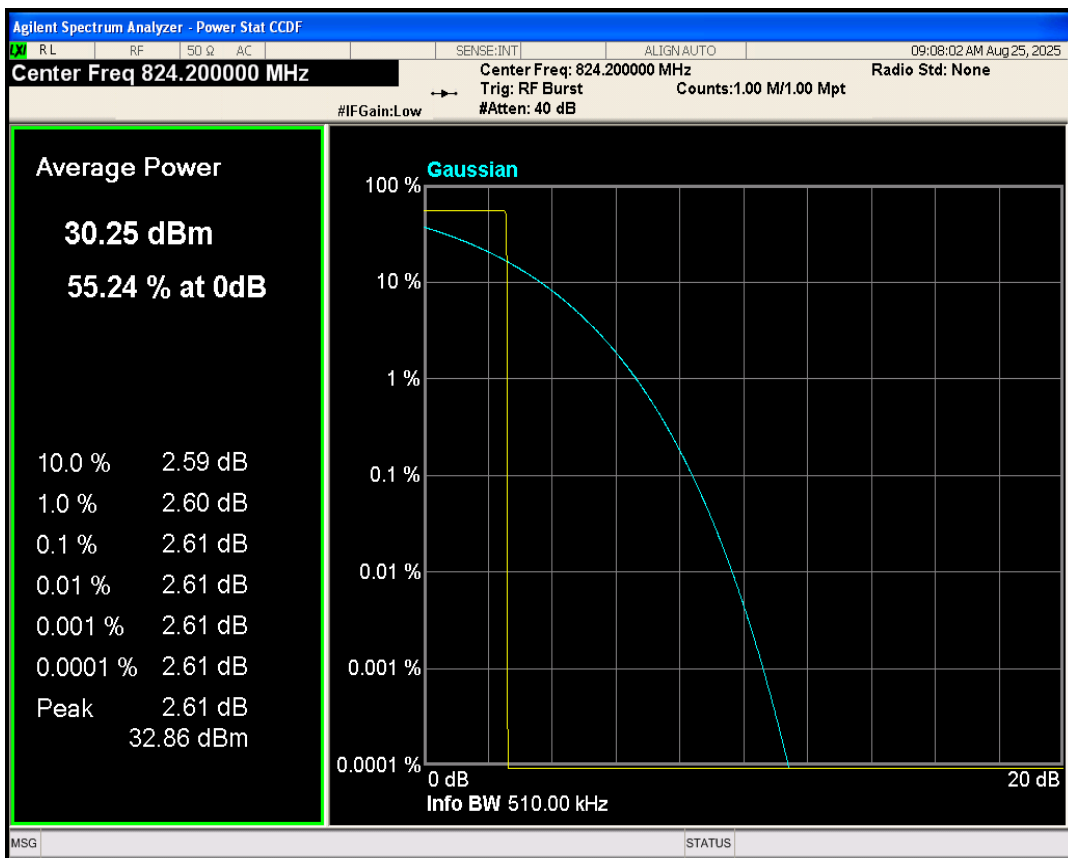

GSM850 Channel=189

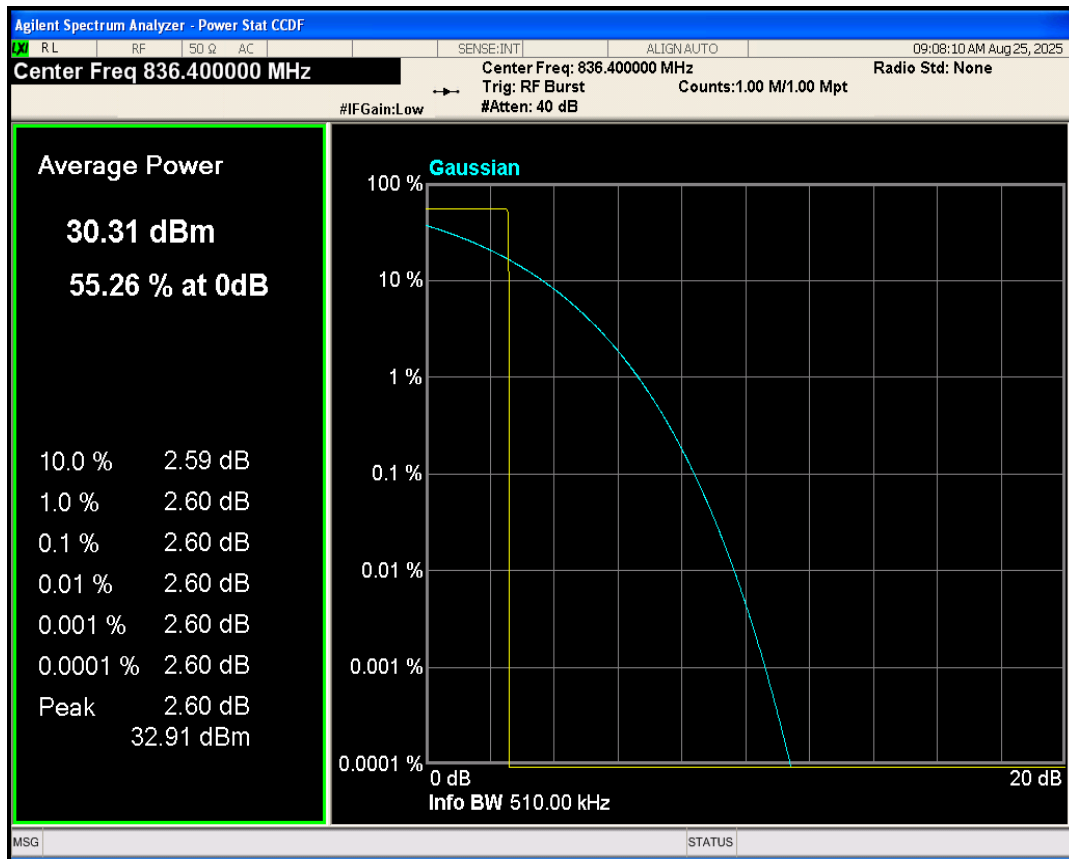


GSM850 Channel=251

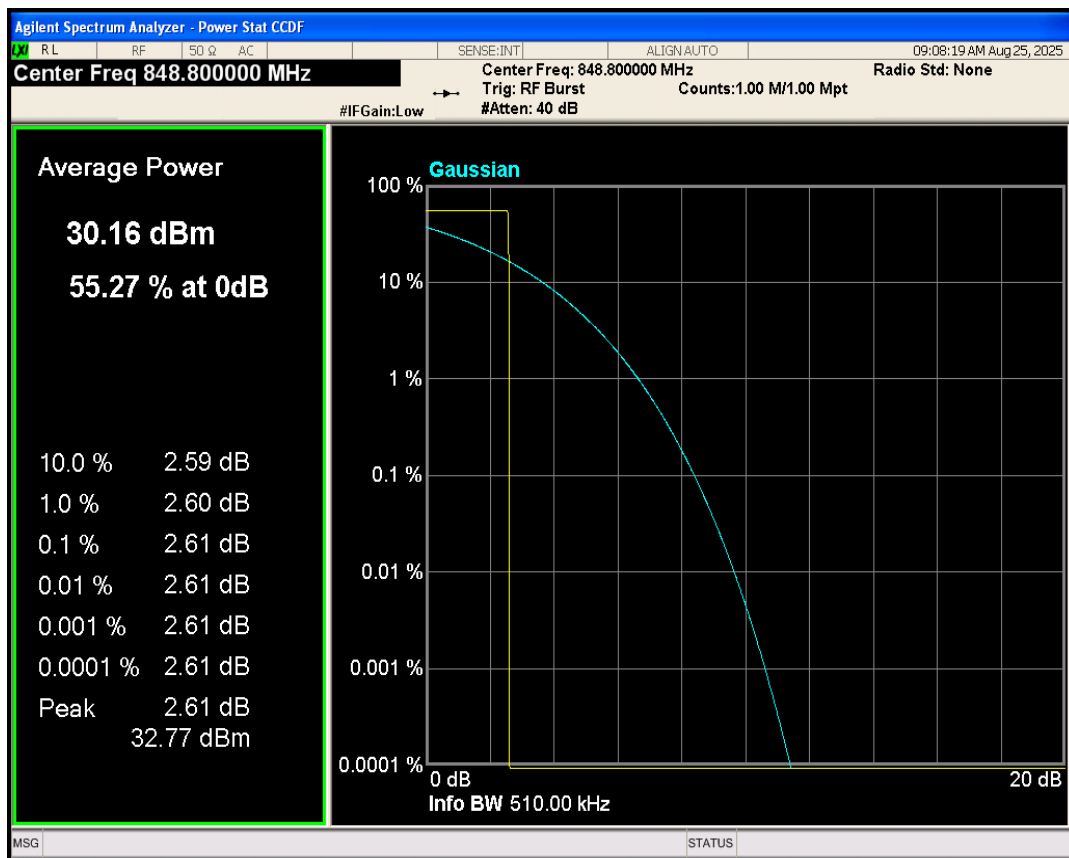


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	244.571	316.992	PASS
GSM1900	661	1880	250.010	314.561	PASS
GSM1900	810	1909.8	239.288	315.427	PASS
GSM850	128	824.2	251.467	320.313	PASS
GSM850	189	836.4	250.743	316.955	PASS
GSM850	251	848.8	244.010	316.570	PASS


GSM1900 Channel=512

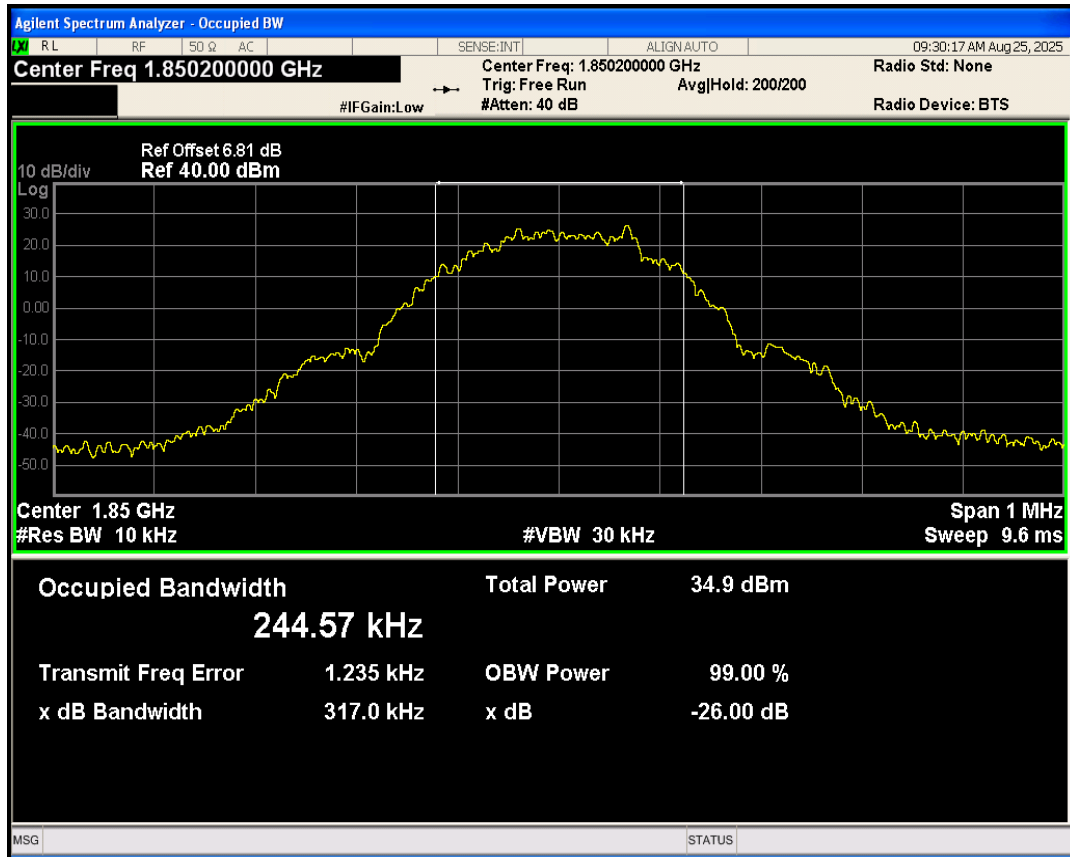


GSM1900 Channel=661

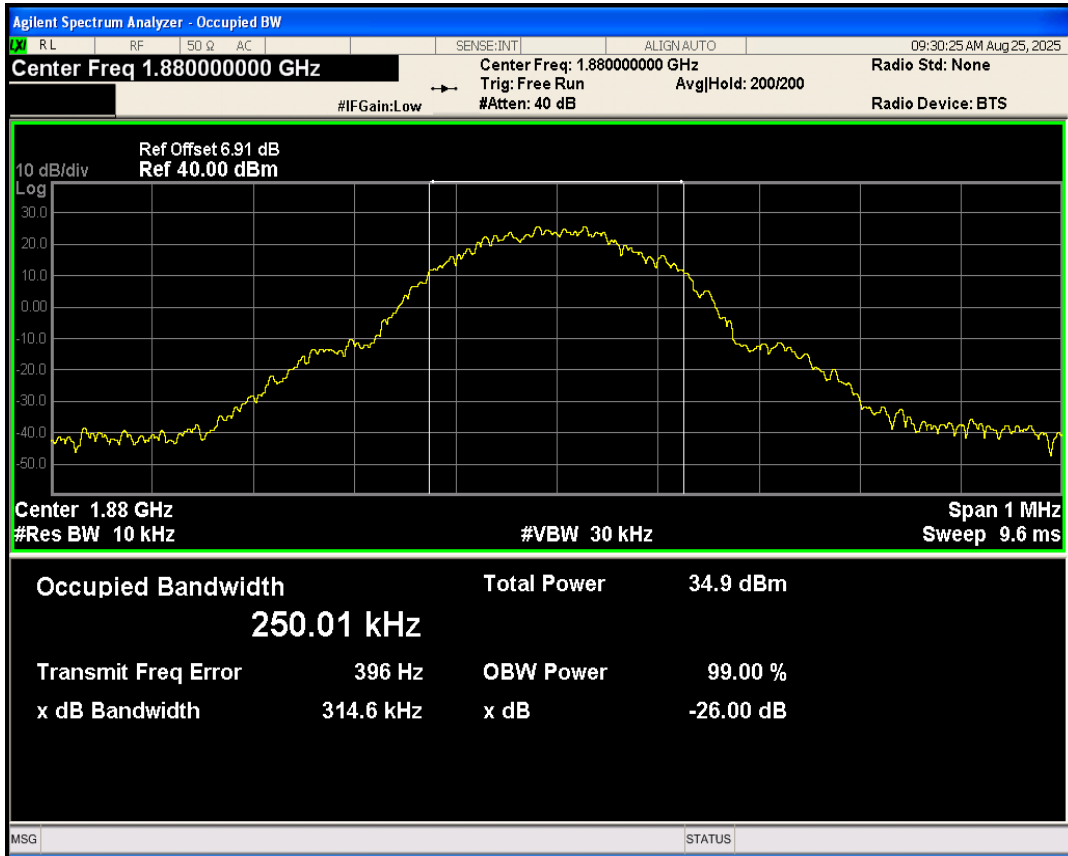


GSM1900 Channel=810

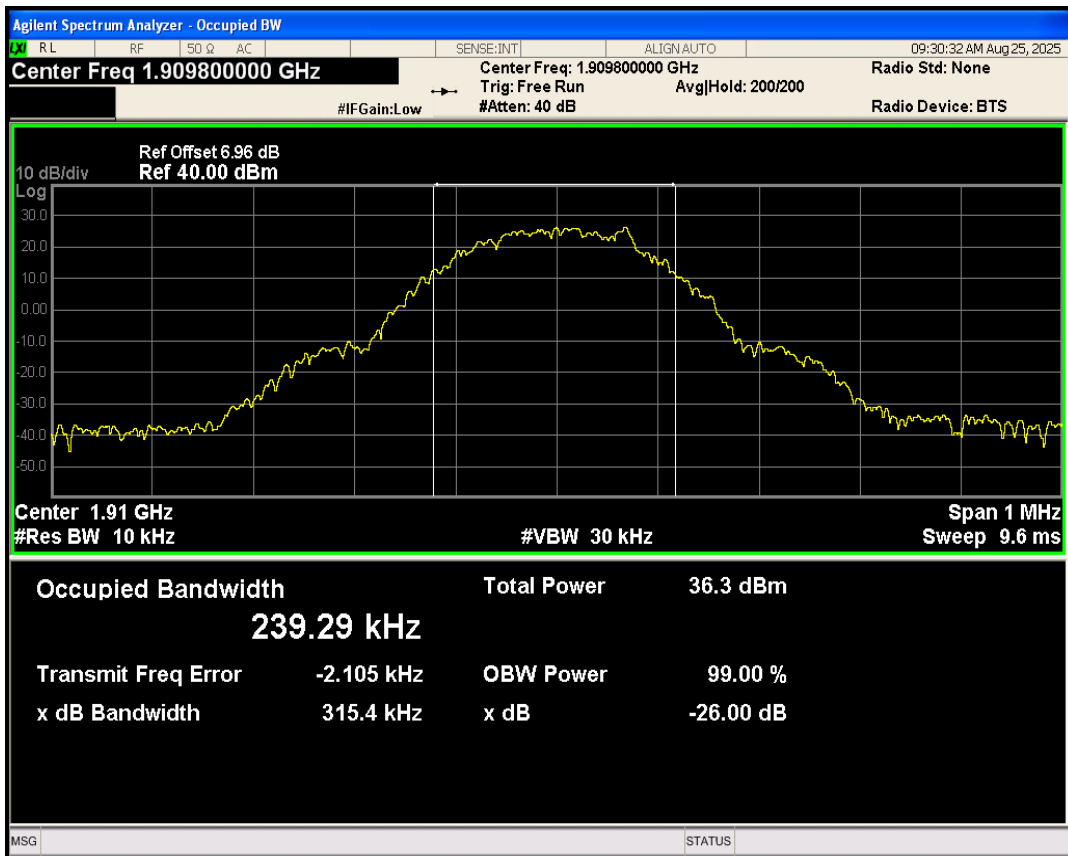


GSM850 Channel=128

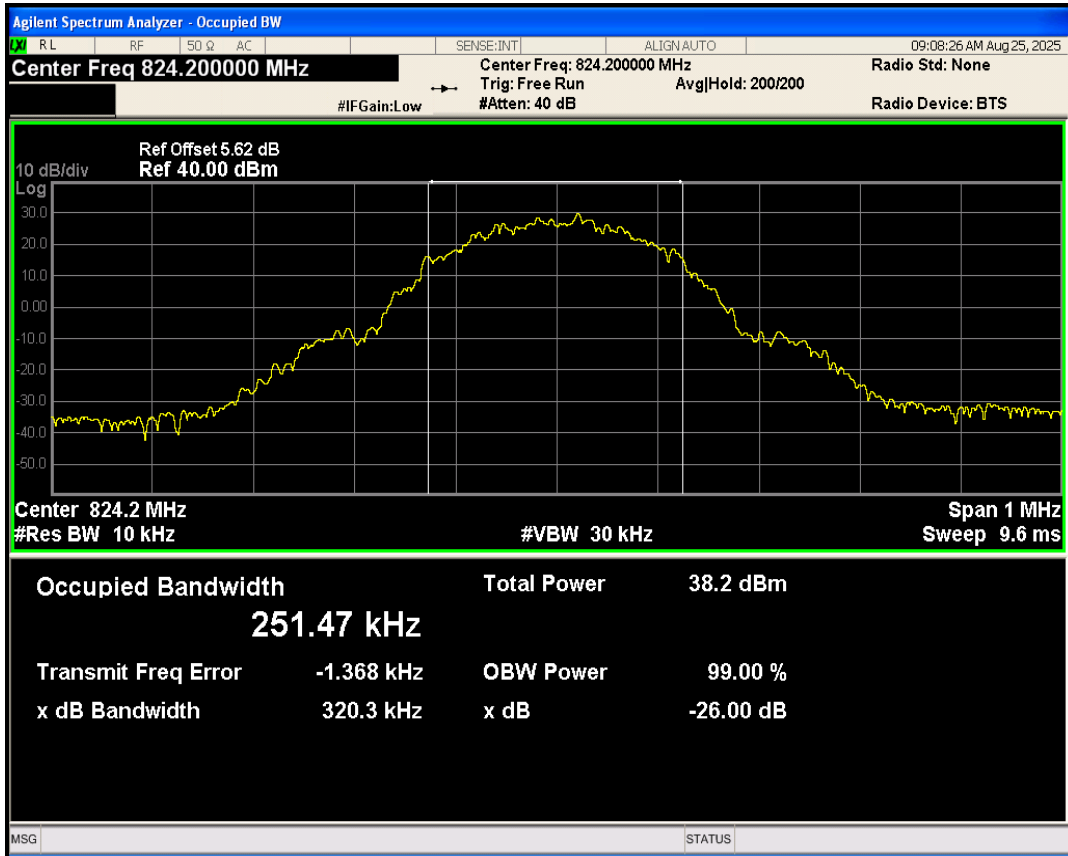

GSM850 Channel=189

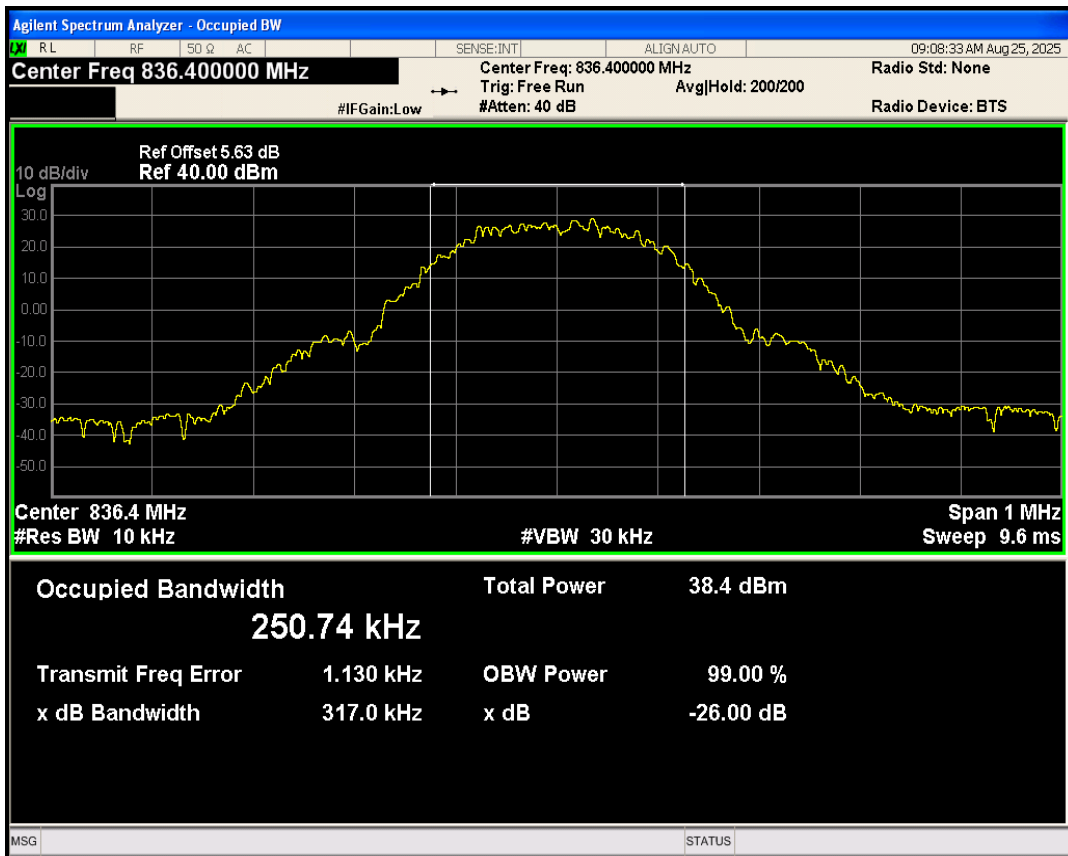


GSM850 Channel=251

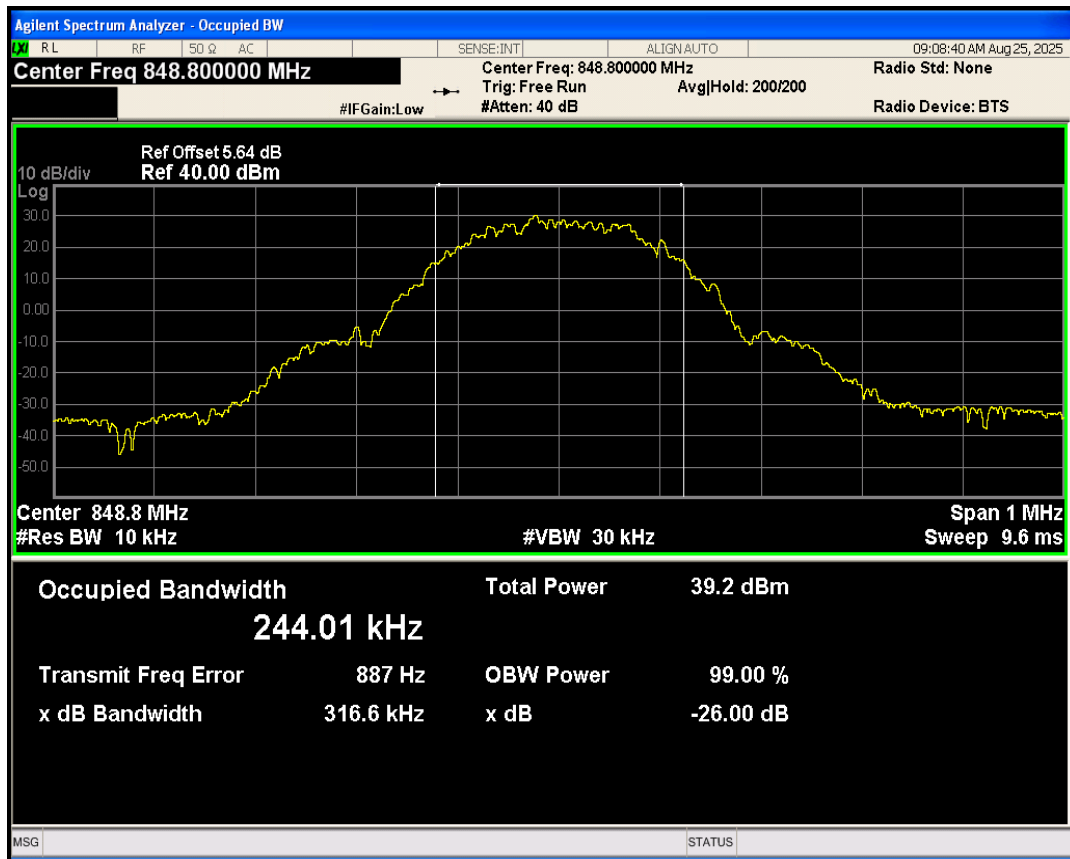


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1849.98	-31.69	-13	PASS
GSM1900	810	1909.8	1910.02	-28.93	-13	PASS
GSM850	128	824.2	824.00	-26.32	-13	PASS
GSM850	251	848.8	849.02	-26.12	-13	PASS


GSM1900 Channel=512

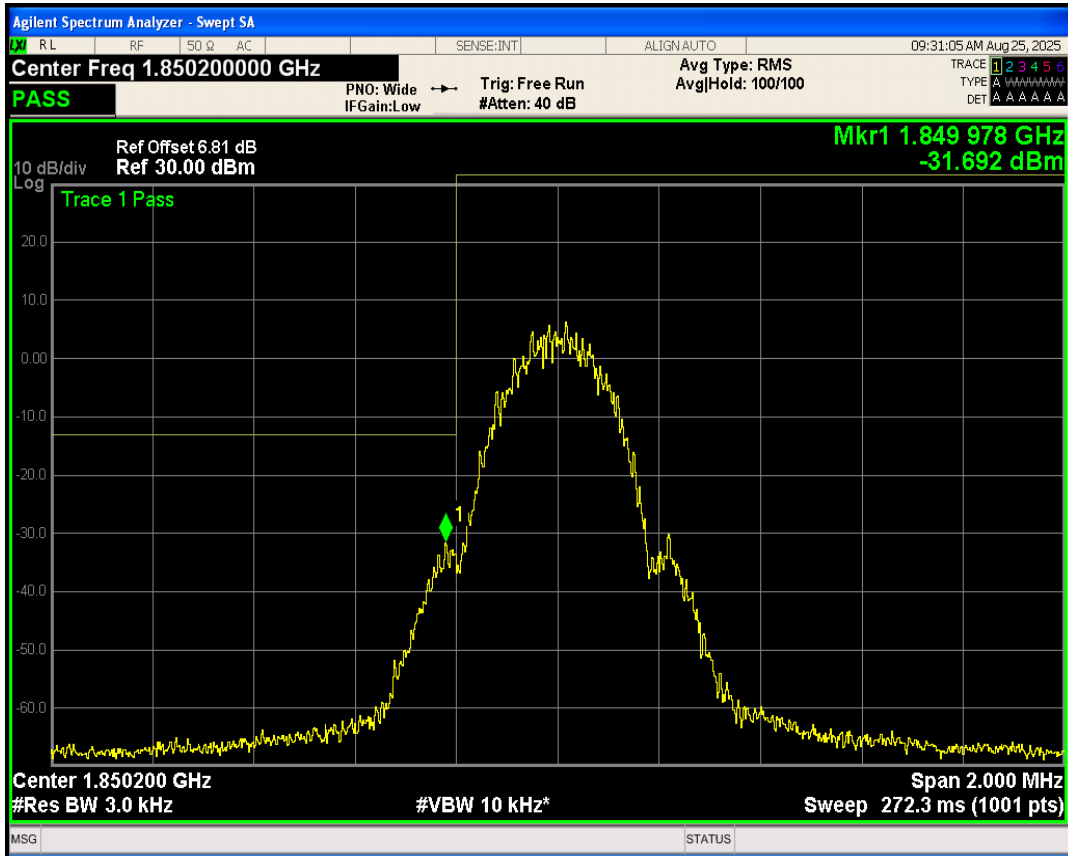


GSM1900 Channel=810

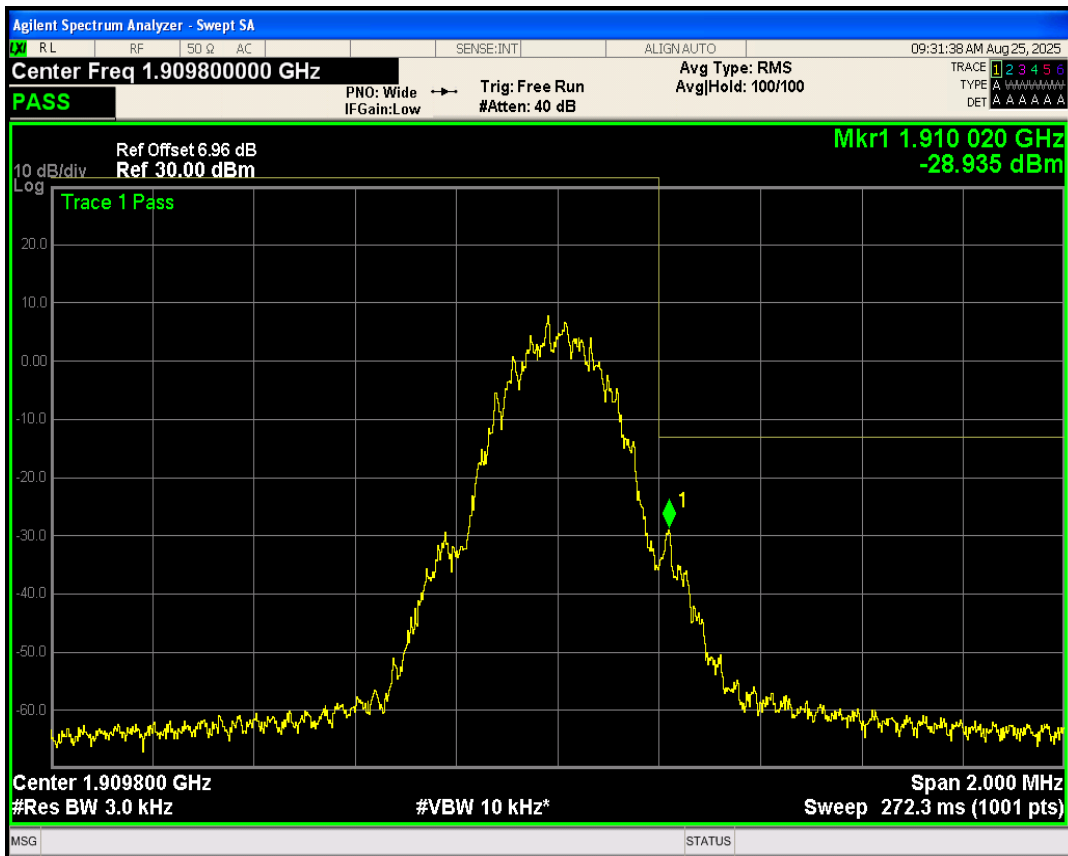

GSM850 Channel=128

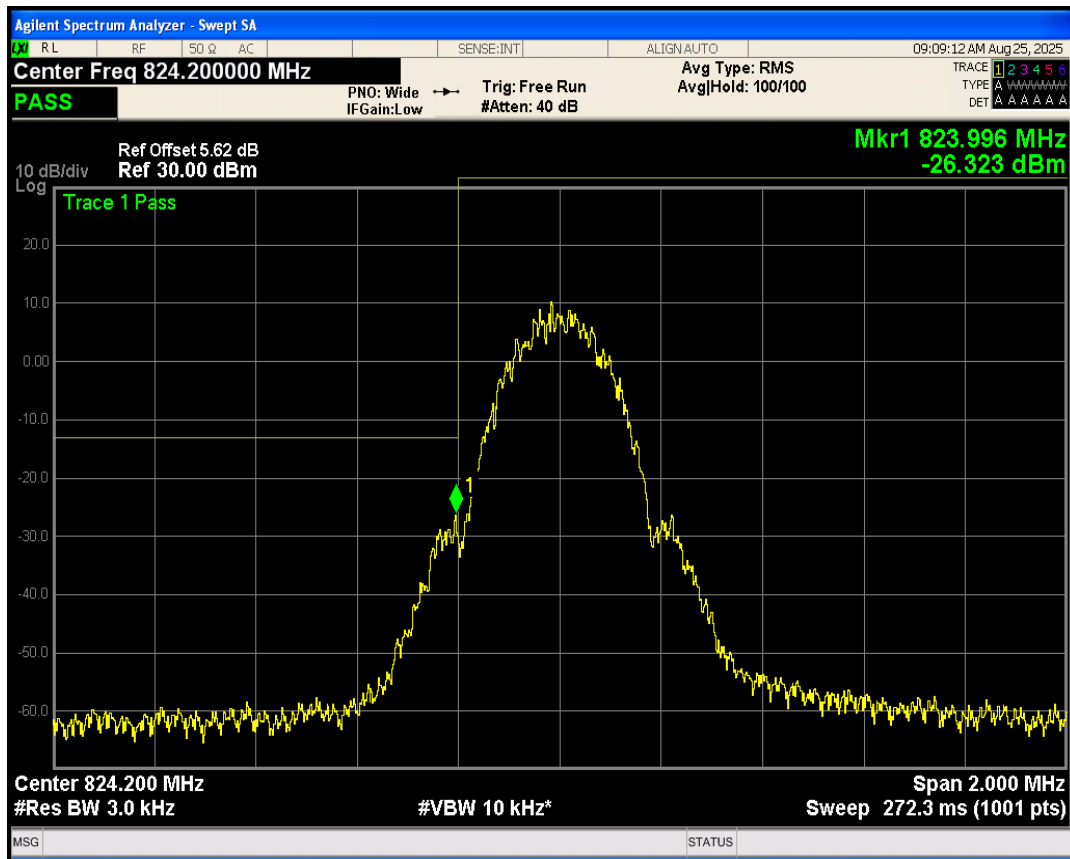


GSM850 Channel=251

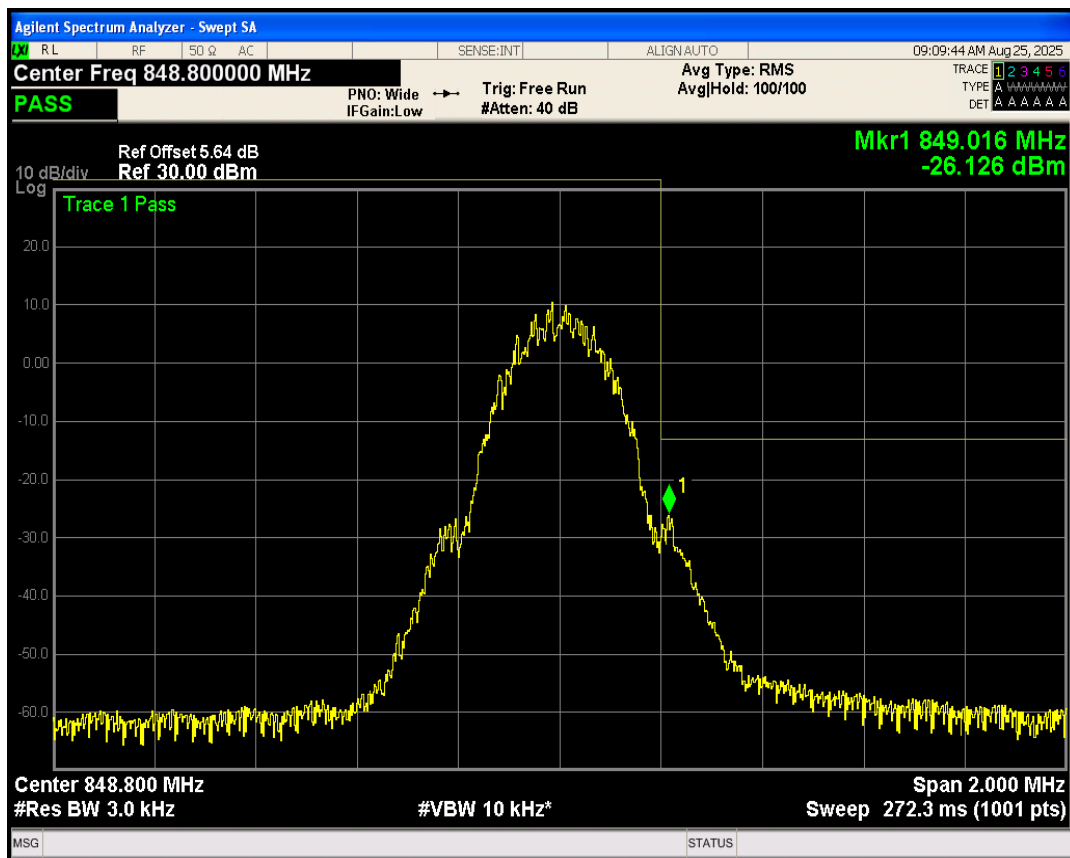


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	25292.31	-20.07	-13	PASS
GSM1900	661	1880	25577.52	-20.66	-13	PASS
GSM1900	810	1909.8	25624.50	-20.31	-13	PASS
GSM850	128	824.2	25656.27	-21.84	-13	PASS
GSM850	189	836.4	25410.10	-22.28	-13	PASS
GSM850	251	848.8	25646.34	-21.77	-13	PASS


GSM1900 Channel=512

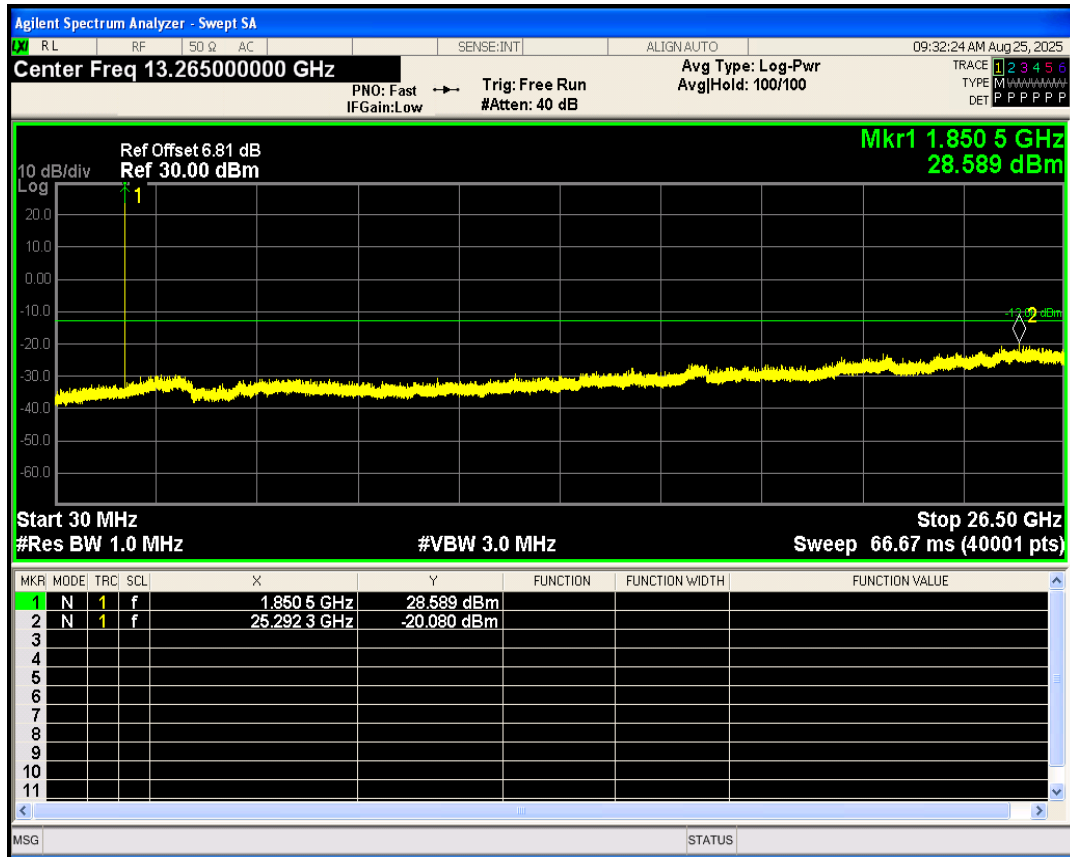


GSM1900 Channel=661

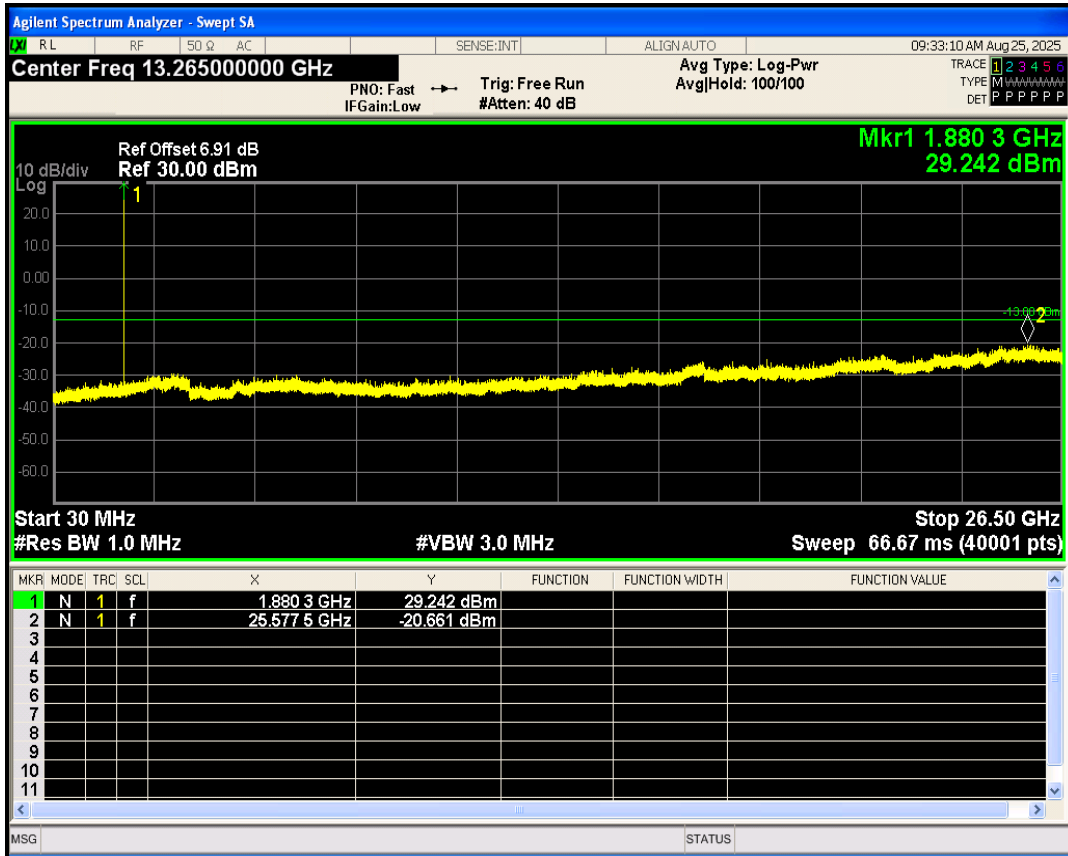


GSM1900 Channel=810

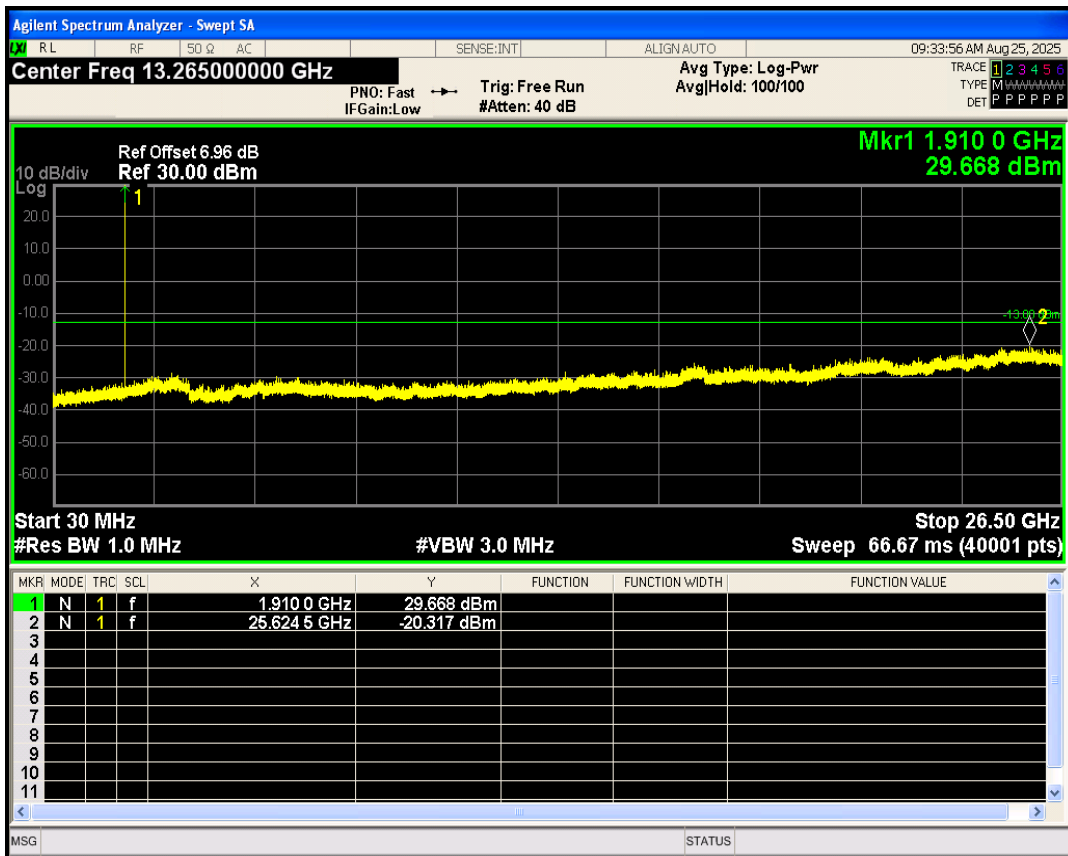

GSM850 Channel=128

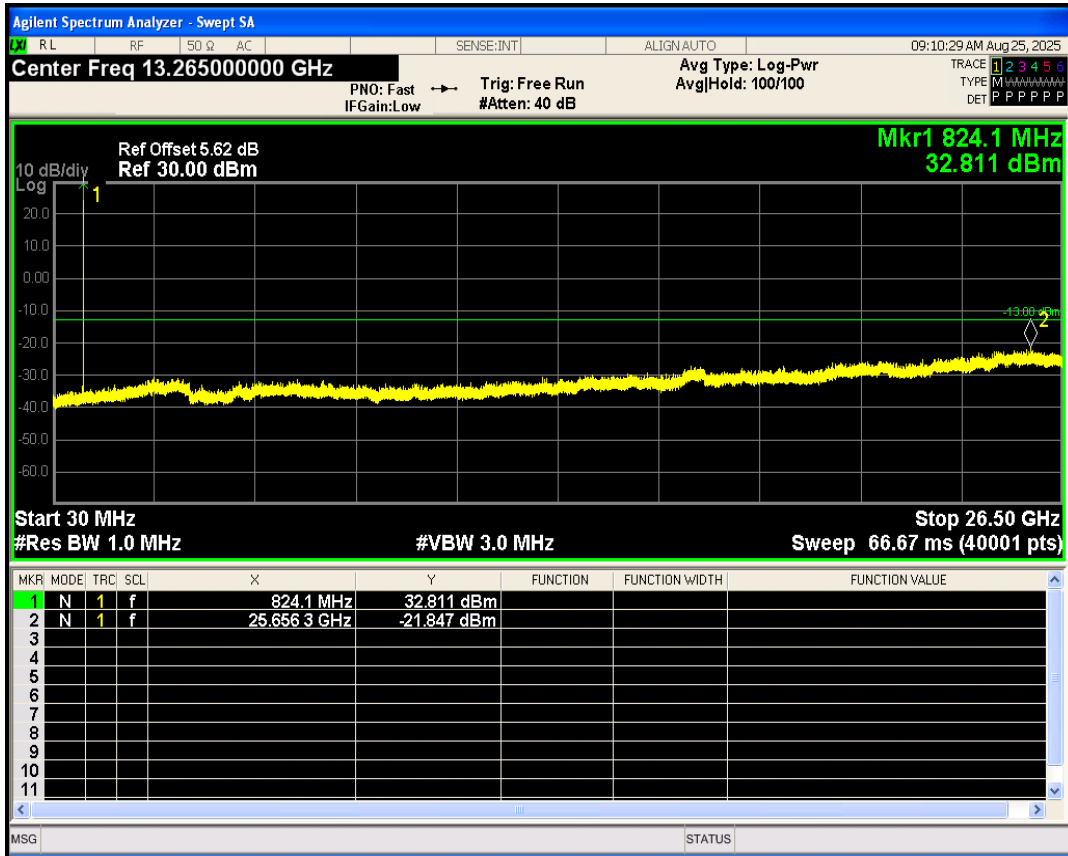

GSM850 Channel=189

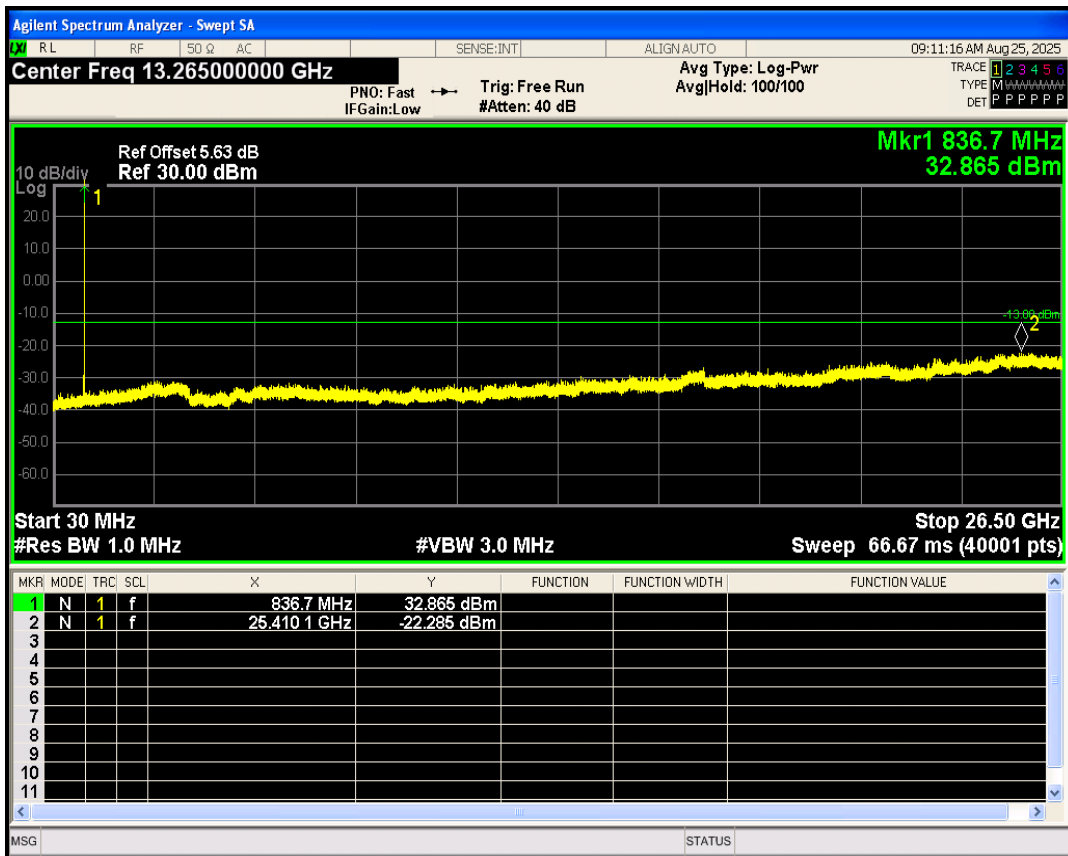

GSM850 Channel=251

