


3 YEAR  
WARRANTY



Scan the QR code using a smart-phone device,  
for product warranty registration online.

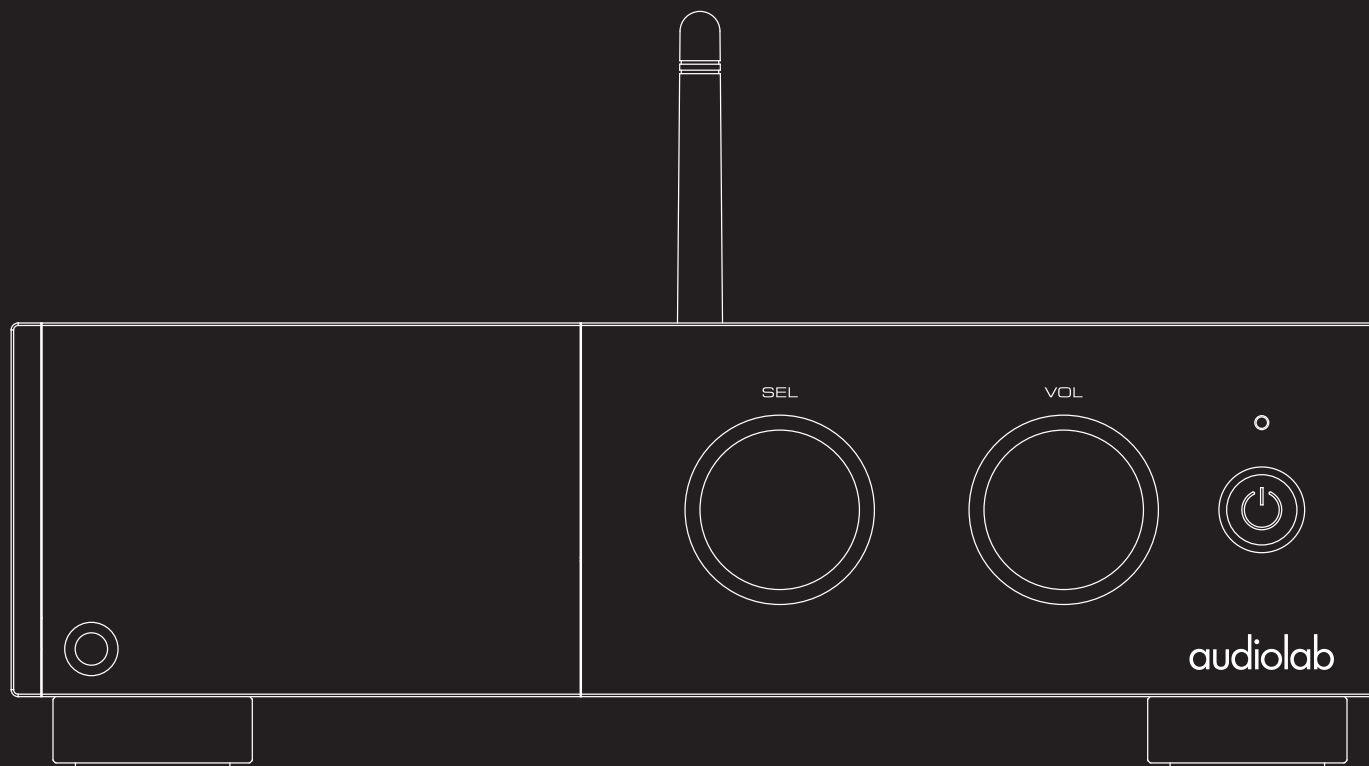

# D9

## User Manual

audiolab

# Important Safety Information



This lightning flash with an arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of non-insulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock.

**Warning:** To reduce the risk of electric shock, do not remove cover (or back) as there are no user-serviceable parts inside. Refer servicing to qualified personnel. The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the appliance. Read these instructions. Keep these instructions. Heed all warnings.

## Follow all instructions:

Do not use this apparatus near water. Clean only with a dry cloth.  
Do not block any ventilation openings. Install under the manufacturer's instructions.  
Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.  
Do not defeat the safety purpose of the polarised or grounding-type plug. A polarised plug has two blades with one wider than the other. A grounding plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for the replacement of the obsolete outlet.

Protect the power cord from being stepped on or pinched, particularly at the plugs, convenience receptacles, and at the point where they exit from the apparatus.  
Unplug this apparatus during lightning storms or when unused for long periods of time.

Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilt or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

**CAUTION:** These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Do not install this equipment in a confined or built-in space such as a bookcase or similar unit, and keep well ventilated in an open space. The ventilation should not

be impeded by covering the ventilation openings with items such as newspaper, tablecloths, curtains etc.

**WARNING:** Only use attachments/accessories specified or provided by the manufacturer (such as the exclusive supply adapter, battery etc.).

**WARNING:** Please refer to the information on the exterior panel of the enclosure for electrical and safety information before installing or operating the apparatus.

**WARNING:** To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on the apparatus.

**WARNING:** For the terminals marked with the symbol of "⚡" may be of sufficient magnitude to constitute a risk of electric shock. The external wiring connected to the terminals requires installation by an instructed person or the use of ready-made leads or cords.



Ground protection terminal. This product should be connected to a power outlet with ground protection.

**Denmark:** Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.

**Finland:** Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan.

**Norway:** Apparatet må tilkoples jordet stikkontakt.

**Sweden:** Apparaten skall anslutas till jordat uttag.

**WARNING:** No naked flame sources, such as lighted candles, should be placed on the apparatus.

**WARNING:** Attention should be drawn to environmental aspects of battery disposal. **WARNING:** Use of the apparatus in tropical climates.

## THE FUSE VALUES ARE:

220 – 240V (UK, China, etc.) T1.0AL 250V Slow Blow

100 – 120V (USA, Japan, etc.) T1.6AL 250V Slow Blow

# Important Safety Information



The Bluetooth® word mark and logos are registered trademarks, owned by Bluetooth SIG, Inc. and any use of such marks by IAG Group Ltd is under license. Other trademarks and trade names are those of their respective owners.



Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries.



Being Roon Tested means that IAG Group Ltd and Roon have collaborated to ensure you have the best experience using Roon, software and IAG Group Ltd equipment together, so you can just enjoy the music.



MQA (Master Quality Authenticated)

MQA is an award-winning British technology that delivers the sound of the original master recording. The master MQA file is fully authenticated and is small enough to stream or download. Visit [mqa.co.uk](http://mqa.co.uk) for more information. D9 includes MQA technology, which enables you to playback MQA audio files and streams, delivering the sound of the original master recording.



The audiolab D9 LED on screen glows green or blue to indicate that the unit is decoding and playing an MQA stream or file, and denotes provenance to ensure that the sound is identical to that of the source material. It glows blue to indicate it is playing an MQA Studio file, which has either been approved in the studio by the artist/producer or has been verified by the copyright owner

# 1 : Important Safety Information

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by the manufacturer could void your authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference, and
- 2) This device must accept any interference received, including interference that may cause undesired operations.

## RF Exposure Information

- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.

## ISED Statement

This device contains license-exempt transmitter (s) / receiver (s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS (s).

Operation is subject to the following two conditions:

- 1) This device may not cause interference.
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

CAN ICES (B) / NMB (B).

This device meets the exemption from the routine evaluation limits in section 6.6 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Radio Frequency Exposure Statement for IC This equipment complies with IC exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body. Cet équipement est conforme aux limites d'exposition IC définies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20cm entre le radiateur et la carrosserie.



The Bluetooth® word mark and logos are registered trademarks, owned by Bluetooth SIG, Inc. and any use of such marks by IAG Group Ltd is under license. Other trademarks and trade names are those of their respective owners.



aptX® software is copyright CSR plc. or its group companies. All rights reserved. The aptX® mark and the aptX® logo are trademarks of CSR plc. or one of its group companies and may be registered in one or more jurisdictions.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L' appareil ne doit pas produire de brouillage;
- (2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.

# Contents

## Audiolab D9

|                                 |    |
|---------------------------------|----|
| 1. Getting Started .....        | 05 |
| 2. Controls And Functions ..... | 06 |
| 3. Remote Handset .....         | 07 |
| 4. Connections .....            | 08 |
| 5. Menu Options.....            | 09 |
| 6. System Operations .....      | 12 |
| 7. Playing Operations .....     | 15 |
| 8. Warranty Coverage.....       | 16 |
| 9. Specifications .....         | 18 |

## Introduction of D9

Introduction of D9

### Features

- Full DAC(9038pro) and preamp facilities
- Bluetooth aptX, aptX HD, LDAC receiver
- Selectable digital filter setting
- Dedicated headphone amplifier
- 800 x 480px WVGA full view IPS LCD

### Inputs

- Two coaxial SPDIF digital inputs
- Two optical SPDIF digital inputs
- One AES/EBU digital input
- Bluetooth 5.1(aptX/aptX HD/LDAC) input
- USB-A port for USB HDD
- USB-B 2.0 port for replaying stereo from a compatible host

### Outputs

- One pair balanced output
- One pair unbalanced output
- Headphone output
- 2 x Trigger outputs

## Unpacking the Equipment

The carton should contain:

- The Audiolab D9
- One IEC power cord suitable for your area
- One remote handset
- One instruction manual



Please note: The remote control requires 2 x type batteries. Due to international shipping and courier regulations with Lithium-Ion batteries, the remote controller battery is not included in this package.

Consult the dealer from whom you purchased the equipment if any item is not present. Carefully unpack the unit and accessories. Take care not to damage the surface finish when undoing the protective polythene sleeve. Retain the packing materials for future use. Retain the user manual and information concerning the date and place of purchase of your equipment for future reference. If you transfer the unit to a third party, please pass on this instruction manual along with the equipment.

## Placement

The unit must be mounted on a solid, level and stable surface.

Before you connect the Audiolab D9 to the AC mains power, ensure your AC mains voltage corresponds to the rating on the rear panel of the product. If in doubt, consult your dealer. If you move to an area that has a different mains voltage, seek advice from an Audiolab appointed dealer or a competent service technician.

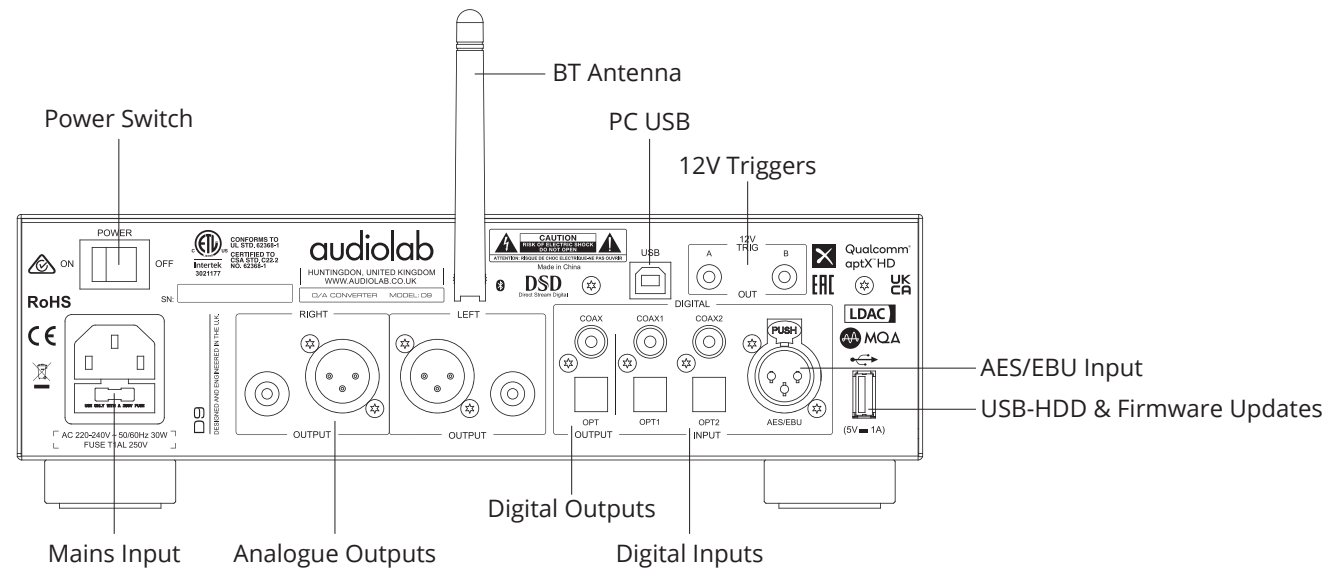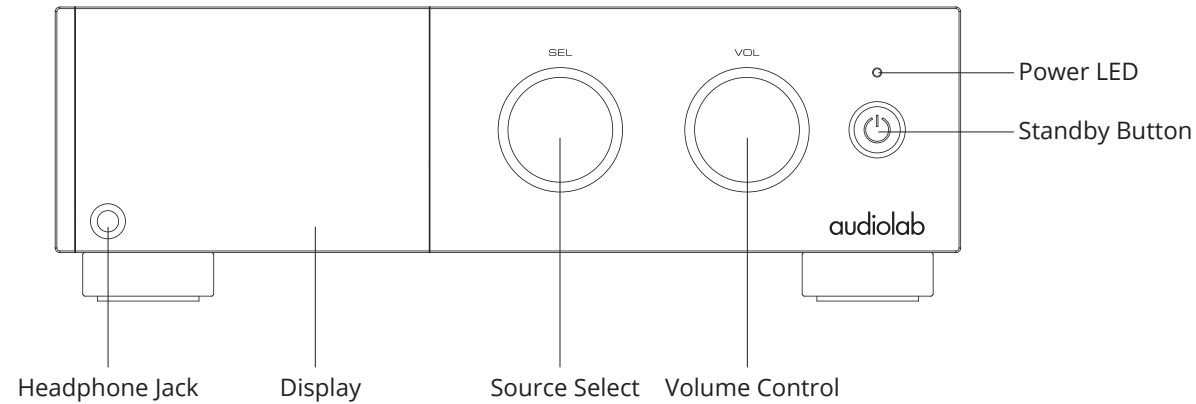



|               |                                                                                                                                                                                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Standby    | Press to bring the unit in/out of Standby                                                                                                                                         |
| 2. Mute       | Press to mute and unmute the sound                                                                                                                                                |
| 3.            | Long press to inter Folder mode selection in the playing interface. Short press to inter folder browse, briefly press to return to previous folder; long press to exit the browse |
| 4. Menu       | Press to enter or exit the Menu                                                                                                                                                   |
| 5. TIME       | Press to toggle single track time remaining or all tracks time remaining                                                                                                          |
| 6.            | Page up                                                                                                                                                                           |
| 7.            | Move to the previous track                                                                                                                                                        |
| 8.            | Move to the next track                                                                                                                                                            |
| 9.            | Press to start/pause. Press to confirm setting selected in menu                                                                                                                   |
| 10.           | Page down                                                                                                                                                                         |
| 11.           | Press to select the repeat mode                                                                                                                                                   |
| 12.           | Press to select the random mode                                                                                                                                                   |
| 13.           | Press to select the display option                                                                                                                                                |
| 14. +/-       | Increase/decrease volume                                                                                                                                                          |
| 15.           | Press to stop                                                                                                                                                                     |
| 16.           | Press to cycle source inputs                                                                                                                                                      |
| 17. PC USB    | Press to select PC USB input                                                                                                                                                      |
| 18. USB HDD   | Press to select USB HDD input                                                                                                                                                     |
| 19. DIGITAL   | Press to cycle select digital inputs                                                                                                                                              |
| 20. BLUETOOTH | Press to select BT input                                                                                                                                                          |

## Coaxial Digital Input


Connect your coaxial digital sources to either COAX1 or COAX2.

## Optical Digital Input

Connect your optical digital sources to either OPT1 or OPT2.

## AES/EBU Digital Input

Connect your optical digital sources to AES/EBU input.



## Digital Output


Connect your DAC or amplifier to D9 via Coaxial/optical output

## Balanced Output

Balanced connections provide greater dynamic range and lower noise. If your amplifier has balanced inputs, please connect them to the balanced outputs. You will need one XLR balanced cable per channel.

## Unbalanced Output

Connect your amplifier to the RCA output by one pair of RCA cable.



## Headphone Output

A stereo 6.3mm (1/4") jack is provided on the front panel for connecting headphones. When headphones are connected the audio to the loudspeakers terminals will be cut off.

## Bluetooth Connection

Also add. Once paired, you can disconnect your mobile device with by long pressing the Play/Pause button on the remote controller.



## USB Update


Put the update file into the USB drive, Turn off the d9 via the rear power Rocker switch plug the drive into the USB port, Hold the STANDBY button on the front panel then POWER ON, your d9 using the rear rocker switch, your d9 will then upgrade automatically. After the completion, unplug the USB drive and restart the device.



(5V 1A)


## 12V Trigger Connection

The D9 features two 12V trigger output connections. Use the output to control other products. The trigger connections are made using "3.5 to 3.5mm" jack interconnects (not include).



## Mains Input

Before connecting the AC power cord to the D9, please make sure the Power Switch is in the OFF position. Switch it to the ON position after connecting the unit to the AC mains.



## Filter

Configure the digital filter for the audio DAC. Linear Phase (Slow Roll-Off) is the default setting.



- **Linear (Fast):** This is the most common filter with clean overall suppression and excellent rejection, best for music with large transients. Provides crisp clean highs.
- **Linear (Slow):** A low group delay and symmetrical input response with less ringing than 'Linear-phase fast roll-off'. It offers punchier bass than 'Linear-phase fast roll-off' with clean highs. (Default)
- **Minimum (Fast):** This offers minimal pre-ringing. It is usually preferred for imaging and sound stages. It offers no aliasing in the frequency domain and stronger bass than 'Linear Phase', with clean highs.
- **Minimum (Slow):** A Non-Symmetrical filter designed to minimize pre-ringing. It offers a strong punchy bass with a good transient attack.
- **Hybrid:** This is the combination of 'Linear-phase' and 'Minimum-phase'. It offers a fast transient attack, strong punchy bass and crisp highs.


## MQA Decoding

There are four MQA decoding options:

- **Full Decode A** (PCM Upsampling Off) - This enables the full internal MQA decoding process of the D9, and simultaneously enables PCM streaming via SPDIF (COAX or OPTICAL) up to 192kHz. The SPDIF outputs will be switched off when MQA decoding is taking place, or if the PCM stream sample rate is above 192kHz. This mode is best for those streaming MQA and using the analogue outputs, or for streaming PCM (FLAC, WAV etc.) and using either analogue or digital outputs.
- **Full Decode B** (PCM Upsampling On) - this enables the full internal MQA decoding process of the D9, and upsamples both MQA and PCM to 352.8kHz or 384kHz. This mode is for use with the analogue outputs only. The SPDIF outputs (COAX and OPTICAL) are disabled.

• **Core Decode** - this option is suitable for users connecting to a 3rd party external MQA renderer via SPDIF, up to a sample rate of 192kHz.


• **Passthrough Mode** - this will bypass the MQA decoding stage in the D9 and allow the full non-decoded signal to pass through the D9 via the digital outputs. This mode is suited to users who prefer to use a separate DAC within their system (for example, when using the D9 with the Audiolab 9000A). The MQA decoding will therefore happen at the external DAC stage, not within the D9. Default setting is Full Decode A (PCM Upsampling OFF).

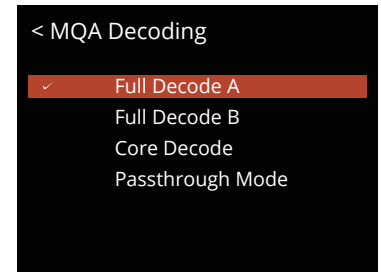

## DPLL


This setting is used for changing the bandwidth of the digital phase lock loop of the D/A converter to accommodate different levels of jitter on the incoming SPDIF signal. Normal mode should be selected for signals with low jitter, while Wide mode should be selected for signals with abnormal jitter.

For best audio quality leave this setting at the default value Normal, only use Wide for a given input if the system is having problems locking onto the source.

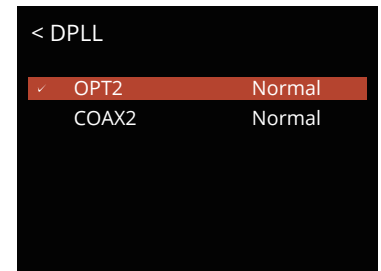

## Balance

Adjust the Left and Right balance of the D9 audio output.

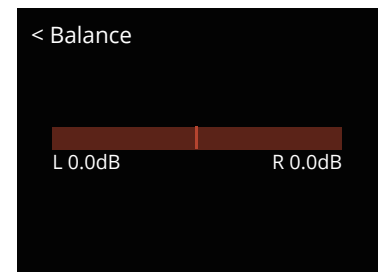


## Volume

### Power On Limit

Power On Limit sets the maximum volume level as the unit is switched on. When coming out of standby, the volume setting will be set to the level that was used at the end of the previous operating session OR to the Power On Limit value set in this menu, whichever is lowest.

This will avoid a sudden loud signal at the beginning of a new session.

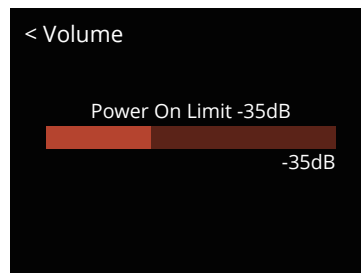


### Output

The analogue output level can be switched between FIXED and ADJUSTABLE.

When set to FIXED mode, the analogue output level will be fixed to the maximum output. This can be useful when connecting to an integrated amplifiers' AUX input, and therefore using the integrated amplifiers volume control.


When set to ADJUSTABLE, the D9 Volume control is used to adjust the level of the analogue output. This is required when connecting directly to a power amplifier. The default setting on the D9 is ADJUSTABLE.

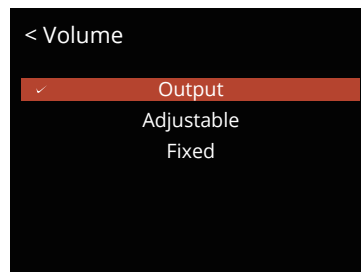

## Display Options

The D9 has different display modes (Home, VU Digital, VU Analogue, Audiolab logo & Display Off).

When 'off' is selected, press any key to turn on the display. The display will be reverting to 'off' after 5 seconds of inactivity, by default. You can change the duration to 10, 15 and 30 seconds from the Display Time Out option in the menu.




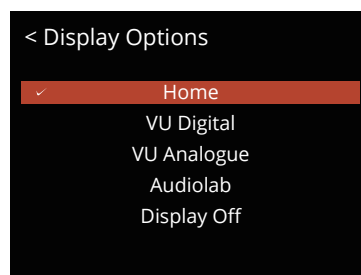


## Display Settings

Brightness: Adjust the brightness of the D9 front panel display.


Display Time Out: Adjust the time after which the D9 display will revert to your chosen display option, from the home screen, after performing volume adjustments and other operations.

Animation: Turn display animations on or off.

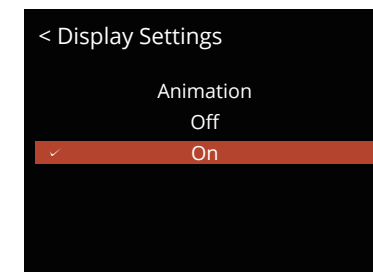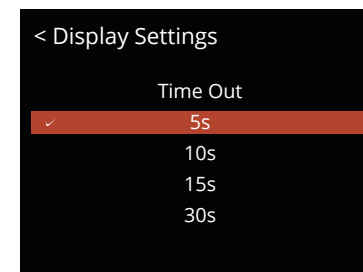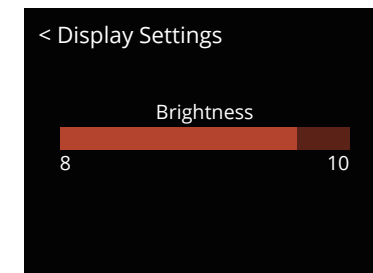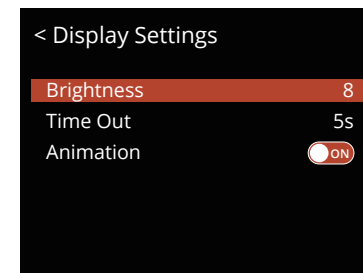

## Trigger

Activate or deactivate the 12V trigger function of the D9.

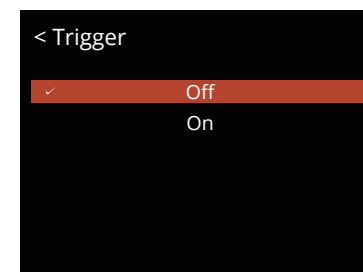


## Language

There are multiple different languages you can choose from to display your system so you can view information in your preferred language. Default language is English.




## Reset

Reset the D9 to the factory default settings.

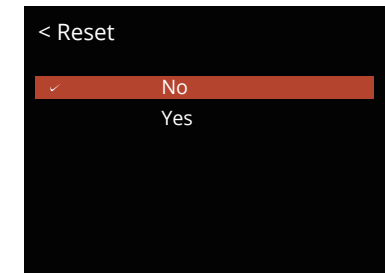


## Standby

The auto-standby feature will put the D9 into a standby model after 20 minutes of inactivity. This feature can be also user-defined and set to 20 minutes, 60 minutes or 'never'. The latter option means that the D9 will not enter standby mode without user instruction by way of the front panel 'standby' button or remote control 'standby' button.

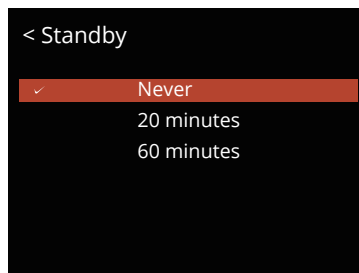

## Version

Check the current operation firmware version.

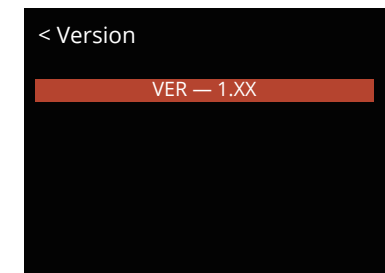

## Switching on and Off

The D9 should be switched on before the amplification stage in your system. When switching off your system, turn off the amplifier stage before switching off the D9.

## Standby Mode

The D9 will enter standby mode after being powered on. Press the “Standby” button to bring the D9 out of standby, the power indicator LED becomes brighter and the display shows “Audiolab” welcome screen while the unit is getting ready for operation.

## Source Select

Rotate the MODE knob on the front panel or use the source (▼or▲) buttons on the remote handset to select different source inputs.

## Volume Control

Rotate the VOL knob on the front panel, or use the Volume up/ down keys on the remote control, to set the volume level. The range is -78dB to 0dB, the factory default volume setting is -30dB. When coming out of standby the D9 will be set to the previous used volume setting, except if louder than -30dB, in which case the volume will default to -30dB.

## Mute

Press the VOL knob on the front panel or MUTE button on the remote handset to mute / un-mute the sound.

## Display Options


Press the DISPLAY button on the remote control or setting Front View in the menu will display the different display modes (VU Digital, VU Analog, Audiolab, Display Off, Home), and also turn off the display. When the display is off, press any key it will wake up the display, and the display will turn off again after about 10 seconds.

## The Menu


The menu enables you to customize the unit and optimize the interface with other equipment in your system.

D9 has 13 different menu pages. Press the MODE knob on front panel or MENU key on the remote to enter menu mode, and then press VOL- or VOL+ to turn to different setting, press to the sub menu. You can also press MODE button on the front to enter the menu, then rotate it turn to different setting, press to the sub menu. Press again to confirm.

## The Menu Tree

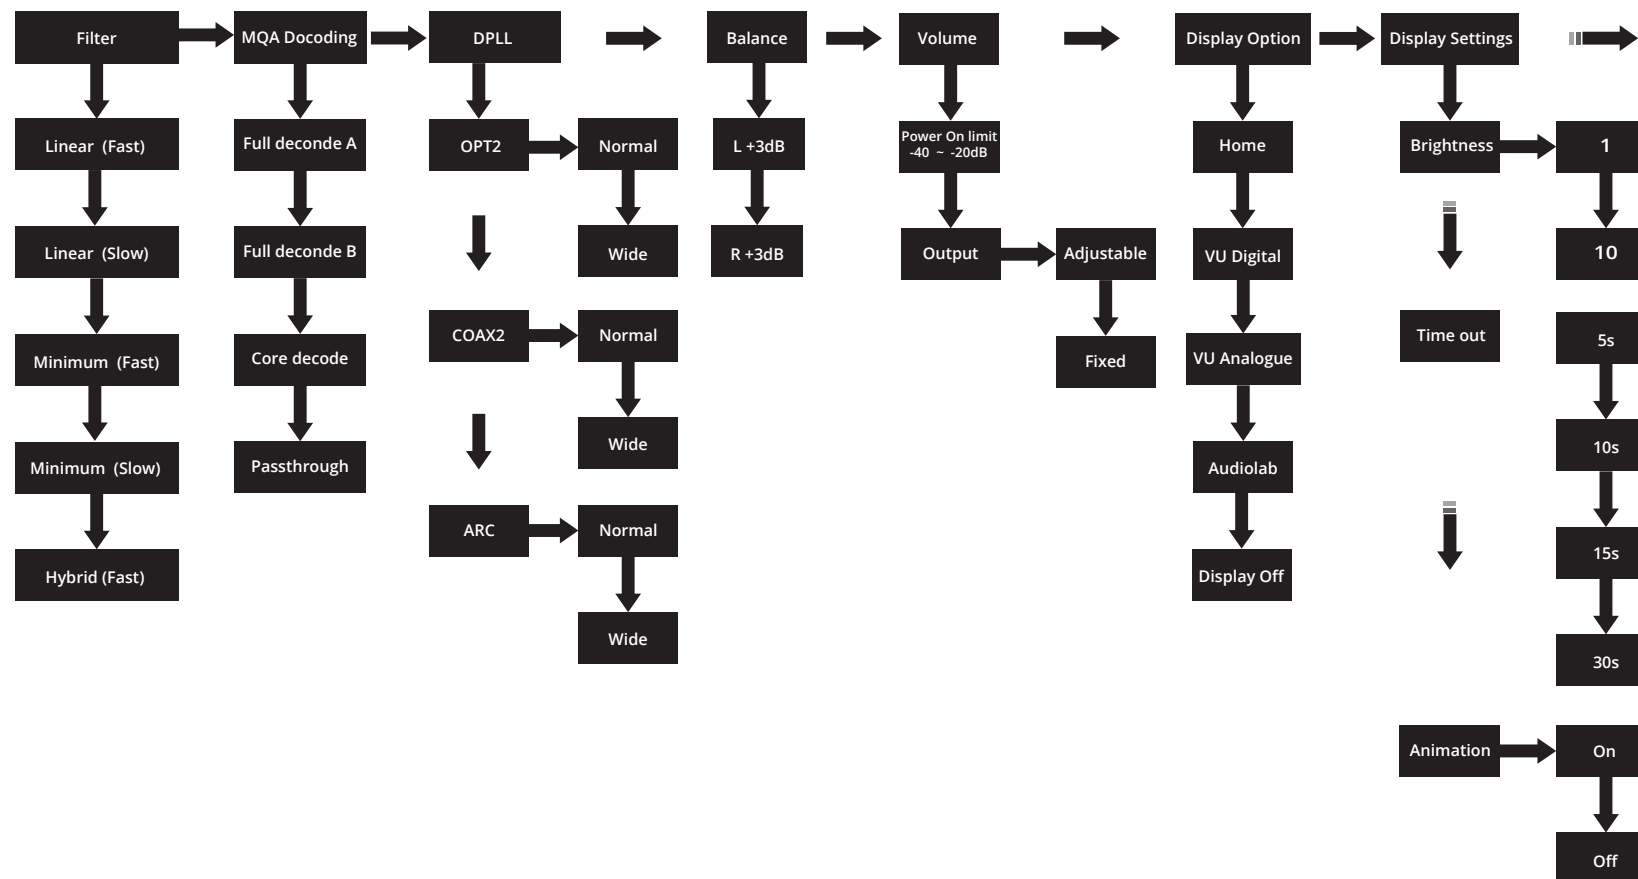

## The Menu Tree

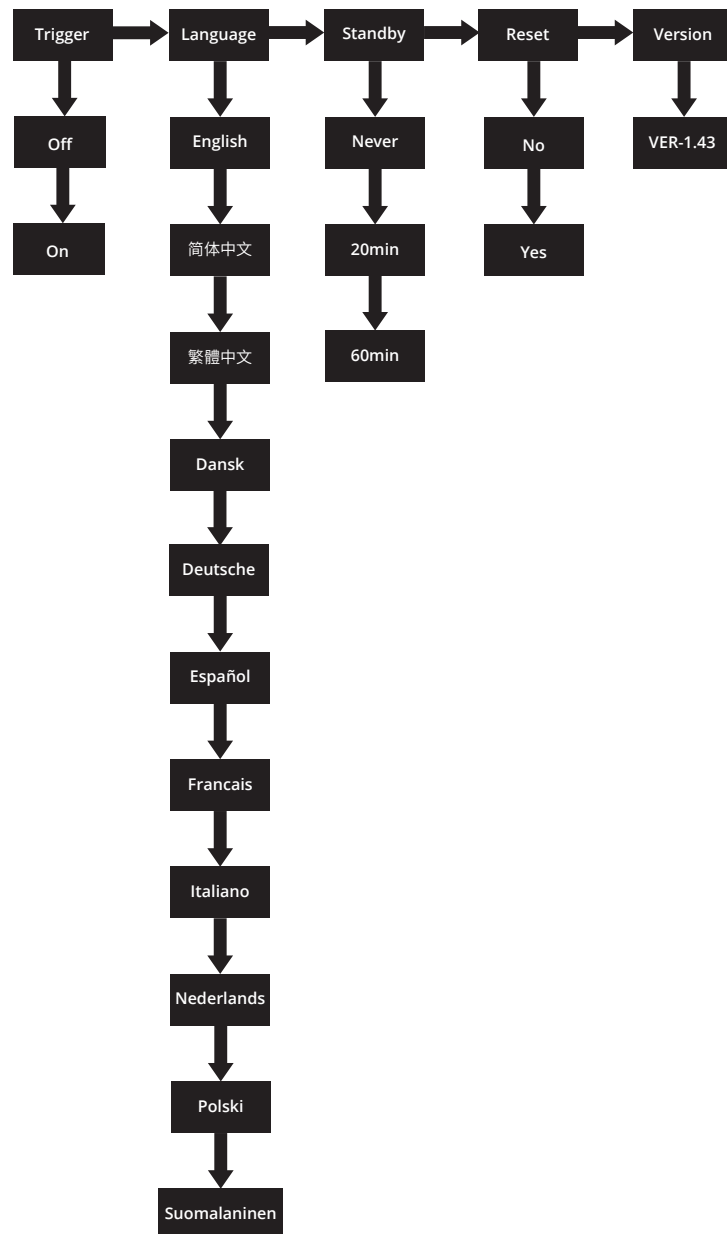

## Playing PC USB Input

### USB DRIVERS

To download Windows Drivers, please see the separate manual. Any firmware updates will also be available from [www.audiolab.co.uk](http://www.audiolab.co.uk)

Connect your computer to D9 via USB cable (type A to Type B), change the Play mode to USB input using the handset or the button on the front panel.

“No Input Signal” will be displayed if there is no input signal to the USB input. When you play a file the digital inputs will lock onto the digital signal as soon as there is an input signal for USB. The display screen will then indicate the presence of a “Active input” and show the output sampling frequency of the music file in your computer.

## Playing Tracks from USB Storage Device

The D9 can play music tracks saved on a USB HDD storage device and is compatible with USB device that are “FAT16” “FAT32” and “exFAT” formatted.

The D9 supports audio files in the format of WMA, MP3, WAV, FLAC, AAC and APE.

Connect your USB drive to the rear panel USB-A port. Select USB HDD playback input.

Play/Pause by pressing the ▶|| button on the remote control.

You can use the ◀◀▶▶ buttons on the remote control to skip, fast forward and fast reverse tracks.

Long press the 📁 button on the remote to enable/disable Folder Play mode.

Enable: All the files in the selected folder are played.

Disable: All the files in all the folders are played.

Briefly press the 📁 button on the remote to enter folder browse. When you browse, briefly press to return to previous folder, long press to exit the browse

### Compatible Formats

|      | Sampling Frequency  | Bite Rate         | Bite Length | Extension |
|------|---------------------|-------------------|-------------|-----------|
| WMA  | 16/32/44.1/48kHz    | 32~320kbps        |             | .wma      |
| MP3  | 16/32/44.1/48kHz    | 32~384kbps        |             | .mp3      |
| WAV  | 16/32/44.1/48/96kHz | 64~768kbps        | Up to 32bit | .wav      |
| AAC  | 16/32/44.1/48kHz    | 128kbps and above |             | .m4a      |
| FLAC | 16/32/44.1/48/96kHz | All bitrates      |             | .flac     |
| APE  | 16/32/44.1/48kHz    | All bitrates      |             | .ape      |

Audiolab warrants this product, subject to the terms and conditions below, to be free from defects in materials and workmanship. During the warranty period Audiolab will repair or replace (at Audiolab's option) this product, or any defective part in this product, if it is found to be defective due to faulty materials, workmanship or function. The warranty period may vary from country to country.

### Online Registration



Scan the QR code using a smart-phone device, for product warranty registration online.

The three (3) year extended warranty is applicable to items purchased from Jan 1st 2021, onwards. Items purchased prior to this date are not eligible for this extended warranty service but are subject to statutory warranty claims and all applicable consumer rights.

To qualify for the extended 3 year warranty, you must register your product within ninety (90) calendar days from the date of purchase.

Visit [audiolab.co.uk/warranty-registration](https://audiolab.co.uk/warranty-registration) to complete your online registration. Items not registered online will have a Limited Warranty for one (1) year, or for the period of your country's statutory warranty, whichever is longer.

Warranty can only be offered to products registered with proof of purchase with date, model and details of the authorised dealer clearly stated on the receipt/invoice. Please keep the original receipt/invoice in case it is required for a warranty claim.

This Limited Warranty is non-transferable and is offered exclusively to the original owner.

This Limited Warranty is valid only in the original country of purchase.

Repairs or replacements are provided under this warranty are the exclusive remedy of the consumer. Audiolab shall not be liable for any incidental or consequential damages for breach of any expenses or implied warranty with any product. Except to the extent prohibited by law, this warranty is exclusive and in lieu of all other warranties whatsoever, both expressed and implied, including but not limited to the warrant of merchantability and fitness for practical purpose.

This warranty provides benefits that are additional to and do not affect your statutory consumer rights.

This Limited Warranty offer is subject to correct information being submitted in your application. Incorrect dates or mismatched purchase receipt dates that are outside of the warranty terms will immediately invalidate any warranty claim.

\*Please check with your dealer local distributor for further information.

### Exclusions

The following items are excluded from the Audiolab warranty:

Normal wear and tear and cosmetic damage (including but not limited to any wear from reasonable use, environmental deterioration or neglect)

Products on which the serial number has been removed, altered or otherwise made illegible.

Products not purchased from an authorised Audiolab dealer.

Products that were not new at the time of original purchase.

Products sold 'as is', 'as seen' or 'with faults'

Product not purchased from an Authorised Dealer/Distributor within the region of the claim (ie parallel imports or grey market products)

Accidental damage or faults caused by commercial use, acts of God, incorrect installation, incorrect connection, incorrect packaging, misuse or careless operation or handling which is not in accordance with the user instructions.

Equipment that has been operated in conjunction with unsuitable, inappropriate or faulty apparatus.

Repairs, alterations or modifications carried out by parties other than Audiolab or its authorised service partners.

Damage in transit that cannot be attributable to the fault of Audiolab, the authorised distributor or dealer (ie. claims otherwise covered by transit insurance.)

Faults relating to abnormal or inappropriate power supply voltage or power surges.

Faults relating to extremities in temperature, exposure to heat, water or other liquids, insects, excessive moisture, sand, chemicals, battery leakage or any other contaminants.

Any force majeure events, including but not limited to any acts of God, fire, lightning, typhoon, storm, earthquake, hurricane, natural disaster, tsunami, flood, war, riot, public disturbance.

Any other causes beyond the reasonable control of either Audiolab and its Authorised Distributor.

Please note items purchased before 1st Jan 2021 are not eligible for the extended warranty claim.

### How to Claim

To obtain warranty service please contact the authorised dealer from which you purchased this product and present the limited warranty certificate offered upon registration of your product's extended warranty offer.

Do not dispatch goods without the prior agreement of the dealer distributor or authorised service centre.

If asked to return products for inspection and or repair, please pack carefully preferably in the original carton or packaging affording an equal degree of protection and returned via insured, trackable courier service.

The authorised dealer or distributor will offer full return details and instructions. However, please note if unsuitable packaging is used the warranty may be deemed void due to improper action in return.

Audiolab or the authorised distributor, dealer or service centre may make a charge for the supply of new packaging for the return of the repaired item. Please note, insurance is recommended as goods are returned at the owner's risk. Authorised distributors or service centres cannot be held liable for loss or damage in transit. Insurance and freight charges on the return journey will be paid for by Audiolab, authorised dealer, distributor or service centre if corrective work proves to be necessary.

In the event of 'no-fault found' or 'no repair necessary', the return shipping charge will be the responsibility of the owner.

### Repairs

All repairs will be carried out by the appointed distributor (or locally appointed service centre). Repairs handled or processed without authorisation or approval of the appointed representative will be excluded from this limited warranty. Please note, Audiolab is not able to supply parts or replacement items to any other entity

than the official distributor or authorised service centre.

Other than the warranty and services set out in this warranty, to the fullest extent permitted by law, Audiolab shall not be liable to you and/or any third party or entity whatsoever for:

- Any loss, damages and/or malfunction caused to any product(s) which is/are connected to any of the products covered by this warranty.
- Any damages, loss and liability, whether direct, indirect, incidental, consequential special, punitive or otherwise, howsoever caused by, arising out of or otherwise, in relation to the installation, delivery, use, service, repair, replacement and/or maintenance of the product;
- Any damages, loss and liability under this warranty in respect of any act, omission, or negligence of any of their technicians, employees, agents, representatives or independent contractors relating to the actual or purported performance of any of the obligations under this warranty.

### Service Centre Address

Should a fault occur with your product, please pack it correctly using the original packing, so you can ship it safely. For technical support, servicing or product queries and information, please contact either your local retailer or the office below:

LAG Service Dept.  
13/14 Glebe Road  
Huntingdon  
Cambridgeshire  
PE29 7DL  
UK

Tel: +44(0)1480 452561  
Email: [service@audiolab.co.uk](mailto:service@audiolab.co.uk)

For information on other authorised service centres worldwide contact Audiolab International, UK.

A worldwide distributors list is available on the Audiolab website: [www.audiolab.co.uk](http://www.audiolab.co.uk)

|                                       |                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>BRAND</b>                          | <b>Audiolab</b>                                                                                                                                                                                                                                                                                                                             |
| <b>Model</b>                          | <b>D9</b>                                                                                                                                                                                                                                                                                                                                   |
| General Description                   | DAC                                                                                                                                                                                                                                                                                                                                         |
| Design Philosophy and Core Technology | ES9038Pro 32-bit DAC<br>MQA Full decoder (PC USB, Coax / Optical)<br>2.8" 480x640 large size full view IPS LCD<br>Bluetooth 5.1 (aptX / aptX HD / LDAC) streaming<br>Dedicated Current-Feedback Headphone AMP<br>VU Digital / VU Analogue Meter<br>Support playing USB memory device (MP3 / WMA / AAC / WAV / FLAC)<br>USB Firmware Upgrade |
| Inputs                                | 2 x SPDIF (Coax), 2 x SPDIF (Optical), 1 x PC USB (USB B)<br>1 x USB HDD (USB A), 1 x Bluetooth (aptX / aptX HD)                                                                                                                                                                                                                            |
| Outputs                               | 1 x RCA, 1 x XLR, 1 x Headphone, 2 x 12V Trigger                                                                                                                                                                                                                                                                                            |
| Sampling Frequency                    | Optical / Coaxial: 44.1kHz -> 192kHz<br>USB HDD: 44.1kHz -> 96kHz<br>PC USB: 44.1kHz -> 768kHz (PCM) / DSD64, DSD128, DSD256, DSD512                                                                                                                                                                                                        |
| <b>DAC</b>                            |                                                                                                                                                                                                                                                                                                                                             |
| D to A Converter                      | ES9038Pro                                                                                                                                                                                                                                                                                                                                   |
| Output level (0dBFS, 1KHz)            | 2.05Vrms (RCA)<br>4.1Vrms (XLR)                                                                                                                                                                                                                                                                                                             |
| Total Harmonic Distortion (THD)       | < 0.001% (1KHz @ 0dBFS)                                                                                                                                                                                                                                                                                                                     |
| Frequency Response                    | 20Hz-20kHz (+/-0.1dB)                                                                                                                                                                                                                                                                                                                       |
| Output Impedance                      | 120 ohm                                                                                                                                                                                                                                                                                                                                     |
| Max. Sampling Frequency               | USB HDD: 96KHz<br>Optical, Coaxial: 192KHz<br>PC USB: PCM768kHz, DSD512                                                                                                                                                                                                                                                                     |

|                                             |                                                        |
|---------------------------------------------|--------------------------------------------------------|
| Signal-to-Noise Ratio (S/N)                 | > 118dB (A-weighted, RCA)<br>> 123dB (A-weighted, XLR) |
| Headphone Amplifier                         |                                                        |
| Total Harmonic Distortion(THD)              | < 0.01% (1kHz, 50mW )                                  |
| Output Impedance                            | 2.35 ohm                                               |
| Load Impedance                              | 20-600 ohm                                             |
| <b>General</b>                              |                                                        |
| Standby Power Consumption                   | <0.5W                                                  |
| Net Weight                                  | 4.2 kg                                                 |
| Gross Weight                                | 5.8 kg                                                 |
| Dimensions (mm) (W x H x D)                 | L: 315 x W: 277 x H: 88.3mm                            |
| Carton Size (mm) (W x H x D)                | L: 451 x W: 409 x H: 220mm                             |
| <b>Finish</b>                               |                                                        |
| Power Requirements<br>(depending on region) | 220-240V ~ 50/ 60Hz<br>100-120V ~ 50/ 60Hz             |
| Standard Accessories                        | Power Cord, Remote Control, User Manual, etc.          |



Audiolab  
IAG House,  
13/14 Glebe Road,  
Huntingdon,  
Cambridgeshire,  
PE29 7DL,  
UK

Telephone: +44(0)1480 452561

Email: [service@audiolab.co.uk](mailto:service@audiolab.co.uk)

<http://www.audiolab.co.uk>