# TEST REPORT

**DT&C Co., Ltd.**
42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1804-0033
2. Customer
   - Name : GNET SYSTEM.CO.,LTD
   - Address : 2-603,6F,Lotte IT Castle II,550-1,98, Gasan digital 2-ro,Geumcheon-gu, Seoul,South Korea
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Wi-fi Dongle / GN-W77
   FCC ID : 2AO7Z-GN-W77
5. Test Method Used : IEEE 1528-2013 , FCC SAR KDB Publications (Details in test report)
   Test Specification : CFR §2.1093
6. Date of Test : 2018.04.09
7. Testing Environment : See appended test report.
8. Test Result : Refer to the attached test result.

| | | |
|---|---|---|
| Affirmation | Tested by<br>Name : ChangWon Lee (Signature) | Reviewed by<br>Name : HakMin Kim (Signature) |

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

**2018 . 04 . 11 .**

**DT&C Co., Ltd.**

**If this report is required to confirmation of authenticity, please contact to report@dtnc.net**

# Test Report Version

| Test Report No. | Date | Description |
|---|---|---|
| DRRFCC1804-0033 | Apr. 11, 2018 | Initial issue |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

# Table of Contents

**1. DESCRIPTION OF DEVICE ..... 4**
1.1 Guidance Applied ..... 4
1.2 Power Reduction for SAR ..... 4
1.3 Device Serial Numbers ..... 4
**2. INTROCUCTION ..... 5**
**3. DESCRIPTION OF TEST EQUIPMENT ..... 6**
3.1 SAR MEASUREMENT SETUP ..... 6
3.2 EX3DV4Probe Specification ..... 7
3.3 Probe Calibration Process ..... 8
3.3.1 E-Probe Calibration ..... 8
3.4 Data Extrapolation ..... 9
3.5 SAM Twin PHANTOM ..... 10
3.6 Device Holder for Transmitters ..... 10
3.7 Brain Simulation Mixture Characterization ..... 11
3.8 SAR TEST EQUIPMENT ..... 12
**4. TEST SYSTEM SPECIFICATIONS ..... 13**
**5. SAR MEASUREMENT PROCEDURE ..... 14**
5.1 Measurement Procedure ..... 14
**6. RF EXPOSURE LIMITS ..... 16**
**7. SAR MEASUREMENT PROCEDURES ..... 17**
7.1 Measured and Reported SAR ..... 17
7.2 SAR Testing with 802.11 Transmitters ..... 17
7.2.1 General Device Setup ..... 17
7.2.2 Initial Test Position Procedure ..... 17
7.2.3 2.4 GHz SAR Test Requirements ..... 18
7.2.4 OFDM Transmission Mode and SAR Test Channel Selection ..... 18
7.2.5 Initial Test Configuration Procedure ..... 18
7.3 Same Dongle Procedure ..... 19
**8. Nominal and Maximum Output Power Spec and RF Conducted Powers ..... 20**
8.1 Bluetooth Nominal and Maximum Output Power Spec and Conducted Powers ..... 20
**9. SYSTEM VERIFICATION ..... 21**
9.1 Tissue Verification ..... 21
9.2 Test System Verification ..... 21
**10. SAR TEST RESULTS ..... 22**
10.1 Body SAR Results ..... 22
10.2 SAR Test Notes ..... 22
**11. MEASUREMENT UNCERTAINTIES ..... 23**
**12. CONCLUSION ..... 24**
**13. REFERENCES ..... 25**
**Attachment 1. – Probe Calibration Data ..... 27**
**Attachment 2. – Dipole Calibration Data ..... 66**
**Attachment 3. – SAR SYSTEM VALIDATION ..... 75**

# 1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

## General Information

| | | | | | |
|---|---|---|---|---|---|
| EUT type | Wi-fi Dongle | | | | |
| FCC ID | 2AO7Z-GN-W77 | | | | |
| Equipment model name | GN-W77 | | | | |
| Equipment add model name | N/A | | | | |
| Equipment serial no. | Identical prototype | | | | |
| Mode(s) of Operation | 2.4 G W-LAN (802.11b/g/n-HT20) | | | | |
| TX Frequency Range | **Band** | **Mode** | **Operating Modes** | **Bandwidth** | **Frequency** |
| | 2.4 GHz W-LAN | 802.11b/g/n | Data | HT20 | 2412 ~ 2462 MHz |
| RX Frequency Range | 2.4 GHz W-LAN | 802.11b/g/n | Data | HT20 | 2412 ~ 2462 MHz |
| **Equipment Class** | **Band** | **Reported SAR** | | | |
| | | **1g SAR (W/kg)** | | | |
| | | **Body** | | | |
| DTS | 2.4 GHz W-LAN | < 0.1 | | | |
| FCC Equipment Class | Digital Transmission System(DTS) | | | | |
| Date(s) of Tests | 2018.04.09 | | | | |
| Antenna Type | Internal Type Antenna | | | | |

## 1.1 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 447498 D02v02r01 (SAR Procedures for Dongle Xmtr)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)

## 1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

## 1.3 Device Serial Numbers

| Band & Mode | Serial Number |
|---|---|
| 2.4 GHz WLAN | FCC #1 |

# 2. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

## SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt}\left(\frac{dU}{dm}\right) = \frac{d}{dt}\left(\frac{dU}{\rho dv}\right)$$

Fig. 2.1 SAR Mathematical Equation

**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

σ = conductivity of the tissue-simulating material (S/m)
ρ = mass density of the tissue-simulating material (kg/m$^3$)
E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

# 3. DESCRIPTION OF TEST EQUIPMENT

## 3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller each pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-4770 3.40 GHz desktop computer with Windows 7 system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Staubli Robotis connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

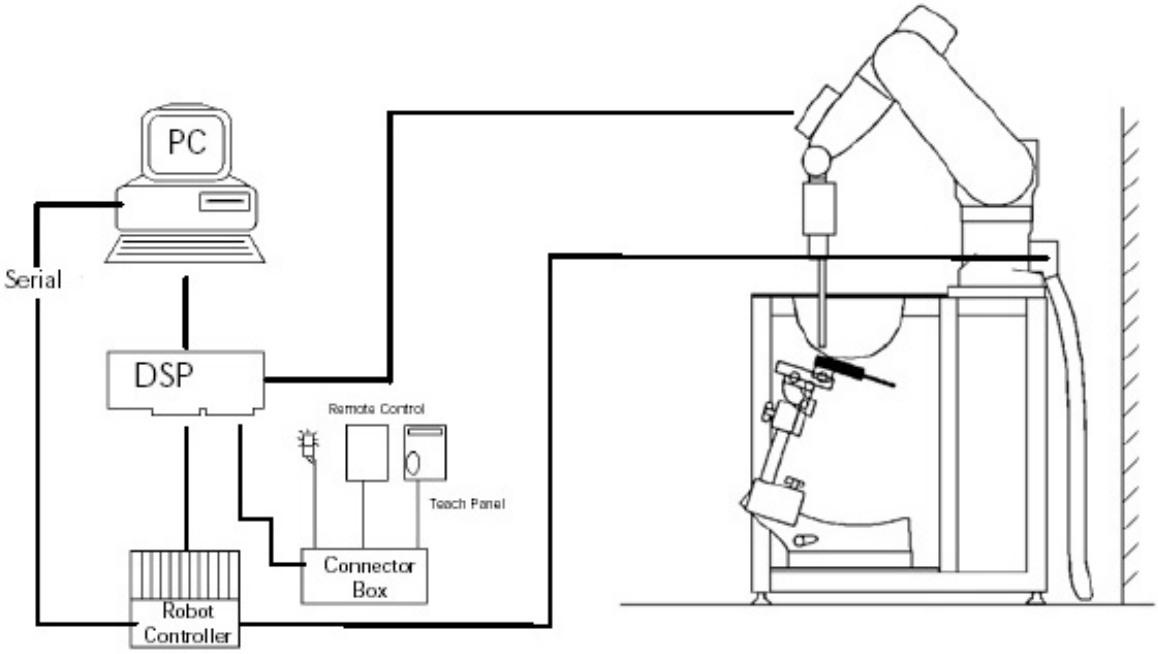


**Figure 3.1 SAR Measurement System Setup**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

## 3.2 Probe Specification

**Calibration** In air from 10 MHz to 6 GHz
In brain and muscle simulating tissue at Frequencies of
750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2300 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz

**Frequency** 10 MHz to 6 GHz

**Linearity** ± 0.2 dB(30 MHz to 6 GHz)

**Dynamic** 10 µW/g to > 100 mW/g

**Range** Linearity : ±0.2dB

**Dimensions** Overall length : 337 mm

**Tip length** 20 mm

**Body diameter** 12 mm

**Tip diameter** 2.5 mm

**Distance from probe tip to sensor center** 1.0 mm

**Application** SAR Dosimetry Testing
Compliance tests of mobile phones




**Figure 3.2 Triangular Probe Configurations**

**Figure 3.3 Probe Thick-Film Technique**

**DAE System**

The SAR measurements were conducted with the dosimetric probe EX3DV4 designed in the classical triangular configuration(see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multitier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

## 3.3 Probe Calibration Process

### 3.3.1 E-Probe Calibration

**Dosimetric Assessment Procedure**

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

**Free Space Assessment**

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

**Temperature Assessment** *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$SAR = C\frac{\Delta T}{\Delta t}$$

where:

$\Delta t$ = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$ = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

$\sigma$ = simulated tissue conductivity,

$\rho$ = Tissue density (1.25 g/cm$^3$ for brain tissue)

SAR is proportional to ΔT / Δt , the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

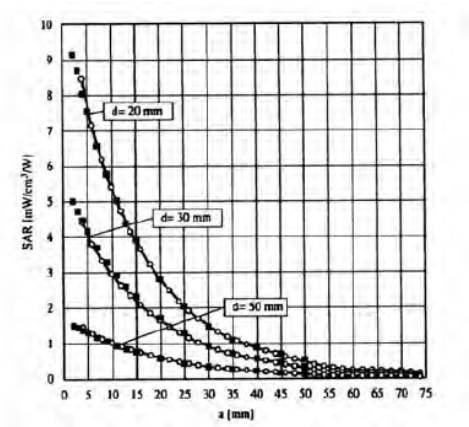


**Figure 3.4 E-Field and Temperature Measurements at 900MHz**

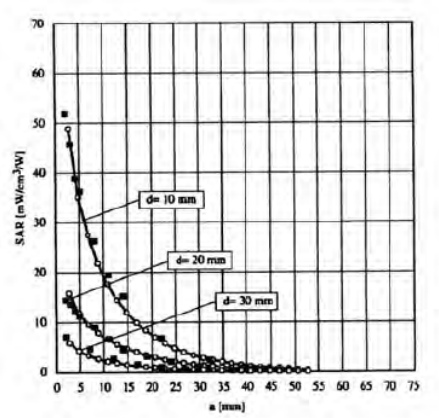


**Figure 3.5 E-Field and Temperature Measurements at 1800MHz**

## 3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with
$V_i$ = compensated signal of channel i (i=x,y,z)
$U_i$ = input signal of channel i (i=x,y,z)
cf = crest factor of exciting field (DASY parameter)
$dcp_i$ = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with
$V_i$ = compensated signal of channel i (i = x,y,z)
$Norm_i$ = sensor sensitivity of channel i (i = x,y,z) $\mu V/(V/m)^2$ for E-field probes
ConvF = sensitivity of enhancement in solution
$E_i$ = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with
SAR = local specific absorption rate in W/g
$E_{tot}$ = total field strength in V/m
σ = conductivity in [mho/m] or [Siemens/m]
ρ = equivalent tissue density in $g/cm^3$

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$

with
$P_{pwe}$ = equivalent power density of a plane wave in $W/cm^2$
$E_{tot}$ = total electric field strength in V/m

## 3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)

**Figure 3.6 SAM Twin Phantom**

### SAM Twin Phantom Specification:

| | |
|---|---|
| **Construction** | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.<br>Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure. |
| **Shell Thickness** | 2 ± 0.2 mm |
| **Filling Volume** | Approx. 25 liters |
| **Dimensions** | Length: 1000 mm<br>Width: 500 mm<br>Height: adjustable feet |

### Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimized reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.

**Figure 3.7 Sam Twin Phantom shell**

## 3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

**Figure 3.8 Mounting Device**

## 3.7 Brain Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.

**Figure 3.9 Simulated Tissue**

**Table 3.1 Composition of the Tissue Equivalent Matter**

| Ingredients (% by weight) | Frequency (MHz) |
|---|---|
| | 2450 |
| **Tissue Type** | **Head** |
| Water | 71.88 |
| Salt (NaCl) | 0.160 |
| Sugar | - |
| HEC | - |
| Bactericide | - |
| Triton X-100 | 19.97 |
| DGBE | 7.990 |
| Diethylene glycol hexyl ether | - |
| Polysorbate (Tween) 80 | - |
| Target for Dielectric Constant | 39.2 |
| Target for Conductivity (S/m) | 1.80 |

| | | | |
|---|---|---|---|
| Salt: | 99 % Pure Sodium Chloride | Sugar: | 98 % Pure Sucrose |
| Water: | De-ionized, 16M resistivity | HEC: | Hydroxyethyl Cellulose |
| DGBE: | 99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol] | | |
| Triton X-100(ultra pure): | Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether | | |

## 3.8 SAR TEST EQUIPMENT

**Table 3.2 Test Equipment Calibration**

| | Type | Manufacturer | Model | Cal.Date | Next.Cal.Date | S/N |
|---|---|---|---|---|---|---|
| ☒ | SEMITEC Engineering | SEMITEC | N/A | N/A | N/A | Shield Room |
| ☒ | Robot | SCHMID | TX60L | N/A | N/A | F14/5VR2A1/A/01 |
| ☒ | Robot Controller | SCHMID | CS8C | N/A | N/A | F14/5VR2A1/C/01 |
| ☒ | Joystick | SCHMID | N/A | N/A | N/A | D21142605A |
| ☒ | Intel Core i7-4770 3.40 GHz Windows 7 Professional | N/A | N/A | N/A | N/A | N/A |
| ☒ | Probe Alignment Unit LB | N/A | N/A | N/A | N/A | SE UKS 030 AA |
| ☒ | Mounting Device | SCHMID | SD000H01KA | N/A | N/A | N/A |
| ☒ | Twin SAM Phantom | SCHMID | TP1220 | N/A | N/A | N/A |
| ☒ | Data Acquisition Electronics | SCHMID | DAE4V1 | 2017-09-19 | 2018-09-19 | 1453 |
| ☒ | Dosimetric E-Field Probe | SCHMID | EX3DV4 | 2017-05-31 | 2018-05-31 | 3866 |
| ☒ | 2450MHz SAR Dipole | SCHMID | D2450V2 | 2017-09-19 | 2019-09-19 | 726 |
| ☒ | Network Analyzer | Agilent | E5071C | 2018-02-02 | 2019-02-02 | MY46111534 |
| ☒ | Signal Generator | Agilent | E4438C | 2017-09-05 | 2018-09-05 | US41461520 |
| ☒ | Amplifier | RFBAY.Inc | MPA-40-40 | 2017-12-28 | 2018-12-28 | 21151801 |
| ☒ | Amplifier | EMPOWER | BBS3Q7ELU | 2017-09-06 | 2018-09-06 | 1020 |
| ☒ | High Power RF Amplifier | EMPOWER | BBS3Q8CCJ | 2017-09-05 | 2018-09-05 | 1005 |
| ☒ | Power Meter | HP | EPM-442A | 2017-12-27 | 2018-12-27 | GB37170267 |
| ☒ | Power Meter | HP | EPM-442A | 2017-12-27 | 2018-12-27 | GB37170413 |
| ☒ | Power Sensor | HP | 8481A | 2017-12-27 | 2018-12-27 | US37294267 |
| ☒ | Power Sensor | HP | 8481A | 2017-12-27 | 2018-12-27 | 3318A96566 |
| ☒ | Power Sensor | HP | 8481A | 2017-12-27 | 2018-12-27 | 2702A65976 |
| ☒ | Directional Coupler | HP | 772D | 2017-07-13 | 2018-07-13 | 2889A01064 |
| ☒ | Low Pass Filter 3.0GHz | Micro LAB | LA-30N | 2017-09-05 | 2018-09-05 | N/A |
| ☒ | Attenuators(3 dB) | Agilent | 8491B | 2017-12-27 | 2018-12-27 | MY39260700 |
| ☒ | Attenuators(10 dB) | WEINSCHEL | 23-10-34 | 2017-12-27 | 2018-12-27 | BP4387 |
| ☒ | Dielectric Probe kit | SCHMID | DAK-3.5 | 2017-11-21 | 2018-11-21 | 1092 |
| ☒ | Dielectric Probe kit | SCHMID | DAK-3.5 | 2017-07-18 | 2018-07-18 | 1046 |

**NOTE:** The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The muscle simulating material was calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the muscle-equivalent material. Each equipment item was used solely within its respective calibration period.

# 4. TEST SYSTEM SPECIFICATIONS

## Automated TEST SYSTEM SPECIFICATIONS:

### Positioner

| | |
|---|---|
| **Robot** | Stäubli Unimation Corp. Robot Model: TX60L |
| **Repeatability** | 0.02 mm |
| **No. of axis** | 6 |

### Data Acquisition Electronic (DAE) System

#### Cell Controller

| | |
|---|---|
| **Processor** | Intel Core i7-4770 |
| **Clock Speed** | 3.40 GHz |
| **Operating System** | Windows 7 Professional |
| **Data Card** | DASY5 PC-Board |

#### Data Converter

| | |
|---|---|
| **Features** | Signal, multiplexer, A/D converter. & control logic |
| **Software** | DASY5 |
| **Connecting Lines** | Optical downlink for data and status info<br>Optical uplink for commands and clock |

#### PC Interface Card

| | |
|---|---|
| **Function** | 24 bit (64 MHz) DSP for real time processing<br>Link to DAE 4<br>16 bit A/D converter for surface detection system<br>serial link to robot<br>direct emergency stop output for robot |

#### E-Field Probes

| | |
|---|---|
| **Model** | EX3DV4 S/N: 3866 |
| **Construction** | Triangular core fiber optic detection system |
| **Frequency** | 10 MHz to 6 GHz |
| **Linearity** | ± 0.2 dB (30 MHz to 6 GHz) |

#### Phantom

| | |
|---|---|
| **Phantom** | SAM Twin Phantom (V5.0) |
| **Shell Material** | Composite |
| **Thickness** | 2.0 ± 0.2 mm |

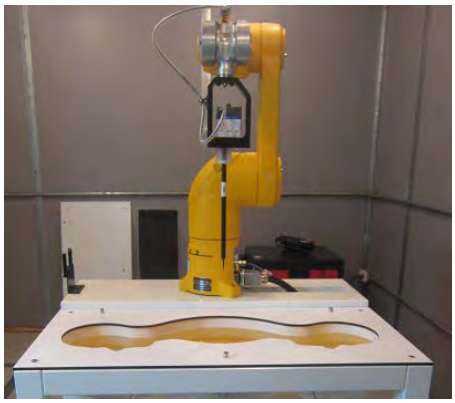

**Figure 4.1 DASY5 Test System**

# 5. SAR MEASUREMENT PROCEDURE

## 5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE1528-2013.

2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.



**Figure 5.1**
**Sample SAR Area Scan**

3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):

   a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 5.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).

   b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.

   c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

| | | | ≤ 3 GHz | > 3 GHz |
|---|---|---|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | | | 5 mm ± 1 mm | ½·$\delta$·ln(2) mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | | | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: $\Delta x_{Area}$, $\Delta y_{Area}$ | | | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm |
| | | | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$, $\Delta y_{Zoom}$ | | | ≤ 2 GHz: ≤ 8 mm<br>2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm<br>4 – 5 GHz: ≤ 3 mm<br>5 – 6 GHz: ≤ 2 mm |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm<br>4 – 5 GHz: ≤ 2.5 mm<br>5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | ≤ 1.5·$\Delta z_{Zoom}(n-1)$ mm | |
| Minimum zoom scan volume | x, y, z | | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm<br>4 – 5 GHz: ≥ 25 mm<br>5 – 6 GHz: ≥ 22 mm |

Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

**Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04***

# 6. RF EXPOSURE LIMITS

**Uncontrolled Environment:**

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Controlled Environment:**

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 6.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992**

| | HUMAN EXPOSURE LIMITS | |
|---|---|---|
| | General Public Exposure (W/kg) or (mW/g) | Occupational Exposure (W/kg) or (mW/g) |
| SPATIAL PEAK SAR * (Brain) | 1.60 | 8.00 |
| SPATIAL AVERAGE SAR ** (Whole Body) | 0.08 | 0.40 |
| SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist) | 4.00 | 20.0 |

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

# 7. SAR MEASUREMENT PROCEDURES

## 7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

## 7.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

### 7.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 7.2.2 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

### 7.2.3 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

### 7.2.4 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11g then 802.11n is used for SAR measurement. When the maximum output power ware the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 7.2.5 Initial Test Configuration Procedure

For OFDM, in both 2.4 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.
Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

## 7.3 Same Dongle Procedure

Test all USB orientations [see figure below: (A) Horizontal-Up, (B) Horizontal-Down, (C) Vertical-Front, and (D) Vertical-Back] with a device-to-phantom separation distance of 5 mm or less, according to KDB Publication 447498 D01 requirements. These test orientations are intended for the exposure conditions found in typical laptop/notebook/netbook or tablet computers with either horizontal or vertical USB connector configurations at various locations in the keyboard section of the computer. Current generation portable host computers should be used to establish the required SAR measurement separation distance. The same test separation distance must be used to test all frequency bands and modes in each USB orientation. The typical Horizontal-Up USB connection (A), found in the majority of host computers, must be tested using an appropriate host computer. A host computer with either Vertical-Front (C) or Vertical-Back (D) USB connection should be used to test one of the vertical USB orientations. If a suitable host computer is not available for testing the Horizontal-Down (B) or the remaining Vertical USB orientation, a high quality USB cable, 12 inches or less, may be used for testing these other orientations. It must be documented that the USB cable does not influence the radiating characteristics and output power of the transmitter.

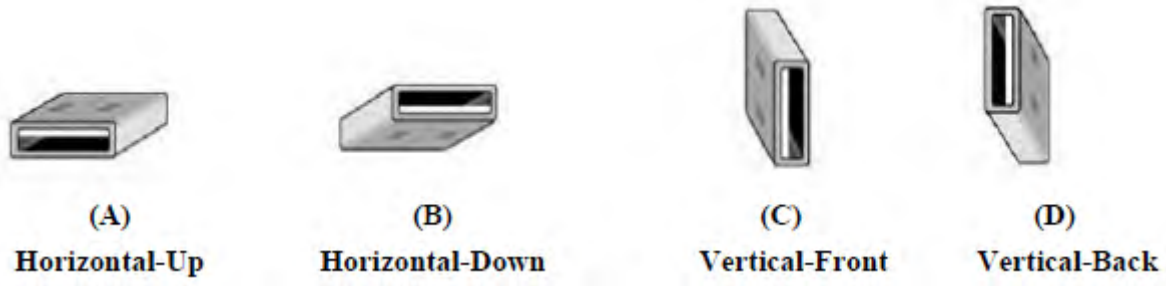


**Figure 7.1 USB Connector Orientations Implemented on Laptop Computers**

Note: These are USB connector orientations on laptop computers; USB dongles have the reverse configuration for plugging into the corresponding laptop computers.

# 8. Nominal and Maximum Output Power Spec and RF Conducted Powers

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

## 8.1 Bluetooth Nominal and Maximum Output Power Spec and Conducted Powers

| Band (GHz) | Mode (MHz) | Modulated Average[dBm] |
|---|---|---|
| | | Target Power (Average) |
| 2.4 | 802.11b | 16.0 |
| | 802.11g | 15.0. |
| | 802.11n(HT20) | 14.0 |

**Table 8.1.1 WLAN 2.4GHz Nominal and Maximum Output Power Spec**

| Mode | Freq. | Channel | IEEE 802.11 (2.4 GHz) Conducted Power |
|---|---|---|---|
| | (MHz) | | (dBm) |
| 802.11b | 2412 | 1 | **15.31** |
| | 2437 | 6 | 15.04 |
| | 2462 | 11 | 15.15 |
| 802.11g | 2412 | 1 | 14.74 |
| | 2437 | 6 | 14.82 |
| | 2462 | 11 | 14.79 |
| 802.11n (HT-20) | 2412 | 1 | 13.81 |
| | 2437 | 6 | 13.57 |
| | 2462 | 11 | 13.67 |

**Table 8.1.2 IEEE 802.11 Average RF Power**

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, duo to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.

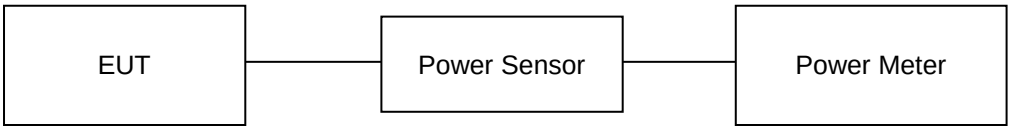


**Figure 8.1.1 Power Measurement Setup**

# 9. SYSTEM VERIFICATION

## 9.1 Tissue Verification

| MEASURED TISSUE PARAMETERS | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Date(s) | Tissue Type | Ambient Temp.[°C] | Liquid Temp.[°C] | Measured Frequency [MHz] | Target Dielectric Constant, εr | Target Conductivity, σ (S/m) | Measured Dielectric Constant, εr | Measured Conductivity, σ (S/m) | Er Deviation [%] | σ Deviation [%] |
| Apr. 09. 2018 | 2450 Body | 21.3 | 21.1 | 2412.0 | 52.751 | 1.914 | 51.421 | 1.867 | -2.52 | -2.46 |
| | | | | 2437.0 | 52.717 | 1.938 | 51.357 | 1.898 | -2.58 | -2.06 |
| | | | | 2450.0 | 52.700 | 1.950 | 51.322 | 1.914 | -2.61 | -1.85 |
| | | | | 2462.0 | 52.685 | 1.967 | 51.297 | 1.928 | -2.63 | -1.98 |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

### Measurement Procedure for Tissue verification:

1) The network analyzer and probe system was configured and calibrated.
2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
3) The complex admittance with respect to the probe aperture was measured
4) The complex relative permittivity , for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\varepsilon_r\varepsilon_0}{[\ln(b/a)]^2}\int_a^b\int_a^b\int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\varepsilon_r'\varepsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where $Y$ is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ , $\omega$ is the angular frequency, and $j = \sqrt{-1}$ .

## 9.2 Test System Verification

Prior to assessment, the system is verified to the ± 10 % of the specifications at 2450 MHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

**Table 9.2.1 System Verification Results**

| SYSTEM DIPOLE VERIFICATION TARGET & MEASURED | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SAR System # | Freq. [MHz] | SAR Dipole kits | Date(s) | Tissue Type | Ambient Temp. [°C] | Liquid Temp. [°C] | Probe S/N | Input Power (mW) | 1 W Target $SAR_{1g}$ (W/kg) | Measured $SAR_{1g}$ (W/kg) | 1 W Normalized $SAR_{1g}$ (W/kg) | Deviation [%] |
| B | 2450 | D2450V2, SN: 726 | Apr. 09. 2018 | Body | 21.3 | 21.1 | 3866 | 125 | 50.3 | 6.31 | 50.48 | 0.36 |

Note: Full system validation status and results can be found in Attachment 3.

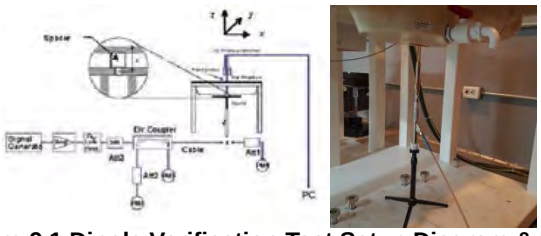

**Figure 9.1 Dipole Verification Test Setup Diagram & Photo**

# 10. SAR TEST RESULTS

## 10.1 Body SAR Results

**Table 10.1.1 DTS Body SAR**

| MEASUREMENT RESULTS | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FREQUENCY | | Mode | Maximum Allowed Power [dBm] | Conducted Power [dBm] | Drift Power [dB] | Phantom Position | Device Serial Number | Peak SAR of Area Scan | Data Rate [Mbps] | Duty Cycle | 1g SAR (W/kg) | Scaling Factor | Scaling Factor (Duty Cycle) | 1g Adjusted SAR (W/kg) | Plots # |
| MHz | Ch | | | | | | | | | | | | | | |
| 2412 | 1 | 802.11b | 16.0 | 15.31 | 0.170 | 5 mm [Horizontal-Up] | FCC #1 | 0.056 | 1 | 91.3 | 0.052 | 1.172 | 1.095 | 0.067 | |
| 2412 | 1 | 802.11b | 16.0 | 15.31 | 0.030 | 5 mm [Horizontal-Down] | FCC #1 | 0.054 | 1 | 91.3 | 0.057 | 1.172 | 1.095 | **0.073** | A1 |
| 2412 | 1 | 802.11b | 16.0 | 15.31 | -0.030 | 5 mm [Vertical-Front] | FCC #1 | 0.030 | 1 | 91.3 | 0.028 | 1.172 | 1.095 | 0.036 | |
| 2412 | 1 | 802.11b | 16.0 | 15.31 | 0.090 | 5 mm [Vertical-Back] | FCC #1 | 0.032 | 1 | 91.3 | 0.035 | 1.172 | 1.095 | 0.045 | |
| **ANSI / IEEE C95.1-1992– SAFETY LIMIT<br>Spatial Peak<br>Uncontrolled Exposure/General Population Exposure** | | | | | | | | **Body<br>1.6 W/kg (mW/g)**<br>averaged over 1 gram | | | | | | | |

## 10.2 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required duo to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured**.**
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

# 11. MEASUREMENT UNCERTAINTIES

**2450 MHz Body**

| Error Description | Uncertainty value ±% | Probability Distribution | Divisor | (Ci) 1g | Standard (1g) | vi 2 or Veff |
|---|---|---|---|---|---|---|
| **Measurement System** | | | | | | |
| Probe calibration | ± 6.0 | Normal | 1 | 1 | ± 6.0 % | ∞ |
| Axial isotropy | ± 4.7 | Rectangular | √3 | 1 | ± 2.7 % | ∞ |
| Hemispherical isotropy | ± 9.6 | Rectangular | √3 | 1 | ± 5.5 % | ∞ |
| Boundary Effects | ± 0.8 | Rectangular | √3 | 1 | ± 0.46 % | ∞ |
| Probe Linearity | ± 4.7 | Rectangular | √3 | 1 | ± 2.7 % | ∞ |
| Probe modulation response | ± 2.4 | Rectangular | √3 | 1 | ± 1.4 % | ∞ |
| Detection limits | ± 0.25 | Rectangular | √3 | 1 | ± 0.14 % | ∞ |
| Readout Electronics | ± 1.0 | Normal | 1 | 1 | ± 1.0 % | ∞ |
| Response time | ± 0.8 | Rectangular | √3 | 1 | ± 0.46 % | ∞ |
| Integration time | ± 2.6 | Rectangular | √3 | 1 | ± 1.5 % | ∞ |
| RF Ambient Conditions – Noise | ± 3.0 | Rectangular | √3 | 1 | ± 1.7 % | ∞ |
| RF Ambient Conditions – Reflections | ± 3.0 | Rectangular | √3 | 1 | ± 1.7 % | ∞ |
| Probe Positioner | ± 0.4 | Rectangular | √3 | 1 | ± 0.23 % | ∞ |
| Probe Positioning | ± 2.9 | Rectangular | √3 | 1 | ± 1.7 % | ∞ |
| Algorithms for Max. SAR Eval. | ± 1.0 | Rectangular | √3 | 1 | ± 0.58 % | ∞ |
| **Test Sample Related** | | | | | | |
| Device Positioning | ± 2.9 | Normal | 1 | 1 | ± 2.9 % | 145 |
| Device Holder | ± 3.6 | Normal | 1 | 1 | ± 3.6 % | 5 |
| Power Drift | ± 5.0 | Rectangular | √3 | 1 | ± 2.9 % | ∞ |
| SAR Scaling | ± 2.0 | Rectangular | √3 | 1 | ± 1.2 % | ∞ |
| **Physical Parameters** | | | | | | |
| Phantom Shell | ± 4.0 | Rectangular | √3 | 1 | ± 2.3 % | ∞ |
| Liquid conductivity (Target) | ± 5.0 | Rectangular | √3 | 0.64 | ± 2.9 % | ∞ |
| Liquid conductivity (Meas.) | ± 4.1 | Normal | 1 | 0.64 | ± 4.1 % | 10 |
| Liquid permittivity (Target) | ± 5.0 | Rectangular | √3 | 0.6 | ± 2.9 % | ∞ |
| Liquid permittivity (Meas.) | ± 4.2 | Normal | 1 | 0.6 | ± 4.2 % | 10 |
| Temp. unc. - Conductivity | ± 1.8 | Rectangular | √3 | 0.78 | ± 1.0 % | ∞ |
| Temp. unc. - Permittivity | ± 1.8 | Rectangular | √3 | 0.23 | ± 1.0 % | ∞ |
| **Combined Standard Uncertainty** | | | | | **± 12 %** | 330 |
| **Expanded Uncertainty (k=2)** | | | | | **± 24 %** | |

The above measurement uncertainties are according to IEEE Std 1528

# 12. CONCLUSION

**Measurement Conclusion**

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

# 13. REFERENCES

[1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.

[2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.

[3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.

[4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.

[5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013,Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.

[6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.

[7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.

[8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1-124.

[9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.

[10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.

[11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.

[12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.

[13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.

[14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.

[15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.

[16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

[17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

[18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

[19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hoschschule Zürich, Dosimetric Evaluation of the Cellular Phone.

[20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), 2016.

[21] RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.

[22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015

[23] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02

[24] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04

[25] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04

[26] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02

[27] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02

[28] Anexo à Resolução No. 533, de 10 de September de 2009.

[29] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), 2010.

# Attachment 1. – Probe Calibration Data

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)** Certificate No: **EX3-3866_May17**

# CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | EX3DV4 - SN:3866 |
| Calibration procedure(s) | QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6<br>Calibration procedure for dosimetric E-field probes |
| Calibration date: | May 31, 2017 |

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02525) | Apr-18 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-16 (No. ES3-3013_Dec16) | Dec-17 |
| DAE4 | SN: 660 | 7-Dec-16 (No. DAE4-660_Dec16) | Dec-17 |
| | | | |
| **Secondary Standards** | **ID** | **Check Date (in house)** | **Scheduled Check** |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Michael Weber | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: May 31, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

## Glossary:

| | |
|---|---|
| TSL | tissue simulating liquid |
| NORMx,y,z | sensitivity in free space |
| ConvF | sensitivity in TSL / NORMx,y,z |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

## Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- *NORMx,y,z:* Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the $E^2$-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z:* DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR:* PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORMx,y,z * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).

# Probe EX3DV4

## SN:3866

Manufactured: February 2, 2012
Calibrated: May 31, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866

## Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|---|---|---|---|
| Norm (μV/(V/m)$^2$)[A] | 0.41 | 0.32 | 0.36 | ± 10.1 % |
| DCP (mV)[B] | 98.7 | 104.7 | 105.6 | |

## Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB√μV | C | D dB | VR mV | Unc[E] (k=2) |
|---|---|---|---|---|---|---|---|---|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 128.8 | ±3.8 % |
| | | Y | 0.0 | 0.0 | 1.0 | | 129.9 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 116.6 | |

Note: For details on UID parameters see Appendix.

## Sensor Model Parameters

| | C1 fF | C2 fF | α $V^{-1}$ | T1 ms.$V^{-2}$ | T2 ms.$V^{-1}$ | T3 ms | T4 $V^{-2}$ | T5 $V^{-1}$ | T6 |
|---|---|---|---|---|---|---|---|---|---|
| X | 80.45 | 604.4 | 36.15 | 27.57 | 2.71 | 5.008 | 0.000 | 0.922 | 1.011 |
| Y | 55.76 | 412.0 | 35.04 | 17.20 | 1.60 | 4.942 | 0.529 | 0.571 | 1.004 |
| Z | 46.51 | 343.2 | 34.91 | 16.57 | 1.418 | 4.95 | 1.280 | 0.347 | 1.004 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of Norm X,Y,Z do not affect the $E^2$-field uncertainty inside TSL (see Pages 5 and 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866

## Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) [C] | Relative Permittivity [F] | Conductivity (S/m) [F] | ConvF X | ConvF Y | ConvF Z | Alpha [G] | Depth [G] (mm) | Unc (k=2) |
|---|---|---|---|---|---|---|---|---|
| 750 | 41.9 | 0.89 | 10.18 | 10.18 | 10.18 | 0.51 | 0.81 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.60 | 9.60 | 9.60 | 0.50 | 0.80 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.45 | 9.45 | 9.45 | 0.48 | 0.80 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.32 | 8.32 | 8.32 | 0.38 | 0.85 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 7.93 | 7.93 | 7.93 | 0.42 | 0.80 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.84 | 7.84 | 7.84 | 0.36 | 0.80 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.48 | 7.48 | 7.48 | 0.33 | 0.92 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.28 | 7.28 | 7.28 | 0.45 | 0.80 | ± 12.0 % |
| 3500 | 37.9 | 2.91 | 6.99 | 6.99 | 6.99 | 0.20 | 1.25 | ± 13.1 % |
| 5200 | 36.0 | 4.66 | 5.34 | 5.34 | 5.34 | 0.35 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 5.25 | 5.25 | 5.25 | 0.35 | 1.80 | ± 13.1 % |
| 5500 | 35.6 | 4.96 | 4.77 | 4.77 | 4.77 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.68 | 4.68 | 4.68 | 0.40 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 4.90 | 4.90 | 4.90 | 0.40 | 1.80 | ± 13.1 % |

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866

## Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) [C] | Relative Permittivity [F] | Conductivity (S/m) [F] | ConvF X | ConvF Y | ConvF Z | Alpha [G] | Depth [G] (mm) | Unc (k=2) |
|---|---|---|---|---|---|---|---|---|
| 750 | 55.5 | 0.96 | 9.67 | 9.67 | 9.67 | 0.45 | 0.80 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.44 | 9.44 | 9.44 | 0.46 | 0.82 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 9.68 | 9.68 | 9.68 | 0.34 | 0.98 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 8.16 | 8.16 | 8.16 | 0.31 | 0.88 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.83 | 7.83 | 7.83 | 0.41 | 0.80 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.65 | 7.65 | 7.65 | 0.36 | 0.90 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.56 | 7.56 | 7.56 | 0.39 | 0.85 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 7.21 | 7.21 | 7.21 | 0.29 | 0.92 | ± 12.0 % |
| 3500 | 51.3 | 3.31 | 6.60 | 6.60 | 6.60 | 0.20 | 1.30 | ± 13.1 % |
| 5200 | 49.0 | 5.30 | 4.98 | 4.98 | 4.98 | 0.40 | 1.90 | ± 13.1 % |
| 5300 | 48.9 | 5.42 | 4.78 | 4.78 | 4.78 | 0.40 | 1.90 | ± 13.1 % |
| 5500 | 48.6 | 5.65 | 4.21 | 4.21 | 4.21 | 0.45 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 4.03 | 4.03 | 4.03 | 0.50 | 1.90 | ± 13.1 % |
| 5800 | 48.2 | 6.00 | 4.24 | 4.24 | 4.24 | 0.50 | 1.90 | ± 13.1 % |

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3866 May 31, 2017

## Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

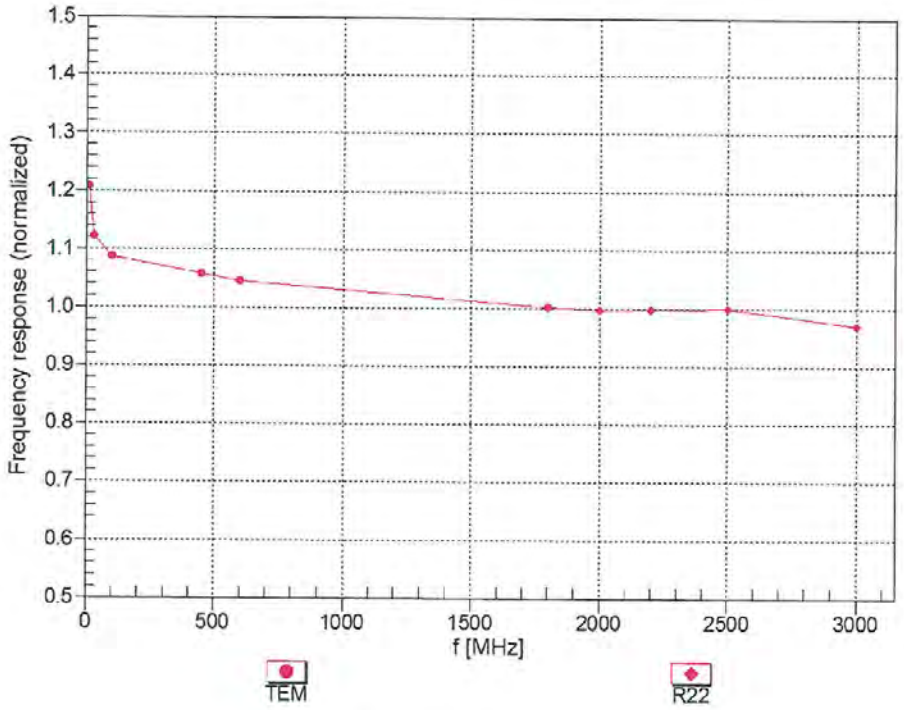


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

EX3DV4– SN:3866 May 31, 2017

## Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM

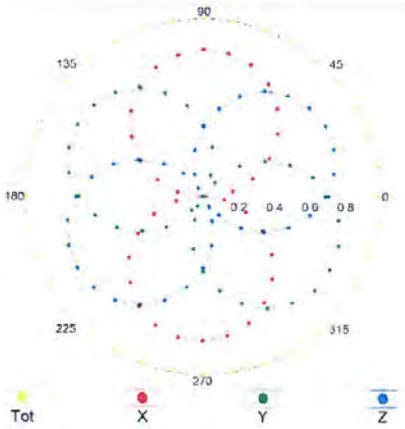


f=1800 MHz,R22

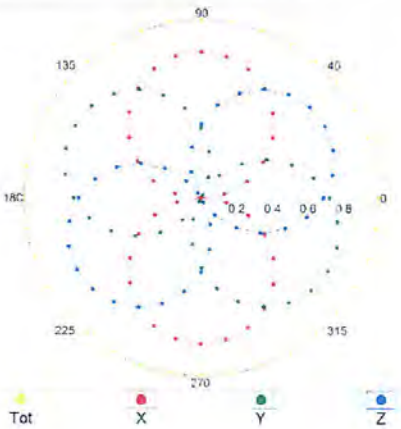


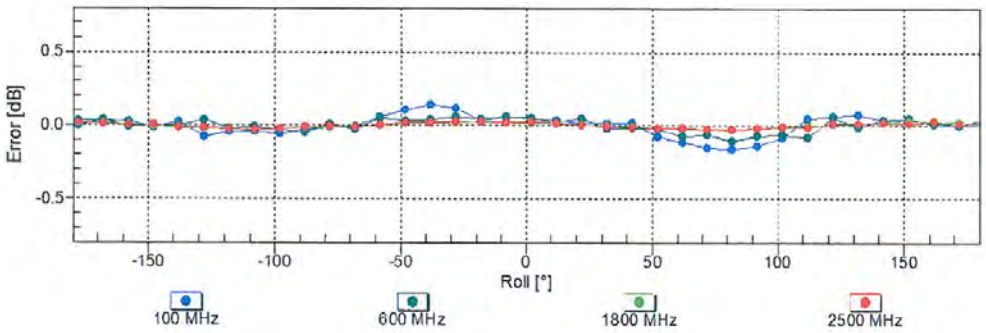


**Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)**

EX3DV4– SN:3866 May 31, 2017

## Dynamic Range f(SAR$_{head}$)
(TEM cell , $f_{eval}$= 1900 MHz)

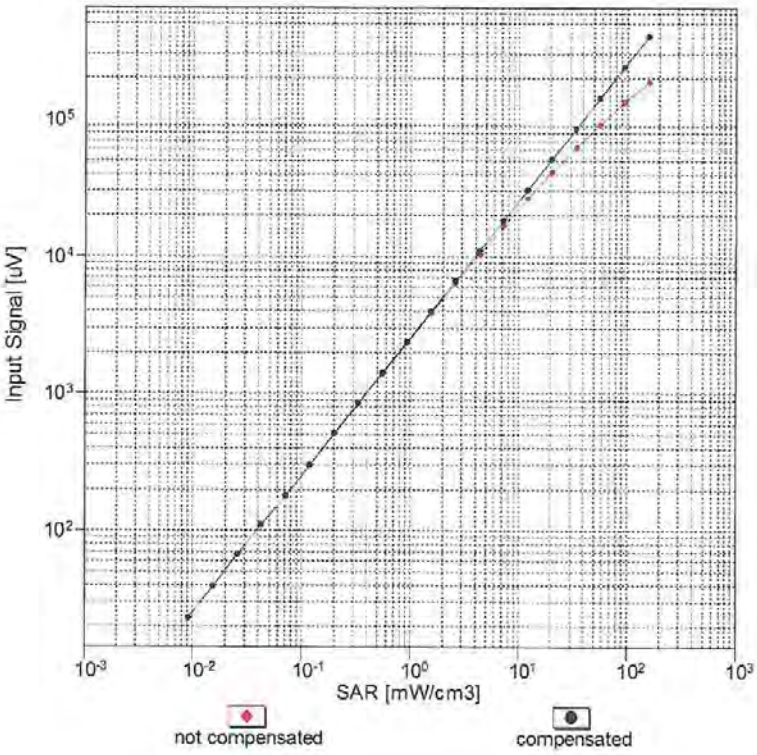


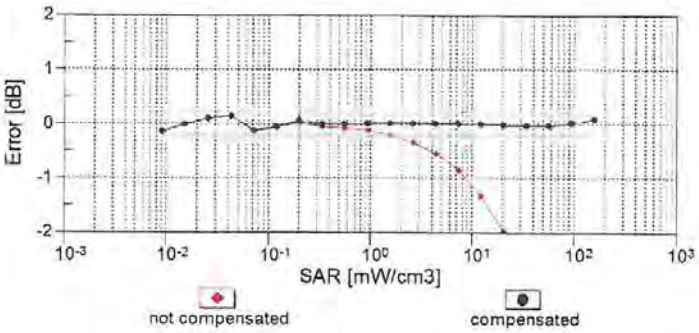


**Uncertainty of Linearity Assessment: ± 0.6% (k=2)**

EX3DV4– SN:3866 May 31, 2017

## Conversion Factor Assessment

f = 835 MHz,WGLS R9 (H_convF)

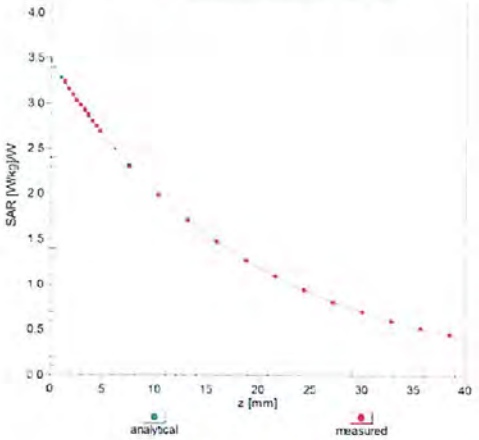


f = 1900 MHz,WGLS R22 (H_convF)

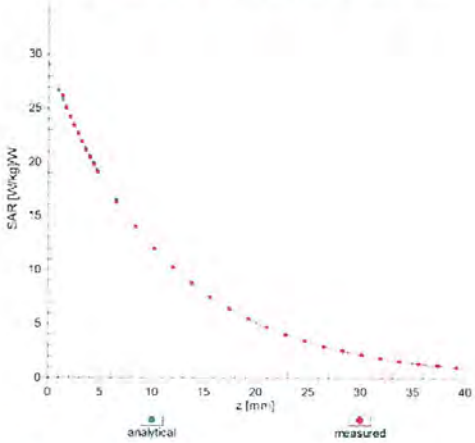


## Deviation from Isotropy in Liquid

**Error (ϕ, ϑ), f = 900 MHz**

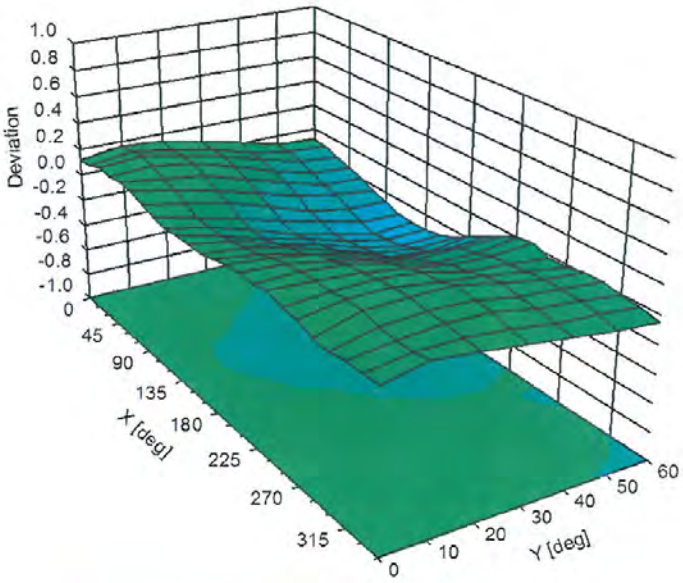





**Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)**

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866

## Other Probe Parameters

| | |
|---|---|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 61.9 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

EX3DV4– SN:3866 May 31, 2017

## Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB√μV | C | D dB | VR mV | Max Unc[E] (k=2) |
|---|---|---|---|---|---|---|---|---|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 128.8 | ± 3.8 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 129.9 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 116.6 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 5.95 | 74.05 | 16.36 | 10.00 | 20.0 | ± 9.6 % |
| | | Y | 3.07 | 66.56 | 11.43 | | 20.0 | |
| | | Z | 2.99 | 66.54 | 11.31 | | 20.0 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 1.28 | 70.56 | 17.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.08 | 68.10 | 15.82 | | 150.0 | |
| | | Z | 1.04 | 67.68 | 15.48 | | 150.0 | |
| 10012-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.32 | 65.32 | 16.30 | 0.41 | 150.0 | ± 9.6 % |
| | | Y | 1.20 | 64.03 | 15.24 | | 150.0 | |
| | | Z | 1.19 | 63.96 | 15.11 | | 150.0 | |
| 10013-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.19 | 66.67 | 17.18 | 1.46 | 150.0 | ± 9.6 % |
| | | Y | 4.90 | 66.40 | 16.75 | | 150.0 | |
| | | Z | 4.82 | 66.51 | 16.77 | | 150.0 | |
| 10021-DAC | GSM-FDD (TDMA, GMSK) | X | 12.15 | 85.52 | 22.11 | 9.39 | 50.0 | ± 9.6 % |
| | | Y | 6.07 | 75.16 | 16.30 | | 50.0 | |
| | | Z | 6.56 | 76.45 | 16.67 | | 50.0 | |
| 10023-DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 11.50 | 84.56 | 21.84 | 9.57 | 50.0 | ± 9.6 % |
| | | Y | 5.84 | 74.50 | 16.08 | | 50.0 | |
| | | Z | 6.17 | 75.47 | 16.33 | | 50.0 | |
| 10024-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 26.23 | 96.72 | 23.98 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 5.12 | 74.76 | 14.90 | | 60.0 | |
| | | Z | 5.82 | 76.45 | 15.41 | | 60.0 | |
| 10025-DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 10.67 | 88.40 | 32.75 | 12.57 | 50.0 | ± 9.6 % |
| | | Y | 4.12 | 65.62 | 21.59 | | 50.0 | |
| | | Z | 6.56 | 79.23 | 28.97 | | 50.0 | |
| 10026-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 14.94 | 95.03 | 32.08 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 9.51 | 87.13 | 28.83 | | 60.0 | |
| | | Z | 10.55 | 91.01 | 30.74 | | 60.0 | |
| 10027-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 100.00 | 113.33 | 27.03 | 4.80 | 80.0 | ± 9.6 % |
| | | Y | 5.60 | 77.09 | 14.96 | | 80.0 | |
| | | Z | 7.37 | 80.07 | 15.84 | | 80.0 | |
| 10028-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 113.17 | 26.19 | 3.55 | 100.0 | ± 9.6 % |
| | | Y | 9.35 | 83.25 | 16.28 | | 100.0 | |
| | | Z | 18.35 | 89.71 | 17.97 | | 100.0 | |
| 10029-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 10.87 | 88.71 | 28.82 | 7.80 | 80.0 | ± 9.6 % |
| | | Y | 6.75 | 80.75 | 25.47 | | 80.0 | |
| | | Z | 6.88 | 82.26 | 26.43 | | 80.0 | |
| 10030-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 43.82 | 102.79 | 24.81 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 4.19 | 73.20 | 13.74 | | 70.0 | |
| | | Z | 4.51 | 74.19 | 14.00 | | 70.0 | |
| 10031-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 100.00 | 114.49 | 25.34 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 12.27 | 86.90 | 16.08 | | 100.0 | |
| | | Z | 14.50 | 88.27 | 16.33 | | 100.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 100.00 | 120.23 | 26.73 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 107.05 | 20.40 | | 100.0 | |
| | | Z | 100.00 | 107.01 | 20.33 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | X | 10.94 | 88.62 | 24.03 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 4.82 | 76.42 | 18.22 | | 70.0 | |
| | | Z | 4.75 | 76.24 | 17.84 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | X | 5.09 | 82.37 | 21.18 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 2.44 | 72.17 | 15.93 | | 100.0 | |
| | | Z | 2.33 | 71.44 | 15.08 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | X | 3.40 | 78.37 | 19.72 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 1.93 | 70.75 | 15.37 | | 100.0 | |
| | | Z | 1.84 | 70.11 | 14.50 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 12.65 | 91.14 | 24.92 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 5.32 | 77.99 | 18.87 | | 70.0 | |
| | | Z | 5.25 | 77.78 | 18.47 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 4.98 | 82.11 | 21.03 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 2.35 | 71.76 | 15.72 | | 100.0 | |
| | | Z | 2.23 | 70.95 | 14.85 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 3.51 | 79.08 | 20.06 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 1.95 | 71.10 | 15.61 | | 100.0 | |
| | | Z | 1.86 | 70.41 | 14.73 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 2.56 | 75.42 | 18.82 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.30 | 75.01 | 17.60 | | 150.0 | |
| | | Z | 1.99 | 73.47 | 16.29 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 16.20 | 89.31 | 21.91 | 7.78 | 50.0 | ± 9.6 % |
| | | Y | 4.76 | 72.97 | 14.33 | | 50.0 | |
| | | Z | 5.04 | 73.85 | 14.55 | | 50.0 | |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | X | 0.00 | 102.20 | 0.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.00 | 102.73 | 3.92 | | 150.0 | |
| | | Z | 0.00 | 99.33 | 2.98 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 8.75 | 77.87 | 21.22 | 13.80 | 25.0 | ± 9.6 % |
| | | Y | 5.51 | 70.74 | 16.23 | | 25.0 | |
| | | Z | 5.63 | 71.35 | 16.31 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 9.70 | 81.24 | 21.09 | 10.79 | 40.0 | ± 9.6 % |
| | | Y | 5.71 | 73.25 | 15.92 | | 40.0 | |
| | | Z | 5.84 | 73.83 | 16.00 | | 40.0 | |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 10.12 | 82.67 | 22.58 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 6.84 | 76.82 | 18.79 | | 50.0 | |
| | | Z | 7.14 | 77.75 | 18.94 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 8.43 | 84.30 | 26.55 | 6.55 | 100.0 | ± 9.6 % |
| | | Y | 5.31 | 76.88 | 23.34 | | 100.0 | |
| | | Z | 5.24 | 77.48 | 23.87 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.47 | 67.27 | 17.17 | 0.61 | 110.0 | ± 9.6 % |
| | | Y | 1.25 | 65.09 | 15.65 | | 110.0 | |
| | | Z | 1.24 | 65.01 | 15.54 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 100.00 | 130.10 | 33.13 | 1.30 | 110.0 | ± 9.6 % |
| | | Y | 4.36 | 86.40 | 21.16 | | 110.0 | |
| | | Z | 4.61 | 87.44 | 21.51 | | 110.0 | |

Certificate No: EX3-3866_May17 Page 13 of 38

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 6.73 | 88.90 | 24.38 | 2.04 | 110.0 | ± 9.6 % |
| | | Y | 2.67 | 75.57 | 19.02 | | 110.0 | |
| | | Z | 2.69 | 76.06 | 19.25 | | 110.0 | |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 4.98 | 66.68 | 16.67 | 0.49 | 100.0 | ± 9.6 % |
| | | Y | 4.73 | 66.55 | 16.37 | | 100.0 | |
| | | Z | 4.63 | 66.59 | 16.34 | | 100.0 | |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 5.01 | 66.81 | 16.78 | 0.72 | 100.0 | ± 9.6 % |
| | | Y | 4.74 | 66.60 | 16.43 | | 100.0 | |
| | | Z | 4.65 | 66.64 | 16.40 | | 100.0 | |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 5.39 | 67.18 | 17.03 | 0.86 | 100.0 | ± 9.6 % |
| | | Y | 5.05 | 66.88 | 16.64 | | 100.0 | |
| | | Z | 4.92 | 66.88 | 16.60 | | 100.0 | |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 5.25 | 67.10 | 17.11 | 1.21 | 100.0 | ± 9.6 % |
| | | Y | 4.91 | 66.74 | 16.67 | | 100.0 | |
| | | Z | 4.79 | 66.75 | 16.65 | | 100.0 | |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 5.29 | 67.18 | 17.29 | 1.46 | 100.0 | ± 9.6 % |
| | | Y | 4.92 | 66.72 | 16.78 | | 100.0 | |
| | | Z | 4.81 | 66.75 | 16.77 | | 100.0 | |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 5.60 | 67.22 | 17.68 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 5.20 | 66.76 | 17.12 | | 100.0 | |
| | | Z | 5.09 | 66.89 | 17.16 | | 100.0 | |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 5.73 | 67.57 | 17.99 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 5.27 | 66.90 | 17.33 | | 100.0 | |
| | | Z | 5.15 | 66.94 | 17.34 | | 100.0 | |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 5.78 | 67.36 | 18.10 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 5.35 | 66.82 | 17.48 | | 100.0 | |
| | | Z | 5.23 | 66.94 | 17.52 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 5.31 | 66.82 | 17.48 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 4.99 | 66.45 | 16.98 | | 100.0 | |
| | | Z | 4.92 | 66.57 | 17.02 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.36 | 67.31 | 17.73 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 4.99 | 66.78 | 17.15 | | 100.0 | |
| | | Z | 4.90 | 66.87 | 17.19 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.46 | 67.54 | 18.06 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 5.05 | 66.89 | 17.40 | | 100.0 | |
| | | Z | 4.97 | 67.03 | 17.47 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 5.46 | 67.56 | 18.30 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 5.03 | 66.79 | 17.52 | | 100.0 | |
| | | Z | 4.97 | 66.96 | 17.60 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.61 | 68.07 | 18.77 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 5.10 | 67.00 | 17.83 | | 90.0 | |
| | | Z | 5.03 | 67.12 | 17.89 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.58 | 67.75 | 18.81 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 5.10 | 66.74 | 17.89 | | 90.0 | |
| | | Z | 5.05 | 66.96 | 18.02 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.60 | 67.82 | 18.90 | 4.30 | 90.0 | ± 9.6 % |
| | | Y | 5.12 | 66.79 | 17.97 | | 90.0 | |
| | | Z | 5.08 | 67.04 | 18.11 | | 90.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 1.27 | 70.24 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.98 | 67.71 | 14.08 | | 150.0 | |
| | | Z | 0.86 | 66.59 | 12.87 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 1.73 | 62.11 | 7.60 | 4.77 | 80.0 | ± 9.6 % |
| | | Y | 0.89 | 58.75 | 4.35 | | 80.0 | |
| | | Z | 0.86 | 58.91 | 4.38 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 25.29 | 96.24 | 23.88 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 5.08 | 74.63 | 14.87 | | 60.0 | |
| | | Z | 5.76 | 76.30 | 15.37 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 2.01 | 68.55 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.89 | 68.09 | 16.11 | | 150.0 | |
| | | Z | 1.85 | 68.04 | 15.86 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.97 | 68.53 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.85 | 68.03 | 16.07 | | 150.0 | |
| | | Z | 1.81 | 67.98 | 15.83 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 14.91 | 94.93 | 32.04 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 9.53 | 87.13 | 28.81 | | 60.0 | |
| | | Z | 10.57 | 91.01 | 30.73 | | 60.0 | |
| 10100-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 3.70 | 72.32 | 17.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.30 | 71.07 | 17.03 | | 150.0 | |
| | | Z | 3.15 | 70.59 | 16.83 | | 150.0 | |
| 10101-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.59 | 68.49 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.34 | 67.87 | 16.11 | | 150.0 | |
| | | Z | 3.24 | 67.63 | 15.98 | | 150.0 | |
| 10102-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.68 | 68.35 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.45 | 67.84 | 16.22 | | 150.0 | |
| | | Z | 3.34 | 67.61 | 16.07 | | 150.0 | |
| 10103-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 7.82 | 75.74 | 19.97 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.01 | 72.79 | 18.45 | | 65.0 | |
| | | Z | 6.25 | 74.01 | 19.06 | | 65.0 | |
| 10104-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 8.19 | 75.35 | 20.72 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.66 | 73.01 | 19.41 | | 65.0 | |
| | | Z | 6.53 | 73.21 | 19.57 | | 65.0 | |
| 10105-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 7.58 | 73.89 | 20.39 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.04 | 71.14 | 18.90 | | 65.0 | |
| | | Z | 6.27 | 72.37 | 19.53 | | 65.0 | |
| 10108-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 3.27 | 71.37 | 17.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.89 | 70.23 | 16.85 | | 150.0 | |
| | | Z | 2.74 | 69.80 | 16.65 | | 150.0 | |
| 10109-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 3.27 | 68.30 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.01 | 67.74 | 16.08 | | 150.0 | |
| | | Z | 2.90 | 67.51 | 15.90 | | 150.0 | |
| 10110-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.70 | 70.25 | 17.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.36 | 69.21 | 16.48 | | 150.0 | |
| | | Z | 2.22 | 68.90 | 16.25 | | 150.0 | |
| 10111-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.98 | 68.82 | 16.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.76 | 68.70 | 16.56 | | 150.0 | |
| | | Z | 2.63 | 68.51 | 16.27 | | 150.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10112-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 3.38 | 68.12 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.13 | 67.71 | 16.13 | | 150.0 | |
| | | Z | 3.02 | 67.52 | 15.96 | | 150.0 | |
| 10113-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 3.13 | 68.77 | 16.98 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.91 | 68.81 | 16.68 | | 150.0 | |
| | | Z | 2.79 | 68.66 | 16.40 | | 150.0 | |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 5.38 | 67.36 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.19 | 67.25 | 16.45 | | 150.0 | |
| | | Z | 5.11 | 67.25 | 16.43 | | 150.0 | |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.86 | 67.90 | 16.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.54 | 67.52 | 16.58 | | 150.0 | |
| | | Z | 5.39 | 67.35 | 16.49 | | 150.0 | |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.53 | 67.63 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.31 | 67.49 | 16.49 | | 150.0 | |
| | | Z | 5.20 | 67.43 | 16.45 | | 150.0 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 5.38 | 67.35 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.18 | 67.22 | 16.45 | | 150.0 | |
| | | Z | 5.07 | 67.11 | 16.38 | | 150.0 | |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.83 | 67.70 | 16.77 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.61 | 67.67 | 16.66 | | 150.0 | |
| | | Z | 5.46 | 67.54 | 16.59 | | 150.0 | |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 5.48 | 67.51 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.28 | 67.43 | 16.47 | | 150.0 | |
| | | Z | 5.18 | 67.38 | 16.43 | | 150.0 | |
| 10140-CAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.74 | 68.35 | 16.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.49 | 67.83 | 16.13 | | 150.0 | |
| | | Z | 3.38 | 67.61 | 15.99 | | 150.0 | |
| 10141-CAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.85 | 68.30 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.61 | 67.92 | 16.30 | | 150.0 | |
| | | Z | 3.50 | 67.72 | 16.16 | | 150.0 | |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 2.47 | 70.19 | 17.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.15 | 69.32 | 16.33 | | 150.0 | |
| | | Z | 2.01 | 68.99 | 15.96 | | 150.0 | |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.89 | 69.59 | 17.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.67 | 69.73 | 16.56 | | 150.0 | |
| | | Z | 2.52 | 69.44 | 16.05 | | 150.0 | |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 2.70 | 67.64 | 15.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.40 | 67.16 | 14.83 | | 150.0 | |
| | | Z | 2.24 | 66.84 | 14.28 | | 150.0 | |
| 10145-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 1.97 | 70.10 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.52 | 67.65 | 13.88 | | 150.0 | |
| | | Z | 1.24 | 65.51 | 11.97 | | 150.0 | |
| 10146-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 4.51 | 76.77 | 18.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.44 | 68.50 | 13.41 | | 150.0 | |
| | | Z | 1.88 | 65.68 | 11.07 | | 150.0 | |
| 10147-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 5.75 | 80.68 | 20.67 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.03 | 71.42 | 14.87 | | 150.0 | |
| | | Z | 2.20 | 67.48 | 12.06 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10149-CAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 3.28 | 68.36 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.02 | 67.81 | 16.13 | | 150.0 | |
| | | Z | 2.90 | 67.58 | 15.95 | | 150.0 | |
| 10150-CAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 3.39 | 68.17 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.14 | 67.77 | 16.18 | | 150.0 | |
| | | Z | 3.03 | 67.57 | 16.00 | | 150.0 | |
| 10151-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 8.20 | 77.58 | 20.81 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.49 | 75.24 | 19.50 | | 65.0 | |
| | | Z | 6.49 | 75.92 | 19.85 | | 65.0 | |
| 10152-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 7.78 | 75.36 | 20.58 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.15 | 72.70 | 19.01 | | 65.0 | |
| | | Z | 6.01 | 72.92 | 19.11 | | 65.0 | |
| 10153-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 8.10 | 76.01 | 21.20 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.53 | 73.66 | 19.80 | | 65.0 | |
| | | Z | 6.41 | 73.92 | 19.91 | | 65.0 | |
| 10154-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.79 | 70.93 | 17.54 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.43 | 69.84 | 16.85 | | 150.0 | |
| | | Z | 2.28 | 69.36 | 16.54 | | 150.0 | |
| 10155-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.97 | 68.79 | 16.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.75 | 68.70 | 16.56 | | 150.0 | |
| | | Z | 2.64 | 68.53 | 16.29 | | 150.0 | |
| 10156-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 2.38 | 70.70 | 17.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.03 | 69.70 | 16.35 | | 150.0 | |
| | | Z | 1.86 | 69.17 | 15.79 | | 150.0 | |
| 10157-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 2.56 | 68.45 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.27 | 67.99 | 15.08 | | 150.0 | |
| | | Z | 2.10 | 67.52 | 14.38 | | 150.0 | |
| 10158-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 3.14 | 68.82 | 17.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.92 | 68.88 | 16.73 | | 150.0 | |
| | | Z | 2.79 | 68.73 | 16.45 | | 150.0 | |
| 10159-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 2.69 | 68.91 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.41 | 68.63 | 15.46 | | 150.0 | |
| | | Z | 2.22 | 68.05 | 14.69 | | 150.0 | |
| 10160-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 3.11 | 69.55 | 16.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.84 | 68.95 | 16.51 | | 150.0 | |
| | | Z | 2.74 | 68.78 | 16.38 | | 150.0 | |
| 10161-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 3.28 | 68.03 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.04 | 67.71 | 16.14 | | 150.0 | |
| | | Z | 2.93 | 67.53 | 15.94 | | 150.0 | |
| 10162-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 3.37 | 67.94 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.15 | 67.79 | 16.21 | | 150.0 | |
| | | Z | 3.04 | 67.69 | 16.05 | | 150.0 | |
| 10166-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 4.28 | 70.28 | 19.69 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.74 | 69.45 | 18.87 | | 150.0 | |
| | | Z | 3.63 | 69.87 | 19.11 | | 150.0 | |
| 10167-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 5.55 | 73.25 | 20.22 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 72.31 | 19.32 | | 150.0 | |
| | | Z | 4.63 | 73.35 | 19.75 | | 150.0 | |

Certificate No: EX3-3866_May17 Page 17 of 38

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10168-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.00 | 74.91 | 21.24 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 5.28 | 74.84 | 20.79 | | 150.0 | |
| | | Z | 5.27 | 76.11 | 21.29 | | 150.0 | |
| 10169-CAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.34 | 73.27 | 20.82 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.28 | 69.91 | 19.02 | | 150.0 | |
| | | Z | 3.11 | 69.87 | 19.09 | | 150.0 | |
| 10170-CAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 6.52 | 79.56 | 22.99 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.86 | 76.70 | 21.63 | | 150.0 | |
| | | Z | 4.75 | 77.55 | 22.02 | | 150.0 | |
| 10171-AAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 5.30 | 75.06 | 20.34 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.78 | 71.45 | 18.41 | | 150.0 | |
| | | Z | 3.67 | 72.20 | 18.78 | | 150.0 | |
| 10172-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 14.20 | 92.21 | 27.61 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.31 | 80.40 | 22.75 | | 65.0 | |
| | | Z | 7.75 | 85.93 | 25.05 | | 65.0 | |
| 10173-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 15.48 | 90.10 | 25.55 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.20 | 83.52 | 22.24 | | 65.0 | |
| | | Z | 10.68 | 87.60 | 23.70 | | 65.0 | |
| 10174-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 12.86 | 86.06 | 23.83 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.38 | 74.78 | 18.72 | | 65.0 | |
| | | Z | 8.28 | 82.76 | 21.60 | | 65.0 | |
| 10175-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 4.26 | 72.82 | 20.52 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.23 | 69.49 | 18.71 | | 150.0 | |
| | | Z | 3.07 | 69.51 | 18.82 | | 150.0 | |
| 10176-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 6.53 | 79.58 | 23.00 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.87 | 76.73 | 21.64 | | 150.0 | |
| | | Z | 4.75 | 77.58 | 22.03 | | 150.0 | |
| 10177-CAF | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 4.31 | 73.06 | 20.67 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.26 | 69.71 | 18.85 | | 150.0 | |
| | | Z | 3.10 | 69.68 | 18.92 | | 150.0 | |
| 10178-CAD | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 6.40 | 79.18 | 22.81 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.78 | 76.35 | 21.45 | | 150.0 | |
| | | Z | 4.69 | 77.29 | 21.89 | | 150.0 | |
| 10179-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 5.82 | 77.04 | 21.48 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 73.75 | 19.80 | | 150.0 | |
| | | Z | 4.14 | 74.64 | 20.22 | | 150.0 | |
| 10180-CAD | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 5.26 | 74.91 | 20.25 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.76 | 71.33 | 18.33 | | 150.0 | |
| | | Z | 3.66 | 72.12 | 18.72 | | 150.0 | |
| 10181-CAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 4.30 | 73.03 | 20.65 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.26 | 69.69 | 18.83 | | 150.0 | |
| | | Z | 3.09 | 69.66 | 18.91 | | 150.0 | |
| 10182-CAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 6.39 | 79.15 | 22.80 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.77 | 76.32 | 21.44 | | 150.0 | |
| | | Z | 4.68 | 77.26 | 21.88 | | 150.0 | |
| 10183-AAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 5.26 | 74.89 | 20.24 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.75 | 71.31 | 18.32 | | 150.0 | |
| | | Z | 3.65 | 72.09 | 18.71 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 4.32 | 73.09 | 20.68 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.27 | 69.74 | 18.86 | | 150.0 | |
| | | Z | 3.10 | 69.71 | 18.94 | | 150.0 | |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 6.42 | 79.23 | 22.83 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.80 | 76.41 | 21.48 | | 150.0 | |
| | | Z | 4.71 | 77.35 | 21.92 | | 150.0 | |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 5.28 | 74.95 | 20.27 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.77 | 71.37 | 18.36 | | 150.0 | |
| | | Z | 3.67 | 72.16 | 18.75 | | 150.0 | |
| 10187-CAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 4.32 | 73.09 | 20.70 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.28 | 69.77 | 18.91 | | 150.0 | |
| | | Z | 3.11 | 69.77 | 19.00 | | 150.0 | |
| 10188-CAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 6.69 | 80.08 | 23.26 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 5.03 | 77.38 | 21.99 | | 150.0 | |
| | | Z | 4.91 | 78.22 | 22.37 | | 150.0 | |
| 10189-AAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 5.42 | 75.48 | 20.58 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.87 | 71.90 | 18.68 | | 150.0 | |
| | | Z | 3.77 | 72.68 | 19.06 | | 150.0 | |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.82 | 66.68 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.61 | 66.69 | 16.22 | | 150.0 | |
| | | Z | 4.51 | 66.70 | 16.15 | | 150.0 | |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 5.04 | 67.10 | 16.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.80 | 67.04 | 16.34 | | 150.0 | |
| | | Z | 4.68 | 67.00 | 16.27 | | 150.0 | |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 5.08 | 67.07 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.84 | 67.06 | 16.35 | | 150.0 | |
| | | Z | 4.72 | 67.03 | 16.29 | | 150.0 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.85 | 66.81 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.63 | 66.78 | 16.25 | | 150.0 | |
| | | Z | 4.51 | 66.75 | 16.16 | | 150.0 | |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 5.06 | 67.11 | 16.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.81 | 67.06 | 16.35 | | 150.0 | |
| | | Z | 4.69 | 67.02 | 16.28 | | 150.0 | |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 5.09 | 67.08 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.84 | 67.07 | 16.36 | | 150.0 | |
| | | Z | 4.72 | 67.05 | 16.30 | | 150.0 | |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.81 | 66.84 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.58 | 66.79 | 16.22 | | 150.0 | |
| | | Z | 4.46 | 66.77 | 16.13 | | 150.0 | |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 5.07 | 67.12 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.81 | 67.04 | 16.34 | | 150.0 | |
| | | Z | 4.68 | 66.99 | 16.27 | | 150.0 | |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 5.09 | 67.03 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 67.00 | 16.34 | | 150.0 | |
| | | Z | 4.73 | 66.97 | 16.28 | | 150.0 | |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 5.37 | 67.40 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.16 | 67.24 | 16.45 | | 150.0 | |
| | | Z | 5.05 | 67.12 | 16.38 | | 150.0 | |

Certificate No: EX3-3866_May17 Page 19 of 38

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.74 | 67.56 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.49 | 67.44 | 16.57 | | 150.0 | |
| | | Z | 5.34 | 67.30 | 16.48 | | 150.0 | |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.45 | 67.58 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.21 | 67.34 | 16.43 | | 150.0 | |
| | | Z | 5.10 | 67.24 | 16.36 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 3.09 | 66.39 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.90 | 66.33 | 15.61 | | 150.0 | |
| | | Z | 2.80 | 66.28 | 15.36 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 16.00 | 90.76 | 25.85 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.66 | 84.39 | 22.63 | | 65.0 | |
| | | Z | 11.34 | 88.68 | 24.14 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 14.05 | 87.61 | 24.43 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.75 | 81.87 | 21.28 | | 65.0 | |
| | | Z | 10.02 | 85.56 | 22.56 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 16.43 | 95.41 | 28.75 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.49 | 85.80 | 24.72 | | 65.0 | |
| | | Z | 9.08 | 88.93 | 26.11 | | 65.0 | |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 15.52 | 90.13 | 25.57 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.26 | 83.61 | 22.28 | | 65.0 | |
| | | Z | 10.75 | 87.69 | 23.74 | | 65.0 | |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 13.65 | 87.05 | 24.18 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.41 | 81.19 | 20.97 | | 65.0 | |
| | | Z | 9.53 | 84.70 | 22.20 | | 65.0 | |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 15.89 | 94.70 | 28.45 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.15 | 85.00 | 24.36 | | 65.0 | |
| | | Z | 8.68 | 88.03 | 25.73 | | 65.0 | |
| 10232-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 15.51 | 90.13 | 25.57 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.24 | 83.59 | 22.27 | | 65.0 | |
| | | Z | 10.74 | 87.68 | 23.73 | | 65.0 | |
| 10233-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 13.64 | 87.05 | 24.18 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.39 | 81.18 | 20.97 | | 65.0 | |
| | | Z | 9.51 | 84.69 | 22.19 | | 65.0 | |
| 10234-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 15.33 | 93.90 | 28.11 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 7.84 | 84.19 | 23.97 | | 65.0 | |
| | | Z | 8.32 | 87.14 | 25.32 | | 65.0 | |
| 10235-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 15.52 | 90.15 | 25.58 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.24 | 83.60 | 22.28 | | 65.0 | |
| | | Z | 10.74 | 87.70 | 23.74 | | 65.0 | |
| 10236-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 13.71 | 87.13 | 24.20 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.44 | 81.24 | 20.98 | | 65.0 | |
| | | Z | 9.58 | 84.78 | 22.22 | | 65.0 | |
| 10237-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 15.95 | 94.80 | 28.48 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.16 | 85.03 | 24.37 | | 65.0 | |
| | | Z | 8.69 | 88.09 | 25.75 | | 65.0 | |
| 10238-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 15.50 | 90.13 | 25.57 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.23 | 83.56 | 22.26 | | 65.0 | |
| | | Z | 10.71 | 87.65 | 23.72 | | 65.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10239-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 13.64 | 87.06 | 24.18 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.38 | 81.16 | 20.96 | | 65.0 | |
| | | Z | 9.49 | 84.66 | 22.18 | | 65.0 | |
| 10240-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 15.91 | 94.76 | 28.47 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.13 | 84.99 | 24.36 | | 65.0 | |
| | | Z | 8.67 | 88.05 | 25.74 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 11.13 | 82.41 | 25.70 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 8.34 | 78.68 | 23.38 | | 65.0 | |
| | | Z | 8.64 | 80.88 | 24.34 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 9.91 | 79.85 | 24.58 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 7.20 | 75.75 | 22.09 | | 65.0 | |
| | | Z | 7.99 | 79.38 | 23.68 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 8.27 | 77.94 | 24.58 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 5.98 | 73.27 | 21.82 | | 65.0 | |
| | | Z | 6.43 | 76.20 | 23.27 | | 65.0 | |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 8.97 | 79.15 | 21.15 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.58 | 72.44 | 16.74 | | 65.0 | |
| | | Z | 5.08 | 71.38 | 15.69 | | 65.0 | |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 8.92 | 78.82 | 20.99 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.56 | 72.17 | 16.58 | | 65.0 | |
| | | Z | 5.02 | 71.01 | 15.49 | | 65.0 | |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 7.93 | 79.91 | 21.09 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.97 | 73.86 | 17.47 | | 65.0 | |
| | | Z | 4.55 | 72.94 | 16.66 | | 65.0 | |
| 10247-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 7.23 | 76.19 | 20.23 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.17 | 72.08 | 17.43 | | 65.0 | |
| | | Z | 4.86 | 71.50 | 16.77 | | 65.0 | |
| 10248-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 7.29 | 75.82 | 20.08 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.24 | 71.81 | 17.31 | | 65.0 | |
| | | Z | 4.89 | 71.20 | 16.64 | | 65.0 | |
| 10249-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 8.41 | 80.65 | 21.74 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.79 | 76.14 | 19.09 | | 65.0 | |
| | | Z | 5.65 | 76.27 | 18.90 | | 65.0 | |
| 10250-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 7.86 | 77.32 | 21.56 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.11 | 74.47 | 19.80 | | 65.0 | |
| | | Z | 5.97 | 74.64 | 19.74 | | 65.0 | |
| 10251-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 7.54 | 75.43 | 20.55 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.90 | 72.73 | 18.76 | | 65.0 | |
| | | Z | 5.74 | 72.89 | 18.69 | | 65.0 | |
| 10252-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 8.41 | 79.71 | 21.76 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.35 | 76.72 | 20.07 | | 65.0 | |
| | | Z | 6.39 | 77.53 | 20.37 | | 65.0 | |
| 10253-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 7.57 | 74.80 | 20.44 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.02 | 72.23 | 18.84 | | 65.0 | |
| | | Z | 5.91 | 72.49 | 18.92 | | 65.0 | |
| 10254-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 7.91 | 75.46 | 21.02 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.39 | 73.13 | 19.56 | | 65.0 | |
| | | Z | 6.27 | 73.41 | 19.63 | | 65.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10255-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 7.97 | 77.29 | 20.97 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.28 | 74.88 | 19.59 | | 65.0 | |
| | | Z | 6.29 | 75.56 | 19.91 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 8.49 | 78.25 | 20.21 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.62 | 69.68 | 14.65 | | 65.0 | |
| | | Z | 3.97 | 67.90 | 13.13 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 8.47 | 77.86 | 20.00 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.61 | 69.35 | 14.43 | | 65.0 | |
| | | Z | 3.94 | 67.51 | 12.87 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 7.49 | 79.02 | 20.38 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.13 | 71.05 | 15.63 | | 65.0 | |
| | | Z | 3.55 | 69.20 | 14.22 | | 65.0 | |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 7.45 | 76.46 | 20.64 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.53 | 72.93 | 18.27 | | 65.0 | |
| | | Z | 5.29 | 72.68 | 17.86 | | 65.0 | |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 7.53 | 76.34 | 20.62 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.60 | 72.83 | 18.25 | | 65.0 | |
| | | Z | 5.33 | 72.52 | 17.80 | | 65.0 | |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 8.18 | 79.85 | 21.65 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.83 | 75.89 | 19.33 | | 65.0 | |
| | | Z | 5.75 | 76.27 | 19.31 | | 65.0 | |
| 10262-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 7.86 | 77.29 | 21.53 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.10 | 74.42 | 19.75 | | 65.0 | |
| | | Z | 5.95 | 74.58 | 19.70 | | 65.0 | |
| 10263-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 7.54 | 75.44 | 20.55 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.89 | 72.72 | 18.75 | | 65.0 | |
| | | Z | 5.73 | 72.88 | 18.68 | | 65.0 | |
| 10264-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 8.37 | 79.61 | 21.70 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.30 | 76.58 | 19.99 | | 65.0 | |
| | | Z | 6.33 | 77.37 | 20.28 | | 65.0 | |
| 10265-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 7.78 | 75.36 | 20.58 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.14 | 72.70 | 19.01 | | 65.0 | |
| | | Z | 6.01 | 72.92 | 19.12 | | 65.0 | |
| 10266-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 8.10 | 76.01 | 21.19 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.53 | 73.65 | 19.79 | | 65.0 | |
| | | Z | 6.41 | 73.91 | 19.90 | | 65.0 | |
| 10267-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 8.19 | 77.55 | 20.80 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.48 | 75.21 | 19.49 | | 65.0 | |
| | | Z | 6.48 | 75.89 | 19.83 | | 65.0 | |
| 10268-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 8.29 | 75.07 | 20.77 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.83 | 72.94 | 19.54 | | 65.0 | |
| | | Z | 6.70 | 73.16 | 19.68 | | 65.0 | |
| 10269-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 8.21 | 74.70 | 20.71 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.81 | 72.63 | 19.48 | | 65.0 | |
| | | Z | 6.69 | 72.85 | 19.62 | | 65.0 | |
| 10270-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 8.08 | 75.76 | 20.23 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.62 | 73.80 | 19.12 | | 65.0 | |
| | | Z | 6.57 | 74.24 | 19.38 | | 65.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.76 | 66.59 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.64 | 66.60 | 15.48 | | 150.0 | |
| | | Z | 2.59 | 66.69 | 15.30 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.90 | 69.79 | 16.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.69 | 68.48 | 15.99 | | 150.0 | |
| | | Z | 1.62 | 68.20 | 15.71 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 5.02 | 68.20 | 13.47 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 3.07 | 63.14 | 8.94 | | 50.0 | |
| | | Z | 2.83 | 62.55 | 8.24 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 8.60 | 78.91 | 20.42 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 4.73 | 69.97 | 14.69 | | 50.0 | |
| | | Z | 4.23 | 68.38 | 13.48 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 8.80 | 79.14 | 20.52 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 4.84 | 70.19 | 14.82 | | 50.0 | |
| | | Z | 4.32 | 68.59 | 13.61 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 2.08 | 72.13 | 17.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.73 | 70.79 | 15.54 | | 150.0 | |
| | | Z | 1.49 | 69.39 | 14.25 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 1.23 | 69.84 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.95 | 67.41 | 13.92 | | 150.0 | |
| | | Z | 0.84 | 66.34 | 12.73 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 1.63 | 75.37 | 19.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.33 | 73.19 | 16.99 | | 150.0 | |
| | | Z | 1.19 | 71.89 | 15.72 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 2.37 | 81.78 | 22.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.51 | 83.07 | 21.32 | | 150.0 | |
| | | Z | 2.33 | 81.64 | 20.01 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 8.12 | 78.82 | 22.36 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 6.35 | 75.25 | 19.41 | | 50.0 | |
| | | Z | 6.85 | 76.57 | 19.54 | | 50.0 | |
| 10297-AAB | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 3.29 | 71.49 | 17.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.91 | 70.36 | 16.93 | | 150.0 | |
| | | Z | 2.76 | 69.91 | 16.72 | | 150.0 | |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 2.19 | 70.68 | 16.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.81 | 69.34 | 15.44 | | 150.0 | |
| | | Z | 1.58 | 68.11 | 14.28 | | 150.0 | |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 4.44 | 75.75 | 18.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.00 | 70.72 | 15.22 | | 150.0 | |
| | | Z | 2.65 | 69.43 | 13.85 | | 150.0 | |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 3.42 | 70.62 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.26 | 66.10 | 12.36 | | 150.0 | |
| | | Z | 1.94 | 64.85 | 10.97 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 5.45 | 66.39 | 18.27 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.76 | 65.03 | 17.30 | | 50.0 | |
| | | Z | 4.59 | 65.00 | 17.17 | | 50.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.95 | 67.03 | 18.97 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 5.29 | 65.83 | 18.09 | | 50.0 | |
| | | Z | 5.20 | 66.17 | 18.17 | | 50.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 5.78 | 67.02 | 19.02 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 5.06 | 65.55 | 17.98 | | 50.0 | |
| | | Z | 4.97 | 65.86 | 18.03 | | 50.0 | |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 5.48 | 66.51 | 18.31 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.84 | 65.37 | 17.46 | | 50.0 | |
| | | Z | 4.75 | 65.67 | 17.49 | | 50.0 | |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 6.08 | 72.50 | 22.89 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.70 | 67.98 | 19.95 | | 35.0 | |
| | | Z | 4.73 | 69.00 | 20.20 | | 35.0 | |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 5.79 | 68.34 | 20.52 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.91 | 66.57 | 19.26 | | 35.0 | |
| | | Z | 4.87 | 67.25 | 19.44 | | 35.0 | |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 5.95 | 70.24 | 21.57 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.86 | 66.96 | 19.34 | | 35.0 | |
| | | Z | 4.81 | 67.58 | 19.49 | | 35.0 | |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 5.95 | 70.59 | 21.77 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.83 | 67.14 | 19.47 | | 35.0 | |
| | | Z | 4.80 | 67.86 | 19.67 | | 35.0 | |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 5.89 | 68.57 | 20.63 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.98 | 66.81 | 19.41 | | 35.0 | |
| | | Z | 4.92 | 67.45 | 19.58 | | 35.0 | |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 5.76 | 68.46 | 20.49 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.87 | 66.70 | 19.27 | | 35.0 | |
| | | Z | 4.84 | 67.39 | 19.46 | | 35.0 | |
| 10311-AAB | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 3.67 | 70.83 | 17.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.29 | 69.70 | 16.59 | | 150.0 | |
| | | Z | 3.13 | 69.21 | 16.37 | | 150.0 | |
| 10313-AAA | iDEN 1:3 | X | 5.42 | 73.66 | 16.54 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 3.23 | 68.66 | 13.67 | | 70.0 | |
| | | Z | 3.24 | 69.09 | 13.89 | | 70.0 | |
| 10314-AAA | iDEN 1:6 | X | 6.44 | 77.53 | 20.45 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 3.71 | 71.31 | 17.32 | | 30.0 | |
| | | Z | 3.76 | 72.02 | 17.68 | | 30.0 | |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.19 | 65.03 | 16.23 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.10 | 64.01 | 15.31 | | 150.0 | |
| | | Z | 1.09 | 63.89 | 15.13 | | 150.0 | |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 4.88 | 66.71 | 16.46 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.64 | 66.59 | 16.19 | | 150.0 | |
| | | Z | 4.54 | 66.61 | 16.15 | | 150.0 | |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.88 | 66.71 | 16.46 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.64 | 66.59 | 16.19 | | 150.0 | |
| | | Z | 4.54 | 66.61 | 16.15 | | 150.0 | |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 5.07 | 67.13 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.80 | 67.07 | 16.31 | | 150.0 | |
| | | Z | 4.66 | 67.04 | 16.26 | | 150.0 | |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 5.65 | 67.18 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.44 | 67.12 | 16.38 | | 150.0 | |
| | | Z | 5.36 | 67.17 | 16.39 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.95 | 67.81 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.73 | 67.64 | 16.50 | | 150.0 | |
| | | Z | 5.61 | 67.51 | 16.42 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 2.08 | 72.13 | 17.20 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.73 | 70.79 | 15.54 | | 115.0 | |
| | | Z | 1.49 | 69.39 | 14.25 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 2.08 | 72.13 | 17.20 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.73 | 70.79 | 15.54 | | 115.0 | |
| | | Z | 1.49 | 69.39 | 14.25 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 25.96 | 105.00 | 28.55 | 0.00 | 100.0 | ± 9.6 % |
| | | Y | 35.97 | 107.39 | 27.34 | | 100.0 | |
| | | Z | 100.00 | 117.41 | 28.38 | | 100.0 | |
| 10410-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 39.66 | 105.40 | 27.14 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 5.60 | 78.79 | 17.37 | | 80.0 | |
| | | Z | 6.13 | 80.71 | 17.76 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 1.05 | 63.68 | 15.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.02 | 63.25 | 14.93 | | 150.0 | |
| | | Z | 1.01 | 63.14 | 14.73 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.81 | 66.68 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.61 | 66.73 | 16.27 | | 150.0 | |
| | | Z | 4.51 | 66.73 | 16.21 | | 150.0 | |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.81 | 66.68 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.61 | 66.73 | 16.27 | | 150.0 | |
| | | Z | 4.51 | 66.73 | 16.21 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preambule) | X | 4.80 | 66.82 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.60 | 66.88 | 16.28 | | 150.0 | |
| | | Z | 4.50 | 66.90 | 16.24 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preambule) | X | 4.82 | 66.78 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.62 | 66.83 | 16.29 | | 150.0 | |
| | | Z | 4.52 | 66.84 | 16.24 | | 150.0 | |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.96 | 66.79 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 66.83 | 16.30 | | 150.0 | |
| | | Z | 4.64 | 66.83 | 16.25 | | 150.0 | |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 5.21 | 67.23 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 67.18 | 16.43 | | 150.0 | |
| | | Z | 4.80 | 67.14 | 16.36 | | 150.0 | |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 5.10 | 67.16 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 67.13 | 16.40 | | 150.0 | |
| | | Z | 4.72 | 67.09 | 16.33 | | 150.0 | |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.64 | 67.50 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.42 | 67.40 | 16.52 | | 150.0 | |
| | | Z | 5.31 | 67.34 | 16.48 | | 150.0 | |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.66 | 67.55 | 16.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.42 | 67.41 | 16.52 | | 150.0 | |
| | | Z | 5.32 | 67.37 | 16.49 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.70 | 67.63 | 16.73 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.44 | 67.42 | 16.53 | | 150.0 | |
| | | Z | 5.33 | 67.35 | 16.48 | | 150.0 | |
| 10430-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.61 | 70.13 | 18.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.54 | 71.62 | 18.84 | | 150.0 | |
| | | Z | 4.34 | 71.47 | 18.45 | | 150.0 | |
| 10431-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 4.62 | 67.28 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 67.30 | 16.34 | | 150.0 | |
| | | Z | 4.19 | 67.30 | 16.21 | | 150.0 | |
| 10432-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.90 | 67.21 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.62 | 67.17 | 16.36 | | 150.0 | |
| | | Z | 4.49 | 67.16 | 16.28 | | 150.0 | |
| 10433-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 5.13 | 67.24 | 16.60 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.86 | 67.17 | 16.42 | | 150.0 | |
| | | Z | 4.73 | 67.13 | 16.35 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.70 | 70.75 | 18.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 72.68 | 18.95 | | 150.0 | |
| | | Z | 4.48 | 72.50 | 18.48 | | 150.0 | |
| 10435-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 37.53 | 104.49 | 26.87 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 5.44 | 78.34 | 17.17 | | 80.0 | |
| | | Z | 5.88 | 80.12 | 17.53 | | 80.0 | |
| 10447-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.97 | 67.39 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.65 | 67.40 | 15.84 | | 150.0 | |
| | | Z | 3.48 | 67.35 | 15.53 | | 150.0 | |
| 10448-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%) | X | 4.41 | 67.05 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.16 | 67.08 | 16.20 | | 150.0 | |
| | | Z | 4.03 | 67.09 | 16.08 | | 150.0 | |
| 10449-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%) | X | 4.65 | 67.03 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.42 | 67.01 | 16.27 | | 150.0 | |
| | | Z | 4.30 | 66.99 | 16.19 | | 150.0 | |
| 10450-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.81 | 66.98 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.61 | 66.94 | 16.28 | | 150.0 | |
| | | Z | 4.50 | 66.91 | 16.21 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 3.93 | 67.73 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.57 | 67.69 | 15.58 | | 150.0 | |
| | | Z | 3.37 | 67.51 | 15.13 | | 150.0 | |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.49 | 68.19 | 16.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.27 | 67.99 | 16.68 | | 150.0 | |
| | | Z | 6.17 | 67.89 | 16.63 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.92 | 65.38 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.83 | 65.36 | 16.00 | | 150.0 | |
| | | Z | 3.78 | 65.38 | 15.92 | | 150.0 | |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 3.67 | 66.56 | 15.63 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.38 | 66.92 | 15.01 | | 150.0 | |
| | | Z | 3.18 | 66.77 | 14.47 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 4.75 | 64.52 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.38 | 64.72 | 15.57 | | 150.0 | |
| | | Z | 4.28 | 65.18 | 15.52 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 1.12 | 71.77 | 18.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.94 | 69.07 | 16.80 | | 150.0 | |
| | | Z | 0.91 | 68.55 | 16.38 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 119.31 | 30.82 | 3.29 | 80.0 | ± 9.6 % |
| | | Y | 3.10 | 73.05 | 16.04 | | 80.0 | |
| | | Z | 2.89 | 73.54 | 16.13 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 18.95 | 88.90 | 20.75 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.38 | 61.26 | 8.79 | | 80.0 | |
| | | Z | 1.06 | 60.00 | 7.67 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 10.36 | 80.77 | 17.93 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.23 | 60.00 | 7.78 | | 80.0 | |
| | | Z | 1.08 | 60.00 | 7.25 | | 80.0 | |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 117.71 | 29.93 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.52 | 70.33 | 14.54 | | 80.0 | |
| | | Z | 2.25 | 70.28 | 14.39 | | 80.0 | |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 14.09 | 85.26 | 19.62 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.33 | 60.91 | 8.56 | | 80.0 | |
| | | Z | 1.06 | 60.00 | 7.62 | | 80.0 | |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.41 | 78.26 | 17.06 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.23 | 60.00 | 7.74 | | 80.0 | |
| | | Z | 1.08 | 60.00 | 7.21 | | 80.0 | |
| 10467-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 117.87 | 30.00 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.60 | 70.71 | 14.71 | | 80.0 | |
| | | Z | 2.33 | 70.74 | 14.59 | | 80.0 | |
| 10468-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 15.00 | 86.04 | 19.87 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.34 | 60.98 | 8.61 | | 80.0 | |
| | | Z | 1.05 | 60.00 | 7.63 | | 80.0 | |
| 10469-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.49 | 78.39 | 17.10 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.23 | 60.00 | 7.73 | | 80.0 | |
| | | Z | 1.08 | 60.00 | 7.21 | | 80.0 | |
| 10470-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 117.89 | 30.01 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.59 | 70.68 | 14.70 | | 80.0 | |
| | | Z | 2.32 | 70.72 | 14.58 | | 80.0 | |
| 10471-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 14.99 | 86.02 | 19.85 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.33 | 60.96 | 8.58 | | 80.0 | |
| | | Z | 1.05 | 60.00 | 7.62 | | 80.0 | |
| 10472-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.47 | 78.36 | 17.08 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.23 | 60.00 | 7.72 | | 80.0 | |
| | | Z | 1.08 | 60.00 | 7.20 | | 80.0 | |
| 10473-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 117.86 | 30.00 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.58 | 70.66 | 14.68 | | 80.0 | |
| | | Z | 2.32 | 70.69 | 14.56 | | 80.0 | |
| 10474-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 14.86 | 85.93 | 19.82 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.33 | 60.94 | 8.58 | | 80.0 | |
| | | Z | 1.05 | 60.00 | 7.62 | | 80.0 | |
| 10475-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.43 | 78.30 | 17.07 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.23 | 60.00 | 7.73 | | 80.0 | |
| | | Z | 1.07 | 60.00 | 7.20 | | 80.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10477-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 14.24 | 85.37 | 19.64 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.32 | 60.87 | 8.52 | | 80.0 | |
| | | Z | 1.05 | 60.00 | 7.60 | | 80.0 | |
| 10478-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.34 | 78.16 | 17.01 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.23 | 60.00 | 7.72 | | 80.0 | |
| | | Z | 1.08 | 60.00 | 7.19 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 7.58 | 82.44 | 22.68 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 3.59 | 72.16 | 17.26 | | 80.0 | |
| | | Z | 3.82 | 73.96 | 17.62 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.66 | 80.46 | 20.82 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 3.62 | 69.25 | 14.74 | | 80.0 | |
| | | Z | 3.25 | 68.73 | 13.95 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.32 | 79.39 | 20.20 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 3.30 | 67.75 | 13.82 | | 80.0 | |
| | | Z | 2.81 | 66.70 | 12.77 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.61 | 74.84 | 18.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.45 | 67.42 | 14.54 | | 80.0 | |
| | | Z | 2.17 | 66.40 | 13.61 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 7.04 | 78.01 | 20.15 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.22 | 67.65 | 14.25 | | 80.0 | |
| | | Z | 2.72 | 66.06 | 12.91 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.88 | 77.42 | 19.95 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.19 | 67.33 | 14.13 | | 80.0 | |
| | | Z | 2.68 | 65.67 | 12.75 | | 80.0 | |
| 10485-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.87 | 75.43 | 19.35 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.80 | 68.87 | 15.89 | | 80.0 | |
| | | Z | 2.65 | 68.70 | 15.57 | | 80.0 | |
| 10486-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.39 | 71.11 | 17.61 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.97 | 66.86 | 14.77 | | 80.0 | |
| | | Z | 2.74 | 66.32 | 14.11 | | 80.0 | |
| 10487-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.42 | 70.85 | 17.52 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.01 | 66.70 | 14.70 | | 80.0 | |
| | | Z | 2.77 | 66.11 | 14.01 | | 80.0 | |
| 10488-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.15 | 74.67 | 19.27 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.29 | 69.38 | 16.67 | | 80.0 | |
| | | Z | 3.18 | 69.51 | 16.70 | | 80.0 | |
| 10489-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.57 | 70.52 | 17.95 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.41 | 67.34 | 16.01 | | 80.0 | |
| | | Z | 3.29 | 67.38 | 15.90 | | 80.0 | |
| 10490-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.64 | 70.21 | 17.86 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.52 | 67.30 | 16.03 | | 80.0 | |
| | | Z | 3.39 | 67.34 | 15.91 | | 80.0 | |
| 10491-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.16 | 72.89 | 18.65 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.65 | 68.85 | 16.62 | | 80.0 | |
| | | Z | 3.54 | 68.96 | 16.70 | | 80.0 | |
| 10492-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.86 | 69.73 | 17.79 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.83 | 67.17 | 16.24 | | 80.0 | |
| | | Z | 3.72 | 67.23 | 16.22 | | 80.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10493-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.93 | 69.55 | 17.75 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.91 | 67.12 | 16.25 | | 80.0 | |
| | | Z | 3.79 | 67.17 | 16.21 | | 80.0 | |
| 10494-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.74 | 74.72 | 19.14 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.85 | 69.89 | 16.87 | | 80.0 | |
| | | Z | 3.73 | 69.95 | 16.96 | | 80.0 | |
| 10495-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.96 | 70.37 | 18.01 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.85 | 67.52 | 16.39 | | 80.0 | |
| | | Z | 3.74 | 67.53 | 16.38 | | 80.0 | |
| 10496-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.01 | 69.97 | 17.90 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.95 | 67.37 | 16.38 | | 80.0 | |
| | | Z | 3.83 | 67.39 | 16.37 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.01 | 73.25 | 17.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.93 | 64.71 | 12.56 | | 80.0 | |
| | | Z | 1.59 | 62.88 | 11.00 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.65 | 69.30 | 15.53 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.84 | 62.00 | 10.41 | | 80.0 | |
| | | Z | 1.45 | 60.03 | 8.60 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.67 | 69.04 | 15.33 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.83 | 61.70 | 10.14 | | 80.0 | |
| | | Z | 1.46 | 60.00 | 8.46 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.83 | 74.54 | 19.13 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.97 | 68.88 | 16.15 | | 80.0 | |
| | | Z | 2.85 | 68.93 | 16.01 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.45 | 70.72 | 17.68 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.17 | 67.08 | 15.27 | | 80.0 | |
| | | Z | 2.99 | 66.87 | 14.86 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.49 | 70.49 | 17.57 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.24 | 67.03 | 15.21 | | 80.0 | |
| | | Z | 3.05 | 66.79 | 14.78 | | 80.0 | |
| 10503-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.08 | 74.48 | 19.18 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.26 | 69.22 | 16.59 | | 80.0 | |
| | | Z | 3.14 | 69.35 | 16.62 | | 80.0 | |
| 10504-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.55 | 70.45 | 17.91 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.39 | 67.26 | 15.96 | | 80.0 | |
| | | Z | 3.27 | 67.30 | 15.84 | | 80.0 | |
| 10505-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.62 | 70.13 | 17.82 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.50 | 67.21 | 15.98 | | 80.0 | |
| | | Z | 3.38 | 67.26 | 15.86 | | 80.0 | |
| 10506-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.70 | 74.57 | 19.08 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.82 | 69.76 | 16.81 | | 80.0 | |
| | | Z | 3.70 | 69.84 | 16.89 | | 80.0 | |
| 10507-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.94 | 70.30 | 17.97 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.84 | 67.45 | 16.35 | | 80.0 | |
| | | Z | 3.72 | 67.47 | 16.34 | | 80.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10508-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.00 | 69.91 | 17.86 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.94 | 67.30 | 16.34 | | 80.0 | |
| | | Z | 3.82 | 67.33 | 16.33 | | 80.0 | |
| 10509-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.79 | 72.95 | 18.48 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.26 | 69.29 | 16.69 | | 80.0 | |
| | | Z | 4.14 | 69.32 | 16.77 | | 80.0 | |
| 10510-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.42 | 70.01 | 17.89 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.37 | 67.55 | 16.52 | | 80.0 | |
| | | Z | 4.25 | 67.52 | 16.53 | | 80.0 | |
| 10511-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.43 | 69.67 | 17.81 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.43 | 67.38 | 16.51 | | 80.0 | |
| | | Z | 4.31 | 67.37 | 16.51 | | 80.0 | |
| 10512-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 6.25 | 74.86 | 19.04 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.32 | 70.27 | 16.92 | | 80.0 | |
| | | Z | 4.20 | 70.27 | 16.99 | | 80.0 | |
| 10513-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.36 | 70.54 | 18.07 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.24 | 67.74 | 16.56 | | 80.0 | |
| | | Z | 4.12 | 67.67 | 16.56 | | 80.0 | |
| 10514-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.30 | 69.96 | 17.91 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.27 | 67.44 | 16.51 | | 80.0 | |
| | | Z | 4.16 | 67.39 | 16.51 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 1.02 | 63.96 | 15.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.98 | 63.45 | 15.00 | | 150.0 | |
| | | Z | 0.97 | 63.33 | 14.80 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 0.94 | 78.96 | 21.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.63 | 71.55 | 18.18 | | 150.0 | |
| | | Z | 0.60 | 70.68 | 17.59 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.92 | 67.01 | 16.91 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.84 | 65.58 | 15.77 | | 150.0 | |
| | | Z | 0.82 | 65.26 | 15.47 | | 150.0 | |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.82 | 66.79 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.61 | 66.81 | 16.26 | | 150.0 | |
| | | Z | 4.50 | 66.81 | 16.20 | | 150.0 | |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 5.08 | 67.12 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.81 | 67.06 | 16.38 | | 150.0 | |
| | | Z | 4.68 | 67.02 | 16.30 | | 150.0 | |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.92 | 67.13 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 67.05 | 16.31 | | 150.0 | |
| | | Z | 4.53 | 66.99 | 16.23 | | 150.0 | |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.85 | 67.15 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.60 | 67.05 | 16.30 | | 150.0 | |
| | | Z | 4.47 | 66.98 | 16.22 | | 150.0 | |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.87 | 66.98 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.65 | 67.07 | 16.35 | | 150.0 | |
| | | Z | 4.53 | 67.08 | 16.31 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.75 | 66.99 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 66.97 | 16.21 | | 150.0 | |
| | | Z | 4.42 | 66.97 | 16.17 | | 150.0 | |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.84 | 66.98 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.60 | 67.01 | 16.33 | | 150.0 | |
| | | Z | 4.47 | 67.00 | 16.27 | | 150.0 | |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.77 | 66.04 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.57 | 66.07 | 15.93 | | 150.0 | |
| | | Z | 4.47 | 66.07 | 15.88 | | 150.0 | |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 5.00 | 66.46 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.76 | 66.45 | 16.07 | | 150.0 | |
| | | Z | 4.63 | 66.42 | 16.01 | | 150.0 | |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.92 | 66.48 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 66.43 | 16.03 | | 150.0 | |
| | | Z | 4.55 | 66.38 | 15.96 | | 150.0 | |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.94 | 66.50 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 66.44 | 16.06 | | 150.0 | |
| | | Z | 4.56 | 66.40 | 15.99 | | 150.0 | |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.94 | 66.50 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 66.44 | 16.06 | | 150.0 | |
| | | Z | 4.56 | 66.40 | 15.99 | | 150.0 | |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.97 | 66.67 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 66.57 | 16.08 | | 150.0 | |
| | | Z | 4.55 | 66.49 | 16.00 | | 150.0 | |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.82 | 66.62 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.55 | 66.44 | 16.02 | | 150.0 | |
| | | Z | 4.42 | 66.35 | 15.93 | | 150.0 | |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.96 | 66.50 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 66.48 | 16.04 | | 150.0 | |
| | | Z | 4.58 | 66.46 | 15.98 | | 150.0 | |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 5.43 | 66.70 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.21 | 66.56 | 16.10 | | 150.0 | |
| | | Z | 5.10 | 66.47 | 16.03 | | 150.0 | |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 5.52 | 66.87 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.27 | 66.70 | 16.15 | | 150.0 | |
| | | Z | 5.16 | 66.64 | 16.11 | | 150.0 | |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 5.37 | 66.84 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.14 | 66.69 | 16.13 | | 150.0 | |
| | | Z | 5.03 | 66.60 | 16.07 | | 150.0 | |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 5.44 | 66.79 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.20 | 66.65 | 16.12 | | 150.0 | |
| | | Z | 5.09 | 66.56 | 16.06 | | 150.0 | |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 5.57 | 66.89 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.31 | 66.69 | 16.18 | | 150.0 | |
| | | Z | 5.17 | 66.57 | 16.10 | | 150.0 | |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 5.44 | 66.79 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.22 | 66.67 | 16.18 | | 150.0 | |
| | | Z | 5.10 | 66.57 | 16.12 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 5.46 | 66.82 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.20 | 66.57 | 16.13 | | 150.0 | |
| | | Z | 5.08 | 66.47 | 16.05 | | 150.0 | |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.58 | 66.75 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.35 | 66.62 | 16.16 | | 150.0 | |
| | | Z | 5.24 | 66.54 | 16.10 | | 150.0 | |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.72 | 66.87 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.43 | 66.64 | 16.19 | | 150.0 | |
| | | Z | 5.31 | 66.56 | 16.13 | | 150.0 | |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.68 | 66.81 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.50 | 66.67 | 16.09 | | 150.0 | |
| | | Z | 5.41 | 66.59 | 16.03 | | 150.0 | |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.89 | 67.14 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.69 | 67.04 | 16.21 | | 150.0 | |
| | | Z | 5.59 | 66.96 | 16.17 | | 150.0 | |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.81 | 67.15 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.58 | 66.92 | 16.17 | | 150.0 | |
| | | Z | 5.47 | 66.77 | 16.09 | | 150.0 | |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.91 | 67.23 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.66 | 66.98 | 16.19 | | 150.0 | |
| | | Z | 5.54 | 66.81 | 16.10 | | 150.0 | |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 6.14 | 68.03 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.88 | 67.79 | 16.56 | | 150.0 | |
| | | Z | 5.73 | 67.57 | 16.45 | | 150.0 | |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.82 | 67.06 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.60 | 66.89 | 16.16 | | 150.0 | |
| | | Z | 5.50 | 66.80 | 16.11 | | 150.0 | |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.83 | 67.13 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.61 | 66.96 | 16.16 | | 150.0 | |
| | | Z | 5.50 | 66.84 | 16.09 | | 150.0 | |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.74 | 66.94 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 66.75 | 16.07 | | 150.0 | |
| | | Z | 5.43 | 66.67 | 16.02 | | 150.0 | |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.83 | 66.97 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.61 | 66.80 | 16.12 | | 150.0 | |
| | | Z | 5.50 | 66.69 | 16.05 | | 150.0 | |
| 10554-AAA | IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 6.06 | 67.19 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.90 | 67.03 | 16.17 | | 150.0 | |
| | | Z | 5.82 | 66.94 | 16.11 | | 150.0 | |
| 10555-AAA | IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 6.26 | 67.62 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.03 | 67.32 | 16.29 | | 150.0 | |
| | | Z | 5.93 | 67.21 | 16.22 | | 150.0 | |
| 10556-AAA | IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.24 | 67.53 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.05 | 67.36 | 16.30 | | 150.0 | |
| | | Z | 5.96 | 67.26 | 16.24 | | 150.0 | |
| 10557-AAA | IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 6.24 | 67.54 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.03 | 67.30 | 16.29 | | 150.0 | |
| | | Z | 5.92 | 67.17 | 16.22 | | 150.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10558-AAA | IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 6.30 | 67.71 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.08 | 67.47 | 16.38 | | 150.0 | |
| | | Z | 5.97 | 67.32 | 16.31 | | 150.0 | |
| 10560-AAA | IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 6.32 | 67.63 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.08 | 67.33 | 16.36 | | 150.0 | |
| | | Z | 5.97 | 67.18 | 16.28 | | 150.0 | |
| 10561-AAA | IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 6.21 | 67.53 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.99 | 67.28 | 16.37 | | 150.0 | |
| | | Z | 5.89 | 67.14 | 16.29 | | 150.0 | |
| 10562-AAA | IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 6.36 | 67.97 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.12 | 67.67 | 16.56 | | 150.0 | |
| | | Z | 5.99 | 67.47 | 16.46 | | 150.0 | |
| 10563-AAA | IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 6.56 | 68.09 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.44 | 68.16 | 16.75 | | 150.0 | |
| | | Z | 6.14 | 67.53 | 16.44 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WIFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 5.15 | 66.88 | 16.56 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.93 | 66.82 | 16.35 | | 150.0 | |
| | | Z | 4.82 | 66.84 | 16.31 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.46 | 67.42 | 16.90 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 5.18 | 67.32 | 16.70 | | 150.0 | |
| | | Z | 5.04 | 67.27 | 16.63 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 5.28 | 67.29 | 16.72 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 5.01 | 67.17 | 16.51 | | 150.0 | |
| | | Z | 4.88 | 67.12 | 16.44 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 5.30 | 67.69 | 17.07 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 5.04 | 67.62 | 16.90 | | 150.0 | |
| | | Z | 4.91 | 67.53 | 16.81 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 5.16 | 66.90 | 16.42 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.90 | 66.84 | 16.21 | | 150.0 | |
| | | Z | 4.78 | 66.86 | 16.19 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 5.23 | 67.67 | 17.07 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.99 | 67.67 | 16.93 | | 150.0 | |
| | | Z | 4.87 | 67.63 | 16.87 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 5.28 | 67.45 | 16.98 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 5.03 | 67.51 | 16.88 | | 150.0 | |
| | | Z | 4.90 | 67.48 | 16.81 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.35 | 66.13 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.19 | 64.43 | 15.36 | | 130.0 | |
| | | Z | 1.18 | 64.35 | 15.23 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.38 | 66.86 | 17.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.20 | 65.01 | 15.71 | | 130.0 | |
| | | Z | 1.19 | 64.89 | 15.56 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 11.19 | 110.54 | 30.57 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.73 | 81.41 | 21.20 | | 130.0 | |
| | | Z | 1.63 | 80.44 | 20.78 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.76 | 75.02 | 20.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.35 | 70.98 | 18.69 | | 130.0 | |
| | | Z | 1.30 | 70.28 | 18.27 | | 130.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.93 | 66.62 | 16.56 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.69 | 66.49 | 16.28 | | 130.0 | |
| | | Z | 4.59 | 66.53 | 16.25 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.96 | 66.79 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 66.67 | 16.36 | | 130.0 | |
| | | Z | 4.61 | 66.70 | 16.32 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 5.24 | 67.17 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.94 | 67.00 | 16.54 | | 130.0 | |
| | | Z | 4.81 | 66.98 | 16.49 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 5.13 | 67.36 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.84 | 67.19 | 16.67 | | 130.0 | |
| | | Z | 4.71 | 67.15 | 16.60 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.90 | 66.75 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.59 | 66.39 | 15.91 | | 130.0 | |
| | | Z | 4.46 | 66.37 | 15.86 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.95 | 66.65 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.63 | 66.38 | 15.90 | | 130.0 | |
| | | Z | 4.51 | 66.41 | 15.89 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 5.05 | 67.49 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.73 | 67.22 | 16.59 | | 130.0 | |
| | | Z | 4.61 | 67.17 | 16.53 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.87 | 66.47 | 16.10 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.53 | 66.11 | 15.67 | | 130.0 | |
| | | Z | 4.40 | 66.12 | 15.64 | | 130.0 | |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.93 | 66.62 | 16.56 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.69 | 66.49 | 16.28 | | 130.0 | |
| | | Z | 4.59 | 66.53 | 16.25 | | 130.0 | |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.96 | 66.79 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 66.67 | 16.36 | | 130.0 | |
| | | Z | 4.61 | 66.70 | 16.32 | | 130.0 | |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 5.24 | 67.17 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.94 | 67.00 | 16.54 | | 130.0 | |
| | | Z | 4.81 | 66.98 | 16.49 | | 130.0 | |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 5.13 | 67.36 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.84 | 67.19 | 16.67 | | 130.0 | |
| | | Z | 4.71 | 67.15 | 16.60 | | 130.0 | |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.90 | 66.75 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.59 | 66.39 | 15.91 | | 130.0 | |
| | | Z | 4.46 | 66.37 | 15.86 | | 130.0 | |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.95 | 66.65 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.63 | 66.38 | 15.90 | | 130.0 | |
| | | Z | 4.51 | 66.41 | 15.89 | | 130.0 | |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 5.05 | 67.49 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.73 | 67.22 | 16.59 | | 130.0 | |
| | | Z | 4.61 | 67.17 | 16.53 | | 130.0 | |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.87 | 66.47 | 16.10 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.53 | 66.11 | 15.67 | | 130.0 | |
| | | Z | 4.40 | 66.12 | 15.64 | | 130.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 5.09 | 66.69 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.84 | 66.58 | 16.40 | | 130.0 | |
| | | Z | 4.74 | 66.60 | 16.36 | | 130.0 | |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.29 | 67.05 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.01 | 66.92 | 16.53 | | 130.0 | |
| | | Z | 4.89 | 66.93 | 16.49 | | 130.0 | |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 5.23 | 67.04 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.93 | 66.84 | 16.41 | | 130.0 | |
| | | Z | 4.80 | 66.82 | 16.36 | | 130.0 | |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 5.27 | 67.16 | 16.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.99 | 67.01 | 16.57 | | 130.0 | |
| | | Z | 4.86 | 66.99 | 16.52 | | 130.0 | |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 5.27 | 67.18 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.95 | 66.95 | 16.45 | | 130.0 | |
| | | Z | 4.82 | 66.94 | 16.41 | | 130.0 | |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 5.19 | 67.13 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.89 | 66.93 | 16.44 | | 130.0 | |
| | | Z | 4.76 | 66.93 | 16.41 | | 130.0 | |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 5.15 | 67.11 | 16.67 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.84 | 66.84 | 16.33 | | 130.0 | |
| | | Z | 4.71 | 66.82 | 16.28 | | 130.0 | |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 5.13 | 67.41 | 16.95 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.83 | 67.13 | 16.63 | | 130.0 | |
| | | Z | 4.70 | 67.07 | 16.55 | | 130.0 | |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.77 | 67.42 | 16.87 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.50 | 67.15 | 16.59 | | 130.0 | |
| | | Z | 5.39 | 67.08 | 16.55 | | 130.0 | |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.99 | 68.01 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.64 | 67.53 | 16.75 | | 130.0 | |
| | | Z | 5.50 | 67.43 | 16.69 | | 130.0 | |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.84 | 67.66 | 16.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.53 | 67.30 | 16.65 | | 130.0 | |
| | | Z | 5.41 | 67.23 | 16.61 | | 130.0 | |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.96 | 67.73 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.61 | 67.25 | 16.54 | | 130.0 | |
| | | Z | 5.51 | 67.30 | 16.56 | | 130.0 | |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 6.09 | 68.14 | 17.25 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.71 | 67.64 | 16.87 | | 130.0 | |
| | | Z | 5.58 | 67.56 | 16.83 | | 130.0 | |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.79 | 67.43 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.50 | 67.09 | 16.59 | | 130.0 | |
| | | Z | 5.43 | 67.15 | 16.61 | | 130.0 | |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.88 | 67.61 | 16.98 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.60 | 67.34 | 16.70 | | 130.0 | |
| | | Z | 5.50 | 67.35 | 16.70 | | 130.0 | |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.64 | 67.11 | 16.61 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.38 | 66.83 | 16.31 | | 130.0 | |
| | | Z | 5.25 | 66.71 | 16.24 | | 130.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10607-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.91 | 65.98 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 65.88 | 16.01 | | 130.0 | |
| | | Z | 4.58 | 65.91 | 15.98 | | 130.0 | |
| 10608-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 5.16 | 66.42 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.87 | 66.29 | 16.18 | | 130.0 | |
| | | Z | 4.75 | 66.30 | 16.14 | | 130.0 | |
| 10609-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 5.04 | 66.34 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.76 | 66.13 | 16.01 | | 130.0 | |
| | | Z | 4.64 | 66.13 | 15.97 | | 130.0 | |
| 10610-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 5.10 | 66.49 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.81 | 66.31 | 16.18 | | 130.0 | |
| | | Z | 4.69 | 66.30 | 16.14 | | 130.0 | |
| 10611-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 5.04 | 66.38 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.73 | 66.11 | 16.02 | | 130.0 | |
| | | Z | 4.61 | 66.09 | 15.98 | | 130.0 | |
| 10612-AAA | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 5.05 | 66.47 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.74 | 66.23 | 16.04 | | 130.0 | |
| | | Z | 4.61 | 66.23 | 16.01 | | 130.0 | |
| 10613-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 5.07 | 66.42 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.75 | 66.14 | 15.94 | | 130.0 | |
| | | Z | 4.61 | 66.10 | 15.89 | | 130.0 | |
| 10614-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 5.00 | 66.68 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.69 | 66.38 | 16.21 | | 130.0 | |
| | | Z | 4.56 | 66.32 | 16.14 | | 130.0 | |
| 10615-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 5.03 | 66.12 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 65.88 | 15.77 | | 130.0 | |
| | | Z | 4.60 | 65.91 | 15.74 | | 130.0 | |
| 10616-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.57 | 66.66 | 16.47 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.32 | 66.41 | 16.21 | | 130.0 | |
| | | Z | 5.21 | 66.36 | 16.18 | | 130.0 | |
| 10617-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.66 | 66.81 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.37 | 66.51 | 16.23 | | 130.0 | |
| | | Z | 5.28 | 66.52 | 16.23 | | 130.0 | |
| 10618-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.53 | 66.83 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.27 | 66.59 | 16.29 | | 130.0 | |
| | | Z | 5.17 | 66.54 | 16.25 | | 130.0 | |
| 10619-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.55 | 66.62 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.29 | 66.38 | 16.11 | | 130.0 | |
| | | Z | 5.18 | 66.32 | 16.08 | | 130.0 | |
| 10620-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.70 | 66.80 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.39 | 66.47 | 16.20 | | 130.0 | |
| | | Z | 5.27 | 66.37 | 16.15 | | 130.0 | |
| 10621-AAA | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.67 | 66.88 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.39 | 66.61 | 16.40 | | 130.0 | |
| | | Z | 5.28 | 66.53 | 16.35 | | 130.0 | |
| 10622-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.64 | 66.90 | 16.67 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.39 | 66.71 | 16.44 | | 130.0 | |
| | | Z | 5.28 | 66.67 | 16.42 | | 130.0 | |

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 5.58 | 66.69 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.27 | 66.24 | 16.08 | | 130.0 | |
| | | Z | 5.16 | 66.20 | 16.05 | | 130.0 | |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.72 | 66.66 | 16.50 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.46 | 66.44 | 16.25 | | 130.0 | |
| | | Z | 5.35 | 66.40 | 16.21 | | 130.0 | |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 6.02 | 67.31 | 16.86 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.83 | 67.39 | 16.77 | | 130.0 | |
| | | Z | 5.66 | 67.19 | 16.66 | | 130.0 | |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.80 | 66.70 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.59 | 66.47 | 16.17 | | 130.0 | |
| | | Z | 5.51 | 66.43 | 16.14 | | 130.0 | |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 6.04 | 67.10 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.82 | 66.97 | 16.37 | | 130.0 | |
| | | Z | 5.73 | 66.93 | 16.35 | | 130.0 | |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.89 | 66.92 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.64 | 66.58 | 16.10 | | 130.0 | |
| | | Z | 5.53 | 66.47 | 16.06 | | 130.0 | |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 6.00 | 67.02 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.73 | 66.66 | 16.13 | | 130.0 | |
| | | Z | 5.60 | 66.52 | 16.07 | | 130.0 | |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 6.47 | 68.52 | 17.19 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.14 | 68.04 | 16.82 | | 130.0 | |
| | | Z | 5.94 | 67.72 | 16.68 | | 130.0 | |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 6.47 | 68.60 | 17.41 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.09 | 68.05 | 17.04 | | 130.0 | |
| | | Z | 5.91 | 67.74 | 16.88 | | 130.0 | |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 6.09 | 67.42 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.81 | 67.11 | 16.59 | | 130.0 | |
| | | Z | 5.71 | 67.03 | 16.54 | | 130.0 | |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 6.02 | 67.23 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.72 | 66.79 | 16.24 | | 130.0 | |
| | | Z | 5.61 | 66.68 | 16.19 | | 130.0 | |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 6.01 | 67.25 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.71 | 66.84 | 16.34 | | 130.0 | |
| | | Z | 5.59 | 66.71 | 16.27 | | 130.0 | |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.88 | 66.55 | 16.04 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.57 | 66.09 | 15.67 | | 130.0 | |
| | | Z | 5.46 | 66.00 | 15.63 | | 130.0 | |
| 10636-AAA | IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.19 | 67.09 | 16.50 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.00 | 66.85 | 16.26 | | 130.0 | |
| | | Z | 5.92 | 66.78 | 16.22 | | 130.0 | |
| 10637-AAA | IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.42 | 67.60 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.15 | 67.20 | 16.41 | | 130.0 | |
| | | Z | 6.07 | 67.13 | 16.38 | | 130.0 | |
| 10638-AAA | IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.36 | 67.41 | 16.61 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.15 | 67.18 | 16.37 | | 130.0 | |
| | | Z | 6.07 | 67.12 | 16.35 | | 130.0 | |

EX3DV4– SN:3866 May 31, 2017

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 10639-AAA | IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 6.39 | 67.51 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.15 | 67.18 | 16.43 | | 130.0 | |
| | | Z | 6.05 | 67.07 | 16.37 | | 130.0 | |
| 10640-AAA | IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 6.42 | 67.57 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.15 | 67.18 | 16.36 | | 130.0 | |
| | | Z | 6.04 | 67.05 | 16.30 | | 130.0 | |
| 10641-AAA | IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 6.42 | 67.34 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.17 | 67.01 | 16.29 | | 130.0 | |
| | | Z | 6.09 | 66.98 | 16.28 | | 130.0 | |
| 10642-AAA | IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 6.53 | 67.76 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.25 | 67.39 | 16.66 | | 130.0 | |
| | | Z | 6.14 | 67.25 | 16.60 | | 130.0 | |
| 10643-AAA | IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 6.32 | 67.36 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.06 | 66.99 | 16.35 | | 130.0 | |
| | | Z | 5.97 | 66.91 | 16.32 | | 130.0 | |
| 10644-AAA | IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.56 | 68.07 | 17.04 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.25 | 67.56 | 16.65 | | 130.0 | |
| | | Z | 6.11 | 67.33 | 16.55 | | 130.0 | |
| 10645-AAA | IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.75 | 68.14 | 17.02 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.64 | 68.25 | 16.94 | | 130.0 | |
| | | Z | 6.31 | 67.55 | 16.62 | | 130.0 | |
| 10646-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 17.14 | 96.60 | 31.35 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 11.66 | 91.33 | 28.76 | | 60.0 | |
| | | Z | 14.54 | 98.42 | 31.68 | | 60.0 | |
| 10647-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 17.01 | 97.08 | 31.61 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 11.05 | 90.83 | 28.68 | | 60.0 | |
| | | Z | 13.46 | 97.50 | 31.51 | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 1.00 | 66.85 | 14.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.78 | 64.69 | 11.99 | | 150.0 | |
| | | Z | 0.68 | 63.70 | 10.81 | | 150.0 | |

[E] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

# Attachment 2. – Dipole Calibration Data

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

**Accreditation No.: SCS 0108**

**Client** DT&C (Dymstec)

**Certificate No: D2450V2-726_Sep17**

# CALIBRATION CERTIFICATE

| | |
|---|---|
| Object | D2450V2 - SN:726 |
| Calibration procedure(s) | QA CAL-05.v9<br>Calibration procedure for dipole validation kits above 700 MHz |
| Calibration date: | September 19, 2017 |

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---|---|---|---|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02522) | Apr-18 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529) | Apr-18 |
| Reference Probe EX3DV4 | SN: 7349 | 31-May-17 (No. EX3-7349_May17) | May-18 |
| DAE4 | SN: 601 | 28-Mar-17 (No. DAE4-601_Mar17) | Mar-18 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---|---|---|---|
| Power meter EPM-442A | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

| | Name | Function | Signature |
|---|---|---|---|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: September 19, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**
Schmid & Partner
Engineering AG
**Zeughausstrasse 43, 8004 Zurich, Switzerland**

**S** Schweizerischer Kalibrierdienst
**C** Service suisse d'étalonnage
Servizio svizzero di taratura
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**

**Accreditation No.: SCS 0108**

**Glossary:**

| | |
|---|---|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

**Calibration is Performed According to the Following Standards:**

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|---|---|---|
| **DASY Version** | DASY5 | V52.10.0 |
| **Extrapolation** | Advanced Extrapolation | |
| **Phantom** | Modular Flat Phantom | |
| **Distance Dipole Center - TSL** | 10 mm | with Spacer |
| **Zoom Scan Resolution** | dx, dy, dz = 5 mm | |
| **Frequency** | 2450 MHz ± 1 MHz | |

## Head TSL parameters

The following parameters and calculations were applied.

| | **Temperature** | **Permittivity** | **Conductivity** |
|---|---|---|---|
| **Nominal Head TSL parameters** | 22.0 °C | 39.2 | 1.80 mho/m |
| **Measured Head TSL parameters** | (22.0 ± 0.2) °C | 37.8 ± 6 % | 1.86 mho/m ± 6 % |
| **Head TSL temperature change during test** | < 0.5 °C | --- | --- |

## SAR result with Head TSL

| **SAR averaged over 1 cm$^3$ (1 g) of Head TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 13.3 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **51.9 W/kg ± 17.0 % (k=2)** |

| **SAR averaged over 10 cm$^3$ (10 g) of Head TSL** | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 6.22 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | **24.5 W/kg ± 16.5 % (k=2)** |

## Body TSL parameters

The following parameters and calculations were applied.

| | **Temperature** | **Permittivity** | **Conductivity** |
|---|---|---|---|
| **Nominal Body TSL parameters** | 22.0 °C | 52.7 | 1.95 mho/m |
| **Measured Body TSL parameters** | (22.0 ± 0.2) °C | 51.9 ± 6 % | 2.04 mho/m ± 6 % |
| **Body TSL temperature change during test** | < 0.5 °C | ---- | ---- |

## SAR result with Body TSL

| **SAR averaged over 1 cm$^3$ (1 g) of Body TSL** | Condition | |
|---|---|---|
| SAR measured | 250 mW input power | 12.9 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **50.3 W/kg ± 17.0 % (k=2)** |

| **SAR averaged over 10 cm$^3$ (10 g) of Body TSL** | condition | |
|---|---|---|
| SAR measured | 250 mW input power | 6.05 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | **23.9 W/kg ± 16.5 % (k=2)** |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

| | |
|---|---|
| Impedance, transformed to feed point | 52.6 Ω + 4.0 jΩ |
| Return Loss | - 26.6 dB |

### Antenna Parameters with Body TSL

| | |
|---|---|
| Impedance, transformed to feed point | 49.4 Ω + 6.5 jΩ |
| Return Loss | - 23.7 dB |

### General Antenna Parameters and Design

| | |
|---|---|
| Electrical Delay (one direction) | 1.160 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

| | |
|---|---|
| Manufactured by | SPEAG |
| Manufactured on | January 09, 2003 |

## DASY5 Validation Report for Head TSL

Date: 19.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; $\sigma$ = 1.86 S/m; $\varepsilon_r$ = 37.8; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.12, 8.12, 8.12); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 110.8 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 26.9 W/kg
**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.22 W/kg**
Maximum value of SAR (measured) = 21.0 W/kg

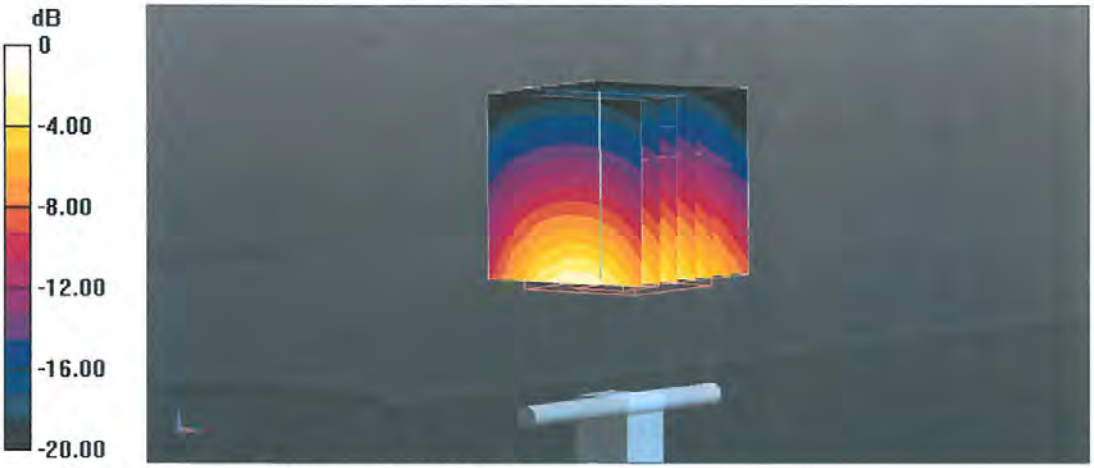


0 dB = 21.0 W/kg = 13.22 dBW/kg

## Impedance Measurement Plot for Head TSL

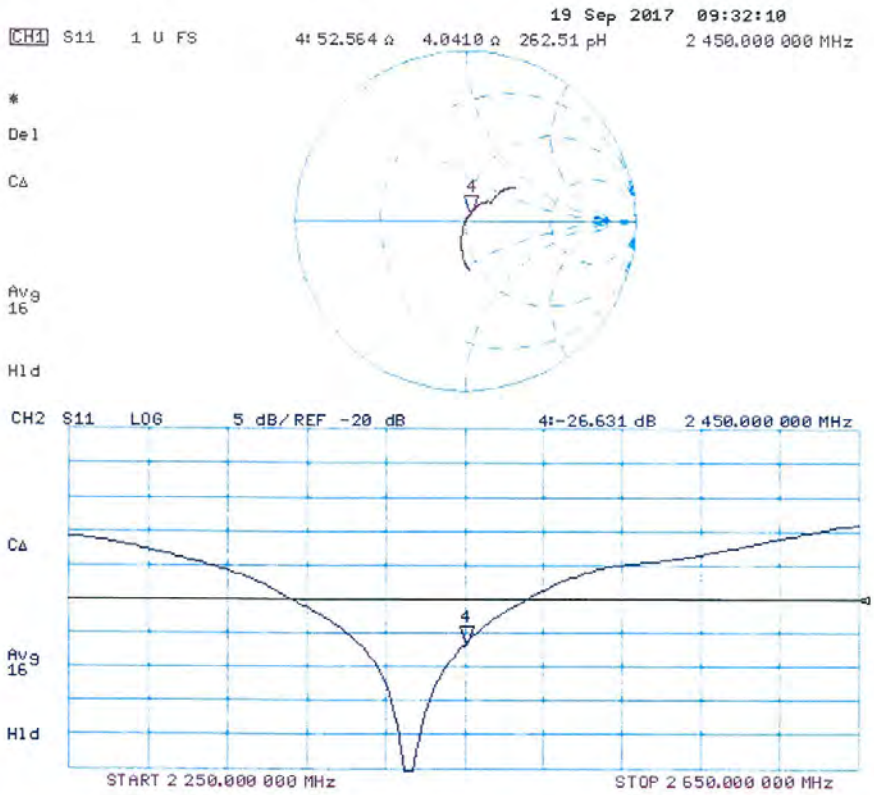

## DASY5 Validation Report for Body TSL

Date: 19.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726**

Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; $\sigma$ = 2.04 S/m; $\varepsilon_r$ = 51.9; $\rho$ = 1000 kg/m$^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.1, 8.1, 8.1); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 104.9 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 25.4 W/kg
**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.05 W/kg**
Maximum value of SAR (measured) = 20.3 W/kg

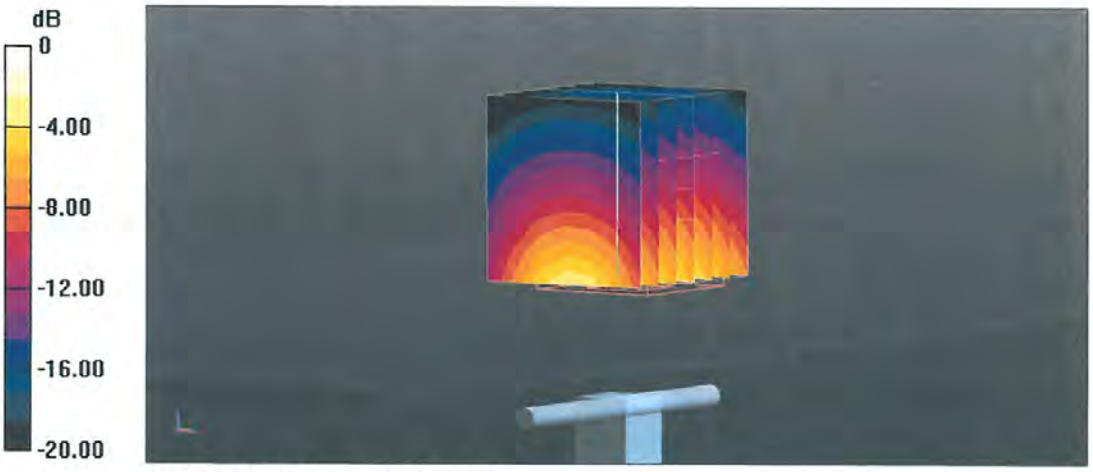


0 dB = 20.3 W/kg = 13.07 dBW/kg

## Impedance Measurement Plot for Body TSL

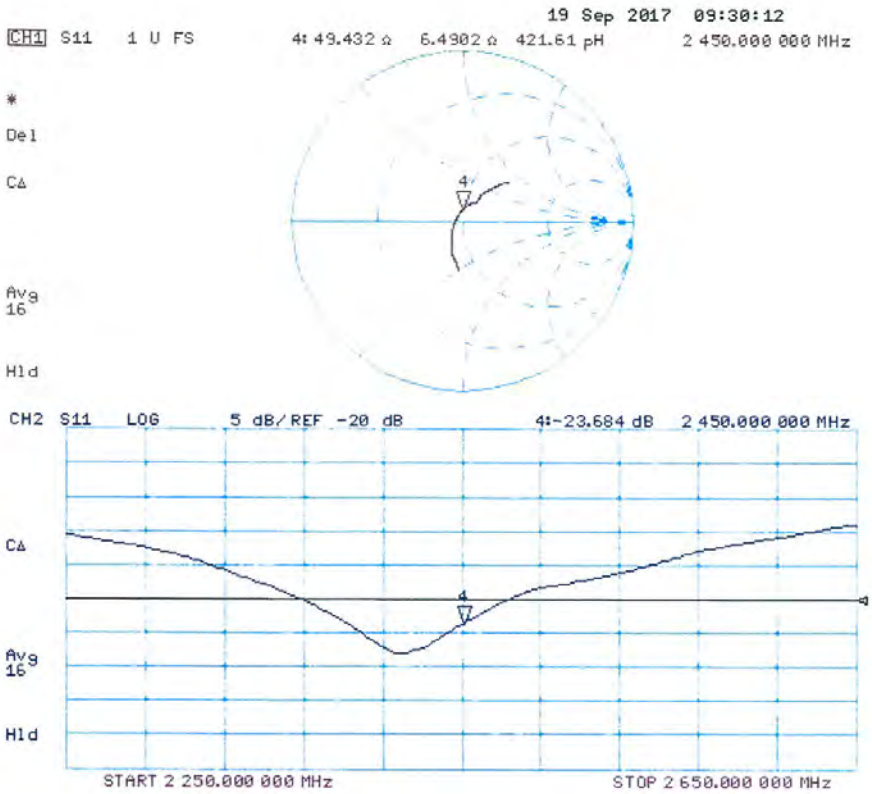


Certificate No: D2450V2-726_Sep17 Page 8 of 8

# Attachment 3. – SAR SYSTEM VALIDATION

## SAR System Validation

Per FCC KDB 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01v01r04 and IEEE 1528-2013.Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

**Table Attachment 3.1 SAR System Validation Summary**

| SAR System | Freq. [MHz] | Date | Probe SN | Probe Type | Probe CAL. Point | | PERM. | COND. | CW Validation | | | MOD. Validation | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | (εr) | (σ) | Sensi-tivity | Probe Linearity | Probe Isortopy | MOD. Type | Duty Factor | PAR |
| B | 2450 | 2017.06.21 | 3866 | EX3DV4 | 2450 | Body | 51.985 | 2.015 | PASS | PASS | PASS | OFDM | PASS | PASS |

NOTE: While the probes have been calibrated for both a CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664.