



Dual Button Precise Alert

H5PD Dual Panic Button



The H5PD Dual Panic Button is an innovative wearable badge designed to deliver instant emergency response. Its compact design features dual buttons for customizable various clicks (double click, triple click, etc.), enabling users to trigger precise alerts. Using different forms, these two buttons are convenient for users to accurately distinguish in emergencies. With firmware-configurable functions for each button, the H5PD is ideal for personnel safety in various environments like hospitals, schools, hotels and more.

Features



Dual programmable buttons




IP66 waterproof



Replaceable battery



Supports RFID



Supports alarm feedback




Supports silent alerting

Applications



Hotel




Construction



School

General Specifications

Connectivity	BLE 5.0
Dimensions (mm)	68.0*50.0*6.6
Weight	23g
Color	Body - White Button - Red&Blue
Material	PC
IP rating	IP65
Sensor	Accelerometer
LED	Red Green
Buzzer	Yes
RFID/NFC	HF LF/UHF (Customizable)
Battery capacity	550mAh Replaceable battery
Battery lifespan	3 years*
Operating temperature	-20°C/60°C
Transmission range	Up to 150m (Without any obstacles)
Installation	Lanyard
Certification	FCC CE Rohs WEEE

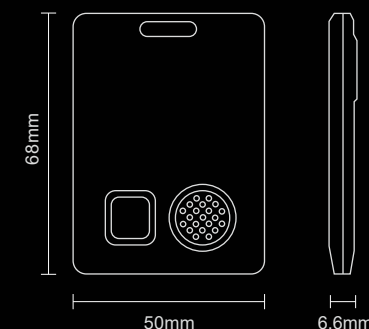

*Battery lifespan estimates are based on the default settings without accelerometer sensor – 1 active slot, 1000ms ADV interval and 0dBm Tx Power.

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.