

T580

USER MANUAL
READ BEFORE USING


T580

PACKAGE CONTENTS


- T580 True Wireless Earbuds
- On-the-go Charging Case
- 12 × Silicone Eartips (Two are already attached.)
- 4 × Earhook Cover
- 1 × Charging Cord
- User Manual

PRODUCT DIAGRAM

- ① Multi-function Button
- ② LED Indicator
- ③ Charging Contact
- ④ Micro USB Charging Port
- ⑤ Charging Case LED Indicator

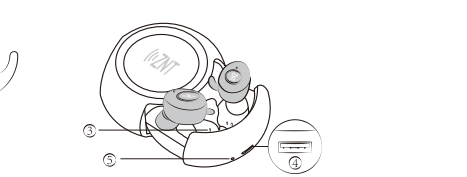

HOW TO OPEN THE CHARGING CASE



PRODUCT SPECIFICATIONS

Product Name	T580
Bluetooth Version	V4.2
Operation Range	≤ 33Feet(Unobstructed Effective Range)
Earbud Charging Time	≤ 90 minutes
Charging Case Charging Time	≤ 150 minutes
Play Time	3-3.5 Hours (at 75% volume)
Talk Time	3 Hours (at 75% volume)
Standby Time	160 Hours
Bluetooth Profiles	A2DP,AVRCP,HFP,HSP
Earbud Battery Type	50mAh Rechargeable Lithium Batteries
Charging Case Battery Type	500mAh Rechargeable Lithium Batteries

HOW TO CHARGE

Charging The Earbuds

When the battery is low, the LED indicator flashes white with a voice prompt to remind you of a low battery. To recharge the earbuds, simply place them in the charging case and close the case. The earbuds LED indicator turns white and then shuts off when fully charged.

Charging The Charging Case


To power up the charging case, simply plug it into a USB power supply, the charging case LED will flash blue when charging, and the blue light will remain on when fully charged. (Please check the battery level and charging status as indicated below.)

Battery Level	The Charging Case LED Indicator Light Status
0 ~ 25%	Blue light flashes once every 2 seconds.
25 ~ 50%	Blue light flashes twice every 2 seconds.
50 ~ 75%	Blue light flashes 3 times every 2 seconds.
75% ~ 100%	Blue light flashes 4 times every 2 seconds

HOW TO PAIR

First Time to Pair with Devices:

- ① Take both earbuds from the charging case, both earbuds will power on and connect with each other automatically. You will hear a voice "pairing" indicating that the earbuds are in pairing mode.
- ② Enable Bluetooth on your device and select "T580". You will hear a voice "Pairing successful, second device connected" once connected.



Second Time to Pair with Latest Devices:

Take the earbuds out of the case, it will pair with your latest device automatically. ✖ The earbuds turn off automatically when you put them back to the charging case. To manually power off, long press either earbud multi-function button for 6 seconds; To manually power on, hold still both earbuds multi-function buttons for 6 seconds.

HOW TO USE MONO MODE

Left earbud for mono mode:

Take the left earbud out of the charging case, it will power on and enter pairing mode automatically, enable the Bluetooth on your device and search " T580 ", tap to connect. If the left earbud has been used for stero mode last time, just pick it up and it will connect with your last connected device automatically.

Right earbud for mono mode:

Take the right earbud out of the charging case, it will power on automatically. Quickly click the earbud multi-function button for 3 times, you will hear a voice "pairing" indicating that the earbud has entered pairing mode, it will enter pairing mode, enable the Bluetooth on your device and search " T580 + ", tap to connect.

HOW TO WEAR

Both earbuds for mono mode at the same time: Take both earbuds out of the charging case, click the right earbud button for 3 times, both earbuds will lose their connection and enter pairing mode. Then search " T580 " on the Bluetooth menu of A device and tap to pair, search the other " T580 + " on the Bluetooth menu of B device to pair.



- ① Select the proper sized eartips.
- ② Put earbuds into your ear canal.
- ③ To get the best sound, the top of the Earhooks Cover should fit tight into the fossa triangularis of the ear.

HOW TO RESET PAIRING

Keep both earbuds in the charging case, quickly double-click both earbuds multi-function buttons until the LED indicator turns white. Remove both earbuds from the case and double click both earbuds multi-function buttons, wait for about 10 seconds, You will hear "Pairing Successful" "Connected" "Left Channel" "Right Channel".

HOW TO CARE FOR YOUR EARBUDS

Always store the earbuds in the charging case and safely protected. Avoid storage at extreme temperatures (Above 65°C/149°F or below -10°C/°F). Otherwise, it would shorten the battery life and may affect the earbuds.

CONTROLS

Listening to Music

▶ Pause Music	Press either earbud button for once.
⏮ Play Music	Press either earbud button for once.
⏭ Next Songs	Double press either earbud button.
🎤 Activate/Stop Siri	Press the button on LEFT earbud for 1 second during standby/music play.

Making and Answering Calls

📞 Announce Phone Number	The LEFT earbud will announce the caller's phone number when there's an incoming call.
📞 Answer call	Press either earbud button for once.
📞 End Call	Press either earbud button for once.
📞 Reject Call	When a call is incoming, double press the LEFT earbud button.
📞 Redial the Last Contact Caller	Press the LEFT earbud button for three times to redial the last contact phone number.
🔄 Switch Phone Chat Device	During a call, double press the LEFT earbud button to switch chat between the earbud and your phone.

FAQS

Questions	Answers
Q1: The right earbud can not connect with the left earbud	Refer to "HOW TO RESET PAIRING"
Q2: Can't turn on the earbuds.	A1: Check whether there's battery left in the charging case. Charge the charging case then try again if this is the case. A2: Put the earbuds back to the charging case to fully charge the earbuds, then try again.
Q3: Can't pair successfully with your device.	A1: Remove the earbuds Bluetooth from your device. A2: Reset the earbuds, search " T580 " on your device, tap to connect.
Q4: The right earbud cuts out and in.	A1: Wear the earbuds in a correct way. (Refer to "HOW TO WEAR") A2: Disable the connection between the earbuds and your device, pair with the device again.
Q5: Still get problems?	Feel free to contact us at support@i-znt.com. We will reply back within 24 hours.

CORRECT DISPOSAL OF THIS PRODUCT

(Waste Electrical & Electrical Equipment)
This symbol shown on the package or its literature indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.
Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance

could void the user's authority to operate the equipment. This device complies with Part

15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.