

# Doorbell-O4outdoor unit

## Installation Guide

## Guide d' installation

## Installationsanleitung

## Gu í a de instalaci ó n

Version 1.0.1a



Camera  
Caméra  
Kamera  
Cámara


Camera Flash  
Flash d'appareil photo  
Kamerablitz  
Flash de la cámara

Doorbell  
Button  
Bouton de  
sonnette  
Klingelknopf  
Botón de timbre

Call Indicator Light  
Indicateur d'appel lumineux  
Rufanzeige  
Indicador de luz de llamada

## Doorbell features

Battery location  
Emplacement de la  
batterie  
Batterieort  
Ubicación de la  
bater í a

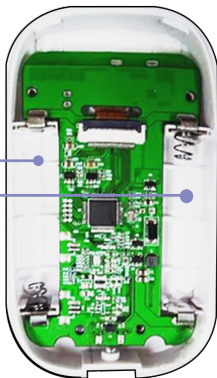

## Doorbell Internal features



Fixing Screw  
Vis de fixation  
Befestigungsschraube  
Tornillo de fijación

Weather Cover overview

Speaker  
Haut-parleur  
Lautsprecher  
Altavoz

LED Status Light  
Voyant d'état à DEL  
LED-Statusleuchte  
Luz de estado LED

Function Key  
Clé de fonction  
Funktionstaste  
Tecla de función



Inner ringer overview

# Batteries

Installation Guide

Guide d'installation

Installationsanleitung

Guía de instalación



1. Open doorbell and install 2 x AAA batteries.
1. Ouvrier la sonnette et installez 2 piles AAA.
1. Öffnen Sie die Türklingel und installieren Sie 2 x AAA-Batterien.
1. Abra el timbre e instale 2 pilas AAA.

# Eule Photo App

Installation Guide

Guide d'installation de l'application

App Installationshandbuch

Guía de instalación de la aplicación



[www.eule-tech.com](http://www.eule-tech.com)



- Refer to website for installation instructions
- Reportez-vous au site Web pour les instructions d'installation
- Auf der Website finden Sie Installationsanweisungen
- Consulte el sitio web para obtener instrucciones de instalación

Download the App

02-UK

15:00

<

Register

Account Name

Password

Submit

Note



Account Name must be between 6-50 characters; letters, numbers and \_ are allowed. Other characters are not permitted.

Email addresses cannot be used as your account name.



Password must be between 8-31 characters of case sensitive letters and numbers. Special characters are not permitted.

Ensure a valid email address is registered to the account once you have logged in under the settings menu> Account & Security

# Register

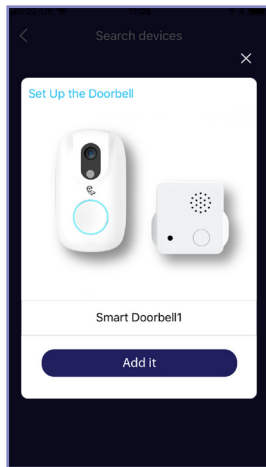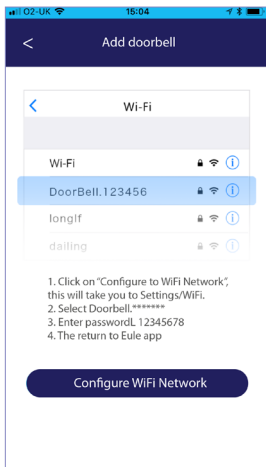

Connect to WiFi and link Doorbell

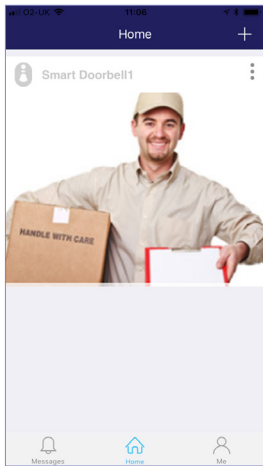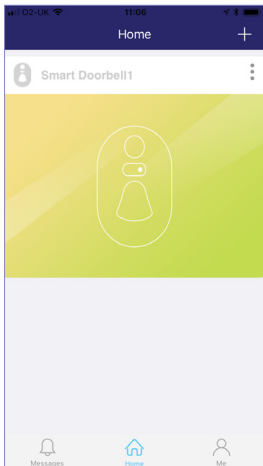

After installation the latest image will appear on the app home page



Installation Guide  
Guide d'installation  
Installationsanleitung  
Guía de instalación

The eule doorbell can be fixed in place either by the 3M tape or by screwing to your door-frame or other suitable location.

La sonnette d'eule peut être fixée en place par le ruban 3M ou en vissant à votre porte ou à un autre endroit approprié.

Die Eule-Türklingel kann entweder mit dem 3M-Band oder durch Verschrauben an Ihrem Türrahmen oder an einer anderen geeigneten Stelle befestigt werden.

El timbre eule se puede fijar en su lugar mediante la cinta de 3M o atornillándolo al marco de la puerta u otra ubicación adecuada.

## Suggested fixing locations



## Rain Cover overview

## Door Mounting Options

1. Screw Mounting
2. Screw Mounting with weather cover
3. Tape Mounting
4. Tape Mounting with weather cover

**Screw Mounting**  
Installation Guide  
Guide d'installation  
Installationsanleitung  
Guía de instalación



1. Remove the plate from the doorbell.


1. Retirez la plaque de la sonnette.

1. Entfernen Sie die Platte von der Türklingel.

1. Retire la placa del timbre.



2. Place the backplate in position, mark and drill mounting holes, then screw into place.
2. Placer la plaque arrière, marquez et percez les trous de montage, puis vissez.
2. Setzen Sie die Rückplatte in Position, markieren und bohren Sie die Montagelöcher und schrauben Sie sie dann fest.
2. Coloque la placa posterior en su posición, marque y taladre los orificios de montaje, luego atornille en su lugar.

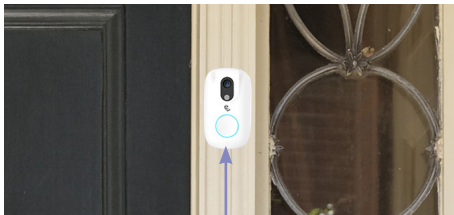

3. Mount the doorbell onto the plate and screw in retaining screw.
3. Monter la sonnette sur la plaque et vissez la vis de retenue.
3. Montieren Sie die Türklingel auf die Platte und schrauben Sie die Halteschraube ein.
3. Monte el timbre en la placa y atornille el tornillo de retención.

# Weather Cover Mounting with Screws

Installation Guide


Guide d'installation

Installationsanleitung

Guía de instalación



1. Place the rain cover in position, mark and drill mounting screws into place.
1. Placer la protection contre la pluie, marquez et percez les vis de montage.
1. Bringen Sie die Regenabdeckung in Position, markieren Sie sie und bohren Sie die Befestigungsschrauben.
1. Coloque la cubierta para lluvia en su posición, marque y taladre los tornillos de montaje en su lugar.

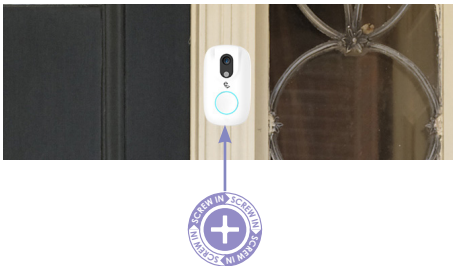

2. Mount the doorbell unit in the cover and screw in the retaining screw.
2. Monter l'unité de la sonnette dans le couvercle et vissez la vis de retenue.
2. Montieren Sie die Klingeleinheit in die Abdeckung und schrauben Sie die Halteschraube ein.
2. Monte la unidad del timbre en la tapa y atornille el tornillo de retención..


# 3M Tape Mounting (without Weather Cover)

Installation Guide

Guide d'installation

Installationsanleitung


Guía de instalación

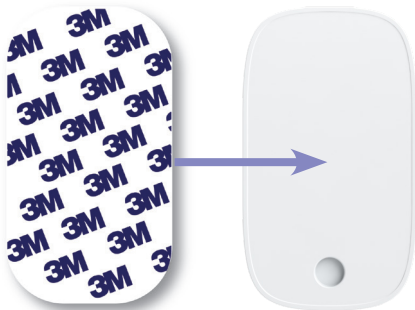

1. Take the 3M tape and peel off one side and stick to the rear of the doorbell.
1. Prener le ruban adhésif 3M, retirez-le d'un côté et collez-le à l'arrière de la sonnette.
1. Nehmen Sie das 3M-Band und ziehen Sie es auf der Rückseite der Klingel ab.
1. Tome la cinta de 3M y despegue un lado y péguese a la parte posterior del timbre.



2. Peel off the cover tape from the back of the fixing plate.
2. Décoller le ruban de protection à l'arrière de la plaque de fixation.
2. Ziehen Sie das Abdeckband von der Rückseite der Befestigungsplatte ab.
2. Retire la cinta protectora de la parte posterior de la placa de fijación.

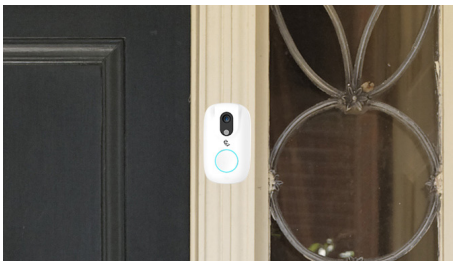

3. Place the doorbell in position on the door frame and hold for 10 second.
3. Placer la sonnette en position sur le cadre de la porte et maintenez-la pendant 10 secondes
3. Setzen Sie die Türklingel in Position auf dem Türrahmen und halten Sie sie 10 Sekunden lang.
3. Coloque la timbre posterior en posición en el marco de la puerta y manténgala presionada durante 10 segundos.


# 3M Tape Mounting (with Weather Cover)

Installation Guide

Guide d'installation

Installationsanleitung

Guía de instalación

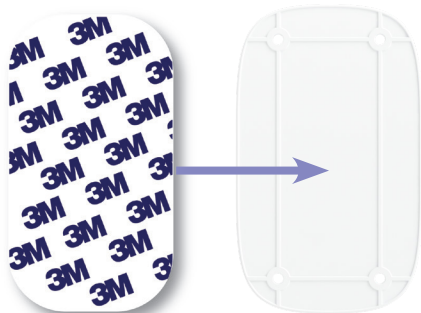

1. Take the 3M tape and peel off one side and stick to the rear of the weather cover.
1. Prener la bande 3M et retirez-la d'un côté et collez-la à l'arrière de la couverture météo.
1. Nehmen Sie das 3M-Band und ziehen Sie es auf der Rückseite der Wetterabdeckung ab.
1. Tome la cinta de 3M y despegue de un lado y péguela a la parte posterior de la cubierta del clima.



2. Peel off the cover tape from the back of the fixing plate.
2. Décoller le ruban de protection à l'arrière de la plaque de fixation.
2. Ziehen Sie das Abdeckband von der Rückseite der Befestigungsplatte ab.
2. Retire la cinta protectora de la parte posterior de la placa de fijación.



3. Place the weather cover in position on the door frame and hold for 10 second.
3. Placer le couvercle de protection contre les intempéries sur le cadre de la porte et maintenez-le pendant 10 secondes.
3. Setzen Sie die Wetterabdeckung auf den Türrahmen und halten Sie sie 10 Sekunden lang.
3. Coloque la cubierta del clima en posición en el marco de la puerta y manténgala presionada durante 10 segundos.



- 4. Mount the doorbell unit in the cover and screw in the retaining screw.
- 4. Monter la sonnette sur la plaque et vissez la vis de retenue.
- 4. Montieren Sie die Türklingel auf die Platte und schrauben Sie die Halteschraube ein.
- 4. Monte la unidad del timbre en la tapa y atornille el tornillo de retención..

### FCC Statement

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off or on, the user is encouraged to try to correct the interference by one or more of the following measures;

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that which the receiver is connected.
- Consult an experienced radio/TV technician for help.

FCC ID: 2A0J2-D2-A

### FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter should be installed and operated a minimum distance of 20 centimeters between the radiator and your body and must not be co-located or operated in conjunction with any other antenna or transmitter. This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions;

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### Caution!

Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Safety Warnings

This device is not intended for use by persons (including children) with reduced physical, sensory or mental capacities, or lack of experience or knowledge, unless they have been given supervision or instruction concerning use of the appliance responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance. The wall adapter is designed for internal use only.

Before inserting the batteries, check that the contacts in the device and on the batteries are clean, and clean them if necessary. Note the polarity (+/-) when inserting the batteries.

Do not throw the batteries into a fire, short-circuit or dismantle them. Keep children away from batteries. Seek medical attention immediately if a battery is swallowed.

### Consignes de sécurité

Cet appareil n'est pas destiné à être utilisé par des personnes (notamment des enfants) dont les capacités physiques, sensorielles ou mentales sont réduites, ou qui n'ont pas d'expérience et de connaissances, à moins qu'elle ne soient surveillées ou instruites concernant l'utilisation de l'appareil par une personne responsable de la sécurité.

Les enfants doivent être surveillés pour s'assurer qu'ils ne jouent pas avec l'appareil. L'adaptateur mural est conçu pour un usage interne uniquement. Avant d'insérer les piles. Vérifiez que les contacts de l'appareil et des piles sont propres et nettoyez-les si nécessaire. Respectez la polarité (+/-) lors de l'insertion des piles.

Ne jetez pas les piles dans un incendie, créer de court-circuitez ou les démanteler. Gardez les enfants loin des piles. Consulter un médecin immédiatement si une pile est avalée.

#### EU Declaration of Conformity

We, Eule, declare that this device is in compliance with the essential requirements and other provisions of Directive 1999/5/EC.

#### English

We, Eule, declare that this device is in compliance with the essential requirements and other provisions of Directive 1999/5/EC.

#### Deutsch (German)

Wir, Eule, erklären, dass dieses Gerät die grundlegenden Anforderungen und andere Bestimmungen der Richtlinie 1999/5 / EG erfüllt.

#### Français (French)

Nous, Eule, déclarons que cet appareil est conforme aux exigences essentielles et aux autres dispositions de la directive 1999/5 / CE.

#### Español (Spanish)

Nosotros, Eule, declaramos que este dispositivo cumple con los requisitos esenciales y otras disposiciones de la Directiva 1999/5 / CE.

#### Nederlands (Dutch)

Wij, Eule, verklaren dat dit apparaat voldoet aan de essentiële vereisten en andere bepalingen van Richtlijn 1999/5 / EG.

#### Italiano (Italian)

Noi, Eule, dichiariamo che questo dispositivo è conforme ai requisiti essenziali e alle altre disposizioni della direttiva 1999/5 / CE.

#### Dansk (Danish)

Vi, Eule, erklærer, at denne enhed overholder de væsentlige krav og andre bestemmelser i direktiv 1999/5 / EF.

#### Svenska (Swedish)

Vi, Eule, förklarar att denna enhet överensstämmer med de väsentliga kraven och andra bestämmelser i direktiv 1999/5 / EG.

#### Norge (Norwegian)

Vi, Eule, erklærer at denne enheten er i samsvar med de vesentlige kravene og andre bestemmelser i direktiv 1999/5 / EF.

#### Polskie (Polish)

My, Reguła, oświadczamy, że to urządzenie jest zgodne z zasadczymi wymaganiami i innymi postanowieniami dyrektywy 1999/5 / WE.

| Item                               | Description                                   |
|------------------------------------|-----------------------------------------------|
| Product Name                       | Eule Photo Doorbell                           |
| Photo                              | Resolution: 480 x 320 dpi                     |
| Image Sensor                       | 1/4 CMOS 80° F/2.8 Lens                       |
| Night Mode                         | Built in LED flood light                      |
| Wireless and Security              |                                               |
| WiFi                               | 2.4 GHZ WiFi                                  |
| Wireless Protocol                  | Supports IEEE 802.11b/g/n                     |
| Wireless Standard                  | Support Station, Access Point and WiFi-Direct |
| Security                           | Supports WPA and WPS 2.0 encryption           |
| Power and Environmental Conditions |                                               |
| Power                              | 2 x AAA batteries                             |
| WiFi Frequency                     | 2.4 - 2.484 GHZ                               |
| Environment                        | Temperature: -10° - 60° C<br>Humidity <90%    |
| Installation                       | 3M Tape or screw fixed                        |

| Item               | Description                                |
|--------------------|--------------------------------------------|
| Product Name       | Eule Photo Doorbell Indoor Ringer          |
| Power              | 100-240 V                                  |
| Available Versions | EU, USA, UK                                |
| Environment        | Temperature: -10° - 60° C<br>Humidity <90% |
| Size               | Eule Photo Doorbell Indoor Ringer          |

## Doorbell Indicator Status (ringer plug)

| Indicator Light        | Status                                                                            |                               | Explanation                |
|------------------------|-----------------------------------------------------------------------------------|-------------------------------|----------------------------|
| Status Indicator Light |  | White solid                   | Active                     |
|                        |  | White flashing slowly (1 sec) | Ready to connect to device |
|                        |  | White flashing quickly        | Last Connection            |

**EU USERS - Eule offers a 2 year limited warranty**  
**All other regions Eule offers a 1 year limited warranty**

Email our Service and Support team at [support@eule-tech.com](mailto:support@eule-tech.com) . For FAQ's and installation advise please see [www.eule-tech.com](http://www.eule-tech.com)

Manufacturer: Eule  
 Website: [www.eule-tech.com](http://www.eule-tech.com)  
 After-sale service: [support@eule-tech.com](mailto:support@eule-tech.com)  
 Warranty: 2 year limited warranty  
 Importer and distributor:

Strax GmbH. 52-54 Belgische Allee, Troisdorf, D-53842, Germany

Congratulations your doorbell is  
installed.

Félicitations, votre sonnette est  
installée.

Herzlichen Glückwunsch, dass Ihre  
Türklingel installiert ist.

Felicitaciones, tu timbre está insta-  
lado.