



©Anker Innovations Limited. All rights reserved, registered
in the United States and other countries.

Anker Innovations Limited


Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt
Road, Hong Kong

Model: T8215
5100xxxxx_V1




QUICK START GUIDE

Video Doorbell S4 with Chime

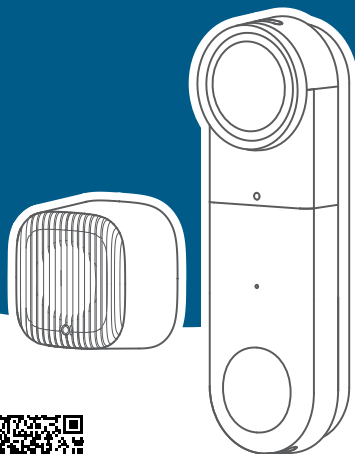

Video / User Guide
/ Support

What's in the Box



Video Doorbell



Rechargeable
Battery Pack



USB-C
Cable



Screw Hole
Positioning
Card



Mounting
Bracket



Extension
Cables



Chime
Bypass
Jumpers



Doorbell
Detaching Pin



eufy Chime 2



Power Pin
Adapter



Screw
Pack




Quick Start
Guide

Tools You Will Need

- Phillips Screwdriver
- Power Drill & 15/64" Drill Bit


At a Glance

Front View

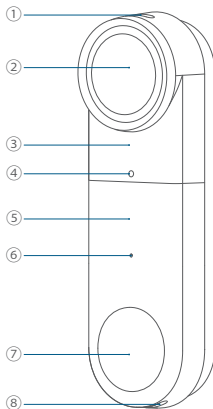

- 1 Spotlight
- 2 Camera Lens
- 3 Motion Sensors
- 4 Ambient Light Sensor
- 5 Radar Sensor
- 6 Microphone
- 7 LED Ring / Doorbell Button
- 8 Spotlight

Rear View

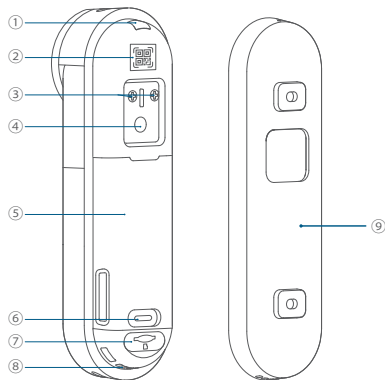

1 Detaching Mechanism

2 QR Code

3 Power Terminals for Doorbell Wires (Optional)

4 SYNC Button

- Press to turn on the doorbell.
- Press and hold for 2 seconds until you hear a beep to set up the doorbell. (Optional)
- Press quickly 5 times within 3 seconds to turn off the doorbell.

5 Battery

6 USB-C Port

- Use to charge the battery.

7 SD Card Slot


- Lift up the silicone lid to insert the SD Card.


8 Speaker

9 Mounting Bracket

Step 1 Charge the Battery Pack

Fully charge the rechargeable battery pack before installation.

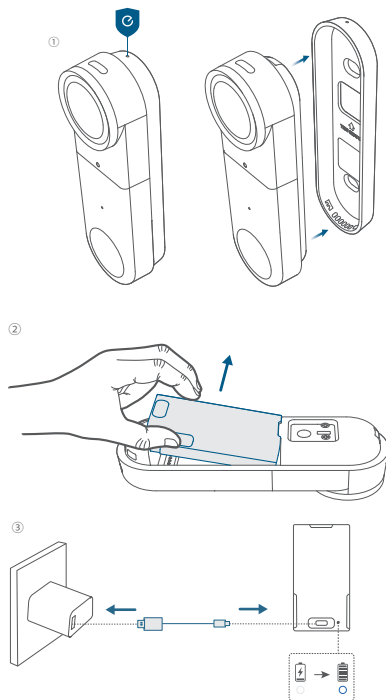

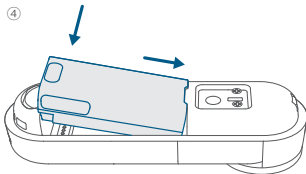

Step 2 Set Up the System

1. Download and install the eufy app, then sign in or create an account.



2. Tap **Add Device** on the home screen of the app, and the  icon on the upper right corner, then scan the QR code on the doorbell.



3. Follow the in-app instructions to add the video doorbell.

Step 3 Determine the Power Option

If you...

don't have existing doorbell wiring



Battery-Powered



- 3-step wire-free installation
- Need to recharge the battery



Follow Step 6,7 and 9

have existing doorbell wiring



Wire-Powered




- Continuous power supply
- 24/7 recording
- 5-second pre-roll



Follow Step 4 to 10

Step 4 Check the Doorbell Wiring

1. Ring the existing doorbell to ensure the wires are working.
2. **Shut off** the power at the circuit breaker.

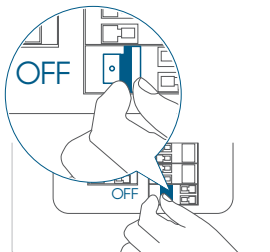


! Always be careful when handling wires. If you're not comfortable installing it yourself, have a qualified electrician to do it.

Optional: if you want to enable 24/7 recording:

The video doorbell requires sufficient power. Follow steps below to bypass the chime:

1. Find the doorbell chime in your house if you have one.
2. Remove the cover and find the screw terminals with **TRANS** and **FRONT** markings.
3. Use the provided jumper to connect **FRONT** and **TRANS** terminals on the circuit.

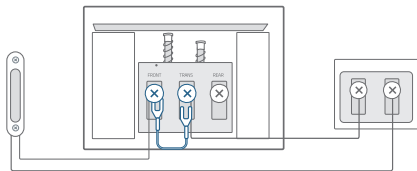


When the jumper is in place, then existing chime will not sound anymore.

Step 5 Detach Existing Doorbell Button

If you already have existing doorbell wiring:


1. Remove the existing doorbell and their accessories.
2. Pull the two wires out carefully when removing the existing doorbell. Straighten the wire ends if necessary.

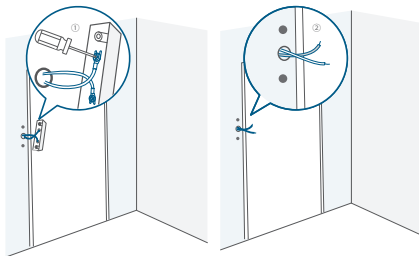

Step 6 Choose a Location


1. **Take the video doorbell to your front door and check the live view in the app.** Consider the following factors:

- Check if you can reuse the existing holes and anchors in the wall or door frame.
- Least at least 2.5 in (6 cm) of space above the doorbell to insert the detaching pin.
- If you are drilling the mounting holes for the first time, the recommended height is 48" (1.2m) above the ground.

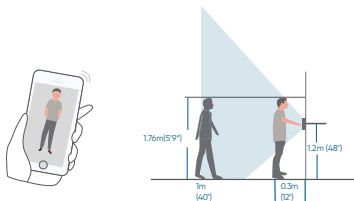


2. Place the screw hole positioning card against the wall to mark the location.

- If mounting on a hard wall (brick, concrete, or stucco), use a 15/64" (5.95mm) drill bit to drill 2 holes through the screw hole positioning card.

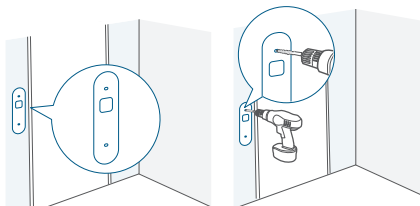

Step 7 Mount the Bracket

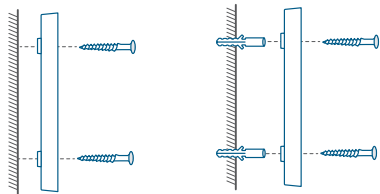

Wooden Surface



Hard Surfaces

Step 8 Connect Wires to the Doorbell



Skip this step if you are installing **battery-powered** doorbell.


Connect the wires to the terminals on the back of the doorbell, then tighten the terminal screws. Wire can be connected to any terminal.

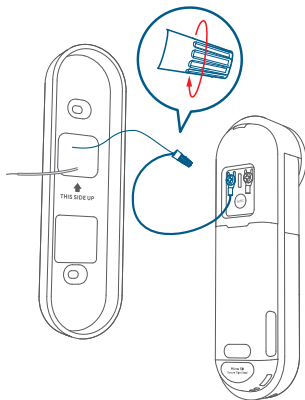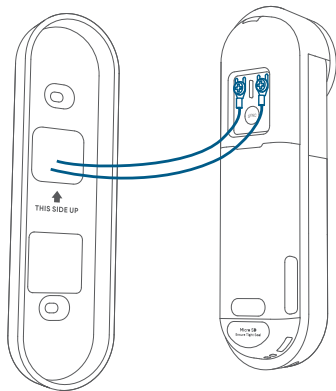

To prevent short-circuiting, make sure the wires are not touching each other after connecting them to the terminals. If the wires are too short, use the extension wires and wire nuts to make them longer. Use electrical wiring tape instead if there is no more space on the wall for wire nuts.

Step 9 Install the Doorbell

Align the doorbell with the mounting bracket, then press the doorbell into place until it clicks.

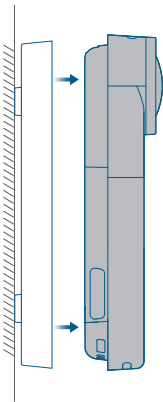


You're all set if you are installing a **battery-powered** doorbell!

If it's a **wired doorbell**, just one more step to complete the setup!



Step 10 Restore Power


Switch the main circuit breaker back to **ON**. You're all set!

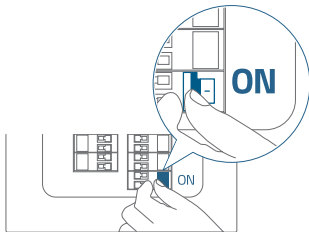


Step 11 Install the Chime

1. Attach the power connector to the doorbell chime.


①

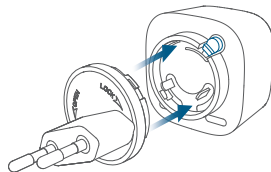

②



2. Plug the chime into a wall outlet at your desired location. The LED indicator turns solid green when the chime is ready for setup.
3. Open the app, tap the + icon, scan the QR code on the chime, and follow in-app prompts to complete the setup.

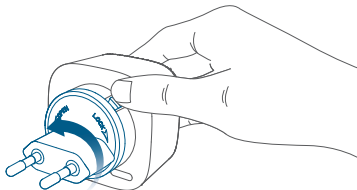

To remove the power connector:

Press the release latch and rotate to the Open position.