



FCC Radio Test Report

FCC ID: 2AOKI-WF8225U1

This report concerns: Original Grant

Project No. : 2601C218
Equipment : WIFI7 Module
Brand Name : AI-LINK
Model Name : WF8225-U1
Applicant : Sichuan AI-Link Technology Co.,Ltd.
Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Manufacturer : Sichuan AI-Link Technology Co.,Ltd.
Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Factory : Sichuan AI-Link Technology Co.,Ltd.
Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Date of Receipt : Jan. 20, 2026
Date of Test : Jan. 22, 2026 ~ Mar. 05, 2026
Issued Date : Mar. 12, 2026
Test Sample : Engineering Sample No.: DG920260120293 for conducted,
DG920260120294 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E


The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by :



Antony Liang

Approved by :



Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	18
3.4 DUTY CYCLE	21
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	24
3.6 SUPPORT UNITS	24
3.7 CUSTOMER INFORMATION DESCRIPTION	24
4 . AC POWER LINE CONDUCTED EMISSIONS	25
4.1 LIMIT	25
4.2 TEST PROCEDURE	25
4.3 DEVIATION FROM TEST STANDARD	25
4.4 TEST SETUP	26
4.5 EUT OPERATION CONDITIONS	26
4.6 TEST RESULTS	26
5 . RADIATED EMISSIONS	27
5.1 LIMIT	27
5.2 TEST PROCEDURE	28
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	29
5.5 EUT OPERATION CONDITIONS	30
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	31
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	31
5.8 TEST RESULTS - ABOVE 1000 MHZ	31
6 . BANDWIDTH	32
6.1 LIMIT	32

Table of Contents	Page
6.2 TEST PROCEDURE	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33
6.6 TEST RESULTS	33
7 . MAXIMUM OUTPUT POWER	34
7.1 LIMIT	34
7.2 TEST PROCEDURE	34
7.3 DEVIATION FROM STANDARD	34
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS	34
7.6 TEST RESULTS	34
8 . POWER SPECTRAL DENSITY	35
8.1 LIMIT	35
8.2 TEST PROCEDURE	35
8.3 DEVIATION FROM STANDARD	35
8.4 TEST SETUP	36
8.5 EUT OPERATION CONDITIONS	36
8.6 TEST RESULTS	36
9 . FREQUENCY STABILITY	37
9.1 LIMIT	37
9.2 TEST PROCEDURE	37
9.3 DEVIATION FROM STANDARD	37
9.4 TEST SETUP	37
9.5 EUT OPERATION CONDITIONS	37
9.6 TEST RESULTS	37
10 . MEASUREMENT INSTRUMENTS LIST	38
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	41
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	44
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	49
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	52
APPENDIX E - BANDWIDTH	193

Table of Contents	Page
APPENDIX F - MAXIMUM OUTPUT POWER	226
APPENDIX G - POWER SPECTRAL DENSITY	259
APPENDIX H - FREQUENCY STABILITY	315

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2601C218	R00	Original Report.	Mar. 12, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☐ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For radiated emissions above 1GHz Items: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For other Items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (3m)	CISPR	30MHz ~ 1000MHz	3.88
		1GHz ~ 18GHz	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (1m)	CISPR	18GHz ~ 40GHz	4.30

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.8 dB
Frequency Stability	1.4 ppm
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	52%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9kHz to 30MHz	23°C	44%	DC 5V	Hayden Chen
Radiated Emissions -30MHz to 1000MHz	23°C	51%	DC 5V	Torin Long
Radiated Emissions -Above 1000 MHz	23°C	32%	DC 5V	Lafu Li
	23°C	42%	DC 5V	Ilya Zhang
Bandwidth	22-25°C	46-51%	DC 5V	Jay Wei / Jensen Zhou
Maximum Output Power	23-24°C	49-59%	DC 5V	Arvin Tong
Power Spectral Density	22-25°C	46-51%	DC 5V	Jay Wei / Jensen Zhou
Frequency Stability	Normal & Extreme	46-51%	Normal & Extreme	Jay Wei / Jensen Zhou

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIFI7 Module
Brand Name	AI-LINK
Test Model	WF8225-U1
Model Name	WF8225-U1
Model Difference(s)	N/A
Software Version	V20
Hardware Version	1816
Power Source	DC Voltage supplied from External Power Supply.
Power Rating	DC 5V/2A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 573.6 Mbps IEEE 802.11ax: up to 2442 Mbps IEEE 802.11be: up to 2882 Mbps
Maximum Output Power UNII-1	IEEE 802.11be(EHT20): 18.56 dBm (0.0717 W)
Maximum Output Power UNII-2A	IEEE 802.11be(EHT40): 18.54 dBm (0.0715 W)
Maximum Output Power UNII-2C	IEEE 802.11be(EHT20): 19.17 dBm (0.0825 W)
Maximum Output Power UNII-3	IEEE 802.11be(EHT20): 19.17 dBm (0.0825 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	Hanyang Antenna Design Co., Ltd.	7925	PCB	N/A	3.35
2	Hanyang Antenna Design Co., Ltd.	7925	PCB	N/A	5.37

Note:

- This EUT supports CDD, and Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=5.37.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 5.37 + 10\log(2/1)\text{dBi} = 8.38$.
Then, the UNII-1, UNII-2A and UNII-2C power spectral density limit is $11 - (8.38 - 6) = 8.62$, the UNII-3 power spectral density limit is $30 - (8.38 - 6) = 27.62$.
- Beamforming Gain: 3 dB.

4. Table for Antenna Configuration:
For Non Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT160)		V (Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode	TX Mode	2TX
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT160)		V (Ant. 1 + Ant. 2)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX BE(EHT20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX BE(EHT40) Mode Channel 38/46 (UNII-1)
Mode 7	TX BE(EHT80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX BE(EHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX BE(EHT40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX BE(EHT80) Mode Channel 58 (UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 16	TX BE(EHT160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140/144 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX BE(EHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX BE(EHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX BE(EHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX BE(EHT160) Mode Channel 114 (UNII-2C)
Mode 26	TX A Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 30	TX BE(EHT20) Mode Channel 149/157/165 (UNII-3)
Mode 31	TX BE(EHT40) Mode Channel 151/159 (UNII-3)
Mode 32	TX BE(EHT80) Mode Channel 155 (UNII-3)
Mode 33	TX BE(EHT20) Mode Channel 157(UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 33	TX BE(EHT20) Mode Channel 157(UNII-3)

Radiated Emissions Test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 33	TX BE(EHT20) Mode Channel 157(UNII-3)

Radiated Emissions Test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48(UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48(UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46(UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42(UNII-1)
Mode 5	TX BE(EHT20) Mode Channel 36/40/48(UNII-1)
Mode 6	TX BE(EHT40) Mode Channel 38/46(UNII-1)
Mode 7	TX BE(EHT80) Mode Channel 42(UNII-1)
Mode 8	TX A Mode Channel 52/60/64(UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64(UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62(UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58(UNII-2A)
Mode 12	TX BE(EHT20) Mode Channel 52/60/64(UNII-2A)
Mode 13	TX BE(EHT40) Mode Channel 54/62(UNII-2A)
Mode 14	TX BE(EHT80) Mode Channel 58(UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50(UNII-1+UNII-2A)
Mode 16	TX BE(EHT160) Mode Channel 50(UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140/144 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX BE(EHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX BE(EHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX BE(EHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX BE(EHT160) Mode Channel 114(UNII-2C)
Mode 26	TX A Mode Channel 149/157/165(UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165(UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159(UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155(UNII-3)

Mode 30	TX BE(EHT20) Mode Channel 149/157/165(UNII-3)
Mode 31	TX BE(EHT40) Mode Channel 151/159(UNII-3)
Mode 32	TX BE(EHT80) Mode Channel 155(UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48(UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48(UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46(UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42(UNII-1)
Mode 5	TX BE(EHT20) Mode Channel 36/40/48(UNII-1)
Mode 6	TX BE(EHT40) Mode Channel 38/46(UNII-1)
Mode 7	TX BE(EHT80) Mode Channel 42(UNII-1)
Mode 8	TX A Mode Channel 52/60/64(UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64(UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62(UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58(UNII-2A)
Mode 12	TX BE(EHT20) Mode Channel 52/60/64(UNII-2A)
Mode 13	TX BE(EHT40) Mode Channel 54/62(UNII-2A)
Mode 14	TX BE(EHT80) Mode Channel 58(UNII-2A)
Mode 15	TX AC(VHT160) Mode Channel 50(UNII-1+UNII-2A)
Mode 16	TX BE(EHT160) Mode Channel 50(UNII-1+UNII-2A)
Mode 17	TX A Mode Channel 100/116/140/144 (UNII-2C)
Mode 18	TX AC(VHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 19	TX AC(VHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 20	TX AC(VHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 21	TX AC(VHT160) Mode Channel 114 (UNII-2C)
Mode 22	TX BE(EHT20) Mode Channel 100/116/140/144 (UNII-2C)
Mode 23	TX BE(EHT40) Mode Channel 102/110/134/142 (UNII-2C)
Mode 24	TX BE(EHT80) Mode Channel 106/122/138 (UNII-2C)
Mode 25	TX BE(EHT160) Mode Channel 114(UNII-2C)
Mode 26	TX A Mode Channel 149/157/165(UNII-3)
Mode 27	TX AC(VHT20) Mode Channel 149/157/165(UNII-3)
Mode 28	TX AC(VHT40) Mode Channel 151/159(UNII-3)
Mode 29	TX AC(VHT80) Mode Channel 155(UNII-3)
Mode 30	TX BE(EHT20) Mode Channel 149/157/165(UNII-3)
Mode 31	TX BE(EHT40) Mode Channel 151/159(UNII-3)
Mode 32	TX BE(EHT80) Mode Channel 155(UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX BE(EHT20) Mode Channel 157(UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) For Beamforming operation, the manufacturer automatically reduces power based on a factor calculated as the difference between the beamforming directional gain and the CDD directional power gain. Thus, only the CDD mode was evaluated in this report.
- (6) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is only recorded.
- (7) EHT20/EHT40/EHT80/EHT160 covers HE20/HE40/HE80/HE160, VHT20/VHT40 covers HT20/HT40, and due to same modulation (in full RU). The power setting for 802.11n HT20/HT40 are the same or lower than 802.11ac VHT20/VHT40, the power setting for 802.11ax HE20/HE40/HE80/HE160 are the same or lower than 802.11be EHT20/EHT40/EHT80/EHT160.
- (8) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	QAtool_V14		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	14.5	14.5	14
IEEE 802.11ac(VHT20)	14.5	14.5	14
IEEE 802.11be(EHT20)	14.5	14.5	14.5
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	14	14	
IEEE 802.11be(EHT40)	14.5	14.5	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	14		
IEEE 802.11be(EHT80)	14		

UNII-2A			
Test Software Version	QAtool_V14		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	14	14.5	14.5
IEEE 802.11ac(VHT20)	14	14.5	14.5
IEEE 802.11be(EHT20)	14.5	14.5	14.5
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	14	14	
IEEE 802.11be(EHT40)	14.5	14.5	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	14		
IEEE 802.11be(EHT80)	14		

UNII-1+UNII-2A	
Test Software Version	QAtool_V14
Frequency (MHz)	5250
IEEE 802.11ac(VHT160)	11
IEEE 802.11be(EHT160)	11.5

UNII-2C				
Test Software Version	QAtool_V14			
Frequency (MHz)	5500	5580	5700	5720
IEEE 802.11a	15.5	15.5	15.5	15.5
IEEE 802.11ac(VHT20)	15.5	15	15.5	15.5
IEEE 802.11be(EHT20)	15.5	15.5	15.5	16
Frequency (MHz)	5510	5550	5670	5710
IEEE 802.11ac(VHT40)	15	15	15	14.5
IEEE 802.11be(EHT40)	15.5	15.5	15.5	15
Frequency (MHz)	5530	5610	5690	
IEEE 802.11ac(VHT80)	14	14	13.5	
IEEE 802.11be(EHT80)	14.5	14.5	14	
Frequency (MHz)	5570			
IEEE 802.11ac(VHT160)	12			
IEEE 802.11be(EHT160)	12.5			

UNII-3			
Test Software Version	QAtool_V14		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	16	15.5	15.5
IEEE 802.11ac(VHT20)	16	15.5	15.5
IEEE 802.11be(EHT20)	16	15.5	15.5
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	15	14.5	
IEEE 802.11be(EHT40)	15	14.5	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	14		
IEEE 802.11be(EHT80)	14		


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

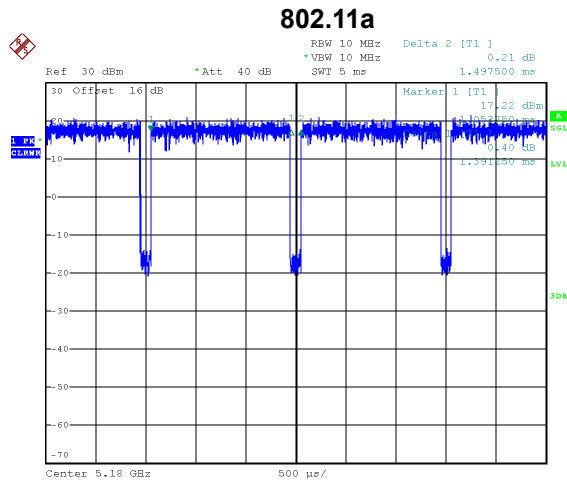


Date: 27.JAN.2026 14:07:41

Duty cycle = 1.391 ms / 1.498 ms = 92.86%
Duty Factor = 10 log(1/Duty cycle) = 0.32 dB

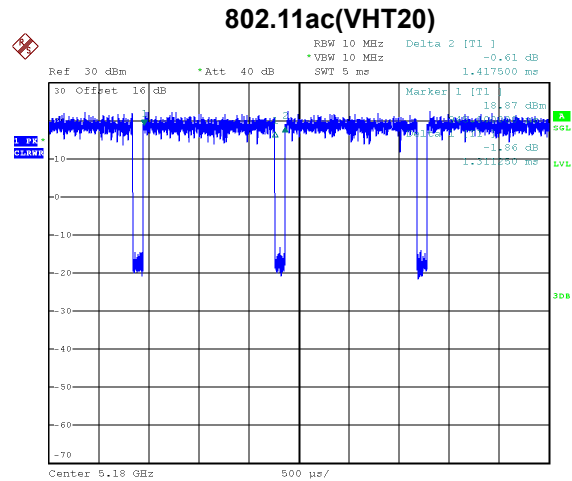


Date: 27.FEB.2026 10:28:25

Duty cycle = 1.311 ms / 1.418 ms = 92.45%
Duty Factor = 10 log(1/Duty cycle) = 0.34 dB

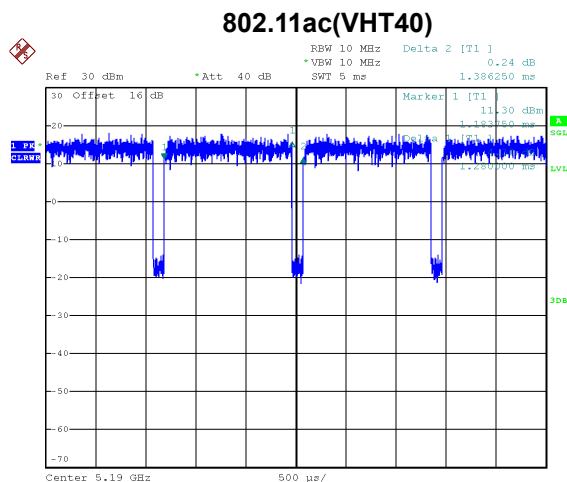

Date: 27.FEB.2026 10:30:27


Duty cycle = 1.280 ms / 1.386 ms = 92.35%
Duty Factor = 10 log(1/Duty cycle) = 0.35 dB

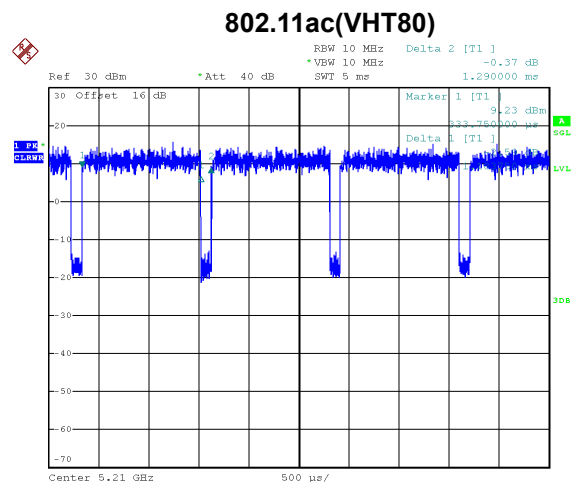

Date: 27.FEB.2026 10:36:42

Duty cycle = 1.184 ms / 1.290 ms = 91.78%
Duty Factor = 10 log(1/Duty cycle) = 0.37 dB


802.11ac(VHT160)

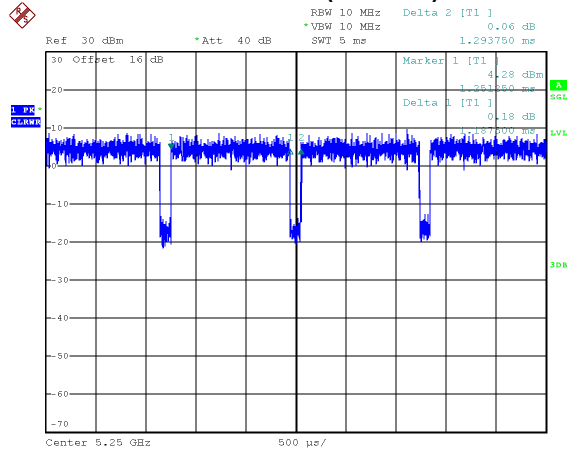

Date: 27.FEB.2026 10:37:51

Duty cycle = 1.188 ms / 1.294 ms = 91.81%
Duty Factor = 10 log(1/Duty cycle) = 0.37 dB


802.11be(EHT20)

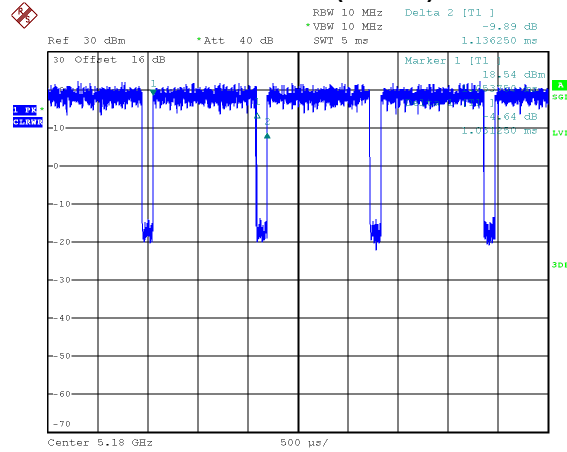

Date: 27.JAN.2026 13:51:21

Duty cycle = 1.031 ms / 1.136 ms = 90.76%
Duty Factor = 10 log(1/Duty cycle) = 0.42 dB


802.11be(EHT40)

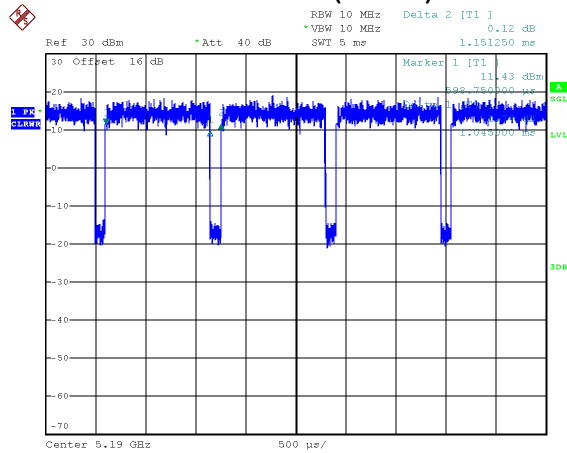

Date: 27.JAN.2026 13:53:54


Duty cycle = 1.045 ms / 1.151 ms = 90.79%
Duty Factor = 10 log(1/Duty cycle) = 0.42 dB

802.11be(EHT80)

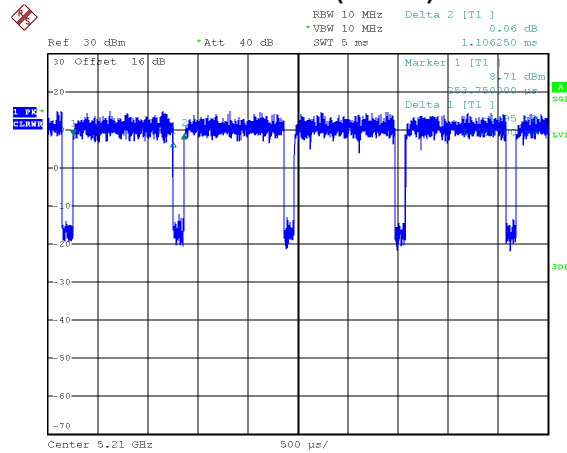

Date: 27.JAN.2026 13:56:51

Duty cycle = 1.000 ms / 1.106 ms = 90.42%
Duty Factor = 10 log(1/Duty cycle) = 0.44 dB

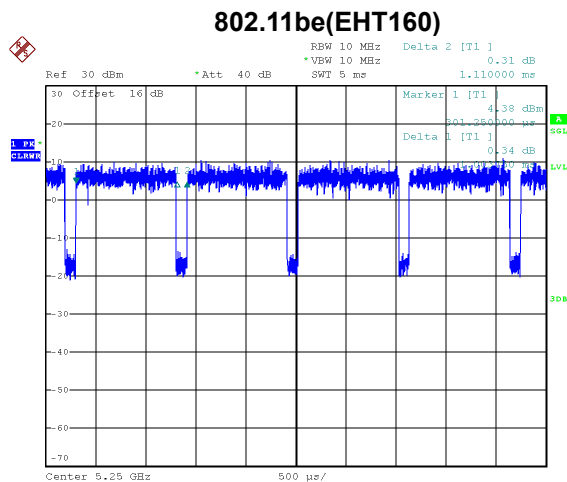

Date: 27.JAN.2026 13:55:48

Duty cycle = 1.004 ms / 1.110 ms = 90.45%
Duty Factor = 10 log(1/Duty cycle) = 0.44 dB

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 719 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 763 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 781 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 845 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 842 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 970 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 957 Hz (Duty cycle < 98%).


For IEEE 802.11be(EHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1000 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 996 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

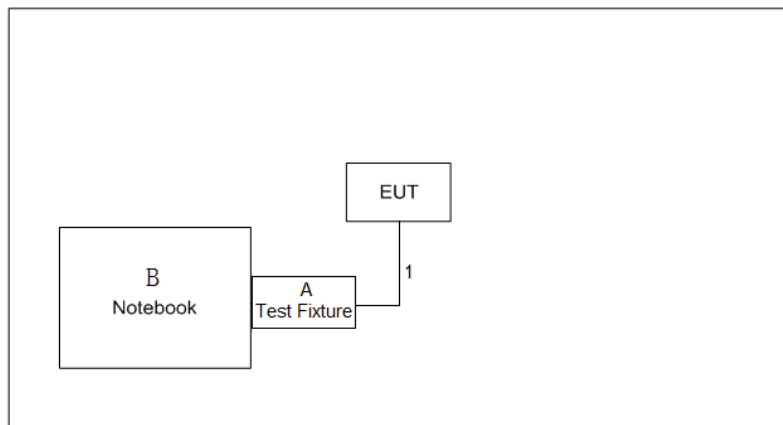

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Test Fixture	N/A	N/A	N/A
B	Notebook	HP	HP ProBook 450	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Data Cable	NO	NO	0.1m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

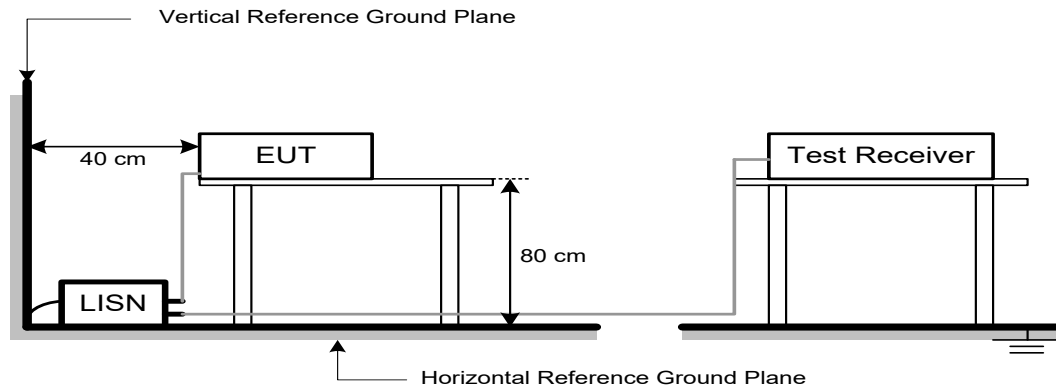

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

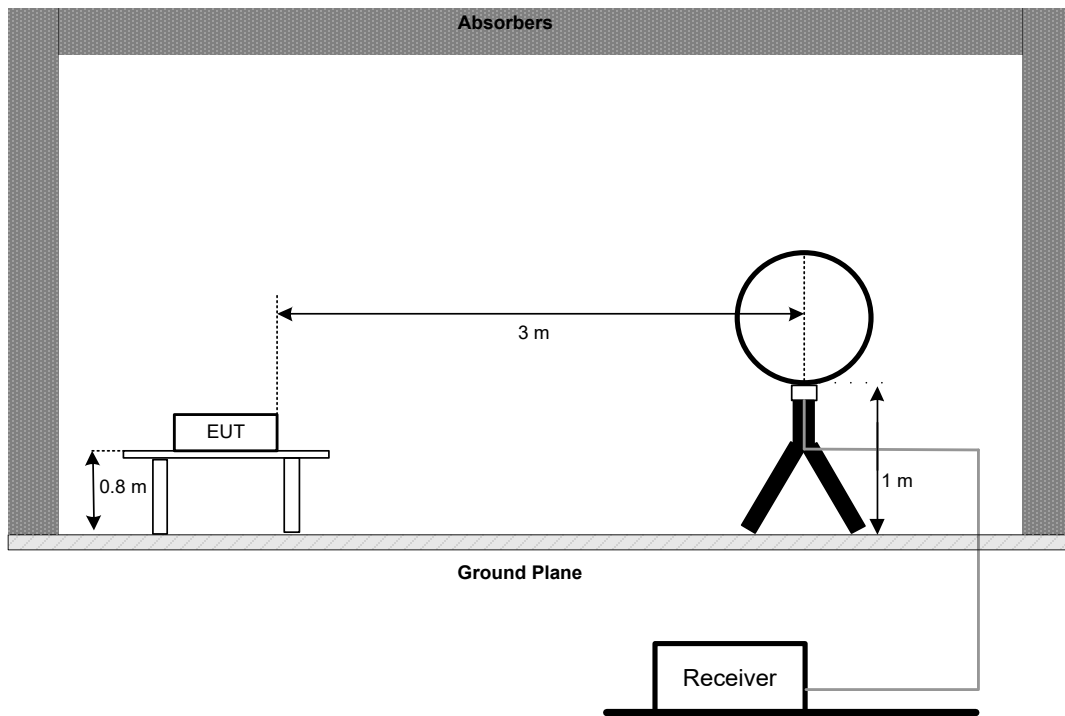


30 MHz to 1 GHz

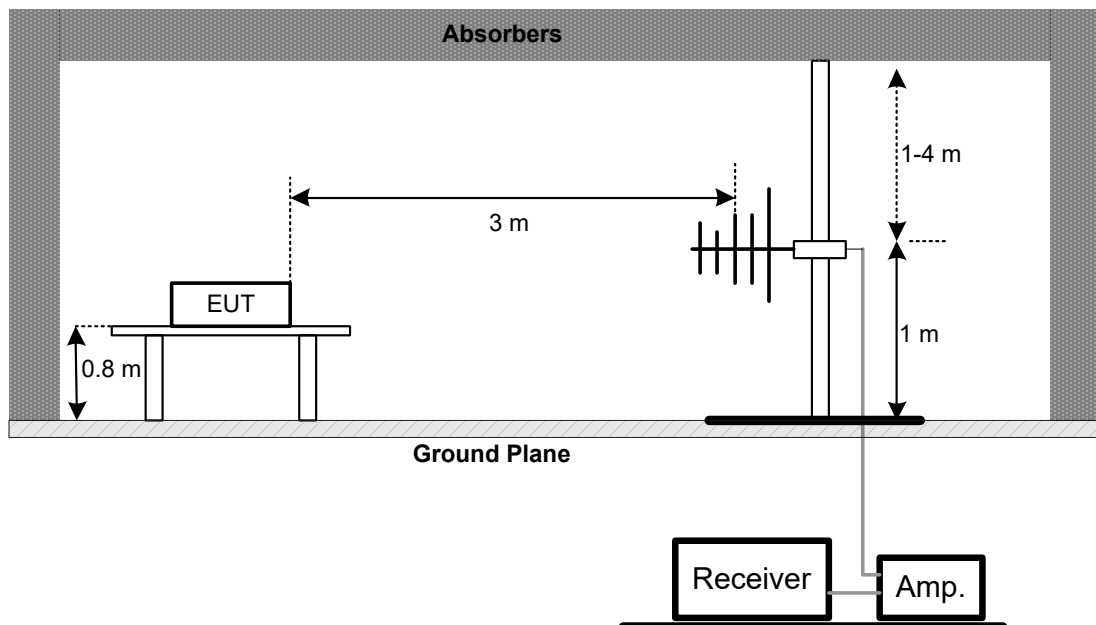

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

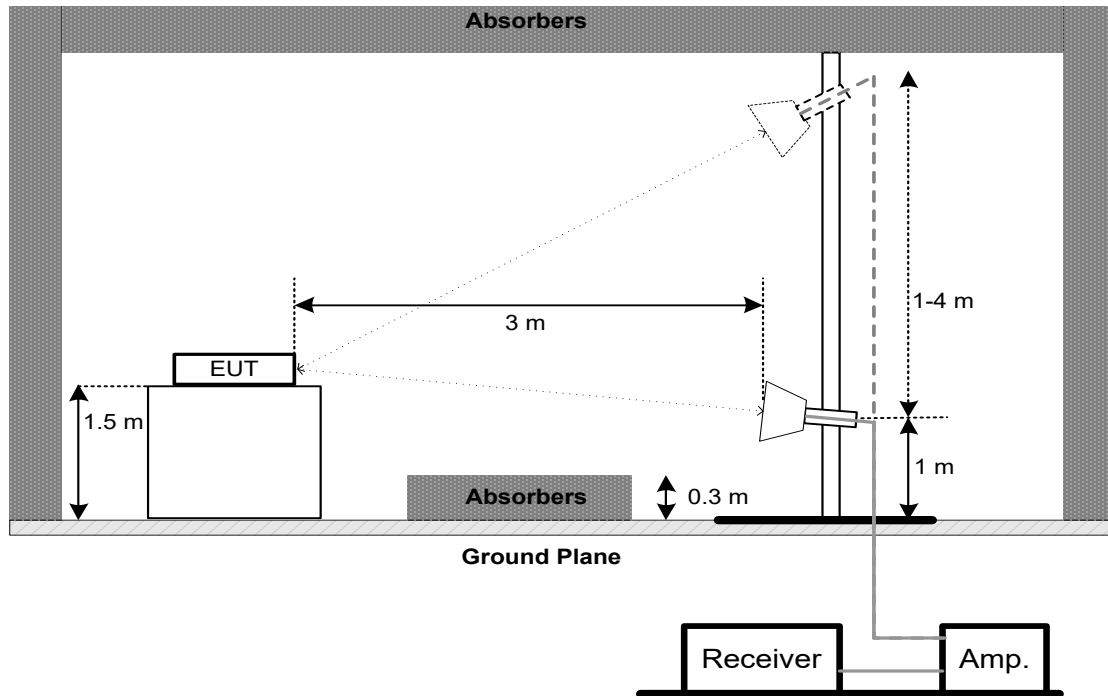

Harmonic(18 GHz to 40 GHz)

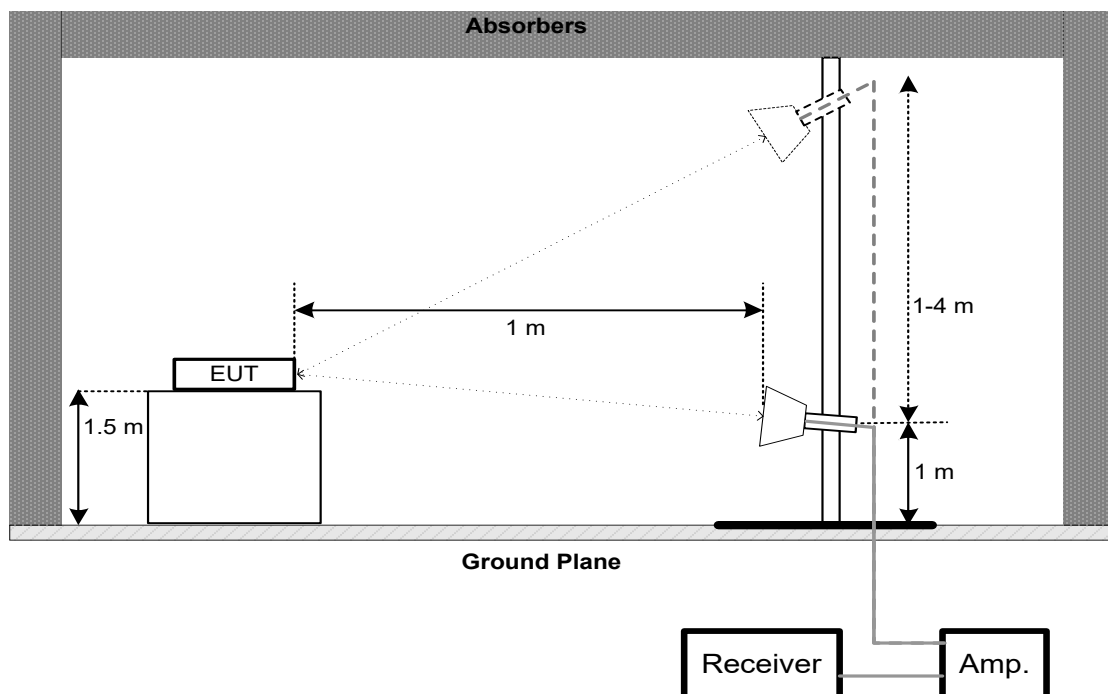

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

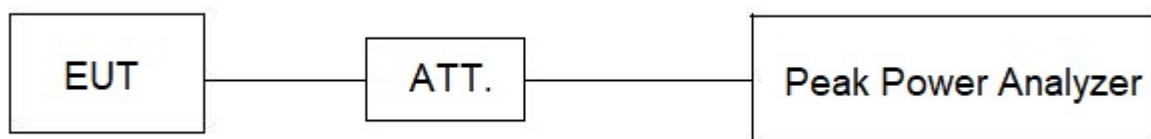

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

- b. Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz
VBW	300 kHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 6.99 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is -10°C~70°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

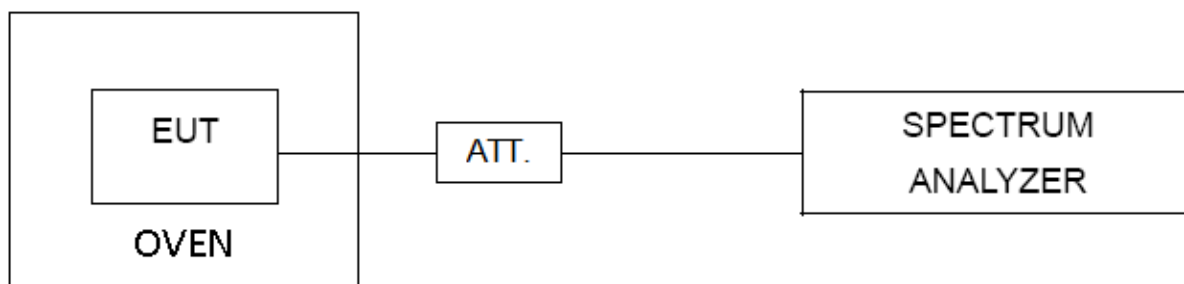

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Jan. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Jan. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Mar. 05, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec.07,2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec.07,2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May. 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jul.25,2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15,2026

Radiated Emissions - 1 GHz - 18 GHz (Test Date: Jan. 27, 2026 ~ Feb. 28, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Positioning Controller	MF	MF-7802	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	Double Ridged Horn Antenna	RF SPIN	DRH18-E	210509A18ES	Sep. 12, 2026
4	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Oct. 20, 2026
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Oct. 20, 2026
7	Cable	RegalWay	RWLP50-4.0A-SMS M-1M	N/A	Oct. 20, 2026
8	966 Chamber room	Tai He	9*6*6(NSA&VSWR)	N/A	May 18, 2026
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPE6-M6500-180 00-547	N/A	Oct. 17, 2026
12	Positioning Controller	MF	MF-7802	N/A	N/A
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz (Test Date: Jan. 28, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
2	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980911	Jun. 05, 2026
3	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	0 1046	Jul. 18, 2026
4	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 06, 2027
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 06, 2027
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chamber room	Tai He	9*6*6(NSA&VSWR)	N/A	May 18, 2026

Bandwidth & Power Spectral Density (Test Date: Jan. 27, 2026 ~ Feb. 27, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 27, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power (Test Date: Jan. 26, 2026 ~ Mar. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A


Frequency Stability (Test Date: Jan. 27, 2026 ~ Feb. 27, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 27, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Dec. 19, 2026
5	DC power supply	UNI-T	UDP6721	AWP7224050031	Nov. 21, 2026
6	Cable	RegalWay	N/A	RWP50-402-SMSM-1M	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Phase	Line
-----------	--	-------	------

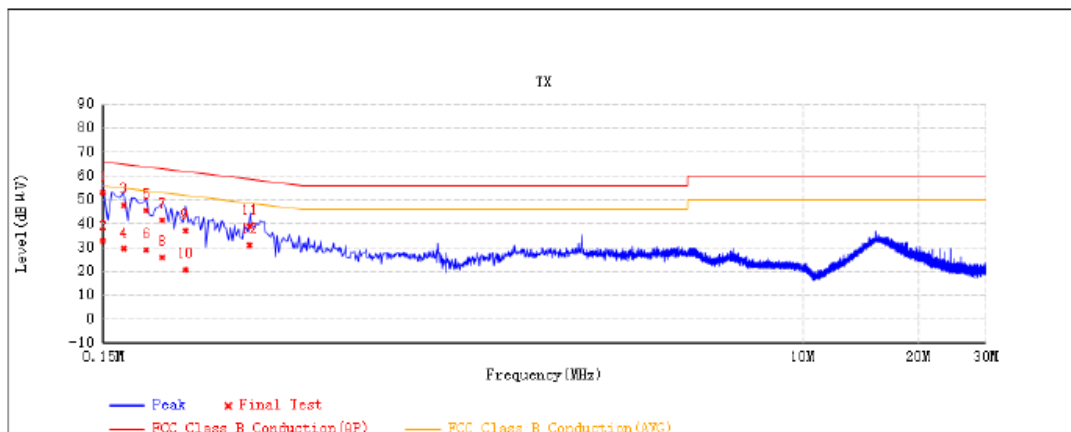


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.15	42.73	10.36	53.1	66	-12.9	QP	
	2	0.15	22.31	10.36	32.68	56	-23.32	AVG	
	3	0.17	37.38	10.38	47.76	64.96	-17.2	QP	
	4	0.17	19.34	10.38	29.71	54.96	-25.25	AVG	
	5	0.1941	35.12	10.4	45.51	63.86	-18.35	QP	
	6	0.1941	18.77	10.4	29.17	53.86	-24.7	AVG	
	7	0.2138	30.94	10.41	41.35	63.05	-21.7	QP	
	8	0.2138	15.51	10.41	25.91	53.05	-27.14	AVG	
	9	0.2457	26.67	10.42	37.1	61.89	-24.79	QP	
	10	0.2457	10.49	10.42	20.91	51.89	-30.98	AVG	
	11	0.3615	28.47	10.45	38.92	58.68	-19.76	QP	
	12	0.3615	20.56	10.45	31.01	48.68	-17.67	AVG	

REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Phase	Neutral
-----------	--	-------	---------

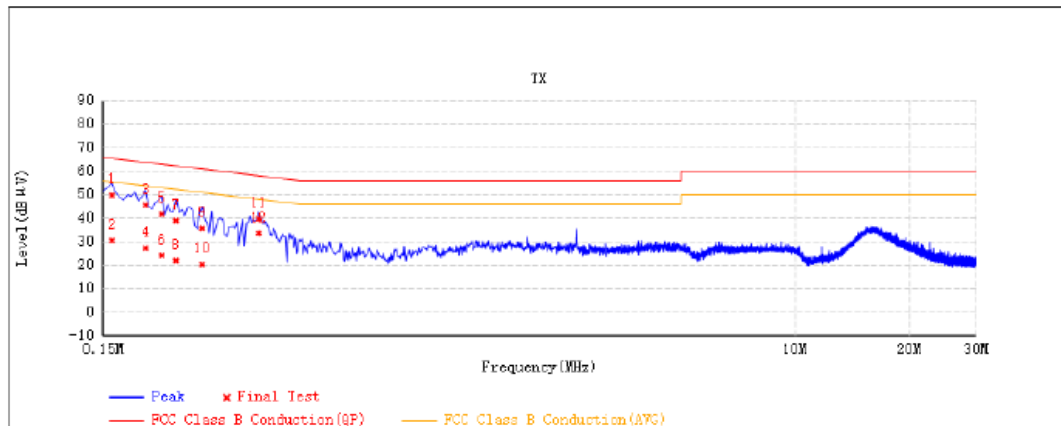

Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1583	39.4	10.42	49.82	65.57	-15.75	QP	
	2	0.1583	20.14	10.42	30.56	55.57	-25.01	AVG	
	3	0.1944	35.2	10.44	45.64	63.86	-18.23	QP	
	4	0.1944	17	10.44	27.43	53.86	-26.43	AVG	
	5	0.2143	31.34	10.44	41.78	63.05	-21.27	QP	
	6	0.2143	13.7	10.44	24.14	53.05	-28.91	AVG	
	7	0.2336	28.49	10.45	38.94	62.31	-23.37	QP	
	8	0.2336	11.52	10.45	21.97	52.31	-30.34	AVG	
	9	0.2741	25.41	10.47	35.87	61	-25.12	QP	
	10	0.2741	9.95	10.47	20.42	51	-30.58	AVG	
	11	0.3857	29.28	10.49	39.77	58.15	-18.38	QP	
*	12	0.3857	23.25	10.49	33.74	48.15	-14.41	AVG	


REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

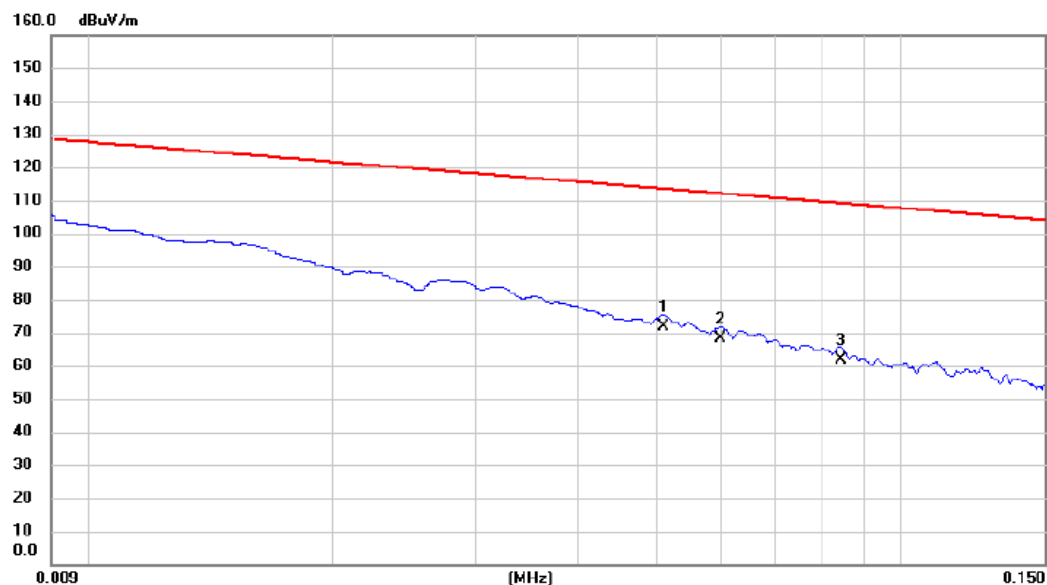


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.051	51.78	20.14	71.92	113.45	-41.53	AVG	
2	0.060	47.93	20.14	68.07	112.04	-43.97	AVG	
3	0.084	41.65	20.14	61.79	109.10	-47.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Polarization	Ant 0°
-----------	--	--------------	--------

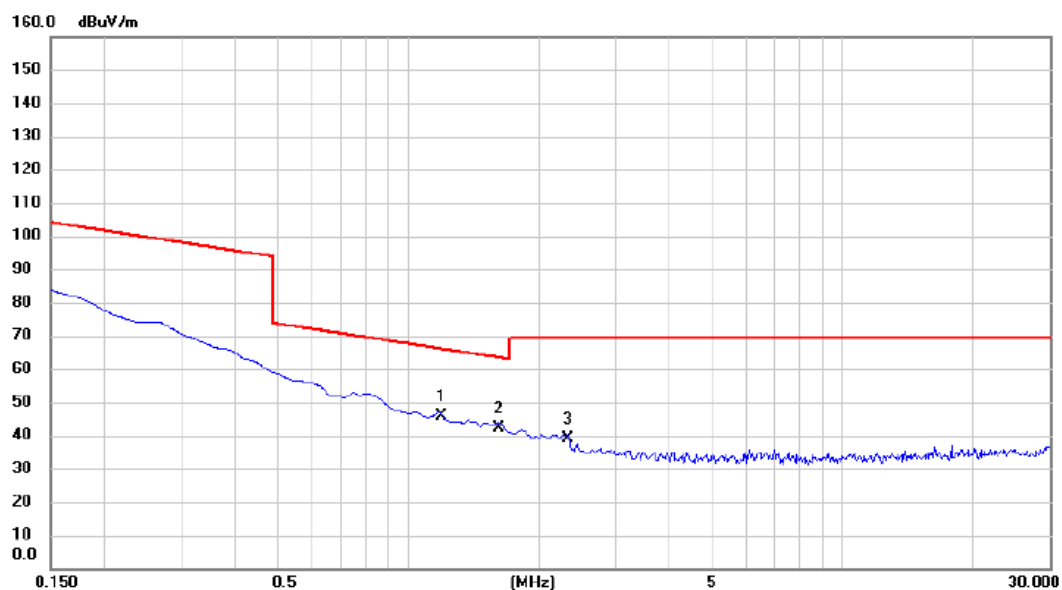


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.195	25.97	20.00	45.97	66.06	-20.09	QP	
2		1.613	22.03	20.01	42.04	63.45	-21.41	QP	
3		2.329	18.81	20.03	38.84	69.54	-30.70	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

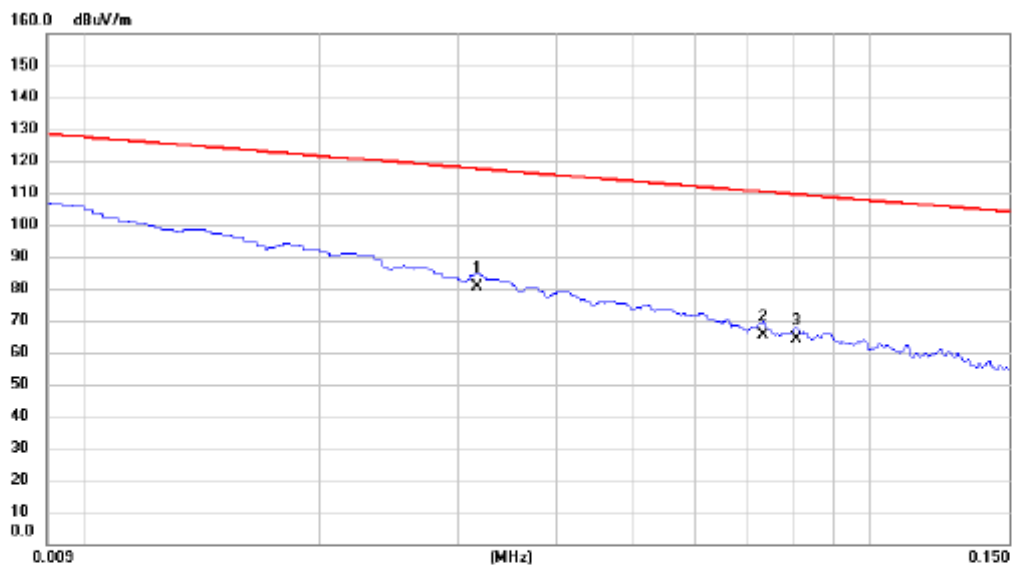


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.032	60.32	20.14	80.46	117.58	-37.12	AVG	
2		0.073	45.19	20.14	65.33	110.34	-45.01	AVG	
3		0.081	43.97	20.14	64.11	109.49	-45.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Polarization	Ant 90°
-----------	--	--------------	---------

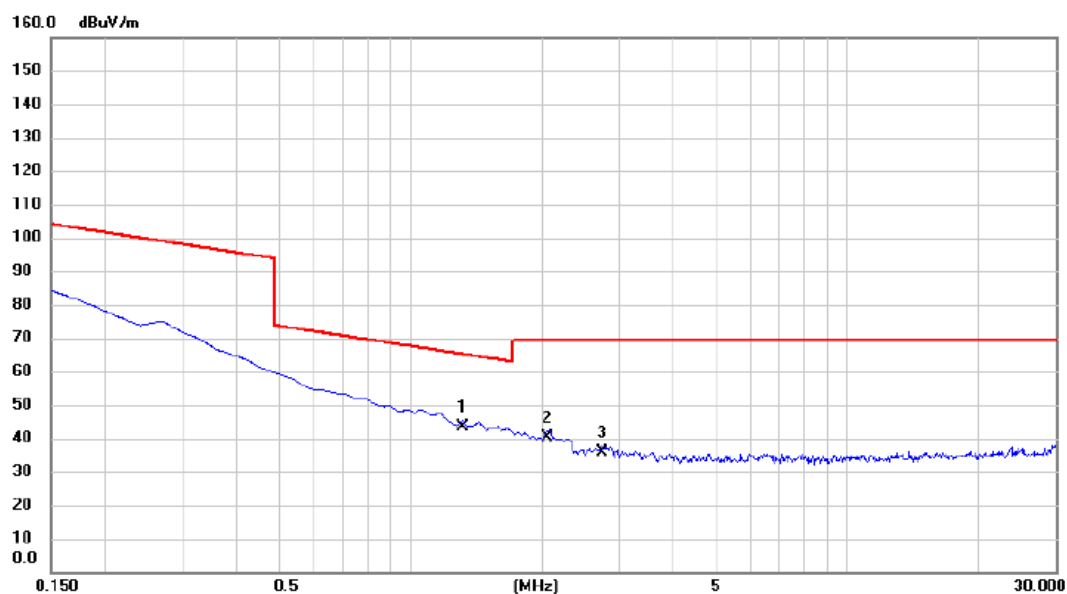

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	1.314	23.48	20.00	43.48	65.23	-21.75	QP	
2	2.060	20.14	20.01	40.15	69.54	-29.39	QP	
3	2.747	15.71	20.06	35.77	69.54	-33.77	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Polarization	Vertical
-----------	--	--------------	----------




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.880	45.00	-12.43	32.57	40.00	-7.43	QP	
2		187.140	42.86	-12.40	30.46	43.52	-13.06	peak	
3		289.960	42.90	-9.99	32.91	46.02	-13.11	peak	
4		398.600	37.84	-7.64	30.20	46.02	-15.82	peak	
5		474.260	38.34	-5.73	32.61	46.02	-13.41	peak	
6		619.760	36.79	-3.03	33.76	46.02	-12.26	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode Channel 157 (UNII-3)	Polarization	Horizontal
-----------	--	--------------	------------

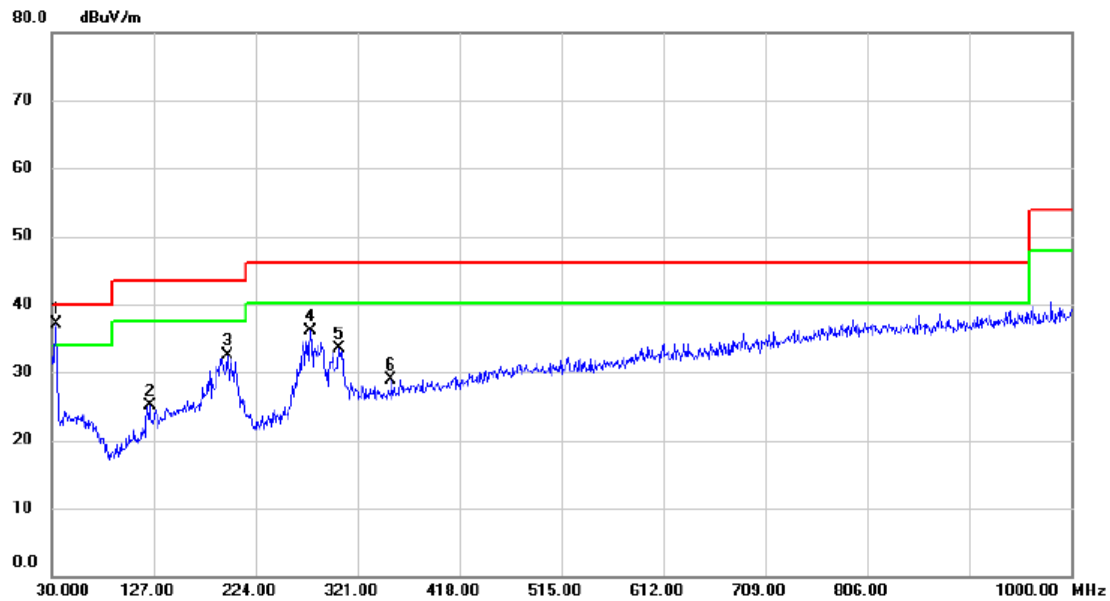

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	34.850	49.49	-12.34	37.15	40.00	-2.85	peak	
2		123.120	38.13	-13.11	25.02	43.52	-18.50	peak	
3		196.840	45.89	-13.30	32.59	43.52	-10.93	peak	
4		276.380	46.62	-10.45	36.17	46.02	-9.85	peak	
5		303.540	43.06	-9.63	33.43	46.02	-12.59	peak	
6		353.010	37.71	-8.71	29.00	46.02	-17.02	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

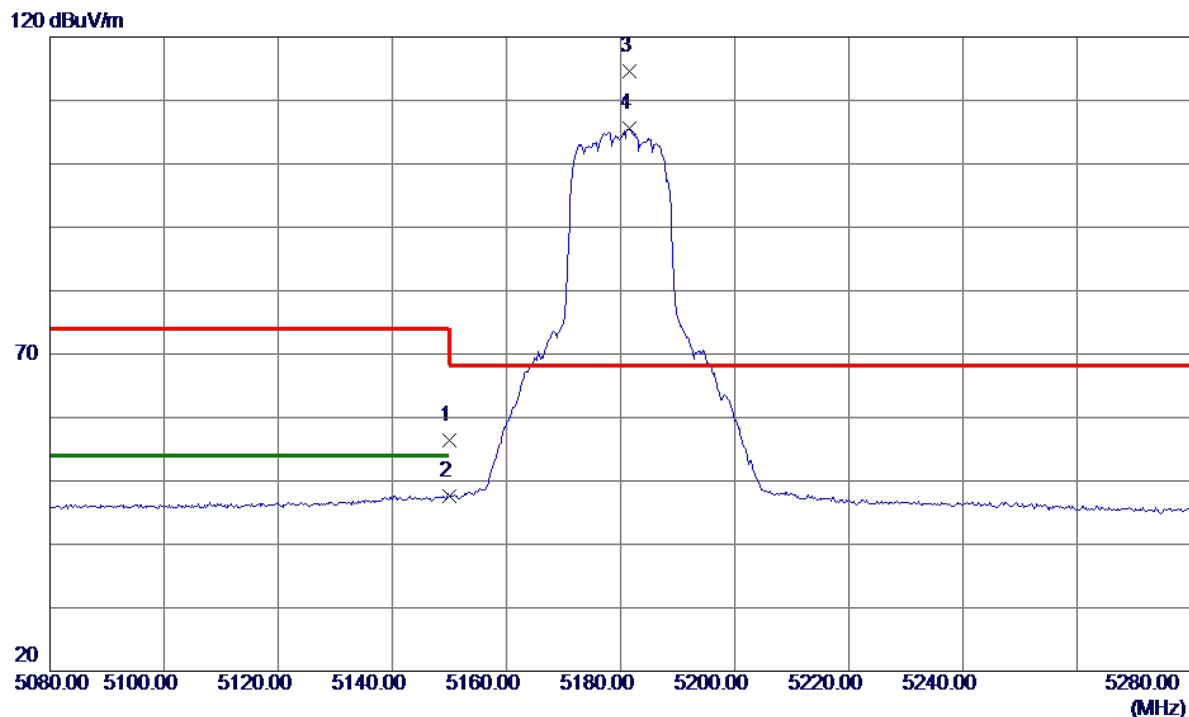


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.60	15.88	56.48	74.00	-17.52	Peak	
2	5150.0000	31.68	15.88	47.56	54.00	-6.44	AVG	
3 *	5181.6000	98.68	15.90	114.58	68.20	46.38	Peak	No Limit
4	5181.6000	89.61	15.90	105.51	999.00	-893.49	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

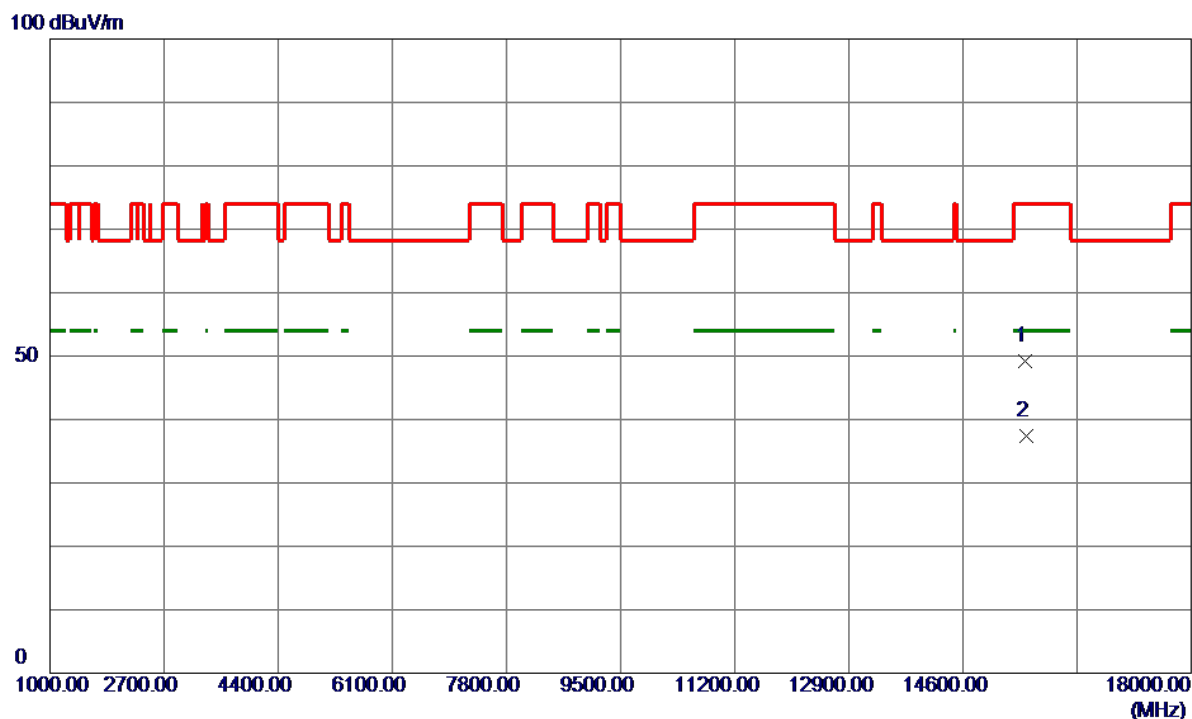


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15530.6000	38.13	10.99	49.12	74.00	-24.88	Peak	
2 *	15535.2600	26.48	10.99	37.47	54.00	-16.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

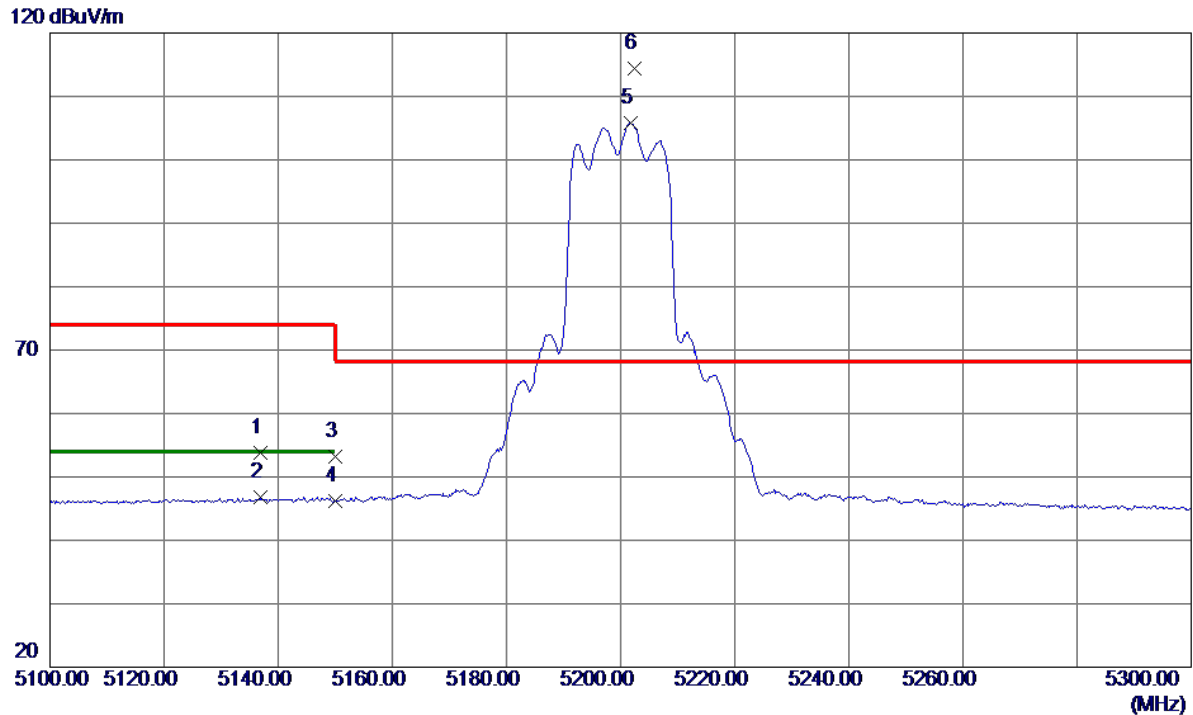


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5136.8000	37.98	15.88	53.86	74.00	-20.14	Peak	
2	5136.8000	30.92	15.88	46.80	54.00	-7.20	AVG	
3	5150.0000	37.24	15.88	53.12	74.00	-20.88	Peak	
4	5150.0000	30.37	15.88	46.25	54.00	-7.75	AVG	
5	5201.8000	89.99	15.90	105.89	999.00	-893.11	AVG	No Limit
6 *	5202.4000	98.52	15.91	114.43	68.20	46.23	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

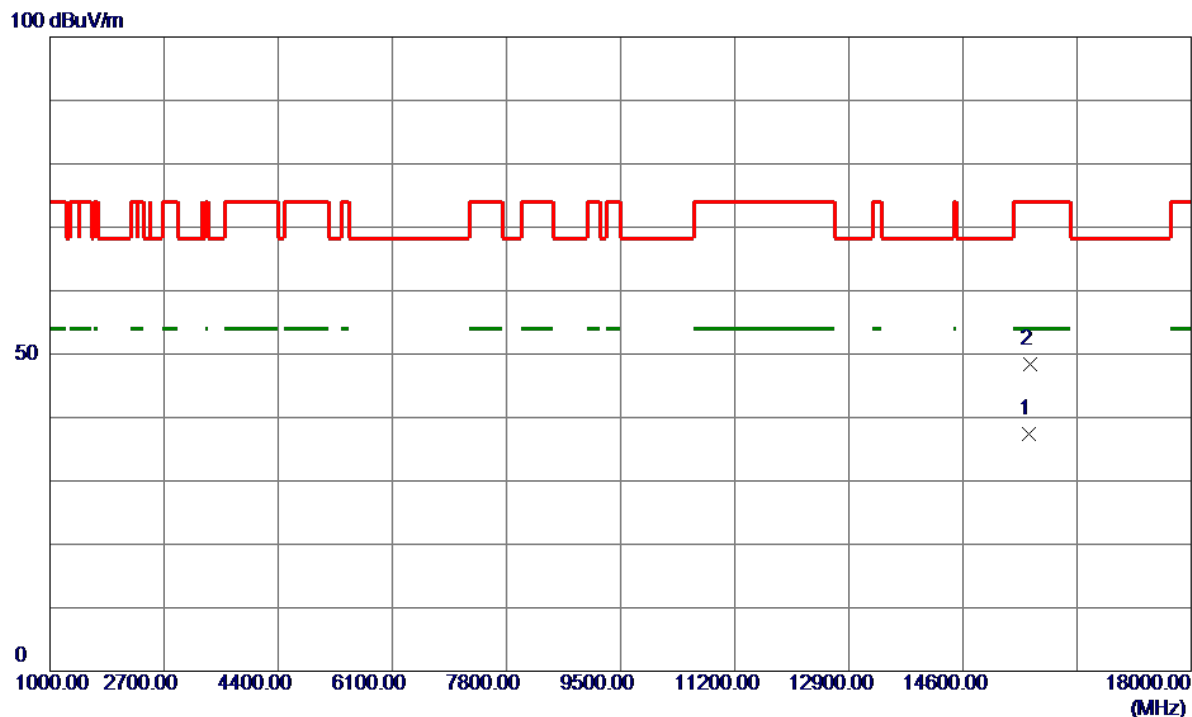


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15591.4200	26.32	10.99	37.31	54.00	-16.69	AVG	
2	15605.5400	37.33	10.99	48.32	74.00	-25.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

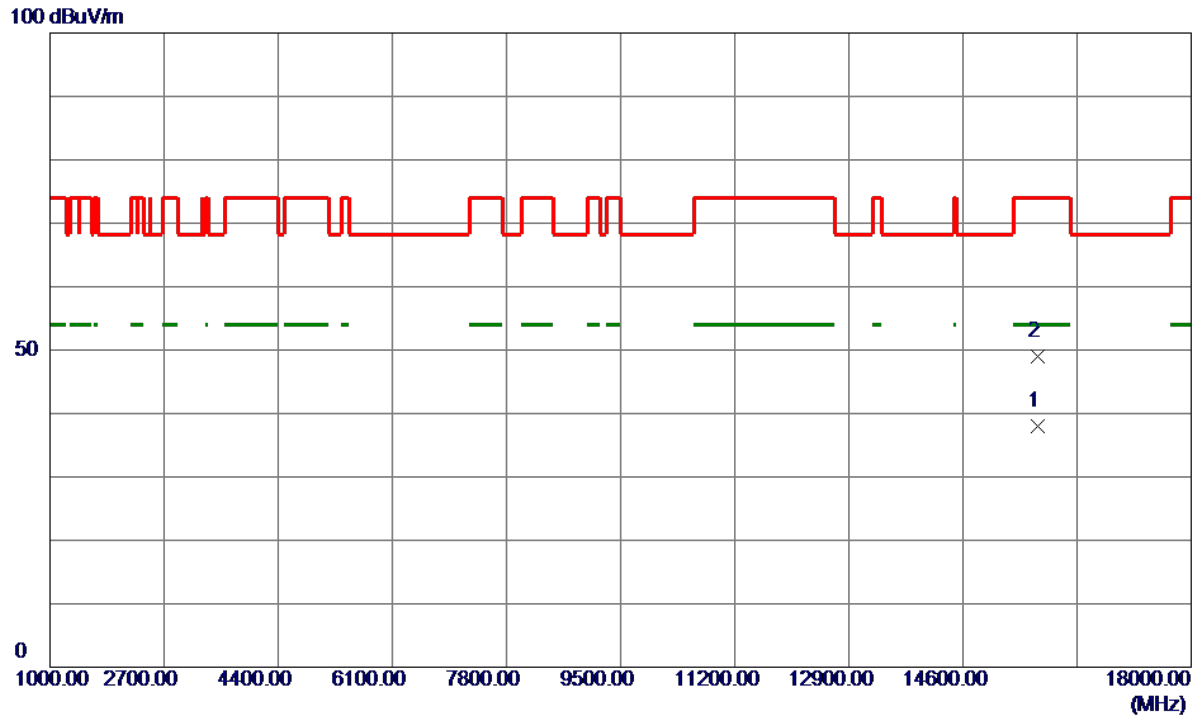


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15712.3000	26.96	11.00	37.96	54.00	-16.04	AVG	
2	15713.5400	37.94	11.00	48.94	74.00	-25.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

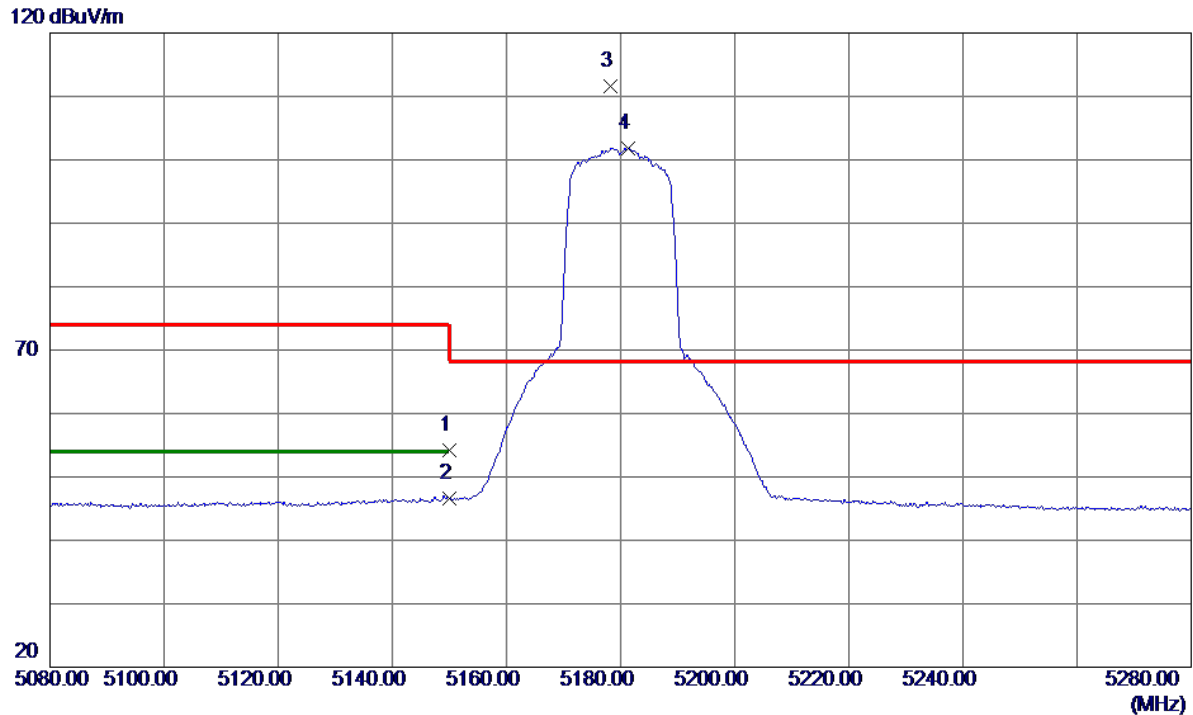


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	38.35	15.88	54.23	74.00	-19.77	Peak	
2	5150.0000	30.65	15.88	46.53	54.00	-7.47	AVG	
3 *	5178.2000	95.68	15.89	111.57	68.20	43.37	Peak	No Limit
4	5181.4000	85.94	15.90	101.84	999.00	-897.16	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

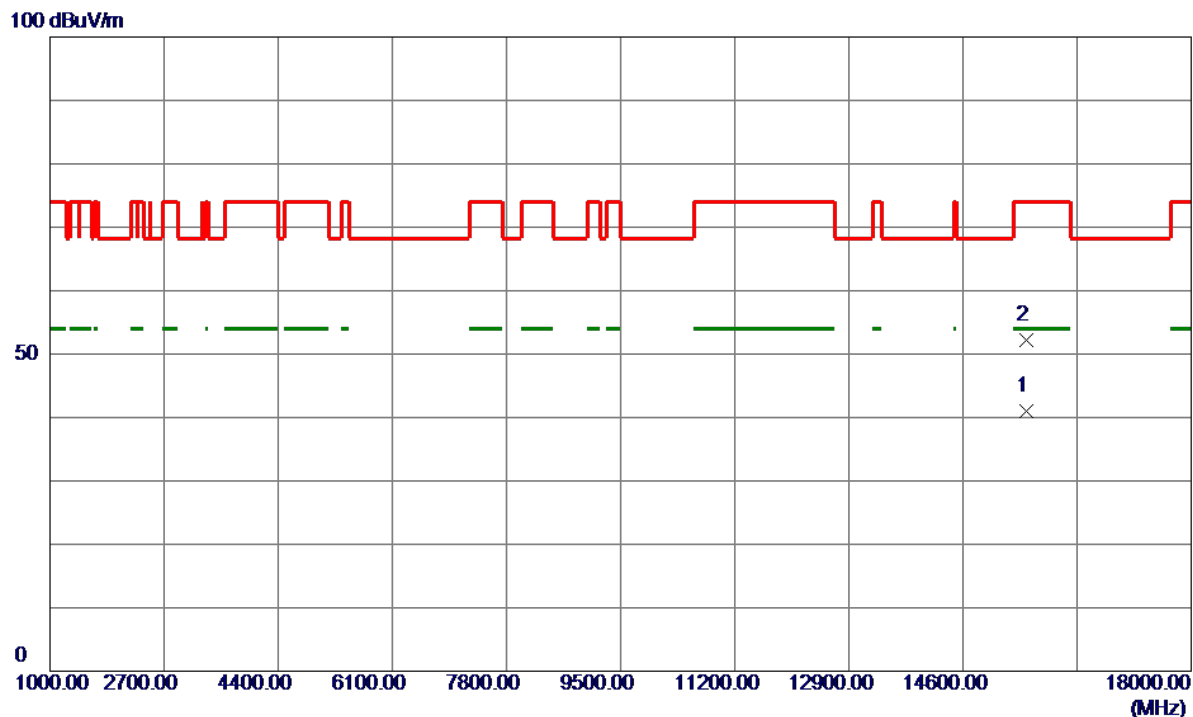


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15536.8600	29.94	10.99	40.93	54.00	-13.07	AVG	
2	15548.0600	41.28	10.99	52.27	74.00	-21.73	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

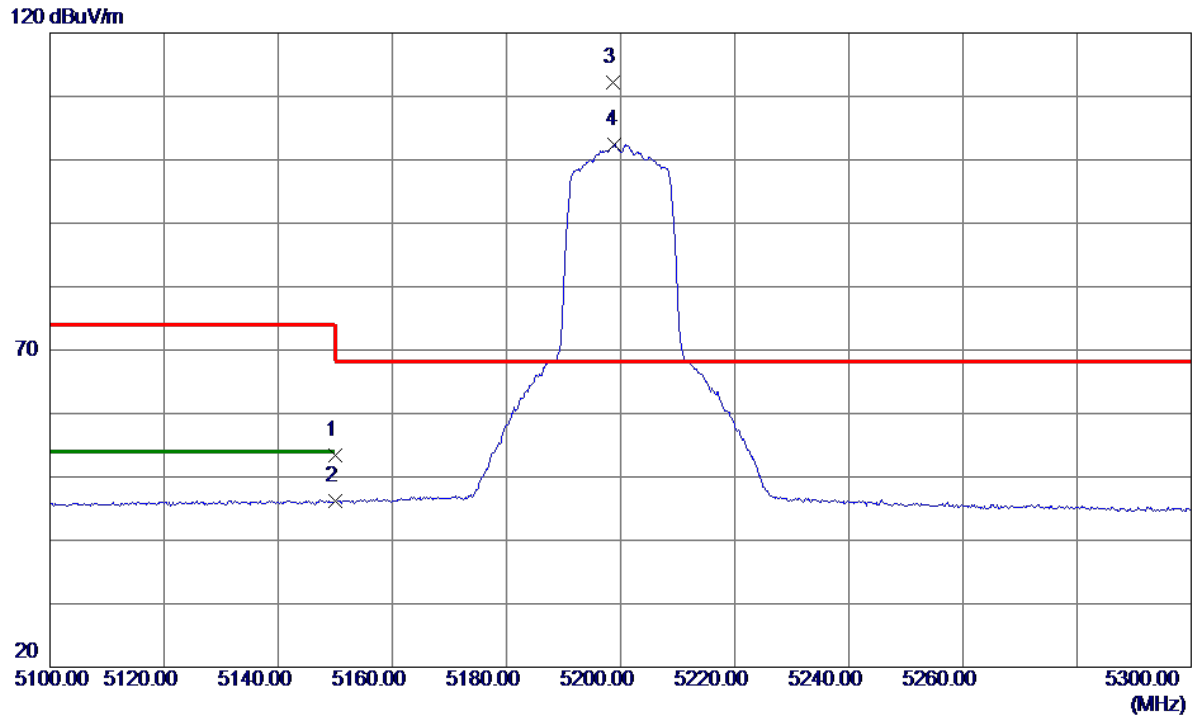


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.59	15.88	53.47	74.00	-20.53	Peak	
2	5150.0000	30.40	15.88	46.28	54.00	-7.72	AVG	
3 *	5198.6000	96.27	15.90	112.17	68.20	43.97	Peak	No Limit
4	5199.0000	86.51	15.90	102.41	999.00	-896.59	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

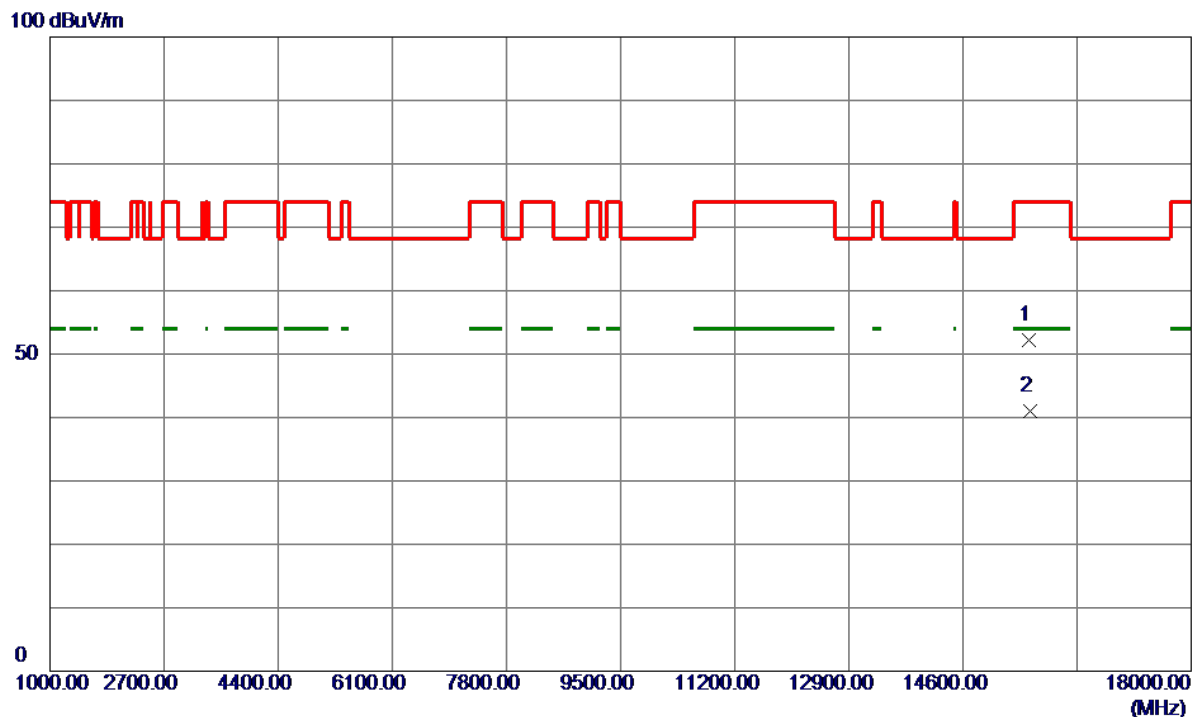


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15590.2200	41.16	10.99	52.15	74.00	-21.85	Peak	
2 *	15607.7200	30.09	10.99	41.08	54.00	-12.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

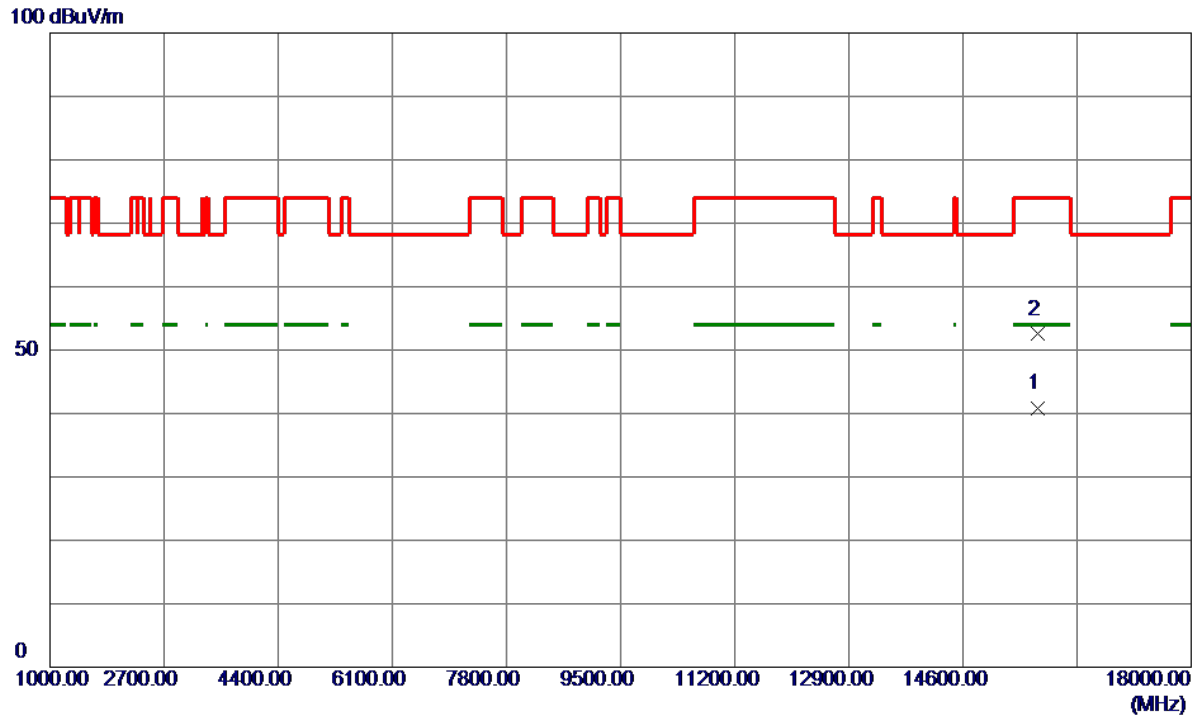


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15712.3800	29.89	11.00	40.89	54.00	-13.11	AVG	
2	15713.5600	41.50	11.00	52.50	74.00	-21.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

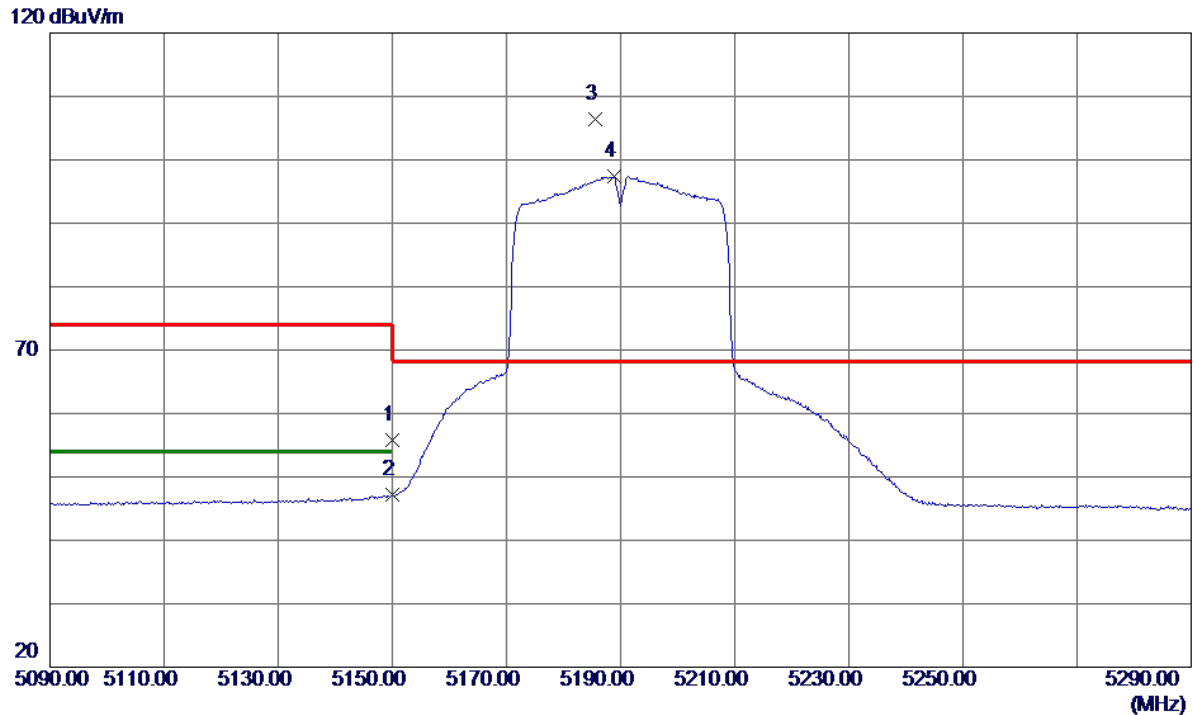


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.90	15.88	55.78	74.00	-18.22	Peak	
2	5150.0000	31.27	15.88	47.15	54.00	-6.85	AVG	
3 *	5185.6000	90.55	15.90	106.45	68.20	38.25	Peak	No Limit
4	5188.8000	81.45	15.90	97.35	999.00	-901.65	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

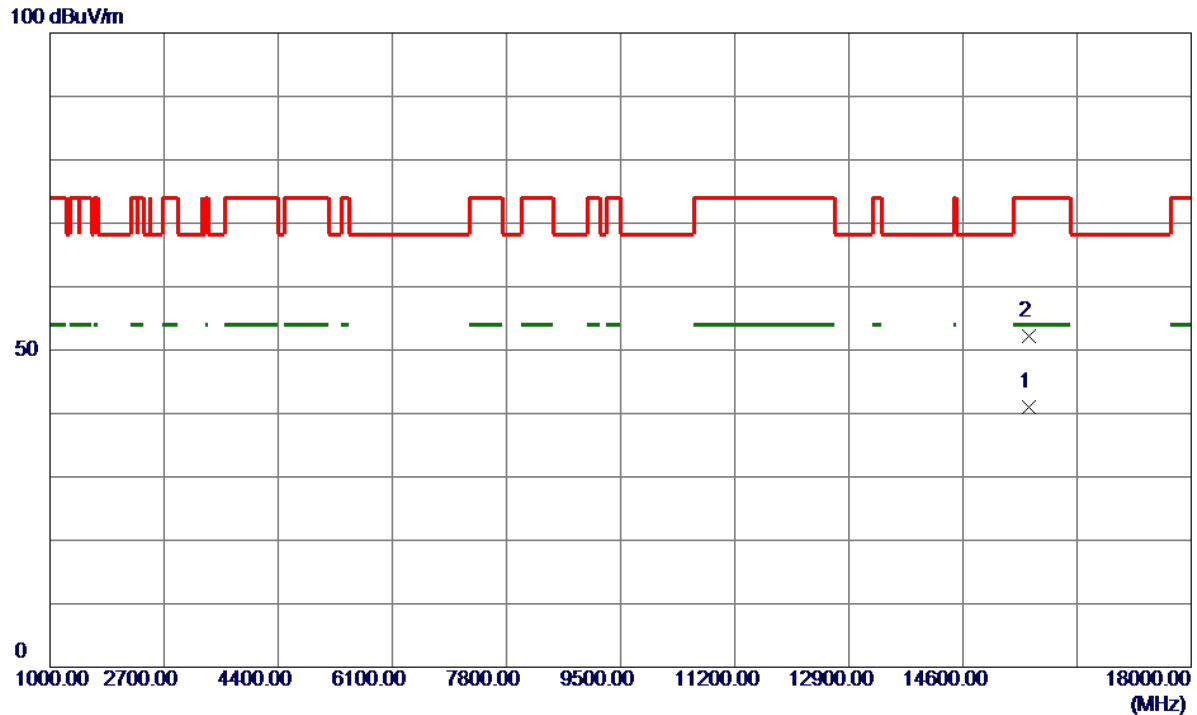


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15572.8400	29.96	10.99	40.95	54.00	-13.05	AVG	
2	15579.6000	41.24	10.99	52.23	74.00	-21.77	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

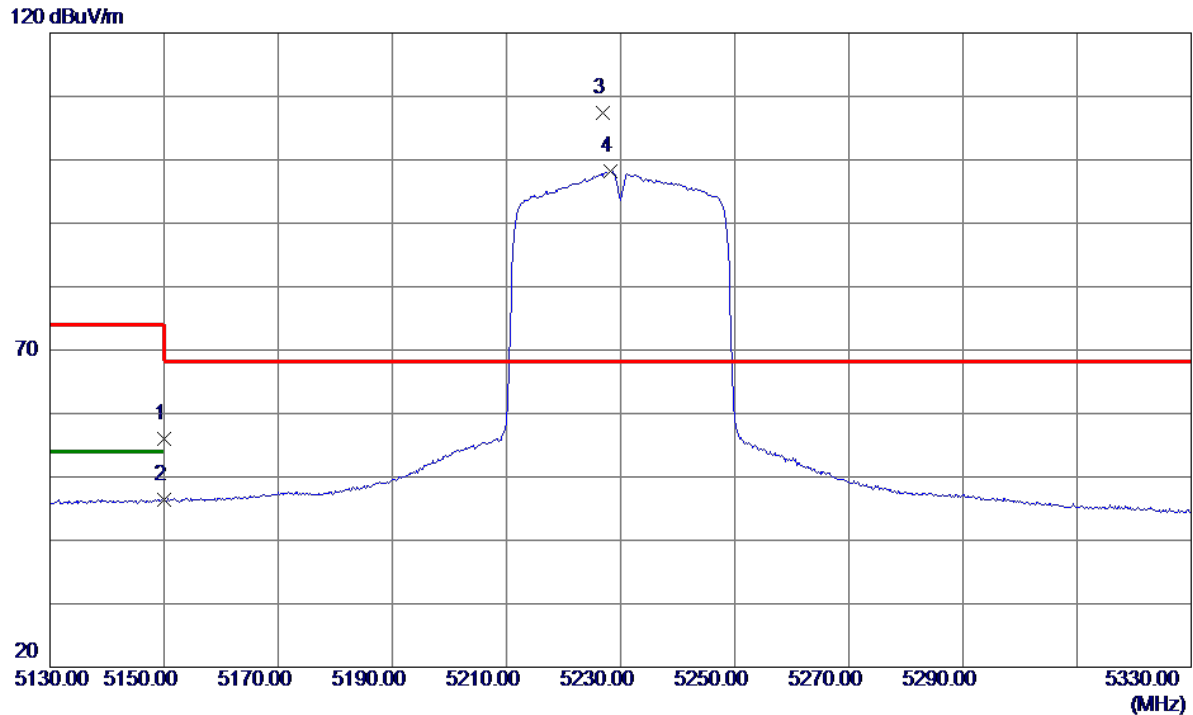


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.05	15.88	55.93	74.00	-18.07	Peak	
2	5150.0000	30.47	15.88	46.35	54.00	-7.65	AVG	
3 *	5226.8000	91.55	15.92	107.47	68.20	39.27	Peak	No Limit
4	5228.2000	82.33	15.92	98.25	999.00	-900.75	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

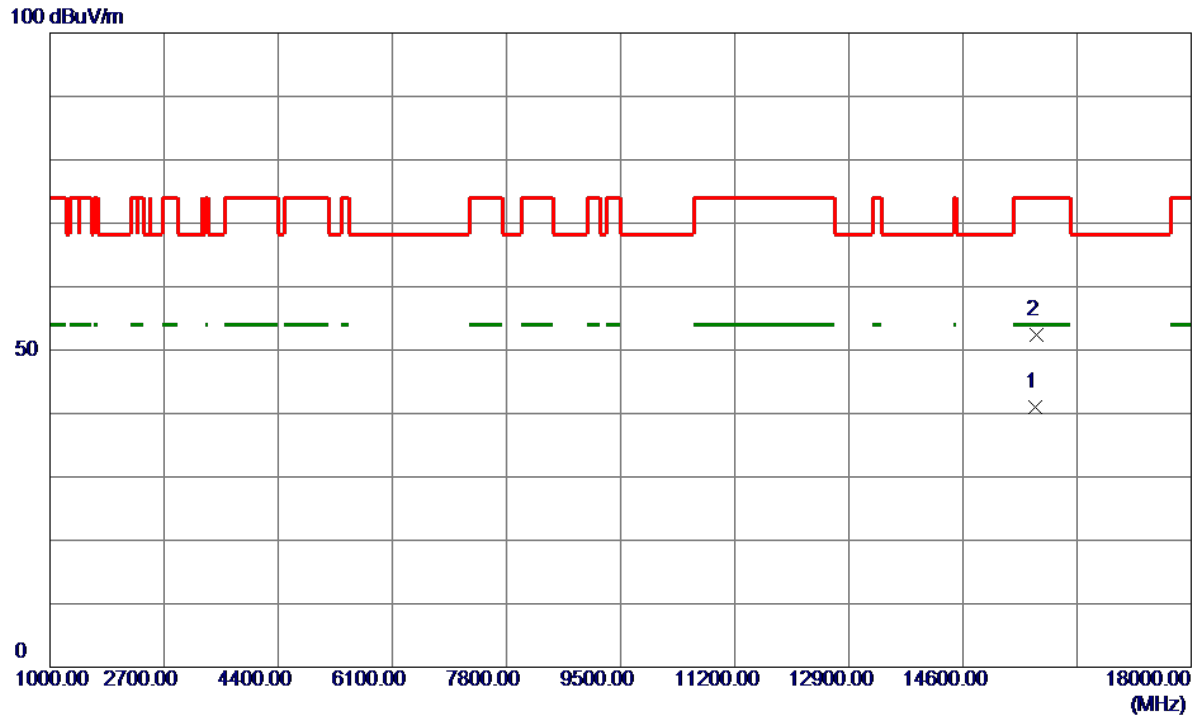


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15680.1200	29.95	11.00	40.95	54.00	-13.05	AVG	
2	15696.7200	41.48	11.00	52.48	74.00	-21.52	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

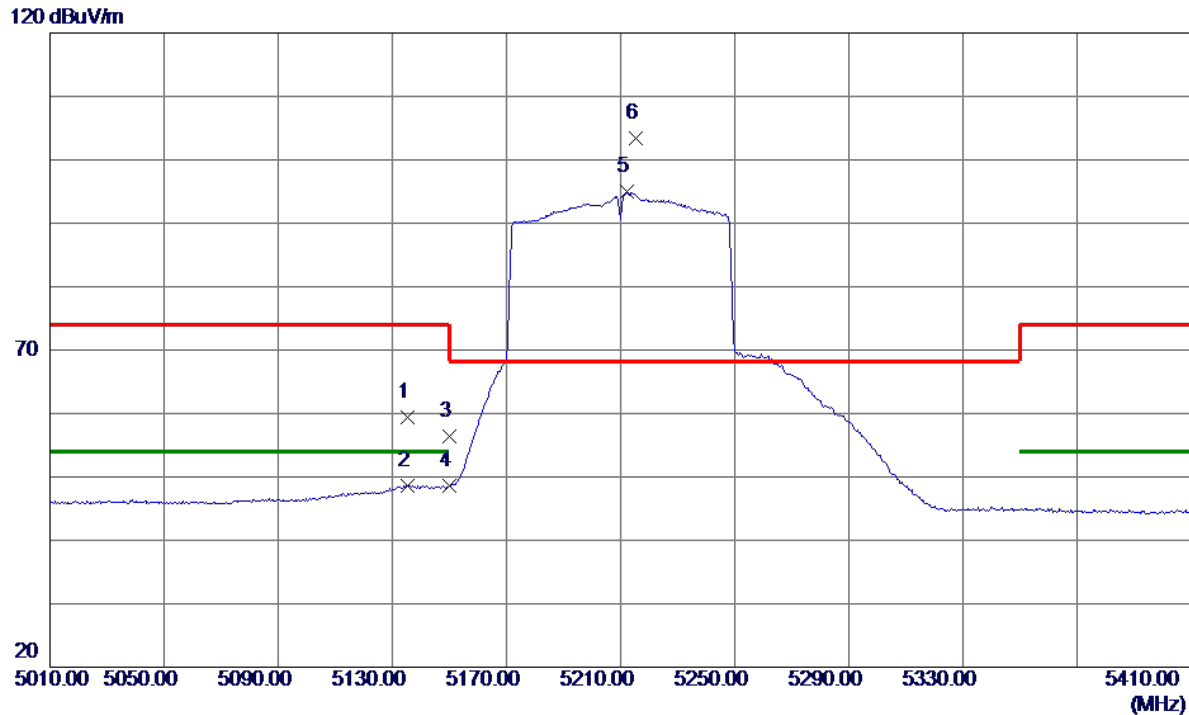


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5135.2000	43.46	15.88	59.34	74.00	-14.66	Peak	
2	5135.2000	32.80	15.88	48.68	54.00	-5.32	AVG	
3	5150.0000	40.54	15.88	56.42	74.00	-17.58	Peak	
4	5150.0000	32.66	15.88	48.54	54.00	-5.46	AVG	
5	5212.4000	79.07	15.91	94.98	999.00	-904.02	AVG	No Limit
6 *	5215.2000	87.50	15.91	103.41	68.20	35.21	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

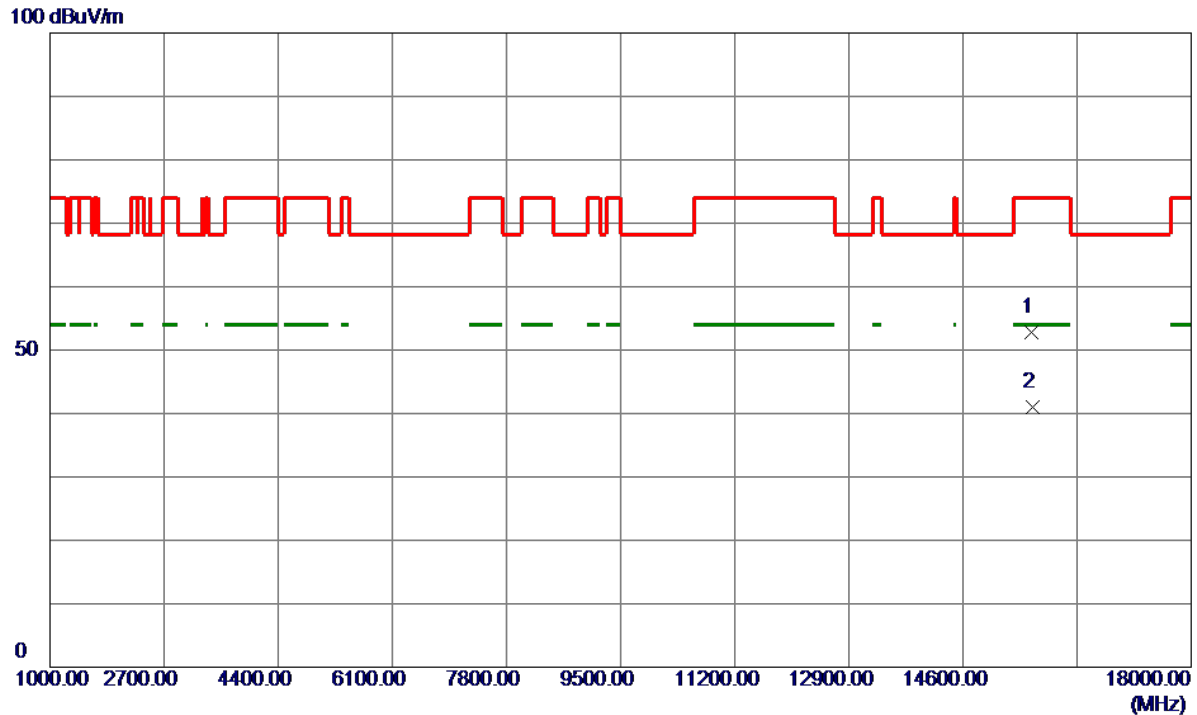


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15621.5400	41.78	10.99	52.77	74.00	-21.23	Peak	
2 *	15631.1600	30.08	11.00	41.08	54.00	-12.92	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

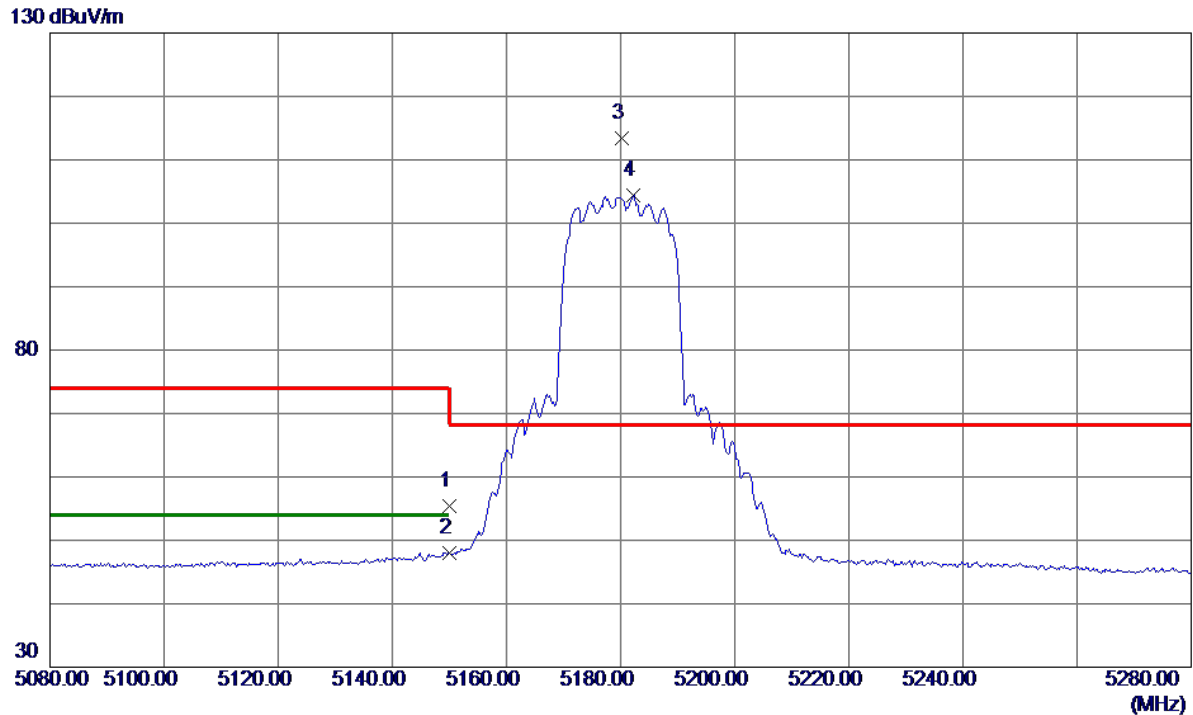


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.57	15.88	55.45	74.00	-18.55	Peak	
2	5150.0000	32.08	15.88	47.96	54.00	-6.04	AVG	
3 *	5180.2000	97.46	15.90	113.36	68.20	45.16	Peak	No Limit
4	5182.2000	88.56	15.90	104.46	999.00	-894.54	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5180 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

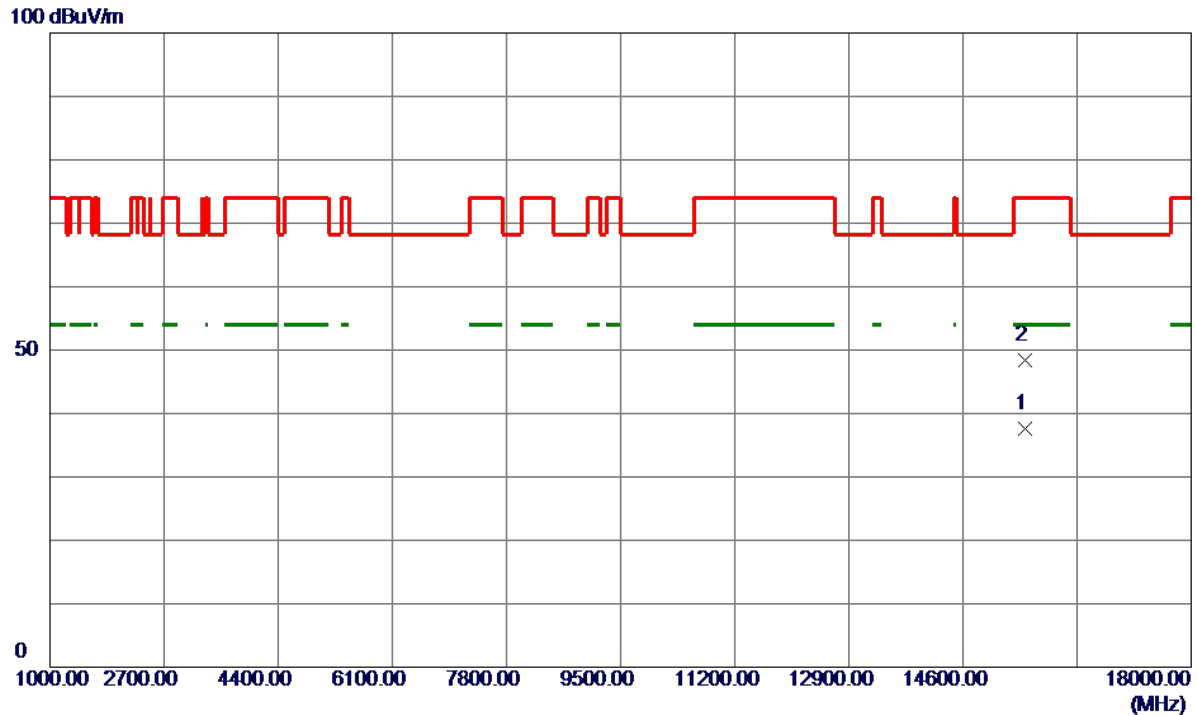


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15530.5200	26.53	10.99	37.52	54.00	-16.48	AVG	
2	15531.1000	37.36	10.99	48.35	74.00	-25.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

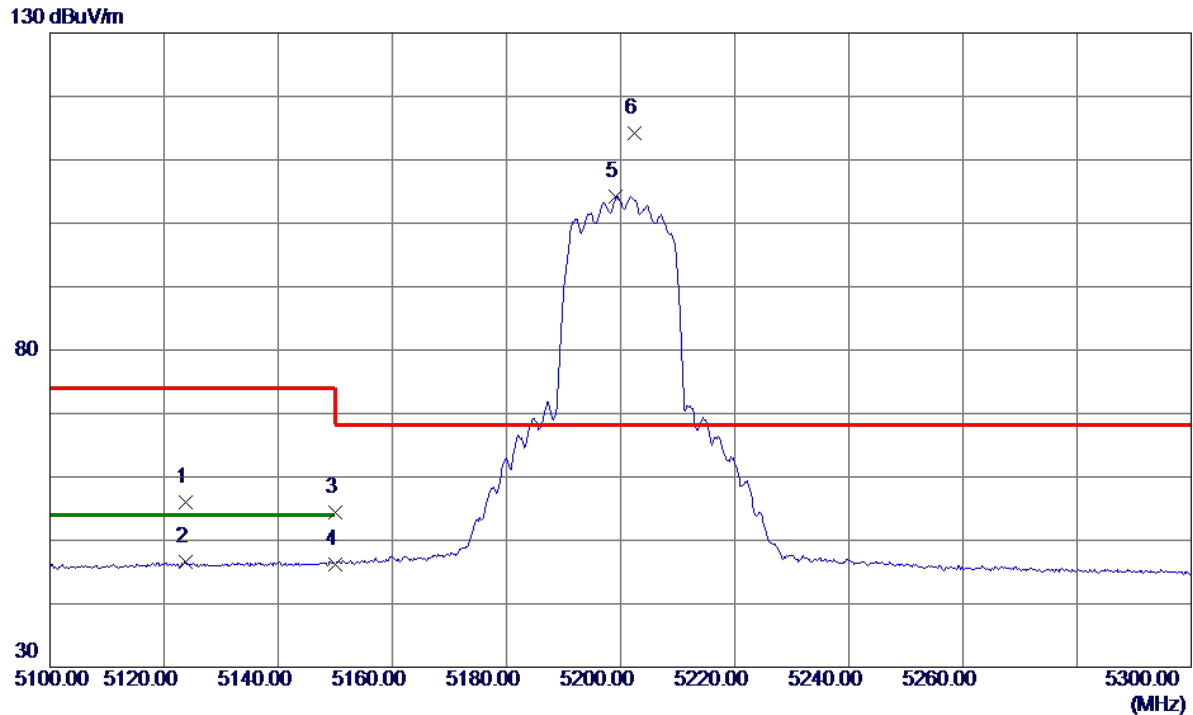


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5123.8000	40.15	15.87	56.02	74.00	-17.98	Peak	
2	5123.8000	30.76	15.87	46.63	54.00	-7.37	AVG	
3	5150.0000	38.50	15.88	54.38	74.00	-19.62	Peak	
4	5150.0000	30.40	15.88	46.28	54.00	-7.72	AVG	
5	5199.2000	88.37	15.90	104.27	999.00	-894.73	AVG	No Limit
6 *	5202.4000	98.30	15.91	114.21	68.20	46.01	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5200 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

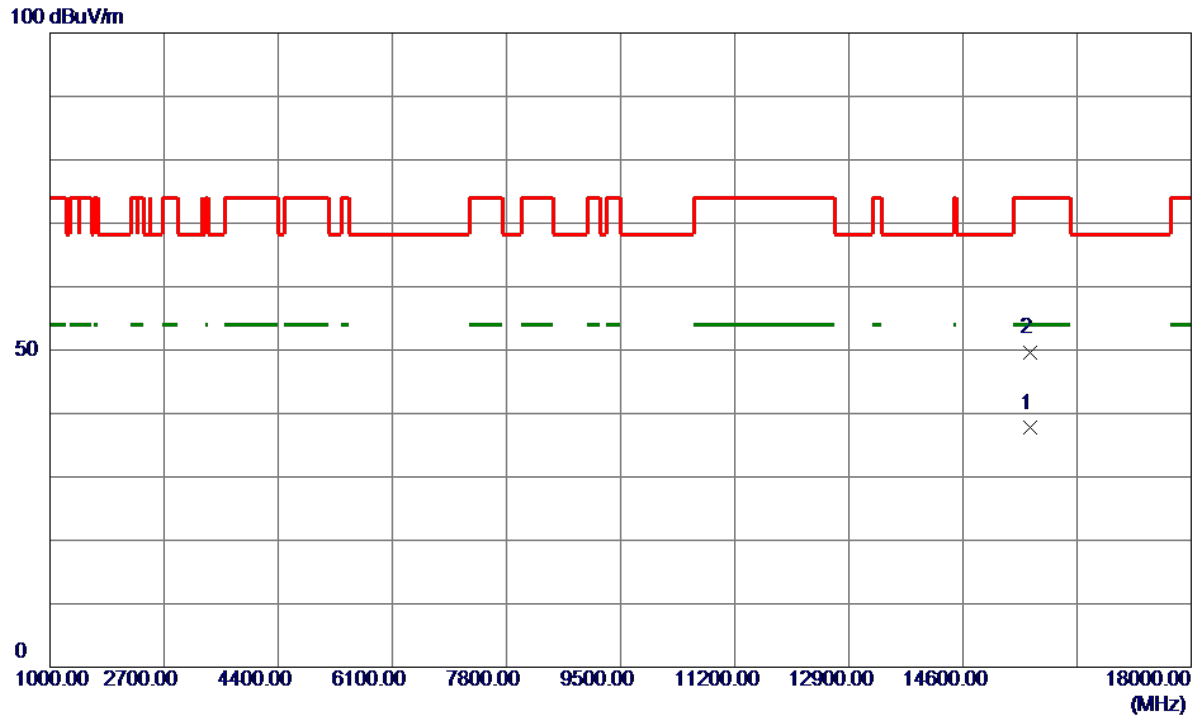


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15605.6800	26.71	10.99	37.70	54.00	-16.30	AVG	
2	15606.7400	38.62	10.99	49.61	74.00	-24.39	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT20) Mode 5240 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

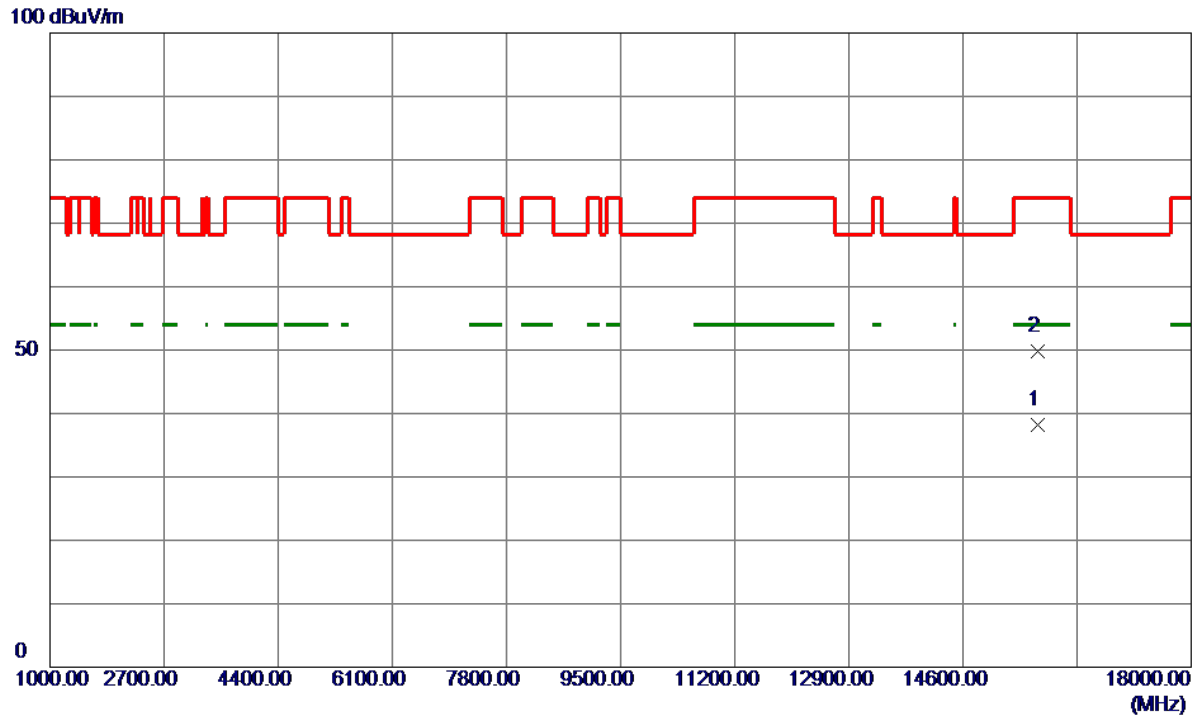


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15714.8400	27.20	11.00	38.20	54.00	-15.80	AVG	
2	15716.5800	38.78	11.00	49.78	74.00	-24.22	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

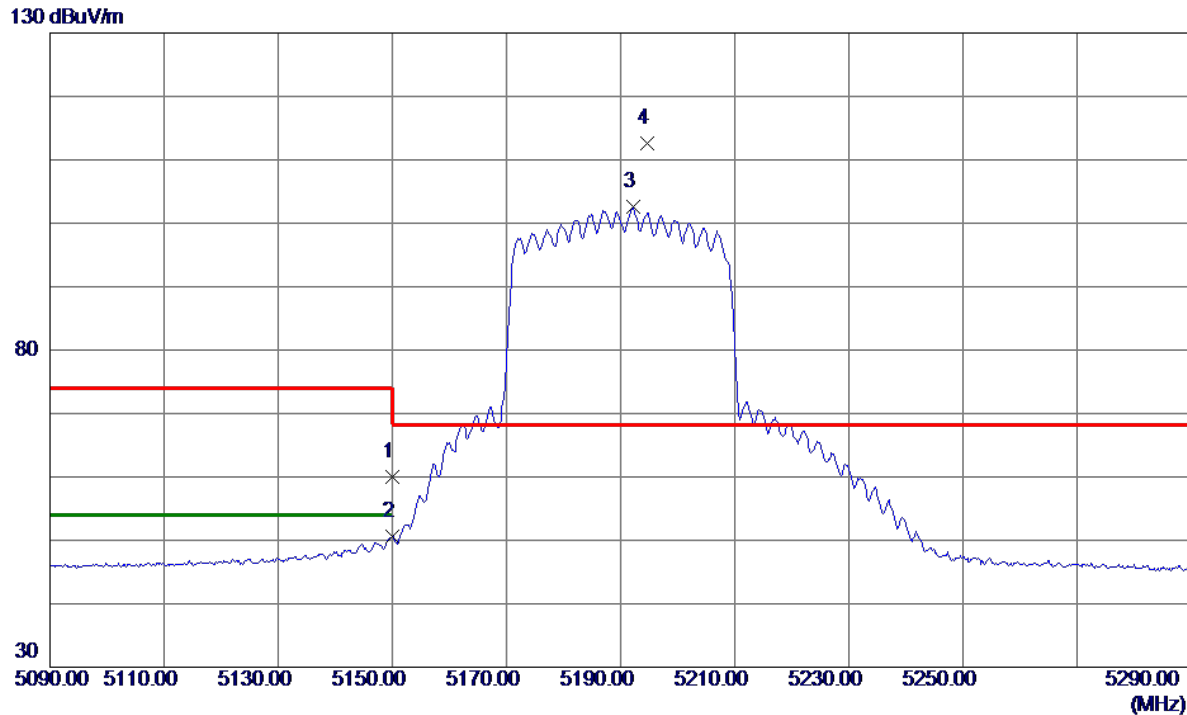


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.03	15.88	59.91	74.00	-14.09	Peak	
2	5150.0000	34.78	15.88	50.66	54.00	-3.34	AVG	
3	5192.2000	86.63	15.90	102.53	999.00	-896.47	AVG	No Limit
4 *	5194.6000	96.62	15.90	112.52	68.20	44.32	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5190 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

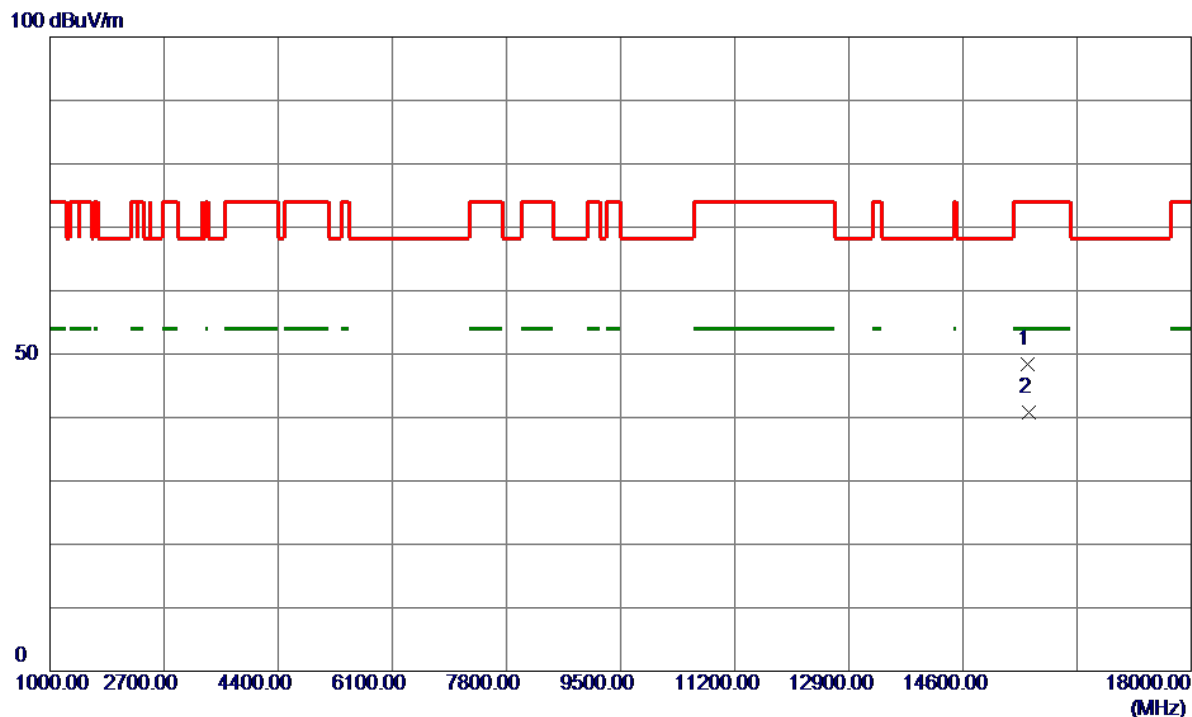


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15566.2600	37.39	10.99	48.38	74.00	-25.62	Peak	
2 *	15578.0600	29.78	10.99	40.77	54.00	-13.23	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

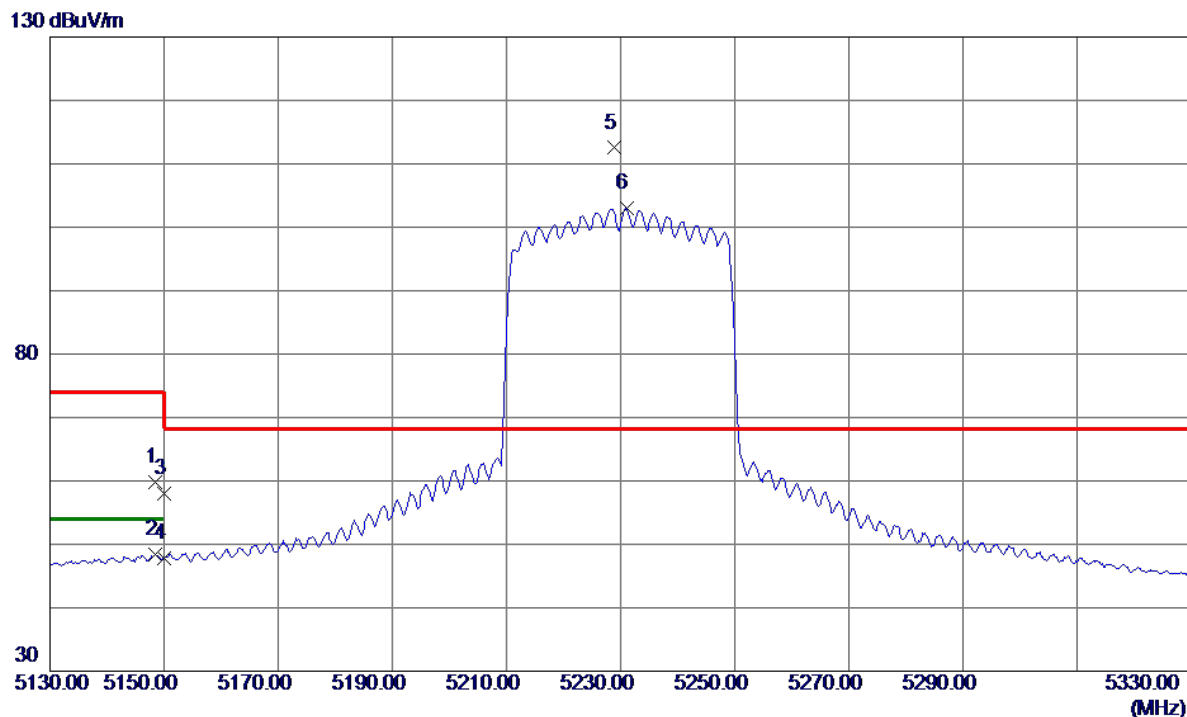


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4000	43.91	15.88	59.79	74.00	-14.21	Peak	
2	5148.4000	32.43	15.88	48.31	54.00	-5.69	AVG	
3	5150.0000	42.09	15.88	57.97	74.00	-16.03	Peak	
4	5150.0000	31.88	15.88	47.76	54.00	-6.24	AVG	
5 *	5228.8000	96.58	15.92	112.50	68.20	44.30	Peak	No Limit
6	5231.0000	87.02	15.92	102.94	999.00	-896.06	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT40) Mode 5230 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

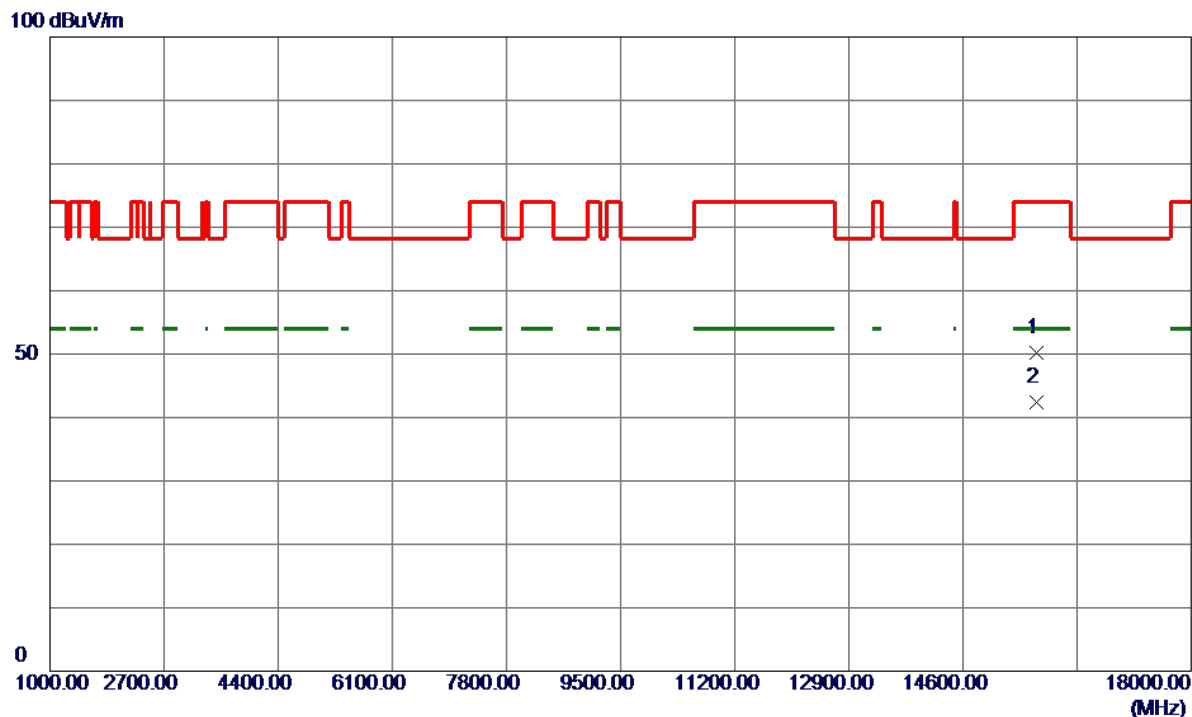


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15695.9800	39.29	11.00	50.29	74.00	-23.71	Peak	
2 *	15699.5200	31.45	11.00	42.45	54.00	-11.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

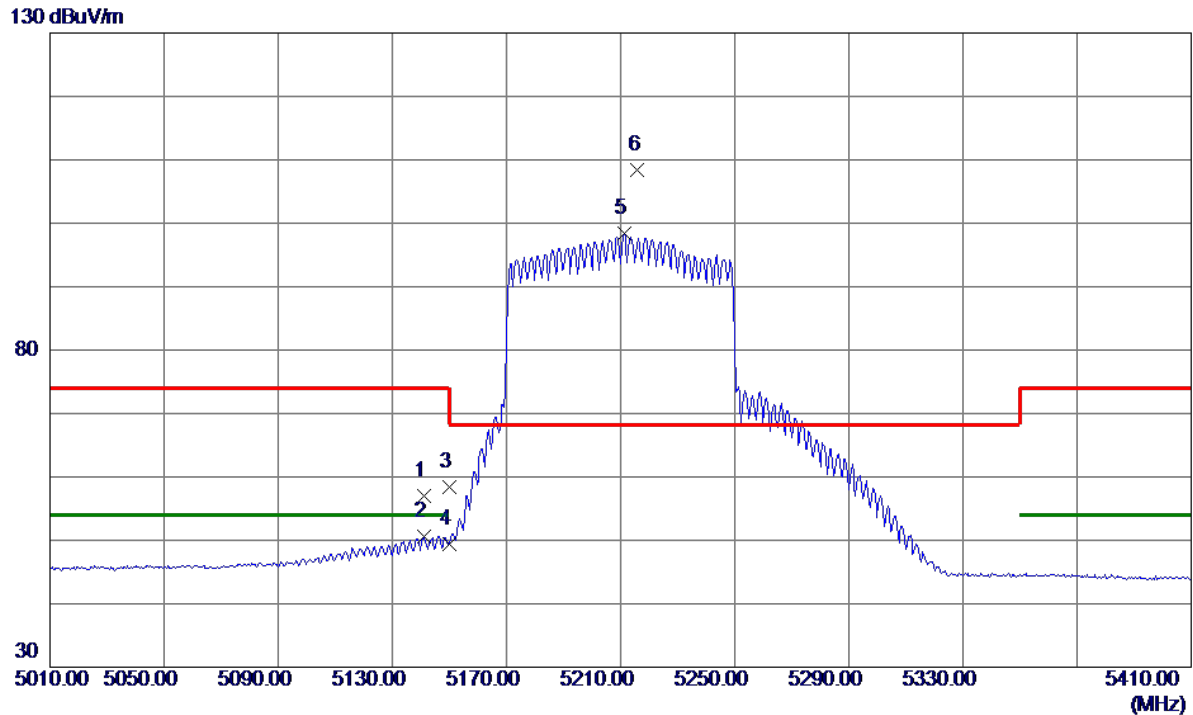


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5141.2000	41.10	15.88	56.98	74.00	-17.02	Peak	
2	5141.2000	34.69	15.88	50.57	54.00	-3.43	AVG	
3	5150.0000	42.59	15.88	58.47	74.00	-15.53	Peak	
4	5150.0000	33.46	15.88	49.34	54.00	-4.66	AVG	
5	5211.2000	82.43	15.91	98.34	999.00	-900.66	AVG	No Limit
6 *	5216.0000	92.41	15.91	108.32	68.20	40.12	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX BE(EHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

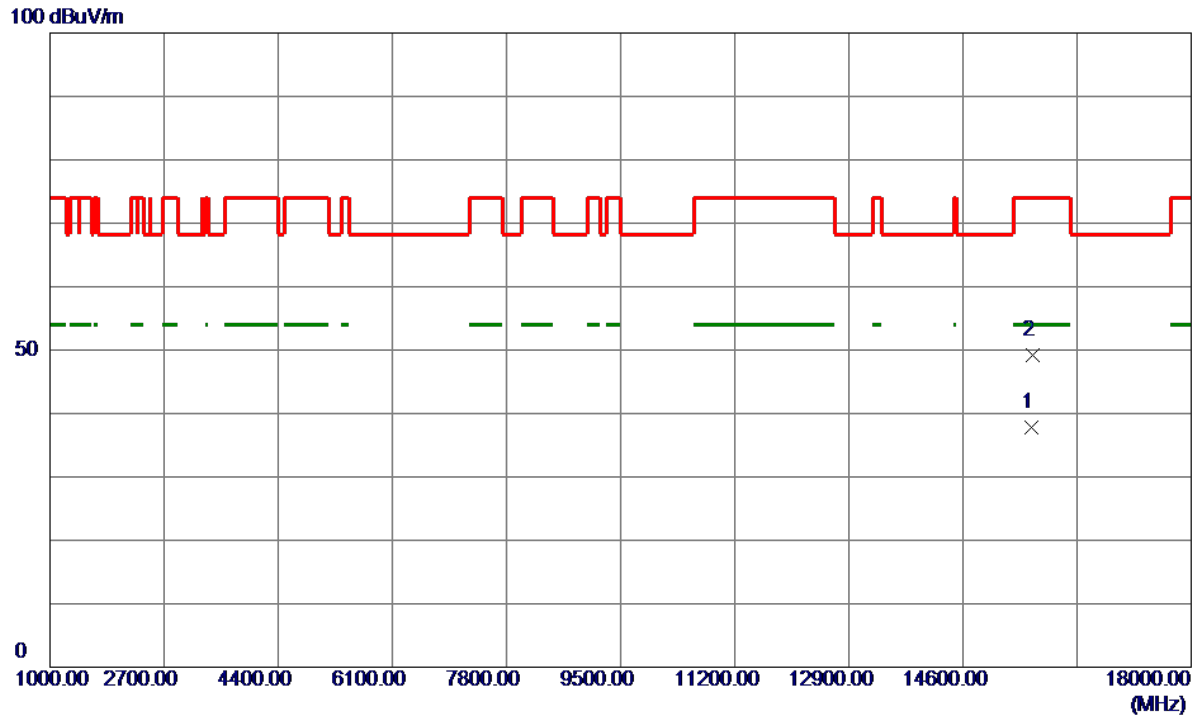


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15622.4000	26.88	10.99	37.87	54.00	-16.13	AVG	
2	15638.9200	38.13	11.00	49.13	74.00	-24.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

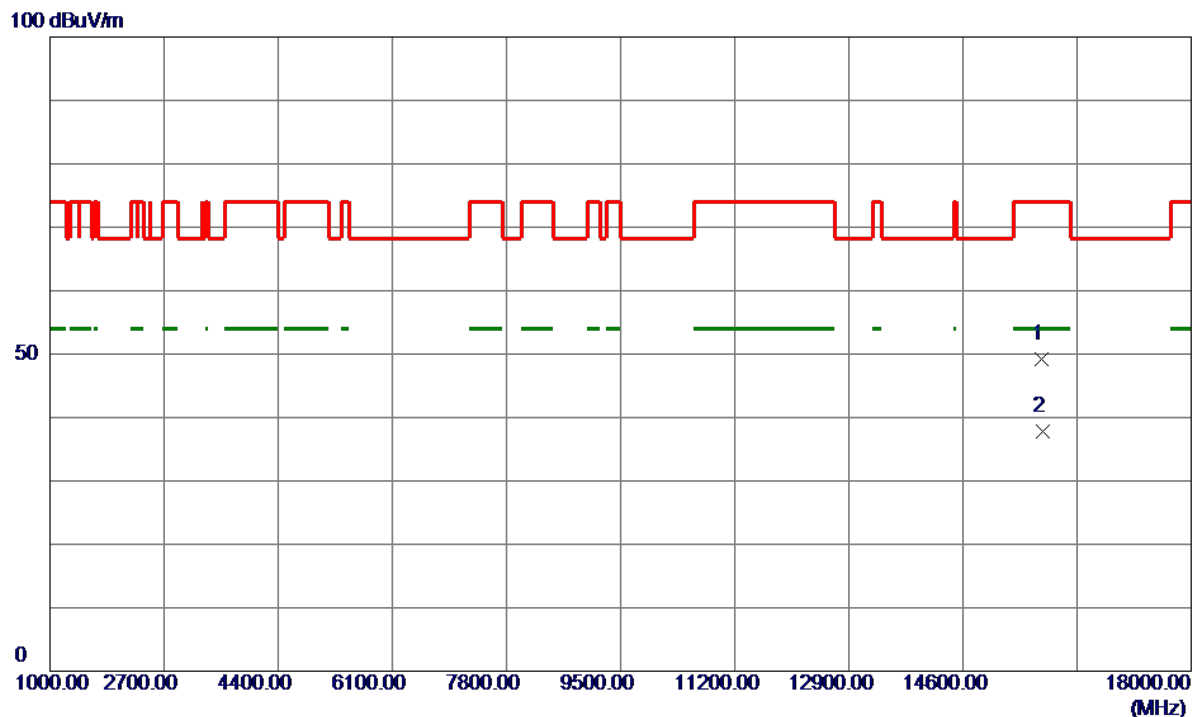


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15770.6400	38.17	11.00	49.17	74.00	-24.83	Peak	
2 *	15783.9800	26.87	11.00	37.87	54.00	-16.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

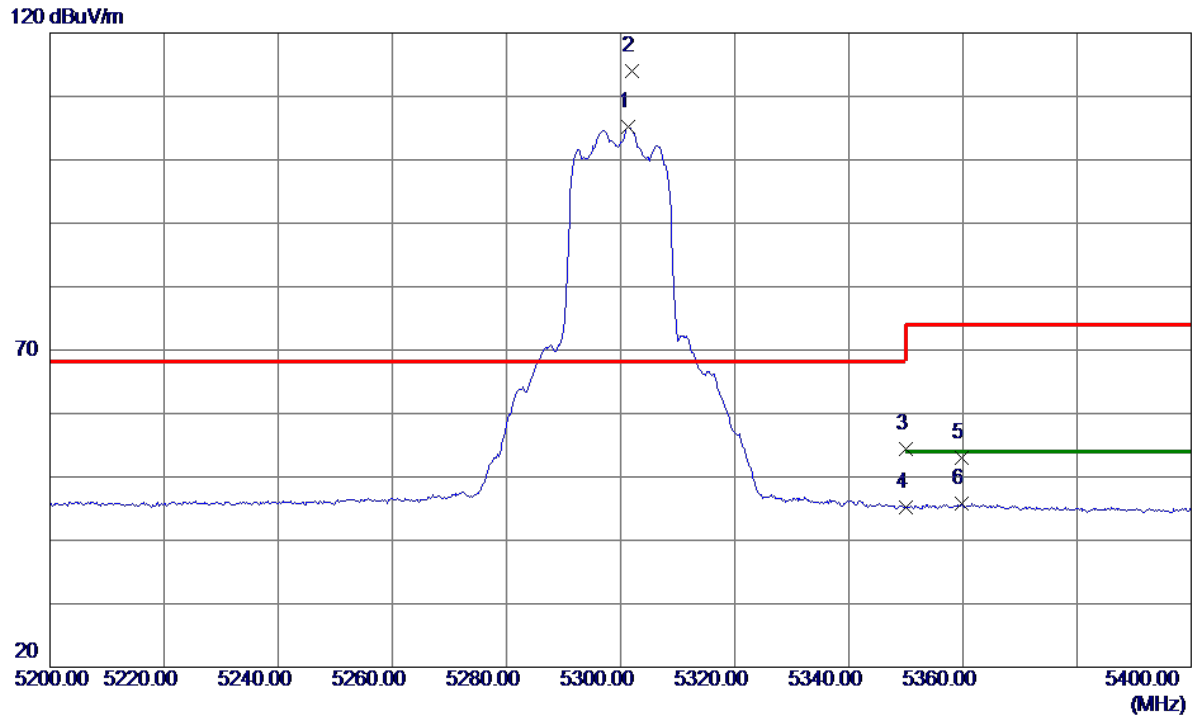


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5301.4000	89.22	15.95	105.17	999.00	-893.83	AVG	No Limit
2 *	5302.0000	98.07	15.95	114.02	68.20	45.82	Peak	No Limit
3	5350.0000	38.40	15.97	54.37	74.00	-19.63	Peak	
4	5350.0000	29.24	15.97	45.21	54.00	-8.79	AVG	
5	5359.8000	37.04	15.97	53.01	74.00	-20.99	Peak	
6	5359.8000	29.82	15.97	45.79	54.00	-8.21	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

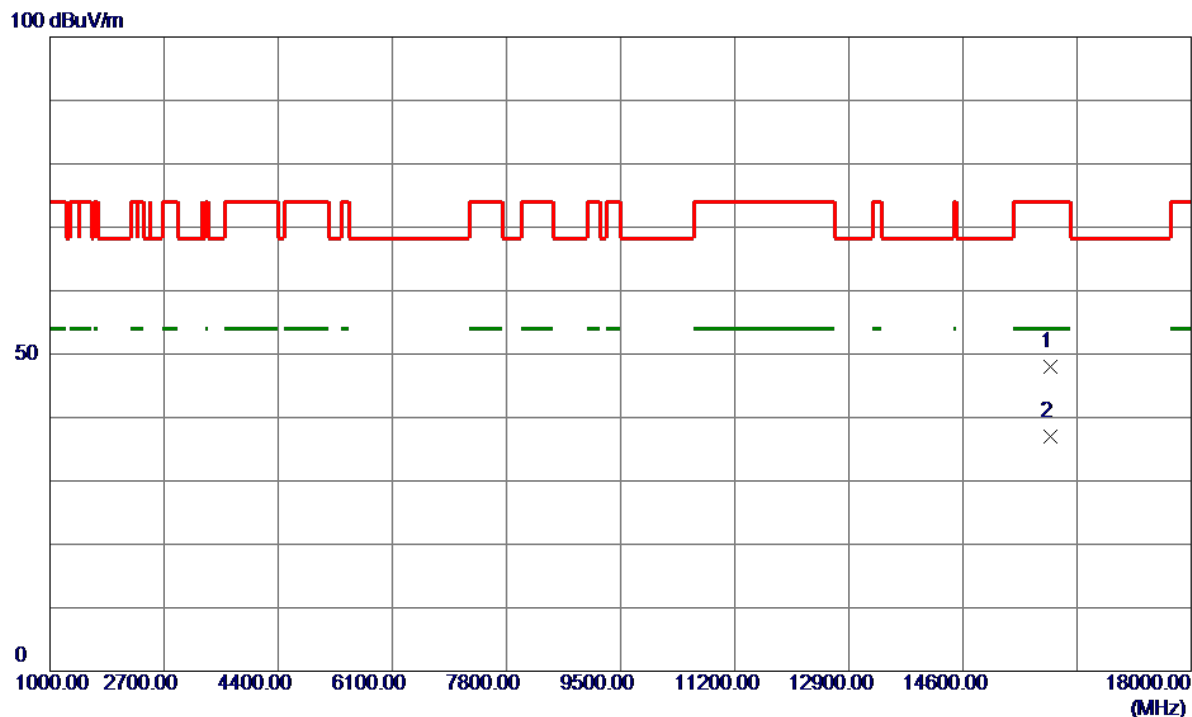


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15905.3200	37.08	11.01	48.09	74.00	-25.91	Peak	
2 *	15906.8200	25.93	11.01	36.94	54.00	-17.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

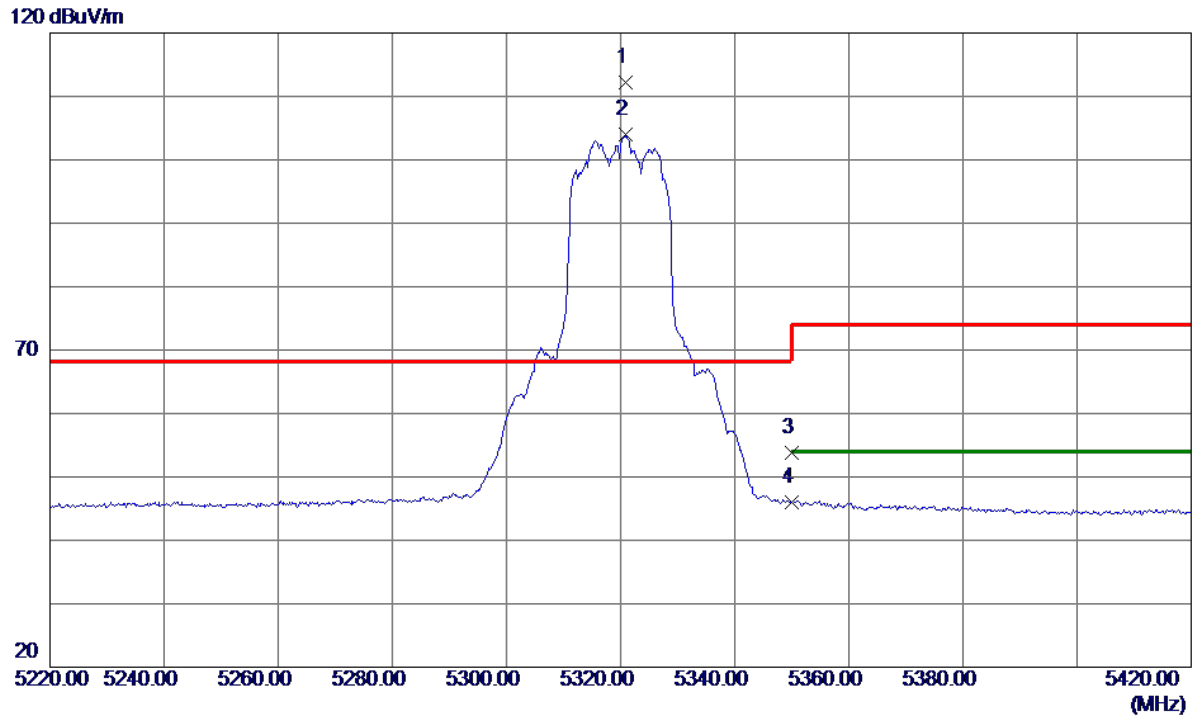


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5320.8000	96.35	15.95	112.30	68.20	44.10	Peak	No Limit
2	5320.8000	88.03	15.95	103.98	999.00	-895.02	AVG	No Limit
3	5350.0000	37.92	15.97	53.89	74.00	-20.11	Peak	
4	5350.0000	30.02	15.97	45.99	54.00	-8.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

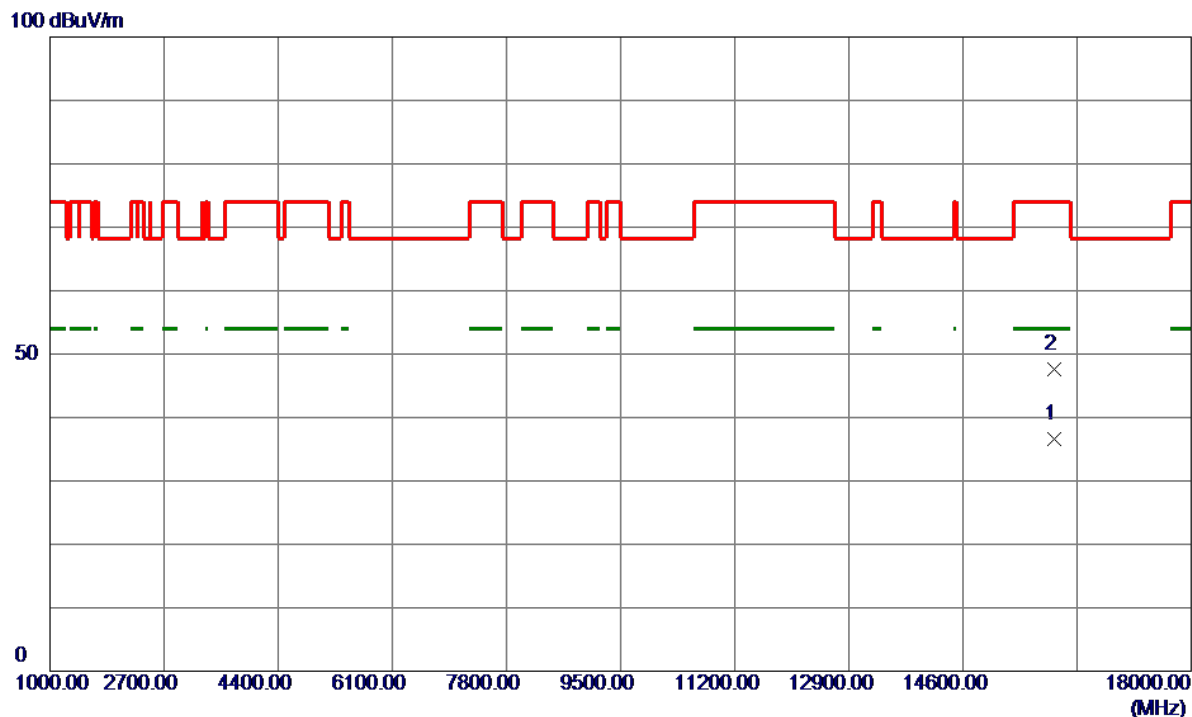


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15962.4400	25.52	11.01	36.53	54.00	-17.47	AVG	
2	15965.6400	36.57	11.01	47.58	74.00	-26.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

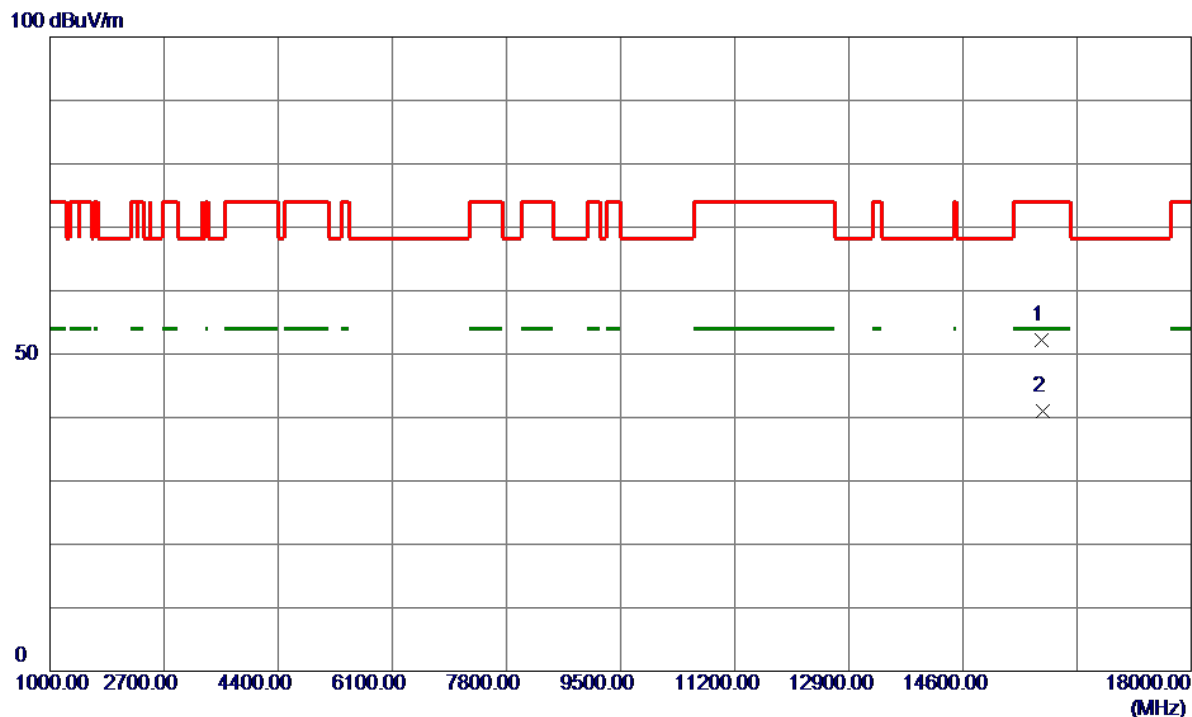


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15776.0800	41.28	11.00	52.28	74.00	-21.72	Peak	
2 *	15789.2200	29.99	11.00	40.99	54.00	-13.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

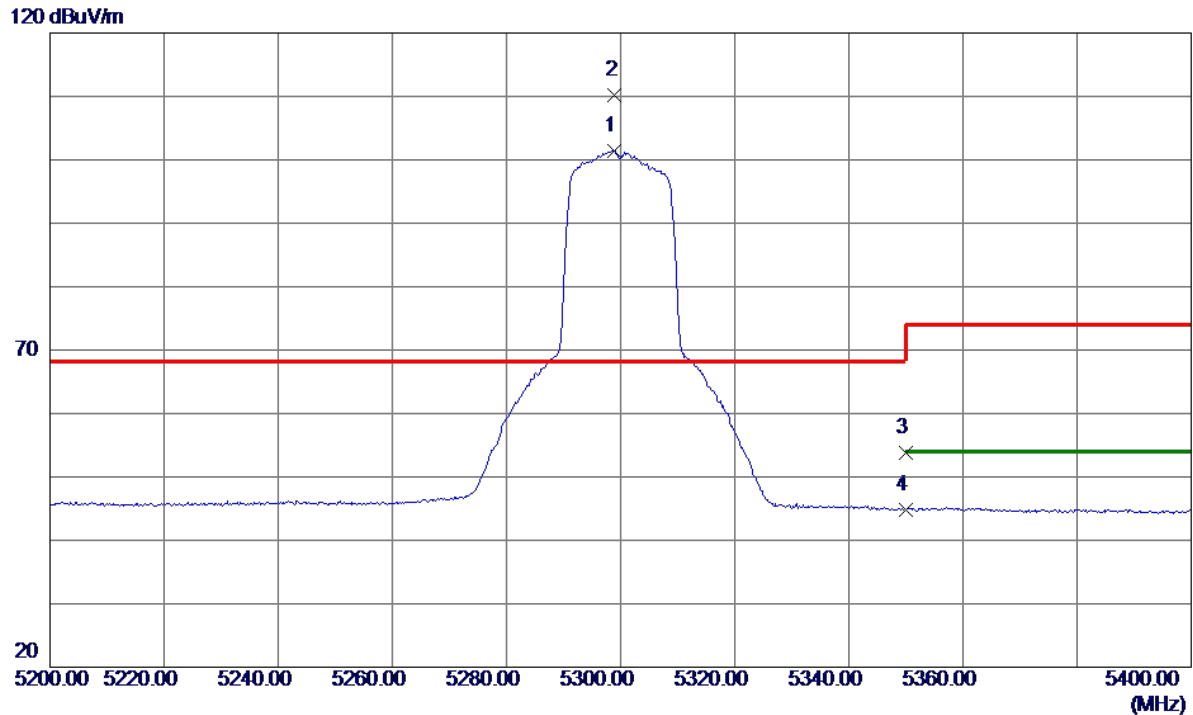


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.8000	85.51	15.95	101.46	999.00	-897.54	AVG	No Limit
2 *	5299.0000	94.28	15.95	110.23	68.20	42.03	Peak	No Limit
3	5350.0000	37.76	15.97	53.73	74.00	-20.27	Peak	
4	5350.0000	28.77	15.97	44.74	54.00	-9.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

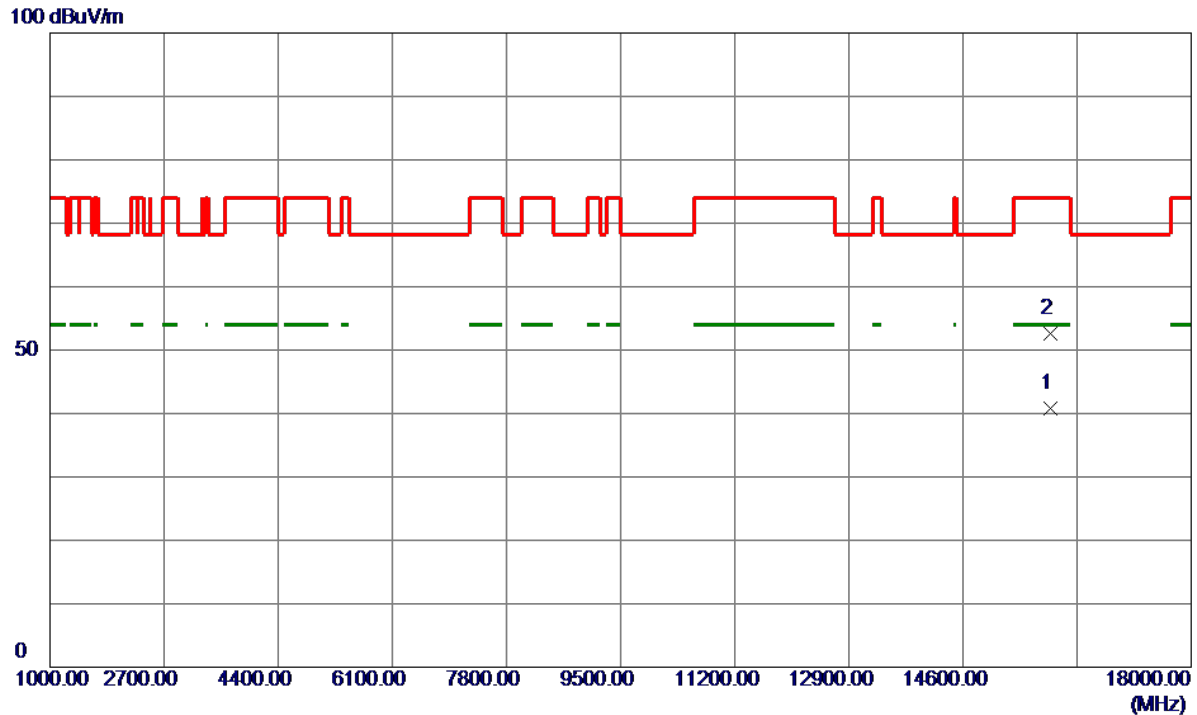


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15906.0800	29.80	11.01	40.81	54.00	-13.19	AVG	
2	15908.7600	41.55	11.01	52.56	74.00	-21.44	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

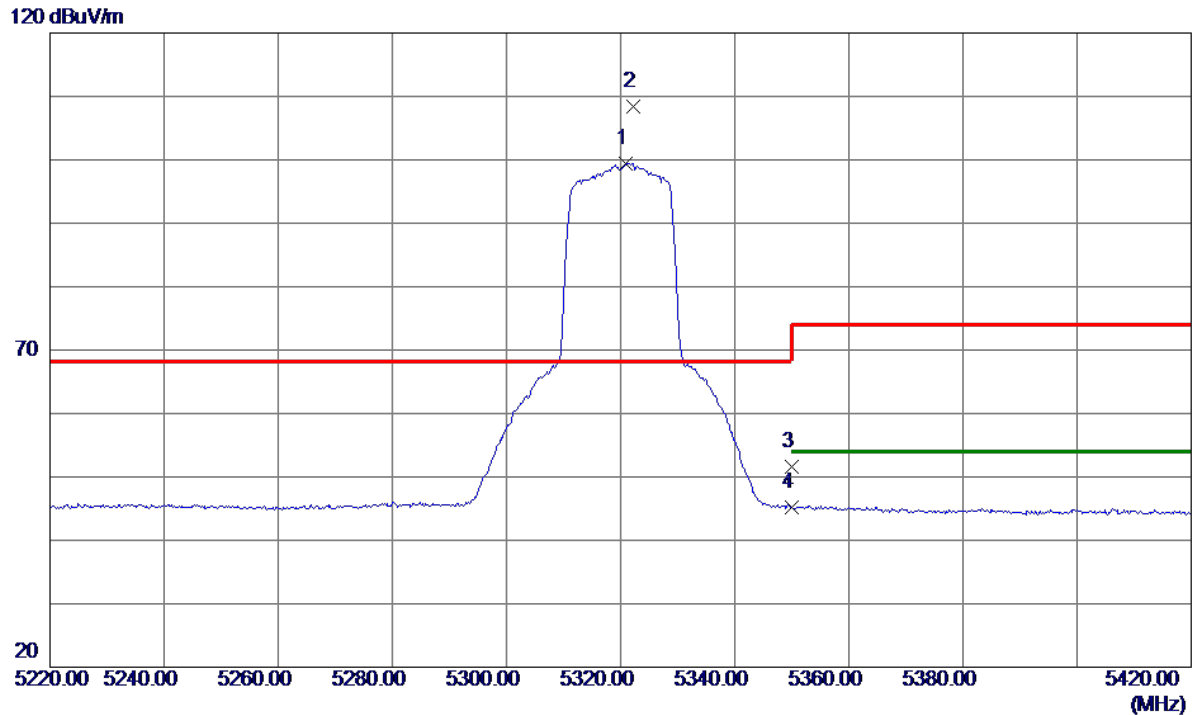


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5320.8000	83.45	15.95	99.40	999.00	-899.60	AVG	No Limit
2 *	5322.2000	92.40	15.96	108.36	68.20	40.16	Peak	No Limit
3	5350.0000	35.71	15.97	51.68	74.00	-22.32	Peak	
4	5350.0000	29.18	15.97	45.15	54.00	-8.85	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

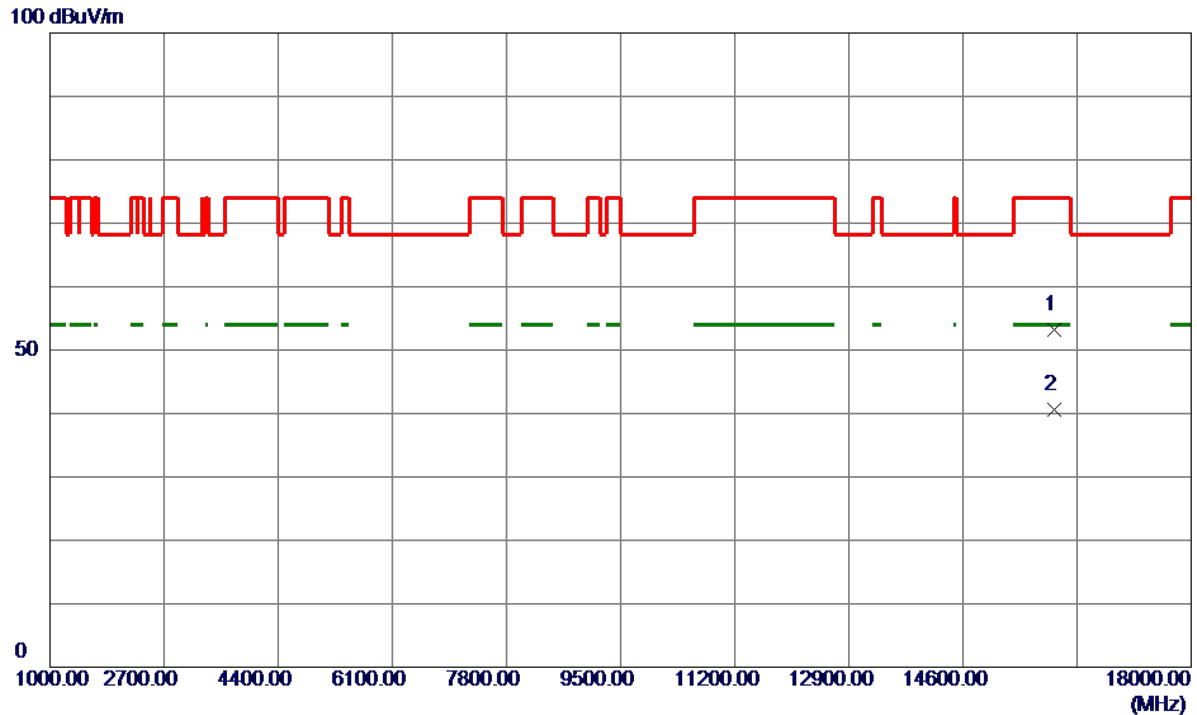


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15957.2400	42.13	11.01	53.14	74.00	-20.86	Peak	
2 *	15968.5600	29.62	11.01	40.63	54.00	-13.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

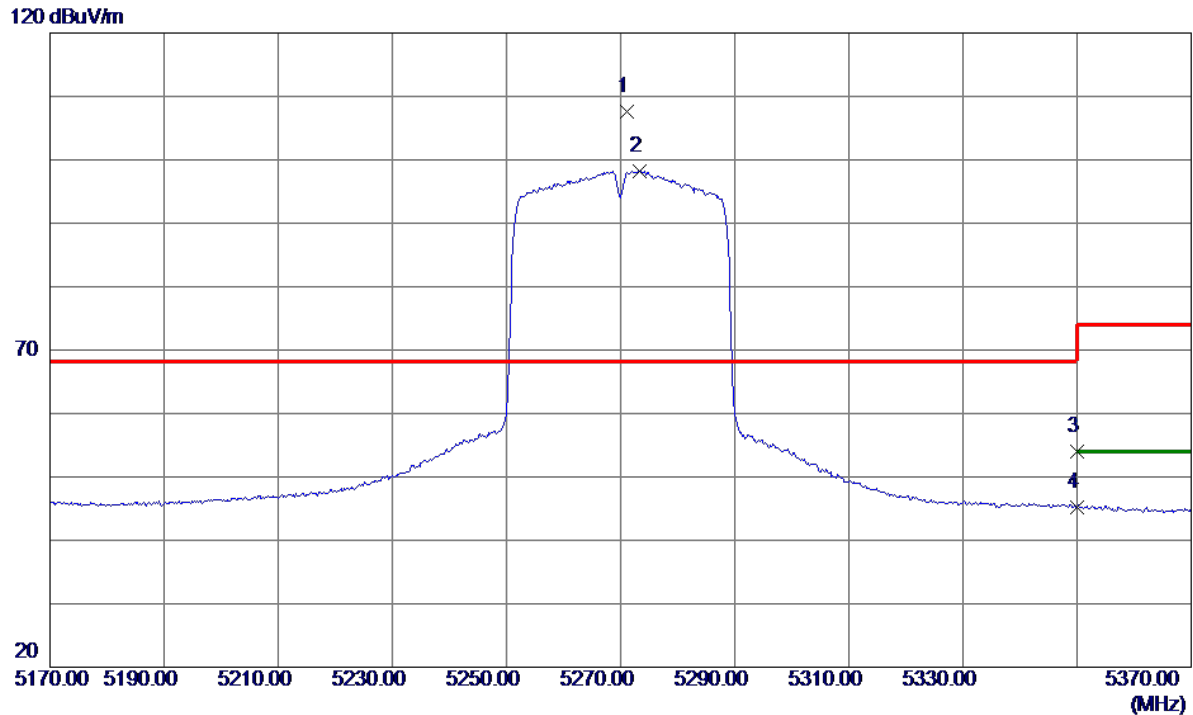


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5271.2000	91.59	15.93	107.52	68.20	39.32	Peak	No Limit
2	5273.4000	82.36	15.93	98.29	999.00	-900.71	AVG	No Limit
3	5350.0000	37.96	15.97	53.93	74.00	-20.07	Peak	
4	5350.0000	29.19	15.97	45.16	54.00	-8.84	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

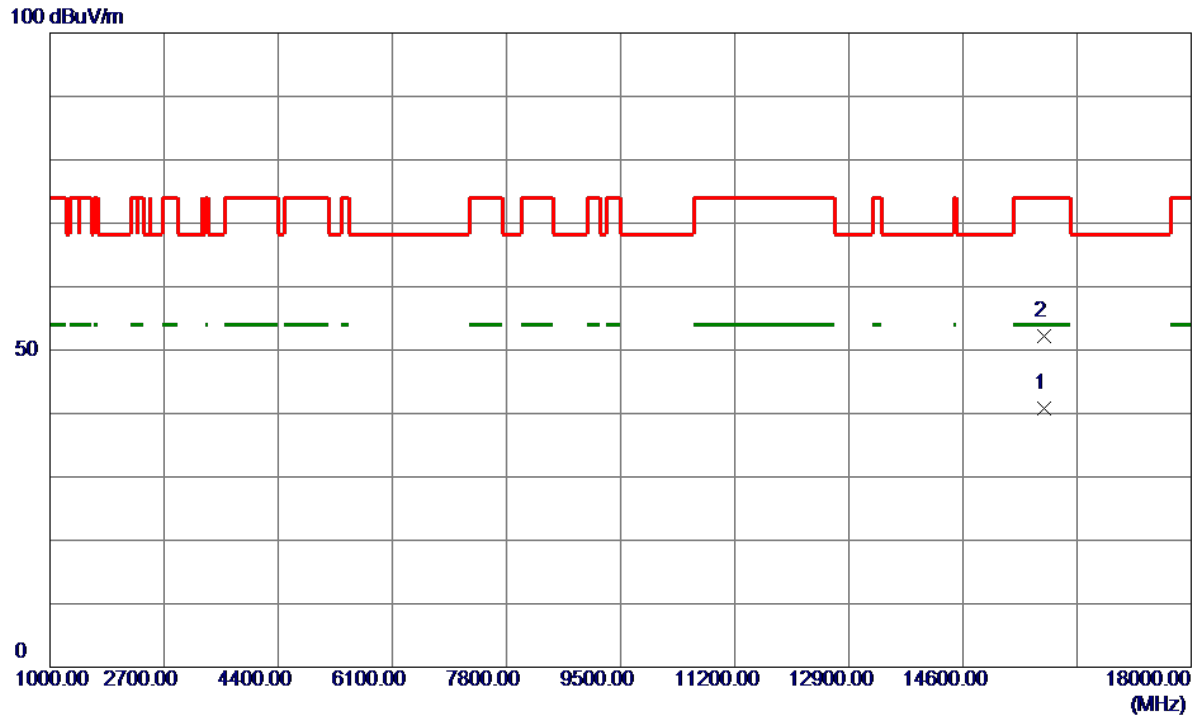


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15800.7600	29.73	11.00	40.73	54.00	-13.27	AVG	
2	15806.1200	41.11	11.00	52.11	74.00	-21.89	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

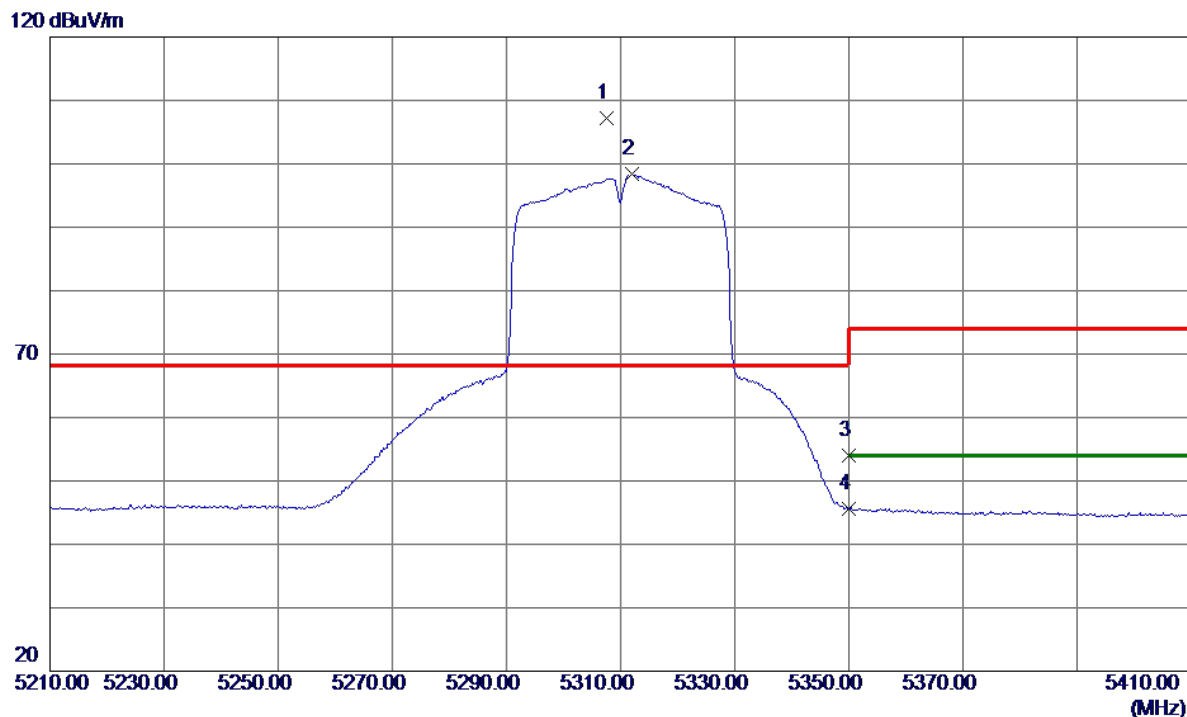


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5307.6000	91.21	15.95	107.16	68.20	38.96	Peak	No Limit
2	5312.0000	82.37	15.95	98.32	999.00	-900.68	AVG	No Limit
3	5350.0000	38.09	15.97	54.06	74.00	-19.94	Peak	
4	5350.0000	29.71	15.97	45.68	54.00	-8.32	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

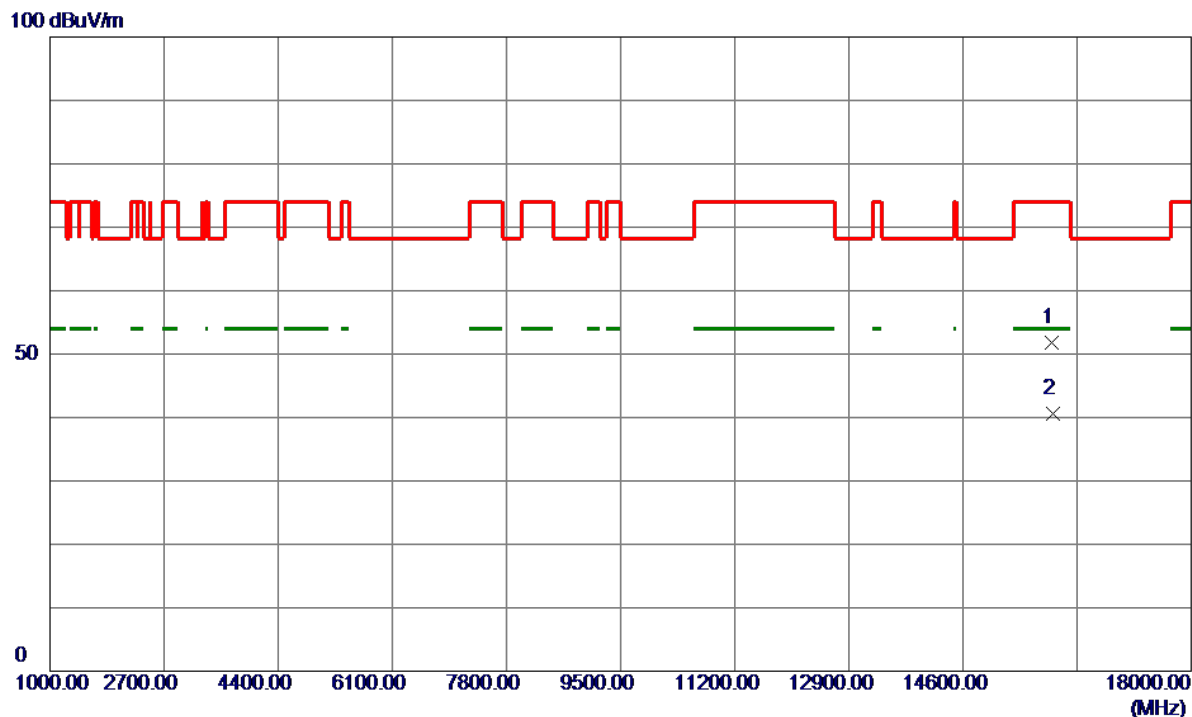


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15928.3200	40.71	11.01	51.72	74.00	-22.28	Peak	
2 *	15938.5200	29.66	11.01	40.67	54.00	-13.33	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

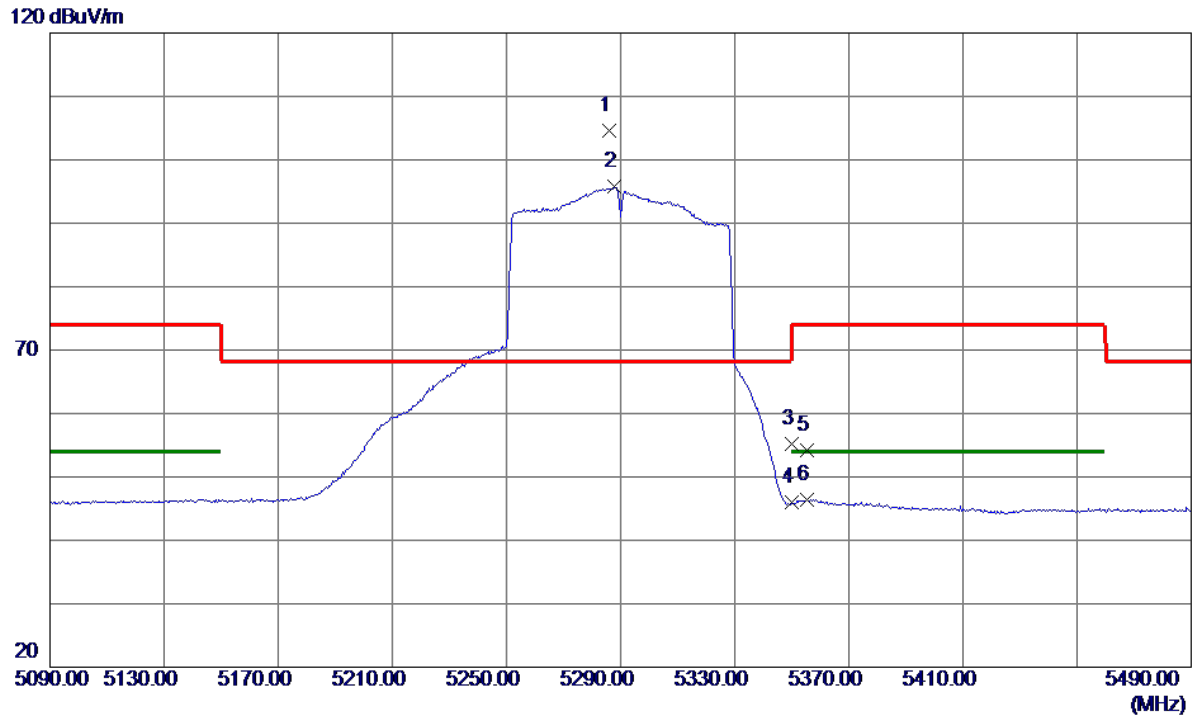


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5286.0000	88.60	15.94	104.54	68.20	36.34	Peak	No Limit
2	5287.6000	79.81	15.94	95.75	999.00	-903.25	AVG	No Limit
3	5350.0000	39.17	15.97	55.14	74.00	-18.86	Peak	
4	5350.0000	29.94	15.97	45.91	54.00	-8.09	AVG	
5	5355.2000	38.16	15.97	54.13	74.00	-19.87	Peak	
6	5355.2000	30.46	15.97	46.43	54.00	-7.57	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

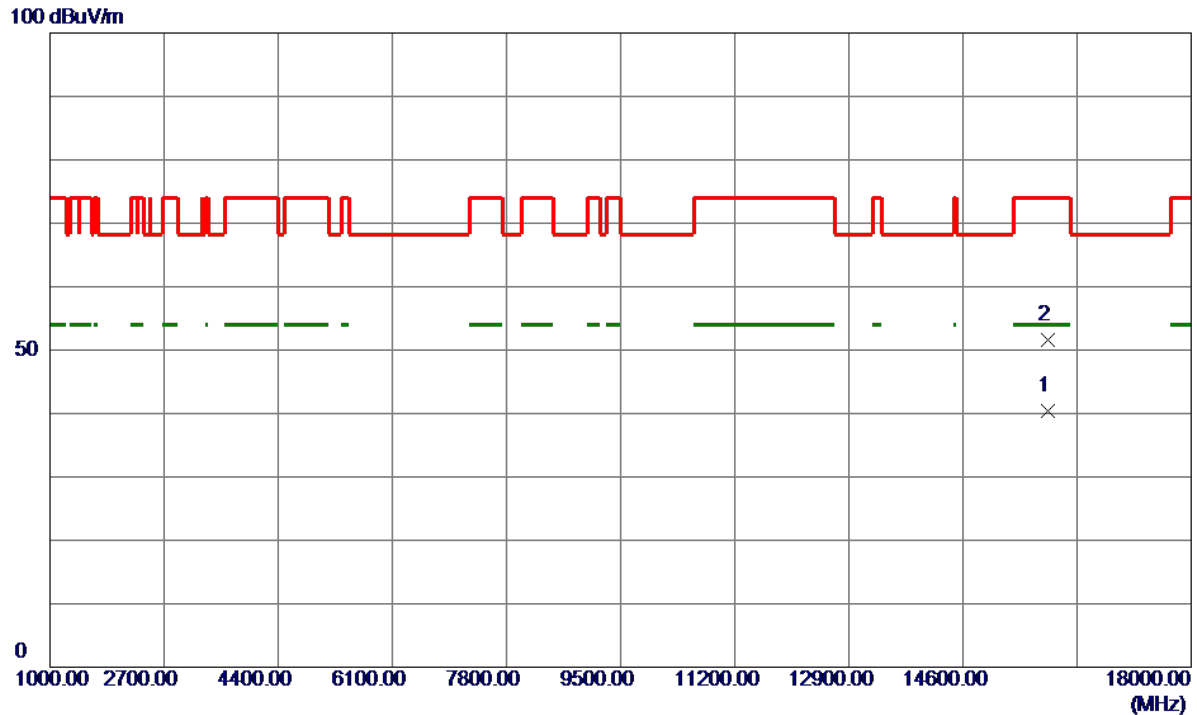


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15861.8800	29.49	11.00	40.49	54.00	-13.51	AVG	
2	15864.0600	40.69	11.00	51.69	74.00	-22.31	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5260 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

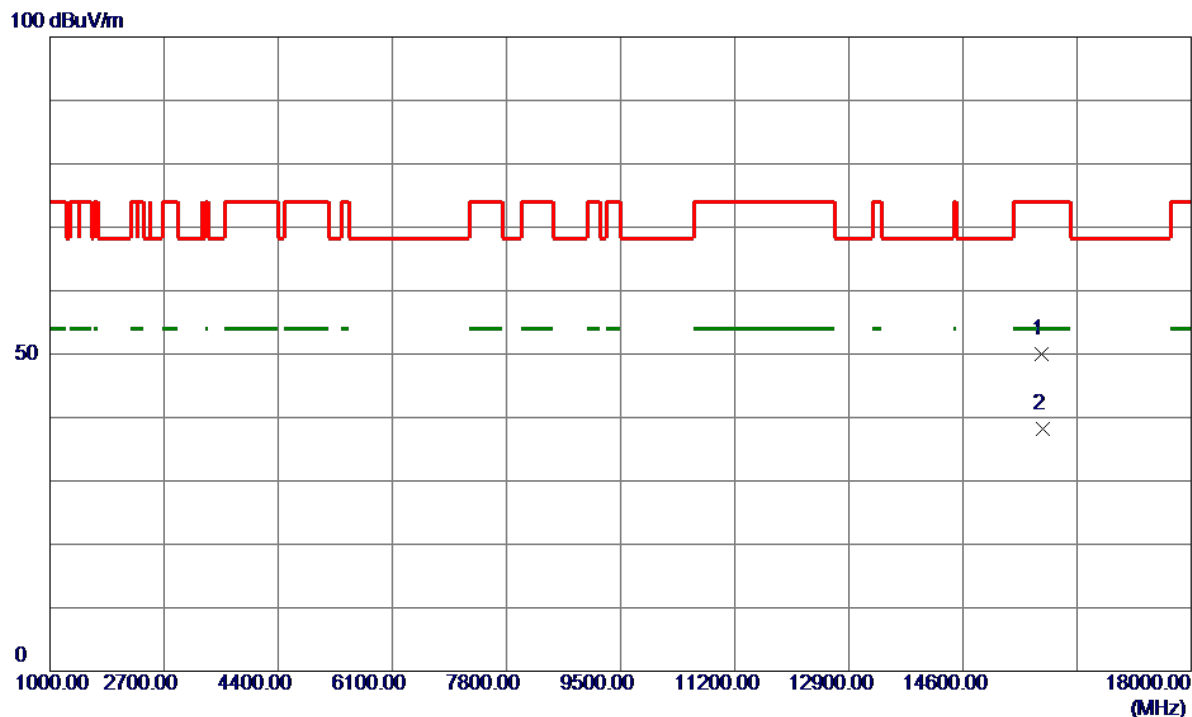


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15770.3800	39.05	11.00	50.05	74.00	-23.95	Peak	
2 *	15783.9000	27.23	11.00	38.23	54.00	-15.77	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

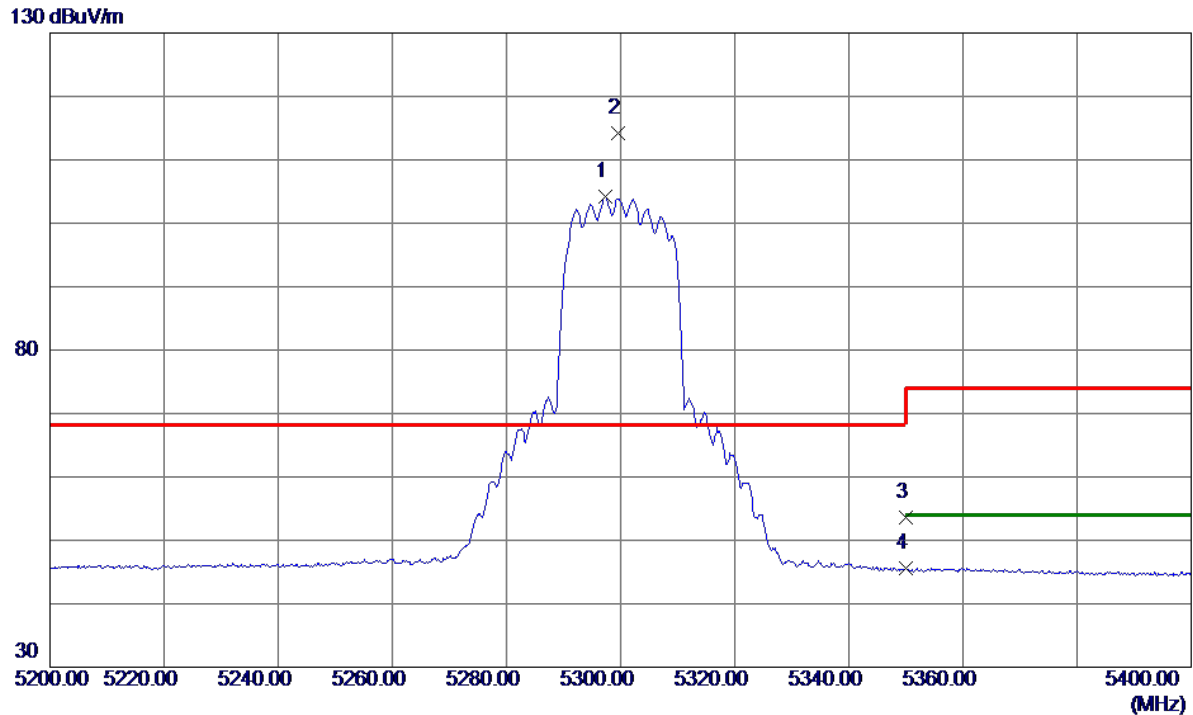


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5297.4000	88.26	15.94	104.20	999.00	-894.80	AVG	No Limit
2 *	5299.6000	98.28	15.95	114.23	68.20	46.03	Peak	No Limit
3	5350.0000	37.62	15.97	53.59	74.00	-20.41	Peak	
4	5350.0000	29.56	15.97	45.53	54.00	-8.47	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5300 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

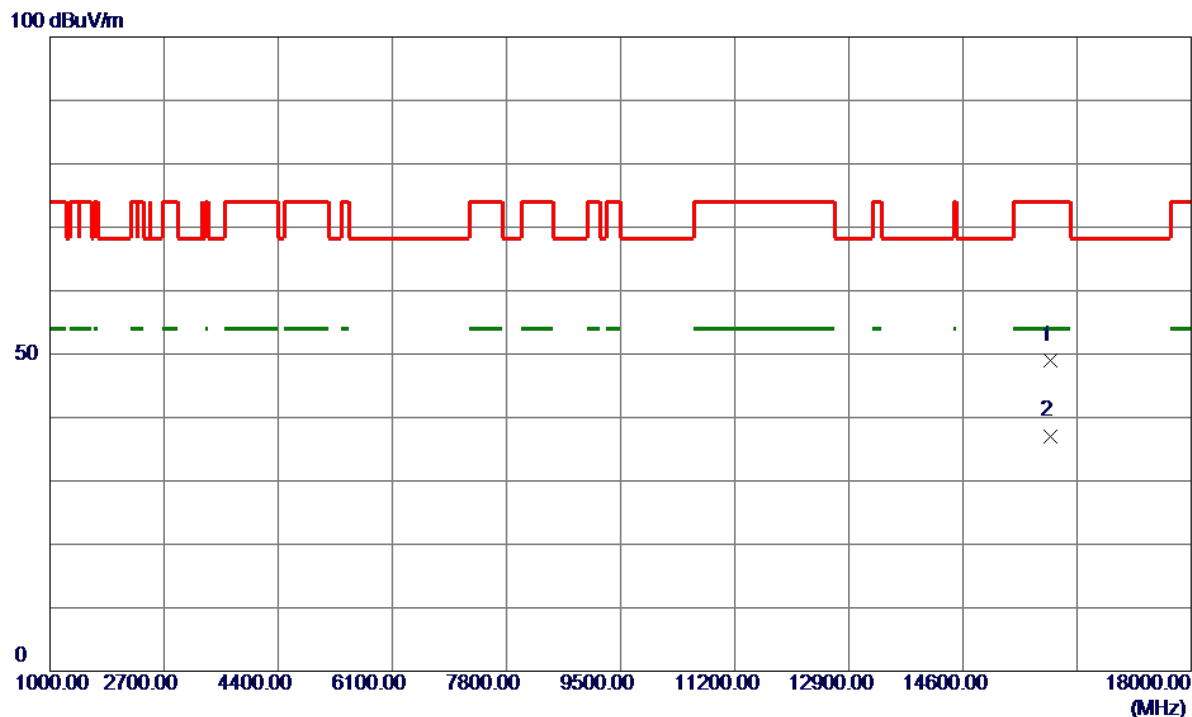


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15905.6600	37.94	11.01	48.95	74.00	-25.05	Peak	
2 *	15907.8200	26.09	11.01	37.10	54.00	-16.90	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

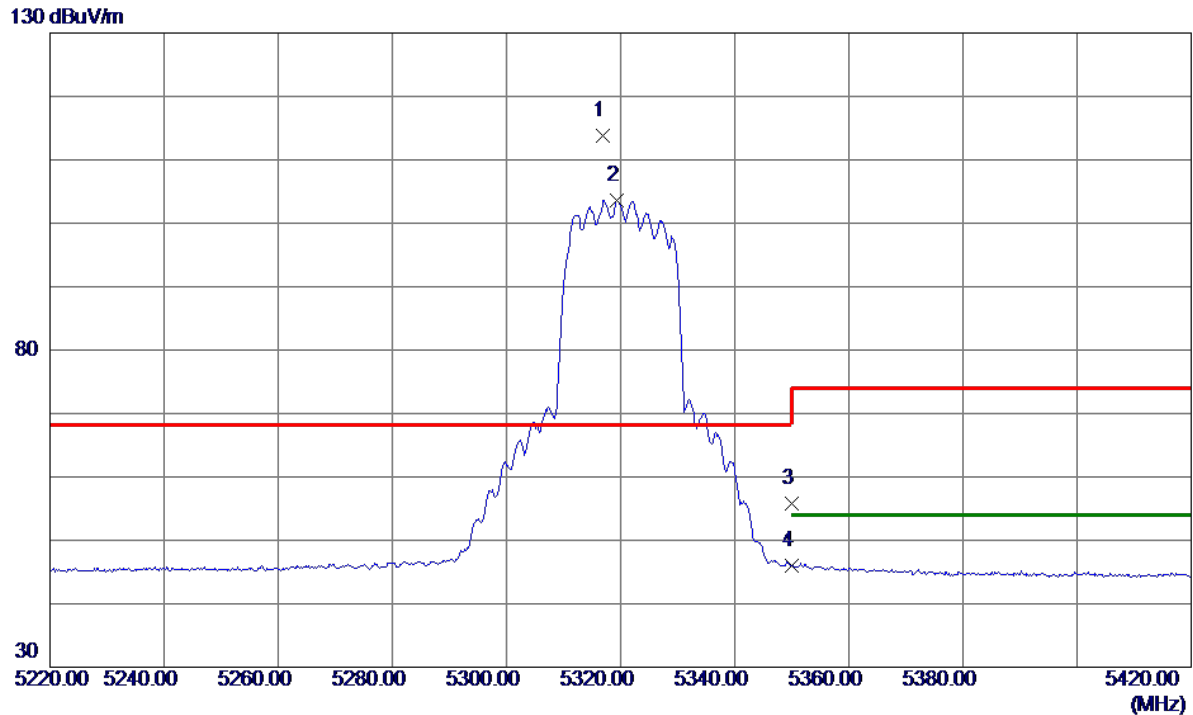


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5316.8000	97.76	15.95	113.71	68.20	45.51	Peak	No Limit
2	5319.4000	87.66	15.95	103.61	999.00	-895.39	AVG	No Limit
3	5350.0000	39.82	15.97	55.79	74.00	-18.21	Peak	
4	5350.0000	30.08	15.97	46.05	54.00	-7.95	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT20) Mode 5320 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

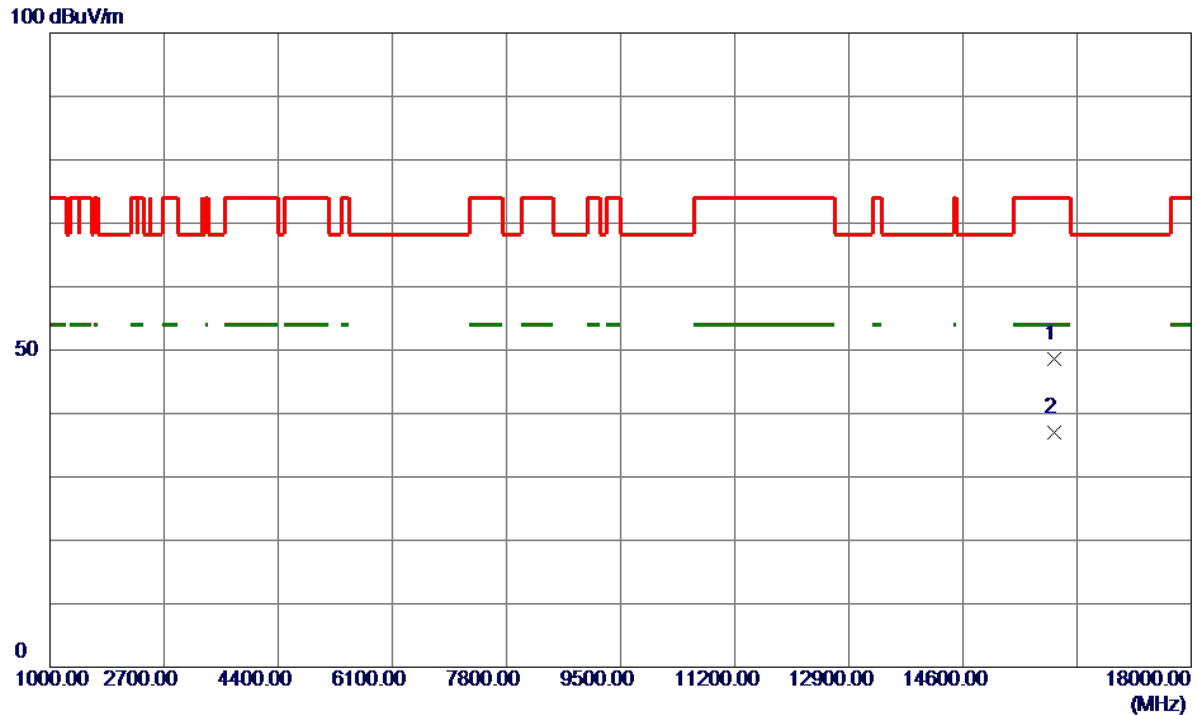

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15968.1800	37.57	11.01	48.58	74.00	-25.42	Peak	
2 *	15969.1200	26.07	11.01	37.08	54.00	-16.92	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

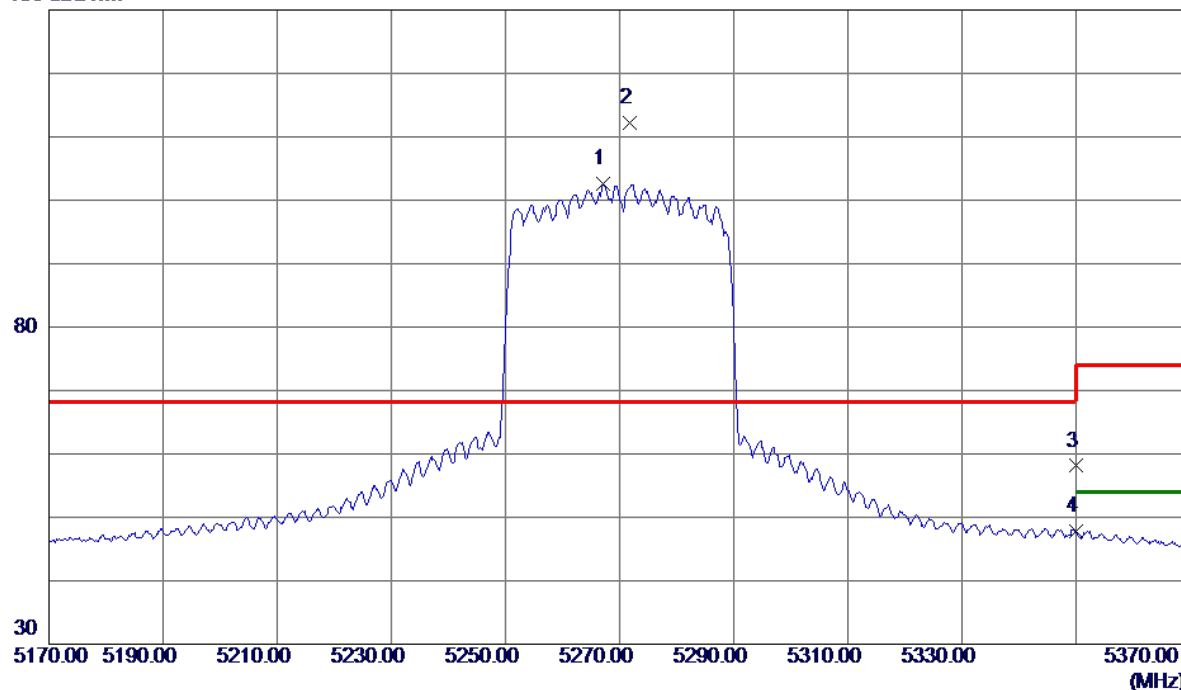


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5267.2000	86.61	15.93	102.54	999.00	-896.46	AVG	No Limit
2 *	5271.8000	96.34	15.93	112.27	68.20	44.07	Peak	No Limit
3	5350.0000	42.13	15.97	58.10	74.00	-15.90	Peak	
4	5350.0000	31.90	15.97	47.87	54.00	-6.13	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5270 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

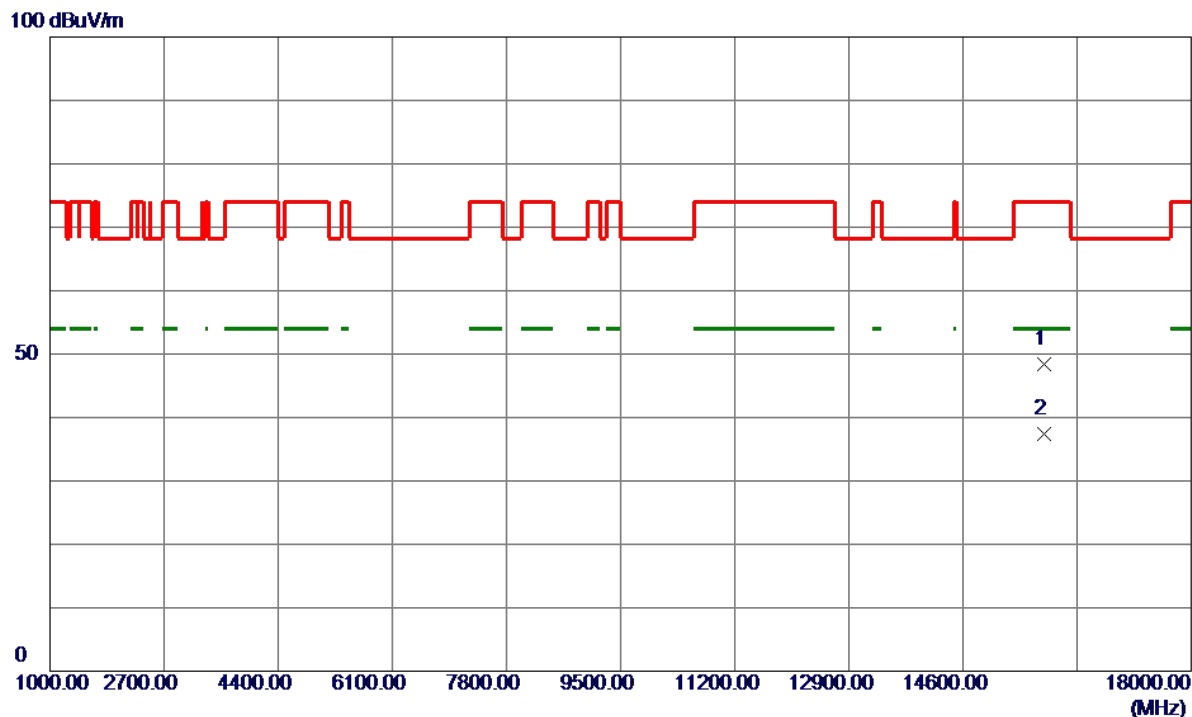


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15803.4600	37.47	11.00	48.47	74.00	-25.53	Peak	
2 *	15803.4600	26.36	11.00	37.36	54.00	-16.64	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

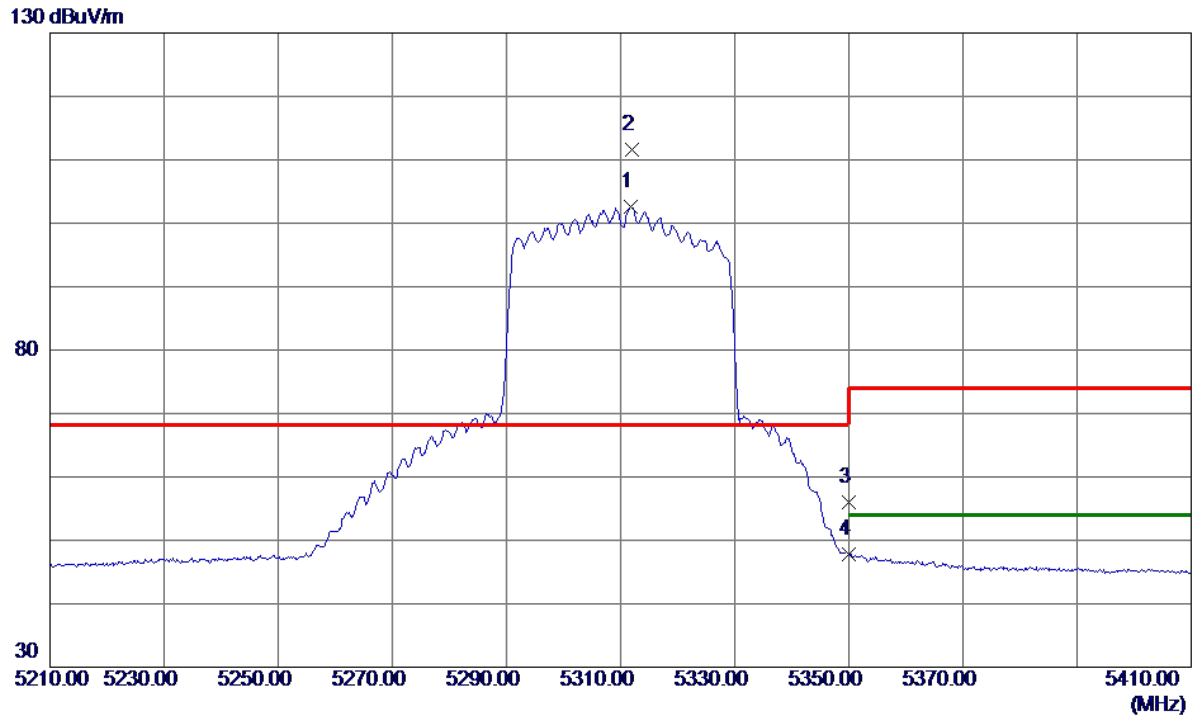


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5311.8000	86.63	15.95	102.58	999.00	-896.42	AVG	No Limit
2 *	5312.0000	95.69	15.95	111.64	68.20	43.44	Peak	No Limit
3	5350.0000	40.10	15.97	56.07	74.00	-17.93	Peak	
4	5350.0000	31.91	15.97	47.88	54.00	-6.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT40) Mode 5310 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

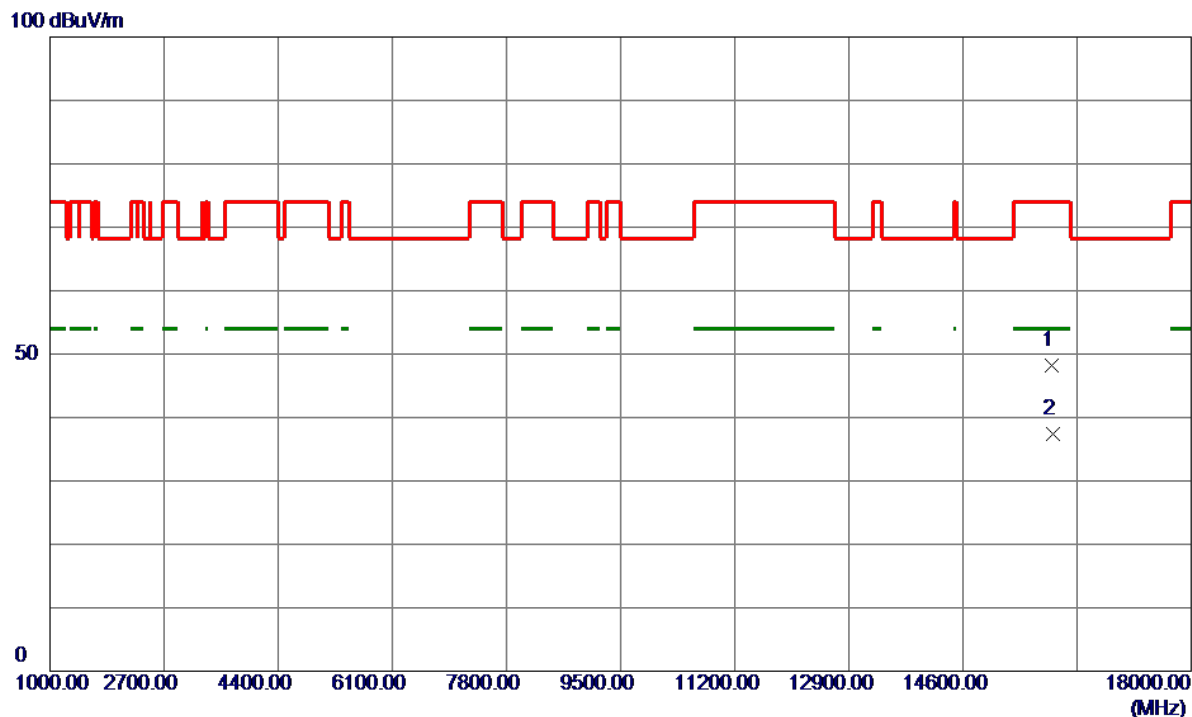


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15930.2200	37.16	11.01	48.17	74.00	-25.83	Peak	
2 *	15938.5200	26.40	11.01	37.41	54.00	-16.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

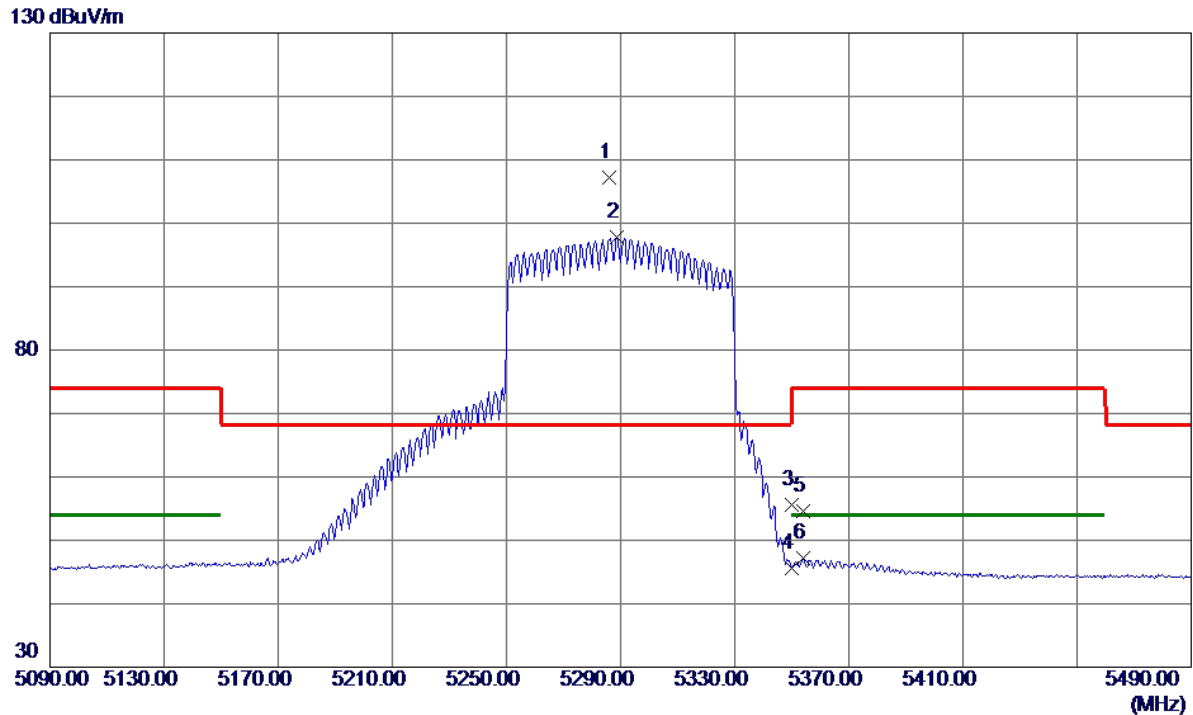


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5286.0000	91.29	15.94	107.23	68.20	39.03	Peak	No Limit
2	5288.8000	81.79	15.94	97.73	999.00	-901.27	AVG	No Limit
3	5350.0000	39.61	15.97	55.58	74.00	-18.42	Peak	
4	5350.0000	29.69	15.97	45.66	54.00	-8.34	AVG	
5	5354.0000	38.68	15.97	54.65	74.00	-19.35	Peak	
6	5354.0000	31.14	15.97	47.11	54.00	-6.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX BE(EHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

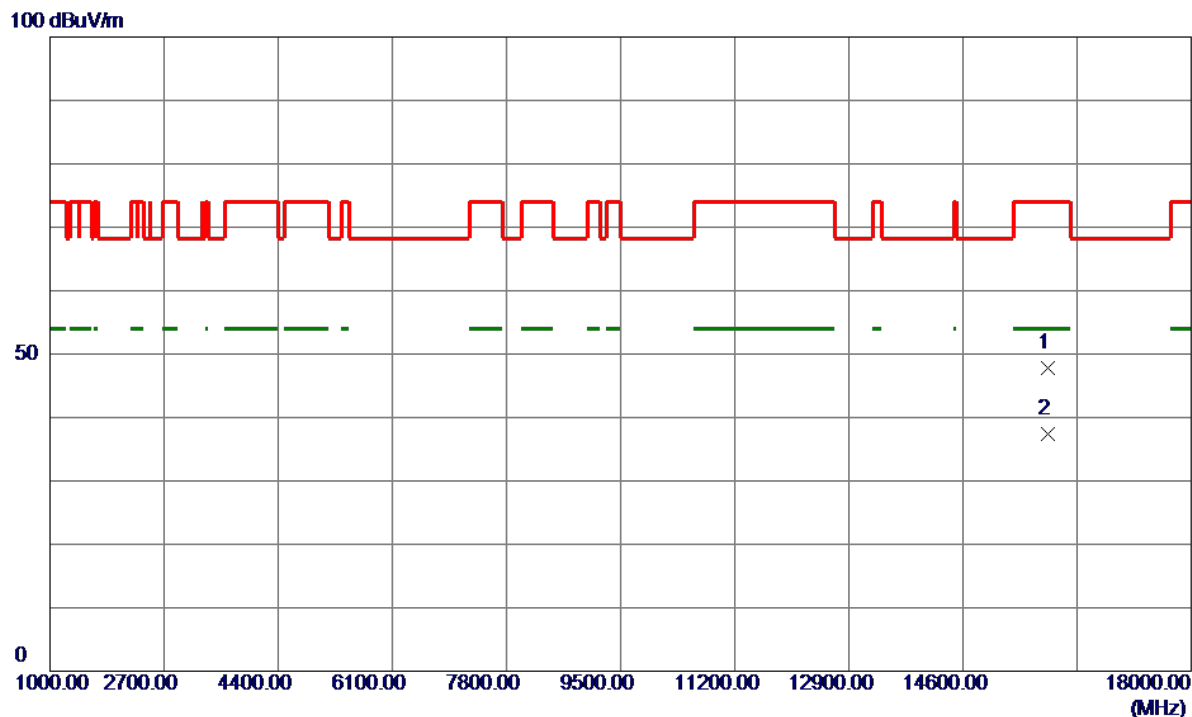


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15863.5000	36.89	11.00	47.89	74.00	-26.11	Peak	
2 *	15864.0000	26.31	11.00	37.31	54.00	-16.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

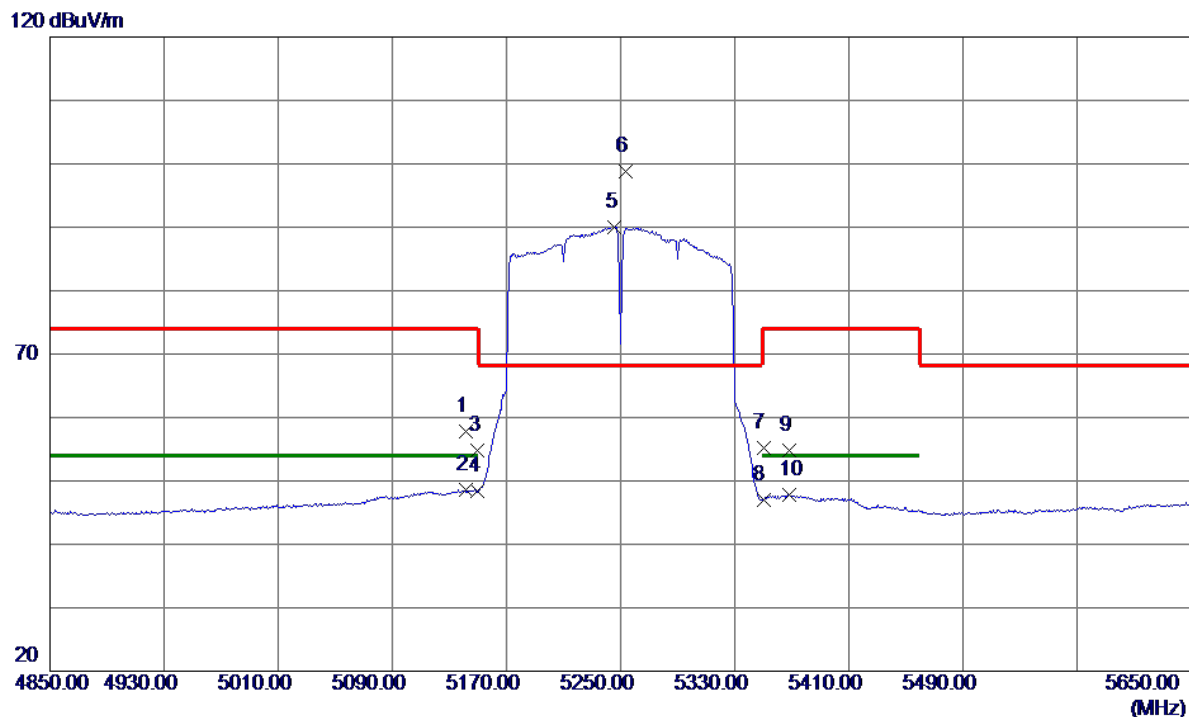


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5141.2000	41.87	15.88	57.75	74.00	-16.25	Peak	
2	5141.2000	32.74	15.88	48.62	54.00	-5.38	AVG	
3	5150.0000	38.90	15.88	54.78	74.00	-19.22	Peak	
4	5150.0000	32.58	15.88	48.46	54.00	-5.54	AVG	
5	5246.0000	74.12	15.92	90.04	999.00	-908.96	AVG	No Limit
6 *	5253.2000	82.95	15.93	98.88	68.20	30.68	Peak	No Limit
7	5350.0000	39.26	15.97	55.23	74.00	-18.77	Peak	
8	5350.0000	31.09	15.97	47.06	54.00	-6.94	AVG	
9	5368.4000	38.91	15.97	54.88	74.00	-19.12	Peak	
10	5368.4000	31.78	15.97	47.75	54.00	-6.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

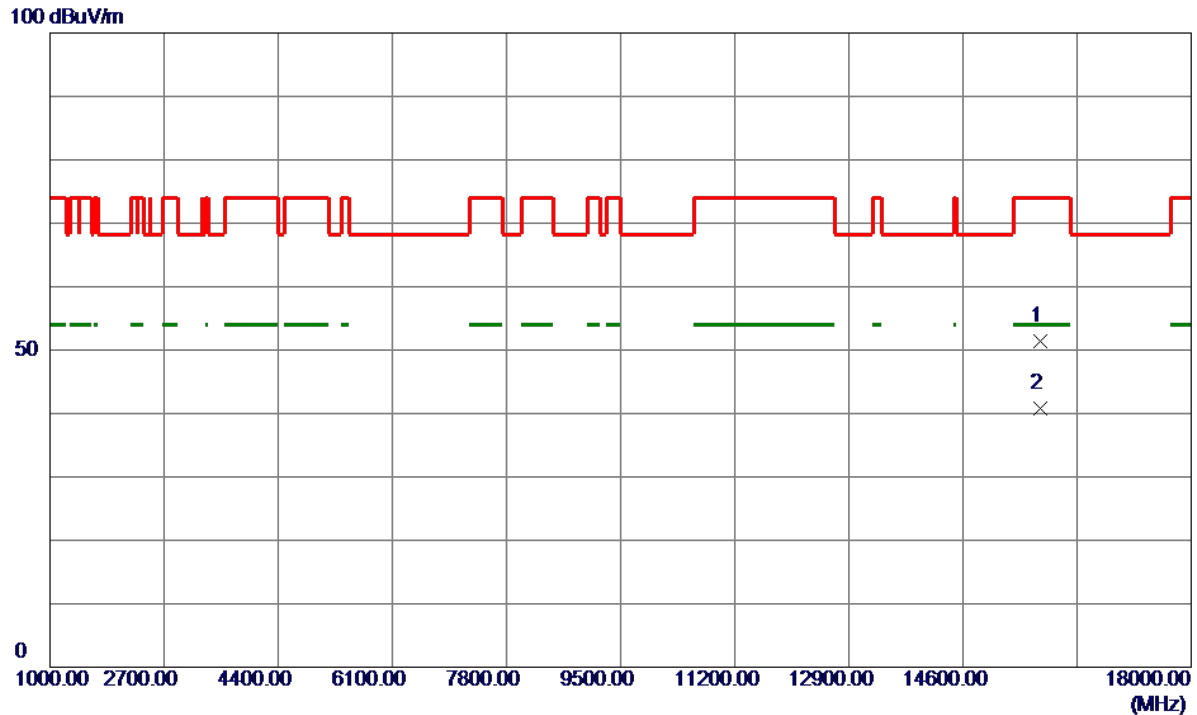

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15745.6000	40.44	11.00	51.44	74.00	-22.56	Peak	
2 *	15754.7800	29.83	11.00	40.83	54.00	-13.17	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

130 dBuV/m

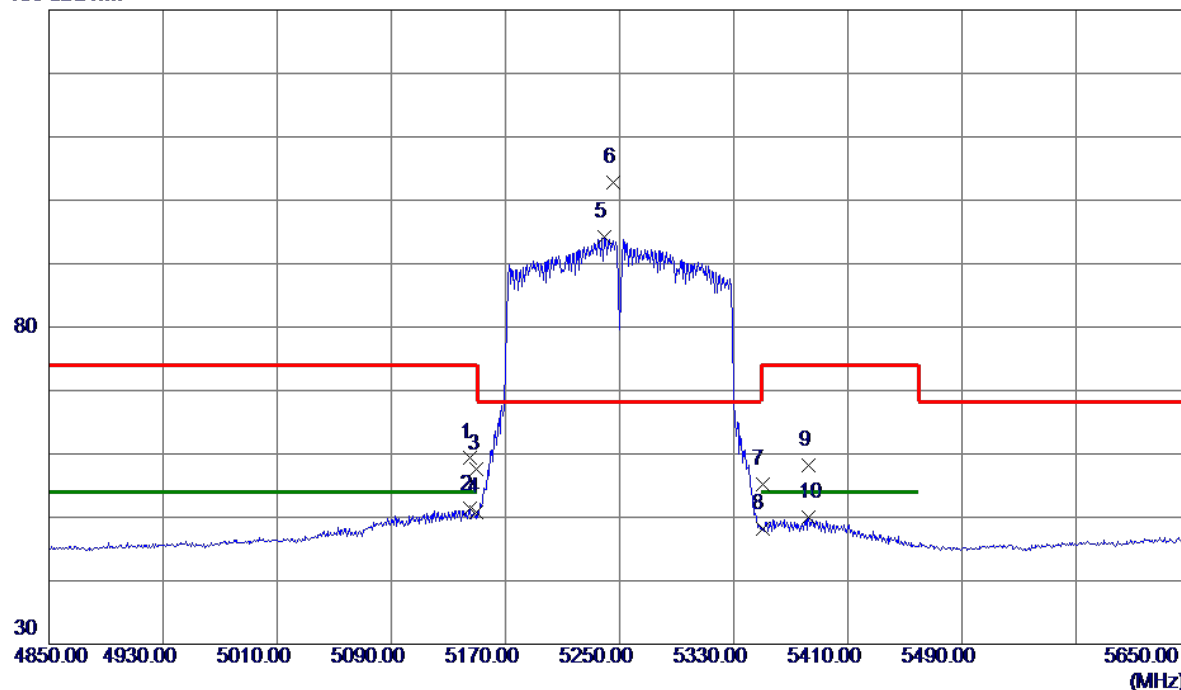


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.2000	43.44	15.88	59.32	74.00	-14.68	Peak	
2	5145.2000	35.42	15.88	51.30	54.00	-2.70	AVG	
3	5150.0000	41.78	15.88	57.66	74.00	-16.34	Peak	
4	5150.0000	34.92	15.88	50.80	54.00	-3.20	AVG	
5	5239.6000	78.35	15.92	94.27	999.00	-904.73	AVG	No Limit
6 *	5245.2000	86.94	15.92	102.86	68.20	34.66	Peak	No Limit
7	5350.0000	39.31	15.97	55.28	74.00	-18.72	Peak	
8	5350.0000	32.30	15.97	48.27	54.00	-5.73	AVG	
9	5382.2000	42.23	15.98	58.21	74.00	-15.79	Peak	
10	5382.8000	33.98	15.98	49.96	54.00	-4.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

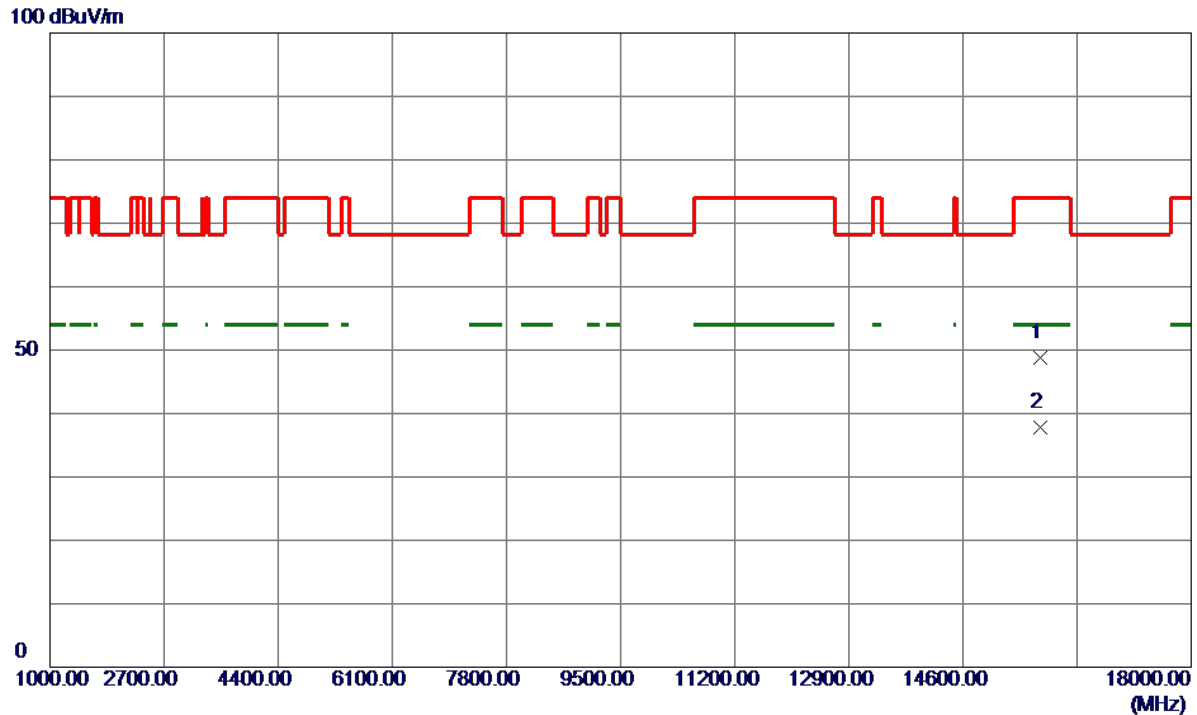


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15746.0200	37.86	11.00	48.86	74.00	-25.14	Peak	
2 *	15747.8000	26.72	11.00	37.72	54.00	-16.28	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

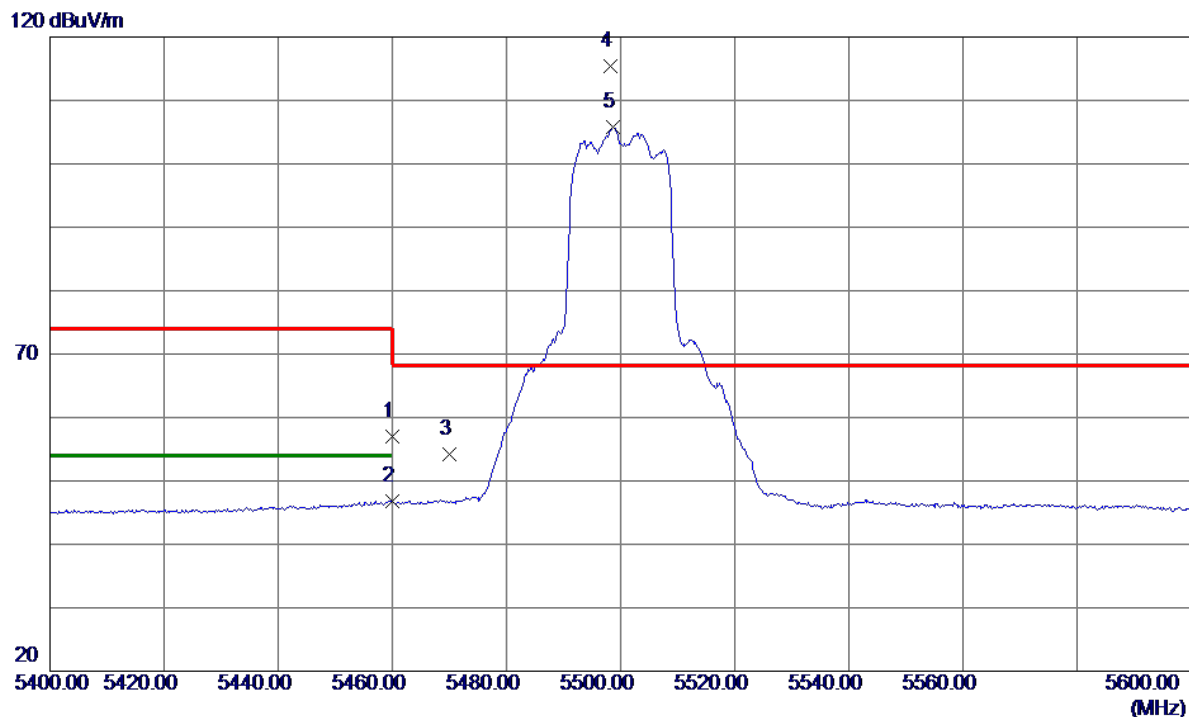


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	40.91	16.01	56.92	74.00	-17.08	Peak	
2	5460.0000	30.80	16.01	46.81	54.00	-7.19	AVG	
3	5470.0000	38.11	16.02	54.13	68.20	-14.07	Peak	
4 *	5498.2000	99.36	16.03	115.39	68.20	47.19	Peak	No Limit
5	5498.6000	89.78	16.03	105.81	999.00	-893.19	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

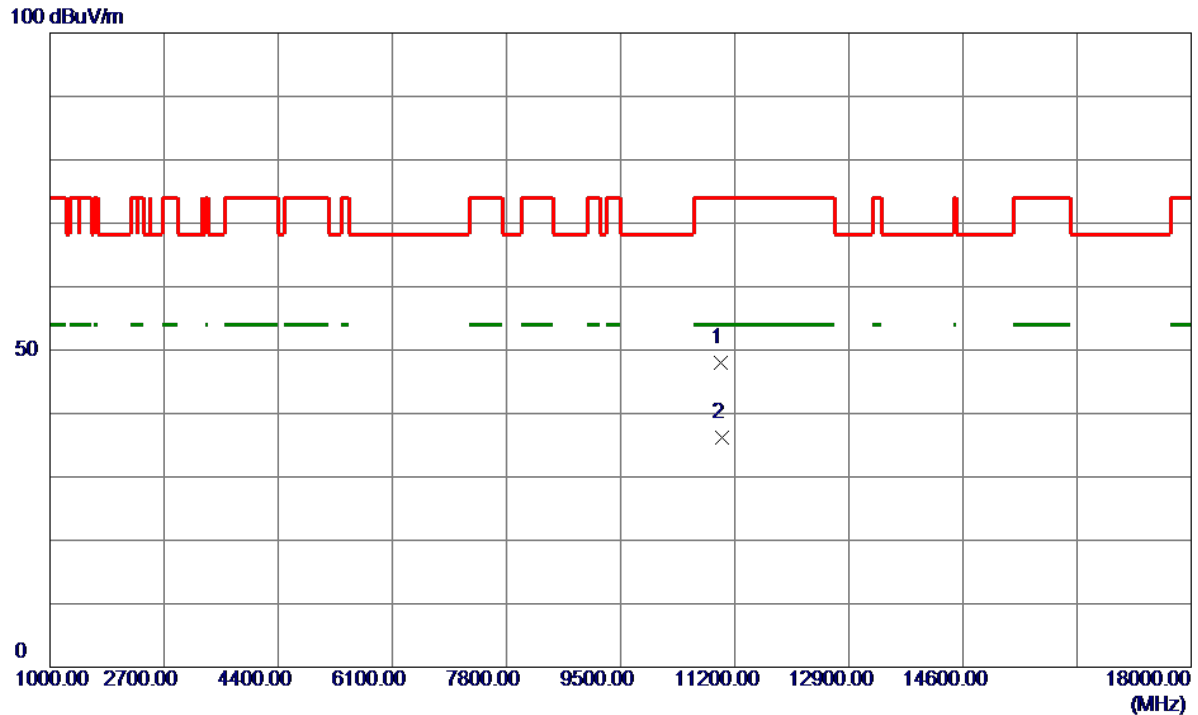


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10999.0400	36.22	11.82	48.04	74.00	-25.96	Peak	
2 *	11005.6000	24.31	11.84	36.15	54.00	-17.85	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

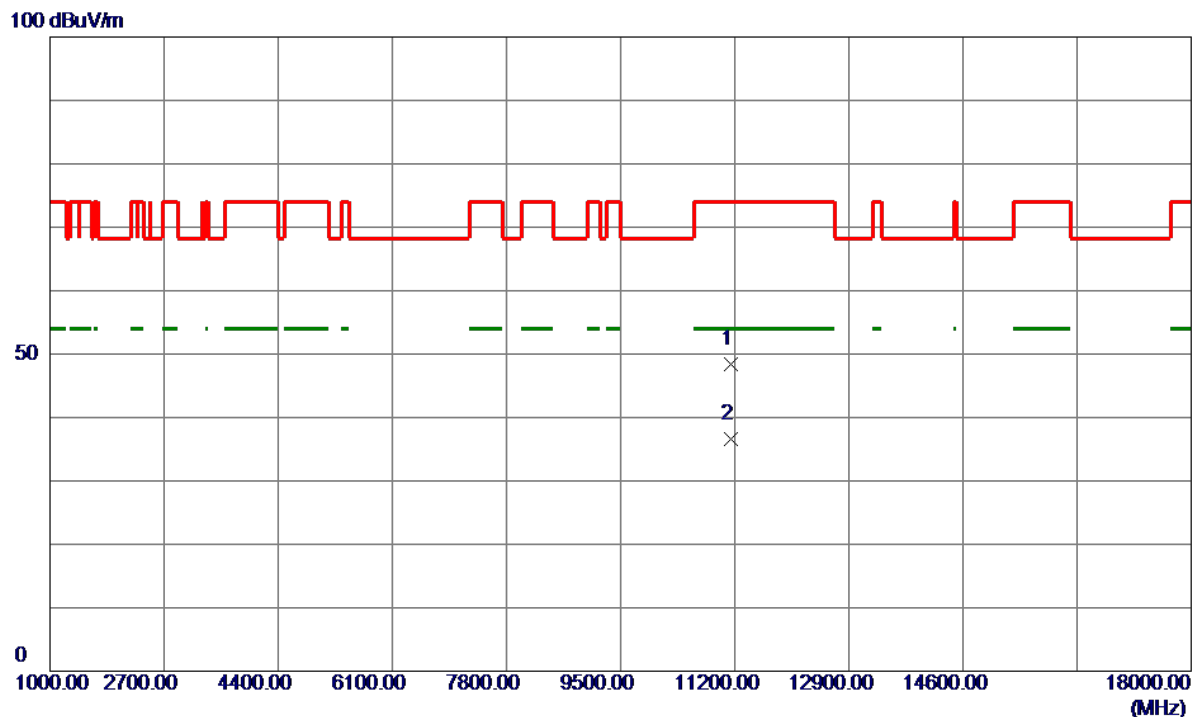


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11150.9200	35.88	12.46	48.34	74.00	-25.66	Peak	
2 *	11152.1000	24.19	12.47	36.66	54.00	-17.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

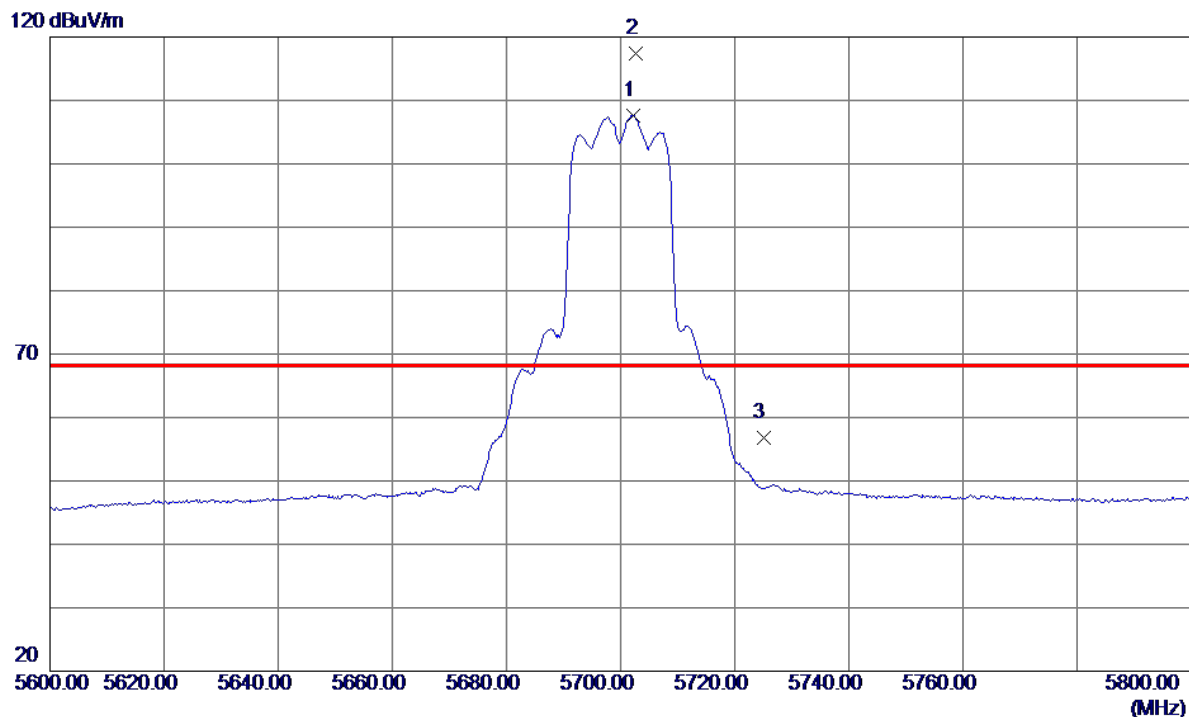


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5702.2000	90.72	16.97	107.69	999.00	-891.31	AVG	No Limit
2 *	5702.6000	100.50	16.97	117.47	68.20	49.27	Peak	No Limit
3	5725.0000	39.82	17.07	56.89	68.20	-11.31	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

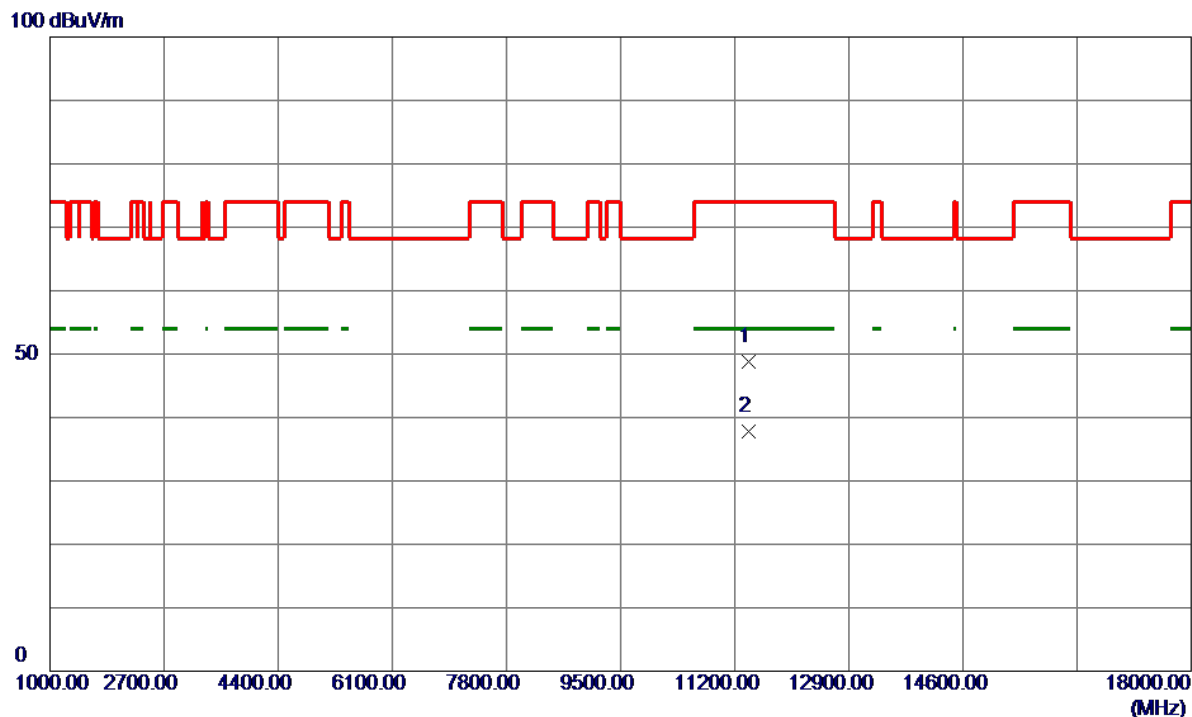


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11405.8800	35.21	13.55	48.76	74.00	-25.24	Peak	
2 *	11407.6000	24.19	13.56	37.75	54.00	-16.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

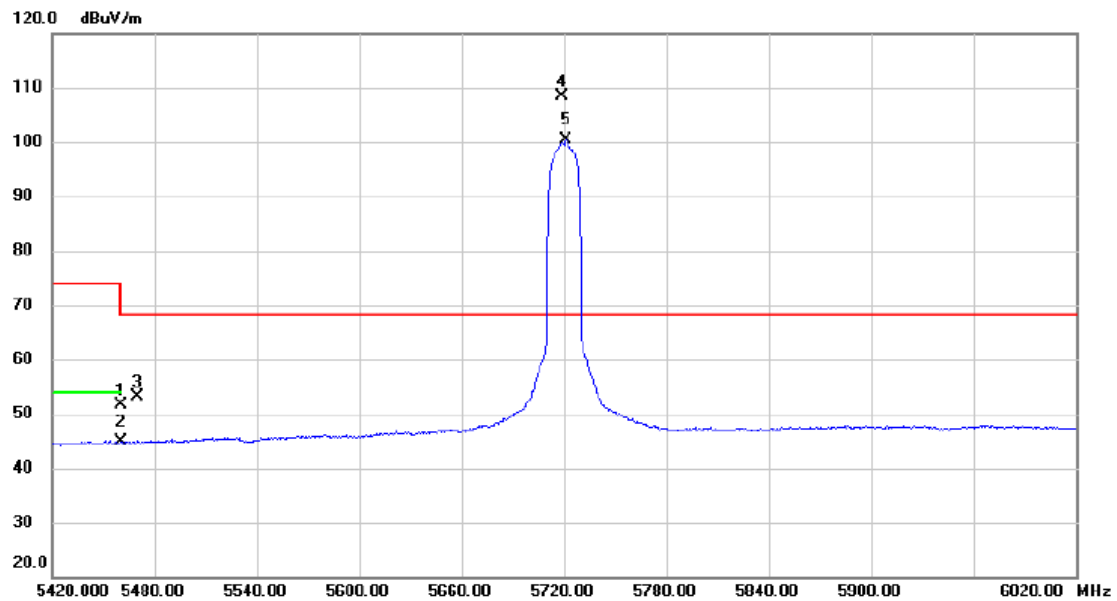


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	35.58	16.01	51.59	74.00	-22.41	peak	
2		5460.000	28.85	16.01	44.86	54.00	-9.14	AVG	
3		5470.000	37.04	16.02	53.06	68.20	-15.14	peak	
4	*	5718.800	91.45	17.05	108.50	68.20	40.30	peak	No Limit
5	X	5721.200	83.25	17.06	100.31	68.20	32.11	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

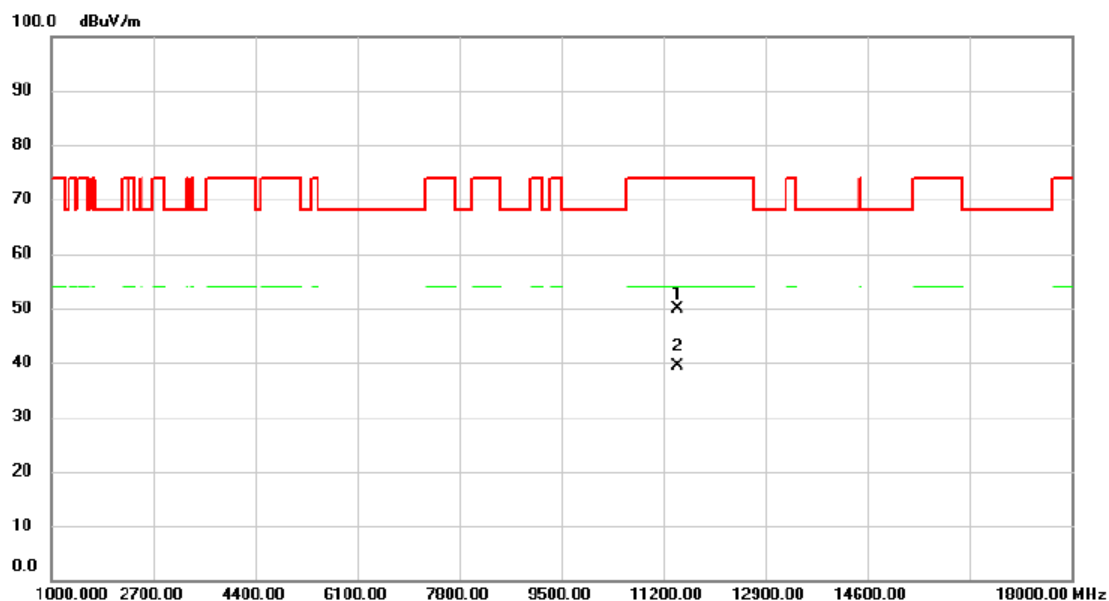


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11439.760	36.12	13.69	49.81	74.00	-24.19	peak	
2	*	11441.240	25.72	13.70	39.42	54.00	-14.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

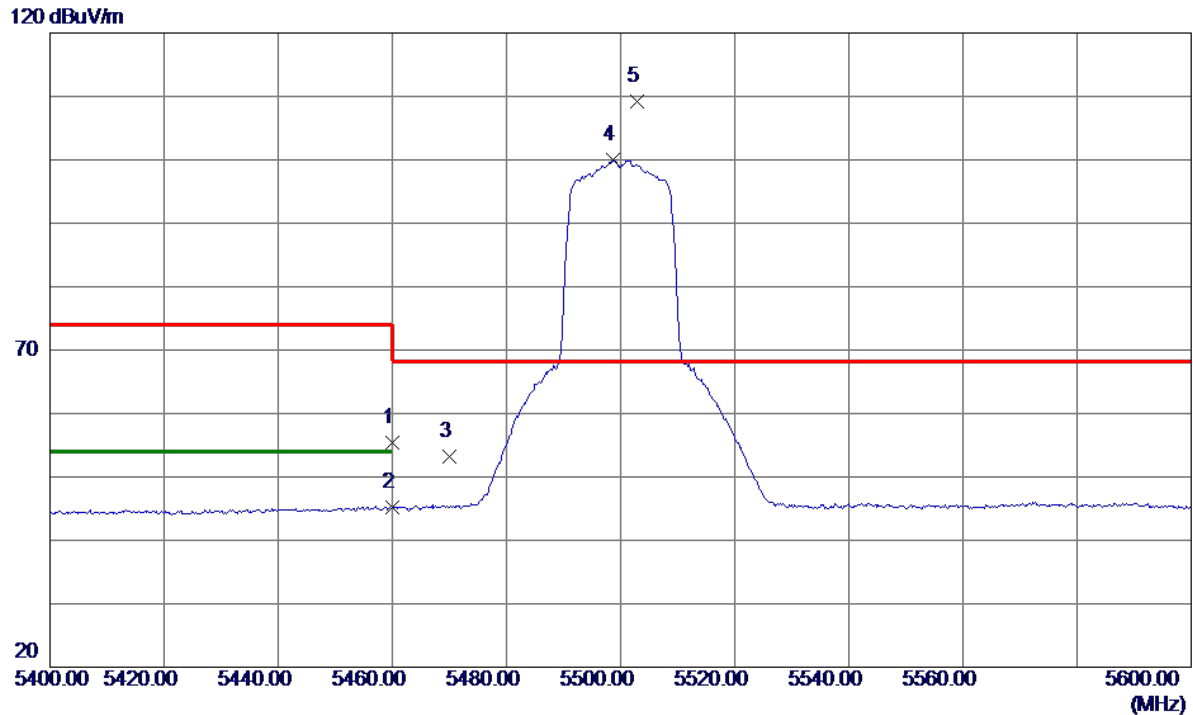


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.32	16.01	55.33	74.00	-18.67	Peak	
2	5460.0000	29.15	16.01	45.16	54.00	-8.84	AVG	
3	5470.0000	37.22	16.02	53.24	68.20	-14.96	Peak	
4	5498.6000	83.99	16.03	100.02	999.00	-898.98	AVG	No Limit
5 *	5502.8000	93.10	16.04	109.14	68.20	40.94	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

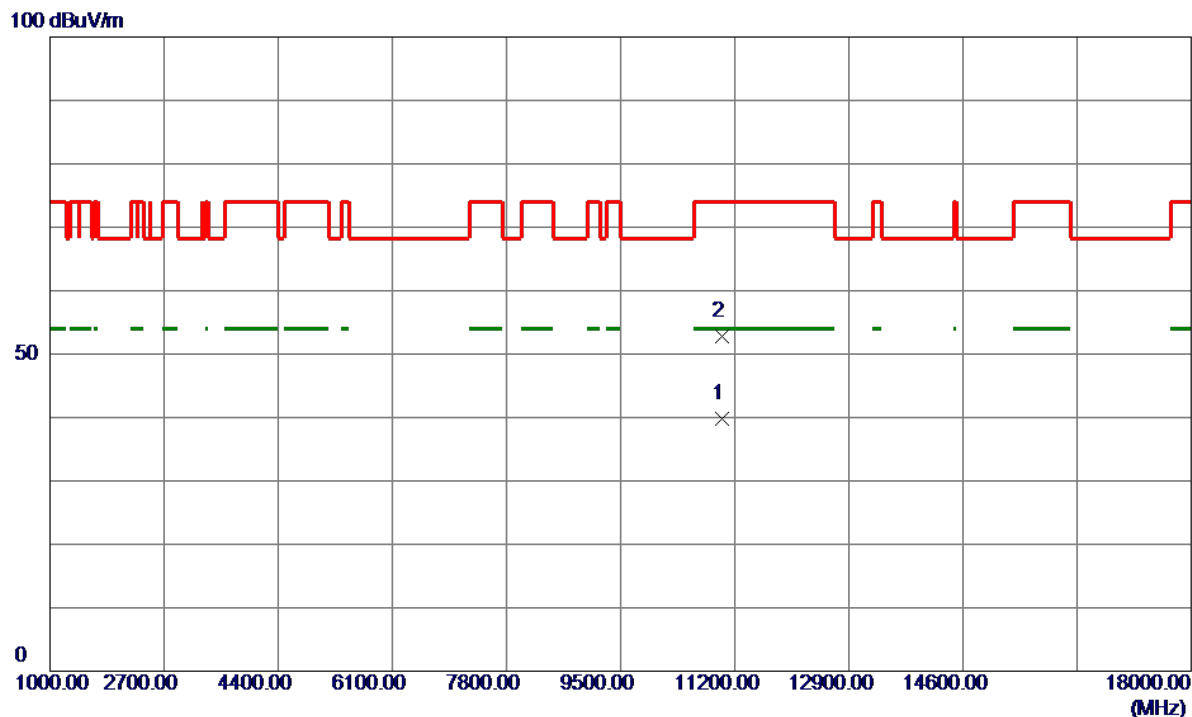


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11003.2200	28.06	11.83	39.89	54.00	-14.11	AVG	
2	11008.6200	40.96	11.86	52.82	74.00	-21.18	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

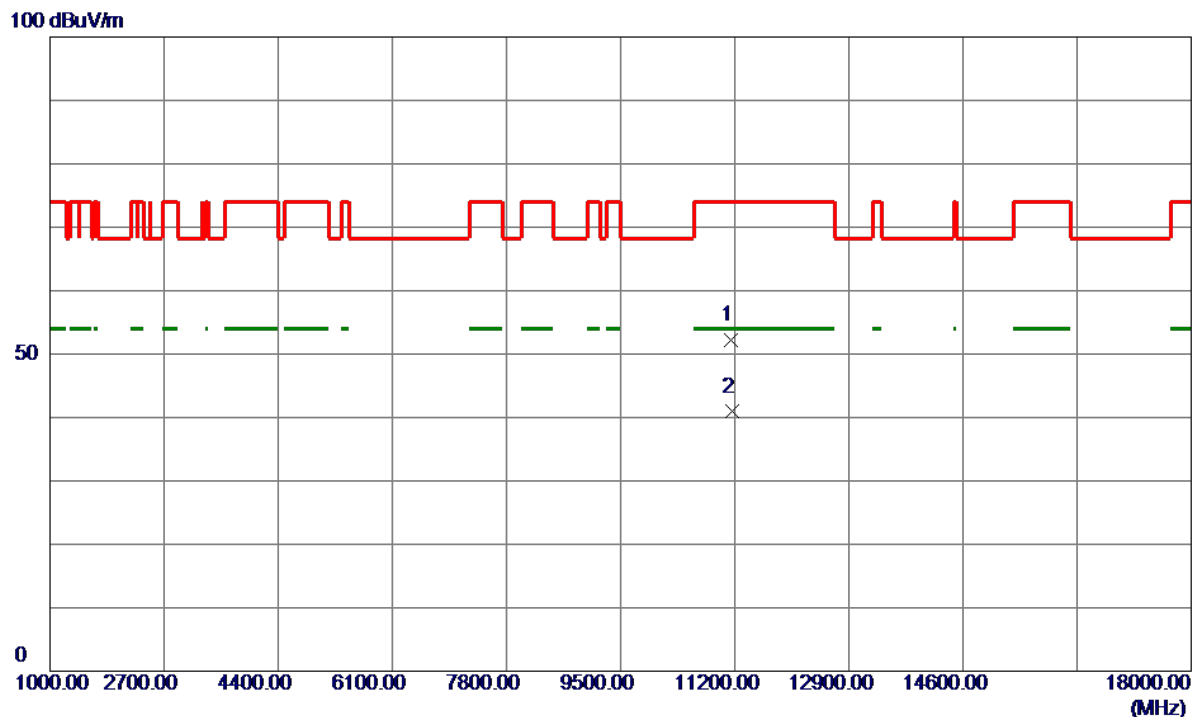


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11151.9600	39.64	12.47	52.11	74.00	-21.89	Peak	
2 *	11154.6000	28.42	12.48	40.90	54.00	-13.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

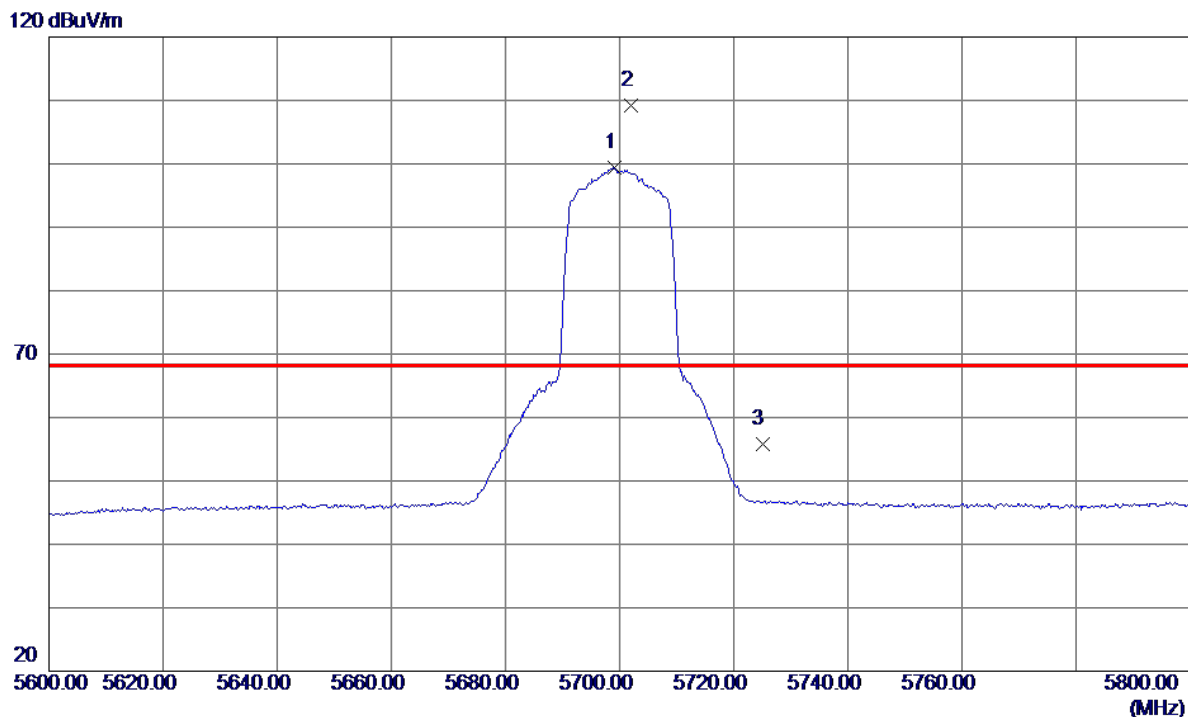


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5699.2000	82.37	16.95	99.32	999.00	-899.68	AVG	No Limit
2 *	5702.0000	92.16	16.97	109.13	68.20	40.93	Peak	No Limit
3	5725.0000	38.81	17.07	55.88	68.20	-12.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

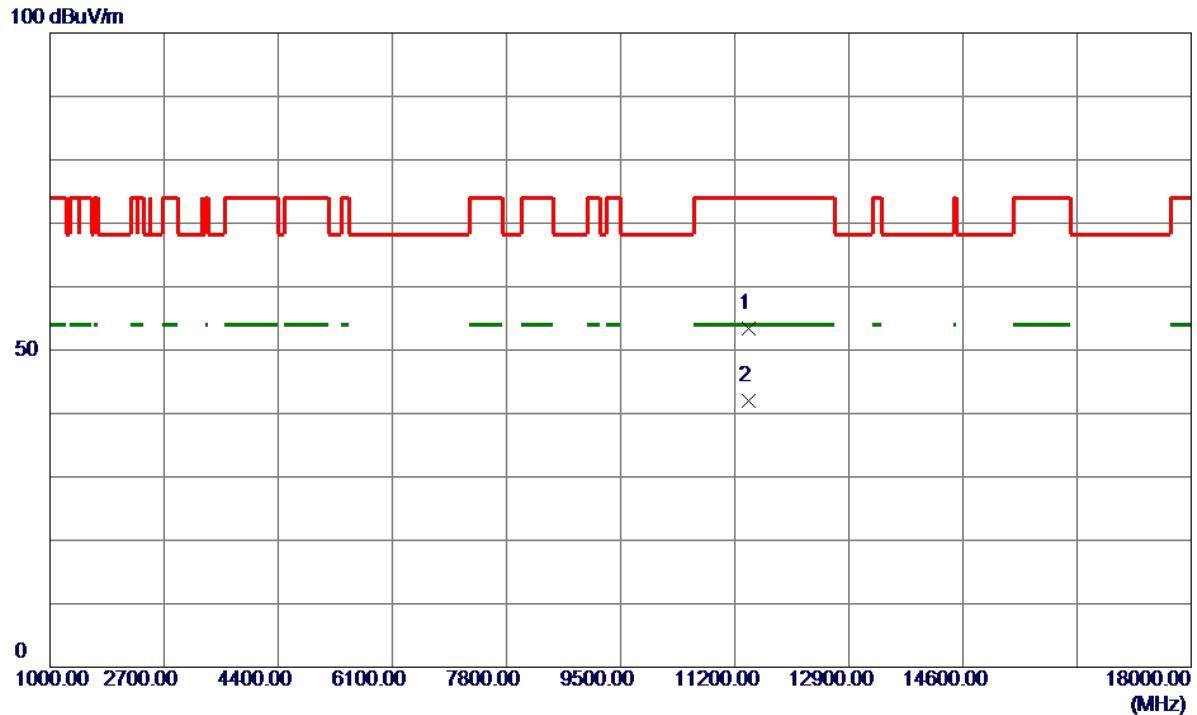


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11403.1200	39.94	13.54	53.48	74.00	-20.52	Peak	
2 *	11409.7200	28.36	13.57	41.93	54.00	-12.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

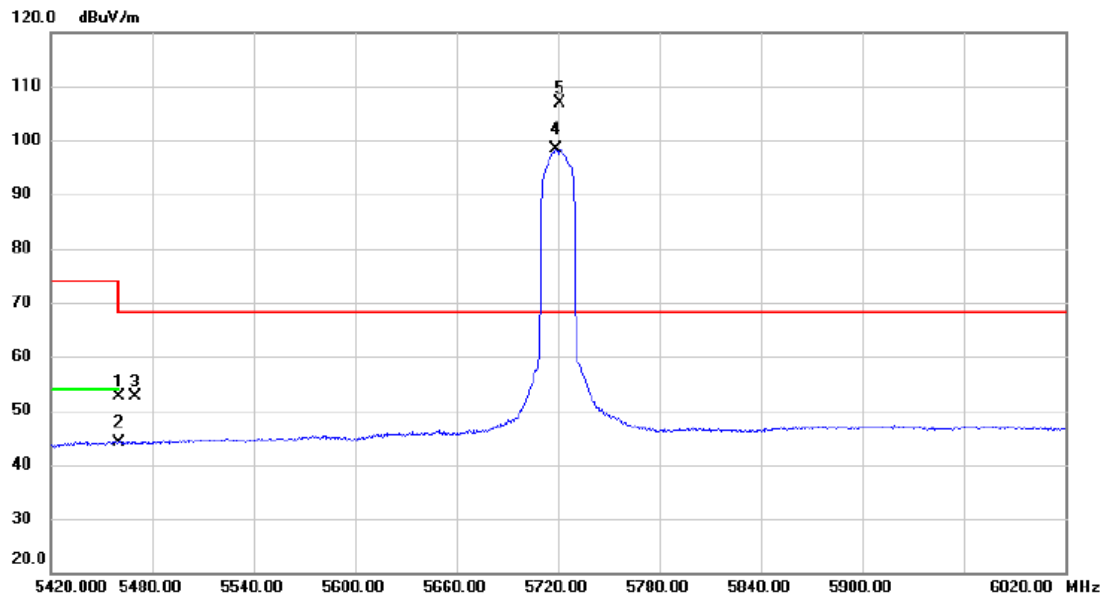


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	36.53	16.01	52.54	74.00	-21.46	peak	
2		5460.000	28.13	16.01	44.14	54.00	-9.86	AVG	
3		5470.000	36.59	16.02	52.61	68.20	-15.59	peak	
4	X	5718.800	81.28	17.05	98.33	68.20	30.13	AVG	No Limit
5	*	5721.200	89.78	17.06	106.84	68.20	38.64	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

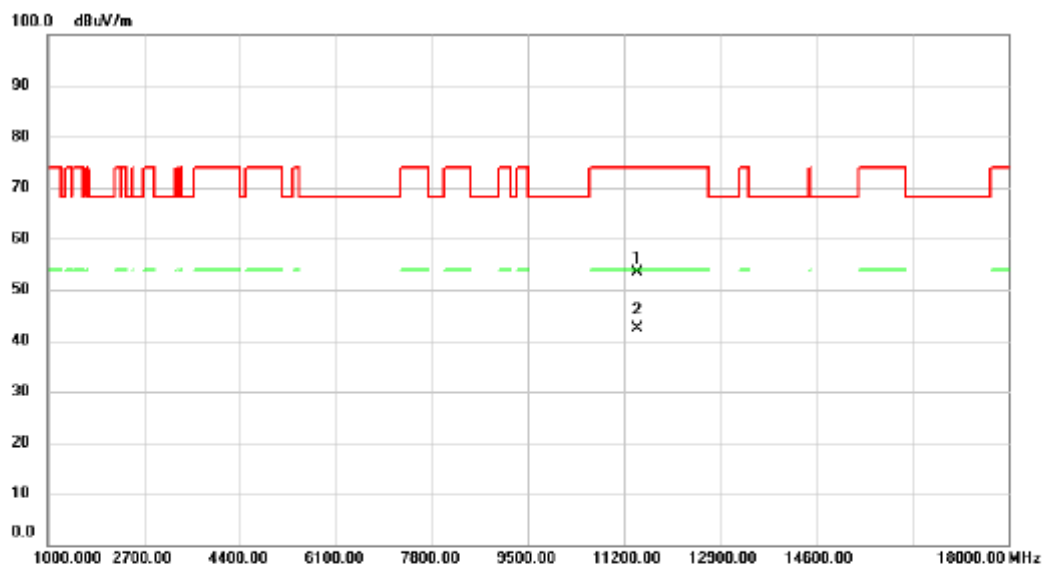


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11434.800	39.63	13.67	53.30	74.00	-20.70	peak	
2	*	11441.540	28.73	13.70	42.43	54.00	-11.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

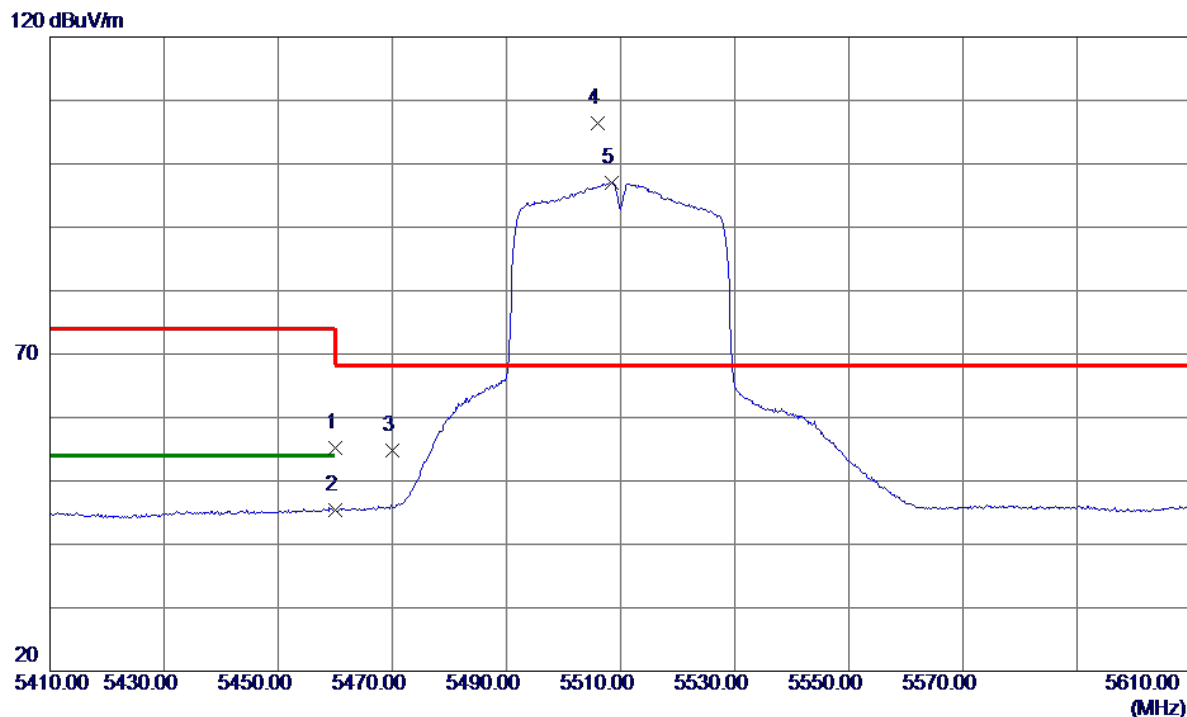


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.28	16.01	55.29	74.00	-18.71	Peak	
2	5460.0000	29.31	16.01	45.32	54.00	-8.68	AVG	
3	5470.0000	38.70	16.02	54.72	68.20	-13.48	Peak	
4 *	5506.0000	90.25	16.06	106.31	68.20	38.11	Peak	No Limit
5	5508.4000	81.01	16.07	97.08	999.00	-901.92	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

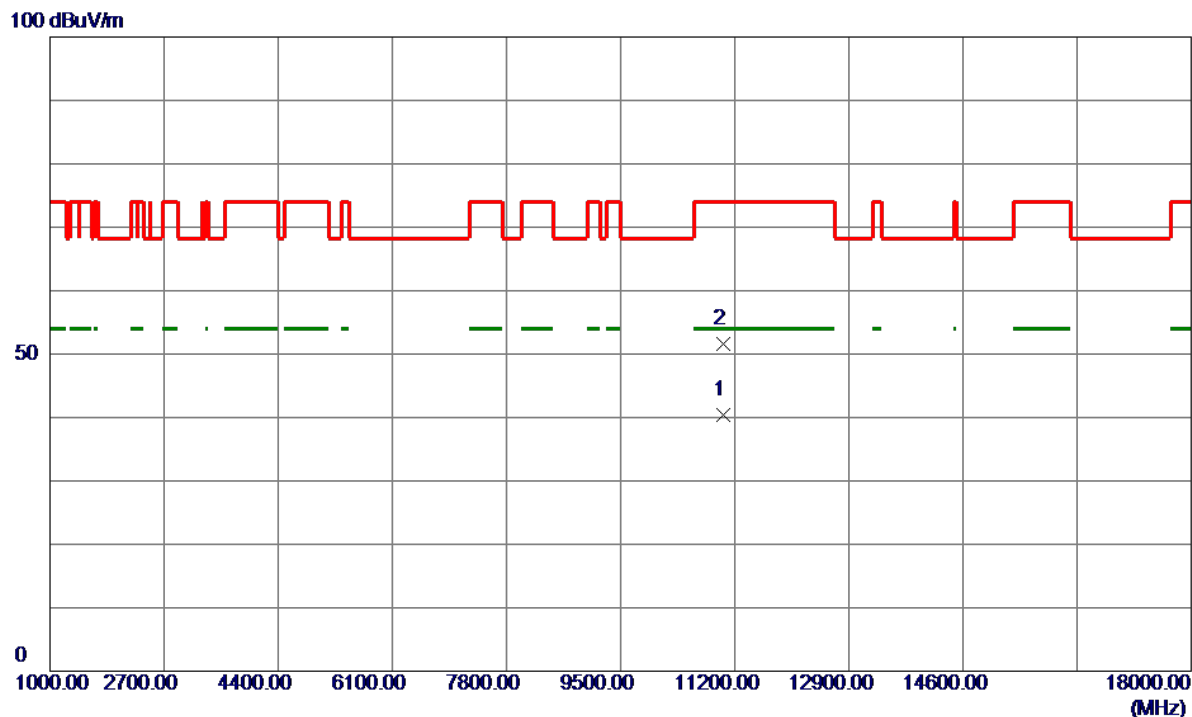


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11028.4000	28.40	11.94	40.34	54.00	-13.66	AVG	
2	11029.3800	39.73	11.94	51.67	74.00	-22.33	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

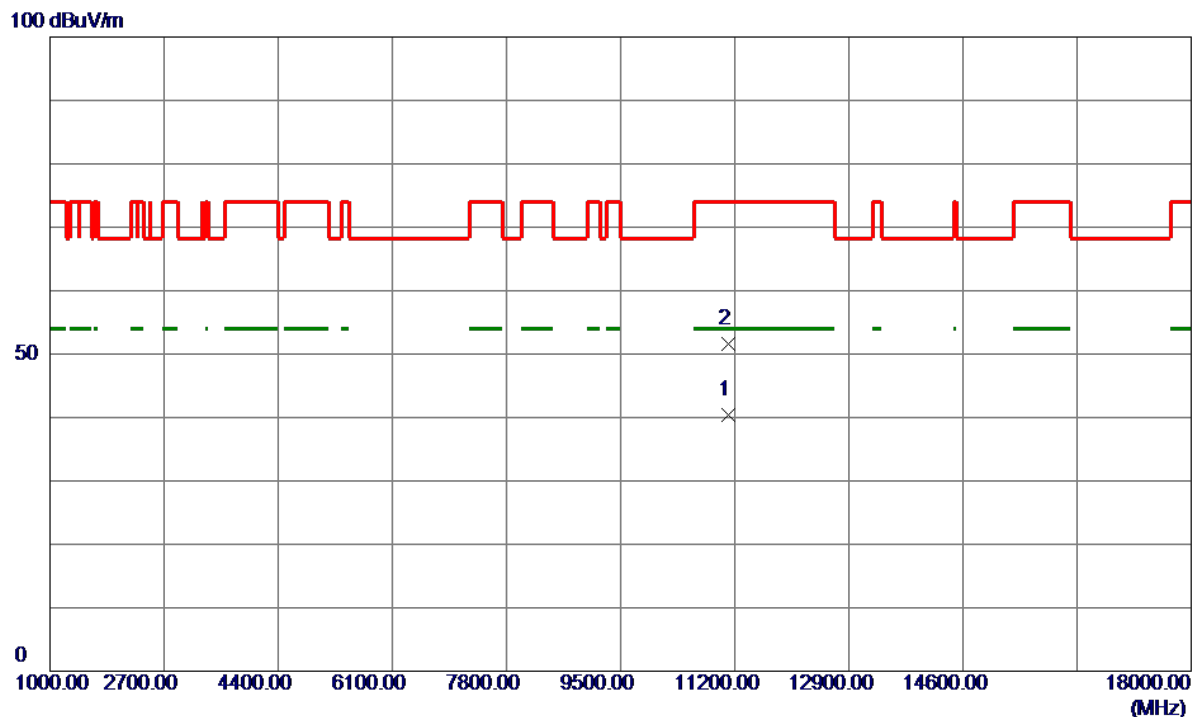


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11111.1400	28.08	12.29	40.37	54.00	-13.63	AVG	
2	11112.3000	39.23	12.30	51.53	74.00	-22.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

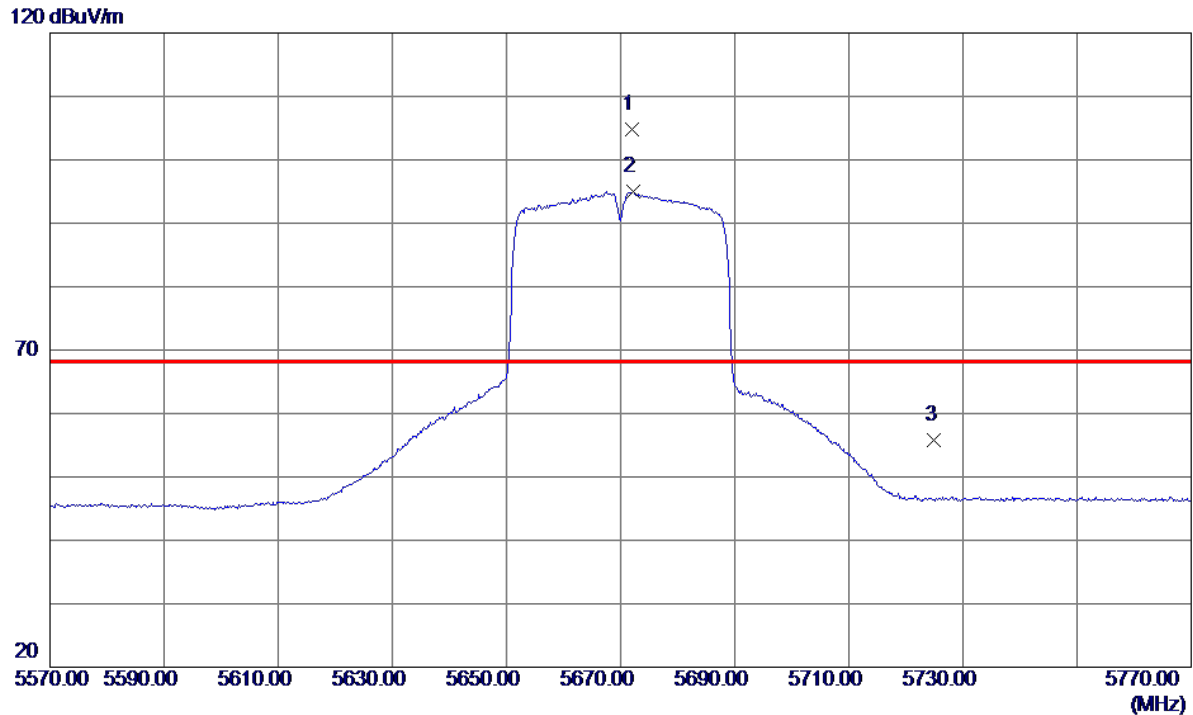


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5672.0000	87.92	16.83	104.75	68.20	36.55	Peak	No Limit
2	5672.2000	78.18	16.83	95.01	999.00	-903.99	AVG	No Limit
3	5725.0000	38.81	17.07	55.88	68.20	-12.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

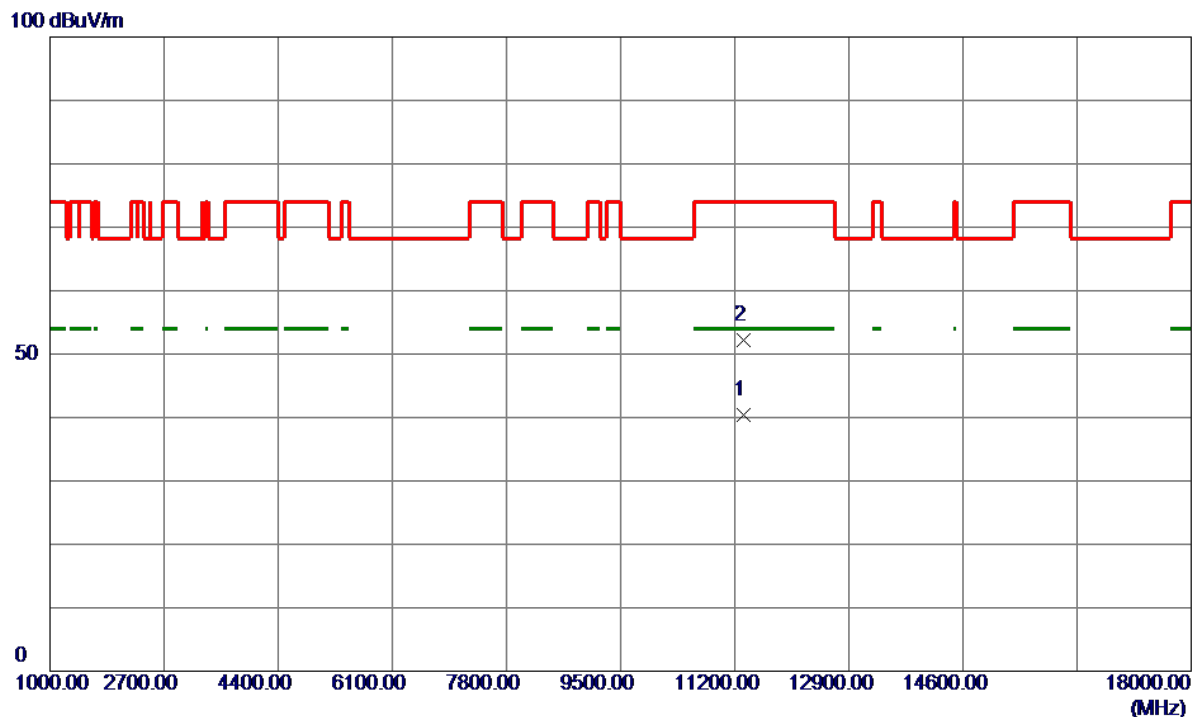


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11341.0800	27.17	13.27	40.44	54.00	-13.56	AVG	
2	11341.2400	38.90	13.27	52.17	74.00	-21.83	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

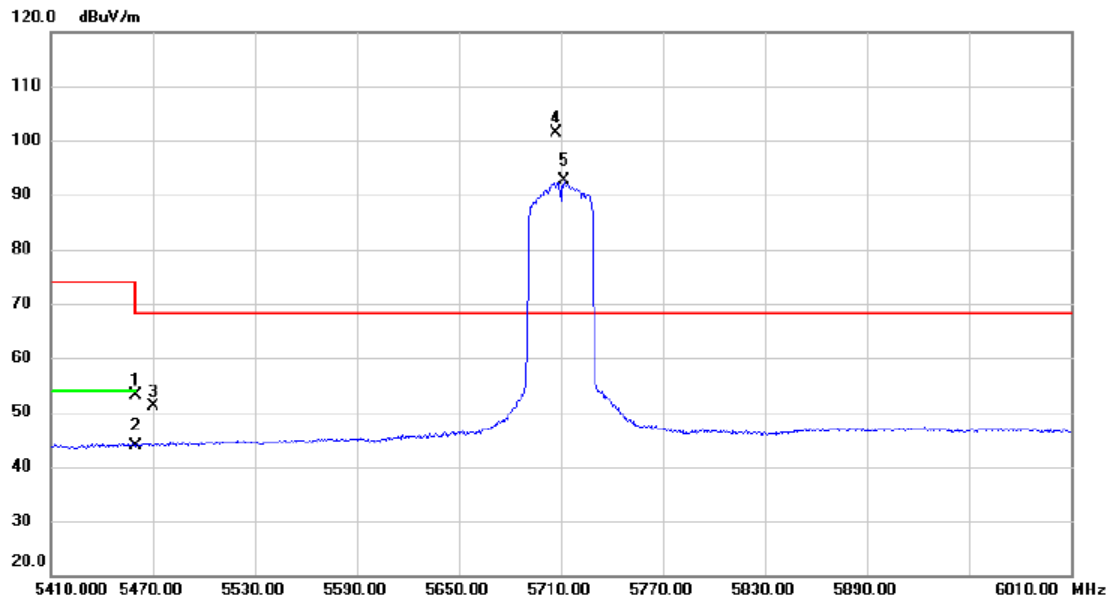


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.22	16.01	53.23	74.00	-20.77	peak	
2		5460.000	27.92	16.01	43.93	54.00	-10.07	AVG	
3		5470.000	35.08	16.02	51.10	68.20	-17.10	peak	
4	*	5707.000	84.37	16.99	101.36	68.20	33.16	peak	No Limit
5	X	5712.400	75.52	17.01	92.53	68.20	24.33	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

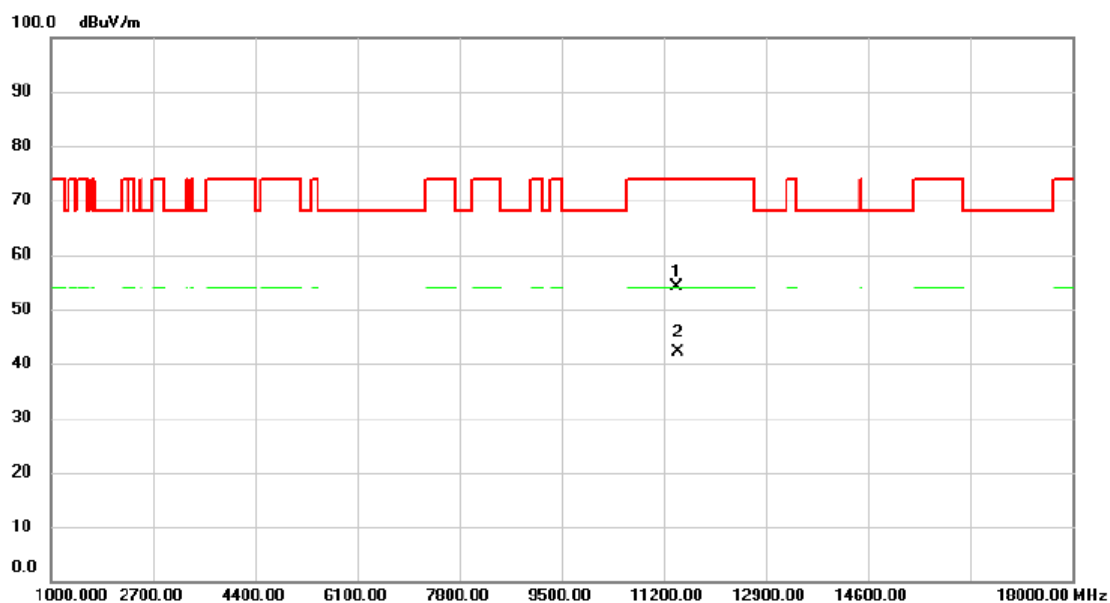


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11424.920	40.40	13.63	54.03	74.00	-19.97	peak	
2	*	11428.580	28.53	13.64	42.17	54.00	-11.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

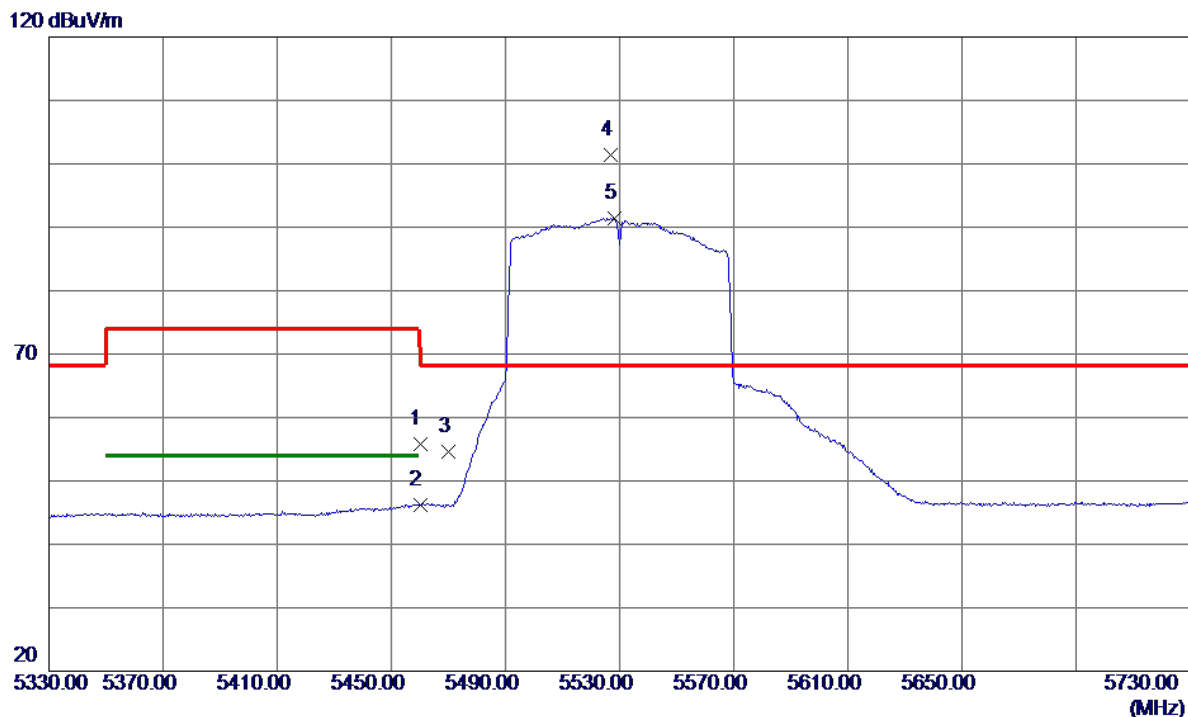


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	39.75	16.01	55.76	74.00	-18.24	Peak	
2	5460.0000	30.24	16.01	46.25	54.00	-7.75	AVG	
3	5470.0000	38.55	16.02	54.57	68.20	-13.63	Peak	
4 *	5526.8000	85.31	16.15	101.46	68.20	33.26	Peak	No Limit
5	5528.4000	75.31	16.16	91.47	999.00	-907.53	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

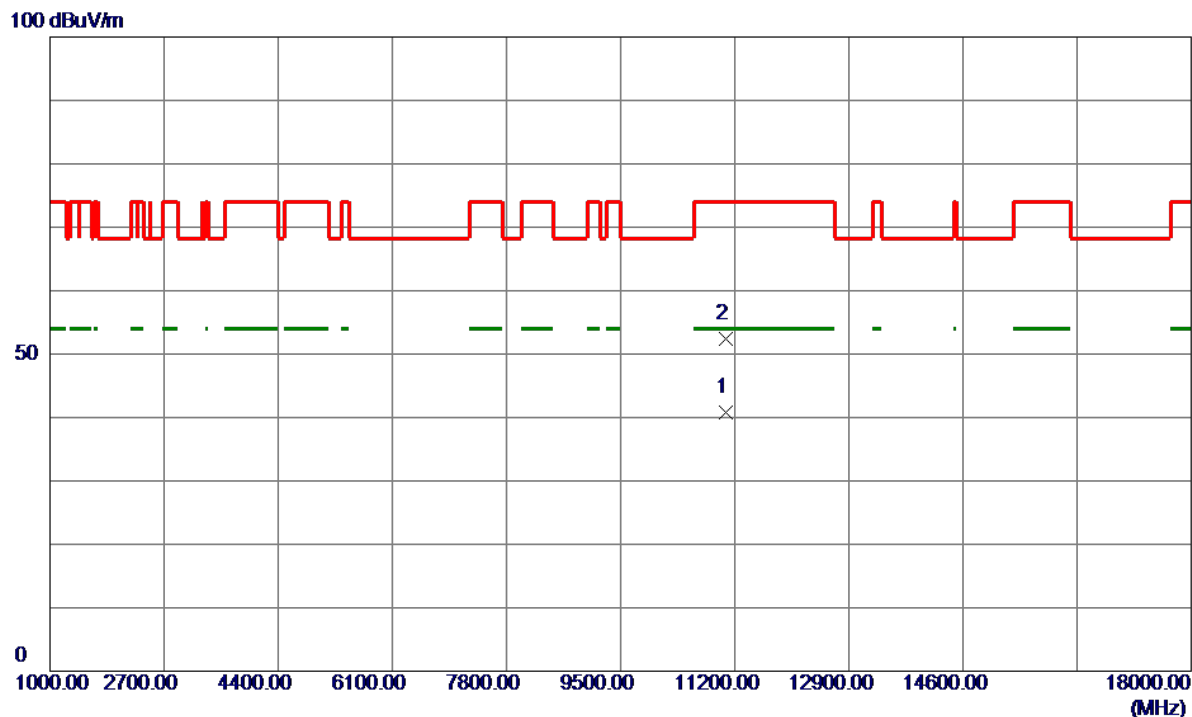


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11061.7800	28.70	12.08	40.78	54.00	-13.22	AVG	
2	11062.5800	40.22	12.09	52.31	74.00	-21.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

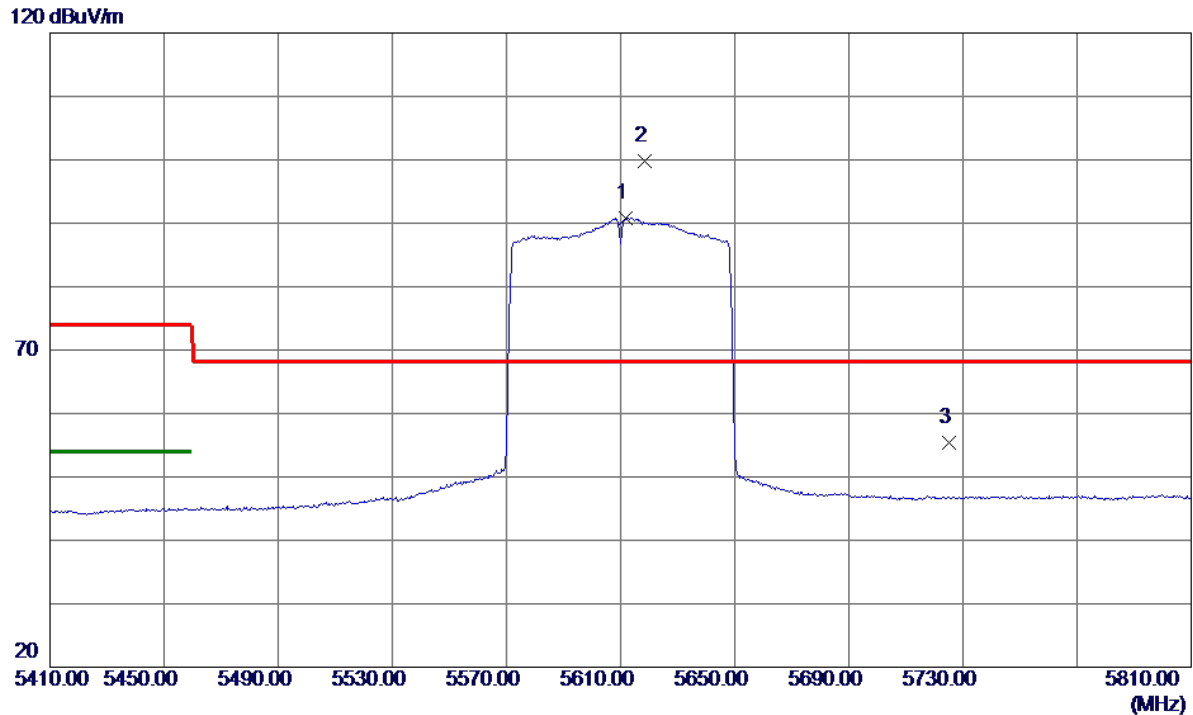


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5611.6000	74.34	16.55	90.89	999.00	-908.11	AVG	No Limit
2 *	5618.4000	83.28	16.58	99.86	68.20	31.66	Peak	No Limit
3	5725.0000	38.32	17.07	55.39	68.20	-12.81	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

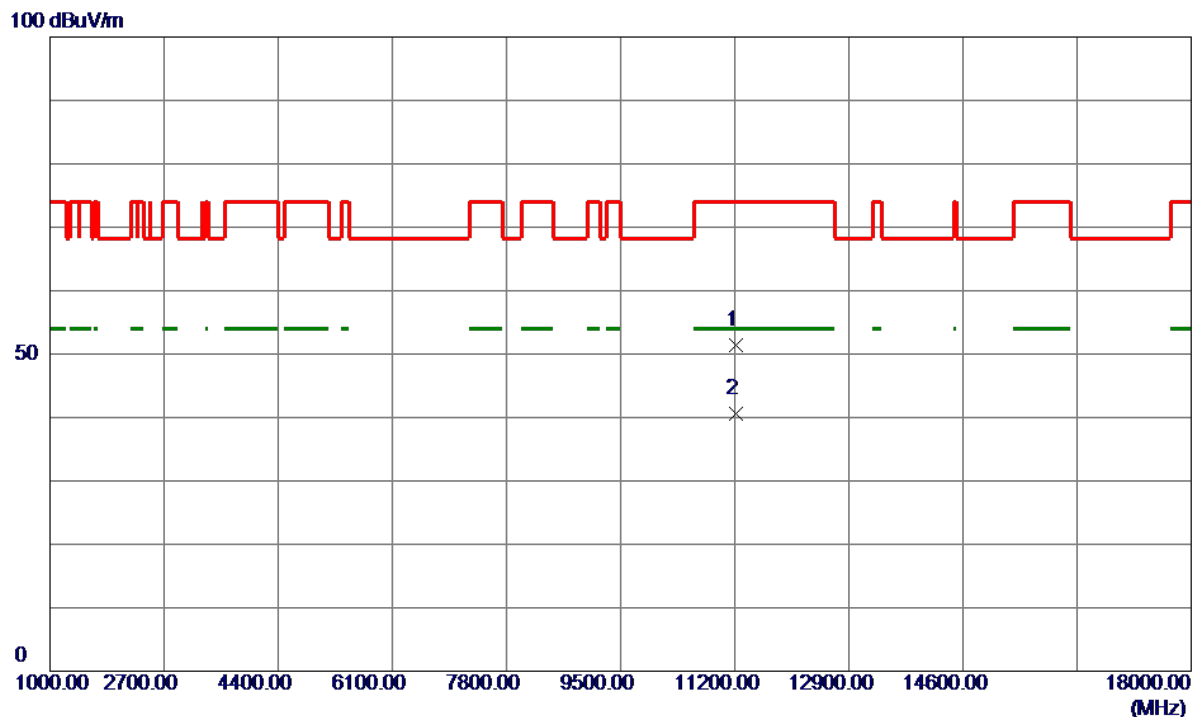


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11221.1600	38.58	12.76	51.34	74.00	-22.66	Peak	
2 *	11221.7600	27.81	12.76	40.57	54.00	-13.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

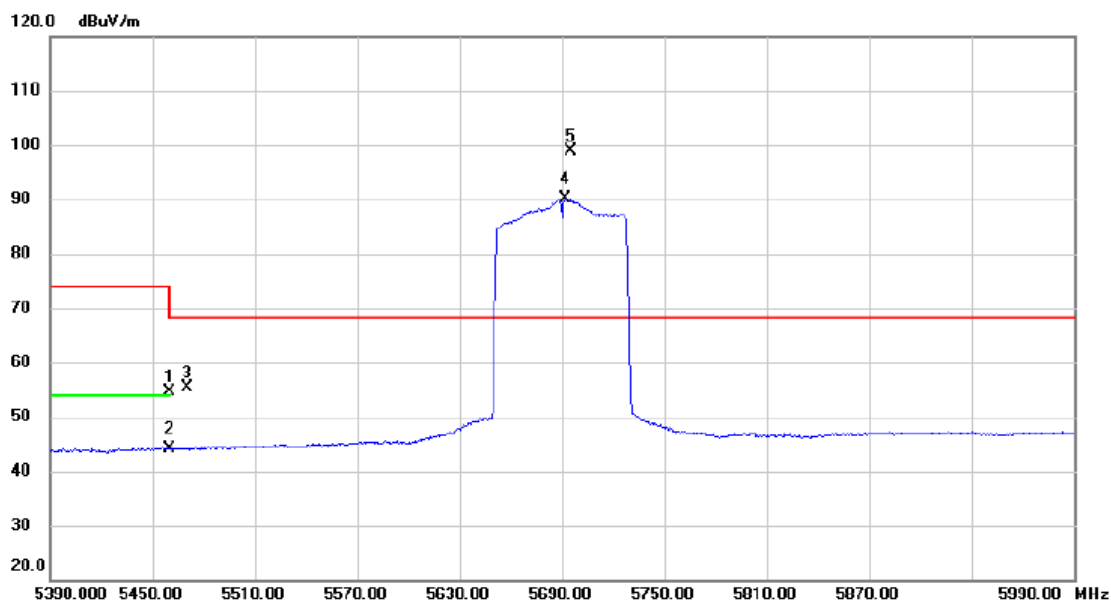


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.63	16.01	54.64	74.00	-19.36	peak	
2		5460.000	28.20	16.01	44.21	54.00	-9.79	AVG	
3		5470.000	39.29	16.02	55.31	68.20	-12.89	peak	
4	X	5691.800	73.26	16.91	90.17	68.20	21.97	AVG	No Limit
5	*	5695.400	82.07	16.93	99.00	68.20	30.80	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

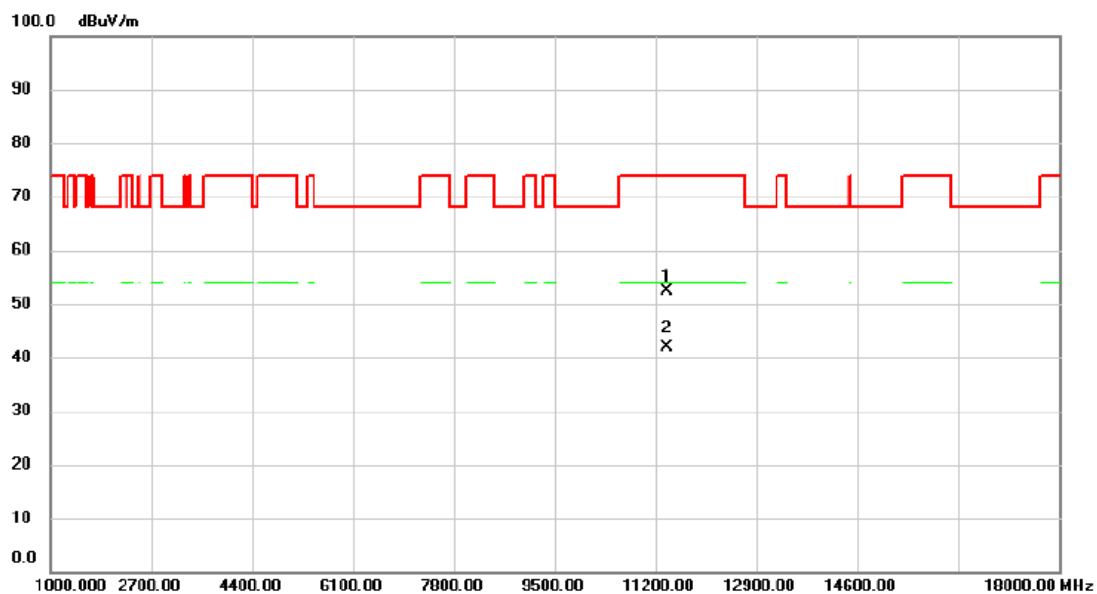


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11385.820	38.94	13.46	52.40	74.00	-21.60	peak	
2	*	11388.080	28.32	13.48	41.80	54.00	-12.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

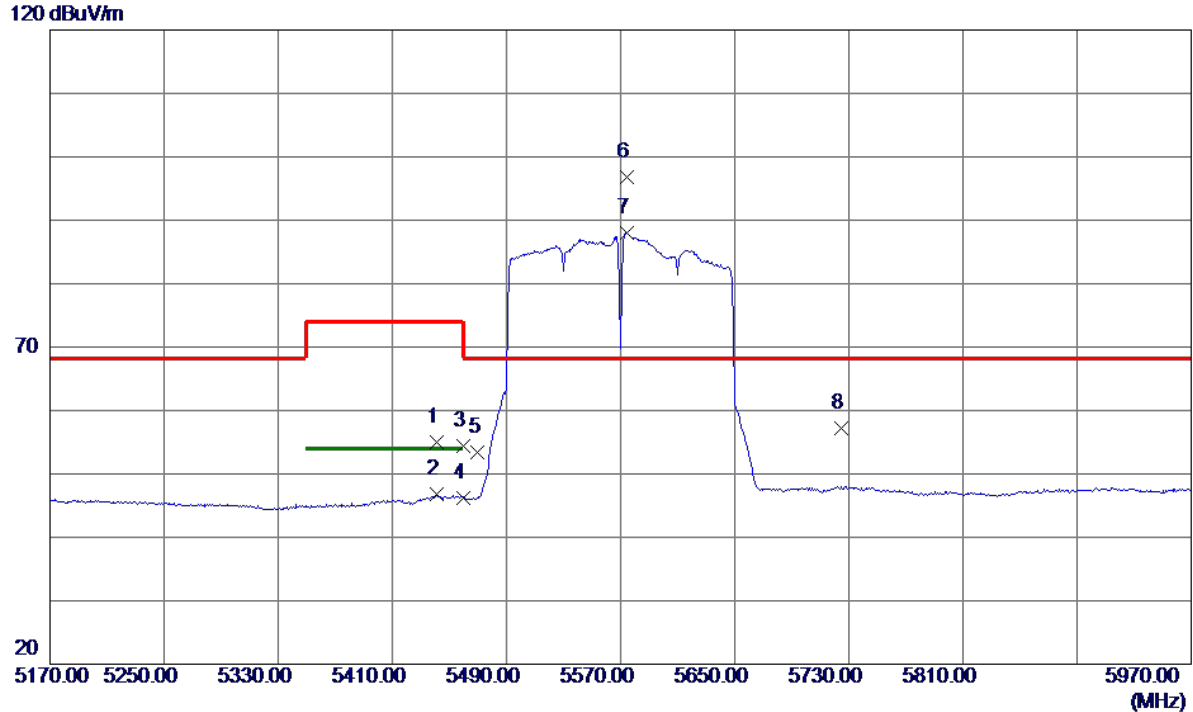


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5441.2000	38.91	16.01	54.92	74.00	-19.08	Peak	
2	5441.2000	30.71	16.01	46.72	54.00	-7.28	AVG	
3	5460.0000	38.45	16.01	54.46	74.00	-19.54	Peak	
4	5460.0000	30.11	16.01	46.12	54.00	-7.88	AVG	
5	5470.0000	37.34	16.02	53.36	68.20	-14.84	Peak	
6 *	5574.8000	80.44	16.38	96.82	68.20	28.62	Peak	No Limit
7	5574.8000	71.62	16.38	88.00	999.00	-911.00	AVG	No Limit
8	5725.0000	40.05	17.07	57.12	68.20	-11.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

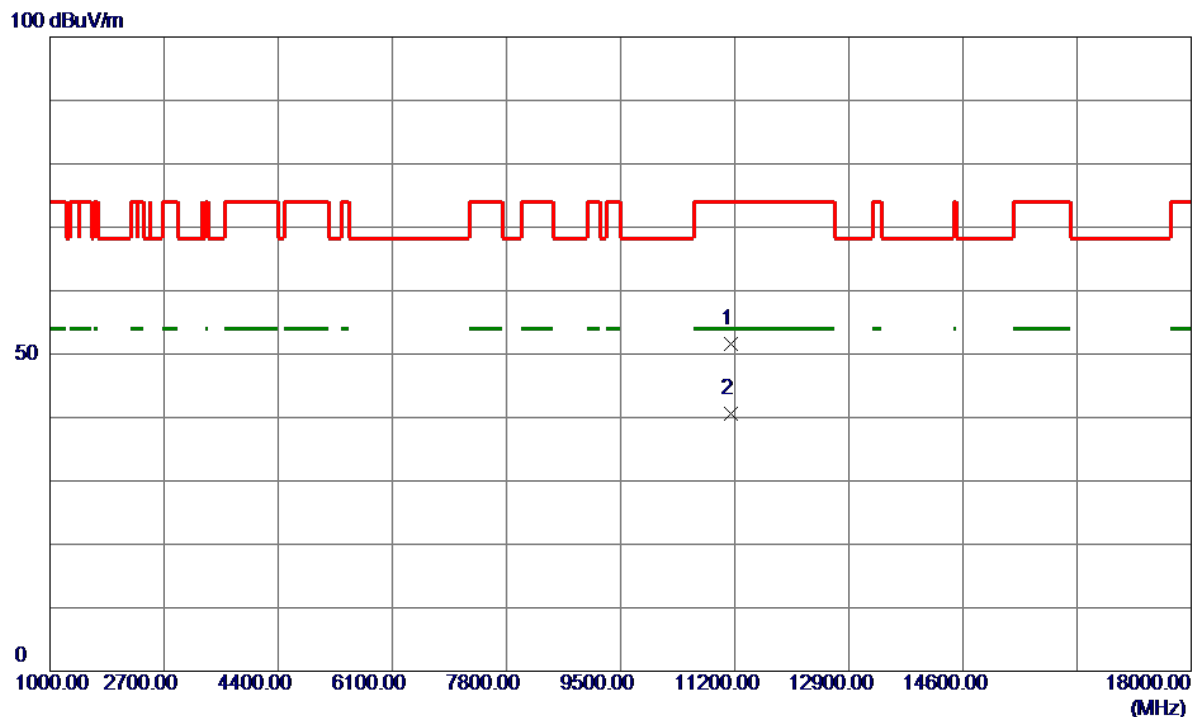


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11134.8800	39.20	12.39	51.59	74.00	-22.41	Peak	
2 *	11148.7000	28.08	12.45	40.53	54.00	-13.47	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

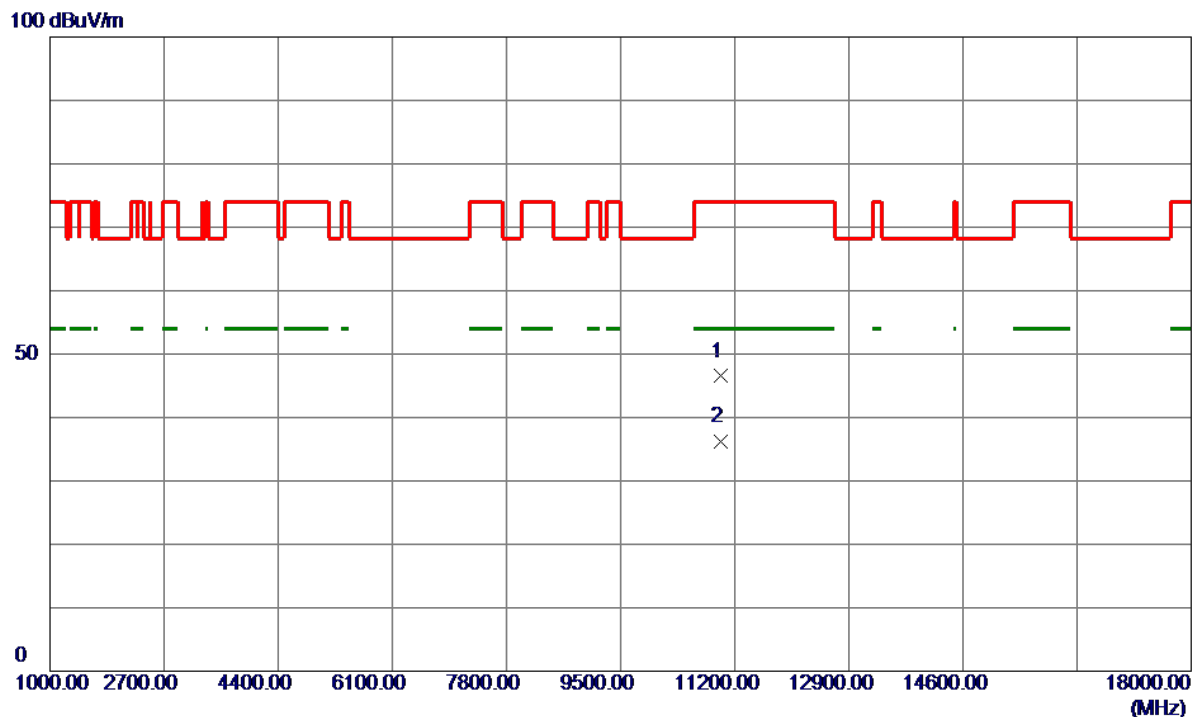


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.5400	34.68	11.82	46.50	74.00	-27.50	Peak	
2 *	11001.2600	24.28	11.83	36.11	54.00	-17.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

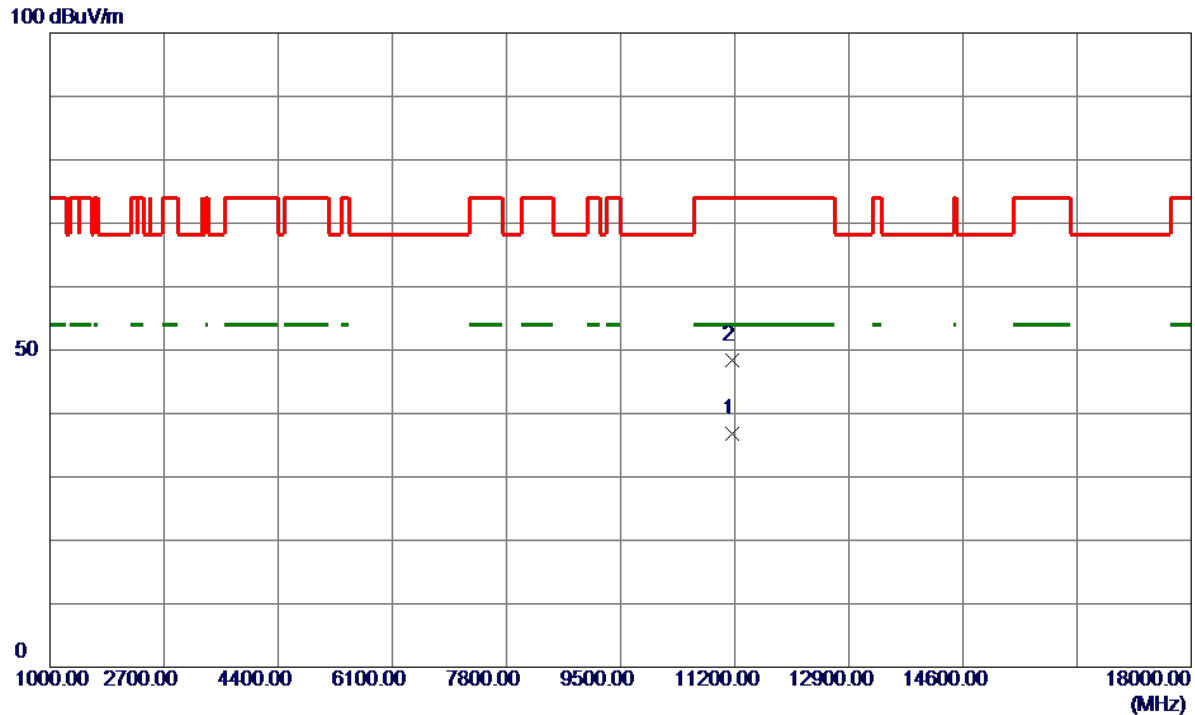


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11154.0199	24.36	12.48	36.84	54.00	-17.16	AVG	
2	11166.2800	35.93	12.53	48.46	74.00	-25.54	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

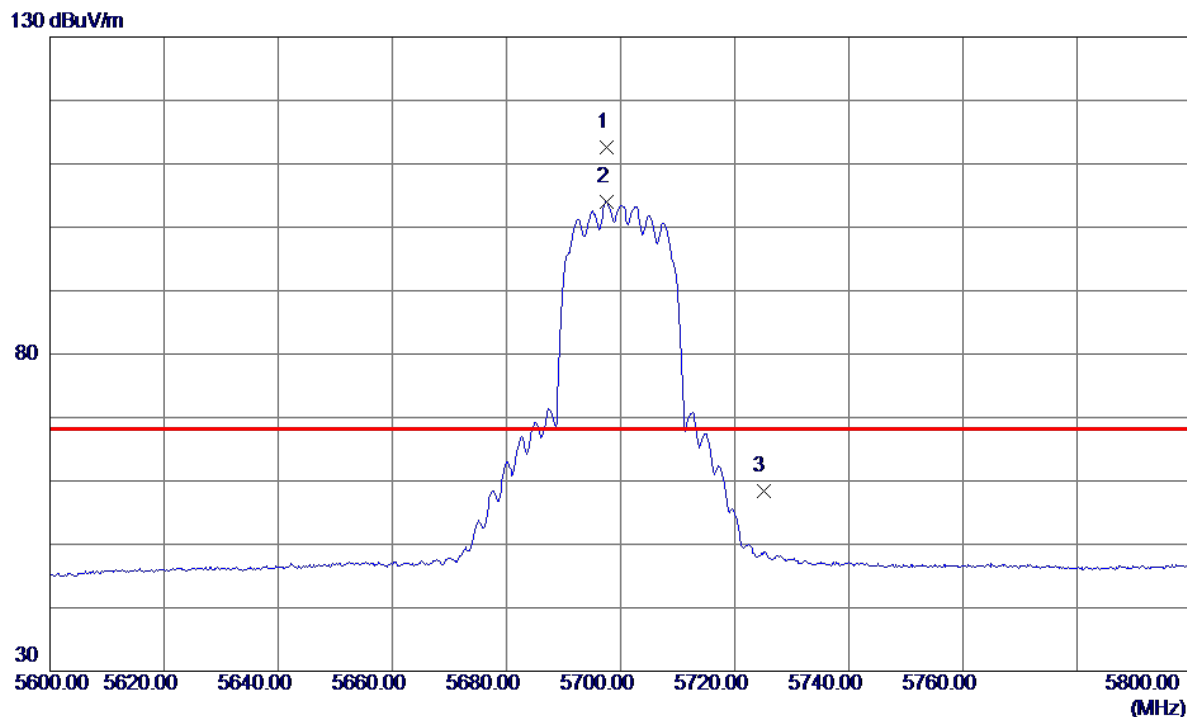


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5697.6000	95.60	16.95	112.55	68.20	44.35	Peak	No Limit
2	5697.6000	87.12	16.95	104.07	999.00	-894.93	AVG	No Limit
3	5725.0000	41.25	17.07	58.32	68.20	-9.88	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

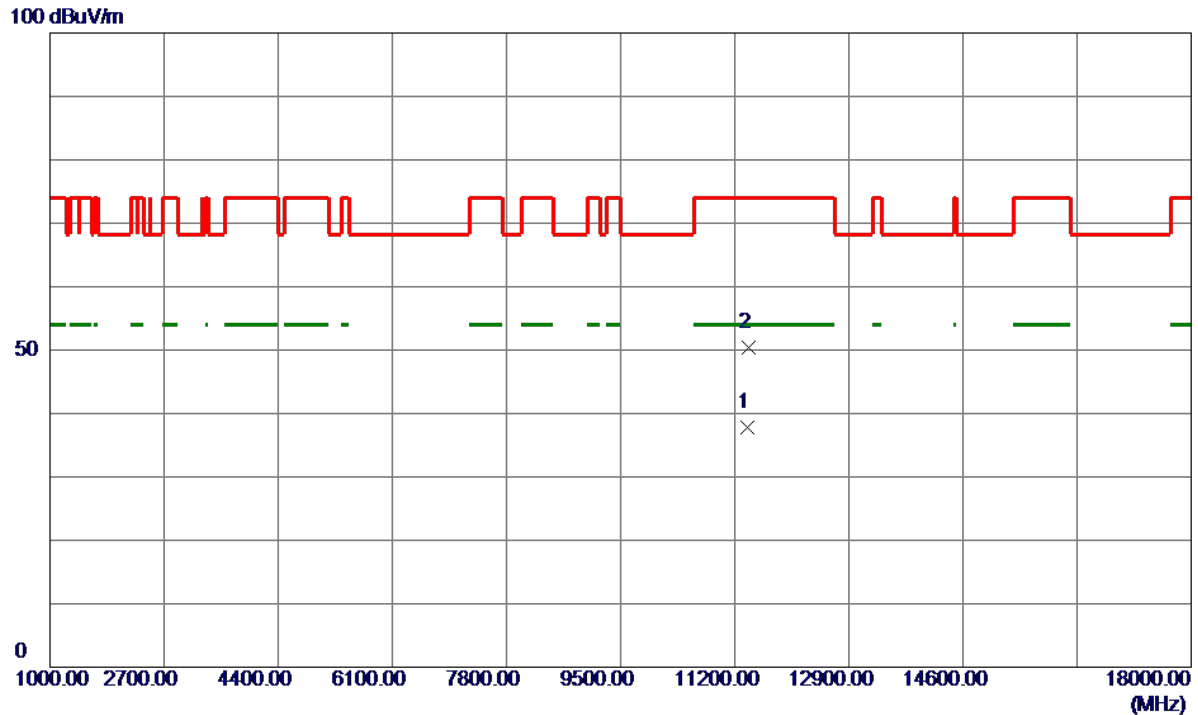


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11390.4000	24.27	13.48	37.75	54.00	-16.25	AVG	
2	11406.6000	36.85	13.55	50.40	74.00	-23.60	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

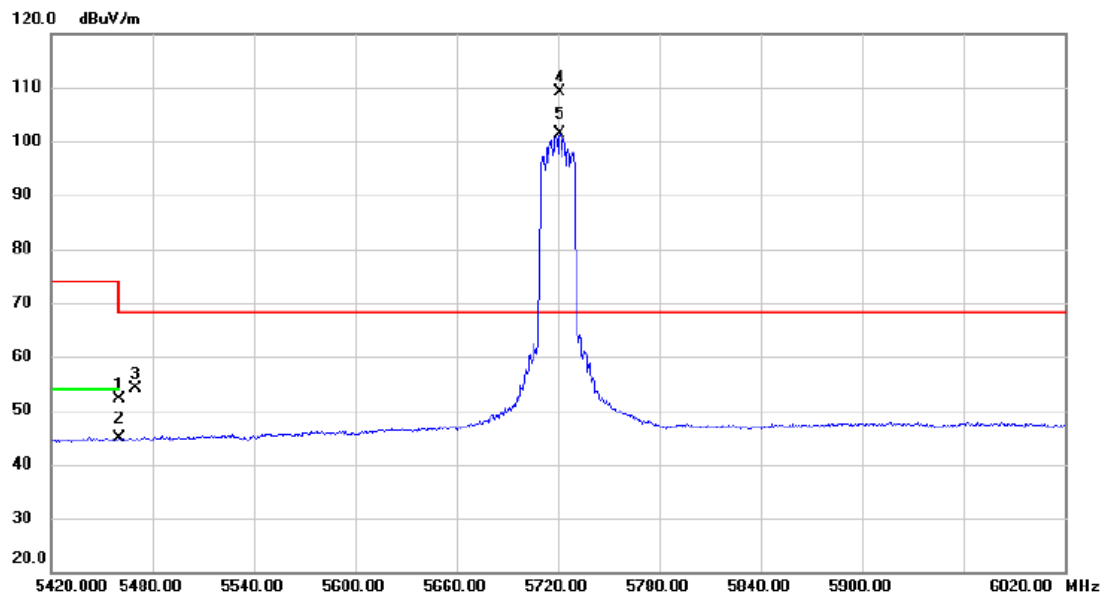


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5460.000	36.17	16.01	52.18	74.00	-21.82	peak	
2		5460.000	28.81	16.01	44.82	54.00	-9.18	AVG	
3		5470.000	38.00	16.02	54.02	68.20	-14.18	peak	
4	*	5721.200	92.17	17.06	109.23	68.20	41.03	peak	No Limit
5	X	5721.200	84.38	17.06	101.44	68.20	33.24	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

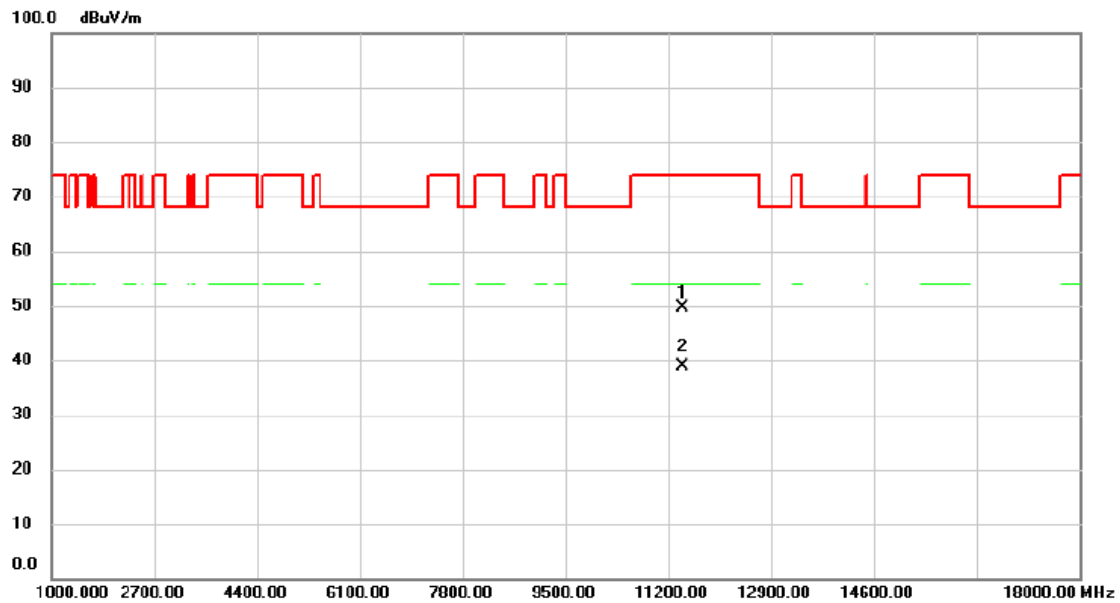


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11433.260	35.92	13.66	49.58	74.00	-24.42	peak	
2	*	11446.720	25.20	13.73	38.93	54.00	-15.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

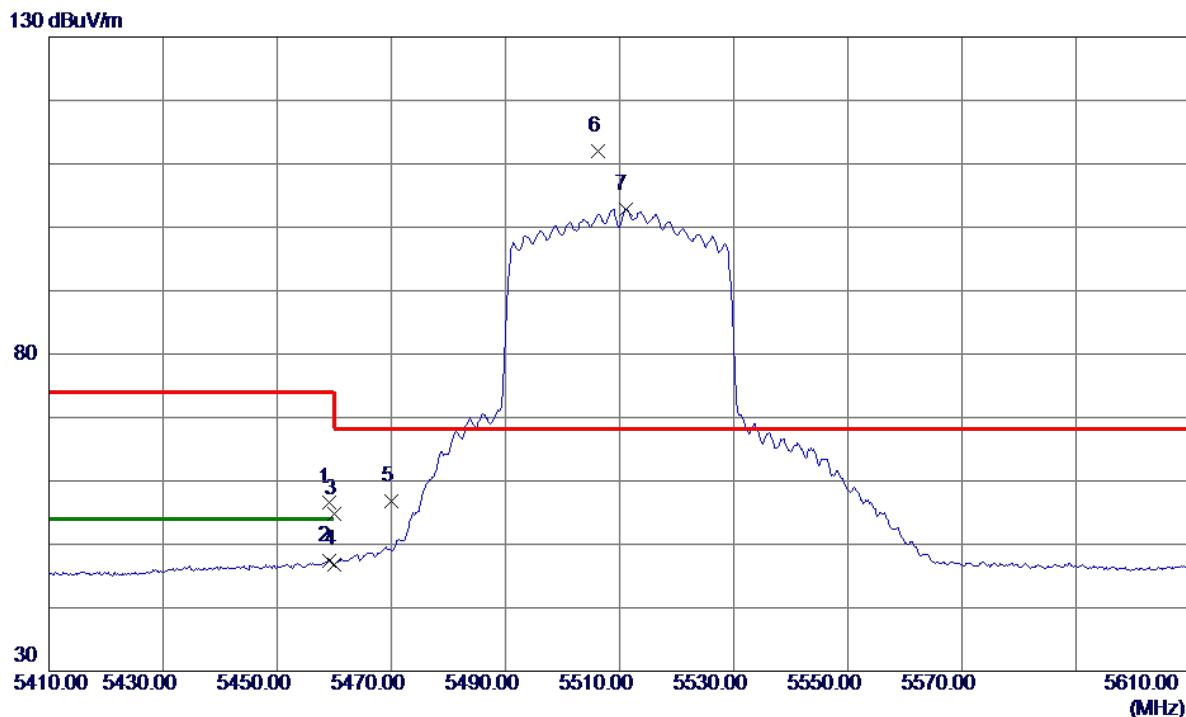


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.0000	40.64	16.01	56.65	74.00	-17.35	Peak	
2	5459.0000	31.45	16.01	47.46	54.00	-6.54	AVG	
3	5460.0000	38.77	16.01	54.78	74.00	-19.22	Peak	
4	5460.0000	30.82	16.01	46.83	54.00	-7.17	AVG	
5	5470.0000	40.72	16.02	56.74	68.20	-11.46	Peak	
6 *	5506.2000	95.87	16.06	111.93	68.20	43.73	Peak	No Limit
7	5511.0000	86.79	16.08	102.87	999.00	-896.13	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

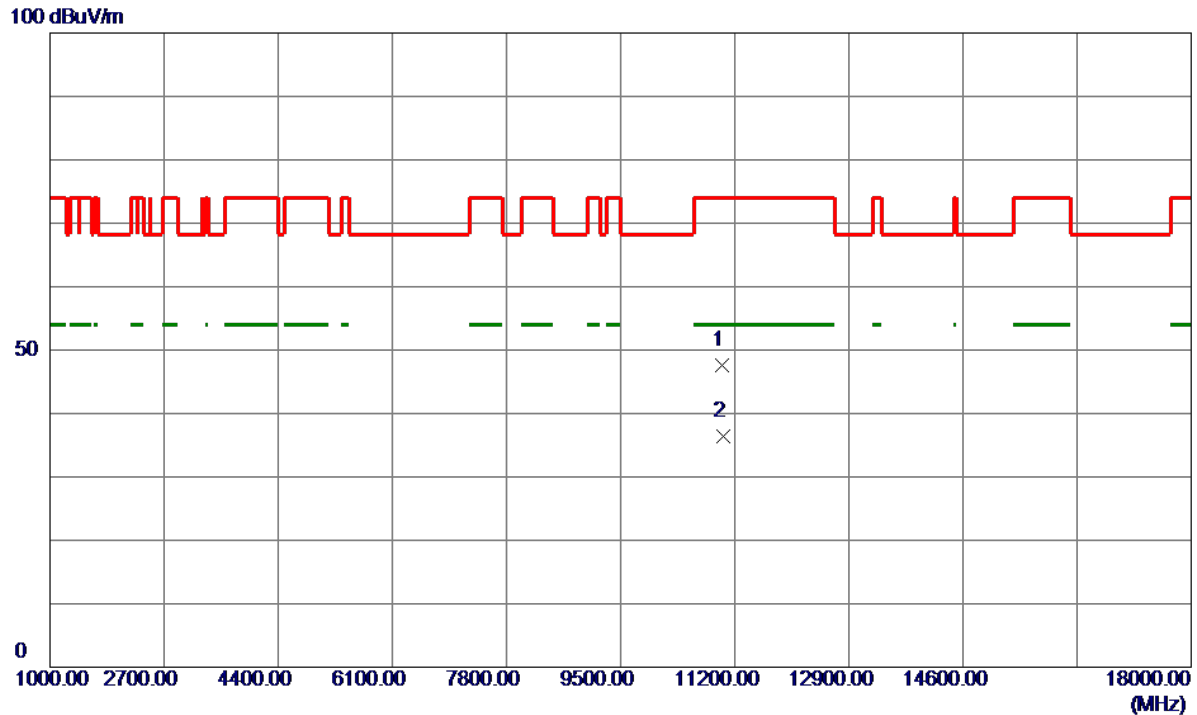


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11015.4800	35.76	11.89	47.65	74.00	-26.35	Peak	
2 *	11026.5599	24.44	11.93	36.37	54.00	-17.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

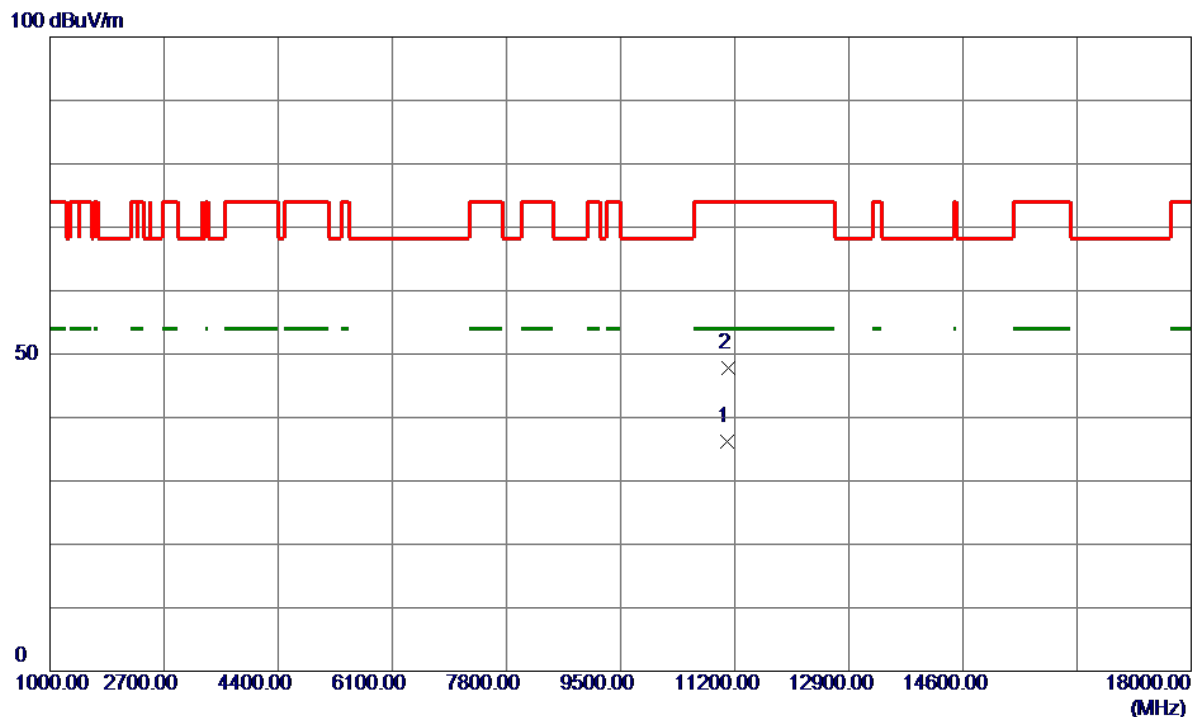


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11091.4800	24.06	12.21	36.27	54.00	-17.73	AVG	
2	11097.2200	35.51	12.23	47.74	74.00	-26.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

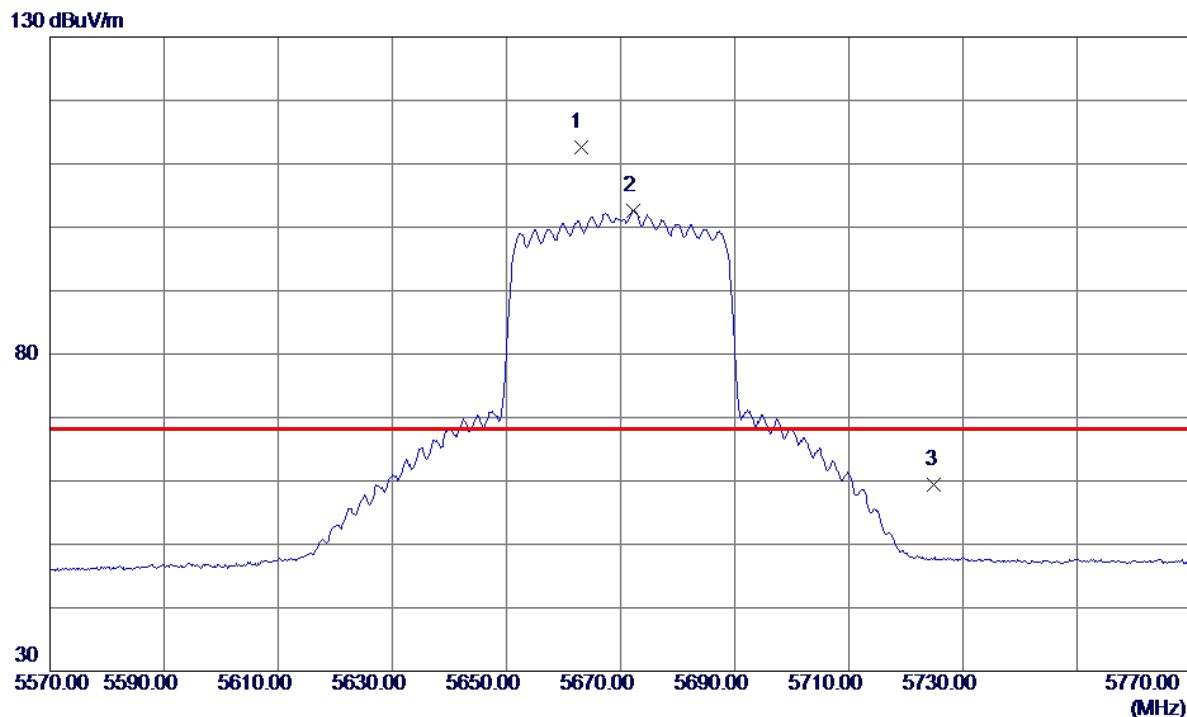


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5663.0000	95.80	16.79	112.59	68.20	44.39	Peak	No Limit
2	5672.2000	85.85	16.83	102.68	999.00	-896.32	AVG	No Limit
3	5725.0000	42.29	17.07	59.36	68.20	-8.84	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

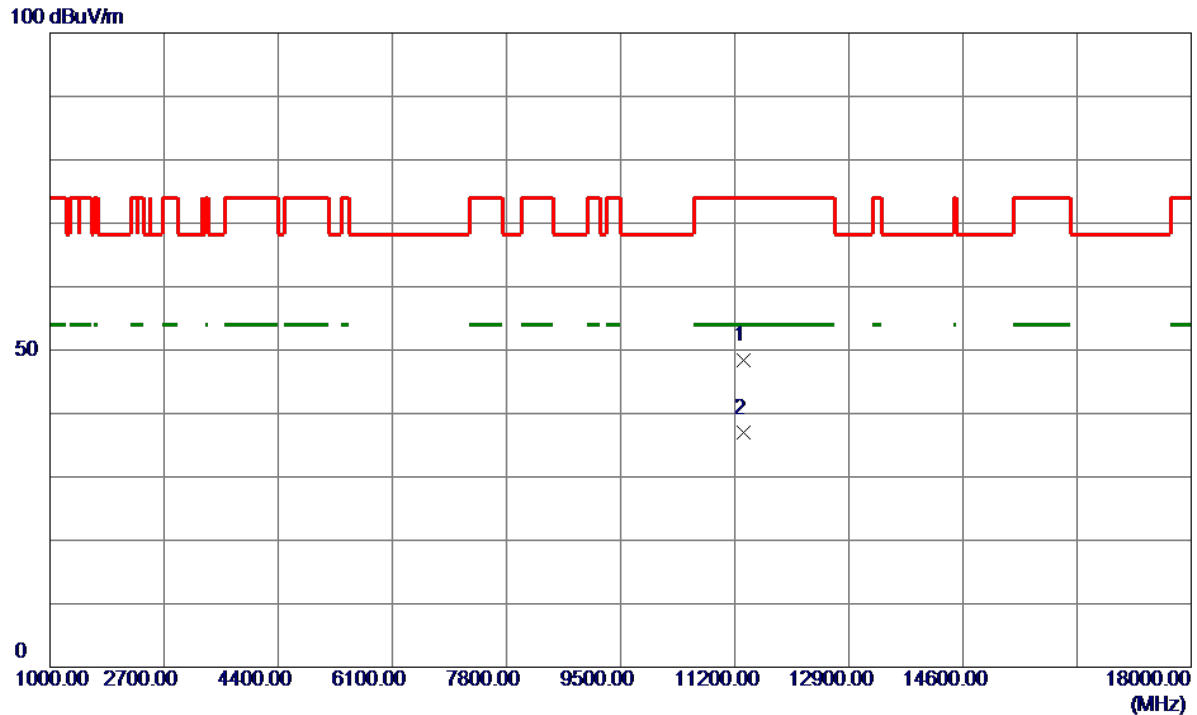


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11337.9400	35.11	13.26	48.37	74.00	-25.63	Peak	
2 *	11341.6600	23.62	13.28	36.90	54.00	-17.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

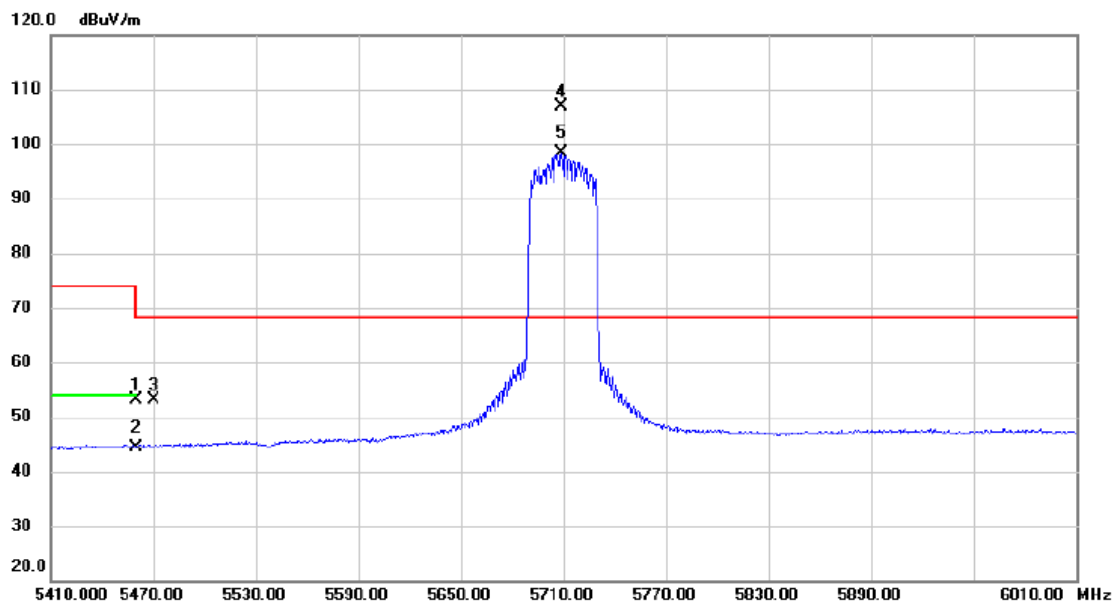


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.13	16.01	53.14	74.00	-20.86	peak	
2		5460.000	28.47	16.01	44.48	54.00	-9.52	AVG	
3		5470.000	37.23	16.02	53.25	68.20	-14.95	peak	
4	*	5708.800	89.97	16.99	106.96	68.20	38.76	peak	No Limit
5	X	5708.800	81.37	16.99	98.36	68.20	30.16	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

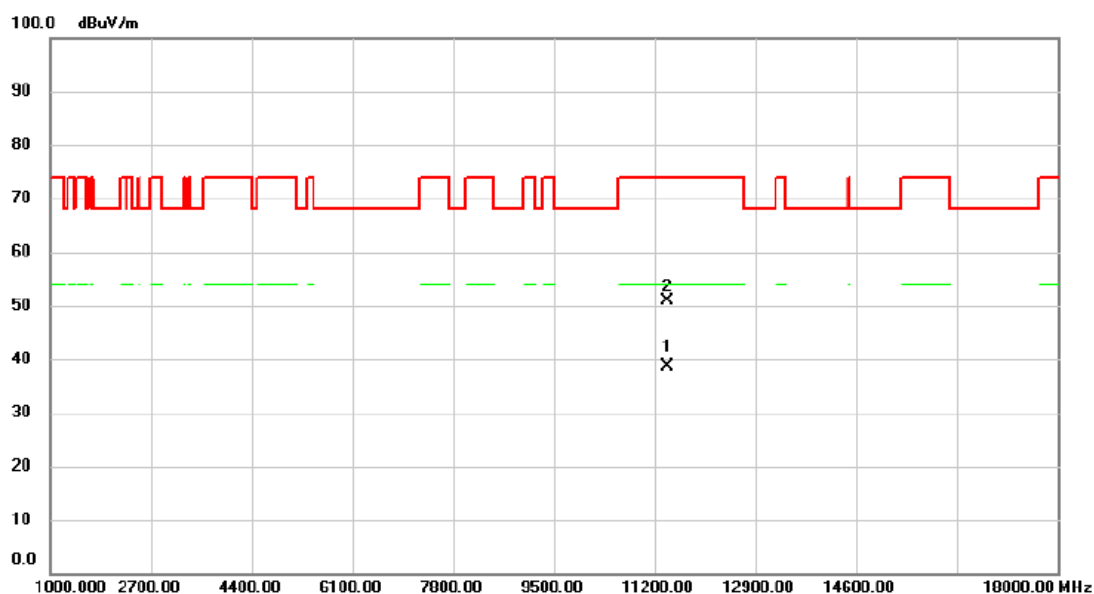


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11414.860	25.13	13.59	38.72	54.00	-15.28	AVG	
2		11417.460	37.29	13.60	50.89	74.00	-23.11	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

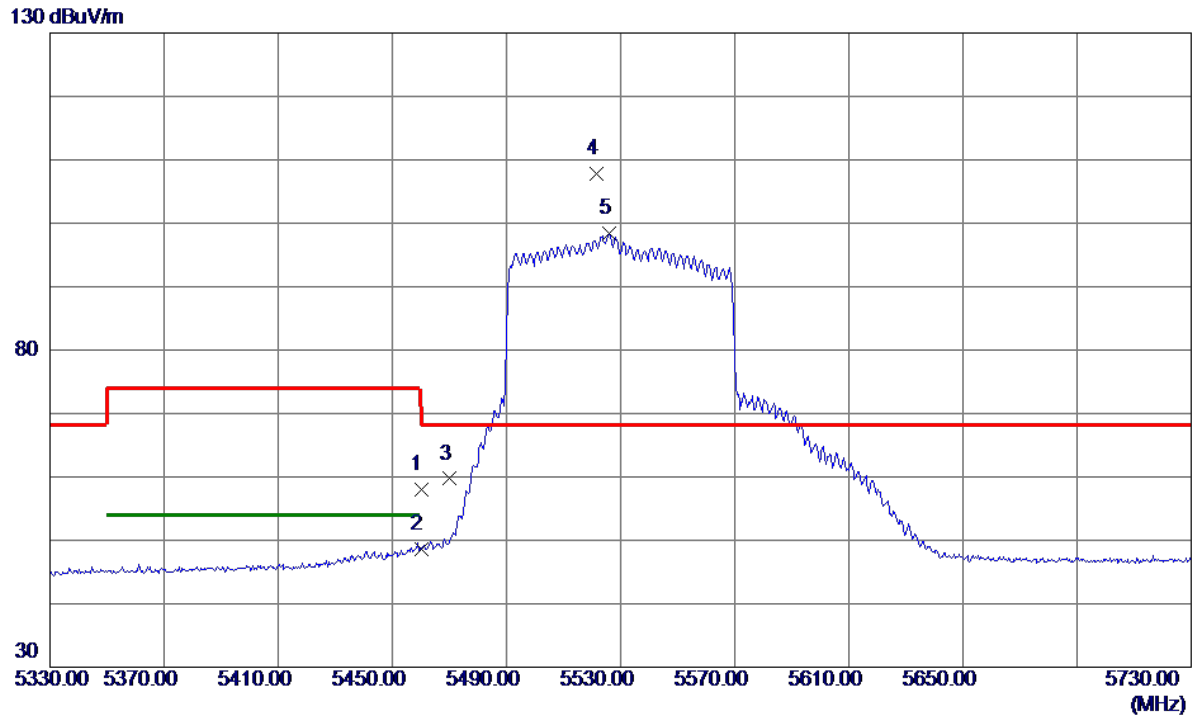

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	41.96	16.01	57.97	74.00	-16.03	Peak	
2	5460.0000	32.63	16.01	48.64	54.00	-5.36	AVG	
3	5470.0000	43.68	16.02	59.70	68.20	-8.50	Peak	
4 *	5521.6000	91.72	16.13	107.85	68.20	39.65	Peak	No Limit
5	5526.0000	82.24	16.15	98.39	999.00	-900.61	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

100 dBuV/m

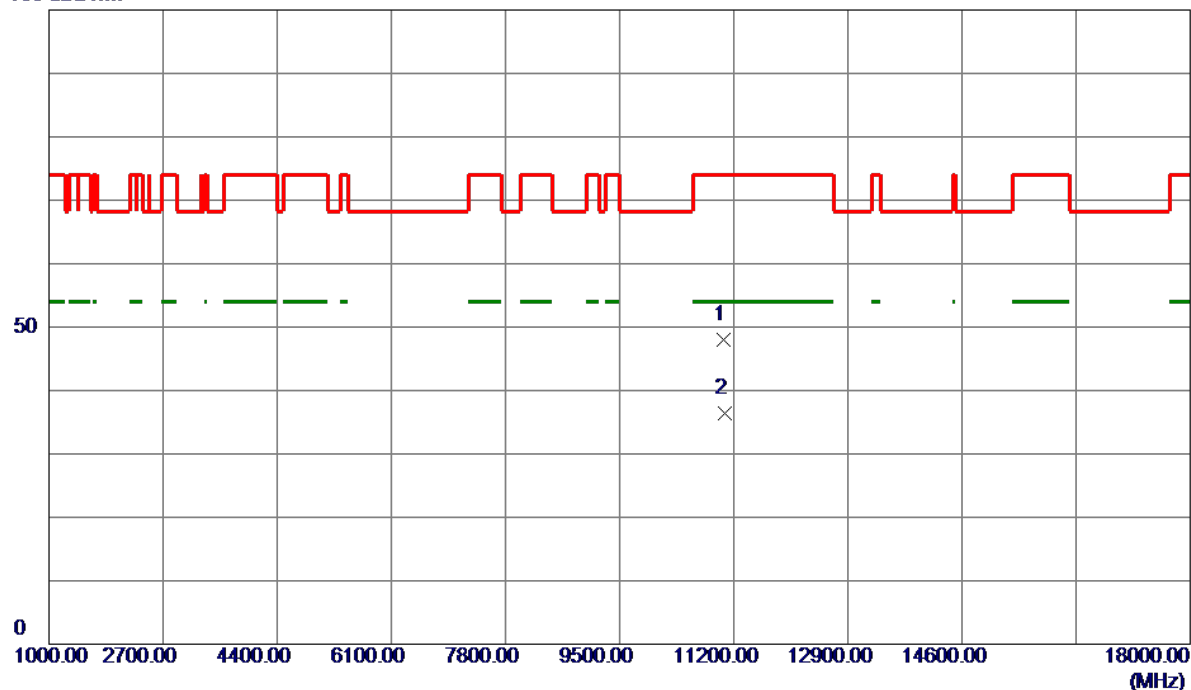


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11057.9200	36.02	12.07	48.09	74.00	-25.91	Peak	
2 *	11059.4200	24.27	12.07	36.34	54.00	-17.66	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

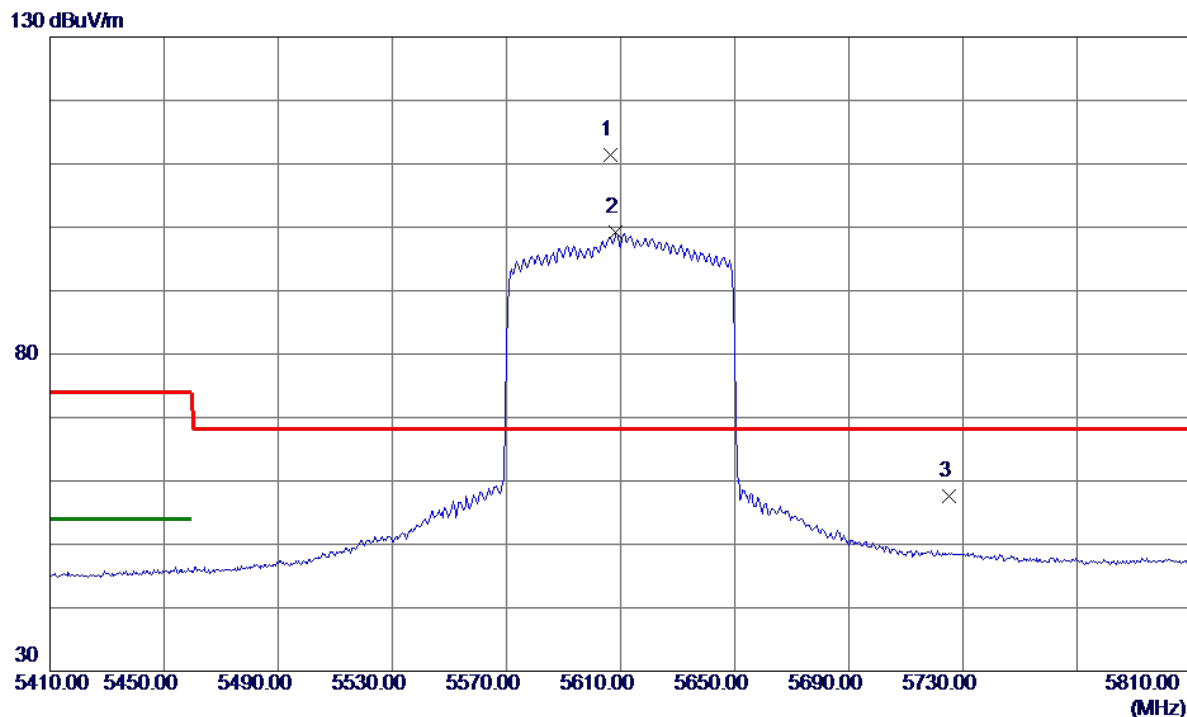


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5606.4000	94.95	16.52	111.47	68.20	43.27	Peak	No Limit
2	5608.4000	82.72	16.53	99.25	999.00	-899.75	AVG	No Limit
3	5725.0000	40.61	17.07	57.68	68.20	-10.52	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

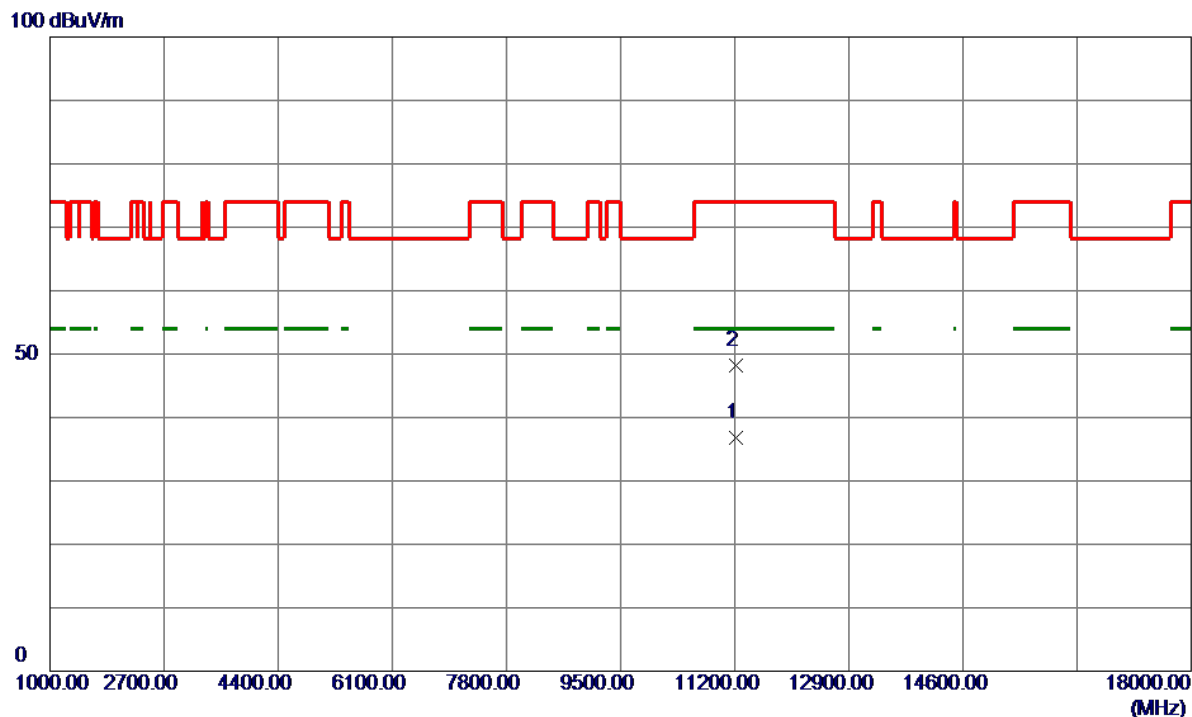


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11223.7600	24.02	12.77	36.79	54.00	-17.21	AVG	
2	11225.2400	35.40	12.78	48.18	74.00	-25.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

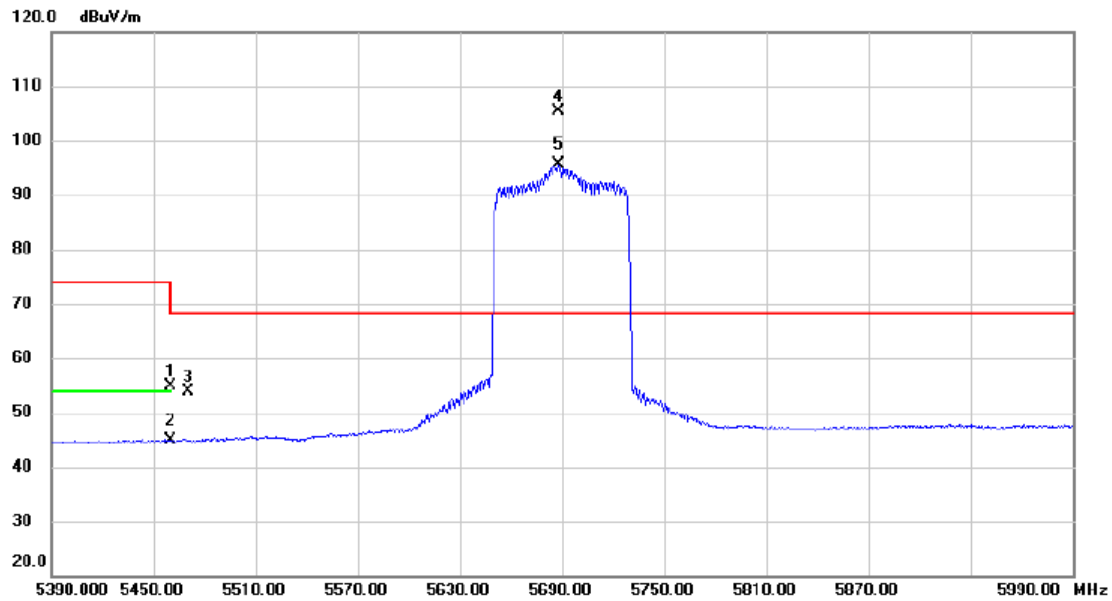


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.80	16.01	54.81	74.00	-19.19	peak	
2		5460.000	28.88	16.01	44.89	54.00	-9.11	AVG	
3		5470.000	37.74	16.02	53.76	68.20	-14.44	peak	
4	*	5688.200	88.46	16.91	105.37	68.20	37.17	peak	No Limit
5	X	5688.200	78.83	16.91	95.74	68.20	27.54	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

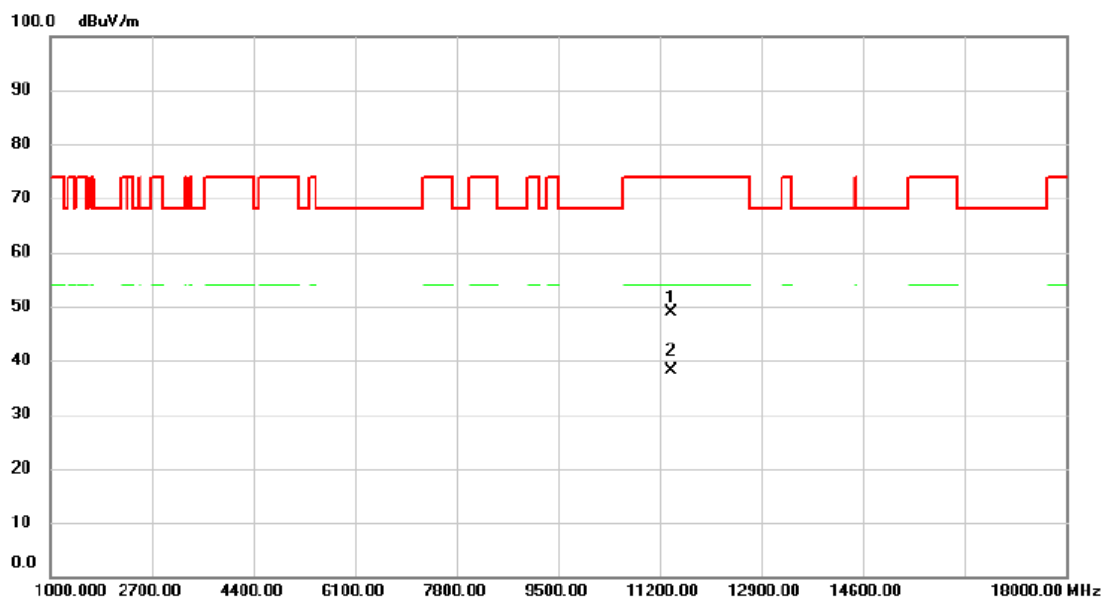


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11388.100	35.32	13.48	48.80	74.00	-25.20	peak	
2	*	11389.780	24.60	13.48	38.08	54.00	-15.92	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

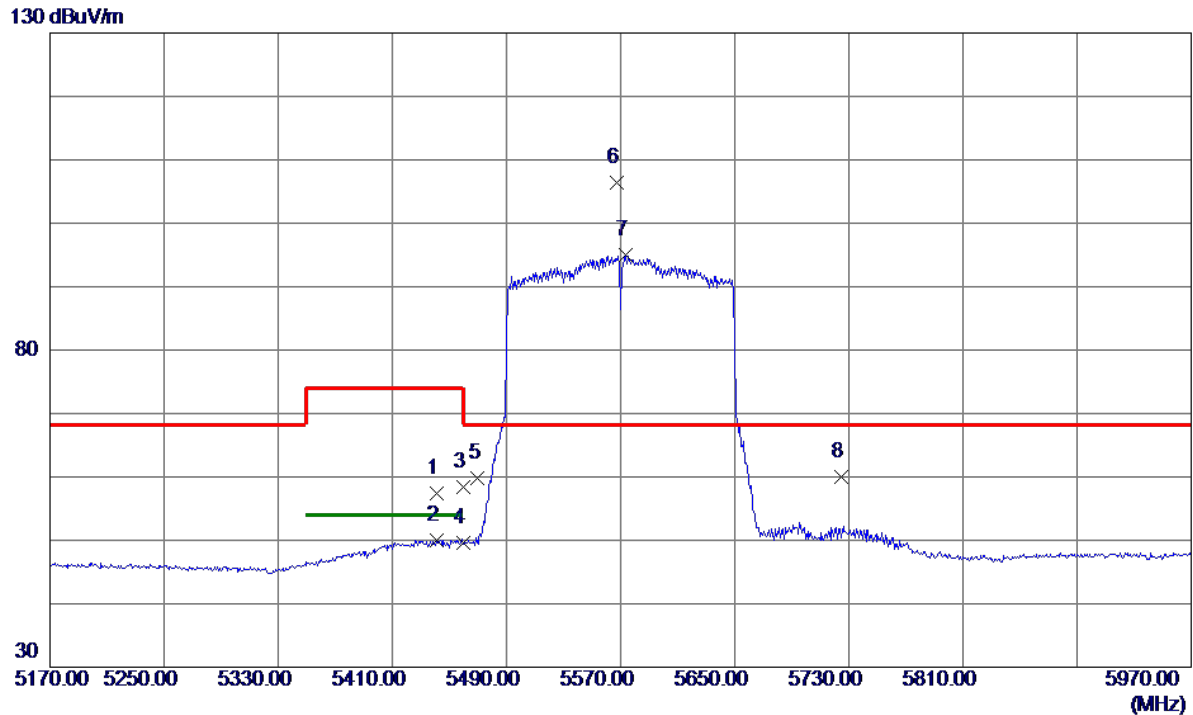


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5441.2000	41.37	16.01	57.38	74.00	-16.62	Peak	
2	5441.2000	34.04	16.01	50.05	54.00	-3.95	AVG	
3	5460.0000	42.38	16.01	58.39	74.00	-15.61	Peak	
4	5460.0000	33.61	16.01	49.62	54.00	-4.38	AVG	
5	5470.0000	43.76	16.02	59.78	68.20	-8.42	Peak	
6 *	5567.6000	43.13	16.34	106.47	68.20	38.27	Peak	No Limit
7	5573.2000	78.53	16.37	94.90	999.00	-904.10	AVG	No Limit
8	5725.0000	42.86	17.07	59.93	68.20	-8.27	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

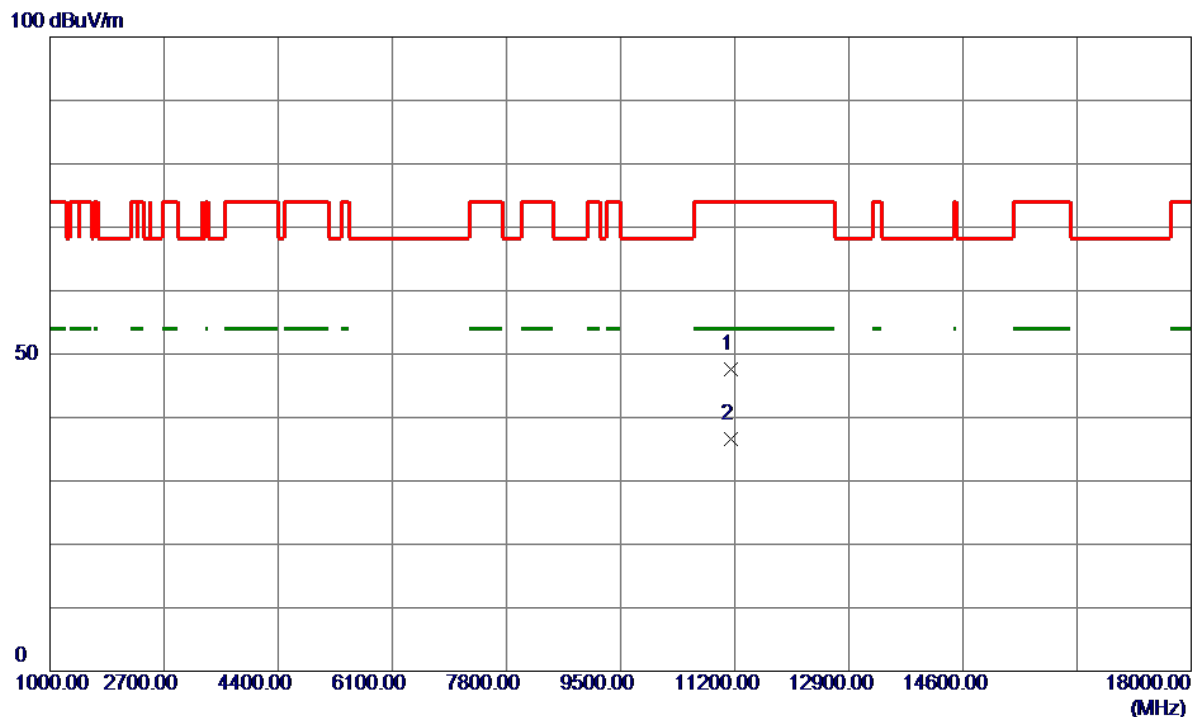


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11147.9200	35.14	12.45	47.59	74.00	-26.41	Peak	
2 *	11148.8200	24.07	12.45	36.52	54.00	-17.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

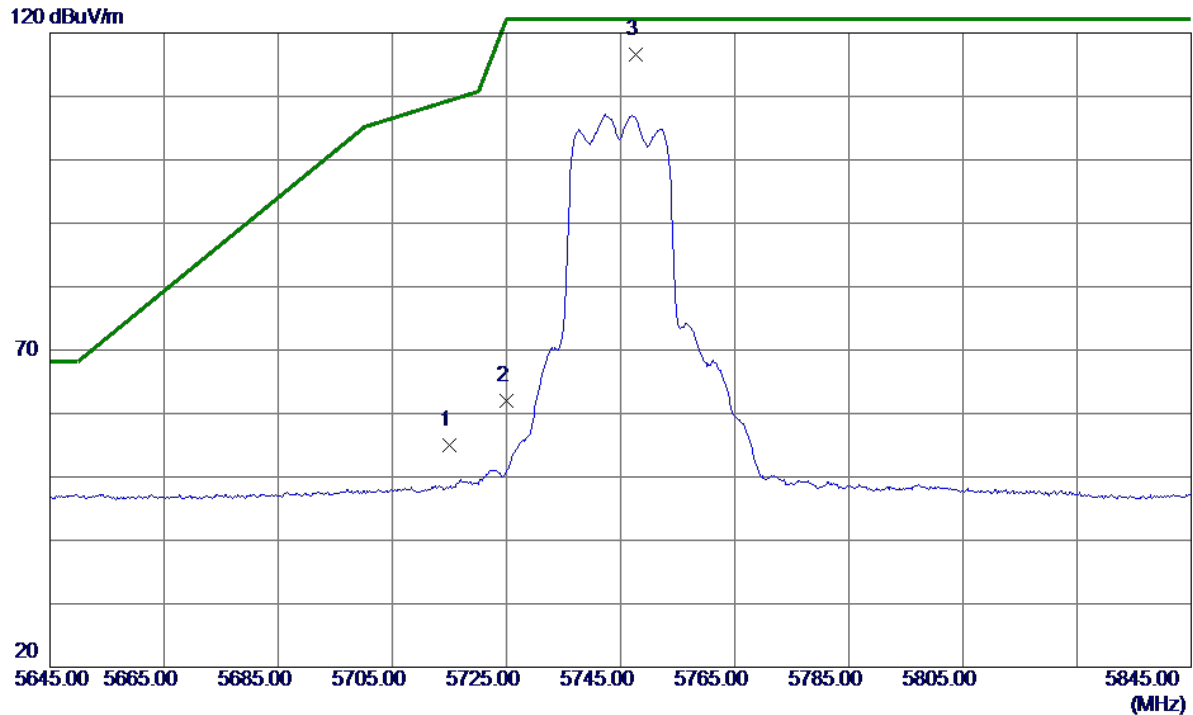


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.06	17.03	55.09	109.40	-54.31	Peak	
2	5725.0000	44.84	17.07	61.91	122.20	-60.29	Peak	
3 *	5747.6000	99.45	17.18	116.63	122.20	-5.57	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

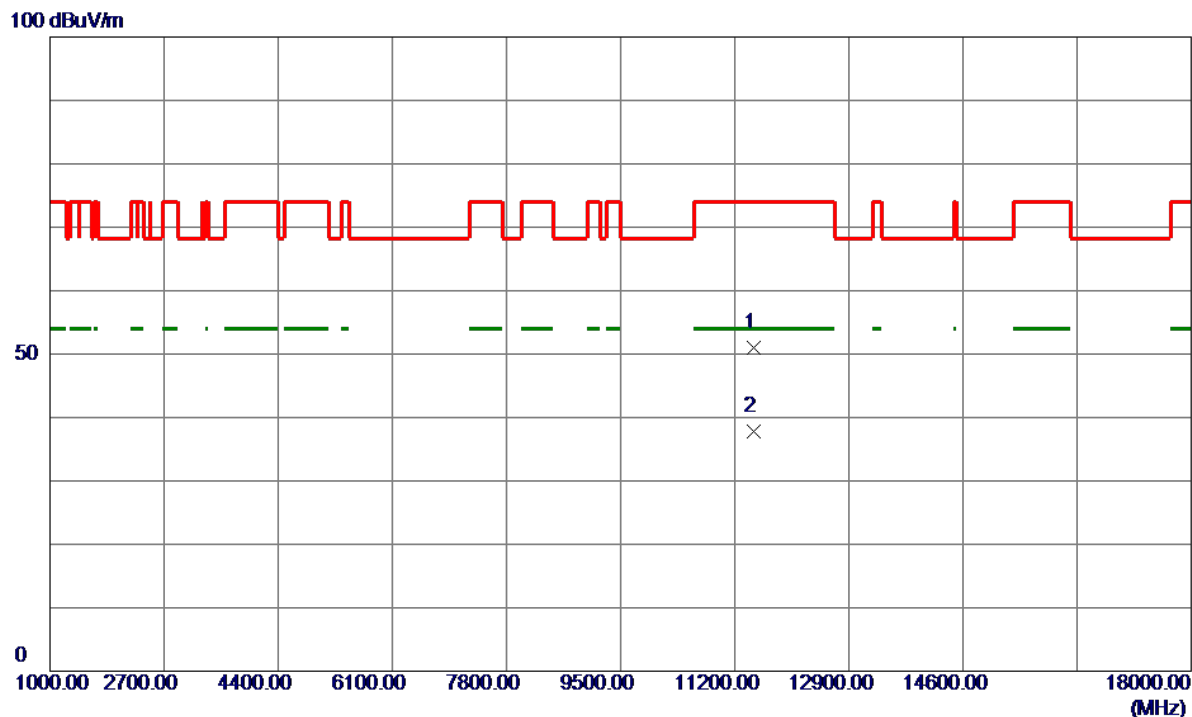


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11482.8600	37.05	13.88	50.93	74.00	-23.07	Peak	
2 *	11489.9200	23.93	13.91	37.84	54.00	-16.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

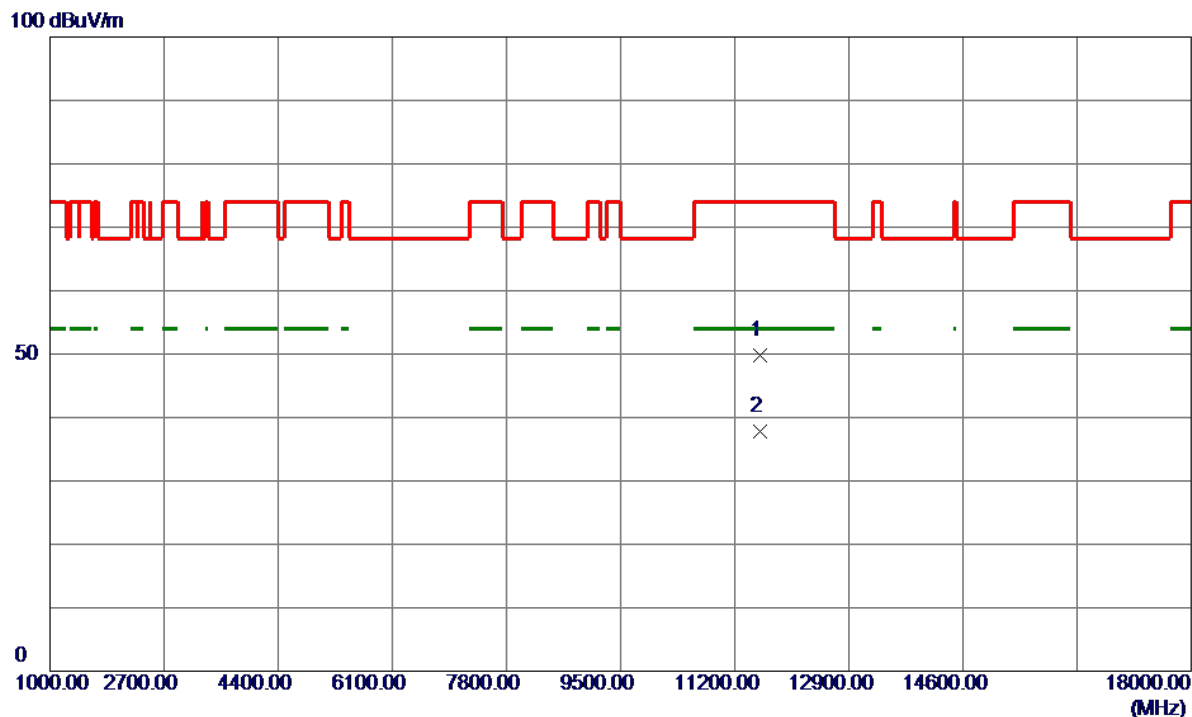


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.9800	35.97	13.83	49.80	74.00	-24.20	Peak	
2 *	11576.2200	24.03	13.82	37.85	54.00	-16.15	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

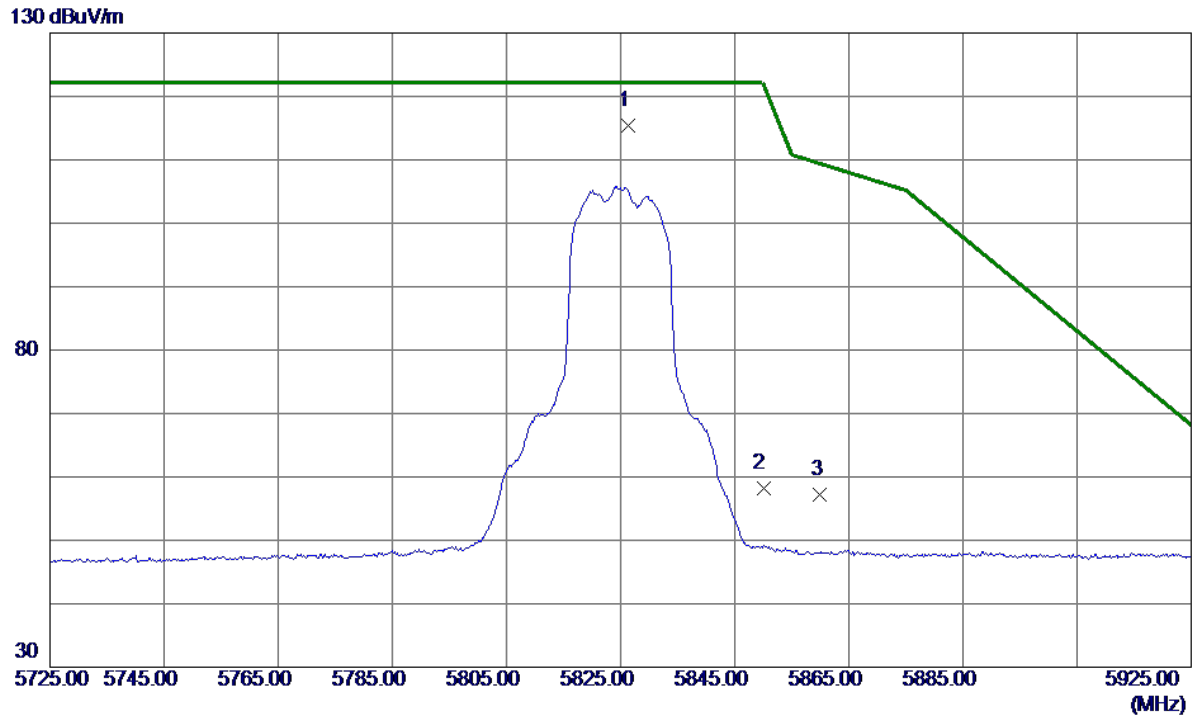


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.4000	97.91	17.54	115.45	122.20	-6.75	Peak	No Limit
2	5850.0000	40.55	17.65	58.20	122.20	-64.00	Peak	
3	5860.0000	39.58	17.70	57.28	109.40	-52.12	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

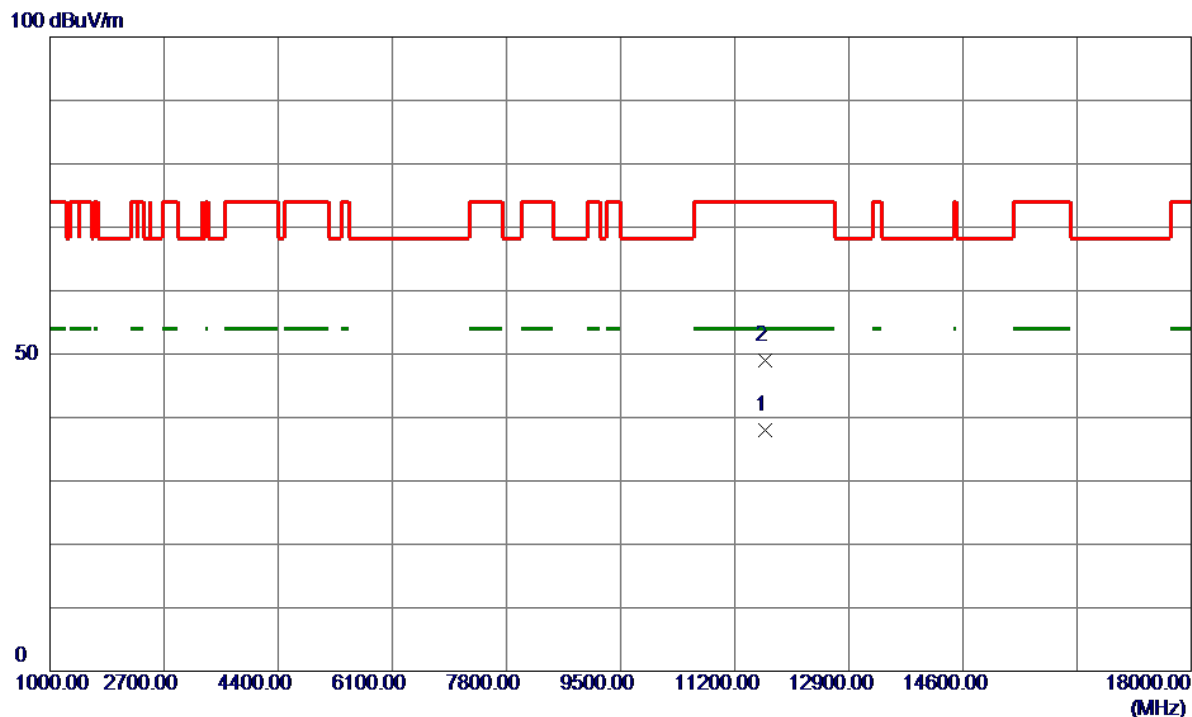


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11659.0199	24.25	13.69	37.94	54.00	-16.06	AVG	
2	11659.2600	35.39	13.69	49.08	74.00	-24.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

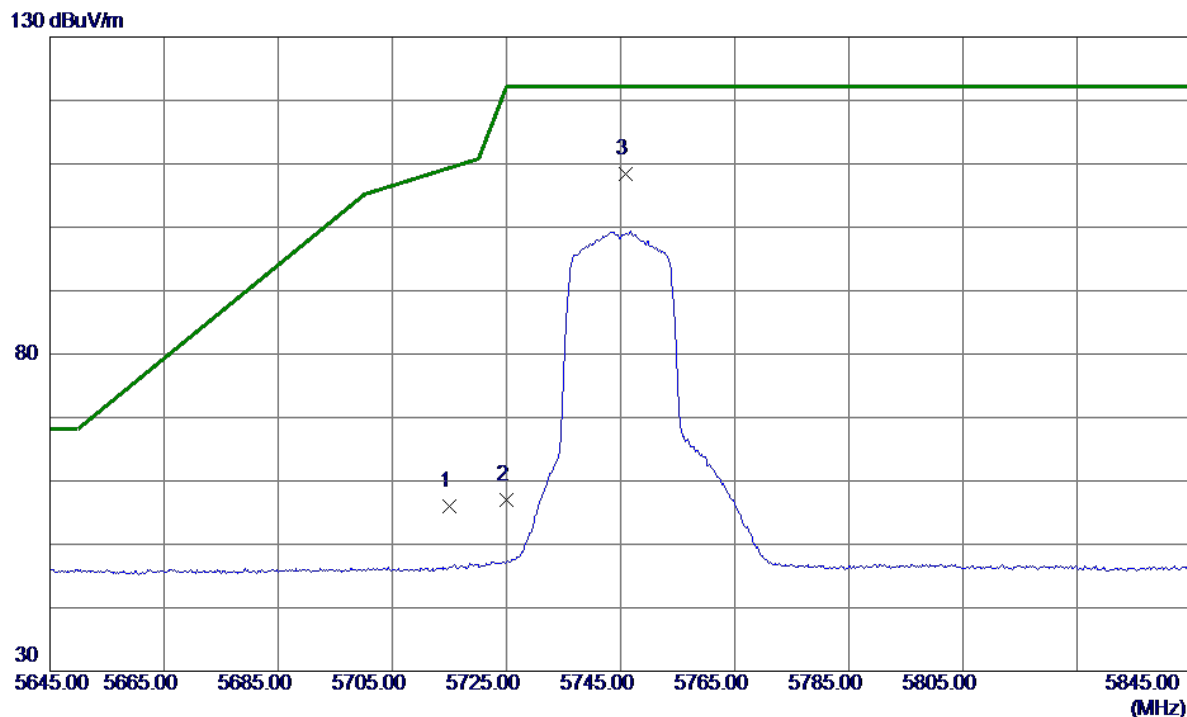


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	39.01	17.03	56.04	109.40	-53.36	Peak	
2	5725.0000	39.88	17.07	56.95	122.20	-65.25	Peak	
3 *	5745.8000	91.19	17.17	108.36	122.20	-13.84	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

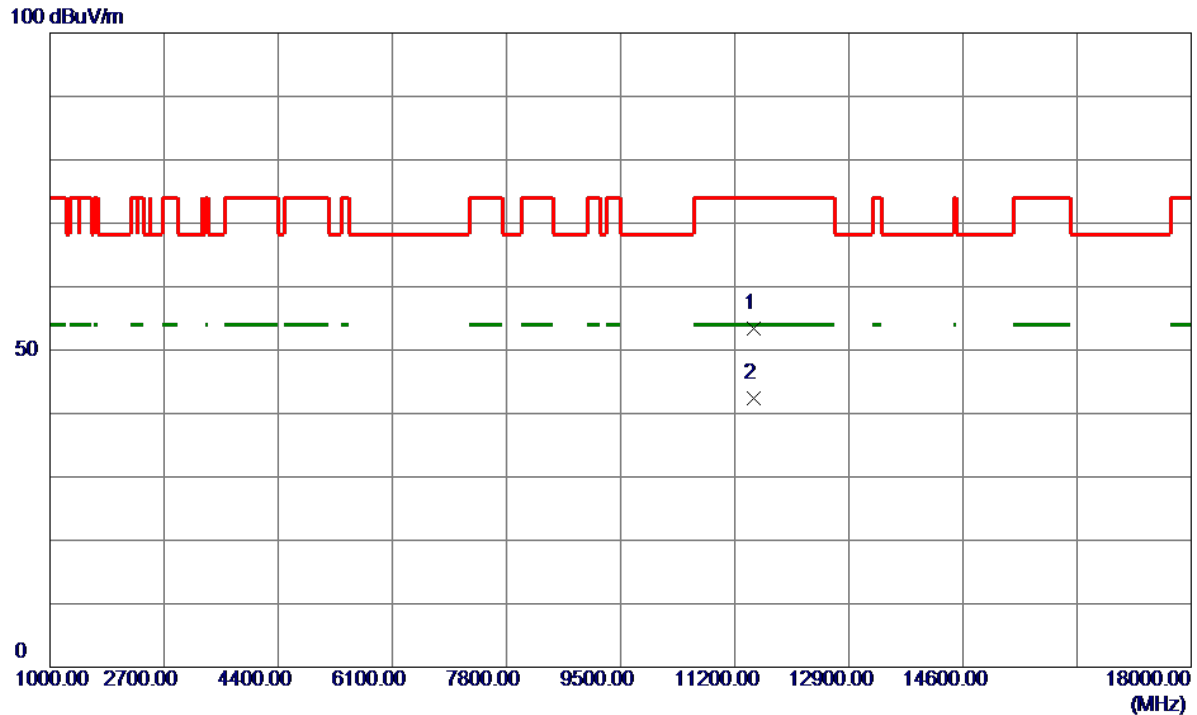


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11484.5199	39.50	13.88	53.38	74.00	-20.62	Peak	
2 *	11491.0599	28.41	13.91	42.32	54.00	-11.68	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

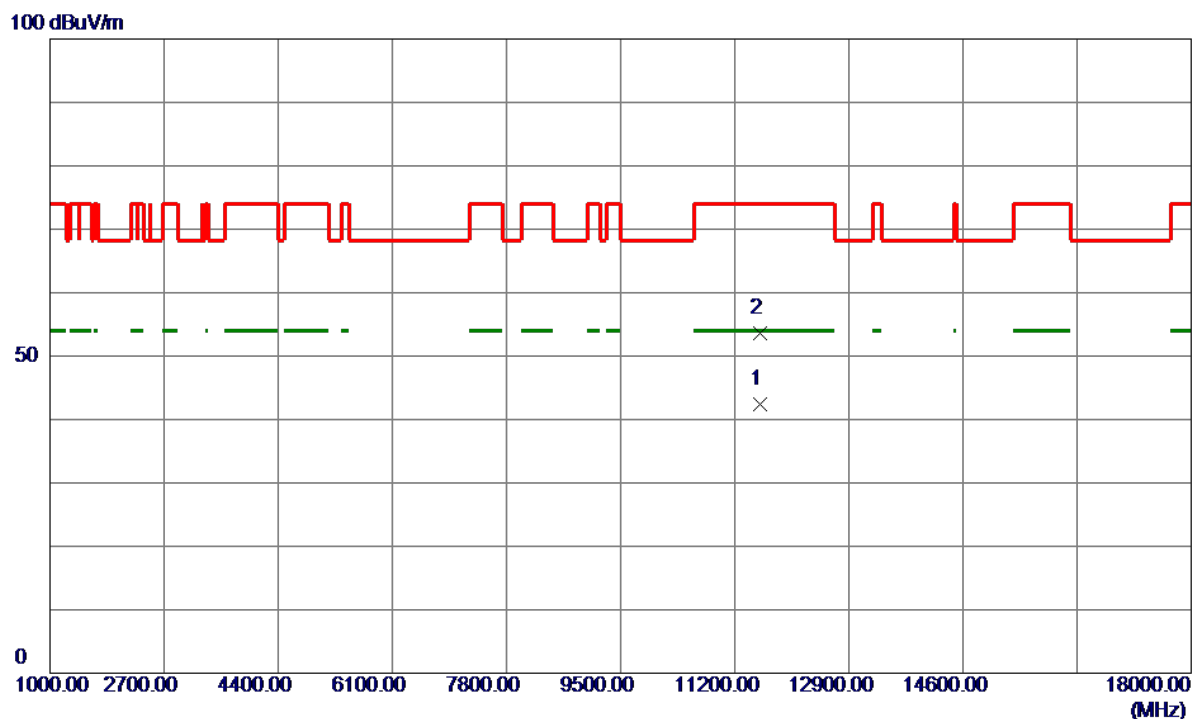


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11571.4000	28.49	13.83	42.32	54.00	-11.68	AVG	
2	11571.8400	39.85	13.83	53.68	74.00	-20.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

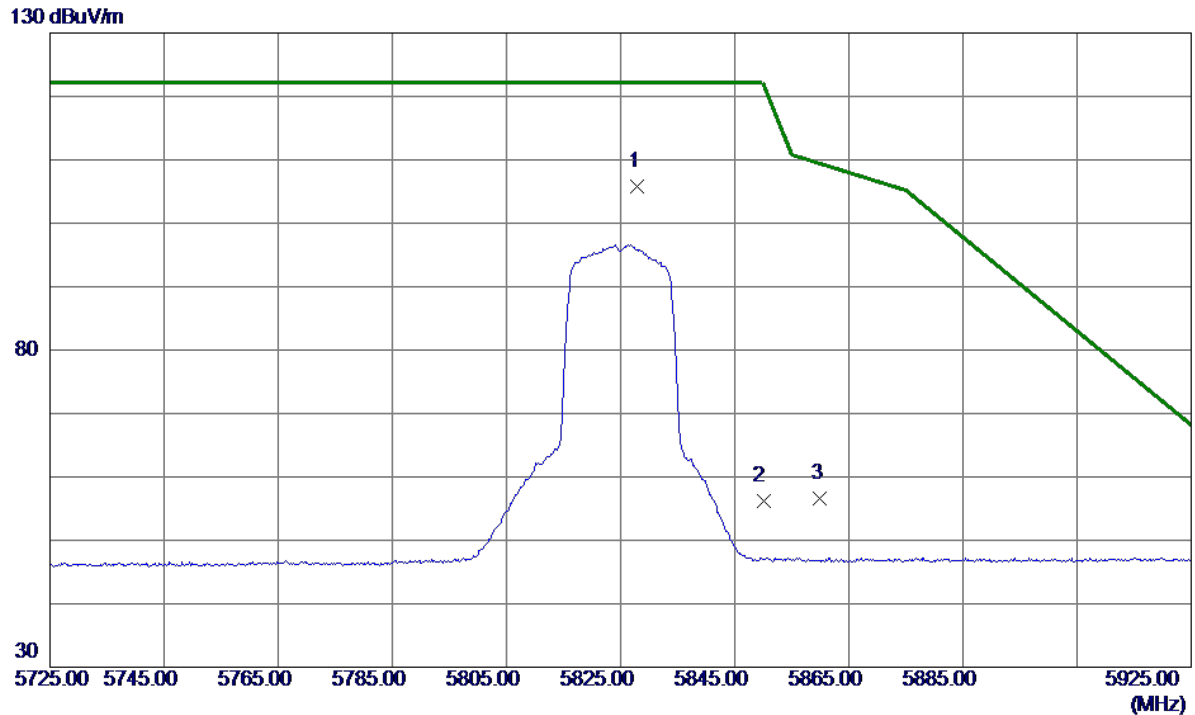


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5828.0000	88.30	17.55	105.85	122.20	-16.35	Peak	No Limit
2	5850.0000	38.51	17.65	56.16	122.20	-66.04	Peak	
3	5860.0000	38.88	17.70	56.58	109.40	-52.82	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

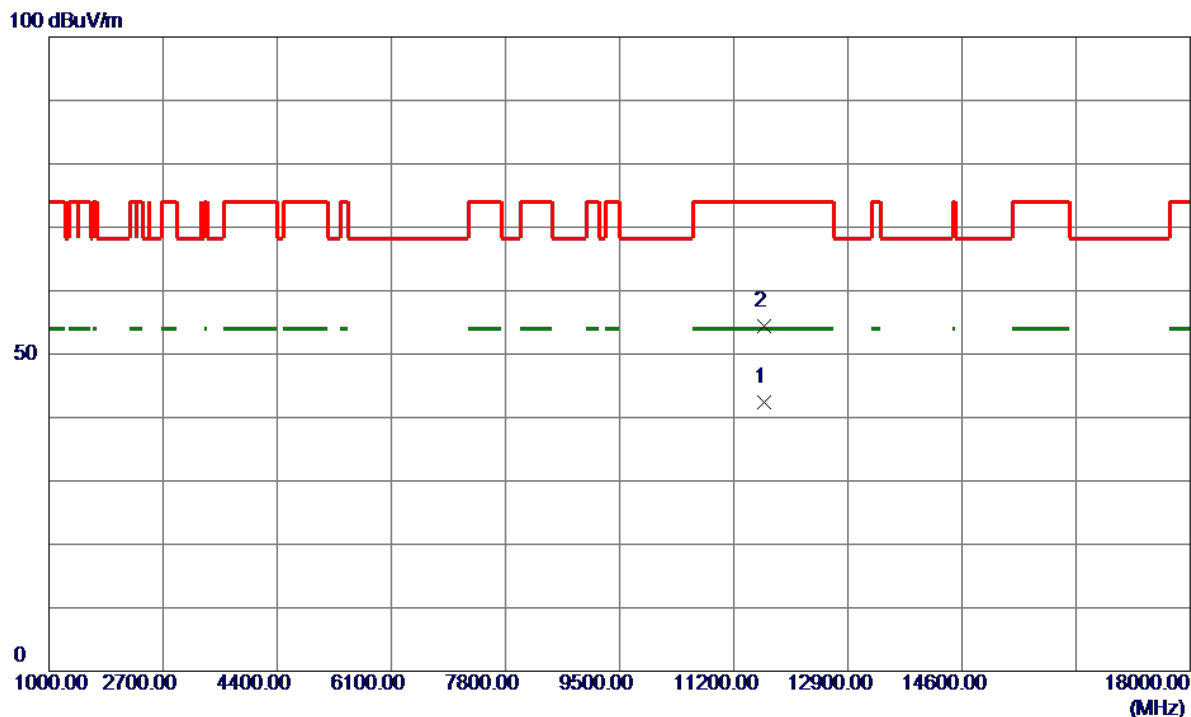


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.9600	28.69	13.70	42.39	54.00	-11.61	AVG	
2	11651.3600	40.70	13.70	54.40	74.00	-19.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

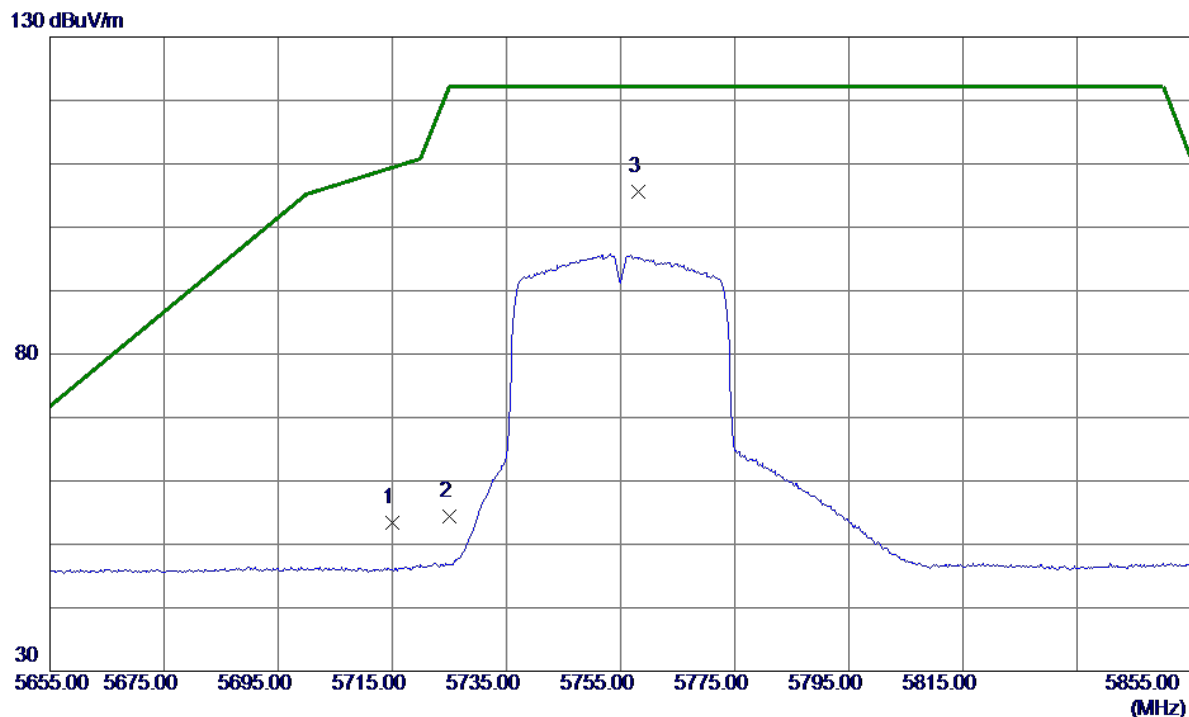


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.45	17.03	53.48	109.40	-55.92	Peak	
2	5725.0000	37.27	17.07	54.34	122.20	-67.86	Peak	
3 *	5758.2000	88.37	17.23	105.60	122.20	-16.60	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

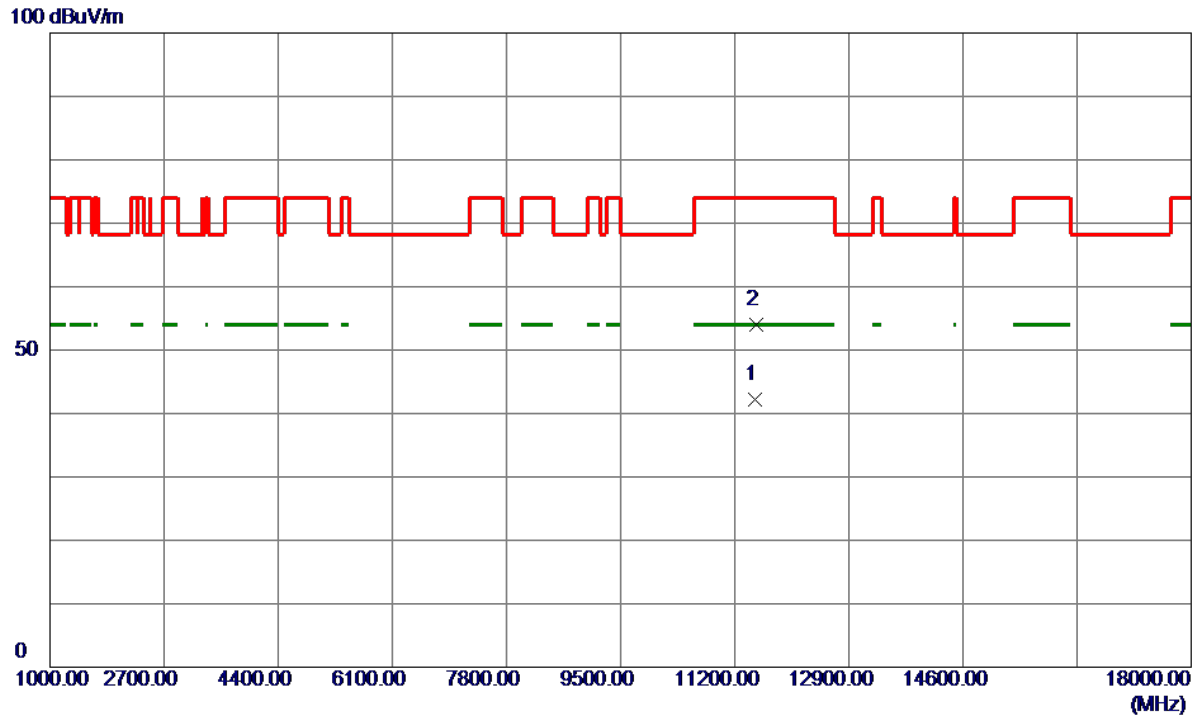


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11504.3200	28.21	13.94	42.15	54.00	-11.85	AVG	
2	11512.4200	40.05	13.93	53.98	74.00	-20.02	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

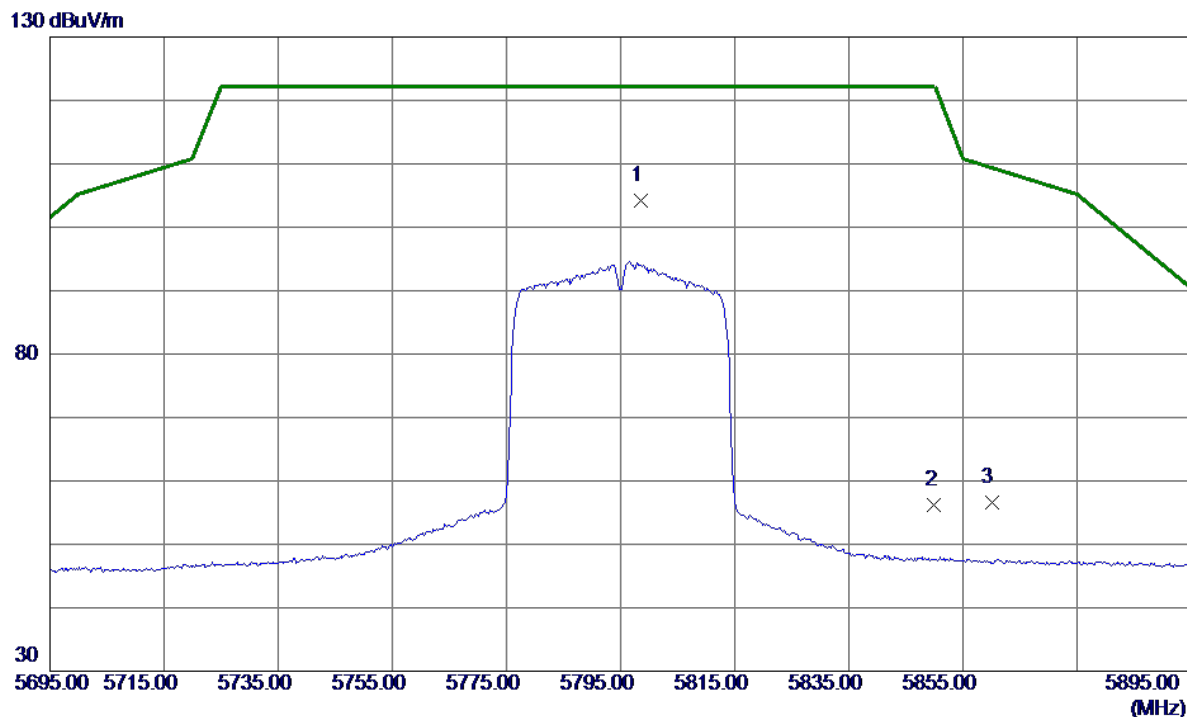


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5798.6000	86.84	17.42	104.26	122.20	-17.94	Peak	No Limit
2	5850.0000	38.53	17.65	56.18	122.20	-66.02	Peak	
3	5860.0000	38.94	17.70	56.64	109.40	-52.76	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

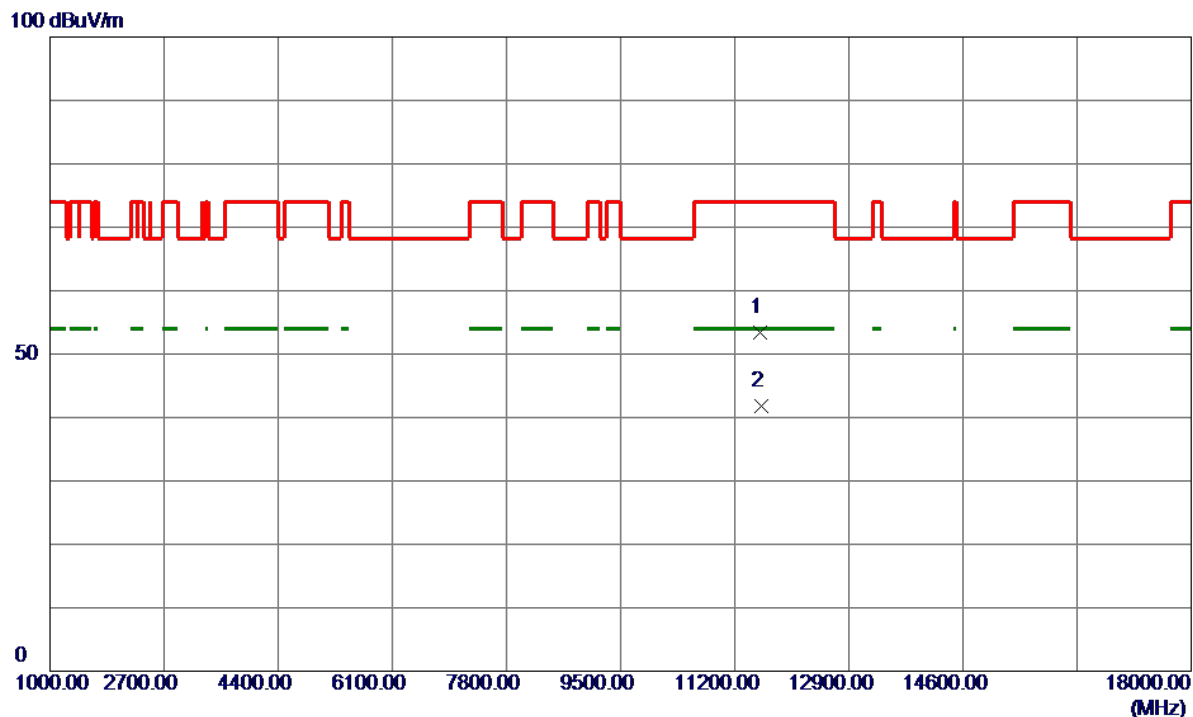


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11582.1600	39.67	13.82	53.49	74.00	-20.51	Peak	
2 *	11595.2000	28.03	13.79	41.82	54.00	-12.18	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

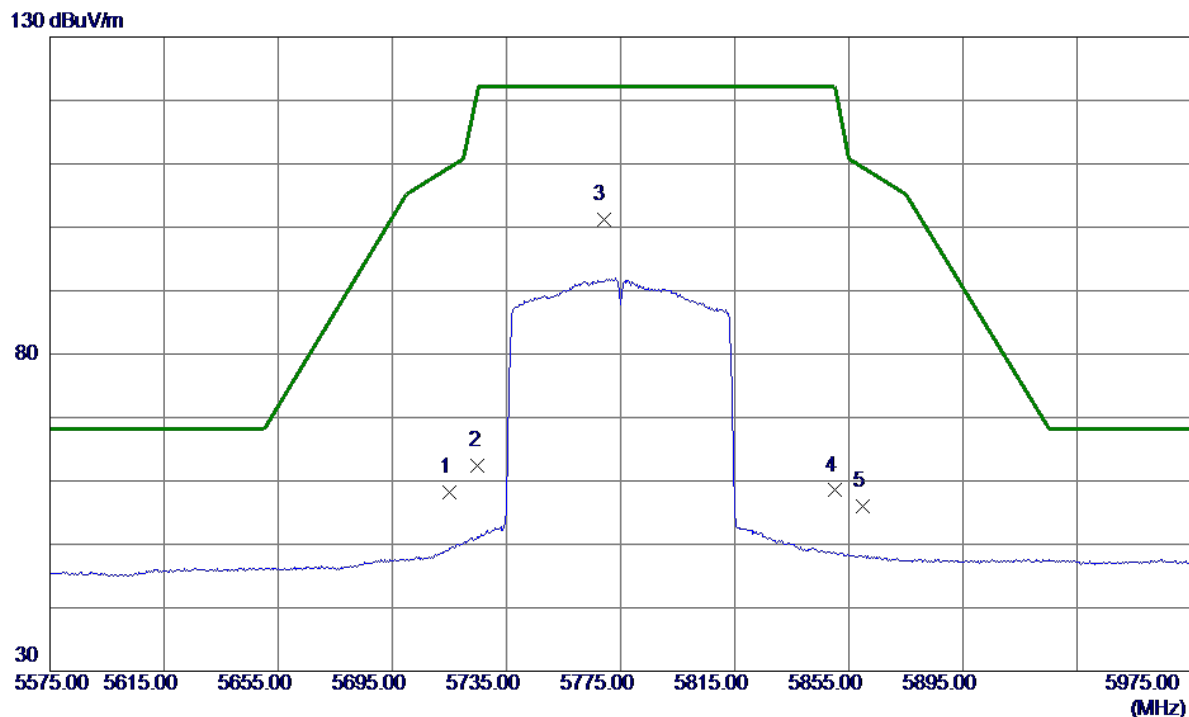


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	41.12	17.03	58.15	109.40	-51.25	Peak	
2	5725.0000	45.24	17.07	62.31	122.20	-59.89	Peak	
3 *	5769.0000	83.85	17.28	101.13	122.20	-21.07	Peak	No Limit
4	5850.0000	40.85	17.65	58.50	122.20	-63.70	Peak	
5	5860.0000	38.32	17.70	56.02	109.40	-53.38	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

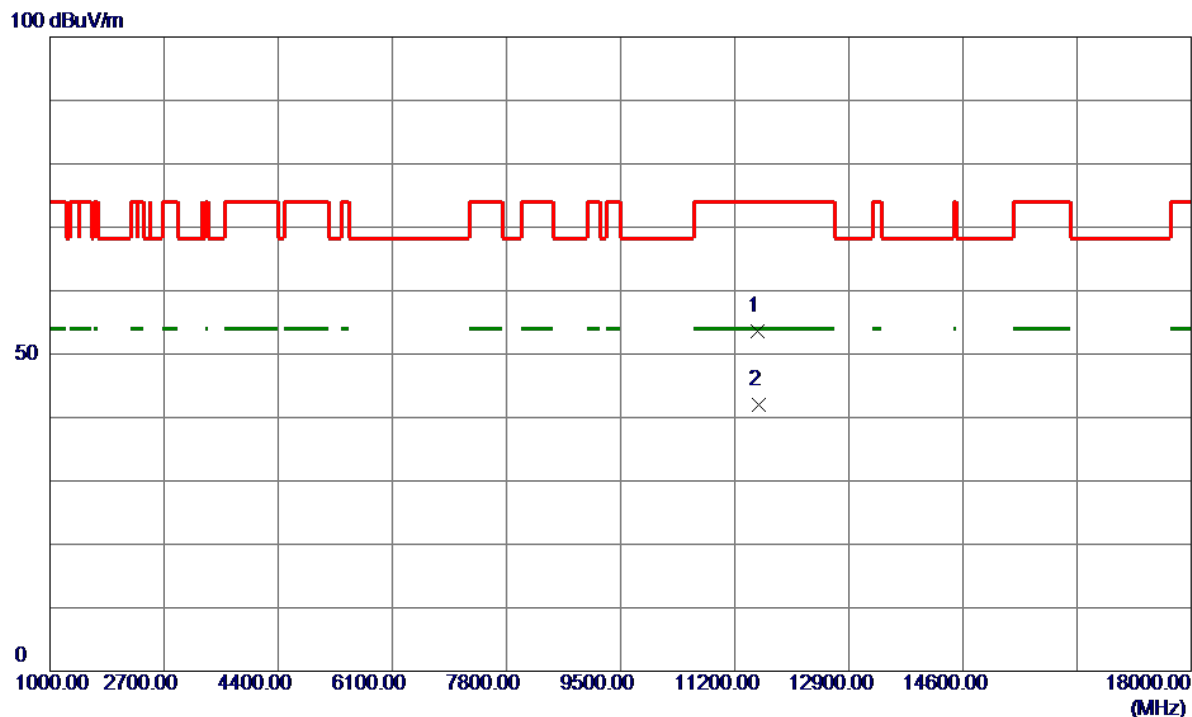


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11546.1600	39.81	13.87	53.68	74.00	-20.32	Peak	
2 *	11552.0800	28.23	13.86	42.09	54.00	-11.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

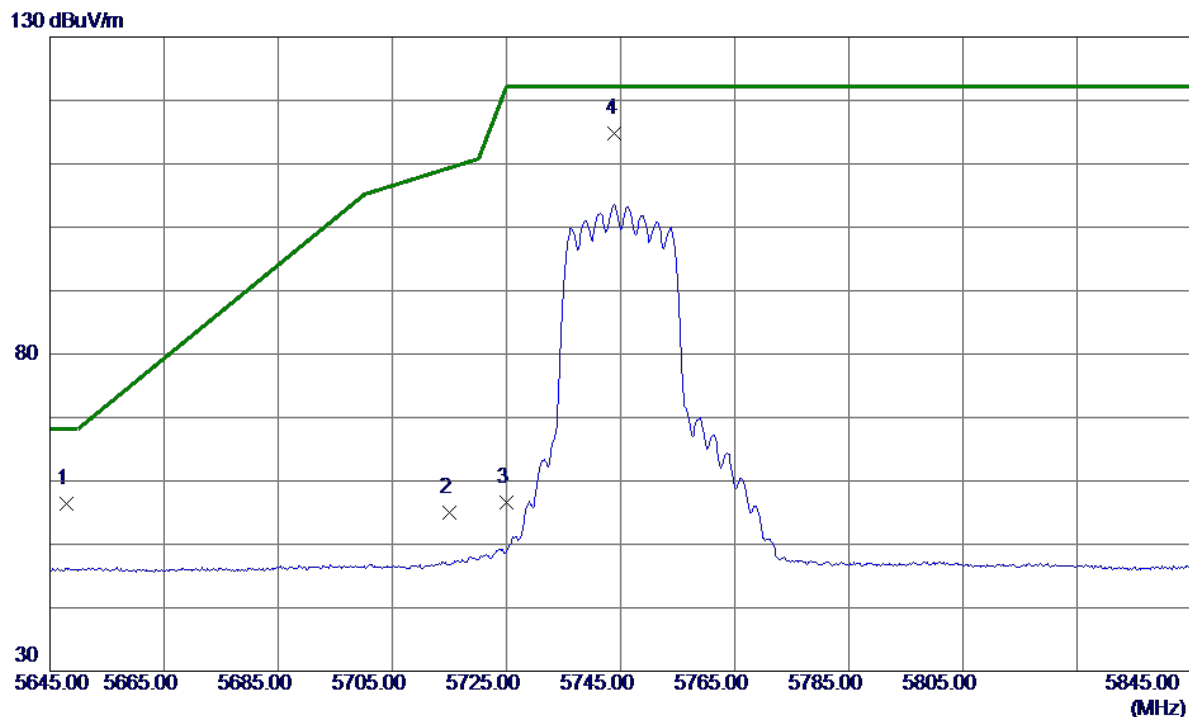


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.8000	39.60	16.72	56.32	68.20	-11.88	Peak	
2	5715.0000	38.05	17.03	55.08	109.40	-54.32	Peak	
3	5725.0000	39.56	17.07	56.63	122.20	-65.57	Peak	
4 *	5744.0000	97.62	17.16	114.78	122.20	-7.42	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

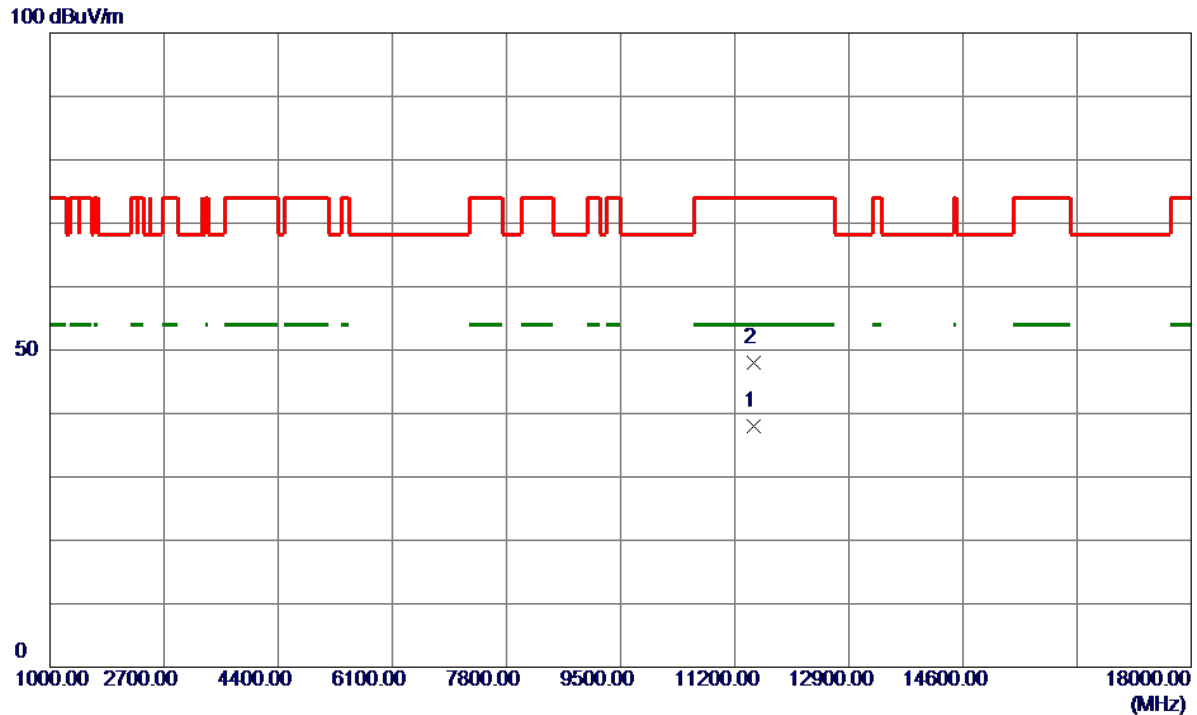


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11480.1800	24.14	13.87	38.01	54.00	-15.99	AVG	
2	11489.1800	34.07	13.90	47.97	74.00	-26.03	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

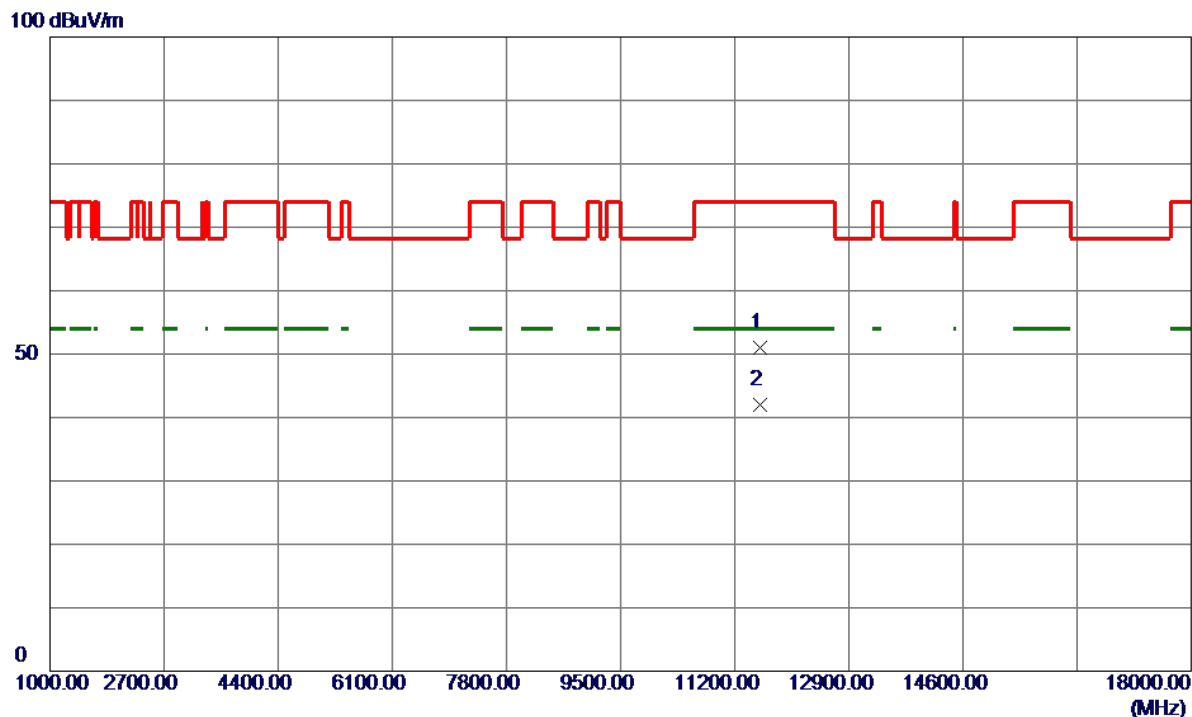


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11572.9200	37.25	13.83	51.08	74.00	-22.92	Peak	
2 *	11577.1800	28.13	13.82	41.95	54.00	-12.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

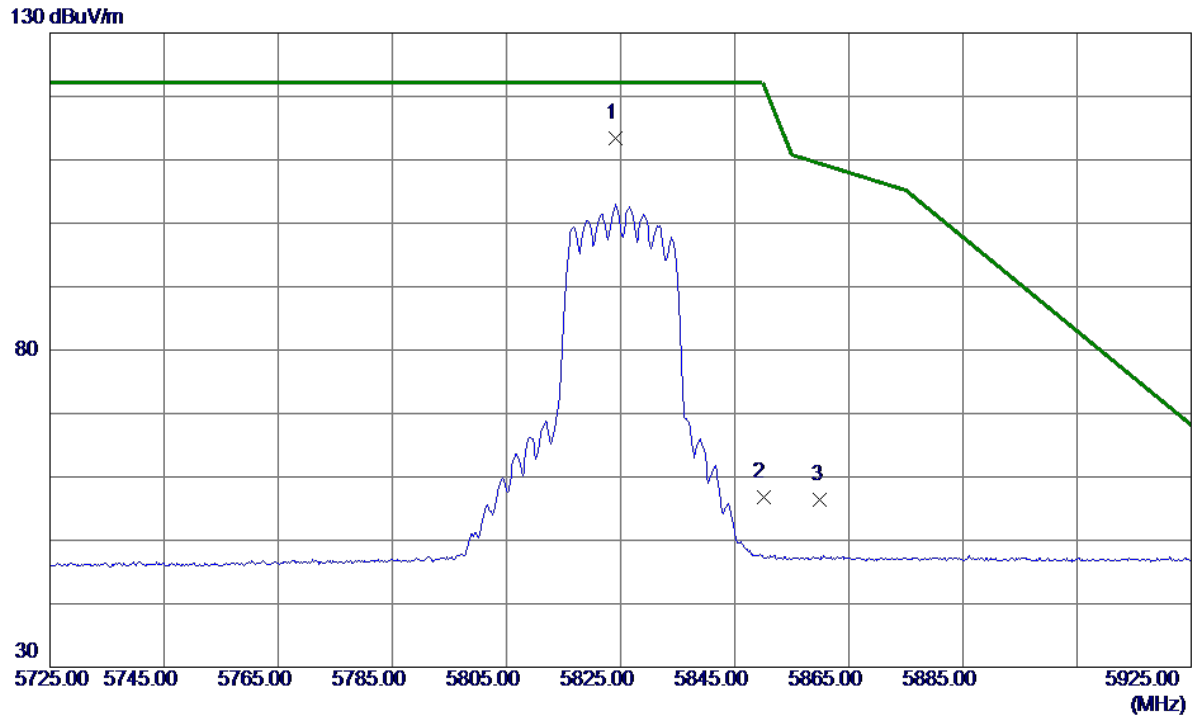


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.2000	95.87	17.53	113.40	122.20	-8.80	Peak	No Limit
2	5850.0000	39.11	17.65	56.76	122.20	-65.44	Peak	
3	5860.0000	38.78	17.70	56.48	109.40	-52.92	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

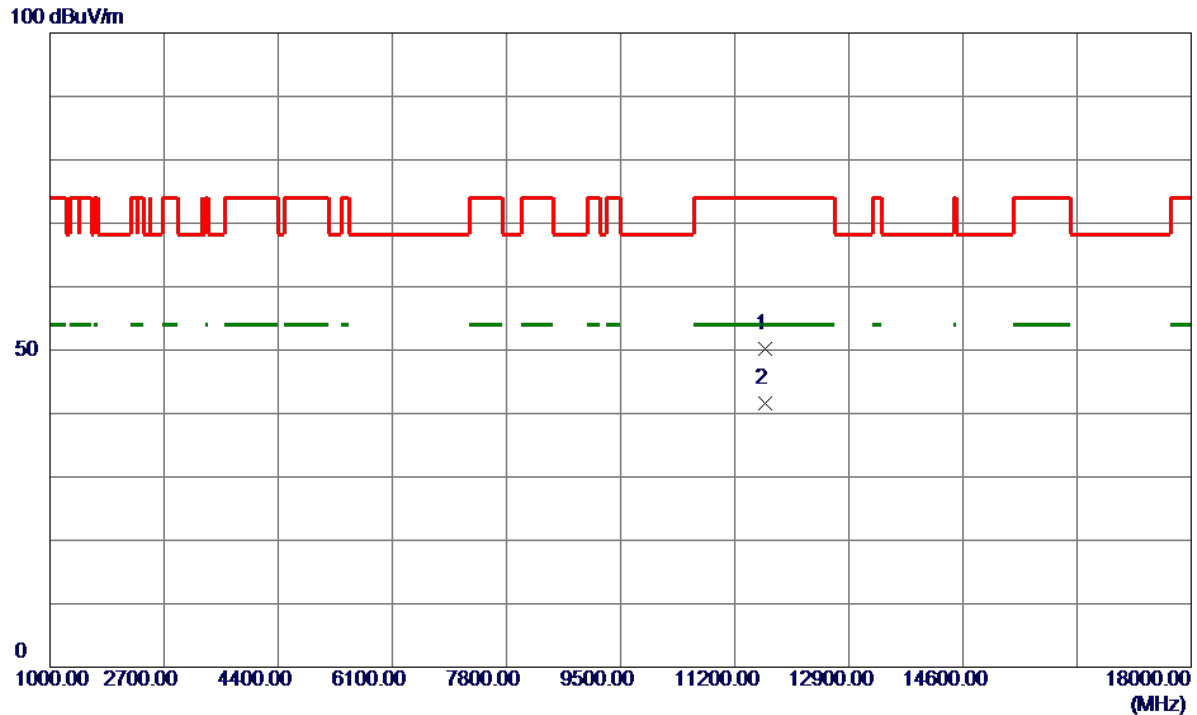


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11652.9400	36.49	13.70	50.19	74.00	-23.81	Peak	
2 *	11655.1000	27.84	13.70	41.54	54.00	-12.46	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

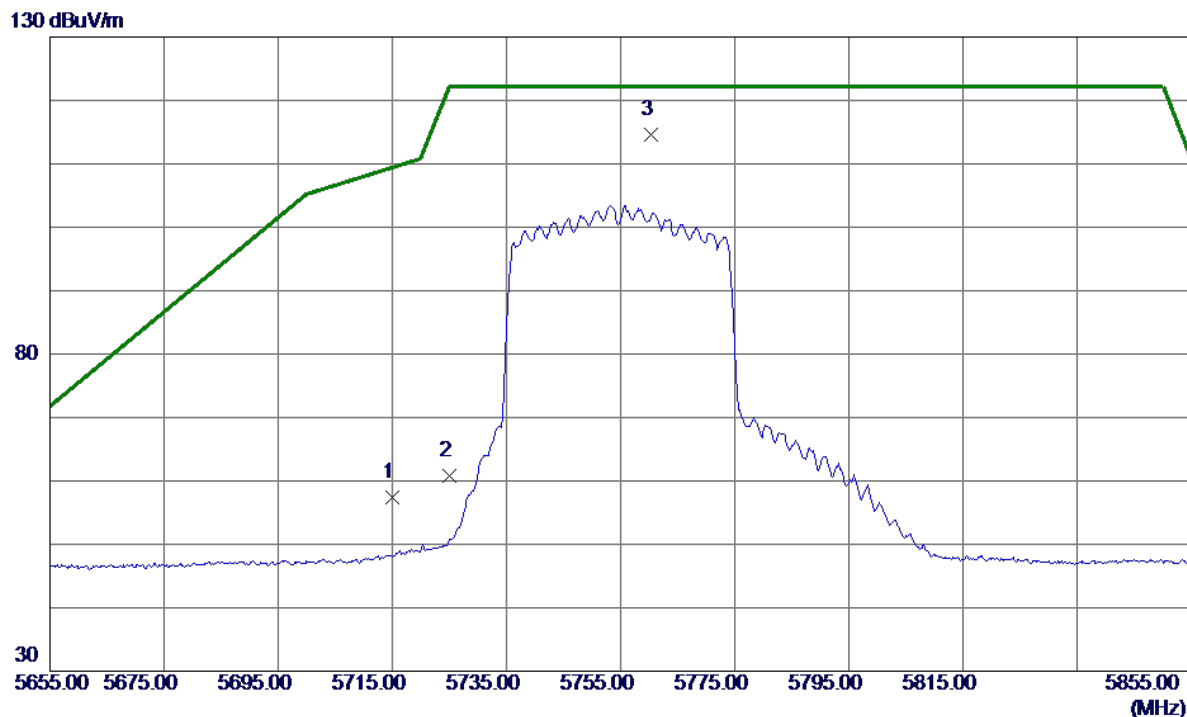


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	40.39	17.03	57.42	109.40	-51.98	Peak	
2	5725.0000	43.73	17.07	60.80	122.20	-61.40	Peak	
3 *	5760.4000	97.35	17.24	114.59	122.20	-7.61	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

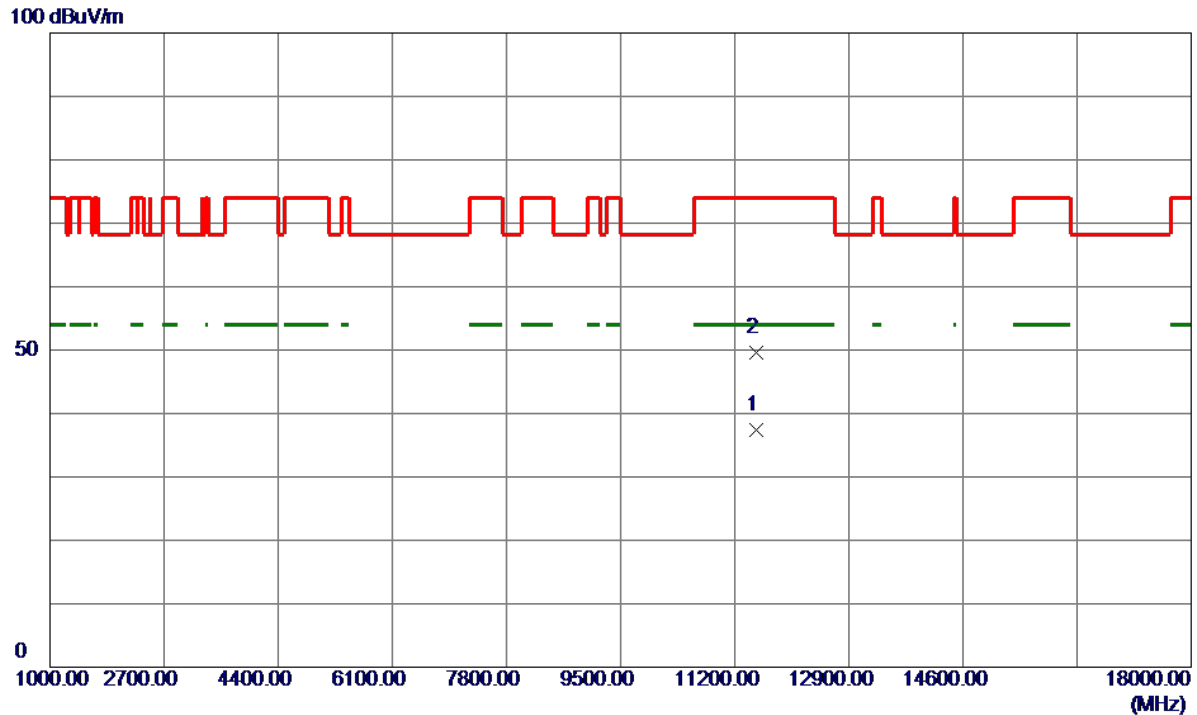


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11513.5599	23.48	13.93	37.41	54.00	-16.59	AVG	
2	11516.8200	35.72	13.92	49.64	74.00	-24.36	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

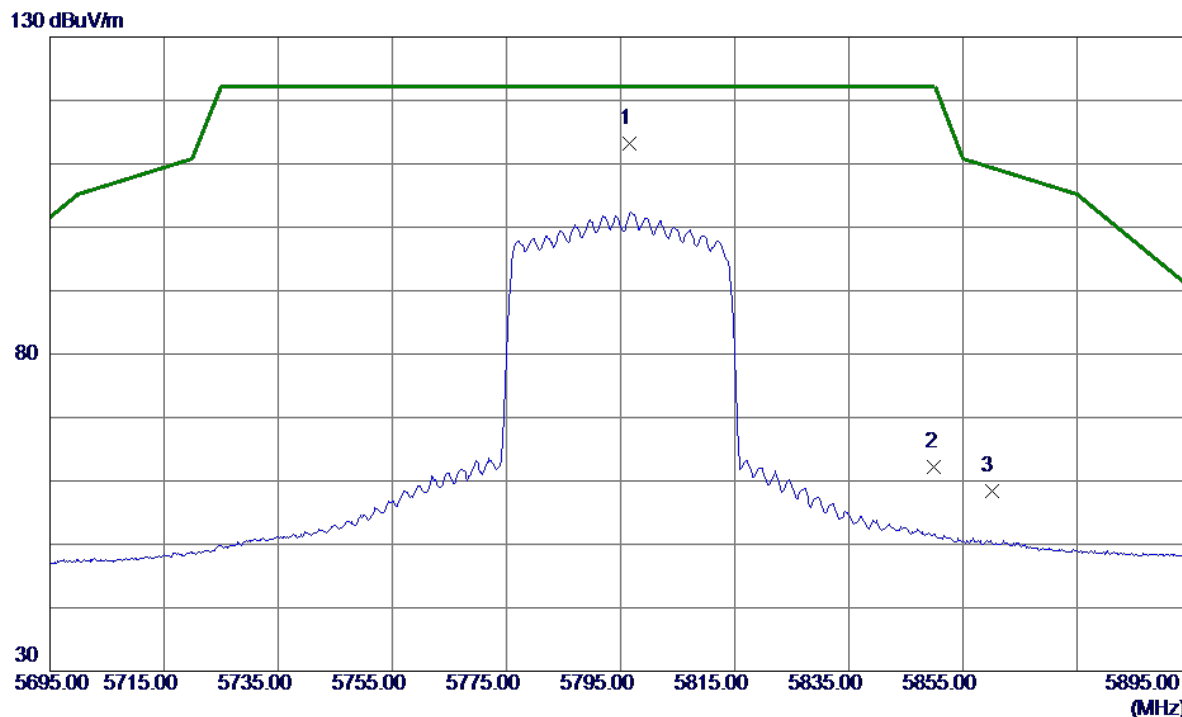


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5796.6000	95.73	17.41	113.14	122.20	-9.06	Peak	No Limit
2	5850.0000	44.62	17.65	62.27	122.20	-59.93	Peak	
3	5860.0000	40.64	17.70	58.34	109.40	-51.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

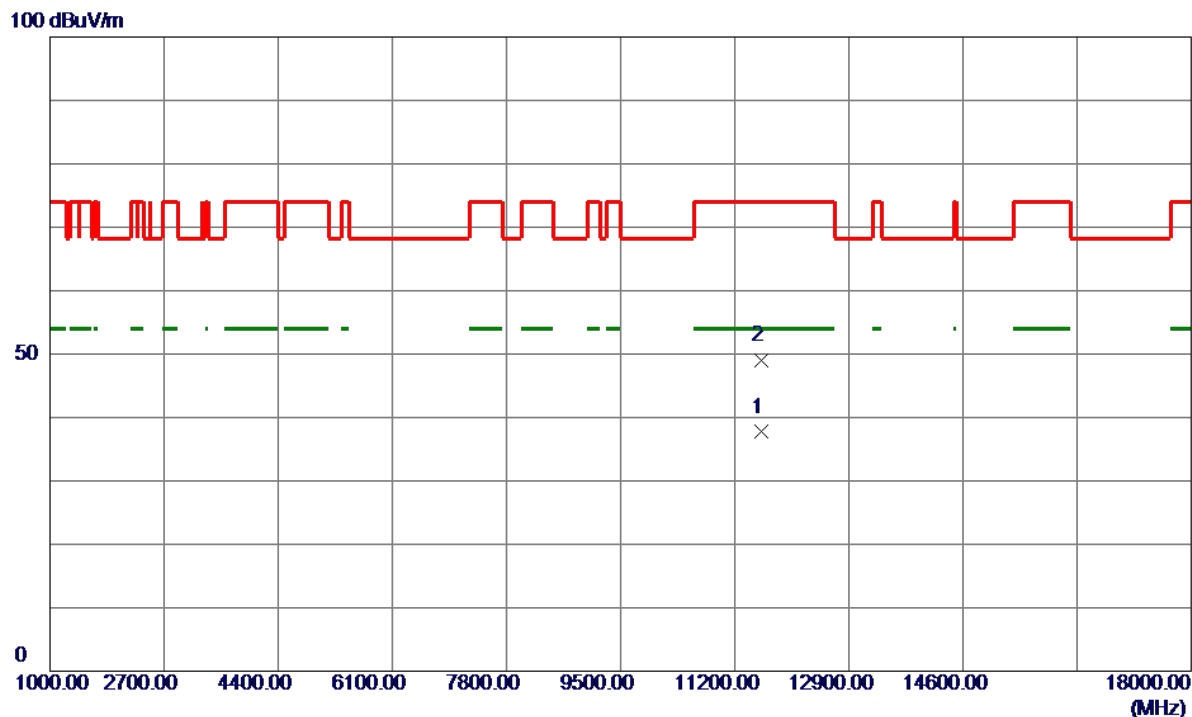


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11587.7000	23.89	13.81	37.70	54.00	-16.30	AVG	
2	11588.6600	35.23	13.80	49.03	74.00	-24.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

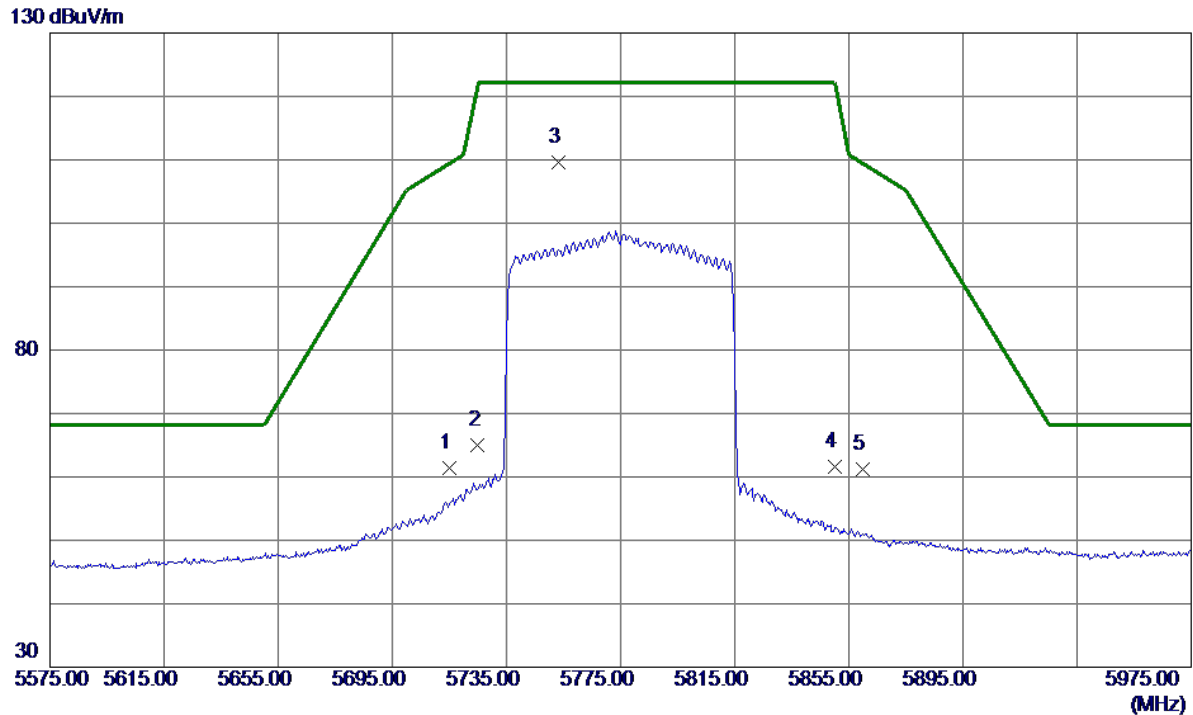


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	44.31	17.03	61.34	109.40	-48.06	Peak	
2	5725.0000	47.99	17.07	65.06	122.20	-57.14	Peak	
3 *	5753.4000	92.35	17.21	109.56	122.20	-12.64	Peak	No Limit
4	5850.0000	43.99	17.65	61.64	122.20	-60.56	Peak	
5	5860.0000	43.41	17.70	61.11	109.40	-48.29	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

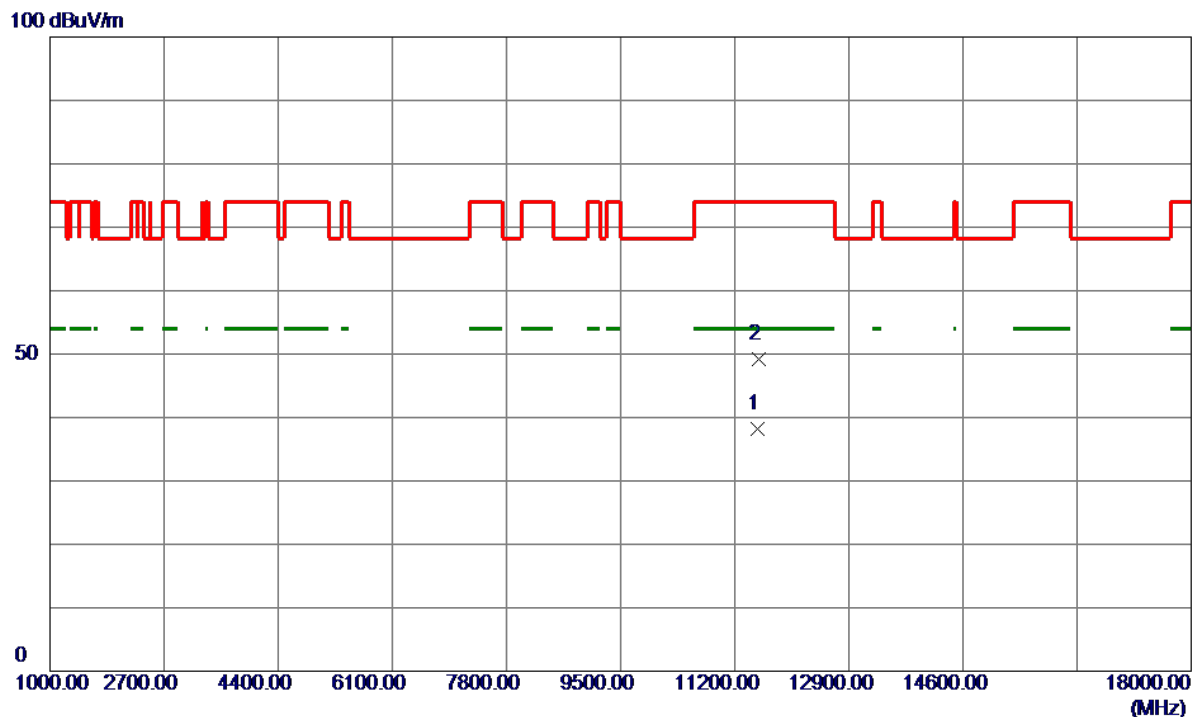


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11542.6200	24.23	13.88	38.11	54.00	-15.89	AVG	
2	11557.9000	35.28	13.86	49.14	74.00	-24.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

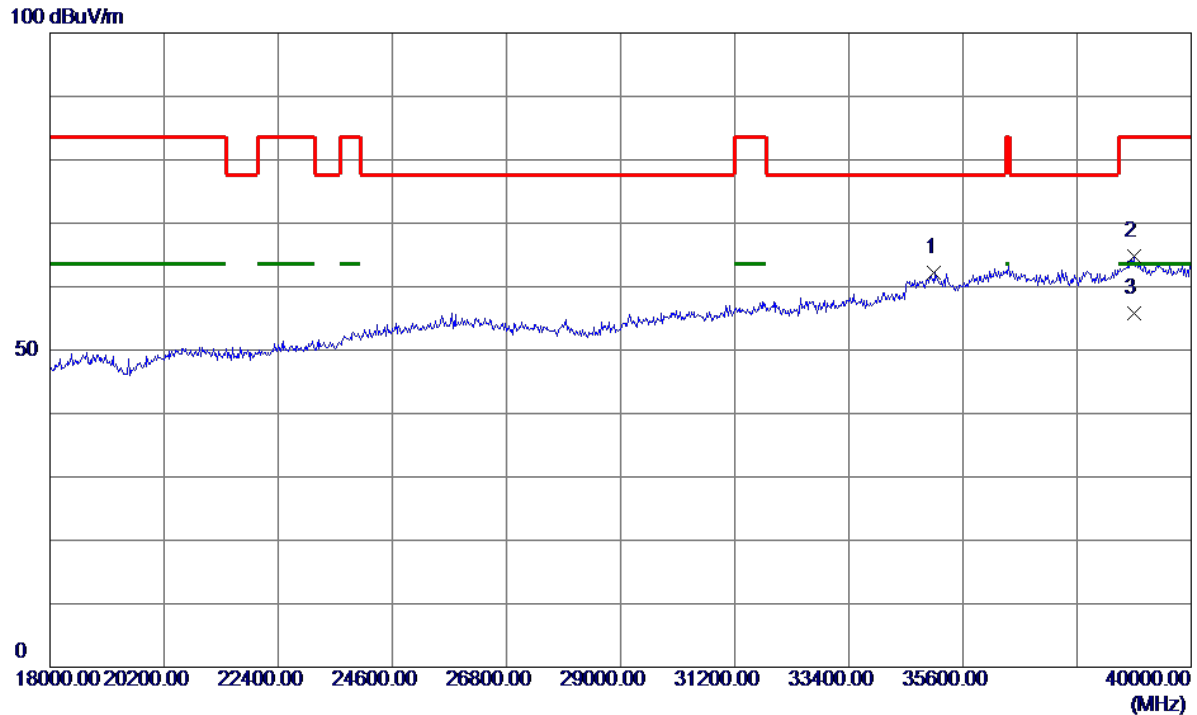

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35050.0000	48.77	13.49	62.26	77.70	-15.44	Peak	
2	38900.0000	49.88	14.84	64.72	83.50	-18.78	Peak	
3 *	38900.0000	41.03	14.84	55.87	63.50	-7.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.