

Appendix - BLE

1. Duty Cycle


1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.463	0.624	74.20	1.30	0.01
		2440	0.464	0.625	74.24	1.29	0.06
		2480	0.463	0.625	74.08	1.30	0.03

1.2 Test Graph

1.2.1 Ant1

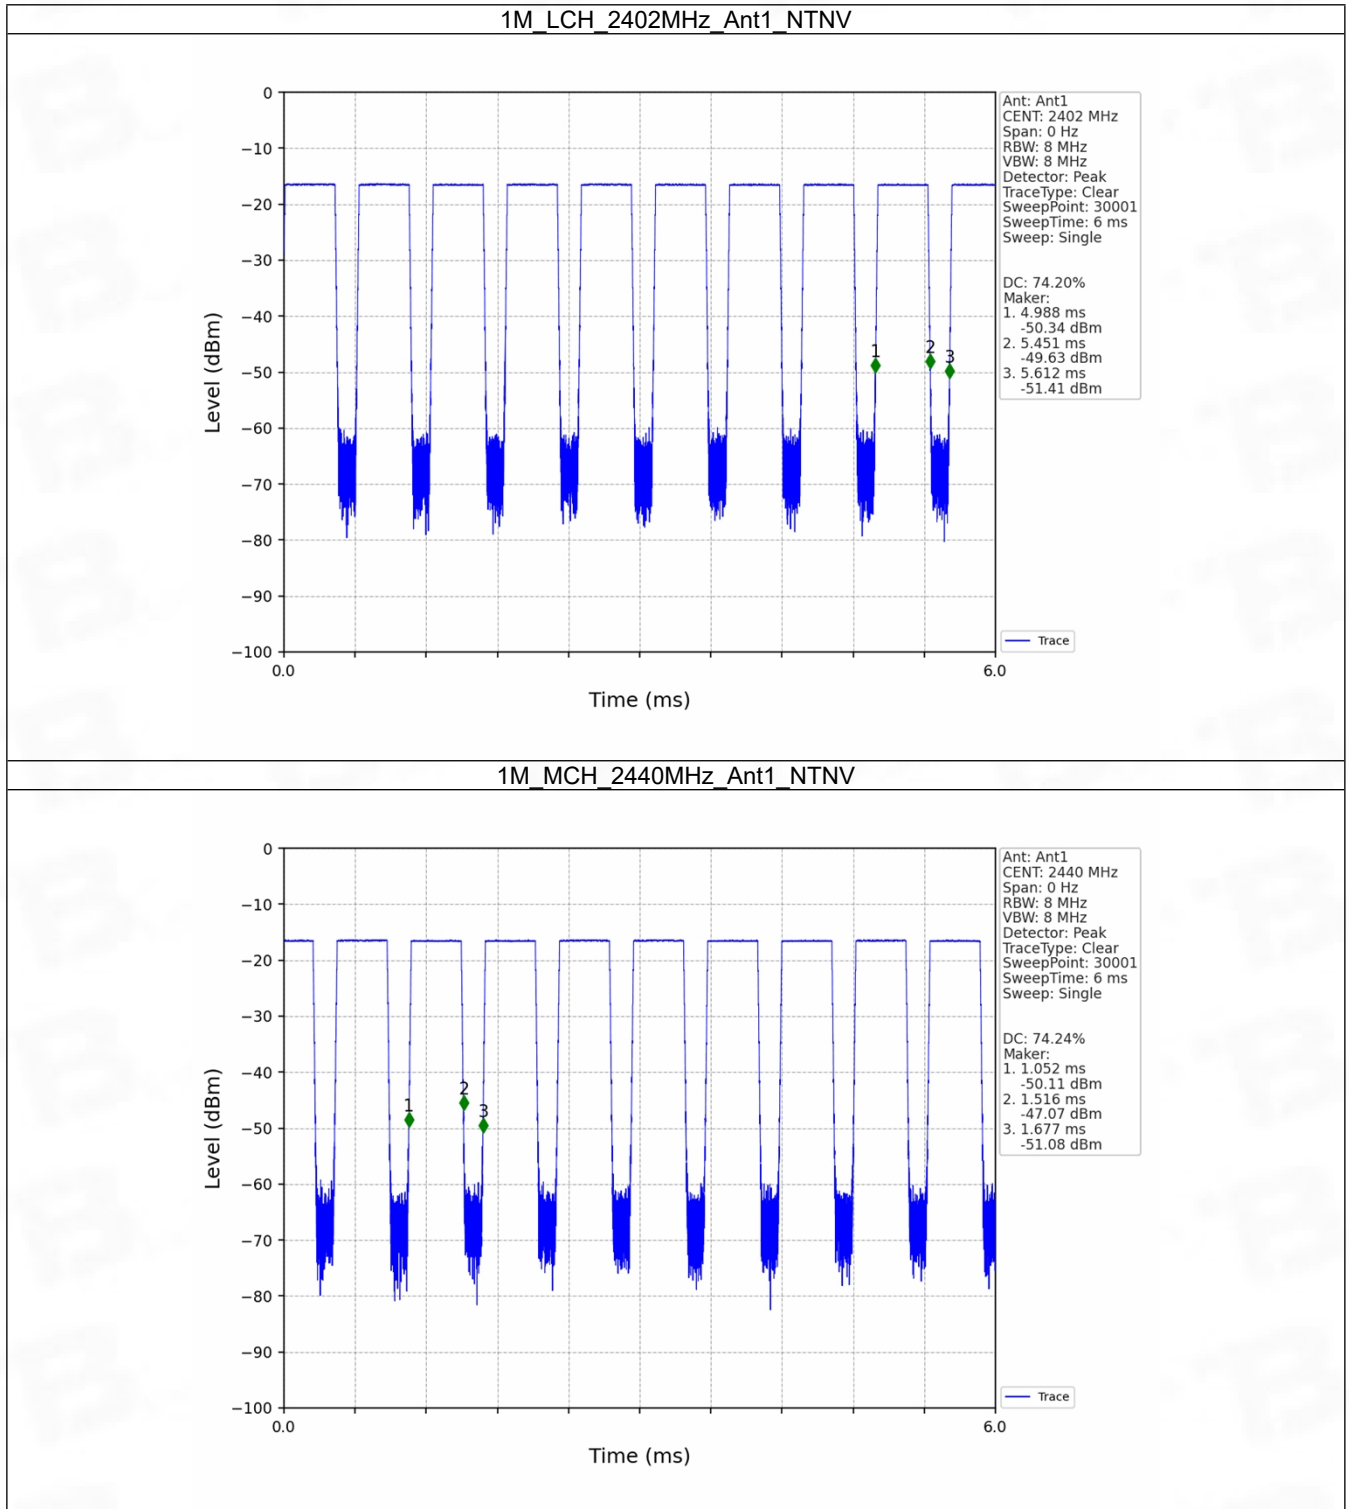

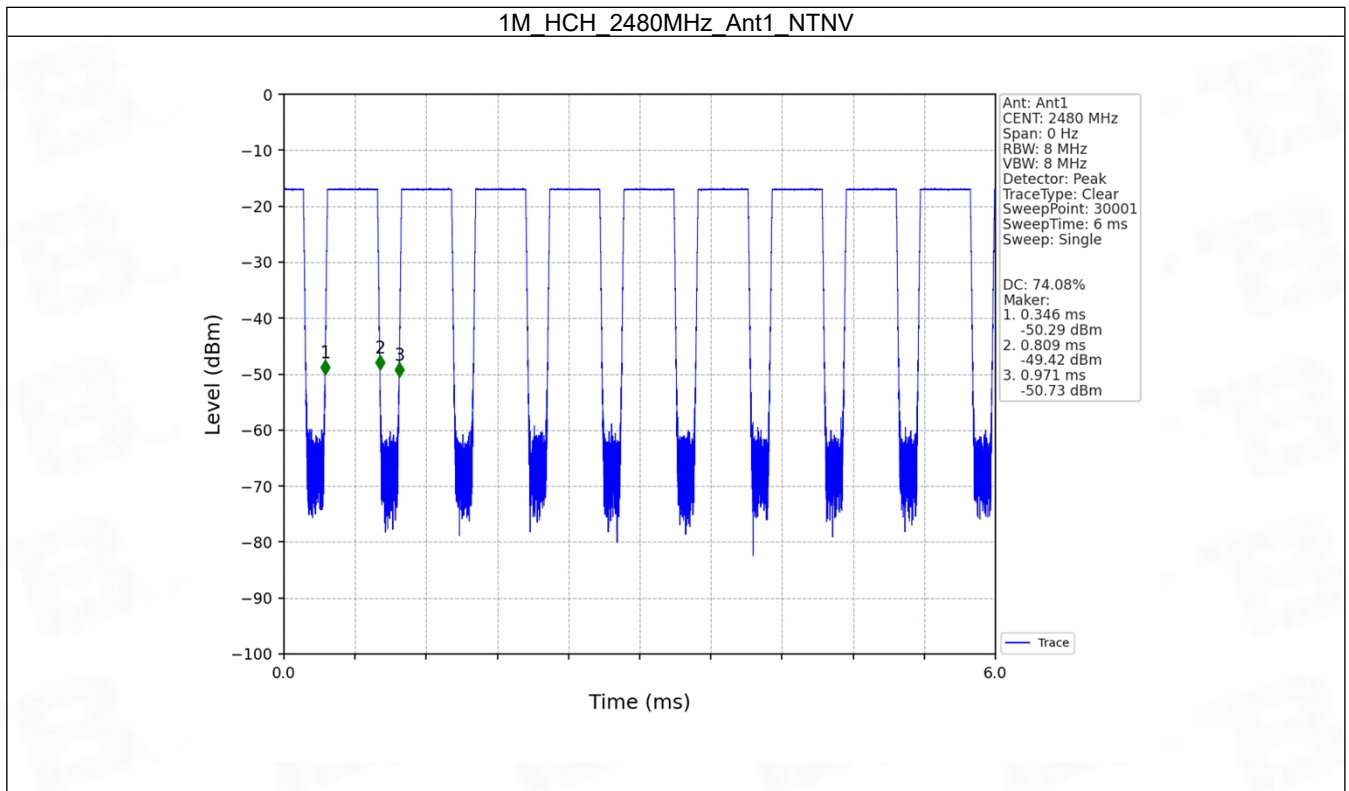

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.062	/	Pass
		2440	1	1.047	/	Pass
		2480	1	1.054	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.788	≥ 0.5	Pass
		2440	1	0.743	≥ 0.5	Pass
		2480	1	0.724	≥ 0.5	Pass


2.2 Test Graph


2.2.1 OBW

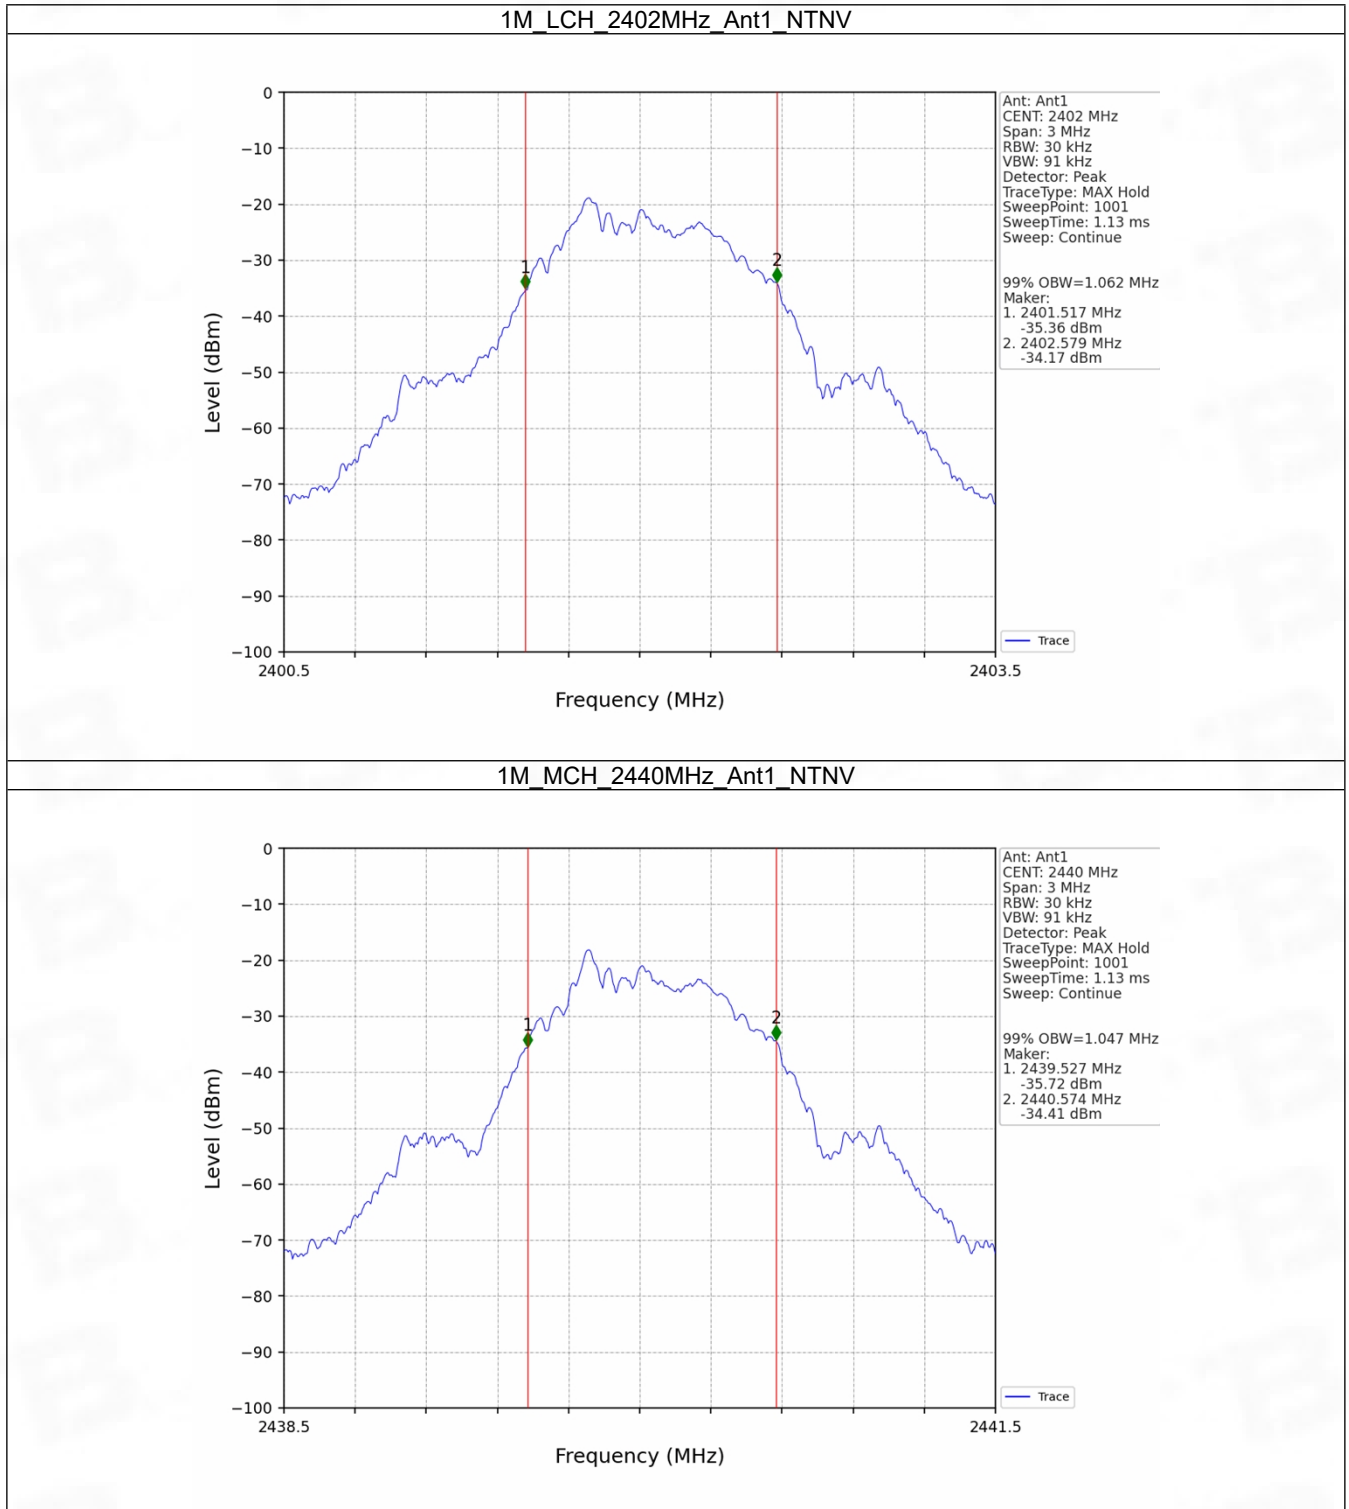

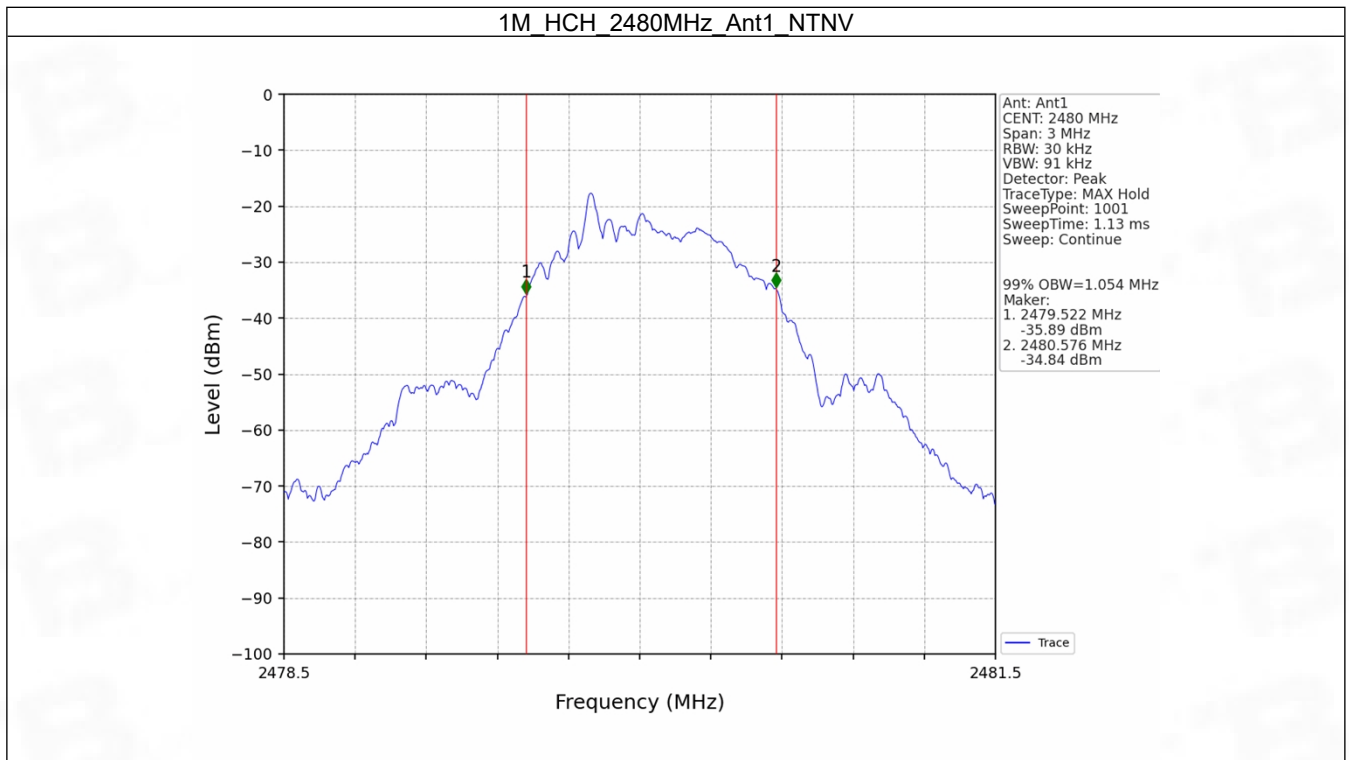

2.2.2 6dB BW

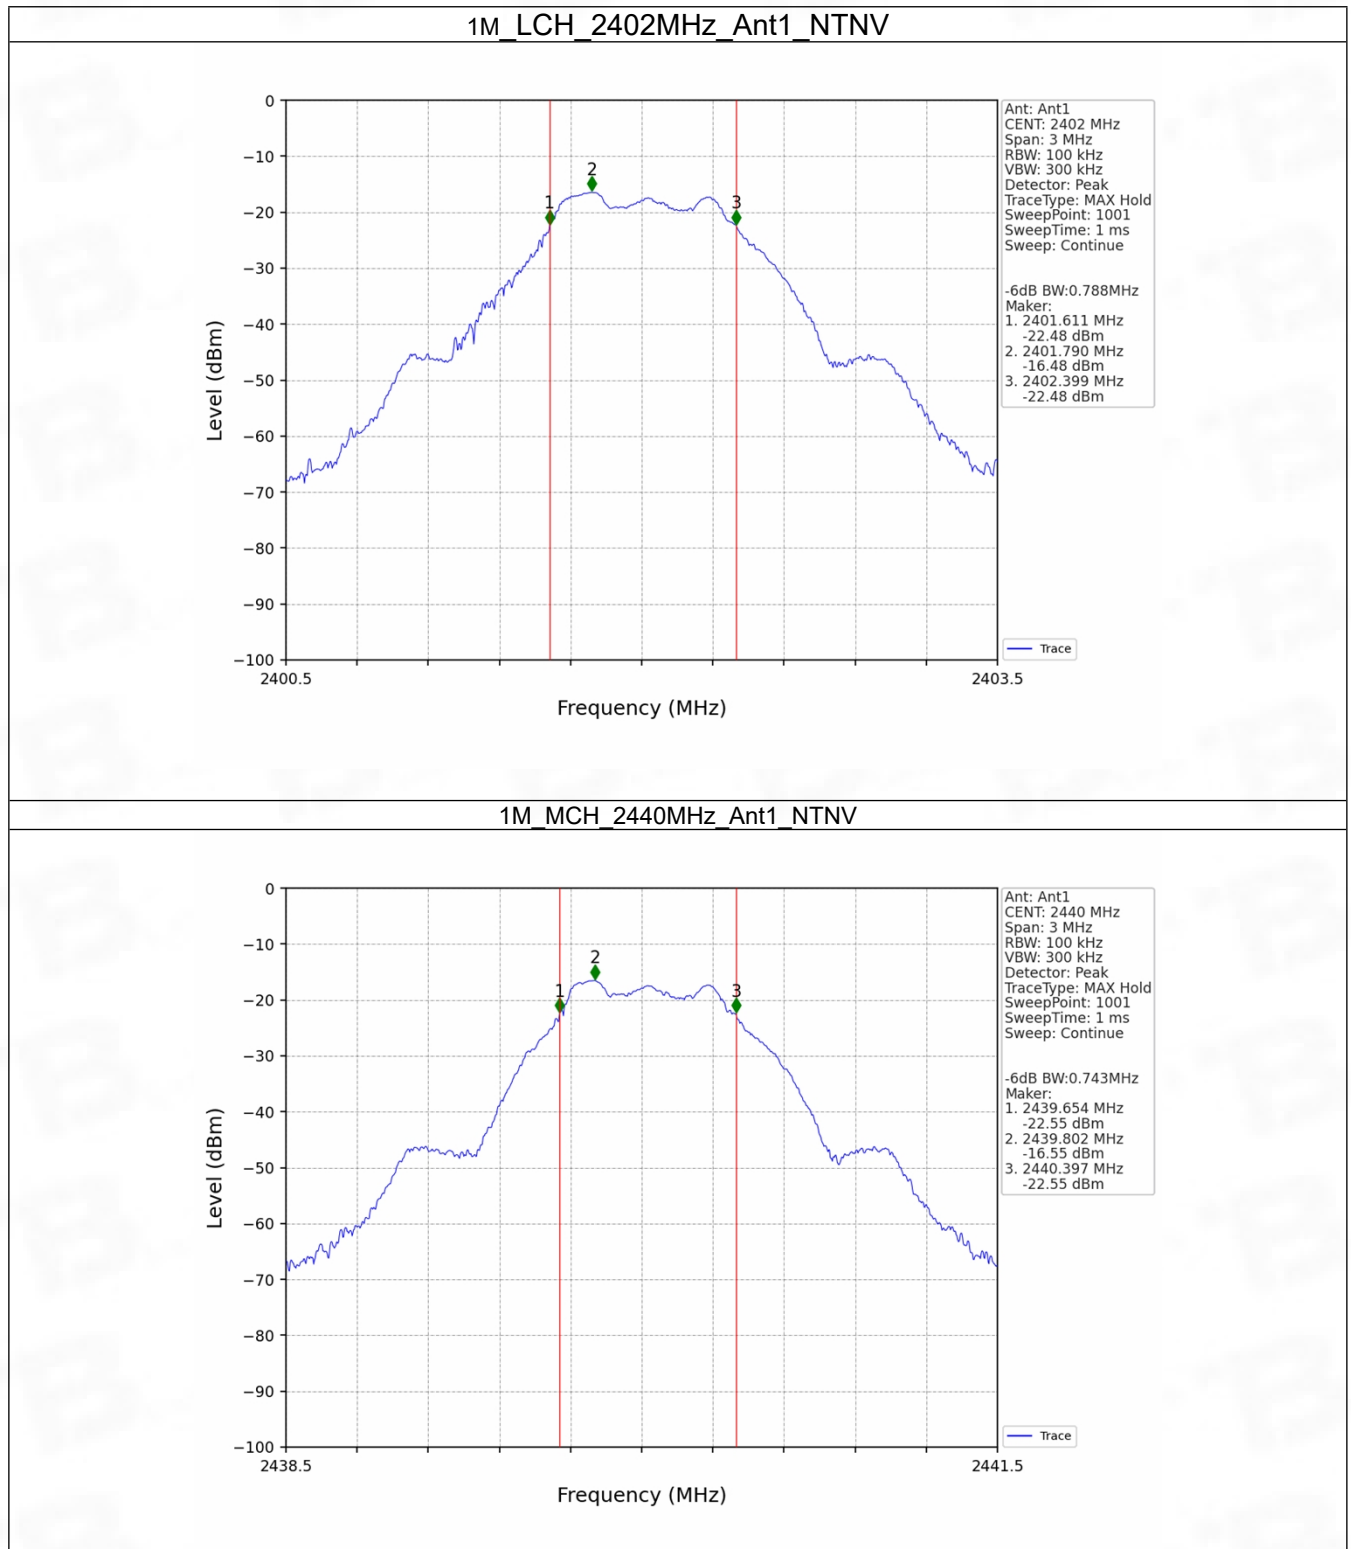

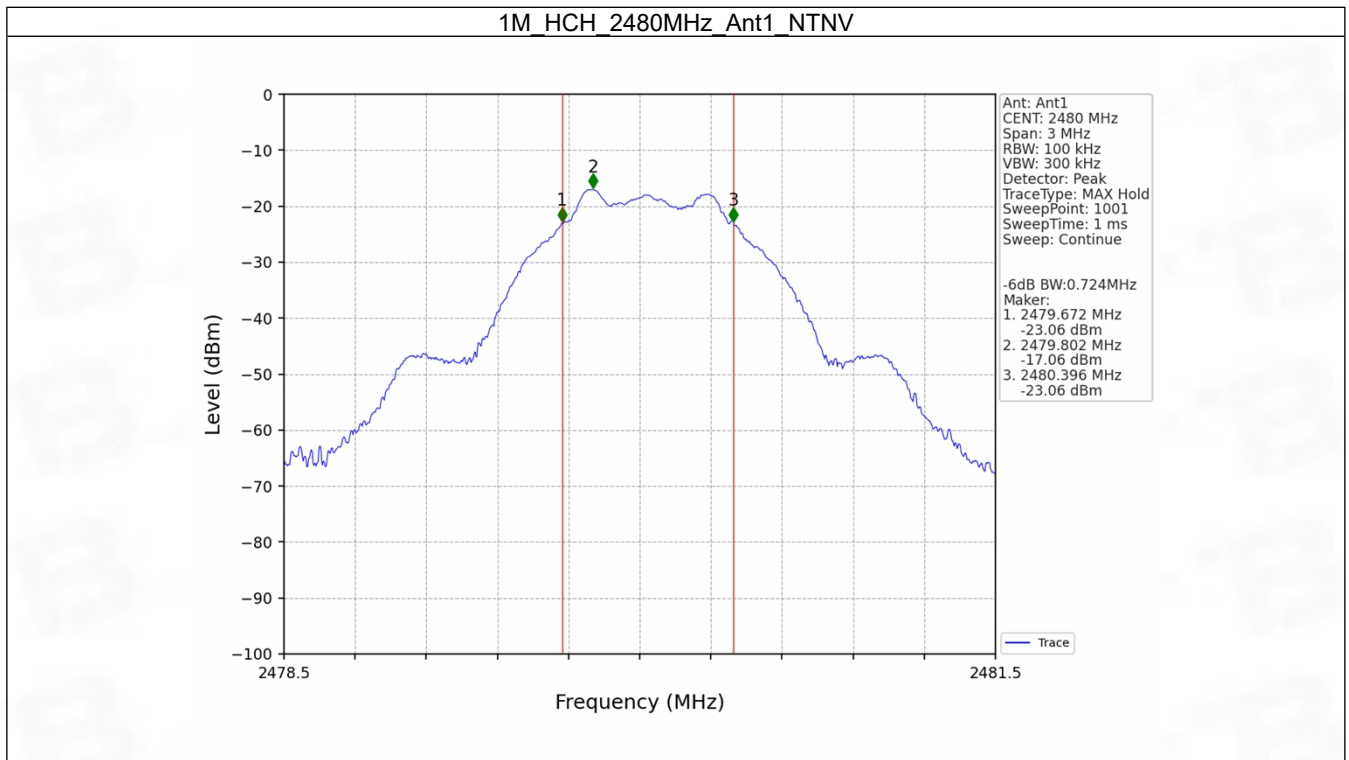

3. Maximum Conducted Output Power


3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-16.27	<=30	Pass
		2440	-16.29	<=30	Pass
		2480	-16.79	<=30	Pass

3.2 Test Graph

3.2.1 Power

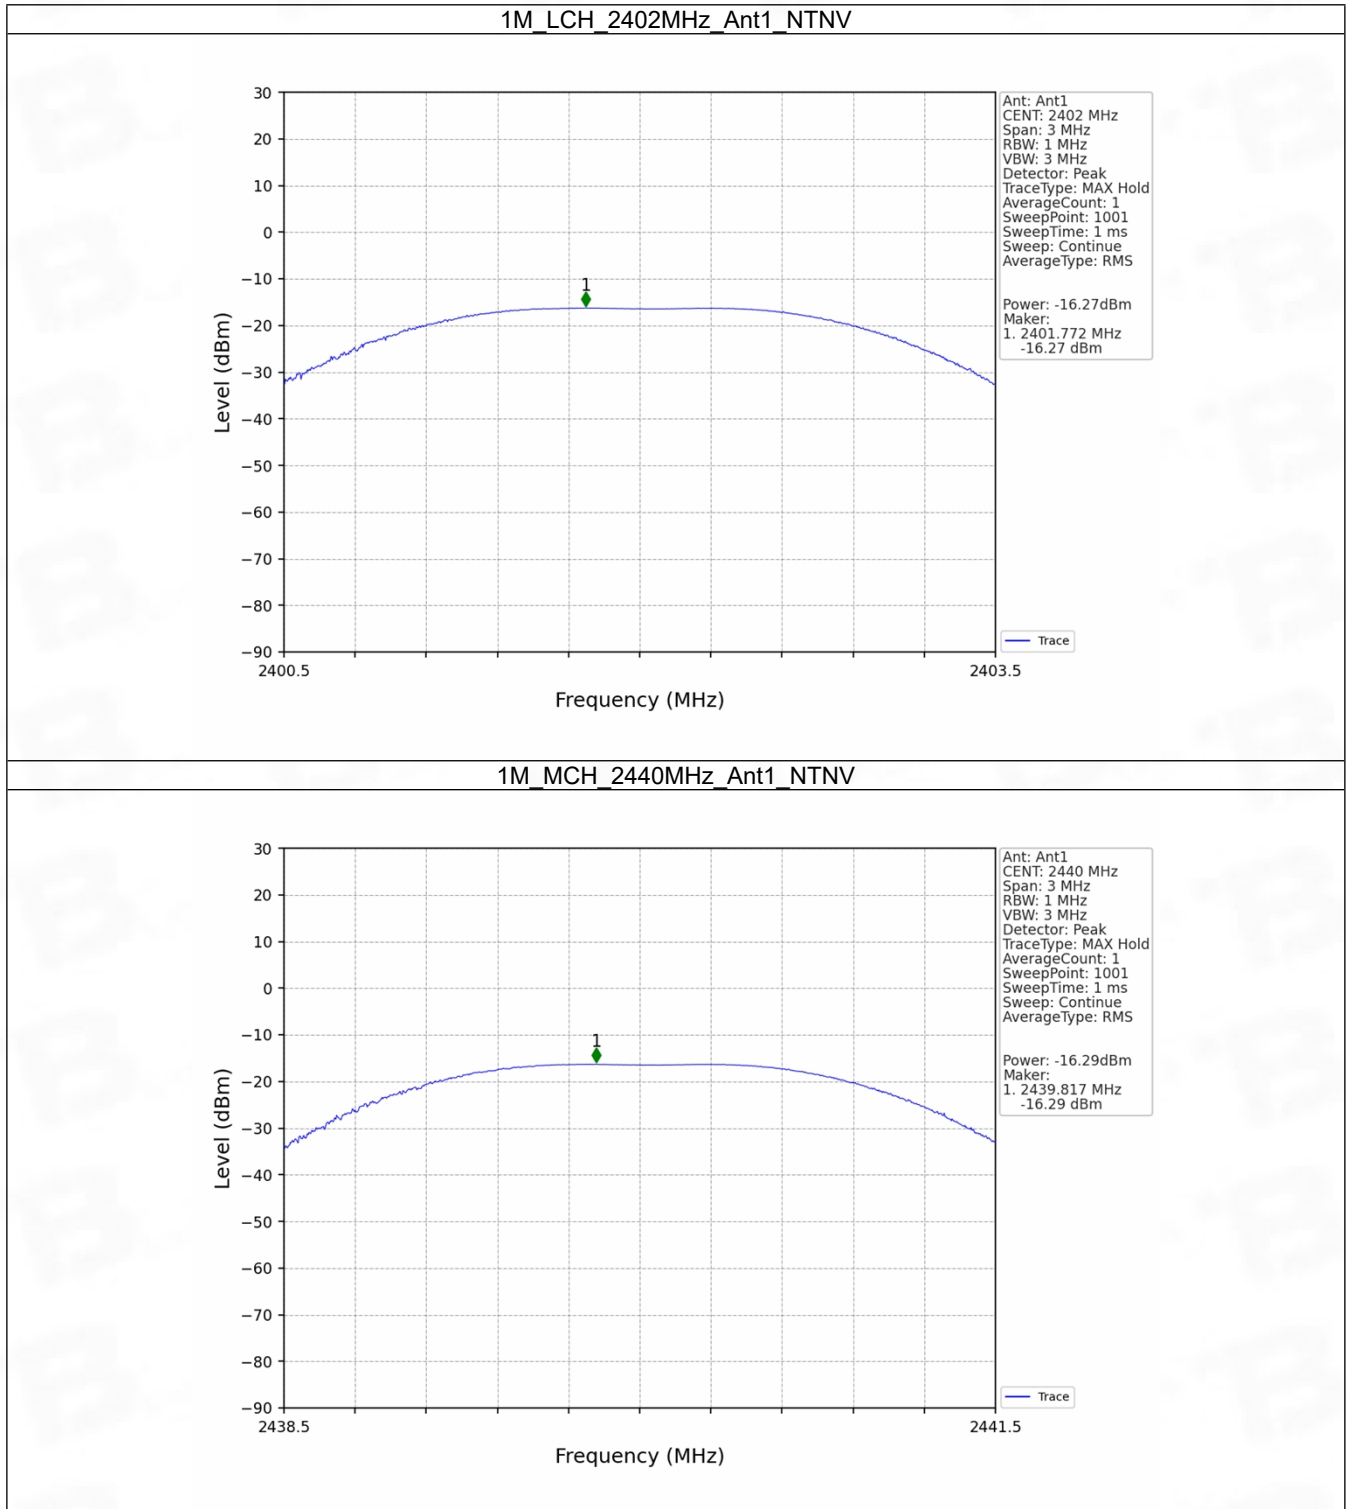

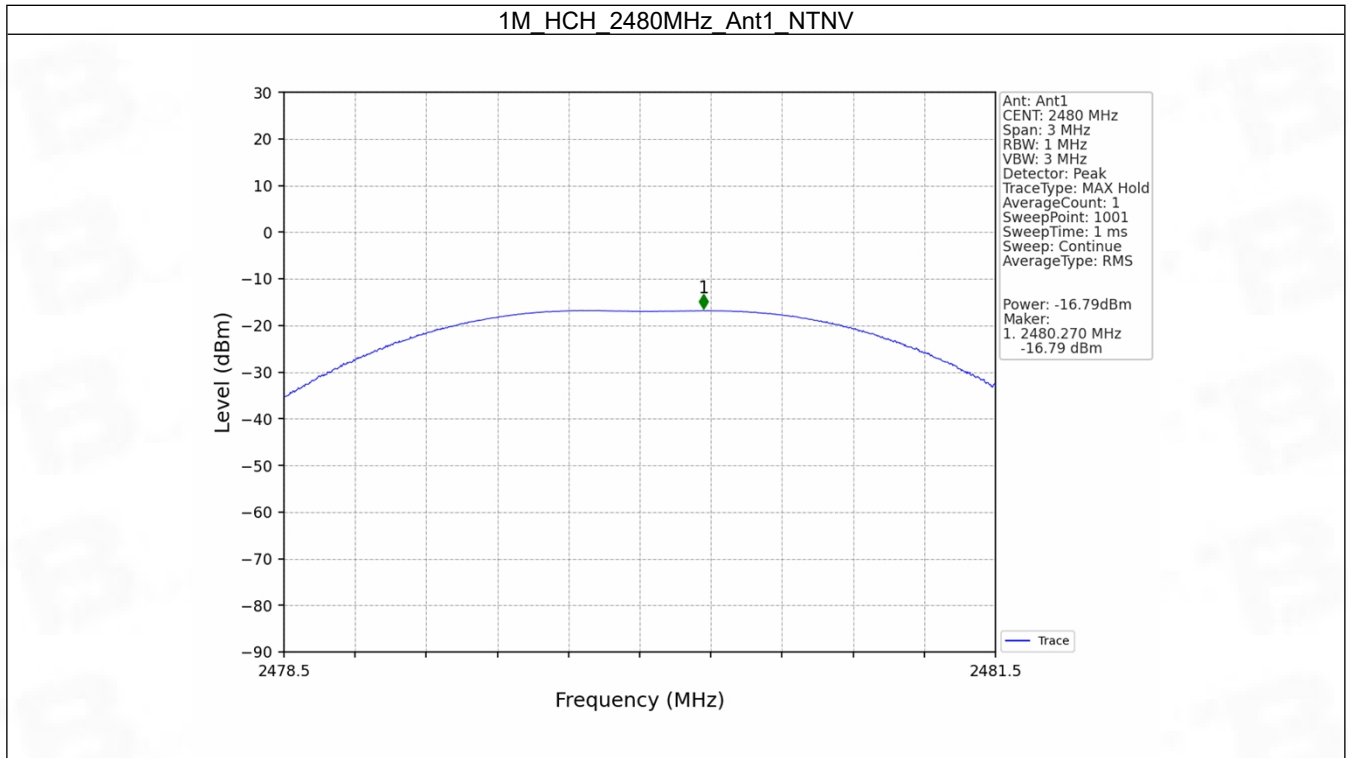

4. Maximum Power Spectral Density


4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-32.52	<=8	Pass
		2440	-32.39	<=8	Pass
		2480	-32.14	<=8	Pass

4.2 Test Graph

4.2.1 PSD

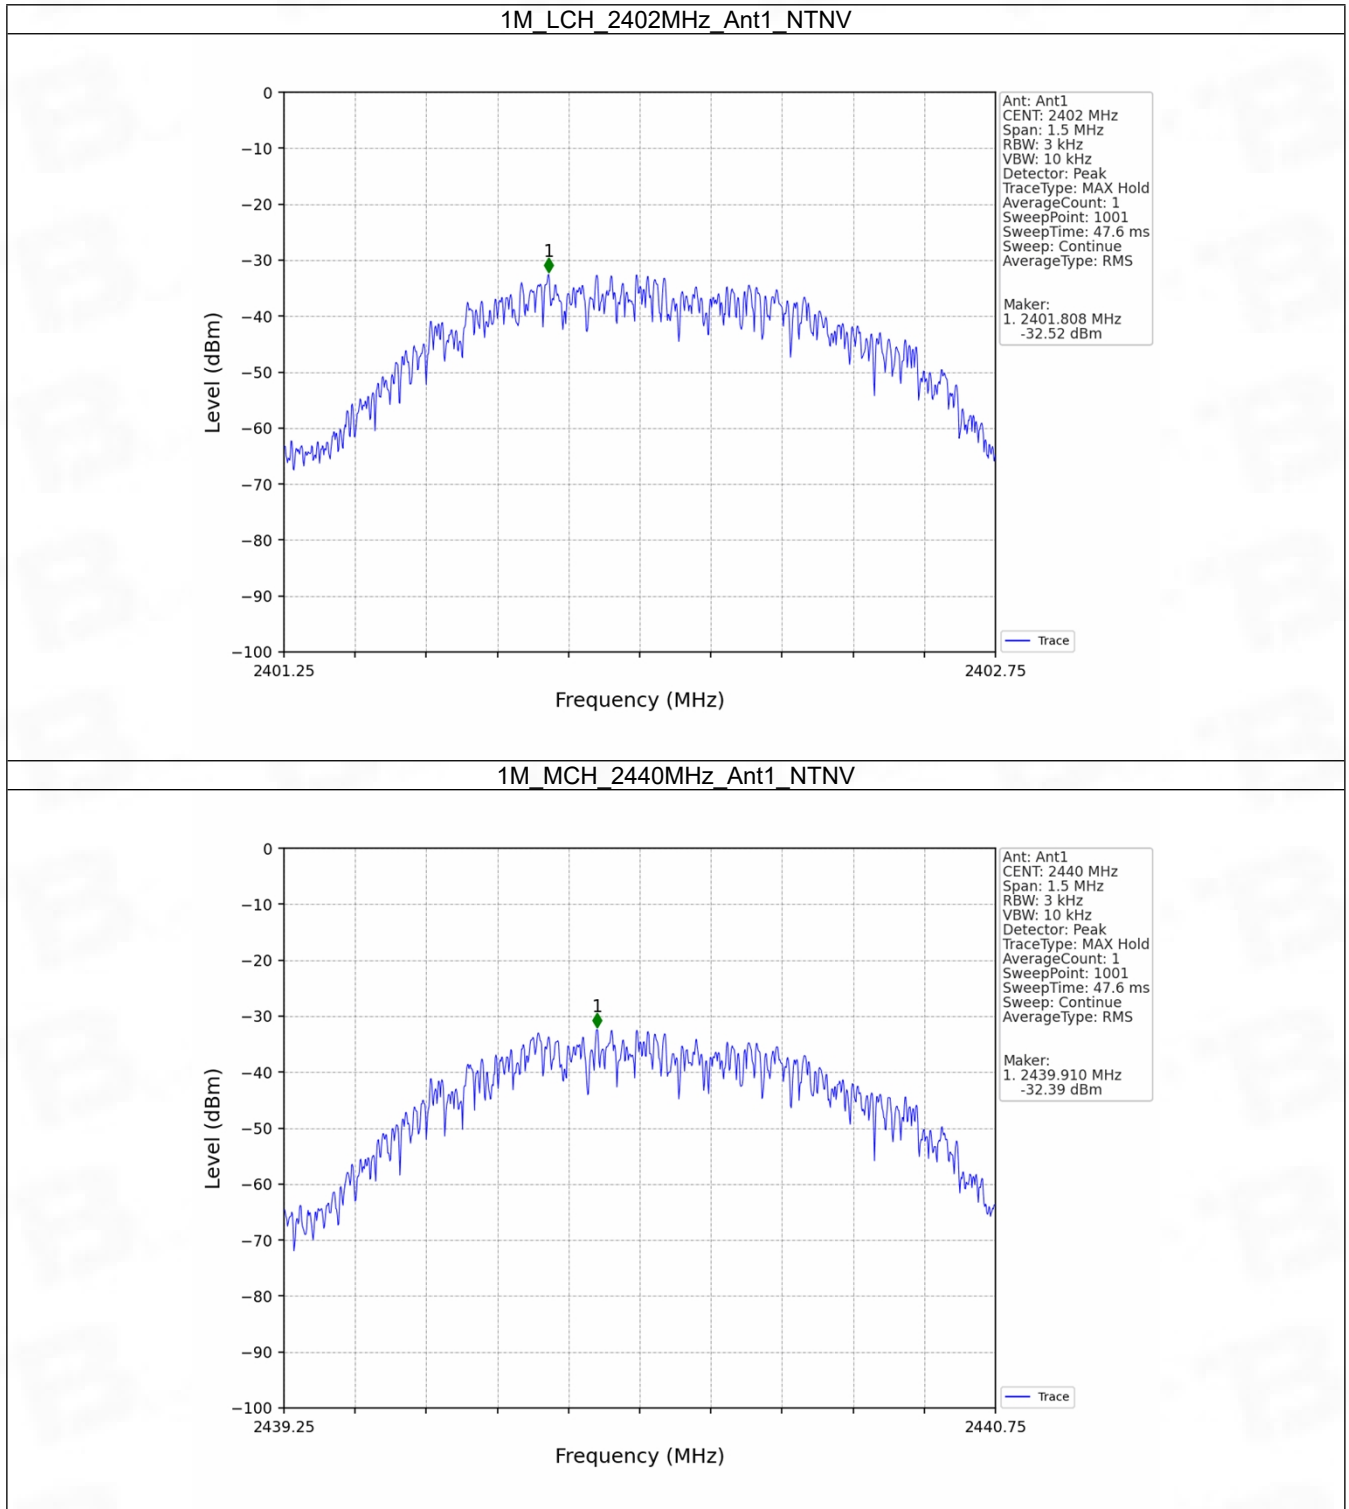

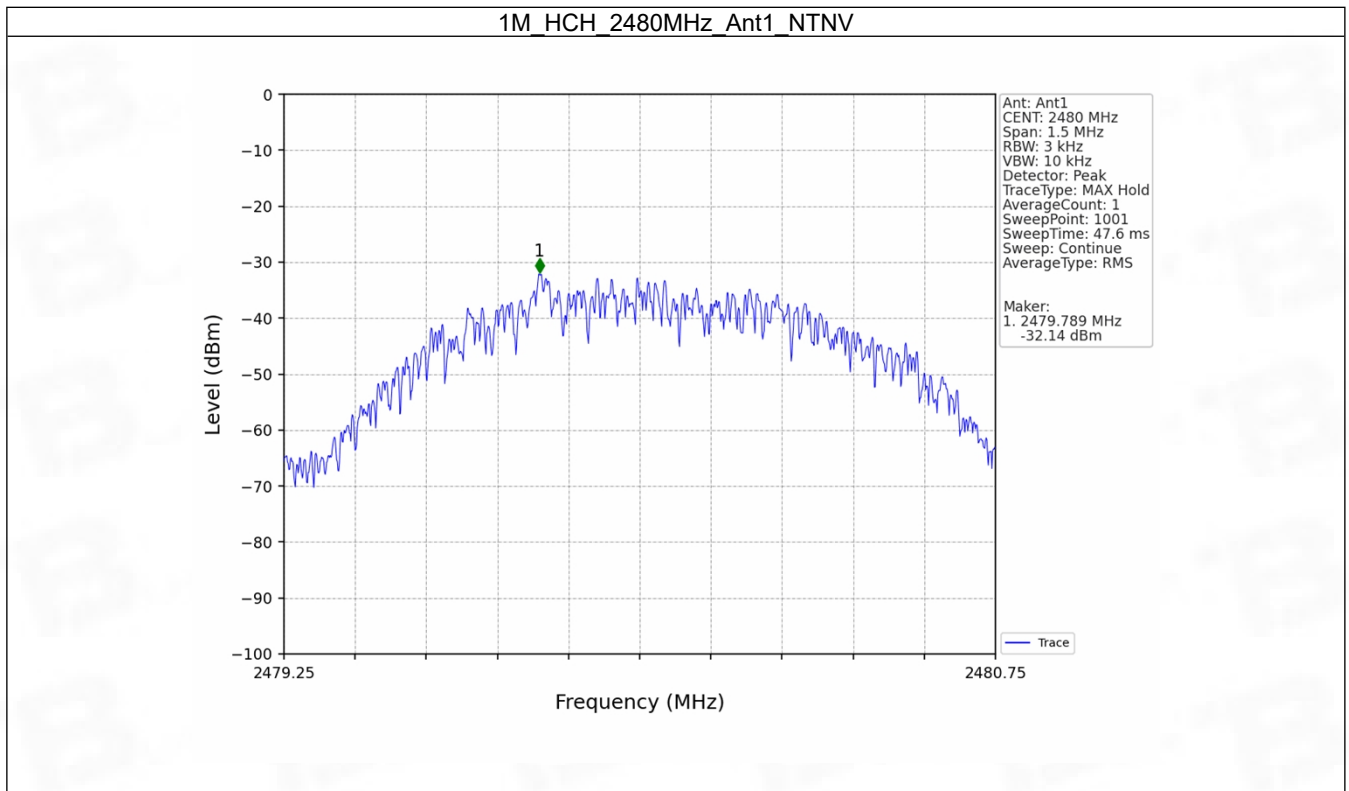

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-16.50
		2440	1	-16.54
		2480	1	-17.01


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-16.50	-36.50	Pass
		2440	1	-16.54	-36.54	Pass
		2480	1	-17.01	-37.01	Pass


5.2 Test Graph

5.2.1 Ref

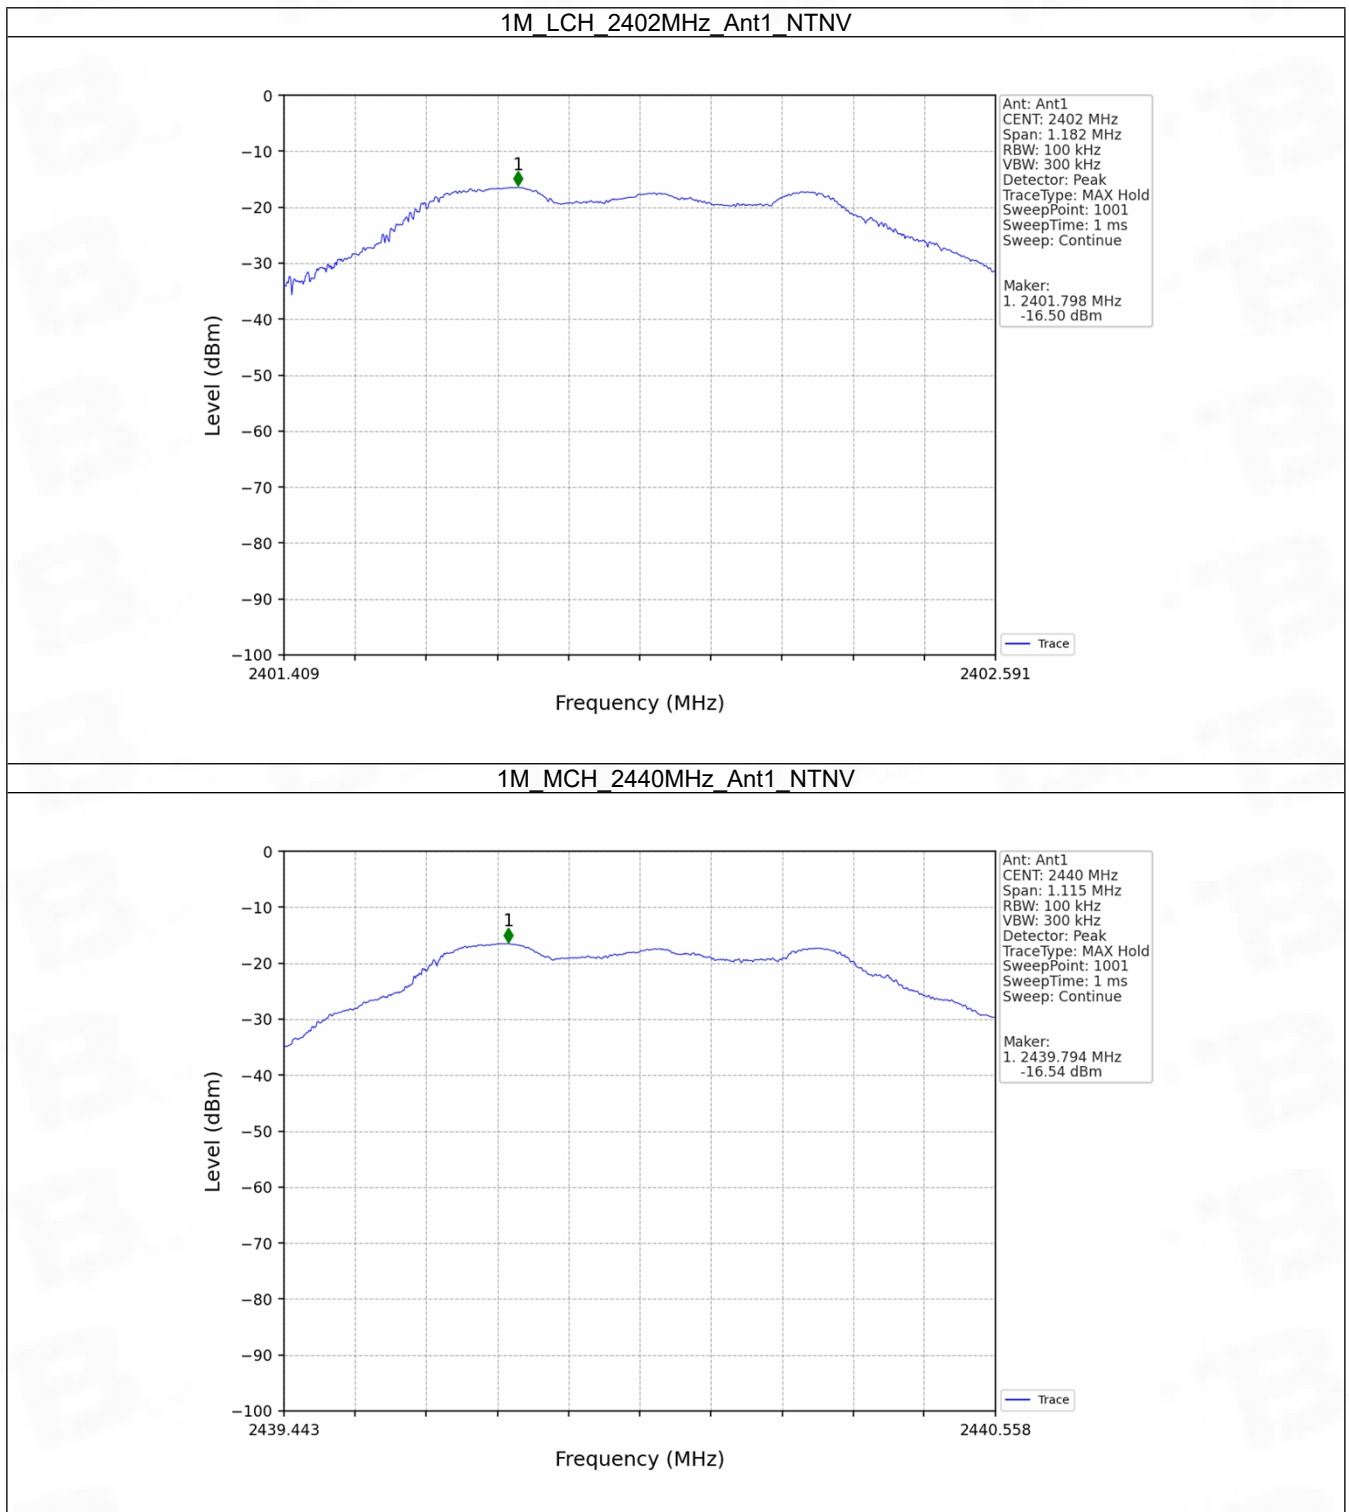


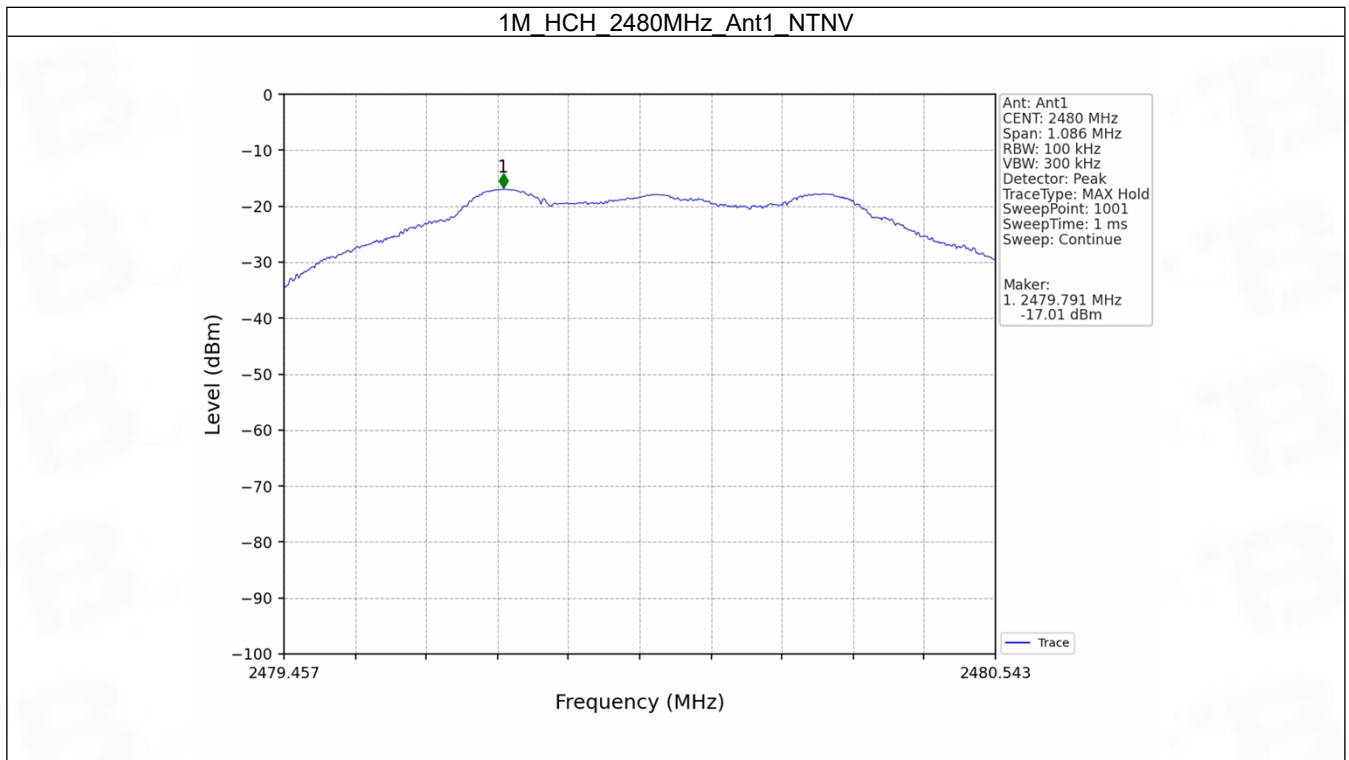

5.2.2 CSE

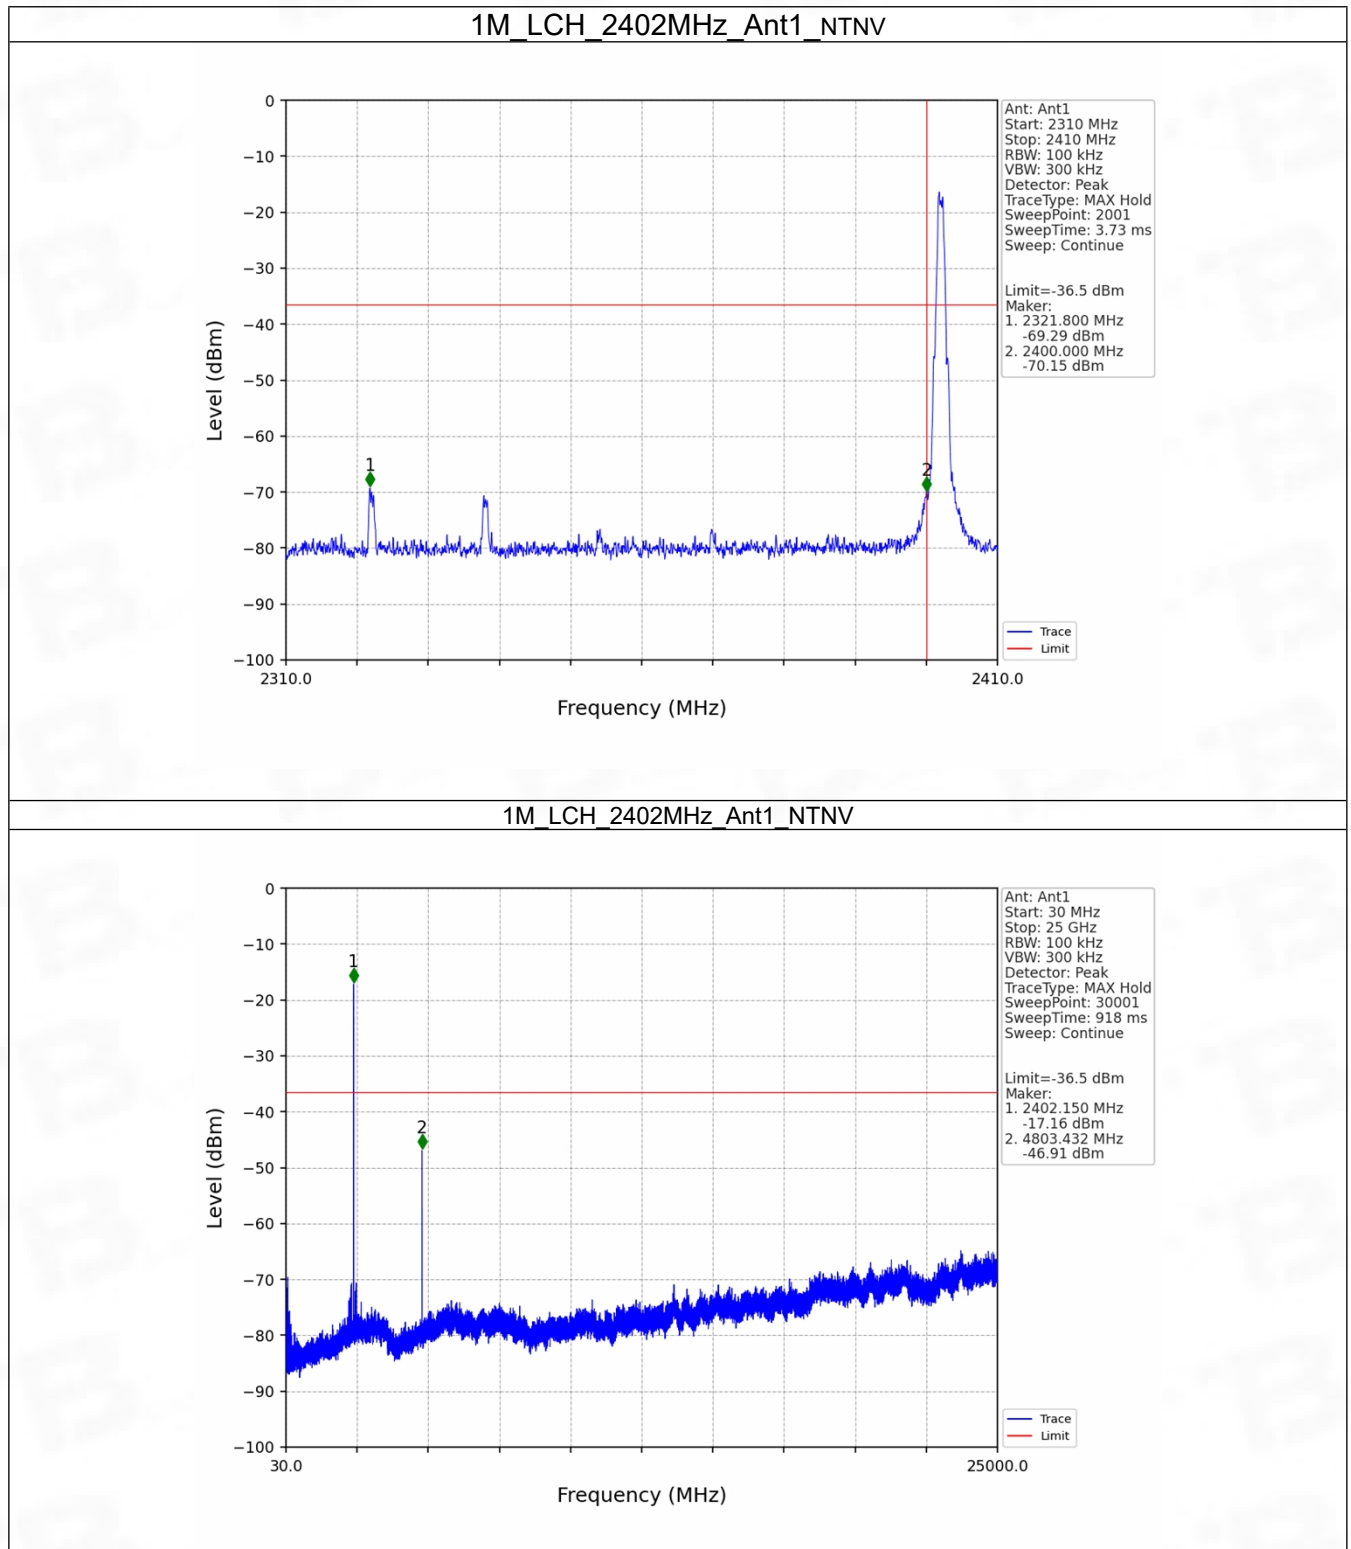

1M_MCH_2440MHz_Ant1_NTNV

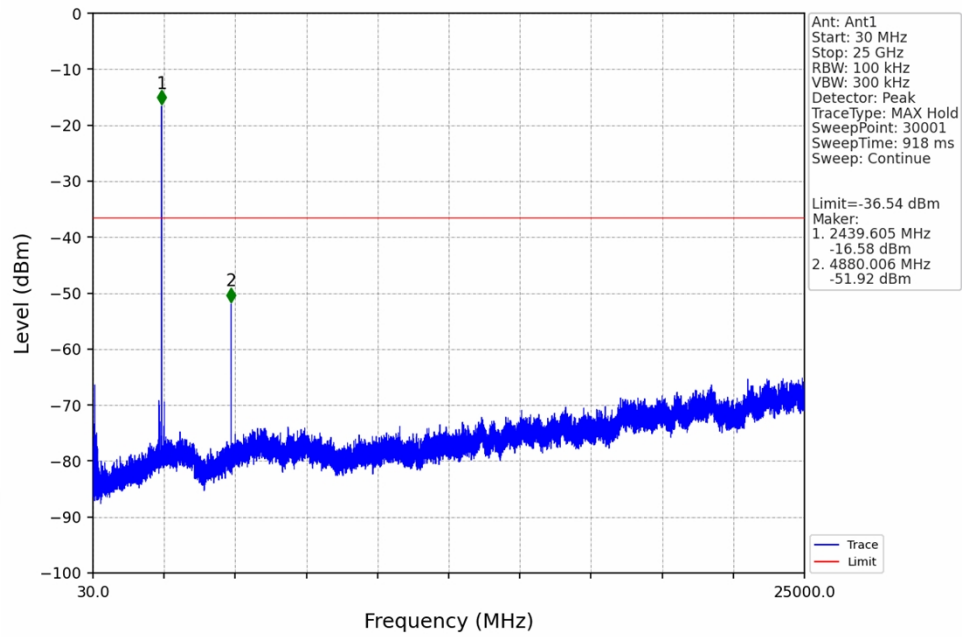

1M_HCH_2480MHz_Ant1_NTNV

