


Duty Cycle



Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	2.09	2.136	97.85	0.09	0.48	0.25
NVNT	a	5200	2.088	2.138	97.66	0.1	0.48	0.26
NVNT	a	5240	2.09	2.138	97.75	0.1	0.48	0.24
NVNT	n20	5180	4.02	4.06	99.01	0.04	0.25	/
NVNT	n20	5200	4.02	4.07	98.77	0.05	0.25	/
NVNT	n20	5240	4.02	4.07	98.77	0.05	0.25	/
NVNT	ac20	5180	4.005	4.05	98.89	0.05	0.25	/
NVNT	ac20	5200	4.005	4.055	98.77	0.05	0.25	/
NVNT	ac20	5240	4.005	4.055	98.77	0.05	0.25	/



Duty Cycle NVNT a 5240MHz


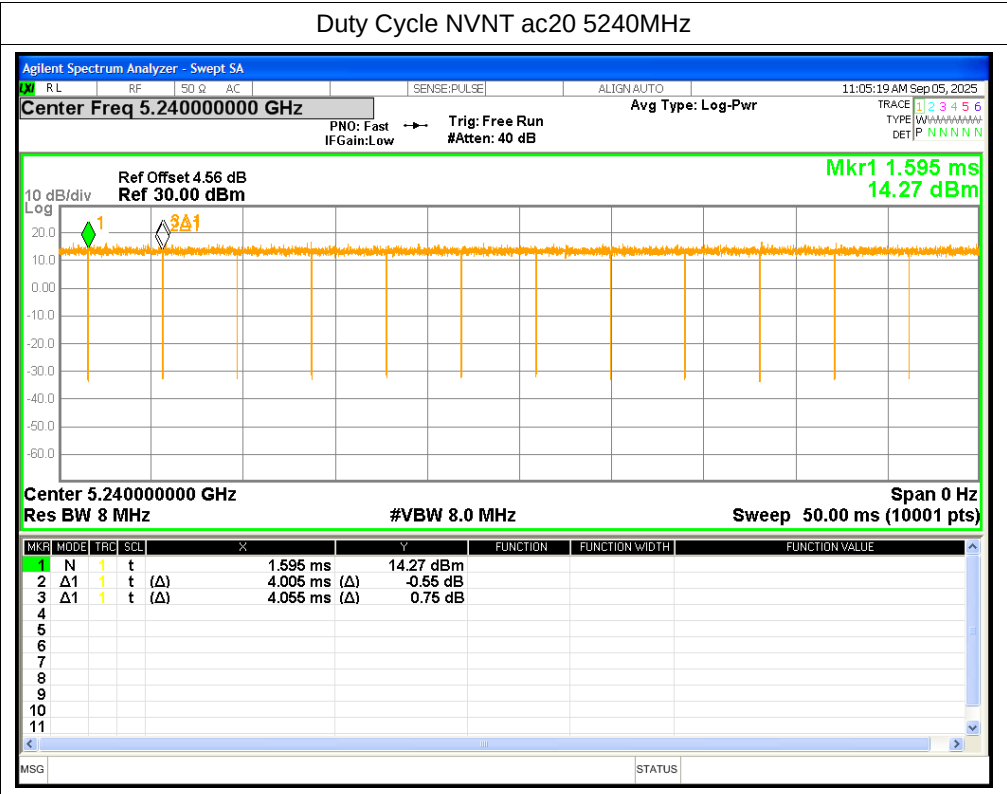




Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Correction Factor (dB)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.14	0.09	11.23	<=24	Pass
NVNT	a	5200	10.93	0.1	11.03	<=24	Pass
NVNT	a	5240	11.29	0.1	11.39	<=24	Pass
NVNT	n20	5180	11.62	-	11.62	<=24	Pass
NVNT	n20	5200	11.39	-	11.39	<=24	Pass
NVNT	n20	5240	11.69	-	11.69	<=24	Pass
NVNT	ac20	5180	11.05	-	11.05	<=24	Pass
NVNT	ac20	5200	10.79	-	10.79	<=24	Pass
NVNT	ac20	5240	11.1	-	11.1	<=24	Pass

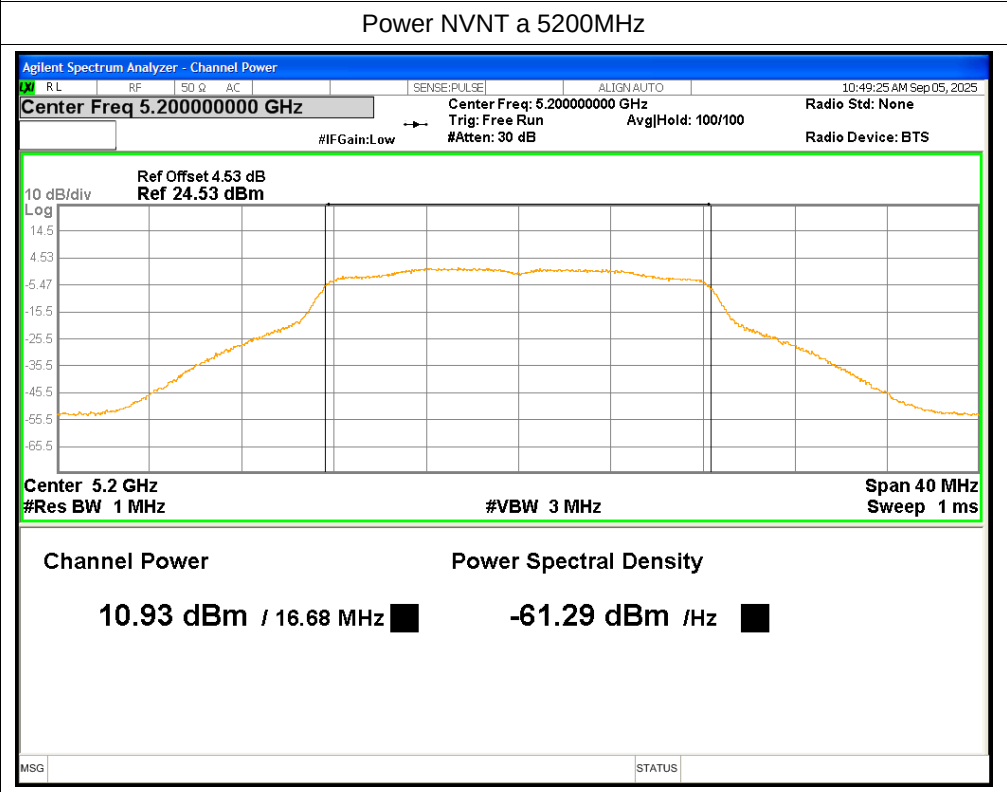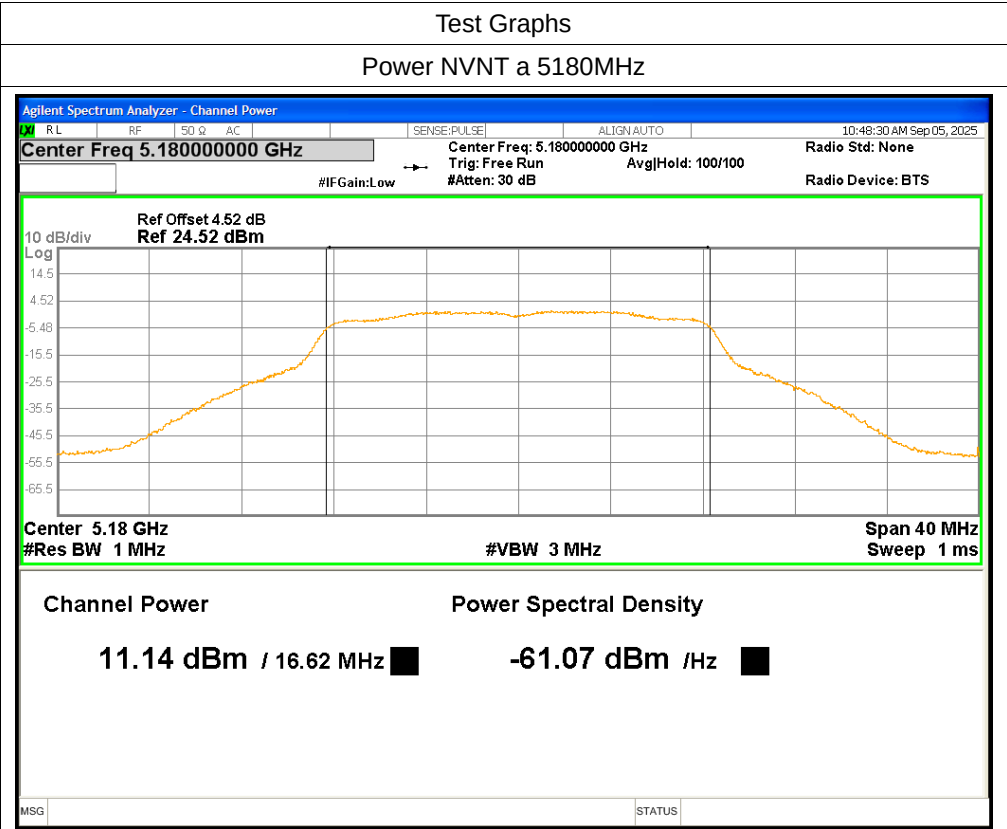

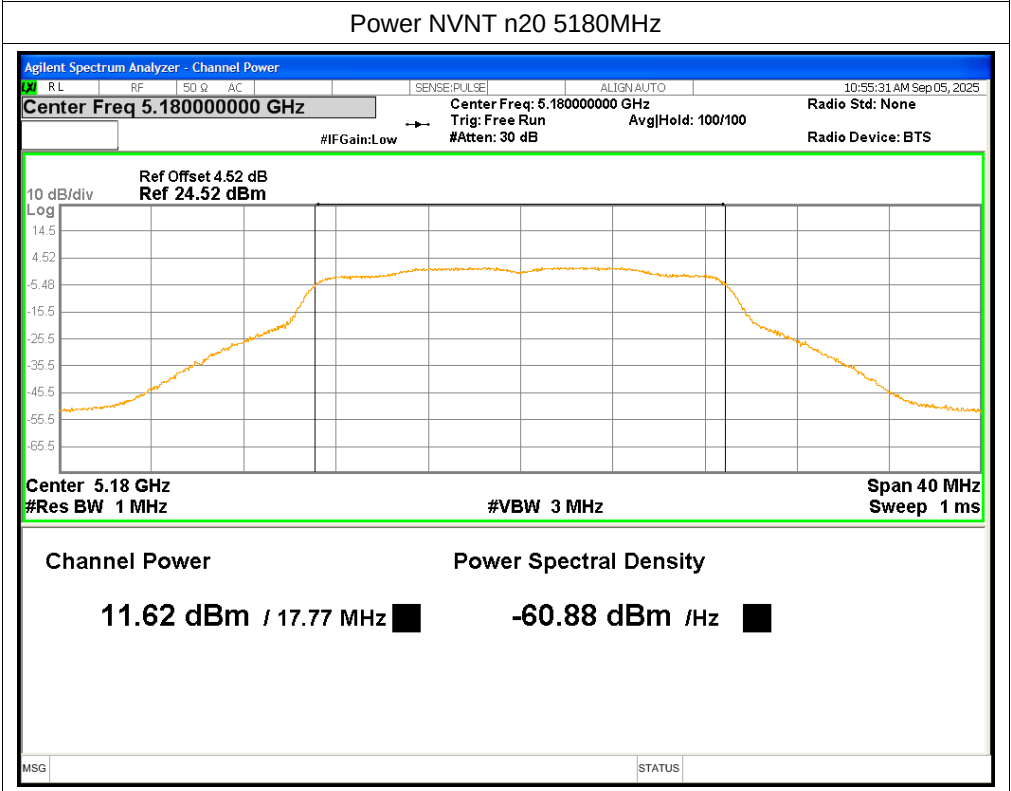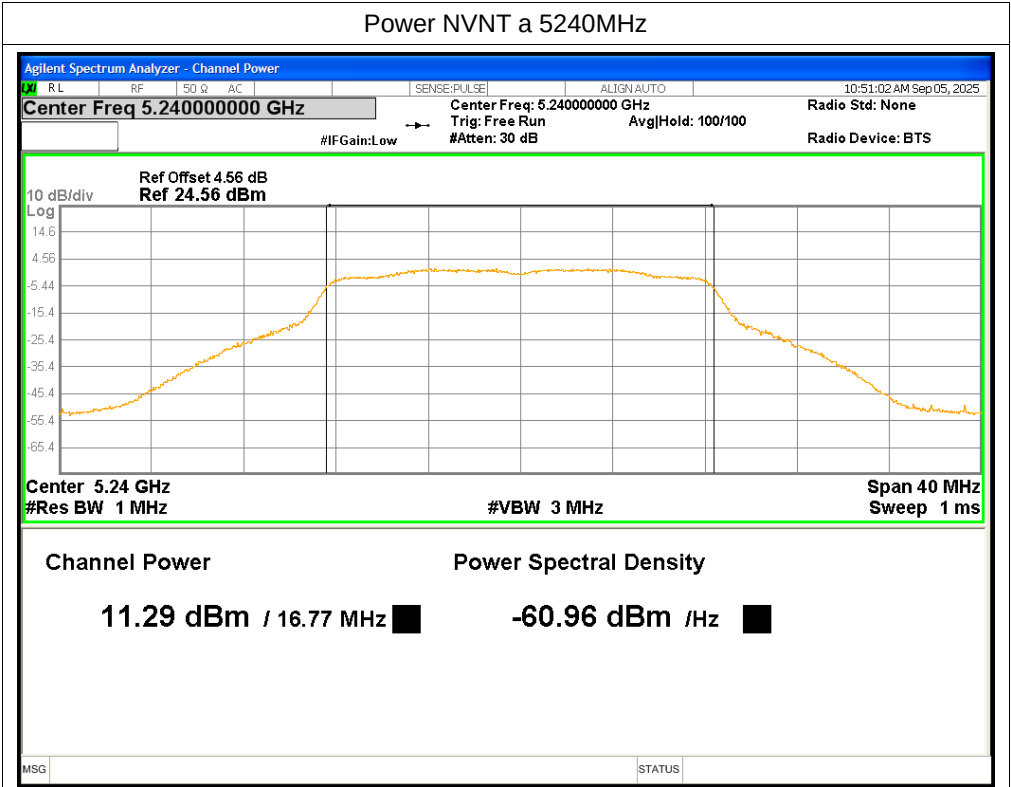

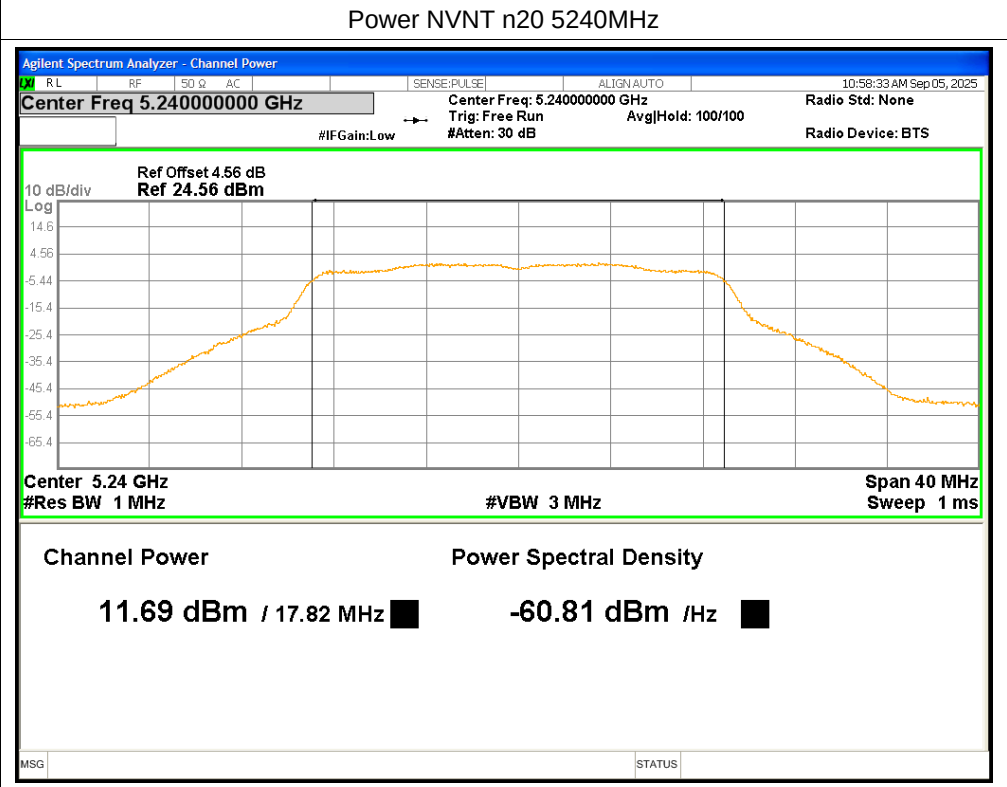
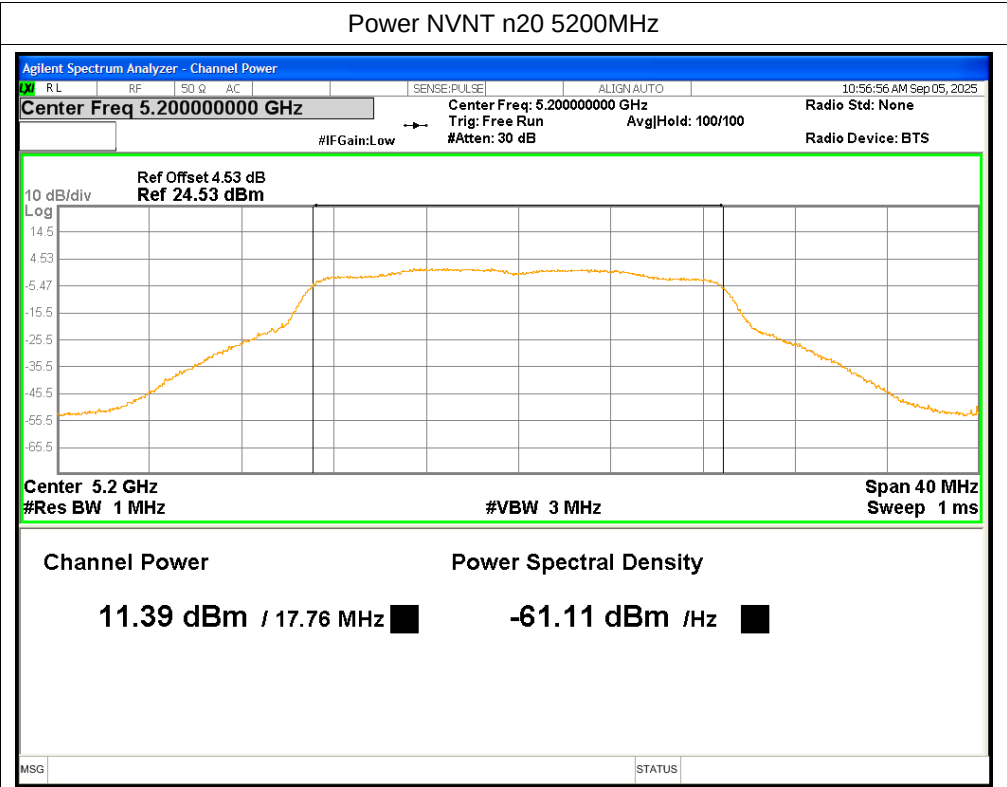


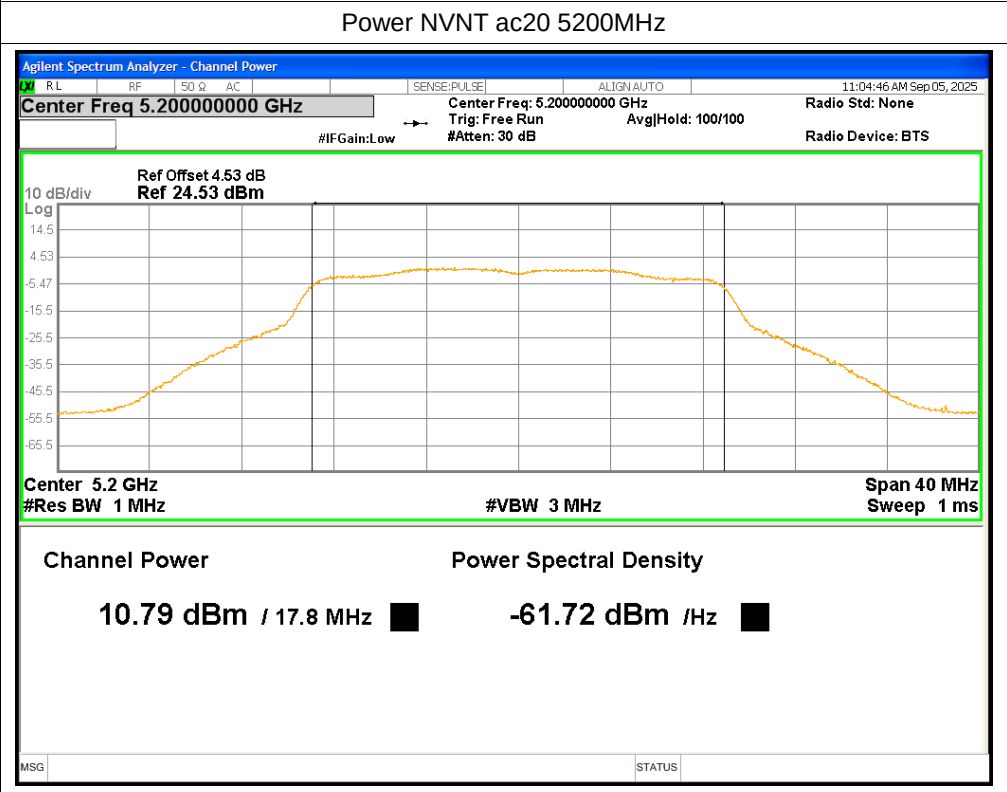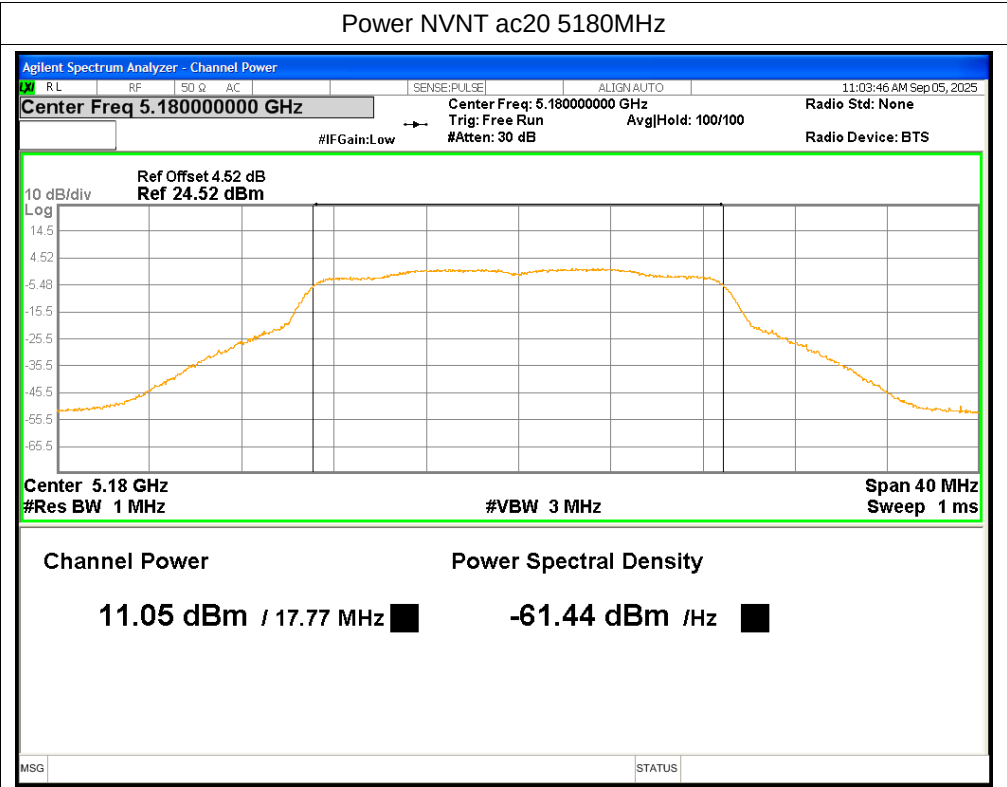

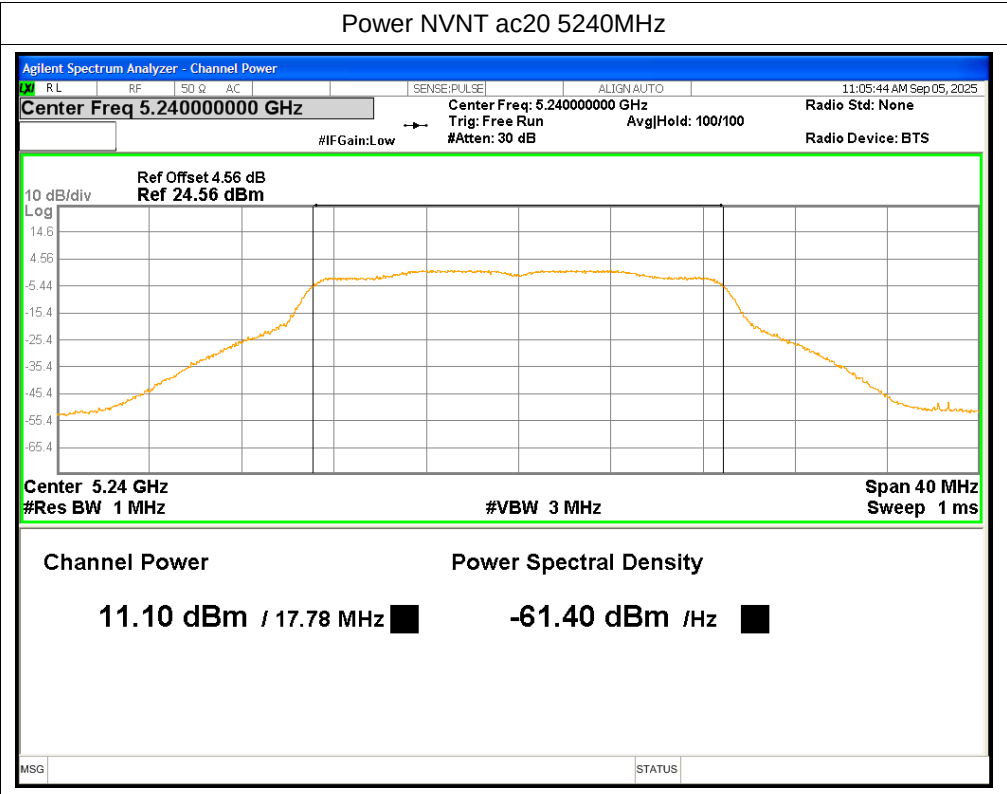


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	24.06	Pass
NVNT	a	5200	23.08	Pass
NVNT	a	5240	24.05	Pass
NVNT	n20	5180	23.75	Pass
NVNT	n20	5200	23.86	Pass
NVNT	n20	5240	24.57	Pass
NVNT	ac20	5180	23.6	Pass
NVNT	ac20	5200	24.27	Pass
NVNT	ac20	5240	24.49	Pass

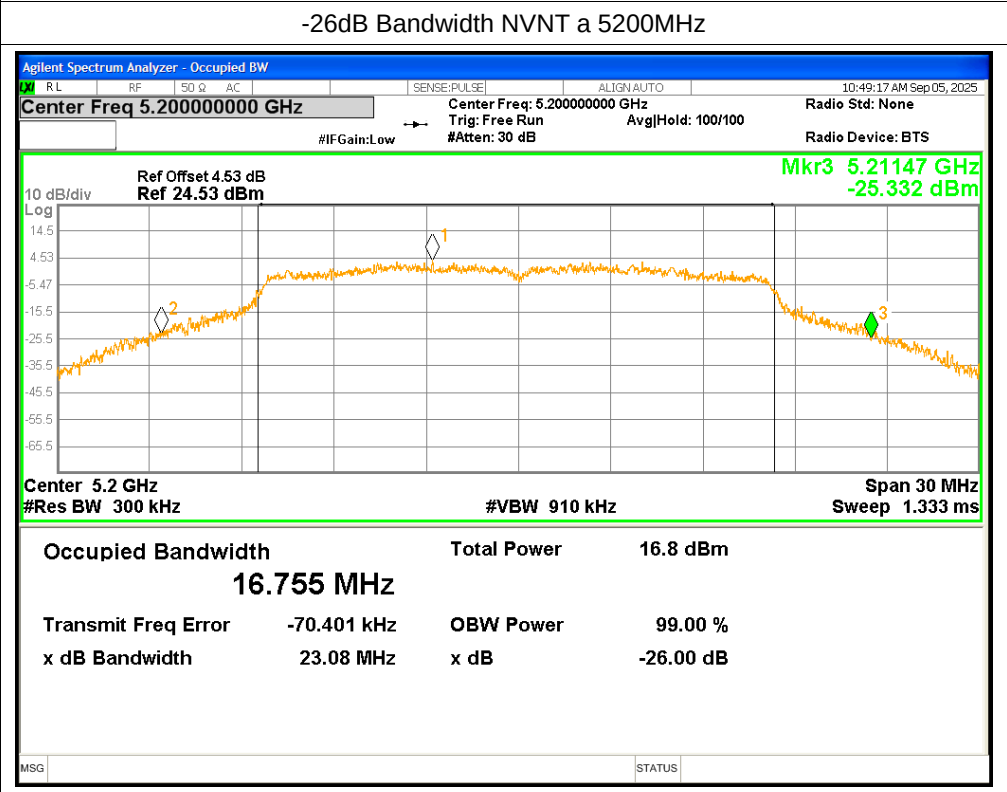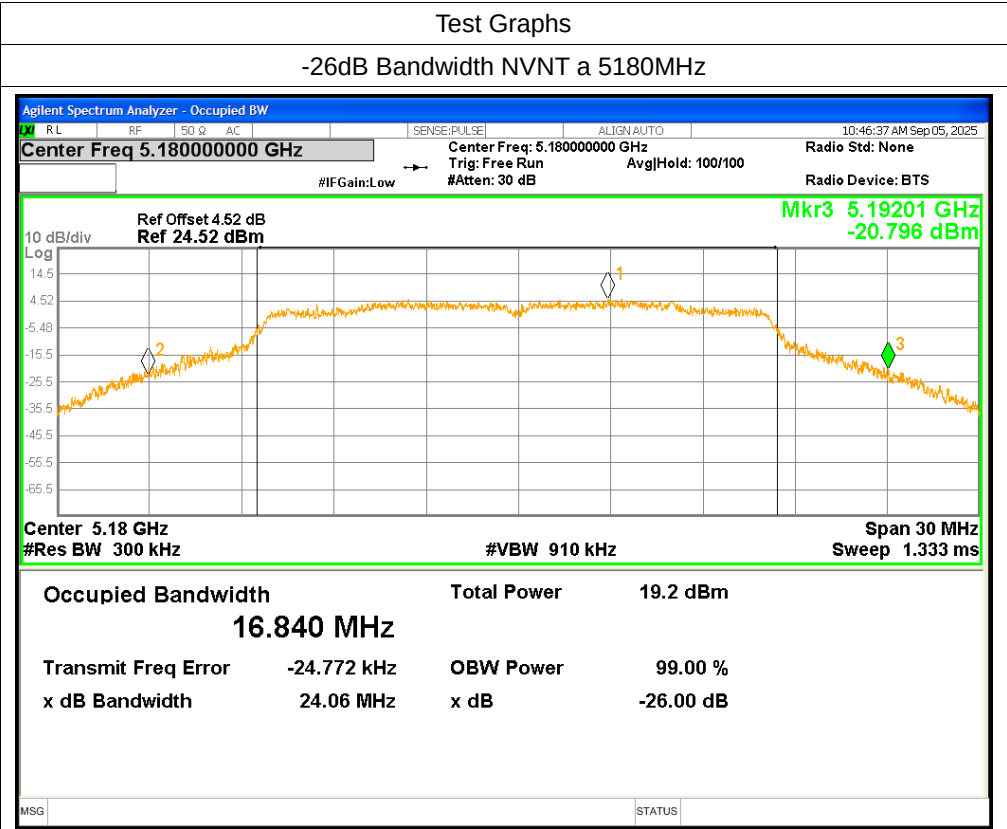


-26dB Bandwidth NVNT a 5240MHz

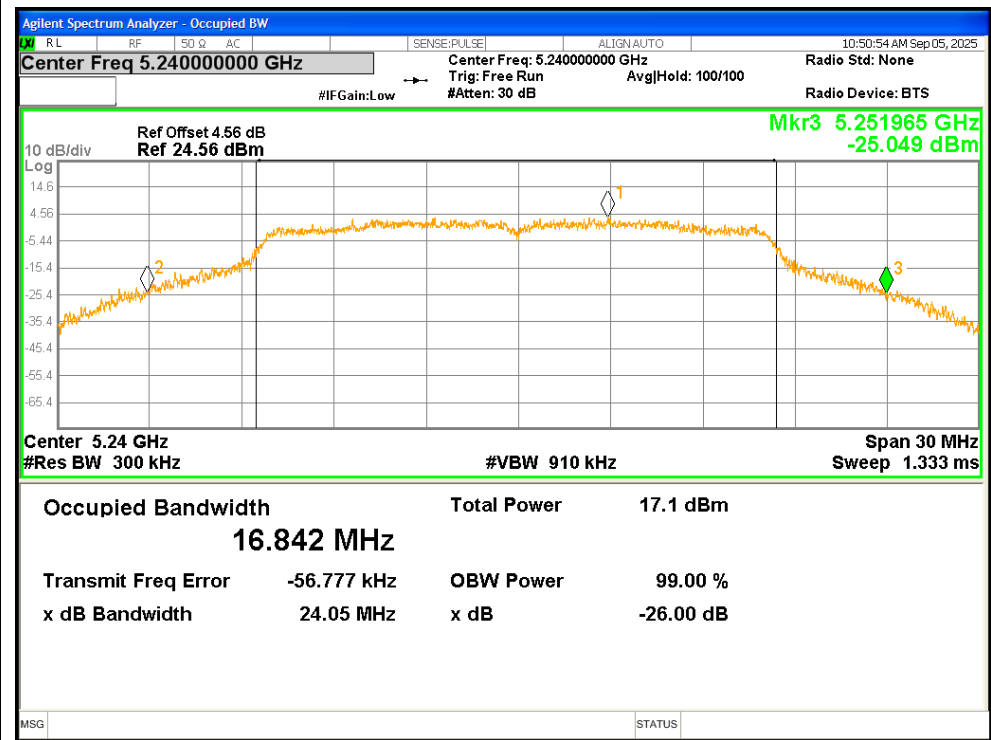


-26dB Bandwidth NVNT n20 5180MHz

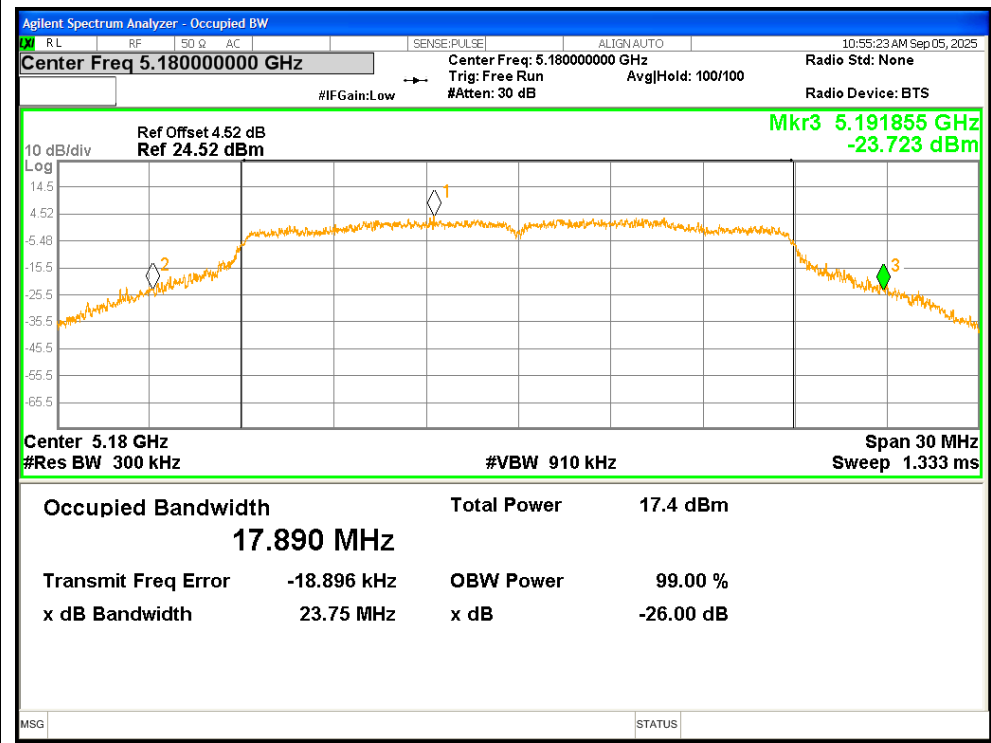


-26dB Bandwidth NVNT n20 5200MHz

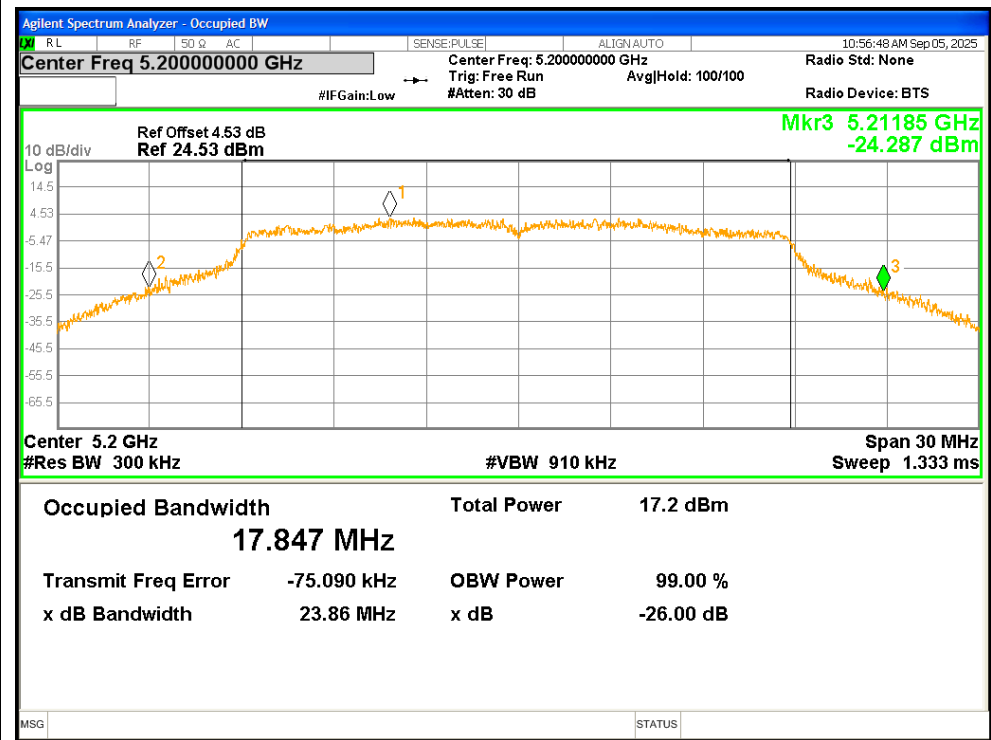


-26dB Bandwidth NVNT n20 5240MHz

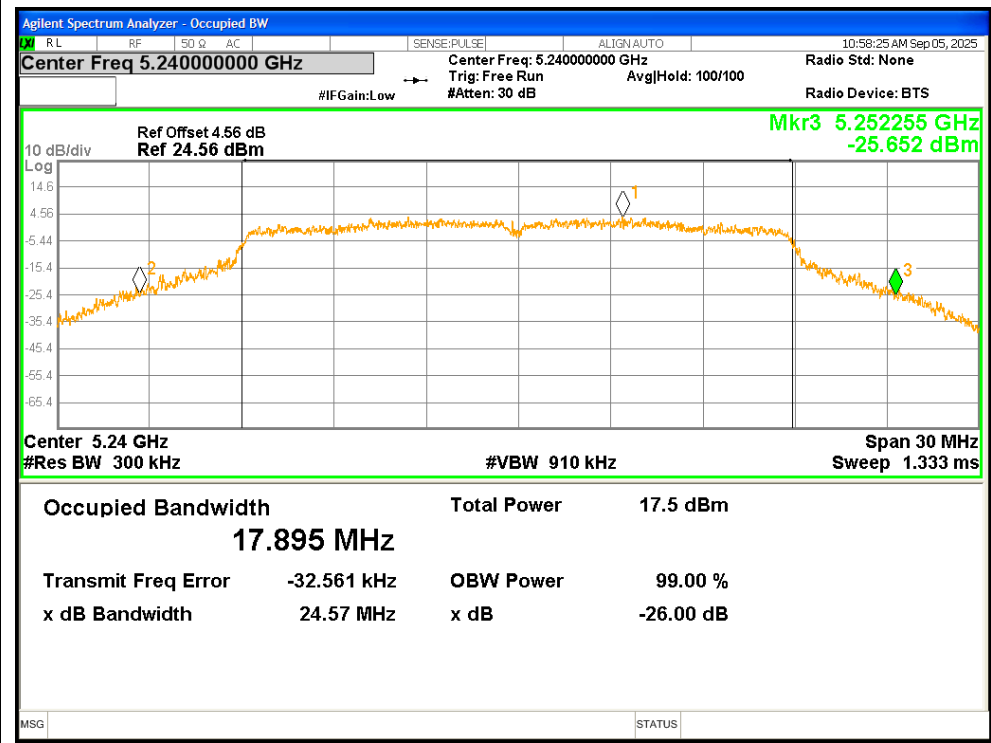


-26dB Bandwidth NVNT ac20 5180MHz

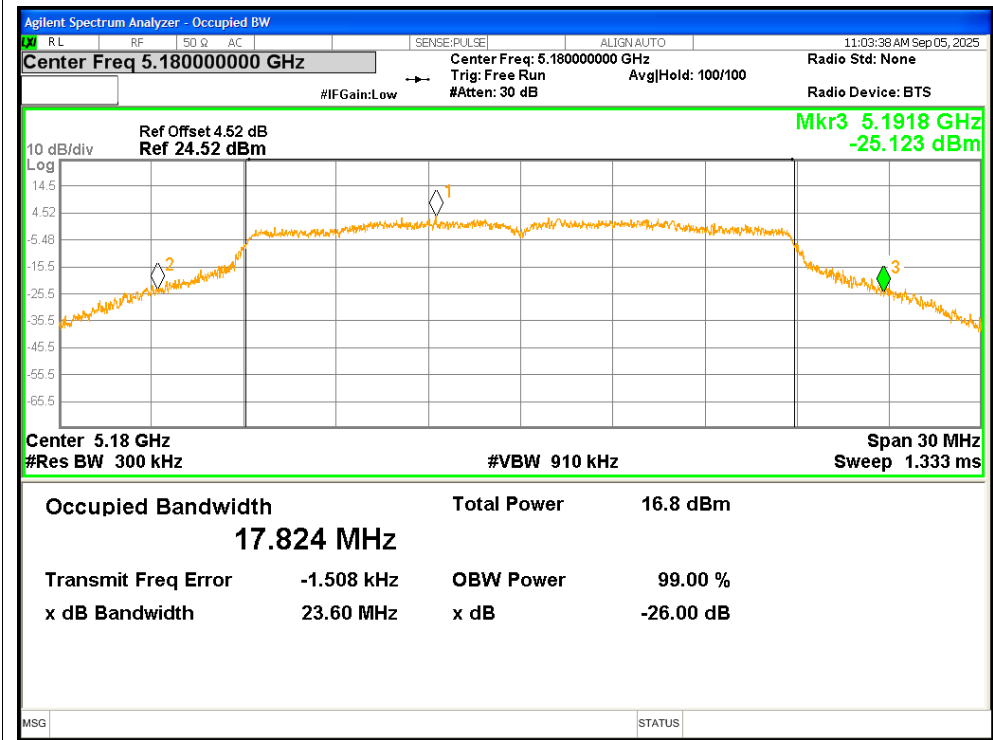

-26dB Bandwidth NVNT ac20 5200MHz

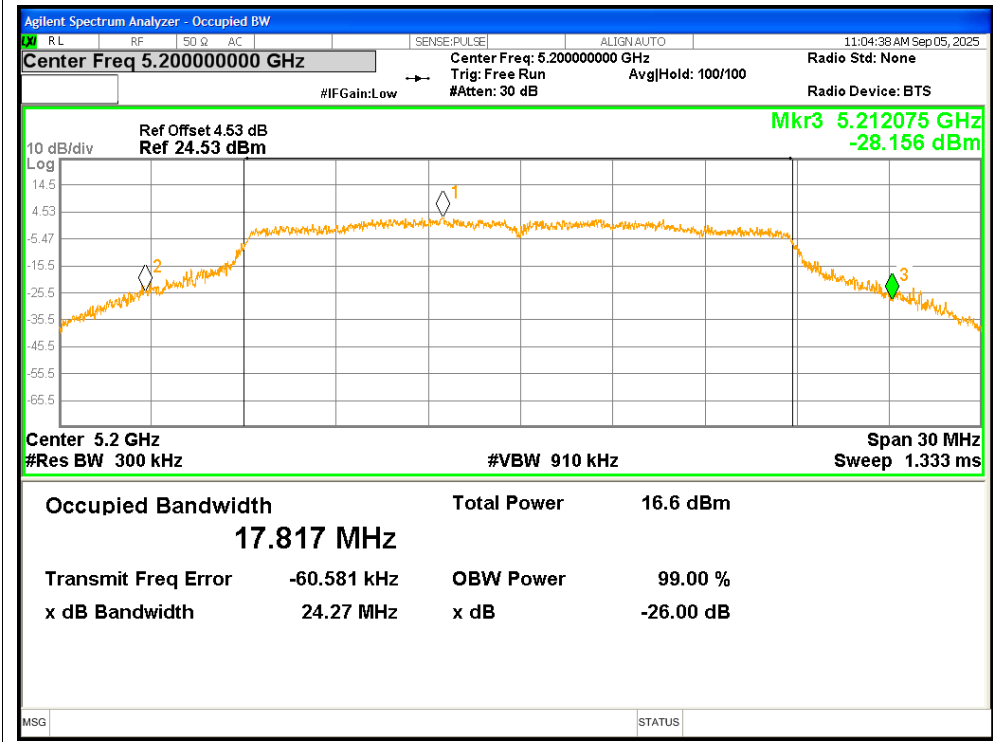

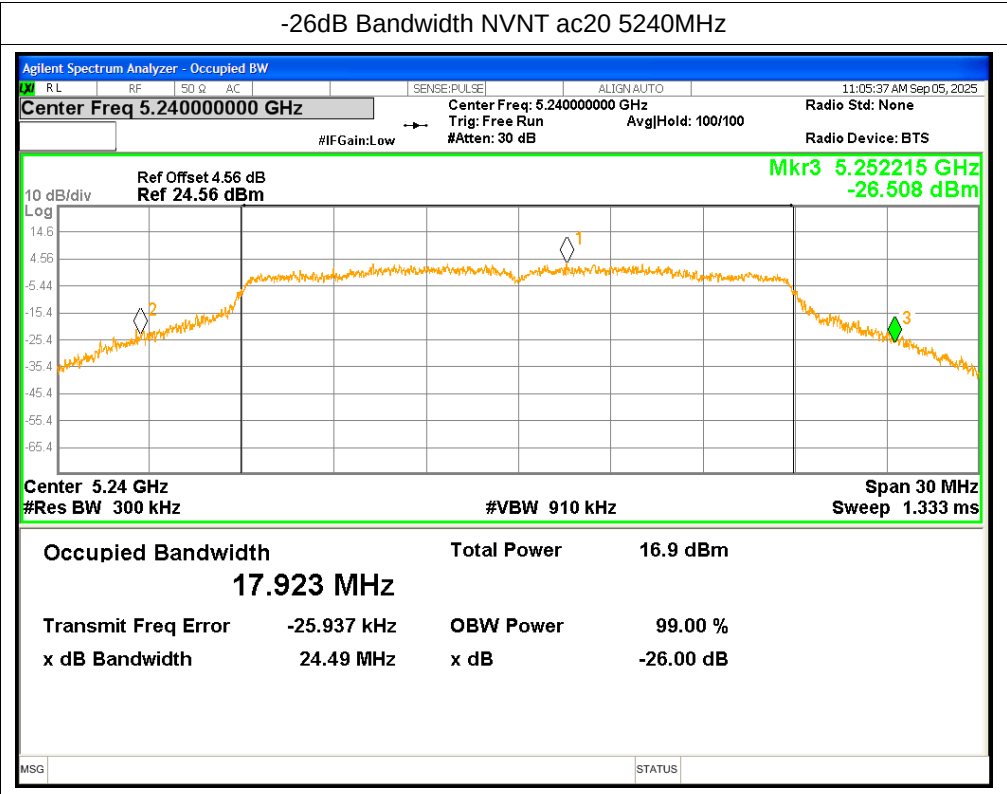


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.624
NVNT	a	5200	16.676
NVNT	a	5240	16.772
NVNT	n20	5180	17.771
NVNT	n20	5200	17.761
NVNT	n20	5240	17.815
NVNT	ac20	5180	17.771
NVNT	ac20	5200	17.797
NVNT	ac20	5240	17.781



Test Graphs



OBW NVNT a 5180MHz

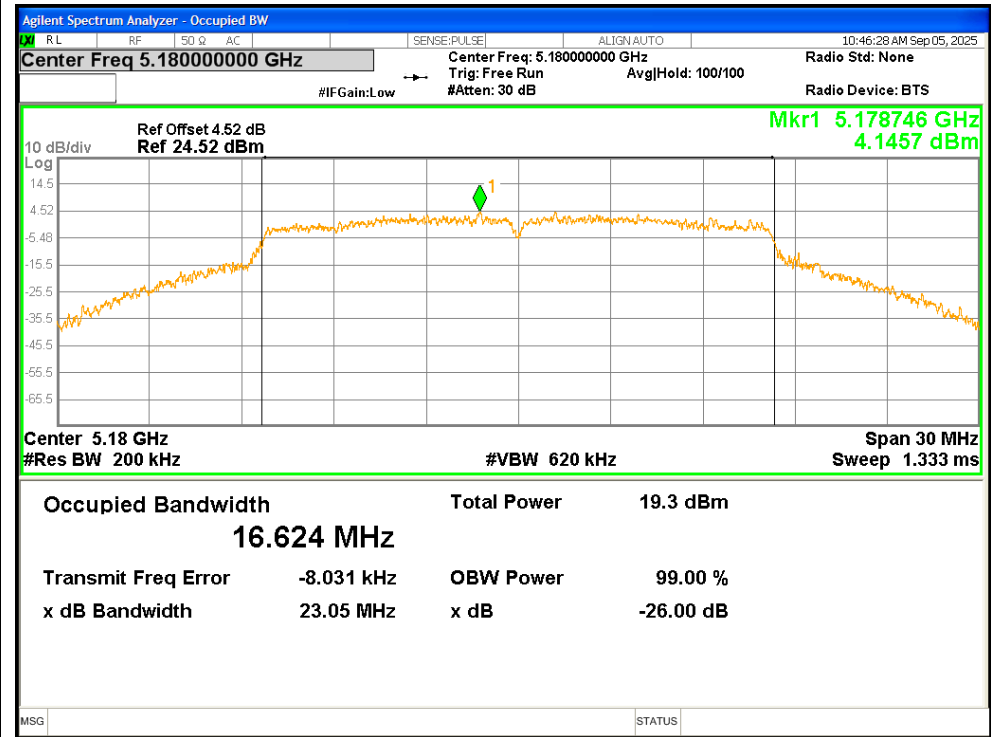



OBW NVNT a 5200MHz

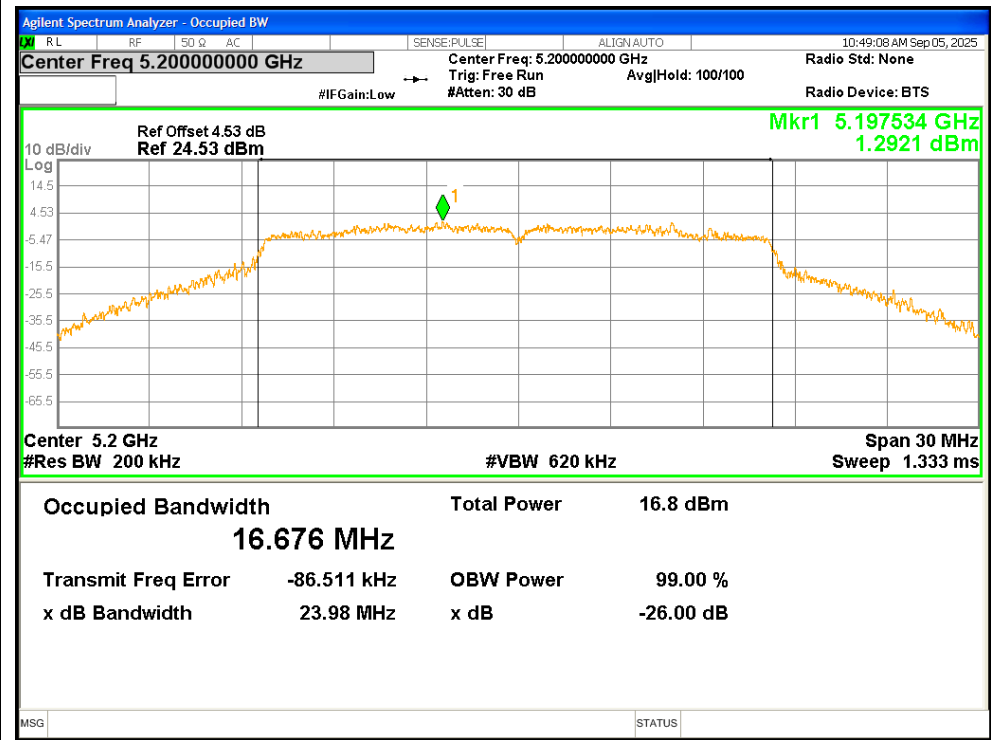

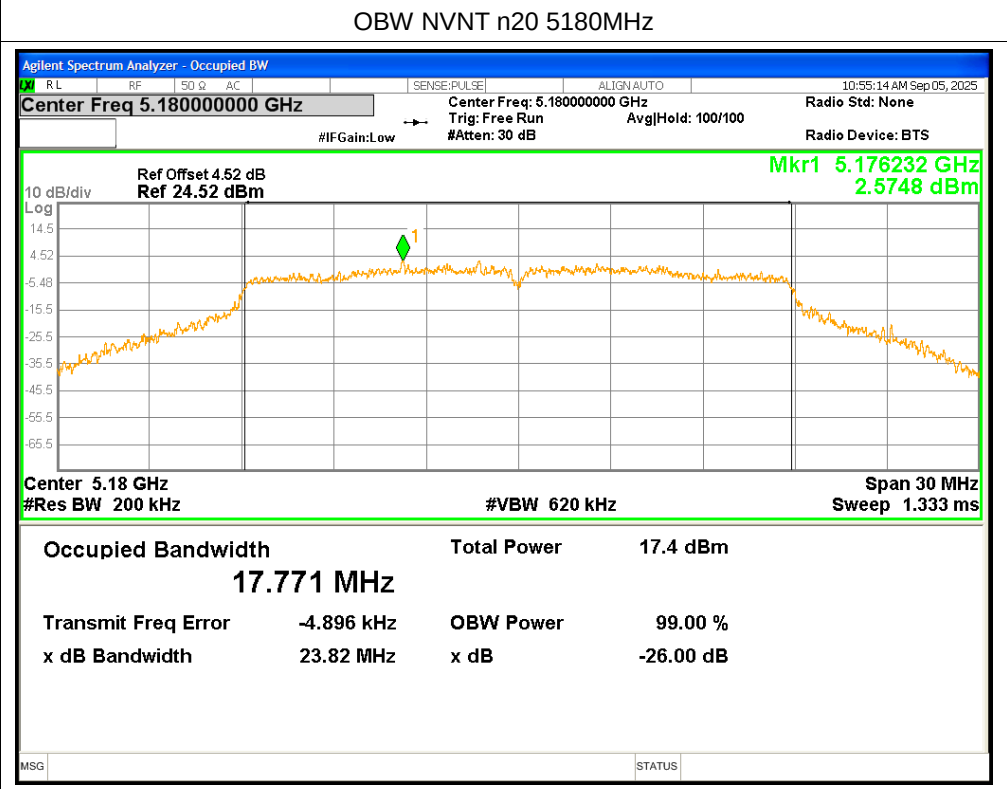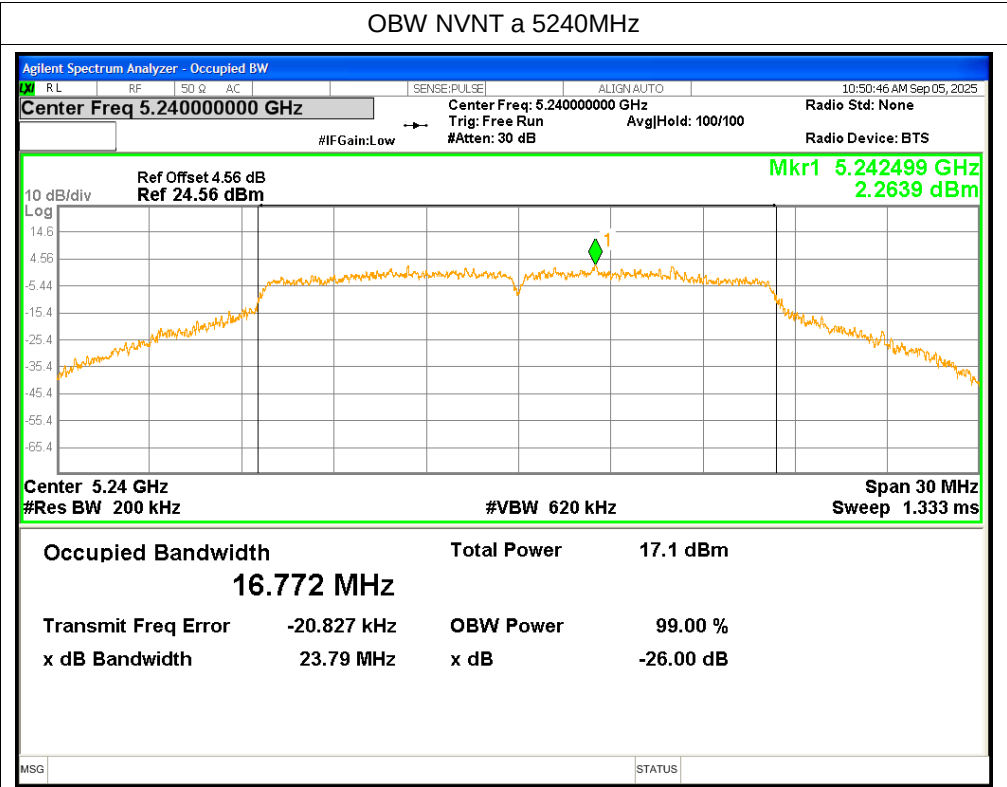

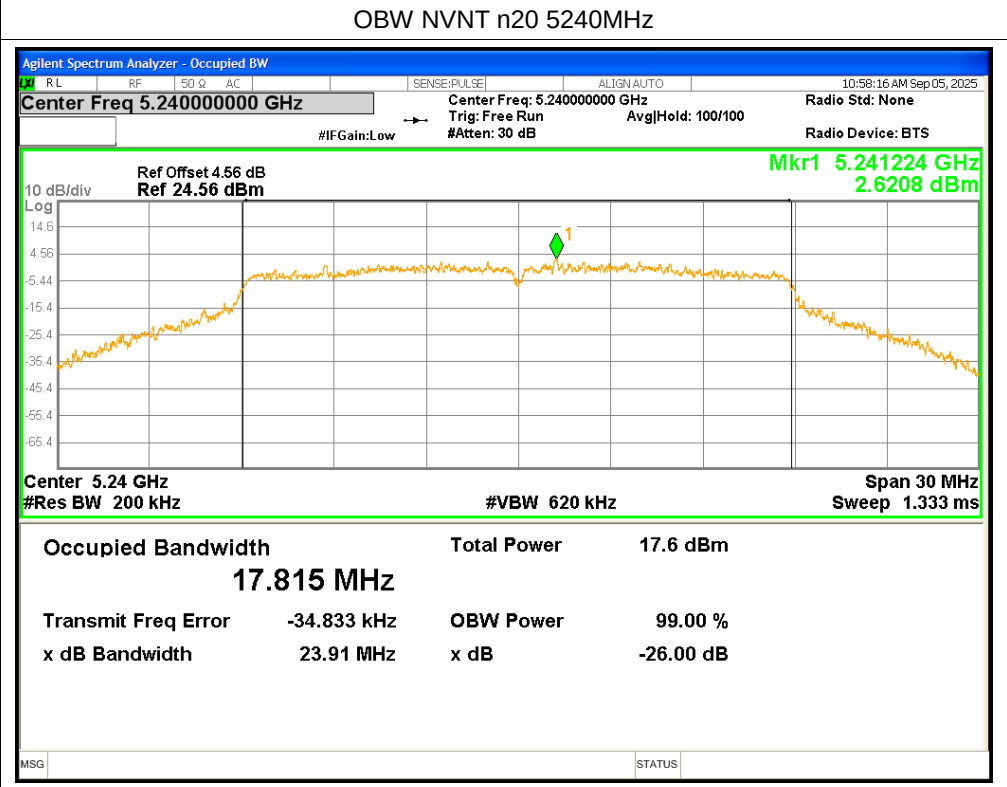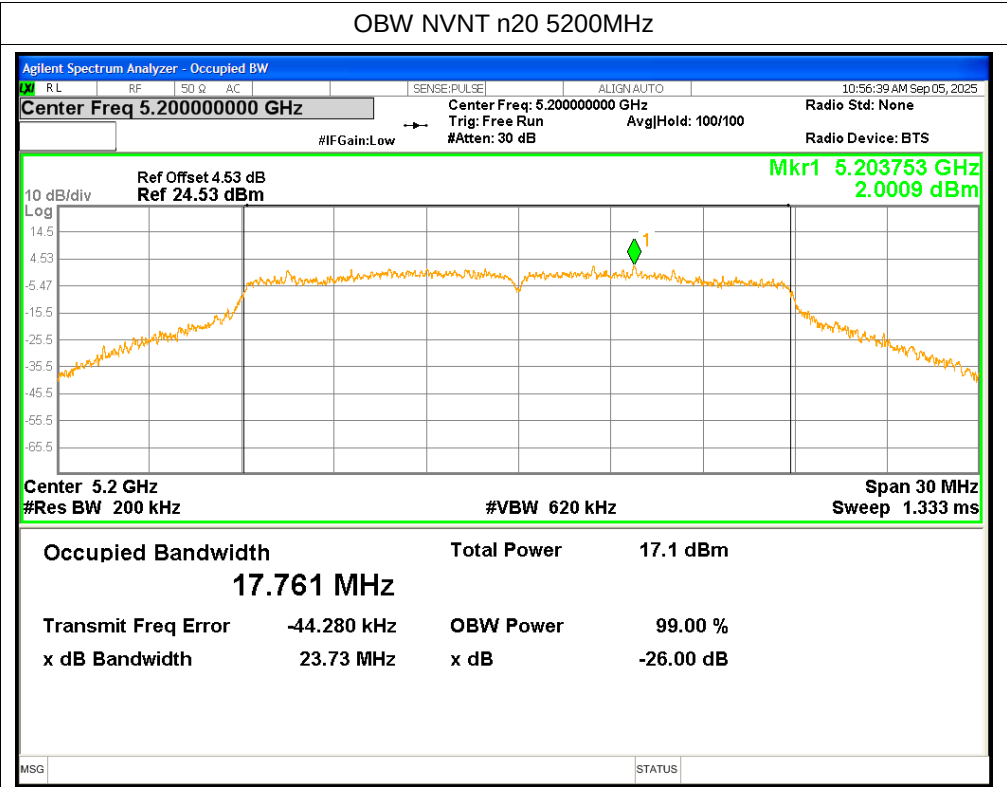

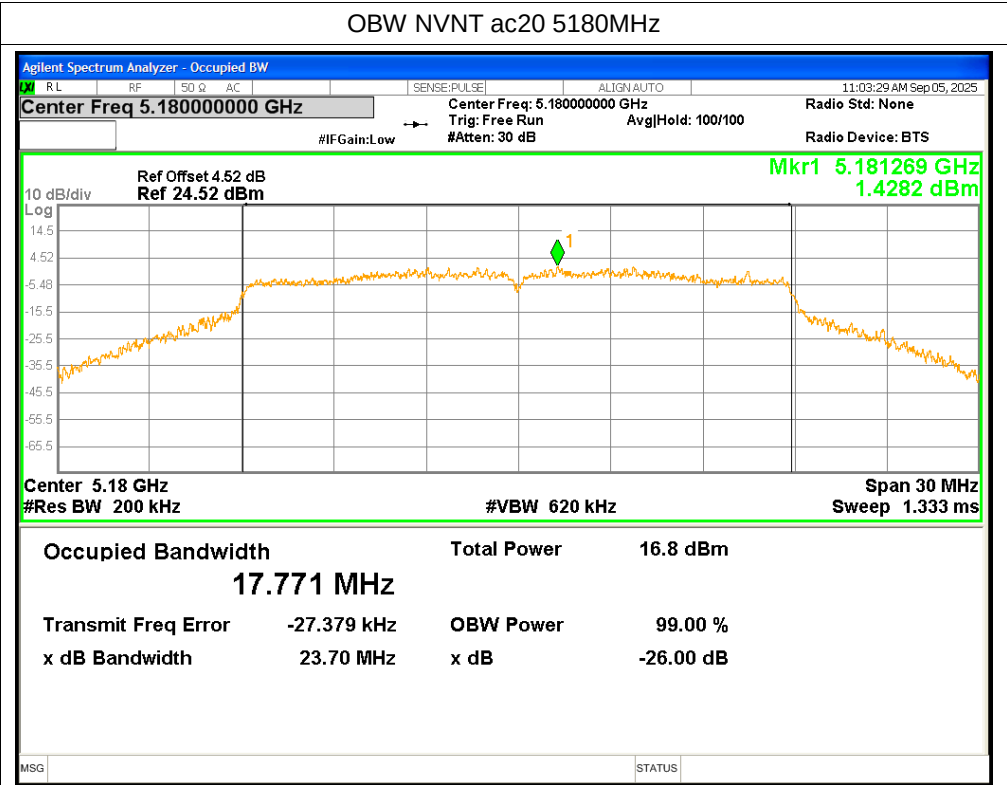

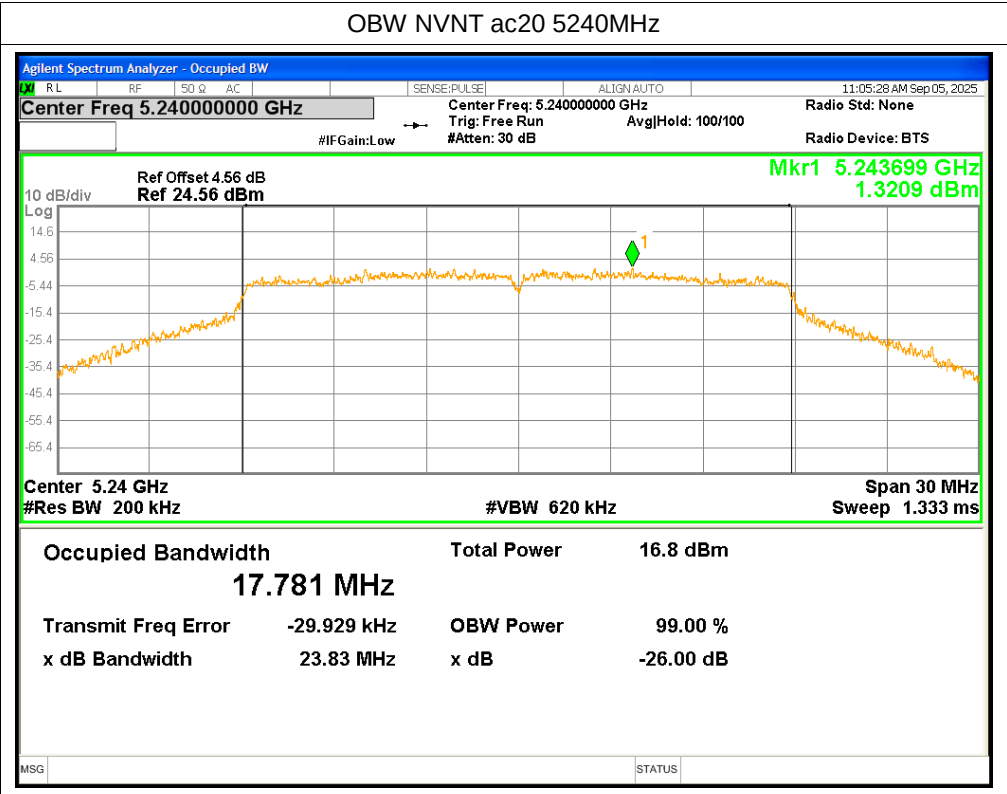

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Correction Factor (dB)	Conducted Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	1.26	0.09	1.35	<=11	Pass
NVNT	a	5200	1.128	0.1	1.228	<=11	Pass
NVNT	a	5240	1.407	0.1	1.507	<=11	Pass
NVNT	n20	5180	1.757	-	1.757	<=11	Pass
NVNT	n20	5200	1.383	-	1.383	<=11	Pass
NVNT	n20	5240	1.628	-	1.628	<=11	Pass
NVNT	ac20	5180	0.964	-	0.964	<=11	Pass
NVNT	ac20	5200	0.677	-	0.677	<=11	Pass
NVNT	ac20	5240	1.104	-	1.104	<=11	Pass

