



TEST REPORT

Test item description: Open Ear Sound Amplifier Headphones
FCC ID: 2AP4P-F2C
Trademark(s): N/A
Model/Type reference: BoneHearing F2C, BoneHearing S1, AS21S, BoneHearing F9, BoneHearing F2, BoneHearing F2A, BoneHearing F2B, BoneHearing F2D, BoneHearing F2H, BoneHearing F2Y, BoneHearing F11, HearVox F12, HearVox F13, BoneHearing F19, BoneHearing F20, BoneHearing F21, BoneHearing F22, BoneHearing F207A, BoneHearing F207B, BoneHearing F8A, HearVox F8B, HearVox F8C, BoneHearing F19, BoneHearing F30
Applicant's name: SHENZHEN ALEX TECHNOLOGY CO., LTD.
Address: 7th Floor, Building B, Tangxi Zhigu, Xijing Road, Xixiang, Baoan, Shenzhen, China
Manufacturer: SHENZHEN ALEX TECHNOLOGY CO., LTD.
Address: 7th Floor, Building B, Tangxi Zhigu, Xijing Road, Xixiang, Baoan, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 23, 2026
Sample tested Date: Mar. 23, 2026 to Apr. 20, 2026
Issue Date: Apr. 20, 2026
Report No.: CTB26032305604RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	18
7.3 Test procedure	19
7.4 Test Result	20
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup	38
8.2 Limit	38
8.3 Test procedure	38
8.4 Test Result	39
9. CONDUCTED PEAK OUTPUT POWER	53
9.1 Block Diagram Of Test Setup	53
9.2 Limit	53
9.3 Test procedure	53
9.4 Test Result	53
10. 20DB OCCUPIED BANDWIDTH	60
10.1 Block Diagram Of Test Setup	60
10.2 Limit	60
10.3 Test procedure	60
10.4 Test Result	60
11. CARRIER FREQUENCIES SEPARATION	67
11.1 Block Diagram Of Test Setup	67
11.2 Limit	67
11.3 Test procedure	67
11.4 Test Result	67
12. HOPPING CHANNEL NUMBER	74
12.1 Block Diagram Of Test Setup	74
12.2 Limit	74
12.3 Test procedure	74
12.4 Test Result	74

13. DWELL TIME	77
13.1 Block Diagram Of Test Setup	77
13.2 Limit	77
13.3 Test procedure	77
13.4 Test Result	78
14. PSEUDORANDOM FREQUENCY	85
14.1 Limit	85
14.2 Test procedure	85
14.3 Test Result	85
15. ANTENNA REQUIREMENT	86
16. EUT TEST SETUP PHOTOGRAPHS	87

(Note: N/A means not applicable)

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB26032305604RF02	Apr. 20, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2020	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2020	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2020	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2020	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9kHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
Frequency	1×10 ⁻⁷
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	BoneHearing F2C, BoneHearing S1, AS21S, BoneHearing F9, BoneHearing F2, BoneHearing F2A, BoneHearing F2B, BoneHearing F2D, BoneHearing F2H, BoneHearing F2Y, BoneHearing F11, HearVox F12, HearVox F13, BoneHearing F19, BoneHearing F20, BoneHearing F21, BoneHearing F22, BoneHearing F207A, BoneHearing F207B, BoneHearing F8A, HearVox F8B, HearVox F8C, BoneHearing F19, BoneHearing F30
Model Difference:	All the model are the same circuit and RF module, only the model names are different. Test sample model: BoneHearing F2C
Bluetooth Version:	Bluetooth 5.3
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth Module 1: 1.63dBm Module 2: 1.139dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Chip antenna
Antenna Gain:	Bluetooth: 2.4dBi
Ratings:	DC 5V charging from adapter DC 3.87V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.87V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7	2025/5/23	2026/5/22

					(104489/003)		
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/9/19	2026/9/18
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.2 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/9/19	2026/9/18
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2

5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/9/19	2026/9/18
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/9/19	2026/9/18
10	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
11	Coaxial cable	Times	2m	/	/	2025/9/19	2026/9/18
12	Coaxial cable	Times	1m	/	/	2025/9/19	2026/9/18
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

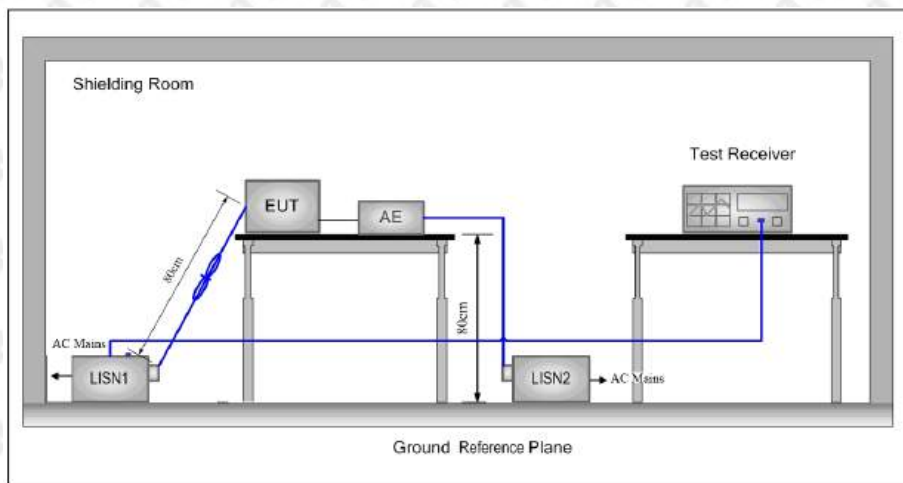

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

Module 1

L: Worst case-GFSK(low channel)

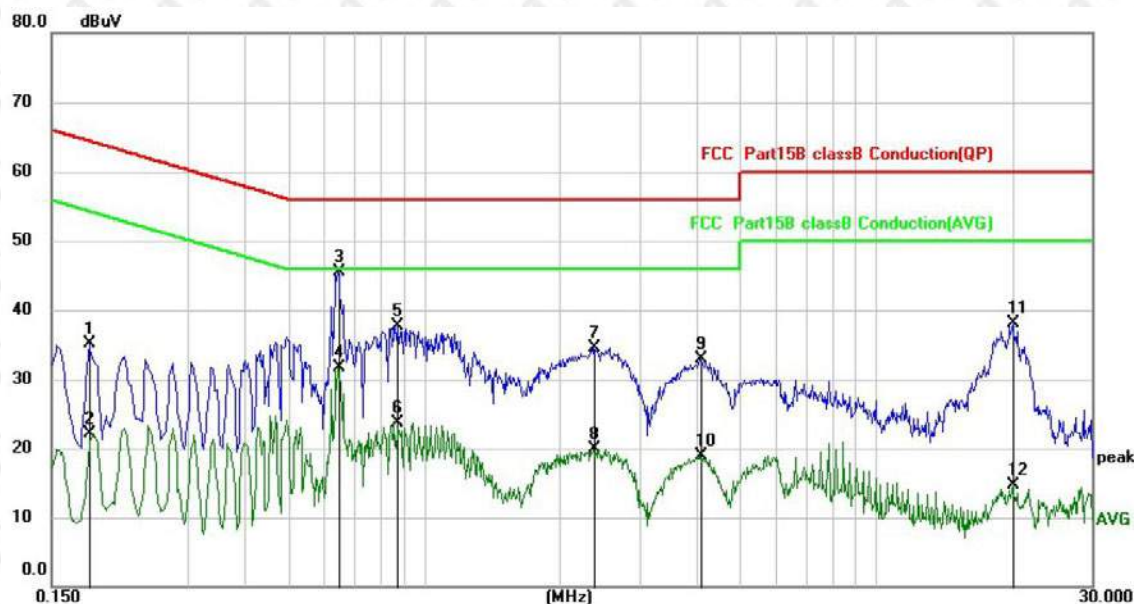


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	24.96	10.08	35.04	64.40	-29.36	QP
2		0.1819	12.10	10.08	22.18	54.40	-32.22	AVG
3	*	0.6460	35.46	10.10	45.56	56.00	-10.44	QP
4		0.6460	21.67	10.10	31.77	46.00	-14.23	AVG
5		0.8739	27.53	10.12	37.65	56.00	-18.35	QP
6		0.8739	13.68	10.12	23.80	46.00	-22.20	AVG
7		2.3780	24.30	10.18	34.48	56.00	-21.52	QP
8		2.3780	9.82	10.18	20.00	46.00	-26.00	AVG
9		4.0819	22.58	10.25	32.83	56.00	-23.17	QP
10		4.0819	8.61	10.25	18.86	46.00	-27.14	AVG
11		20.1619	27.10	10.97	38.07	60.00	-21.93	QP
12		20.1619	3.81	10.97	14.78	50.00	-35.22	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

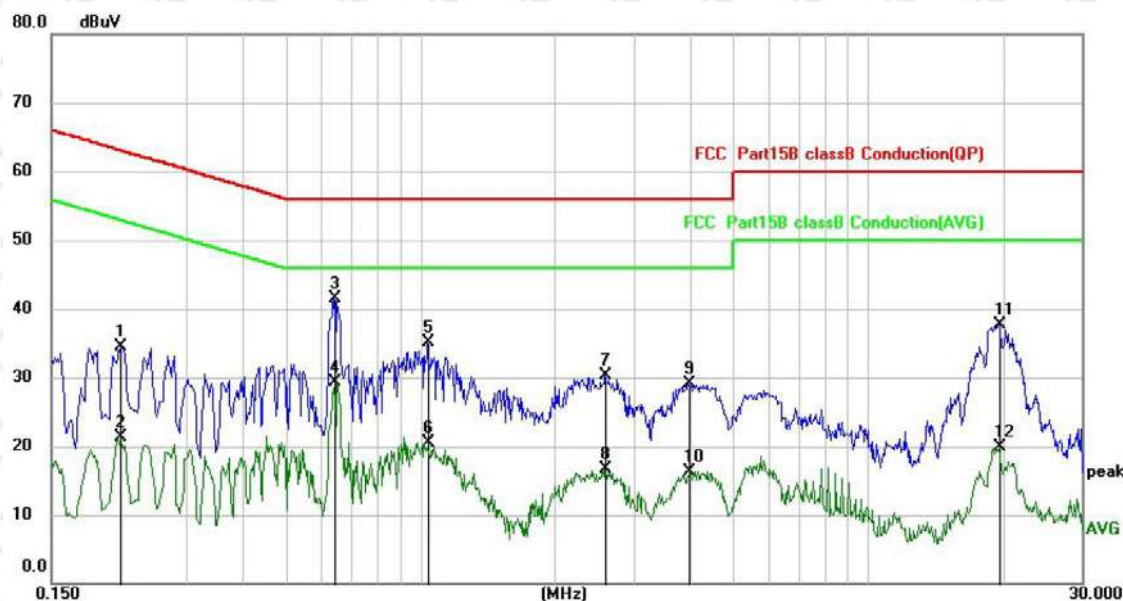


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.2139	24.45	10.08	34.53	63.05	-28.52	QP
2		0.2139	11.18	10.08	21.26	53.05	-31.79	AVG
3	*	0.6419	31.45	10.10	41.55	56.00	-14.45	QP
4		0.6419	19.22	10.10	29.32	46.00	-16.68	AVG
5		1.0380	24.92	10.13	35.05	56.00	-20.95	QP
6		1.0380	10.32	10.13	20.45	46.00	-25.55	AVG
7		2.5900	20.06	10.19	30.25	56.00	-25.75	QP
8		2.5900	6.43	10.19	16.62	46.00	-29.38	AVG
9		3.9660	18.87	10.24	29.11	56.00	-26.89	QP
10		3.9660	6.08	10.24	16.32	46.00	-29.68	AVG
11		19.6737	26.82	10.94	37.76	60.00	-22.24	QP
12		19.6737	8.88	10.94	19.82	50.00	-30.18	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Module 2

L: Worst case-GFSK(low channel)

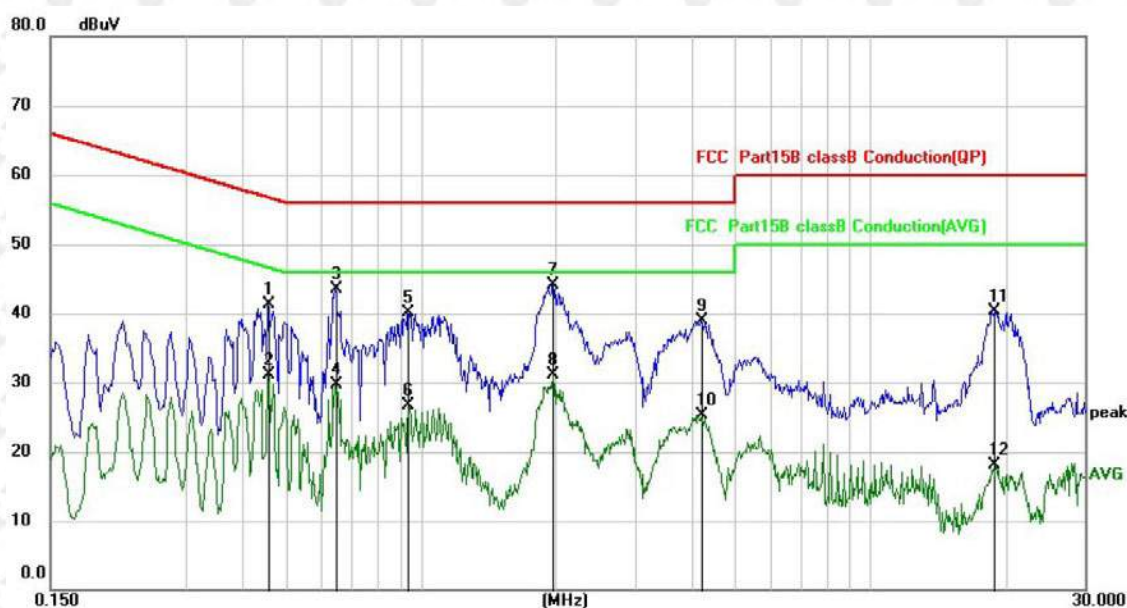


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4580	31.26	10.09	41.35	56.73	-15.38	QP
2		0.4580	21.06	10.09	31.15	46.73	-15.58	AVG
3		0.6460	33.46	10.10	43.56	56.00	-12.44	QP
4		0.6460	19.67	10.10	29.77	46.00	-16.23	AVG
5		0.9378	30.03	10.13	40.16	56.00	-15.84	QP
6		0.9378	16.49	10.13	26.62	46.00	-19.38	AVG
7	*	1.9618	33.89	10.17	44.06	56.00	-11.94	QP
8		1.9618	20.99	10.17	31.16	46.00	-14.84	AVG
9		4.2100	28.60	10.25	38.85	56.00	-17.15	QP
10		4.2100	14.98	10.25	25.23	46.00	-20.77	AVG
11		18.8417	29.35	10.91	40.26	60.00	-19.74	QP
12		18.8417	7.17	10.91	18.08	50.00	-31.92	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

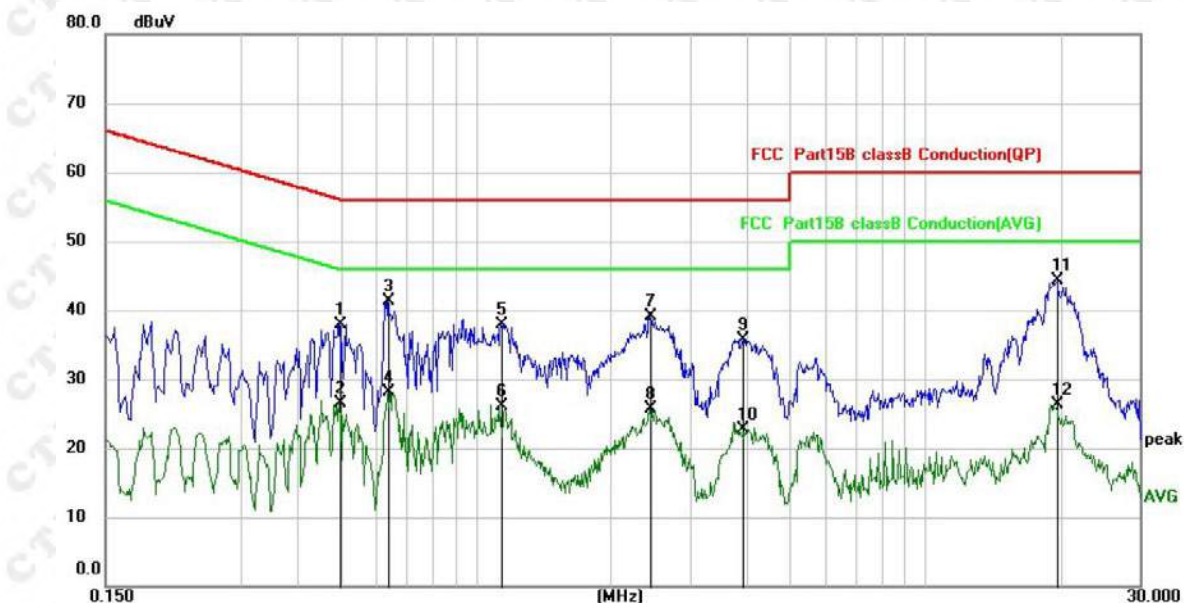

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4979	27.73	10.09	37.82	56.03	-18.21	QP
2		0.4979	16.51	10.09	26.60	46.03	-19.43	AVG
3	*	0.6380	31.13	10.10	41.23	56.00	-14.77	QP
4		0.6380	18.01	10.10	28.11	46.00	-17.89	AVG
5		1.1378	27.80	10.14	37.94	56.00	-18.06	QP
6		1.1378	15.91	10.14	26.05	46.00	-19.95	AVG
7		2.4420	28.98	10.19	39.17	56.00	-16.83	QP
8		2.4420	15.50	10.19	25.69	46.00	-20.31	AVG
9		3.9340	25.49	10.24	35.73	56.00	-20.27	QP
10		3.9340	12.47	10.24	22.71	46.00	-23.29	AVG
11		19.6737	33.32	10.94	44.26	60.00	-15.74	QP
12		19.6737	15.38	10.94	26.32	50.00	-23.68	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

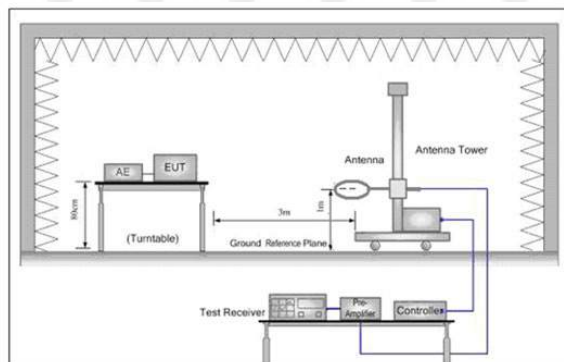


Figure 1. Below 30MHz

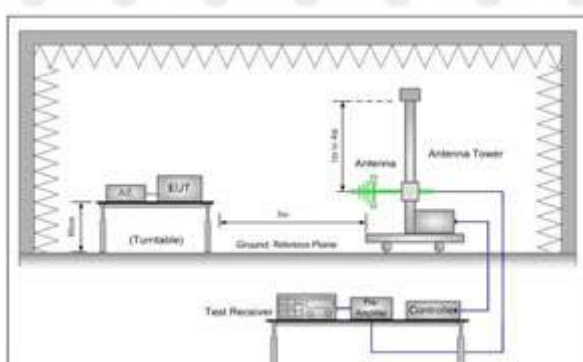


Figure 2. 30MHz to 1GHz

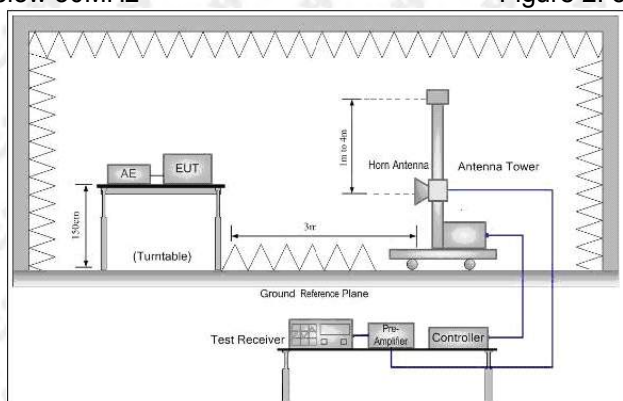


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

Module 1

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

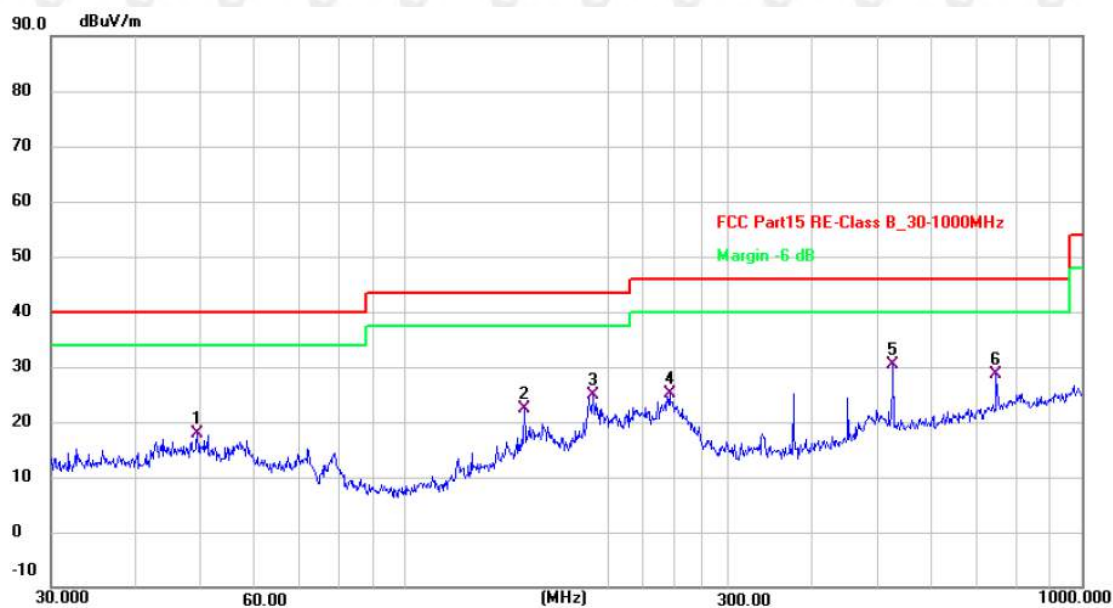

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.3594	31.15	-13.17	17.98	40.00	-22.02	QP
2	150.0107	34.58	-12.24	22.34	43.50	-21.16	QP
3	189.7384	40.26	-15.46	24.80	43.50	-18.70	QP
4	245.9510	39.26	-14.13	25.13	46.00	-20.87	QP
5 *	526.3967	37.66	-7.31	30.35	46.00	-15.65	QP
6	747.4823	31.64	-2.96	28.68	46.00	-17.32	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

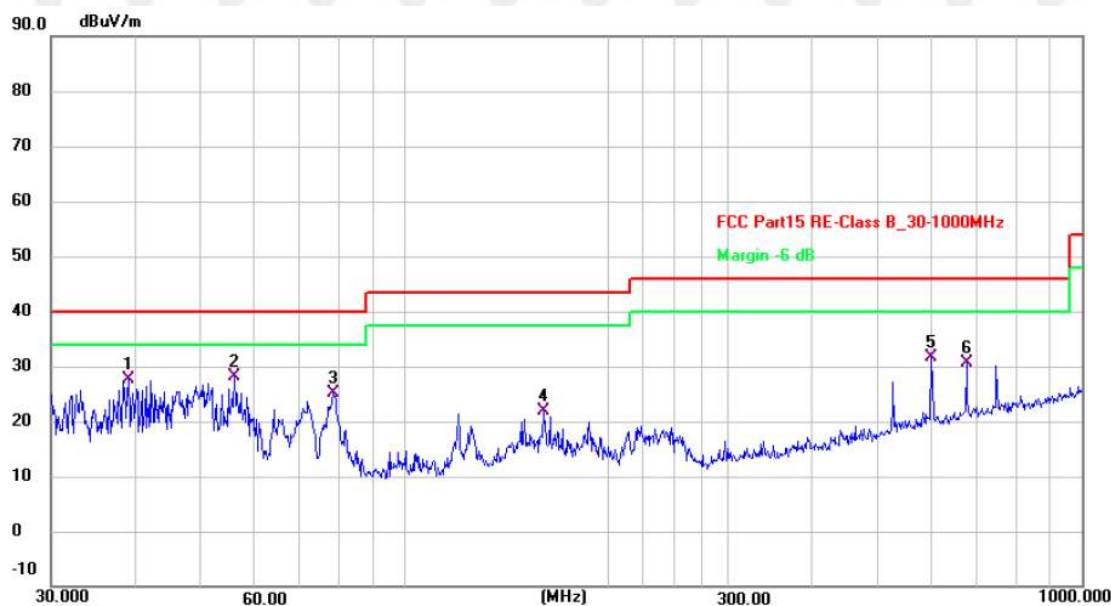

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.0242	40.73	-13.14	27.59	40.00	-12.41	QP
2 *	56.0007	41.65	-13.50	28.15	40.00	-11.85	QP
3	78.4133	41.67	-16.58	25.09	40.00	-14.91	QP
4	160.3454	34.07	-12.23	21.84	43.50	-21.66	QP
5	599.3211	37.21	-5.51	31.70	46.00	-14.30	QP
6	675.2080	34.78	-4.12	30.66	46.00	-15.34	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Module 2

Below 1GHz Test Results:

Antenna polarity: H

Worst case-GFSK(low channel)

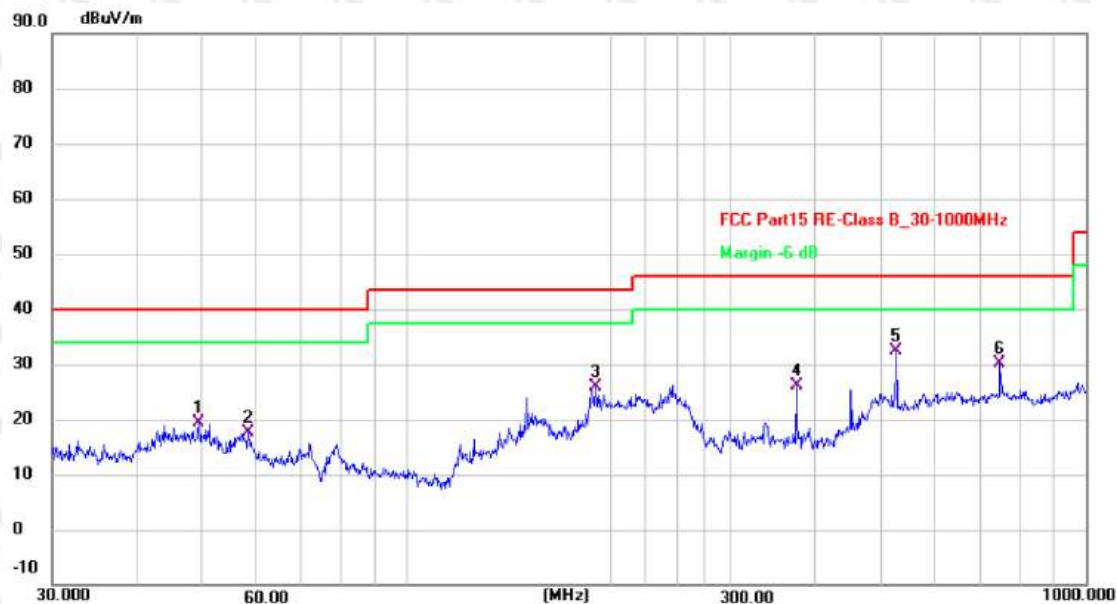

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	49.3594	32.65	-13.17	19.48	40.00	-20.52	QP
2	58.4074	31.16	-13.63	17.53	40.00	-22.47	QP
3	189.7384	41.26	-15.46	25.80	43.50	-17.70	QP
4	374.6225	37.04	-10.79	26.25	46.00	-19.75	QP
5 *	526.3967	39.66	-7.31	32.35	46.00	-13.65	QP
6	747.4823	33.14	-2.96	30.18	46.00	-15.82	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	39.0242	43.23	-13.14	30.09	40.00	-9.91	QP
2	57.1914	40.10	-13.57	26.53	40.00	-13.47	QP
3	160.3454	34.07	-12.23	21.84	43.50	-21.66	QP
4	213.7632	34.94	-15.27	19.67	43.50	-23.83	QP
5	526.3967	36.42	-7.31	29.11	46.00	-16.89	QP
6	599.3211	37.21	-5.51	31.70	46.00	-14.30	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Module 1

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.34	-3.65	53.69	74.00	-20.31	peak
4804	50.26	-3.65	46.61	54.00	-7.39	AVG
7206	58.83	-0.95	57.88	74.00	-16.12	peak
7206	40.07	-0.95	39.12	54.00	-14.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.82	-3.65	55.17	74.00	-18.83	peak
4804	48.96	-3.65	45.31	54.00	-8.69	AVG
7206	60.41	-0.95	59.46	74.00	-14.54	peak
7206	42.78	-0.95	41.83	54.00	-12.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.84	-3.54	54.30	74.00	-19.70	peak
4882.00	48.94	-3.54	45.40	54.00	-8.60	AVG
7323.00	57.54	-0.81	56.73	74.00	-17.27	peak
7323.00	43.01	-0.81	42.20	54.00	-11.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	56.80	-3.54	53.26	74.00	-20.74	peak
4882.00	49.77	-3.54	46.23	54.00	-7.77	AVG
7323.00	56.48	-0.81	55.67	74.00	-18.33	peak
7323.00	42.43	-0.81	41.62	54.00	-12.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.52	-3.43	55.09	74.00	-18.91	peak
4960	47.41	-3.44	43.97	54.00	-10.03	AVG
7440	61.36	-0.77	60.59	74.00	-13.41	peak
7440	40.05	-0.77	39.28	54.00	-14.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.57	-3.43	53.14	74.00	-20.86	peak
4960	49.15	-3.44	45.71	54.00	-8.29	AVG
7440	60.66	-0.77	59.89	74.00	-14.11	peak
7440	41.50	-0.77	40.73	54.00	-13.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.24	-5.81	51.43	54.00	-2.57	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.81	-5.84	48.97	54.00	-5.03	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.56	-5.81	50.75	54.00	-3.25	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.21	-5.84	49.37	54.00	-4.63	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.30	-5.81	49.49	54.00	-4.51	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.54	-6.06	48.48	54.00	-5.52	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.25	-5.81	50.44	54.00	-3.56	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.22	-6.06	48.16	54.00	-5.84	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.82	-5.81	51.01	54.00	-2.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.76	-5.84	47.92	54.00	-6.08	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.10	-5.81	49.29	54.00	-4.71	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.26	-5.84	47.42	54.00	-6.58	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.73	-5.81	49.92	54.00	-4.08	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.64	-6.06	48.58	54.00	-5.42	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.67	-5.81	50.86	54.00	-3.14	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.70	-6.06	48.64	54.00	-5.36	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Module 2

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	58.04	-3.65	54.39	74.00	-19.61	peak
4804	48.39	-3.65	44.74	54.00	-9.26	AVG
7206	59.77	-0.95	58.82	74.00	-15.18	peak
7206	41.48	-0.95	40.53	54.00	-13.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.93	-3.65	54.28	74.00	-19.72	peak
4804	49.38	-3.65	45.73	54.00	-8.27	AVG
7206	59.88	-0.95	58.93	74.00	-15.07	peak
7206	40.54	-0.95	39.59	54.00	-14.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.24	-3.54	54.70	74.00	-19.30	peak
4882.00	47.37	-3.54	43.83	54.00	-10.17	AVG
7323.00	56.67	-0.81	55.86	74.00	-18.14	peak
7323.00	44.09	-0.81	43.28	54.00	-10.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.32	-3.54	55.78	74.00	-18.22	peak
4882.00	49.86	-3.54	46.32	54.00	-7.68	AVG
7323.00	57.39	-0.81	56.58	74.00	-17.42	peak
7323.00	41.46	-0.81	40.65	54.00	-13.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	57.74	-3.43	54.31	74.00	-19.69	peak
4960	47.78	-3.44	44.34	54.00	-9.66	AVG
7440	58.75	-0.77	57.98	74.00	-16.02	peak
7440	41.96	-0.77	41.19	54.00	-12.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.95	-3.43	55.52	74.00	-18.48	peak
4960	48.70	-3.44	45.26	54.00	-8.74	AVG
7440	58.94	-0.77	58.17	74.00	-15.83	peak
7440	41.71	-0.77	40.94	54.00	-13.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.27	-5.81	51.46	54.00	-2.54	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.15	-5.84	50.31	54.00	-3.69	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.80	-5.81	49.99	54.00	-4.01	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.30	-5.84	50.46	54.00	-3.54	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.82	-5.81	50.01	54.00	-3.99	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.02	-6.06	46.96	54.00	-7.04	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.46	-5.81	51.65	54.00	-2.35	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.19	-6.06	49.13	54.00	-4.87	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.73	-5.81	49.92	54.00	-4.08	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.12	-5.84	50.28	54.00	-3.72	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.60	-5.81	49.79	54.00	-4.21	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.47	-5.84	48.63	54.00	-5.37	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.27	-5.81	49.46	54.00	-4.54	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.80	-6.06	48.74	54.00	-5.26	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.81	-5.81	50.00	54.00	-4.00	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.92	-6.06	48.86	54.00	-5.14	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

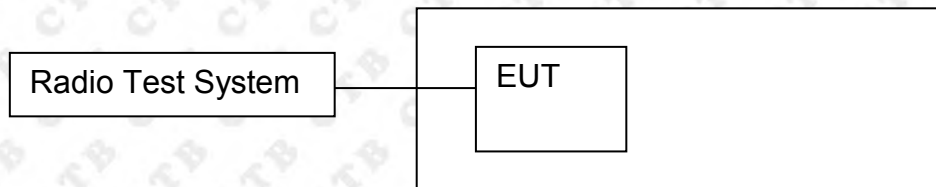

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


Module 1




GFSK/HCH/
Hop



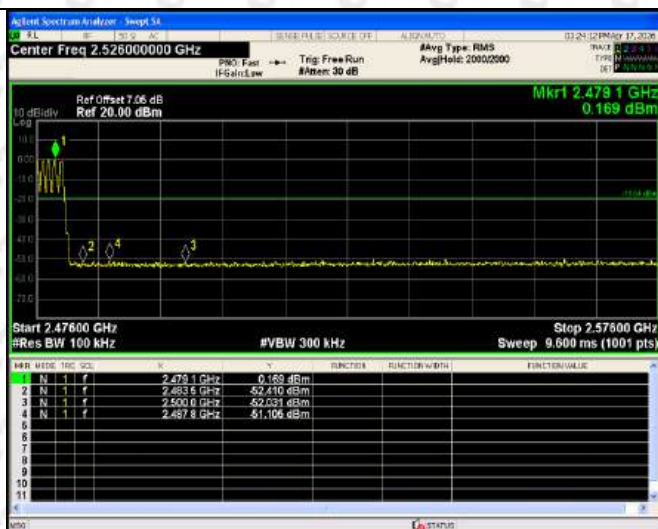


$\pi/4$ DQPSK/LCH/
No Hop

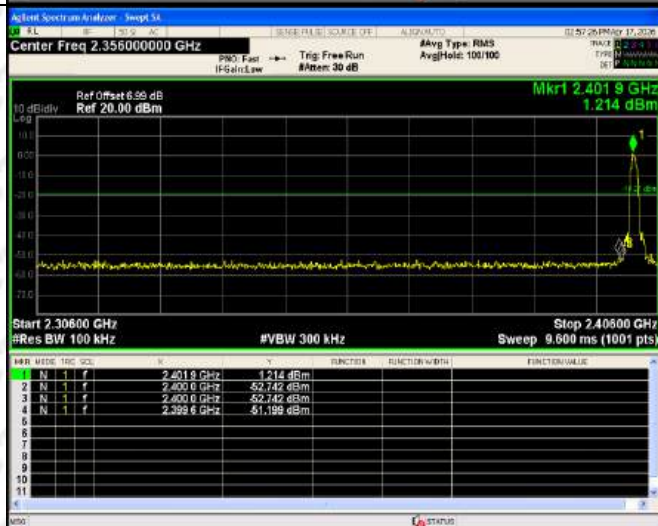


$\pi/4$ DQPSK/LCH/
Hop

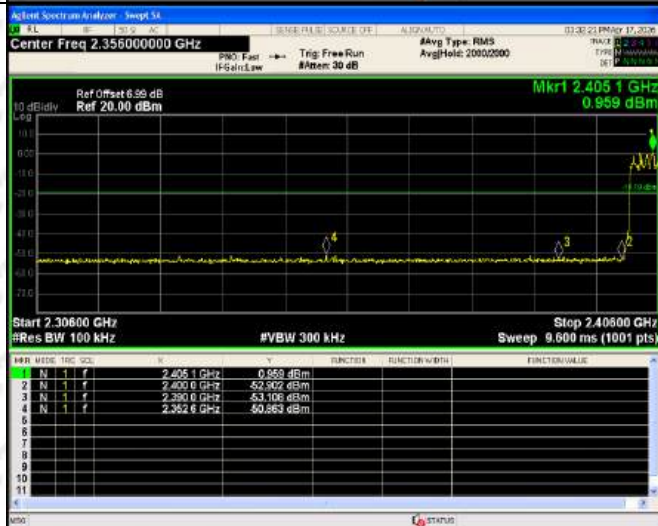


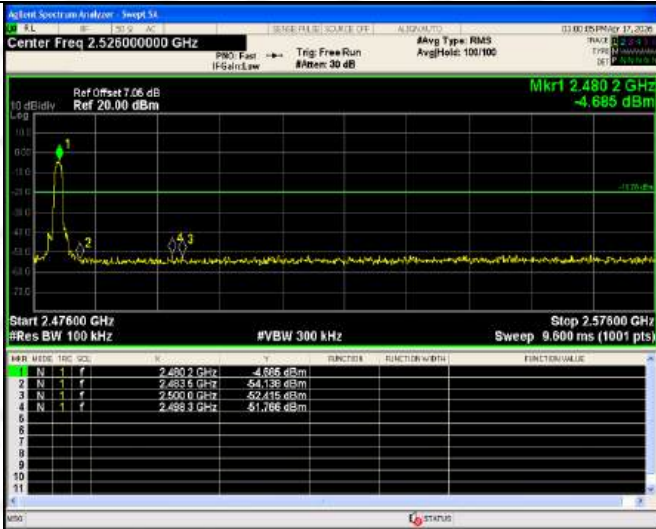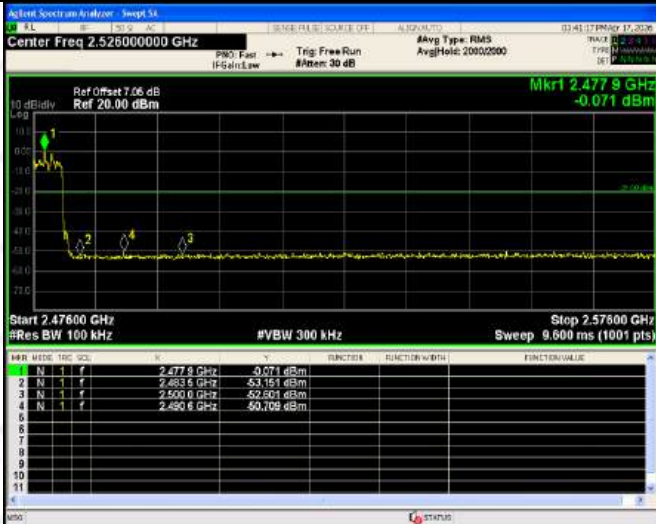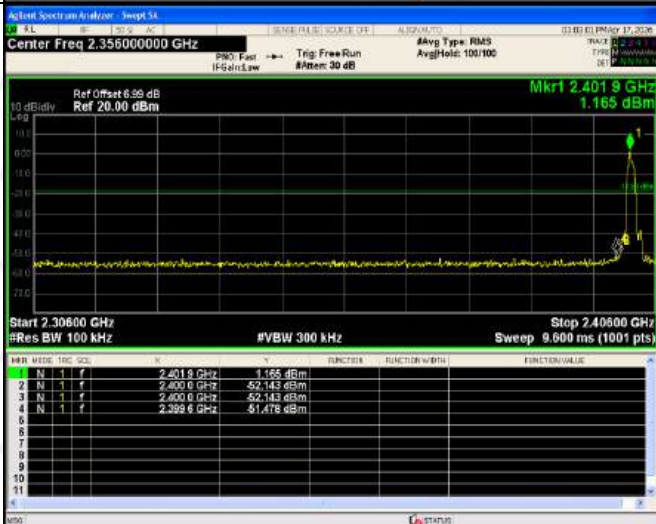$\pi/4$ DQPSK/HCH/ No Hop	 <table><thead><tr><th>#</th><th>FREQ</th><th>UNIT</th><th>POW</th><th>UNIT</th></tr></thead><tbody><tr><td>1</td><td>2.480 GHz</td><td></td><td>-4.685 dBm</td><td></td></tr><tr><td>2</td><td>2.483 GHz</td><td></td><td>-54.136 dBm</td><td></td></tr><tr><td>3</td><td>2.500 GHz</td><td></td><td>-52.415 dBm</td><td></td></tr><tr><td>4</td><td>2.499 GHz</td><td></td><td>-51.766 dBm</td><td></td></tr></tbody></table>	#	FREQ	UNIT	POW	UNIT	1	2.480 GHz		-4.685 dBm		2	2.483 GHz		-54.136 dBm		3	2.500 GHz		-52.415 dBm		4	2.499 GHz		-51.766 dBm	
#	FREQ	UNIT	POW	UNIT																						
1	2.480 GHz		-4.685 dBm																							
2	2.483 GHz		-54.136 dBm																							
3	2.500 GHz		-52.415 dBm																							
4	2.499 GHz		-51.766 dBm																							
$\pi/4$ DQPSK/HCH/ Hop	 <table><thead><tr><th>#</th><th>FREQ</th><th>UNIT</th><th>POW</th><th>UNIT</th></tr></thead><tbody><tr><td>1</td><td>2.477 GHz</td><td></td><td>-0.071 dBm</td><td></td></tr><tr><td>2</td><td>2.483 GHz</td><td></td><td>-53.151 dBm</td><td></td></tr><tr><td>3</td><td>2.500 GHz</td><td></td><td>-52.201 dBm</td><td></td></tr><tr><td>4</td><td>2.490 GHz</td><td></td><td>-50.709 dBm</td><td></td></tr></tbody></table>	#	FREQ	UNIT	POW	UNIT	1	2.477 GHz		-0.071 dBm		2	2.483 GHz		-53.151 dBm		3	2.500 GHz		-52.201 dBm		4	2.490 GHz		-50.709 dBm	
#	FREQ	UNIT	POW	UNIT																						
1	2.477 GHz		-0.071 dBm																							
2	2.483 GHz		-53.151 dBm																							
3	2.500 GHz		-52.201 dBm																							
4	2.490 GHz		-50.709 dBm																							
8DPSK/LCH/No Hop	 <table><thead><tr><th>#</th><th>FREQ</th><th>UNIT</th><th>POW</th><th>UNIT</th></tr></thead><tbody><tr><td>1</td><td>2.401 GHz</td><td></td><td>1.165 dBm</td><td></td></tr><tr><td>2</td><td>2.400 GHz</td><td></td><td>-52.143 dBm</td><td></td></tr><tr><td>3</td><td>2.400 GHz</td><td></td><td>-52.143 dBm</td><td></td></tr><tr><td>4</td><td>2.399 GHz</td><td></td><td>-51.476 dBm</td><td></td></tr></tbody></table>	#	FREQ	UNIT	POW	UNIT	1	2.401 GHz		1.165 dBm		2	2.400 GHz		-52.143 dBm		3	2.400 GHz		-52.143 dBm		4	2.399 GHz		-51.476 dBm	
#	FREQ	UNIT	POW	UNIT																						
1	2.401 GHz		1.165 dBm																							
2	2.400 GHz		-52.143 dBm																							
3	2.400 GHz		-52.143 dBm																							
4	2.399 GHz		-51.476 dBm																							


8DPSK
/LCH/Hop

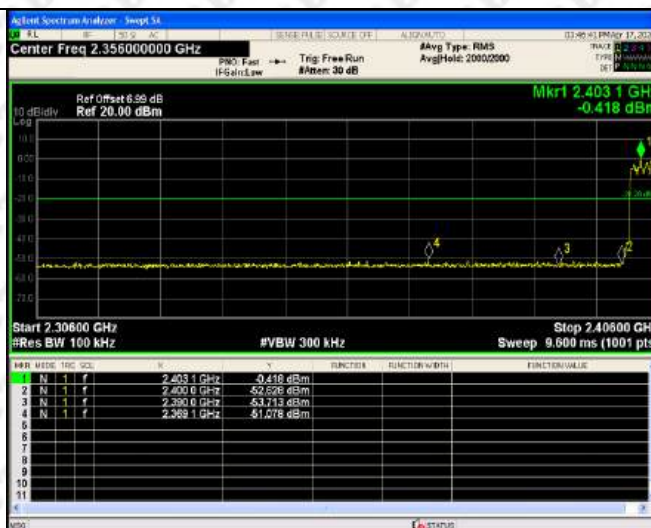

8DPSK /HCH/No
Hop

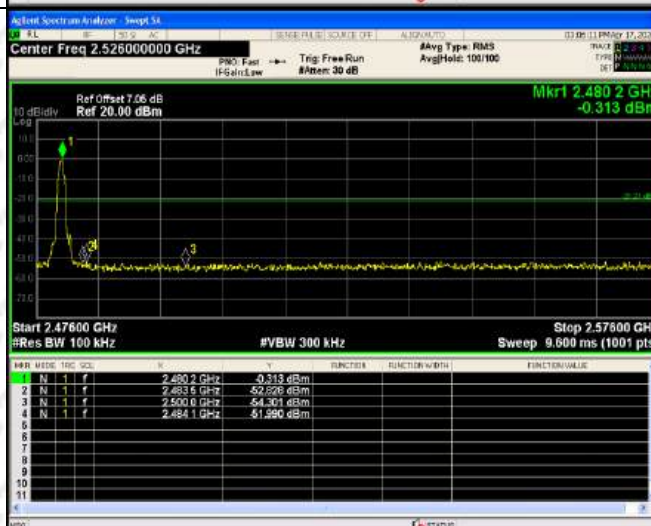


8DPSK
/HCH/Hop

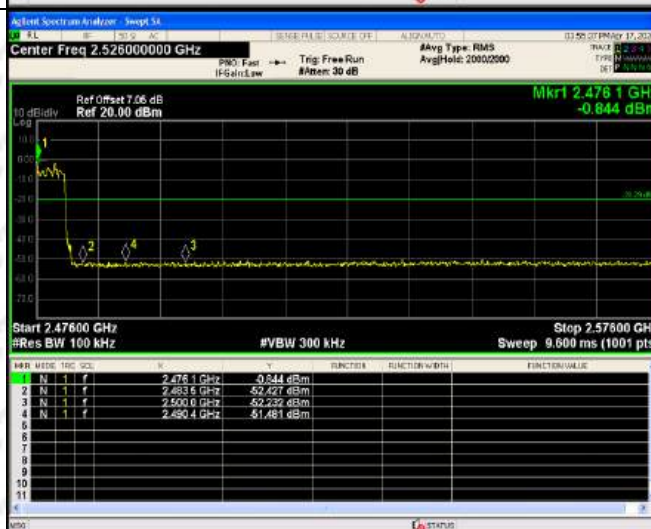


RF Conducted Spurious Emissions Graphs


GFSK/LCH



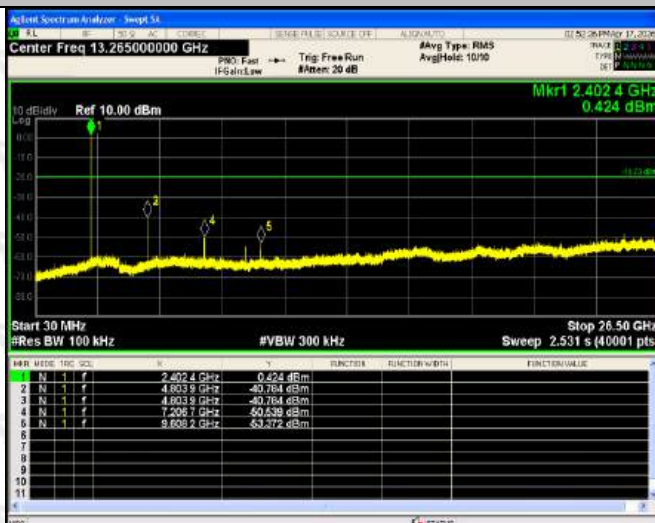


GFSK/MCH

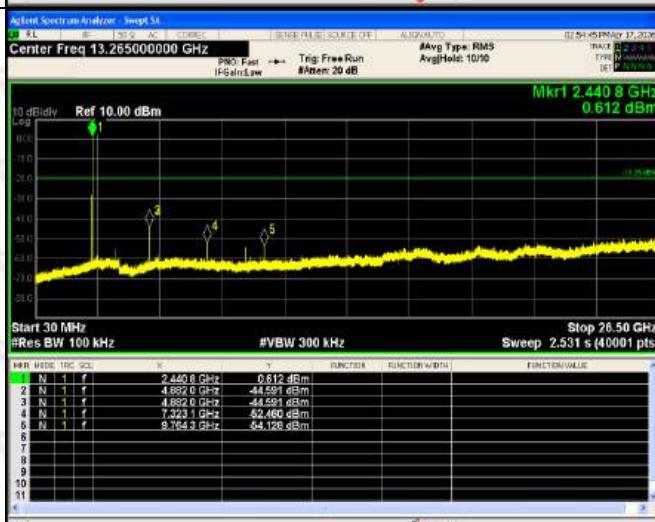


GFSK/HCH

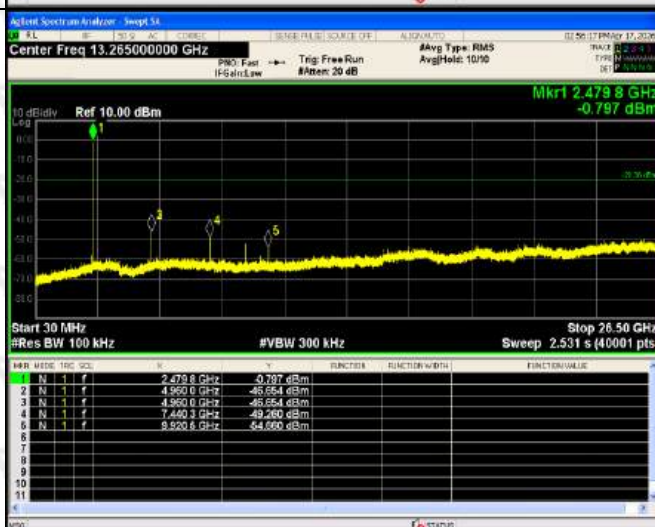


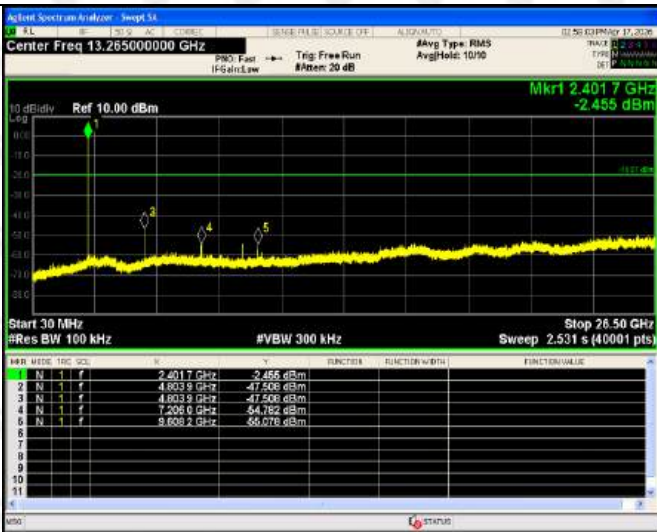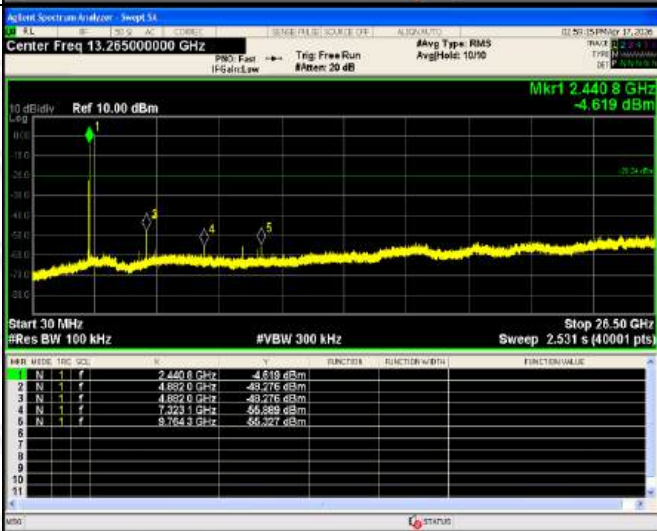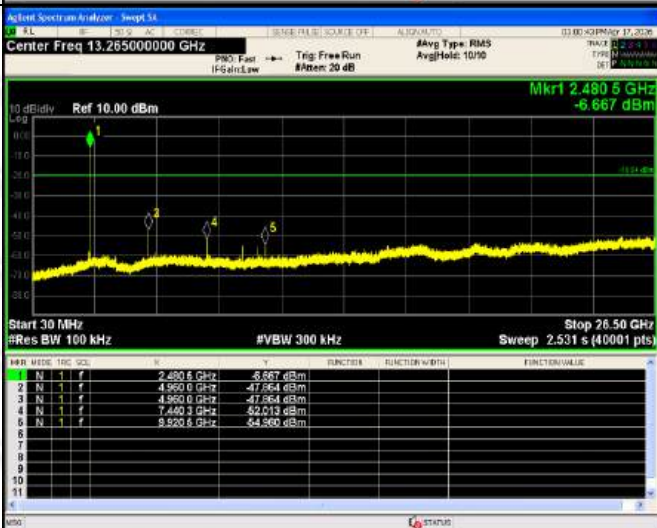$\pi/4$ DQPSK /LCH	 <table><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>13.26500000</td><td>-2.455</td></tr><tr><td>2</td><td>13.26500000</td><td>-47.506</td></tr><tr><td>3</td><td>13.26500000</td><td>-47.506</td></tr><tr><td>4</td><td>13.26500000</td><td>-47.506</td></tr><tr><td>5</td><td>13.26500000</td><td>-47.506</td></tr></table>	Marker	Freq (GHz)	Power (dBm)	1	13.26500000	-2.455	2	13.26500000	-47.506	3	13.26500000	-47.506	4	13.26500000	-47.506	5	13.26500000	-47.506
Marker	Freq (GHz)	Power (dBm)																	
1	13.26500000	-2.455																	
2	13.26500000	-47.506																	
3	13.26500000	-47.506																	
4	13.26500000	-47.506																	
5	13.26500000	-47.506																	
$\pi/4$ DQPSK/MCH	 <table><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>13.26500000</td><td>-4.619</td></tr><tr><td>2</td><td>13.26500000</td><td>-48.276</td></tr><tr><td>3</td><td>13.26500000</td><td>-48.276</td></tr><tr><td>4</td><td>13.26500000</td><td>-48.276</td></tr><tr><td>5</td><td>13.26500000</td><td>-48.276</td></tr></table>	Marker	Freq (GHz)	Power (dBm)	1	13.26500000	-4.619	2	13.26500000	-48.276	3	13.26500000	-48.276	4	13.26500000	-48.276	5	13.26500000	-48.276
Marker	Freq (GHz)	Power (dBm)																	
1	13.26500000	-4.619																	
2	13.26500000	-48.276																	
3	13.26500000	-48.276																	
4	13.26500000	-48.276																	
5	13.26500000	-48.276																	
$\pi/4$ DQPSK/HCH	 <table><tr><th>Marker</th><th>Freq (GHz)</th><th>Power (dBm)</th></tr><tr><td>1</td><td>13.26500000</td><td>-6.667</td></tr><tr><td>2</td><td>13.26500000</td><td>-47.564</td></tr><tr><td>3</td><td>13.26500000</td><td>-47.564</td></tr><tr><td>4</td><td>13.26500000</td><td>-47.564</td></tr><tr><td>5</td><td>13.26500000</td><td>-47.564</td></tr></table>	Marker	Freq (GHz)	Power (dBm)	1	13.26500000	-6.667	2	13.26500000	-47.564	3	13.26500000	-47.564	4	13.26500000	-47.564	5	13.26500000	-47.564
Marker	Freq (GHz)	Power (dBm)																	
1	13.26500000	-6.667																	
2	13.26500000	-47.564																	
3	13.26500000	-47.564																	
4	13.26500000	-47.564																	
5	13.26500000	-47.564																	


8DPSK /LCH

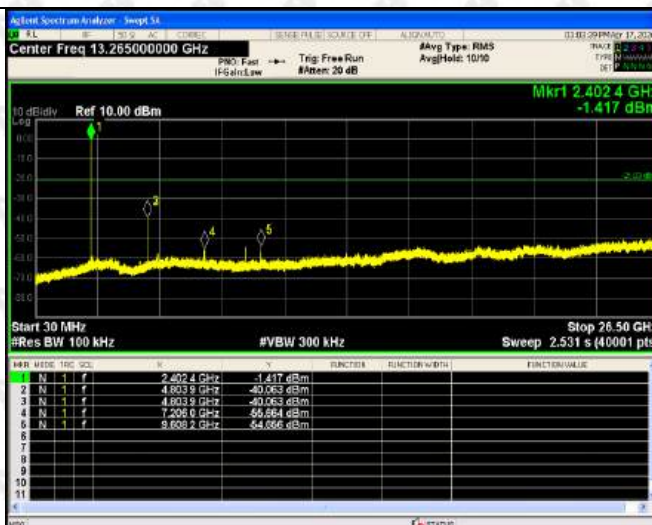

8DPSK /MCH



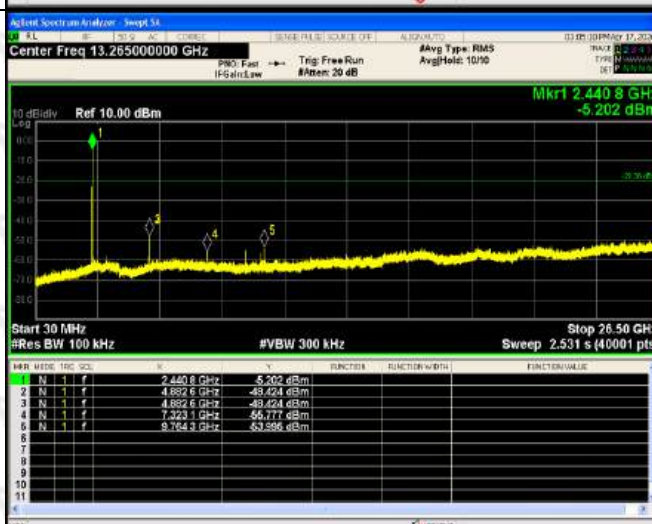


8DPSK /HCH

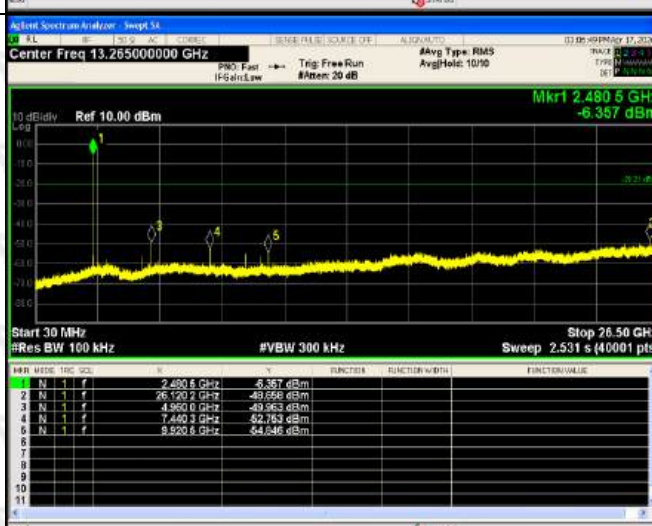


Module 2


BAND EDGE Graphs

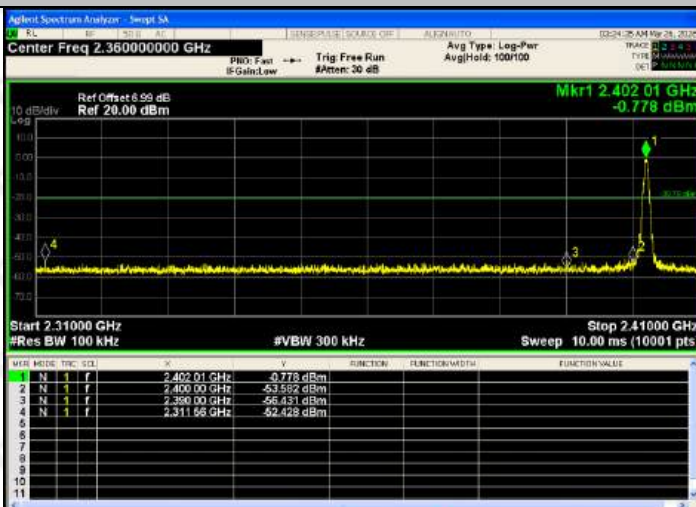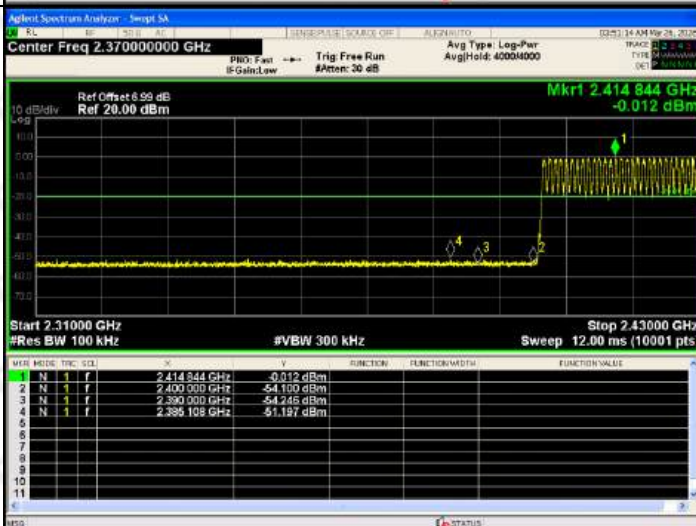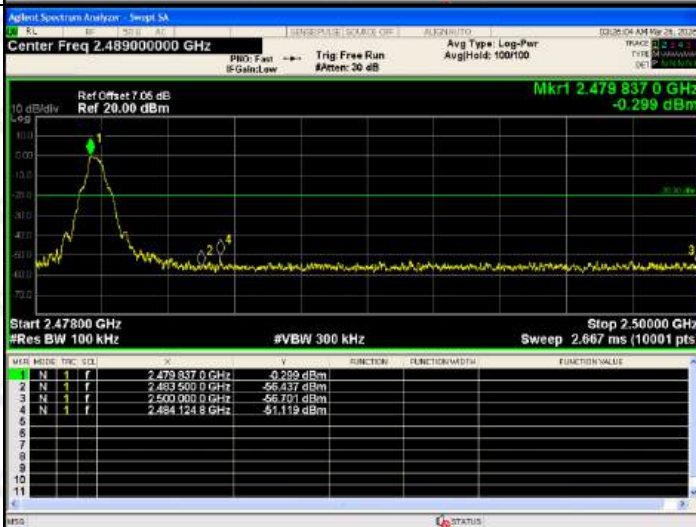GFSK/LCH/
No Hop

GFSK/LCH/
Hop

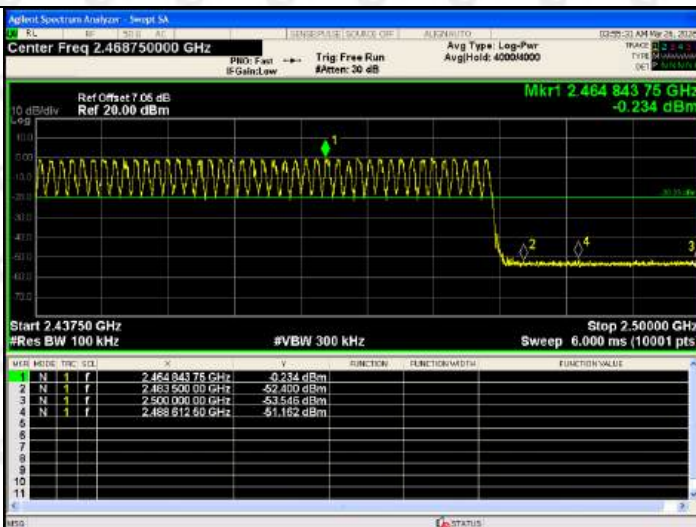GFSK/HCH/
No Hop


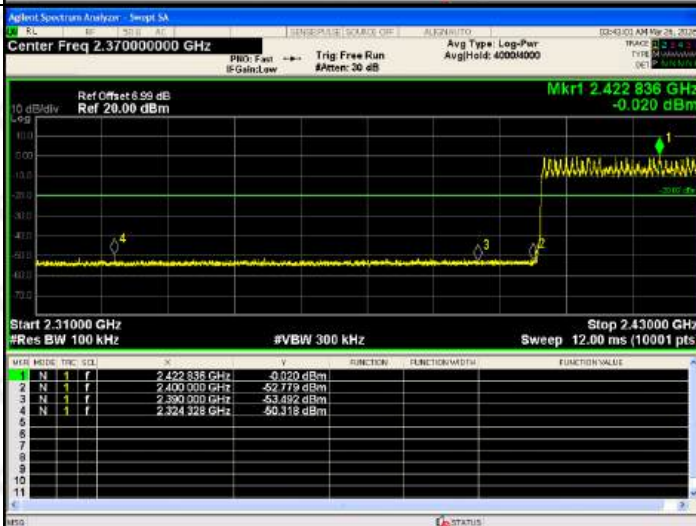
GFSK/HCH/
Hop



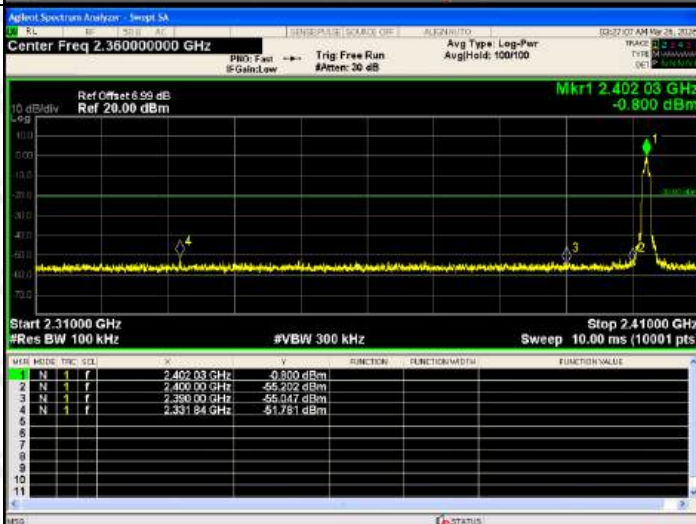


$\pi/4$ DQPSK/LCH/
No Hop




$\pi/4$ DQPSK/LCH/
Hop

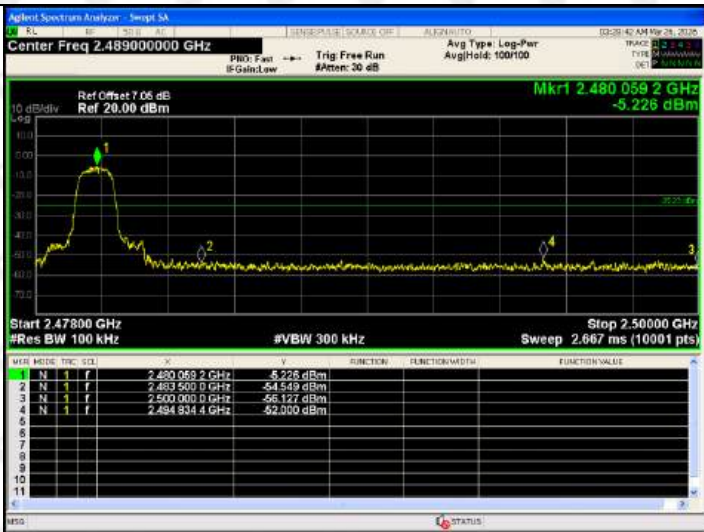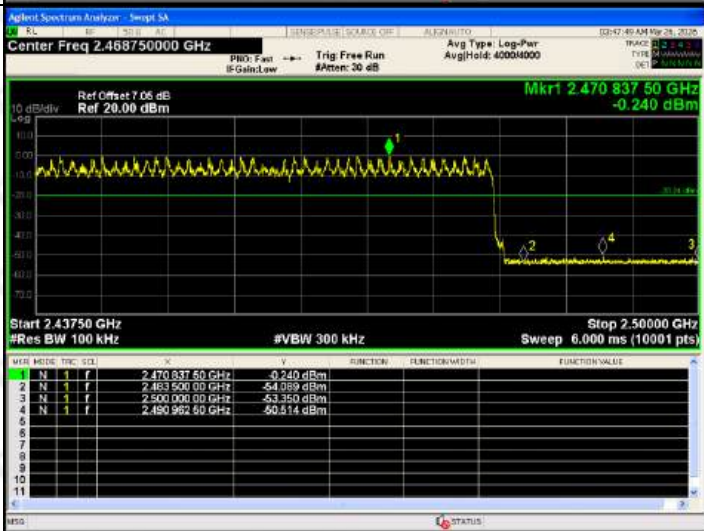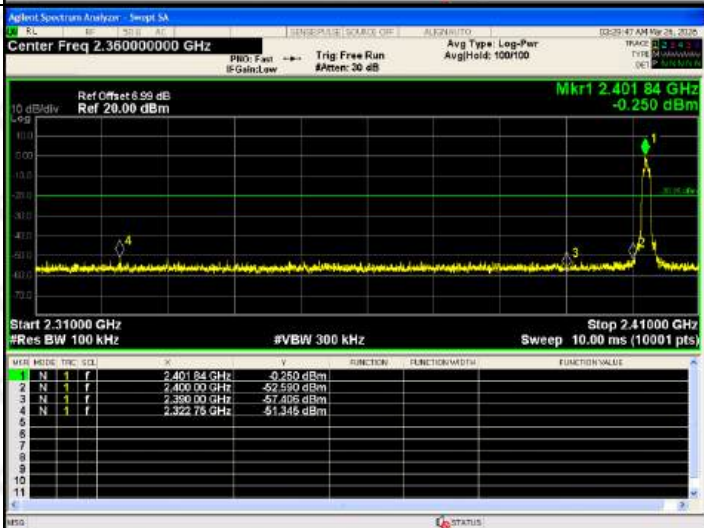


$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Screenshot Center Freq 2.48900000 GHz Ref Offset 7.06 dB Ref 20.00 dBm Mkr1 2.480 059 2 GHz -5.226 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts) <table><thead><tr><th>Marker</th><th>Frequency (GHz)</th><th>Power (dBm)</th></tr></thead><tbody><tr><td>1</td><td>2.480 059 2</td><td>-5.226</td></tr><tr><td>2</td><td>2.483 500 0</td><td>-54.549</td></tr><tr><td>3</td><td>2.500 000 0</td><td>-56.122</td></tr><tr><td>4</td><td>2.484 834 4</td><td>-62.000</td></tr></tbody></table>	Marker	Frequency (GHz)	Power (dBm)	1	2.480 059 2	-5.226	2	2.483 500 0	-54.549	3	2.500 000 0	-56.122	4	2.484 834 4	-62.000
Marker	Frequency (GHz)	Power (dBm)														
1	2.480 059 2	-5.226														
2	2.483 500 0	-54.549														
3	2.500 000 0	-56.122														
4	2.484 834 4	-62.000														
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Screenshot Center Freq 2.48875000 GHz Ref Offset 7.06 dB Ref 20.00 dBm Mkr1 2.470 837 50 GHz -0.240 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts) <table><thead><tr><th>Marker</th><th>Frequency (GHz)</th><th>Power (dBm)</th></tr></thead><tbody><tr><td>1</td><td>2.470 837 50</td><td>-0.240</td></tr><tr><td>2</td><td>2.483 500 0</td><td>-54.089</td></tr><tr><td>3</td><td>2.500 000 0</td><td>-53.350</td></tr><tr><td>4</td><td>2.480 962 60</td><td>-50.614</td></tr></tbody></table>	Marker	Frequency (GHz)	Power (dBm)	1	2.470 837 50	-0.240	2	2.483 500 0	-54.089	3	2.500 000 0	-53.350	4	2.480 962 60	-50.614
Marker	Frequency (GHz)	Power (dBm)														
1	2.470 837 50	-0.240														
2	2.483 500 0	-54.089														
3	2.500 000 0	-53.350														
4	2.480 962 60	-50.614														
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Screenshot Center Freq 2.36000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.401 84 GHz -0.250 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts) <table><thead><tr><th>Marker</th><th>Frequency (GHz)</th><th>Power (dBm)</th></tr></thead><tbody><tr><td>1</td><td>2.401 84</td><td>-0.250</td></tr><tr><td>2</td><td>2.400 00</td><td>-52.590</td></tr><tr><td>3</td><td>2.390 00</td><td>-57.405</td></tr><tr><td>4</td><td>2.322 75</td><td>-51.345</td></tr></tbody></table>	Marker	Frequency (GHz)	Power (dBm)	1	2.401 84	-0.250	2	2.400 00	-52.590	3	2.390 00	-57.405	4	2.322 75	-51.345
Marker	Frequency (GHz)	Power (dBm)														
1	2.401 84	-0.250														
2	2.400 00	-52.590														
3	2.390 00	-57.405														
4	2.322 75	-51.345														


8DPSK
/LCH/Hop



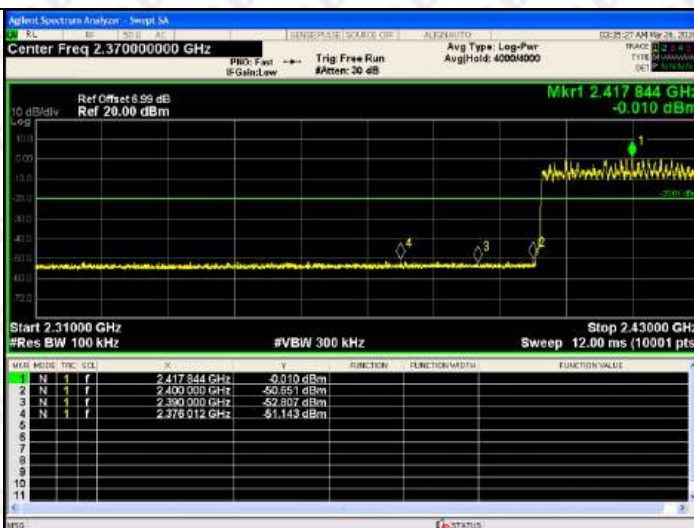


8DPSK /HCH/No
Hop

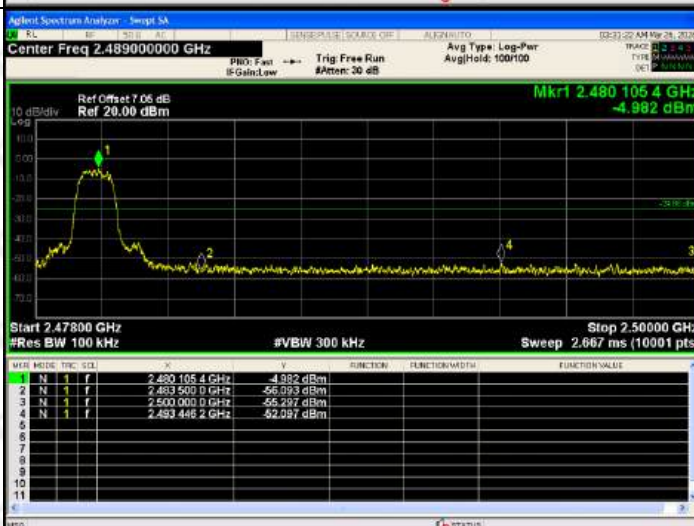


8DPSK
/HCH/Hop

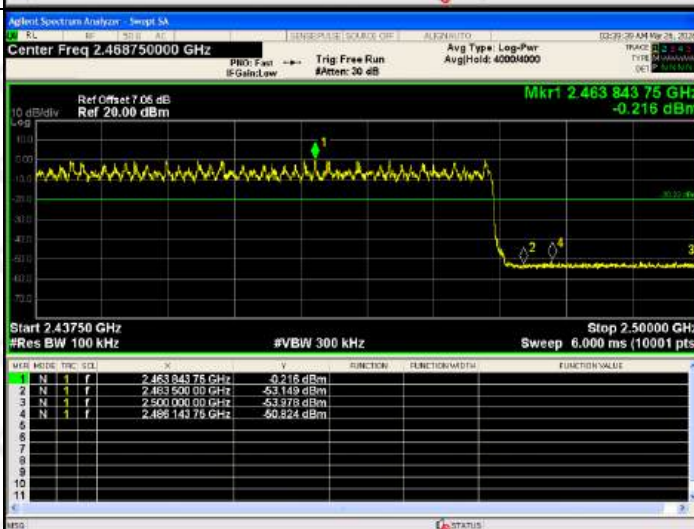


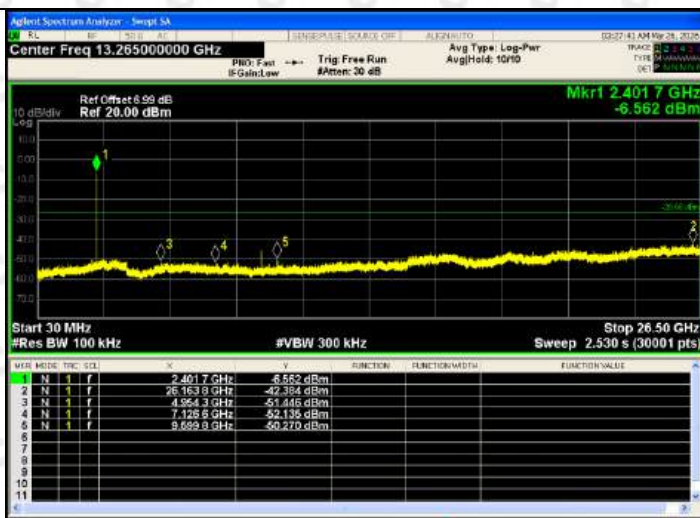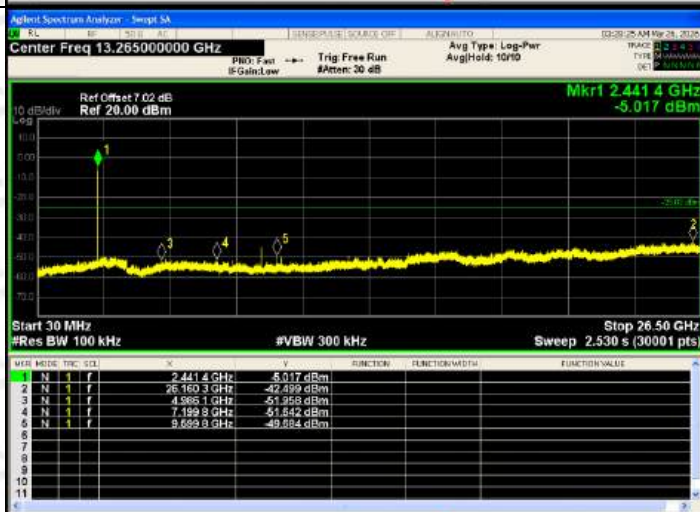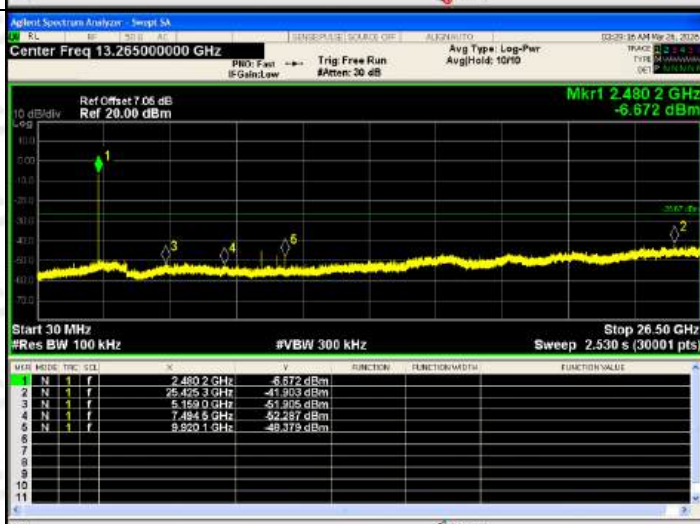$\pi/4$ DQPSK /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset: 6.99 dB Ref 20.00 dBm Mkr1 2.401 7 GHz -6.562 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Marker</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.401 7 GHz</td><td>-6.562 dBm</td></tr><tr><td>2</td><td>26.163 9 GHz</td><td>-42.384 dBm</td></tr><tr><td>3</td><td>4.954 3 GHz</td><td>-51.445 dBm</td></tr><tr><td>4</td><td>7.126 8 GHz</td><td>-52.135 dBm</td></tr><tr><td>5</td><td>9.689 9 GHz</td><td>-50.270 dBm</td></tr></table>	Marker	Freq	Power	1	2.401 7 GHz	-6.562 dBm	2	26.163 9 GHz	-42.384 dBm	3	4.954 3 GHz	-51.445 dBm	4	7.126 8 GHz	-52.135 dBm	5	9.689 9 GHz	-50.270 dBm
Marker	Freq	Power																	
1	2.401 7 GHz	-6.562 dBm																	
2	26.163 9 GHz	-42.384 dBm																	
3	4.954 3 GHz	-51.445 dBm																	
4	7.126 8 GHz	-52.135 dBm																	
5	9.689 9 GHz	-50.270 dBm																	
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset: 7.02 dB Ref 20.00 dBm Mkr1 2.441 4 GHz -5.017 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Marker</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.441 4 GHz</td><td>-5.017 dBm</td></tr><tr><td>2</td><td>26.160 3 GHz</td><td>-42.499 dBm</td></tr><tr><td>3</td><td>4.985 1 GHz</td><td>-51.259 dBm</td></tr><tr><td>4</td><td>7.199 9 GHz</td><td>-51.542 dBm</td></tr><tr><td>5</td><td>9.689 9 GHz</td><td>-49.584 dBm</td></tr></table>	Marker	Freq	Power	1	2.441 4 GHz	-5.017 dBm	2	26.160 3 GHz	-42.499 dBm	3	4.985 1 GHz	-51.259 dBm	4	7.199 9 GHz	-51.542 dBm	5	9.689 9 GHz	-49.584 dBm
Marker	Freq	Power																	
1	2.441 4 GHz	-5.017 dBm																	
2	26.160 3 GHz	-42.499 dBm																	
3	4.985 1 GHz	-51.259 dBm																	
4	7.199 9 GHz	-51.542 dBm																	
5	9.689 9 GHz	-49.584 dBm																	
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset: 7.06 dB Ref 20.00 dBm Mkr1 2.480 2 GHz -6.672 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Marker</th><th>Freq</th><th>Power</th></tr><tr><td>1</td><td>2.480 2 GHz</td><td>-6.672 dBm</td></tr><tr><td>2</td><td>26.425 3 GHz</td><td>-41.903 dBm</td></tr><tr><td>3</td><td>5.159 0 GHz</td><td>-51.905 dBm</td></tr><tr><td>4</td><td>7.484 5 GHz</td><td>-52.257 dBm</td></tr><tr><td>5</td><td>9.820 1 GHz</td><td>-49.379 dBm</td></tr></table>	Marker	Freq	Power	1	2.480 2 GHz	-6.672 dBm	2	26.425 3 GHz	-41.903 dBm	3	5.159 0 GHz	-51.905 dBm	4	7.484 5 GHz	-52.257 dBm	5	9.820 1 GHz	-49.379 dBm
Marker	Freq	Power																	
1	2.480 2 GHz	-6.672 dBm																	
2	26.425 3 GHz	-41.903 dBm																	
3	5.159 0 GHz	-51.905 dBm																	
4	7.484 5 GHz	-52.257 dBm																	
5	9.820 1 GHz	-49.379 dBm																	


8DPSK /LCH

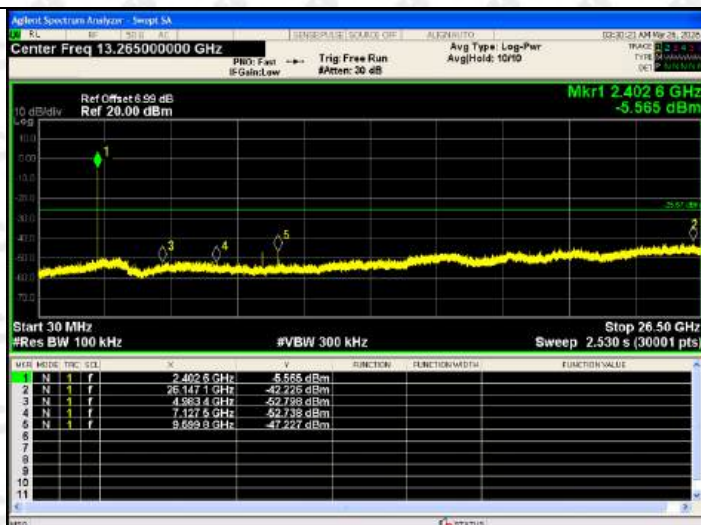

8DPSK /MCH

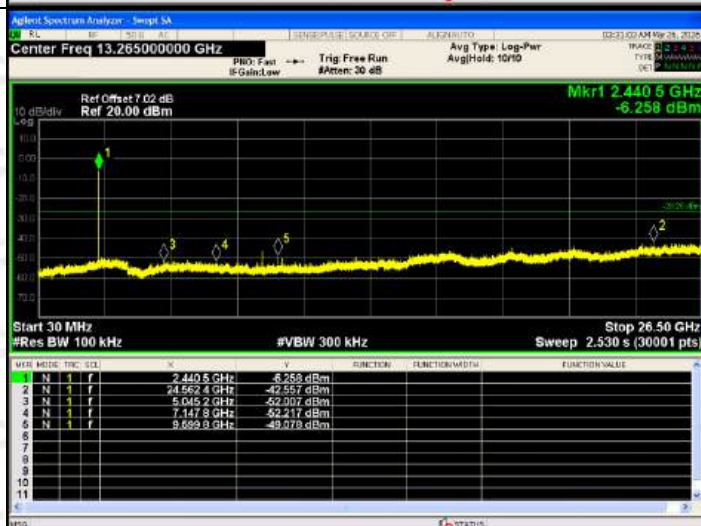


8DPSK /HCH

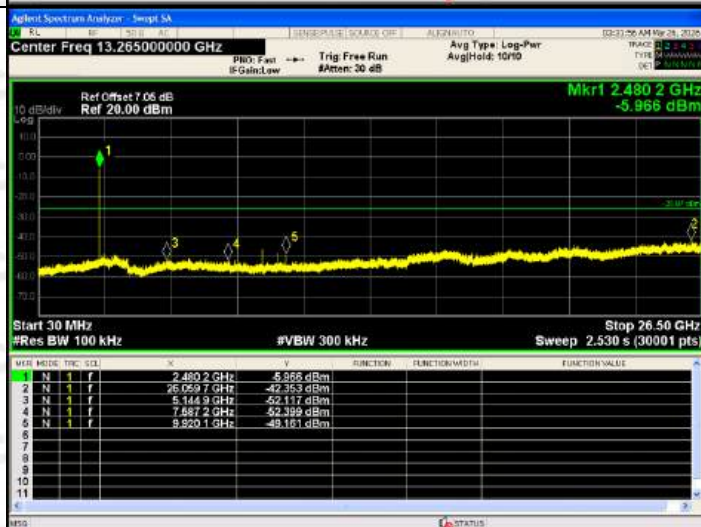

9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

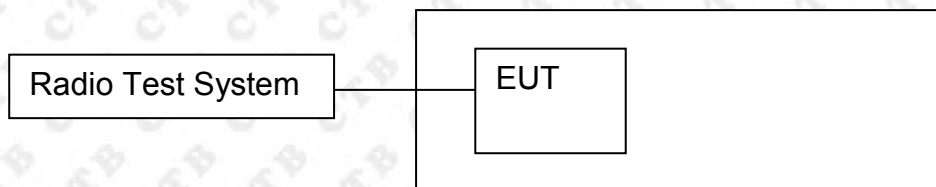

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Module 1


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	1.63	20.97	PASS
	MCH	1	20.97	PASS
	HCH	0.86	20.97	PASS
$\pi/4$ DQPSK	LCH	1.52	20.97	PASS
	MCH	0.94	20.97	PASS
	HCH	0.81	20.97	PASS
8DPSK	LCH	1.8	20.97	PASS
	MCH	1.24	20.97	PASS
	HCH	1.13	20.97	PASS




Module 2



Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	1.132	20.97	PASS
	MCH	0.824	20.97	PASS
	HCH	1.139	20.97	PASS
$\pi/4$ DQPSK	LCH	-0.079	20.97	PASS
	MCH	-0.387	20.97	PASS
	HCH	-0.06	20.97	PASS
8DPSK	LCH	0.119	20.97	PASS
	MCH	-0.156	20.97	PASS
	HCH	0.133	20.97	PASS

Module 1

Test Graph:

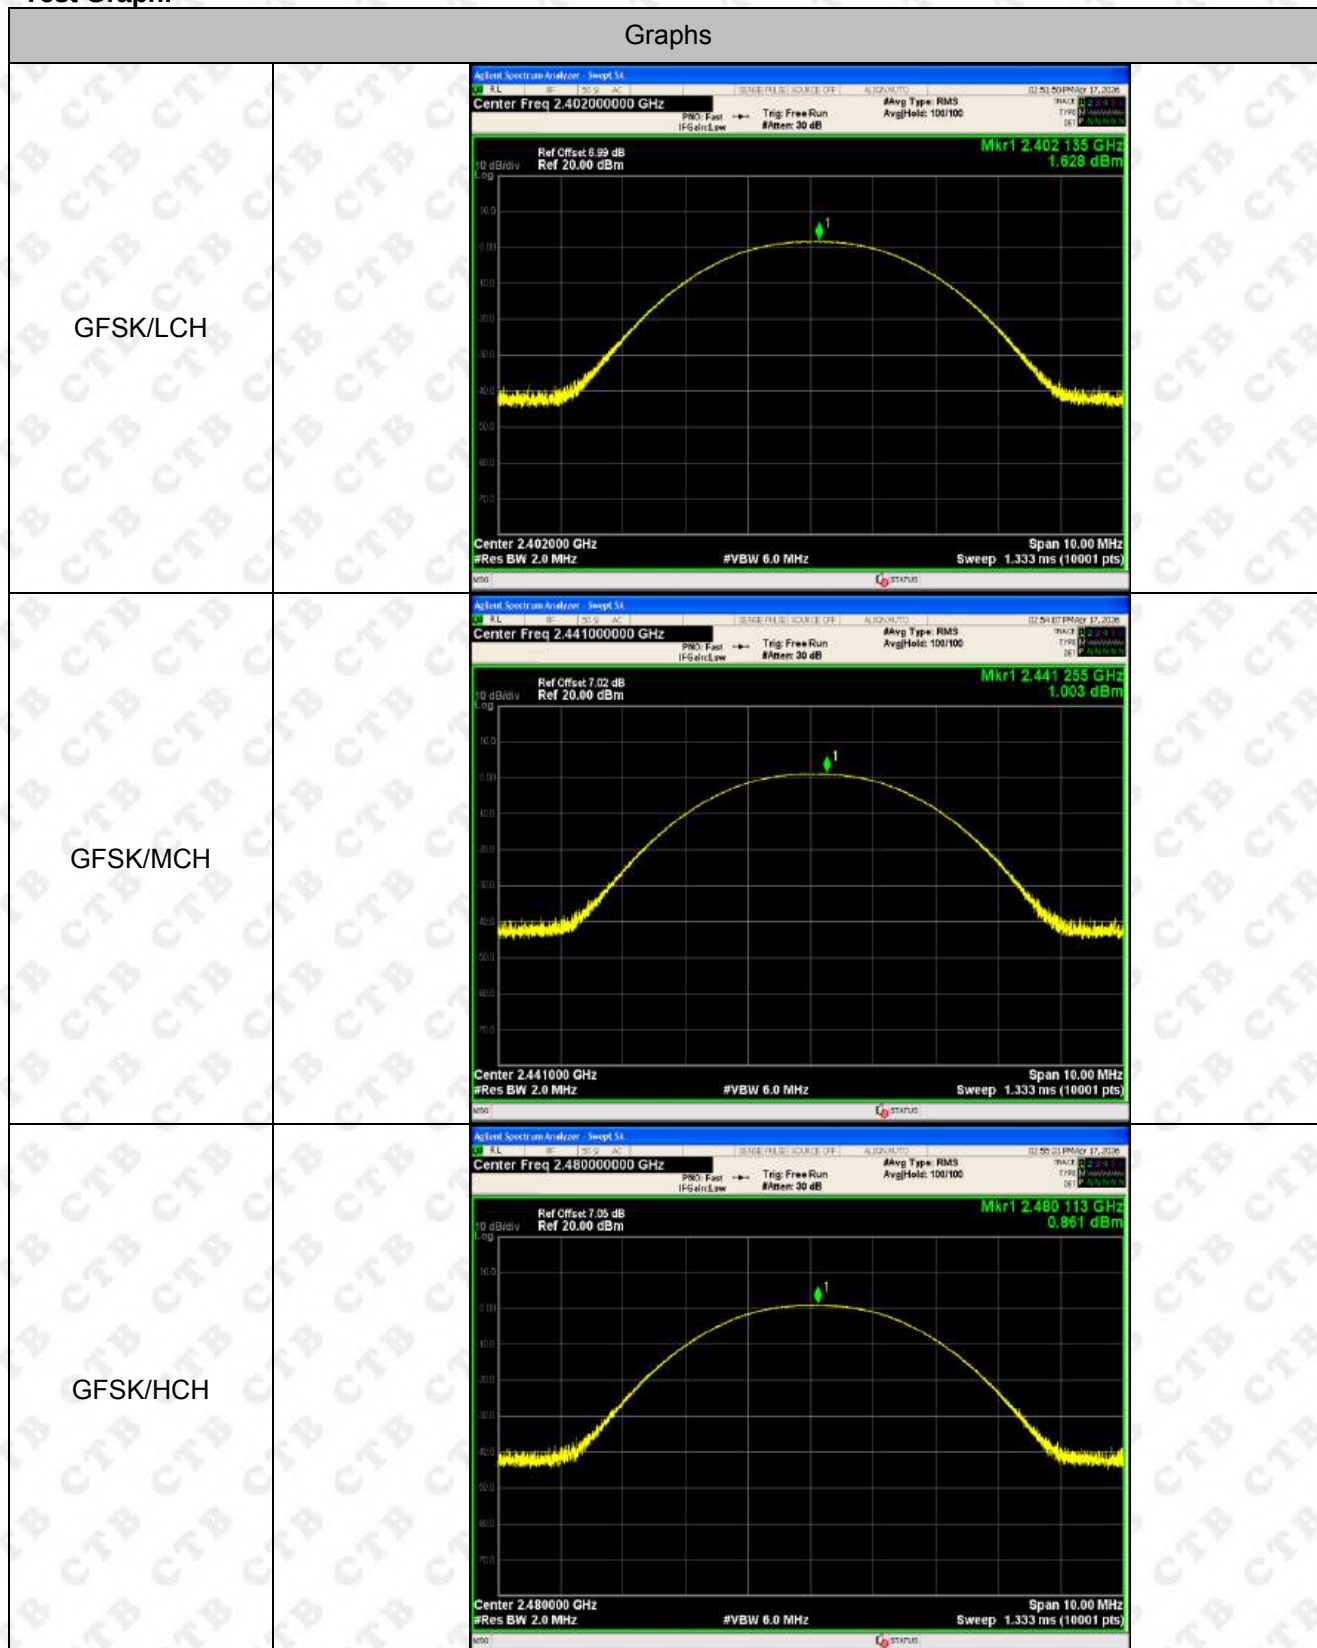


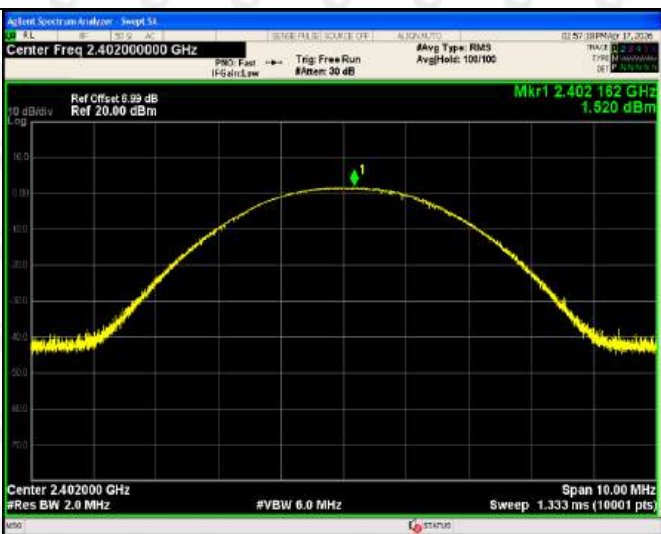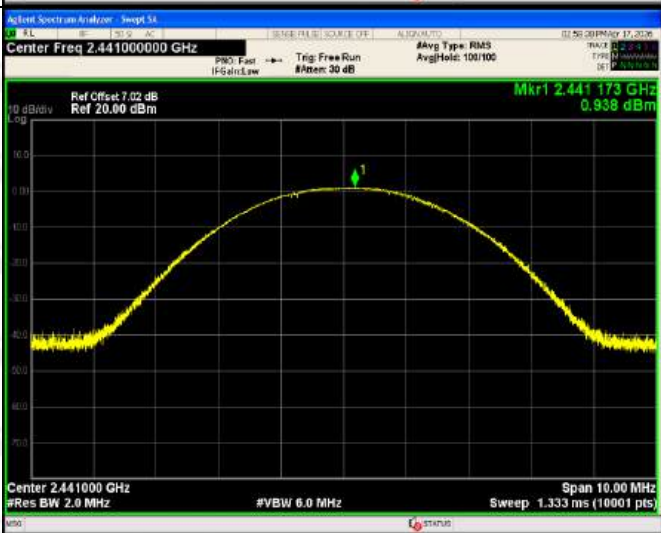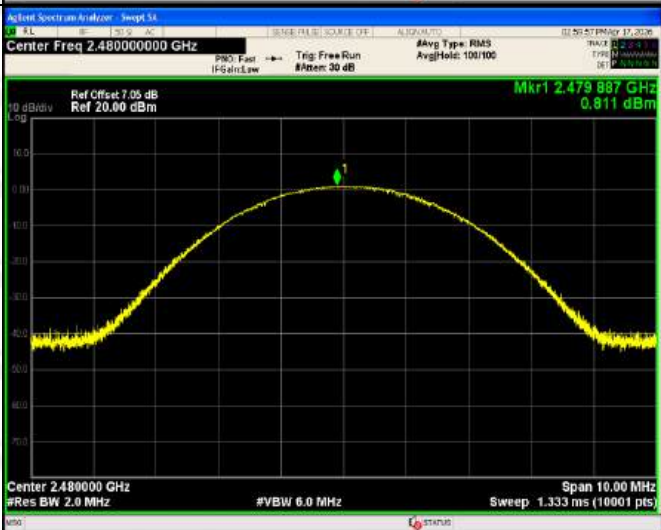
$\pi/4$DQPSK/LCH	 Agilent Spectrum Analyzer - Swept S.F. Center Freq 2.40200000 GHz Ref Offset: 6.59 dB Ref 20.00 dBm Mkr1 2.402182 GHz 1.520 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$DQPSK/MCH	 Agilent Spectrum Analyzer - Swept S.F. Center Freq 2.44100000 GHz Ref Offset: 7.02 dB Ref 20.00 dBm Mkr1 2.441173 GHz 0.938 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
$\pi/4$DQPSK/HCH	 Agilent Spectrum Analyzer - Swept S.F. Center Freq 2.48000000 GHz Ref Offset: 7.05 dB Ref 20.00 dBm Mkr1 2.479987 GHz 0.811 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)

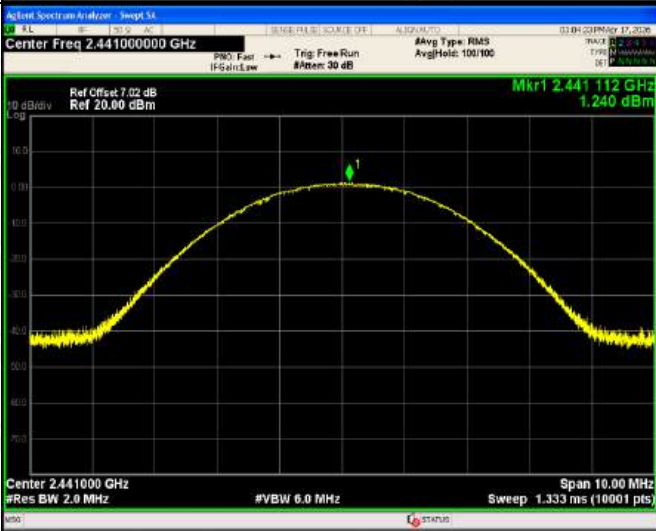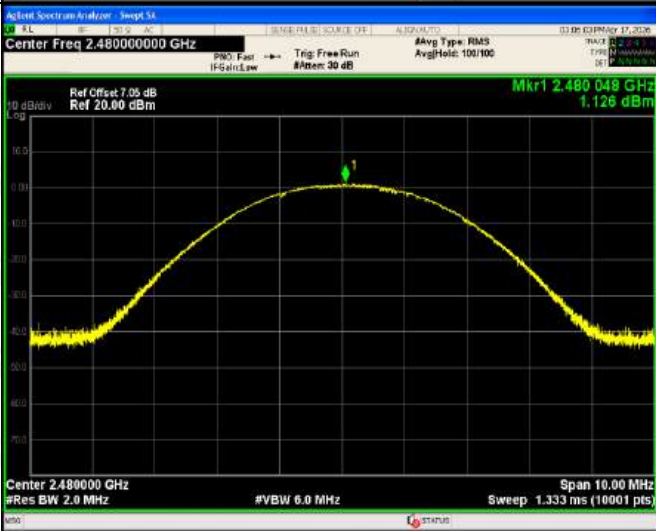8DPSK/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset: 6.99 dB Ref 20.00 dBm Mkr1 2.402136 GHz 1.796 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset: 7.05 dB Ref 20.00 dBm Mkr1 2.441112 GHz 1.240 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset: 7.05 dB Ref 20.00 dBm Mkr1 2.480048 GHz 1.126 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)

Module 2

Test Graph:

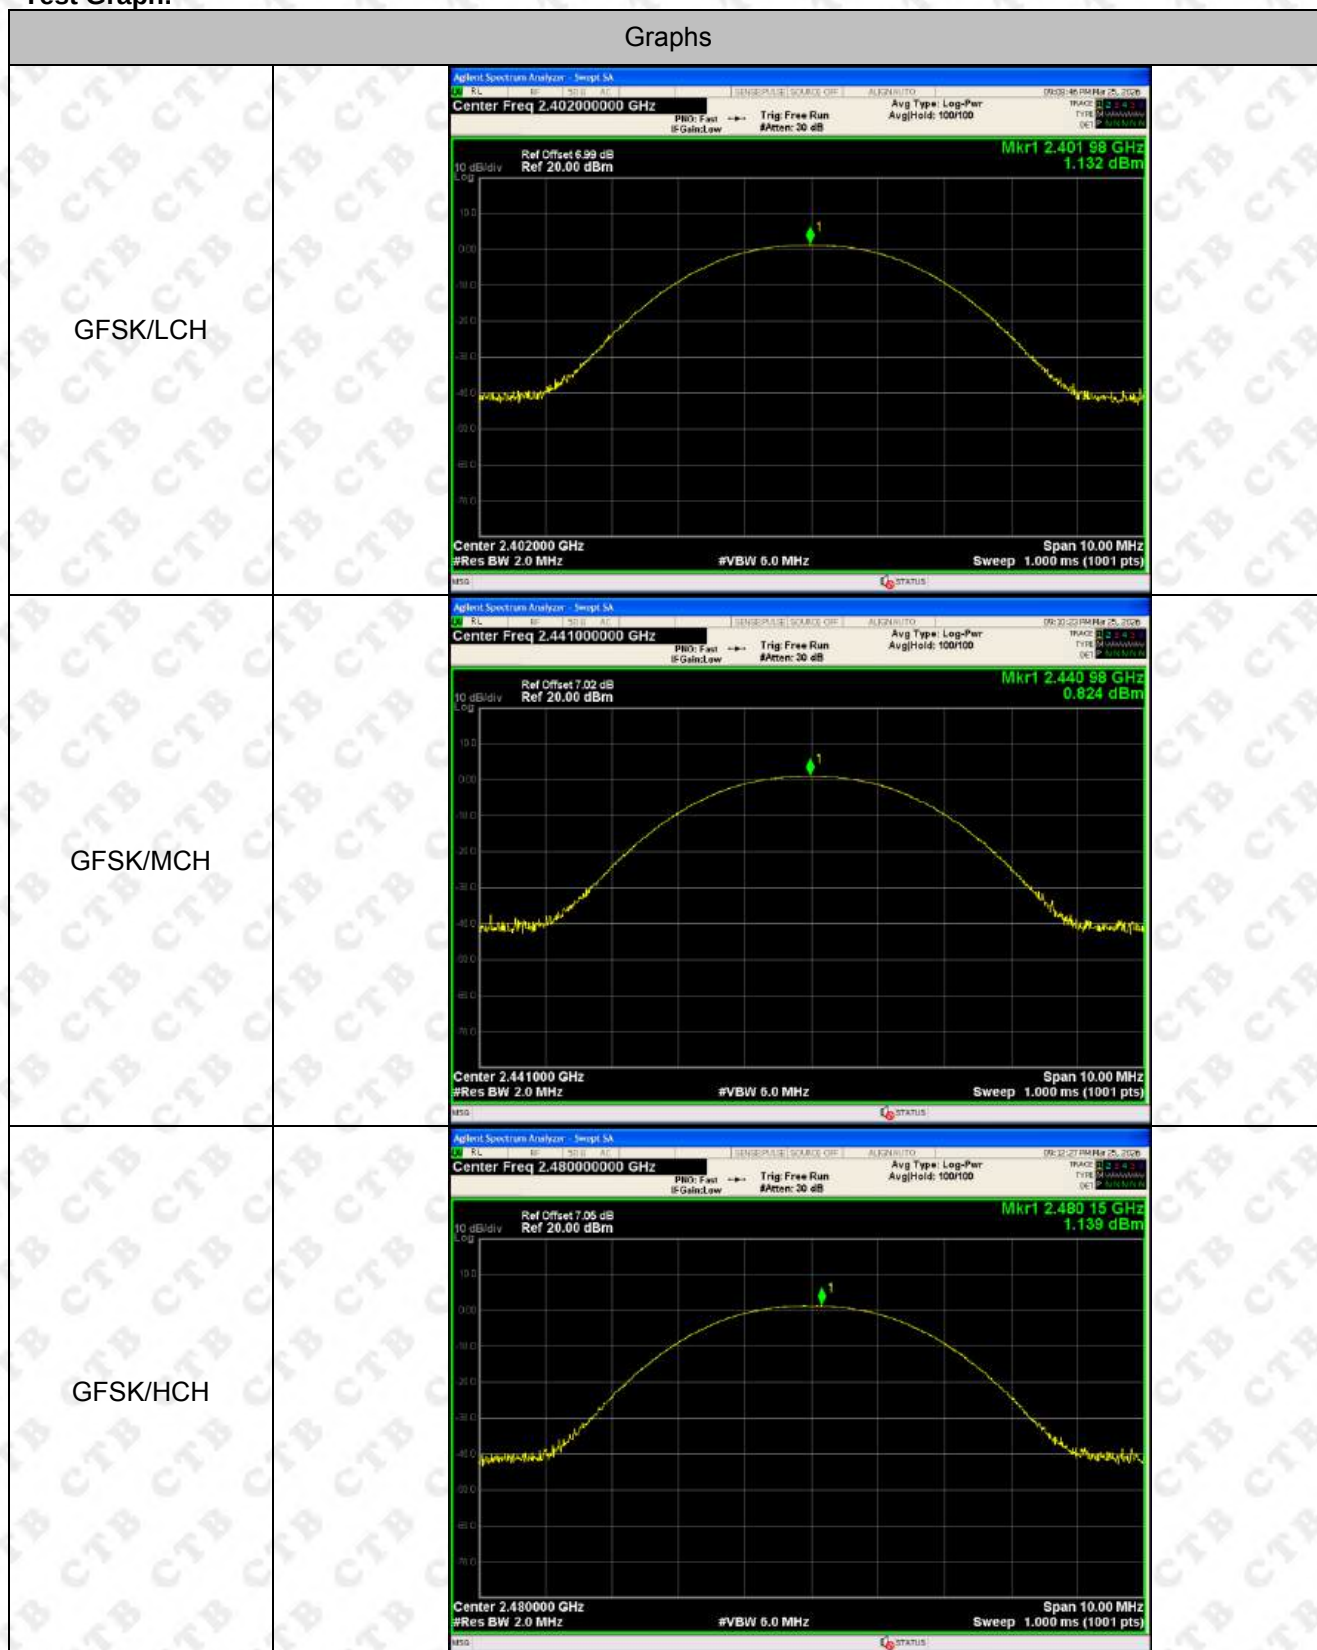


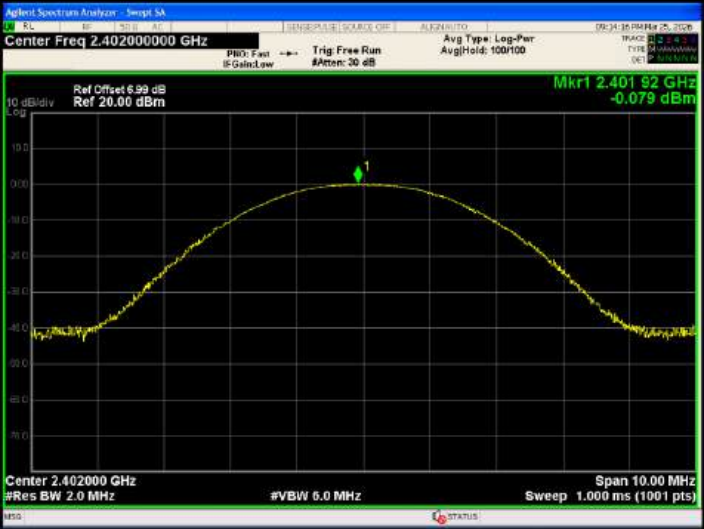$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	
$\pi/4$ DQPSK/HCH	

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.402 07 GHz 0.119 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.441 01 GHz -0.156 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.479 87 GHz 0.133 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

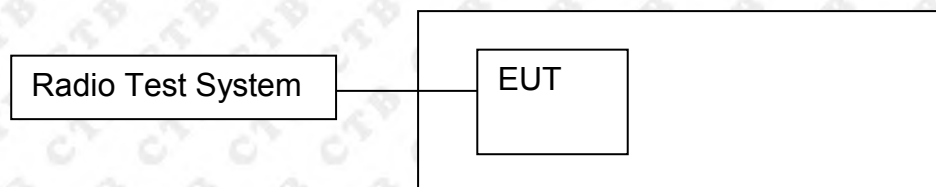

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Module 1

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.869	PASS
	Mid channel	0.875	PASS
	High channel	0.873	PASS
$\pi/4$ DQPSK	Low channel	1.327	PASS
	Mid channel	1.279	PASS
	High channel	1.291	PASS
8DPSK	Low channel	1.3	PASS
	Mid channel	1.295	PASS
	High channel	1.299	PASS

Module 2

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.957	PASS
	Mid channel	0.943	PASS
	High channel	0.881	PASS
$\pi/4$ DQPSK	Low channel	1.263	PASS
	Mid channel	1.213	PASS
	High channel	1.225	PASS
8DPSK	Low channel	1.299	PASS
	Mid channel	1.235	PASS
	High channel	1.199	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Module 1

Test Graph:

GFSK Low channel	
GFSK Mid channel	
GFSK High channel	

$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 5.99 dB Ref 26.99 dBm Center Freq 2.40200000 GHz Trig: Free Run Avg/Hold: 200/200 Radio Std: None Radio Device: BTS Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1777 MHz Total Power 8.42 dBm Transmit Freq Error 15.969 kHz OBW Power 99.00 % x dB Bandwidth 1.300 MHz x dB -20.00 dB Mkr3 2.402866 GHz -20.425 dBm
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 27.02 dBm Center Freq 2.44100000 GHz Trig: Free Run Avg/Hold: 200/200 Radio Std: None Radio Device: BTS Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1895 MHz Total Power 8.38 dBm Transmit Freq Error 17.811 kHz OBW Power 99.00 % x dB Bandwidth 1.285 MHz x dB -20.00 dB Mkr3 2.441865 GHz -20.035 dBm
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Center Freq 2.48000000 GHz Trig: Free Run Avg/Hold: 200/200 Radio Std: None Radio Device: BTS Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.2035 MHz Total Power 7.73 dBm Transmit Freq Error 14.279 kHz OBW Power 99.00 % x dB Bandwidth 1.299 MHz x dB -20.00 dB Mkr3 2.480664 GHz -20.000 dBm

Module 2

Test Graph:


GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 8.99 dB Ref 26.99 dBm Mkr3 2.402475 GHz -21.215 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 905.97 kHz Total Power 6.46 dBm Transmit Freq Error -3.629 kHz OBW Power 99.00 % x dB Bandwidth 956.9 kHz x dB -20.00 dB
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Ref Offset 7.02 dB Ref 27.02 dBm Mkr3 2.441457 GHz -22.623 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 866.63 kHz Total Power 6.78 dBm Transmit Freq Error -13.977 kHz OBW Power 99.00 % x dB Bandwidth 942.5 kHz x dB -20.00 dB
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Mkr3 2.48043 GHz -22.636 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 856.64 kHz Total Power 7.22 dBm Transmit Freq Error -10.734 kHz OBW Power 99.00 % x dB Bandwidth 881.4 kHz x dB -20.00 dB

$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

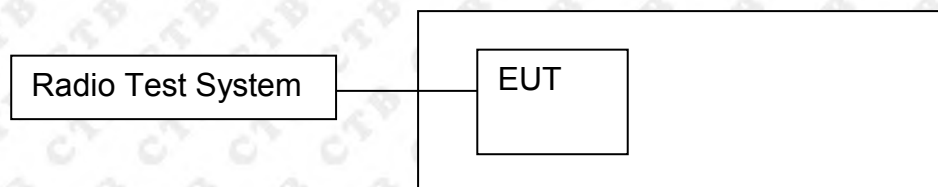

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Module 1


Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.579	PASS
GFSK	MCH	0.998	0.583	PASS
GFSK	HCH	1.000	0.582	PASS
$\pi/4$ DQPSK	LCH	1.000	0.885	PASS
$\pi/4$ DQPSK	MCH	1.000	0.853	PASS
$\pi/4$ DQPSK	HCH	1.002	0.861	PASS
8DPSK	LCH	1.002	0.867	PASS
8DPSK	MCH	1.000	0.863	PASS
8DPSK	HCH	0.998	0.866	PASS

Module 2

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.004	0.638	PASS
GFSK	MCH	1.000	0.629	PASS
GFSK	HCH	1.000	0.587	PASS
$\pi/4$ DQPSK	LCH	1.000	0.842	PASS
$\pi/4$ DQPSK	MCH	0.998	0.809	PASS
$\pi/4$ DQPSK	HCH	0.996	0.817	PASS
8DPSK	LCH	0.998	0.866	PASS
8DPSK	MCH	1.004	0.823	PASS
8DPSK	HCH	1.002	0.799	PASS

Module 1

Test Graph

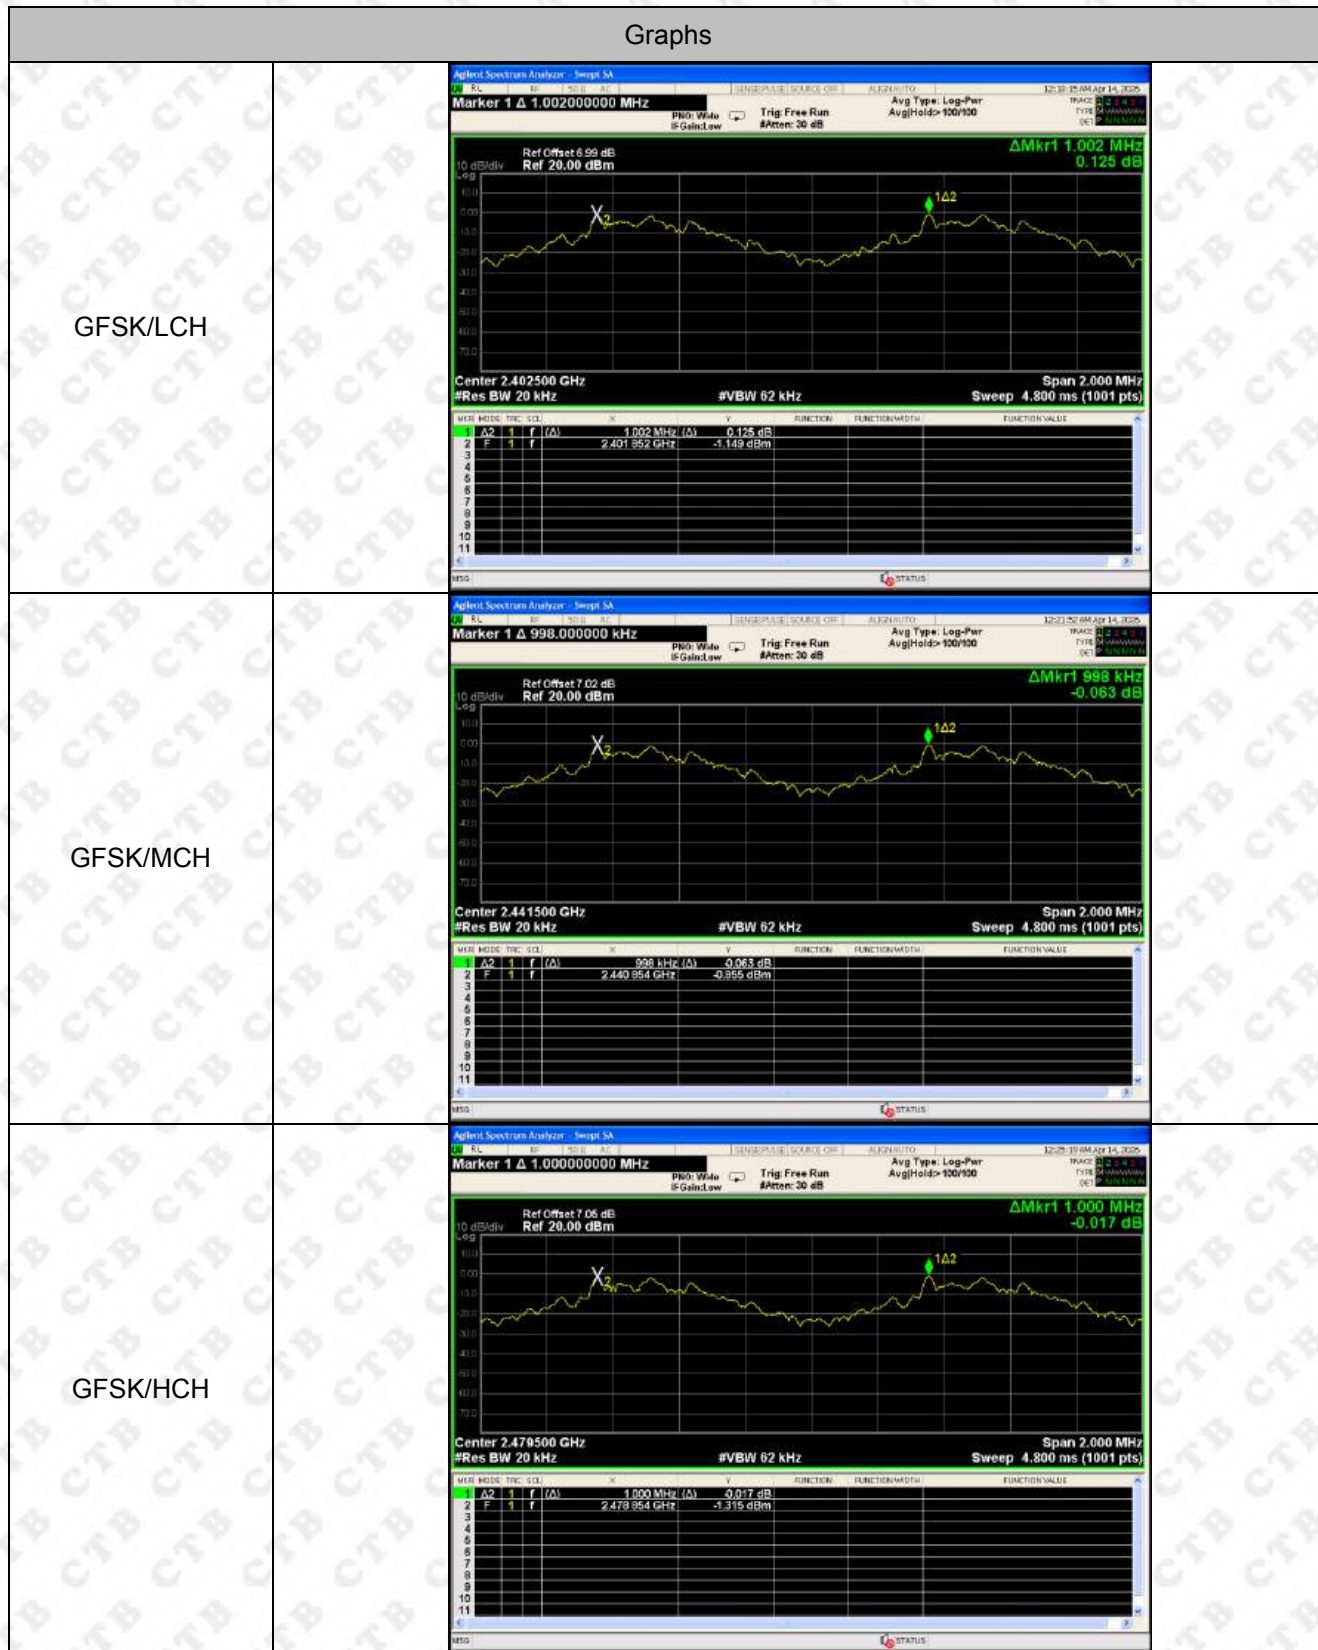

$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH


8DPSK/LCH



8DPSK /MCH



8DPSK /HCH



Module 2 Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH



$\pi/4$ DQPSK/LCH

 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH


8DPSK/LCH



8DPSK /MCH




8DPSK /HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

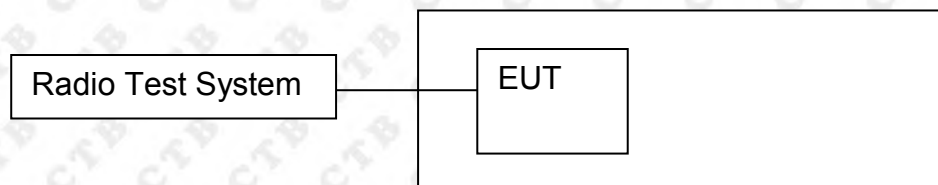

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Module 1

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Module 2

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Module 1 Test Graph

Graphs


GFSK/Hop

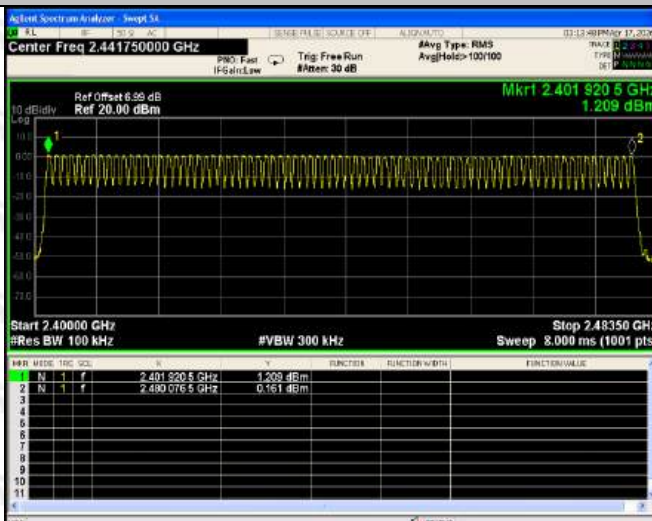

$\pi/4$ DQPSK/Hop

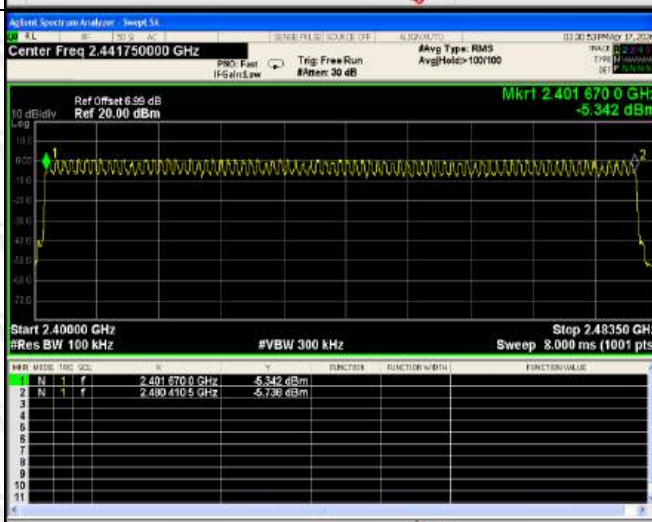



8DPSK/Hop

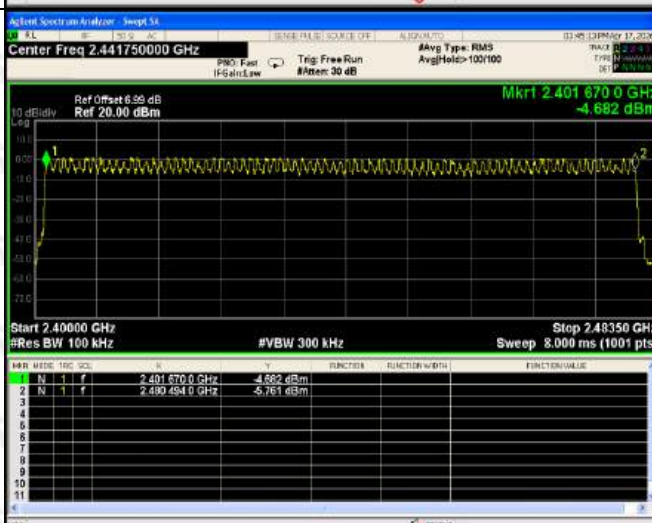


Module 2 Test Graph

Graphs

GFSK/Hop

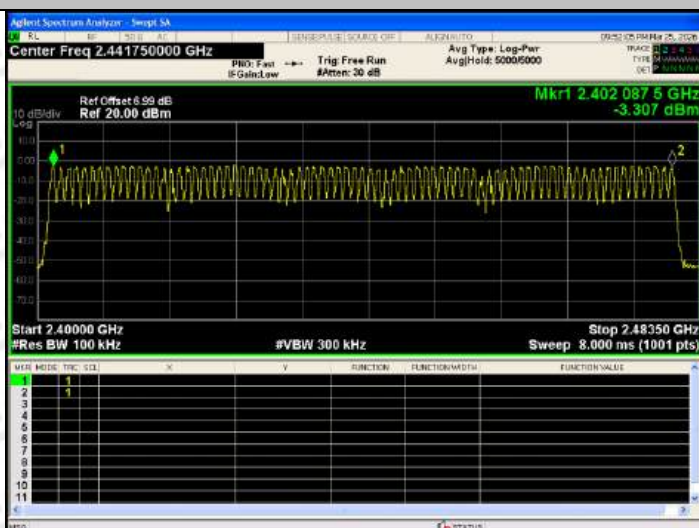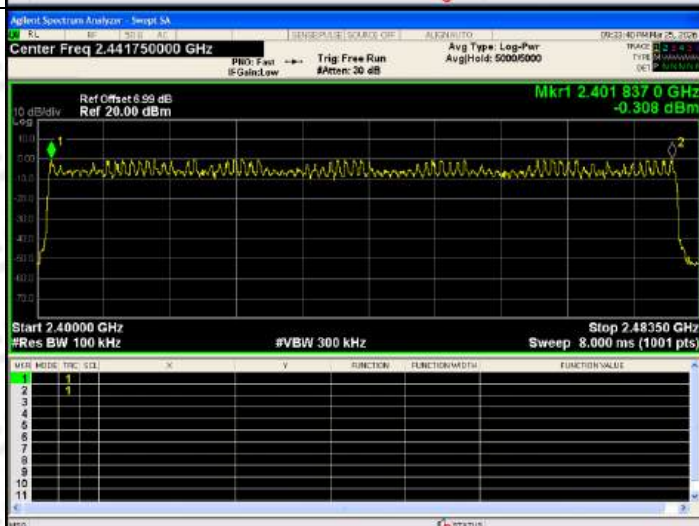

 $\pi/4$ DQPSK/Hop


8DPSK/Hop

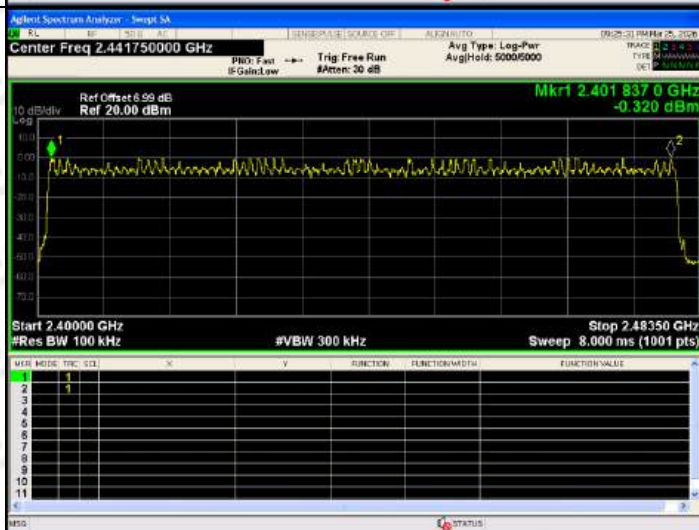

13. DWELL TIME

13.1 Block Diagram Of Test Setup

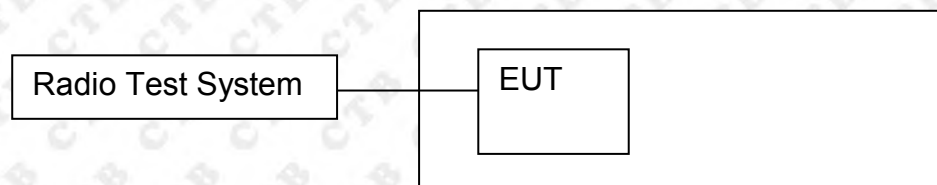

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Module 1

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.371	118.349	400	PASS
	DH1	MCH	0.372	118.296	400	PASS
	DH1	HCH	0.372	118.668	400	PASS
	DH3	LCH	1.63	260.8	400	PASS
	DH3	MCH	1.631	260.96	400	PASS
	DH3	HCH	1.631	259.329	400	PASS
	DH5	LCH	2.88	305.28	400	PASS
	DH5	MCH	2.88	311.04	400	PASS
	DH5	HCH	2.88	308.16	400	PASS

Module 2

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.372	119.04	400	PASS
	DH1	MCH	0.372	119.04	400	PASS
	DH1	HCH	0.372	119.04	400	PASS
	DH3	LCH	1.633	261.28	400	PASS
	DH3	MCH	1.632	261.12	400	PASS
	DH3	HCH	1.632	261.12	400	PASS
	DH5	LCH	2.882	307.413	400	PASS
	DH5	MCH	2.881	307.307	400	PASS
	DH5	HCH	2.882	307.413	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Module 1 Test Graph

Graphs


GFSK_DH1/LCH

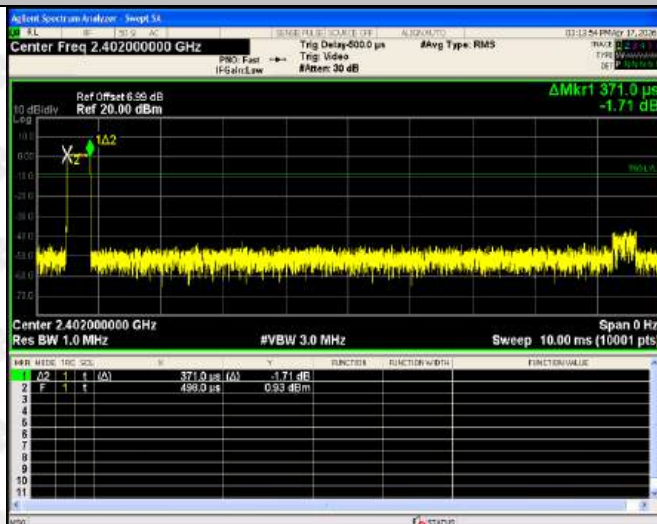


GFSK_DH1/MCH

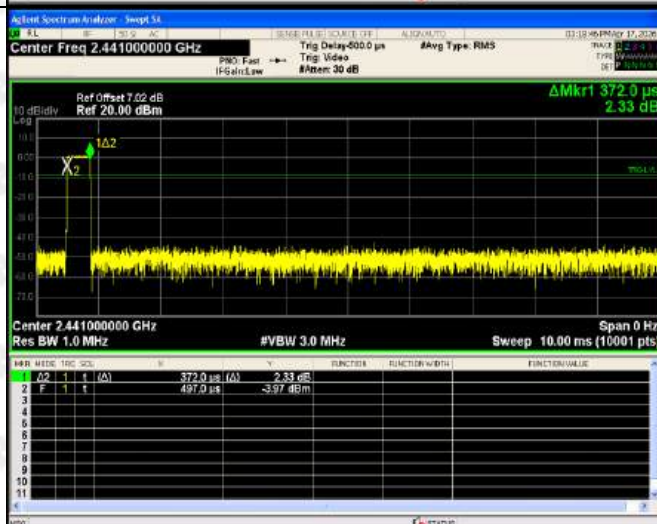


GFSK_DH1/HCH

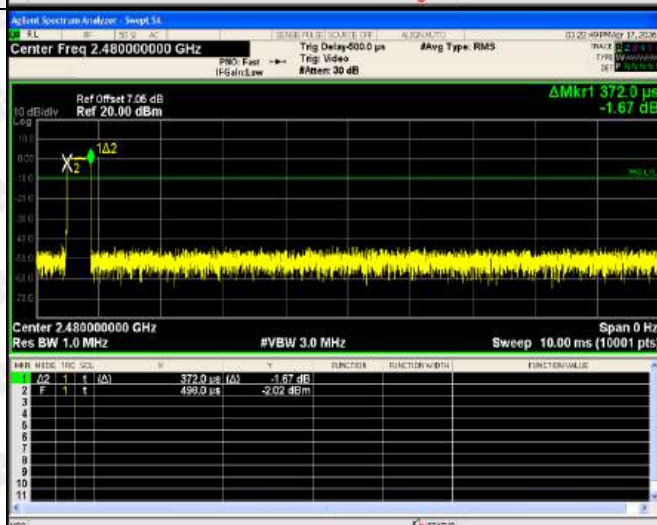


GFSK_DH3/LCH

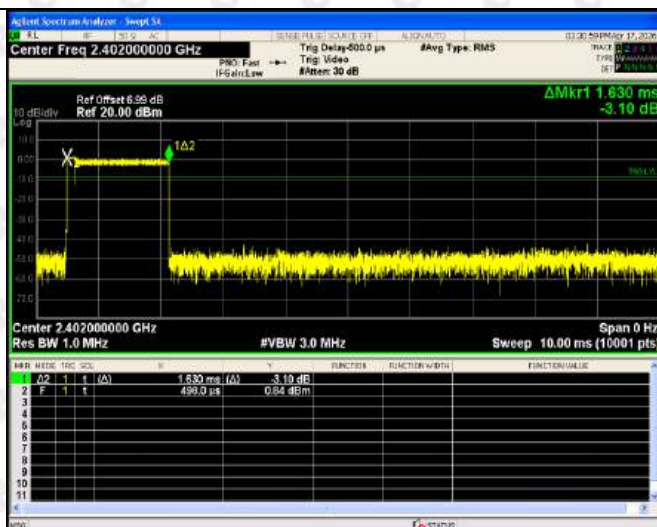


GFSK_DH3/MCH

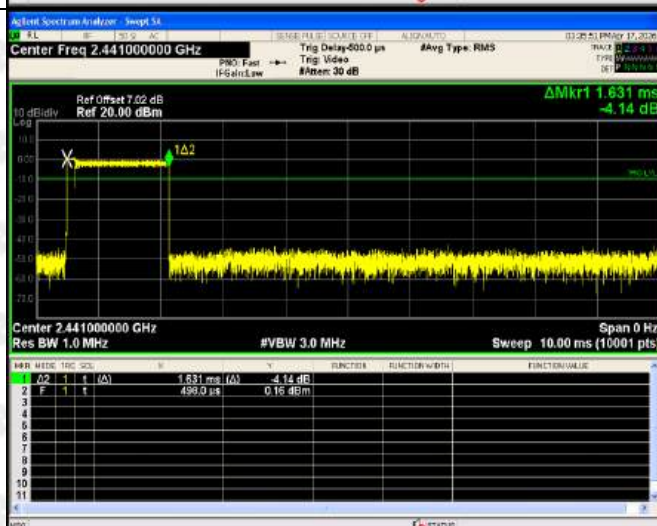


GFSK_DH3/HCH

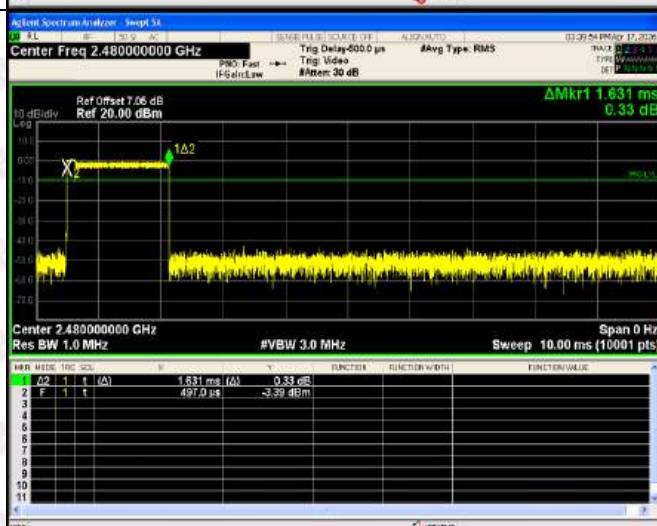


GFSK_DH5/LCH

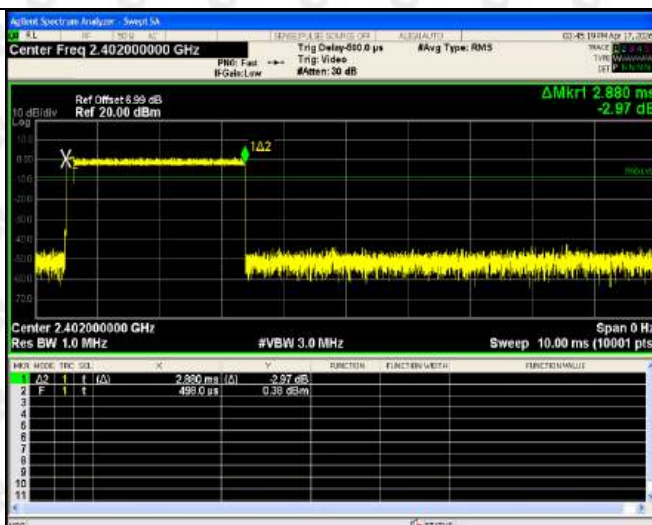

GFSK_DH5/MCH

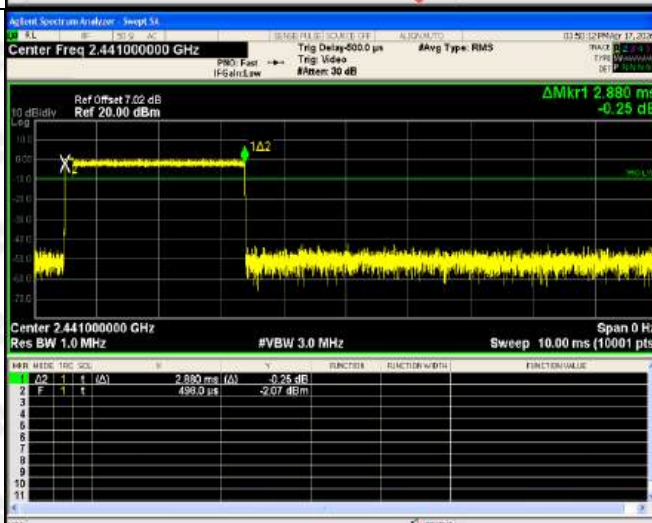


GFSK_DH5/HCH

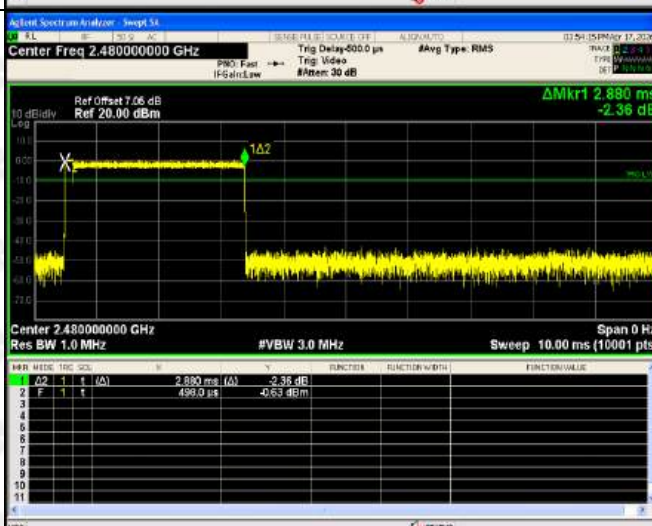


Module 2 Test Graph

Graphs


GFSK_DH1/LCH

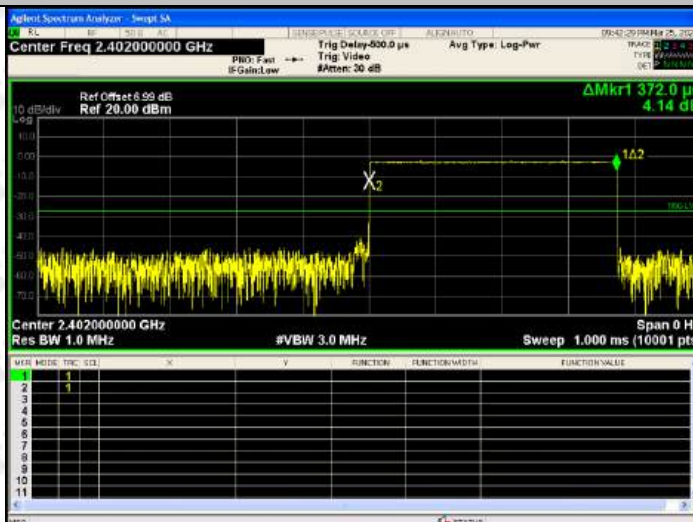


GFSK_DH1/MCH

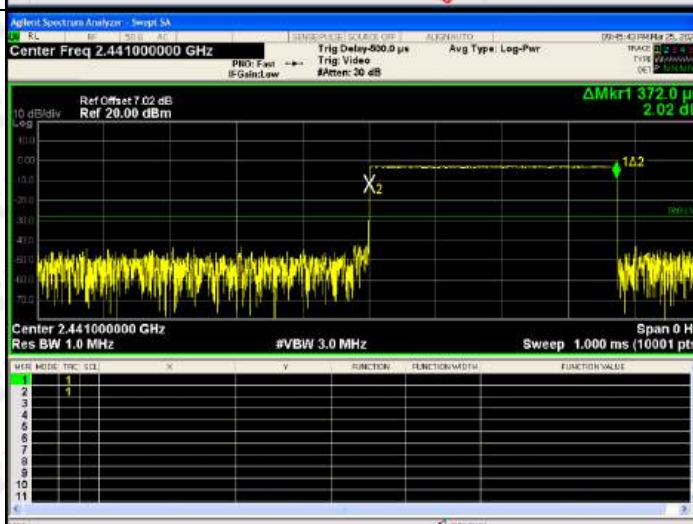


GFSK_DH1/HCH

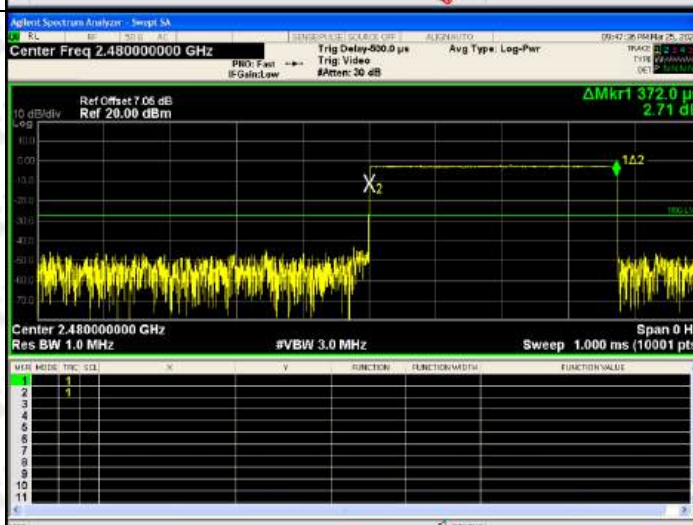


GFSK_DH3/LCH

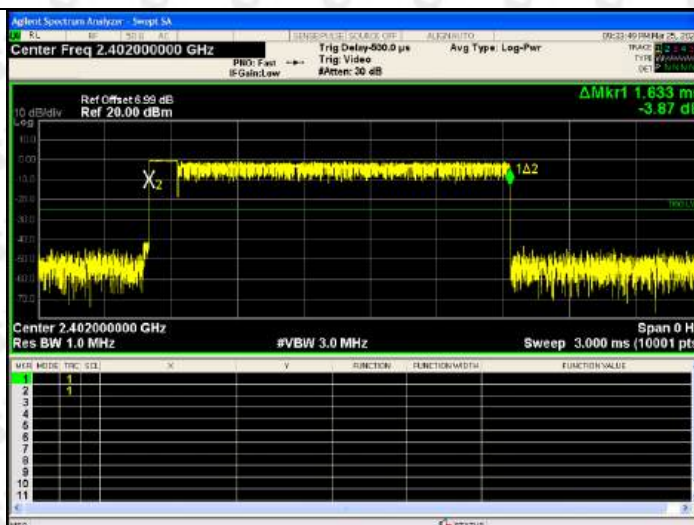


GFSK_DH3/MCH

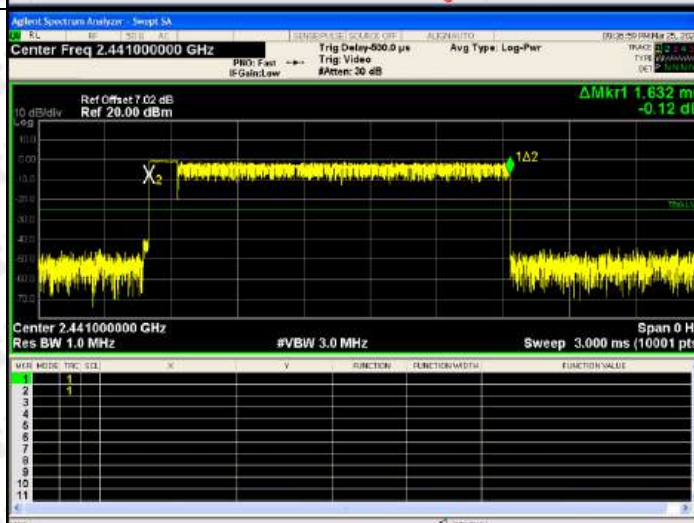


GFSK_DH3/HCH

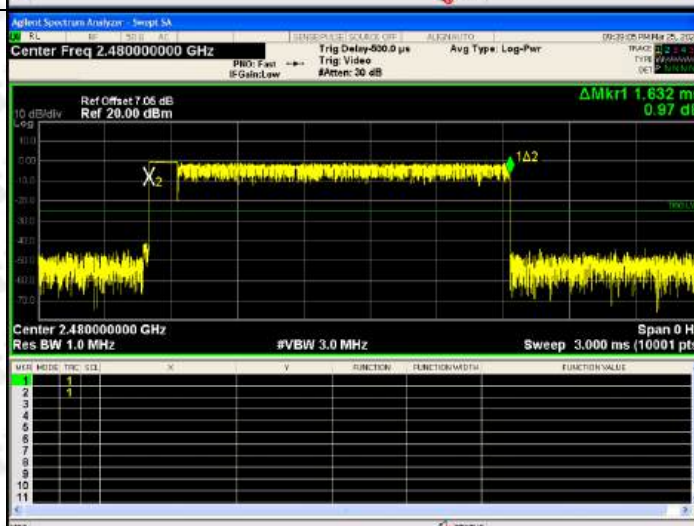


GFSK_DH5/LCH

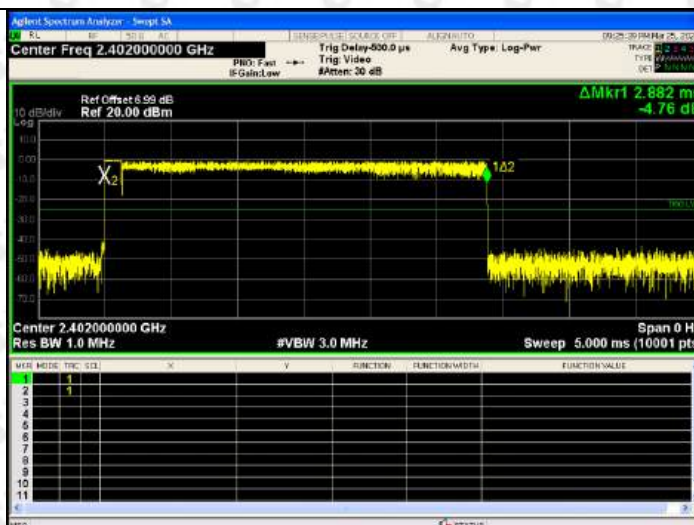

GFSK_DH5/MCH

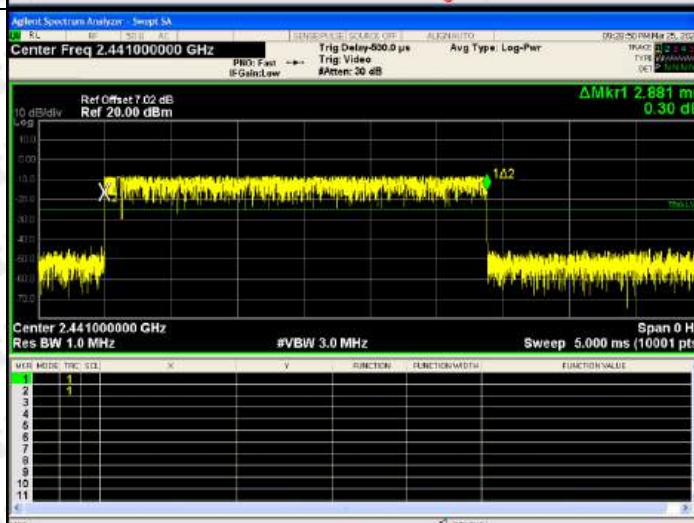

GFSK_DH5/HCH

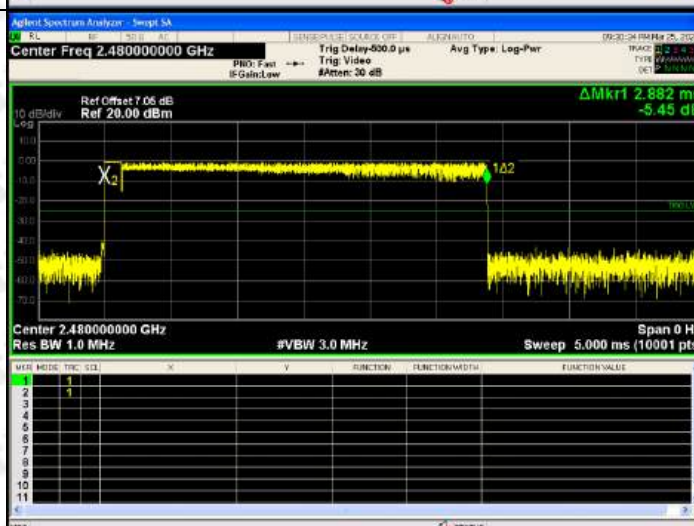

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

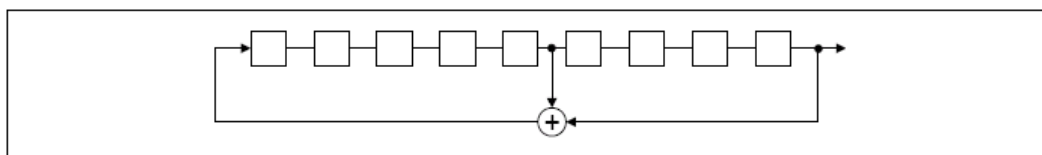

An example of Pseudorandom Frequency Hopping Sequence as follow:

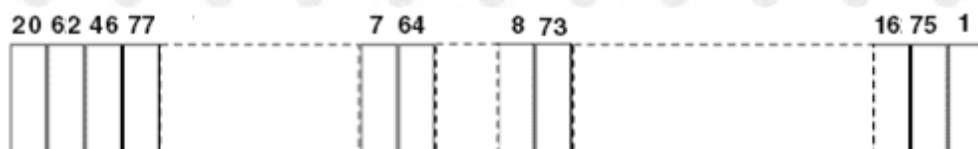

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Chip antenna. The best case gain of the antenna is 2.4dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

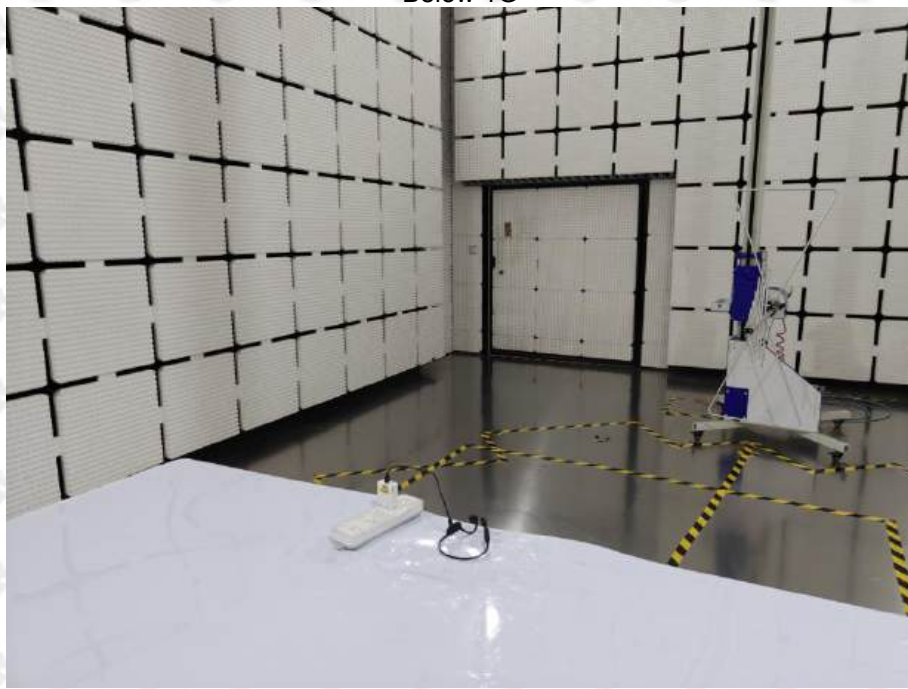

Above 1G



Conducted emissions



***** END OF REPORT *****